

LFS | Catalogue 2010/2011



Cable routing systems

THINK CONNECTED.

Welcome to Customer Service


Service telephone: +49 (0)2373 89-1500

Telefax for enquiries: +49 (0)2373 89-7777

Telefax for orders: +49 (0)2373 89-7755

E-mail: info@obo.de


Internet: www.obo.de

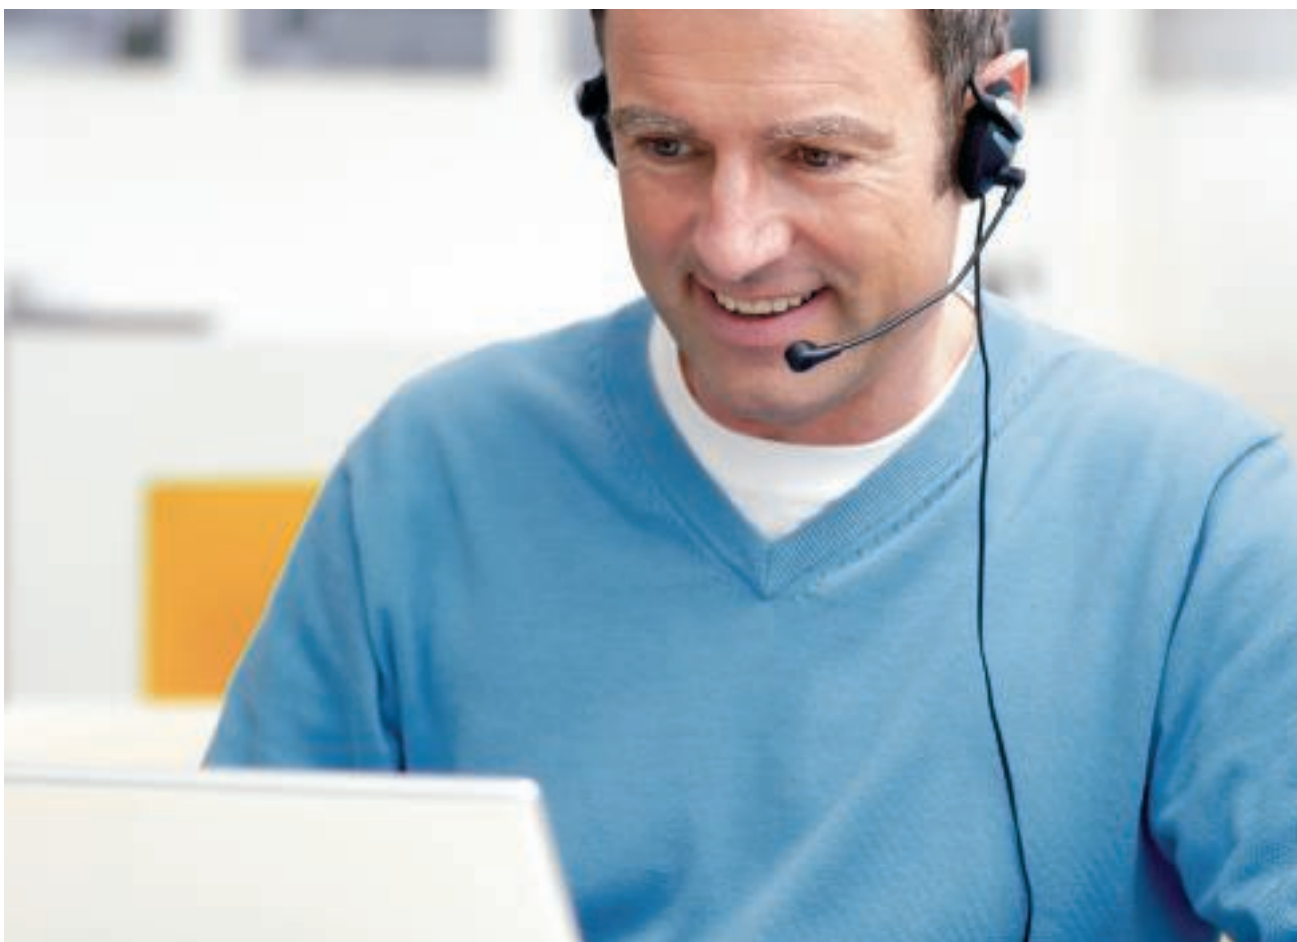

Use the direct line to OBO Customer Service! On the Service Hotline +49 (0)2373 89-1500, we are available every day from 7.30 a.m. to 5.00 p.m. for any questions about the OBO product range for electrical installations. The newly structured OBO Customer Service can offer you the full service:

- Competent contacts from your region
- All the information on the OBO product range
- Knowledgeable advice on special application topics
- Quick, direct access to all the technical data of the OBO and we also want to provide the best in customer relations

Contents

	Planning aid	5
	WDK cable trunking systems, plastic	83
	LKM metal cable trunking systems	137
	SKL skirting trunking systems	157
	VK wiring trunking systems, System Dahl	163
	Rapid 45 plastic device installation trunking systems	187
	Rapid 45 aluminium device installation trunking systems	199
	Rapid 80 GK plastic device installation trunking systems	207
	Rapid 80 GS sheet steel device installation trunking systems	219
	GEK-A aluminium device installation trunking	265
	Accessories for device installation trunking	303
	ISS service pole systems	315
	Device installation	337
	Directories	359



OBO LFS seminars: First-hand knowledge

With a comprehensive programme of training courses and seminars on the subject of cable routing systems, OBO is able to support its customers with specialist knowledge from a single source. Alongside the basic theoretical principles, the programme also deals with practical implementation in everyday applications. Special calculation and application examples round off the comprehensive programme of knowledge transfer.

Invitations to tender, product information and datasheets

We can make life easier for you. With our comprehensive selection of materials designed for practical applications, which provide you with effective support with the planning and calculation of a project. These include:

- Invitations to tender
- Product information
- Information sheets
- Datasheets

These documents are continually updated and can be downloaded at no charge at any time from the Internet download area at www.o-bo.de.

Invitations to tender on the Internet at

www.ausschreiben.de

More than 10,000 entries from the KTS, BSS, TBS, LFS, EGS and UFS ranges can be called up free of charge. Regular updates and expansions mean that you always have a comprehensive overview of the OBO products. All the current file formats (PDF, DOC, GAEB, HTML, TEXT, XML, ÖNORM) are available.

www.ausschreiben.de

Contents of planning and mounting aids

	General planning aid	6
	WDK cable trunking systems, plastic	13
	LKM metal cable trunking systems	19
	SKL skirting trunking systems	23
	VK wiring trunking system, System Dahl	27
	Rapid 45 device installation trunking, 45 mm system opening	35
	Rapid 80 device installation trunking, 80 mm system opening	41
	Accessories for device installation trunking	53
	Service pole systems	59
	Device installation	65
	Additional information	75



Inclusion of the cable routing systems and metal service poles in the service measures



Specifications for protective measures

If there is a fault, touchable metallic parts must not carry voltage. For this reason it is necessary to carry out appropriate safety measures. These are specified in the currently valid standards. EN 50085-1 and EN 50085-2-1 apply to the setup of the cable routing system, whilst the erection regulations DIN VDE 0100 Parts 410 and 540 apply to the installation (protection measure against dangerous shock currents).

Different installation types in the European standard

The European standard EN 50085-1 takes different installation types into account, as they are used in different countries within the EU. Whilst only equipotential bonding testing was previously required for installation trunking systems, now the listed component standards also require protective conductor functions. This is because, in some countries, it is possible to route insulated cable in trunking.

All the metallic components must be included

EN 50085-1 requires that all the metallic components must be included in the protective measures. The manufacturers must carry out the appropriate tests and document them. OBO installation trunking is also tested and certified by an external testing office – that of the VDE.

Testing the effectiveness by the installation engineers

The erector (installation engineer) must test the effectiveness of the protection measure in accordance with DIN VDE 0100 Part 610

after completion. Ensure the tightening torque of the contact screws on the earthing terminals and the proper mounting of the couplings.

Continuous protection measures

If the trunking is interrupted at a wall penetration, then continuation of the protective measures is required, as, in this case, the trunking is a foreign, conductive part, which spreads through different areas of a building.

With aluminium device installation trunking, the connection between the bases is created using the coupling. The connection between the covers and the device installation trunking is made using the self-contacting cover. This guarantees continuous protection without any additional wiring.

With the LKM metal cable trunking, a connection is made between the cover and the base without an additional earthing cable. The connection between the bases is made via the joint connector. Important: powder-coated metallic covers do not count as mixed construction and are thus not considered as insulating! They should therefore be included in the protective measure. The sheet-steel separating retainers are self-contacting. From the aspect of capacitive coupling and the possible static coupling, the inclusion of metallic device installation trunking covers is included in the planning of the protective conductor function. The shielding measure reduces electro-smog and generally achieves improved EMC protection. Protective conductor connections should be permanent. If there is a change to the system, e.g. for retro-installations, it is important to guarantee the maintenance of the protection functions.



Who needs to observe which standards



OBO as a manufacturer


Standard	Title	OBO system
DIN EN 50085-1 Device testing directive	Electrical installation systems for electrical installations, Part 1: General requirements	All systems
DIN EN 50085-2-1	Special requirements for electrical installation trunking systems on walls or ceilings.	WDK, LKM, SKL, GEK-K, GEK-S, GEK-A
prEN 50085-2-2	Special requirements for electrical installation systems for underfloor, flushfloor or on-floor installation.	UFS
DIN EN 50085-2-3	Special requirements for electrical installation trunking systems in distributor cabinets.	VK
prEN 50085-2-4	Special requirements for freestanding installation units.	ISS

The installation engineer as systems engineer

Standard	Title	OBO system
VDE 0100 Part 410	Setup of electrical systems with rated voltages of up to 1,000 V. Protection against electric shock.	All systems
VDE 0100 Part 520	Setup of electrical systems with rated voltages of up to 1,000 V. Cables.	All systems
VDE 0100 Part 540	Setup of electrical systems with rated voltages of up to 1,000 V. Equipotential bonding.	All systems
VDE 0100 Part 610	Setup of electrical systems with rated voltages of up to 1,000 V. First testing of electrical systems before handover to the operator.	All systems
VDE 0298	Setup of electrical systems with rated voltages of up to 1,000 V. Insulated cables in heavy current systems.	All systems
DIN EN 50310	Application of equipotential bonding and earthing in buildings with information technology equipment.	All systems



How can I work out the cable volume

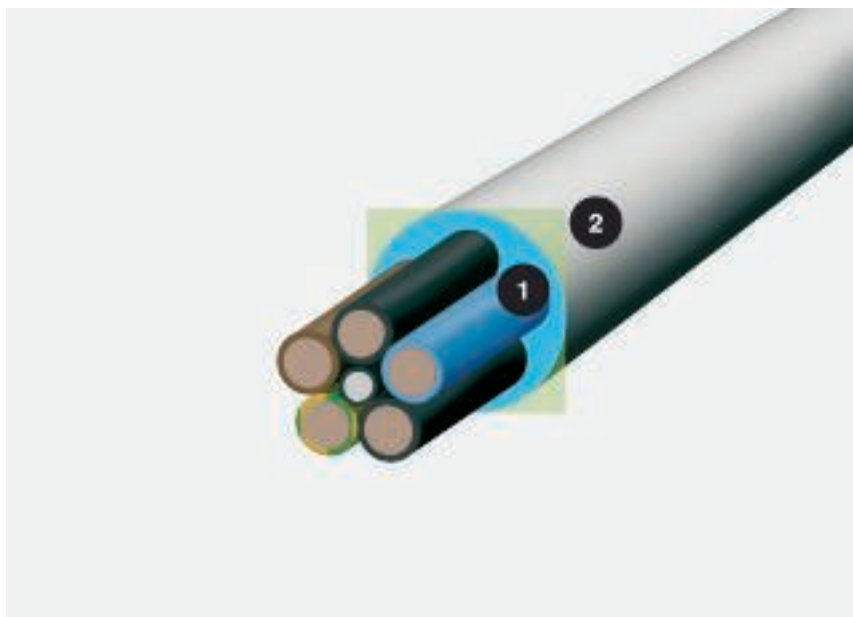

Cable diameter and space required; 1 = diameter in mm, 2 = space required in cm²

An important criterion for the selection of the right trunking size of the underfloor system is the cable volume. As the cables are never packed tightly together or are absolutely parallel, it is not enough to base the volume calculation solely on the cable diameter. A realistic calculation is provided by the formula $(2r)^2$. To simplify your work, we have listed the diameters and space requirements of the most important cable types on this double page. Important: the values are average values, which may vary between manufacturers. Please refer to the manufacturer's specifications for the exact values.

The right choice

The table on this page will help you to select the correct trunking size. Besides the usable cross-section of the appropriate trunking, please observe the current DIN/VDE standards for the fill factor and the approved cable heating.

Calculation using the formula $(2r)^2$

The diameter says little about the actual space required by a cable. Calculate: $(2r)^2$. This value reflects the realistic space requirements, including the compartments.



General planning aids, cable volume table



Insulated power cables

Type	Diameter mm	Useful cross-section cm ²
1 x 4	6.5	0.42
1 x 6	7	0.49
1 x 10	8	0.64
1 x 16	9.5	0.9
1 x 25	12.5	1.56
3 x 1.5	8.5	0.72
3 x 2.5	9.5	0.9
3 x 4	11	1.21
4 x 1.5	9	0.81
4 x 2.5	10.5	1.1
4 x 4	12.5	1.56
4 x 6	13.5	1.82
4 x 10	16.5	2.72
4 x 16	19	3.61
4 x 25	23.5	5.52
4 x 35	26	6.76
5 x 1.5	9.5	0.9
5 x 2.5	11	1.21
5 x 4	13.5	1.82
5 x 6	14.5	2.1
5 x 10	18	3.24
5 x 16	21.5	4.62
5 x 25	26	6.76
7 x 1.5	10.5	1.1
7 x 2.5	13	1.69



Insulated power cables

Type	Diameter mm	Useful cross-section cm ²
1 x 10	10.5	1.1
1 x 16	11.5	1.32
1 x 25	12.5	1.56
1 x 35	13.5	1.82
1 x 50	15.5	2.4
1 x 70	16.5	2.72
1 x 95	18.5	3.42
1 x 120	20.5	4.2
1 x 150	22.5	5.06
1 x 185	25	6.25
1 x 240	28	7.84
1 x 300	30	9
3 x 1.5	11.5	1.32
3 x 2.5	12.5	1.56
3 x 10	17.5	3.06
3 x 16	19.5	3.8
3 x 50	26	6.76
3 x 70	30	9
3 x 120	36	12.96
4 x 1.5	12.5	1.56
4 x 2.5	13.5	1.82
4 x 6	16.5	2.72
4 x 10	18.5	3.42
4 x 16	21.5	4.62
4 x 25	25.5	6.5
4 x 35	28	7.84
4 x 50	30	9
4 x 70	34	11.56
4 x 95	39	15.21
4 x 120	42	17.64
4 x 150	47	22
4 x 185	52	27
4 x 240	58	33.6
5 x 1.5	13.5	1.82
5 x 2.5	14.5	2.1
5 x 6	18.5	3.42
5 x 10	20.5	4.2
5 x 16	22.5	5.06
5 x 25	27.5	7.56
5 x 35	34	11.56
5 x 50	40	16



Telecommunications cables

Type	Diameter mm	Useful cross-section cm ²
2 x 2 x 0.6	5	0.25
4 x 2 x 0.6	5.5	0.3
6 x 2 x 0.6	6.5	0.42
10 x 2 x 0.6	7.5	0.56
20 x 2 x 0.6	9	0.81
40 x 2 x 0.6	11	1.12
60 x 2 x 0.6	13	1.69
100 x 2 x 0.6	17	2.89
200 x 2 x 0.6	23	5.29
2 x 2 x 0.8	6	0.36
4 x 2 x 0.8	7	0.49
6 x 2 x 0.8	8.5	0.72
10 x 2 x 0.8	9.5	0.9
20 x 2 x 0.8	13	1.69
40 x 2 x 0.8	16.5	2.72
60 x 2 x 0.8	20	4
100 x 2 x 0.8	25.5	6.5
200 x 2 x 0.8	32	10.24



IT cables Type Cat...

Type	Diameter mm	Useful cross-section cm ²
Cat. 5	8	0.64
Cat. 6	8	0.64



Coax cable (Standard)

Type	Diameter mm	Useful cross-section cm ²
SAT/BK cable	6.8	0.48



Processing materials with the correct tool

Different materials must be processed differently. Chop saws have proved to be very useful when laying device installation trunking. This allows exact cutting.

Trunking made of PVC and PC/ABS:

- Hand saw, fine-tooth (iron saw)
- Piercing saw with iron or plastic saw blade with fine teeth
- Circular saw with plastic saw blade, 350 mm diameter, 80–108 teeth/inch and 2,800 rpm

Sheet steel and aluminium trunking:

- Ribbon saw with saw ribbon for hard metals
- Circular saw with saw blade for hard metals, 350 mm diameter, 80–108 teeth/inch and 2,800 rpm
- Angle grinder with metal separating disc

Take the length expansion of the materials into account

Different materials expand differently and this must be taken into account. The expansion of the materials PVC, steel and aluminium can be calculated using the formula below.

$\Delta L = L \cdot \alpha \cdot \Delta T$

L = Length m

α = Thermal expansion co-efficient

ΔT = Temperature change

Thermal expansion coefficient:

- Steel: $14 \times 10^{-6}/1\text{ K}$
- Aluminium: $23.1 \times 10^{-6}/1\text{ K}$
- Hard PVC: $71 \times 10^{-6}/1\text{ K}$

Examples

At a temperature difference ΔT of 20°, the 2,000 mm standard length changes as follows:

- For hard PVC, 2.84 mm
- For steel, 0.56 mm
- For aluminium, 0.924 mm

Perfect interplay for more efficient working

Faster and better installation sequences – this is the aim of both ourselves and the manufacturers of electrical devices. Previously used bolt-firing devices have thus become modern nail guns. With its Pulsa 700E, Spit can offer devices of the highest quality for this area of the electrical industry. Many OBO products can be processed particularly efficiently using the devices. This is proved by tests for mounting cable and device installation trunking, carried out with Spit devices.

Properties of the hard PVC used

Property	Value	DIN
Material designation	PVC-U-E-D-08-04-28	to DIN 7748
Tensile strength	min. 40 N/mm ²	to DIN 53 455
Crack expansion	min. 85%	to DIN 53 455
Breakdown voltage	min. 20 KV/mm	to DIN 53 481
Surface resistance	min. 1,010 Ohm	to DIN 53 455
Shape heat resistance	min. 75 °C	to DIN 53 400/B
Temperature resistance in the application	max. 65 °C	
Flammability	Level V0	to UL 94
Glow wire test	960 °C	to DIN IEC 695

You can find more details in the chapter "Chemical resistance of hard PVC" in the "Additional information" part.



Colours



RAL, NCS, DB

The wide range of standard colours and the many possible special colours mean that it is possible to integrate the colour of the cable routing systems into any office landscape. The plastic cable trunking and device installation trunking systems are available in the RAL colours pure white (RAL 9010), light grey (RAL 7035), grey (RAL 7030) and cream (RAL 9001) as standard. The device installation trunking systems and service poles are made of sheet steel or aluminium and are available in the standard colours pure white, light grey and cream. Powder coating means that all the other RAL colours are possible on sheet-steel and aluminium trunking. Alternatively to the RAL standard, both NCS and DB colours can be applied on request.







Mounting aid, WDK

14



Mounting aid for WDK cable trunking systems



WDK mini trunking on the wall/ceiling

The WDK mini trunking can be used as either wall or ceiling trunking. It is the perfect solution for tiny retro-installations.



WDK mini trunking on plastic surfaces

Due to the small dimensions, the mini trunking can be routed so that it is almost invisible.



Mounting of mini trunking

Remove the protective film. Stick the trunking to a dust-free, adherent substrate.



Cut mini trunking

The OBO shears can be used to create an exact straight cut for the WDK trunking. The shears can be used for trunking sizes of up to 25 x 45 mm.



Cut mini trunking

The OBO shears can be used to create an exact mitre cut for the WDK trunking. The shears can be used for trunking sizes of up to 25 x 45 mm.



WDK in the service connection room

Cables are combined and run in bundles in the area of distributors and counter cabinets. The WDK cable routing trunking is used here.



WDK for cellar installation

The WDK allows flexible cable routing in cellar installations.



WDK for workshops

The WDK cable trunking of depth 60 mm can be used as device installation trunking with accessory mounting boxes.



WDK with nail strip

The nail strip means that WDK trunking can be mounted with steel nails. At the same time, it prevents nail damage to the cables. Of course, the nail strip can also be used as a separating retainer for routing different voltage levels.



Mounting of trunking

WDK cable trunking possesses a system base perforation, guaranteeing flexible fastening and thus simple mounting.



Trunking labelling

The labelling is printed in the cover and the base. Refer to this for the type, colour, size, etc. for any later installations.



Mounting of cover clip

The cover clip is locked into the cover contour. To insert the cables, move it forward through 30°. The clip stabilises the WDK trunking and keeps the cables in the trunking.

Mounting aid for WDK cable trunking systems



Shifting of the cover clips

The cover clip can be moved along the entire length of the cable trunking.



Mounting of partition

The partition is simply locked onto the floor connector. This guarantees a clear separation between cables of different voltage levels.



Mounting of hood fittings

The cover fittings can be added easily and with no visual impairment in areas of cable trunking in which installations are difficult, such as internal corners, external corners or T pieces.



Mounting of joint covers

The joint cover is plugged in over the covers set at a distance. They are fastened in the cover contour.




Mounting internal corner hood fitting

The hood fitting is placed over the mounted WDK trunking and locks into the cover contour.



Mounting of external corner hood fitting

The bases of the WDK trunking are mounted on the wall up to the corner.

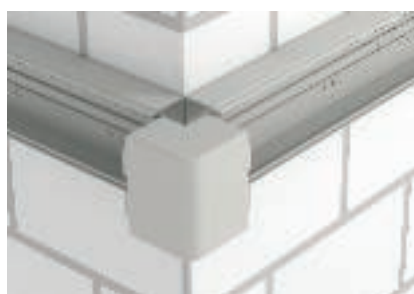

Mounting of external corner hood fitting

After the cables have been routed, the external cable hood fitting is placed on the bases.



Mounting of external corner hood fitting

The covers are cut to size and pushed into the external corner. This connection ensures a firm hold of the fitting in the WDK trunking.



Mounting of end piece

The end piece is fastened to the floor connector. The end piece is placed on the open end of the WDK trunking.



Mounting of accessory mounting box

The accessory mounting box is locked onto the floor connectors.



Mounting of accessory mounting box

Then the accessory mounting box can be moved along the entire length of the trunking.



Mounting of accessory mounting box

Then the accessory mounting box is fixed to the WDK trunking using the bolt located in the base.

Mounting aid for WDK cable trunking systems



Mounting of accessory mounting box

The partition is run up to the accessory mounting box and is locked onto the floor connector.



Mounting of power socket

After the cables have been inserted, the switches and sockets can be connected and installed in the accessory mounting boxes.



Mounting of power socket

The cover sections allow easy closure of the openings on the sockets without any additional work. These cover sections are available in the versions 1x to 3x in the product range.



Mounting of power socket

The finished cover sections can create optically perfect trunking installations with switching and plug-in devices.



Mounting of CEE socket

The underfloor box 2392 is used to install the CEE sockets. It can be used to install CEE sockets in the WDK trunking from a height of 130 mm.



Mounting of CEE socket

The adapter flange allows easy installation of CEE sockets made by different manufacturers.



Mounting of CEE socket

The adapter flange is fastened, together with the CEE socket, to the accessory mounting box.



Mounting of CEE socket

A tidy cover of the CEE sockets is created using the cover section, type 2425.



Mounting with nail device

Mounting of the cable trunking is fast and efficient with a Spit nail device.



RK universal trunking

The universal trunking hides the cables inserted in distributors and counter cabinets.



RK clip mounting

The clips (OBO Quick Clip Pg16) are mounted using knock-in anchors on the left and right of the distributor cabinets. They are contained in the scope of delivery.



RK end piece mounting

The end pieces are fastened by locking them in the clips.

Mounting aid for WDK cable trunking systems



Cut RK cover

The covers are cut to the appropriate length using a standard coping saw.



RK cover mounting

Simply lock the cover in the end pieces.



RK cover clip mounting

Use cover clips for longer trunking covers, so that the cover does not sag.



RK front cover mounting


Attach the front cover to the cover clips.



RK complete mounting

The universal trunking allows tidy laying, even if a lot of cables need to be hidden.



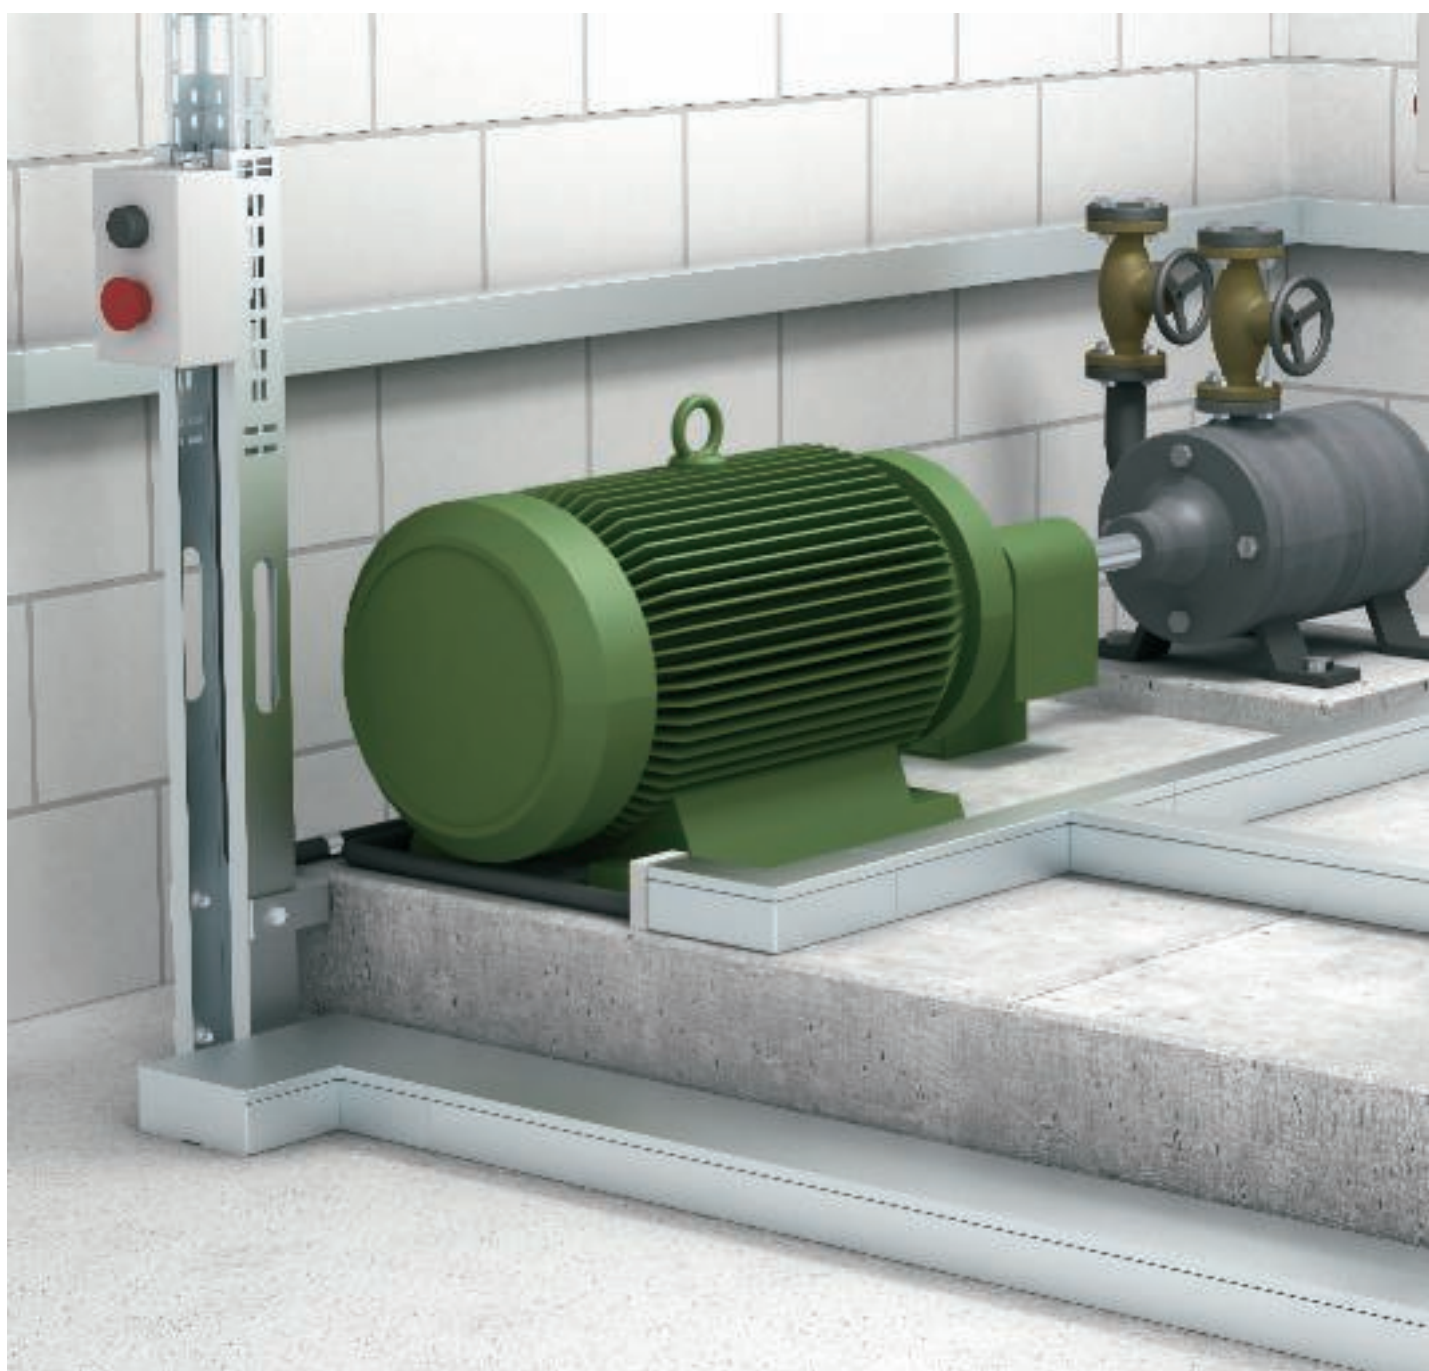



Mounting aid, LKM metal cable trunking



Mounting aid for LKM metal cable trunking



Machines application area

In the area of machines, the LKM metal cable trunking is used to provide additional protection for the cables.



Corridor, stairwell application area

The stable LKM metal cable trunking can be used anywhere, in which cables require mechanical protection.



Machine trunking mounting

Screw the LKM metal cable trunking to the machine, for example, using cylinder head bolts of type 341.



Wall trunking mounting

Knock-in anchors of type 910/SD can be used to fasten the LKM trunking directly on the wall.



Installation of internal corner

As with the LKM trunking, the fittings are mounted at the appropriate points.



Installation of joint connectors

After installing the LKM trunking, lock the joint connector into the parts to be connected from inside. This guarantees the equipotential bonding between these two parts.



Installation of partition

Insert the partition into the straps located on the floor. This guarantees equipotential bonding without any additional aids.



Installation of cable fixing holder

The cable bracket is mounted using the trunking fastening screw. The cables can be held using cable ties, type 555.



Installation of duct clamp

The duct clamp is placed on the loop perforation in the base and then locked into the cover contour. It can be placed at an offset. A partition can be installed at a later time.



Equipotential bonding

Equipotential bonding is guaranteed between the cover and the base through the special cover contour. The LKM trunking is earthed using the connection strap located in the base.



Installation of edge protection ring

Place the edge protection ring on the open ends of the LKM trunking. It prevents damage to the cables within.



Installation complete

The many fittings and accessories allow individual installation designs.





Mounting aid, SKL skirting trunking



Mounting aid for SKL skirting trunking



Cable trunking application area

The SKL skirting trunking can be used as a skirting board in housing. This allows tidy retro-installation of cables.



Cable trunking application area with socket

The mounting boxes mean that sockets can be mounted wherever they are required.



Use of coloured variant

The beech design means that the SKL skirting trunking can also be used with wooden floors.



Trunking mounting

The base of the SKL skirting trunking is fastened using bolts and anchors or knock-in anchors.



Mounting of cover

The sealing lip ensures optimum wall and floor connections. The cover is simply pushed onto the base.



Mounting of fitting

The fitting is attached to the cover and thus fastened. This allows the implementation of a visually attractive installation.



Mounting of device support

The device support is placed on the trunking base and fastened to the wall with four bolts.



Mounting of Schuko socket

The Schuko socket is connected and mounted on the screwless terminals located in the base of the device support.



Mounting of Modul 45 devices

The Modul 45 sockets are connected to the cable and pushed into the mounting box until a click can be heard.



Mounting of cover

The cover is run up to the mounting box base and placed on the base.



Mounting of device support cover

The cover of the device support is simply locked onto the base. The reducing elements may need to be removed, depending on the trunking height.



Installation of mounting box cover

The cover of the device support is placed on the base and fastened using the socket cover.

Mounting aid for SKL skirting trunking



Installation of mounting box cover
Mounted device support.



Installation complete
Sockets can be mounted wherever they are required.






VK wiring trunking systems



Properties of VK wiring trunking system, System Dahl	28
Filling volumes, VK wiring trunking	29
Hole patterns and dimensions	30
Mounting aid, VK wiring trunking	32



Properties of VK wiring trunking system, System Dahl

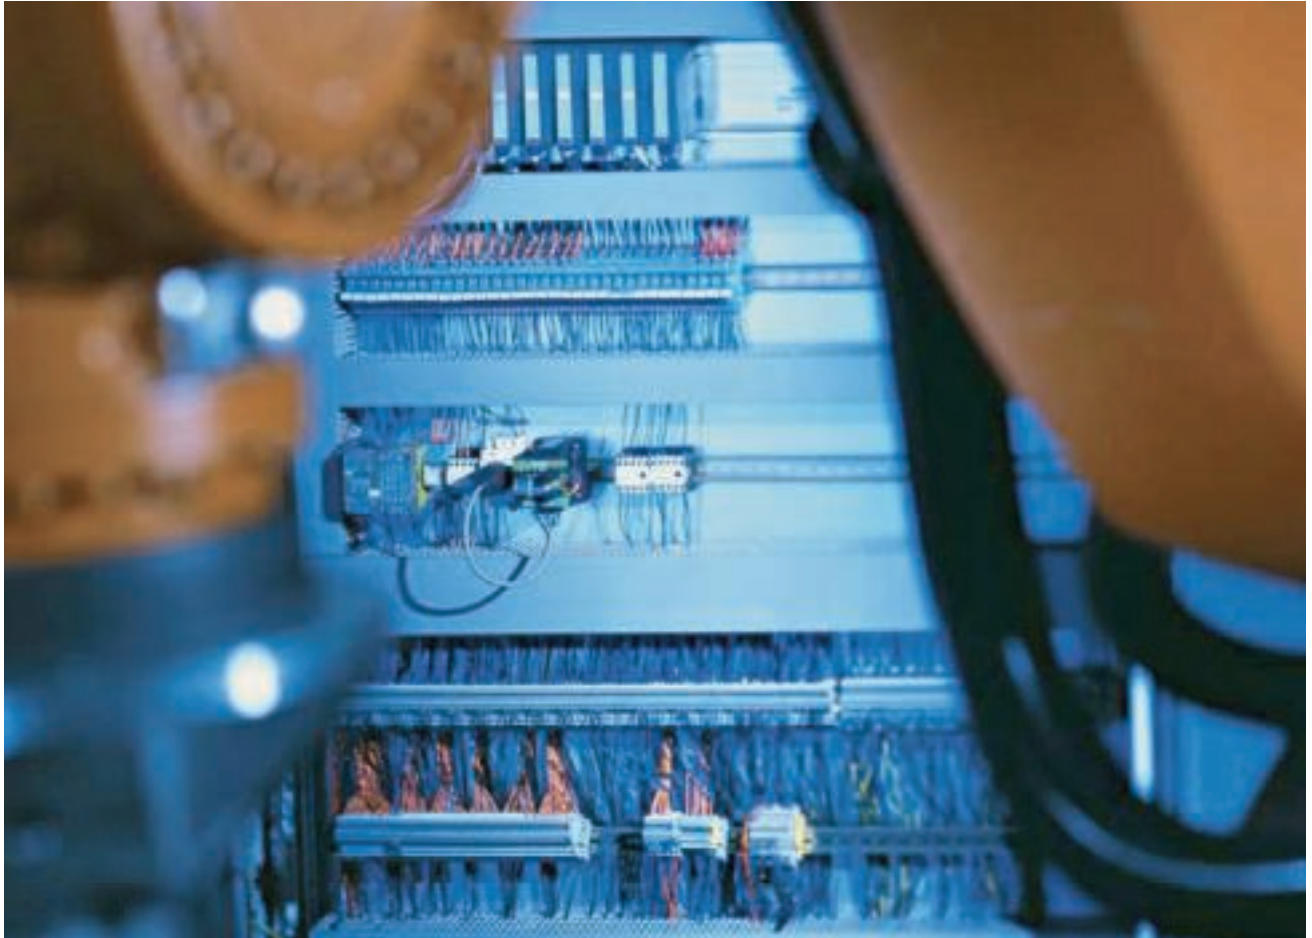

Advantages of the VK wiring trunking

The Dahl wiring trunking is produced in the known quality – with soft, burr-free slots. Rounded tabs prevent injury during installation. Additional benefits are:

- Stable trunking with large wall thicknesses
 - Exact predetermined breaking points in the strut and base area
 - Absolute dimensional accuracy of the side perforation
 - Absolute dimensional accuracy of the base perforation
 - Starting dimension of the base perforation can be adjusted variably, if requested by the customer.
 - Cut edges rounded and deburred in the closing area
 - VDE-tested
 - UL-tested and listed, UL file No. E301798
 - Special designs on request
- Firm positioning of the covers through optimum closing contours



Filling volumes, VK wiring trunking

Determination of the suitable trunking width

The number of cables, cable types and cross-sections is of key importance for the correct selection of the trunking size. To simplify the selection, the following tables list the maximum filling volumes of the VK trunking for standard cable

types.

Important:

The values in the table are only theoretically calculated values! The following factors are taking into account in the tables:

- Cable entries and exits
- Not currently routed cables
- Cable bundles, concentrations at crossing points

- Temperatures to be expected in the switchgear cabinet

The installation engineer is responsible for an installation which complies with regulations. We recommend working with a maximum filling factor of 50% during planning.

Max. filling volume (100%) VK trunking according to cable type


VK trunking, Type LK4 - LK4/N	Cable type 0.75 mm ² , d = 2.8 mm	Cable type 1.00 mm ² , d = 2.9 mm	Cable type 1.5 mm ² , d = 3.2 mm
15015	17	16	14
30015	36	34	28
30025	58	54	45
40025	80	74	61
40040	126	118	97
40060	194	181	149
40080	261	244	200
40100	329	307	252
60015	75	70	57
60025	122	113	93
60040	195	182	150
60060	296	276	227
60080	397	370	304
60100	499	466	382
60120	600	560	460
80025	164	153	126
80040	263	245	202
80060	398	371	305
80080	533	497	408
80100	669	624	512
80120	804	750	616

Max. filling volume (100%) VK trunking according to cable type

VK trunking, Type LKV - LKV/N	Cable type 0.75 mm ² , d = 2.8 mm	Cable type 1.00 mm ² , d = 2.9 mm	Cable type 1.5 mm ² , d = 3.2 mm
25025	36	34	28
37025	58	54	45
37037	94	88	72
50025	80	75	61
50037	129	120	99
50050	178	166	136
50075	273	255	209
75025	123	114	94
75037	192	179	147
75050	267	249	204
75075	417	388	318
75100	560	522	428
75125	596	556	456
10037	258	240	198
10050	356	332	272
10075	560	522	428
100100	712	664	544



06 LFS_Katalog_2010_Neuer_Stand / en / 25/02/2010 (LLEExport_00995)

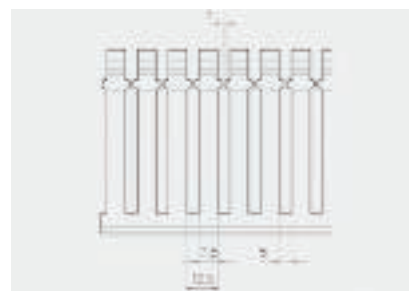

Planning aid, wiring trunking



LKV/H	Item no.	Hole pattern
LKV/H 50037	6178612	2
LKV/H 50050	6178614	2
LKV/H 50075	6178616	2
LKV/H 75037	6178622	2
LKV/H 75050	6178624	2
LKV/H 75075	6178626	1
LKV/H 75100	6178628	1
LKV/H 75125	6178630	1

Mounting aid, VK wiring trunking



Area of application: distributor cabinet

The VK slotted cable trunking system ensures tidy cable routing in the distributor cabinet.



Wiring trunking installation

The VK slotted cable trunking system is fastened to the mounting plate of the distributor cabinet using spreading rivets. The spreading rivets are installed using the plastic rivet tool.




Break-out of retainers

The retainers are bent outwards. When a bend angle of approx. 70–80° is exceeded, they break.




Notching pliers

The side retainers can be removed down to the base of the trunking using the release pliers. When the side retainers have been broken out, there is no loss in volume in the transfer area to the next trunking.

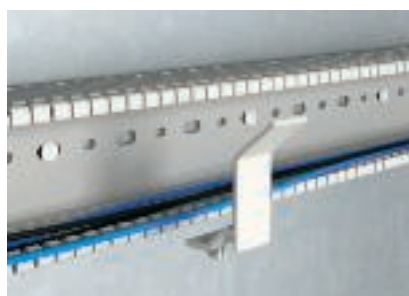

Wire retainers

The wire retainers can be adjusted according to the trunking width. To do this, simply break off the wire retainer at the predetermined breaking points. This means that just one wire retainer is necessary for any trunking width.

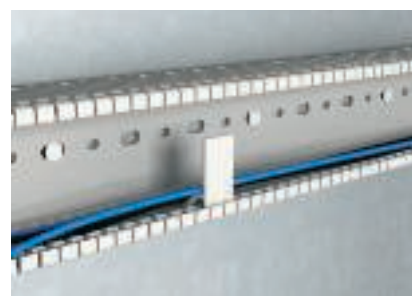

Wire retainer installation

The wire retainer is inserted into the side slot of the VK slotted cable trunking system. This simplifies cable installation and keeps the cables in place in the VK slotted cable trunking system. It also guarantees easy attachment of the cover. If installations are required at a later date, then, when the cover is removed, the cables are held in the trunking and do not fall out.



Wire holding lugs

In the N versions, there is a holding lug on the side retainer, allowing fixing of the cables in the VK slotted cable trunking system.



Cover contour LK4

True to size processing enables easy mounting and removal of the cover, despite a firm cover fit.



Cover contour LKV

The special cover contours also guarantee a perfect fit on the LKV slotted cable trunking system.



Spacer installation

The spacer allows raised installation of the VK slotted cable trunking system above the mounting plate.



Spacer installation

The spacers can be connected one on top of the other to allow greater distance to the mounting plate. This allows a certain amount of height variation for any cables to be routed behind the VK wiring trunking system.



Base perforation

Single and dual-track base perforation to DIN 43659 enable precise work.

Mounting aid, VK wiring trunking



Installation complete

The practical dimensions and accessories allow professional installation in the distributor cabinet.

Planning aid, wiring trunking





Rapid 45 device installation trunking, 45 mm system opening



Mounting aid for device installation trunking Rapid 45

38



Providing flexibility right to the end – Rapid 45

Planning aid, device installation trunking, size 45



Easy adaptation to all spatial features

The universal system offers plenty of space for a clean separation – between energy and data cables, for instance. Practical fittings allow ideal installation solutions, both in residential as well as all industrial and commercial applications. The decisive advantage is that switches, sockets and the like are simply snapped into the trunking profile by hand. The Rapid 45 device installation trunking is available in a PVC and aluminium version and two sizes for flexible installation solutions. Quickly, reliably, cleanly and precisely. The result is always a perfect, aesthetic and practical installation.

Clarity through standardisation

It goes without saying that the Rapid 45 device installation trunking satisfies all current regulations and standards. The system achieves IP 40 protection without extra equipment or covers.

Usable cross-section and quantity of cables



A lot of space for a lot of cables
The mono and the duo ducts are extremely spacious and offer ample room for line installation. The trunking depth of 53 mm and the compact design of the EGS devices enable the lines to be installed either above, below or behind the switches and sockets. The following tables list the recommended maximum filling volumes (50% filling) of the empty and filled Rapid 45 trunking for standard cable types.

Calculation formula for cable assignment in the trunking
To calculate the recommended cable assignment for trunking, you require the following data:

- Trunking cross-section: D · H (in mm)
- Realistic space requirements of the cables: (2r)²
- Max. filling factor (recommended): 0.5

This data allows calculation of the usable cross-section for cable assignment, as follows:
Usable cross-section for cable assignment = (trunking cross-section / (2r)²) · 0.5

GEK-K 53100 GEK-A 53100	Without device installation	With device installation
Trunking cross-section	4,080 mm²	2,596 mm²
NYM 3 x 1.5 mm d = 10.5 mm	23	15
NYM 5 x 1.5 mm d = 12 mm	18	11
Telecommunications cable J-Y(St.)Y 2 x 0.6 d = 5 mm	104	66
	Filling factor: 0.5 = the capacity reserve is 50%.	

GEK-K 53160 GEK-A 53160	Without device installation	With device installation
	6,480 mm²	3,696 mm²
NYM 3 x 1.5 mm d = 10.5 mm	36	20
NYM 5 x 1.5 mm d = 12 mm	28	15
Telecommunications cable J-Y(St.)Y 2 x 0.6 d = 5 mm	156	96
	Filling factor: 0.5 = the capacity reserve is 50%.	





Mounting aid for device installation trunking Rapid 45



Office application area

The many practical fittings permit easy integration of the Rapid 45 device installation trunking system into any office situation. Switches, sockets and data technology are just clicked into place.



Office application area

Thanks to its asymmetrical design, the Rapid 45 device installation trunking system can also be mounted as skirting trunking. The sockets with a 33° arrangement allow easy insertion of angular connectors.



Workshop application area

The Rapid 45 device installation trunking can be installed anywhere in which sockets must be mounted in a small area.



Cut trunking

The Rapid 45 PVC device installation trunking can be processed using a standard coping saw, whilst the Rapid 45 aluminium trunking should be cut with an electrical circular coping saw.



Mounting of trunking

The Rapid 45 device installation trunking can be mounted quickly on the wall, for example, using knock-in anchors.



Mounting of variable fittings

The variable fittings allow an attractive cover, even for corners which are not at a right angle. Fixing takes place in the cover contour.



Mounting of fixed fittings

The fixed fittings are integrated in the trunking base installation.



Mounting of joint connectors

The joint connectors can be separated from their stalk and serve both as a joint connector and a joint cover to cover cut edges.



Mounting of joint cover

The joint cover is attached to the trunking bases. This provides an optically attractive connection for the trunking bases.

Mounting aid for device installation trunking Rapid 45



Mounting of end piece

The end piece is attached to the floor connector or to fasten it. A spring attached to the end piece locks it securely in place.



Earthing of aluminium Rapid 45

To set up the equipotential bonding between the cover and the base, use the protective conductor connection bracket, type 8AWR, and the earthing line, type EDA 45.



Installation of socket

The cables are connected to the socket.




Mounting of socket

The socket is pushed into the Rapid 45 device installation trunking without additional aids.



Mounting of socket

The module socket locks into the cover contour. Attaching the cover means that the system is complete and VDE-conformant.

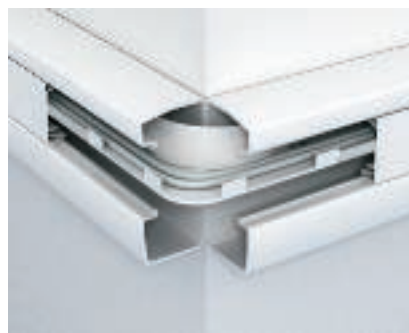

Bend-Radius

The bend radius for fibre optic cable routing can also be used with the Rapid 45 device installation trunking. This maintains the correct radii.



Installation complete

The flexibility ensures clean and quick installation.





Rapid 80 device installation trunking, 80 mm system opening



System range	42
Usable cross-section and quantity of cables	43
Decentral protection and noise protection	46 47
Mounting aid for device installation trunking 80	48



System range



Aluminium device installation trunking

Aluminium device installation trunking is a classic in high-quality office environments. The GEK-A system is suitable for mounting directly on the wall or on fastening panels. The trunking has a C profile rail on the base to accept a partition. The stock length is 2,000 mm. The equipotential bonding between the bases takes place using a coupling. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. This connection is made without additional wiring, as the fixing clips are pre-mounted in the cover. The aluminium device installation trunking is available with a shiny, anodised surface or in the colour pure white (RAL 9010).



GK device installation trunking

GK device installation trunking, made of lead-free Polyvinylchloride (PVC) is suitable for installing directly on the wall or on wall panels. Fastening takes place using the perforation in the trunking. The GK device installation trunking possesses a C rail to accept a plastic partition. Couplings, pre-mounted on one side for the correct connection of the trunking sections, are included in the scope of delivery. GK device installation trunking is supplied as standard in the colours pure white (RAL 9010), cream (RAL 9001), light grey (RAL 7035) and grey (RAL 7030). The product range comprises all the necessary accessories and fittings.



GS device installation trunking

GS sheet steel device installation trunking is suitable for mounting directly on the wall or on fastening panels. Fastening takes place using the perforation in the trunking base. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. This connection is created without any extra wiring being necessary. The connection to the equipotential bonding can be created by simply using the protective conductor connection bracket. GS device installation trunking is supplied as standard in the colours pure white (RAL 9010), cream (RAL 9001) and light grey (RAL 7035).



Usable cross-section and quantity of cables



Trunking without accessory mounting box



Trunking with accessory mounting box



Usable cross-section for installed device installation units

The number of cables and the cable types are of key importance for the correct selection of trunking size. Even during the selection of the trunking system, it must be taken into account that the installation of accessory mounting boxes or device installation units means the loss of part of the usable cross-section. Refer to the tables for the usable cross-sections, which will help you to simplify the correct device installation trunking.

The usable cross-section of the device installation trunking is not restricted by device installation. The entire interior can be used for cable routing. The value “gross” in the tables indicates this usable trunking cross-section.

The installation of an accessory mounting box reduces the usable cross-section available for cable routing. The value “net” in the tables indicates this usable trunking cross-section.



Usable cross-section and quantity of cables, sheet steel

Usable trunking cross-section in mm²

Nominal size	Trunking depth ST = 70	Trunking depth ST = 70	Trunking depth ST = 90	Trunking depth ST = 90
	Gross	Net	Gross	Net
110	6.036	2.880	8.300	5.010
130	7.480	4.685	10.050	7.170
170	10.010	7.290	13.450	10.575
170 D top	5.150	2.365	6.360	4.055
170 D bottom	4.495	4.495	5.995	6.050
210	12.700	9.900	16.850	13.975
210 D top	6.572	3.784	8.785	5.905
210 D bottom	5.530	2.734	7.420	4.545
Desk trunking	9.950	7.310	-	-

Gross = trunking without accessory mounting box

Net = trunking with accessory mounting box

Number of cables to be laid in device installation trunking, filling factor 50%

Nominal size	Trunking depth ST = 70	Trunking depth ST = 70	Trunking depth ST = 90	Trunking depth ST = 90
Cable diameter	9 mm gross/net	11 mm gross/net	9 mm gross/net	11 mm gross/net
110	37/18	25/12	51/31	33/21
130	47/29	30/19	43/40	40/28
170	63/44	41/30	80/63	54/42
170 D top	32/15	21/10	41/24	27/16
170 D bottom	28/28	19/19	36/36	24/24
210	78/62	53/41	100/84	68/56
210 D top	40/24	27/16	53/35	35/23
210 D bottom	40/24	27/16	53/35	35/23
Desk trunking	61/45	41/30	-	-

Gross = trunking without accessory mounting box

Net = trunking with accessory mounting box



Usable cross-section and quantity of cables, aluminium

Usable trunking cross-section in mm²

Nominal size	Trunking depth AL = 70	Trunking depth AL = 70	Trunking depth AL = 90	Trunking depth AL = 90	Trunking depth AL = 100	Trunking depth AL = 100
	Gross	Net	Gross	Net	Gross	Net
110	4.715	1.920	6.400	3.605	-	-
133	6.480	3.660	6.480	3.685	-	-
173	8.620	6.090	11.756	8.961	-	-
173 D top	4.725	1.939	6.650	3.855	-	-
173 D bottom	3.410	3.410	4.790	4.790	-	-
213	10.760	7.965	14.688	11.893	-	-
213 D top	5.110	2.315	-	-	8.050	5.255
213 D bottom	5.110	2.315	-	-	8.050	5.255

Gross = trunking without accessory mounting box

Net = trunking with accessory mounting box

Number of cables to be laid in device installation trunking, filling factor 50%


Nominal size	Trunking depth AL = 70	Trunking depth AL = 70	Trunking depth AL = 90	Trunking depth AL = 90	Trunking depth AL = 100	Trunking depth AL = 100
Cable diameter	9 mm gross/net	11 mm gross/net	9 mm gross/net	11 mm gross/net	9 mm gross/net	11 mm gross/net
110	29/12	19/8	40/22	26/15	-	-
133	40/23	27/15	40/23	27/15	-	-
173	53/36	36/25	73/55	49/37	-	-
173 D top	29/12	20/8	41/24	27/16	-	-
173 D bottom	21/21	14/14	30/30	20/20	-	-
213	66/49	44/33	91/73	61/49	-	-
213 D top	32/14	21/10	-	-	50/32	33/22
213 D bottom	32/14	21/10	-	-	50/32	33/22

Gross = trunking without accessory mounting box

Net = trunking with accessory mounting box



Decentral protection

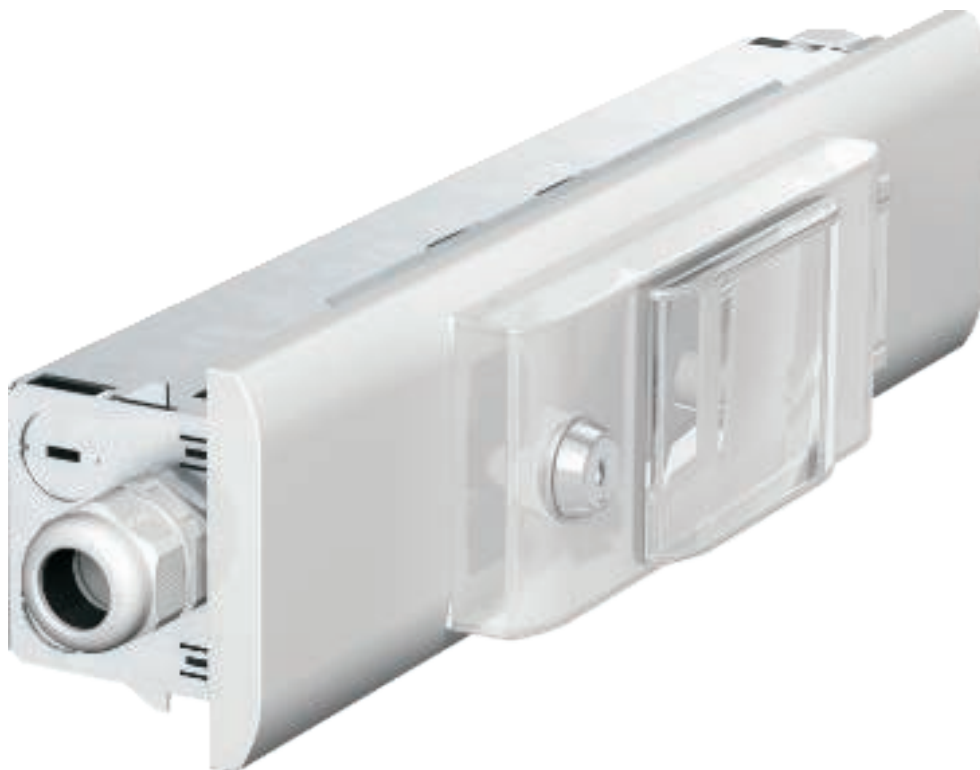

Decentral protection – in-trunking installation unit IKR

With decentral protection, a single cable with a large cross-section is run as the supply cable from the distributor to the IKR through the entire storey. The circuits are then tapped at suitable points, the cable cross-section reduced and centrally protected using cable safety switches. From the IKR, smaller cross-sections continue to the consumers. The in-trunking installation unit IKR is suitable for all the device installation trunking with a system opening of 76.5 mm.

The benefits are to hand

There are less cables in the device installation trunking and the larger cross-sections up to the cable protection switches give a higher current load capacity in the sockets. The IKR in-trunking installation units contain everything in a single housing which is required for decentralised protection.



Noise protection



When walls speak

In modern office buildings, device installation trunking is often run through office partitions, creating a connection between multiple offices. Here, there is the problem that noise may be carried through the trunking penetration. This air noise transmission can be prevented by using insulating wool in the area of the trunking wall penetration.

Air conduction of noise

To prevent air conduction of noise, the free cross-section of the trunking remaining after cabling must be filled with a noise insulation, e.g. air noise barrier, type 7 LSB. The same applies to any gaps between the trunking and the adjoining wall.

When used correctly, the air noise barrier, type 7 LSB, can achieve attenuation of up to 40 dB. The air noise barrier is made of rockwool and is provided in individual plaits,

with 15 plaits in each package. Multiple plaits are usually required to fully insulate trunking. The following table contains the required number of plaits for standard trunking sizes.

Required number of plaits according to the trunking size

Trunking width	Trunking depth 70 mm	Trunking depth 90 mm
Width 110 mm	12	15
Width 130 mm	13	17
Width 170 mm	15	20
Width 210 mm	19	24



Mounting aid, Rapid 80 device installation trunking



GK warehouse office application area

The GK PVC device installation trunking system is often used in industry for offices near to production.



GK laboratory application area

In laboratories, this system can create a solid basis for a reliable electrical installation.



GK flexible office installation

The large product range of fittings and installation options allows flexible installation, for which changes and additions are not a problem.



GS stable and with large volume

The GEK-S device installation trunking is cut to the appropriate length using a capping and mitring saw. Saw cores are used for this, ensuring an exact cut.



GS desk trunking

Its sloping installation front means that the GS desk trunking offers ideal access to the devices. It is primarily used in workshops and laboratories.



GA area of application, executive office

The exclusive appearance of anodised surface of the GA device installation trunking means that special design concepts and requirements can be implemented in offices and seminar rooms.



GK cutting

The GK device installation trunking can be cut using a standard commercial saw.



GS/GA cutting

The GS and GS device installation trunking is cut to the appropriate length using a capping and mitring saw. Saw cores can be used for this, ensuring an exact cut.



De-burr GS/GA cutting edges

De-burr the cutting edges using a file.



Mounting on the wall

The fastening holes can be drawn on the wall using a chalk mark and then drilled.



Mounting on the wall


The device installation trunking is fastened to the wall using anchors of type 910/N and Golden Sprint screws.



GK coupling mounting

The coupling of the GK device installation trunking is contained in the scope of delivery and is pre-mounted. It is pulled out of the trunking and automatically locks in the correct position. This allows simple mounting of additional trunking sections.

Mounting aid, Rapid 80 device installation trunking

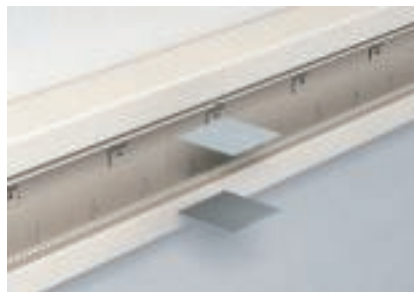


GK/GS/GA coupling mounting

A coupling pair must be ordered separately to connect two trunking bases.



GK/GS/GA coupling mounting

Insert the coupling in the top part of the device installation trunking and push it into the trunking. This automatically locks the coupling and, at the same time, the equipotential bonding is created between the two trunking bases.

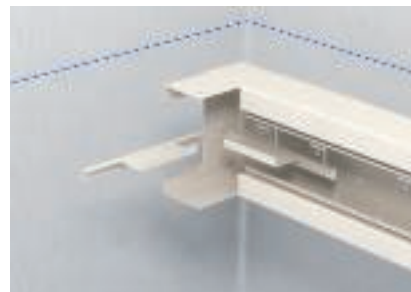

GS mounting of simplified internal corner

The simplified internal corner is pushed into the trunking base and connected to the separating retainer on the trunking side.



GS mounting of simplified internal corner

The internal corner is completely fastened on the wall using the GS device installation trunking.



GS mounting of simplified internal corner

The second trunking base is pushed onto the internal corner and fastened to the wall. Then the separating retainer must be mounted. The equipotential bonding between the trunking sections is created using the separating retainer.



GK/GS/GA external corner mounting

The external corner is fastened directly on the wall or ceiling using bolts and anchors. In the GS and GA systems, the equipotential bonding is ensured through the use of trunking couplings.



GK/GS/GA accessory mounting box mounting

Lock the accessory mounting boxes of series 71GD...to the cover contour. They can be moved lengthwise in the trunking.



GK/GS/GA accessory mounting box mounting

The separating retainer divides up the device installation trunking, meaning that different voltage layers can be routed. The separating retainer must be interrupted in the area of accessory mounting boxes.



GK/GS/GA accessory mounting box mounting

The base of the accessory mounting boxes can be removed if necessary (e.g. for data boxes). This means that the box can be used as a front-locking device support.



Mounting aid, Rapid 80 device installation trunking



GK/GS/GA accessory mounting box mounting

The real trunking opening width of 76.5 mm ensures that even switches of a greater external radius do not leave visible openings between the top trunking cover and the series cover.



GK/GS/GA accessory mounting box mounting

When the cover frame and central plates have been positioned, the installation has a tidy appearance. The selection of the switch range plays a key role here.



GK/GS/GA Modul 45 device installation

The Modul 45 accessory mounting box system and the appropriate covers of the S990 series allow space and time-saving installation in all the device installation trunking systems and service poles.



GS/GA cover earthing

With cut covers, the locking springs can be installed at a later date as necessary. They must be mounted at a distance of 50 mm from the end of the cover.



GS/GA cover earthing

The self-contacting cover earthing guarantees continuous protection without any additional wiring. The locking springs are pre-mounted in the cover.



GK/GS/GA duct clamp mounting

The duct clamp is placed diagonally on the separating retainer and turned into the device installation trunking. The marked side must point upwards.



GK/GS/GA duct clamp mounting

Place the duct clamp. Mounting is complete.



GS mounting of protective conductor connection bracket

The protective conductor connection bracket is turned into the appropriate recesses in the trunking base and fastened using a screwdriver.



GS mounting of protective conductor connection bracket

To earth the system, connect the equipotential bonding to the protective conductor connection bracket.




GA mounting of protective conductor connection bracket

The protective conductor connection bracket is turned into the appropriate C rail in the trunking base and fastened using a screwdriver.

Mounting aid, Rapid 80 device installation trunking



GK/GS end piece components
The end piece consists of a fastening element and a screen. The screen guides are suitable for each trunking type (symmetrical, asymmetrical or duoduct) as well as left and right end pieces. The pictograms on the screen help to select the appropriate guide.

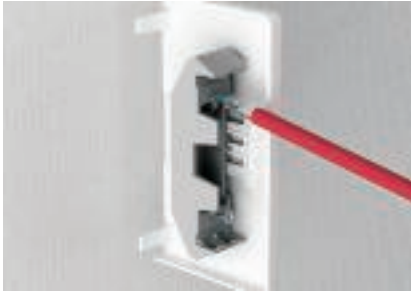

GK/GS fastening element mounting
Locate the bolts of the fastening element and turn them in only a few revolutions. Push the fastening element into the matching panel guide.



GK/GS end piece mounting
Place the pre-mounted end piece on the trunking and fix it to the trunking using the two bolts. Then mount the cover.



Installation complete
The well-thought-out and matched components allow the creation of high-quality, tidy installations.





Accessories Rapid 80 device installation trunking




Installation principle of panel and convection grid systems	54
Mounting aid, device installation trunking accessories	55



Installation principle of panel and convection grid systems

System components

1	Device installation trunking, steel
2	Steel cover
3	Plastic cover
4	Partition
5	Convection grid profile
6	Profile connector, horizontal
7	Profile connector, vertical
8	Mounting and connection profile
9	Floor panel
10	Convactor panelling

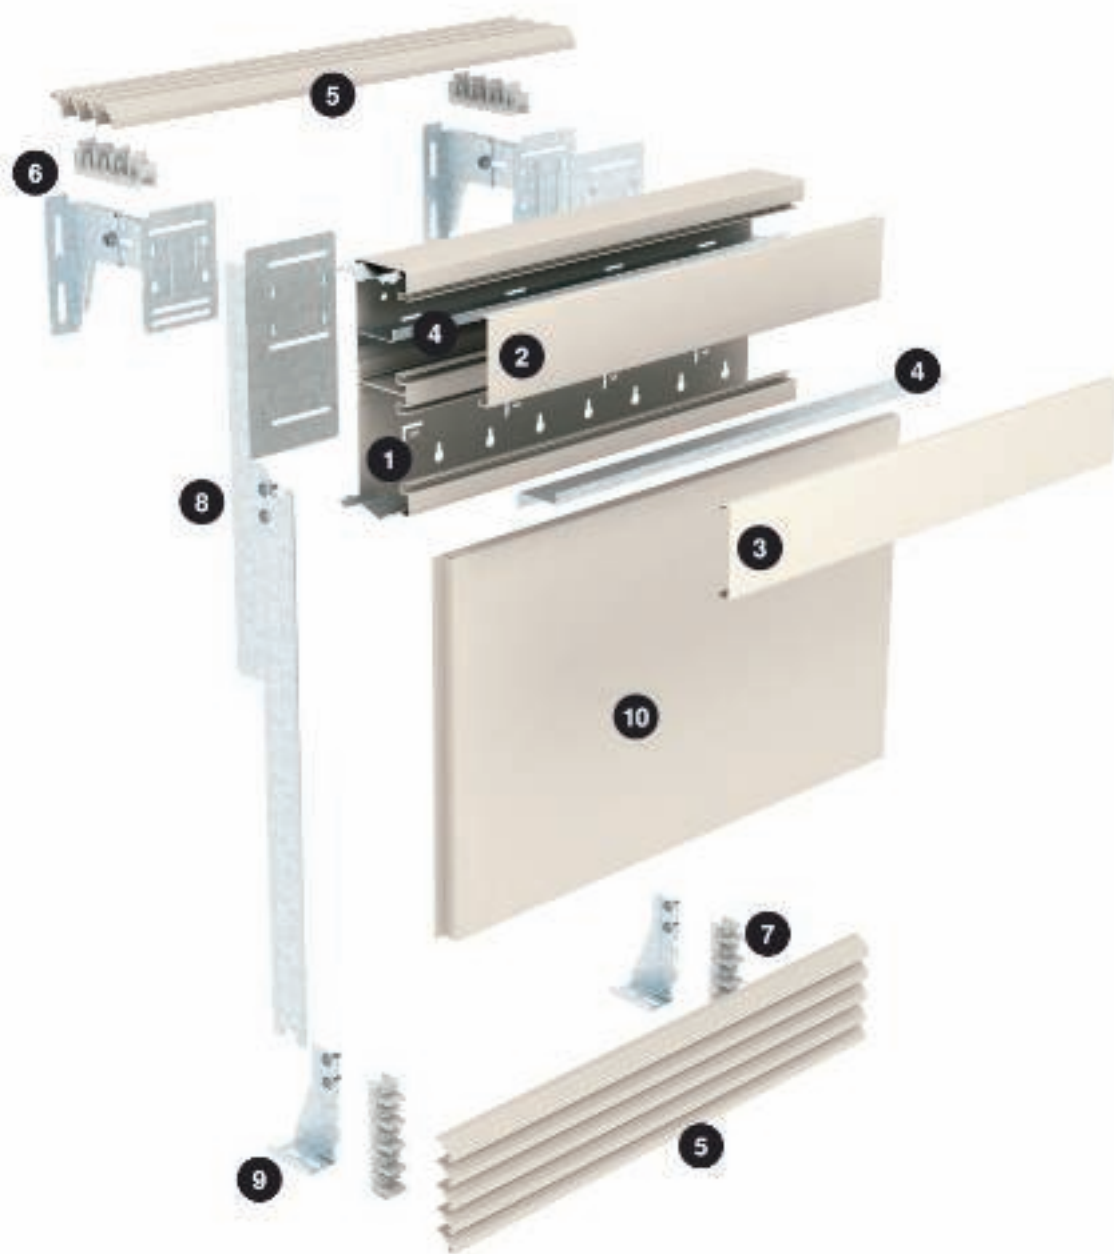

Mounting aid, accessories Rapid 80 device installation trunking



Convector panelling, open at bottom

Often, convector panelling is planned in such a way that it is not connected to the floor, in order to aid room cleaning.



Convector panelling, closed at bottom

To ensure the continued circulation of the room air, the connection to the floor should be made with convection grids.



Panelling with convection grids

Convector panelling can also be fully created using convection grids. The spaces between the lamellae supports circulation and creates a visually attractive solution.



Installation of wall bracket

The fastening holes for wall brackets are drawn on the wall using a chalk mark. The maximum panel spacing should be 600 mm.



Installation of wall bracket

The holes for fastening the wall brackets are drilled and the wall panels fastened to the walls using bolts and anchors.



Installation of wall bracket

The height and depth of the wall panels are aligned one after the other and then the panels are locked.



Installation of stabilising profile

The stabilisation profile is required to install GEK device installation trunking of trunking height 213 mm. This is simply locked into the front of the existing panels.



Installation of connection profile

When combined with the vertically aligned convection grids or convector panelling, the appropriate installation and connection profiles are locked to the front of the fixing panels.



Installation of connection profile

The mounting and connection profiles, type 6VG3/..., are required to install convection grid profiles, type 6VV3/.. are required for closed convector panelling.



Installation of device installation trunking on wall bracket

The GEK device installation trunking is mounted on the wall racket and fastened using the M5 fastening screws. This also creates a conductive connection between the trunking and the wall bracket.



Installation of profile connector

The profile connectors for horizontal convection grids are attached to the wall brackets and locked with the clamp.



Installation of spacings for convection grid mounting

When mounting convection grids on the wall panels, ensure that a maximum spacing of 150 mm is maintained between the end of the grid lamella and the wall panels.



Mounting aid, accessories Rapid 80 device installation trunking



Installation of convection grids

The convector grid lamellae are inserted and locked in the profile connector one after another.



Installation of convection grids

The profile connectors are available in different lengths for accepting between two and twelve convection grid lamellae. If necessary, they can be mounted one behind the other on the fastening panels.



Convection grid with device installation trunking

The horizontal convection grids present a high-quality appearance and a perfect transition between the device installation trunking and the wall. They also allow the room air to circulate.



Installation of convector panelling

To mount the convector panelling, first attach the mounting and connection profiles 6VV3/... During planning, specify the length of the mounting blades according to the size of the convector panelling.



Installation of convector panelling

The convector panelling is attached to the mounting and connection profile and clamped at the bottom using the mounting blade. Fastening on the floor is only required in conjunction with the installing of the floor panel BVB125 for the acceptance of additional convector grid lamellae.



Installation of convector panelling

If panelling is required down to the floor, mount the floor bracket first. Then the selected profile connector can be locked in place.



Installation of convector panelling

After installing the floor panels, the convector panelling can be installed first, followed by the convection grid lamellae.



Mounting of vertical convection grids

The convection grid profiles are also simply locked into the profile connectors for vertical mounting.



Fire protection systems

OBO KBK-K fire protection cushions are the ideal solution for running PVC device installation trunking or cable ducts through walls classified as fire resistance.



Fire protection systems

The OBO FBA-BK fire protection blocks made of permanently elastic foam are superbly suited as insulation for metal or plastic trunking.



Mounting aid, accessories Rapid 80 device installation trunking



Soundproofing barrier

The noise limit barrier is fitted in the trunking in the area of a wall penetration between two rooms. These achieve noise insulation of approx. 40 dB.



Mounting of wall cover

The wall cover is mounted on the already mounted device installation trunking. For this, pull off the double-sided adhesive tape on the bottom side and stick it on the wall cover.



Supply trunking

With its tightly closable cover, the supply trunking is ideal for feeding in cables in device installation trunking.



Installation complete

The well-thought-out and matched components allow the creation of high-quality, tidy installations.







Mounting aid for service poles 60

Mounting aid for service pole systems



Open-plan office application area

ISS service poles are used in open-plan offices to supply the workstations. The poles are powered through the false ceiling.



Laboratory application area

In the laboratory, the workstation power supply can be positioned exactly where it is needed.



Retail store application area

In the till area of retail stores, ISS service poles are used to supply till areas.



Specify the location of the service pole

The location of the ISS service pole must be specified.



Cut out ceiling plate

The ceiling plate for the ISS service pole is prepared.



Erect service pole

The ISS service pole is pushed through the ceiling plate and tensioned between the floor and the ceiling.



Erect service pole

To tension it, the telescope of the ISS service pole is extended to the ceiling or the floor and is tensioned using a spanner.




Connection of the service pole in the false ceiling

The ISS service pole is connected to the routed cables in the false ceiling. This can be done using a branch box or the cables are run directly into the service pole.




Mounting of room-height service pole

To mount the ISS 120 service pole, remove the cover of the ISS service pole.

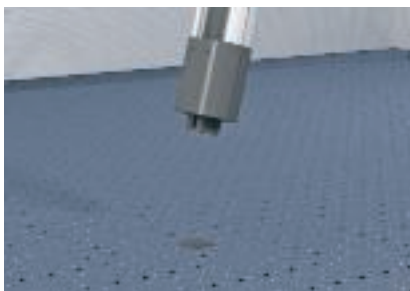

Mounting of room-height service pole

The rubber support is laid under the ISS service pole. This prevents the pole from slipping on smooth substrates.

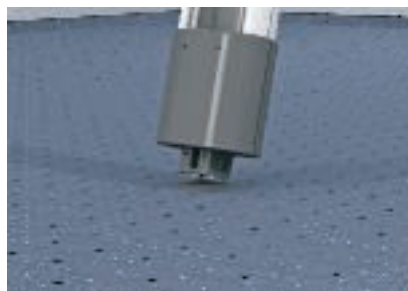

Erect room-height service pole

The ISS service pole is swivelled towards the ceiling.



Tensioning of service pole

The ISS service pole is tensioned between the floor and the ceiling using the clamping device.

Mounting aid for service pole systems



Cable entry

The cables are inserted in the holes located at the top of the ISS service pole.



Device installation in service poles

Then the devices are connected and installed in the ISS service pole.



Device installation in service poles

Finally, the covers are placed in the ISS service pole.




Mounting of floor service pole

With these ISS service poles, fastening takes place on the floor. The cables are run to the pole through the underfloor system or cable protection pipes.



Mounting of clamping device

The cover of the service pole is removed and the clamping device screwed on.

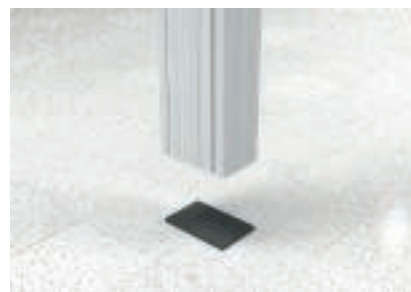


ISS on rubber support

The ISS service pole is erected and locked in place using the clamping device. In the case of slippery substrates, a rubber support is to be placed in the floor area.



ISS clamping device

The fixed tensioning between the floor and the ceiling is created using the bolt attached to the clamping device. When the ISS service pole has been fully installed, then the lock nut is screwed tight.

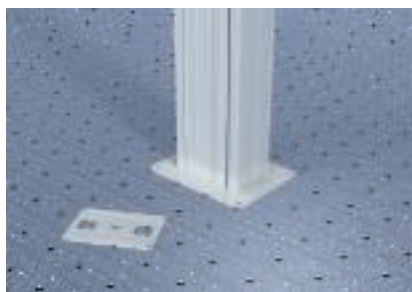

ISS screwed to the ground

If the ISS service pole is to be screwed to the floor, then the existing floor panel must be removed and replaced with a larger floor plate.




Screwing on of the clamping device

ISS service poles with clamping device to ceiling can be screwed tight as an option. For this, replace the head plate of the clamping device.



ISS screwed to the ground

The ISS service pole can now be fastened on the floor using bolts and anchors.

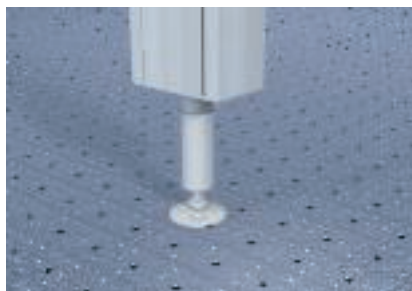

Mounting of stand

If the ISS service pole is to be mounted as a stand-off on the floor, then the stand must be attached in the floor plate. One or two stands can be mounted, depending on the pole type.



Mounting of ceiling rosette

The ceiling rosettes can be attached after complete installation. They consist of two parts, which are interconnected. They are either stuck on using the attached adhesive film or are screwed on.

Mounting aid for service pole systems




Service pole earthing

The continuous equipotential bonding between the cover and base is made automatically using the locking brackets attached to the cover.



Installation complete

The ISS service poles can be positioned exactly where all kinds of circuits are required.

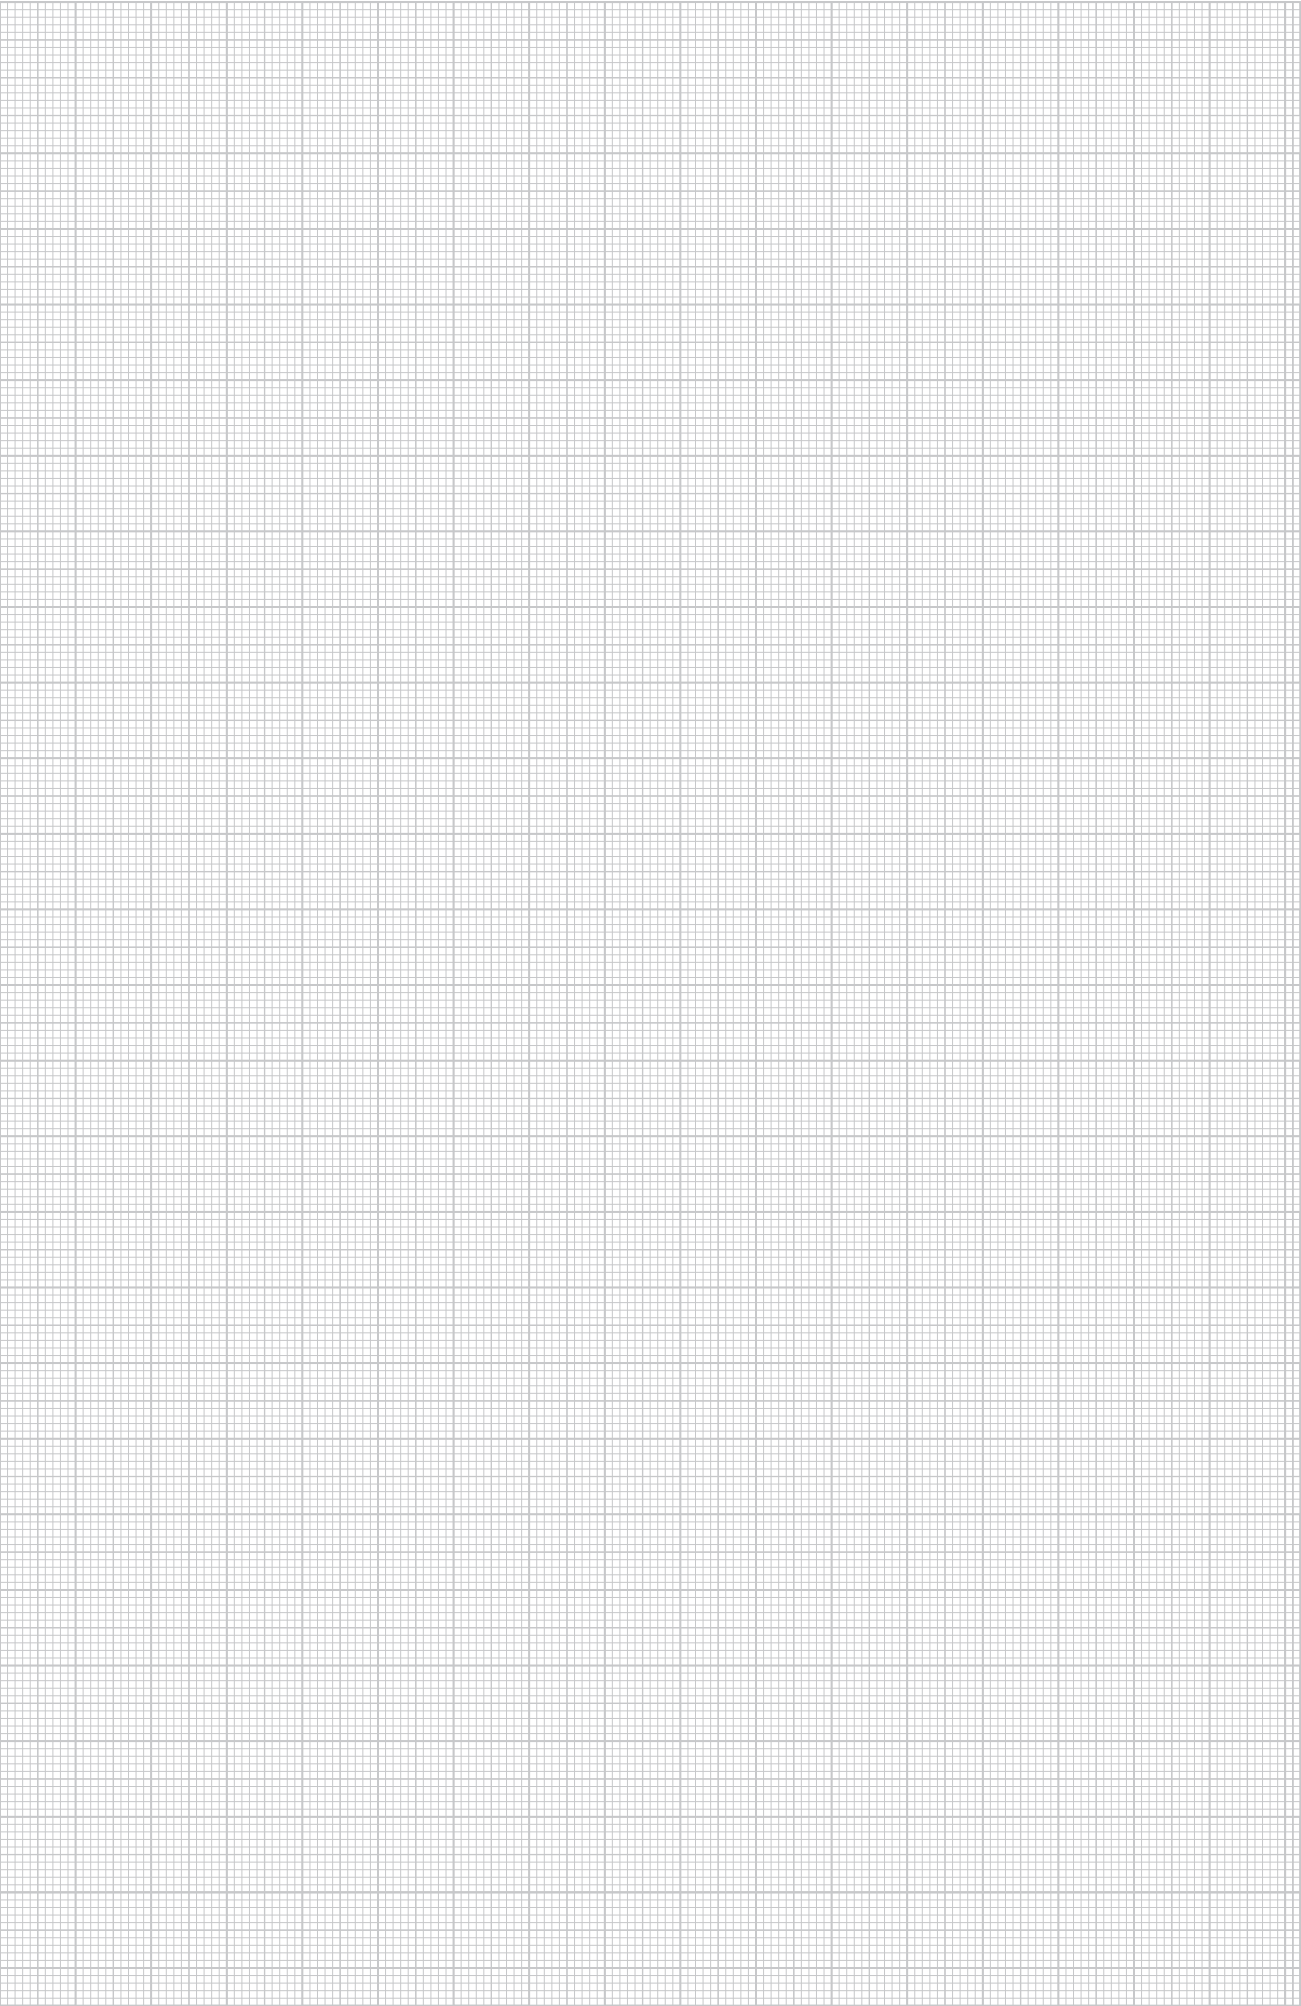





Country-specific sockets of the Modul 45 system	66
Mounting aid, Modul 45 sockets	67
What is Modul 45connect?	68
Mounting aid, Modul 45connect sockets	70
Close safety loopholes in local networks	71
Mounting aid, Modul 45 data technology	73



Country-specific sockets of the Modul 45 system



Ready for the world

The Modul 45 system is ready for use around the world. The continually growing range of components and systems included in the Modul 45 system is fulfilling ever more international requirements. Thanks to country-specific sockets such as the socket with earthing pin, the Danish or Swiss sockets, the Modul 45 system is being used in an increasing number of countries.

Danish standard socket

for plug type C (Euro) and K:

- Denmark

Socket with earthing pin

for plug type C (Euro) and E:

- Belgium
- France
- Monaco
- Poland
- Slovakia
- Czech Republic

Swiss standard socket

for plug type C (Euro) and J:

- Liechtenstein
- Switzerland

Power socket

for plug type C (Euro) and F:

- Albania
- Andorra
- Bosnia and Herzegovina

- Bulgaria
- Germany
- Estonia
- Finland
- Greece
- Iceland
- Croatia
- Latvia
- Lithuania
- Luxembourg
- Macedonia
- Moldova
- Montenegro
- Netherlands
- Norway
- Austria
- Portugal
- Romania
- Russia
- Sweden
- Serbia
- Slovenia
- Spain
- Ukraine
- Hungary

All data subject to change.

Safety power supply

To restrict special power circuits in industrial buildings, the sockets are available in the colours orange, green and red. This means that, for example in a laboratory, all the requirements of DIN VDE 100 Part 710 can be met.



Mounting aid for Modul 45 sockets



Device connection

The electrical connection is made using integrated screwless terminals, designed for rigid cables with a cross-section of 1.5–2.5 mm². Flexible wire ends must be equipped with a plug connector.



Use of strain relief

The strain relief is attached to the front side on the fastening grooves. The strain on cables of a diameter of up to 10 mm is relieved correctly.




Using the encoding pin

Attach the encoding pin to the connector and stick it fast. It is not possible to insert a connector into an encoded socket without the encoded pin being mounted.



What is Modul 45connect?

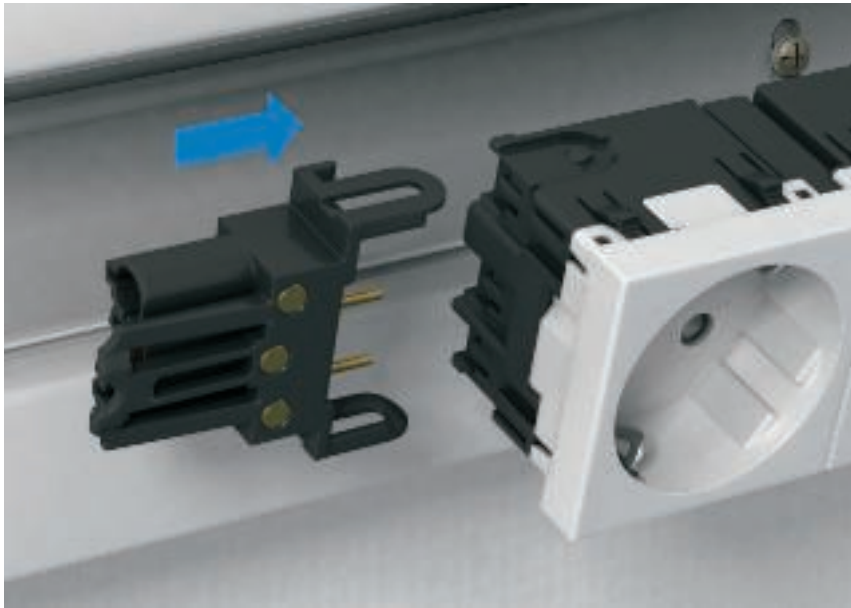

Mounted at high speed

Time is money! This statement reflects the fact that installation and mounting time is becoming ever more important in the decision for or against a product. The new Modul 45connect socket system from OBO Bettermann is taking this principle up and can offer new and innovative opportunities with regard to speed, safety and flexibility.

The new socket concept

The Modul 45connect sockets, with their simplified installation and optimised and reduced mounting work, are waiting just for you. With them, you need not do without the known benefits of the Modul 45 products. The plug connections of the new sockets are located on the front side and are thus particularly suited to applications in device installation trunking or service poles. Besides the standard fixed wiring up to a cable cross-section of 2.5 mm², the new arrangement of the plug connections allows simple attachment of connection adapters. For country-specific use, protective contact sockets and sockets with an earthing pin are available in double and triple versions with a 33° connection direction.

Connection adapters


All the connection adapters for the Modul 45connect system are equipped with the tried-and-trusted GST18i connector system and use connector and socket adapters to offer a standardised connection and forwarding option for power supplies using the known VL extension cables. To ensure visual differentiation between circuits, all the connection adapters and connection cables are available in the colours white and black.

Connection adapter

An additional new function is the connection of sockets using the plug connector for the Modul 45connect system. It is possible to create multi-socket combinations (up to 6x combinations) without the need for additional wiring.



What advantages does Modul 45connect system have?

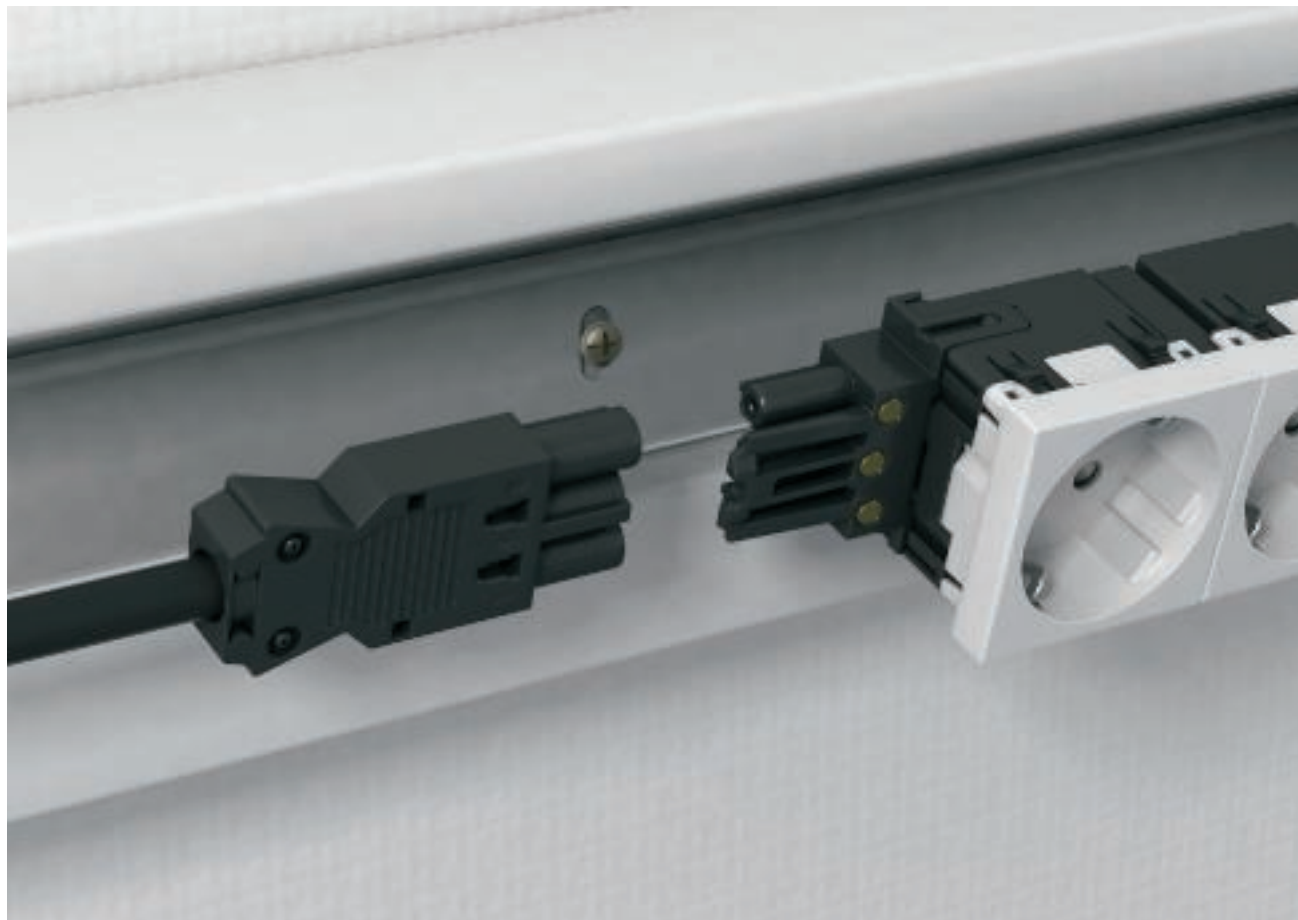

Quick installation

The Modul 45connect sockets, together with the connection adapters, can reduce mounting times considerably, compared to standard socket installations. Time-intensive work steps when connecting sockets, such as removing the insulation from cables, connecting wires and mounting strain reliefs, are no longer necessary. The socket connection can be made in a few actions without the use of tools.

Touch protection included

If sockets with connection adapters or connectors are used for electrical installations, then there is no need for an additional protective housing. Modul 45connect guarantees comprehensive touch protection according to the VDE requirements.

More safety

When the adapter is used, it is almost impossible to swap the connection sides. Each box has a socket and a plug connection side, to which only a matching adapter can be connected. The Modul 45connect socket system ensures that unpleasantness, and subsequent damage caused by faulty wiring, are a thing of the past.

Flexible and secure for the future

Should reconstruction take place in the system at a later date, only the plug connections need to be disconnected and then the system can be adapted to the new circumstances without any problems.



Mounting aid for Modul 45connect sockets



Conventional device connection

The electrical connection is made using integrated screwless terminals, designed for rigid cables with a cross-section of 1.5–2.5 mm². Flexible wire ends must be equipped with a plug connector.



Device connection with connection adapter

The boxes possess two connection sides, which are designated the plug and socket side. Mechanical encoding is used to limit the connection options of the adapters to one side per type. Incorrect connection of the socket is excluded by the encoding.



Connection adapter, straight, connector

Insert the connection adapter (connector part adapter) into the plug side of the box and lock it in place.



Connection adapter, straight, socket part

Insert the connection adapter (socket part adapter) into the socket side of the box and lock it in place.



Connection adapter, U-shaped, connector part

Insert the connection adapter (U-shaped connector part adapter) into the plug side of the box and lock it in place.



Connection adapter

Insert the connection adapter into the socket side of the first box and lock it in place. The next socket can be inserted and locked when the protective flap is removed. Note: Socket combinations with two connection adapters at most are permitted.



Use of strain relief

The strain relief is attached to the front side on the fastening grooves. The strain on cables of a diameter of up to 10 mm is relieved correctly.



Close safety loopholes in local networks



Complete solutions from one source

Data loss can prove fatal

More than 40% of companies losing all their data never recover; 29% have to close their business within two years of the crash. All too often, the causes of these catastrophes are within the cabling infrastructure.

Network security is essential

You cannot afford your networks to fail! As a planner, installation engineer or person responsible for IT and data cabling, you know of the essential significance of a reliable, secure infrastructure. Every second company suffers damage of up to 50,000 US dollars, caused simply by a one-hour interruption of their network. In sensitive areas, the loss could rise up to 90,000 US dollars per hour. The long-term consequences of longer failures in data and communication networks can often reach dramatic dimensions. Of particular sensitivity are stock exchanges and money transfer facilities, power supplies, telecommunication, health care and transportation, as well as larger manufacturing facilities.

The factor of people and small causes

It is often the simple, unspectacular connection errors and human frailties which cause network faults and data loss. Someone carelessly, incorrectly or improperly removes a connector, manipulates a cable connection or connects a universal cable to the wrong socket. And that's where the damage begins. Independent studies have shown that only 7% of data loss is caused by computer viruses, but

44% is caused by hardware errors and 32% by human error. Other studies show that 59% of network problems can be traced directly back to the physical infrastructure and the connections.

More network safety

- Mechanical and colour coding prevent incorrect network connections.
- A lock mechanism allows authorised attachment and removal protection.

More flexibility

- Suitable for RJ45 & SC-RJ fibre components
- Simple attachment and refitting thanks to R&M smart holes

Comfort

- Tool-free mounting
- Retro-installation

Causes of data loss and network faults

Errors reducable using OBO and R&M

- Faulty manipulation 32%
- Hardware and system errors 32%
- Various extreme influences, EMC, etc. 3%

Errors not reducable by OBO and R&M

- Virus 7%
- Software errors 14%



Universal data technology support for Modul 45



Universal support suitable for all applications

OBO offers two universally usable data technology supports for device installation with data modules: with straight connection direction and with slanting outlet. Both supports possess system fastening on all four sides and can thus be used in the wall trunking or in an installation column. The data outlets are always arranged horizontally. Connection cables can be attached simply and safely and do not impede each other.

Safety

Integrated dust protection flaps cover the modules when unused and protect them against dust and other outside influences. When in use, the flaps are pushed up, and they close again automatically when the connection cable is removed.

Labelling panel

Both supports are supplied with labelling panels with a transparent cover. The labelling panel is designed for strip labels of up to 12 mm width.

Flexible use

The data technology support consists of two components which are combined under a single order number. The base support assumes the function of installation in the system environment whilst the system-specific module support accepts the data modules. Each data technology support can accept up to two data modules. Both versions of the Universal data technology support are available for standard data modules.



Mounting aid for Modul 45 data technology



Device connection – cable preparation
Remove the outer jacket of the data technology cable and, if necessary, the insulation to a length of 50 mm.



Device connection – strain relief
Attach the cable to the cable seat and relieve the strain using the enclosed cable ties. With shielded cables, ensure that the contacting strap is connected to the shield.



Device connection – cable sorting
Attach the individual wires according to the connection table and fix the using the contacting terminal.



Device connection – shorted cable excess
Cut off the excess cable length with cutters.



Device connection – cable attachment
Place the contacting bracket on the connection module and lock it in place. In the shielded version, the shield housing must also be attached.



Device connection as RJ11 telephone socket
When used as a telephone connection box, wire only the inner connection points. The reducing frame (type DMZ-RR/RJ11) prevents unintentional insertion of RJ45 connectors into the telephone socket.




Data technology support installation – device installation
Insert the complete data technology connection module into the data technology support from behind. For this, insert the support plate of the connection module into the seat and lock it in place.



Data technology support installation – system installation
Simply lock the data technology support into the system environment. The locking fastening is suitable for horizontal and vertical device installation.



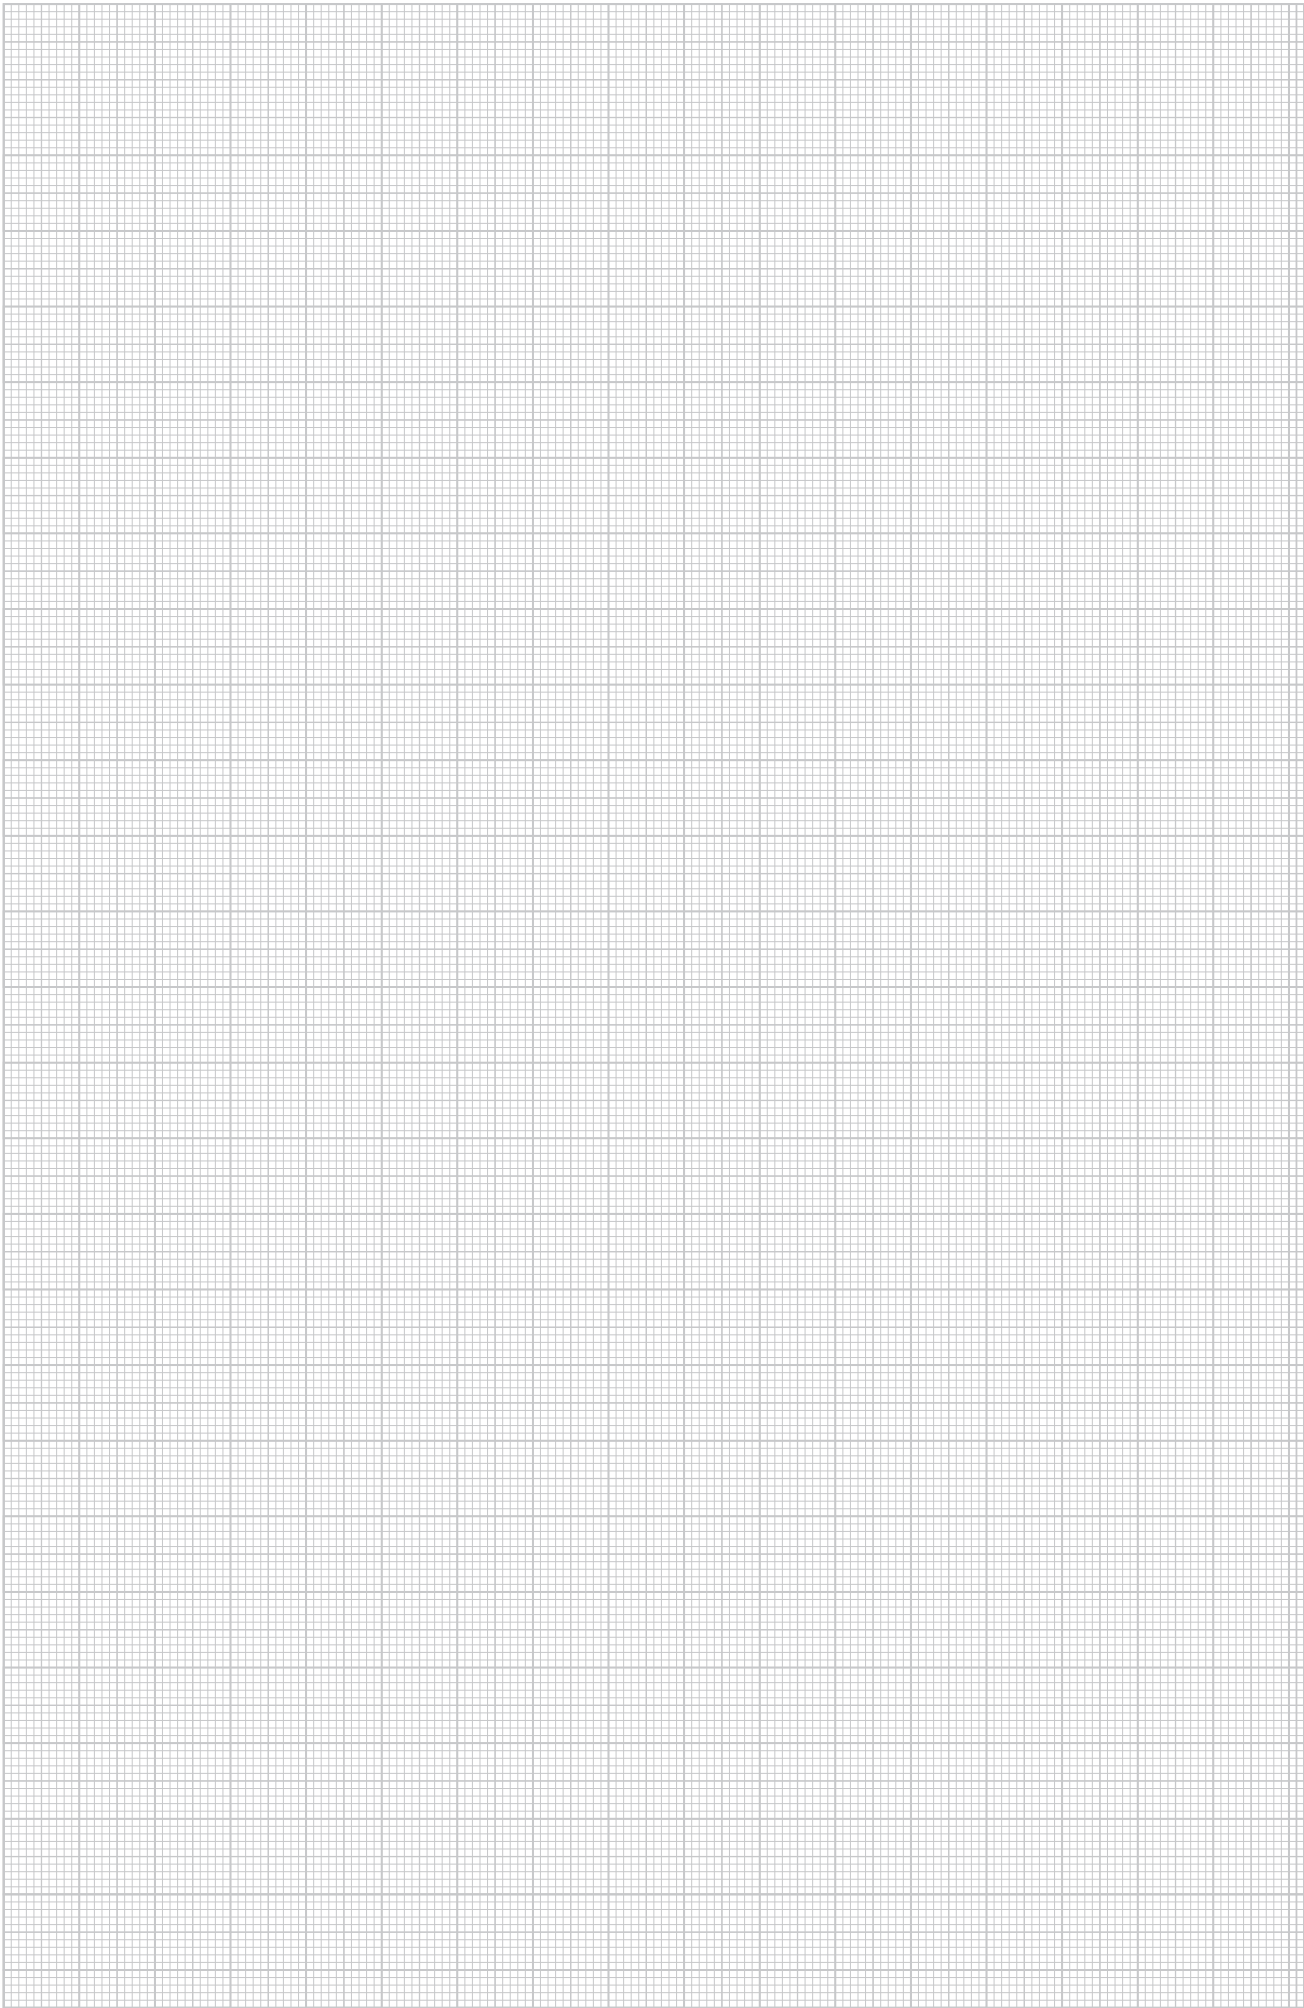

Plastic materials

GUM — Rubber

HP — Hard cardboard

MGUM — Foam rubber

PA — Polyamide

Temperature resistance:
permanently up to approx. 90 °C, briefly up to about 130 °C
and to about minus 40 °C*.

Chem. resistance generally as for polyethylene.

Resistant to

Petrol, benzene, diesel oil, acetone, solvents for paints and lacquers, oils and greases.

Bleach, most acids, chlorine.

Low in air-humid conditions; only with some aqueous salt solutions.
Highly desiccated parts (high temperature and extremely low air humidity)
are highly sensitive to fuels and various solvents.

PA/GF — Polyamide, fibreglass reinforced

Temperature resistance:
permanently up to 100–110 °C, briefly up to 160 °C
and to about minus 40 °C*.

Resistant to

Petrol, benzene, diesel oil, acetone, solvents for paints and lacquers, oils and greases.

Slightly susceptible to stress-cracking.

Bleach, most acids, chlorine.

Low in air-humid conditions; only with some aqueous salt solutions.
Highly desiccated parts (high temperature and extremely low air humidity)
are highly sensitive to fuels and various solvents.

PE — Polyethylene

Temperature resistance:
hard types permanently up to about 90 °C, briefly up to about 105 °C,
soft types permanently up to about 80 °C, briefly up to about 100 °C and
to about minus 40 °C*.

Resistant to

Alkalis and inorganic acids.

Conditionally resistant to

Acetone, organic acids, petrol, benzene, diesel oil, most oils.

Chlorine, hydrocarbons, oxidising acids.

Relatively high.

Stress cracks can be caused by, among others, acetone, various alcohols, formic acid, ethanol, petrol, benzene, butyric acid, acetic acid, formaldehyde, various oils, petroleum, propanol, nitric acid, hydrochloric acid, sulphuric acid, soap solutions, turpentine, trichloroethylene, citric acid.

PP — Polypropylene

Temperature resistance:
permanently up to approx. 90 °C, briefly up to about 110 °C
and to about minus 30 °C*.

Chem. resistance generally as for polyethylene.

Resistant to

Alkalis and inorganic acids.

Conditionally resistant to

Acetone, organic acids, petrol, benzene, diesel oil, most oils.

Chlorine, hydrocarbons, oxidising acids.

Low, only with some acids such as chromic acid, hydrofluoric acid and hydrochloric acid, as well as nitrogen oxide.

PVC — Polyvinylchloride

Temperature resistance:
permanently up to 65 °C, briefly up to 75 °C and to about minus 30 °C.

Resistant to

Weak acids, alkalis, oils and greases, petrol.

Strong acids, benzene, acetone, iodine, toluene, trichloroethylene.

Low, only with some solvents such as benzene and acetone.

*The minus values apply only for parts in the quiescent condition with no severe impact stress.

There is no plastic that is resistant to every chemical. The agents listed are only a small selection. Plastic parts are especially at risk in the presence of chemicals and high temperatures. Stress cracks may occur. If in doubt, please consult us and/or ask for a detailed chemical resistance table.

Stress crack formation: stress cracks may occur if plastic parts under tension are exposed to chemicals at the same time. Parts made of polystyrene and polyethylene are particularly susceptible. Stress cracks may even be caused by agents to which the plastic in question is resistant in the absence of stress. Typical examples of parts under constant stress when used as intended: grip clips, intermediate supports of cable glands, ribbon clips.



European classification

Classification to EN 50085-1

		WDK Cable trunking	LKM Cable trunking	SKL Skirting trunking	VK Wiring trunking	GEK-K Device installation trunking Rapid 45	GEK-A Device installation trunking Rapid 45	GK Device installation trunking	GS Device installation trunking	GEK-A Device installation trunking	ISS Service pole
6.1	According to material	*2	*2	*2	*2	*2	*2	*2	*2	*2	*2
6.2	According to impact resistance for installation and application		*1								
6.2.1	Electrical installation duct systems for impact energy 0,5 J.	x	*1								
6.2.2	Electrical installation duct systems for impact energy 1 J.		*1								
6.2.3	Electrical installation duct systems for impact energy 2 J.		*1								
6.2.4	Electrical installation duct systems for impact energy 5 J.		*1			x		x			
6.2.5	Electrical installation duct systems for impact energy 20 J.		*1				x		x	x	x
6.3	According to temperature, as specified in the Tables 1, 2 and 3										
	Table 1: Minimum storage and transport temperatures $\pm 2^\circ\text{C}$										
	-45										
	-25		x				x		x	x	x
	-15		x			x		x			
	-5	x	x		x						
	Table 2: Minimum installation and application temperatures $\pm 2^\circ\text{C}$										
	-25		x				x		x	x	x
	-15					x		x			
	-5	x									
	+5										
	+15				x						
	Table 3: Maximum application temperatures $\pm 2^\circ\text{C}$										
	+60	x			x	x	x	x	x	x	x
	+90										
	+105										
	+120										
6.4	According to the resistance against fire spread										
6.4.1	Electrical installation trunking systems which allow the spread of fire	x			x	x		x			
6.4.2	Electrical installation trunking systems which do not permit the spread of fire		x	x			x		x	x	x

x Appropriate classification, *1 in test, *2 under consultation



European classification

Classification to EN 50085-1

		WDK Cable trunking	LKM Cable trunking	SKL Skirting trunking	VK Wiring trunking	GEK-K Device installation trunking Rapid 45	GEK-A Device installation trunking Rapid 45	GK Device installation trunking	GS Device installation trunking	GEK-A Device installation trunking	ISS Service pole
6.5	According to the electrical conductivity										
6.5.1	Electrical installation trunking system with electrical conductivity		x				x		x	x	x
6.5.2	Electrical installation trunking system without electrical conductivity	x		x	x	x		x			
6.6	According to the electrical insulation property										
6.6.1	Electrical installation trunking system without electrical insulation property	x		x	x	x		x			
6.6.2	Electrical installation trunking system with electrical insulation property		x				x		x	x	x
6.7	According to the protection ratings offered by the housing or casing to EN 60529:1991										
6.7.1	According to protection against ingress of solid foreign bodies	x	IP30	x			x	x	x	IP30	IP30
6.7.2	According to protection against ingress of water										
6.7.3	According to protection against contact with dangerous parts										
6.8	According to protection against corrosive or impure substances	*2									
6.9	According to the fastening type of the system trunking cover										
6.9.1	Only open the trunking cover of the electrical installation trunking system without tools	x	x		x						
6.9.2	Only open the trunking cover of the electrical installation trunking system with tools					x	x	x	x	x	
6.10	According to the electrical protection separation										
6.10.1	Electrical installation trunking systems without internal protection separation element		x		x		x		x	x	
6.10.2	Electrical installation trunking systems with internal protection separation element	x				x		x			

x Appropriate classification, *2 under consultation



European classification

Classification to EN 50085-2-1

		WDK Cable trunking	LKM Cable trunking	SKL Skirting trunking	VK Wiring trunking	GEK-K Device installation trunking Rapid 45	GEK-A Device installation trunking Rapid 45	GK Device installation trunking	GS Device installation trunking	GEK-A Device installation trunking	ISS Service pole
6.101.3	Concealed/surface-mounded electrical installation trunking on the wall or ceiling.										
6.101.3.1	Concealed/surface-mounded electrical installation trunking on the wall.	x	x			x	x	x	x	x	
6.101.3.2	Concealed/surface-mounded electrical installation trunking on the ceiling.	x	x			x	x	x	x	x	
6.101.3.3	Electrical installation trunking on the wall and supported by the base.										
6.101.3.4	Electrical installation trunking on the wall and supported by a different horizontal surface to the floor.										
6.101.4	Electrical installation trunking system, mounted at a distance to the wall or ceiling with fastenings.					x	x	x	x	x	
6.102	According to the protection against contact between liquids and insulated cables and parts carrying voltage in the case of skirting trunking and wet cleaning of the floor.										
6.102.1	No data										
6.102.2	Add to the instructions of the manufacturer, which limit the installation position of the electrical installation trunking system.					x	x				
6.102.3	Add to the instructions of the manufacturer, which allow all the installations of the electrical installation trunking system, but limits the layers of insulated cables and parts carrying voltage in the electrical installation trunking system.										
6.102.4	Add to the instructions of the manufacturer, which allow all the installations of the electrical installation trunking system and allows the layers of insulated cables and parts carrying voltage in the electrical installation trunking system.										
6.103	According to type										
6.103.1	Type 1 Electrical installation trunking system										
6.103.2	Type 2 Electrical installation trunking system (distribution electrical installation trunking system)	x	x								
6.103.3	Type 3 Electrical installation trunking system (installation electrical installation trunking system)				x	x	x	x	x	x	

x Appropriate classification



Chemical resistances of hard PVC

A = very good resistance
B = average resistance
C = not resistant

Medium	Temp. °C	Resistance
1.3-benzole disulphonic acid	20	A
1.3-butadiene	20	A
2.4-chlorobenzoyl chloride	20	A
2-amino-2.2-diphenylacetic acid	20	A
4-chlorine-2-nitroaniline	20	C
4-chlorobenzaldehyde-2-sulphonic acid	20	A
5-amino-2-hydroxybenzoic acid	20	A
Abietic acid	20	A
Acetaldehyde 100%	20	C
Acetaldehyde 40%	20	A
Acetaldehyde 40%	40	B
Acetaldehyde, acetic acid ratio 90:10	20	B
Acetanilide 100%	20	A
Acetates (ammonium-, Na- and others)	50	A
Acetic acid 10%	60	A
Acetic acid 100%	20	A
Acetic acid 100%	60	B
Acetic acid 25%	40	A
Acetic acid 25-70%	40	A
Acetic anhydride	20	C
Acetone	20	C
Acetophenone (methyl phenyl ketone)	20	C
Acetylacetone (2.4-pentanedione)	20	C
Acetylene 100%	20	B
Acetylsalicylic acid	20	A
Adipic acid	20	A
Adipic acid	60	B
Alcoholic drinks	< 40	A
Alizarin 100%	20	A
Alkanoic sulphonic acids	50	A
Allyl alcohol 100%	20	B
Allyl alcohol 100%	60	C
Allyl chloride	20	C
Aminobenzene (p-)	20	A
Aminobenzenesulphonic acid (m-, o-, p-)	20	A
Aminosalicic acid (p-)	20	A
Ammonia (vapours of all concentrations)	40	A
Ammonia (vapours of all concentrations)	60	B
Ammonia, anhydrous, liquid	< 60	B
Ammonium hydroxide	60	A
Aniline 100%	20	A
Aniline chloride, saturated solution	20	C
Apple juice	60	A
Ascorbic acid	20	A
Aspartic acid	20	A
Beer	60	A
Benzine, containing benzole	20	C
Benzine, free from aromatic hydrocarbons	60	A
Benzoic acid	40	A
Benzoic anhydride	30	A
Benzole	20	C
Benzophenone 100%	20	C
Benzosulphonic acid	60	A
Benzotrithloride	20	C
Benzotrifluoride	20	C
Benzoylbenzoic acid	20	A
Benzyl chloride	20	C
Betene	20	A
Bleaching liquor, 12% active chlorine	40	A
Bleaching liquor, 12% active chlorine	60	B
Blood	40	A
Boiled oil	60	C
Borates (NA-)	20	A
Borax	40	A
Boric acid	20	A
Brewer's wort	20	A
Brine	60	A
Bromates (K-, Na-)	40	A
Bromic acid	20	A
Bromides (K-, Na- and others)	60	A
Bromine water	20	A
Bromine, gaseous, dry	20	A
Bromine, liquid	20	C
Bromobenzene	20	C
Bromochloromethane	20	C
Bromochloropropane	20	C
Bromoform 100%	20	C
Butane, gaseous, 30%	20	A
Butanediol over 60%	40	B
Butanediol over 60%	20	C
Butanediol to 10%	20	A
Butanol	60	A
Buttermilk	20	A
Butyl acetate	20	C
Butyl butyrate	20	C
Butyl chloride	20	C

A = very good resistance
B = average resistance
C = not resistant

Medium	Temp. °C	Resistance
Butyl glycolate	20	C
Butyl phenoles	20	C
Butyric acid 100%	20	C
Butyric acid 20%	20	A
Butyric acid 20%	60	C
Carbon dioxide	60	A
Carbon disulphide 100%	20	B
Carbon monoxide	60	A
Castor oil	60	A
Chlorates (K-, Na- and others)	20	A
Chlorates (K-, Na- and others)	60	B
Chlorates (K-, Na- and others)	60	A
Chloric acid to 20%	40	A
Chloric acid to 20%	60	B
Chlorides (ammonium-, Na- and others)	20	A
Chlorine cyanide	20	A
Chlorine water (saturated solution)	20	B
Chlorine, gaseous, dry 0.5%	20	A
Chlorine, gaseous, dry 100%	20	B
Chlorine, gaseous, moist 5%	20	B
Chlorine, liquid	20	C
Chloroacetaldehyde	20	C
Chloroacetic acid	20	A
Chloroacetones	20	C
Chloroacetylchloride	20	C
Chloroanilines	20	C
Chlorobenzaldehyde	20	C
Chlorobenzene	20	C
Chlorobenzotrifluoride	20	C
Chlorobenzoylchloride	20	C
Chlorocresoles	20	C
Chloroethylbenzene	20	C
Chloroform	20	C
Chloronaphthalines	20	C
Chloronitrobenzoic acid	20	A
Chromates (K-, Na- to 50%)	50	A
Chrome alum	60	A
Chromic acid	30	A
Chromic acid to 50%	40	A
Citrates (ammonium-, Na)	20	A
Citric acid	20	A
Citric acid	60	B
Cresol	20	C
Cumene	20	C
Cyanacetic acid	20	C
Cyanamide	20	A
Cyanides (K-, Na- to 50%)	60	A
Cyclohexanol	20	C
Cyclohexanone	20	C
Developer	40	A
Dextrose	50	A
Dibromomethylene	20	C
Dibutyl phthalate	20	C
Dibutylxalate	20	C
Dichloroethylene	20	C
Dichloropropylene	20	C
Dichromates (K-, Na-)	50	C
Diethyl ether	20	C
Diethylamine 100%	20	C
Diethylene glycol	60	C
Dimethylether	20	C
Di-n-butylether	20	C
Diethylphthalate	20	C
Dioxan	20	C
Diphenyl	20	C
Diphenylamine	20	C
Ethane	20	A
Ethanol	40	A
Ethanolamine	20	B
Ethyl acetate	20	C
Ethyl acrylate	20	C
Ethyl chloride	20	C
Ethylbenzene	20	C
Ethylene glycol	20	A
Fish oil	20	A
Fixing bath	60	A
Fluorides (ammonium-, K-, Na- and others)	60	A
Fluorine	20	B
Fluorine	60	C
Formaldehyde	60	A
Formamide 100%	20	C
Formiates (ammonium- and others)	20	A
Formic acid 100%	20	B
Formic acid 100%	60	C
Formic acid 50%	40	A
Furfural	20	C



Chemical resistances of hard PVC

A = very good resistance
B = average resistance
C = not resistant

Medium	Temp. °C	Resistance
Furfuryl alcohol	20	C
Gelatine	60	A
Gluconic acid	20	A
Glucose	60	A
Glutamic acid	20	A
Glycerine	60	A
Glycine	40	A
Glycol	60	A
Heptanes	20	A
Hexachloroethane	20	C
Hexacyanoferrates-II (Na-)	40	A
Hexacyanoferrates-III (K-)	40	A
Hexafluorosilicates (ammonium-, K- and others)	60	A
Hexafluorosilicic acid 32%	60	A
Hexamethylenetetramine (urotropine) 40% aqueous solution	60	A
Humic acids	20	A
Hydrazine, diluted solution 100%	20	C
Hydrazine, diluted solution 30%	20	A
Hydrobromic acid to 40%	60	A
Hydrochloric acid to 30%	20	A
Hydrochloric acid to 30%	60	B
Hydrochloric acid to 37%	20	A
Hydrochloric acid to 37%	40	B
Hydrofluoric acid to 40%	40	A
Hydrofluoric acid to 40%	60	B
Hydrogen bromide 100%	20	A
Hydrogen bromide 100%	60	B
Hydrogen chloride (gaseous, dry and moist)	40	A
Hydrogen cyanide	40	A
Hydrogen peroxide to 30%	60	A
Hydrogen peroxide to 90%	20	A
Hydrogen sulphide	60	A
Hydroxides (alkaline-earth metal)	60	A
Hydroxides (K-, Na-)	60	A
Hypochlorites (K-, Na- and others)	60	A
hypochlorous acid	60	A
Illuminating gas	20	A
Iodates (K-, Na- and others)	60	A
Iodides (K-, Na-)	60	A
Iodine	20	C
Isobutylphosphate	20	C
Lactic acid 10%	20	A
Lactic acid 10%	60	C
Lactic acid 100%	20	C
Lard	20	A
Linoleic acid	60	A
Linseed oil	60	A
Malic acid	20	A
Material characteristics		
Methanol 100%	40	A
Methanol 100%	60	B
Methyl bromide	20	C
Methyl chloride	20	C
Methyl methacrylate	20	C
Methylamine	20	B
Methylene dichloride	20	C
Milk	20	A
Mineral oils	60	C
N,N-diethyl aniline	20	C
Naphthalene	20	C
Nitrates (ammonium-, K-, Na- and others)	60	A
Nitric acid 25%	20	A
Nitric acid 25%	60	B
Nitric acid 50%	20	A
Nitric acid 50%	50	B
Nitric acid 95%	20	C
Nitrites (K-, Na- and others)	60	A
Nitrobenzene	20	C
Nitrogen oxide	20	C
Nitroglycerine	20	B
Nitrous acid to 50%	50	A
Nitrous acid to 98%	20	C
Oleic acid	60	A
Oxalates (ammonium-, K-, Na- and others)	60	A
Oxalic acid	40	A
Oxygen	60	A
Ozone 10%	30	A
Ozone 10%	60	B
Palmitic acid	20	A
Paraffin	40	A
Pentyl laurate	20	C
Pentylacetate	20	C

A = very good resistance
B = average resistance
C = not resistant



Medium	Temp. °C	Resistance
Pentylalcohol	60	A
Pentylchloride	20	C
Perbonate (K-)	60	A
Perchlorate	40	A
Perchloric acid 70%	20	A
Permanganate (K-) 6 to 15%	40	A
Permanganate (K-) 6 to 15%	60	B
Permanganate (K-) to 6%	60	A
Peroxymonosulphuric acid (Caro's acid)	20	A
Persulphate (Ammonium-, K-, Na- and others)	40	A
Petroleum	60	A
Phenol 1%	20	A
Phenol 90%	45	B
Phenylhydrazine	20	C
Phenylhydrazine chloride	20	B
Phenylhydrazine chloride	60	C
Phosgene, gaseous	20	A
Phosgene, gaseous	60	B
Phosgene, liquid	20	C
Phosphates (ammonium-, K-, Na- and others)	60	A
Phosphoric acid	40	A
Phosphoric acid	60	B
Phosphorus pentoxide	20	A
Propane	20	A
Propanol	60	A
Pyridine	20	A
Rhodanides (ammonium-, K-, Na- and others)	60	A
Salicylic acid	20	A
Silicates (K-)	20	A
Soap solution	40	A
Stearic acid	60	A
Sulphates (ammonium-, K-, Na- and others)	60	A
Sulphites (ammonium-, K-, Na- and others)	60	A
Sulphur dioxide, gaseous, dry and moist 100%	60	A
Sulphuric acid to 40%	20	C
Sulphuric acid to 50%	50	A
Sulphuric acid to 50%	60	A
Sulphuric acid to 80%	40	C
Sulphuric acid to 80%	60	B
Sulphuric acid to 96%	20	A
Sulphuric acid to 96%	60	B
Sulphuric acid, fuming (10% oleum)	20	C
Sulphurous acid	60	A
Tallow	60	A
Tan bark	20	A
Tar, free from aromatic hydrocarbons	20	A
Tartaric acid	60	A
Tetraethyl lead	60	A
Tetrafluoroboric acid	20	A
Tetrahydrofurane	20	C
Thickness	60	A
Toluene	20	A
Transformer oil	60	A
Trichloroethylene	20	C
Turpentine	20	A
Urea	60	C
Vegetable oils	40	A
Vinyl acetate	20	C
Viscose spinning solutions	60	A
Water	40	A
Water	60	B
Wine	40	A
Wine vinegar	50	A
Wood tar	20	C
Xylenes	20	C

Material properties of the hard PVC used	
Material description according to DIN 7748	PVC-U-E-D-080-04-28
Tensile strength according to DIN 53 455	min. 40 N/mm ²
Elongation at tear according to DIN 53 455	min. 65%
Puncture strength according to DIN 53 481	min. 20 KV/mm
Surface resistance according to DIN 53 482	min. 10 10
Thermoforming resistance according to DIN 53 460/B	min. 75 °C
Temperature resistance in the application max.	65 °C
Flammability	according to UL 94 Level V-0
Hot-wire test	according to DIN IEC 695 960 °C
Material classification	to DIN EN 4102, Class B1 and B2-tested





WDK cable trunking systems, plastic

	Mini trunking	With adhesive film	84
		With adhesive film and hinge cover	84
		Cutters for mini trunking	85
	Trunking depth 15 mm	Trunking height 15 mm	90
	Trunking depth 20 mm	Trunking height 20 mm	95
		Trunking height 35 mm	
		Trunking height 50 mm	
		Trunking height 50 mm with nail strip	
	Trunking depth 25 mm	Trunking height 25 mm	99
		Trunking height 40 mm	100
		Trunking height 40 mm with nail strip	100
	Trunking depth 30 mm	Trunking height 30 mm	102
		Trunking height 45 mm	103
	Trunking depth 40 mm	Trunking height 40 mm	104
		Trunking height 60 mm	105
		Trunking height 90 mm	106
		Trunking height 110 mm	107
	Trunking depth 60 mm	Trunking height 60 mm	108
		Trunking height 90 mm	109
		Trunking height 230 mm	110
	Trunking depth 60 mm, device installation	Trunking height 110 mm	111
		Trunking height 130 mm	112
		Trunking height 150 mm	113
		Trunking height 210 mm	114
			115
	Trunking depth 80 mm	Trunking height 170 mm	119
		Trunking height 210 mm	117
	Trunking depth 100 mm	Trunking height 130 mm	118
		Trunking height 230 mm	120
	Universal trunking	-	126
	Halogen-free	Dimensions 20 x 20 mm	128
		Dimensions 30 x 45 mm	129
		Dimensions 40 x 60 mm	130
		Dimensions 40 x 60 mm with a partition	131
		Dimensions 60 x 90 mm	132
		Dimensions 60 x 110 mm	133
		Dimensions 60 x 150 mm	134

Mini trunking



Mini trunking with adhesive film M7


Type	Colour	Length mm	For cable diameter mm	Pack. m	Weight kg/100 m	Item No.
WDKM7	Pure white	2,000	4-5.5	176	3.100	6150 07 1

PVC Polyvinylchloride

/m

Mini trunking with adhesive film.

Pulling off the film on the base allows the WDK trunking to be stuck directly on the wall.



Mini trunking with adhesive film M9


Type	Colour	Length mm	For cable diameter mm	Pack. m	Weight kg/100 m	Item No.
WDKM9	Pure white	2,000	6-8	140	4.100	6150 09 8

PVC Polyvinylchloride

/m

Mini trunking with adhesive strip.

Pulling off the film on the base allows the WDK trunking to be stuck directly on the wall.



Mini trunking with adhesive film M11


Type	Colour	Length mm	For cable diameter mm	Pack. m	Weight kg/100 m	Item No.
WDKM11	Pure white	2,000	8-10	104	4.900	6150 10 1

PVC Polyvinylchloride

/m

Mini trunking with adhesive strip.

Pulling off the film on the base allows the WDK trunking to be stuck directly on the wall.



Mini trunking with adhesive film and hinge cover MD4


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKMD4RW	Pure white	2,000	224	3.300	6150 26 8
WDKMD4CW	Cream	2,000	224	3.300	6150 15 2

PVC Polyvinylchloride

/m

Mini trunking with adhesive film and hinge cover.

Pulling off the film on the base allows the WDK trunking to be stuck directly on the wall.



Mini trunking with adhesive film and hinge cover MD7


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKMD7RW	Pure white	2,000	100	5.000	6150 27 6
WDKMD7CW	Cream	2,000	100	5.000	6150 16 0

PVC Polyvinylchloride

/m

Mini trunking with adhesive film and hinge cover.

Pulling off the film on the base allows the WDK trunking to be stuck directly on the wall.



Mini trunking with adhesive film and hinge cover MD12


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKMD12RW	Pure white	2,000	80	7.000	6150 28 4
WDKMD12CW	Cream	2,000	80	7.000	6150 17 9

PVC Polyvinylchloride

/m

Mini trunking with adhesive film and hinge cover.

Pulling off the film on the base allows the WDK trunking to be stuck directly on the wall.



Mini trunking with adhesive film and hinge cover MD17


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKMD17RW	Pure white	2,000	56	9.000	6150 29 2
WDKMD17CW	Cream	2,000	56	9.000	6150 18 7

PVC Polyvinylchloride

/m

Mini trunking with adhesive film and hinge cover.

Pulling off the film on the base allows the WDK trunking to be stuck directly on the wall.



Shears for WDK trunking, straight cut			
Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
SK2545	1	40.000	6028 40 3
ST Steel			/pc.
Cutters for WDK trunking up to dimensions 25 x 45 mm.			



Shears for WDK trunking, mitre cut			
Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
SG2545	1	50.000	6028 41 1
ST Steel			/pc.
Cutters for mitre cutting of WDK trunking up to dimensions 25 x 45 mm.			



Trunking depth 10 mm, trunking height 20 mm




Trunking, type WDK 10020

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK10020RW	Pure white	2,000	96	11.100	6150 76 4
WDK10020CW	Cream	2,000	96	11.100	6150 75 6

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.



Trunking, type WDK-N 10020


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK-N10020RW	Pure white	2,000	96	11.000	6150 41 1
WDK-N10020CW	Cream	2,000	96	11.000	6150 40 3

PVC Polyvinylchloride

/m

Trunking cover and base with nail strip and base perforation.

The WDK trunking can be fastened directly on the wall through the nail strip using a nail.



Joint cover


Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS10020RW	Pure white	22	14	20	0.200	6154 02 6
WDK HS10020CW	Cream	22	14	20	0.200	6152 00 7

PVC Polyvinylchloride

/pc.

Joint cover for smooth connection of trunking segments.

Fittings are generally designed as hood fittings.



Internal corner hood


Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI10020RW	Pure white	30	4	0.300	6154 32 8
WDK HI10020CW	Cream	30	4	0.300	6153 00 3

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



External corner hood


Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA10020RW	Pure white	30	4	0.600	6154 41 7
WDK HA10020CW	Cream	30	4	0.600	6153 29 1

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



Flat angle hood


Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF10020RW	Pure white	40	4	0.400	6154 21 2
WDK HF10020CW	Cream	40	4	0.400	6152 60 0

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.



T piece hood


Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT10020RW	Pure white	45	34	4	0.400	6154 11 5
WDK HT10020CW	Cream	45	34	4	0.400	6152 30 9

PVC Polyvinylchloride


/pc.

T piece cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



Trunking depth 10 mm, trunking height 20 mm



End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE10020RW	Pure white	22	11	20	0.200	6154 51 4
WDK HE10020CW	Cream	22	11	20	0.200	6153 59 3

PVC Polyvinylchloride /pc.

End piece for closing the WDK trunking.
The end pieces are pushed onto the WDK trunking and are fixed on the floor connector by spring force.



Trunking depth 10 mm, trunking height 30 mm




Trunking, type WDK 10030

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK10030RW	Pure white	2,000	64	13.000	6150 78 0
WDK10030CW	Cream	2,000	64	13.000	6150 77 2

PVC Polyvinylchloride

/m

Trunking cover and base with base opening.



Trunking, type WDK-N 10030


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK-N10030RW	Pure white	2,000	56	14.000	6150 45 4
WDK-N10030CW	Cream	2,000	56	14.000	6150 44 6

PVC Polyvinylchloride

/m

Trunking cover and base with nail strip and base perforation.

A nail is used to fix the WDK trunking directly through the nail strip on the wall.



Joint cover


Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS10030RW	Pure white	32	14	20	0.300	6154 03 4
WDK HS10030CW	Cream	32	14	20	0.300	6152 01 5

PVC Polyvinylchloride

/pc.

Joint cover for smooth connection of trunking segments.

Fittings are generally designed as cover fittings.



Internal corner hood


Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI10030RW	Pure white	30	4	0.400	6154 33 6
WDK HI10030CW	Cream	30	4	0.400	6153 01 1

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.



External corner hood


Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA10030RW	Pure white	30	4	0.500	6154 42 5
WDK HA10030CW	Cream	30	4	0.500	6153 30 5

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



Flat angle hood


Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF10030RW	Pure white	50	4	0.600	6154 22 0
WDK HF10030CW	Cream	50	4	0.600	6152 61 9

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.



T piece hood


Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT10030RW	Pure white	55	44	4	0.500	6154 12 3
WDK HT10030CW	Cream	55	44	4	0.500	6152 31 7

PVC Polyvinylchloride


/pc.

T piece cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.



Trunking depth 10 mm, trunking height 30 mm



End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE10030RW	Pure white	32	11	20	0.200	6154 52 2
WDK HE10030CW	Cream	32	11	20	0.200	6153 60 7

PVC Polyvinylchloride /pc.

End piece for closing the WDK trunking.
The end pieces are pushed onto the WDK trunking and are fixed on the floor connector by spring force.



Trunking depth 15 mm, trunking height 15 mm




Trunking, type WDK 15015

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK15015RW	Pure white	2,000	56	11.000	6191 00 2
WDK15015CW	Cream	2,000	56	10.600	6024 96 3
WDK15015LGR	Light grey	2,000	56	10.600	6024 94 7
WDK15015GR	Stone grey	2,000	56	10.600	6024 95 5

PVC Polyvinylchloride /m

Trunking cover and base with base opening.




End piece

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE15015RW	Pure white	15	15	20	0.085	6193 09 9
WDK HE15015CW	Cream	15	15	20	0.085	6162 49 5
WDK HE15015LGR	Light grey	15	15	20	0.085	6183 60 3
WDK HE15015GR	Stone grey	15	15	20	0.085	6158 69 2


PVC Polyvinylchloride /pc.

End piece for closing the WDK trunking.

The end pieces are pushed onto the WDK trunking and are fixed on the floor connector by spring force.



Trunking depth 15 mm, trunking height 30 mm




Trunking, type WDK 15030

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK15030RW	Pure white	2,000	48	19.500	6191 01 0
WDK15030CW	Cream	2,000	48	19.500	6025 01 3
WDK15030GR	Stone grey	2,000	48	19.500	6025 00 5

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.



Trunking, type WDK-N 15030


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK-N15030RW	Pure white	2,000	32	24.000	6150 52 7
WDK-N15030CW	Cream	2,000	32	24.000	6150 51 9

PVC Polyvinylchloride

/m

Trunking cover and base with nail strip and base perforation.

The WDK trunking can be fastened directly on the wall through the nail strip using a nail.



Joint cover


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS15030RW	Pure white	32	14	20	0.200	6193 50 1
WDK HS15030CW	Cream	32	14	20	0.200	6152 03 1
WDK HS15030GR	Stone grey	32	14	20	0.200	6158 83 8

PVC Polyvinylchloride

/pc.

Joint cover for smooth connection of trunking segments.

Fittings are generally designed as cover fittings.



Internal corner hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI15030RW	Pure white	38,5	4	0.840	6191 84 3
WDK HI15030CW	Cream	38,5	4	0.840	6160 02 6
WDK HI15030GR	Stone grey	38,5	4	0.840	6158 23 4

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



External corner hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA15030RW	Pure white	38,5	4	1.000	6192 14 9
WDK HA15030CW	Cream	38,5	4	1.000	6160 61 1
WDK HA15030GR	Stone grey	38,5	4	1.000	6158 35 8

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.



Flat angle hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF15030RW	Pure white	53	4	0.850	6192 75 0
WDK HF15030CW	Cream	53	4	0.850	6161 21 9
WDK HF15030GR	Stone grey	53	4	0.850	6158 59 5

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.



Trunking depth 15 mm, trunking height 30 mm




T piece hood

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT15030RW	Pure white	73	53	4	1.000	6192 45 9
WDK HT15030CW	Cream	73	53	4	1.000	6161 92 8
WDK HT15030GR	Stone grey	73	53	4	1.000	6158 46 3

PVC Polyvinylchloride /pc.

T piece cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




End piece


Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE15030RW	Pure white	30	17	20	0.270	6193 10 2
WDK HE15030CW	Cream	30	17	20	0.270	6162 51 7
WDK HE15030GR	Stone grey	30	17	20	0.270	6158 71 4

PVC Polyvinylchloride /pc.

End piece for closing the WDK trunking.
The end pieces are pushed onto the WDK trunking and are fixed on the connector by spring force.



Trunking depth 15 mm, trunking height 40 mm




Trunking, type WDK 15040

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK15040RW	Pure white	2,000	36	23.000	6191 02 9
WDK15040CW	Cream	2,000	36	23.000	6025 16 1
WDK15040GR	Stone grey	2,000	36	23.000	6025 13 7

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.



Trunking, type WDK-N 15040


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK-N15040RW	Pure white	2,000	54	31.400	6150 54 3
WDK-N15040CW	Cream	2,000	54	31.400	6150 53 5

PVC Polyvinylchloride

/m

Trunking cover and base with nail strip and base perforation.

The WDK trunking can be fastened directly on the wall through the nail strip using a nail.



Joint cover


Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS15040RW	Pure white	42	14	20	0.500	6193 52 8
WDK HS15040CW	Cream	42	14	20	0.500	6152 05 8
WDK HS15040GR	Stone grey	42	14	20	0.500	6158 84 6

PVC Polyvinylchloride

/pc.

Joint cover for smooth connection of trunking segments.

Fittings are generally designed as hood fittings.



Internal corner hood


Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI15040RW	Pure white	42	4	1.020	6191 85 1
WDK HI15040CW	Cream	42	4	1.020	6160 03 4
WDK HI15040GR	Stone grey	42	4	1.020	6158 24 2

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



External corner hood


Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA15040RW	Pure white	42	4	1.400	6192 15 7
WDK HA15040CW	Cream	42	4	1.400	6160 63 8
WDK HA15040GR	Stone grey	42	4	1.400	6158 36 6

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.



Flat angle hood

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF15040RW	Pure white	63	4	1.400	6192 76 9
WDK HF15040CW	Cream	63	4	1.400	6161 22 7
WDK HF15040GR	Stone grey	63	4	1.400	6158 60 9

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



Trunking depth 15 mm, trunking height 40 mm




T piece hood

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT15040RW	Pure white	83	74	4	1.600	6192 46 7
WDK HT15040CW	Cream	83	74	4	1.600	6161 93 6
WDK HT15040GR	Stone grey	83	74	4	1.600	6158 47 1

PVC Polyvinylchloride /pc.

T piece cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood/cover fittings.




End piece


Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE15040RW	Pure white	40	17	20	0.400	6193 11 0
WDK HE15040CW	Cream	40	17	20	0.400	6162 52 5
WDK HE15040GR	Stone grey	40	17	20	0.400	6158 72 2

PVC Polyvinylchloride /pc.

End piece for closing the WDK trunking.
The end pieces are pushed onto the WDK trunking and are fixed on the connector by spring force.



Trunking depth 20 mm, trunking height 20 mm




Trunking, type WDK 20020

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK20020RW	Pure white	2,000	48	11.100	6191 03 7
WDK20020CW	Cream	2,000	48	11.100	6025 15 3
WDK20020LGR	Light grey	2,000	48	11.100	6025 10 2
WDK20020GR	Stone grey	2,000	48	11.100	6025 11 0

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.



Internal corner hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI20020RW	Pure white	38,5	4	0.600	6191 87 8
WDK HI20020CW	Cream	38,5	4	0.600	6160 01 8
WDK HI20020LGR	Light grey	38,5	4	0.600	6182 01 1
WDK HI20020GR	Stone grey	38,5	4	0.600	6158 22 6

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



External corner hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA20020RW	Pure white	38,5	4	0.700	6192 16 5
WDK HA20020CW	Cream	38,5	4	0.700	6160 60 3
WDK HA20020LGR	Light grey	38,5	4	0.700	6182 40 2
WDK HA20020GR	Stone grey	38,5	4	0.700	6158 33 1

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.



Flat angle hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF20020RW	Pure white	38	4	0.550	6192 77 7
WDK HF20020CW	Cream	38	4	0.550	6161 20 0
WDK HF20020LGR	Light grey	38	4	0.550	6183 21 2
WDK HF20020GR	Stone grey	38	4	0.550	6158 58 7

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.



T piece hood


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT20020RW	Pure white	57	53.5	4	0.700	6192 47 5
WDK HT20020CW	Cream	57	53.5	4	0.700	6161 90 1
WDK HT20020LGR	Light grey	57	53.5	4	0.700	6182 80 1
WDK HT20020GR	Stone grey	57	53.5	4	0.700	6158 45 5

PVC Polyvinylchloride

/pc.

T piece cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE20020RW	Pure white	17	18	20	0.150	6193 12 9
WDK HE10030CW	Cream	17	18	20	0.150	6162 50 9
WDK HE20020LGR	Light grey	17	18	20	0.150	6183 61 1
WDK HE10030GR	Stone grey	17	18	20	0.150	6158 70 6

PVC Polyvinylchloride

/pc.

End piece for closing the WDK trunking.

The end pieces are pushed onto the WDK trunking and are fixed on the floor connector by spring force.



Trunking depth 20 mm, trunking height 35 mm




Trunking, type WDK 20035

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK20035RW	Pure white	2,000	36	23.500	6191 04 5
WDK20035CW	Cream	2,000	36	23.500	6026 37 0
WDK20035LGR	Light grey	2,000	36	23.500	6026 35 4
WDK20035GR	Stone grey	2,000	36	23.500	6026 36 2

PVC Polyvinylchloride /m

Trunking cover and base with base opening.




End piece

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE20035RW	Pure white	35	20	20	0.300	6193 13 7
WDK HE20035CW	Cream	35	20	20	0.300	6162 48 7
WDK HE20035LGR	Light grey	35	20	20	0.300	6183 65 4
WDK HE20035GR	Stone grey	35	20	20	0.300	6158 78 1


PVC Polyvinylchloride /pc.

End piece for closing the WDK trunking.

The end pieces are pushed onto the WDK trunking and are fixed on the floor connector by spring force.



Trunking depth 20 mm, trunking height 50 mm




Trunking, type WDK 20050

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK20050RW	Pure white	2,000	42	30.700	6168 73 6
WDK20050CW	Cream	2,000	42	30.700	6168 70 1

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.



Trunking, type WDK-N 20050


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK-N20050RW	Pure white	2,000	42	37.000	6168 74 4
WDK-N20050CW	Cream	2,000	42	37.000	6168 72 8

PVC Polyvinylchloride

/m

Trunking cover and base with nail strip and base perforation.

A nail is used to fix the WDK trunking directly through the nail strip on the wall.



Joint cover


Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS20050RW	Pure white	53	14	20	0.500	6154 06 9
WDK HS20050CW	Cream	53	14	20	0.500	6152 10 4

PVC Polyvinylchloride

/pc.

Joint cover for smooth connection of trunking segments.

Fittings are generally designed as hood fittings.



Internal corner hood


Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI20050RW	Pure white	45	4	2.500	6154 36 0
WDK HI20050CW	Cream	45	4	2.500	6153 08 9

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



External corner hood


Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA20050RW	Pure white	45	4	3.000	6154 46 8
WDK HA20050CW	Cream	45	4	3.000	6153 37 2

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



Flat angle hood


Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF20050RW	Pure white	73	4	3.000	6154 25 5
WDK HF20050CW	Cream	73	4	3.000	6152 68 6

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



T piece hood

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT20050RW	Pure white	93	73	4	3.500	6154 16 6
WDK HT20050CW	Cream	93	73	4	3.500	6152 38 4

PVC Polyvinylchloride

/pc.

T piece cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.



Trunking depth 20 mm, trunking height 50 mm



End piece


Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE20050RW	Pure white	50	20	20	0.600	6154 55 7
WDK HE20050CW	Cream	50	20	20	0.600	6153 67 4

PVC Polyvinylchloride


/pc.

End piece for closing the WDK trunking.

The end pieces are pushed onto the WDK trunking and are fixed on the floor connector by spring force.



Trunking depth 25 mm, trunking height 25 mm




Trunking, type WDK 25025

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK25025RW	Pure white	2,000	32	24.500	6191 05 3
WDK25025CW	Cream	2,000	32	24.500	6026 42 7
WDK25025LGR	Light grey	2,000	32	24.500	6026 40 0
WDK25025GR	Stone grey	2,000	32	24.500	6026 41 9

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.



Internal corner hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI25025RW	Pure white	50	4	1.000	6191 88 6
WDK HI25025CW	Cream	50	4	1.000	6160 04 2
WDK HI25025LGR	Light grey	50	4	1.000	6182 06 2
WDK HI25025GR	Stone grey	50	4	1.000	6158 25 0

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



External corner hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA25025RW	Pure white	50	4	1.000	6192 17 3
WDK HA25025CW	Cream	50	4	1.000	6160 64 6
WDK HA25025LGR	Light grey	50	4	1.000	6182 44 5
WDK HA25025GR	Stone grey	50	4	1.000	6158 37 4

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



Flat angle hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF25025RW	Pure white	48	4	1.000	6192 78 5
WDK HF25025CW	Cream	48	4	1.000	6161 23 5
WDK HF25025LGR	Light grey	48	4	1.000	6183 25 5
WDK HF25025GR	Stone grey	48	4	1.000	6158 61 7

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



T piece hood


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT25025RW	Pure white	68	48	4	1.000	6192 48 3
WDK HT25025CW	Cream	68	48	4	1.000	6161 94 4
WDK HT25025LGR	Light grey	68	48	4	1.000	6182 85 2
WDK HT25025GR	Stone grey	68	48	4	1.000	6158 49 8

PVC Polyvinylchloride

/pc.

T piece cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE25025RW	Pure white	25	25	20	0.360	6193 14 5
WDK HE25025CW	Cream	25	25	20	0.360	6162 53 3
WDK HE25025LGR	Light grey	25	25	20	0.360	6183 66 2
WDK HE25025GR	Stone grey	25	25	20	0.360	6158 73 0

PVC Polyvinylchloride

/pc.

End piece for closing the WDK trunking.

The end pieces are pushed onto the WDK trunking and are fixed on the floor connector by spring force.



Trunking depth 25 mm, trunking height 40 mm




Trunking, type WDK 25040

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK25040RW	Pure white	2,000	24	30.000	6191 06 1
WDK25040CW	Cream	2,000	24	30.000	6026 45 1
WDK25040GR	Stone grey	2,000	24	30.000	6026 44 3

PVC Polyvinylchloride

/m

Trunking cover and base with base opening.



Trunking, type WDK-N 25040


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK-N25040RW	Pure white	2,000	36	36.000	6150 64 0
WDK-N25040CW	Cream	2,000	36	36.000	6150 63 2

PVC Polyvinylchloride

/m

Trunking cover and base with nail strip and base perforation.

A nail is used to fix the WDK trunking directly through the nail strip on the wall.



Joint cover


Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS25040RW	Pure white	42	14	20	0.500	6193 56 0
WDK HS25040CW	Cream	42	14	20	0.500	6152 08 2
WDK HS25040GR	Stone grey	42	14	20	0.500	6158 88 9

PVC Polyvinylchloride

/pc.

Joint cover for smooth connection of trunking segments.

Fittings are generally designed as hood fittings.



Internal corner hood


Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI25040RW	Pure white	50	4	1.500	6191 89 4
WDK HI25040CW	Cream	50	4	1.500	6160 05 0
WDK HI25040GR	Stone grey	50	4	1.500	6158 26 9

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



External corner hood


Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA25040RW	Pure white	52	4	1.900	6192 18 1
WDK HA25040CW	Cream	52	4	1.900	6160 65 4
WDK HA25040GR	Stone grey	52	4	1.900	6158 38 2

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.



Flat angle hood


Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF25040RW	Pure white	63	4	1.700	6192 79 3
WDK HF25040CW	Cream	63	4	1.700	6161 24 3
WDK HF25040GR	Stone grey	63	4	1.700	6158 62 5

PVC Polyvinylchloride


/pc.

Flat angle cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.



Trunking depth 25 mm, trunking height 40 mm



T piece hood


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT25040RW	Pure white	83	63	4	2.100	6192 49 1
WDK HT25040CW	Cream	83	63	4	2.100	6161 95 2
WDK HT25040GR	Stone grey	83	63	4	2.100	6158 50 1

PVC Polyvinylchloride

/pc.

T piece cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE25040RW	Pure white	40	25	20	0.480	6193 15 3
WDK HE25040CW	Cream	40	25	20	0.480	6162 54 1
WDK HE25040GR	Stone grey	40	25	20	0.480	6158 74 9

PVC Polyvinylchloride

/pc.

End piece for closing the WDK trunking.

The end pieces are pushed onto the WDK trunking and are fixed on the connector by spring force.



Trunking depth 30 mm, trunking height 30 mm




Trunking, type WDK 30030

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK30030RW	Pure white	2,000	32	24.900	6191 09 6
WDK30030CW	Cream	2,000	32	24.900	6026 82 6
WDK30030LGR	Light grey	2,000	32	24.900	6026 79 6
WDK30030GR	Stone grey	2,000	32	24.900	6026 81 8

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.



Internal corner hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI30030RW	Pure white	52	4	1.200	6191 92 4
WDK HI30030CW	Cream	52	4	1.200	6160 07 7
WDK HI30030LGR	Light grey	52	4	1.200	6182 09 7
WDK HI30030GR	Stone grey	52	4	1.200	6158 28 5

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.



External corner hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA30030RW	Pure white	57	4	1.700	6192 21 1
WDK HA30030CW	Cream	57	4	1.700	6160 67 0
WDK HA30030LGR	Light grey	57	4	1.700	6182 48 8
WDK HA30030GR	Stone grey	57	4	1.700	6158 40 4

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.



Flat angle hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF30030RW	Pure white	53	4	1.300	6192 81 5
WDK HF30030CW	Cream	53	4	1.300	6161 27 8
WDK HF30030LGR	Light grey	53	4	1.300	6183 29 8
WDK HF30030GR	Stone grey	53	4	1.300	6158 64 1

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



T piece hood


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT30030RW	Pure white	50	39	4	1.500	6192 51 3
WDK HT30030CW	Cream	50	39	4	1.500	6161 97 9
WDK HT30030LGR	Light grey	50	39	4	1.500	6182 88 7
WDK HT30030GR	Stone grey	50	39	4	1.500	6158 53 6

PVC Polyvinylchloride

/pc.

T piece cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



End piece


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE30030RW	Pure white	30	30	20	0.500	6193 18 8
WDK HE30030CW	Cream	30	30	20	0.500	6162 57 6
WDK HE30030LGR	Light grey	30	30	20	0.500	6183 69 7
WDK HE30030GR	Stone grey	30	30	20	0.500	6158 76 5

PVC Polyvinylchloride


/pc.

End piece for closing the WDK trunking.

The end pieces are pushed onto the WDK trunking and are fixed on the connector.



Trunking depth 30 mm, trunking height 45 mm




Trunking, type WDK 30045

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK30045RW	Pure white	2,000	48	32.000	6191 11 8
WDK30045CW	Cream	2,000	48	32.000	6026 86 9
WDK30045LGR	Light grey	2,000	48	32.000	6026 84 2
WDK30045GR	Stone grey	2,000	48	32.000	6026 85 0

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.



Internal corner hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI30045RW	Pure white	52	4	1.900	6191 93 2
WDK HI30045CW	Cream	52	4	1.900	6160 08 5
WDK HI30045LGR	Light grey	52	4	1.900	6182 10 0
WDK HI30045GR	Stone grey	52	4	1.900	6158 30 7

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



External corner hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA30045RW	Pure white	57	4	2.600	6192 23 8
WDK HA30045CW	Cream	57	4	2.600	6160 68 9
WDK HA30045LGR	Light grey	57	4	2.600	6182 49 6
WDK HA30045GR	Stone grey	57	4	2.600	6158 42 0

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.



Flat angle hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF30045RW	Pure white	68	4	2.500	6192 82 3
WDK HF30045CW	Cream	68	4	2.500	6161 28 6
WDK HF30045LGR	Light grey	68	4	2.500	6183 30 1
WDK HF30045GR	Stone grey	68	4	2.500	6158 67 6

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



T piece hood


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT30045RW	Pure white	88	68	4	3.000	6192 52 1
WDK HT30045CW	Cream	88	68	4	3.000	6161 98 7
WDK HT30045LGR	Light grey	88	68	4	3.000	6182 89 5
WDK HT30045GR	Stone grey	88	68	4	3.000	6158 55 2

PVC Polyvinylchloride

/pc.

T piece cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE30045RW	Pure white	45	30	20	0.520	6193 19 6
WDK HE30045CW	Cream	45	30	20	0.520	6162 58 4
WDK HE30045LGR	Light grey	45	30	20	0.520	6183 70 0
WDK HE30045GR	Stone grey	45	30	20	0.520	6158 80 3

PVC Polyvinylchloride

/pc.

End piece for closing the WDK trunking.

The end pieces are pushed onto the WDK trunking and are fixed on the floor connector by spring force.



Trunking depth 40 mm, trunking height 40 mm




Trunking, type WDK 40040

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK40040RW	Pure white	2,000	36	42.100	6191 12 6
WDK40040CW	Cream	2,000	36	42.100	6025 41 2
WDK40040LGR	Light grey	2,000	36	42.100	6027 01 6
WDK40040GR	Stone grey	2,000	36	42.100	6025 44 7

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.



Internal corner hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI40040RW	Pure white	65	4	2.200	6191 94 0
WDK HI40040CW	Cream	65	4	2.200	6160 09 3
WDK HI40040LGR	Light grey	65	4	2.200	6182 11 9
WDK HI40040GR	Stone grey	65	4	2.200	6158 29 3

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



External corner hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA40040RW	Pure white	66	4	2.900	6192 24 6
WDK HA40040CW	Cream	66	4	2.900	6160 69 7
WDK HA40040LGR	Light grey	66	4	2.900	6182 52 6
WDK HA40040GR	Stone grey	66	4	2.900	6158 41 2

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.



T and intersection hood


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT40040RW	Pure white	83	43	4	2.500	6192 54 8
WDK HT40040CW	Cream	83	43	4	2.500	6161 99 5
WDK HT40040LGR	Light grey	83	43	4	2.500	6182 91 7
WDK HT40040GR	Stone grey	83	43	4	2.500	6158 54 4

PVC Polyvinylchloride

/pc.

T and intersection cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



Flat angle hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF40040RW	Pure white	63	4	2.100	6192 83 1
WDK HF40040CW	Cream	63	4	2.100	6161 29 4
WDK HF40040LGR	Light grey	63	4	2.100	6183 33 6
WDK HF40040GR	Stone grey	63	4	2.100	6158 66 8

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



End piece


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE40040RW	Pure white	40	40	20	0.660	6193 21 8
WDK HE40040CW	Cream	40	40	20	0.660	6162 59 2
WDK HE40040LGR	Light grey	40	40	20	0.660	6183 72 7
WDK HE40040GR	Stone grey	40	40	20	0.660	6158 77 3

PVC Polyvinylchloride


/pc.

End piece to close the WDK trunking.

The end pieces are pushed onto the trunking and kept in place by the spring action.



Trunking depth 40 mm, trunking height 60 mm




Trunking, type WDK 40060

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK40060RW	Pure white	2,000	24	56.200	6191 13 4
WDK40060CW	Cream	2,000	24	56.200	6020 88 7
WDK40060LGR	Light grey	2,000	24	56.200	6027 02 4
WDK40060GR	Stone grey	2,000	24	56.200	6025 63 3

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.
Four cover fixing devices included.




Internal corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI40060RW	Pure white	110	2	7.800	6191 95 9
WDK HI40060CW	Cream	110	2	7.800	6160 10 7
WDK HI40060LGR	Light grey	110	2	7.800	6182 12 7
WDK HI40060GR	Stone grey	110	2	7.800	6021 71 9

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




External corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA40060RW	Pure white	100	2	8.700	6192 25 4
WDK HA40060CW	Cream	100	2	8.700	6160 70 0
WDK HA40060LGR	Light grey	100	2	8.700	6182 53 4
WDK HA40060GR	Stone grey	100	2	8.700	6021 69 7

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




T and intersection hood

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK40060RW	Pure white	190	63	2	9.600	6192 55 6
WDK HK40060CW	Cream	190	63	2	9.600	6162 00 2
WDK HK40060LGR	Light grey	190	63	2	9.800	6182 92 5
WDK HK40060GR	Stone grey	190	63	2	9.600	6023 31 2

PVC Polyvinylchloride

/pc.

T and intersection cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




Flat angle hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF40060RW	Pure white	101	2	6.400	6192 85 8
WDK HF40060CW	Cream	101	2	6.400	6161 30 8
WDK HF40060LGR	Light grey	101	2	6.400	6183 34 4
WDK HF40060GR	Stone grey	101	2	6.400	6021 73 5

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.



End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE40060RW	Pure white	60	40	20	1.200	6193 22 6
WDK HE40060CW	Cream	60	40	20	1.200	6162 60 6
WDK HE40060LGR	Light grey	60	40	20	1.200	6183 73 5
WDK HE40060GR	Stone grey	60	40	20	1.200	6021 49 2

PVC Polyvinylchloride

/pc.

End piece to close the WDK trunking.
The end pieces are pushed onto the trunking and kept in place by the spring action.



Trunking depth 40 mm, trunking height 90 mm



Trunking, type WDK 40090


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK40090RW	Pure white	2,000	32	77.300	6191 14 2
WDK40090CW	Cream	2,000	32	77.300	6020 89 5
WDK40090LGR	Light grey	2,000	32	77.300	6027 03 2
WDK40090GR	Stone grey	2,000	32	77.300	6021 01 8

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.

Four cover fixing devices included.



Internal corner hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI40090RW	Pure white	109	2	10.000	6191 96 7
WDK HI40090CW	Cream	109	2	10.000	6160 11 5
WDK HI40090LGR	Light grey	109	2	10.000	6182 13 5
WDK HI40090GR	Stone grey	109	2	10.000	6021 19 0

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



External corner hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA40090RW	Pure white	100	2	11.500	6192 26 2
WDK HA40090CW	Cream	100	2	11.500	6160 71 9
WDK HA40090LGR	Light grey	100	2	11.500	6182 54 2
WDK HA40090GR	Stone grey	100	2	11.500	6021 09 3

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



T and intersection hood


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK40090RW	Pure white	230	91	2	24.300	6192 56 4
WDK HK40090CW	Cream	230	91	2	24.300	6162 01 0
WDK HK40090LGR	Light grey	230	91	2	24.300	6182 93 3
WDK HK40090GR	Stone grey	230	91	2	24.300	6023 14 2

PVC Polyvinylchloride

/pc.

T and intersection cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



Flat angle hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF40090RW	Pure white	129	2	12.500	6192 86 6
WDK HF40090CW	Cream	129	2	12.500	6161 31 6
WDK HF40090LGR	Light grey	129	2	10.000	6183 35 2
WDK HF40090GR	Stone grey	129	2	10.000	6021 33 6

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



End piece


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE40090RW	Pure white	90	40	20	1.500	6193 23 4
WDK HE40090CW	Cream	90	40	20	1.500	6162 61 4
WDK HE40090LGR	Light grey	90	40	20	1.500	6183 74 3
WDK HE40090GR	Stone grey	90	40	20	1.500	6021 50 6

PVC Polyvinylchloride


/pc.

End piece to close the WDK trunking.

The end pieces are pushed onto the trunking and kept in place by the spring action.



Trunking depth 40 mm, trunking height 110 mm



Trunking, type WDK 40110


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK40110RW	Pure white	2,000	24	111.800	6191 15 0
WDK40110CW	Cream	2,000	24	111.800	6020 90 9
WDK40110LGR	Light grey	2,000	24	111.800	6027 04 0
WDK40110GR	Stone grey	2,000	24	111.800	6021 03 4

PVC Polyvinylchloride

Trunking cover and base with base perforation.
Four cover fixing devices included.



WDK cable trunking systems, plastic




Internal corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI40110RW	Pure white	110,5	2	12.000	6191 97 5
WDK HI40110CW	Cream	110,5	2	12.300	6160 12 3
WDK HI40110LGR	Light grey	110,5	2	13.200	6182 14 3
WDK HI40110GR	Stone grey	110,5	2	13.200	6021 72 7

PVC Polyvinylchloride

Internal corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




External corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA40110RW	Pure white	100	2	13.500	6192 27 0
WDK HA40110CW	Cream	100	2	13.500	6160 72 7
WDK HA40110LGR	Light grey	100	2	13.500	6182 55 0
WDK HA40110GR	Stone grey	100	2	13.500	6021 70 0

PVC Polyvinylchloride

External corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




T and intersection hood

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK40110RW	Pure white	272	112	2	22.600	6192 57 2
WDK HK40110CW	Cream	272	112	2	22.600	6162 02 9
WDK HK40110LGR	Light grey	272	112	2	22.600	6182 94 1
WDK HK40110GR	Stone grey	272	112	2	22.600	6023 33 9

PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood/cover fittings.




Flat angle hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF40110RW	Pure white	110	2	13.000	6192 87 4
WDK HF40110CW	Cream	110	2	13.000	6161 32 4
WDK HF40110LGR	Light grey	110	2	13.000	6183 36 0
WDK HF40110GR	Stone grey	110	2	13.000	6021 74 3

PVC Polyvinylchloride

Flat angle cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.



End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE40110RW	Pure white	110	40	20	2.200	6193 24 2
WDK HE40110CW	Cream	110	40	20	2.200	6162 62 2
WDK HE40110LGR	Light grey	110	40	20	2.200	6183 75 1
WDK HE40110GR	Stone grey	110	40	20	2.200	6021 51 4

PVC Polyvinylchloride

End piece to close the WDK trunking.
The end pieces are pushed onto the trunking and kept in place by the spring action.



Trunking depth 60 mm, trunking height 60 mm




Trunking, type WDK 60060

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60060RW	Pure white	2,000	32	81.600	6191 19 3
WDK60060CW	Cream	2,000	32	81.600	6021 94 8
WDK60060LGR	Light grey	2,000	32	81.600	6027 10 5
WDK60060GR	Stone grey	2,000	32	81.600	6025 66 8

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.
Four cover clips included.




Internal corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60060RW	Pure white	130	2	11.200	6192 01 7
WDK HI60060CW	Cream	130	2	11.200	6160 30 1
WDK HI60060LGR	Light grey	130	2	11.200	6182 19 4
WDK HI60060GR	Stone grey	130	2	11.200	6022 38 3

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




External corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60060RW	Pure white	100	2	12.500	6192 31 9
WDK HA60060CW	Cream	100	2	12.500	6160 90 5
WDK HA60060LGR	Light grey	100	2	12.500	6182 59 3
WDK HA60060GR	Stone grey	100	2	12.500	6022 07 3

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




T and intersection hood

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60060RW	Pure white	190	65	2	12.200	6192 61 0
WDK HK60060CW	Cream	190	65	2	12.200	6162 20 7
WDK HK60060LGR	Light grey	190	65	2	12.200	6183 01 8
WDK HK60060GR	Stone grey	190	65	2	12.200	6023 22 3

PVC Polyvinylchloride

/pc.

T and intersection cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




Flat angle hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60060RW	Pure white	101	2	8.500	6192 91 2
WDK HF60060CW	Cream	101	2	8.500	6161 50 2
WDK HF60060LGR	Light grey	101	2	8.400	6183 40 9
WDK HF60060GR	Stone grey	101	2	8.400	6022 44 8

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60060RW	Pure white	60	60	20	1.500	6193 28 5
WDK HE60060CW	Cream	60	60	20	1.500	6162 80 0
WDK HE60060LGR	Light grey	60	60	20	1.500	6183 80 8
WDK HE60060GR	Stone grey	60	60	20	1.500	6022 49 9


PVC Polyvinylchloride

/pc.

End piece for closing the WDK trunking.
The end pieces are pushed onto the trunking and kept in place by the spring action.



Trunking depth 60 mm, trunking height 90 mm



Trunking, type WDK 60090

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60090RW	Pure white	2,000	24	110.000	6191 20 7
WDK60090CW	Cream	2,000	24	110.000	6021 91 3
WDK60090LGR	Light grey	2,000	24	110.000	6027 11 3
WDK60090GR	Stone grey	2,000	24	110.000	6022 00 6


PVC Polyvinylchloride

/m

Trunking cover and base with base opening.
Four cover fixing devices included.



WDK cable trunking systems, plastic




Internal corner hood

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60090RW	Pure white	130	2	12.000	6192 02 5
WDK HI60090CW	Cream	130	2	12.000	6160 32 8
WDK HI60090LGR	Light grey	130	2	12.000	6182 20 8
WDK HI60090GR	Stone grey	130	2	12.000	6022 21 9

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




External corner hood

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60090RW	Pure white	100	2	15.000	6192 32 7
WDK HA60090CW	Cream	100	2	15.000	6160 91 3
WDK HA60090LGR	Light grey	100	2	15.000	6182 60 7
WDK HA60090GR	Stone grey	100	2	15.000	6022 11 1

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




T and intersection hood

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60090RW	Pure white	230	65	2	24.300	6192 62 9
WDK HK60090CW	Cream	230	65	2	24.300	6162 21 5
WDK HK60090LGR	Light grey	230	65	2	24.300	6183 02 6
WDK HK60090GR	Stone grey	230	65	2	24.300	6023 00 2

PVC Polyvinylchloride

/pc.

T and intersection cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




Flat angle hood

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60090RW	Pure white	129	2	11.500	6192 92 0
WDK HF60090CW	Cream	129	2	11.500	6161 51 0
WDK HF60090LGR	Light grey	129	2	11.500	6183 41 7
WDK HF60090GR	Stone grey	129	2	11.500	6022 31 6

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.



End piece

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60090RW	Pure white	90	60	20	2.500	6193 29 3
WDK HE60090CW	Cream	90	60	20	2.500	6162 81 9
WDK HE60090LGR	Light grey	90	60	20	2.500	6183 81 6
WDK HE60090GR	Stone grey	90	60	20	2.500	6022 50 2

PVC Polyvinylchloride

/pc.

End piece for closing the WDK trunking.
The end pieces are pushed onto the trunking and kept in place by the spring action.



Trunking depth 60 mm, trunking height 230 mm




Trunking, type WDK 60230

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60230RW	Pure white	2,000	8	298.000	6191 27 4
WDK60230CW	Cream	2,000	8	298.000	6021 89 1
WDK60230LGR	Light grey	2,000	8	298.000	6027 18 0
WDK60230GR	Stone grey	2,000	8	298.000	6022 05 7

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.
Four cover fixing devices included.




Internal corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60230RW	Pure white	130	2	19.800	6192 09 2
WDK HI60230CW	Cream	130	2	19.800	6160 39 5
WDK HI60230LGR	Light grey	130	2	19.800	6182 26 7
WDK HI60230GR	Stone grey	130	2	19.800	6024 44 0

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




External corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60230RW	Pure white	100	2	23.100	6192 39 4
WDK HA60230CW	Cream	100	2	23.000	6160 98 0
WDK HA60230LGR	Light grey	100	2	23.000	6182 67 4
WDK HA60230GR	Stone grey	100	2	23.000	6024 54 8

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




T and intersection hood

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60230RW	Pure white	291	66	2	39.600	6192 69 6
WDK HK60230CW	Cream	291	66	2	39.600	6162 29 0
WDK HK60230LGR	Light grey	291	66	2	39.600	6183 08 5
WDK HK60230GR	Stone grey	291	66	2	39.600	6024 77 7

PVC Polyvinylchloride

/pc.

T and intersection cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




Flat angle hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60230RW	Pure white	270	2	39.000	6192 99 8
WDK HF60230CW	Cream	270	2	39.000	6161 59 6
WDK HF60230LGR	Light grey	270	2	39.000	6183 48 4
WDK HF60230GR	Stone grey	270	2	39.000	6024 60 2

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60230RW	Pure white	230	60	10	6.500	6193 36 6
WDK HE60230CW	Cream	230	60	10	6.500	6162 88 6
WDK HE60230LGR	Light grey	230	60	10	6.500	6183 87 5
WDK HE60230GR	Stone grey	230	60	10	6.500	6024 83 1


PVC Polyvinylchloride

/pc.

End piece for closing the WDK trunking.
The end pieces are pushed onto the trunking and kept in place by the spring action.



Trunking depth 60 mm, trunking height 110 mm, device installation



Trunking, type WDK 60110


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60110RW	Pure white	2,000	16	117.000	6191 21 5
WDK60110CW	Cream	2,000	16	117.000	6021 84 0
WDK60110LGR	Light grey	2,000	16	117.000	6027 12 1
WDK60110GR	Stone grey	2,000	16	117.000	6022 01 4

PVC Polyvinylchloride

Trunking cover and base with base perforation.
Four cover fixing devices included.



WDK cable trunking systems, plastic




Internal corner hood

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60110RW	Pure white	130	2	13.500	6192 03 3
WDK HI60110CW	Cream	130	2	13.500	6160 33 6
WDK HI60110LGR	Light grey	130	2	13.500	6182 21 6
WDK HI60110GR	Stone grey	130	2	13.500	6022 23 5

PVC Polyvinylchloride

Internal corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




External corner hood

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60110RW	Pure white	100	2	17.000	6192 33 5
WDK HA60110CW	Cream	100	2	17.000	6160 92 1
WDK HA60110LGR	Light grey	100	2	17.000	6182 61 5
WDK HA60110GR	Stone grey	100	2	17.000	6022 14 6

PVC Polyvinylchloride

External corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




T and intersection hood

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60110RW	Pure white	272	65	2	26.200	6192 63 7
WDK HK60110CW	Cream	272	65	2	26.200	6162 22 3
WDK HK60110LGR	Light grey	272	65	2	26.200	6183 03 4
WDK HK60110GR	Stone grey	272	65	2	26.200	6023 02 9

PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




Flat angle hood

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60110RW	Pure white	149	2	14.500	6192 93 9
WDK HF60110CW	Cream	149	2	14.500	6161 52 9
WDK HF60110LGR	Light grey	149	2	14.500	6183 42 5
WDK HF60110GR	Stone grey	149	2	14.500	6022 33 2

PVC Polyvinylchloride

Flat angle cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.



End piece

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60110RW	Pure white	110	60	20	3.000	6193 30 7
WDK HE60110CW	Cream	110	60	20	3.000	6162 82 7
WDK HE60110LGR	Light grey	110	60	20	3.000	6183 82 4
WDK HE60110GR	Stone grey	110	60	20	3.000	6022 58 8

PVC Polyvinylchloride

End piece for closing the WDK trunking.
The end pieces are pushed onto the trunking and kept in place by the spring action.



Trunking depth 60 mm, trunking height 130 mm, device installation



Trunking, type WDK 60130


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60130RW	Pure white	2,000	16	135.000	6191 22 3
WDK60130CW	Cream	2,000	16	135.000	6021 85 9
WDK60130LGR	Light grey	2,000	16	135.000	6027 14 8
WDK60130GR	Stone grey	2,000	16	135.000	6022 02 2

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.

Four cover fixing devices included.



Internal corner hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60130RW	Pure white	130	2	14.500	6192 04 1
WDK HI60130CW	Cream	130	2	14.500	6160 34 4
WDK HI60130LGR	Light grey	130	2	14.500	6182 22 4
WDK HI60130GR	Stone grey	130	2	14.500	6022 25 1

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



External corner hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60130RW	Pure white	100	2	19.000	6192 34 3
WDK HA60130CW	Cream	100	2	19.000	6160 94 8
WDK HA60130LGR	Light grey	100	2	19.000	6182 62 3
WDK HA60130GR	Stone grey	100	2	19.000	6022 16 2

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.



T and intersection hood


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60130RW	Pure white	272	65	2	28.200	6192 64 5
WDK HK60130CW	Cream	272	65	2	28.200	6162 23 1
WDK HK60130LGR	Light grey	272	65	2	28.200	6183 04 2
WDK HK60130GR	Stone grey	272	65	2	28.200	6023 04 5

PVC Polyvinylchloride

/pc.

T and intersection cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



Flat angle hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60130RW	Pure white	170	2	19.300	6192 94 7
WDK HF60130CW	Cream	170	2	19.300	6161 53 7
WDK HF60130LGR	Light grey	170	2	19.300	6183 43 3
WDK HF60130GR	Stone grey	170	2	19.300	6022 35 9

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



End piece


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60130RW	Pure white	130	61	20	3.500	6193 31 5
WDK HE60130CW	Cream	130	61	20	3.500	6162 83 5
WDK HE60130LGR	Light grey	130	61	20	3.500	6183 83 2
WDK HE60130GR	Stone grey	130	61	20	3.500	6022 52 9

PVC Polyvinylchloride


/pc.

End piece for closing the WDK trunking.

The end pieces are pushed onto the trunking and kept in place by the spring action.



Trunking depth 60 mm, trunking height 150 mm, device installation




Trunking, type WDK 60150

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60150RW	Pure white	2,000	8	175.000	6191 23 1
WDK60150CW	Cream	2,000	8	175.000	6021 88 3
WDK60150LGR	Light grey	2,000	8	175.000	6027 15 6
WDK60150GR	Stone grey	2,000	8	175.000	6022 03 0

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.
Four cover fixing devices included.




Internal corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60150RW	Pure white	130	2	15.300	6192 06 8
WDK HI60150CW	Cream	130	2	15.300	6160 37 9
WDK HI60150LGR	Light grey	130	2	15.300	6182 23 2
WDK HI60150GR	Stone grey	130	2	15.300	6024 43 2

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood/cover fittings.




External corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60150RW	Pure white	100	2	16.000	6192 35 1
WDK HA60150CW	Cream	100	2	15.500	6160 97 2
WDK HA60150LGR	Light grey	100	2	15.500	6182 63 1
WDK HA60150GR	Stone grey	100	2	15.500	6024 52 1

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




T and intersection hood

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60150RW	Pure white	291	66	2	27.500	6192 65 3
WDK HK60150CW	Cream	291	66	2	27.500	6162 27 4
WDK HK60150LGR	Light grey	291	66	2	27.500	6183 05 0
WDK HK60150GR	Stone grey	291	66	2	27.500	6024 76 9

PVC Polyvinylchloride

/pc.

T and intersection cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




Flat angle hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60150RW	Pure white	190	2	23.600	6192 95 5
WDK HF60150CW	Cream	190	2	23.600	6161 56 1
WDK HF60150LGR	Light grey	190	2	23.600	6183 44 1
WDK HF60150GR	Stone grey	190	2	23.600	6024 59 9

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.



End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60150RW	Pure white	150	60	10	4.500	6193 32 3
WDK HE60150CW	Cream	150	60	10	4.500	6162 87 8
WDK HE60150LGR	Light grey	150	60	10	4.500	6183 84 0
WDK HE60150GR	Stone grey	150	60	10	4.500	6024 82 3

PVC Polyvinylchloride

/pc.

End piece for closing the WDK trunking.
The end pieces are pushed onto the trunking and kept in place by the spring action.



Trunking depth 60 mm, trunking height 170 mm, device installation



Trunking, type WDK 60170


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60170RW	Pure white	2,000	8	178.000	6191 25 8
WDK60170CW	Cream	2,000	8	178.000	6021 86 7
WDK60170LGR	Light grey	2,000	8	178.000	6027 16 4
WDK60170GR	Stone grey	2,000	8	178.000	6022 04 9

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.

Four cover clips included.



Internal corner hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60170RW	Pure white	130	2	16.100	6192 07 6
WDK HI60170CW	Cream	130	2	16.100	6160 35 2
WDK HI60170LGR	Light grey	130	2	16.100	6182 24 0
WDK HI60170GR	Stone grey	130	2	16.100	6022 28 6

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



External corner hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60170RW	Pure white	100	2	23.000	6192 37 8
WDK HA60170CW	Cream	100	2	23.000	6160 95 6
WDK HA60170LGR	Light grey	100	2	23.000	6182 65 8
WDK HA60170GR	Stone grey	100	2	23.000	6022 18 9

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



T and intersection hood


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60170RW	Pure white	291	66	2	32.600	6192 66 1
WDK HK60170CW	Cream	291	66	2	32.600	6162 25 8
WDK HK60170LGR	Light grey	291	66	2	32.600	6183 06 9
WDK HK60170GR	Stone grey	291	66	2	32.600	6023 06 1

PVC Polyvinylchloride

/pc.

T and intersection cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.



Flat angle hood


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60170RW	Pure white	211	2	27.200	6192 96 3
WDK HF60170CW	Cream	211	2	27.200	6161 54 5
WDK HF60170LGR	Light grey	211	2	27.200	6183 46 8
WDK HF60170GR	Stone grey	211	2	27.200	6022 37 5

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.



End piece


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60170RW	Pure white	170	60	10	5.000	6193 33 1
WDK HE60170CW	Cream	170	60	10	5.000	6162 84 3
WDK HE60170LGR	Light grey	170	60	10	5.000	6183 85 9
WDK HE60170GR	Stone grey	170	60	10	5.000	6022 54 5

PVC Polyvinylchloride


/pc.

End piece for closing the WDK trunking.

The end pieces are pushed onto the trunking and kept in place by the spring action.



Trunking depth 60 mm, trunking height 210 mm, device installation




Trunking, type WDK 60210

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60210RW	Pure white	2,000	8	258.000	6191 26 6
WDK60210CW	Cream	2,000	8	258.000	6021 87 5
WDK60210LGR	Light grey	2,000	8	258.000	6027 17 2
WDK60210GR	Stone grey	2,000	8	258.000	6022 06 5

PVC Polyvinylchloride

/m

Trunking cover and base with base opening.
Four cover fixing devices included.




Internal corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60210RW	Pure white	130	2	19.500	6192 08 4
WDK HI60210CW	Cream	130	2	19.500	6160 36 0
WDK HI60210LGR	Light grey	130	2	19.500	6182 25 9
WDK HI60210GR	Stone grey	130	2	19.500	6022 29 4

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as cover fittings.




External corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60210RW	Pure white	100	2	27.000	6192 38 6
WDK HA60210CW	Cream	100	2	27.000	6160 96 4
WDK HA60210LGR	Light grey	100	2	27.000	6182 66 6
WDK HA60210GR	Stone grey	100	2	27.000	6022 19 7

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




T and intersection hood

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60210RW	Pure white	291	66	2	31.500	6192 68 8
WDK HK60210CW	Cream	291	66	2	31.500	6162 26 6
WDK HK60210LGR	Light grey	291	66	2	35.500	6183 07 7
WDK HK60210GR	Stone grey	291	66	2	31.500	6023 12 6

PVC Polyvinylchloride

/pc.

T and intersection cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.



Flat angle hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60210RW	Pure white	250	2	39.000	6192 97 1
WDK HF60210CW	Cream	250	2	39.000	6161 55 3
WDK HF60210LGR	Light grey	250	2	39.000	6183 47 6
WDK HF60210GR	Stone grey	250	2	39.000	6022 39 1

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.



Trunking depth 60 mm, trunking height 210 mm, device installation




End piece

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60210RW	Pure white	210	60	10	5.400	6193 35 8
WDK HE60210CW	Cream	210	60	10	5.400	6162 85 1
WDK HE60210LGR	Light grey	210	60	10	5.400	6183 86 7
WDK HE60210GR	Stone grey	210	60	10	5.400	6022 56 1


PVC Polyvinylchloride

/pc.

End piece for closing the WDK trunking.
The end pieces are pushed onto the trunking and kept in place by the spring action.



Trunking depth 80 mm, trunking height 210 mm




Trunking, type WDK 80210

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK80210RW	Pure white	2,000	8	240.000	6191 31 2
WDK80210CW	Cream	2,000	8	240.000	6026 20 6
WDK80210LGR	Light grey	2,000	8	240.000	6027 23 7
WDK80210GR	Stone grey	2,000	8	240.000	6026 19 2

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.
Four cover fixing devices included.




Internal corner hood

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI80210RW	Pure white	150	2	21.500	6192 11 0
WDK HI80210CW	Cream	150	2	21.500	6160 49 2
WDK HI80210LGR	Light grey	150	2	21.500	6182 31 3
WDK HI80210GR	Stone grey	150	2	21.500	6024 47 5

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




External corner hood

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA80210RW	Pure white	150	2	32.000	6192 42 0
WDK HA80210CW	Cream	150	2	32.000	6161 11 1
WDK HA80210LGR	Light grey	150	2	32.000	6182 72 0
WDK HA80210GR	Stone grey	150	2	32.000	6024 57 2

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




T and intersection hood

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK80210RW	Pure white	282	213	2	34.500	6192 72 2
WDK HK80210CW	Cream	282	213	2	34.500	6162 42 8
WDK HK80210LGR	Light grey	282	213	2	34.500	6183 13 1
WDK HK80210GR	Stone grey	282	213	2	34.500	6024 80 7

PVC Polyvinylchloride

/pc.

T and intersection cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




Flat angle hood

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF80210RW	Pure white	247	2	35.000	6193 02 5
WDK HF80210CW	Cream	247	2	35.000	6161 71 5
WDK HF80210LGR	Light grey	247	2	35.000	6183 53 0
WDK HF80210GR	Stone grey	247	2	35.000	6024 62 9

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood/cover fittings.



End piece

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE80210RW	Pure white	150	80	10	14.500	6193 39 1
WDK HE80210CW	Cream	150	80	10	14.500	6163 01 7
WDK HE80210LGR	Light grey	150	80	10	14.500	6183 92 1
WDK HE80210GR	Stone grey	150	80	10	14.500	6024 87 4

PVC Polyvinylchloride

/pc.

End piece for closing the WDK trunking.
The end pieces are pushed onto the WDK trunking in the same way as the covers.



Trunking depth 100 mm, trunking height 130 mm




Trunking, type WDK 100130

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK100130RW	Pure white	2,000	8	214.000	6191 34 7
WDK100130CW	Cream	2,000	8	214.000	6026 27 3
WDK100130LGR	Light grey	2,000	8	214.000	6027 24 5
WDK100130GR	Stone grey	2,000	8	214.000	6026 28 1

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.
Four cover fixing devices included.




Internal corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI100130RW	Pure white	170	2	17.500	6192 11 4
WDK HI100130CW	Cream	170	2	17.500	6160 52 2
WDK HI100130LGR	Light grey	170	2	17.500	6182 34 8
WDK HI100130GR	Stone grey	170	2	17.500	6024 48 3

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




External corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA100130RW	Pure white	170	2	27.000	6192 42 4
WDK HA100130CW	Cream	170	2	27.000	6161 15 4
WDK HA100130LGR	Light grey	170	2	27.000	6182 74 7
WDK HA100130GR	Stone grey	170	2	27.000	6024 58 0

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




T and intersection hood

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK100130RW	Pure white	282	133	2	31.500	6192 72 6
WDK HK100130CW	Cream	282	133	2	31.500	6162 45 2
WDK HK100130LGR	Light grey	282	133	2	31.500	6183 16 6
WDK HK100130GR	Stone grey	282	133	2	31.500	6024 81 5

PVC Polyvinylchloride

/pc.

T and intersection cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




Flat angle hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF100130RW	Pure white	166	2	22.500	6193 02 9
WDK HF100130CW	Cream	166	2	22.500	6161 75 8
WDK HF100130LGR	Light grey	166	2	22.500	6183 55 7
WDK HF100130GR	Stone grey	166	2	22.500	6024 63 7

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE100130RW	Pure white	150	100	10	8.200	6193 39 5
WDK HE100130CW	Cream	150	100	10	8.200	6163 04 1
WDK HE100130LGR	Light grey	150	100	10	8.200	6183 95 6
WDK HE100130GR	Stone grey	150	100	10	8.200	6024 88 2


PVC Polyvinylchloride

/pc.

End piece for closing the WDK trunking.
The end pieces are pushed onto the WDK trunking in the same way as the covers.



Trunking depth 80 mm, trunking height 170 mm



Trunking, type WDK 80170

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK80170RW	Pure white	2,000	8	214.000	6191 30 4
WDK80170CW	Cream	2,000	8	214.000	6026 17 6
WDK80170LGR	Light grey	2,000	8	214.000	6027 22 9
WDK80170GR	Stone grey	2,000	8	214.000	6026 18 4


PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.
Four cover fixing devices included.



WDK cable trunking systems, plastic




Internal corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI80170RW	Pure white	150	2	20.000	6192 10 6
WDK HI80170CW	Cream	150	2	20.000	6160 48 4
WDK HI80170LGR	Light grey	150	2	20.000	6182 30 5
WDK HI80170GR	Stone grey	150	2	20.000	6024 46 7

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




External corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA80170RW	Pure white	150	2	27.500	6192 41 6
WDK HA80170CW	Cream	150	2	27.500	6161 10 3
WDK HA80170LGR	Light grey	150	2	27.500	6182 71 2
WDK HA80170GR	Stone grey	150	2	27.500	6024 56 4

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




T and intersection hood

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK80170RW	Pure white	282	173	2	29.000	6192 71 8
WDK HK80170CW	Cream	282	173	2	29.000	6162 40 1
WDK HK80170LGR	Light grey	282	173	2	29.000	6183 12 3
WDK HK80170GR	Stone grey	282	173	2	29.000	6024 79 3

PVC Polyvinylchloride

/pc.

T and intersection cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




Flat angle hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF80170RW	Pure white	206	2	27.500	6193 02 1
WDK HF80170CW	Cream	206	2	27.500	6161 70 7
WDK HF80170LGR	Light grey	206	2	27.500	6183 52 2
WDK HF80170GR	Stone grey	206	2	27.500	6024 61 0

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.



End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE80170RW	Pure white	150	80	10	11.900	6193 38 7
WDK HE80170CW	Cream	150	80	10	11.900	6163 00 9
WDK HE80170LGR	Light grey	150	80	10	11.900	6183 91 3
WDK HE80170GR	Stone grey	150	80	10	11.900	6024 85 8

PVC Polyvinylchloride

/pc.

End piece for closing the WDK trunking.
The end pieces are pushed onto the WDK trunking in the same way as the covers.



Trunking depth 100 mm, trunking height 230 mm




Trunking, type WDK 100230

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK100230RW	Pure white	2,000	4	338.000	6191 35 5
WDK100230CW	Cream	2,000	4	338.000	6026 33 8
WDK100230LGR	Light grey	2,000	4	338.000	6027 25 3
WDK100230GR	Stone grey	2,000	4	338.000	6026 31 1

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.
Four cover fixing devices included.




Internal corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI100230RW	Pure white	170	2	27.000	6192 11 8
WDK HI100230CW	Cream	170	2	27.000	6160 54 9
WDK HI100230LGR	Light grey	170	2	27.000	6182 36 4
WDK HI100230GR	Stone grey	170	2	27.000	6024 50 5

PVC Polyvinylchloride

/pc.

Internal corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




External corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA100230RW	Pure white	170	2	30.000	6192 42 8
WDK HA100230CW	Cream	170	2	30.000	6161 17 0
WDK HA100230LGR	Light grey	170	2	30.000	6182 76 3
WDK HA100230GR	Stone grey	170	2	30.000	6024 68 8

PVC Polyvinylchloride

/pc.

External corner cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




T and intersection hood

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK100230RW	Pure white	282	233	2	39.000	6192 73 0
WDK HK100230CW	Cream	282	233	2	39.000	6162 47 9
WDK HK100230LGR	Light grey	282	233	2	39.000	6183 18 2
WDK HK100230GR	Stone grey	282	233	2	39.000	6024 71 8

PVC Polyvinylchloride

/pc.

T and intersection cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




Flat angle hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF100230RW	Pure white	266	2	48.000	6193 03 3
WDK HF100230CW	Cream	266	2	48.000	6161 77 4
WDK HF100230LGR	Light grey	266	2	48.000	6183 57 3
WDK HF100230GR	Stone grey	266	2	48.000	6024 65 3

PVC Polyvinylchloride

/pc.

Flat angle cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.




End piece


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE100230RW	Pure white	230	100	5	10.300	6193 39 9
WDK HE100230CRW	Cream	230	100	5	10.300	6163 07 6
WDK HE100230LGR	Light grey	230	100	5	10.300	6183 98 0
WDK HE100230GR	Stone grey	230	100	5	10.300	6024 90 4

PVC Polyvinylchloride

/pc.

End piece for closing the WDK trunking.
The end pieces are pushed onto the WDK trunking in the same way as the covers.






Cover clip for 60 mm trunking width

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2370 60	Stone grey	48,8	24.8	100	0.600	6022 99 5
PVC Polyvinylchloride						/100 pc.


Cover clip for better and easier laying of lines in the WDK trunking.
The cover clip is locked on one side and moved forward. This provides an opening of 30°, making cable routing very easy.



Cover clip for 90 mm trunking width

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2370 90	Stone grey	75,7	28.8	100	1.000	6023 50 9
PVC Polyvinylchloride						/100 pc.


Cover clip for better and easier laying of lines in the WDK trunking.
The cover clip is locked on one side and moved forward. This provides an opening of 30°, making cable routing very easy.



Cover clip for 110 mm trunking width

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2370 110	Stone grey	95,7	28.8	100	2.000	6023 51 7
PVC Polyvinylchloride						/100 pc.


Cover clip for better and easier laying of lines in the WDK trunking.
The cover clip is locked on one side and moved forward. This provides an opening of 30°, making cable routing very easy.



Cover clip for 130 mm trunking width

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2370 130	Stone grey	116,2	36	100	2.500	6023 52 5
PVC Polyvinylchloride						/100 pc.


Cover clip for better and easier laying of lines in the WDK trunking.
The cover clip is locked on one side and moved forward. This provides a 30° opening, meaning that cable routing is very simple.



Cover clip for 150 mm trunking width

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2370 150	Stone grey	136,2	36	50	3.000	6023 53 3
PVC Polyvinylchloride						/100 pc.


Cover clip for better and easier laying of lines in the WDK trunking.
The cover clip is locked on one side and moved forward. This provides an opening of 30°, making cable routing very easy.



Cover clip for 170 mm trunking width

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2370 170	Stone grey	156,7	36	50	3.300	6023 54 1
PVC Polyvinylchloride						/100 pc.

Cover clip for better and easier laying of lines in the WDK trunking.
The cover clip is locked on one side and moved forward. This provides an opening of 30°, making cable routing very easy.



Cover clip for 210 mm trunking width

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2370 210	Stone grey	197,2	36	50	3.900	6023 57 6
PVC Polyvinylchloride						/100 pc.

Cover clip for better and easier laying of lines in the WDK trunking.
The cover clip is locked on one side and moved forward. This provides a 30° opening, meaning that cable routing is very simple.




Plastic cable trunking accessories



Cover clip for 230 mm trunking width

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2370 230	Stone grey	216,2	36	50	4.800	6023 58 4
PVC Polyvinylchloride						/100 pc.


Cover clip for better and easier laying of lines in the WDK trunking.
The cover clip is locked on one side and moved forward. This provides an opening of 30°, making cable routing very easy.



Partition for trunking height 40 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2371 40	Light grey	2,000	60	13.500	6023 09 6
PVC Polyvinylchloride					


Partition to divide the WDK and GEK-K trunking for different voltage levels.
The partitions are pinned on the connectors in the base.



Partition for trunking height 60 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2371 60	Light grey	2,000	40	17.000	6023 11 8
PVC Polyvinylchloride					


Partition to divide the trunking for different voltage levels.
The partitions are pinned on the connectors in the base.



Partition for trunking height 80 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2371 80	Light grey	2,000	40	33.000	6026 98 2
PVC Polyvinylchloride					


Partition to divide the trunking for different voltage levels.
The partitions are pinned on the connectors in the base.



Partition for trunking height 100 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2371 100	Light grey	2,000	20	40.000	6026 99 0
PVC Polyvinylchloride					


Partition to divide the trunking for different voltage levels.
The partitions are pinned on the connectors in the base.



Accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
2390	Light grey	5	4.700	6023 20 7
PVC Polyvinylchloride				


Mounting box for mounting devices with support ring.
The accessory mounting box is placed on the floor connectors and fastened in the centre with a bolt.




Cover for single accessory mounting box, trunking height 110 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-1 110RW	Pure white	300	10	8.000	6194 03 6
D2-1 110CW	Cream	300	10	8.000	6169 30 9
PVC Polyvinylchloride					

Cover section, single, for device installation in WDK trunking.






Cover for double accessory mounting box, trunking height 110 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-2 110GR	Stone grey	300	10	6.500	6159 37 0
D2-2 110CW	Cream	300	10	6.500	6169 37 6
D2-2 110RW	Pure white	300	10	6.500	6194 10 9

PVC Polyvinylchloride /pc.

Cover section, double, for device installation in WDK trunking.




Cover for triple accessory mounting box, trunking height 110 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-3 110CW	Cream	300	10	5.000	6169 43 0
D2-3 110RW	Pure white	300	10	5.000	6194 18 4

PVC Polyvinylchloride /pc.

Cover section, triple, for device installation in WDK trunking.




Cover for single accessory mounting box, trunking height 130 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-1 130RW	Pure white	300	10	9.000	6194 04 4
D2-1 130CW	Cream	300	10	9.000	6169 31 7

PVC Polyvinylchloride /pc.

Cover section, single, for device installation in WDK trunking.




Cover for double accessory mounting box, trunking height 130 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-2 130RW	Pure white	300	10	7.500	6194 11 7
D2-2 130CW	Cream	300	10	7.500	6169 38 4

PVC Polyvinylchloride /pc.

Cover section, double, for device installation in WDK trunking.




Cover for triple accessory mounting box, trunking height 130 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-3 130RW	Pure white	300	10	6.200	6194 19 2
D2-3 130CW	Cream	300	10	6.200	6169 44 9

PVC Polyvinylchloride /pc.

Cover section, triple, for device installation in WDK trunking.




Cover for single accessory mounting box, trunking height 150 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-1 150RW	Pure white	300	10	10.000	6194 05 2
D2-1 150CW	Cream	300	10	10.000	6169 29 5

PVC Polyvinylchloride /pc.

Cover section, single, for device installation in WDK trunking.



Cover for double accessory mounting box, trunking height 150 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-2 150RW	Pure white	300	10	9.000	6194 12 5
D2-2 150CW	Cream	300	10	9.000	6169 36 8

PVC Polyvinylchloride /pc.

Cover section, double, for device installation in WDK trunking.



Plastic cable trunking accessories




Cover for triple accessory mounting box, trunking height 150 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-3 150RW	Pure white	300	10	9.500	6194 20 6
D2-3 150CW	Cream	300	10	9.500	6169 42 2

PVC Polyvinylchloride

/pc.

Cover section, triple, for device installation in WDK trunking.




Cover for single accessory mounting box, trunking height 170 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-1 170RW	Pure white	300	10	13.400	6194 06 0
D2-1 170CW	Cream	300	10	13.400	6169 39 5

PVC Polyvinylchloride

/pc.

Cover section, single, for device installation in WDK trunking.




Cover for double accessory mounting box, trunking height 170 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-2 170RW	Pure white	300	10	12.000	6194 13 3
D2-2 170CW	Cream	300	10	12.000	6169 39 2

PVC Polyvinylchloride

/pc.

Cover section, double, for device installation in WDK trunking.




Cover for triple accessory mounting box, trunking height 170 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-3 170RW	Pure white	300	10	10.300	6194 21 4
D2-3 170CW	Cream	300	10	10.300	6169 45 7

PVC Polyvinylchloride

/pc.

Cover section, triple, for device installation in WDK trunking.




Cover for double accessory mounting box, trunking height 210 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-2 210RW	Pure white	300	10	17.700	6194 14 1
D2-2 210CW	Cream	300	10	17.700	6169 40 6

PVC Polyvinylchloride

/pc.

Cover section, double, for device installation in WDK trunking.



CEE accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
2392	Light grey	5	10.500	6024 00 9

PA/GF Polyamide, fibreglass reinforced

/pc.

Underfloor box for mounting CEE sockets in WDK trunking. Also suitable as concealed installation box for CEE sockets.


Concealed installation box for installing CEE sockets. The underfloor box can also be used for installing WDK trunking.


Straight version, 16 and 32 A, with 60 x 60 mm hole spacing.

Supplied complete with one strain relief clip.

1 plug-in seal ED 16,

1 screw plug VS 16 and 4 cylinder bolts M5 x 18 to fasten the socket.





CEE adapter flange 16 A


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2393 16	Stone grey	110	96	5	4.000	6024 02 5

PVC Polyvinylchloride

/pc.

Intermediate flange for CEE 16 A sockets.

Installed from the CEE sockets behind the cover of the accessory mounting boxes.



CEE adapter flange 32 A


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2393 32	Stone grey	110	96	5	4.000	6024 03 3

PVC Polyvinylchloride

/pc.

Intermediate flange for CEE 32 A sockets.

Installed from the CEE sockets behind the cover of the accessory mounting boxes.




Cover for CEE accessory mounting box

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2425 150RW	Pure white	300	10	11.500	6194 72 9
2425 150CW	Cream	300	10	11.500	6168 52 3

PVC Polyvinylchloride

/pc.

Cover section for installation of CEE sockets in WDK trunking.



Knock-in anchor

Type	Dowel-Ø mm	Length mm	Pull-out force N min/concrete	Box Quantity pcs	Pack. pcs	Weight kg/100 pcs.	Item No.
910 SD 6X35	6	35	260	1,200	100	0.310	2351 05 6

PA Polyamide

/100 pc.

Knock-in anchor: steel, electrogalvanised and transparently passivated.



Universal trunking




End piece

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RK-E1117GR	Stone grey	175	127	2	13.500	6156 22 3
RK-E1117LGR	Light grey	175	127	2	13.500	6156 23 1

PVC Polyvinylchloride /pc.

End piece for fastening and side closing of the universal trunking. The required fastening clips, type 2955 GL, are included.




Cover

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2410 110GR	Stone grey	2,000	16	34.000	6022 71 5
2410 110LGR	Light grey	2,000	16	34.000	6028 15 2

PVC Polyvinylchloride /m

Cover for creating the universal trunking.




Front cover

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2410 170GR	Stone grey	2,000	36	56.700	6022 75 8
2410 170LGR	Light grey	2,000	36	56.700	6028 18 7

PVC Polyvinylchloride /m

Front cover for creating the universal trunking.





Cover clip

Type	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RK-K1117	120	166	2	9.000	6156 20 7

ST Steel **FS** Strip-galvanised /pc.

Cover clip for fixing the covers of the universal trunking. These are required to prevent the covers from sagging.



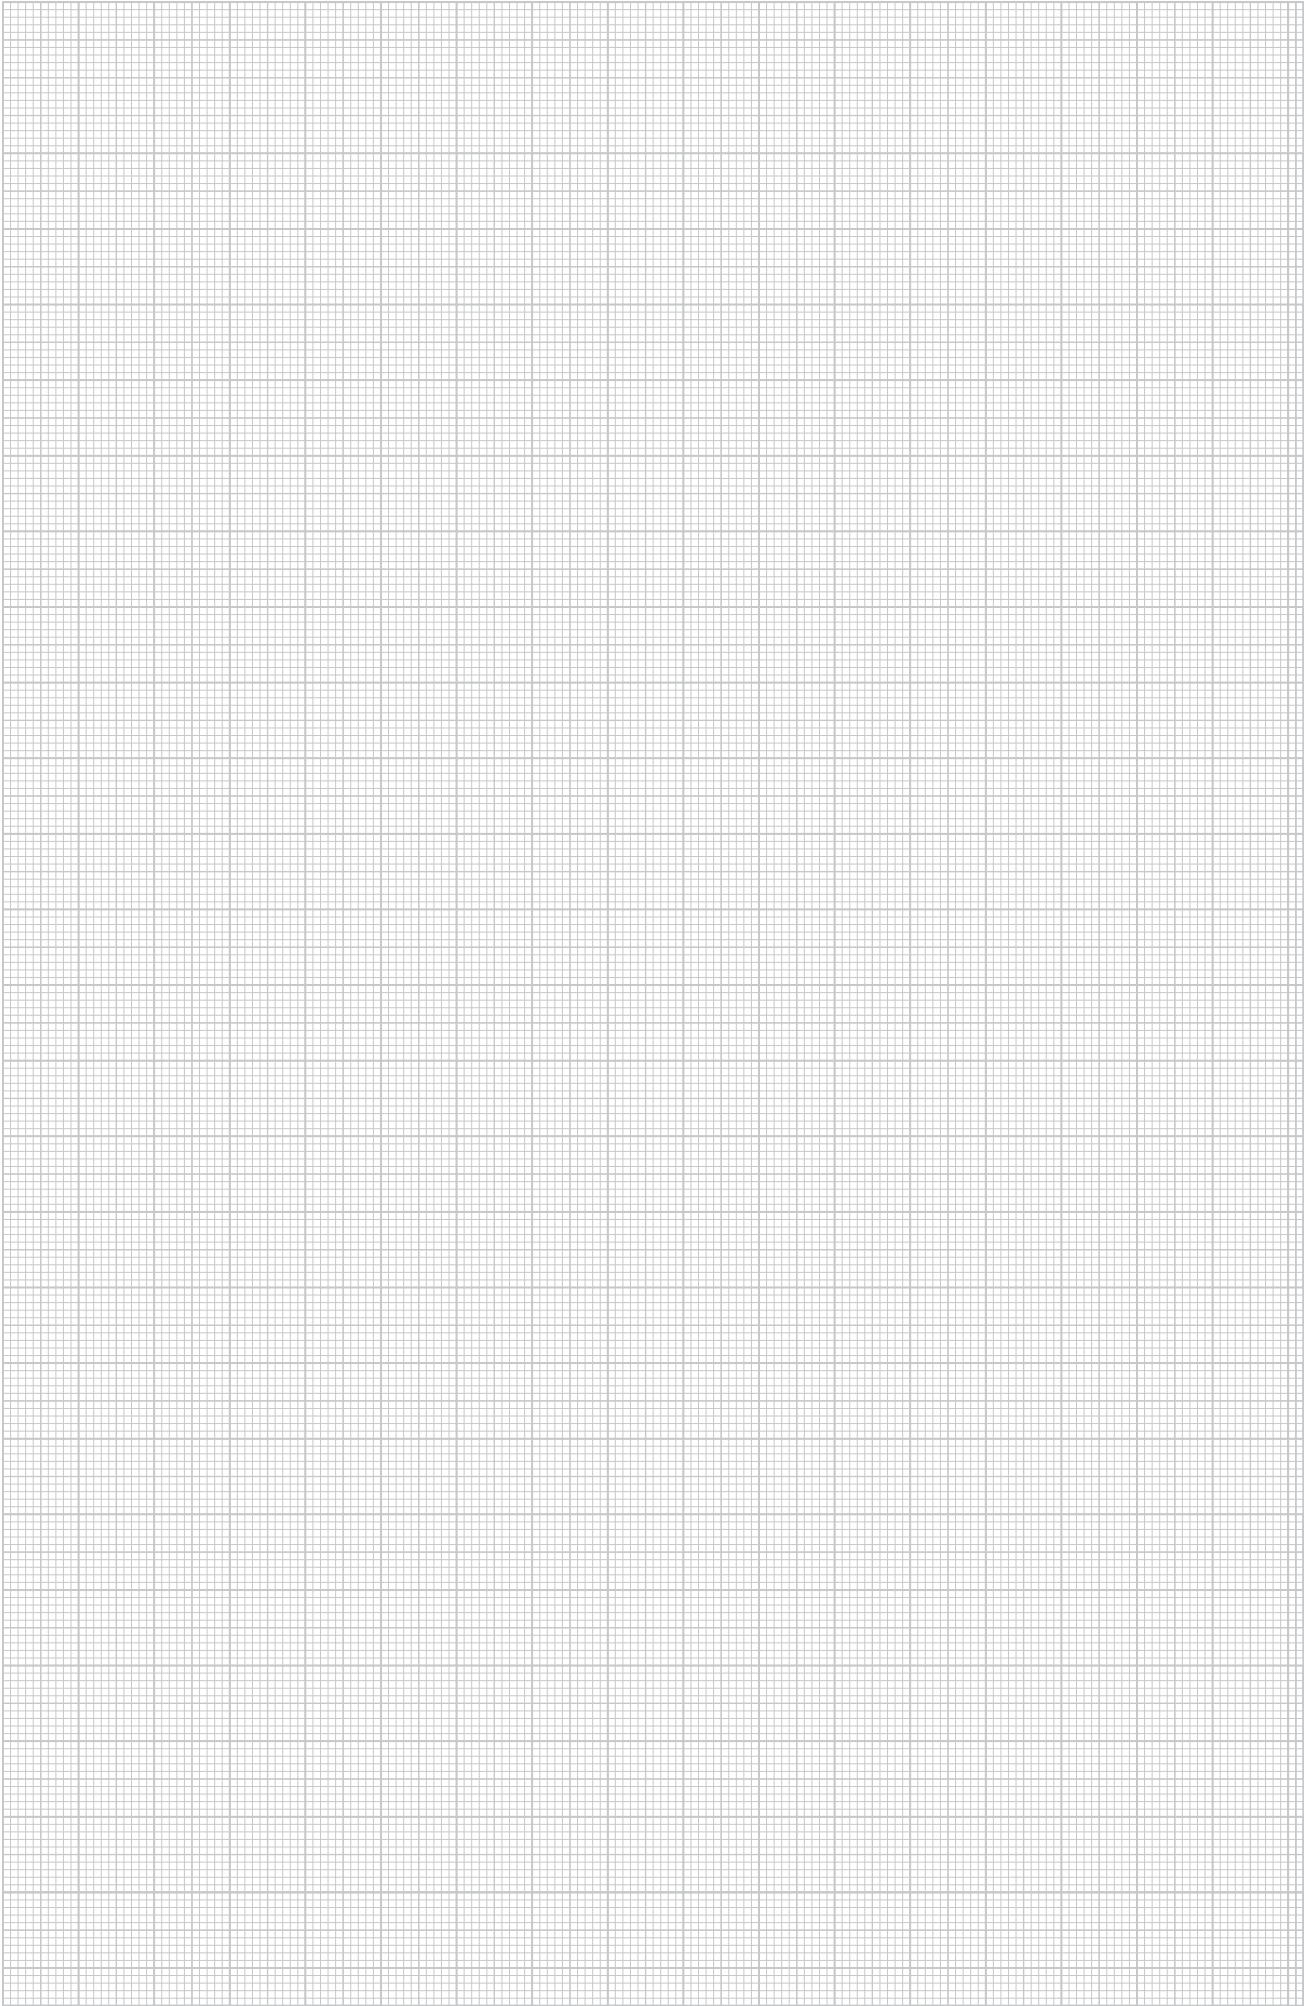


Halogen-free, trunking depth 20 mm, trunking height 20 mm



Trunking, type WDK-H 20020

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK-H20020	Pure white	2,000	72	10.300	6175 00 2
PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene					/m


Trunking cover and base with base perforation made of halogen-free plastic.




End piece

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HE20020	Pure white	19	18	1	0.100	6175 15 0
PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene					/pc.	

End piece for closing the WDK-H trunking.



Halogen-free, trunking depth 30 mm, trunking height 45 mm




Trunking, type WDK-H 30045

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK-H30045	Pure white	2,000	32	28.000	6175 00 8

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Trunking cover and base with base perforation made of halogen-free plastic.




Internal corner hood

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HI30045	Pure white	60	1	2.200	6175 05 1

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Internal corner cover for changing the direction of the halogen-free WDK-H trunking.




External corner hood

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HA30045	Pure white	60	1	2.700	6175 10 3

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

External corner cover for changing the direction of the WDK-H trunking.




Flat angle hood

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HF30045	Pure white	60	1	1.900	6175 20 4

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle cover for changing the direction of the halogen-free WDK-H trunking.




T and intersection hood

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HT30045	Pure white	130	1	3.300	6175 25 5

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T and intersection cover for changing the direction of the halogen-free WDK-H trunking.



End piece

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HE30045	Pure white	45	30	1	0.800	6175 15 6

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

End piece for closing the WDK-H trunking.



Halogen-free, trunking depth 40 mm, trunking height 60 mm




Trunking, type WDK-H 40060

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK-H40060	Pure white	2,000	24	40.600	6175 01 4

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene /m

Trunking cover and base with base perforation made of halogen-free plastic including cover fixing devices.




Internal corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HI40060	Pure white	85	1	4.800	6175 05 7

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene /pc.

Internal corner cover for changing the direction of the halogen-free WDK-H trunking.




External corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HA40060	Pure white	85	1	5.600	6175 10 9

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene /pc.

External corner cover for changing the direction of the WDK-H trunking.




Flat angle hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HF40060	Pure white	85	1	4.400	6175 21 0

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene /pc.

Flat angle cover for changing the direction of the halogen-free WDK-H trunking.




T and intersection hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HT40060	Pure white	170	1	7.200	6175 26 1

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene /pc.

T and intersection cover for changing the direction of the halogen-free WDK-H trunking.




End piece


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HE40060	Pure white	60	40	1	1.200	6175 16 2

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene /pc.

End piece for closing the WDK-H trunking.



Halogen-free, trunking depth 40 mm, trunking height 60 mm




Trunking, type WDK-H 40061

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK-H40061	Pure white	2,000	24	46.700	6175 02 0

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

/m

Trunking cover and base with base perforation made of halogen-free plastic including cover fixing devices.




Internal corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HI40061	Pure white	85	1	4.800	6175 06 3

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

/pc.

Internal corner cover for changing the direction of the halogen-free WDK-H trunking.




External corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HA40061	Pure white	85	1	5.600	6175 11 5

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

/pc.

External corner cover for changing the direction of the WDK-H trunking.




Flat angle hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HF40061	Pure white	85	1	4.400	6175 21 6

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

/pc.

Flat angle cover for changing the direction of the halogen-free WDK-H trunking.




T and intersection hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HT40061	Pure white	170	1	7.200	6175 26 7

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

/pc.

T and intersection cover for changing the direction of the halogen-free WDK-H trunking.



End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HE40061	Pure white	60	40	1	1.200	6175 16 8

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

/pc.

End piece for closing the WDK-H trunking.



Halogen-free, trunking depth 60 mm, trunking height 90 mm




Trunking, type WDK-H 60090

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK-H60090	Pure white	2,000	12	69.300	6175 02 6

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene /m

Trunking cover and base with base perforation made of halogen-free plastic including cover fixing devices.




Internal corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HI60090	Pure white	130	1	9.800	6175 06 9

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene /pc.

Internal corner cover for changing the direction of the halogen-free WDK-H trunking.




External corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HA60090	Pure white	130	1	12.300	6175 12 1

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene /pc.

External corner cover for changing the direction of the WDK-H trunking.




Flat angle hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HF60090	Pure white	120	1	8.400	6175 22 2

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene /pc.

Flat angle cover for changing the direction of the halogen-free WDK-H trunking.




T and intersection hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HT60090	Pure white	170	1	10.400	6175 27 3

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene /pc.

Flat angle cover for changing the direction of the halogen-free WDK-H trunking.




End piece


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HE60090	Pure white	90	60	1	2.800	6175 17 4

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene /pc.

End piece for closing the WDK-H trunking.



Halogen-free, trunking depth 60 mm, trunking height 110 mm




Trunking, type WDK-H 60110

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK-H60110	Pure white	2,000	24	89.600	6175 03 2

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene /m

Trunking cover and base with base perforation made of halogen-free plastic including cover fixing devices.




Internal corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HI60110	Pure white	130	1	12.500	6175 07 5

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene /pc.

Internal corner cover for changing the direction of the halogen-free WDK-H trunking.




External corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HA60110	Pure white	130	1	14.000	6175 12 7

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene /pc.

External corner cover for changing the direction of the WDK-H trunking.




Flat angle hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HF60110	Pure white	140	1	11.200	6175 22 8

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene /pc.

Flat angle cover for changing the direction of the halogen-free WDK-H trunking.




T and intersection hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HT60110	Pure white	190	1	13.800	6175 27 9

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene /pc.

T and intersection cover for changing the direction of the halogen-free WDK-H trunking.



End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HE60110	Pure white	110	60	1	3.200	6175 18 0

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene /pc.

End piece for closing the WDK-H trunking.



Halogen-free, trunking depth 60 mm, trunking height 150 mm




Trunking, type WDK-H 60150

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK-H60150	Pure white	2,000	12	128.600	6175 03 8

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

/m

Trunking cover and base with base perforation made of halogen-free plastic including cover fixing devices.




Internal corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HI60150	Pure white	130	1	15.600	6175 08 1

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

/pc.

Internal corner cover for changing the direction of the halogen-free WDK-H trunking.




External corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HA60150	Pure white	130	1	20.200	6175 13 3

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

/pc.

External corner cover for changing the direction of the WDK-H trunking.




Flat angle hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HF60150	Pure white	180	1	16.700	6175 23 4

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

/pc.

Flat angle cover for changing the direction of the halogen-free WDK-H trunking.




T and intersection hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HT60150	Pure white	250	1	21.700	6175 28 5

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

/pc.

T and intersection cover for changing the direction of the halogen-free WDK-H trunking.




End piece


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK-HE60150	Pure white	150	60	1	4.000	6175 18 6


PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

/pc.

End piece for closing the WDK-H trunking.



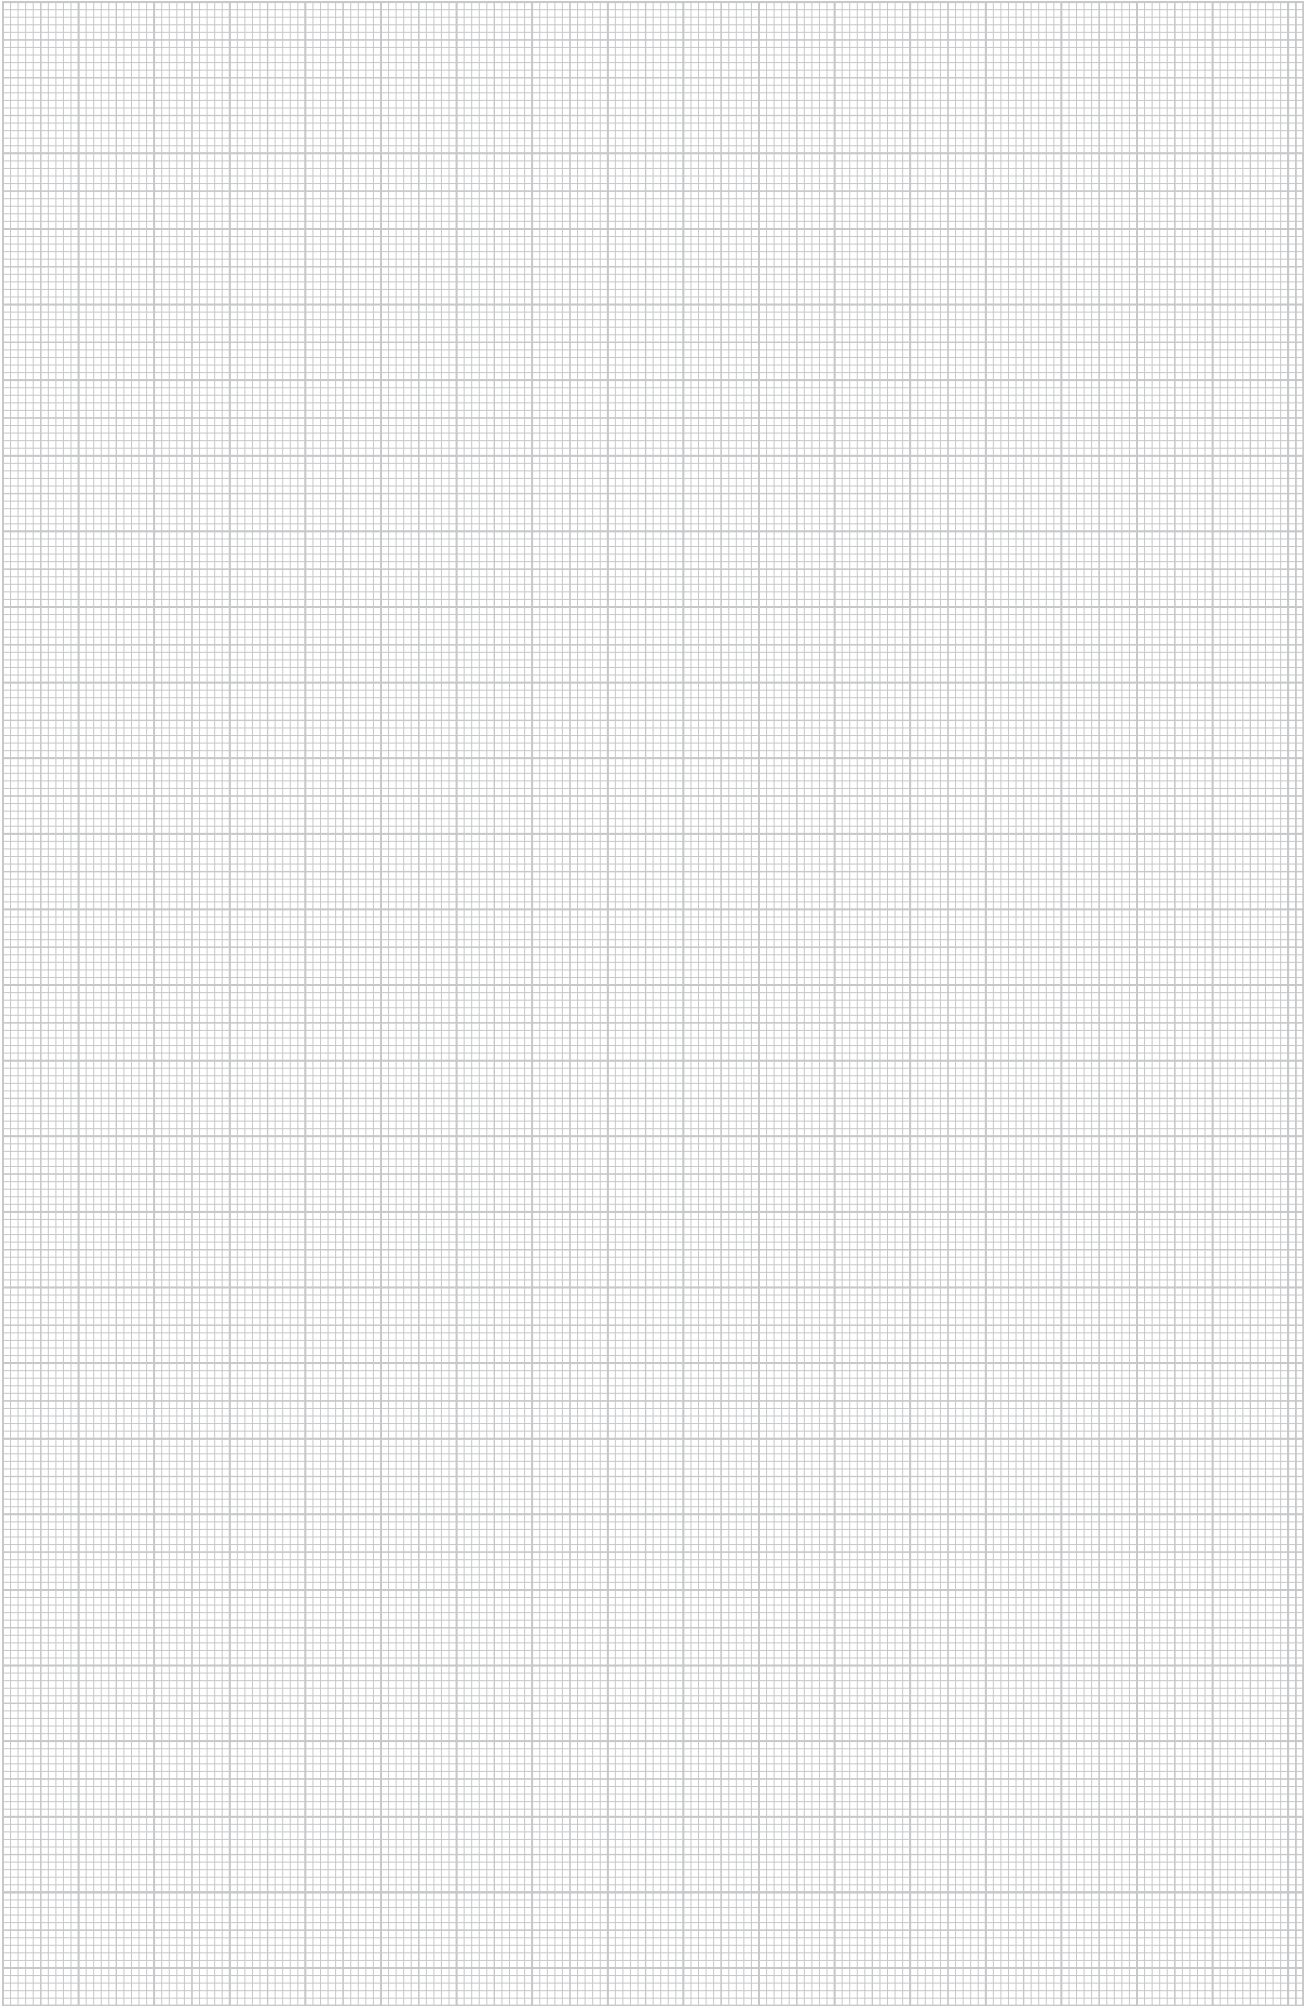

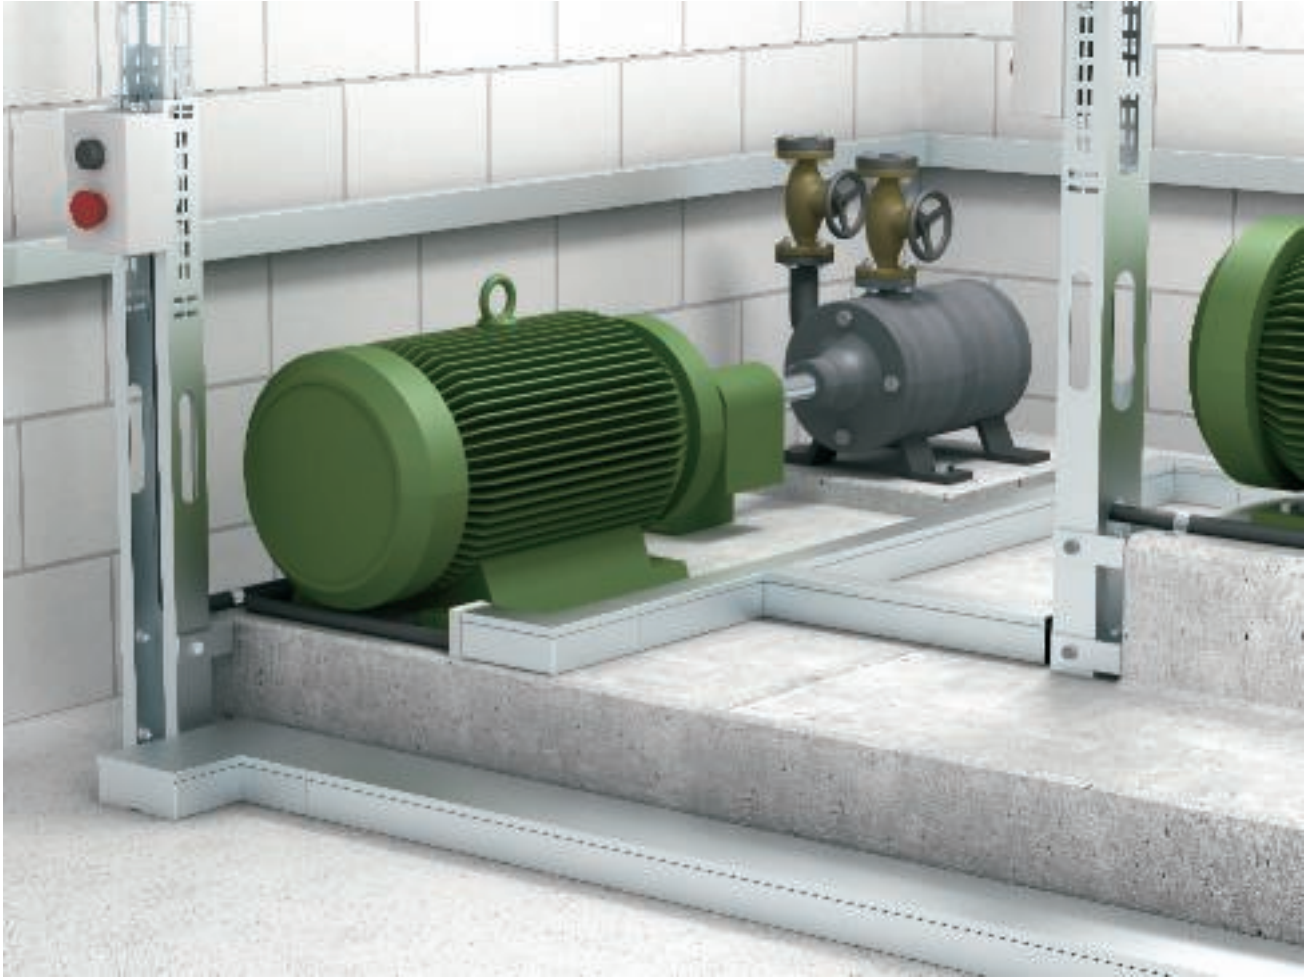

LKM metal cable trunking systems

	Trunking depth 24 mm	Trunking height 20 mm	95
		Trunking height 30 mm	139
	Trunking depth 30 mm	Trunking height 30 mm	140
	Trunking depth 40 mm	Trunking height 40 mm	141
		Trunking height 60 mm	143
	Trunking depth 60 mm	Trunking height 60 mm	145
		Trunking height 100 mm	147
		Trunking height 150 mm	149
		Trunking height 200 mm	151
	Trunking depth 80 mm	Trunking height 80 mm	153
	Accessories	Partition	155
		Cable bracket	155
		Duct clamp	155



Trunking depth 20 mm, trunking height 20 mm




Trunking, type LKM 20020

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM20020FS	—	2,000	32	46.000	6246 96 6
LKM20020RW	Pure white	2,000	32	46.000	6248 46 2

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /m

Trunking cover and base with base perforation.
Equipotential bonding is guaranteed between the cover and the base without any additional aids.




Joint connector

Type	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV20	45	19.7	10	0.160	6247 43 1

ST Steel **G** Electrogalvanised /pc.

Joint connector for connecting the bases.
This creates the equipotential bonding between the trunking bases.




Edge protection ring


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR20020	Grey	28	24	10	0.900	6249 84 2

PE Polyethylene /pc.

Edge protection ring for the open ends of LKM cable trunking.



Trunking depth 20 mm, trunking height 30 mm




Trunking, type LKM 20030

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM20030FS	—	2,000	24	58.000	6246 97 4
LKM20030RW	Pure white	2,000	24	58.000	6248 47 0

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /m

Trunking cover and base with base perforation.
Equipotential bonding is guaranteed between the cover and the base without any additional aids.




Joint connector

Type	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV30	53,8	29,5	10	0.400	6247 43 4

ST Steel **G** Electrogalvanised /pc.

Joint connector for connecting the bases.
This creates the equipotential bonding between the trunking bases.



Edge protection ring

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR20030	Grey	34	28	10	1.100	6249 84 4

PE Polyethylene /pc.

Edge protection ring for the open ends of LKM cable trunking.



Trunking depth 30 mm, trunking height 30 mm




Trunking, type LKM 30030

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM30030FS	—	2,000	1	51.500	6246 98 2
LKM30030RW	Pure white	2,000	1	51.500	6248 48 2

ST Steel **FS** Strip-galvanised /m

Trunking cover and base with base perforation.

Equipotential bonding is guaranteed between the cover and the base without any additional aids.




Joint connector

Type	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV30	53,8	29,5	10	0.400	6247 43 4

ST Steel **G** Electrogalvanised /pc.

Joint connector for connecting the bases.

This creates the equipotential bonding between the trunking bases.




Edge protection ring


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR30030	Grey	34	34	1	1.300	6249 84 5

PE Polyethylene /pc.

Edge protection ring for the open ends of LKM cable trunking.




Trunking depth 40 mm, trunking height 40 mm



Trunking, type LKM 40040

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM40040FS	—	2,000	16	127.600	6246 99 0
LKM40040RW	Pure white	2,000	16	127.600	6248 49 7
ST Steel	FS Strip-galvanised	FSK Strip-galvanised/plastic-coated	/m		


Trunking cover and base with floor perforation.
Equipotential bonding is guaranteed between the cover and the base without any additional aids.



Joint connector

Type	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV40	76	29.6	10	1.000	6247 45 8
V2A Stainless steel, 1.4301	/pc.				


Joint connector to connect the bases.
This creates the equipotential bonding between the trunking bases.



Internal corner

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM I40040FS	—	160	4	28.000	6247 65 2
LKM I40040RW	Pure white	160	4	28.000	6249 16 7
ST Steel	FS Strip-galvanised	FSK Strip-galvanised/plastic-coated	/pc.		


Internal corner for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.



External corner

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM A40040FS	—	160	4	38.600	6247 56 3
LKM A40040RW	Pure white	160	4	38.600	6249 08 6
ST Steel	FS Strip-galvanised	FSK Strip-galvanised/plastic-coated	/pc.		


External corner including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.



T piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM T40040FS	—	280	140	4	39.700	6247 72 5
LKM T40040RW	Pure white	280	140	4	39.700	6249 25 6
ST Steel	FS Strip-galvanised	FSK Strip-galvanised/plastic-coated			/pc.	


T piece including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.



Flat angle

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM F40040FS	—	160	4	37.100	6247 49 0
LKM F40040RW	Pure white	160	4	37.100	6248 99 3
ST Steel	FS Strip-galvanised	FSK Strip-galvanised/plastic-coated	/pc.		

Flat angle including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.



End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM E40040FS	—	40	38	10	2.500	6247 88 1
LKM E40040RW	Pure white	40	38	10	2.500	6249 41 8
ST Steel	FS Strip-galvanised	FSK Strip-galvanised/plastic-coated			/pc.	

End piece for closing the LKM trunking.



Trunking depth 40 mm, trunking height 40 mm




Edge protection ring

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR40040	Grey	47,7	44	10	1.800	6249 84 6


PE Polyethylene

/pc.

Edge protection ring for the open ends of LKM cable trunking.




Trunking depth 40 mm, trunking height 60 mm



Trunking, type LKM 40060

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM40060FS	—	2,000	8	151.200	6247 01 6
LKM40060RW	Pure white	2,000	8	151.200	6248 51 9
ST Steel	FS Strip-galvanised	FSK Strip-galvanised/plastic-coated	/m		


Trunking cover and base with base perforation.
Equipotential bonding is guaranteed between the cover and the base without any additional aids.



Joint connector

Type	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV40	76	29.6	10	1.000	6247 45 8
V2A Stainless steel, 1.4301	/pc.				


Joint connector to connect the bases.
This creates the equipotential bonding between the trunking bases.



Cable bracket

Type	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM Z60	46	30	10	1.100	6249 90 6
ST Steel	FS Strip-galvanised	/pc.			


Cable fixing device to fix cables in vertical routing.



Internal corner

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM I40060FS	—	160	4	31.400	6247 66 0
LKM I40060RW	Pure white	160	4	31.400	6249 17 5
ST Steel	FS Strip-galvanised	FSK Strip-galvanised/plastic-coated	/pc.		


Internal corner for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.



External corner

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM A40060FS	—	160	4	46.300	6247 57 1
LKM A40060RW	Pure white	160	4	46.300	6249 09 4
ST Steel	FS Strip-galvanised	FSK Strip-galvanised/plastic-coated	/pc.		


External corner including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.



T piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM T40060FS	—	300	180	4	46.800	6247 73 3
LKM T40060RW	Pure white	300	180	4	46.800	6249 26 4
ST Steel	FS Strip-galvanised	FSK Strip-galvanised/plastic-coated			/pc.	

T piece including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.



Flat angle

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM F40060FS	—	180	4	47.400	6247 50 4
LKM F40060RW	Pure white	180	4	47.400	6249 00 0
ST Steel	FS Strip-galvanised	FSK Strip-galvanised/plastic-coated	/pc.		

Flat angle including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.




Trunking depth 40 mm, trunking height 60 mm




End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM E40060FS	—	60	38	10	3.000	6247 90 3
LKM E40060RW	Pure white	60	38	10	3.000	6249 42 6
ST Steel	FS Strip-galvanised	FSK Strip-galvanised/plastic-coated				
End piece for closing the LKM trunking.						/pc.




Edge protection ring

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR40060	Grey	47	64	10	2.300	6249 84 8
PE Polyethylene						/pc.
Edge protection ring for the open ends of LKM cable trunking.						



Trunking depth 60 mm, trunking height 60 mm




Trunking, type LKM 60060

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM60060FS	—	2,000	8	174.700	6247 09 1
LKM60060RW	Pure white	2,000	8	174.700	6248 60 8

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /m

Trunking cover and base with base perforation.
Equipotential bonding is guaranteed between the cover and the base without any additional aids.




Joint connector

Type	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV60	75	50	10	1.600	6247 46 6

V2A Stainless steel 1.4310 /pc.

Joint connector to connect the bases.
This creates the equipotential bonding between the trunking bases.




Internal corner

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM I60060FS	—	180	4	31.900	6248 12 8
LKM I60060RW	Pure white	180	4	31.900	6249 61 2

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

Internal corner for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.




External corner

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM A60060FS	—	180	4	55.800	6248 04 7
LKM A60060RW	Pure white	180	4	55.800	6249 55 8

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

External corner including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.




T piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM T60060FS	—	300	180	4	54.200	6248 18 7
LKM T60060RW	Pure white	300	180	4	54.200	6249 67 1

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

T piece including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.




Flat angle

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM F60060FS	—	180	4	54.700	6247 98 9
LKM F60060RW	Pure white	180	4	54.700	6249 48 5

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

Flat angle including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.



End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM E60060FS	—	63	60	10	4.500	6248 28 4
LKM E60060RW	Pure white	63	60	10	4.500	6249 79 5

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

End piece for closing the LKM trunking.



Trunking depth 60 mm, trunking height 60 mm




Edge protection ring

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR60060	Grey	67,7	64	10	2.400	6249 85 0


PE Polyethylene

/pc.

Edge protection ring for the open ends of LKM cable trunking.



Trunking depth 60 mm, trunking height 100 mm



Trunking, type LKM 60100


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM60100FS	—	2,000	8	221.700	6247 11 3
LKM60100RW	Pure white	2,000	8	221.700	6248 62 4

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /m

Trunking cover and base with base perforation.
Equipotential bonding is guaranteed between the cover and the base without any additional aids.



LKM metal cable trunking systems




Joint connector

Type	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV60	75	50	10	1.600	6247 46 6

V2A Stainless steel 1.4310 /pc.

Joint connector to connect the bases.
This creates the equipotential bonding between the trunking bases.




Internal corner

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM I60100FS	—	180	4	39.400	6248 14 4
LKM I60100RW	Pure white	180	4	39.400	6249 63 9

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

Internal corner for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.




External corner

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM A60100FS	—	180	4	73.100	6248 06 3
LKM A60100RW	Pure white	180	4	73.100	6249 57 4

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

External corner including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.




T piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM T60100FS	—	340	220	4	69.200	6248 20 9
LKM T60100RW	Pure white	340	220	4	69.200	6249 70 1

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

T piece including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.




Flat angle

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM F60100FS	—	220	4	63.400	6248 00 4
LKM F60100RW	Pure white	220	4	63.400	6249 50 7

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

Flat angle including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.



End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM E60100FS	—	100	63	10	6.200	6248 30 6
LKM E60100RW	Pure white	100	63	10	6.500	6249 81 7

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

End piece for closing the LKM trunking.



Trunking depth 60 mm, trunking height 100 mm




Edge protection ring

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR60100	Grey	104	67.7	5	3.400	6249 85 2

PE Polyethylene /pc.

Edge protection ring for the open ends of LKM cable trunking.




Duct clamp for function maintenance E30–E90


Type	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM KF 60100	10	9.800	6249 88 1

ST Steel FS Strip-galvanised /pc.

Duct clamp for the metal cable trunking, type LKM 60100. The duct clamp is essential when the trunking is used in cable systems with integrated function maintenance to DIN 4102 Part 12. You can find more information in the BSS catalogue and in the current testing certificates on the Internet.



Trunking depth 60 mm, trunking height 150 mm




Trunking, type LKM 60150


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM60150FS	—	2,000	8	280.100	6247 14 8
LKM60150CRW	Pure white	2,000	8	280.100	6248 64 0

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /m

Trunking cover and base with base perforation.
Equipotential bonding is guaranteed between the cover and the base without any additional aids.



LKM metal cable trunking systems




Joint connector

Type	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV60	75	50	10	1.600	6247 46 6

V2A Stainless steel 1.4310 /pc.

Joint connector to connect the bases.
This creates the equipotential bonding between the trunking bases.




Internal corner

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM I60150FS	—	180	4	48.400	6248 15 2
LKM I60150RW	Pure white	180	4	48.400	6249 64 7

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

Internal corner for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.



External corner

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM A60150FS	—	180	4	91.300	6248 07 1
LKM A60150RW	Pure white	180	4	91.300	6249 58 2

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

External corner including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.




T piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM T60150FS	—	390	270	4	87.600	6248 21 7
LKM T60150RW	Pure white	390	270	4	87.600	6249 72 8

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

T piece including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.




Flat angle

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM F60150FS	—	270	4	113.500	6248 01 2
LKM F60150RW	Pure white	270	4	113.500	6249 51 5

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

Flat angle including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.



End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM E60150FS	—	150	63	10	8.600	6248 31 4
LKM E60150RW	Pure white	150	63	10	9.000	6249 82 5

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

End piece for closing the LKM trunking.



Trunking depth 60 mm, trunking height 150 mm




Edge protection ring

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR60150	Grey	154	67.7	5	4.400	6249 85 4

PE Polyethylene

/pc.

Edge protection ring for the open ends of LKM cable trunking.



Trunking depth 60 mm, trunking height 200 mm




Trunking, type LKM 60200


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM60200FS	—	2,000	8	338.700	6247 16 4
LKM60200RW	Pure white	2,000	8	338.700	6248 66 7

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /m

Trunking cover and base with base perforation.
Equipotential bonding is guaranteed between the cover and the base without any additional aids.



LKM metal cable trunking systems




Joint connector

Type	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV60	75	50	10	1.600	6247 46 6

V2A Stainless steel 1.4310 /pc.

Joint connector to connect the bases.
This creates the equipotential bonding between the trunking bases.




Internal corner

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM I60200FS	—	180	4	57.500	6248 16 0
LKM I60200RW	Pure white	180	4	57.500	6249 65 5

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

Internal corner for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.



External corner

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM A60200FS	—	180	4	114.000	6248 09 8
LKM A60200RW	Pure white	180	4	114.000	6249 59 0

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

External corner including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.




T piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM T60200FS	—	440	320	4	106.000	6248 22 5
LKM T60200RW	Pure white	440	320	4	106.000	6249 73 6

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

T piece including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.




Flat angle

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM F60200FS	—	320	4	154.400	6248 02 0
LKM F60200RW	Pure white	320	4	154.400	6249 52 3

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

Flat angle including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.



End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM E60200FS	—	200	63	10	11.000	6248 32 2
LKM E60200RW	Pure white	200	63	10	11.500	6249 83 3

ST Steel **FS** Strip-galvanised **FSK** Strip-galvanised/plastic-coated /pc.

End piece for closing the LKM trunking.



Trunking depth 60 mm, trunking height 200 mm




Edge protection ring

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR60200	Grey	204	67.7	5	4.700	6249 85 6


PE Polyethylene

/pc.

Edge protection ring for the open ends of LKM cable trunking.



Trunking depth 80 mm, trunking height 80 mm




Trunking, type LKM 80080

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM80080FS	—	2,000	1	183.500	6247 19 4
LKM80080RW	Pure white	2,000	1	183.500	6248 69 4

ST Steel FS Strip-galvanised

/m

Trunking cover and base with base perforation.
Equipotential bonding is guaranteed between the cover and the base without any additional aids.




Joint connector

Type	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV80	75	65.6	1	0.000	6247 47 2

ST Steel

/pc.

Joint connector to connect the bases.
This creates the equipotential bonding between the trunking bases.




Internal corner

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM I80080FS	—	160	1	0.000	6248 33 6
LKM I80080RW	Pure white	160	1	0.000	6248 43 6

ST Steel FS Strip-galvanised FSK Strip-galvanised/plastic-coated

/pc.

Internal corner for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.




External corner

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM A80080FS	—	200	1	0.000	6248 33 2
LKM A80080RW	Pure white	200	1	0.000	6248 43 2

ST Steel FS Strip-galvanised FSK Strip-galvanised/plastic-coated

/pc.

External corner including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.




T piece

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM T80080FS	—	300	1	0.000	6248 34 0
LKM T80080RW	Pure white	300	1	0.000	6248 45 0

ST Steel FS Strip-galvanised FSK Strip-galvanised/plastic-coated

/pc.

T piece, including cover, for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.




Flat angle

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM F80080FS	—	240	1	0.000	6248 32 8
LKM F80080RW	Pure white	240	1	0.000	6248 42 8

ST Steel FS Strip-galvanised FSK Strip-galvanised/plastic-coated

/pc.

Flat angle including cover for changing the direction of the LKM trunking.
Equipotential bonding between the cover and the base without any additional aids.



End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM E80080FS	—	80	80	1	0.000	6248 34 4
LKM E80080RW	Pure white	80	80	1	0.000	6248 45 4

ST Steel FS Strip-galvanised FSK Strip-galvanised/plastic-coated

/pc.

End piece for closing the LKM trunking.



Trunking depth 80 mm, trunking height 80 mm




Edge protection ring

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR80080	Grey	84	84	1	3.800	6249 86 5








PE Polyethylene

/pc.

Edge protection ring for the open ends of LKM cable trunking.



Metal cable trunking accessories

	Partition						
	Type	Length	Dimension a	Pack.	Weight	Item No.	
		mm	mm	m	kg/100 m		
	LKM TWS55	2,000	55	32	53.000	6249 87 6	
	ST Steel		FS Strip-galvanised			/m	
	Partition to divide the trunking for different voltage levels. The loop perforation in the base transfers the equipotential bonding to the partition.						
	Cable bracket						
	Type	Dimension a	Dimension b	Pack.	Weight	Item No.	
		mm	mm	pcs	kg/100 pcs.		
	LKM Z60	46	30	10	1.100	6249 90 6	
	ST Steel		FS Strip-galvanised			/pc.	
	Cable fixing device to fix cables in vertical routing.						
	Cable bracket						
	Type	Dimension a	Dimension b	Pack.	Weight	Item No.	
		mm	mm	pcs	kg/100 pcs.		
	LKM Z100	96	30	10	2.100	6249 92 2	
	ST Steel		FS Strip-galvanised			/pc.	
	Cable fixing device to fix cables in vertical routing.						
	Cable bracket						
	Type	Dimension a	Dimension b	Pack.	Weight	Item No.	
		mm	mm	pcs	kg/100 pcs.		
	LKM Z150	146	30	10	3.000	6249 96 5	
	ST Steel		FS Strip-galvanised			/pc.	
	Cable fixing device to fix cables in vertical routing.						
	Cable bracket						
	Type	Dimension a	Dimension b	Pack.	Weight	Item No.	
		mm	mm	pcs	kg/100 pcs.		
	LKM Z200	166	30	10	3.600	6249 98 1	
	ST Steel		FS Strip-galvanised			/pc.	
	Cable fixing device to fix cables in vertical routing.						
	Duct clamp						
	Type	Dimension a	Dimension b	Dimension C	Pack.	Weight	Item No.
		mm	mm	mm	pcs	kg/100 pcs.	
	LKM K80	25	80	48.5	20	2.700	6249 88 4
	ST Steel		FS Strip-galvanised			/100 pc.	
	Duct clamp for better routing of cables in the trunking. The duct clamps are plugged onto the loop perforation and locked on the side wall.						
	Duct clamp						
	Type	Dimension a	Dimension b	Dimension C	Pack.	Weight	Item No.
		mm	mm	mm	pcs	kg/100 pcs.	
	LKM K140	25	140	48.5	20	3.600	6249 88 8
	ST Steel		FS Strip-galvanised			/100 pc.	
	Duct clamp for better routing of cables in the trunking. The duct clamps are plugged onto the loop perforation and locked on the side wall.						





SKL skirting trunking systems

	Trunking height 50 mm	158
	Trunking height 70 mm	160
	Floor trunking	161



Trunking height 50 mm




SKL skirting trunking, type SKL 50 D

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
SKL-50DRW	Pure white	2,000	32	44.700	6199 10 3
SKL-50DCW	Cream	2,000	32	44.700	6199 10 5
SKL-50DBR	Sepia brown	2,000	32	44.700	6199 10 7
SKL-50DBU	Beech	2,000	32	44.700	6199 10 9

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation and dyed elastic connection lips.




Joint cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKL-SA50DRW	Pure white	5	0.500	6199 18 0
SKL-SA50DCW	Cream	5	0.500	6199 18 2
SKL-SA50DBR	Sepia brown	5	0.500	6199 18 4
SKL-SA50DBU	Beech	5	0.500	6199 18 6

PVC Polyvinylchloride

/pc.

Joint cover for smooth connection of trunking segments.




Internal corner hood

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKL-I50DRW	Pure white	5	0.700	6199 12 2
SKL-I50DCW	Cream	5	0.700	6199 12 4
SKL-I50DBR	Sepia brown	5	0.700	6199 12 6
SKL-I50DBU	Beech	5	0.700	6199 12 8

PVC Polyvinylchloride

/pc.

Internal corner for changing the direction of the SKL trunking.




External corner hood

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKL-A50DRW	Pure white	5	1.200	6199 13 3
SKL-A50DCW	Cream	5	1.200	6199 13 5
SKL-A50DBR	Sepia brown	5	1.200	6199 13 7
SKL-A50DBU	Beech	5	1.200	6199 13 9

PVC Polyvinylchloride

/pc.

External corner for changing the direction of the SKL trunking.




End piece left

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKL-EL50DRW	Pure white	5	0.500	6199 15 0
SKL-EL50DCW	Cream	5	0.500	6199 15 2
SKL-EL50DBR	Sepia brown	5	0.500	6199 15 4
SKL-EL50DBU	Beech	5	0.500	6199 15 6

PVC Polyvinylchloride

/pc.

End piece, left, for closing the SKL trunking.




End piece right

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKL-ER50DRW	Pure white	5	0.500	6199 16 3
SKL-ER50DCW	Cream	5	0.500	6199 16 5
SKL-ER50DBR	Sepia brown	5	0.500	6199 16 7
SKL-ER50DBU	Beech	5	0.500	6199 16 9


PVC Polyvinylchloride

/pc.

End piece, right, for closing the SKL trunking.



Trunking height 50 mm




Device support

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKL-R DRW	Pure white	1	11.400	6199 40 2
SKL-R DCW	Cream	1	11.400	6199 40 4
SKL-R DBR	Sepia brown	1	11.400	6199 40 6
SKL-R DBU	Beech	1	11.400	6199 40 8

PVC Polyvinylchloride

/pc.

Device support, universally equippable for all SKL trunking.
Single, empty.




Device support

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKL-Z DRW	Pure white	1	13.000	6199 44 2
SKL-Z DCW	Cream	1	13.000	6199 44 4
SKL-Z DBR	Sepia brown	1	13.000	6199 44 6
SKL-Z DBU	Beech	1	13.000	6199 44 8

PVC Polyvinylchloride

/pc.

Device support, universally equippable for all SKL trunking.
Single, with central plate.




Device support

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKL-DS DRW	Pure white	1	19.000	6199 42 1
SKL-DS DCW	Cream	1	19.000	6199 42 3
SKL-DS DBR	Sepia brown	1	19.000	6199 42 5
SKL-DS DBU	Beech	1	19.000	6199 42 7

PVC Polyvinylchloride

/pc.

Device support with a pre-wired double socket for all SKL trunking.
Double with sockets and child protection.



Device support

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKL-45 DRW	Pure white	1	10.000	6199 46 1
SKL-45 DCW	Cream	1	10.000	6199 46 3
SKL-45 DBR	Sepia brown	1	10.000	6199 46 5
SKL-45 DBU	Beech	1	10.000	6199 46 7

PVC Polyvinylchloride

/pc.

Device support system for all SKL trunking, equippable with all Modul 45 devices.
Double, empty, fittable with Modul 45 devices.



Trunking height 70 mm




SKL skirting trunking, type SKL 70 D

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
SKL-70DRW	Pure white	2,000	24	57.700	6199 20 2
SKL-70DCW	Cream	2,000	24	57.700	6199 20 4
SKL-70DBR	Sepia brown	2,000	24	57.700	6199 20 6
SKL-70DBU	Beech	2,000	24	57.700	6199 20 8

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation and dyed elastic connection lips.




Joint cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKL-SA70DRW	Pure white	5	0.600	6199 28 1
SKL-SA70DCW	Cream	5	0.600	6199 28 3
SKL-SA70DBR	Sepia brown	5	0.600	6199 28 5
SKL-SA70DBU	Beech	5	0.600	6199 28 7

PVC Polyvinylchloride

/pc.

Joint cover for smooth connection of trunking segments.




Internal corner hood

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKL-I70DRW	Pure white	5	0.900	6199 22 3
SKL-I70DCW	Cream	5	0.900	6199 22 5
SKL-I70DBR	Sepia brown	5	0.900	6199 22 7
SKL-I70DBU	Beech	5	0.900	6199 22 9

PVC Polyvinylchloride

/pc.

Internal corner for changing the direction of the SKL trunking.




External corner hood

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKL-A70DRW	Pure white	5	1.500	6199 23 2
SKL-A70DCW	Cream	5	1.500	6199 23 4
SKL-A70DBR	Sepia brown	5	1.500	6199 23 6
SKL-A70DBU	Beech	5	1.500	6199 23 8

PVC Polyvinylchloride

/pc.

External corner for changing the direction of the SKL trunking.




End piece left

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKL-EL70DRW	Pure white	5	0.600	6199 25 1
SKL-EL70DCW	Cream	5	0.600	6199 25 3
SKL-EL70DBR	Sepia brown	5	0.600	6199 25 5
SKL-EL70DBU	Beech	5	0.600	6199 25 7

PVC Polyvinylchloride

/pc.

End piece, left, for closing the SKL trunking.



End piece right

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKL-ER70DRW	Pure white	5	0.600	6199 26 2
SKL-ER70DCW	Cream	5	0.600	6199 26 4
SKL-ER70DBR	Sepia brown	5	0.600	6199 26 6
SKL-ER70DBU	Beech	5	0.600	6199 26 8


PVC Polyvinylchloride

/pc.

End piece, right, for closing the SKL trunking.



Trunking height 70 mm




Device support

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKL-R DRW	Pure white	1	11.400	6199 40 2
SKL-R DCW	Cream	1	11.400	6199 40 4
SKL-R DBR	Sepia brown	1	11.400	6199 40 6
SKL-R DBU	Beech	1	11.400	6199 40 8

PVC Polyvinylchloride

/pc.

Device support, universally equippable for all SKL trunking.
Single, empty.




Device support

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKL-Z DRW	Pure white	1	13.000	6199 44 2
SKL-Z DCW	Cream	1	13.000	6199 44 4
SKL-Z DBR	Sepia brown	1	13.000	6199 44 6
SKL-Z DBU	Beech	1	13.000	6199 44 8

PVC Polyvinylchloride

/pc.

Device support, universally equippable for all SKL trunking.
Single, with central plate.




Device support

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKL-DS DRW	Pure white	1	19.000	6199 42 1
SKL-DS DCW	Cream	1	19.000	6199 42 3
SKL-DS DBR	Sepia brown	1	19.000	6199 42 5
SKL-DS DBU	Beech	1	19.000	6199 42 7

PVC Polyvinylchloride

/pc.

Device support with a pre-wired double socket for all SKL trunking.
Double with sockets and child protection.




Device support

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKL-45 DRW	Pure white	1	10.000	6199 46 1
SKL-45 DCW	Cream	1	10.000	6199 46 3
SKL-45 DBR	Sepia brown	1	10.000	6199 46 5
SKL-45 DBU	Beech	1	10.000	6199 46 7

PVC Polyvinylchloride

/pc.

Device support system for all SKL trunking, equippable with all Modul 45 devices.
Double, empty, fittable with Modul 45 devices.



Floor trunking, type 2650

Type	Colour	Length	Pack.	Weight	Item No.
		mm	m	kg/100 m	
2650	Stone grey	2,000	36	43.000	6020 80 1

PVC Polyvinylchloride

/m

Trunking cover and base with base perforation.





VK wiring trunking system, System Dahl

	LK4 wiring trunking	15 x 15 mm to 80 x 120 mm	164
	LK4/N wiring trunking with wire retaining lug	60 x 15 mm to 80 x 120 mm	170
	LKV DIN wiring trunking	25 x 25 mm to 100 x 100 mm	174
	LKV/N DIN wiring trunking with wire retaining lug	75 x 25 mm to 100 x 100 mm	179
	LKV/H DIN wiring trunking, halogen-free	50 x 37 mm to 75 x 125 mm	182
	Accessories	Wire retainer	184
		Plastic rivet tool	184
		Release pliers	184
		Spacer	185
		Support rail	185
		Hat profile rail	185




LK4 wiring trunking



Wiring trunking, type LK4 15015

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 15015	Stone grey	2,000	15x15	72	12.000	6178 00 1
PVC Polyvinylchloride						/m


Wiring trunking including cover and base perforation.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 DM 15	Stone grey	15	2,000	92	8.500	6178 47 9
PVC Polyvinylchloride						/m


Trunking cover for replacement requirements.



Wiring trunking, type LK4 30015

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 30015	Stone grey	2,000	15x30	40	18.000	6178 00 3
PVC Polyvinylchloride						/m


Wiring trunking including cover and base perforation.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 15	Stone grey	15	2,000	92	8.500	6178 48 0
PVC Polyvinylchloride						/m


Trunking cover for replacement requirements.



Wiring trunking, type LK4 30025

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 30025	Stone grey	2,000	25x30	48	28.000	6178 00 5
PVC Polyvinylchloride						/m


Wiring trunking including cover and base perforation.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 25	Stone grey	25	2,000	32	10.000	6178 48 2
PVC Polyvinylchloride						/m


Trunking cover for replacement requirements.



Wiring trunking, type LK4 40025

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 40025	Stone grey	2,000	25x40	48	36.500	6178 01 0
PVC Polyvinylchloride						/m


Wiring trunking including cover and base perforation.




Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 25	Stone grey	25	2,000	32	10.000	6178 48 2
PVC Polyvinylchloride						/m

Trunking cover for replacement requirements.






Wiring trunking, type LK4 40040

Type	Colour	Length	Dimension b x h	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 40040	Stone grey	2,000	40x40	36	44.000	6178 01 2
PVC	Polyvinylchloride					/m


Wiring trunking including cover and base perforation.



Cover

Type	Colour	Dimension a	Length	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 D 40	Stone grey	40	2,000	24	13.500	6178 48 4
PVC	Polyvinylchloride					/m


Trunking cover for replacement requirements.



Wiring trunking, type LK4 40060

Type	Colour	Length	Dimension b x h	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 40060	Stone grey	2,000	60x40	24	57.000	6178 01 4
PVC	Polyvinylchloride					/m


Wiring trunking including cover and base perforation.



Cover

Type	Colour	Dimension a	Length	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 D 60	Stone grey	60	2,000	40	18.000	6178 48 6
PVC	Polyvinylchloride					/m


Trunking cover for replacement requirements.



Wiring trunking, type LK4 40080

Type	Colour	Length	Dimension b x h	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 40080	Stone grey	2,000	80x40	24	71.000	6178 01 6
PVC	Polyvinylchloride					/m


Wiring trunking including cover and base perforation.



Cover

Type	Colour	Dimension a	Length	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 D 80	Stone grey	80	2,000	12	27.000	6178 48 8
PVC	Polyvinylchloride					/m


Trunking cover for replacement requirements.



Wiring trunking, type LK4 40100

Type	Colour	Length	Dimension b x h	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 40100	Stone grey	2,000	100x40	24	85.500	6178 01 8
PVC	Polyvinylchloride					/m

Wiring trunking including cover and base perforation.



Cover

Type	Colour	Dimension a	Length	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 D 100	Stone grey	100	2,000	12	35.500	6178 49 0
PVC	Polyvinylchloride					/m

Trunking cover for replacement requirements.




LK4 wiring trunking



Wiring trunking, type LK4 60015

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 60015	Stone grey	2,000	15x60	48	32.500	6178 02 6
PVC Polyvinylchloride /m						


Wiring trunking including cover and base perforation.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 15	Stone grey	15	2,000	92	8.500	6178 48 0
PVC Polyvinylchloride /m						


Trunking cover for replacement requirements.



Wiring trunking, type LK4 60025

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 60025	Stone grey	2,000	25x60	32	46.000	6178 02 8
PVC Polyvinylchloride /m						


Wiring trunking including cover and base perforation.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 25	Stone grey	25	2,000	32	10.000	6178 48 2
PVC Polyvinylchloride /m						


Trunking cover for replacement requirements.



Wiring trunking, type LK4 60040

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 60040	Stone grey	2,000	40x60	24	53.500	6178 03 1
PVC Polyvinylchloride /m						


Wiring trunking including cover and base perforation.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 40	Stone grey	40	2,000	24	13.500	6178 48 4
PVC Polyvinylchloride /m						


Trunking cover for replacement requirements.



LK4 wiring trunking, type LK4 60060

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 60060	Stone grey	2,000	60x60	32	64.500	6178 03 3
PVC Polyvinylchloride /m						


Wiring trunking including cover and base perforation.




Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 60	Stone grey	60	2,000	40	18.000	6178 48 6
PVC Polyvinylchloride /m						

Trunking cover for replacement requirements.




LK4 wiring trunking



Wiring trunking, type LK4 60080

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 60080	Stone grey	2,000	80x60	24	82.500	6178 03 5
PVC Polyvinylchloride						/m


Wiring trunking including cover and base perforation.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 80	Stone grey	80	2,000	12	27.000	6178 48 8
PVC Polyvinylchloride						/m


Trunking cover for replacement requirements.



Wiring trunking, type LK4 60100

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 60100	Stone grey	2,000	100x60	16	100.000	6178 03 7
PVC Polyvinylchloride						/m


Wiring trunking including cover and base perforation.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 100	Stone grey	100	2,000	12	35.500	6178 49 0
PVC Polyvinylchloride						/m


Trunking cover for replacement requirements.



Wiring trunking, type LK4 60120

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 60120	Stone grey	2,000	120x60	8	117.000	6178 03 9
PVC Polyvinylchloride						/m


Wiring trunking including cover and base perforation.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 120	Stone grey	120	2,000	16	45.500	6178 49 2
PVC Polyvinylchloride						/m


Trunking cover for replacement requirements.



Wiring trunking, type LK4 80025

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 80025	Stone grey	2,000	25x80	32	61.000	6178 05 0
PVC Polyvinylchloride						/m

Wiring trunking including cover and base perforation.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 25	Stone grey	25	2,000	32	10.000	6178 48 2
PVC Polyvinylchloride						/m

Trunking cover for replacement requirements.



VK wiring trunking system, Dahl




LK4 wiring trunking



Wiring trunking, type LK4 80040

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 80040	Stone grey	2,000	40x80	24	64.500	6178 05 2
PVC Polyvinylchloride /m						


Wiring trunking including cover and base perforation.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 40	Stone grey	40	2,000	24	13.500	6178 48 4
PVC Polyvinylchloride /m						


Trunking cover for replacement requirements.



Wiring trunking, type LK4 80060

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 80060	Stone grey	2,000	60x80	24	76.000	6178 05 4
PVC Polyvinylchloride /m						


Wiring trunking including cover and base perforation.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 60	Stone grey	60	2,000	40	18.000	6178 48 6
PVC Polyvinylchloride /m						


Trunking cover for replacement requirements.



Wiring trunking, type LK4 80080

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 80080	Stone grey	2,000	80x80	16	95.500	6178 05 6
PVC Polyvinylchloride /m						


Wiring trunking including cover and base perforation.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 80	Stone grey	80	2,000	12	27.000	6178 48 8
PVC Polyvinylchloride /m						


Trunking cover for replacement requirements.



Wiring trunking, type LK4 80100

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 80100	Stone grey	2,000	100x80	16	111.500	6178 05 9
PVC Polyvinylchloride /m						


Wiring trunking including cover and base perforation.




Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 100	Stone grey	100	2,000	12	35.500	6178 49 0
PVC Polyvinylchloride /m						

Trunking cover for replacement requirements.






Wiring trunking, type LK4 80120

Type	Colour	Length	Dimension b x h	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 80120	Stone grey	2,000	120x80	8	128.500	6178 06 1

PVC Polyvinylchloride /m
Wiring trunking including cover and base perforation.



Cover

Type	Colour	Dimen- sion a	Length	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 D 120	Stone grey	120	2,000	16	45.500	6178 49 2

PVC Polyvinylchloride /m
Trunking cover for replacement requirements.



LK4/N wiring trunking




Wiring trunking, type LK4/N 60015

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 60015	Stone grey	2,000	15x60	48	41.000	6178 20 1

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stop the cables from falling out.




Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 15	Stone grey	15	2,000	92	8.500	6178 48 0

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4/N 60025

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 60025	Stone grey	2,000	25x60	32	48.500	6178 20 3

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stop the cables from falling out.




Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 25	Stone grey	25	2,000	32	10.000	6178 48 2

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4/N 60040

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 60040	Stone grey	2,000	40x60	24	56.000	6178 20 5

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stop the cables from falling out.




Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 40	Stone grey	40	2,000	24	13.500	6178 48 4

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4/N 60060

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 60060	Stone grey	2,000	60x60	32	68.000	6178 20 7

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stop the cables from falling out.





Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 60	Stone grey	60	2,000	40	18.000	6178 48 6

PVC Polyvinylchloride

Trunking cover for replacement requirements.






Wiring trunking, type LK4/N 60080

Type	Colour	Length	Dimension b x h	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 N 60080	Stone grey	2,000	80x60	24	87.000	6178 20 9

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stop the cables from falling out.




Cover

Type	Colour	Dimension a	Length	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 D 80	Stone grey	80	2,000	12	27.000	6178 48 8

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4/N 60100

Type	Colour	Length	Dimension b x h	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 N 60100	Stone grey	2,000	100x60	16	105.500	6178 21 1

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stop the cables from falling out.




Cover

Type	Colour	Dimension a	Length	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 D 100	Stone grey	100	2,000	12	35.500	6178 49 0

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4/N 60120

Type	Colour	Length	Dimension b x h	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 N 60120	Stone grey	2,000	120x60	8	120.500	6178 21 3

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stop the cables from falling out.




Cover

Type	Colour	Dimension a	Length	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 D 120	Stone grey	120	2,000	16	45.500	6178 49 2

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4/N 80025

Type	Colour	Length	Dimension b x h	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 N 80025	Stone grey	2,000	25x80	32	65.000	6178 22 5

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stop the cables from falling out.



Cover

Type	Colour	Dimension a	Length	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 D 25	Stone grey	25	2,000	32	10.000	6178 48 2

PVC Polyvinylchloride

Trunking cover for replacement requirements.



LK4/N wiring trunking




Wiring trunking, type LK4/N 80040

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 80040	Stone grey	2,000	40x80	24	73.500	6178 22 7

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stop the cables from falling out.




Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 40	Stone grey	40	2,000	24	13.500	6178 48 4

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4/N 80060

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 80060	Stone grey	2,000	60x80	24	82.000	6178 22 9

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stop the cables from falling out.




Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 60	Stone grey	60	2,000	40	18.000	6178 48 6

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4/N 80080

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 80080	Stone grey	2,000	80x80	16	101.000	6178 23 1

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stop the cables from falling out.




Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 80	Stone grey	80	2,000	12	27.000	6178 48 8

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4/N 80100

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 80100	Stone grey	2,000	100x80	16	116.500	6178 23 3

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stop the cables from falling out.





Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 100	Stone grey	100	2,000	12	35.500	6178 49 0

PVC Polyvinylchloride

Trunking cover for replacement requirements.






Wiring trunking, type LK4/N 80120

Type	Colour	Length	Dimension b x h	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 N 80120	Stone grey	2,000	120x80	8	133.500	6178 23 6

PVC Polyvinylchloride /m
Wiring trunking including cover and base perforation, tapering in the side slots stop the cables from falling out.



Cover

Type	Colour	Dimension a	Length	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LK4 D 120	Stone grey	120	2,000	16	45.500	6178 49 2

PVC Polyvinylchloride /m
Trunking cover for replacement requirements.



VK wiring trunking system, Dahl




LKV DIN wiring trunking




Wiring trunking, type 25025

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV 25025	Stone grey	2,000	25x25	32	24.000	6178 30 2
PVC Polyvinylchloride						/m
Wiring trunking including cover and base perforation to DIN EN 50085-2-3.						




Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 25	Stone grey	25	2,000	36	9.500	6178 50 4
PVC Polyvinylchloride						/m
Trunking cover for replacement requirements.						




Wiring trunking, type 37025

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV 37025	Stone grey	2,000	25x37,5	32	31.500	6178 30 5
PVC Polyvinylchloride						/m
Wiring trunking including cover and base perforation to DIN EN 50085-2-3.						




Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 25	Stone grey	25	2,000	36	9.500	6178 50 4
PVC Polyvinylchloride						/m
Trunking cover for replacement requirements.						




Wiring trunking, type 37037

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV 37037	Stone grey	2,000	37,5x37,5	60	40.500	6178 30 7
PVC Polyvinylchloride						/m
Wiring trunking including cover and base perforation to DIN EN 50085-2-3.						




Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 37	Stone grey	37,5	2,000	24	15.000	6178 50 6
PVC Polyvinylchloride						/m
Trunking cover for replacement requirements.						




Wiring trunking, type 50025


Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV 50025	Stone grey	2,000	25x50	60	35.500	6178 31 0
PVC Polyvinylchloride						/m
Wiring trunking including cover and base perforation to DIN EN 50085-2-3.						



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 25	Stone grey	25	2,000	36	9.500	6178 50 4
PVC Polyvinylchloride						/m
Trunking cover for replacement requirements.						






Wiring trunking, type 50037

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV 50037	Stone grey	2,000	37,5x50	48	44.500	6178 31 2
PVC Polyvinylchloride						/m


Wiring trunking including cover and base perforation to DIN EN 50085-2-3.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 37	Stone grey	37,5	2,000	24	15.000	6178 50 6
PVC Polyvinylchloride						/m


Trunking cover for replacement requirements.



Wiring trunking, type 50050

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV 50050	Stone grey	2,000	50x50	36	50.000	6178 31 4
PVC Polyvinylchloride						/m


Wiring trunking including cover and base perforation to DIN EN 50085-2-3.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 50	Stone grey	50	2,000	24	17.500	6178 50 8
PVC Polyvinylchloride						/m


Trunking cover for replacement requirements.



Wiring trunking, type 50075

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV 50075	Stone grey	2,000	75x50	24	66.000	6178 31 6
PVC Polyvinylchloride						/m


Wiring trunking including cover and base perforation to DIN EN 50085-2-3.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 75	Stone grey	75	2,000	12	23.000	6178 51 0
PVC Polyvinylchloride						/m


Trunking cover for replacement requirements.



Wiring trunking, type 75025

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV 75025	Stone grey	2,000	25x75	40	48.500	6178 32 0
PVC Polyvinylchloride						/m

Wiring trunking including cover and base perforation to DIN EN 50085-2-3.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 25	Stone grey	25	2,000	36	9.500	6178 50 4
PVC Polyvinylchloride						/m

Trunking cover for replacement requirements.



LKV DIN wiring trunking



Wiring trunking, type 75037

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV 75037	Stone grey	2,000	37,5x75	32	58.500	6178 32 2
PVC Polyvinylchloride						/m


Wiring trunking including cover and base perforation to DIN EN 50085-2-3.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 37	Stone grey	37,5	2,000	24	15.000	6178 50 6
PVC Polyvinylchloride						/m


Trunking cover for replacement requirements.



Wiring trunking, type 75050

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV 75050	Stone grey	2,000	50x75	24	67.500	6178 32 4
PVC Polyvinylchloride						/m


Wiring trunking including cover and base perforation to DIN EN 50085-2-3.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 50	Stone grey	50	2,000	24	17.500	6178 50 8
PVC Polyvinylchloride						/m


Trunking cover for replacement requirements.



Wiring trunking, type 75075

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV 75075	Stone grey	2,000	75x75	16	80.000	6178 32 6
PVC Polyvinylchloride						/m


Wiring trunking including cover and base perforation to DIN EN 50085-2-3.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 75	Stone grey	75	2,000	12	23.000	6178 51 0
PVC Polyvinylchloride						/m


Trunking cover for replacement requirements.



Wiring trunking, type 75100

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV 75100	Stone grey	2,000	100x75	16	105.500	6178 32 8
PVC Polyvinylchloride						/m


Wiring trunking including cover and base perforation to DIN EN 50085-2-3.




Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 100	Stone grey	100	2,000	12	34.500	6178 51 2
PVC Polyvinylchloride						/m

Trunking cover for replacement requirements.







Wiring trunking, type 75125

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV 75125	Stone grey	2,000	125x75	8	128.500	6178 33 0
PVC Polyvinylchloride						/m


Wiring trunking including cover and base perforation to DIN EN 50085-2-3.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 125	Stone grey	125	2,000	16	47.000	6178 51 4
PVC Polyvinylchloride						/m


Trunking cover for replacement requirements.



Wiring trunking, type 10037

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV 10037	Stone grey	2,000	37,5x100	32	67.000	6178 33 4
PVC Polyvinylchloride						/m


Wiring trunking including cover and base perforation to DIN EN 50085-2-3.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 37	Stone grey	37,5	2,000	24	15.000	6178 50 6
PVC Polyvinylchloride						/m


Trunking cover for replacement requirements.



Wiring trunking, type 10050

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV 10050	Stone grey	2,000	50x100	24	77.000	6178 33 6
PVC Polyvinylchloride						/m


Wiring trunking including cover and base perforation to DIN EN 50085-2-3.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 50	Stone grey	50	2,000	24	17.500	6178 50 8
PVC Polyvinylchloride						/m


Trunking cover for replacement requirements.



Wiring trunking, type 10075

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV 10075	Stone grey	2,000	75x100	16	96.000	6178 33 8
PVC Polyvinylchloride						/m

Wiring trunking including cover and base perforation to DIN EN 50085-2-3.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 75	Stone grey	75	2,000	12	23.000	6178 51 0
PVC Polyvinylchloride						/m

Trunking cover for replacement requirements.





LKV DIN wiring trunking




Wiring trunking, type 100100

Type	Colour	Length	Dimension b x h	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LKV 100100	Stone grey	2,000	100x100	8	116.500	6178 34 1

PVC Polyvinylchloride /m

Wiring trunking including cover and base perforation to DIN EN 50085-2-3.





Cover

Type	Colour	Dimension a	Length	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LKV D 100	Stone grey	100	2,000	12	34.500	6178 51 2

PVC Polyvinylchloride /m

Trunking cover for replacement requirements.






Wiring trunking, type 75025

Type	Colour	Length	Dimension b x h	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LKV N 75025	Stone grey	2,000	25x75	40	49.500	6178 42 0

PVC Polyvinylchloride /m

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stop the cables from falling out.




Cover

Type	Colour	Dimension a	Length	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LKV D 25	Stone grey	25	2,000	36	9.500	6178 50 4

PVC Polyvinylchloride /m

Trunking cover for replacement requirements.




Wiring trunking, type 75037

Type	Colour	Length	Dimension b x h	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LKV N 75037	Stone grey	2,000	37,5x75	32	60.500	6178 42 2

PVC Polyvinylchloride /m

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stop the cables from falling out.




Cover

Type	Colour	Dimension a	Length	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LKV D 37	Stone grey	37,5	2,000	24	15.000	6178 50 6

PVC Polyvinylchloride /m

Trunking cover for replacement requirements.




Wiring trunking, type 75050

Type	Colour	Length	Dimension b x h	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LKV N 75050	Stone grey	2,000	50x75	24	72.500	6178 42 4

PVC Polyvinylchloride /m

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stop the cables from falling out.




Cover

Type	Colour	Dimension a	Length	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LKV D 50	Stone grey	50	2,000	24	17.500	6178 50 8

PVC Polyvinylchloride /m

Trunking cover for replacement requirements.




Wiring trunking, type 75075

Type	Colour	Length	Dimension b x h	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LKV N 75075	Stone grey	2,000	75x75	16	84.500	6178 42 6

PVC Polyvinylchloride /m

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stop the cables from falling out.



Cover

Type	Colour	Dimension a	Length	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LKV D 75	Stone grey	75	2,000	12	23.000	6178 51 0

PVC Polyvinylchloride /m

Trunking cover for replacement requirements.




LKV/N DIN wiring trunking



Wiring trunking, type 75100

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV N 75100	Stone grey	2,000	100x75	16	112.000	6178 42 8
PVC Polyvinylchloride /m						


Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stop the cables from falling out.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 100	Stone grey	100	2,000	12	34.500	6178 51 2
PVC Polyvinylchloride /m						


Trunking cover for replacement requirements.



Wiring trunking, type 75125

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV N 75125	Stone grey	2,000	125x75	8	138.500	6178 43 0
PVC Polyvinylchloride /m						


Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stop the cables from falling out.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 125	Stone grey	125	2,000	16	47.000	6178 51 4
PVC Polyvinylchloride /m						


Trunking cover for replacement requirements.



Wiring trunking, type 10037

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV N 10037	Stone grey	2,000	37,5x100	32	73.000	6178 43 5
PVC Polyvinylchloride /m						


Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stop the cables from falling out.



Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 37	Stone grey	37,5	2,000	24	15.000	6178 50 6
PVC Polyvinylchloride /m						


Trunking cover for replacement requirements.



Wiring trunking, type 10050

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV N 10050	Stone grey	2,000	50x100	24	83.000	6178 43 7
PVC Polyvinylchloride /m						


Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stop the cables from falling out.




Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 50	Stone grey	50	2,000	24	17.500	6178 50 8
PVC Polyvinylchloride /m						

Trunking cover for replacement requirements.






Wiring trunking, type 10075

Type	Colour	Length	Dimension b x h	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LKV N 10075	Stone grey	2,000	75x100	16	102.000	6178 43 9


PVC Polyvinylchloride /m
Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stop the cables from falling out.



Cover

Type	Colour	Dimension a	Length	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LKV D 75	Stone grey	75	2,000	12	23.000	6178 51 0


PVC Polyvinylchloride /m
Trunking cover for replacement requirements.



Wiring trunking, type 100100

Type	Colour	Length	Dimension b x h	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LKV N 100100	Stone grey	2,000	100x100	8	122.500	6178 44 1

PVC Polyvinylchloride /m
Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stop the cables from falling out.



Cover

Type	Colour	Dimension a	Length	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LKV D 100	Stone grey	100	2,000	12	34.500	6178 51 2

PVC Polyvinylchloride /m
Trunking cover for replacement requirements.



LKV/H DIN wiring trunking, halogen-free




Wiring trunking, type 50037

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV H 50037	Light grey	2,000	37,5x50	32	44.500	6178 61 2

PPO Polyphenylene oxide

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.

/m




Wiring trunking, type 50050

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV H 50050	Light grey	2,000	50x50	42	50.000	6178 61 4

PPO Polyphenylene oxide

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.

/m




Wiring trunking, type 50075

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV H 50075	Light grey	2,000	75x50	28	65.000	6178 61 6

PPO Polyphenylene oxide

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.

/m




Wiring trunking, type 75037

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV H 75037	Light grey	2,000	37,5x75	24	45.000	6178 62 2

PPO Polyphenylene oxide

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.

/m




Wiring trunking, type 75050

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV H 75050	Light grey	2,000	50x75	28	65.000	6178 62 4

PPO Polyphenylene oxide

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.

/m




Wiring trunking, type 75075

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV H 75075	Light grey	2,000	75x75	24	80.000	6178 62 6

PPO Polyphenylene oxide

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.

/m




Wiring trunking, type 75100

Type	Colour	Length mm	Dimension b x h mm	Pack. m	Weight kg/100 m	Item No.
LKV H 75100	Light grey	2,000	100x75	16	105.000	6178 62 8


PPO Polyphenylene oxide

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.

/m



LKV/H DIN wiring trunking, halogen-free



Wiring trunking, type 75125

Type	Colour	Length	Dimension b x h	Pack.	Weight	Item No.
		mm	mm	m	kg/100 m	
LKV H 75125	Light grey	2,000	125x75	16	130.000	6178 63 0

PPO Polyphenylene oxide /m
Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.



VK wiring trunking system, Dahl




VK wiring trunking accessories



Wire retainer for type LK4 and LK4/N

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LK4 H	Stone grey	56	20	100	0.470	6178 09 2
PS Polystyrene						/100 pc.


Wire retainer for wiring trunking, type LK4 and LK4/N. The wire retainer prevents already inserted cables from falling out. These predetermined breaking points allow the length to be reduced for various trunking widths to 38, 28 and 23 mm.



Wire retainer for type LKV and LKV/N

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKV H	Stone grey	56	20	100	0.470	6178 34 9
PS Polystyrene						/100 pc.


Wire retainer for wiring trunking, type LKV and LKV/N. The wire retainer prevents already inserted cables from falling out. These predetermined breaking points allow the length to be reduced for various trunking widths to 38, 28 and 23 mm.



Wire retainer for type LKV/H

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKV H H	Light grey	56	20	100	0.361	6178 65 0
PS Polystyrene						/100 pc.


Wire retainer for halogen-free wiring trunking, type LKV/H. The wire retainer prevents already inserted cables from falling out. These predetermined breaking points allow the length to be reduced for various trunking widths to 38, 28 and 23 mm.



Plastic rivet tool

Type	Dimension a mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KNW1	150	Black	1	9.300	6178 52 7
KNW2	150	Black	1	9.300	6178 52 9
POM Polyacetal					/pc.

Riveting tool for installing body-bound rivets 4.5 mm.



Spreading rivet, KSN 1

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSN1	Light grey	4,5	100	0.024	6178 52 0
PP Polypropylene					/100 pc.

The VK slotted cable trunking system is fixed to the mounting plate using the spreading rivet and the riveting tool.



Spreading rivet, KSN 2


Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSN2	Light grey	6	100	0.056	6178 52 2
PP	Polypropylene				/100 pc.

The VK slotted cable trunking system is fixed to the mounting plate using the spreading rivet and the riveting tool.



Release pliers

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
AKZ	1	30.857	6178 53 5
ST Steel			/pc.

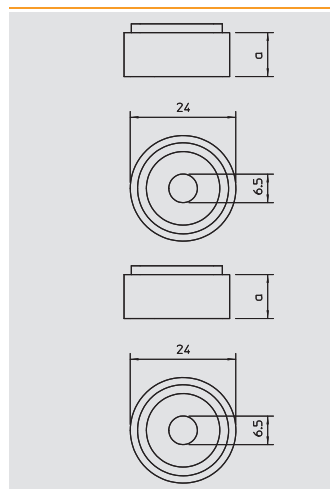

Spacer

Type	Colour	Dimension a mm	Diameter mm	Pack. pcs	Weight kg/100 pcs.	Item No.
AH1	Grey	12	24	100	0.354	6178 54 0


PVC Polyvinylchloride

Stackable spacer for height compensation between the different component heights.

Type	Colour	Dimension a mm	Diameter mm	Pack. pcs	Weight kg/100 pcs.	Item No.
AH2	Grey	20	24	100	0.576	6178 54 2

PVC Polyvinylchloride

For height compensation between the different component heights.




Washer

Type	Colour	Dimension h mm	Diameter mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ULS	Grey	3	5	100	0.166	6178 54 8

PVC Polyvinylchloride

Washer as compensation for different heights.




Support rail, unperforated

Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2064 GTP 2M	Unperforated	1.5	2,000	20	70.000	1115 05 7

ST Steel GTP Electrogalvanised, transparently passivated

G rail G32 to DIN EN 60715 (previously DIN EN 50035).




Support rail, perforated

Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2064 GTPL 2M	Perforated	1.5	2,000	20	69.000	1115 06 5

ST Steel GTP Electrogalvanised, transparently passivated

G rail G32 to DIN EN 60715 (previously DIN EN 50035).




Hat profile rail, unperforated

Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2069 2M GTP	Unperforated	1	2,000	50	34.000	1115 65 0

ST Steel GTP Electrogalvanised, transparently passivated

Hat profile rail 35 x 7.5 mm to DIN EN 60715 (formerly DIN EN 50022).



Hat profile rail, perforated

Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2069 2M GTPL	Perforated	1	2,000	50	33.000	1115 66 9

ST Steel GTP Electrogalvanised, transparently passivated

Hat profile rail 35 x 7.5 mm to DIN EN 60715 (formerly DIN EN 50022).



Rapid 45 plastic device installation trunking

	Device installation trunking, 1-compartment	Trunking depth 53 mm Trunking height 100 mm	188
	Device installation trunking, 2-compartment	Trunking depth 53 mm Trunking height 160 mm	191
	Device installation trunking, 3-compartment	Trunking depth 53 mm Trunking height 160 mm	194
	Device installation	-	337




Trunking depth 53 mm, trunking height 100 mm




Rapid 45 device installation trunking, type GEK-K 53100

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-K53100	Pure white	2,000	8	102.000	6116 02 7
PVC Polyvinylchloride					/m
Trunking base and cover with base perforation for direct wall mounting.					




Cover clip

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
OK-K 45	—	10	0.490	6116 11 6
V2A Stainless steel, 1.4301				
Cover clip for better and easier cable routing in the Rapid 45 device installation trunking.				




Partition

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2371 40	Light grey	2,000	60	13.500	6023 09 6
PVC Polyvinylchloride					/m
Partition to divide the WDK and GEK-K trunking for different voltage levels. The partitions are pinned on the connectors in the base.					




Cover

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-KOT45	Pure white	2,000	24	18.600	6116 10 8
PVC Polyvinylchloride					/m
Trunking cover for closing the Rapid 45 device installation trunking.					




Joint cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-KS45	Pure white	6	0.890	6116 15 0
PVC Polyvinylchloride				
Joint cover for perfect trunking segment connection. The joint covers are simply attached. They are suitable for trunking heights of 100 and 160 mm.				




Rising flat angle

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-KFS53100	Pure white	1	26.000	6116 41 8
PVC Polyvinylchloride				
Flat angle, rising, for changing the direction of Rapid 45 device installation trunking.				




Falling flat angle

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-KFF53100	Pure white	1	26.000	6116 46 4
PVC Polyvinylchloride				
Flat angle, falling, for changing the direction of Rapid 45 device installation trunking.				




Bend radius, flat angle

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
TW BR-F	Light grey	5	4.100	6023 08 9
PVC Polyvinylchloride				
Bend radius for standard laying and maintenance of the bend radii of fibre-optic cables in WDK trunking of side height 60 mm or greater and GEK-K trunking.				



Trunking depth 53 mm, trunking height 100 mm




Internal corner hood

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KI53100	Pure white	2	11.210	6116 20 5

PVC Polyvinylchloride /pc.

Internal corner for changing the direction of the Rapid 45 device installation trunking. The fittings can be variably adjusted between 80 and 103°.




Internal corner

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KIS53100	Pure white	1	23.800	6116 21 3

PVC Polyvinylchloride /pc.

Internal corner for changing the direction of Rapid 45 device installation trunking.




Bend radius, internal corner

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
TW BR-I	Light grey	5	4.120	6023 08 1

PVC Polyvinylchloride /pc.

Bend radius for standard laying and maintenance of the bend radii of fibre-optic cables in WDK trunking of side height 60 mm or greater and GEK-K trunking.




External corner hood

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KA53100	Pure white	2	16.070	6116 26 4

PVC Polyvinylchloride /pc.

External corner for changing the direction of the Rapid 45 device installation trunking. The fittings can be variably adjusted between 70 and 130°.




External corner

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KAS53100	Pure white	1	29.100	6116 27 2

PVC Polyvinylchloride /pc.

External corner for changing the direction of Rapid 45 device installation trunking.

Fittings can be adjusted through 70–130°.




Bend radius, external corner

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
TW BR-A	Light grey	5	4.600	6023 08 5

PVC Polyvinylchloride /pc.

Bend radius for standard laying and maintenance of the bend radii of fibre-optic cables in WDK trunking of side height 60 mm or greater and GEK-K trunking.



T piece, rising

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KTS53100	Pure white	2	11.800	6116 16 7

PVC Polyvinylchloride /pc.

T piece, rising, for changing the direction of the Rapid 45 device installation trunking.




Trunking depth 53 mm, trunking height 100 mm



T piece, falling

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KTF53100	Pure white	2	11.800	6116 18 0
PVC	Polyvinylchloride			/pc.


T piece, falling, for changing the direction of the Rapid 45 device installation trunking.



Intersection

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KK53100	Pure white	2	10.300	6116 49 5
PVC	Polyvinylchloride			/pc.


Intersection for changing the direction of the Rapid 45 device installation trunking.



End piece left

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KEL53100	Pure white	6	2.200	6116 30 2
PVC	Polyvinylchloride			/pc.


End piece, left, for closing the device installation trunking, Rapid 45 GEK-K/GEK-A.
The end pieces are attached to the floor connector.



End piece right

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KER53100	Pure white	6	2.200	6116 35 3
PVC	Polyvinylchloride			/pc.

End piece, right, for closing the device installation trunking, Rapid 45 GEK-K/GEK-A.
The end pieces are pinned on the connector in the base.



Trunking depth 53 mm, trunking height 160 mm

Rapid 45 device installation trunking, type GEK-K 53160

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-K53160	Pure white	2,000	6	182.000	6116 05 1
PVC Polyvinylchloride					/m

Trunking base and cover with floor perforation for direct wall mounting.



Cover clip

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
OK-K 45	—	10	0.490	6116 11 6

V2A Stainless steel, 1.4301

/pc.

Cover clip for better and easier cable routing in the Rapid 45 device installation trunking.



Partition

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2371 40	Light grey	2,000	60	13.500	6023 09 6

PVC Polyvinylchloride

/m

Partition to divide the WDK and GEK-K trunking for different voltage levels.

The partitions are pinned on the connectors in the base.



Cover

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-KOT45	Pure white	2,000	24	18.600	6116 10 8

PVC Polyvinylchloride

/m

Trunking cover for closing the Rapid 45 device installation trunking.



Joint cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-KS45	Pure white	6	0.890	6116 15 0

PVC Polyvinylchloride

/pc.

Joint cover for perfect trunking segment connection.

The joint covers are simply attached. They are suitable for trunking heights of 100 and 160 mm.



Rising flat angle

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-KFS53160	Pure white	1	51.200	6116 43 4

PVC Polyvinylchloride

/pc.

Flat angle, rising, for changing the direction of Rapid 45 device installation trunking.



Falling flat angle

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-KFF53160	Pure white	1	51.200	6116 48 0

PVC Polyvinylchloride

/pc.

Flat angle, falling, for changing the direction of Rapid 45 device installation trunking.




Trunking depth 53 mm, trunking height 160 mm




Bend radius, flat angle

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
TW BR-F	Light grey	5	4.100	6023 08 9
PVC	Polyvinylchloride			/pc.
Bend radius for standard laying and maintenance of the bend radii of fibre-optic cables in WDK trunking of side height 60 mm or greater and GEK-K trunking.				




Internal corner hood

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KI53160	Pure white	2	14.020	6116 22 1
PVC	Polyvinylchloride			/pc.
Internal corner for changing the direction of the Rapid 45 device installation trunking. The fittings can be variably adjusted between 80 and 103°.				




Internal corner

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KIS53160	Pure white	1	38.300	6116 24 8
PVC	Polyvinylchloride	/pc.		
Internal corner for changing the direction of Rapid 45 device installation trunking.				




Bend radius, internal corner

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
TW BR-I	Light grey	5	4.120	6023 08 1
PVC	Polyvinylchloride			/pc.
Bend radius for standard laying and maintenance of the bend radii of fibre-optic cables in WDK trunking of side height 60 mm or greater and GEK-K trunking.				




External corner hood

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KA53160	Pure white	2	20.800	6116 28 0
PVC	Polyvinylchloride			/pc.
External corner for changing the direction of the Rapid 45 device installation trunking. The fittings can be variably adjusted between 70 and 130°.				




External corner

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KAS53160	Pure white	1	46.800	6116 29 4
PVC	Polyvinylchloride			/pc.
External corner for changing the direction of Rapid 45 device installation trunking.				




Bend radius, external corner

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
TW BR-A	Light grey	5	4.600	6023 08 5
PVC Polyvinylchloride		/pc.		
Bend radius for standard laying and maintenance of the bend radii of fibre-optic cables in WDK trunking of side height 60 mm or greater and GEK-K trunking.				




Trunking depth 53 mm, trunking height 160 mm



T piece, rising

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KTS53160	Pure white	2	14.900	6116 17 2
PVC	Polyvinylchloride			/pc.


T piece, rising, for changing the direction of the Rapid 45 device installation trunking.



T piece, falling

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KTF53160	Pure white	2	14.900	6116 18 4
PVC	Polyvinylchloride			/pc.


T piece, falling, for changing the direction of the Rapid 45 device installation trunking.



Intersection

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KK53160	Pure white	2	12.700	6116 49 8
PVC	Polyvinylchloride			/pc.


Intersection for changing the direction of the Rapid 45 device installation trunking.



End piece left

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KEL53160	Pure white	6	3.500	6116 32 9
PVC	Polyvinylchloride			/pc.

End piece, left, for closing the device installation trunking, Rapid 45 GEK-K/GEK-A.
The end pieces are attached to the floor connector.



End piece right

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KER53160	Pure white	6	4.000	6116 38 8
PVC	Polyvinylchloride			/pc.

End piece, right, for closing the device installation trunking, Rapid 45 GEK-K/GEK-A.
The end pieces are attached to the floor connector.




Trunking depth 53 mm, trunking height 160 mm, 3-compartment



Rapid 45 device installation trunking, type GEK-K 53160-3

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-K53160-3	Pure white	2,000	8	210.000	6116 07 3
PVC Polyvinylchloride					/m


Trunking base and cover with base perforation for direct wall mounting.



Partition

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2371 40	Light grey	2,000	60	13.500	6023 09 6
PVC Polyvinylchloride					/m


Partition to divide the WDK and GEK-K trunking for different voltage levels.
The partitions are pinned on the connectors in the base.



Cover

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-KOT45	Pure white	2,000	24	18.600	6116 10 8
PVC Polyvinylchloride					/m


Trunking cover for closing the Rapid 45 device installation trunking.



Joint cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-KS45-3	Pure white	6	1.310	6116 16 3
PVC Polyvinylchloride				/pc.


Joint cover for smooth connection of trunking segments.



Flat angle

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-KF53160-3	Pure white	1	64.000	6116 49 3
PVC Polyvinylchloride				/pc.


Flat angle for direction change of Rapid 45 device installation trunking, GEK-K53160-3.



Bend radius, flat angle

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
TW BR-F	Light grey	5	4.100	6023 08 9
PVC Polyvinylchloride				/pc.


Bend radius for standard laying and maintenance of the bend radii of fibre-optic cables in WDK trunking of side height 60 mm or greater and GEK-K trunking.




Internal corner hood

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-KI53160-3	Pure white	2	13.800	6116 20 1
PVC Polyvinylchloride				/pc.


Internal corner as hood fitting for direction change of three-compartment Rapid 45 device installation trunking. The fittings can be variably adjusted between 80 and 103°.




Trunking depth 53 mm, trunking height 160 mm, 3-compartment




Internal corner				
Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KIS53160-3	Pure white	1	48.100	6116 20 3
PVC Polyvinylchloride /pc.				
Rigid 90° internal corner for changing the direction of the Rapid 45 three-compartment device installation trunking.				




Bend radius, internal corner				
Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
TW BR-I	Light grey	5	4.120	6023 08 1
PVC Polyvinylchloride /pc.				
Bend radius for standard laying and maintenance of the bend radii of fibre-optic cables in WDK trunking of side height 60 mm or greater and GEK-K trunking.				




External corner hood				
Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KA53160-3	Pure white	2	22.000	6116 26 1
PVC Polyvinylchloride /pc.				
External corner as hood fitting for direction change of three-compartment Rapid 45 device installation trunking. The fittings can be adjusted variably between 70–130°.				
Fittings can be adjusted through 70–130°.				




External corner				
Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KAS53160-3	Pure white	1	64.000	6116 26 3
PVC Polyvinylchloride /pc.				
Rigid 90° external corner for changing the direction of the Rapid 45 three-compartment device installation trunking.				
Fittings can be adjusted through 70–130°.				



Bend radius, external corner				
Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
TW BR-A	Light grey	5	4.600	6023 08 5
PVC Polyvinylchloride /pc.				
Bend radius for standard laying and maintenance of the bend radii of fibre-optic cables in WDK trunking of side height 60 mm or greater and GEK-K trunking.				



T piece				
Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KT53160-3	Pure white	1	72.000	6116 19 3
PVC Polyvinylchloride /pc.				
Prefabricated T piece for vertical branch of the Rapid 45 device installation trunking, three-compartment.				



End piece				
Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KE53160-3	Pure white	8	3.700	6116 40 3
PVC Polyvinylchloride /pc.				
End piece for closing the device installation trunking Rapid 45 GEK-K53160-3.				





Trunking depth 53 mm, trunking height 160 mm, 3-compartment




Hole punch

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
GEK-LZ	1	59.000	6270 67 0

/pc.

Hole punch to create round punch-outs d = 18 mm in fixed partitions between the trunking compartments of the three-compartment Rapid 45 device installation trunking.

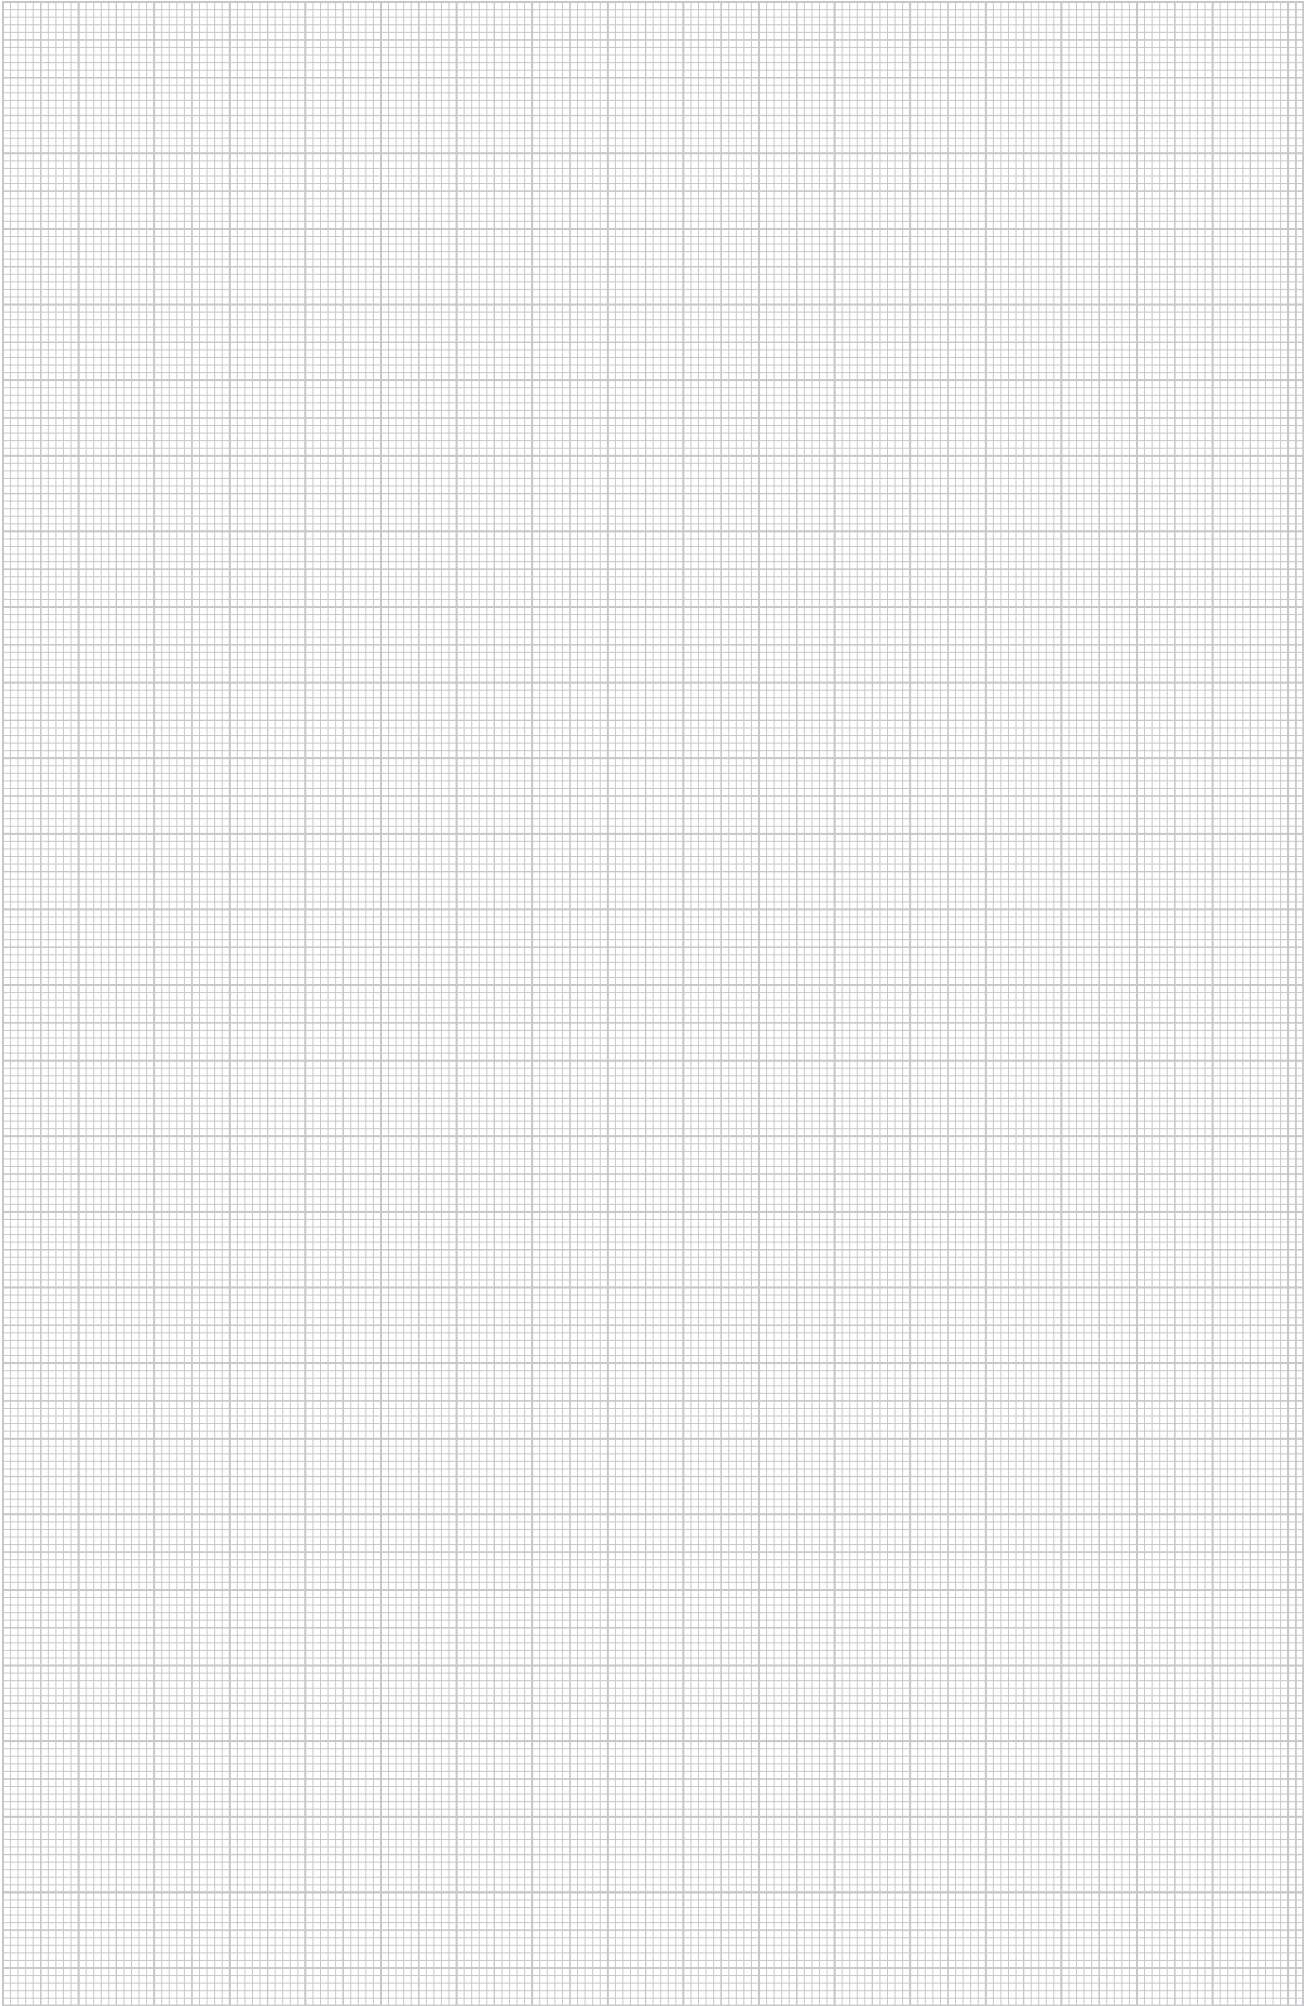

Rapid 45 aluminium device installation trunking

	Device installation trunking, 1-compartment	Trunking depth 53 mm Trunking height 100 mm	200
	Device installation trunking, 2-compartment	Trunking depth 53 mm Trunking height 160 mm	203
	Device installation	-	337



Trunking depth 53 mm, trunking height 100 mm




Rapid 45 device installation trunking, type GEK-A 53100

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-A53100EL	Aluminium	Anodised	2,000	8	175.000	6116 51 5
AI Aluminium	EL Anodised					/m

Trunking base and cover without base perforation suitable for direct wall mounting.

Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). Alternatively, we recommend powder coating in the colour RAL 9006 (white aluminium). 45 mm devices can be clicked on directly. When using PVC fittings, there may be colour differences due to the different materials.



Joint connector

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AKU45	10	0.135	6116 75 2
ST Steel			/pc.

Joint connector for connecting the bases of the Rapid 45 aluminium device installation trunking.




Partition

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2371 40	Light grey	2,000	60	13.500	6023 09 6
PVC Polyvinylchloride					/m

Partition to divide the WDK and GEK-K trunking for different voltage levels.


The partitions are pinned on the connectors in the base.



Cover

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-AOT45	Aluminium	Anodised	2,000	24	31.000	6116 55 8
AI Aluminium	EL Anodised					/m

Trunking cover for closing the Rapid 45 device installation trunking.



Earthing cable

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
EDA45	Yellow green	400	10	1.400	6257 59 8
Cu Copper					/pc.


Earthing cable 2.5 mm² to connect the bases and covers for GEK-A Rapid 45 device installation trunking.



Earthing terminal

Type	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
EDAKL	Electrogalvanised	40	1.100	6257 60 3
ST Steel	G Electrogalvanised			/pc.

Earthing terminal max. 6 mm² for GEK-A Rapid 45 device installation trunking.




Joint cover


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-KS45	Aluminium	6	0.890	6116 15 4
PVC Polyvinylchloride				/pc.

Joint cover for perfect trunking segment connection.

The joint covers are simply attached. They are suitable for trunking heights of 100 and 160 mm.



Trunking depth 53 mm, trunking height 100 mm




Rising flat angle

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AFS53100	Aluminium	Anodised	1	44.000	6116 66 8

AI Aluminium **EL** Anodised /pc.

Flat angle, rising, for changing the direction of Rapid 45 device installation trunking.



Falling flat angle


Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AFF53100	Aluminium	Anodised	1	44.000	6116 70 9

AI Aluminium **EL** Anodised /pc.

Flat angle, falling, for changing the direction of Rapid 45 device installation trunking.

Note:

For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). Alternatively, we recommend powder coating in the colour RAL 9006 (white aluminium).




Bend radius, flat angle

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
TW BR-F	Light grey	5	4.100	6023 08 9

PVC Polyvinylchloride /pc.

Bend radius for standard laying and maintenance of the bend radii of fibre-optic cables in WDK trunking of side height 60 mm or greater and GEK-K trunking.




Internal corner hood

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KI53100	Aluminium	2	11.210	6116 21 0

PVC Polyvinylchloride /pc.

Internal corner for changing the direction of the Rapid 45 device installation trunking. The fittings can be variably adjusted between 80 and 103°.




Internal corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AI53100	Aluminium	Anodised	1	45.000	6116 57 9

AI Aluminium **EL** Anodised /pc.

Internal corner for changing the direction of the Rapid 45 device installation trunking.




Bend radius, internal corner

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
TW BR-I	Light grey	5	4.120	6023 08 1

PVC Polyvinylchloride /pc.

Bend radius for standard laying and maintenance of the bend radii of fibre-optic cables in WDK trunking of side height 60 mm or greater and GEK-K trunking.



External corner hood

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KA53100	Aluminium	2	16.070	6116 26 9

PVC Polyvinylchloride /pc.

External corner for changing the direction of the Rapid 45 device installation trunking. The fittings can be variably adjusted between 70 and 130°.




Trunking depth 53 mm, trunking height 100 mm




External corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AA53100	Aluminium	Anodised	1	54.000	6116 61 7
AI Aluminium	EL Anodised				/pc.
External corner for changing the direction of Rapid 45 device installation trunking.					




Bend radius, external corner

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
TW BR-A	Light grey	5	4.600	6023 08 5
PVC Polyvinylchloride				/pc.
Bend radius for standard laying and maintenance of the bend radii of fibre-optic cables in WDK trunking of side height 60 mm or greater and GEK-K trunking.				




T piece, rising

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KTS53100	Aluminium	1	11.800	6116 16 9
PVC Polyvinylchloride				/pc.
T piece, rising, for changing the direction of the Rapid 45 device installation trunking.				




T piece, falling

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KTF53100	Aluminium	1	11.800	6116 18 1
PVC Polyvinylchloride				/pc.
T piece, falling, for changing the direction of the Rapid 45 device installation trunking.				




Intersection

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KK53100	Aluminium	1	10.300	6116 49 6
PVC Polyvinylchloride				/pc.
Intersection for changing the direction of the Rapid 45 device installation trunking.				




End piece left

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KEL53100	Aluminium	1	2.200	6116 30 7
PVC Polyvinylchloride				/pc.
End piece, left, for closing the device installation trunking, Rapid 45 GEK-K/GEK-A. The end pieces are attached to the floor connector.				




End piece right

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KER53100	Aluminium	1	2.200	6116 35 8
PVC Polyvinylchloride				/pc.
End piece, right, for closing the device installation trunking, Rapid 45 GEK-K/GEK-A. The end pieces are pinned on the connector in the base.				



Trunking depth 53 mm, trunking height 160 mm



Rapid 45 device installation trunking, type GEK-A 53160

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-A53160EL	Aluminium	Anodised	2,000	6	250.000	6116 53 6
Al Aluminium	EL Anodised					/m

Trunking base and cover without base perforation suitable for direct wall mounting.

Note:


For anodised device installation trunking and fittings made from aluminium, light colour differences caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). Alternatively, we recommend powder coating in the colour RAL 9006 (white aluminium). 45 mm devices can be clicked on directly. When using PVC fittings, there may be colour differences due to the different materials.



Joint connector

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AKU45	10	0.135	6116 75 2
ST Steel			/pc.


Joint connector for connecting the bases of the Rapid 45 aluminium device installation trunking.



Partition

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2371 40	Light grey	2,000	60	13.500	6023 09 6
PVC Polyvinylchloride					/m

Partition to divide the WDK and GEK-K trunking for different voltage levels. The partitions are pinned on the connectors in the base.



Cover

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-AOT45	Aluminium	Anodised	2,000	24	31.000	6116 55 8
Al Aluminium	EL Anodised					/m


Trunking cover for closing the Rapid 45 device installation trunking.



Earthing cable

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
EDA45	Yellow green	400	10	1.400	6257 59 8
Cu Copper					/pc.


Earthing cable 2.5 mm² to connect the bases and covers for GEK-A Rapid 45 device installation trunking.



Earthing terminal

Type	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
EDA45	Electroalgalvanised	40	1.100	6257 60 3
ST Steel	G Electroalgalvanised			/pc.

Earthing terminal max. 6 mm² for GEK-A Rapid 45 device installation trunking.



Joint cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-KS45	Aluminium	6	0.890	6116 15 4
PVC Polyvinylchloride				/pc.

Joint cover for perfect trunking segment connection.

The joint covers are simply attached. They are suitable for trunking heights of 100 and 160 mm.




Trunking depth 53 mm, trunking height 160 mm



Rising flat angle

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AFS53160	Aluminium	Anodised	1	81.000	6116 68 5
AI Aluminium	EL Anodised				/pc.


Flat angle, rising, for changing the direction of Rapid 45 device installation trunking.



Falling flat angle

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AFF53160	Aluminium	Anodised	1	81.000	6116 73 6
AI Aluminium	EL Anodised				/pc.


Flat angle, falling, for changing the direction of Rapid 45 device installation trunking.



Bend radius, flat angle

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
TW BR-F	Light grey	5	4.100	6023 08 9
PVC Polyvinylchloride				/pc.


Bend radius for standard laying and maintenance of the bend radii of fibre-optic cables in WDK trunking of side height 60 mm or greater and GEK-K trunking.



Internal corner hood

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KI53160	Aluminium	2	14.020	6116 22 6
PVC Polyvinylchloride				/pc.


Internal corner for changing the direction of the Rapid 45 device installation trunking. The fittings can be variably adjusted between 80 and 103°.



Internal corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AI53160	Aluminium	Anodised	1	75.000	6116 59 5
AI Aluminium	EL Anodised				/pc.


Internal corner for changing the direction of Rapid 45 device installation trunking.



Bend radius, internal corner

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
TW BR-I	Light grey	5	4.120	6023 08 1
PVC Polyvinylchloride				/pc.


Bend radius for standard laying and maintenance of the bend radii of fibre-optic cables in WDK trunking of side height 60 mm or greater and GEK-K trunking.




External corner hood

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KA53160	Aluminium	2	20.800	6116 28 5
PVC Polyvinylchloride				/pc.

External corner for changing the direction of the Rapid 45 device installation trunking. The fittings can be variably adjusted between 70 and 130°.




Trunking depth 53 mm, trunking height 160 mm



External corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AA53160	Aluminium	Anodised	1	98.000	6116 64 7
AI Aluminium	EL Anodised				/pc.


External corner for changing the direction of Rapid 45 device installation trunking.



Bend radius, external corner

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
TW BR-A	Light grey	5	4.600	6023 08 5
PVC Polyvinylchloride				/pc.


Bend radius for standard laying and maintenance of the bend radii of fibre-optic cables in WDK trunking of side height 60 mm or greater and GEK-K trunking.



T piece, rising

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KTS53160	Aluminium	1	14.900	6116 17 4
PVC Polyvinylchloride				/pc.


T piece, rising, for changing the direction of the Rapid 45 device installation trunking.



T piece, falling

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KTF53160	Aluminium	1	14.900	6116 18 5
PVC Polyvinylchloride				/pc.


T piece, falling, for changing the direction of the Rapid 45 device installation trunking.



Intersection

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KK53160	Aluminium	1	12.700	6116 49 9
PVC Polyvinylchloride				/pc.


Intersection for changing the direction of the Rapid 45 device installation trunking.



End piece left

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KEL53160	Aluminium	1	3.500	6116 33 4
PVC Polyvinylchloride				/pc.

End piece, left, for closing the device installation trunking, Rapid 45 GEK-K/GEK-A.
The end pieces are attached to the floor connector.



End piece right

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GEK-KER53160	Aluminium	1	4.000	6116 39 3
PVC Polyvinylchloride				/pc.

End piece, right, for closing the device installation trunking, Rapid 45 GEK-K/GEK-A.
The end pieces are attached to the floor connector.





Rapid 80 device installation duct plastic systems

	Trunking depth 70 mm	Trunking height 110 mm	208
	Trunking depth 70 mm	Trunking height 130 mm	211
	Trunking depth 70 mm	Trunking height 170 mm	214
	Device installation trunking accessories	-	303
	Device installation	-	337



Trunking depth 70 mm, trunking height 110 mm



Device installation trunking, type GK70110


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-70110RW	Pure white	2,000	8	132.000	6274 30 0
GK-70110CW	Cream	2,000	8	132.000	6274 30 1
GK-70110LGR	Light grey	2,000	8	132.000	6274 30 2
GK-70110GR	Stone grey	2,000	8	132.000	6274 30 6

PVC Polyvinylchloride

/m

GK device installation trunking, made of lead-free PVC, suitable for installing directly on the wall or on wall panels. Fastening takes place using the perforation in the trunking. The GK device installation trunking possesses a C profile on the floor to accept a plastic partition. All the switch programmes with a support ring and support clamp design as well as Modul 45 installation devices can be installed in the accessory mounting boxes of series 71GD.... The system opening is 76.5 mm. On each trunking length a coupling pair is pre-assembled on one side.

Cover must be ordered separately.




Coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-KUP	Light grey	50	1.070	6274 65 0

ABS/ASA Acrylonitrile butadiene styrene

/pc.

Coupling as trunking connector for tight connection of the trunking sections. A coupling pair is included and pre-mounted for each stock length.




Single accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide

/pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.




Double accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide

/pc.

Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.




Strain relief

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	31.500	6288 79 0

PA Polyamide

/pc.

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.




Trunking cover, smooth

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTGRW	Pure white	2,000	16	27.500	6278 68 0
GK-OTGCW	Cream	2,000	16	27.500	6278 68 1
GK-OTGLGR	Light grey	2,000	16	27.500	6278 68 2
GK-OTGGR	Stone grey	2,000	16	27.500	6278 68 6


PVC Polyvinylchloride

/m

Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.



Trunking depth 70 mm, trunking height 110 mm




Trunking cover, fluted

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTKRW	Pure white	2,000	16	27.000	6278 78 0
GK-OTKCW	Cream	2,000	16	27.000	6278 78 1
GK-OTKLGR	Light grey	2,000	16	27.000	6278 78 2
GK-OTKGR	Stone grey	2,000	16	27.000	6278 78 6

PVC Polyvinylchloride

/m

Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.



External corner


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-A70110RW	Pure white	1	116.000	6274 31 0
GK-A70110CW	Cream	1	116.000	6274 31 1
GK-A70110LGR	Light grey	1	116.000	6274 31 2
GK-A70110GR	Stone grey	1	116.000	6274 31 6

PVC Polyvinylchloride

/pc.

External corner for changing the direction of the GK device installation trunking.

Cover must be ordered separately.




External corner cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGARW	Pure white	2	14.000	6274 79 0
GK-OTGACW	Cream	2	14.000	6274 79 1
GK-OTGALGR	Light grey	2	14.000	6274 79 2
GK-OTGAGR	Stone grey	2	14.000	6274 79 6

PVC Polyvinylchloride

/pc.

PVC external corner cover, smooth surface.




External corner cover, fluted

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTKARW	Pure white	2	16.000	6274 89 0
GK-OTKACW	Cream	2	16.000	6274 89 1
GK-OTKALGR	Light grey	2	16.000	6274 89 2
GK-OTKAGR	Stone grey	2	16.000	6274 89 6

PVC Polyvinylchloride

/pc.

PVC external corner cover, fluted surface.



Flat angle


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-F70110RW	Pure white	1	78.000	6274 32 0
GK-F70110CW	Cream	1	78.000	6274 32 1
GK-F70110LGR	Light grey	1	78.000	6274 32 2
GK-F70110GR	Stone grey	1	78.000	6274 32 6

PVC Polyvinylchloride

/pc.

Flat angle for changing the direction of the GK device installation trunking.

Cover must be ordered separately.



Flat angle cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGFRW	Pure white	2	17.000	6274 49 0
GK-OTGFCW	Cream	2	17.000	6274 49 1
GK-OTGFLGR	Light grey	2	17.000	6274 49 2
GK-OTGFGR	Stone grey	2	17.000	6274 49 6

PVC Polyvinylchloride

/pc.

Flat angle cover, smooth surface.



Trunking depth 70 mm, trunking height 110 mm




Flat angle cover, fluted

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTKFRW	Pure white	2	20.000	6274 59 0
GK-OTKFCW	Cream	2	20.000	6274 59 1
GK-OTKFLGR	Light grey	2	20.000	6274 59 2
GK-OTKFGR	Stone grey	2	20.000	6274 59 6

PVC Polyvinylchloride

/pc.

Flat angle cover, fluted surface.




Internal corner

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-I70110RW	Pure white	1	100.000	6274 34 0
GK-I70110CW	Cream	1	100.000	6274 34 1
GK-I70110LGR	Light grey	1	100.000	6274 34 2
GK-I70110GR	Stone grey	1	100.000	6274 34 6

PVC Polyvinylchloride

/pc.

Internal corner for changing the direction of the GK device installation trunking.




T piece

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-T70110RW	Pure white	1	100.000	6274 36 0
GK-T70110CW	Cream	1	100.000	6274 36 1
GK-T70110LGR	Light grey	1	100.000	6274 36 2
GK-T70110GR	Stone grey	1	100.000	6274 36 6

PVC Polyvinylchloride

/pc.

T piece for changing the direction of the GK device installation trunking.




End piece

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-E70110RW	Pure white	10	4.800	6274 37 0
GK-E70110CW	Cream	10	4.800	6274 37 1
GK-E70110LGR	Light grey	10	4.800	6274 37 2
GK-E70110GR	Stone grey	10	4.800	6274 37 6

PVC Polyvinylchloride

/pc.

End piece for closing the GK device installation trunking.




Separating retainer

Type	Colour	Length	Pack.	Weight	Item No.
		mm	m	kg/100 m	
GK-TW70	—	2,000	40	17.400	6274 90 0

PVC Polyvinylchloride

/m

Partition for mounting in GK device installation trunking for installing cables of different voltage levels.




Duct clamp

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
KL80A	20	0.680	6288 64 0


PA Polyamide

/pc.

Duct clamp for secure cable holding and fixing the partition in the GK, GS and GEK-A device installation trunking.



Trunking depth 70 mm, trunking height 130 mm



Device installation trunking, type GK70130


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-70130RW	Pure white	2,000	8	152.000	6274 50 0
GK-70130CW	Cream	2,000	8	152.000	6274 50 1
GK-70130LGR	Light grey	2,000	8	152.000	6274 50 2
GK-70130GR	Stone grey	2,000	8	152.000	6274 50 6

PVC Polyvinylchloride

/m

GK device installation trunking, made of lead-free PVC, suitable for installing directly on the wall or on wall panels. Fastening takes place using the perforation in the trunking. The GK device installation trunking possesses a C profile on the floor to accept a plastic partition. All the switch programmes with a support ring and support clamp design as well as Modul 45 installation devices can be installed in the accessory mounting boxes of series 71GD.... The system opening is 76.5 mm. On each trunking length a coupling pair is pre-assembled on one side.

Cover must be ordered separately.




Coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-KUP	Light grey	50	1.070	6274 65 0

ABS/ASA Acrylonitrile butadiene styrene

/pc.

Coupling as trunking connector for tight connection of the trunking sections. A coupling pair is included and pre-mounted for each stock length.




Single accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide

/pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.




Double accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide

/pc.

Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.




Strain relief

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	31.500	6288 79 0

PA Polyamide

/pc.

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.



Trunking cover, smooth

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTGRW	Pure white	2,000	16	27.500	6278 68 0
GK-OTGCW	Cream	2,000	16	27.500	6278 68 1
GK-OTGLGR	Light grey	2,000	16	27.500	6278 68 2
GK-OTGGR	Stone grey	2,000	16	27.500	6278 68 6

PVC Polyvinylchloride

/m

Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.



Trunking depth 70 mm, trunking height 130 mm




Trunking cover, fluted

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTKRW	Pure white	2,000	16	27.000	6278 78 0
GK-OTKCW	Cream	2,000	16	27.000	6278 78 1
GK-OTKLGR	Light grey	2,000	16	27.000	6278 78 2
GK-OTKGR	Stone grey	2,000	16	27.000	6278 78 6

PVC Polyvinylchloride

/m

Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.



External corner

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-A70130RW	Pure white	1	127.000	6274 51 0
GK-A70130CW	Cream	1	127.000	6274 51 1
GK-A70130LGR	Light grey	1	127.000	6274 51 2
GK-A70130GR	Stone grey	1	127.000	6274 51 6

PVC Polyvinylchloride

/pc.

External corner for changing the direction of the GK device installation trunking.

Cover must be ordered separately.




External corner cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGARW	Pure white	2	14.000	6274 79 0
GK-OTGACW	Cream	2	14.000	6274 79 1
GK-OTGALGR	Light grey	2	14.000	6274 79 2
GK-OTGAGR	Stone grey	2	14.000	6274 79 6

PVC Polyvinylchloride

/pc.

PVC external corner cover, smooth surface.




External corner cover, fluted

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTKARW	Pure white	2	16.000	6274 89 0
GK-OTKACW	Cream	2	16.000	6274 89 1
GK-OTKALGR	Light grey	2	16.000	6274 89 2
GK-OTKAGR	Stone grey	2	16.000	6274 89 6

PVC Polyvinylchloride

/pc.

PVC external corner cover, fluted surface.



Flat angle


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-F70130RW	Pure white	1	83.000	6274 52 0
GK-F70130CW	Cream	1	83.000	6274 52 1
GK-F70130LGR	Light grey	1	83.000	6274 52 2
GK-F70130GR	Stone grey	1	83.000	6274 52 6

PVC Polyvinylchloride

/pc.

Flat angle for changing the direction of the GK device installation trunking.

Cover must be ordered separately.




Flat angle cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGFRW	Pure white	2	17.000	6274 49 0
GK-OTGFCW	Cream	2	17.000	6274 49 1
GK-OTGFLGR	Light grey	2	17.000	6274 49 2
GK-OTGFGR	Stone grey	2	17.000	6274 49 6


PVC Polyvinylchloride

/pc.

Flat angle cover, smooth surface.



Trunking depth 70 mm, trunking height 130 mm




Flat angle cover, fluted

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTKFRW	Pure white	2	20.000	6274 59 0
GK-OTKFCW	Cream	2	20.000	6274 59 1
GK-OTKFLGR	Light grey	2	20.000	6274 59 2
GK-OTKFGR	Stone grey	2	20.000	6274 59 6

PVC Polyvinylchloride

/pc.

Flat angle cover, fluted surface.




Internal corner

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-I70130RW	Pure white	1	110.000	6274 54 0
GK-I70130CW	Cream	1	110.000	6274 54 1
GK-I70130LGR	Light grey	1	110.000	6274 54 2
GK-I70130GR	Stone grey	1	110.000	6274 54 6

PVC Polyvinylchloride

/pc.

Internal corner for changing the direction of the GK device installation trunking.




T piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-T70130RW	Pure white	1	108.000	6274 56 0
GK-T70130CW	Cream	1	108.000	6274 56 1
GK-T70130LGR	Light grey	1	108.000	6274 56 2
GK-T70130GR	Stone grey	1	108.000	6274 56 6

PVC Polyvinylchloride

/pc.

T piece for changing the direction of the GK device installation trunking.




End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E70130RW	Pure white	10	5.300	6274 57 0
GK-E70130CW	Cream	10	5.300	6274 57 1
GK-E70130LGR	Light grey	10	5.300	6274 57 2
GK-E70130GR	Stone grey	10	5.300	6274 57 6

PVC Polyvinylchloride

/pc.

End piece for closing the GK device installation trunking.




Separating retainer

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-TW70	—	2,000	40	17.400	6274 90 0

PVC Polyvinylchloride

/m

Partition for mounting in GK device installation trunking for installing cables of different voltage levels.



Duct clamp

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
KL80A	20	0.680	6288 64 0

PA Polyamide

/pc.

Duct clamp for secure cable holding and fixing the partition in the GK, GS and GEK-A device installation trunking.



Trunking depth 70 mm, trunking height 170 mm



Device installation trunking, type GK70170


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-70170RW	Pure white	2,000	8	180.000	6274 70 0
GK-70170CW	Cream	2,000	8	180.000	6274 70 1
GK-70170LGR	Light grey	2,000	8	180.000	6274 70 2
GK-70170GR	Stone grey	2,000	8	180.000	6274 70 6

PVC Polyvinylchloride

/m

GK device installation trunking, made of lead-free PVC, suitable for installing directly on the wall or on wall panels. Fastening takes place using the perforation in the trunking. The GK device installation trunking possesses a C profile on the floor to accept a plastic partition. All the switch programmes with a support ring and support clamp design as well as Modul 45 installation devices can be installed in the accessory mounting boxes of series 71GD.... The system opening is 76.5 mm. On each trunking length a coupling pair is pre-assembled on one side.

Cover must be ordered separately.




Coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-KUP	Light grey	50	1.070	6274 65 0

ABS/ASA Acrylonitrile butadiene styrene

/pc.

Coupling as trunking connector for tight connection of the trunking sections. A coupling pair is included and pre-mounted for each stock length.




Single accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide

/pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.




Double accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide

/pc.

Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.




Strain relief

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	31.500	6288 79 0

PA Polyamide

/pc.

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.




Trunking cover, smooth

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTGRW	Pure white	2,000	16	27.500	6278 68 0
GK-OTGCW	Cream	2,000	16	27.500	6278 68 1
GK-OTGLGR	Light grey	2,000	16	27.500	6278 68 2
GK-OTGGR	Stone grey	2,000	16	27.500	6278 68 6


PVC Polyvinylchloride

/m

Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.



Trunking depth 70 mm, trunking height 170 mm




Trunking cover, fluted

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTKRW	Pure white	2,000	16	27.000	6278 78 0
GK-OTKCW	Cream	2,000	16	27.000	6278 78 1
GK-OTKLGR	Light grey	2,000	16	27.000	6278 78 2
GK-OTKGR	Stone grey	2,000	16	27.000	6278 78 6

PVC Polyvinylchloride

/m

Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.



External corner


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-A70170RW	Pure white	1	149.000	6274 71 0
GK-A70170CW	Cream	1	149.000	6274 71 1
GK-A70170LGR	Light grey	1	149.000	6274 71 2
GK-A70170GR	Stone grey	1	149.000	6274 71 6

PVC Polyvinylchloride

/pc.

External corner for changing the direction of the GK device installation trunking.

Cover must be ordered separately.




External corner cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGARW	Pure white	2	14.000	6274 79 0
GK-OTGACW	Cream	2	14.000	6274 79 1
GK-OTGALGR	Light grey	2	14.000	6274 79 2
GK-OTGAGR	Stone grey	2	14.000	6274 79 6

PVC Polyvinylchloride

/pc.

PVC external corner cover, smooth surface.




External corner cover, fluted

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTKARW	Pure white	2	16.000	6274 89 0
GK-OTKACW	Cream	2	16.000	6274 89 1
GK-OTKALGR	Light grey	2	16.000	6274 89 2
GK-OTKAGR	Stone grey	2	16.000	6274 89 6

PVC Polyvinylchloride

/pc.

PVC external corner cover, fluted surface.



Flat angle


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-F70170RW	Pure white	1	91.000	6274 72 0
GK-F70170CW	Cream	1	91.000	6274 72 1
GK-F70170LGR	Light grey	1	91.000	6274 72 2
GK-F70170GR	Stone grey	1	91.000	6274 72 6

PVC Polyvinylchloride

/pc.

Flat angle for changing the direction of the GK device installation trunking.

Cover must be ordered separately.



Flat angle cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGFRW	Pure white	2	17.000	6274 49 0
GK-OTGFCW	Cream	2	17.000	6274 49 1
GK-OTGFLGR	Light grey	2	17.000	6274 49 2
GK-OTGFGR	Stone grey	2	17.000	6274 49 6

PVC Polyvinylchloride

/pc.

Flat angle cover, smooth surface.



Trunking depth 70 mm, trunking height 170 mm




Flat angle cover, fluted

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTKFRW	Pure white	2	20.000	6274 59 0
GK-OTKFCW	Cream	2	20.000	6274 59 1
GK-OTKFLGR	Light grey	2	20.000	6274 59 2
GK-OTKFGR	Stone grey	2	20.000	6274 59 6

PVC Polyvinylchloride

/pc.

Flat angle cover, fluted surface.




Internal corner

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-I70170RW	Pure white	1	130.000	6274 74 0
GK-I70170CW	Cream	1	130.000	6274 74 1
GK-I70170LGR	Light grey	1	130.000	6274 74 2
GK-I70170GR	Stone grey	1	130.000	6274 74 6

PVC Polyvinylchloride

/pc.

Internal corner for changing the direction of the GK device installation trunking.




T piece

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-T70170RW	Pure white	1	120.000	6274 76 0
GK-T70170CW	Cream	1	120.000	6274 76 1
GK-T70170LGR	Light grey	1	120.000	6274 76 2
GK-T70170GR	Stone grey	1	120.000	6274 76 6

PVC Polyvinylchloride

/pc.

T piece for changing the direction of the GK device installation trunking.




End piece

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-E70170RW	Pure white	10	6.200	6274 77 0
GK-E70170CW	Cream	10	6.200	6274 77 1
GK-E70170LGR	Light grey	10	6.200	6274 77 2
GK-E70170GR	Stone grey	10	6.200	6274 77 6

PVC Polyvinylchloride

/pc.

End piece for closing the GK device installation trunking.




Separating retainer

Type	Colour	Length	Pack.	Weight	Item No.
		mm	m	kg/100 m	
GK-TW70	—	2,000	40	17.400	6274 90 0

PVC Polyvinylchloride

/m

Partition for mounting in GK device installation trunking for installing cables of different voltage levels.




Duct clamp


Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
KL80A	20	0.680	6288 64 0

PA Polyamide

/pc.



Duct clamp for secure cable holding and fixing the partition in the GK, GS and GEK-A device installation trunking.



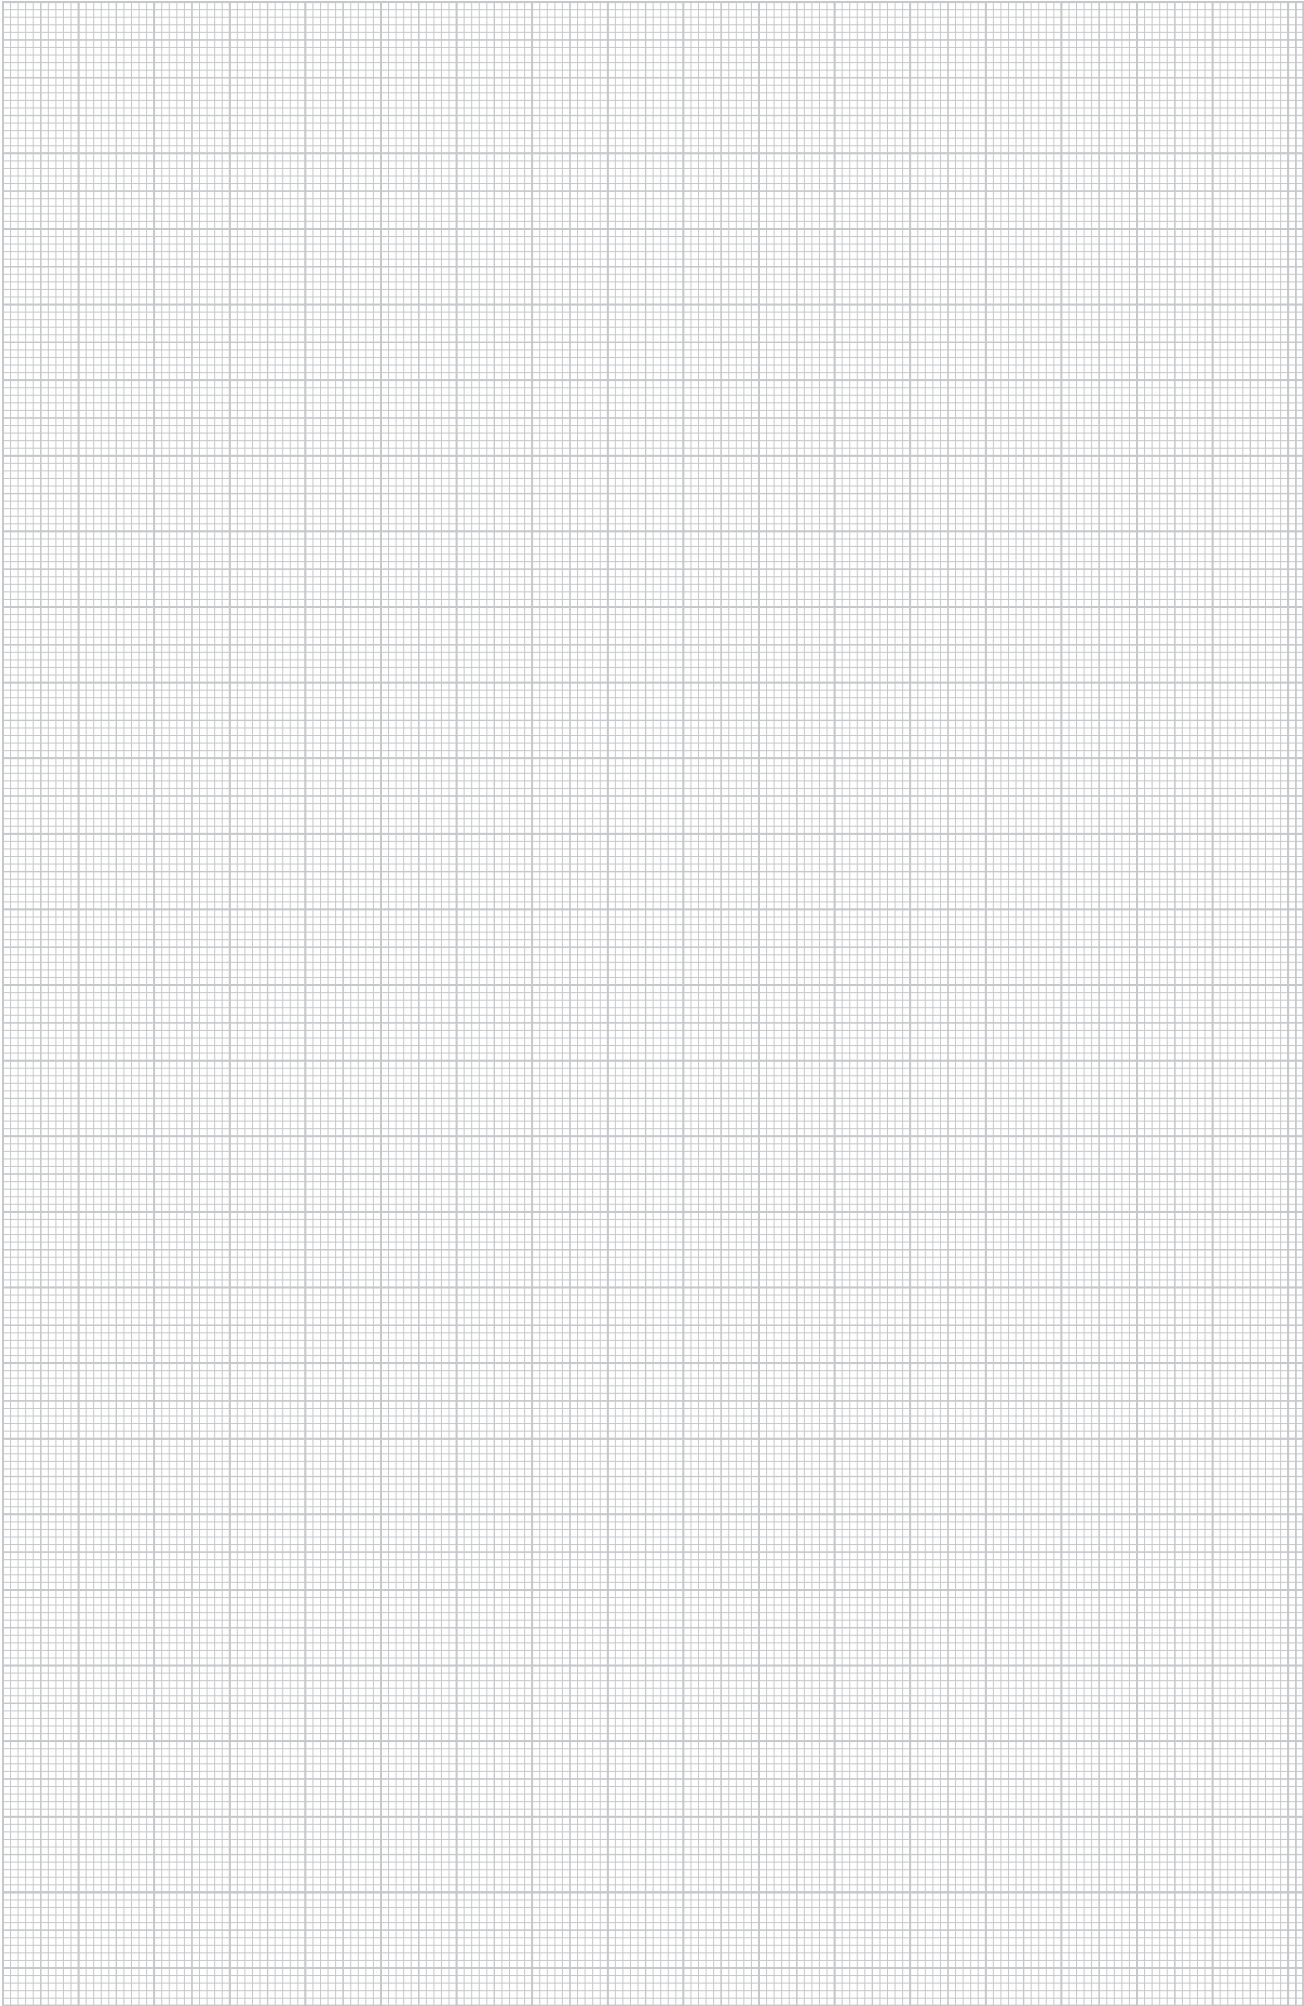



Rapid 80 sheet steel device installation trunking systems

	Trunking height 110 mm	Trunking depth 70 mm Trunking depth 90 mm	220
	Trunking height 130 mm	Trunking depth 70 mm Trunking depth 90 mm	225
	Trunking height 130 mm, asymmetrical	Trunking depth 70 mm Trunking depth 90 mm	230
	Trunking height 170 mm	Trunking depth 70 mm Trunking depth 90 mm	236
	Trunking height 170 mm, asymmetrical	Trunking depth 70 mm Trunking depth 90 mm	241
	Trunking height 170 mm, duoduct 80/50 mm cover	Trunking depth 70 mm Trunking depth 90 mm	247
	Trunking height 210 mm, asymmetrical	Trunking depth 70 mm Trunking depth 90 mm	252
	Trunking height 210 mm, duoduct 80/80 mm cover	Trunking depth 70 mm Trunking depth 90 mm	258
	Device installation trunking accessories	-	303
	Device installation	-	337



Trunking height 110 mm




Device installation trunking, trunking depth 70 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-S70110RW	Pure white	2,000	12	258.000	6277 00 0
GS-S70110CW	Cream	2,000	12	258.000	6277 00 1
GS-S70110LGR	Light grey	2,000	12	258.000	6277 00 2

ST Steel /m

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.




Device installation trunking, trunking depth 90 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-S90110RW	Pure white	2,000	10	290.000	6277 10 0
GS-S90110CW	Cream	2,000	10	290.000	6277 10 1
GS-S90110LGR	Light grey	2,000	10	290.000	6277 10 2

ST Steel /m

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.




Coupling, trunking depth 70 mm

Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-KUP70	120	25	6.400	6277 29 0

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Coupling, trunking depth 90 mm

Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-KUP90	—	25	8.200	6277 29 4

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Single accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide /pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.




Double accessory mounting box


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide /pc.


Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.




Trunking height 110 mm





Strain relief			
Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
7ZE	50	31.500	6288 79 0
PA Polyamide /pc.			
Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... .			
Cable clamping range to 14 mm.			




Trunking cover, sheet steel			
Type	Colour	Length	
		mm	
GS-OTRW	Pure white	2,000	
GS-OTCW	Cream	2,000	
GS-OTLGR	Light grey	2,000	
ST Steel /m			
Cover to close the device installation trunking GEK-S and GEK-A.			




Locking bracket			
Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
RKV3V	20	0.120	6288 70 0
/pc.			
Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases.			




Plastic trunking cover, smooth			
Type	Colour	Length	
		mm	
GK-OTGRW	Pure white	2,000	
GK-OTGCW	Cream	2,000	
GK-OTGLGR	Light grey	2,000	
PVC Polyvinylchloride /m			
Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.			



Plastic trunking cover, fluted			
Type	Colour	Length	
		mm	
GK-OTKRW	Pure white	2,000	
GK-OTKCW	Cream	2,000	
GK-OTKLGR	Light grey	2,000	
PVC Polyvinylchloride /m			
Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.			



Joint cover, trunking depth 70 mm			
Type	Colour	Pack.	Weight
		pcs	kg/100 pcs.
G-SVS70110RW	Pure white	1	4.800
G-SVS70110CW	Cream	1	4.800
G-SVS70110LGR	Light grey	1	4.800
ST Steel /pc.			
Joint cover to hide sawn trunking joint edges.			



Joint cover, trunking depth 90 mm			
Type	Colour	Pack.	Weight
		pcs	kg/100 pcs.
G-SVS90110RW	Pure white	1	5.600
G-SVS90110CW	Cream	1	5.600
G-SVS90110LGR	Light grey	1	5.600
ST Steel /pc.			
Joint cover to hide sawn trunking joint edges.			



Rapid 80 sheet steel device installation trunking systems



Trunking height 110 mm




External corner, trunking depth, 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-SA70110RW	Pure white	1	172.000	6277 01 0
GS-SA70110CW	Cream	1	172.000	6277 01 1
GS-SA70110LGR	Light grey	1	172.000	6277 01 2

ST Steel

/pc.

External corner suitable for direct wall mounting.




External corner, trunking depth, 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-SA90110RW	Pure white	1	199.000	6277 11 0
GS-SA90110CW	Cream	1	199.000	6277 11 1
GS-SA90110LGR	Light grey	1	199.000	6277 11 2

ST Steel

/pc.

External corner suitable for direct wall mounting.




Sheet steel external corner cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-OTARW	Pure white	1	21.400	6279 87 0
GS-OTACW	Cream	1	21.400	6279 87 1
GS-OTALGR	Light grey	1	21.400	6279 87 2

ST Steel

/pc.

External corner suitable for direct wall mounting.




Plastic external corner cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGARW	Pure white	2	14.000	6274 79 0
GK-OTGACW	Cream	2	14.000	6274 79 1
GK-OTGALGR	Light grey	2	14.000	6274 79 2

PVC Polyvinylchloride

/pc.

PVC external corner cover, smooth surface.




Plastic external corner cover, fluted

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTKARW	Pure white	2	16.000	6274 89 0
GK-OTKACW	Cream	2	16.000	6274 89 1
GK-OTKALGR	Light grey	2	16.000	6274 89 2

PVC Polyvinylchloride

/pc.

PVC external corner cover, fluted surface.




Flat angle, trunking depth 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-SFS70110RW	Pure white	1	127.000	6277 02 0
GS-SFS70110CW	Cream	1	127.000	6277 02 1
GS-SFS70110LGR	Light grey	1	127.000	6277 02 2

ST Steel

/pc.

Flat angle, suitable for direct wall mounting.




Flat angle, trunking depth 90 mm


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-SFS90110RW	Pure white	1	143.000	6277 12 0
GS-SFS90110CW	Cream	1	143.000	6277 12 1
GS-SFS90110LGR	Light grey	1	143.000	6277 12 2

ST Steel

/pc.

Flat angle, suitable for direct wall mounting.






Sheet steel flat angle cover

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-OTFRW	Pure white	1	47.600	6279 86 0
GS-OTFCW	Cream	1	47.600	6279 86 1
GS-OTFLGR	Light grey	1	47.600	6279 86 2
ST	Steel			

/pc.




Plastic flat angle cover, smooth

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTGFRW	Pure white	2	17.000	6274 49 0
GK-OTGFCW	Cream	2	17.000	6274 49 1
GK-OTGFLGR	Light grey	2	17.000	6274 49 2
PVC	Polyvinylchloride			

Flat angle cover, smooth surface.

/pc.




Plastic flat angle cover, fluted

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTKFRW	Pure white	2	20.000	6274 59 0
GK-OTKFCW	Cream	2	20.000	6274 59 1
GK-OTKFLGR	Light grey	2	20.000	6274 59 2
PVC	Polyvinylchloride			

Flat angle cover, fluted surface.

/pc.




Internal corner, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-SI70110RW	Pure white	1	55.000	6277 04 0
GS-SI70110CW	Cream	1	55.000	6277 04 1
GS-SI70110LGR	Light grey	1	55.000	6277 04 2
ST	Steel			

Internal corner for direct installation on GS device installation trunking.

/pc.




Internal corner, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-SI90110RW	Pure white	1	72.000	6277 14 0
GS-SI90110CW	Cream	1	72.000	6277 14 1
GS-SI90110LGR	Light grey	1	72.000	6277 14 2
ST	Steel			

Internal corner for direct installation on GS device installation trunking.

/pc.




T piece, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-ST70110RW	Pure white	1	127.000	6277 06 0
GS-ST70110CW	Cream	1	127.000	6277 06 1
GS-ST70110LGR	Light grey	1	127.000	6277 06 2
ST	Steel			

T piece suitable for direct wall mounting.

/pc.



T piece, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-ST90110RW	Pure white	1	142.000	6277 16 0
GS-ST90110CW	Cream	1	142.000	6277 16 1
GS-ST90110LGR	Light grey	1	142.000	6277 16 2
ST	Steel			

T piece suitable for direct wall mounting.

/pc.




Trunking height 110 mm



End piece, trunking depth 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-E70110RW	Pure white	1	6.500	6277 07 0
GS-E70110CW	Cream	1	6.500	6277 07 1
GS-E70110LGR	Light grey	1	6.500	6277 07 2


ST Steel /pc.
End piece for GS device installation trunking.
Two couplings are supplied as standard.



End piece, trunking depth 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-E90110RW	Pure white	1	8.200	6277 17 0
GS-E90110CW	Cream	1	8.200	6277 17 1
GS-E90110LGR	Light grey	1	8.200	6277 17 2


ST Steel /pc.
End piece for GS device installation trunking.
Two couplings are supplied as standard.



Sheet steel partition, trunking depth 70 mm

Type	Length mm	Suitable for trunking depth	Pack. m	Weight kg/100 m	Item No.
GS-TW70	2,000	—	2	58.650	6277 09 0


ST Steel /m
Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.



Sheet steel partition, trunking depth 90 mm

Type	Length mm	Suitable for trunking depth	Pack. m	Weight kg/100 m	Item No.
GS-TW90	2,000	—	2	74.400	6277 09 5


ST Steel /m
Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.



Duct clamp

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
KL80A	20	0.680	6288 64 0


PA Polyamide /pc.
Duct clamp for secure cable holding and fixing the partition in the GK, GS and GEK-A device installation trunking.




Protective conductor connection bracket

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
8AWR	10	0.641	6288 70 4

ST Steel **G** Electrogalvanised /pc.
Earth conductor clamp for insertion in trunking bases and dividers.



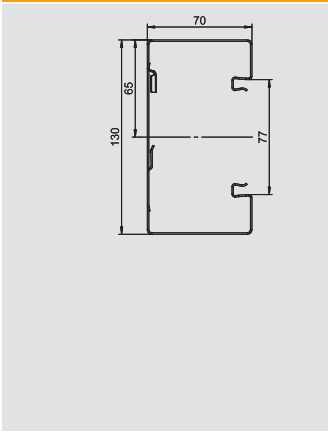


Device installation trunking, trunking depth 70 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-S70130RW	Pure white	2,000	12	289.000	6277 20 0
GS-S70130CW	Cream	2,000	12	289.000	6277 20 1
GS-S70130LGR	Light grey	2,000	12	289.000	6277 20 2

ST Steel /m

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

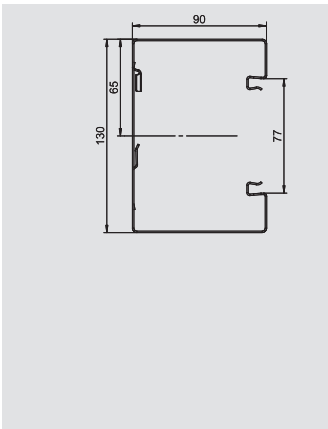


Device installation trunking, trunking depth 90 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-S90130RW	Pure white	2,000	8	321.000	6277 30 0
GS-S90130CW	Cream	2,000	8	321.000	6277 30 1
GS-S90130LGR	Light grey	2,000	8	321.000	6277 30 2

ST Steel /m

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.




Coupling, trunking depth 70 mm

Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-KUP70	120	25	6.400	6277 29 0

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Coupling, trunking depth 90 mm

Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-KUP90	—	25	8.200	6277 29 4

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Single accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide /pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.



Double accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide /pc.

Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.




Trunking height 130 mm



Strain relief

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
7ZE	50	31.500	6288 79 0
PA Polyamide /pc.			
Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... .			
Cable clamping range to 14 mm.			




Trunking cover, sheet steel

Type	Colour	Length	Pack.	Weight	Item No.
		mm	m	kg/100 m	
GS-OTRW	Pure white	2,000	2	65.000	6279 85 0
GS-OTCW	Cream	2,000	2	65.000	6279 85 1
GS-OTLGR	Light grey	2,000	2	65.000	6279 85 2
ST Steel					/m
Cover to close the device installation trunking GEK-S and GEK-A.					




Locking bracket

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
RKV3V	20	0.120	6288 70 0
/pc.			
Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases.			




Plastic trunking cover, smooth

Type	Colour	Length	Pack.	Weight	Item No.
		mm	m	kg/100 m	
GK-OTGRW	Pure white	2,000	16	27.500	6278 68 0
GK-OTGCW	Cream	2,000	16	27.500	6278 68 1
GK-OTGLGR	Light grey	2,000	16	27.500	6278 68 2
PVC Polyvinylchloride					/m
Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.					




Plastic trunking cover, fluted

Type	Colour	Length	Pack.	Weight	Item No.
		mm	m	kg/100 m	
GK-OTKRW	Pure white	2,000	16	27.000	6278 78 0
GK-OTKCW	Cream	2,000	16	27.000	6278 78 1
GK-OTKLGR	Light grey	2,000	16	27.000	6278 78 2
PVC Polyvinylchloride					/m
Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.					




Joint cover, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
G-SVS70130RW	Pure white	1	5.200	6279 76 4
G-SVS70130CW	Cream	1	5.200	6279 76 5
G-SVS70130LGR	Light grey	1	5.200	6279 76 6
ST Steel				/pc.
Joint cover to hide sawn trunking joint edges.				




Joint cover, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
G-SVS90130RW	Pure white	1	6.000	6279 78 0
G-SVS90130CW	Cream	1	6.000	6279 78 1
G-SVS90130LGR	Light grey	1	6.000	6279 78 2
ST Steel				/pc.
Joint cover to hide sawn trunking joint edges.				



Trunking height 130 mm




External corner, trunking depth, 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-SA70130RW	Pure white	1	193.000	6277 21 0
GS-SA70130CW	Cream	1	193.000	6277 21 1
GS-SA70130LGR	Light grey	1	193.000	6277 21 2

ST Steel

/pc.

External corner suitable for direct wall mounting.




External corner, trunking depth, 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-SA90130RW	Pure white	1	221.000	6277 31 0
GS-SA90130CW	Cream	1	221.000	6277 31 1
GS-SA90130LGR	Light grey	1	221.000	6277 31 2

ST Steel

/pc.

External corner suitable for direct wall mounting.




Sheet steel external corner cover

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-OTARW	Pure white	1	21.400	6279 87 0
GS-OTACW	Cream	1	21.400	6279 87 1
GS-OTALGR	Light grey	1	21.400	6279 87 2

ST Steel

/pc.




Plastic external corner cover, smooth

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTGARW	Pure white	2	14.000	6274 79 0
GK-OTGACW	Cream	2	14.000	6274 79 1
GK-OTGALGR	Light grey	2	14.000	6274 79 2

PVC Polyvinylchloride

/pc.

PVC external corner cover, smooth surface.




Plastic external corner cover, fluted

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTKARW	Pure white	2	16.000	6274 89 0
GK-OTKACW	Cream	2	16.000	6274 89 1
GK-OTKALGR	Light grey	2	16.000	6274 89 2

PVC Polyvinylchloride

/pc.

PVC external corner cover, fluted surface.




Flat angle, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-SFS70130RW	Pure white	1	137.000	6277 22 0
GS-SFS70130CW	Cream	1	137.000	6277 22 1
GS-SFS70130LGR	Light grey	1	137.000	6277 22 2

ST Steel

/pc.

Flat angle, suitable for direct wall mounting.



Flat angle, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-SFS90130RW	Pure white	1	152.000	6277 32 0
GS-SFS90130CW	Cream	1	152.000	6277 32 1
GS-SFS90130LGR	Light grey	1	152.000	6277 32 2

ST Steel

/pc.

Flat angle, suitable for direct wall mounting.




Trunking height 130 mm



Sheet steel flat angle cover


Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-OTFRW	Pure white	1	47.600	6279 86 0
GS-OTFCW	Cream	1	47.600	6279 86 1
GS-OTFLGR	Light grey	1	47.600	6279 86 2
ST	Steel			/pc.



Plastic flat angle cover, smooth

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTGFRW	Pure white	2	17.000	6274 49 0
GK-OTGFCW	Cream	2	17.000	6274 49 1
GK-OTGFLGR	Light grey	2	17.000	6274 49 2
PVC	Polyvinylchloride			/pc.


Flat angle cover, smooth surface.



Plastic flat angle cover, fluted

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTKFRW	Pure white	2	20.000	6274 59 0
GK-OTKFCW	Cream	2	20.000	6274 59 1
GK-OTKFLGR	Light grey	2	20.000	6274 59 2
PVC	Polyvinylchloride			/pc.


Flat angle cover, fluted surface.



Internal corner, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-SI70130RW	Pure white	1	57.000	6277 24 0
GS-SI70130CW	Cream	1	57.000	6277 24 1
GS-SI70130LGR	Light grey	1	57.000	6277 24 2
ST	Steel			/pc.


Internal corner for direct installation on GS device installation trunking.



Internal corner, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-SI90130RW	Pure white	1	77.000	6277 34 0
GS-SI90130CW	Cream	1	77.000	6277 34 1
GS-SI90130LGR	Light grey	1	77.000	6277 34 2
ST	Steel			/pc.


Internal corner for direct installation on GS device installation trunking.



T piece, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-ST70130RW	Pure white	1	142.000	6277 26 0
GS-ST70130CW	Cream	1	142.000	6277 26 1
GS-ST70130LGR	Light grey	1	142.000	6277 26 2
ST	Steel			/pc.


T piece suitable for direct wall mounting.




T piece, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-ST90130RW	Pure white	1	157.000	6277 36 0
GS-ST90130CW	Cream	1	157.000	6277 36 1
GS-ST90130LGR	Light grey	1	157.000	6277 36 2
ST	Steel			/pc.

T piece suitable for direct wall mounting.






End piece, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-E70130RW	Pure white	1	7.500	6277 27 0
GS-E70130CW	Cream	1	7.500	6277 27 1
GS-E70130LGR	Light grey	1	7.500	6277 27 2

ST Steel /pc.

End piece for GS device installation trunking.
Two couplings are supplied as standard.




End piece, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-E90130RW	Pure white	1	9.400	6277 37 0
GS-E90130CW	Cream	1	9.400	6277 37 1
GS-E90130LGR	Light grey	1	9.400	6277 37 2

ST Steel /pc.

End piece for GS device installation trunking.
Two couplings are supplied as standard.




Sheet steel partition, trunking depth 70 mm

Type	Length	Suitable for trunking depth	Pack.	Weight	Item No.
	mm		m	kg/100 m	
GS-TW70	2,000	—	2	58.650	6277 09 0

ST Steel /m

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.




Sheet steel partition, trunking depth 90 mm

Type	Length	Suitable for trunking depth	Pack.	Weight	Item No.
	mm		m	kg/100 m	
GS-TW90	2,000	—	2	74.400	6277 09 5

ST Steel /m

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.




Duct clamp

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
KL80A	20	0.680	6288 64 0

PA Polyamide /pc.

Duct clamp for secure cable holding and fixing the partition in the GK, GS and GEK-A device installation trunking.



Protective conductor connection bracket

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
8AWR	10	0.641	6288 70 4

ST Steel G Electrogalvanised /pc.

Earth conductor clamp for insertion in trunking bases and dividers.



Trunking height 130 mm, asymmetrical




Device installation trunking, trunking depth 70 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-A70130RW	Pure white	2,000	12	289.000	6277 40 0
GS-A70130CW	Cream	2,000	12	289.000	6277 40 1
GS-A70130LGR	Light grey	2,000	12	289.000	6277 40 2

ST Steel /m

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

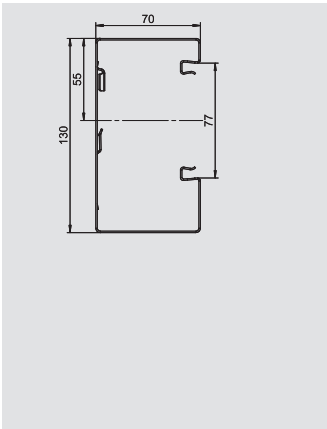


Device installation trunking, trunking depth 90 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-A90130RW	Pure white	2,000	8	321.000	6277 50 0
GS-A90130CW	Cream	2,000	8	321.000	6277 50 1
GS-A90130LGR	Light grey	2,000	8	321.000	6277 50 2

ST Steel /m

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

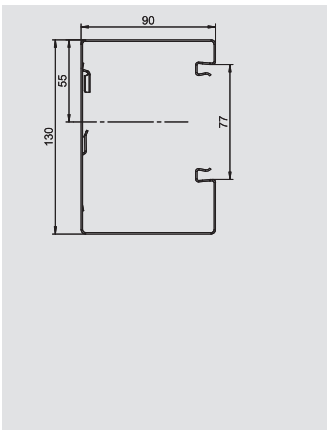


Coupling, trunking depth 70 mm

Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-KUP70	120	25	6.400	6277 29 0

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Coupling, trunking depth 90 mm

Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-KUP90	—	25	8.200	6277 29 4

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Single accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide /pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.




Double accessory mounting box


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide /pc.


Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.




Trunking height 130 mm, asymmetrical




Strain relief			
Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
7ZE	50	31.500	6288 79 0
PA Polyamide /pc.			
Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... .			
Cable clamping range to 14 mm.			




Trunking cover, sheet steel			
Type	Colour	Length	
		mm	
GS-OTRW	Pure white	2,000	
GS-OTCW	Cream	2,000	
GS-OTLGR	Light grey	2,000	
ST Steel /m			
Cover to close the device installation trunking GEK-S and GEK-A.			




Locking bracket			
Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
RKV3V	20	0.120	6288 70 0
/pc.			
Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases.			




Plastic trunking cover, smooth			
Type	Colour	Length	
		mm	
GK-OTGRW	Pure white	2,000	
GK-OTGCW	Cream	2,000	
GK-OTGLGR	Light grey	2,000	
PVC Polyvinylchloride /m			
Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.			



Plastic trunking cover, fluted			
Type	Colour	Length	
		mm	
GK-OTKRW	Pure white	2,000	
GK-OTKCW	Cream	2,000	
GK-OTKLGR	Light grey	2,000	
PVC Polyvinylchloride /m			
Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.			



Joint cover, trunking depth 70 mm			
Type	Colour	Pack.	Weight
		pcs	kg/100 pcs.
G-SVS70130RW	Pure white	1	5.200
G-SVS70130CW	Cream	1	5.200
G-SVS70130LGR	Light grey	1	5.200
ST Steel /pc.			
Joint cover to hide sawn trunking joint edges.			



Joint cover, trunking depth 90 mm			
Type	Colour	Pack.	Weight
		pcs	kg/100 pcs.
G-SVS90130RW	Pure white	1	6.000
G-SVS90130CW	Cream	1	6.000
G-SVS90130LGR	Light grey	1	6.000
ST Steel /pc.			
Joint cover to hide sawn trunking joint edges.			



Trunking height 130 mm, asymmetrical




External corner, trunking depth, 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AA70130RW	Pure white	1	193.000	6277 41 0
GS-AA70130CW	Cream	1	193.000	6277 41 1
GS-AA70130LGR	Light grey	1	193.000	6277 41 2

ST Steel

/pc.

External corner suitable for direct wall mounting.




External corner, trunking depth, 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AA90130RW	Pure white	1	221.000	6277 51 0
GS-AA90130CW	Cream	1	221.000	6277 51 1
GS-AA90130LGR	Light grey	1	221.000	6277 51 2

ST Steel

/pc.

External corner suitable for direct wall mounting.




Sheet steel external corner cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-OTARW	Pure white	1	21.400	6279 87 0
GS-OTACW	Cream	1	21.400	6279 87 1
GS-OTALGR	Light grey	1	21.400	6279 87 2

ST Steel

/pc.



Plastic external corner cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGARW	Pure white	2	14.000	6274 79 0
GK-OTGACW	Cream	2	14.000	6274 79 1
GK-OTGALGR	Light grey	2	14.000	6274 79 2

PVC Polyvinylchloride

/pc.

PVC external corner cover, smooth surface.



Plastic external corner cover, fluted

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTKARW	Pure white	2	16.000	6274 89 0
GK-OTKACW	Cream	2	16.000	6274 89 1
GK-OTKALGR	Light grey	2	16.000	6274 89 2

PVC Polyvinylchloride

/pc.

PVC external corner cover, fluted surface.




Rising flat angle, trunking depth 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AFS70130RW	Pure white	1	137.000	6277 42 0
GS-AFS70130CW	Cream	1	137.000	6277 42 1
GS-AFS70130LGR	Light grey	1	137.000	6277 42 2

ST Steel

/pc.

Flat angle, rising, suitable for direct wall mounting.




Rising flat angle, trunking depth 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AFS90130RW	Pure white	1	152.000	6277 52 0
GS-AFS90130CW	Cream	1	152.000	6277 52 1
GS-AFS90130LGR	Light grey	1	152.000	6277 52 2


ST Steel

/pc.

Flat angle, rising, suitable for direct wall mounting.



Trunking height 130 mm, asymmetrical




Falling flat angle, trunking depth 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AFF70130RW	Pure white	1	137.000	6277 43 0
GS-AFF70130CW	Cream	1	137.000	6277 43 1
GS-AFF70130LGR	Light grey	1	137.000	6277 43 2

ST Steel

/pc.

Flat angle, falling, suitable for direct wall mounting.




Falling flat angle, trunking depth 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AFF90130RW	Pure white	1	152.000	6277 53 0
GS-AFF90130CW	Cream	1	152.000	6277 53 1
GS-AFF90130LGR	Light grey	1	152.000	6277 53 2

ST Steel

/pc.

Flat angle, falling, suitable for direct wall mounting.




Sheet steel flat angle cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-OTFRW	Pure white	1	47.600	6279 86 0
GS-OTFCW	Cream	1	47.600	6279 86 1
GS-OTFLGR	Light grey	1	47.600	6279 86 2

ST Steel

/pc.

Flat angle cover, smooth surface.




Plastic flat angle cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGFRW	Pure white	2	17.000	6274 49 0
GK-OTGFCW	Cream	2	17.000	6274 49 1
GK-OTGFLGR	Light grey	2	17.000	6274 49 2

PVC Polyvinylchloride

/pc.

Flat angle cover, smooth surface.




Plastic flat angle cover, fluted

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTKFRW	Pure white	2	20.000	6274 59 0
GK-OTKFCW	Cream	2	20.000	6274 59 1
GK-OTKFLGR	Light grey	2	20.000	6274 59 2

PVC Polyvinylchloride

/pc.

Flat angle cover, fluted surface.




Internal corner, trunking depth 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AI70130RW	Pure white	1	57.000	6277 44 0
GS-AI70130CW	Cream	1	57.000	6277 44 1
GS-AI70130LGR	Light grey	1	57.000	6277 44 2

ST Steel

/pc.

Internal corner for direct installation on GS device installation trunking.



Internal corner, trunking depth 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AI90130RW	Pure white	1	77.000	6277 54 0
GS-AI90130CW	Cream	1	77.000	6277 54 1
GS-AI90130LGR	Light grey	1	77.000	6277 54 2

ST Steel

/pc.

Internal corner for direct installation on GS device installation trunking.



Trunking height 130 mm, asymmetrical




T piece, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AT70130RW	Pure white	1	142.000	6277 46 0
GS-AT70130CW	Cream	1	142.000	6277 46 1
GS-AT70130LGR	Light grey	1	142.000	6277 46 2

ST Steel

/pc.

T piece suitable for direct wall mounting.




T piece, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AT90130RW	Pure white	1	157.000	6277 56 0
GS-AT90130CW	Cream	1	157.000	6277 56 1
GS-AT90130LGR	Light grey	1	157.000	6277 56 2

ST Steel

/pc.

T piece suitable for direct wall mounting.



End piece, trunking depth 70 mm


Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-E70130RW	Pure white	1	7.500	6277 27 0
GS-E70130CW	Cream	1	7.500	6277 27 1
GS-E70130LGR	Light grey	1	7.500	6277 27 2

ST Steel

/pc.

End piece for GS device installation trunking.

Two couplings are supplied as standard.



End piece, trunking depth 90 mm


Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-E90130RW	Pure white	1	9.400	6277 37 0
GS-E90130CW	Cream	1	9.400	6277 37 1
GS-E90130LGR	Light grey	1	9.400	6277 37 2

ST Steel

/pc.

End piece for GS device installation trunking.

Two couplings are supplied as standard.




Sheet steel partition, trunking depth 70 mm

Type	Length	Suitable for trunking depth	Pack.	Weight	Item No.
	mm		m	kg/100 m	
GS-TW70	2,000	—	2	58.650	6277 09 0

ST Steel

/m

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.




Sheet steel partition, trunking depth 90 mm

Type	Length	Suitable for trunking depth	Pack.	Weight	Item No.
	mm		m	kg/100 m	
GS-TW90	2,000	—	2	74.400	6277 09 5

ST Steel

/m

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.



Duct clamp

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
KL80A	20	0.680	6288 64 0


PA Polyamide

/pc.

Duct clamp for secure cable holding and fixing the partition in the GK, GS and GEK-A device installation trunking.



Trunking height 130 mm, asymmetrical



Protective conductor connection bracket				
Type		Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
8AWR		10	0.641	6288 70 4
ST Steel	G Electrogalvanised	/pc.		
Earth conductor clamp for insertion in trunking bases and dividers.				



Trunking height 170 mm




Device installation trunking, trunking depth 70 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-S70170RW	Pure white	2,000	8	352.000	6277 60 0
GS-S70170CW	Cream	2,000	8	352.000	6277 60 1
GS-S70170LGR	Light grey	2,000	8	352.000	6277 60 2

ST Steel /m

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.




Device installation trunking, trunking depth 90 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-S90170RW	Pure white	2,000	6	384.000	6277 70 0
GS-S90170CW	Cream	2,000	6	384.000	6277 70 1
GS-S90170LGR	Light grey	2,000	6	384.000	6277 70 2

ST Steel /m

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.




Coupling, trunking depth 70 mm

Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-KUP70	120	25	6.400	6277 29 0

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Coupling, trunking depth 90 mm

Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-KUP90	—	25	8.200	6277 29 4

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Single accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide /pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.




Double accessory mounting box


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide /pc.


Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.




Trunking height 170 mm




Strain relief			
Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
7ZE	50	31.500	6288 79 0
PA Polyamide /pc.			
Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... .			
Cable clamping range to 14 mm.			




Trunking cover, sheet steel			
Type	Colour	Length	
		mm	
GS-OTRW	Pure white	2,000	
GS-OTCW	Cream	2,000	
GS-OTLGR	Light grey	2,000	
ST Steel /m			
Cover to close the device installation trunking GEK-S and GEK-A.			




Plastic trunking cover, smooth			
Type	Colour	Length	
		mm	
GK-OTGRW	Pure white	2,000	
GK-OTGCW	Cream	2,000	
GK-OTGLGR	Light grey	2,000	
PVC Polyvinylchloride /m			
Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.			




Plastic trunking cover, fluted			
Type	Colour	Length	
		mm	
GK-OTKRW	Pure white	2,000	
GK-OTKCW	Cream	2,000	
GK-OTKLGR	Light grey	2,000	
PVC Polyvinylchloride /m			
Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.			



Joint cover, trunking depth 70 mm			
Type	Colour		
		Pack.	Weight
		pcs	kg/100 pcs.
			Item No.
G-SVS70170RW	Pure white	1	6.000
G-SVS70170CW	Cream	1	6.000
G-SVS70170LGR	Light grey	1	6.000
ST Steel /pc.			
Joint cover to hide sawn trunking joint edges.			



Joint cover, trunking depth 90 mm			
Type	Colour		
		Pack.	Weight
		pcs	kg/100 pcs.
			Item No.
G-SVS90170RW	Pure white	1	6.700
G-SVS90170CW	Cream	1	6.700
G-SVS90170LGR	Light grey	1	6.700
ST Steel /pc.			
Joint cover to hide sawn trunking joint edges.			



Locking bracket			
Type			
	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
RKV3V	20	0.120	6288 70 0
/pc.			
Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases.			



Rapid 80 sheet steel device installation trunking systems



Trunking height 170 mm




External corner, trunking depth, 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-SA70170RW	Pure white	1	236.000	6277 61 0
GS-SA70170CW	Cream	1	236.000	6277 61 1
GS-SA70170LGR	Light grey	1	236.000	6277 61 2

ST Steel

/pc.

External corner suitable for direct wall mounting.




External corner, trunking depth, 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-SA90170RW	Pure white	1	265.000	6277 71 0
GS-SA90170CW	Cream	1	265.000	6277 71 1
GS-SA90170LGR	Light grey	1	265.000	6277 71 2

ST Steel

/pc.

External corner suitable for direct wall mounting.




Sheet steel external corner cover

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-OTARW	Pure white	1	21.400	6279 87 0
GS-OTACW	Cream	1	21.400	6279 87 1
GS-OTALGR	Light grey	1	21.400	6279 87 2

ST Steel

/pc.

External corner suitable for direct wall mounting.




Plastic external corner cover, smooth

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTGARW	Pure white	2	14.000	6274 79 0
GK-OTGACW	Cream	2	14.000	6274 79 1
GK-OTGALGR	Light grey	2	14.000	6274 79 2

PVC Polyvinylchloride

/pc.

PVC external corner cover, smooth surface.




Plastic external corner cover, fluted

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTKARW	Pure white	2	16.000	6274 89 0
GK-OTKACW	Cream	2	16.000	6274 89 1
GK-OTKALGR	Light grey	2	16.000	6274 89 2

PVC Polyvinylchloride

/pc.

PVC external corner cover, fluted surface.




Flat angle, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-SFS70170RW	Pure white	1	152.000	6277 62 0
GS-SFS70170CW	Cream	1	152.000	6277 62 1
GS-SFS70170LGR	Light grey	1	152.000	6277 62 2

ST Steel

/pc.

Flat angle, suitable for direct wall mounting.




Flat angle, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-SFS90170RW	Pure white	1	167.000	6277 72 0
GS-SFS90170CW	Cream	1	167.000	6277 72 1
GS-SFS90170LGR	Light grey	1	167.000	6277 72 2


ST Steel

/pc.

Flat angle, suitable for direct wall mounting.




Trunking height 170 mm



Sheet steel flat angle cover


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-OTFRW	Pure white	1	47.600	6279 86 0
GS-OTFCW	Cream	1	47.600	6279 86 1
GS-OTFLGR	Light grey	1	47.600	6279 86 2
ST Steel				/pc.



Plastic flat angle cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGFRW	Pure white	2	17.000	6274 49 0
GK-OTGFCW	Cream	2	17.000	6274 49 1
GK-OTGFLGR	Light grey	2	17.000	6274 49 2
PVC Polyvinylchloride				/pc.


Flat angle cover, smooth surface.



Plastic flat angle cover, fluted

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTKFRW	Pure white	2	20.000	6274 59 0
GK-OTKFCW	Cream	2	20.000	6274 59 1
GK-OTKFLGR	Light grey	2	20.000	6274 59 2
PVC Polyvinylchloride				/pc.


Flat angle cover, fluted surface.



Internal corner, trunking depth 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-SI70170RW	Pure white	1	67.000	6277 64 0
GS-SI70170CW	Cream	1	67.000	6277 64 1
GS-SI70170LGR	Light grey	1	67.000	6277 64 2
ST Steel				/pc.


Internal corner for direct installation on GS device installation trunking.



Internal corner, trunking depth 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-SI90170RW	Pure white	1	86.000	6277 74 0
GS-SI90170CW	Cream	1	86.000	6277 74 1
GS-SI90170LGR	Light grey	1	86.000	6277 74 2
ST Steel				/pc.


Internal corner for direct installation on GS device installation trunking.



T piece, trunking depth 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-ST70170RW	Pure white	1	172.000	6277 66 0
GS-ST70170CW	Cream	1	172.000	6277 66 1
GS-ST70170LGR	Light grey	1	172.000	6277 66 2
ST Steel				/pc.

T piece suitable for direct wall mounting.



T piece, trunking depth 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-ST90170RW	Pure white	1	186.000	6277 76 0
GS-ST90170CW	Cream	1	186.000	6277 76 1
GS-ST90170LGR	Light grey	1	186.000	6277 76 2
ST Steel				/pc.

T piece suitable for direct wall mounting.




Trunking height 170 mm



End piece, trunking depth 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-E70170RW	Pure white	1	9.500	6277 67 0
GS-E70170CW	Cream	1	9.500	6277 67 1
GS-E70170LGR	Light grey	1	9.500	6277 67 2


ST Steel /pc.
End piece for GS device installation trunking.
Two couplings are supplied as standard.



End piece, trunking depth 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-E90170RW	Pure white	1	12.000	6277 77 0
GS-E90170CW	Cream	1	12.000	6277 77 1
GS-E90170LGR	Light grey	1	12.000	6277 77 2


ST Steel /pc.
End piece for GS device installation trunking.
Two couplings are supplied as standard.



Sheet steel partition, trunking depth 70 mm

Type	Length mm	Suitable for trunking depth	Pack. m	Weight kg/100 m	Item No.
GS-TW70	2,000	—	2	58.650	6277 09 0


ST Steel /m
Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.



Sheet steel partition, trunking depth 90 mm

Type	Length mm	Suitable for trunking depth	Pack. m	Weight kg/100 m	Item No.
GS-TW90	2,000	—	2	74.400	6277 09 5


ST Steel /m
Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.



Duct clamp

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
KL80A	20	0.680	6288 64 0


PA Polyamide /pc.
Duct clamp for secure cable holding and fixing the partition in the GK, GS and GEK-A device installation trunking.




Protective conductor connection bracket

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
8AWR	10	0.641	6288 70 4

ST Steel **G** Electrogalvanised /pc.
Earth conductor clamp for insertion in trunking bases and dividers.



Trunking height 170 mm, asymmetrical




Device installation trunking, trunking depth 70 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-A70170RW	Pure white	2,000	8	352.000	6277 80 0
GS-A70170CW	Cream	2,000	8	352.000	6277 80 1
GS-A70170LGR	Light grey	2,000	8	352.000	6277 80 2

ST Steel /m

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.




Device installation trunking, trunking depth 90 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-A90170RW	Pure white	2,000	6	384.000	6277 90 0
GS-A90170CW	Cream	2,000	6	384.000	6277 90 1
GS-A90170LGR	Light grey	2,000	6	384.000	6277 90 2

ST Steel /m

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.




Coupling, trunking depth 70 mm

Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-KUP70	120	25	6.400	6277 29 0

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Coupling, trunking depth 90 mm

Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-KUP90	—	25	8.200	6277 29 4

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Single accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide /pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.



Double accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide /pc.

Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.




Trunking height 170 mm, asymmetrical



Strain relief

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
7ZE	50	31.500	6288 79 0
PA Polyamide /pc. Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... Cable clamping range to 14 mm.			




Trunking cover, sheet steel

Type	Colour	Length	Pack.	Weight	Item No.
		mm	m	kg/100 m	
GS-OTRW	Pure white	2,000	2	65.000	6279 85 0
GS-OTCW	Cream	2,000	2	65.000	6279 85 1
GS-OTLGR	Light grey	2,000	2	65.000	6279 85 2
ST Steel /m Cover to close the device installation trunking GEK-S and GEK-A.					




Plastic trunking cover, smooth

Type	Colour	Length	Pack.	Weight	Item No.
		mm	m	kg/100 m	
GK-OTGRW	Pure white	2,000	16	27.500	6278 68 0
GK-OTGCW	Cream	2,000	16	27.500	6278 68 1
GK-OTGLGR	Light grey	2,000	16	27.500	6278 68 2
PVC Polyvinylchloride /m Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.					




Plastic trunking cover, fluted

Type	Colour	Length	Pack.	Weight	Item No.
		mm	m	kg/100 m	
GK-OTKRW	Pure white	2,000	16	27.000	6278 78 0
GK-OTKCW	Cream	2,000	16	27.000	6278 78 1
GK-OTKLGR	Light grey	2,000	16	27.000	6278 78 2
PVC Polyvinylchloride /m Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.					




Locking bracket

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
RKV3V	20	0.120	6288 70 0
/pc. Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases.			




Joint cover, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
G-SVS70170RW	Pure white	1	6.000	6279 76 8
G-SVS70170CW	Cream	1	6.000	6279 76 9
G-SVS70170LGR	Light grey	1	6.000	6279 77 0
ST Steel /pc. Joint cover to hide sawn trunking joint edges.				




Joint cover, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
G-SVS90170RW	Pure white	1	6.700	6279 78 4
G-SVS90170LGR	Light grey	1	6.700	6279 78 6
G-SVS90170CW	Cream	1	6.700	6279 78 5
ST Steel /pc. Joint cover to hide sawn trunking joint edges.				



Trunking height 170 mm, asymmetrical




External corner, trunking depth, 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AA70170RW	Pure white	1	237.000	6277 81 0
GS-AA70170CW	Cream	1	237.000	6277 81 1
GS-AA70170LGR	Light grey	1	237.000	6277 81 2

ST Steel

/pc.

External corner suitable for direct wall mounting.




External corner, trunking depth, 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AA90170RW	Pure white	1	265.000	6277 91 0
GS-AA90170CW	Cream	1	265.000	6277 91 1
GS-AA90170LGR	Light grey	1	265.000	6277 91 2

ST Steel

/pc.

External corner suitable for direct wall mounting.




Sheet steel external corner cover

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-OTARW	Pure white	1	21.400	6279 87 0
GS-OTACW	Cream	1	21.400	6279 87 1
GS-OTALGR	Light grey	1	21.400	6279 87 2

ST Steel

/pc.

External corner suitable for direct wall mounting.




Plastic external corner cover, smooth

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTGARW	Pure white	2	14.000	6274 79 0
GK-OTGACW	Cream	2	14.000	6274 79 1
GK-OTGALGR	Light grey	2	14.000	6274 79 2

PVC Polyvinylchloride

/pc.

PVC external corner cover, smooth surface.




Plastic external corner cover, fluted

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTKARW	Pure white	2	16.000	6274 89 0
GK-OTKACW	Cream	2	16.000	6274 89 1
GK-OTKALGR	Light grey	2	16.000	6274 89 2

PVC Polyvinylchloride

/pc.

PVC external corner cover, fluted surface.




Rising flat angle, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AFS70170RW	Pure white	1	152.000	6277 82 0
GS-AFS70170CW	Cream	1	152.000	6277 82 1
GS-AFS70170LGR	Light grey	1	152.000	6277 82 2

ST Steel

/pc.

Flat angle, rising, suitable for direct wall mounting.



Rising flat angle, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AFS90170RW	Pure white	1	167.000	6277 92 0
GS-AFS90170CW	Cream	1	167.000	6277 92 1
GS-AFS90170LGR	Light grey	1	167.000	6277 92 2

ST Steel

/pc.

Flat angle, rising, suitable for direct wall mounting.



Trunking height 170 mm, asymmetrical




Falling flat angle, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AFF70170RW	Pure white	1	152.000	6277 83 0
GS-AFF70170CW	Cream	1	152.000	6277 83 1
GS-AFF70170LGR	Light grey	1	152.000	6277 83 2

ST Steel

/pc.

Flat angle, falling, suitable for direct wall mounting.




Falling flat angle, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AFF90170RW	Pure white	1	167.000	6277 93 0
GS-AFF90170CW	Cream	1	167.000	6277 93 1
GS-AFF90170LGR	Light grey	1	167.000	6277 93 2

ST Steel

/pc.

Flat angle, falling, suitable for direct wall mounting.




Sheet steel flat angle cover

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-OTFRW	Pure white	1	47.600	6279 86 0
GS-OTFCW	Cream	1	47.600	6279 86 1
GS-OTFLGR	Light grey	1	47.600	6279 86 2

ST Steel

/pc.

Flat angle cover, smooth surface.




Plastic flat angle cover, smooth

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTGFRW	Pure white	2	17.000	6274 49 0
GK-OTGFCW	Cream	2	17.000	6274 49 1
GK-OTGFLGR	Light grey	2	17.000	6274 49 2

PVC Polyvinylchloride

/pc.

Flat angle cover, smooth surface.




Plastic flat angle cover, fluted

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTKFRW	Pure white	2	20.000	6274 59 0
GK-OTKFCW	Cream	2	20.000	6274 59 1
GK-OTKFLGR	Light grey	2	20.000	6274 59 2

PVC Polyvinylchloride

/pc.

Flat angle cover, fluted surface.




Internal corner, simplified, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AI70170RW	Pure white	1	67.000	6277 84 0
GS-AI70170CW	Cream	1	67.000	6277 84 1
GS-AI70170LGR	Light grey	1	67.000	6277 84 2

ST Steel

/pc.

Internal corner for direct installation on GS device installation trunking.




Internal corner, simplified, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AI90170RW	Pure white	1	86.000	6277 94 0
GS-AI90170CW	Cream	1	86.000	6277 94 1
GS-AI90170LGR	Light grey	1	86.000	6277 94 2


ST Steel

/pc.

Internal corner for direct installation on GS device installation trunking.



Trunking height 170 mm, asymmetrical




T piece, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AT70170RW	Pure white	1	172.000	6277 86 0
GS-AT70170CW	Cream	1	172.000	6277 86 1
GS-AT70170LGR	Light grey	1	172.000	6277 86 2

ST Steel

/pc.

T piece suitable for direct wall mounting.




T piece, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AT90170RW	Pure white	1	186.000	6277 96 0
GS-AT90170CW	Cream	1	186.000	6277 96 1
GS-AT90170LGR	Light grey	1	186.000	6277 96 2

ST Steel

/pc.

T piece suitable for direct wall mounting.




End piece, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-E70170RW	Pure white	1	9.500	6277 67 0
GS-E70170CW	Cream	1	9.500	6277 67 1
GS-E70170LGR	Light grey	1	9.500	6277 67 2

ST Steel

/pc.

End piece for GS device installation trunking.
Two couplings are supplied as standard.




End piece, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-E90170RW	Pure white	1	12.000	6277 77 0
GS-E90170CW	Cream	1	12.000	6277 77 1
GS-E90170LGR	Light grey	1	12.000	6277 77 2

ST Steel

/pc.

End piece for GS device installation trunking.
Two couplings are supplied as standard.




Sheet steel partition, trunking depth 70 mm

Type	Length	Suitable for trunking depth	Pack.	Weight	Item No.
	mm		m	kg/100 m	
GS-TW70	2,000	—	2	58.650	6277 09 0

ST Steel

/m

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.




Sheet steel partition, trunking depth 90 mm

Type	Length	Suitable for trunking depth	Pack.	Weight	Item No.
	mm		m	kg/100 m	
GS-TW90	2,000	—	2	74.400	6277 09 5

ST Steel

/m

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.



Duct clamp

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
KL80A	20	0.680	6288 64 0

PA Polyamide

/pc.

Duct clamp for secure cable holding and fixing the partition in the GK, GS and GEK-A device installation trunking.






Trunking height 170 mm, asymmetrical




Protective conductor connection bracket

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
8AWR	10	0.641	6288 70 4
ST Steel	G	Electrogalvanised	/pc.
Earth conductor clamp for insertion in trunking bases and dividers.			



Trunking height 170 mm, duoduct

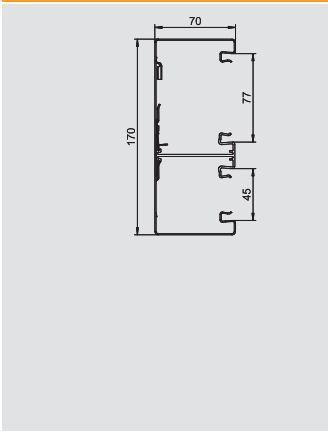


Device installation trunking, trunking depth 70 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-D70170RW	Pure white	2,000	8	382.000	6278 20 0
GS-D70170CW	Cream	2,000	8	382.000	6278 20 1
GS-D70170LGR	Light grey	2,000	8	382.000	6278 20 2

ST Steel /m

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

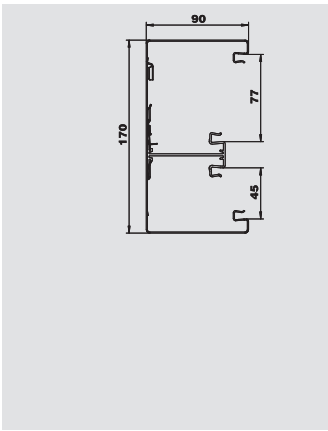


Device installation trunking, trunking depth 90 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-D90170RW	Pure white	2,000	6	423.300	6278 30 0
GS-D90170CW	Cream	2,000	6	423.300	6278 30 1
GS-D90170LGR	Light grey	2,000	6	423.300	6278 30 2

ST Steel /m

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.




Coupling, trunking depth 70 mm

Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-KUP70	120	25	6.400	6277 29 0

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Coupling, trunking depth 90 mm

Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-KUP90	—	25	8.200	6277 29 4

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Single accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide /pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.



Double accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide /pc.

Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.




Trunking height 170 mm, duoduct



Strain relief

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
7ZE	50	31.500	6288 79 0
PA Polyamide			
Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... .			
Cable clamping range to 14 mm.			



Sheet steel trunking cover, size 80 track

Type	Colour	Length	Pack.	Weight	Item No.
		mm	m	kg/100 m	
GS-OTRW	Pure white	2,000	2	65.000	6279 85 0
GS-OTCW	Cream	2,000	2	65.000	6279 85 1
GS-OTLGR	Light grey	2,000	2	65.000	6279 85 2
ST Steel					


Cover to close the device installation trunking GEK-S and GEK-A.



Sheet steel trunking cover, size 50 track

Type	Colour	Length	Pack.	Weight	Item No.
		mm	m	kg/100 m	
GS-OT50RW	Pure white	2,000	2	45.550	6279 88 0
GS-OT50CW	Cream	2,000	2	45.550	6279 88 1
GS-OT50LGR	Light grey	2,000	2	45.550	6279 88 2
ST Steel					

Cover for closing the GEK-S device installation trunking.
Sheet steel version.



Locking bracket

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
RKV3V	20	0.120	6288 70 0


Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases.



Joint cover, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
G-SVS70170RW	Pure white	1	6.000	6279 76 8
G-SVS70170CW	Cream	1	6.000	6279 76 9
G-SVS70170LGR	Light grey	1	6.000	6279 77 0
ST Steel				


Joint cover to hide sawn trunking joint edges.



Joint cover, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
G-SVS90170RW	Pure white	1	6.700	6279 78 4
G-SVS90170CW	Cream	1	6.700	6279 78 5
G-SVS90170LGR	Light grey	1	6.700	6279 78 6
ST Steel				


Joint cover to hide sawn trunking joint edges.




External corner, trunking depth, 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-DA70170RW	Pure white	1	0.000	6278 21 0
GS-DA70170CW	Cream	1	0.000	6278 21 1
GS-DA70170LGR	Light grey	1	0.000	6278 21 2
ST Steel				

External corner suitable for direct wall mounting.



Trunking height 170 mm, duoduct




External corner, trunking depth, 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-DA90170RW	Pure white	1	0.000	6278 31 0
GS-DA90170CW	Cream	1	0.000	6278 31 1
GS-DA90170LGR	Light grey	1	0.000	6278 31 2

ST Steel

/pc.

External corner suitable for direct wall mounting.




Sheet steel external corner cover, size 80 track

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-OTARW	Pure white	1	21.400	6279 87 0
GS-OTACW	Cream	1	21.400	6279 87 1
GS-OTALGR	Light grey	1	21.400	6279 87 2

ST Steel

/pc.



Sheet steel external corner cover, size 50 track


Type	Colour	Length	Pack.	Weight	Item No.
		mm	m	kg/100 m	
GS-OT50RW	Pure white	2,000	2	45.550	6279 88 0
GS-OT50CW	Cream	2,000	2	45.550	6279 88 1
GS-OT50LGR	Light grey	2,000	2	45.550	6279 88 2

ST Steel

/m

Cover for closing the GEK-S device installation trunking.

Sheet steel version.




Rising flat angle, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-DFS70170RW	Pure white	1	0.000	6278 22 0
GS-DFS70170CW	Cream	1	0.000	6278 22 1
GS-DFS70170LGR	Light grey	1	0.000	6278 22 2

ST Steel

/pc.

Flat angle, rising, suitable for direct wall mounting.




Rising flat angle, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-DFS90170RW	Pure white	1	0.000	6278 32 0
GS-DFS90170CW	Cream	1	0.000	6278 32 1
GS-DFS90170LGR	Light grey	1	0.000	6278 32 2

ST Steel

/pc.

Flat angle, rising, suitable for direct wall mounting.




Falling flat angle, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-DFF70170RW	Pure white	1	0.000	6278 23 0
GS-DFF70170CW	Cream	1	0.000	6278 23 1
GS-DFF70170LGR	Light grey	1	0.000	6278 23 2

ST Steel

/pc.

Flat angle, falling, suitable for direct wall mounting.



Falling flat angle, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-DFF90170RW	Pure white	1	0.000	6278 33 0
GS-DFF90170CW	Cream	1	0.000	6278 33 1
GS-DFF90170LGR	Light grey	1	0.000	6278 33 2

ST Steel

/pc.

Flat angle, falling, suitable for direct wall mounting.



Trunking height 170 mm, duoduct




Sheet steel flat angle cover, size 80 track

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-OTFRW	Pure white	1	47.600	6279 86 0
GS-OTFCW	Cream	1	47.600	6279 86 1
GS-OTFLGR	Light grey	1	47.600	6279 86 2

ST Steel

/pc.




Sheet steel flat angle cover, size 50 track

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-OT50FRW	Pure white	1	0.000	6279 99 0
GS-OT50FCW	Cream	1	0.000	6279 99 1
GS-OT50FLGR	Light grey	1	0.000	6279 99 2

ST Steel

/pc.




Internal corner, simplified, trunking depth 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-DI70170RW	Pure white	1	0.000	6278 24 0
GS-DI70170CW	Cream	1	0.000	6278 24 1
GS-DI70170LGR	Light grey	1	0.000	6278 24 2

ST Steel

/pc.

Internal corner for direct installation on GS device installation trunking.




Internal corner, simplified, trunking depth 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-DI90170RW	Pure white	1	0.000	6278 34 0
GS-DI90170CW	Cream	1	0.000	6278 34 1
GS-DI90170LGR	Light grey	1	0.000	6278 34 2

ST Steel

/pc.

Internal corner for direct installation on GS device installation trunking.




T piece, trunking depth 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-DT70170RW	Pure white	1	188.100	6278 26 0
GS-DT70170CW	Cream	1	188.100	6278 26 1
GS-DT70170LGR	Light grey	1	188.100	6278 26 2

ST Steel

/pc.

T piece suitable for direct wall mounting.




T piece, trunking depth 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-DT90170RW	Pure white	1	207.000	6278 36 0
GS-DT90170CW	Cream	1	207.000	6278 36 1
GS-DT90170LGR	Light grey	1	207.000	6278 36 2

ST Steel

/pc.

T piece suitable for direct wall mounting.



End piece, trunking depth 70 mm


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-E70170RW	Pure white	1	9.500	6277 67 0
GS-E70170CW	Cream	1	9.500	6277 67 1
GS-E70170LGR	Light grey	1	9.500	6277 67 2

ST Steel


/pc.

End piece for GS device installation trunking.

Two couplings are supplied as standard.



Trunking height 170 mm, duoduct




End piece, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-E90170RW	Pure white	1	12.000	6277 77 0
GS-E90170CW	Cream	1	12.000	6277 77 1
GS-E90170LGR	Light grey	1	12.000	6277 77 2

ST Steel /pc.

End piece for GS device installation trunking.
Two couplings are supplied as standard.




Sheet steel partition, trunking depth 70 mm

Type	Length	Suitable for trunking depth	Pack.	Weight	Item No.
	mm		m	kg/100 m	
GS-TW70	2,000	—	2	58.650	6277 09 0

ST Steel /m

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.




Sheet steel partition, trunking depth 90 mm

Type	Length	Suitable for trunking depth	Pack.	Weight	Item No.
	mm		m	kg/100 m	
GS-TW90	2,000	—	2	74.400	6277 09 5

ST Steel /m

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.




Duct clamp

Type	Pack.	Weight	Item No.
		pcs kg/100 pcs.	
KL80A	20	0.680	6288 64 0

PA Polyamide /pc.

Duct clamp for secure cable holding and fixing the partition in the GK, GS and GEK-A device installation trunking.



Protective conductor connection bracket

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
8AWR	10	0.641	6288 70 4

ST Steel G Electrogalvanised /pc.

Earth conductor clamp for insertion in trunking bases and dividers.



Trunking height 210 mm, asymmetrical




Device installation trunking, trunking depth 70 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-A70210RW	Pure white	2,000	8	415.000	6278 00 0
GS-A70210CW	Cream	2,000	8	415.000	6278 00 1
GS-A70210LGR	Light grey	2,000	8	415.000	6278 00 2

ST Steel /m

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.




Device installation trunking, trunking depth 90 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-A90210RW	Pure white	2,000	6	447.000	6278 10 0
GS-A90210CW	Cream	2,000	6	447.000	6278 10 1
GS-A90210LGR	Light grey	2,000	6	447.000	6278 10 2

ST Steel /m

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.




Coupling, trunking depth 70 mm

Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-KUP70	120	25	6.400	6277 29 0

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Coupling, trunking depth 90 mm

Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-KUP90	—	25	8.200	6277 29 4

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Single accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide /pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.




Double accessory mounting box


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide /pc.


Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.




Trunking height 210 mm, asymmetrical




Strain relief			
Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
7ZE	50	31.500	6288 79 0
PA Polyamide /pc.			
Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... .			
Cable clamping range to 14 mm.			




Trunking cover, sheet steel			
Type	Colour	Length	
		mm	
GS-OTRW	Pure white	2,000	
GS-OTCW	Cream	2,000	
GS-OTLGR	Light grey	2,000	
ST Steel			/m
Cover to close the device installation trunking GEK-S and GEK-A.			





Plastic trunking cover, smooth			
Type	Colour	Length	
		mm	
GK-OTGRW	Pure white	2,000	
GK-OTGCW	Cream	2,000	
GK-OTGLGR	Light grey	2,000	
PVC Polyvinylchloride			/m
Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.			




Plastic trunking cover, fluted			
Type	Colour	Length	
		mm	
GK-OTKRW	Pure white	2,000	
GK-OTKCW	Cream	2,000	
GK-OTKLGR	Light grey	2,000	
PVC Polyvinylchloride			/m
Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.			



Locking bracket			
Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
RKV3V	20	0.120	6288 70 0
/pc.			
Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases.			



Joint cover, trunking depth 70 mm			
Type	Colour	Pack.	Weight
		pcs	kg/100 pcs.
G-SVS70210RW	Pure white	1	6.700
G-SVS70210CW	Cream	1	6.700
G-SVS70210LGR	Light grey	1	6.700
ST Steel			/pc.
Joint cover to hide sawn trunking joint edges.			



Joint cover, trunking depth 90 mm			
Type	Colour	Pack.	Weight
		pcs	kg/100 pcs.
G-SVS90210RW	Pure white	1	7.500
G-SVS90210CW	Cream	1	7.500
G-SVS90210LGR	Light grey	1	7.500
ST Steel			/pc.
Joint cover to hide sawn trunking joint edges.			



Trunking height 210 mm, asymmetrical




External corner, trunking depth, 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AA70210RW	Pure white	1	279.000	6278 01 0
GS-AA70210CW	Cream	1	279.000	6278 01 1
GS-AA70210LGR	Light grey	1	279.000	6278 01 2

ST Steel

/pc.

External corner suitable for direct wall mounting.




External corner, trunking depth, 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AA90210RW	Pure white	1	309.000	6278 11 0
GS-AA90210CW	Cream	1	309.000	6278 11 1
GS-AA90210LGR	Light grey	1	309.000	6278 11 2

ST Steel

/pc.

External corner suitable for direct wall mounting.




Sheet steel external corner cover

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-OTARW	Pure white	1	21.400	6279 87 0
GS-OTACW	Cream	1	21.400	6279 87 1
GS-OTALGR	Light grey	1	21.400	6279 87 2

ST Steel

/pc.

PVC external corner cover, smooth surface.




Plastic external corner cover, smooth

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTGARW	Pure white	2	14.000	6274 79 0
GK-OTGACW	Cream	2	14.000	6274 79 1
GK-OTGALGR	Light grey	2	14.000	6274 79 2

PVC Polyvinylchloride

/pc.

PVC external corner cover, smooth surface.




Plastic external corner cover, fluted

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTKARW	Pure white	2	16.000	6274 89 0
GK-OTKACW	Cream	2	16.000	6274 89 1
GK-OTKALGR	Light grey	2	16.000	6274 89 2

PVC Polyvinylchloride

/pc.

PVC external corner cover, fluted surface.




Rising flat angle, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AFS70210RW	Pure white	1	162.000	6278 02 0
GS-AFS70210CW	Cream	1	162.000	6278 02 1
GS-AFS70210LGR	Light grey	1	162.000	6278 02 2

ST Steel

/pc.

Flat angle, rising, suitable for direct wall mounting.




Rising flat angle, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AFS90210RW	Pure white	1	175.000	6278 12 0
GS-AFS90210CW	Cream	1	175.000	6278 12 1
GS-AFS90210LGR	Light grey	1	175.000	6278 12 2


ST Steel

/pc.

Flat angle, rising, suitable for direct wall mounting.



Trunking height 210 mm, asymmetrical




Falling flat angle, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AFF70210RW	Pure white	1	162.000	6278 03 0
GS-AFF70210CW	Cream	1	162.000	6278 03 1
GS-AFF70210LGR	Light grey	1	162.000	6278 03 2

ST Steel

/pc.

Flat angle, falling, suitable for direct wall mounting.




Falling flat angle, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AFF90210RW	Pure white	1	175.000	6278 13 0
GS-AFF90210CW	Cream	1	175.000	6278 13 1
GS-AFF90210LGR	Light grey	1	175.000	6278 13 2

ST Steel

/pc.

Flat angle, falling, suitable for direct wall mounting.




Sheet steel flat angle cover

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-OTFRW	Pure white	1	47.600	6279 86 0
GS-OTFCW	Cream	1	47.600	6279 86 1
GS-OTFLGR	Light grey	1	47.600	6279 86 2

ST Steel

/pc.

Flat angle cover, smooth surface.




Plastic flat angle cover, smooth

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTGFRW	Pure white	2	17.000	6274 49 0
GK-OTGFCW	Cream	2	17.000	6274 49 1
GK-OTGFLGR	Light grey	2	17.000	6274 49 2

PVC Polyvinylchloride

/pc.

Flat angle cover, smooth surface.




Plastic flat angle cover, fluted

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTKFRW	Pure white	2	20.000	6274 59 0
GK-OTKFCW	Cream	2	20.000	6274 59 1
GK-OTKFLGR	Light grey	2	20.000	6274 59 2

PVC Polyvinylchloride

/pc.

Flat angle cover, fluted surface.




Internal corner, simplified, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AI70210RW	Pure white	1	75.000	6278 05 0
GS-AI70210CW	Cream	1	75.000	6278 05 1
GS-AI70210LGR	Light grey	1	75.000	6278 05 2

ST Steel

/pc.

Internal corner for direct installation on GS device installation trunking.



Internal corner, simplified, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AI90210RW	Pure white	1	95.000	6278 14 0
GS-AI90210CW	Cream	1	95.000	6278 14 1
GS-AI90210LGR	Light grey	1	95.000	6278 14 2

ST Steel

/pc.

Internal corner for direct installation on GS device installation trunking.



Trunking height 210 mm, asymmetrical




T piece, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AT70210RW	Pure white	1	202.000	6278 06 0
GS-AT70210CW	Cream	1	202.000	6278 06 1
GS-AT70210LGR	Light grey	1	202.000	6278 06 2

ST Steel

/pc.

T piece suitable for direct wall mounting.




T piece, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-AT90210RW	Pure white	1	216.000	6278 16 0
GS-AT90210CW	Cream	1	216.000	6278 16 1
GS-AT90210LGR	Light grey	1	216.000	6278 16 2

ST Steel

/pc.

T piece suitable for direct wall mounting.



End piece, trunking depth 70 mm


Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-E70210RW	Pure white	1	12.000	6278 07 0
GS-E70210CW	Cream	1	12.000	6278 07 1
GS-E70210LGR	Light grey	1	12.000	6278 07 2

ST Steel

/pc.

End piece for GS device installation trunking.

Two couplings are supplied as standard.



End piece, trunking depth 90 mm


Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-E90210RW	Pure white	1	14.000	6278 17 0
GS-E90210CW	Cream	1	14.000	6278 17 1
GS-E90210LGR	Light grey	1	14.000	6278 17 2

ST Steel

/pc.

End piece for GS device installation trunking.

Two couplings are supplied as standard.




Sheet steel partition, trunking depth 70 mm

Type	Length	Suitable for trunking depth	Pack.	Weight	Item No.
	mm		m	kg/100 m	
GS-TW70	2,000	—	2	58.650	6277 09 0

ST Steel

/m

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.




Sheet steel partition, trunking depth 90 mm

Type	Length	Suitable for trunking depth	Pack.	Weight	Item No.
	mm		m	kg/100 m	
GS-TW90	2,000	—	2	74.400	6277 09 5

ST Steel

/m

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.




Duct clamp

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
KL80A	20	0.680	6288 64 0


PA Polyamide

/pc.

Duct clamp for secure cable holding and fixing the partition in the GK, GS and GEK-A device installation trunking.



Trunking height 210 mm, asymmetrical



Protective conductor connection bracket				
Type		Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
8AWR		10	0.641	6288 70 4
ST Steel	G Electrogalvanised	/pc.		
Earth conductor clamp for insertion in trunking bases and dividers.				



Trunking height 210 mm, duoduct



Device installation trunking, trunking depth 70 mm


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-D70210RW	Cream	2,000	8	420.000	6278 40 1
GS-D70210CW	Pure white	2,000	8	420.000	6278 40 0
GS-D70210LGR	Light grey	2,000	8	420.000	6278 40 2

ST Steel

/m

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.



Device installation trunking, trunking depth 90 mm


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-D90210RW	Pure white	2,000	6	0.000	6278 50 0
GS-D90210CW	Cream	2,000	6	0.000	6278 50 1
GS-D90210LGR	Light grey	2,000	6	0.000	6278 50 2

ST Steel

/m

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.




Coupling, trunking depth 70 mm

Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-KUP70	120	25	6.400	6277 29 0

V2A Stainless steel, 1.4301

/pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Coupling, trunking depth 90 mm

Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-KUP90	—	25	8.200	6277 29 4

V2A Stainless steel, 1.4301

/pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Single accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide

/pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.




Double accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1


PA Polyamide

/pc.


Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.




Trunking height 210 mm, duoduct




Strain relief			
Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
7ZE	50	31.500	6288 79 0
/pc.			
PA Polyamide			
Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... .			
Cable clamping range to 14 mm.			




Trunking cover, sheet steel			
Type	Colour	Length	
		mm	
GS-OTRW	Pure white	2,000	
GS-OTCW	Cream	2,000	
GS-OTLGR	Light grey	2,000	
/m			
ST Steel			
Cover to close the device installation trunking GEK-S and GEK-A.			




Plastic trunking cover, smooth			
Type	Colour	Length	
		mm	
GK-OTGRW	Pure white	2,000	
GK-OTGCW	Cream	2,000	
GK-OTGLGR	Light grey	2,000	
/m			
PVC Polyvinylchloride			
Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.			




Plastic trunking cover, fluted			
Type	Colour	Length	
		mm	
GK-OTKRW	Pure white	2,000	
GK-OTKCW	Cream	2,000	
GK-OTKLGR	Light grey	2,000	
/m			
PVC Polyvinylchloride			
Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.			



Locking bracket			
Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
RKV3V	20	0.120	6288 70 0
/pc.			
Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases.			



Joint cover, trunking depth 70 mm			
Type	Colour	Pack.	Weight
		pcs	kg/100 pcs.
G-SVS70210RW	Pure white	1	6.700
G-SVS70210CW	Cream	1	6.700
G-SVS70210LGR	Light grey	1	6.700
/pc.			
ST Steel			
Joint cover to hide sawn trunking joint edges.			



Joint cover, trunking depth 90 mm			
Type	Colour	Pack.	Weight
		pcs	kg/100 pcs.
G-SVS90210RW	Pure white	1	7.500
G-SVS90210CW	Cream	1	7.500
G-SVS90210LGR	Light grey	1	7.500
/pc.			
ST Steel			
Joint cover to hide sawn trunking joint edges.			



Rapid 80 sheet steel device installation trunking systems

Trunking height 210 mm, duoduct




External corner, trunking depth, 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-DA70210RW	Pure white	1	0.000	6278 41 0
GS-DA70210CW	Cream	1	0.000	6278 41 1
GS-DA70210LGR	Light grey	1	0.000	6278 41 2

ST Steel

/pc.

External corner suitable for direct wall mounting.




External corner, trunking depth, 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-DA90210RW	Pure white	1	0.000	6278 51 0
GS-DA90210CW	Cream	1	0.000	6278 51 1
GS-DA90210LGR	Light grey	1	0.000	6278 51 2

ST Steel

/pc.

External corner suitable for direct wall mounting.




Sheet steel external corner cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-OTARW	Pure white	1	21.400	6279 87 0
GS-OTACW	Cream	1	21.400	6279 87 1
GS-OTALGR	Light grey	1	21.400	6279 87 2

ST Steel

/pc.

PVC external corner cover, smooth surface.




Plastic external corner cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGARW	Pure white	2	14.000	6274 79 0
GK-OTGACW	Cream	2	14.000	6274 79 1
GK-OTGALGR	Light grey	2	14.000	6274 79 2

PVC Polyvinylchloride

/pc.

PVC external corner cover, smooth surface.




Plastic external corner cover, fluted

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTKARW	Pure white	2	16.000	6274 89 0
GK-OTKACW	Cream	2	16.000	6274 89 1
GK-OTKALGR	Light grey	2	16.000	6274 89 2

PVC Polyvinylchloride

/pc.

PVC external corner cover, fluted surface.




Rising flat angle, trunking depth 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-DFS70210RW	Pure white	1	0.000	6278 42 0
GS-DFS70210CW	Cream	1	0.000	6278 42 1
GS-DFS70210LGR	Light grey	1	0.000	6278 42 2

ST Steel

/pc.

Flat angle, rising, suitable for direct wall mounting.




Rising flat angle, trunking depth 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-DFS90210RW	Pure white	1	0.000	6278 52 0
GS-DFS90210CW	Cream	1	0.000	6278 52 1
GS-DFS90210LGR	Light grey	1	0.000	6278 52 2


ST Steel

/pc.

Flat angle, rising, suitable for direct wall mounting.



Trunking height 210 mm, duoduct




Falling flat angle, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-DFF70210RW	Pure white	1	0.000	6278 43 0
GS-DFF70210CW	Cream	1	0.000	6278 43 1
GS-DFF70210LGR	Light grey	1	0.000	6278 43 2

ST Steel

/pc.

Flat angle, falling, suitable for direct wall mounting.




Falling flat angle, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-DFF90210RW	Pure white	1	0.000	6278 53 0
GS-DFF90210CW	Cream	1	0.000	6278 53 1
GS-DFF90210LGR	Light grey	1	0.000	6278 53 2

ST Steel

/pc.

Flat angle, falling, suitable for direct wall mounting.




Sheet steel flat angle cover

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-OTFRW	Pure white	1	47.600	6279 86 0
GS-OTFCW	Cream	1	47.600	6279 86 1
GS-OTFLGR	Light grey	1	47.600	6279 86 2

ST Steel

/pc.




Plastic flat angle cover, smooth

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTGFRW	Pure white	2	17.000	6274 49 0
GK-OTGFCW	Cream	2	17.000	6274 49 1
GK-OTGFLGR	Light grey	2	17.000	6274 49 2

PVC Polyvinylchloride

/pc.

Flat angle cover, smooth surface.




Plastic flat angle cover, fluted

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTKFRW	Pure white	2	20.000	6274 59 0
GK-OTKFCW	Cream	2	20.000	6274 59 1
GK-OTKFLGR	Light grey	2	20.000	6274 59 2

PVC Polyvinylchloride

/pc.

Flat angle cover, fluted surface.




Internal corner, simplified, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-DI70210RW	Pure white	1	0.000	6278 44 0
GS-DI70210CW	Cream	1	0.000	6278 44 1
GS-DI70210LGR	Light grey	1	0.000	6278 44 2

ST Steel

/pc.

Internal corner for direct installation on GS device installation trunking.



Internal corner, simplified, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-DI90210RW	Pure white	1	0.000	6278 54 0
GS-DI90210CW	Cream	1	0.000	6278 54 1
GS-DI90210LGR	Light grey	1	0.000	6278 54 2

ST Steel

/pc.

Internal corner for direct installation on GS device installation trunking.

Trunking height 210 mm, duoduct




T piece, trunking depth 70 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-DT70210RW	Pure white	1	207.000	6278 46 0
GS-DT70210CW	Cream	1	207.000	6278 46 1
GS-DT70210LGR	Light grey	1	207.000	6278 46 2

ST Steel

/pc.

T piece suitable for direct wall mounting.




T piece, trunking depth 90 mm

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-DT90210RW	Pure white	1	226.000	6278 56 0
GS-DT90210CW	Cream	1	226.000	6278 56 1
GS-DT90210LGR	Light grey	1	226.000	6278 56 2

ST Steel

/pc.

T piece suitable for direct wall mounting.



End piece, trunking depth 70 mm


Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-E70210RW	Pure white	1	12.000	6278 07 0
GS-E70210CW	Cream	1	12.000	6278 07 1
GS-E70210LGR	Light grey	1	12.000	6278 07 2

ST Steel

/pc.

End piece for GS device installation trunking.

Two couplings are supplied as standard.



End piece, trunking depth 90 mm


Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GS-E90210RW	Pure white	1	14.000	6278 17 0
GS-E90210CW	Cream	1	14.000	6278 17 1
GS-E90210LGR	Light grey	1	14.000	6278 17 2

ST Steel

/pc.

End piece for GS device installation trunking.

Two couplings are supplied as standard.




Sheet steel partition, trunking depth 70 mm

Type	Length	Suitable for trunking depth	Pack.	Weight	Item No.
	mm		m	kg/100 m	
GS-TW70	2,000	—	2	58.650	6277 09 0

ST Steel

/m

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.




Sheet steel partition, trunking depth 90 mm

Type	Length	Suitable for trunking depth	Pack.	Weight	Item No.
	mm		m	kg/100 m	
GS-TW90	2,000	—	2	74.400	6277 09 5

ST Steel

/m

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.




Duct clamp


Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
KL80A	20	0.680	6288 64 0

PA Polyamide

/pc.

Duct clamp for secure cable holding and fixing the partition in the GK, GS and GEK-A device installation trunking.







Protective conductor connection bracket

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
8AWR	10	0.641	6288 70 4
ST Steel	G Electrogalvanised		/pc.
Earth conductor clamp for insertion in trunking bases and dividers.			





GEK aluminium device installation trunking, size 80 cover

	Trunking height 110 mm	Trunking depth 70 mm	266
		Trunking depth 90 mm	269
	Trunking height 133 mm	Trunking depth 70 mm	272
		Trunking depth 90 mm	275
	Trunking height 173 mm, asymmetrical	Trunking depth 70 mm	278
		Trunking depth 90 mm	281
	Trunking height 213 mm, asymmetrical	Trunking depth 70 mm	284
		Trunking depth 90 mm	287
	Trunking height 173 mm, duoduct 80/50 mm cover	Trunking depth 70 mm	290
		Trunking depth 90 mm	293
	Trunking height 213 mm, duoduct 80/80 mm cover	Trunking depth 70 mm	296
		Trunking depth 100 mm	299
	Device installation trunking accessories	-	303
	Device installation	-	337



Trunking depth 70 mm, trunking height 110 mm



GEK-A device installation trunking, type 70110


Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-A70110RW	Pure white	—	2,000	12	201.000	6285 40 0
GEK-A70110EL	—	Anodised	2,000	12	191.000	6285 40 3

AI Aluminium EL Anodised /m

Device installation trunking without base perforation for direct wall mounting or mounting on panels. Overlengths up to 6,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). Alternatively, we recommend powder coating in the colour RAL 9006 (white aluminium).




Coupling

Type	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KUPA	55	1	3.000	6288 66 7

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Single accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide /pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.




Double accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide /pc.

Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.




Strain relief

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	31.500	6288 79 0

PA Polyamide /pc.

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... .

Cable clamping range to 14 mm.



Aluminium cover

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
OT3V GEKA80RW	Pure white	—	2,000	2	38.400	6287 17 0
OT3V GEKA80EL	—	Anodised	2,000	2	36.900	6287 17 3


AI Aluminium EL Anodised /m

Cover for closing the GEK-A device installation trunking.

Aluminium version.



Trunking depth 70 mm, trunking height 110 mm




External corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AA70110RW	Pure white	—	1	159.600	6285 41 0
GEK-AA70110EL	—	Anodised	1	157.600	6285 41 3

AI Aluminium EL Anodised /pc.

External corner suitable for direct wall mounting.



Aluminium external corner cover


Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
AO3VA80RW	Pure white	—	1	14.000	6287 20 0
AO3VA80EL	—	Anodised	1	13.500	6287 20 3

AI Aluminium EL Anodised /pc.

Cover for closing external corners.

Note:

For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).




Rising flat angle

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AFS70110RW	Pure white	—	1	149.700	6285 42 0
GEK-AFS70110EL	—	Anodised	1	147.700	6285 42 3

AI Aluminium EL Anodised /pc.

Flat angle, rising, for changing the direction upwards.




Falling flat angle

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AFF70110RW	Pure white	—	1	149.700	6285 43 0
GEK-AFF70110EL	—	Anodised	1	147.700	6285 43 3

AI Aluminium EL Anodised /pc.

Flat angle, falling, for downward changes of direction.



Aluminium flat angle cover


Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
FO3VRW	Pure white	—	1	13.000	6287 21 0
FO3VEL	—	Anodised	1	12.500	6287 21 3

AI Aluminium EL Anodised /pc.

Cover for closing flat angles.

Note:

For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).




Internal corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AIA70RW	Pure white	—	1	159.600	6285 44 0
GEK-AIA70EL	—	Anodised	1	157.600	6285 44 3

AI Aluminium EL Anodised /pc.

Internal corner suitable for direct wall mounting.



T piece

Type	Colour	Surface finish	Dimension a mm	Pack.	Weight	Item No.
				pcs	kg/100 pcs.	
GEK-AT70110RW	Pure white	—	40	1	94.600	6285 46 0
GEK-AT70110EL	—	Anodised	40	1	92.600	6285 46 3

AI Aluminium EL Anodised /pc.

T piece suitable for direct wall mounting.






Trunking depth 70 mm, trunking height 110 mm




End piece

Type	Colour	Surface finish	Dimen- sion a mm	Dimen- sion h mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AE70110RW	Pure white	—	70	110	1	11.700	6285 47 0
GEK-AE70110EL	—	Anodised	70	110	1	11.200	6285 47 3

Al Aluminium **EL** Anodised /pc.
End piece for device installation trunking, type GEK-A.



Trunking depth 90 mm, trunking height 110 mm

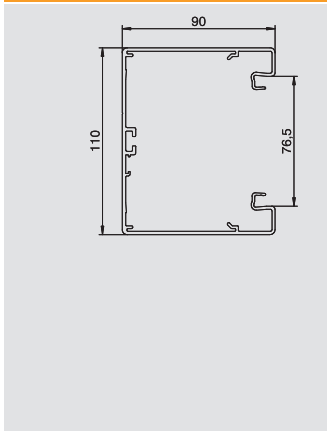



GEK-A device installation trunking, type 90110

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-A90110RW	Pure white	—	2,000	8	224.000	6285 50 0
GEK-A90110EL	—	Anodised	2,000	8	213.000	6285 50 3
Al Aluminium EL Anodised						

Device installation trunking without base penetration for direct wall mounting or mounting on panels. Overlengths up to 6,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Note:


For anodised device installation trunking and fittings made from aluminium, light colour differences caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). Alternatively, we recommend powder coating in the colour RAL 9006 (white aluminium).



Coupling

Type	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KUPA 55	55	1	3.000	6288 66 7
V2A Stainless steel, 1.4301				


Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.



Single accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5
PA Polyamide				


Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.



Double accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1
PA Polyamide				


Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.



Strain relief

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	31.500	6288 79 0
PA Polyamide			

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.



Aluminium cover

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
OT3V GEKA80RW	Pure white	—	2,000	2	38.400	6287 17 0
OT3V GEKA80EL	—	Anodised	2,000	2	36.900	6287 17 3
Al Aluminium EL Anodised						

Cover for closing the GEK-A device installation trunking. Aluminium version.




Trunking depth 90 mm, trunking height 110 mm



External corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AA90110RW	Pure white	—	1	147.000	6285 51 0
GEK-AA90110EL	—	Anodised	1	145.000	6285 51 3
AI Aluminium	EL Anodised				/pc.

External corner suitable for direct wall mounting.




Aluminium external corner cover

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
AO3VA80RW	Pure white	—	1	14.000	6287 20 0
AO3VA80EL	—	Anodised	1	13.500	6287 20 3
AI Aluminium	EL Anodised				/pc.

Cover for closing external corners.

Note:


For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).



Rising flat angle

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AFS90110RW	Pure white	—	1	136.000	6285 52 0
GEK-AFS90110EL	—	Anodised	1	134.000	6285 52 3
AI Aluminium	EL Anodised				/pc.


Flat angle, rising, for changing the direction upwards.



Falling flat angle

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AFF90110RW	Pure white	—	1	136.000	6285 53 0
GEK-AFF90110EL	—	Anodised	1	134.000	6285 53 3
AI Aluminium	EL Anodised				/pc.

Flat angle, falling, for downward changes of direction.




Aluminium flat angle cover

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
FO3VRW	Pure white	—	1	13.000	6287 21 0
FO3VEL	—	Anodised	1	12.500	6287 21 3
AI Aluminium	EL Anodised				/pc.

Cover for closing flat angles.

Note:


For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).



Internal corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AI90110RW	Pure white	—	1	147.000	6285 54 0
GEK-AI90110EL	—	Anodised	1	145.000	6285 54 3
AI Aluminium	EL Anodised				/pc.


Internal corner suitable for direct wall mounting.




T piece

Type	Colour	Surface finish	Dimension a mm	Pack.	Weight	Item No.
				pcs	kg/100 pcs.	
GEK-AT90110RW	Pure white	—	60	1	104.200	6285 56 0
GEK-AT90110EL	—	Anodised	60	1	102.200	6285 56 3
AI Aluminium	EL Anodised					/pc.

T piece suitable for direct wall mounting.



Trunking depth 90 mm, trunking height 110 mm



End piece						
Type	Colour	Surface finish	Dimension a mm	Dimension h mm	Pack. pcs	Weight kg/100 pcs.
GEK-AE90110RW	Pure white	—	90	110	1	12.900
GEK-AE90110EL	—	Anodised	90	110	1	12.400
AI Aluminium EL Anodised /pc.						
End piece for device installation trunking, type GEK-A.						



Trunking depth 70 mm, trunking height 133 mm



GEK-A device installation trunking, type 70133


Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-A70133RW	Pure white	—	2,000	10	221.000	6284 40 0
GEK-A70133EL	—	Anodised	2,000	10	214.000	6284 40 3

Al Aluminium **EL** Anodised /m

Device installation trunking without base penetration for direct wall mounting or mounting on panels. Over-lengths up to 6000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). Alternatively, we recommend powder coating in the colour RAL 9006 (white aluminium).




Coupling

Type	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KUPA	55	1	3.000	6288 66 7

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Single accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide /pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.




Double accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide /pc.

Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.




Strain relief

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	31.500	6288 79 0

PA Polyamide /pc.

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.



Aluminium cover


Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
OT3V GEKA80RW	Pure white	—	2,000	2	38.400	6287 17 0
OT3V GEKA80EL	—	Anodised	2,000	2	36.900	6287 17 3

Al Aluminium **EL** Anodised /m

Cover for closing the GEK-A device installation trunking. Aluminium version.



Trunking depth 70 mm, trunking height 133 mm




External corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AA70133RW	Pure white	—	1	152.000	6284 41 0
GEK-AA70133EL	—	Anodised	1	150.000	6284 41 3

AI Aluminium EL Anodised

External corner suitable for direct wall mounting.



Aluminium external corner cover


Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
AO3VA80RW	Pure white	—	1	14.000	6287 20 0
AO3VA80EL	—	Anodised	1	13.500	6287 20 3

AI Aluminium EL Anodised

Cover for closing external corners.

Note:

For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).




Rising flat angle

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AFS70133RW	Pure white	—	1	127.000	6284 42 0
GEK-AFS70133EL	—	Anodised	1	125.000	6284 42 3

AI Aluminium EL Anodised

Flat angle, rising, for changing the direction upwards.




Falling flat angle

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AFF70133RW	Pure white	—	1	127.000	6284 43 0
GEK-AFF70133EL	—	Anodised	1	125.000	6284 43 3

AI Aluminium EL Anodised

Flat angle, falling, for downward changes of direction.



Aluminium flat angle cover


Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
FO3VRW	Pure white	—	1	13.000	6287 21 0
FO3VEL	—	Anodised	1	12.500	6287 21 3

AI Aluminium EL Anodised

Cover for closing flat angles.

Note:

For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).




Internal corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AIS70133RW	Pure white	—	1	194.000	6284 44 0
GEK-AIS70133EL	—	Anodised	1	192.000	6284 44 3

AI Aluminium EL Anodised

Internal corner suitable for direct wall mounting.



T piece

Type	Colour	Surface finish	Dimension a mm	Pack.	Weight	Item No.
				pcs	kg/100 pcs.	
GEK-AT70133RW	Pure white	—	40	1	109.500	6284 46 0
GEK-AT70133EL	—	Anodised	40	1	107.200	6284 46 3

AI Aluminium EL Anodised

T piece suitable for direct wall mounting.



GEK-A aluminium device installation trunking systems, size 80 cover






Trunking depth 70 mm, trunking height 133 mm




End piece

Type	Colour	Surface finish	Dimen- sion a mm	Dimen- sion h mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AE70133RW	Pure white	—	70	133	1	12.500	6284 47 0
GEK-AE70133EL	—	Anodised	70	133	1	11.500	6284 47 3

AI Aluminium EL Anodised /pc.
End piece for GEK-A device installation trunking system.



Trunking depth 90 mm, trunking height 133 mm

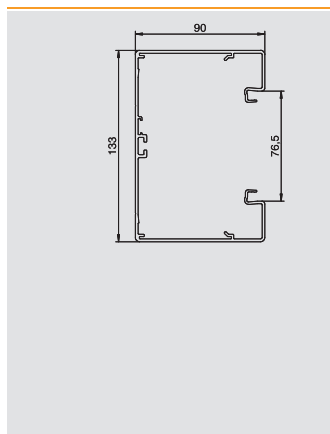

GEK-A device installation trunking, type 90133


Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-A90133RW	Pure white	—	2,000	8	245.500	6284 50 0
GEK-A90133EL	—	Anodised	2,000	8	236.500	6284 50 3

Al Aluminium **EL** Anodised /m

Device installation trunking without base penetration for direct wall mounting or mounting on panels. Over-lengths up to 6000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). Alternatively, we recommend powder coating in the colour RAL 9006 (white aluminium).




Coupling

Type	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KUPA 55	55	1	3.000	6288 66 7

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Single accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide /pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.




Double accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide /pc.

Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.




Strain relief

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	31.500	6288 79 0

PA Polyamide /pc.

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.



Aluminium cover

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
OT3V GEKA80RW	Pure white	—	2,000	2	38.400	6287 17 0
OT3V GEKA80EL	—	Anodised	2,000	2	36.900	6287 17 3

Al Aluminium **EL** Anodised /m

Cover for closing the GEK-A device installation trunking. Aluminium version.



Trunking depth 90 mm, trunking height 133 mm




External corner

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AA90133RW	Pure white	—	1	190.800	6284 51 0
GEK-AA90133EL	—	Anodised	1	188.800	6284 51 3

AI Aluminium EL Anodised

External corner suitable for direct wall mounting.



Aluminium external corner cover


Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
AO3VA80RW	Pure white	—	1	14.000	6287 20 0
AO3VA80EL	—	Anodised	1	13.500	6287 20 3

AI Aluminium EL Anodised

Cover for closing external corners.

Note:

For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).




Rising flat angle

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AFS90133RW	Pure white	—	1	142.000	6284 52 0
GEK-AFS90133EL	—	Anodised	1	140.000	6284 52 3

AI Aluminium EL Anodised

Flat angle, rising, for changing the direction upwards.




Falling flat angle

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AFF90133RW	Pure white	—	1	142.000	6284 53 0
GEK-AFF90133EL	—	Anodised	1	140.000	6284 53 3

AI Aluminium EL Anodised

Flat angle, falling, for downward changes of direction.



Aluminium flat angle cover


Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
FO3VRW	Pure white	—	1	13.000	6287 21 0
FO3VEL	—	Anodised	1	12.500	6287 21 3

AI Aluminium EL Anodised

Cover for closing flat angles.

Note:

For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).




Internal corner

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AIS90133RW	Pure white	—	1	200.000	6284 54 0
GEK-AIS90133EL	—	Anodised	1	198.000	6284 54 3

AI Aluminium EL Anodised

Internal corner suitable for direct wall mounting.




T piece


Type	Colour	Surface finish	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AT90133RW	Pure white	—	60	1	120.200	6284 56 0
GEK-AT90133EL	—	Anodised	60	1	118.200	6284 56 3

AI Aluminium EL Anodised

T piece suitable for direct wall mounting.



Trunking depth 90 mm, trunking height 133 mm




End piece						
Type	Colour	Surface finish	Dimension a mm	Dimension h mm	Pack. pcs	Weight kg/100 pcs.
GEK-AE901RW	Pure white	—	90	133	1	13.500
GEK-AE901EL	—	Anodised	90	133	1	12.500
AI Aluminium EL Anodised /pc.						

End piece for GEK-A device installation trunking system.



Trunking depth 70 mm, trunking height 173 mm, asymmetrical



GEK-AA device installation trunking, type 70173


Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-AA70173RW	Pure white	—	2,000	6	273.000	6284 60 0
GEK-AA70173EL	—	Anodised	2,000	6	264.000	6284 60 3

Al Aluminium **EL** Anodised /m

Device installation trunking without base penetration for direct wall mounting or mounting on panels. Over-lengths up to 6000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). Alternatively, we recommend powder coating in the colour RAL 9006 (white aluminium).




Coupling

Type	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KUPA	55	1	3.000	6288 66 7

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Single accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide /pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.




Double accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide /pc.

Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.




Strain relief

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	31.500	6288 79 0

PA Polyamide /pc.

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... .

Cable clamping range to 14 mm.




Aluminium cover


Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
OT3V GEKA80RW	Pure white	—	2,000	2	38.400	6287 17 0
OT3V GEKA80EL	—	Anodised	2,000	2	36.900	6287 17 3

Al Aluminium **EL** Anodised /m

Cover for closing the GEK-A device installation trunking. Aluminium version.



Trunking depth 70 mm, trunking height 173 mm, asymmetrical




External corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AAA70173RW	Pure white	—	1	197.000	6284 61 0
GEK-AAA70173EL	—	Anodised	1	195.000	6284 61 3

Al Aluminium EL Anodised

External corner suitable for direct wall mounting.



Aluminium external corner cover


Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
AO3VA80RW	Pure white	—	1	14.000	6287 20 0
AO3VA80EL	—	Anodised	1	13.500	6287 20 3

Al Aluminium EL Anodised

Cover for closing external corners.

Note:

For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).




Rising flat angle

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AAFS70173RW	Pure white	—	1	147.000	6284 62 0
GEK-AAFS70173EL	—	Anodised	1	145.000	6284 62 3

Al Aluminium EL Anodised

Flat angle, rising, for changing the direction upwards.




Falling flat angle

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AAFF7RW	Pure white	—	1	147.000	6284 63 0
GEK-AAFF7EL	—	Anodised	1	145.000	6284 63 3

Al Aluminium EL Anodised

Flat angle, falling, for downward changes of direction.



Aluminium flat angle cover


Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
FO3VRW	Pure white	—	1	13.000	6287 21 0
FO3VEL	—	Anodised	1	12.500	6287 21 3

Al Aluminium EL Anodised

Cover for closing flat angles.

Note:

For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).




Internal corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AAIS70173RW	Pure white	—	1	196.000	6284 64 0
GEK-AAIS70173EL	—	Anodised	1	194.000	6284 64 3

Al Aluminium EL Anodised

Internal corner suitable for direct wall mounting.



T piece

Type	Colour	Surface finish	Dimension a	Pack.	Weight	Item No.
			mm	pcs	kg/100 pcs.	
GEK-AAT70173RW	Pure white	—	40	1	134.500	6284 66 0
GEK-AAT70173EL	—	Anodised	40	1	132.500	6284 66 3

Al Aluminium EL Anodised

T piece suitable for direct wall mounting.






Trunking depth 70 mm, trunking height 173 mm, asymmetrical




End piece

Type	Colour	Surface finish	Dimension a mm	Dimension h mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AAE70173RW	Pure white	—	70	173	1	14.000	6284 67 0
GEK-AAE70173EL	—	Anodised	70	173	1	13.000	6284 67 3

AI Aluminium EL Anodised /pc.
End piece for GEK-A device installation trunking system.



Trunking depth 90 mm, trunking height 173 mm, asymmetrical



GEK-AA device installation trunking, type 90173

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-AA90173RW	Pure white	—	2,000	6	288.000	6284 70 0
GEK-AA90173EL	—	Anodised	2,000	6	277.500	6284 70 3

Al Aluminium **EL** Anodised /m


Device installation trunking without base penetration for direct wall mounting or mounting on panels. Over-lengths up to 6000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). Alternatively, we recommend powder coating in the colour RAL 9006 (white aluminium).



Coupling




Type	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KUPA 55	55	1	3.000	6288 66 7

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.



Single accessory mounting box




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide /pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.



Double accessory mounting box




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide /pc.

Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.



Strain relief



Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	31.500	6288 79 0

PA Polyamide /pc.

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.



Aluminium cover



Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
OT3V GEKA80RW	Pure white	—	2,000	2	38.400	6287 17 0
OT3V GEKA80EL	—	Anodised	2,000	2	36.900	6287 17 3

Al Aluminium **EL** Anodised /m

Cover for closing the GEK-A device installation trunking. Aluminium version.




Trunking depth 90 mm, trunking height 173 mm, asymmetrical



External corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AAA90RW	Pure white	—	1	202.000	6284 71 0
GEK-AAA90EL	—	Anodised	1	200.000	6284 71 3
AI Aluminium	EL Anodised				/pc.

External corner suitable for direct wall mounting.




Aluminium external corner cover

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
AO3VA80RW	Pure white	—	1	14.000	6287 20 0
AO3VA80EL	—	Anodised	1	13.500	6287 20 3
AI Aluminium	EL Anodised				/pc.

Cover for closing external corners.

Note:


For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).



Rising flat angle

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AAFS90173RW	Pure white	—	1	157.000	6284 72 0
GEK-AAFS90173EL	—	Anodised	1	155.000	6284 72 3
AI Aluminium	EL Anodised				/pc.


Flat angle, rising, for changing the direction upwards.



Falling flat angle

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AAFF90173RW	Pure white	—	1	157.000	6284 73 0
GEK-AAFF90173EL	—	Anodised	1	155.000	6284 73 3
AI Aluminium	EL Anodised				/pc.

Flat angle, falling, for downward changes of direction.




Aluminium flat angle cover

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
FO3VRW	Pure white	—	1	13.000	6287 21 0
FO3VEL	—	Anodised	1	12.500	6287 21 3
AI Aluminium	EL Anodised				/pc.

Cover for closing flat angles.

Note:


For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).



Internal corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AAIS90173RW	Pure white	—	1	203.000	6284 74 0
GEK-AAIS90173EL	—	Anodised	1	201.000	6284 74 3
AI Aluminium	EL Anodised				/pc.


Internal corner suitable for direct wall mounting.




T piece

Type	Colour	Surface finish	Dimension a mm	Pack.	Weight	Item No.
				pcs	kg/100 pcs.	
GEK-AAT90173RW	Pure white	—	60	1	144.000	6284 76 0
GEK-AAT90173EL	—	Anodised	60	1	142.000	6284 76 3
AI Aluminium	EL Anodised					/pc.

T piece suitable for direct wall mounting.



Trunking depth 90 mm, trunking height 173 mm, asymmetrical



End piece						
Type	Colour	Surface finish	Dimension a mm	Dimension h mm	Pack. pcs	Weight kg/100 pcs.
GEK-AAE90173RW	Pure white	—	90	173	1	16.500
GEK-AAE90173EL	—	Anodised	90	173	1	15.500
AI Aluminium	EL Anodised					/pc.



End piece for GEK-A device installation trunking system.

Trunking depth 70 mm, trunking height 213 mm, asymmetrical



GEK-AA device installation trunking, type 70213


Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-AA70213RW	Pure white	—	2,000	6	318.000	6284 80 0
GEK-AA70213EL	—	Anodised	2,000	6	307.500	6284 80 3

Al Aluminium EL Anodised /m

Device installation trunking without base penetration for direct wall mounting or mounting on panels. Over-lengths up to 6000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). Alternatively, we recommend powder coating in the colour RAL 9006 (white aluminium).




Coupling

Type	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KUPA	55	1	3.000	6288 66 7

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Single accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide /pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.




Double accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide /pc.

Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.




Strain relief

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	31.500	6288 79 0

PA Polyamide /pc.

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.




Aluminium cover


Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
OT3V GEKA80RW	Pure white	—	2,000	2	38.400	6287 17 0
OT3V GEKA80EL	—	Anodised	2,000	2	36.900	6287 17 3

Al Aluminium EL Anodised /m

Cover for closing the GEK-A device installation trunking. Aluminium version.



Trunking depth 70 mm, trunking height 213 mm, asymmetrical




External corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AAA70213RW	Pure white	—	1	222.000	6284 81 0
GEK-AAA70213EL	—	Anodised	1	220.000	6284 81 3

AI Aluminium EL Anodised

External corner suitable for direct wall mounting.



Aluminium external corner cover


Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
AO3VA80RW	Pure white	—	1	14.000	6287 20 0
AO3VA80EL	—	Anodised	1	13.500	6287 20 3

AI Aluminium EL Anodised

Cover for closing external corners.

Note:

For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).




Rising flat angle

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AAFS70213RW	Pure white	—	1	212.000	6284 82 0
GEK-AAFS70213EL	—	Anodised	1	210.000	6284 82 3

AI Aluminium EL Anodised

Flat angle, rising, for changing the direction upwards.




Falling flat angle

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AAFF70213RW	Pure white	—	1	212.000	6284 83 0
GEK-AAFF70213EL	—	Anodised	1	210.000	6284 83 3

AI Aluminium EL Anodised

Flat angle, falling, for downward changes of direction.



Aluminium flat angle cover


Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
FO3VRW	Pure white	—	1	13.000	6287 21 0
FO3VEL	—	Anodised	1	12.500	6287 21 3

AI Aluminium EL Anodised

Cover for closing flat angles.

Note:

For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).





Internal corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AAIS70213RW	Pure white	—	1	200.000	6284 84 0
GEK-AAIS70213EL	—	Anodised	1	198.000	6284 84 3

AI Aluminium EL Anodised

Internal corner suitable for direct wall mounting.



T piece

Type	Colour	Surface finish	Dimension a	Pack.	Weight	Item No.
			mm	pcs	kg/100 pcs.	
GEK-AAT70213RW	Pure white	—	40	1	159.000	6284 86 0
GEK-AAT70213EL	—	Anodised	40	1	157.000	6284 86 3

AI Aluminium EL Anodised

T piece suitable for direct wall mounting.



GEK-A aluminium device installation trunking systems, size 80 cover






Trunking depth 70 mm, trunking height 213 mm, asymmetrical




End piece

Type	Colour	Surface finish	Dimension a mm	Dimension h mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AAE70213RW	Pure white	—	70	213	1	16.000	6284 87 0
GEK-AAE70213EL	—	Anodised	70	213	1	15.500	6284 87 3

AI Aluminium EL Anodised /pc.
End piece for GEK-A device installation trunking system.



Trunking depth 90 mm, trunking height 213 mm, asymmetrical



GEK-AA device installation trunking, type 90213

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-AA90213RW	Pure white	—	2,000	4	342.500	6284 90 0
GEK-AA90213EL	—	Anodised	2,000	4	329.500	6284 90 3

Al Aluminium **EL** Anodised

/m


Device installation trunking without base penetration for direct wall mounting or mounting on panels. Over-lengths up to 6000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). Alternatively, we recommend powder coating in the colour RAL 9006 (white aluminium).



Coupling



Type	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KUPA	55	1	3.000	6288 66 7


V2A Stainless steel, 1.4301

/pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.



Single accessory mounting box



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5


PA Polyamide

/pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.



Double accessory mounting box



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1


PA Polyamide

/pc.

Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.



Strain relief



Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	31.500	6288 79 0

PA Polyamide

/pc.

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.



Aluminium cover



Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
OT3V GEKA80RW	Pure white	—	2,000	2	38.400	6287 17 0
OT3V GEKA80EL	—	Anodised	2,000	2	36.900	6287 17 3

Al Aluminium **EL** Anodised

/m

Cover for closing the GEK-A device installation trunking. Aluminium version.



Trunking depth 90 mm, trunking height 213 mm, asymmetrical




External corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AAA90213RW	Pure white	—	1	242.000	6284 91 0
GEK-AAA90213EL	—	Anodised	1	240.000	6284 91 3

AI Aluminium EL Anodised

External corner suitable for direct wall mounting.



Aluminium external corner cover


Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
AO3VA80RW	Pure white	—	1	14.000	6287 20 0
AO3VA80EL	—	Anodised	1	13.500	6287 20 3

AI Aluminium EL Anodised

Cover for closing external corners.

Note:

For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).




Rising flat angle

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AAFS90213RW	Pure white	—	1	227.000	6284 92 0
GEK-AAFS90213EL	—	Anodised	1	225.000	6284 92 3

AI Aluminium EL Anodised

Flat angle, rising, for changing the direction upwards.




Falling flat angle

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AAFF90213RW	Pure white	—	1	227.000	6284 93 0
GEK-AAFF90213EL	—	Anodised	1	225.000	6284 93 3

AI Aluminium EL Anodised

Flat angle, falling, for downward changes of direction.



Aluminium flat angle cover


Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
FO3VRW	Pure white	—	1	13.000	6287 21 0
FO3VEL	—	Anodised	1	12.500	6287 21 3

AI Aluminium EL Anodised

Cover for closing flat angles.

Note:

For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).




Internal corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AAIS90213RW	Pure white	—	1	211.000	6284 94 0
GEK-AAIS90213EL	—	Anodised	1	209.000	6284 94 3

AI Aluminium EL Anodised

Internal corner suitable for direct wall mounting.




T piece


Type	Colour	Surface finish	Dimension a	Pack.	Weight	Item No.
			mm	pcs	kg/100 pcs.	
GEK-AAT90213RW	Pure white	—	60	1	167.000	6284 96 0
GEK-AAT90213EL	—	Anodised	60	1	165.000	6284 96 3

AI Aluminium EL Anodised

T piece suitable for direct wall mounting.



Trunking depth 90 mm, trunking height 213 mm, asymmetrical



End piece						
Type	Colour	Surface finish	Dimension a mm	Dimension h mm	Pack. pcs	Weight kg/100 pcs.
GEK-AAE90213RW	Pure white	—	90	213	1	18.500
GEK-AAE90213EL	—	Anodised	90	213	1	18.000
AI Aluminium	EL Anodised					/pc.

End piece for GEK-A device installation trunking system.



Trunking depth 70 mm, trunking height 173 mm, duoduct



GEK-AA device installation trunking, type 70173D


Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-AA70173DRW	Pure white	—	2,000	8	318.500	6285 00 0
GEK-AA70173DEL	—	Anodised	2,000	8	306.500	6285 00 3

Al Aluminium **EL** Anodised /m

Device installation trunking without base penetration for direct wall mounting or mounting on panels. Over-lengths up to 6000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). Alternatively, we recommend powder coating in the colour RAL 9006 (white aluminium).




Coupling

Type	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KUPA 55	55	1	3.000	6288 66 7

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Single accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide /pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.




Double accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide /pc.

Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.




Strain relief

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	31.500	6288 79 0

PA Polyamide /pc.

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.



Aluminium cover, size 80 track


Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
OT3V GEKA80RW	Pure white	—	2,000	2	38.400	6287 17 0
OT3V GEKA80EL	—	Anodised	2,000	2	36.900	6287 17 3

Al Aluminium **EL** Anodised /m

Cover for closing the GEK-A device installation trunking. Aluminium version.



Trunking depth 70 mm, trunking height 173 mm, duoduct




Aluminium cover, size 50 track

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
OT3V GEKA50RW	Pure white	—	2,000	2	32.750	6287 16 0
OT3V GEKA50EL	—	Anodised	2,000	2	27.750	6287 16 3

AI Aluminium EL Anodised

Cover for closing the GEK-A device installation trunking.
Aluminium version.




External corner

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AAA70173DRW	Pure white	—	1	235.300	6285 01 0
GEK-AAA70173DEL	—	Anodised	1	233.300	6285 01 3

AI Aluminium EL Anodised

External corner suitable for direct wall mounting.



Aluminium external corner cover, size 80 track


Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
AO3VA80RW	Pure white	—	1	14.000	6287 20 0
AO3VA80EL	—	Anodised	1	13.500	6287 20 3

AI Aluminium EL Anodised

Cover for closing external corners.

Note:

For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).




Aluminium external corner cover, size 50 track

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
AO3VA50RW	Pure white	—	1	4.910	6287 23 0
AO3VA50EL	—	Anodised	1	4.162	6287 23 3

AI Aluminium EL Anodised

Cover for closing external corners.




Rising flat angle

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AAFS70173DRW	Pure white	—	1	225.300	6285 02 0
GEK-AAFS70173DEL	—	Anodised	1	223.300	6285 02 3

AI Aluminium EL Anodised

Flat angle, rising, suitable for direct wall mounting.



Falling flat angle

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AAFF70173DRW	Pure white	—	1	225.300	6285 03 0
GEK-AAFF70173DEL	—	Anodised	1	223.300	6285 03 3

AI Aluminium EL Anodised

Flat angle, falling, suitable for direct wall mounting.



Trunking depth 70 mm, trunking height 173 mm, duoduct




Aluminium flat angle cover, size 80 track

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
FO3VRW	Pure white	—	1	13.000	6287 21 0
FO3VEL	—	Anodised	1	12.500	6287 21 3

AI Aluminium EL Anodised /pc.

Cover for closing flat angles.

Note:
For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).




Aluminium flat angle cover, size 50 track

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
FO3VRW	Pure white	—	1	2.947	6287 22 0
FO3VEL	—	Anodised	1	2.497	6287 22 3

AI Aluminium EL Anodised /pc.

Cover for closing flat angles.




Internal corner

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AIA70173DRW	Pure white	—	1	235.300	6285 04 0
GEK-AIA70173DEL	—	Anodised	1	233.300	6285 04 3

AI Aluminium EL Anodised /pc.

Internal corner suitable for direct wall mounting.




T piece

Type	Colour	Surface finish	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AAT70173DRW	Pure white	—	40	1	149.000	6285 06 0
GEK-AAT70173DEL	—	Anodised	40	1	147.000	6285 06 3

AI Aluminium EL Anodised /pc.

T piece suitable for direct wall mounting.




End piece


Type	Colour	Surface finish	Dimension a mm	Dimension h mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AAE70173RW	Pure white	—	70	173	1	14.000	6284 67 0
GEK-AAE70173EL	—	Anodised	70	173	1	13.000	6284 67 3

AI Aluminium EL Anodised /pc.

End piece for GEK-A device installation trunking system.



Trunking depth 90 mm, trunking height 173 mm, duoduct



GEK-AA device installation trunking, type 90173D

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-AA90173DRW	Pure white	—	2,000	6	353.100	6285 10 0
GEK-AA90173DEL	—	Anodised	2,000	6	341.100	6285 10 3

Al Aluminium **EL** Anodised

/m


Device installation trunking without base penetration for direct wall mounting or mounting on panels. Over-lengths up to 6000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). Alternatively, we recommend powder coating in the colour RAL 9006 (white aluminium).



Coupling



Type	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KUPA 55	55	1	3.000	6288 66 7


V2A Stainless steel, 1.4301

/pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.



Single accessory mounting box



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5


PA Polyamide

/pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.



Double accessory mounting box



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1


PA Polyamide

/pc.

Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.



Strain relief



Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	31.500	6288 79 0


PA Polyamide

/pc.

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.



Aluminium cover, size 80 track



Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
OT3V GEKA80RW	Pure white	—	2,000	2	38.400	6287 17 0
OT3V GEKA80EL	—	Anodised	2,000	2	36.900	6287 17 3






Al Aluminium **EL** Anodised

/m

Cover for closing the GEK-A device installation trunking. Aluminium version.



Trunking depth 90 mm, trunking height 173 mm, duoduct

	Aluminium cover, size 50 track						
	Type	Colour	Surface finish	Length	Pack.	Weight	
				mm	m	kg/100 m	
	OT3V GEKA50RW	Pure white	—	2,000	2	32.750	
	External corner						
	Type	Colour	Surface finish		Pack.	Weight	
					pcs	kg/100 pcs.	
	GEK-AAA90173DRW	Pure white	—		1	243.000	
	Aluminium external corner cover, size 80 track						
	Type	Colour	Surface finish		Pack.	Weight	
					pcs	kg/100 pcs.	
	AO3VA80RW	Pure white	—		1	14.000	
	Aluminium external corner cover, size 50 track						
	Type	Colour	Surface finish		Pack.	Weight	
					pcs	kg/100 pcs.	
	AO3VA50RW	Pure white	—		1	4.910	
	Rising flat angle						
	Type	Colour	Surface finish		Pack.	Weight	
					pcs	kg/100 pcs.	
	GEK-AAFS90173DRW	Pure white	—		1	233.000	
	Falling flat angle						
	Type	Colour	Surface finish		Pack.	Weight	
					pcs	kg/100 pcs.	
	GEK-AAFF90173DRW	Pure white	—		1	233.000	

AI Aluminium EL Anodised /m
Cover for closing the GEK-A device installation trunking.
Aluminium version.

AI Aluminium EL Anodised /pc.
External corner suitable for direct wall mounting.


AI Aluminium EL Anodised /pc.
Cover for closing external corners.
Note:
For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).

AI Aluminium EL Anodised /pc.
Cover for closing external corners.

AI Aluminium EL Anodised /pc.
Flat angle, rising, suitable for direct wall mounting.

AI Aluminium EL Anodised /pc.
Flat angle, falling, suitable for direct wall mounting.

Trunking depth 90 mm, trunking height 173 mm, duoduct



Aluminium flat angle cover, size 80 track

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
FO3VRW	Pure white	—	1	13.000	6287 21 0
FO3VEL	—	Anodised	1	12.500	6287 21 3


AI Aluminium EL Anodised

/pc.

Cover for closing flat angles.

Note:

For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).




Aluminium flat angle cover, size 50 track

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
FO3VRW	Pure white	—	1	2.947	6287 22 0
FO3VEL	—	Anodised	1	2.497	6287 22 3

AI Aluminium EL Anodised

/pc.

Cover for closing flat angles.




Internal corner

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AIA90173DRW	Pure white	—	1	243.000	6285 14 0
GEK-AIA90173DEL	—	Anodised	1	241.000	6285 14 3

AI Aluminium EL Anodised

/pc.

Internal corner suitable for direct wall mounting.




T piece

Type	Colour	Surface finish	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AAT90173DRW	Pure white	—	60	1	163.000	6285 16 0
GEK-AAT90173DEL	—	Anodised	60	1	161.000	6285 16 3

AI Aluminium EL Anodised

/pc.

T piece suitable for direct wall mounting.



End piece

Type	Colour	Surface finish	Dimension a mm	Dimension h mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AAE90173RW	Pure white	—	90	173	1	16.500	6284 77 0
GEK-AAE90173EL	—	Anodised	90	173	1	15.500	6284 77 3

AI Aluminium EL Anodised

/pc.

End piece for GEK-A device installation trunking system.



GEK-A aluminium device installation trunking systems, size 80 cover



Trunking depth 70 mm, trunking height 213 mm, duoduct



GEK-A device installation trunking, type 70213


Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-A70213DRW	Pure white	—	2,000	6	355.500	6285 20 0
GEK-A70213DEL	—	Anodised	2,000	6	345.500	6285 20 3

Al Aluminium **EL** Anodised /m

Device installation trunking without base penetration for direct wall mounting or mounting on panels. Over-lengths up to 6000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). Alternatively, we recommend powder coating in the colour RAL 9006 (white aluminium).




Coupling

Type	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KUPA 55	55	1	3.000	6288 66 7

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Single accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide /pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.




Double accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide /pc.

Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.




Strain relief

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	31.500	6288 79 0

PA Polyamide /pc.

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... .

Cable clamping range to 14 mm.




Aluminium cover

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
OT3V GEKA80RW	Pure white	—	2,000	2	38.400	6287 17 0
OT3V GEKA80EL	—	Anodised	2,000	2	36.900	6287 17 3


Al Aluminium **EL** Anodised /m

Cover for closing the GEK-A device installation trunking.

Aluminium version.



Trunking depth 70 mm, trunking height 213 mm, duoduct




External corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AA70213DRW	Pure white	—	1	242.000	6285 21 0
GEK-AA70213DEL	—	Anodised	1	240.000	6285 21 3

Al Aluminium EL Anodised

/pc.

External corner suitable for direct wall mounting.



Aluminium external corner cover

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
AO3VA80RW	Pure white	—	1	14.000	6287 20 0
AO3VA80EL	—	Anodised	1	13.500	6287 20 3


Al Aluminium EL Anodised

/pc.

Cover for closing external corners.

Note:

For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).




Rising flat angle

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AFS70213DRW	Pure white	—	1	212.000	6285 22 0
GEK-AFS70213DEL	—	Anodised	1	210.000	6285 22 3

Al Aluminium EL Anodised

/pc.

Flat angle, rising, suitable for direct wall mounting.




Falling flat angle

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AFF70213DRW	Pure white	—	1	212.000	6285 23 0
GEK-AFF70213DEL	—	Anodised	1	210.000	6285 23 3

Al Aluminium EL Anodised

/pc.

Flat angle, falling, suitable for direct wall mounting.



Aluminium flat angle cover

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
FO3VRW	Pure white	—	1	13.000	6287 21 0
FO3VEL	—	Anodised	1	12.500	6287 21 3


Al Aluminium EL Anodised

/pc.

Cover for closing flat angles.

Note:

For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).




Internal corner

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AIS70213DRW	Pure white	—	1	203.000	6285 24 0
GEK-AIS70213DEL	—	Anodised	1	201.000	6285 24 3

Al Aluminium EL Anodised

/pc.

Internal corner suitable for direct wall mounting.



T piece

Type	Colour	Surface finish	Dimension a mm	Pack.	Weight	Item No.
				pcs	kg/100 pcs.	
GEK-AT70213DRW	Pure white	—	40	1	176.000	6285 26 0
GEK-AT70213DEL	—	Anodised	40	1	174.000	6285 26 3

Al Aluminium EL Anodised

/pc.

T piece suitable for direct wall mounting.



GEK-A aluminium device installation trunking systems, size 80 cover






Trunking depth 70 mm, trunking height 213 mm, duoduct




End piece

Type	Colour	Surface finish	Dimen- sion a mm	Dimen- sion h mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AAE70213DRW	Pure white	—	70	213	1	16.000	6285 27 0
GEK-AAE70213DEL	—	Anodised	70	213	1	15.500	6285 27 3

AI Aluminium EL Anodised /pc.
End piece for GEK-A device installation trunking system.



Trunking depth 100 mm, trunking height 213 mm, duoduct



GEK-A device installation trunking, type 100213

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-A100213DRW	Pure white	—	2,000	4	402.000	6285 30 0
GEK-A100213DEL	—	Anodised	2,000	4	389.000	6285 30 3

Al Aluminium **EL** Anodised /m


Device installation trunking without base penetration for direct wall mounting or mounting on panels. Over-lengths up to 6000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Note:

For anodised device installation trunking and fittings made from aluminium, light colour differences caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). Alternatively, we recommend powder coating in the colour RAL 9006 (white aluminium).



Coupling




Type	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KUPA 55	55	1	3.000	6288 66 7

V2A Stainless steel, 1.4301 /pc.

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.



Single accessory mounting box




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide /pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.



Double accessory mounting box




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide /pc.

Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.



Strain relief




Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	31.500	6288 79 0

PA Polyamide /pc.

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.



Aluminium cover



Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
OT3V GEKA80RW	Pure white	—	2,000	2	38.400	6287 17 0
OT3V GEKA80EL	—	Anodised	2,000	2	36.900	6287 17 3

Al Aluminium **EL** Anodised /m

Cover for closing the GEK-A device installation trunking. Aluminium version.



GEK-A aluminium device installation trunking systems, size 80 cover



Trunking depth 100 mm, trunking height 213 mm, duoduct




External corner

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AA100213DRW	Pure white	—	1	262.000	6285 31 0
GEK-AA100213DEL	—	Anodised	1	260.000	6285 31 3

Al Aluminium EL Anodised

External corner suitable for direct wall mounting.



Aluminium external corner cover


Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
AO3VA80RW	Pure white	—	1	14.000	6287 20 0
AO3VA80EL	—	Anodised	1	13.500	6287 20 3

Al Aluminium EL Anodised

Cover for closing external corners.

Note:

For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).




Rising flat angle

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AFS100213DRW	Pure white	—	1	237.000	6285 32 0
GEK-AFS100213DEL	—	Anodised	1	235.000	6285 32 3

Al Aluminium EL Anodised

Flat angle, rising, suitable for direct wall mounting.




Falling flat angle

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AFF100213DRW	Pure white	—	1	237.000	6285 33 0
GEK-AFF100213DEL	—	Anodised	1	235.000	6285 33 3

Al Aluminium EL Anodised

Flat angle, falling, suitable for direct wall mounting.



Aluminium flat angle cover


Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
FO3VRW	Pure white	—	1	13.000	6287 21 0
FO3VEL	—	Anodised	1	12.500	6287 21 3

Al Aluminium EL Anodised

Cover for closing flat angles.

Note:

For anodised installation trunking made from aluminium, light colour differences, caused by tolerance based on the material and process conditions, cannot be avoided (according to DIN 17 611). As an alternative we recommend powder coating in RAL 9006 (white aluminium).




Internal corner

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AIS100213DRW	Pure white	—	1	218.000	6285 34 0
GEK-AIS100213DEL	—	Anodised	1	216.000	6285 34 3

Al Aluminium EL Anodised

Internal corner suitable for direct wall mounting.




T piece


Type	Colour	Surface finish	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-AT100213DRW	Pure white	—	60	1	199.000	6285 36 0
GEK-AT100213DEL	—	Anodised	60	1	197.000	6285 36 3

Al Aluminium EL Anodised

T piece suitable for direct wall mounting.



Trunking depth 100 mm, trunking height 213 mm, duoduct



End piece

Type	Colour	Surface finish	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
GEK-AAE100213DRW	Pure white	—	1	19.500	6285 37 0
GEK-AAE100213DEL	—	Anodised	1	19.000	6285 37 3

AI Aluminium EL Anodised /pc.
End piece for GEK-A device installation trunking system.





Device installation trunking accessories

	Fastening panels and mounting accessories	304
	Wall cover	307
	Noise insulation	313
	Supply trunking	313



Device installation trunking accessories




Fastening panels

Type	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
BKN50 80	53–83 mm	1	0.000	6288 00 1
BKN75 125	78–127 mm	1	0.000	6288 00 3
BKN120 205	120–205 mm	1	0.000	6288 00 5
BKN200 350	198–351 mm	1	0.000	6288 00 7

ST Steel **FS** Strip-galvanised /pc.

Fastening panel for mounting device installation trunking on skirting board construction and as a support for the convection grid. The fixing panel can be used for all device installation trunking systems with 80 mm and 110 mm system openings; GEK-S, GEK-A and GEK-K in conjunction with a wall panel adapter.




Wall panel adapter for GK, trunking height 110 mm

Type	For trunking dimensions	Pack. pcs	Weight kg/100 pcs.	Item No.
KS70110	70x110 mm	1	22.000	6279 80 2

ST Steel **FS** Strip-galvanised /pc.

Wall panel adapter for mounting the GK70110 device installation trunking on wall panels.



Wall panel adapter for GK, trunking height 130 mm

Type	For trunking dimensions	Pack. pcs	Weight kg/100 pcs.	Item No.
KS70130	70x130 mm	1	26.100	6279 80 4

ST Steel **FS** Strip-galvanised /pc.

Wall panel adapter for mounting the GK70130 device installation trunking on wall panels.




Wall panel adapter for GK, trunking height 170 mm

Type	For trunking dimensions	Pack. pcs	Weight kg/100 pcs.	Item No.
KS70170	70x170 mm	1	34.300	6279 80 6

ST Steel **FS** Strip-galvanised /pc.

Wall panel adapter for mounting the GK70170 device installation trunking on wall panels.




Connection profile for trunking height 170 mm

Type	Dimen- sion h mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSP170	152	1	23.500	6279 81 0

ST Steel **FS** Strip-galvanised /pc.

Stabilisation profile for panel mounting of device installation trunking of nominal height 170.





Connection profile for trunking height 210 mm

Type	Dimen- sion h mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSP210	192	1	30.000	6279 81 2

ST Steel **FS** Strip-galvanised /pc.

Stabilisation profile for panel mounting of device installation trunking of nominal height 210.



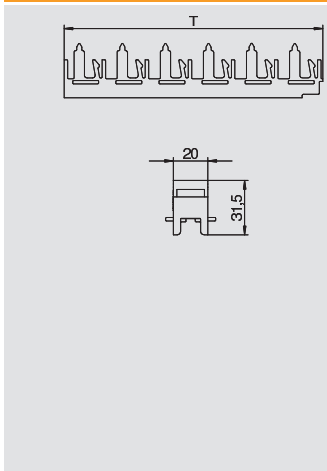


Profile connector, horizontal

Type	Length mm	Number of profiles	Pack. pcs	Weight kg/100 pcs.	Item No.
PV N3 50H	50	2	1	0.730	6288 10 0
PV N3 75H	75	3	1	1.080	6288 10 2
PV N3 100H	100	4	1	1.430	6288 10 4
PV N3 125H	125	5	1	1.800	6288 10 6
PV N3 150H	150	6	1	2.130	6288 10 8
PV N3 175H	175	7	1	2.470	6288 11 0
PV N3 200H	200	8	1	2.830	6288 11 2
PV N3 225H	225	9	1	3.170	6288 11 4
PV N3 250H	250	10	1	3.540	6288 11 6
PV N3 275H	275	11	1	3.900	6288 11 8
PV N3 300H	300	12	1	4.300	6288 12 0

/pc.

Horizontal profile connector with guide slits to lock convection grid profiles. The profile connector is mounted on the fastening panel using the clamp, type SP3.




Clamp

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
SP3	1	0.260	6279 80 0

ST Steel FS Strip-galvanised

/pc.

Clamp to lock supports between the convection grid and the fixing panel.
Suitable for fixing panels for windowsill thickness 23.5.

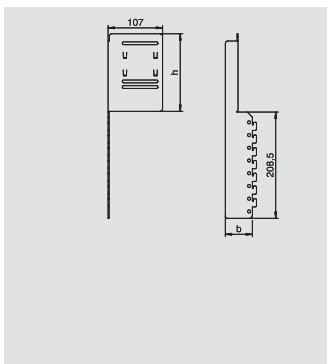


Mounting and connection profile for convection grids, trunking depth 70 mm

Type	For trunking dimensions	Dimension h mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
MVKG70130	70 x 130	110	68	1	38.000	6279 82 0
MVKG70170	70 x 170	150	68	1	43.000	6279 82 2
MVKG70210	70 x 210	190	68	1	50.000	6279 82 4

ST Steel FS Strip-galvanised

/pc.

Mounting and connection profile for panel mounting of device installation trunking in conjunction with vertical convection grids. The installation and connection profile is locked onto the fixing panel and accepts the profile connector, type PVV/N2... vertically. Please observe the trunking dimensions.

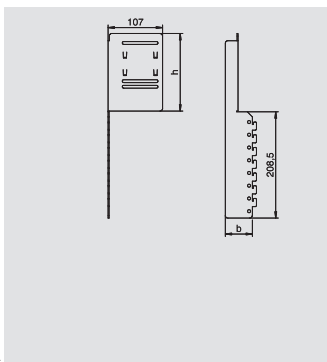

Mounting and connection profile for convection grids, trunking depth 90 mm

Type	For trunking dimensions	Dimension h mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
MVKG90130	90 x 130	110	88	1	44.000	6279 82 6
MVKG90170	90 x 170	150	88	1	50.000	6279 82 8
MVKG90210	90 x 210	190	88	1	57.000	6279 83 0

ST Steel FS Strip-galvanised

/pc.

Mounting and connection profile for panel mounting of device installation trunking in conjunction with vertical convection grids. The installation and connection profile is locked onto the fixing panel and accepts the profile connector, type PVV/N2... vertically. Please observe the trunking dimensions.



Device installation trunking accessories




Profile connector, vertical

Type	Length mm	Number of profiles	Pack. pcs	Weight kg/100 pcs.	Item No.
PVV N2 100	100	4	1	6.000	6288 03 0
PVV N2 125	125	5	1	7.500	6288 03 2
PVV N2 150	150	6	1	9.000	6288 03 4
PVV N2 175	175	7	1	10.500	6288 03 6
PVV N2 200	200	8	1	12.000	6288 03 8
PVV N2 225	225	9	1	13.500	6288 04 0
PVV N2 275	275	11	1	16.000	6288 04 2
PVV N2 300	300	12	1	17.600	6288 07 0
PVV N2 325	325	13	1	18.900	6288 07 2
PVV N2 350	350	14	1	20.700	6288 07 4
PVV N2375	375	15	1	22.800	6288 07 6
PVV N2 400	400	16	1	24.810	6288 07 8
PVV N2 425	425	17	1	25.500	6288 08 0
PVV N2 450	450	18	1	27.320	6288 08 2
PVV N2 475	475	19	1	28.500	6288 04 4
PVV N2 500	500	20	1	29.600	6288 08 4
PVV N2 525	525	21	1	31.000	6288 08 6
PVV N2 550	550	22	1	33.000	6288 04 6
PVV N2 575	575	23	1	34.500	6288 04 8
PVV N2 600	600	24	1	36.000	6288 05 0
PVV N2 625	625	25	1	37.500	6288 05 2
PVV N2 650	650	26	1	39.000	6288 05 4
PVV N2 675	675	27	1	40.500	6288 05 6
PVV N2 700	700	28	1	43.000	6288 05 8
PVV N2 725	725	29	1	44.500	6288 06 0
PVV N2 750	750	30	1	46.000	6288 06 2
PVV N2 775	775	31	1	46.800	6288 08 8
PVV N2 800	800	32	1	51.200	6288 09 0
PVV N2 825	825	33	1	49.050	6288 09 2
PVV N2 850	850	34	1	51.000	6288 06 4
PVV N2 875	875	35	1	52.500	6288 06 6

/pc.

Vertical profile connector with guide slits to lock convection grid profiles for the creation of a compact grid unit. The vertical convection grids can run some way down the front side of the trunking, although a gap should be left near the floor for cleaning, or should be run to the floor and fastened with the BVL floor panel. This version represents a variant of the convector paneling. Alternatively to the convection grid profiles, heating convector panelling can also be created with closed sheet steel panelling.




Floor panel

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
BVL	1	4.000	6288 18 0

/pc.

The BVL floor holder is used to fasten vertical profile connectors of type PVV/N2... on the floor.




Mounting and connection profile for convactor panelling, trunking depth 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MVKV70130	—	1	0.000	6279 83 2
MVKV70170	—	1	0.000	6279 83 4
MVKV70210	—	1	0.000	6279 83 6

ST Steel FS Strip-galvanised

/pc.

Mounting and connection profile for panel mounting of device installation ducts in conjunction with vertical convactor panelling. The mounting and connection profile is locked onto the fastening panel and accepts the guide plates for convactor panelling.




Mounting and connection profile for convactor panelling, trunking depth 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MVKV90130	—	1	0.000	6279 83 8
MVKV90170	—	1	0.000	6279 84 0
MVKV90210	—	1	0.000	6279 84 2


ST Steel FS Strip-galvanised

/pc.

Mounting and connection profile for panel mounting of device installation ducts in conjunction with vertical convactor panelling. The mounting and connection profile is locked onto the fastening panel and accepts the guide plates for convactor panelling.




Device installation trunking accessories



Convector panelling

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
KVV	Pure white	1	0.000	
ST	Steel			/pc.


Convector panelling for closed vertical covering of convector heaters. To achieve an optimum overall picture of room design and to meet the different resulting requirements of the appropriate application, we would request you contact us regarding the planning and ordering of the convector panelling.



Floor panel

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
BVB125	—	1	15.500	6287 80 0
ST	Steel			/pc.


Floor panel as lower closure of convector panelling. This version is only required when closed convector panelling forming the bottom end to the floor is to be additionally provided with vertical convection grid profiles. The floor panel is suitable for accepting a profile connector PVV/N2... for five convection grid profiles.

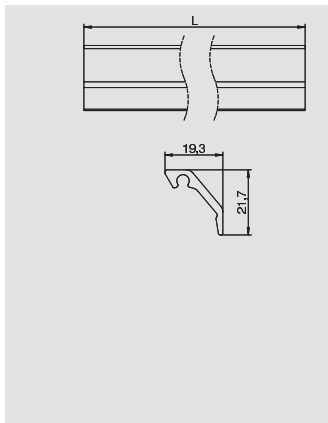

Convection grid profile

Type	Colour	Surface finish	Length	Pack.	Weight	Item No.
			mm	m	kg/100 m	
KG2RW	Pure white	—	2,000	40	23.100	6287 70 0
KG2CW	Cream	—	2,000	40	23.100	6287 70 1
KG2LGR	Light grey	—	2,000	40	23.100	6287 70 2
KG2RW	Pure white	—	3,000	60	23.100	6287 71 0
KG2CW	Cream	—	3,000	60	23.100	6287 71 1
KG2LGR	Light grey	—	3,000	60	23.100	6287 71 2
KG2EL	—	Anodised	3,000	60	21.900	6287 72 3
KG2EL	—	Anodised	2,000	40	21.900	6287 73 3
Al	Aluminium	EL Anodised				/m


Sloping convection grid, for optically attractive closing of spaces between the device installation trunking and the wall. The convection grid profiles are suitable for horizontal and vertical mounting.



Coupling pins

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
8VS4	—	100	0.740	6287 81 0
				/pc.


Coupling pin to connect convection grid profiles.



PVC wall cover, open, 70110

Type	Colour	Dimension a	Dimension b	Pack.	Weight	Item No.
		mm	mm	pcs	kg/100 pcs.	
G-KWAO70110RW	Pure white	178	104	1	6.300	6274 81 0
G-KWAO70110CW	Cream	178	104	1	6.300	6274 81 1
G-KWAO70110LGR	Light grey	178	104	1	6.300	6274 81 2
G-KWAO70110GR	Stone grey	178	104	1	6.300	6274 81 6
ABS/ASA	Acrylonitrile butadiene styrene					/pc.

Wall cover, open, to close wall penetrations during wall mounting. Please specify colour shade for the aluminium version.



PVC wall cover, open, 90110

Type	Colour	Dimension a	Dimension b	Pack.	Weight	Item No.
		mm	mm	pcs	kg/100 pcs.	
G-KWAO90110RW	Pure white	178	124	1	7.100	6274 91 0
G-KWAO90110CW	Cream	178	124	1	7.100	6274 91 1
G-KWAO90110LGR	Light grey	178	124	1	7.100	6274 91 2
ABS/ASA	Acrylonitrile butadiene styrene					/pc.

Wall cover, open, to close wall penetrations during wall mounting. Please specify colour shade for the aluminium version.




Device installation trunking accessories

PVC wall cover, open, 70130

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAO70130RW	Pure white	198	104	1	6.500	6274 82 0
G-KWAO70130CW	Cream	198	104	1	6.500	6274 82 1
G-KWAO70130LGR	Light grey	198	104	1	6.500	6274 82 2
G-KWAO70130GR	Stone grey	198	104	1	6.500	6274 82 6

ABS/ASA Acrylonitrile butadiene styrene /pc.

Wall cover, open, to close wall penetrations during wall mounting.
Please specify colour shade for the aluminium version.




PVC wall cover, open, 90130

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAO90130RW	Pure white	198	124	1	7.300	6274 92 0
G-KWAO90130CW	Cream	198	124	1	7.300	6274 92 1
G-KWAO90130LGR	Light grey	198	124	1	7.300	6274 92 2

ABS/ASA Acrylonitrile butadiene styrene /pc.

Wall cover, open, to close wall penetrations during wall mounting.
Please specify colour shade for the aluminium version.




PVC wall cover, open, 70170

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAO70170RW	Pure white	238	104	1	7.100	6274 83 0
G-KWAO70170CW	Cream	238	104	1	7.100	6274 83 1
G-KWAO70170LGR	Light grey	238	104	1	7.100	6274 83 2
G-KWAO70170GR	Stone grey	238	104	1	7.100	6274 83 6

ABS/ASA Acrylonitrile butadiene styrene /pc.

Wall cover, open, to close wall penetrations during wall mounting.
Please specify colour shade for the aluminium version.




PVC wall cover, open, 90170

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAO90170RW	Pure white	238	124	1	7.500	6274 93 0
G-KWAO90170CW	Cream	238	124	1	7.500	6274 93 1
G-KWAO90170LGR	Light grey	238	124	1	7.500	6274 93 2

ABS/ASA Acrylonitrile butadiene styrene /pc.

Wall cover, open, to close wall penetrations during wall mounting.
Please specify colour shade for the aluminium version.




PVC wall cover, open, 70210

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAO70210RW	Pure white	278	104	1	7.500	6274 84 0
G-KWAO70210CW	Cream	278	104	1	7.500	6274 84 1
G-KWAO70210LGR	Light grey	278	104	1	7.500	6274 84 2

ABS/ASA Acrylonitrile butadiene styrene /pc.

Wall cover, open, to close wall penetrations during wall mounting.
Please specify colour shade for the aluminium version.





PVC wall cover, open, 90210

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAO90210RW	Pure white	278	124	1	7.800	6274 94 0
G-KWAO90210CW	Cream	278	124	1	7.800	6274 94 1
G-KWAO90210LGR	Light grey	278	124	1	7.800	6274 94 2

ABS/ASA Acrylonitrile butadiene styrene /pc.

Wall cover, open, to close wall penetrations during wall mounting.
Please specify colour shade for the aluminium version.






PVC wall cover, closed, 70110

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAG70110RW	Pure white	178	138	1	8.900	6274 85 0
G-KWAG70110CW	Cream	178	138	1	8.900	6274 85 1
G-KWAG70110LGR	Light grey	178	138	1	8.900	6274 85 2
G-KWAG70110GR	Stone grey	178	138	1	8.900	6274 85 6

ABS/ASA Acrylonitrile butadiene styrene

/pc.

Wall cover, closed, to close wall penetrations during panel mounting.
Please specify colour shade for the aluminium version.




PVC wall cover, closed, 90110

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAG90110RW	Pure white	178	158	1	9.600	6274 95 0
G-KWAG90110CW	Cream	178	158	1	9.600	6274 95 1
G-KWAG90110LGR	Light grey	178	158	1	9.600	6274 95 2

ABS/ASA Acrylonitrile butadiene styrene

/pc.

Wall cover, closed, to close wall penetrations during panel mounting.
Please specify colour shade for the aluminium version.




PVC wall cover, closed, 70130

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAG70130RW	Pure white	198	138	1	9.400	6274 86 0
G-KWAG70130CW	Cream	198	138	1	9.400	6274 86 1
G-KWAG70130LGR	Light grey	198	138	1	9.400	6274 86 2
G-KWAG70130GR	Stone grey	198	138	1	9.400	6274 86 6

ABS/ASA Acrylonitrile butadiene styrene

/pc.

Wall cover, closed, to close wall penetrations during panel mounting.
Please specify colour shade for the aluminium version.




PVC wall cover, closed, 90130

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAG90130RW	Pure white	198	158	1	10.100	6274 96 0
G-KWAG90130CW	Cream	198	158	1	10.100	6274 96 1
G-KWAG90130LGR	Light grey	198	158	1	10.100	6274 96 2

ABS/ASA Acrylonitrile butadiene styrene

/pc.

Wall cover, closed, to close wall penetrations during panel mounting.
Please specify colour shade for the aluminium version.




PVC wall cover, closed, 70170

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAG70170RW	Pure white	238	138	1	10.400	6274 87 0
G-KWAG70170CW	Cream	238	138	1	10.400	6274 87 1
G-KWAG70170LGR	Light grey	238	138	1	10.400	6274 87 2
G-KWAG70170GR	Stone grey	238	138	1	10.400	6274 87 6

ABS/ASA Acrylonitrile butadiene styrene

/pc.

Wall cover, closed, to close wall penetrations during panel mounting.
Please specify colour shade for the aluminium version.



PVC wall cover, closed, 90170

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAG90170RW	Pure white	238	158	1	11.100	6274 97 0
G-KWAG90170CW	Cream	238	158	1	11.100	6274 97 1
G-KWAG90170LGR	Light grey	238	158	1	11.100	6274 97 2

ABS/ASA Acrylonitrile butadiene styrene

/pc.

Wall cover, closed, to close wall penetrations during panel mounting.
Please specify colour shade for the aluminium version.



Device installation trunking accessories


PVC wall cover, closed, 70210

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAG70210RW	Pure white	278	138	1	11.400	6274 88 0
G-KWAG70210CW	Cream	278	138	1	11.400	6274 88 1
G-KWAG70210LGR	Light grey	278	138	1	11.400	6274 88 2

ABS/ASA Acrylonitrile butadiene styrene

/pc.

Wall cover, closed, to close wall penetrations during panel mounting.
Please specify colour shade for the aluminium version.




PVC wall cover, closed, 90210

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAG90210RW	Pure white	278	158	1	12.200	6274 98 0
G-KWAG90210CW	Cream	278	158	1	12.200	6274 98 1
G-KWAG90210LGR	Light grey	278	158	1	12.200	6274 98 2

ABS/ASA Acrylonitrile butadiene styrene

/pc.

Wall cover, closed, to close wall penetrations during panel mounting.
Please specify colour shade for the aluminium version.




Aluminium wall cover, open, 70110

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAO70110RW	Pure white	178	104	1	10.300	6278 80 0
G-AWAO70110CW	Cream	178	104	1	10.300	6278 80 1
G-AWAO70110LGR	Light grey	178	104	1	10.300	6278 80 2

Al Aluminium

/pc.

Wall cover, open, to close wall penetrations during wall mounting.
Please specify colour shade for the aluminium version.




Aluminium wall cover, open, 90110

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAO90110RW	Pure white	178	124	1	11.600	6278 88 0
G-AWAO90110CW	Cream	178	124	1	11.600	6278 88 1
G-AWAO90110LGR	Light grey	178	124	1	11.600	6278 88 2

Al Aluminium

/pc.

Wall cover, open, to close wall penetrations during wall mounting.
Please specify colour shade for the aluminium version.




Aluminium wall cover, open, 70130

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAO70130RW	Pure white	198	104	1	10.900	6278 81 0
G-AWAO70130CW	Cream	198	104	1	10.900	6278 81 1
G-AWAO70130LGR	Light grey	198	104	1	10.900	6278 81 2

Al Aluminium

/pc.

Wall cover, open, to close wall penetrations during wall mounting.
Please specify colour shade for the aluminium version.




Aluminium wall cover, open, 90130

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAO90130RW	Pure white	198	124	1	12.300	6278 89 0
G-AWAO90130CW	Cream	198	124	1	12.300	6278 89 1
G-AWAO90130LGR	Light grey	198	124	1	12.300	6278 89 2


Al Aluminium

/pc.

Wall cover, open, to close wall penetrations during wall mounting.
Please specify colour shade for the aluminium version.



Device installation trunking accessories




Aluminium wall cover, open, 70170

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAO70170RW	Pure white	238	104	1	12.300	6278 82 0
G-AWAO70170CW	Cream	238	104	1	12.300	6278 82 1
G-AWAO70170LGR	Light grey	238	104	1	12.300	6278 82 2

Al Aluminium

/pc.

Wall cover, open, to close wall penetrations during wall mounting.
Please specify colour shade for the aluminium version.




Aluminium wall cover, open, 90170

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAO90170RW	Pure white	238	124	1	13.600	6279 00 0
G-AWAO90170CW	Cream	238	124	1	13.600	6279 00 1
G-AWAO90170LGR	Light grey	238	124	1	13.600	6279 00 2

Al Aluminium

/pc.

Wall cover, open, to close wall penetrations during wall mounting.
Please specify colour shade for the aluminium version.




Aluminium wall cover, open, 70210

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAO70210RW	Pure white	278	104	1	13.600	6278 83 0
G-AWAO70210LGR	Light grey	278	104	1	13.600	6278 83 2
G-AWAO70210CW	Cream	278	104	1	13.600	6278 83 1

Al Aluminium

/pc.

Wall cover, open, to close wall penetrations during wall mounting.
Please specify colour shade for the aluminium version.




Aluminium wall cover, open, 90210

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAO90210RW	Pure white	278	124	1	14.900	6279 01 0
G-AWAO90210CW	Cream	278	124	1	14.900	6279 01 1
G-AWAO90210LGR	Light grey	278	124	1	14.900	6279 01 2

Al Aluminium

/pc.

Wall cover, open, to close wall penetrations during wall mounting.
Please specify colour shade for the aluminium version.




Aluminium wall cover, closed, 70110

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAG70110RW	Pure white	178	138	1	16.000	6278 84 0
G-AWAG70110CW	Cream	178	138	1	16.000	6278 84 1
G-AWAG70110LGR	Light grey	178	138	1	16.000	6278 84 2

Al Aluminium

/pc.

Wall cover, closed, to close wall penetrations during panel mounting.
Please specify colour shade for the aluminium version.



Aluminium wall cover, closed, 90110

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAG90110RW	Pure white	178	158	1	17.400	6279 02 0
G-AWAG90110CW	Cream	178	158	1	17.400	6279 02 1
G-AWAG90110LGR	Light grey	178	158	1	17.400	6279 02 2

Al Aluminium

/pc.

Wall cover, closed, to close wall penetrations during panel mounting.
Please specify colour shade for the aluminium version.



Device installation trunking accessories


Aluminium wall cover, closed, 70130

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAG70130RW	Pure white	198	138	1	17.300	6278 85 0
G-AWAG70130CW	Cream	198	138	1	17.300	6278 85 1
G-AWAG70130LGR	Light grey	198	138	1	17.300	6278 85 2

Al Aluminium

/pc.

Wall cover, closed, to close wall penetrations during panel mounting.
Please specify colour shade for the aluminium version.




Aluminium wall cover, closed, 90130

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAG90130RW	Pure white	198	158	1	18.700	6279 03 0
G-AWAG90130CW	Cream	198	158	1	18.700	6279 03 1
G-AWAG90130LGR	Light grey	198	158	1	18.700	6279 03 2

Al Aluminium

/pc.

Wall cover, closed, to close wall penetrations during panel mounting.
Please specify colour shade for the aluminium version.




Aluminium wall cover, closed, 70170

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAG70170RW	Pure white	238	138	1	20.000	6278 86 0
G-AWAG70170CW	Cream	238	138	1	20.000	6278 86 1
G-AWAG70170LGR	Light grey	238	138	1	20.000	6278 86 2

Al Aluminium

/pc.

Wall cover, closed, to close wall penetrations during panel mounting.
Please specify colour shade for the aluminium version.




Aluminium wall cover, closed, 90170

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAG90170RW	Pure white	238	158	1	21.300	6279 04 0
G-AWAG90170CW	Cream	238	158	1	21.300	6279 04 1
G-AWAG90170LGR	Light grey	238	158	1	21.300	6279 04 2

Al Aluminium

/pc.

Wall cover, closed, to close wall penetrations during panel mounting.
Please specify colour shade for the aluminium version.




Aluminium wall cover, closed, 70210

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAG70210RW	Pure white	278	138	1	22.600	6278 87 0
G-AWAG70210CW	Cream	278	138	1	22.600	6278 87 1
G-AWAG70210LGR	Light grey	278	138	1	22.600	6278 87 2

Al Aluminium

/pc.

Wall cover, closed, to close wall penetrations during panel mounting.
Please specify colour shade for the aluminium version.




Aluminium wall cover, closed, 90210

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAG90210RW	Pure white	278	158	1	23.900	6279 05 0
G-AWAG90210CW	Cream	278	158	1	23.900	6279 05 1
G-AWAG90210LGR	Light grey	278	158	1	23.900	6279 05 2

Al Aluminium

/pc.

Wall cover, closed, to close wall penetrations during panel mounting.
Please specify colour shade for the aluminium version.



Device installation trunking accessories

Noise limit barrier

Type	Length	Pack.	Weight	Item No.
	mm	pcs	kg/100 pcs.	
7LSB	300	15	3.867	6288 65 0

/pc.

The noise limit barrier is used to reduce the transmission of airborne noise, e.g. when the trunking system is run through a wall between two offices. The noise limit barrier is made of rock wool, which, when delivered, has a diameter of approx. 50 mm and a length of approx. 300 mm. The material need not be greatly compressed during installation.

The attenuation is approx. 40 dB.



Noise protection, sold by the metre

Type	Pack.	Weight	Item No.
	m	kg/100 m	
7LSB M	1	0.000	6288 65 1

/m

The noise protection barrier is used to reduce airborne transmission, e.g. when running a duct system through wall penetrations between two offices. The noise protection barrier is made of rock wool, which, when delivered, has dimensions of approx. 50 mm and a length of 30 m. The required lengths can be cut off using shears. During mounting, the material need not be greatly compacted.

The attenuation is approx. 40 dB.




Supply trunking

Type	Colour	Length	Pack.	Weight	Item No.
		mm	pcs	kg/100 pcs.	
EK300CW	Cream	850	1	568.000	6246 05 2
EK300RW	Pure white	850	1	568.000	6246 08 7

ST Steel

/pc.

Supply trunking for cable routing to the device installation trunking. Complete with protective conduction connection terminal and removable, screwed-on cover.





ISS service pole systems

	Floor-ceiling service pole, steel	316
	Floor-ceiling service pole, aluminium	318
	ISS floor-ceiling service pole accessories	331
	Floor service pole, steel	332
	Floor service pole, aluminium	333
	Device installation	337

Floor-ceiling service pole, sheet steel




Service pole, sheet steel, with sheet steel cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS98 61OT3RW	Pure white	1	1192.000	6286 55 0

ST Steel /pc.

ISS sheet steel service pole with a 76.5 mm system opening.
Set consists of:
1 single-compartment pole with clamping fixing
Total length 2,800–3,700 mm
1 ceiling attachment with clamp
1 sheet steel cover
Length: 2,500 mm
A 2 m PVC separating retainer and two cover clips are contained in the scope of delivery.
The service pole is suitable for accepting accessory mounting boxes of the series 71GD....
The service pole is pre-mounted and ready for use immediately. The following accessories can also be used, depending on the mounting situation.




Service pole, sheet steel, with PVC cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS98 71OT3KRW	Pure white	1	1120.000	6286 56 0

ST Steel /pc.

ISS sheet steel service pole with a 76.5 mm system opening.
Set consists of:
1 single-compartment pole with clamping fixing
Total length 2,800–3,700 mm
1 ceiling attachment with clamp
1 plastic cover
Length: 2,500 mm
A 2 m PVC separating retainer and two cover clips are contained in the scope of delivery.
The service pole is suitable for accepting accessory mounting boxes of the series 71GD....
The service pole is pre-mounted and ready for use immediately. The following accessories can also be used, depending on the mounting situation.




Cover screen


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS98B	Pure white	1	2.000	6286 80 0

PVC Polyvinylchloride /pc.

Cover screen to laminate the ceiling plate cut-out in the gland area of the ISS98 service pole.



Floor-ceiling service pole, sheet steel



		Clamp fastening		
Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
ISS98KF	—	1	24.500	6286 80 2
ST Steel	FS Strip-galvanised			
Clamp fastening to fasten the telescopic profile of the ISS98 service pole to the support rails of false or suspended ceilings.				



Aluminium floor-ceiling service poles



Service pole, type ISS120

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS120 245RW	Pure white	2,450	1	1200.000	6286 00 0
ISS120 300RW	Pure white	3,000	1	1330.000	6286 11 0
ISS120 310RW	Pure white	3,100	1	1350.000	6286 13 0
ISS120 325RW	Pure white	3,250	1	1380.000	6286 16 0
ISS120 330RW	Pure white	3,300	1	1390.000	6286 17 0
ISS120 340RW	Pure white	3,400	1	1410.000	6286 19 0
ISS120 345RW	Pure white	3,450	1	1420.000	6286 20 0
ISS120 355RW	Pure white	3,550	1	1440.000	6286 22 0
ISS120 370RW	Pure white	3,700	1	1470.000	6286 25 0
ISS120 395RW	Pure white	3,950	1	1510.000	6286 29 0
ISS120 245EL	Anodised	2,450	1	1220.000	6286 00 3
ISS120 300EL	Anodised	3,000	1	1330.000	6286 11 3
ISS120 310EL	Anodised	3,100	1	1350.000	6286 13 3
ISS120 325EL	Anodised	3,250	1	1380.000	6286 16 3
ISS120 330EL	Anodised	3,300	1	1390.000	6286 17 3
ISS120 340EL	Anodised	3,400	1	1410.000	6286 19 3
ISS120 345EL	Anodised	3,450	1	1420.000	6286 20 3
ISS120 355EL	Anodised	3,550	1	1450.000	6286 22 3
ISS120 370EL	Anodised	3,700	1	1470.000	6286 25 3
ISS120 395EL	Anodised	3,950	1	1510.000	6286 29 3

Al Aluminium EL Anodised /pc.

ISS aluminium service pole with a 76.5 mm system opening.


Set consists of:

one single-compartment room height pole, total length: 2,450–3,950 mm

The pole possesses pre-cut covers. A coloured panel profile can be attached in a cover profile. Optionally, a partition, type TW/ISS120, and installation of a cover clip, type KL80A, are possible.

The ISS120 is suitable for accepting front-locking accessory mounting boxes of the series 71GD....

The service pole is pre-mounted and ready for use immediately. The following accessories can also be used, depending on the mounting situation.




Screen profile for ISS 120

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
ISS BP3SW	Black	3,000	3	2.600	6286 75 0
ISS BP4SW	Black	4,000	3	2.600	6286 75 2
ISS BP3GR	Grey white	3,000	3	2.600	6286 75 4
ISS BP3RT	Red	3,000	3	2.600	6286 75 6
ISS BP3GN	Green	3,000	3	2.600	6286 75 8

/m

Cover profile for additional colour matching of the ISS120 service pole. The screen profile can be attached to the external groove of the ISS120 service pole.




Ceiling panel for ISS 120

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS120DDDF9010	Pure white	1	46.660	6286 77 0
ISS120DDDF7035	Light grey	1	46.660	6286 77 2
ISS120DDDF9011RW	Graphite black	1	46.660	6286 77 5

ST Steel /pc.

Ceiling penetration panel for hiding the ceiling plate cut-out in a false ceiling for the ISS120 service pole.



Partition for ISS 120


Type	Length mm	Surface finish	Pack. m	Weight kg/100 m	Item No.
TW ISS120	2,000	Strip-galvanised	2	45.500	6288 83 0

ST Steel FS Strip-galvanised /m

Double partition to divide the ISS 120 service pole for different voltage levels. Self-conducting contacting during mounting.



Aluminium floor-ceiling service poles

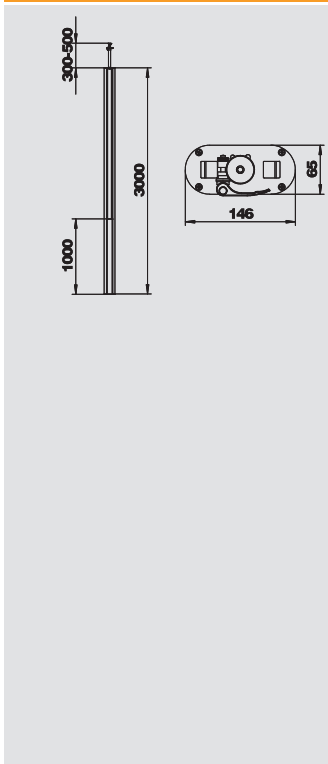


Service pole, type ISST70140

Type	Colour	Surface finish	Length	Pack.	Weight	Item No.
			mm	pcs	kg/100 pcs.	
ISST70140RW	Pure white	—	3,300	1	820.000	6288 93 0
ISST70140EL	—	Anodised	3,300	1	820.000	6288 93 3

Al Aluminium **EL** Anodised /pc.

ISS twin aluminium service pole with a 76.5 mm system opening.
Set consists of:
1 single-compartment column with clamping attachment
Total length: 3,300 mm–3,500 mm
1 single-compartment pole with clamping device
1 trunking installation profile
Length 1,000 mm
1 aluminium cover
Length: 1,000 mm
The area for device installation is suitable for accepting front-locking accessory mounting boxes of the series 71GD...
The service pole is pre-mounted and ready for use immediately. The following accessories can be used, depending on the mounting situation.




Floor plate for ISST70140

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
ISSBP70140RW	Pure white	1	18.500	6290 12 0
ISSBP70140WA	White aluminium	1	18.500	6290 12 4

ST Steel **FSK** Strip-galvanised/plastic-coated /pc.

Floor plate with 30 mm visible edge and four fastening holes Ø 8.5 mm. The floor plate is suitable for installation the service poles of type ISST70140B, ISSO70140 and ISST70140B.




Adapter stabiliser for ISST70140

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
ISSZ70140	Pure white	1	8.000	6290 16 0

ST Steel **FSK** Strip-galvanised/plastic-coated /pc.

Adapter stabiliser for additional stiffening of the twin profiles. Suitable for mounting on the service poles of type ISST70140 and ISST70140B.




Fastening bracket for ISST70140

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
ISSBW70140RW	Pure white	1	8.500	6290 15 0

ST Steel **FSK** Strip-galvanised/plastic-coated /pc.

Fixing bracket for wall fastening of the twin service pole. Suitable for installation on the service poles of type ISST70140 and ISST70140B.



Rubber support for ISST70140

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
ISSGU70140	Black	1	5.000	6290 17 4

GUM Rubber /pc.

Rubber support for slip-free fastening of the floor-ceiling service pole. The rubber support is suitable for installing the service poles of type ISST70140, ISSO70140 and ISST70140B.




Aluminium floor-ceiling service poles



Ceiling panel for ISST70140

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
WAG70140TRW	Pure white	1	28.600	6290 20 0
ST Steel				/pc.

Ceiling rosette for tidy closure of the pole penetration in the ceiling. Suitable for service pole, type ISST70140 and ISST70140B.



Service pole, type ISSO70140

Type	Colour	Surface finish	Length	Pack.	Weight	Item No.
			mm	pcs	kg/100 pcs.	
ISSO70140RW	Pure white	—	3,300	1	840.000	6288 92 0
ISSO70140EL	—	Anodised	3,300	1	840.000	6288 92 3
Al Aluminium	EL Anodised					/pc.

ISS oval aluminium service pole with a 76.5 mm system opening.

Set consists of:

1 single-compartment pole with clamping fastening

Total length 3,300–3,500 mm


1 ceiling attachment with clamp

1 aluminium cover

Length: 3,000 mm

The service pole is suitable for accepting front-locking accessory mounting boxes of the series 71GD...


The service pole is pre-mounted and ready for use immediately. The following accessories can be used, depending on the mounting situation.



Floor plate for ISSO70140

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
ISSBP70140RW	Pure white	1	18.500	6290 12 0
ISSBP70140WA	White aluminium	1	18.500	6290 12 4
ST Steel	FSK Strip-galvanised/plastic-coated			/pc.


Floor plate with 30 mm visible edge and four fastening holes Ø 8.5 mm. The floor plate is suitable for installation the service poles of type ISST70140B, ISSO70140 and ISST70140B.



Rubber support for ISSO70140

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
ISSGU70140	Black	1	5.000	6290 17 4
GUM Rubber				/pc.


Rubber support for slip-free fastening of the floor-ceiling service pole. The rubber support is suitable for installing the service poles of type ISST70140, ISSO70140 and ISST70140B.




Ceiling panel for ISO70140

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
WAG701400	Pure white	1	23.400	6290 26 0
ST Steel				/pc.

Ceiling rosette for tidy closure of the pole penetration in the ceiling. Suitable for service pole, type ISSO70140.



Aluminium floor-ceiling service poles

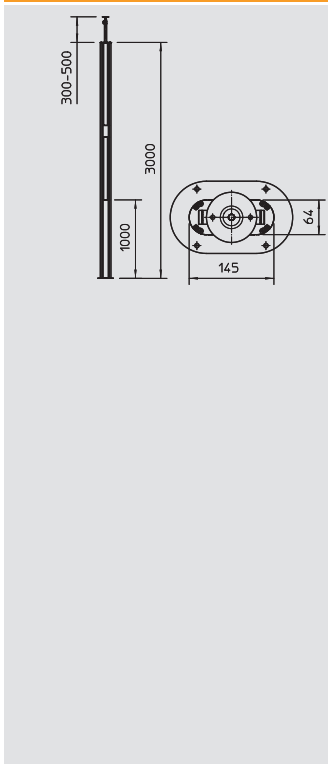


Service pole, type ISST70140B

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISST70140BRW	Pure white	—	3,300	1	860.000	6290 01 0
ISST70140BEL	—	Anodised	3,300	1	860.000	6290 01 3

AI Aluminium **EL** Anodised /pc.

ISS twin aluminium service pole with a 76.5 mm system opening.
Set consists of:
1 single-compartment column with clamping fastening
Total length: 3,300 mm–3,500 mm
1 fastening option for lighting
1 single-compartment pole with clamping device and ceiling attachment for anchoring to the ceiling type ISSDB
1 trunking installation profile
Length 1,000 mm
1 aluminium cover
Length: 1,000 mm
The area for device installation is suitable for accepting front-locking accessory mounting boxes of the series 71GD... The platform for fastening lighting is attached at a height of 1,850 mm and has a height of 148 mm. Here, standard wall holders from the lighting manufacturers can be used to implement different solutions for workstation or general room lighting.
The service pole is pre-mounted and ready for use immediately. The following accessories can be used, depending on the mounting situation.




Floor plate for ISST70140B

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSBP70140RW	Pure white	1	18.500	6290 12 0
ISSBP70140WA	White aluminium	1	18.500	6290 12 4

ST Steel **FSK** Strip-galvanised/plastic-coated /pc.

Floor plate with 30 mm visible edge and four fastening holes Ø 8.5 mm. The floor plate is suitable for installation the service poles of type ISST70140B, ISSO70140 and ISST70140B.




Adapter stabiliser for ISST70140B

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSZ70140	Pure white	1	8.000	6290 16 0

ST Steel **FSK** Strip-galvanised/plastic-coated /pc.

Adapter stabiliser for additional stiffening of the twin profiles. Suitable for mounting on the service poles of type ISST70140 and ISST70140B.




Fastening bracket for ISST70140B

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSBW70140RW	Pure white	1	8.500	6290 15 0

ST Steel **FSK** Strip-galvanised/plastic-coated /pc.

Fixing bracket for wall fastening of the twin service pole. Suitable for installation on the service poles of type ISST70140 and ISST70140B.



Rubber support for ISST70140B

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSGU70140	Black	1	5.000	6290 17 4

GUM Rubber /pc.

Rubber support for slip-free fastening of the floor-ceiling service pole. The rubber support is suitable for installing the service poles of type ISST70140, ISSO70140 and ISST70140B.



Aluminium floor-ceiling service poles




Ceiling panel for ISST70140B

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
WAG70140TRW	Pure white	1	28.600	6290 20 0

ST Steel

/pc.

Ceiling rosette for tidy closure of the pole penetration in the ceiling. Suitable for service pole, type ISST70140 and ISST70140B.



Service pole, type ISS70110

Type	Colour	Surface finish	Length	Pack.	Weight	Item No.
			mm	pcs	kg/100 pcs.	
ISS70110RW	Pure white	—	3,300	1	750.000	6288 94 0
ISS70110EL	—	Anodised	3,300	1	750.000	6288 94 3

Al Aluminium

EL Anodised

/pc.

ISS aluminium service pole with a 76.5 mm system opening.

Set consists of:

1 single-compartment pole with clamping fastening

Total length 3,300–3,500 mm


1 ceiling attachment with clamp

1 aluminium cover

Length: 3,000 mm

The service pole is suitable for accepting front-locking accessory mounting boxes of the series 71GD... Optionally, a partition, type TW (6288256), and installation of a cover clip, type KL80A (6288640), are possible.

The service pole is pre-mounted and ready for use immediately. The following accessories can be used, depending on the mounting situation.



Floor plate for ISS70110


Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
ISSBP70110RW	Pure white	1	16.300	6290 10 0
ISSBP70110WA	White aluminium	1	16.300	6290 10 4

ST Steel

FSK Strip-galvanised/plastic-coated

/pc.

Floor plate with 30 mm visible edge and four fastening holes Ø 8.5 mm. The floor plate is suitable for installation the service poles of type ISS70110.




Rubber support for ISS70110

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
ISSGU70110	Black	1	5.000	6290 17 0

GUM Rubber

/pc.

Rubber support for slip-free fixing of the floor-ceiling service pole. The rubber support is suitable for installing on the service poles of type ISS70110.




Ceiling panel

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
TWVRW	Pure white	1	32.000	6290 24 0


Al Aluminium

/pc.

Ceiling rosette for tidy closure of the pole penetration in the ceiling. Suitable for service pole, type ISS140110.



Aluminium floor-ceiling service poles

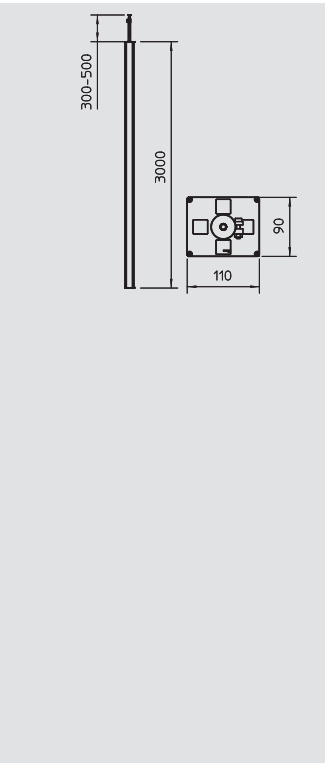


Service pole, type ISS90110

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS90110RW	Pure white	Anodised	3,300	1	810.000	6288 95 0
ISS90110EL	—	Anodised	3,300	1	810.000	6288 95 3

Al Aluminium **EL** Anodised /pc.

ISS aluminium service pole with a 76.5 mm system opening.
Set consists of:
1 single-compartment pole with clamping fastening
Total length 3,300–3,500 mm
1 ceiling attachment with clamp
1 aluminium cover
Length: 3,000 mm
The service pole is suitable for accepting front-locking accessory mounting boxes of the series 71GD... Optionally, a partition, type TW (6288258), and installation of a cover clip, type KL80A (6288640), are possible.
The service pole is pre-mounted and ready for use immediately. The following accessories can be used, depending on the mounting situation.




Floor plate for ISS90110

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSBP90110RW	Pure white	1	18.300	6290 11 0
ISSBP90110WA	White aluminium	1	18.300	6290 11 4

ST Steel /pc.

Floor plate with 30 mm visible edge and four fastening holes Ø 8.5 mm. The floor plate is suitable for installation the service poles of type ISS90110.




Rubber support for ISS90110

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSGU90110	Black	1	5.000	6290 17 2

GUM Rubber /pc.

Rubber support for slip-free fixing of the floor-ceiling service pole. The rubber support is suitable for installing on the service poles of type ISS90110.



Ceiling panel for ISS90110

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WAG90110ARW	Pure white	1	20.600	6290 22 0

Al Aluminium /pc.

Ceiling rosette for tidy closure of the pole penetration in the ceiling. Suitable for service pole, type ISS90110.



Aluminium floor-ceiling service poles



Service pole, type ISS140110

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS140110RW	Pure white	—	3,300	1	1370.000	6288 96 0
ISS140110EL	—	Anodised	3,300	1	1370.000	6288 96 3

Al Aluminium **EL** Anodised

/pc.

ISS aluminium service pole with a 76.5 mm system opening.

Set consists of:

1 two-compartment pole with clamping fastening

Total length 3,300–3,500 mm


1 ceiling attachment with clamp

2 aluminium covers

Length: 3,000 mm

The service pole is suitable for accepting front-locking accessory mounting boxes of the series 71GD... Optionally, a partition, type TW (6288256), and installation of a cover clip, type KL80A (6288640), are possible.

The service pole is pre-mounted and ready for use immediately. The following accessories can be used, depending on the mounting situation.




Floor plate for ISS140110

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSBP140110RW	Pure white	1	106.000	6290 13 0
ISSBP140110WA	White aluminium	1	106.000	6290 13 4

ST Steel **FSK** Strip-galvanised/plastic-coated

/pc.

Floor plate with 30 mm visible edge and four fastening holes Ø 8.5 mm. The floor plate is suitable for installation the service poles of type ISS140110.




Rubber support for ISS 140110

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSGU140110	Black	1	9.000	6290 17 6

GUM Rubber

/pc.

Rubber support for slip-free fastening of the floor-ceiling service pole. The rubber support is suitable for installing on the service poles of type ISS140110.




Ceiling panel for ISS 140110

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
TWVRW	Pure white	1	32.000	6290 24 0


Al Aluminium

/pc.

Ceiling rosette for tidy closure of the pole penetration in the ceiling. Suitable for service pole, type ISS140110.



Aluminium floor-ceiling service poles

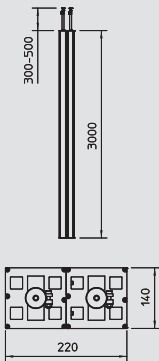

Service pole, type ISS140220

Type	Colour	Surface finish	Length	Pack.	Weight	Item No.
			mm	pcs	kg/100 pcs.	
ISS140220RW	Pure white	—	3,300	1	2740.000	6288 97 0
ISS140220EL	—	Anodised	3,300	1	2740.000	6288 97 3

AI Aluminium EL Anodised /pc.


ISS aluminium service pole with a 76.5 mm system opening.

Set consists of:

- 1 four-compartment pole with clamping fastening
Total length 3,300–3,500 mm
- 2 ceiling attachments with clamp
- 4 aluminium covers
Length: 3,000 mm

The service pole is suitable for accepting front-locking accessory mounting boxes of the series 71GD... Optionally, a partition, type TW (6288256), and installation of a cover clip, type KL80A (6288640), are possible.

The service pole is pre-mounted and ready for use immediately. The following accessories can be used, depending on the mounting situation.




Ceiling panel for ISS 140220

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
WAG14022ARW	Pure white	1	64.000	6290 25 0

AI Aluminium /pc.

Ceiling rosette for tidy closure of the pole penetration in the ceiling. Suitable for service pole, type ISS140220.

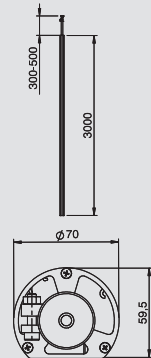

Service pole, type ISSRM45

Type	Colour	Surface finish	Length	Pack.	Weight	Item No.
			mm	pcs	kg/100 pcs.	
ISSRM45RW	Pure white	—	3,300	1	510.000	6290 08 6
ISSRM45EL	—	Anodised	3,300	1	510.000	6290 08 7

AI Aluminium EL Anodised /pc.

ISS aluminium service pole.

Set consists of:

- 1 one-compartment pole with clamping fastening
Total length: 3,300 mm–3,500 mm
- 1 ceiling attachment with clamping device
- 1 aluminium cover
Length 3,000 mm

The design of this ISS service pole is based on an extremely slender, round aluminium profile, which has a smooth cover of the Rapid 45 device installation trunking series as its front side. The 45 mm system opening is suitable for direct acceptance of Modul 45 switch and connection devices.




Aluminium floor-ceiling service poles

Rubber support for ISSRM45

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
ISSRGU	Black	1	1.450	6290 17 8
GUM	Rubber			/pc.


Rubber support for slip-free fastening of the floor-ceiling service pole ISSRM45.



Ceiling panel for ISSRM45

Type	Colour	Dimension a	Dimension b	Pack.	Weight	Item No.
		mm	mm	pcs	kg/100 pcs.	
WAGRM45	Pure white	—	—	1	12.900	6290 26 4
ST	Steel					/pc.

Closed ceiling rosette for tidy closure of the ceiling gland of the service poles, type ISSRM45.



Service pole, type ISSRM45F

Type	Colour	Surface finish	Length	Pack.	Weight	Item No.
			mm	pcs	kg/100 pcs.	
ISSRM45FRW	Pure white	—	3,300	1	430.000	6290 08 2
ISSRM45FEL	—	Anodised	3,300	1	430.000	6290 08 3
Al	Aluminium	EL Anodised				/pc.

ISS aluminium service pole with a flexible hose to the ceiling.

Set consists of:

1 one-compartment pole with flexible house to ceiling

Total length: 2,300 mm


1 flexible hose, length: 1,500 mm

1 aluminium cover

Length: 2,300 mm

The design of this ISS service pole is based on an extremely slender, round aluminium profile, which has a smooth cover of the Rapid 45 device installation trunking series as its front side. The 45 mm system opening is suitable for direct acceptance of Modul 45 switch and connection devices.

The floor plate as a stand, type SFISSF, and the hose connection to the ceiling, type SAISSF, should be ordered separately (see articles below).




Floor plate for ISSRM45F

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SFISSF	Pure white	1	600.000	6290 19 6
SFISSFAL	White aluminium	1	600.000	6290 19 7

ST Steel

/pc.


Floor plate as stand for service poles with hose to ceiling, type ISS110100F, 140100F and ISSRM45F.




Hose connection for ISSRM45F

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SAISSF	—	1	35.100	6290 19 8
ST	Steel			/pc.
	VZ Galvanised			

Hose connection as ceiling attachment for service poles with hose to ceiling, type ISS110100F and 140100F.



Aluminium floor-ceiling service poles




Ceiling panel for ISSRM45F

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DAB-F	Pure white	1	20.700	6290 26 9

ST Steel /pc.

Ceiling rosette for tidy closure of the pole penetration in the ceiling.

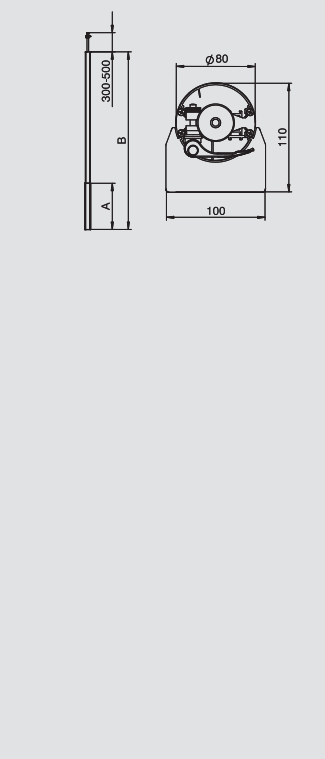

Service pole, type ISS110100R

Type	Colour	Surface finish	Dimension A	Dimension B	Pack.	Weight	Item No.
			mm	mm	pcs	kg/100 pcs.	
ISS110100RRW	Pure white	—	780	3,000	1	1000.000	6289 06 0
ISS110100REL	—	Anodised	780	3,000	1	1000.000	6289 06 3

Al Aluminium EL Anodised /pc.

ISS aluminium service pole with a thin tube to the ceiling.

Set consists of:

1 single-compartment pole with clamping fastening


Total length 3,300–3,500 mm

1 clamping device for clamping to the ceiling

1 equippable aluminium installation area

Length: 780 mm

In areas for device installation, the service pole has a 76.5 mm system opening and is suitable for accepting front-locking accessory mounting boxes of the series 71GD...



Ceiling panel for ISS110100R

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
WAG140100RRW	Pure white	1	14.000	6290 29 0

ST Steel /pc.

Ceiling rosette for tidy closure of the pole penetration in the ceiling. Suitable for service pole ISS110100R and ISS140100R.



Aluminium floor-ceiling service poles

Service pole, type ISS110100F

Type	Colour	Surface finish	Dimension A mm	Dimension B mm	Dimension C mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS110100FRW	Pure white	—	780	2,300	1,500	1	790.000	6289 04 0
ISS110100FEL	—	Anodised	780	2,300	1,500	1	790.000	6289 04 3

Al Aluminium **EL** Anodised

/pc.

ISS aluminium service pole with a flexible hose to the ceiling.

Set consists of:

1 single-compartment pole with flexible hose to the ceiling


Total length 2,300 mm

1 flexible hose, length: 1,500 mm

1 equippable aluminium installation compartment

Length: 780 mm

In areas for device installation, the service pole has a 76.5 mm system opening and is suitable for accepting front-locking accessory mounting boxes of the series 71GD... The floor plate as a stand, type SFISSF, and the hose connection to the ceiling, type SAISSF, should be ordered separately (see articles below).





Floor plate for ISS110100F

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SFISSF	Pure white	1	600.000	6290 19 6
SFISSFAL	White aluminium	1	600.000	6290 19 7

ST Steel

/pc.

Floor plate as stand for service poles with hose to ceiling, type ISS110100F, 140100F and ISSRM45F.




Hose connection for ISS110100F

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SAISSF	—	1	35.100	6290 19 8

ST Steel **VZ** Galvanised

/pc.

Hose connection as ceiling attachment for service poles with hose to ceiling, type ISS110100F and 140100F.




Ceiling panel for ISS110100F

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DAB-F	Pure white	1	20.700	6290 26 9


ST Steel

/pc.

Ceiling rosette for tidy closure of the pole penetration in the ceiling.



Aluminium floor-ceiling service poles



Service pole, type ISS140100R

Type	Colour	Surface finish	Dimension A mm	Dimension B mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS140100RRW	Pure white	—	780	3,000	1	1390.000	6289 07 0
ISS140100REL	—	Anodised	780	3,000	1	1390.000	6289 07 3

AI Aluminium EL Anodised /pc.

ISS aluminium service pole with a thin tube to the ceiling.

Set consists of:

1 two-compartment pole with clamping fastening


Total length 3,300–3,500 mm

1 ceiling attachment with clamp

1 aluminium cover

Length: 1,000 mm

In areas for device installation, the service pole has a 76.5 mm system opening and is suitable for accepting front-locking accessory mounting boxes of the series 71GD...




Ceiling panel for ISS140100R

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WAG140100RRW	Pure white	1	14.000	6290 29 0

ST Steel /pc.

Ceiling rosette for tidy closure of the pole penetration in the ceiling. Suitable for service pole ISS110100R and ISS140100R.



Service pole, type ISS140100F

Type	Colour	Surface finish	Dimension A mm	Dimension B mm	Dimension C mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS140100FRW	Pure white	—	780	2,300	1,500	1	1100.000	6289 05 0
ISS140100FEL	—	Anodised	780	2,300	1,500	1	1100.000	6289 05 3

AI Aluminium EL Anodised /pc.

ISS aluminium service pole with a flexible hose to the ceiling.

Set consists of:

1 double-compartment pole with flexible hose to the ceiling

Total length 2,300 mm

1 flexible hose, length: 1,500 mm

1 aluminium cover

Length: 780 mm

In areas for device installation, the service pole has a 76.5 mm system opening and is suitable for accepting front-locking accessory mounting boxes of the series 71GD... The floor plate as a stand, type SFISSF, and the hose connection to the ceiling, type SAISSF, should be ordered separately (see articles below).




Aluminium floor-ceiling service poles



Floor plate for ISS140100F

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SFISSFRW	Pure white	1	600.000	6290 19 6
SFISSFVAL	White aluminium	1	600.000	6290 19 7


ST Steel /pc.
Floor plate as stand for service poles with hose to ceiling, type ISS110100F, 140100F and ISSRM45F.



Hose connection for ISS140100F

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SAISSF	—	1	35.100	6290 19 8


ST Steel **VZ** Galvanised /pc.
Hose connection as ceiling attachment for service poles with hose to ceiling, type ISS110100F and 140100F.




Ceiling panel for ISS140100F

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DAB-F	Pure white	1	20.700	6290 26 9

ST Steel /pc.
Ceiling rosette for tidy closure of the pole penetration in the ceiling.




Floor-ceiling service pole accessories




Spacer for floor plate

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
ISSAH	1	7.900	6290 18 4
/pc.			
Al Aluminium EL Anodised Spacer for floor area for mounting of the floor-ceiling ISS service pole.			




Classic stand for floor plate

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
ISSSF	Chrome black	2	17.500	6290 18 0
ST	Steel			/pc.
Classic adjustable floor feet for mounting on ISS service pole.				




Single accessory mounting box

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5
PA Polyamide				/pc.
Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.				




Double accessory mounting box

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
71GD7	Grey	2	11.000	6288 61 1
PA	Polyamide			/pc.
Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.				




Single accessory mounting box Modul 45

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
71GD8	Grey	1	5.900	6288 57 0
71GD8	Grey	5	29.500	6288 57 1
PA Polyamide				/pc.
Front-locking accessory mounting box for Modul 45 system, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.				



Triple accessory mounting box Modul 45

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
71GD9	Grey	1	11.600	6288 58 0
71GD9	Grey	2	23.200	6288 58 1
PA	Polyamide			/pc.
Front locking accessory mounting box for Modul 45 system, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.				



Reassignment tool

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
HAT30	Blue	1	3.600	6290 20 1
PA	Polyamide			/pc.
Tool for reassignment of the flexible house for service poles of the ...F series.				



Sheet steel floor service poles



Service pole, type ISSHS4

Type	Colour	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSHS4 61OT3RW	Pure white	4	1	1050.000	6286 70 0
ISSHS4 61OT3LGR	Light grey	4	1	1050.000	6286 70 2

ST Steel /pc.

ISS sheet steel service pole with a 76.5 mm system opening on four sides. Empty, fittable from all four sides with six standard devices (socket, telephone, etc.) on each side, max. 24 devices. Fastening possible directly on the floor. Accessory mounting boxes to be ordered separately. The service pole is suitable for accepting front-locking accessory mounting boxes of the series 71GD....




Protective frame for ISSHS4

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSHS4SR40	Graphite black	1	69.400	6286 81 0

ST Steel /pc.

Protective frame for ISSHS4 service pole for mechanical protection of the columns in the foot area.



Aluminium floor service poles




Service pole, type ISSHS140250

Type	Colour	Surface finish	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSHS140250RW	Pure white	—	2	1	175.000	6290 02 0
ISSHS140250EL	—	Anodised	2	1	175.000	6290 02 3

AI Aluminium EL Anodised /pc.

ISS aluminium service pole with a 76.5 mm system opening.
Empty, fittable with standard devices (socket, telephone, etc.), max. four devices.
Fastening possible directly on floor. Accessory mounting boxes to be ordered separately.
The service pole is suitable for accepting front-locking accessory mounting boxes of the series 71GD.... Optionally, a partition, type TW (6288256), and mounting of the cover clip, type KL80A, are possible.



Service pole, type ISSHS140500

Type	Colour	Surface finish	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSHS140500RW	Pure white	—	2	1	302.000	6290 03 0
ISSHS140500EL	Aluminium	Anodised	2	1	302.000	6290 03 3

AI Aluminium EL Anodised /pc.

ISS service pole
Empty, fittable with standard devices (socket, telephone, etc.), max. eight devices.
Fastening possible directly on floor. Accessory mounting boxes to be ordered separately.
The service pole is suitable for accepting front-locking accessory mounting boxes of the series 71GD.... Optionally, a partition, type TW (6288256), and mounting of the cover clip, type KL80A, are possible.




Service pole, type ISSHS140700

Type	Colour	Surface finish	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSHS140700RW	Pure white	—	2	1	392.000	6290 04 0
ISSHS140700EL	Aluminium	Anodised	2	1	392.000	6290 04 3

AI Aluminium EL Anodised /pc.

ISS service pole
Empty, fittable with standard devices (socket, telephone, etc.), max. ten devices.
Fastening possible directly on floor. Accessory mounting boxes to be ordered separately.
The service pole is suitable for accepting front-locking accessory mounting boxes of the series 71GD.... Optionally, a partition, type TW (6288256), and mounting of the cover clip, type KL80A, are possible.




Service pole, type ISSHSO70140

Type	Colour	Surface finish	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSHSO70140RW	Pure white	—	1	1	207.000	6290 05 0
ISSHSO70140EL	—	Anodised	1	1	207.000	6290 05 3

AI Aluminium EL Anodised /pc.

ISS service pole
Empty, fittable with standard devices (socket, telephone, etc.), max. four devices.
Fastening possible directly on floor. Accessory mounting boxes to be ordered separately.
The service pole is suitable for accepting front-locking accessory mounting boxes of the series 71GD....



Service pole, type ISSHSO270140

Type	Colour	Surface finish	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSHSO270140RW	Pure white	—	2	1	428.000	6290 06 0
ISSHSO270140EL	—	Anodised	2	1	428.000	6290 06 3

AI Aluminium EL Anodised /pc.

ISS service pole
Empty, fittable with standard devices (socket, telephone, etc.), max. ten devices.
Fastening possible directly on floor. Accessory mounting boxes to be ordered separately.
The service pole is suitable for accepting front-locking accessory mounting boxes of the series 71GD....




Aluminium floor service poles



Service pole, type ISSHS6

Type	Colour	Surface finish	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSHS6RW	—	Anodised	6	1	720.000	6290 07 3
Al Aluminium EL Anodised						/pc.

ISS service pole centre
Empty, fittable from all four sides with standard devices (socket, telephone, etc.). two sides of the installation centre can be equipped in two compartments, the other two sides in one compartment. Each installation compartment can accept five devices, and the entire installation centre can accept a maximum of 30 devices. Fastening possible directly on the floor. Accessory mounting boxes to be ordered separately. The service pole is suitable for accepting front-locking accessory mounting boxes of the series 71GD....



Service pole, type ISSHS2D120

Type	Colour	Surface finish	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSHS2D120RW	Pure white	—	2	1	500.000	6286 50 0
ISSHS2D120LGR	Light grey	—	2	1	500.000	6286 50 2
ISSHS2D120EL	—	Anodised	2	1	490.000	6286 50 3
Al Aluminium EL Anodised						/pc.


ISS service pole
Empty, fittable with standard devices (socket, telephone, etc.), max. six devices. Fastening possible directly on floor. Accessory mounting boxes to be ordered separately. The pre-cut segments for direct installation of accessory mounting boxes with the S990 cover range. The service pole is suitable for accepting front-locking accessory mounting boxes of the series 71GD....




Service pole, type ISSRHSM45

Type	Colour	Surface finish	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSRHSM45RW	Pure white	—	1	1	135.000	6290 09 0
ISSRHSM45EL	—	Anodised	1	1	135.000	6290 09 1
Al Aluminium EL Anodised						/pc.

ISS aluminium service pole with a 45 mm system opening.
Set consists of:
1 one-compartment pole with stand
Total length: 670 mm
1 aluminium cover
Length: 670 mm
The design of this ISS service pole is based on an extremely slender, round aluminium profile, which has a smooth cover of the Rapid 45 device installation trunking series as its front side. The 45 mm system opening is suitable for direct acceptance of Modul 45 switch and connection devices.






Single accessory mounting box

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
71GD6	Grey	5	5.600	6288 61 0
71GD6	Grey	1	5.700	6288 61 5

PA Polyamide

/pc.

Front-locking accessory mounting box for switch systems, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.




Double accessory mounting box

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
71GD7	Grey	2	11.000	6288 61 1

PA Polyamide

/pc.

Front-locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket.




Single accessory mounting box Modul 45

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
71GD8	Grey	1	5.900	6288 57 0
71GD8	Grey	5	29.500	6288 57 1

PA Polyamide

/pc.

Front-locking accessory mounting box for Modul 45 system, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.



Triple accessory mounting box Modul 45

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
71GD9	Grey	1	11.600	6288 58 0
71GD9	Grey	2	23.200	6288 58 1

PA Polyamide


/pc.

Front locking accessory mounting box for Modul 45 system, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.





Device installation

	Accessory mounting box for device installation trunking and service pole	338
	Protective contact socket, Modul 45	338
	Switch/button, Modul 45	344
	Modul 45 data technology	348
	Cover frame S990	353
	Socket units, preterminated	355
	Installation unit for series-mounted devices	357




Device systems



Single accessory mounting box Modul 45

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD8	Grey	1	5.900	6288 57 0
71GD8	Grey	5	29.500	6288 57 1


PA Polyamide /pc.
Front-locking accessory mounting box for Modul 45 system, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.



Double/triple accessory mounting box Modul 45

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD9	Grey	1	11.600	6288 58 0
71GD9	Grey	2	23.200	6288 58 1


PA Polyamide /pc.
Front locking accessory mounting box for Modul 45 system, with folding, and also removable, base for time-saving cable connection, with feed openings for cable diameters of up to 14 mm.



Mounting support for data technology and Modul 45 connect

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71MT3 45	Grey	1	5.400	6288 57 5


PA Polyamide /pc.
Front-locking mounting support for Modul 45 data technology systems and Modul 45 connect protective contact sockets with Wieland connection.



Strain relief

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	31.500	6288 79 0

PA Polyamide /pc.
Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.





Protective contact socket 0°



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKS-D0 RW1	Pure white	20	3.800	6117 00 1
SKS-D0 ROR1	Orange	20	3.800	6117 00 3
SKS-D0 MZGN1	Mint green	20	3.800	6117 00 5
SKS-D0 SRO1	Signal red	20	3.800	6117 00 7
SKS-D0 SWGR1	Black-grey	20	3.800	6117 00 8
SKS-D0 AL1	Aluminium paint	20	3.800	6117 00 9

PC Polycarbonate /pc.
Power socket single 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKS-D0 RW2	Pure white	10	7.500	6117 01 2
SKS-D0 ROR2	Orange	10	7.500	6117 01 4
SKS-D0 MZGN2	Mint green	10	7.500	6117 01 6
SKS-D0 SRO2	Signal red	10	7.500	6117 01 8
SKS-D0 SWGR2	Black-grey	10	7.500	6117 01 9
SKS-D0 AL2	Aluminium paint	10	7.500	6117 02 0

PC Polycarbonate /pc.
Power socket double 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.







Protective contact socket 0°

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKS-D0 RW3	Pure white	4	10.300	6117 02 3
SKS-D0 ROR3	Orange	4	10.300	6117 02 5
SKS-D0 MZGN3	Mint green	4	10.300	6117 02 7
SKS-D0 SRO3	Signal red	4	10.300	6117 02 9
SKS-D0 SWGR3	Black-grey	4	10.300	6117 03 0
SKS-D0 AL3	Aluminium paint	4	10.300	6117 03 1

PC Polycarbonate

/pc.

Power socket triple 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.




Protective contact socket 33°

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKS-D3 RW1	Pure white	20	3.800	6117 04 1
SKS-D3 ROR1	Orange	20	3.800	6117 04 3
SKS-D3 MZGN1	Mint green	20	3.800	6117 04 5
SKS-D3 SRO1	Signal red	20	3.800	6117 04 7
SKS-D3 SWGR1	Black-grey	20	3.800	6117 04 8
SKS-D3 AL1	Aluminium paint	20	3.800	6117 04 9

PC Polycarbonate

/pc.

Power socket single 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKS-D3 RW2	Pure white	10	7.500	6117 05 2
SKS-D3 ROR2	Orange	10	7.500	6117 05 4
SKS-D3 MZGN2	Mint green	10	7.500	6117 05 6
SKS-D3 SRO2	Signal red	10	7.500	6117 05 8
SKS-D3 SWGR2	Black-grey	10	7.500	6117 05 9
SKS-D3 AL2	Aluminium paint	10	7.500	6117 06 0

PC Polycarbonate

/pc.

Power socket double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKS-D3 RW3	Pure white	4	10.300	6117 06 3
SKS-D3 ROR3	Orange	4	10.300	6117 06 5
SKS-D3 MZGN3	Mint green	4	10.300	6117 06 7
SKS-D3 SRO3	Signal red	4	10.300	6117 06 9
SKS-D3 SWGR3	Black-grey	4	10.300	6117 07 0
SKS-D3 AL3	Aluminium paint	4	10.300	6117 07 1

PC Polycarbonate

/pc.

Power socket triple 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.



Socket with earthing pin 0°

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKS-F0 RW1	Pure white	20	3.800	6117 10 2
SKS-F0 ROR1	Orange	20	3.800	6117 10 4
SKS-F0 MZGN1	Mint green	20	3.800	6117 10 6
SKS-F0 SRO1	Signal red	20	3.800	6117 10 8
SKS-F0 SWGR1	Black-grey	20	3.800	6117 10 9
SKS-F0 AL1	Aluminium paint	20	3.800	6117 11 0

PC Polycarbonate

/pc.

Socket with earthing pin single 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.



Device systems



Socket with earthing pin 0°

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKS-F0 RW2	Pure white	10	7.500	6117 11 1
SKS-F0 ROR2	Orange	10	7.500	6117 11 3
SKS-F0 MZGN2	Mint green	10	7.500	6117 11 5
SKS-F0 SRO2	Signal red	10	7.500	6117 11 7
SKS-F0 SWGR2	Black-grey	10	7.500	6117 11 8
SKS-F0 AL2	Aluminium paint	10	7.500	6117 11 9

PC Polycarbonate

/pc.





Socket with earthing pin double 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKS-F0 RW3	Pure white	4	12.000	6117 12 3
SKS-F0 ROR3	Orange	4	12.000	6117 12 5
SKS-F0 MZGN3	Mint green	4	12.000	6117 12 7
SKS-F0 SRO3	Signal red	4	12.000	6117 12 9
SKS-F0 SWGR3	Black-grey	4	12.000	6117 13 0
SKS-F0 AL3	Aluminium paint	4	12.000	6117 13 1

PC Polycarbonate

/pc.

Socket with earthing pin triple 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.



Socket with earthing pin 33°

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKS-F3 RW1	Pure white	20	3.800	6117 14 0
SKS-F3 ROR1	Orange	20	3.800	6117 14 2
SKS-F3 MZGN1	Mint green	20	3.800	6117 14 4
SKS-F3 SRO1	Signal red	20	3.800	6117 14 6
SKS-F3 SWGR1	Black-grey	20	3.800	6117 14 7
SKS-F3 AL1	Aluminium paint	20	3.800	6117 14 8

PC Polycarbonate

/pc.

Socket with earthing pin single 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKS-F3 RW2	Pure white	10	7.500	6117 15 1
SKS-F3 ROR2	Orange	10	7.500	6117 15 3
SKS-F3 MZGN2	Mint green	10	7.500	6117 15 5
SKS-F3 SRO2	Signal red	10	7.500	6117 15 7
SKS-F3 SWGR2	Black-grey	10	7.500	6117 15 8
SKS-F3 AL2	Aluminium paint	10	7.500	6117 15 9

PC Polycarbonate

/pc.





Socket with earthing pin double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.







Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKS-F3 RW3	Pure white	4	10.300	6117 16 2
SKS-F3 ROR3	Orange	4	10.300	6117 16 4
SKS-F3 MZGN3	Mint green	4	10.300	6117 16 6
SKS-F3 SRO3	Signal red	4	10.300	6117 16 8
SKS-F3 SWGR3	Black-grey	4	10.300	6117 16 9
SKS-F3 AL3	Aluminium paint	4	10.300	6117 17 0

PC Polycarbonate

/pc.

Socket with earthing pin triple 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.





Socket with earthing pin 0° – encoded version

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKS-FC0 RW1	Pure white	20	3.800	6106 67 1
SKS-FC0 ROR1	Orange	20	3.800	6106 67 3
SKS-FC0 MZGN1	Mint green	20	3.800	6106 67 5
SKS-FC0 SRO1	Signal red	20	3.800	6106 67 7
SKS-FC0 AL1	Aluminium paint	20	3.800	6106 67 9

PC Polycarbonate

/pc.

Socket with earthing pin single 0°, coded version with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

The socket can only be used in conjunction with an encoding pin, type CST-SKS.

Note: The encoding pin is not contained in the scope of supply.

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKS-FC0 RW2	Pure white	10	7.500	6106 68 1
SKS-FC0 ROR2	Orange	10	7.500	6106 68 3
SKS-FC0 MZGN2	Mint green	10	7.500	6106 68 5
SKS-FC0 SRO2	Signal red	10	7.500	6106 68 7
SKS-FC0 AL2	Aluminium paint	10	7.500	6106 68 9

PC Polycarbonate

/pc.

Socket with earthing pin double 0°, coded version with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

The socket can only be used in conjunction with an encoding pin, type CST-SKS.

Note: The encoding pin is not contained in the scope of supply.

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKS-FC0 RW3	Pure white	4	10.300	6106 69 1
SKS-FC0 ROR3	Orange	4	10.300	6106 69 3
SKS-FC0 MZGN3	Mint green	4	10.300	6106 69 5
SKS-FC0 SRO3	Signal red	4	10.300	6106 69 7
SKS-FC0 AL3	Aluminium paint	4	10.300	6106 69 9

PC Polycarbonate

/pc.

Socket with earthing pin triple 0°, coded version with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

The socket can only be used in conjunction with an encoding pin, type CST-SKS.

Note: The encoding pin is not contained in the scope of supply.

Socket with earthing pin 33° – encoded version

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKS-FC3 RW1	Pure white	20	3.800	6106 70 1
SKS-FC3 ROR1	Orange	20	3.800	6106 70 3
SKS-FC3 MZGN1	Mint green	20	3.800	6106 70 5
SKS-FC3 SRO1	Signal red	20	3.800	6106 70 7
SKS-FC3 AL1	Aluminium paint	20	3.800	6106 70 9

PC Polycarbonate

/pc.

Socket with earthing pin single 33°, coded version with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

The socket can only be used in conjunction with an encoding pin, type CST-SKS.

Note: The encoding pin is not contained in the scope of supply.

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKS-FC3 RW2	Pure white	10	7.500	6106 71 1
SKS-FC3 ROR2	Orange	10	7.500	6106 71 3
SKS-FC3 MZGN2	Mint green	10	7.500	6106 71 5
SKS-FC3 SRO2	Signal red	10	7.500	6106 71 7
SKS-FC3 AL2	Aluminium paint	10	7.500	6106 71 9



PC Polycarbonate

/pc.

Socket with earthing pin double 33°, coded version with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

The socket can only be used in conjunction with an encoding pin, type CST-SKS.

Note: The encoding pin is not contained in the scope of supply.




Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKS-FC3 RW3	Pure white	4	10.300	6106 72 1
SKS-FC3 ROR3	Orange	4	10.300	6106 72 3
SKS-FC3 MZGN3	Mint green	4	10.300	6106 72 5
SKS-FC3 SRO3	Signal red	4	10.300	6106 72 7
SKS-FC3 AL3	Aluminium paint	4	10.300	6106 72 9

/pc.

The socket can only be used in conjunction with an encoding pin, type CST-SKS.

The socket can only be used in conjunction with an encoding pin, type CSI-SKS.


Note: The encoding pin is not contained in the scope of supply.



Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
CST-SKS	Black	10	1.200	6106 73 5

/pc.


Encoding pin for socket with earthing pin, encoded version



Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKS-CH0 RW1	Pure white	1	3.400	6117 20 0

/pc.

Socket, single 0°, to Swiss standard (SEV), with screwless terminals, 2-pin, 10 A, 250 V~, type 13, with connection terminals to IEC 60884-1.



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKS-DK0 RW1	Pure white	20	3.050	6117 20 2


/pc.

Socket, single 0°, to Danish standard, with increased touch protection, with screw terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKS-DKE0 RW1	Pure white	20	3.050	6117 20 3

/pc.


Socket, single 0°, to Danish standard, encoded for IT power circuit, with screw terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

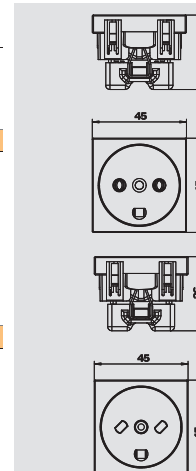


Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
ZL-SKS	Cream	10	0.467	6117 20 5

/pc.

Strain relief for 0° power socket, socket with 0° earthing pin and Modul 45connect sockets, connectable at side. For fastening a 3-wire cable, max. Ø 10 mm.




**Modul 45connect sockets, 33°, double**

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKS-DS3 RW2	Pure white	10	8.240	6117 07 4
SKS-DS3 ROR2	Orange	10	8.240	6117 07 6
SKS-DS3 MZGN2	Mint green	10	8.240	6117 07 8
SKS-DS3 SRO2	Signal red	10	8.240	6117 08 0
SKS-DS3 SWGR2	Black-grey	10	8.240	6117 08 1
SKS-DS3 AL2	Aluminium paint	10	8.240	6117 08 2

PC Polycarbonate

/pc.

Power socket with side connection double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.


**Modul 45connect sockets, 33°, triple**

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKS-DS3 RW3	Pure white	4	11.960	6119 85 0
SKS-DS3 ROR3	Orange	4	11.960	6119 85 2
SKS-DS3 MZGN3	Mint green	4	11.960	6119 85 4
SKS-DS3 SRO3	Signal red	4	11.960	6119 85 6
SKS-DS3 SWGR3	Black-grey	4	11.960	6119 85 8
SKS-DS3 AL3	Aluminium paint	4	11.960	6119 86 0

PC Polycarbonate

/pc.

Power socket with side connection triple 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.


**Modul 45connect socket with earthing pin 33°, double**

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKS-FS3 RW2	Pure white	10	7.880	6119 86 8
SKS-FS3 ROR2	Orange	10	7.880	6119 87 0
SKS-FS3 MZGN2	Mint green	10	7.880	6119 87 2
SKS-FS3 SRO2	Signal red	10	7.880	6119 87 4
SKS-FS3 SWGR2	Black-grey	10	7.880	6119 87 6
SKS-FS3 AL2	Aluminium paint	10	7.880	6119 87 8

PC Polycarbonate

/pc.

Socket with earthing pin with side connection double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

**Modul 45connect socket with earthing pin 33°, triple**


Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SKS-FS3 RW3	Pure white	4	11.600	6119 88 0
SKS-FS3 ROR3	Orange	4	11.600	6119 88 2
SKS-FS3 MZGN3	Mint green	4	11.600	6119 88 4
SKS-FS3 SRO3	Signal red	4	11.600	6119 88 6
SKS-FS3 SWGR3	Black-grey	4	11.600	6119 88 8
SKS-FS3 AL3	Aluminium paint	4	11.600	6119 89 0

PC Polycarbonate

/pc.

Socket with earthing pin with side connection triple 33°, with increased touch protection with screwless terminals, 2-pin, 16 A 250 V~, with connection terminals to IEC 60884-1.

With screwless terminals, 2-pole, 16 A 250 V~, with connection terminals to IEC 60884-1.

**Connection adapter, straight, connector part**

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
STA-SKS S1 SW	Black	10	1.200	6117 19 2
STA-SKS S1 W	White	10	1.200	6117 19 3

/pc.

Connector part adapter, straight, for connection to an SKS-DS or SKS-FS socket from the side, for VL extension cable with Wieland connector GST 18i 3p.



Device systems




Connection adapter, straight, socket part

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
BTA-SKS S1 SW	Black	10	1.200	6117 19 0
BTA-SKS S1 W	White	10	1.200	6117 19 1

/pc.

Socket part adapter, straight, for connection to an SKS-DS or SKS-FS socket from the side, for VL extension cable with Wieland connector GST 18i 3p.




Connection adapter, U-shaped, connector part

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
STA-SKS SU1 SW	Black	10	1.190	6117 19 6
STA-SKS SU1 W	White	10	1.190	6117 19 7

/pc.

Connector part adapter, U-shaped, for connection to an SKS-DS or SKS-FS socket from the side, for VL extension cable with Wieland connector GST 18i 3p.




Connection adapter

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
VB-SKS S	Black	10	0.590	6117 19 8

/pc.

Connection adapter for combining SKS-DS or SKS-FS sockets.

Note: Socket combinations with two connection adapters at most are permitted.




Strain relief

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
ZL-SKS	Cream	10	0.467	6117 20 5

/pc.

Strain relief for 0° power socket, socket with 0° earthing pin and Modul 45connect sockets, connectable at side. For fastening a 3-wire cable, max. Ø 10 mm.




Changeover switch 1/2 module width

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
TA-B RW0.5	Pure white	10	1.800	6117 67 0
TA-B SWGR0.5	Black-grey	10	1.800	6117 66 8
TA-B AL0.5	Aluminium paint	10	1.800	6117 67 1

/pc.

Changeover switch, 1-pin, 10 A, 250 V~, with screwless terminals.




Changeover switch 1/1 module width

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
TA-B RW1	Pure white	10	3.300	6117 67 3
TA-B SWGR1	Black-grey	10	3.300	6117 66 9
TA-B AL1	Aluminium paint	10	3.300	6117 67 4

/pc.

Changeover switch, 1-pin, 10 A, 250 V~, with screwless terminals.





One-way switch, 1/2 module width

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
AS-B RW0.5	Pure white	10	1.700	6117 62 0
AS-B SWGR0.5	Black-grey	10	1.700	6117 62 2
AS-B AL0.5	Aluminium paint	10	1.700	6117 62 1

/pc.

One-way switch, 1-pin, 16 A, 250 V, with screwless terminals.






One-way switch, 1/1 module width

Type	Designation	Colour	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
AS-B2P RW1	Off switch, 2-pole	Pure white	10	2.300	6117 64 4
AS-B2P SWGR1	—	Black-grey	10	2.300	6117 64 3
AS-B2P AL1	Off switch, 2-pole	Aluminium paint	10	2.300	6117 64 5

/pc.

One-way switch, 2-pin, 16 A, 250 V~, with screwless terminals.




Changeover switch 1/2 module width

Type	Designation	Colour	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
WS-B RW0.5	Changeover switch	Pure white	10	1.800	6117 62 7
WS-B SWGR0.5	—	Black-grey	10	1.800	6117 62 6
WS-B AL0.5	Changeover switch	Aluminium paint	10	1.800	6117 62 8

/pc.

Changeover switch 1-pin, 16 A, 250 V~, with screwless terminals.




Changeover switch 1/1 module width

Type	Designation	Colour	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
WS-B RW1	Changeover switch	Pure white	10	2.600	6117 64 0
WS-B SWGR1	—	Black-grey	10	2.600	6117 64 2
WS-B AL1	Changeover switch	Aluminium paint	10	2.600	6117 64 1

/pc.

Changeover switch 1-pin, 16 A, 250 V~, with screwless terminals.




Series switch, 1/1 module width

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
SE-B RW1	Pure white	10	1.800	6117 61 5
SE-B SWGR1	Black-grey	10	1.800	6117 61 4
SE-B AL1	Aluminium paint	10	1.800	6117 61 6

/pc.

Serial switch, 16 A, 250 V~, with screwless terminals.




Cross switch 1/1 module width

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
KS-B RW1	Pure white	10	1.900	6117 63 7
KS-B SWGR1	Black-grey	10	1.900	6117 63 9
KS-B AL1	Aluminium paint	10	1.900	6117 63 8

/pc.

Cross switch, 16 A, 250 V~, with screwless terminals.




Roller blind button 1/1 module width

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
RT-BS1 RW1	Pure white	10	3.700	6117 65 7
RT-BS1 SWGR1	Black-grey	10	3.700	6117 65 6
RT-BS1 AL1	Aluminium paint	10	3.700	6117 65 8

/pc.

Roller blind switch with electrical and mechanical locking, 1-pin, 10 A, 250 V~, with screwless terminals.



Roller blind switch, 1/1 module width

Type	Designation	Colour	Pack.	Weight	Item No.
			pcs	kg/100 pcs.	
RS-BS1 RW1	Roller blind switch	Pure white	10	3.700	6117 65 4
RS-BS1 SWGR1	—	Black-grey	10	3.700	6117 65 3
RS-BS1 AL1	Roller blind switch	Aluminium paint	10	3.700	6117 65 5

/pc.

Roller blind switch with electrical and mechanical lock, 1-pin, 10 A, 250 V~, with screwless terminals.






Adapter for switch installation rotated through 90°

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
AD-90G M45	1	0.400	6258 14 1
ST Steel			/pc.

The adapter allows switch installation rotated through 90° in, for example, installation columns with a 45 mm track or Rapid 45. Suitable for all switches and buttons in one module width (45 x 45 mm).



Surge protection 1/2 module width, visual signalling

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
USS 45-O-RW	Pure white	1	2.411	6117 47 3
USS 45-O-ALU	Aluminium paint	1	2.411	6117 47 5


/pc.

For stationary installation in Rapid 45 trunking, device installation trunking and underfloor systems.

- Version -O with visual function display
- Quick and easy mounting
- Small width of 22.5 mm

Application: The correct installation of the surge protection device, which is performed by the electrical installer, secures individual sockets, but can also be used for protecting socket combinations.

Surge protection device type 3 (class D) to VDE 0675, Parts 6–11 (DIN EN 61643-11).



Surge protection 1/2 module width, acoustic signalling

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
USS 45-A-RW	Pure white	1	2.800	6117 46 5
USS 45-A-ALU	Aluminium paint	1	2.800	6117 46 7


/pc.

For stationary installation in Rapid 45 trunking, device installation trunking and underfloor systems.

- Version -O with visual function display
- Quick and easy mounting
- Small width of 22.5 mm

Application: The correct installation of the surge protection device, which is performed by the electrical installer, secures individual sockets, but can also be used for protecting socket combinations.

Surge protection device type 3 (class D) to VDE 0675, Parts 6–11 (DIN EN 61643-11).



Surge protection module, acoustic signalling


Type	Signalling on device	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
USM-A	Audible	1	1.500	5092 45 1


/pc.

Surge protection module type 3 (class D) to DIN EN 61643-11 (VDE 0675 Parts 6–11), fine protection device, for 230/400 V supplies. For use on power sockets.

- With acoustic defect signal
- With low construction height
- Y circuit

Application: Universally applicable for all installation systems.

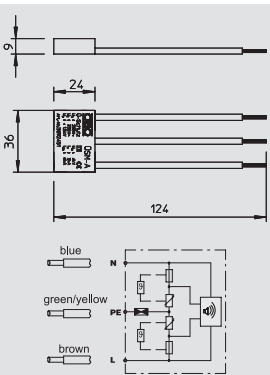




Antenna socket SAT 1/2 module width

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ANT-1S RW0.5	Pure white	1	2.250	6117 60 6
ANT-1S SWGR0.5	Black-grey	1	2.250	6117 61 0
ANT-1S AL0.5	Aluminium paint	1	2.250	6117 60 7

/pc.

Single socket for antennas, BK and satellite reception systems with SAT connection.

Frequency range: To 1 GHz
Through attenuation: Max. 0.055 dB




Antenna socket 1/1 module width

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ANT-2E RW1	Pure white	10	8.100	6117 38 1
ANT-2E SWGR1	Black-grey	10	8.100	6117 38 3
ANT-2E AL1	Aluminium paint	10	8.100	6117 38 5

/pc.

Single socket for antenna, BK and satellite reception systems with connection for TV and radio.

Frequency: 5–862 MHz
Heat attenuation: 1 dB
Return channel attenuation: 14 dB
EMC protection class A




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ANT-2D RW1	Pure white	10	8.100	6117 38 7
ANT-2D SWGR1	Black-grey	10	8.100	6117 38 9
ANT-2D AL1	Aluminium paint	10	8.100	6117 39 1

/pc.

Through socket for antenna, BK and satellite reception systems with connection for TV and radio.

Frequency: 5–862 MHz
Through attenuation: 4 dB
Heat attenuation: 14 dB
EMC protection class A




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ANT-3E RW1	Pure white	10	9.400	6117 39 3
ANT-3E SWGR1	Black-grey	10	9.400	6117 39 5
ANT-3E AL1	Aluminium paint	10	9.400	6117 39 7

/pc.

Single socket for antenna, BK and satellite reception systems with connection for TV, radio and SAT.

Frequency: 5–2050 MHz
Heat attenuation:
5-862 MHz – 1 dB
950-2050 MHz – 2 dB
Return channel attenuation: 14 dB
EMC protection class A



Telephone connection box 1/1 module width

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
TAE-6F RW1	Pure white	10	2.000	6117 42 8
TAE-6F AL1	Aluminium paint	10	2.000	6117 43 0

/pc.

Telephone connection box TAE 6 F.



Device systems




Equipotential bonding socket 1/1 module width

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
PAD-LQ6 RW1	Pure white	1	5.400	6119 99 8
PAD-LQ6 SWGR1	Black-grey	1	5.400	6119 99 7
PAD-LQ6 AL1	Aluminium paint	1	5.400	6119 99 9

/pc.

Equipotential bonding socket to DIN 42 801 for the connection of an angular socket connector, type 1945, rear-sided connection with M6 screw bolts.




Cable outlet, 1/1 module width

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KA-ZKB RW1	Pure white	8	0.890	6117 98 5
KA-ZKB SWGR1	Black-grey	8	0.890	6117 98 6
KA-ZKB AL1	Aluminium paint	8	0.890	6117 98 7

/pc.

Cable outlet with strain relief via cable tie fastening.




Blanking cover 1/2 module width

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ADP-B RW0.5	Pure white	10	0.400	6117 41 4
ADP-B SWGR0.5	Black-grey	10	0.400	6117 41 5
ADP-B AL0.5	Aluminium paint	10	0.400	6117 41 6

/pc.

Blanking cover for closing off empty spaces for half a device (1/2 module width).




Blanking cover 1/1 module width

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ADP-B RW1	Pure white	10	0.800	6117 40 6
ADP-B SWGR1	Black-grey	10	0.800	6117 40 7
ADP-B AL1	Aluminium paint	10	0.800	6117 40 8

/pc.

Blanking cover for closing off empty spaces for a device (one module width).




Data connection module with support plate, Cat. 5e

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C5	1	1.120	6117 33 7

/pc.

Connection module with support plate, Cat. 5e unshielded, with an RJ 45 slot. Including a dust cover, a cable tie and mounting instructions.




Data connection module with support plate, Cat. 5e shielded

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C5 G	1	1.920	6117 32 5

/pc.

Connection module with support plate, Cat. 5e shielded, with an RJ 45 slot. Including an EMC screen hood, a dust cover, a cable tie and mounting instructions





Data connection module with support plate, Cat. 6

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6	1	1.060	6117 34 1

/pc.

Connection module with support plate, Cat. 6 unshielded, with an RJ 45 slot. Including a dust cover, a cable tie and mounting instructions.






Data connection module with support plate, Cat. 6 shielded for 10GbE

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
ASM-C6 G	1	1.850	6117 32 9

/pc.

Connection module with support plate, Cat. 6 shielded for 10GbE, with an RJ 45 slot. Including an EMC screen hood, a dust cover, a cable tie and mounting instructions



Fibre optic coupling with support plate


Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
ASM-LWL K	1	0.095	6117 74 0

/pc.

Fibre optic coupling with support plate, single trunking module.

Scope of supply: coupling, support plate, two dust protection covers, one set of installation instructions, one description.

Scope of delivery: Coupling, carrier plate, 2 dust protection covers, installation instructions, 1 description




Reducing frame, RJ45 to RJ11/RJ12

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DMZ-RR RJ11	Green	1	0.010	6117 97 2

/pc.

Reducing frame for RJ45 to RJ11/RJ12. Prevents unintentional insertion of RJ45 connectors (data) into an RJ45 socket, defined as a telephone socket (RJ11 connector).




Data technology support 1/2 module width

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DMG-1RM RW0.5	Pure white	10	0.470	6117 29 2
DMG-1RM SWGR0.5	Black-grey	10	0.470	6117 29 1
DMG-1RM AL0.5	Aluminium paint	10	0.470	6117 29 3

/pc.

Data technology support with straight outlet to accept one connection module with support plate. The locking fastening is suitable for horizontal installation in the system environment.



Data technology support 1/1 module width

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DMG-2RM RW1	Pure white	10	1.100	6117 31 9
DMG-2RM SWGR1	Black-grey	10	1.100	6117 31 8
DMG-2RM AL1	Aluminium paint	10	1.100	6117 32 0

/pc.


Data technology support with slanting outlet to accept two connection modules with support plate. The locking fastening is suitable for horizontal and vertical installation in the system environment.

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DMS-2RM RW1	Pure white	10	0.855	6117 31 5
DMS-2RM AL1	Aluminium paint	10	0.855	6117 31 6
DMS-2RM SWGR1	Black-grey	10	0.855	6117 31 4

PC Polycarbonate

/pc.

Data technology support with slanting outlet to accept two connection modules with support plate. The locking fastening is suitable for horizontal and vertical installation in the system environment.



Device systems




Safe clip

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DMZ-SC GN	Green	20	0.040	6117 95 7
DMZ-SC RO	Red	20	0.040	6117 95 8

/pc.

Safe clip for visual colour coding of universal cables and CP cross connects.




Hinge dust protection

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DMZ-STW W	White	10	0.058	6117 73 6
DMZ-STW GN	Green	10	0.058	6117 73 7
DMZ-STW RO	Red	10	0.058	6117 73 8

/pc.

Hinge dust protection for visual colour coding of the connection modules, for mounting on DMS and DMG data technology supports.




Mechanical and visual insertion protection

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DMZ-ESMV CB	White	1	0.446	6117 70 8

/pc.

Mechanical and visual plug-in protector for RJ45 socket and RJ45 connector, socket side for mounting on DMS and DMG data technology support, "B" encoding for four different encodings with the colours yellow, brown, violet and white.

Note: During connector mounting, the adapter is only required for specific connector types.




Connection protection

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DMZ-AVS GN	Green	20	0.054	6117 72 4
DMZ-AVS RO	Red	20	0.054	6117 72 6
DMZ-AVS W	White	20	0.054	6117 72 8

/pc.

Connection protection as mechanical attachment protection and for visual colour coding of the connection modules, for mounting on DMS and DMG data technology supports, plug connection can only be released with the appropriate key, DMZ-SCHL AVS.

Note: The key, type DMZ-SCHL AVS, is not contained in the scope of delivery.




Plug-in protector for RJ45

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DMZ-ES AVS	Black	1	0.049	6117 74 5

/pc.

Plug-in protector for connection protection, type DMZ-AVS, plug connection can only be released with the appropriate key, DMZ-SCHL AVS.

Note: The key, type DMZ-SCHL AVS, is not contained in the scope of delivery.





Key for connection protection

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DMZ-SCHL AVS	Yellow	1	0.020	6117 73 2

/pc.

Key with fob for connection protection, type DMZ-AVS, plug connection can only be released with the key.



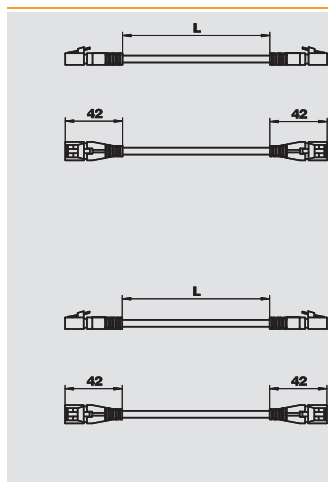

Universal cable, connector – connector version

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
RK-C5SF UTP1	Grey	10	4.530	6117 96 0
RK-C5SF UTP3	Grey	10	12.130	6117 96 2
RK-C5SF UTP5	Grey	10	19.730	6117 96 4


/pc.

Universal cable SF/UTP 4P, LSFRZH, Cat. 5, shielded, connector – connector version.

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
RK-C6S FTP1	Grey	10	4.530	6117 96 6
RK-C6S FTP3	Grey	10	12.130	6117 96 8
RK-C6S FTP5	Grey	10	19.730	6117 97 0

/pc.

Universal cable S/FTP 4P, LSFRZH, Cat. 6, shielded, connector – connector version.

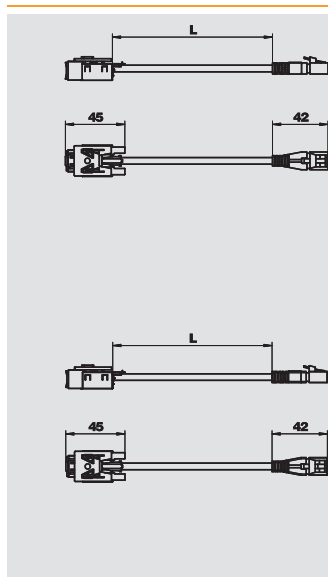

CP cross connect, connector – socket version

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
CPK-C5SF UTP2	Grey	5	8.850	6117 93 8
CPK-C5SF UTP7.5	Grey	5	29.750	6117 94 0
CPK-C5SF UTP10	Grey	5	39.250	6117 94 2
CPK-C5SF UTP15	Grey	5	58.250	6117 94 4


/pc.

Universal cable as extension cable SF/UTP 4P, LSFRZH, Cat. 5, shielded, connector – socket version, socket side can be installable in the data technology support, types DMS and DMG.

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
CPK-C6S FTP2	Grey	5	9.240	6117 94 6
CPK-C6S FTP7.5	Grey	5	30.140	6117 94 8
CPK-C6S FTP10	Grey	5	39.640	6117 95 0
CPK-C6S FTP15	Grey	5	58.640	6117 95 2

/pc.

Universal cable as extension cable S/FTP 4P, LSFRZH, Cat. 6, shielded, connector – socket version, socket side can be installable in the data technology support, types DMS and DMG.

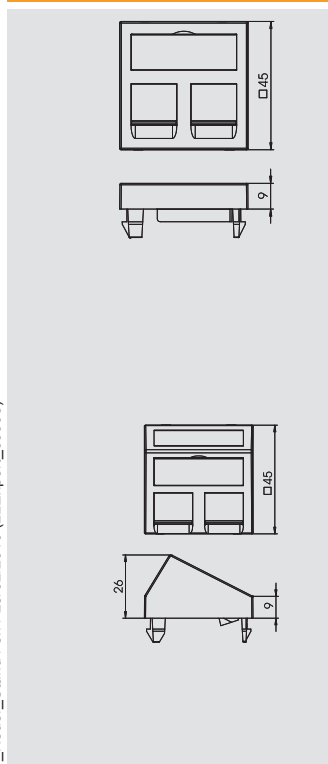

Data technology support Typ A, 1/1 module width

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2A RW1	Pure white	1	1.100	6119 20 2
DTG-2A SWGR1	Black-grey	1	1.100	6119 20 4
DTG-2A AL1	Aluminium paint	1	1.100	6119 20 6

PC Polycarbonate

/pc.

Data technology support with straight outlet and locking slider to accept two data technology connection modules. The locking fastening is suitable for horizontal and vertical installation in the system environment.

Support plate, type A, to accept the following data connection modules: AMP TYCO: SL series 110Connect and Toolless, AMP-Twist (without dust protection cap); Brand-Rex: unshielded module; GG45; Nexans: LANmark with adapter clip.

Type A corresponds to a mounting opening in mm: 20.10 x 14.80.

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2A RW1	Pure white	1	1.500	6119 23 8
DTS-2A SWGR1	Black-grey	1	1.500	6119 24 0
DTS-2A AL1	Aluminium paint	1	1.500	6119 24 2

PC Polycarbonate

/pc.

Data technology support with slanting outlet and lock slide to accept two data technology connection modules. The locking fastening is suitable for horizontal and vertical installation in the system environment.

Support plate, type A, to accept the following data connection modules: AMP TYCO: SL series 110Connect and Toolless, AMP-Twist (without dust protection cap); Brand-Rex: unshielded module; GG45; Nexans: LANmark with adapter clip.

Type A corresponds to a mounting opening in mm: 20.10 x 14.80.





Data technology support Typ B, 1/1 module width

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DTG-2B RW1	Pure white	1	1.100	6119 20 8
DTG-2B SWGR1	Black-grey	1	1.100	6119 21 0
DTG-2B AL1	Aluminium paint	1	1.100	6119 21 2

PC Polycarbonate /pc.

Data technology support with straight outlet and locking slider to accept two data technology connection modules. The locking fastening is suitable for horizontal and vertical installation in the system environment.

Support plate, type B, to accept the following data connection modules: BTR: E-DAT; Dätwyler: MS and MS-N; Kerpen: VarioKeystone.

Type B corresponds to a mounting opening in mm: 19.35/21.55 x 14.85.



Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DTS-2B RW1	Pure white	1	1.500	6119 24 4
DTS-2B SWGR1	Black-grey	1	1.500	6119 24 6
DTS-2B AL1	Aluminium paint	1	1.500	6119 24 8

PC Polycarbonate /pc.

Data technology support with slanting outlet and lock slide to accept two data technology connection modules. The locking fastening is suitable for horizontal and vertical installation in the system environment.

Support plate, type B, to accept the following data connection modules: BTR: E-DAT; Dätwyler: MS and MS-N; Kerpen: VarioKeystone.

Type B corresponds to a mounting opening in mm: 19.35/21.55 x 14.85.



Data technology support Typ C, 1/1 module width

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DTG-2C RW1	Pure white	1	1.100	6119 21 4
DTG-2C SWGR1	Black-grey	1	1.100	6119 21 6
DTG-2C AL1	Aluminium paint	1	1.100	6119 21 8

PC Polycarbonate /pc.

Data technology support with straight outlet and locking slider to accept two data technology connection modules. The locking fastening is suitable for horizontal and vertical installation in the system environment.

Support plate, type C, to accept the following data connection modules: Brand-Rex: shield-ed module; Corning: modules with Keystone seat; Dätwyler: KS-T, MS-K and KU-T; ECU: E-Stone; R&M: Keystone; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.

Type C corresponds to a mounting opening in mm: 19.30 x 14.80.



Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DTS-2C RW1	Pure white	1	1.500	6119 25 0
DTS-2C SWGR1	Black-grey	1	1.500	6119 25 2
DTS-2C AL1	Aluminium paint	1	1.500	6119 25 4

PC Polycarbonate /pc.

Data technology support with slanting outlet and lock slide to accept two data technology connection modules. The locking fastening is suitable for horizontal and vertical installation in the system environment.

Support plate, type C, to accept the following data connection modules: Brand-Rex: shield-ed module; Corning: modules with Keystone seat; Dätwyler: KS-T, MS-K and KU-T; ECU: E-Stone; R&M: Keystone; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.

Type C corresponds to a mounting opening in mm: 19.30 x 14.80.



Data technology support Typ EP, 1/1 module width


Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DTG-2EP RW1	Pure white	1	1.100	6119 23 2
DTG-2EP SWGR1	Black-grey	1	1.100	6119 23 4
DTG-2EP AL1	Aluminium paint	1	1.100	6119 23 6


PC Polycarbonate /pc.

Data technology support with straight outlet and locking slider to accept two data technology connection modules. The locking fastening is suitable for horizontal and vertical installation in the system environment.

Support plate, type EP, to accept the following data connection modules: Leoni Kerpen: ELine Premium-System.

Type EP corresponds to a mounting opening in mm: 16.0 x 14.0.





Data technology support Typ EP, 1/1 module width

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DTS-2EP RW1	Pure white	1	1.500	6119 26 8
DTS-2EP SWGR1	Black-grey	1	1.500	6119 27 0
DTS-2EP AL1	Aluminium paint	1	1.500	6119 27 2


PC Polycarbonate

/pc.

Data technology support with slanting outlet and lock slide to accept two data technology connection modules. The locking fastening is suitable for horizontal and vertical installation in the system environment.

Support plate, type EP, to accept the following data connection modules: Leoni Kerpen: ELine Premium-System.

Type EP corresponds to a mounting opening in mm: 16.0 x 14.0.



Data technology support Typ F, 1/1 module width

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DTG-2F RW1	Pure white	1	1.100	6119 22 0
DTG-2F SWGR1	Black-grey	1	1.100	6119 22 2
DTG-2F AL1	Aluminium paint	1	1.100	6119 22 4


PC Polycarbonate

/pc.

Data technology support with straight outlet and locking slider to accept two data technology connection modules. The locking fastening is suitable for horizontal and vertical installation in the system environment.

Support plate, type F, to accept the following data connection modules: Avaya/Systimax: M series.

Type F corresponds to a mounting opening in mm: 17.40 x 16.60.



Data technology support Typ PA, 1/1 module width

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DTG-2PA RW1	Pure white	1	1.100	6119 22 6
DTG-2PA SWGR1	Black-grey	1	1.100	6119 22 8
DTG-2PA AL1	Aluminium paint	1	1.100	6119 23 0


PC Polycarbonate

/pc.

Data technology support with straight outlet and locking slider to accept two data technology connection modules. The locking fastening is suitable for horizontal and vertical installation in the system environment.

Support plate, type PA, to accept the following data connection modules: Panduit: Mini-Com.

Type PA corresponds to a mounting opening in mm: 18.4 x 16.0.



Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DTS-2PA RW1	Pure white	1	1.500	6119 26 2
DTS-2PA SWGR1	Black-grey	1	1.500	6119 26 4
DTS-2PA AL1	Aluminium paint	1	1.500	6119 26 6


PC Polycarbonate

/pc.

Data technology support with slanting outlet and lock slide to accept two data technology connection modules. The locking fastening is suitable for horizontal and vertical installation in the system environment.

Support plate, type PA, to accept the following data connection modules: Panduit: Mini-Com

Type PA corresponds to a mounting opening in mm: 18.4 x 16.0.




Cover frame S990, single

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
S990-AF1 RW	Pure white	1	2.700	6107 00 2
S990-AF1 AL	Aluminium paint	10	2.700	6107 00 8

PC Polycarbonate

/pc.

Front-locking Modul 45 cover frame.



Cover frame S990, double

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
S990-AF2 RW	Pure white	1	4.800	6107 10 2
S990-AF2 AL	Aluminium paint	5	4.800	6107 10 8

PC Polycarbonate

/pc.

Front-locking Modul 45 cover frame.



Device systems




Cover frame S990, triple

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
S990-AF3 RW	Pure white	1	4.100	6107 20 2
S990-AF3 AL	Aluminium paint	5	4.100	6107 20 8

PC Polycarbonate

Front-locking Modul 45 cover frame.




S990 cover frame with labelling panel, single

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
S990-AFB1 RW	Pure white	1	2.700	6107 05 2
S990-AFB1 AL	Aluminium paint	10	2.700	6107 05 8

PC Polycarbonate

Front-locking Modul 45 cover frame, with inscription panel.




S990 cover frame with labelling panel, double

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
S990-AFB2 RW	Pure white	1	4.800	6107 15 2
S990-AFB2 AL	Aluminium paint	5	4.800	6107 15 8

PC Polycarbonate

Front-locking Modul 45 cover frame, with labelling field.




S990 cover frame with labelling panel, triple

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
S990-AFB3 RW	Pure white	1	4.100	6107 25 2
S990-AFB3 AL	Aluminium paint	5	4.100	6107 25 8

PC Polycarbonate

Front-locking Modul 45 cover frame, with labelling field.




S990 cover frame with labelling panel, single, rectangular

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
S990-AR1 RW	Pure white	10	2.500	6107 07 2
S990-AR1 AL	Aluminium paint	10	2.500	6107 07 8

PC Polycarbonate

Front-locking Modul 45 cover frame, angular design.




S990 cover frame with labelling panel, double, rectangular

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
S990-AR2 RW	Pure white	5	4.000	6107 17 2
S990-AR2 AL	Aluminium paint	5	4.000	6107 17 8

PC Polycarbonate

Front-locking Modul 45 cover frame, angular version.





S990 cover frame with labelling panel, triple, rectangular

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
S990-AR3 RW	Pure white	5	3.400	6107 27 2
S990-AR3 AL	Aluminium paint	5	3.400	6107 27 8

PC Polycarbonate

Front-locking Modul 45 cover frame, angular version.






Aura range cover frame

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
S990-AR80 1 RW	Pure white	10	1.700	6107 37 2
S990-AR80 1 AL	Aluminium paint	10	1.700	6107 37 8

PC Polycarbonate

/pc.

Cover frame for devices from the Aura switch systems.




Aura range cover frame, rectangular

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
ADR-80 1 RW	Pure white	10	1.900	6258 06 9
ADR-80 1 AL	Aluminium paint	10	1.900	6258 07 1

PC Polycarbonate

/pc.

Cover frame for devices from the Aura switch systems, angular design.




Central plate for Aura range, rectangular standard penetration

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
ZP-80 1RW	Pure white	10	1.800	6258 07 3
ZP-80 1AL	Aluminium paint	10	1.800	6258 07 4

/pc.

Central plate 50 x 50 mm, for connection sockets of make Rex, BTR, Panduit, Reichle De Massari, Molex Telegärtner, etc. for cover frames Aura switch systems, type ADR80/1 and S990-AR80/1.



Socket unit, single


Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
KS990RW1-0	Pure white	4	12.800	6288 61 6
KS990GN1-0	Mint green	4	12.800	6288 61 7
KS990RT1-0	Signal red	4	12.800	6288 61 8

/pc.

Completely pre-terminated single protective contact socket unit for the device installation trunking systems GEK-S, GEK-A and ISS, consisting of:

- Appropriate accessory mounting box, type 71GD...
- Modul45 protective contact socket, colour RW pure white, GN green, RT red
- Matching cover frame series S990 colour pure white

The socket units do not contain any connection cables.



Socket unit, double

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
KS990GN2-0	Mint green	2	24.700	6288 62 0
KS990RW2-0	Pure white	2	24.700	6288 61 9
KS990RT2-0	Signal red	2	24.700	6288 62 1

/pc.

Completely pre-terminated double protective contact socket unit for the device installation trunking systems GEK-S, GEK-A and ISS, consisting of:

- Appropriate accessory mounting box, type 71GD...
- Modul45 protective contact socket, colour RW pure white, GN green, RT red
- Matching cover frame series S990 colour pure white

The socket units do not contain any connection cables.






Socket unit, triple

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
KS990RW3-0	Pure white	2	30.400	6288 62 2
KS990GN3-0	Mint green	2	30.400	6288 62 3
KS990RT3-0	Signal red	2	30.400	6288 62 4

/pc.

Completely pre-terminated triple protective contact socket unit for the device installation trunking systems GEK-S, GEK-A and ISS, consisting of:

- Appropriate accessory mounting box, type 71GD...
 - Modul45 protective contact socket, colour RW pure white, GN green, RT red
 - Matching cover frame series S990 colour pure white
- The socket units do not contain any connection cables.




Socket unit with labelling panel, single

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
KSB990RW1-0	Pure white	4	12.800	6288 62 5
KSB990GN1-0	Mint green	4	12.800	6288 62 6
KSB990RT1-0	Signal red	4	12.800	6288 62 7

/pc.

Completely pre-terminated single protective contact socket unit with inscription panel for the device installation trunking systems GEK-S, GEK-A and ISS, consisting of:

- Appropriate accessory mounting box, type 71GD...
 - Modul45 protective contact socket, colour RW pure white, GN green, RT red
 - Matching cover frame series S990 colour pure white
- The socket units do not contain any connection cables.




Socket unit with labelling panel, double

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
KSB990GN2-0	Mint green	2	24.700	6288 62 9
KSB990RW2-0	Pure white	2	24.700	6288 62 8
KSB990RT2-0	Signal red	2	24.700	6288 63 0

/pc.

Completely pre-terminated double protective contact socket unit with labelling panel for the device installation trunking systems GEK-S, GEK-A and ISS, consisting of:

- Appropriate accessory mounting box, type 71GD...
 - Modul45 protective contact socket, colour RW pure white, GN green, RT red
 - Matching cover frame series S990 colour pure white
- The socket units do not contain any connection cables.




Socket unit with labelling panel, triple

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
KSB990GN3-0	Mint green	2	30.400	6288 63 2
KSB990RW3-0	Pure white	2	30.400	6288 63 1
KSB990RT3-0	Signal red	2	30.400	6288 63 3

/pc.

Completely pre-terminated triple protective contact socket unit with labelling panel for the device installation trunking systems GEK-S, GEK-A and ISS, consisting of:

- Appropriate accessory mounting box, type 71GD...
 - Modul45 protective contact socket, colour RW pure white, GN green, RT red
 - Matching cover frame series S990 colour pure white
- The socket units do not contain any connection cables.




CEE 16 A accessory mounting box


Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
CEE16E2	Grey	1	34.110	6288 61 2

PA Polyamide

/pc.

Accessory mounting box, complete, for the installation of a CEE connection device in device installation trunking with 80 mm cover, consisting of:
front-locking device installation trunking
CEE connection unit and mounting material
CEE socket, 16 A.






CEE 32 A accessory mounting box

Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
CEE32E2	Grey	1	37.000	6288 61 4

PA Polyamide /pc.

Accessory mounting box, complete, for the installation of a CEE connection device in device installation trunking with 80 mm cover, consisting of:
front-locking device installation trunking
CEE connection unit and mounting material
CEE socket, 32 A.

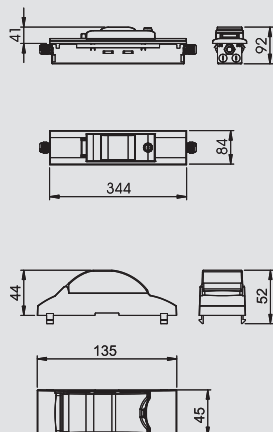

Installation unit

Type	Suitable for trunking depth	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
IKR4RW	—	1	85.400	6288 36 5

/pc.

Flush-mount unit for the installation of automatic circuit-breakers or FI protection switches in device installation trunking. With two hat rails of 3 TE and terminal strips for N and PE. Strain relief is provided by cable ties or a strain relief device.

Type	Suitable for trunking depth	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
IKR6RW	—	1	1.720	6288 36 9

PVC Polyvinylchloride /pc.

Flush-mount unit for the installation of automatic circuit-breakers or FI protection switches in device installation trunking. With two hat rails of 3 TE and terminal strips for N and PE. Strain relief is provided by cable ties or a strain relief device.





Directories

	Alphabetical table of contents	360
	Numeric directory	366
	Type listing	376
	Terms and conditions of sale and delivery	403



Alphabetical table of contents

A

Accessory mounting box, 122
Adapter for switch installation rotated through 90°, 346
Adapter stabiliser for ISST70140, 319
Adapter stabiliser for ISST70140B, 321
Aluminium cover, 266, 269, 272, 275, 278, 281, 284, 287, 296, 299
Aluminium cover, size 50 track, 291, 294
Aluminium cover, size 80 track, 290, 293
Aluminium external corner cover, 267, 270, 273, 276, 279, 282, 285, 288, 297, 300
Aluminium external corner cover, size 50 track, 291, 294
Aluminium external corner cover, size 80 track, 291, 294
Aluminium flat angle cover, 267, 270, 273, 276, 279, 282, 285, 288, 297, 300
Aluminium flat angle cover, size 50 track, 292, 295
Aluminium flat angle cover, size 80 track, 292, 295
Aluminium wall cover, closed, 70110, 311
Aluminium wall cover, closed, 70130, 312
Aluminium wall cover, closed, 70170, 312
Aluminium wall cover, closed, 70210, 312
Aluminium wall cover, closed, 90110, 311
Aluminium wall cover, closed, 90130, 312
Aluminium wall cover, closed, 90170, 312
Aluminium wall cover, closed, 90210, 312
Aluminium wall cover, open, 70110, 310
Aluminium wall cover, open, 70130, 310
Aluminium wall cover, open, 70170, 311
Aluminium wall cover, open, 70210, 311
Aluminium wall cover, open, 90110, 310
Aluminium wall cover, open, 90130, 310
Aluminium wall cover, open, 90170, 311
Aluminium wall cover, open, 90210, 311
Antenna socket 1/1 module width, 347
Antenna socket SAT 1/2 module width, 347
Aura range cover frame, 355
Aura range cover frame, rectangular, 355

B

Bend radius, external corner, 189, 192, 195, 202, 205
Bend radius, flat angle, 188, 192, 194, 201, 204
Bend radius, internal corner, 189, 192, 195, 201, 204
Blanking cover 1/1 module width, 348
Blanking cover 1/2 module width, 348

C

Cable bracket, 143, 155
Cable outlet, 1/1 module width, 348
CEE 16 A accessory mounting box, 356
CEE 32 A accessory mounting box, 357
CEE accessory mounting box, 124
CEE adapter flange 16 A, 125
CEE adapter flange 32 A, 125
Ceiling panel, 322
Ceiling panel for ISO70140, 320
Ceiling panel for ISS 120, 318
Ceiling panel for ISS 140110, 324
Ceiling panel for ISS 140220, 325
Ceiling panel for ISS110100F, 328
Ceiling panel for ISS110100R, 327
Ceiling panel for ISS140100F, 330
Ceiling panel for ISS140100R, 329
Ceiling panel for ISS90110, 323
Ceiling panel for ISSRM45, 326
Ceiling panel for ISSRM45F, 327
Ceiling panel for ISST70140, 320
Ceiling panel for ISST70140B, 322
Central plate for Aura range, rectangular standard, 355 penetration
Changeover switch 1/1 module width, 344-345
Changeover switch 1/2 module width, 344-345
Clamp, 305

C

Clamp fastening, 317
Classic stand for floor plate, 331
Connection adapter, 344
Connection adapter, straight, connector part, 343
Connection adapter, straight, socket part, 344
Connection adapter, U-shaped, connector part, 344
Connection profile for trunking height 170 mm, 304
Connection profile for trunking height 210 mm, 304
Connection protection, 350
Convection grid profile, 307
Convactor panelling, 307
Coupling, 208, 211, 214, 266, 269, 272, 275, 278, 281, 284, 287, 290, 293, 296, 299
Coupling pins, 307
Coupling, trunking depth 70 mm, 220, 225, 230, 236, 241, 247, 252, 258
Coupling, trunking depth 90 mm, 220, 225, 230, 236, 241, 247, 252, 258
Cover, 126, 164-181, 188, 191, 194, 200, 203
Cover clip, 126, 188, 191
Cover clip for 110 mm trunking width, 121
Cover clip for 130 mm trunking width, 121
Cover clip for 150 mm trunking width, 121
Cover clip for 170 mm trunking width, 121
Cover clip for 210 mm trunking width, 121
Cover clip for 230 mm trunking width, 122
Cover clip for 60 mm trunking width, 121
Cover clip for 90 mm trunking width, 121
Cover for CEE accessory mounting box, 125
Cover for double accessory mounting box, trunking, 123 height 110 mm
Cover for double accessory mounting box, trunking, 123 height 130 mm
Cover for double accessory mounting box, trunking, 123 height 150 mm
Cover for double accessory mounting box, trunking, 124 height 170 mm
Cover for double accessory mounting box, trunking, 124 height 210 mm
Cover for single accessory mounting box, trunking, 122 height 110 mm
Cover for single accessory mounting box, trunking, 123 height 130 mm
Cover for single accessory mounting box, trunking, 123 height 150 mm
Cover for single accessory mounting box, trunking, 124 height 170 mm
Cover for triple accessory mounting box, trunking height, 123 110 mm
Cover for triple accessory mounting box, trunking height, 123 130 mm
Cover for triple accessory mounting box, trunking height, 124 150 mm
Cover for triple accessory mounting box, trunking height, 124 170 mm
Cover frame S990, double, 353
Cover frame S990, single, 353
Cover frame S990, triple, 354
Cover screen, 316
CP cross connect, connector – socket version, 351
Cross switch 1/1 module width, 345

D

Danish standard socket 0°, 342
Data connection module with support plate, Cat. 5e, 348
Data connection module with support plate, Cat. 5e, 348 shielded
Data connection module with support plate, Cat. 6, 348
Data connection module with support plate, Cat. 6, 349 shielded for 10GbE
Data technology support 1/1 module width, 349
Data technology support 1/2 module width, 349
Data technology support Typ A, 1/1 module width, 351
Data technology support Typ B, 1/1 module width, 352

D

Data technology support Typ C, 1/1 module width, 352
 Data technology support Typ EP, 1/1 module width, 352-353
 Data technology support Typ F, 1/1 module width, 353
 Data technology support Typ PA, 1/1 module width, 353
 Device installation trunking, trunking depth 70 mm, 220, 225, 230, 236, 241, 247, 252, 258
 Device installation trunking, trunking depth 90 mm, 220, 225, 230, 236, 241, 247, 252, 258
 Device installation trunking, type GK70110, 208
 Device installation trunking, type GK70130, 211
 Device installation trunking, type GK70170, 214
 Device support, 159, 161
 Double accessory mounting box, 208, 211, 214, 220, 225, 230, 236, 241, 247, 252, 258, 266, 269, 272, 275, 278, 281, 284, 287, 290, 293, 296, 299, 331, 335
 Double/triple accessory mounting box Modul 45, 338
 Duct clamp, 155, 210, 213, 216, 224, 229, 234, 240, 245, 251, 256, 262
 Duct clamp for function maintenance E30–E90, 148

E

Earthing cable, 200, 203
 Earthing terminal, 200, 203
 Edge protection ring, 138-140, 142, 144, 146, 148, 150, 152, 154
 Encoding pin, 342
 End piece, 87, 89-90, 92, 94-96, 98-99, 101-114, 116-120, 126, 128-134, 141, 144-145, 147, 149, 151, 153, 195, 210, 213, 216, 268, 271, 274, 277, 280, 283, 286, 289, 292, 295, 298, 301
 End piece left, 158, 160, 190, 193, 202, 205
 End piece right, 158, 160, 190, 193, 202, 205
 End piece, trunking depth 70 mm, 224, 229, 234, 240, 245, 250, 256, 262
 End piece, trunking depth 90 mm, 224, 229, 234, 240, 245, 251, 256, 262
 Equipotential bonding socket 1/1 module width, 348
 External corner, 141, 143, 145, 147, 149, 151, 153, 189, 192, 195, 202, 205, 209, 212, 215, 267, 270, 273, 276, 279, 282, 285, 288, 291, 294, 297, 300
 External corner cover, fluted, 209, 212, 215
 External corner cover, smooth, 209, 212, 215
 External corner hood, 86, 88, 91, 93, 95, 97, 99-100, 102-115, 117-120, 129-134, 158, 160, 189, 192, 195, 201, 204
 External corner, trunking depth, 70 mm, 222, 227, 232, 238, 243, 248, 254, 260
 External corner, trunking depth, 90 mm, 222, 227, 232, 238, 243, 249, 254, 260

F

Falling flat angle, 188, 191, 201, 204, 267, 270, 273, 276, 279, 282, 285, 288, 291, 294, 297, 300
 Falling flat angle, trunking depth 70 mm, 233, 244, 249, 255, 261
 Falling flat angle, trunking depth 90 mm, 233, 244, 249, 255, 261
 Fastening bracket for ISST70140, 319
 Fastening bracket for ISST70140B, 321
 Fastening panels, 304
 Fibre optic coupling with support plate, 349
 Flat angle, 141, 143, 145, 147, 149, 151, 153, 194, 209, 212, 215
 Flat angle cover, fluted, 210, 213, 216
 Flat angle cover, smooth, 209, 212, 215
 Flat angle hood, 86, 88, 91, 93, 95, 97, 99-100, 102-115, 117-120, 129-134
 Flat angle, trunking depth 70 mm, 222, 227, 238
 Flat angle, trunking depth 90 mm, 222, 227, 238
 Floor panel, 306-307
 Floor plate for ISS110100F, 328
 Floor plate for ISS140100F, 330
 Floor plate for ISS140110, 324
 Floor plate for ISS70110, 322
 Floor plate for ISS90110, 323
 Floor plate for ISSO70140, 320

F

Floor plate for ISSRM45F, 326
 Floor plate for ISST70140, 319
 Floor plate for ISST70140B, 321
 Floor trunking, type 2650, 161
 Front cover, 126

G

GEK-A device installation trunking, type 100213, 299
 GEK-A device installation trunking, type 70110, 266
 GEK-A device installation trunking, type 70133, 272
 GEK-A device installation trunking, type 70213, 296
 GEK-A device installation trunking, type 90110, 269
 GEK-A device installation trunking, type 90133, 275
 GEK-AA device installation trunking, type 70173, 278
 GEK-AA device installation trunking, type 70173D, 290
 GEK-AA device installation trunking, type 70213, 284
 GEK-AA device installation trunking, type 90173, 281
 GEK-AA device installation trunking, type 90173D, 293
 GEK-AA device installation trunking, type 90213, 287

H

Hat profile rail, perforated, 185
 Hat profile rail, unperforated, 185
 Hinge dust protection, 350
 Hole punch, 196
 Hose connection for ISS110100F, 328
 Hose connection for ISS140100F, 330
 Hose connection for ISSRM45F, 326

I

Installation unit, 357
 Internal corner, 141, 143, 145, 147, 149, 151, 153, 189, 192, 195, 201, 204, 210, 213, 216, 267, 270, 273, 276, 279, 282, 285, 288, 292, 295, 297, 300
 Internal corner hood, 86, 88, 91, 93, 95, 97, 99-100, 102-115, 117-120, 129-134, 158, 160, 189, 192, 194, 201, 204
 Internal corner, simplified, trunking depth 70 mm, 244, 250, 255, 261
 Internal corner, simplified, trunking depth 90 mm, 244, 250, 255, 261
 Internal corner, trunking depth 70 mm, 223, 228, 233, 239
 Internal corner, trunking depth 90 mm, 223, 228, 233, 239
 Intersection, 190, 193, 202, 205

J

Joint connector, 138-141, 143, 145, 147, 149, 151, 153, 200, 203
 Joint cover, 86, 88, 91, 93, 97, 100, 158, 160, 188, 191, 194, 200, 203
 Joint cover, trunking depth 70 mm, 221, 226, 231, 237, 242, 248, 253, 259
 Joint cover, trunking depth 90 mm, 221, 226, 231, 237, 242, 248, 253, 259

K

Key for connection protection, 350
 Knock-in anchor, 125

L

LK4 wiring trunking, type LK4 60060, 166
 Locking bracket, 221, 226, 231, 237, 242, 248, 253, 259

M

Mechanical and visual insertion protection, 350
 Mini trunking with adhesive film and hinge cover MD12, 84
 Mini trunking with adhesive film and hinge cover MD17, 84
 Mini trunking with adhesive film and hinge cover MD4, 84
 Mini trunking with adhesive film and hinge cover MD7, 84
 Mini trunking with adhesive film M11, 84
 Mini trunking with adhesive film M7, 84
 Mini trunking with adhesive film M9, 84
 Modul 45connect socket with earthing pin 33°, triple, 343
 Modul 45connect socket with earthing pin 33°, double, 343
 Modul 45connect sockets, 33°, double, 343

Alphabetical table of contents

M

Modul 45connect sockets, 33°, triple, 343
Mounting and connection profile for convection grids,, 305
trunking depth 70 mm
Mounting and connection profile for convection grids,, 305
trunking depth 90 mm
Mounting and connection profile for convector panelling,, 306
trunking depth 70 mm
Mounting and connection profile for convector panelling,, 306
trunking depth 90 mm
Mounting support for data technology and Modul 45, 338
connect

N

Noise limit barrier, 313
Noise protection, sold by the metre, 313

O

One-way switch, 1/1 module width, 345
One-way switch, 1/2 module width, 344

P

Partition, 155, 188, 191, 194, 200, 203
Partition for ISS 120, 318
Partition for trunking height 100 mm, 122
Partition for trunking height 40 mm, 122
Partition for trunking height 60 mm, 122
Partition for trunking height 80 mm, 122
Plastic external corner cover, fluted, 222, 227, 232, 238, 243, 254, 260
Plastic external corner cover, smooth, 222, 227, 232, 238, 243, 254, 260
Plastic flat angle cover, fluted, 223, 228, 233, 239, 244, 255, 261
Plastic flat angle cover, smooth, 223, 228, 233, 239, 244, 255, 261
Plastic rivet tool, 184
Plastic trunking cover, fluted, 221, 226, 231, 237, 242, 253, 259
Plastic trunking cover, smooth, 221, 226, 231, 237, 242, 253, 259
Plug-in protector for RJ45, 350
Profile connector, horizontal, 305
Profile connector, vertical, 306
Protective conductor connection bracket, 224, 229, 235, 240, 246, 251, 257, 263
Protective contact socket 0°, 338-339
Protective contact socket 33°, 339
Protective frame for ISSHS4, 332
PVC wall cover, closed, 70110, 309
PVC wall cover, closed, 70130, 309
PVC wall cover, closed, 70170, 309
PVC wall cover, closed, 70210, 310
PVC wall cover, closed, 90110, 309
PVC wall cover, closed, 90130, 309
PVC wall cover, closed, 90170, 309
PVC wall cover, closed, 90210, 310
PVC wall cover, open, 70110, 307
PVC wall cover, open, 70130, 308
PVC wall cover, open, 70170, 308
PVC wall cover, open, 70210, 308
PVC wall cover, open, 90110, 307
PVC wall cover, open, 90130, 308
PVC wall cover, open, 90170, 308
PVC wall cover, open, 90210, 308

R

Rapid 45 device installation trunking, type GEK-A, 200
53100
Rapid 45 device installation trunking, type GEK-A, 203
53160
Rapid 45 device installation trunking, type GEK-K, 188
53100
Rapid 45 device installation trunking, type GEK-K, 191
53160
Rapid 45 device installation trunking, type GEK-K, 194
53160-3
Reassignment tool, 331

R

Reducing frame, RJ45 to RJ11/RJ12, 349
Release pliers, 184
Rising flat angle, 188, 191, 201, 204, 267, 270, 273, 276, 279, 282, 285, 288, 291, 294, 297, 300
Rising flat angle, trunking depth 70 mm, 232, 243, 249, 254, 260
Rising flat angle, trunking depth 90 mm, 232, 243, 249, 254, 260
Roller blind button 1/1 module width, 345
Roller blind switch, 1/1 module width, 345
Rubber support for ISS 140110, 324
Rubber support for ISS70110, 322
Rubber support for ISS90110, 323
Rubber support for ISSO70140, 320
Rubber support for ISSRM45, 326
Rubber support for ISST70140, 319
Rubber support for ISST70140B, 321

S

S990 cover frame with labelling panel, double, 354
S990 cover frame with labelling panel, double,, 354
rectangular
S990 cover frame with labelling panel, single, 354
S990 cover frame with labelling panel, single,, 354
rectangular
S990 cover frame with labelling panel, triple, 354
S990 cover frame with labelling panel, triple,, 354
rectangular
Safe clip, 350
Screen profile for ISS 120, 318
Separating retainer, 210, 213, 216
Series switch, 1/1 module width, 345
Service pole, sheet steel, with PVC cover, 316
Service pole, sheet steel, with sheet steel cover, 316
Service pole, type ISS110100F, 328
Service pole, type ISS110100R, 327
Service pole, type ISS120, 318
Service pole, type ISS140100F, 329
Service pole, type ISS140100R, 329
Service pole, type ISS140110, 324
Service pole, type ISS140220, 325
Service pole, type ISS70110, 322
Service pole, type ISS90110, 323
Service pole, type ISSHS140250, 333
Service pole, type ISSHS140500, 333
Service pole, type ISSHS140700, 333
Service pole, type ISSHS2D120, 334
Service pole, type ISSHS4, 332
Service pole, type ISSHS6, 334
Service pole, type ISSHSO270140, 333
Service pole, type ISSHSO70140, 333
Service pole, type ISSO70140, 320
Service pole, type ISSRHSM45, 334
Service pole, type ISSRM45, 325
Service pole, type ISSRM45F, 326
Service pole, type ISST70140, 319
Service pole, type ISST70140B, 321
Shears for WDK trunking, mitre cut, 85
Shears for WDK trunking, straight cut, 85
Sheet steel external corner cover, 222, 227, 232, 238, 243, 254, 260
Sheet steel external corner cover, size 50 track, 249
Sheet steel external corner cover, size 80 track, 249
Sheet steel flat angle cover, 223, 228, 233, 239, 244, 255, 261
Sheet steel flat angle cover, size 50 track, 250
Sheet steel flat angle cover, size 80 track, 250
Sheet steel partition, trunking depth 70 mm, 224, 229, 234, 240, 245, 251, 256, 262
Sheet steel partition, trunking depth 90 mm, 224, 229, 234, 240, 245, 251, 256, 262
Sheet steel trunking cover, size 50 track, 248
Sheet steel trunking cover, size 80 track, 248
Single accessory mounting box, 208, 211, 214, 220, 225, 230, 236, 241, 247, 252, 258, 266, 269, 272, 275, 278, 281, 284, 287, 290, 293,

S

Single accessory mounting box, 296, 299, 331, 335
 Single accessory mounting box Modul 45, 331, 335, 338
 SKL skirting trunking, type SKL 50 D, 158
 SKL skirting trunking, type SKL 70 D, 160
 Socket unit with labelling panel, double, 356
 Socket unit with labelling panel, single, 356
 Socket unit with labelling panel, triple, 356
 Socket unit, double, 355
 Socket unit, single, 355
 Socket unit, triple, 356
 Socket with earthing pin 0°, 339-340
 Socket with earthing pin 0° – encoded version, 341
 Socket with earthing pin 33°, 340
 Socket with earthing pin 33° – encoded version, 341-342
 Spacer, 185
 Spacer for floor plate, 331
 Spreading rivet, KSN 1, 184
 Spreading rivet, KSN 2, 184
 Strain relief, 208, 211, 214, 221, 226, 231, 237, 242, 248, 253, 259, 266, 269, 272, 275, 278, 281, 284, 287, 290, 293, 296, 299, 338, 342, 344
 Supply trunking, 313
 Support rail, perforated, 185
 Support rail, unperforated, 185
 Surge protection 1/2 module width, acoustic signalling, 346
 Surge protection 1/2 module width, visual signalling, 346
 Surge protection module, acoustic signalling, 346
 Swiss standard socket 0°, 342

T

T and intersection hood, 104-115, 117-120, 129-134
 T piece, 141, 143, 145, 147, 149, 151, 153, 195, 210, 213, 216, 267, 270, 273, 276, 279, 282, 285, 288, 292, 295, 297, 300
 T piece hood, 86, 88, 92, 94-95, 97, 99, 101-103
 T piece, falling, 190, 193, 202, 205
 T piece, rising, 189, 193, 202, 205
 T piece, trunking depth 70 mm, 223, 228, 234, 239, 245, 250, 256, 262
 T piece, trunking depth 90 mm, 223, 228, 234, 239, 245, 250, 256, 262
 Telephone connection box 1/1 module width, 347
 Triple accessory mounting box Modul 45, 331, 335
 Trunking cover, fluted, 209, 212, 215
 Trunking cover, sheet steel, 221, 226, 231, 237, 242, 253, 259
 Trunking cover, smooth, 208, 211, 214
 Trunking, type LKM 20020, 138
 Trunking, type LKM 20030, 139
 Trunking, type LKM 30030, 140
 Trunking, type LKM 40040, 141
 Trunking, type LKM 40060, 143
 Trunking, type LKM 60060, 145
 Trunking, type LKM 60100, 147
 Trunking, type LKM 60150, 149
 Trunking, type LKM 60200, 151
 Trunking, type LKM 80080, 153
 Trunking, type WDK 100130, 118
 Trunking, type WDK 10020, 86
 Trunking, type WDK 100230, 120
 Trunking, type WDK 10030, 88
 Trunking, type WDK 15015, 90
 Trunking, type WDK 15030, 91
 Trunking, type WDK 15040, 93
 Trunking, type WDK 20020, 95
 Trunking, type WDK 20035, 96
 Trunking, type WDK 20050, 97
 Trunking, type WDK 25025, 99
 Trunking, type WDK 25040, 100
 Trunking, type WDK 30030, 102
 Trunking, type WDK 30045, 103
 Trunking, type WDK 40040, 104
 Trunking, type WDK 40060, 105

T

Trunking, type WDK 40090, 106
 Trunking, type WDK 40110, 107
 Trunking, type WDK 60060, 108
 Trunking, type WDK 60090, 109
 Trunking, type WDK 60110, 111
 Trunking, type WDK 60130, 112
 Trunking, type WDK 60150, 113
 Trunking, type WDK 60170, 114
 Trunking, type WDK 60210, 115
 Trunking, type WDK 60230, 110
 Trunking, type WDK 80170, 119
 Trunking, type WDK 80210, 117
 Trunking, type WDK-H 20020, 128
 Trunking, type WDK-H 30045, 129
 Trunking, type WDK-H 40060, 130
 Trunking, type WDK-H 40061, 131
 Trunking, type WDK-H 60090, 132
 Trunking, type WDK-H 60110, 133
 Trunking, type WDK-H 60150, 134
 Trunking, type WDK-N 10020, 86
 Trunking, type WDK-N 10030, 88
 Trunking, type WDK-N 15030, 91
 Trunking, type WDK-N 15040, 93
 Trunking, type WDK-N 20050, 97
 Trunking, type WDK-N 25040, 100

U


Universal cable, connector – connector version, 351

W

Wall panel adapter for GK, trunking height 110 mm, 304
 Wall panel adapter for GK, trunking height 130 mm, 304
 Wall panel adapter for GK, trunking height 170 mm, 304
 Washer, 185
 Wire retainer for type LK4 and LK4/N, 184
 Wire retainer for type LKV and LKV/N, 184
 Wire retainer for type LKV/H, 184
 Wiring trunking, type 100100, 178, 181
 Wiring trunking, type 10037, 177, 180
 Wiring trunking, type 10050, 177, 180
 Wiring trunking, type 10075, 177, 181
 Wiring trunking, type 25025, 174
 Wiring trunking, type 37025, 174
 Wiring trunking, type 37037, 174
 Wiring trunking, type 50025, 174
 Wiring trunking, type 50037, 175, 182
 Wiring trunking, type 50050, 175, 182
 Wiring trunking, type 50075, 175, 182
 Wiring trunking, type 75025, 175, 179
 Wiring trunking, type 75037, 176, 179, 182
 Wiring trunking, type 75050, 176, 179, 182
 Wiring trunking, type 75075, 176, 179, 182
 Wiring trunking, type 75100, 176, 180, 182
 Wiring trunking, type 75125, 177, 180, 183
 Wiring trunking, type LK4 15015, 164
 Wiring trunking, type LK4 30015, 164
 Wiring trunking, type LK4 30025, 164
 Wiring trunking, type LK4 40025, 164
 Wiring trunking, type LK4 40040, 165
 Wiring trunking, type LK4 40060, 165
 Wiring trunking, type LK4 40080, 165
 Wiring trunking, type LK4 40100, 165
 Wiring trunking, type LK4 60015, 166
 Wiring trunking, type LK4 60025, 166
 Wiring trunking, type LK4 60040, 166
 Wiring trunking, type LK4 60080, 167
 Wiring trunking, type LK4 60100, 167
 Wiring trunking, type LK4 60120, 167
 Wiring trunking, type LK4 80025, 167
 Wiring trunking, type LK4 80040, 168

W

Wiring trunking, type LK4 80060,	168
Wiring trunking, type LK4 80080,	168
Wiring trunking, type LK4 80100,	168
Wiring trunking, type LK4 80120,	169
Wiring trunking, type LK4/N 60015,	170
Wiring trunking, type LK4/N 60025,	170
Wiring trunking, type LK4/N 60040,	170
Wiring trunking, type LK4/N 60060,	170
Wiring trunking, type LK4/N 60080,	171
Wiring trunking, type LK4/N 60100,	171
Wiring trunking, type LK4/N 60120,	171
Wiring trunking, type LK4/N 80025,	171
Wiring trunking, type LK4/N 80040,	172
Wiring trunking, type LK4/N 80060,	172
Wiring trunking, type LK4/N 80080,	172
Wiring trunking, type LK4/N 80100,	172
Wiring trunking, type LK4/N 80120,	173

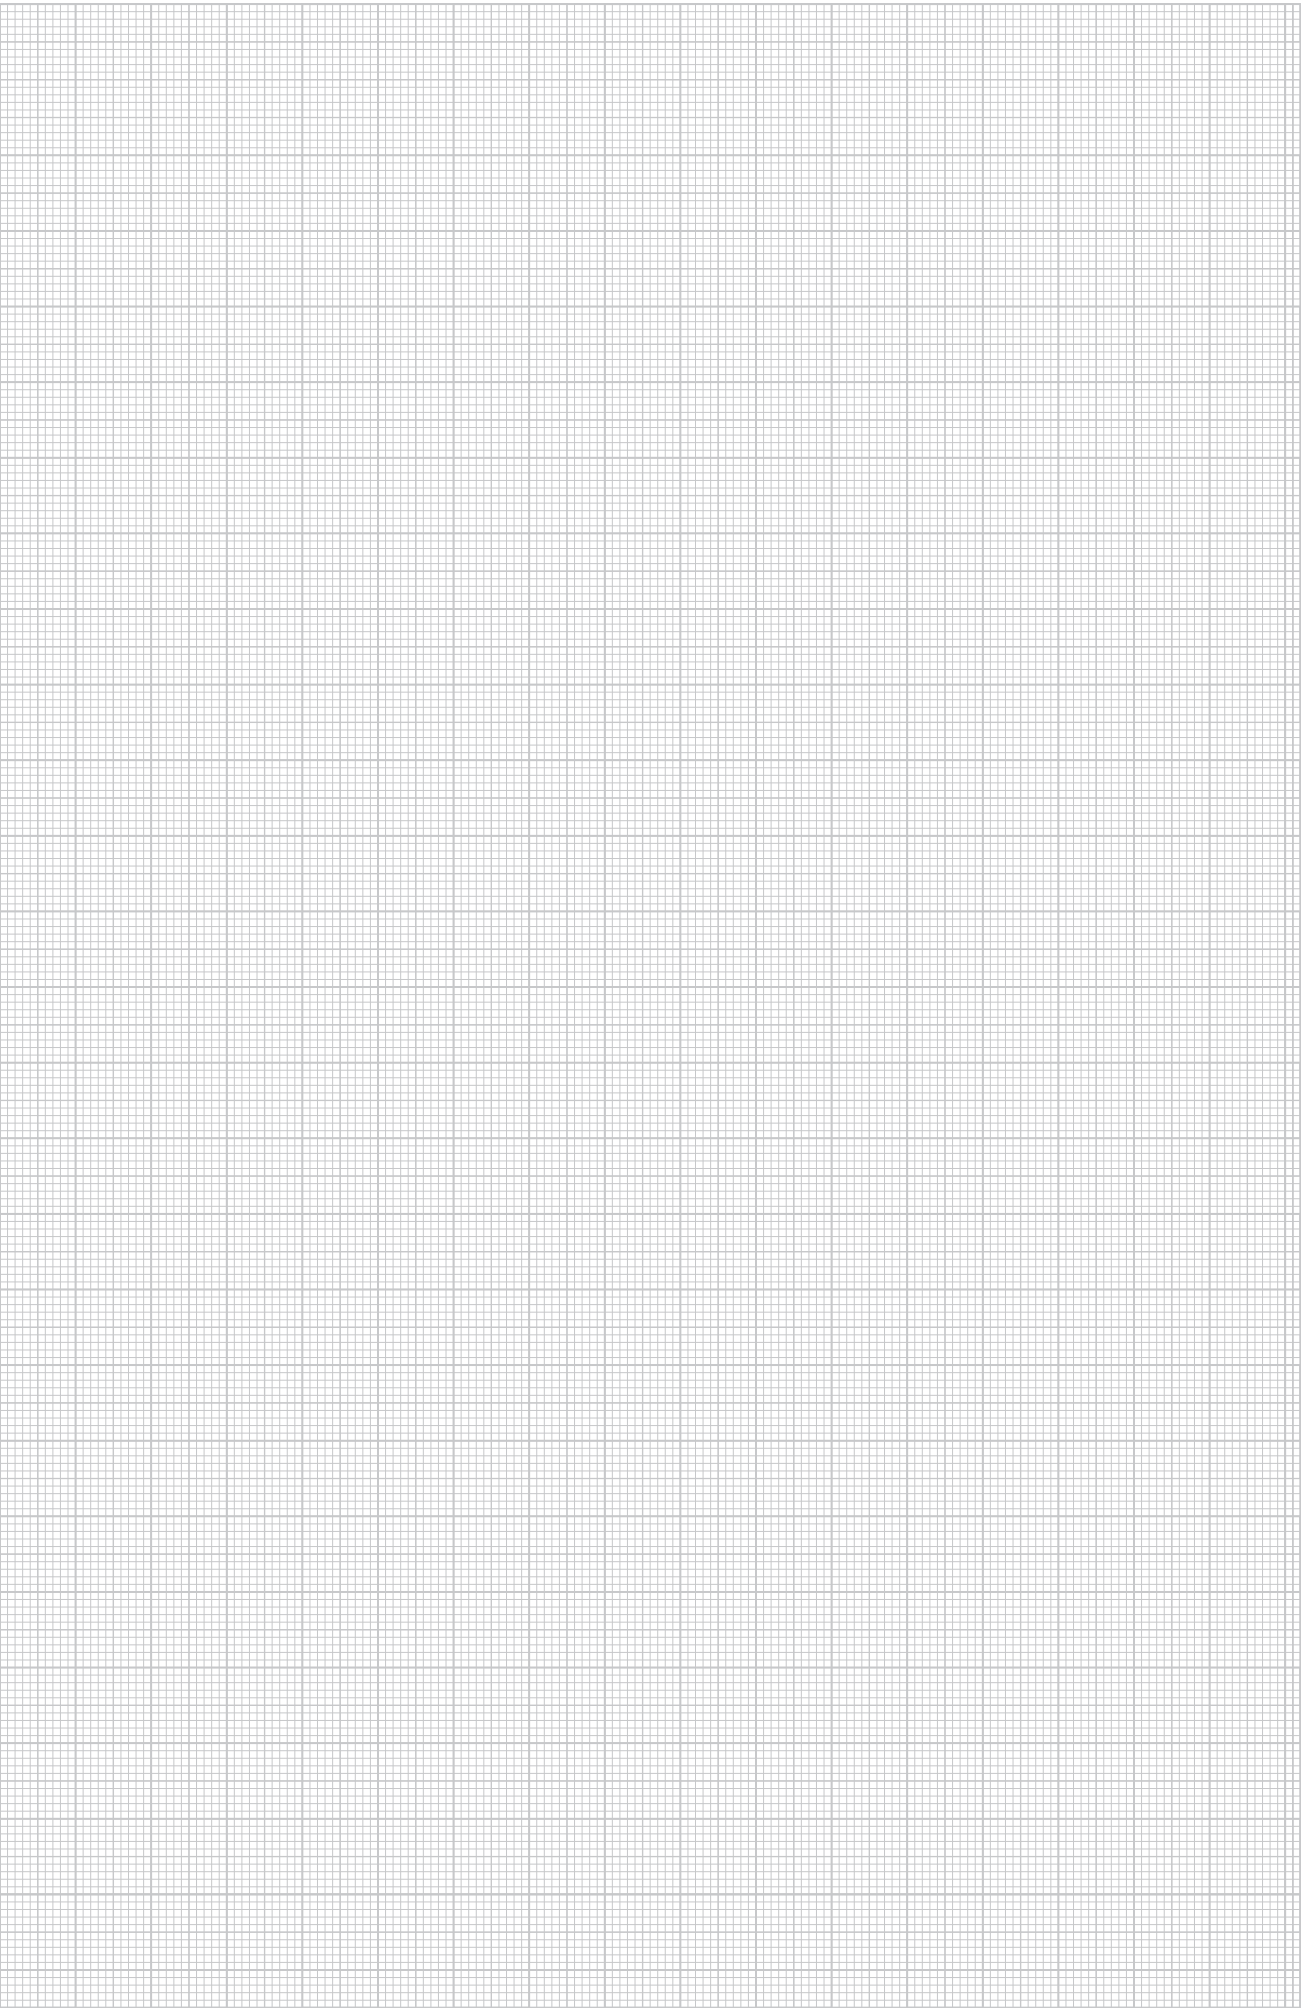

Numeric directory

Structure of the EAN number: Country code **40**

Manufacturer code **1219** (for articles beginning with **0: 1010**)

Individual EAN-C **5647589**

EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page
5044291	1115 05 7	/100 m	185	6023417	6022 75 8	/m	126	6029112	6025 63 3	/m	105	5364566	6106 72 5	/pc.	342
5044352	1115 06 5		185			/100 pc.		6029174	6025 66 8		108	5364597	6106 72 7		342
5045434	1115 65 0		185	6023776	6022 99 5		121					5364603	6106 72 9		342
5045496	1115 66 9		185			/pc.		6029778	6026 17 6		119	5364610	6106 73 5		342
								6029839	6026 18 4		119				
		/100 pc.		6023837	6023 00 2		109	6029891	6026 19 2		117				
5669197	2351 05 6		125	6023950	6023 02 9		111	6029952	6026 20 6		117	5120957	6107 00 2		353
				6024070	6023 04 5		112	6030132	6026 27 3		118				
		/pc.		6024193	6023 06 1		114	6030194	6026 28 1		118	5405726	6107 00 8		353
				6192618	6023 08 1		189	6642076	6026 31 1		120				
5080886	5092 45 1		346	6192670	6023 08 5		189	6642137	6026 33 8		120	5121022	6107 05 2		354
				6192731	6023 08 9		188	6667451	6026 35 4		96				
		/m				/m		6642793	6026 36 2		96	5405733	6107 05 8		354
6362530	6020 80 1		161	6024315	6023 09 6		122	6642854	6026 37 0		96				
				6024377	6023 11 8		122	6667512	6026 40 0		99	5273240	6107 07 2		354
		/pc.				/pc.		6030255	6026 41 9		99	5273288	6107 07 8		354
6016273	6020 88 7		105	6024438	6023 12 6		115	6030316	6026 42 7		99	5121084	6107 10 2		353
6016334	6020 89 5		106	6024551	6023 14 2		106	6030439	6026 44 3		100				
6016396	6020 90 9		107	6024919	6023 20 7		122	6030491	6026 45 1		100	5405740	6107 10 8		353
				6025039	6023 22 3		108	6667574	6026 79 6		102				
6016877	6021 01 8		106	6025459	6023 31 2		105	6332953	6026 81 8		102	5121183	6107 15 2		354
6016990	6021 03 4	/pc.	107	6025572	6023 33 9	/100 pc.	107	6333011	6026 82 6		102				
								6667635	6026 84 2		103	5405757	6107 15 8		354
6017171	6021 09 3		106	6026111	6023 50 9		121	6640874	6026 85 0		103				
6017652	6021 19 0		106	6026173	6023 51 7		121	6640935	6026 86 9		103	5273349	6107 17 2		354
6018253	6021 33 6		106	6026234	6023 52 5		121	6030675	6026 98 2		122	5273356	6107 17 8		354
6018857	6021 49 2		105	6637874	6023 53 3		121	6030736	6026 99 0		122	5121244	6107 20 2		354
6018918	6021 50 6		106	6026296	6023 54 1		121								
6018970	6021 51 4		107	6026357	6023 57 6		121	6667697	6027 01 6		104	5405764	6107 20 8		354
6019212	6021 69 7		105	6639250	6023 58 4		122	6667758	6027 02 4		105				
6019274	6021 70 0		107			/pc.		6667819	6027 03 2		106	5121305	6107 25 2		354
6019335	6021 71 9		105					6667871	6027 04 0		107				
6019397	6021 72 7		107	6027132	6024 00 9		124	6667994	6027 10 5		108	5405771	6107 25 8		354
6019458	6021 73 5		105	6027255	6024 02 5		125	6668052	6027 11 3		109				
6019519	6021 74 3	/m	107	6027316	6024 03 3		125	6668113	6027 12 1		111	5273417	6107 27 2		354
				6638116	6024 43 2		113	6668175	6027 14 8		112	5273424	6107 27 8		354
6019816	6021 84 0		111	6639496	6024 44 0		110	6668236	6027 15 6		113	5273462	6107 37 2		355
6019878	6021 85 9		112	6027491	6024 46 7		119	6668298	6027 16 4		114	5273479	6107 37 8		355
6019939	6021 86 7		114	6027552	6024 47 5		117	6668359	6027 17 2		115				
6019991	6021 87 5		115	6027613	6024 48 3		118	6668410	6027 18 0		110		/m		
6637577	6021 88 3		113	6502097	6024 50 5		120	6668472	6027 22 9		119	6292578	6116 02 7		188
6638956	6021 89 1		110	6638291	6024 52 1		113	6668533	6027 23 7		117	6292516	6116 05 1		191
6020119	6021 91 3		109	6639670	6024 54 8		110	6668595	6027 24 5		118	5391630	6116 07 3		194
6020171	6021 94 8		108	6027675	6024 56 4		119	6668656	6027 25 3		120	6708970	6116 10 8		188
		/pc.		6027736	6024 57 2		117								
6020232	6022 00 6		109	6027798	6024 58 0		118	6669257	6028 15 2		126	6176236	6116 11 6		188
6020294	6022 01 4		111	6638475	6024 59 9		113	6773893	6028 18 7	/pc.	126	6441259	6116 15 0		188
6020355	6022 02 2		112	6639854	6024 60 2		110					6183739	6116 15 4		200
6637515	6022 03 0		113	6027859	6024 61 0		119	6628216	6028 40 3		85	5391647	6116 16 3		194
6020416	6022 04 9		114	6027910	6024 62 9		117	6628278	6028 41 1		85	5391913	6116 16 7		189
6638895	6022 05 7		110	6027972	6024 63 7		118					5391920	6116 16 9		202
6020478	6022 06 5	/pc.	115	6501311	6024 65 3		120					5391968	6116 17 2		193
				6501915	6024 68 8		120	5364139	6106 67 1		341	5391975	6116 17 4		205
6020539	6022 07 3		108	6501670	6024 71 8		120	5364146	6106 67 3		341	5391982	6116 18 0		190
6020713	6022 11 1		109	6638659	6024 76 9		113	5364177	6106 67 5		341	5392026	6116 18 1		202
6020836	6022 14 6		111	6640034	6024 77 7		110	5364184	6106 67 7		341	5392033	6116 18 4		193
6020959	6022 16 2		112	6028030	6024 79 3		119	5364191	6106 67 9		341	5392040	6116 18 5		205
6021079	6022 18 9		114	6028092	6024 80 7		117	5364207	6106 68 1		341	5391654	6116 19 3		195
6021130	6022 19 7		115	6028153	6024 81 5		118	5364238	6106 68 3		341	5428688	6116 20 1		194
6021253	6022 21 9		109	6637935	6024 82 3		113	5364245	6106 68 5		341	5391661	6116 20 3		195
6021376	6022 23 5		111	6639311	6024 83 1		110	5364252	6106 68 7		341	6709038	6116 20 5		189
6021499	6022 25 1		112	6028214	6024 85 8		119	5364269	6106 68 9		341	6183678	6116 21 0		201
6021611	6022 28 6		114	6028276	6024 87 4		117	5364306	6106 69 1		341	6192793	6116 21 3		189
6021673	6022 29 4		115	6028337	6024 88 2		118	5364313	6106 69 3		341	6440955	6116 22 1		192
6021796	6022 31 6		109	6651375	6024 90 4	/m	120	5364320	6106 69 5		341	6184699	6116 22 6		204
6021918	6022 33 2		111					5364368	6106 69 7		341	6192977	6116 24 8		192
6022038	6022 35 9		112	6667338	6024 94 7		90	5364375	6106 69 9		341	5428695	6116 26 1		195
6022151	6022 37 5		114	6642250	6024 95 5		90	5364382	6106 70 1		341	5391678	6116 26 3		195
6022212	6022 38 3		108	6642311	6024 96 3		90	5364412	6106 70 3		341	6441013	6116 26 4		189
6022274	6022 39 1		115					5364429	6106 70 5		341	6184033	6116 26 9		201
6022519	6022 44 8		108	6332779	6025 00 5		91	5364436	6106 70 7		341	6192915	6116 27 2		189
6022694	6022 49 9		108	6332830	6025 01 3		91	5364443	6106 70 9		341	6616879	6116 28 0		192
6022755	6022 50 2		109	6667390	6025 10 2		95	5364474	6106 71 1		341	6184811	6116 28 5		204
6022816	6022 52 9		112	6028399	6025 11 0		95	5364481	6106 71 3		341	6193158	6116 29 4		192
6022878	6022 54 5		114	6028511	6025 13 7		93	5364498	6106 71 5		341	6441075	6116 30 2		190
6022939	6022 56 1		116	6028573	6025 15 3		95	5364504	6106 71 7		341	6184095	6116 30 7		202

EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page
		/pc.				/pc.				/pc.				/pc.	
6184217	6116 35 8		202	5437949	6117 07 8		343	5701200	6117 31 8		349	5623809	6117 67 3		344
6441198	6116 38 8		193	5437970	6117 08 0		343					5623816	6117 67 4		344
6184934	6116 39 3		205	5700937	6117 08 1		343	5006947	6117 31 9		349				
5391685	6116 40 3		195	5437987	6117 08 2		343	5006961	6117 32 0		349	6237913	6117 70 8		350
6184330	6116 41 8		188					6235155	6117 32 5		348	6239054	6117 72 4		350
6184996	6116 43 4		191	6460090	6117 10 2		339	6235216	6117 32 9		349	6239351	6117 72 6		350
6184514	6116 46 4		188	6460151	6117 10 4		339	6235278	6117 33 7		348	6239474	6117 72 8		350
6191239	6116 48 0		191	6460212	6117 10 6		339	6235339	6117 34 1		348	6239535	6117 73 2		350
5391692	6116 49 3		194	6460274	6117 10 8		339					6239597	6117 73 6		350
5391883	6116 49 5		190					5675112	6117 38 1		347	5007562	6117 73 7		350
5391890	6116 49 6		202	5700944	6117 10 9		339	5675129	6117 38 3		347	5007609	6117 73 8		350
5392088	6116 49 8		193					5675150	6117 38 5		347	6237319	6117 74 0		349
5392095	6116 49 9		205	6213498	6117 11 0		339	5675167	6117 38 7		347	6239658	6117 74 5		350
		/m		6460335	6117 11 1		340	5675174	6117 38 9		347	5081005	6117 93 8		351
6198252	6116 51 5		200	6460458	6117 11 3		340	5675181	6117 39 1		347	5008521	6117 94 0		351
6204199	6116 53 6		203	6188956	6117 11 5		340	5675211	6117 39 3		347	5008569	6117 94 2		351
6202034	6116 55 8		200	6189014	6117 11 7		340	5675228	6117 39 5		347	5008620	6117 94 4		351
		/pc.						5675235	6117 39 7		347	5081401	6117 94 6		351
6210015	6116 57 9		201	5433552	6117 11 8		340	6117499	6117 40 6		348	5008644	6117 94 8		351
6210138	6116 59 5		204									5008682	6117 95 0		351
6210251	6116 61 7		202	6213559	6117 11 9		340	5701279	6117 40 7		348	5008743	6117 95 2		351
6210558	6116 64 7		205	6189076	6117 12 3		340					5008767	6117 95 7		350
6210671	6116 66 8		201	6189311	6117 12 5		340	6214037	6117 40 8		348	5008804	6117 95 8		350
6210978	6116 68 5		204	6189373	6117 12 7		340	6117550	6117 41 4		348				
6211272	6116 70 9		201	6189618	6117 12 9		340					5402466	6117 96 0		351
6211395	6116 73 6		204					5701286	6117 41 5		348	5402473	6117 96 2		351
6211456	6116 75 2		200	5433569	6117 13 0		340					5402480	6117 96 4		351
								6215652	6117 41 6		348	5402527	6117 96 6		351
6458295	6117 00 1		338	6213795	6117 13 1		340	6215713	6117 42 8		347	5402534	6117 96 8		351
6458356	6117 00 3		338	6189793	6117 14 0		340	6215959	6117 43 0		347	5402541	6117 97 0		351
6458530	6117 00 5		338	6189854	6117 14 2		340	6117611	6117 46 5		346	5677819	6117 97 2		349
6458592	6117 00 7		338	6287291	6117 14 4		340	5006220	6117 46 7		346	5677864	6117 98 5		348
				6287536	6117 14 6		340	6117673	6117 47 3		346	5677871	6117 98 6		348
5700883	6117 00 8		338					5006213	6117 47 5		346	5677888	6117 98 7		348
				5700968	6117 14 7		340	5406204	6117 60 6		347				
6212774	6117 00 9		338					5406235	6117 60 7		347	5696896	6119 20 2		351
6518531	6117 01 2		338	6213856	6117 14 8		340					5696902	6119 20 4		351
6458653	6117 01 4		338	6460632	6117 15 1		340	5701316	6117 61 0		347	5696940	6119 20 6		351
6458837	6117 01 6		338	6538690	6117 15 3		340	5700999	6117 61 4		345	5696957	6119 20 8		352
6471072	6117 01 8		338	6637218	6117 15 5		340					5696964	6119 21 0		352
				6461059	6117 15 7		340	5405887	6117 61 5		345	5696971	6119 21 2		352
5648956	6117 01 9		338					5405894	6117 61 6		345	5696988	6119 21 4		352
				5700975	6117 15 8		340	5275640	6117 62 0		344	5696995	6119 21 6		352
6212835	6117 02 0		338					5275688	6117 62 1		344	5697008	6119 21 8		352
6458899	6117 02 3		339	6213917	6117 15 9		340					5697015	6119 22 0		353
6645077	6117 02 5		339	6461110	6117 16 2		340	5701019	6117 62 2		344	5697022	6119 22 2		353
6458950	6117 02 7		339	6461233	6117 16 4		340	5701033	6117 62 6		345	5697039	6119 22 4		353
6597376	6117 02 9		339	6461356	6117 16 6		340					5697046	6119 22 6		353
				6461530	6117 16 8		340	5275749	6117 62 7		345	5697053	6119 22 8		353
5700890	6117 03 0		339					5275756	6117 62 8		345	5697060	6119 23 0		353
				5700982	6117 16 9		340	5405924	6117 63 7		345	5697077	6119 23 2		352
6213078	6117 03 1		339					5405931	6117 63 8		345	5697084	6119 23 4		352
6459018	6117 04 1		339	6213979	6117 17 0		340					5697121	6119 23 6		352
6459070	6117 04 3		339					5701064	6117 63 9		345	5697138	6119 23 8		351
6459131	6117 04 5		339	5438069	6117 19 0		344					5697145	6119 24 0		351
6459377	6117 04 7		339	5483540	6117 19 1		344	5275824	6117 64 0		345	5697183	6119 24 2		351
				5438090	6117 19 2		343	5275862	6117 64 1		345	5697190	6119 24 4		352
5700906	6117 04 8		339	5483571	6117 19 3		343					5697206	6119 24 6		352
				5670933	6117 19 6		344	5701071	6117 64 2		345	5697244	6119 24 8		352
6213139	6117 04 9		339	5670940	6117 19 7		344	5701088	6117 64 3		345	5697251	6119 25 0		352
6459551	6117 05 2		339	5438113	6117 19 8		344								
6459612	6117 05 4		339					5275879	6117 64 4		345	5697268	6119 25 2		352
6459674	6117 05 6		339	5008866	6117 20 0		342	5275886	6117 64 5		345				
6459735	6117 05 8		339									5697305	6119 25 4		352
				5462231	6117 20 2		342	5701132	6117 65 3		345	5697381	6119 26 2		353
5700913	6117 05 9		339	5616016	6117 20 3		342					5697428	6119 26 4		353
								5275992	6117 65 4		345	5697435	6119 26 6		353
6213191	6117 06 0		339	6180196	6117 20 5		342	5276005	6117 65 5		345	5697442	6119 26 8		353
6459797	6117 06 3		339									5697480	6119 27 0		353
6459858	6117 06 5		339	5701163	6117 29 1		349	5701149	6117 65 6		345	5697497	6119 27 2		353
6459971	6117 06 7		339									5670865	6119 85 0		343
6460038	6117 06 9		339	6233410	6117 29 2		349	5405948	6117 65 7		345	5670872	6119 85 2		343
								5405955	6117 65 8		345	5670889	6119 85 4		343
5700920	6117 07 0		339	5006725	6117 29 3		349					5670896	6119 85 6		343
				5701194	6117 31 4		349	5701156	6117 66 8		344	5670902	6119 85 8		343
6213436	6117 07 1		339					5701323	6117 66 9		344	5670919	6119 86 0		343
				5006848	6117 31 5		349					5670926	6119 86 8		343
5437925	6117 07 4		343	5006886	6117 31 6		349	5276043	6117 67 0		344	5670957	6119 87 0		343
5437932	6117 07 6		343					5276050	6117 67 1		344	5670964	6119 87 2		343

Numeric directory

Structure of the EAN number: Country code **40**

Manufacturer code **1219** (for articles beginning with **0: 1010**)

Individual EAN-C **5647589**

EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page
		/pc.				/pc.				/pc.				/pc.	
5670971	6119 87 4		343	6491537	6154 42 5		88	6106752	6160 52 2		118	6583935	6162 54 1		101
5670988	6119 87 6		343	6493210	6154 46 8		97	6502035	6160 54 9		120	6584239	6162 57 6		102
5670995	6119 87 8		343	6491834	6154 51 4		87	6579013	6160 60 3		95	6641239	6162 58 4		103
5671008	6119 88 0		343	6491353	6154 52 2		89	6579198	6160 61 1		91	6583331	6162 59 2		104
5671015	6119 88 2		343	6493395	6154 55 7		98	6579372	6160 63 8		93	6109517	6162 60 6		105
5671022	6119 88 4		343					6579556	6160 64 6		99	6109579	6162 61 4		106
5671039	6119 88 6		343	6543199	6156 20 7		126	6579730	6160 65 4		100	6109630	6162 62 2		107
5671046	6119 88 8		343	6543137	6156 22 3		126	6580095	6160 67 0		102	6109876	6162 80 0		108
5671084	6119 89 0		343	6543076	6156 23 1		126	6641598	6160 68 9		103	6109937	6162 81 9		109
5701507	6119 99 7		348					6580279	6160 69 7		104	6109999	6162 82 7		111
				6577576	6158 22 6		95	6106813	6160 70 0		105	6110056	6162 83 5		112
5406532	6119 99 8		348	6577750	6158 23 4		91	6106875	6160 71 9		106	6110117	6162 84 3		114
5406549	6119 99 9		348	6577934	6158 24 2		93	6106936	6160 72 7		107	6110179	6162 85 1		116
				6578115	6158 25 0		99	6107179	6160 90 5		108	6637997	6162 87 8		113
		/m		6578290	6158 26 9		100	6107230	6160 91 3		109	6639373	6162 88 6		110
				6578658	6158 28 5		102	6107292	6160 92 1		111				
6798070	6150 07 1		84	6578832	6158 29 3		104	6107353	6160 94 8		112	6110230	6163 00 9		119
6798131	6150 09 8		84	6641352	6158 30 7		103	6107414	6160 95 6		114	6110292	6163 01 7		117
6798193	6150 10 1		84	6578955	6158 33 1		95	6107476	6160 96 4		115	6110353	6163 04 1		118
6097579	6150 15 2		84	6579136	6158 35 8		91	6638352	6160 97 2		113	6651436	6163 07 6		120
6097630	6150 16 0		84	6579310	6158 36 6		93	6639731	6160 98 0		110				
6097692	6150 17 9		84	6579495	6158 37 4		99					6782659	6168 52 3		125
6097753	6150 18 7		84	6579679	6158 38 2		100	6107537	6161 10 3		119			/m	
6493159	6150 26 8		84	6580033	6158 40 4		102	6107599	6161 11 1		117	6438433	6168 70 1		97
6493098	6150 27 6		84	6580217	6158 41 2		104	6107650	6161 15 4		118	6438495	6168 72 8		97
6493036	6150 28 4		84	6641536	6158 42 0		103	6501854	6161 17 0		120	6801671	6168 73 6		97
6492978	6150 29 2		84	6580392	6158 45 5		95	6581894	6161 20 0		95	6802159	6168 74 4		97
6097814	6150 40 3		86	6580576	6158 46 3		92	6582075	6161 21 9		91				
6492190	6150 41 1		86	6580750	6158 47 1		94	6582259	6161 22 7		93			/pc.	
6097876	6150 44 6		88	6580934	6158 49 8		99	6582433	6161 23 5		99	6781393	6169 29 5		123
6491711	6150 45 4		88	6581115	6158 50 1		101	6582617	6161 24 3		100	6111619	6169 30 9		122
6507979	6150 51 9		91	6581474	6158 53 6		102	6582976	6161 27 8		102	6111671	6169 31 7		123
6493456	6150 52 7		91	6581658	6158 54 4		104	6641772	6161 28 6		103	6111732	6169 32 5		124
6097999	6150 53 5		93	6641895	6158 55 2		103	6583157	6161 29 4		104	6782291	6169 36 8		123
6494477	6150 54 3		93	6581832	6158 58 7		95	6107711	6161 30 8		105	6111855	6169 37 6		123
6507191	6150 63 2		100	6582013	6158 59 5		91	6107773	6161 31 6		106	6111916	6169 38 4		123
6975686	6150 64 0		100	6582198	6158 60 9		93	6107834	6161 32 4		107	6111978	6169 39 2		124
6098170	6150 75 6		86	6582372	6158 61 7		99	6108077	6161 50 2		108	6112036	6169 40 6		124
6492251	6150 76 4		86	6582556	6158 62 5		100	6108138	6161 51 0		109	6782475	6169 42 2		124
6508037	6150 77 2		88	6582914	6158 64 1		102	6108190	6161 52 9		111	6112098	6169 43 0		123
6491773	6150 78 0		88	6583096	6158 66 8		104	6108251	6161 53 7		112	6112159	6169 44 9		123
		/pc.		6641710	6158 67 6		103	6108312	6161 54 5		114	6112210	6169 45 7		124
				6642618	6158 69 2		90	6108374	6161 55 3		115			/m	
6098293	6152 00 7		86	6434473	6158 70 6		95	6638536	6161 56 1		113				
6098354	6152 01 5		88	6434534	6158 71 4		92	6639915	6161 59 6		110	5237396	6175 00 2		128
6507610	6152 03 1		91	6434596	6158 72 2		94	6108435	6161 70 7		119	5237402	6175 00 8		129
6098477	6152 05 8		93	6434657	6158 73 0		99	6108497	6161 71 5		117	5237419	6175 01 4		130
6507375	6152 08 2		100	6434718	6158 74 9		101	6108558	6161 75 8		118	5237426	6175 02 0		131
6507252	6152 10 4		97	6584178	6158 76 5		102	6501250	6161 77 4		120	5237457	6175 02 6		132
6098712	6152 30 9		86	6583270	6158 77 3		104	6580453	6161 90 1		95	5237464	6175 03 2		133
6098774	6152 31 7		88	6643158	6158 78 1		96	6580637	6161 92 8		92	5237471	6175 03 8		134
6507795	6152 38 4		97	6434831	6158 80 3		103	6580811	6161 93 6		94			/pc.	
6099139	6152 60 0		86	6507559	6158 83 8		91	6580996	6161 94 4		99	5237488	6175 05 1		129
6099191	6152 61 9		88	6507498	6158 84 6		93	6581177	6161 95 2		101	5237495	6175 05 7		130
6507733	6152 68 6		97	6507436	6158 88 9		100	6581535	6161 97 9		102	5237501	6175 06 3		131
								6641956	6161 98 7		103	5237518	6175 06 9		132
6099559	6153 00 3		86	6103997	6159 37 0		123	6581719	6161 99 5		104	5237525	6175 07 5		133
6099610	6153 01 1		88									5237532	6175 08 1		134
6507917	6153 08 9		97	6577637	6160 01 8		95	6108619	6162 00 2		105	5237549	6175 10 3		129
6099979	6153 29 1		86	6577811	6160 02 6		91	6108671	6162 01 0		106	5237556	6175 10 9		130
6804498	6153 30 5		88	6577996	6160 03 4		93	6108732	6162 02 9		107	5237563	6175 11 5		131
6507856	6153 37 2		97	6578177	6160 04 2		99	6108978	6162 20 7		108	5237570	6175 12 1		132
6100392	6153 59 3		87	6578351	6160 05 0		100	6109036	6162 21 5		109	5237587	6175 12 7		133
6100453	6153 60 7		89	6578719	6160 07 7		102	6109098	6162 22 3		111	5237594	6175 13 3		134
6507672	6153 67 4		98	6641413	6160 08 5		103	6109159	6162 23 1		112	5237600	6175 15 0		128
				6584598	6160 09 3		104	6109210	6162 25 8		114	5237631	6175 15 6		129
6492138	6154 02 6		86	6105915	6160 10 7		105	6109272	6162 26 6		115	5237648	6175 16 2		130
6491650	6154 03 4		88	6105977	6160 11 5		106	6638710	6162 27 4		113	5237655	6175 16 8		131
6974481	6154 06 9		97	6106035	6160 12 3		107	6640096	6162 29 0		110	5237662	6175 17 4		132
6491957	6154 11 5		86	6106271	6160 30 1		108	6109333	6162 40 1		119	5237693	6175 18 0		133
6491476	6154 12 3		88	6106332	6160 32 8		109	6109395	6162 42 8		117	5237709	6175 18 6		134
6493272	6154 16 6		97	6106394	6160 33 6		111	6109456	6162 45 2		118	5237716	6175 20 4		129
6491896	6154 21 2		86	6106455	6160 34 4		112	6501618	6162 47 9		120	5237723	6175 21 0		130
6491414	6154 22 0		88	6106516	6160 35 2		114	6643219	6162 48 7		96	5237730	6175 21 6		131
6493333	6154 25 5		97	6106578	6160 36 0		115	6642670	6162 49 5		90	5237747	6175 22 2		132
6492077	6154 32 8		86	6638178	6160 37 9		113	6583454	6162 50 9		95	5237754	6175 22 8		133
6491599	6154 33 6		88	6639557	6160 39 5		110	6583577	6162 51 7		92	5237778	6175 23 4		134
6974542	6154 36 0		97	6106639	6160 48 4		119	6583690	6162 52 5		94	5237785	6175 25 5		129
6492015	6154 41 7		86	6106691	6160 49 2		117	6583812	6162 53 3		99	5237815	6175 26 1		130

EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page
5237822	6175 26 7	/pc.	131	6040803	6178 49 0	/m	165	6673278	6182 94 1	/pc.	107	5042273	6191 30 4	/m	119
5237839	6175 27 3		132	6040926	6178 49 2		167					5042280	6191 31 2		117
5237846	6175 27 9		133	6041282	6178 50 4		174	6677054	6183 01 8		108	5042297	6191 34 7		118
5237877	6175 28 5		134	6041404	6178 50 6		174	6677115	6183 02 6		109	5042303	6191 35 5		120
				6041527	6178 50 8		175	6677177	6183 03 4		111			/pc.	
		/m		6041640	6178 51 0		175	6677238	6183 04 2		112	6794652	6191 84 3		91
6000050	6178 00 1		164	6041763	6178 51 2		176	6677290	6183 05 0		113	6494651	6191 85 1		93
6000173	6178 00 3		164	6041886	6178 51 4		177	6677351	6183 06 9		114	6794713	6191 87 8		95
6000296	6178 00 5		164			/100 pc.		6677412	6183 07 7		115	6502219	6191 88 6		99
6000418	6178 01 0		164	6014279	6178 52 0		184	6677474	6183 08 5		110	6794775	6191 89 4		100
6000531	6178 01 2		165	6014392	6178 52 2		184	6677535	6183 12 3		119	6794836	6191 92 4		102
6000654	6178 01 4		165			/pc.		6677597	6183 13 1		117	6976829	6191 93 2		103
6000777	6178 01 6		165	6014514	6178 52 7		184	6677658	6183 16 6		118	6794898	6191 94 0		104
6000890	6178 01 8		165	6014637	6178 52 9		184	6501373	6183 18 2		120	6794959	6191 95 9		105
6001132	6178 02 6		166	6014750	6178 53 5		184	6673391	6183 21 2		95	6795017	6191 96 7		106
6001255	6178 02 8		166			/100 pc.		6673452	6183 25 5		99	6221110	6191 97 5		107
6001378	6178 03 1		166	6014873	6178 54 0		185	6673513	6183 29 8		102				
6001491	6178 03 3		166	6014996	6178 54 2		185	6673575	6183 30 1		103	6362950	6192 01 7		108
6001613	6178 03 5		167	6015061	6178 54 8		185	6673636	6183 33 6		104	6799879	6192 02 5		109
6001736	6178 03 7		167			/m		6673698	6183 34 4		105	6362776	6192 03 3		111
6001859	6178 03 9		167	6016266	6178 61 2		182	6673759	6183 35 2		106	6362479	6192 04 1		112
6002214	6178 05 0		167	6016389	6178 61 4		182	6673810	6183 36 0		107	6800056	6192 06 8		113
6002337	6178 05 2		168	6016501	6178 61 6		182	6677719	6183 40 9		108	6362233	6192 07 6		114
6002450	6178 05 4		168	6016747	6178 62 2		182	6677771	6183 41 7		109	6795079	6192 08 4		115
6002573	6178 05 6		168	6016860	6178 62 4		182	6677832	6183 42 5		111	6800896	6192 09 2		110
6002696	6178 05 9		168	6016983	6178 62 6		182	6677894	6183 43 3		112	5042457	6192 10 6		119
6002818	6178 06 1	/100 pc.	169	6017102	6178 62 8		182	6677955	6183 44 1		113	5042525	6192 11 0		117
				6017225	6178 63 0		183	6678013	6183 46 8		114	5042594	6192 11 4		118
6008339	6178 09 2	/m	184			/100 pc.		6678075	6183 47 6		115	5042662	6192 11 8		120
				6017829	6178 65 0		184	6678136	6183 48 4		110	6795253	6192 14 9		91
6004850	6178 20 1		170			/pc.		6678198	6183 52 2		119	6494712	6192 15 7		93
6004973	6178 20 3		170					6678259	6183 53 0		117	6795314	6192 16 5		95
6005093	6178 20 5		170	6674657	6182 01 1		95	6678310	6183 55 7		118	6504855	6192 17 3		99
6005215	6178 20 7		170	6674718	6182 06 2		99	6222131	6183 57 3		120	6795376	6192 18 1		100
6005307	6178 20 9		171	6674770	6182 09 7		102	6673933	6183 60 3		90	6795437	6192 21 1		102
6005406	6178 21 1		171	6674831	6182 10 0		103	6673995	6183 61 1		95	6497171	6192 23 8		103
6005505	6178 21 3		171	6674893	6182 11 9		104	6674053	6183 65 4		96	6795499	6192 24 6		104
6005802	6178 22 5		171	6674954	6182 12 7		105	6674114	6183 66 2		99	6795550	6192 25 4		105
6005932	6178 22 7		172	6675012	6182 13 5		106	6674176	6183 69 7		102	6795611	6192 26 2		106
6006052	6178 22 9		172	6675074	6182 14 3		107	6674237	6183 70 0		103	6220878	6192 27 0		107
6006175	6178 23 1		172	6675739	6182 19 4		108	6674299	6183 72 7		104	6360970	6192 31 9		108
6006298	6178 23 3		172	6675791	6182 20 8		109	6674350	6183 73 5		105	6801558	6192 32 7		109
6006410	6178 23 6		173	6675852	6182 21 6		111	6674411	6183 74 3		106	6354559	6192 33 5		111
6009411	6178 30 2		174	6675913	6182 22 4		112	6674473	6183 75 1		107	6353057	6192 34 3		112
6009534	6178 30 5		174	6675975	6182 23 2		113	6678372	6183 80 8		108	6492312	6192 35 1		113
6009657	6178 30 7		174	6676033	6182 24 0		114	6678433	6183 81 6		109	6351855	6192 37 8		114
6009732	6178 31 0		174	6676095	6182 25 9		115	6678495	6183 82 4		111	6795673	6192 38 6		115
6009831	6178 31 2		175	6676156	6182 26 7		110	6678556	6183 83 2		112	6492374	6192 39 4		110
6009930	6178 31 4		175	6676217	6182 30 5		119	6678617	6183 84 0		113	5042464	6192 41 6		119
6010073	6178 31 6		175	6676279	6182 31 3		117	6678679	6183 85 9		114	5042532	6192 42 0		117
6010196	6178 32 0		175	6676330	6182 34 8		118	6678730	6183 86 7		116	5042600	6192 42 4		118
6010318	6178 32 2		176	6501977	6182 36 4		120	6678792	6183 87 5		110	5042693	6192 42 8		120
6010400	6178 32 4		176	6675197	6182 40 2		95	6678853	6183 91 3		119	6796212	6192 45 9		92
6010509	6178 32 6		176	6675258	6182 44 5		99	6678914	6183 92 1		117	6494774	6192 46 7		94
6010608	6178 32 8		176	6675319	6182 48 8		102	6678976	6183 95 6		118	6796274	6192 47 5		95
6010707	6178 33 0		177	6675371	6182 49 6		103	6679034	6183 98 0		120	6504978	6192 48 3		99
6010806	6178 33 4		177	6675432	6182 52 6		104			/m		6796335	6192 49 1		101
6010929	6178 33 6		177	6675494	6182 53 4		105					6796397	6192 51 3		102
6011049	6178 33 8		177	6675555	6182 54 2		106	6794058	6191 00 2		90	6497232	6192 52 1		103
6011162	6178 34 1		178	6675616	6182 55 0		107	6794119	6191 01 0		91	6796458	6192 54 8		104
		/100 pc.		6676392	6182 59 3		108	6494590	6191 02 9		93	6796519	6192 55 6		105
6011285	6178 34 9	/m	184	6676453	6182 60 7		109	6794171	6191 03 7		95	6796571	6192 56 4		106
				6676514	6182 61 5		111	6496938	6191 04 5		96	6500833	6192 57 2		107
6013197	6178 42 0		179	6676576	6182 62 3		112	6505036	6191 05 3		99	6351794	6192 61 0		108
6013319	6178 42 2		179	6676637	6182 63 1		113	6794232	6191 06 1		100	6492435	6192 62 9		109
6013432	6178 42 4		179	6676699	6182 65 8		114	6794294	6191 09 6		102	6712519	6192 63 7		111
6013555	6178 42 6		179	6676750	6182 66 6		115	6497058	6191 11 8		103	6712571	6192 64 5		112
6013678	6178 42 8		180	6676811	6182 67 4		110	6363490	6191 12 6		104	6492497	6192 65 3		113
6013791	6178 43 0		180	6676873	6182 71 2		119	6794355	6191 13 4		105	6712632	6192 66 1		114
6013913	6178 43 5		180	6676934	6182 72 0		117	6794416	6191 14 2		106	6796632	6192 68 8		115
6014033	6178 43 7		180	6676996	6182 74 7		118	6501199	6191 15 0		107	6492558	6192 69 6		110
6014156	6178 43 9		181	6501793	6182 76 3		120	6363018	6191 19 3		108	5042471	6192 71 8		119
6015184	6178 44 1		181	6672851	6182 80 1		95	6491292	6191 20 7		109				

Numeric directory

Structure of the EAN number: Country code **40**

Manufacturer code **1219** (for articles beginning with **0: 1010**)

Individual EAN-C **5647589**

EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page
6796816	6192 79 3	/pc.	100	6153497	6199 15 0	/pc.	158	5699019	6247 47 2	/pc.	153	6315017	6249 59 0	/pc.	151
6796878	6192 81 5		102	6153374	6199 15 2		158					6977123	6249 61 2		145
6497294	6192 82 3		103	6153435	6199 15 4		158	6652518	6247 49 0		141	6315079	6249 63 9		147
6796939	6192 83 1		104	6153558	6199 15 6		158	6312313	6247 50 4		143	6315130	6249 64 7		149
6796991	6192 85 8		105	6153619	6199 16 3		158	6652273	6247 56 3		141	6315192	6249 65 5		151
6797059	6192 86 6		106	6153671	6199 16 5		158	6312733	6247 57 1		143	6503537	6249 67 1		145
6496990	6192 87 4		107	6153732	6199 16 7		158	6652150	6247 65 2		141	6318254	6249 70 1		147
6712694	6192 91 2		108	6153794	6199 16 9		158	6313150	6247 66 0		143	6318315	6249 72 8		149
6492619	6192 92 0		109	6153855	6199 18 0		158	6652396	6247 72 5		141	6318377	6249 73 6		151
6712755	6192 93 9		111	6153916	6199 18 2		158	6317592	6247 73 3		143	6503292	6249 79 5		145
6712816	6192 94 7		112	6153978	6199 18 4		158	6652631	6247 88 1		141	6575770	6249 81 7		147
6492671	6192 95 5		113	6154036	6199 18 6		158	6575114	6247 90 3		144	6575831	6249 82 5		149
6712878	6192 96 3		114			/m		6503476	6247 98 9		145	6575893	6249 83 3		151
6797110	6192 97 1		115	6154098	6199 20 2		160					6018598	6249 84 2		138
6492732	6192 99 8		110	6154159	6199 20 4		160	6312559	6248 00 4		147	6018710	6249 84 4		139
				6154210	6199 20 6		160	6312610	6248 01 2		149				
5042488	6193 02 1		119	6154272	6199 20 8		160	6312672	6248 02 0		151	5691020	6249 84 5		140
5042570	6193 02 5		117			/pc.		6977062	6248 04 7		145				
5042648	6193 02 9		118	6154333	6199 22 3		160	6312979	6248 06 3		147	6018833	6249 84 6		142
5042716	6193 03 3		120	6154395	6199 22 5		160	6313037	6248 07 1		149	6018956	6249 84 8		144
6797172	6193 09 9		90	6154456	6199 22 7		160	6313099	6248 09 8		151	6019076	6249 85 0		146
6797233	6193 10 2		92	6154517	6199 22 9		160	6977185	6248 12 8		145	5020325	6249 85 2		148
6975624	6193 11 0		94	6154579	6199 23 2		160	6313396	6248 14 4		147	5020387	6249 85 4		150
6797295	6193 12 9		95	6154630	6199 23 4		160	6313457	6248 15 2		149	5020394	6249 85 6		152
6976768	6193 13 7		96	6154692	6199 23 6		160	6313518	6248 16 0		151				
6504794	6193 14 5		99	6155774	6199 23 8		160	6503599	6248 18 7		145	5691037	6249 86 5		154
6797356	6193 15 3		101	6155835	6199 25 1		160	6317837	6248 20 9		147			/m	
6797417	6193 18 8		102	6155897	6199 25 3		160	6317899	6248 21 7		149				
6497355	6193 19 6		103	6155958	6199 25 5		160	6317950	6248 22 5		151	6644896	6249 87 6		155
6712939	6193 21 8		104	6156016	6199 25 7		160	6503353	6248 28 4		145			/pc.	
6797479	6193 22 6		105	6156078	6199 26 2		160	6575596	6248 30 6		147	5685081	6249 88 1		148
6797530	6193 23 4		106	6156139	6199 26 4		160	6575657	6248 31 4		149			/100 pc.	
6974788	6193 24 2		107	6156313	6199 26 6		160	6575718	6248 32 2		151	6119233	6249 88 4		155
6712991	6193 28 5		108	6156375	6199 26 8		160					6119295	6249 88 8		155
6492794	6193 29 3		109	6156559	6199 28 1		160	5699026	6248 32 8		153			/pc.	
6713059	6193 30 7		111	6156498	6199 28 3		160	5699033	6248 33 2		153	6315376	6249 90 6		143
6713110	6193 31 5		112	6156610	6199 28 5		160	5699040	6248 33 6		153	6315499	6249 92 2		155
6492855	6193 32 3		113	6156672	6199 28 7		160	5699057	6248 34 0		153	6315611	6249 96 5		155
6713172	6193 33 1		114	6156795	6199 40 2		159	5699064	6248 34 4		153	6315673	6249 98 1		155
6797592	6193 35 8		116	6156733	6199 40 4		159	5699095	6248 42 8		153				
6492916	6193 36 6		110	6156856	6199 40 6		159	5699101	6248 43 2		153	5030898	6257 59 8		200
5042518	6193 38 7		119	6156979	6199 40 8		159	5699118	6248 43 6		153	6800711	6257 60 3		200
5042587	6193 39 1		117	6157037	6199 42 1		159	5699125	6248 45 0		153				
5042655	6193 39 5		118	6157099	6199 42 3		159	5699156	6248 45 4		153	6043156	6258 06 9		355
5042723	6193 39 9		120	6157211	6199 42 5		159					6279739	6258 07 1		355
6223695	6193 50 1		91	6157570	6199 42 7		159			/m		5406006	6258 07 3		355
6975266	6193 52 8		93	6157938	6199 44 2		159	6651795	6248 46 2		138				
6507313	6193 56 0		100	6158294	6199 44 4		159	6119059	6248 47 0		139	5406013	6258 07 4		355
				6158652	6199 44 6		159					5469148	6258 14 1		346
6448272	6194 03 6		122	6158713	6199 44 8		159	5690962	6248 48 2		140				
6448098	6194 04 4		123	6158775	6199 46 1		159								
6447978	6194 05 2		123	6158836	6199 46 3		159	6651856	6248 49 7		141	5427650	6270 67 0		196
6447497	6194 06 0		124	6158898	6199 46 5		159	6313570	6248 51 9		143				
6628636	6194 10 9		123	6158959	6199 46 7		159	6977307	6248 60 8		145			/m	
6628575	6194 11 7		123					6313815	6248 62 4		147	5655473	6274 30 0		208
6628513	6194 12 5		123					6313877	6248 64 0		149	5656333	6274 30 1		208
6628452	6194 13 3		124	5126522	6246 05 2		313	6313938	6248 66 7		151	5656340	6274 30 2		208
6628391	6194 14 1		124	5126539	6246 08 7		313					5656371	6274 30 6		208
6628339	6194 18 4		123			/m		5691013	6248 69 4		153			/pc.	
6618910	6194 19 2		123	6651672	6246 96 6		138					5656401	6274 31 0		209
6618859	6194 20 6		124	6118878	6246 97 4		139			/pc.		5656432	6274 31 1		209
6349814	6194 21 4		124					6652570	6248 99 3		141	5656449	6274 31 2		209
6629350	6194 72 9		125	5690955	6246 98 2		140					5656456	6274 31 6		209
		/m		6651733	6246 99 0		141	6313990	6249 00 0		143	5655664	6274 32 0		209
6096329	6199 10 3		158	6311897	6247 01 6		143	6652334	6249 08 6		141	5656463	6274 32 1		209
6096206	6199 10 5		158	6977369	6247 09 1		145	6314232	6249 09 4		143	5656494	6274 32 2		209
6096381	6199 10 7		158	6312139	6247 11 3		147	6652211	6249 16 7		141	5656500	6274 32 6		209
6096442	6199 10 9		158	6312191	6247 14 8		149	6314478	6249 17 5		143	5656517	6274 34 0		210
		/pc.		6312252	6247 16 4		151	6652457	6249 25 6		141	5656524	6274 34 1		210
6096503	6199 12 2		158					6318018	6249 26 4		143	5656555	6274 34 2		210
6096268	6199 12 4		158	5691006	6247 19 4		153	6652693	6249 41 8		141	5656562	6274 34 6		210
6099993	6199 12 6		158					6575350	6249 42 6		144	5656579	6274 36 0		210
6100057	6199 12 8		158			/pc.		6503414	6249 48 5		145	5656586	6274 36 1		210
6119615	6199 13 3		158	6652754	6247 43 1		138	6314713	6249 50 7		147	5656616	6274 36 2		210
6153190	6199 13 5		158	6118991	6247 43 4		139	6314775	6249 51 5		149	5656623	6274 36 6		210

EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page
		/pc.				/pc.				/pc.				/pc.	
5656692	6274 49 0		209	5657668	6274 84 2		308	5659631	6277 12 1		222	5661900	6277 51 0		232
5656708	6274 49 1		209	5657712	6274 85 0		309	5659648	6277 12 2		222	5661917	6277 51 1		232
5656715	6274 49 2		209	5657729	6274 85 1		309	5659709	6277 14 0		223	5661924	6277 51 2		232
5656722	6274 49 6		209	5657767	6274 85 2		309	5659747	6277 14 1		223	5661986	6277 52 0		232
		/m					309	5659754	6277 14 2		223	5661993	6277 52 1		232
5656739	6274 50 0		211	5657774	6274 85 6		309	5659815	6277 16 0		223	5662006	6277 52 2		232
5656746	6274 50 1		211	5657781	6274 86 0		309	5659822	6277 16 1		223	5662020	6277 53 0		233
5656753	6274 50 2		211	5657828	6274 86 1		309	5659860	6277 16 2		223	5662037	6277 53 1		233
5656760	6274 50 6		211	5657835	6274 86 2		309	5659921	6277 17 0		224	5662044	6277 53 2		233
		/pc.					309	5659938	6277 17 1		224	5662075	6277 54 0		233
5656791	6274 51 0		212	5657842	6274 86 6		309	5659945	6277 17 2		224	5662082	6277 54 1		233
5656807	6274 51 1		212	5657880	6274 87 0		309			/m		5662099	6277 54 2		233
5656814	6274 51 2		212	5657897	6274 87 1		309	5660002	6277 20 0		225	5662129	6277 56 0		234
5656821	6274 51 6		212	5657903	6274 87 2		310	5660040	6277 20 1		225	5662136	6277 56 1		234
5656838	6274 52 0		212	5657941	6274 87 6		310	5660057	6277 20 2		225	5662143	6277 56 2		234
5656845	6274 52 1		212	5657958	6274 88 0					/pc.				/m	
5656852	6274 52 2		212	5657965	6274 88 1		209	5660163	6277 21 0		227	5662174	6277 60 0		236
5656869	6274 52 6		212	5658009	6274 88 2		209	5660170	6277 21 1		227	5662181	6277 60 1		236
5656876	6274 54 0		213	5658023	6274 89 0		209	5660187	6277 21 2		227	5662198	6277 60 2		236
5656883	6274 54 1		213	5658061	6274 89 1		209	5660248	6277 22 0		227			/pc.	
5656890	6274 54 2		213	5658078	6274 89 2		209	5660286	6277 22 1		227	5662242	6277 61 0		238
5656906	6274 54 6		213	5658085	6274 89 6		210	5660293	6277 22 2		227	5662259	6277 61 1		238
5656913	6274 56 0		213	5658122	6274 90 0		210	5660323	6277 24 0		228	5662266	6277 61 2		238
5656920	6274 56 1		213	5658139	6274 91 0		307	5660330	6277 24 1		228	5662310	6277 62 0		238
5656937	6274 56 2		213	5658146	6274 91 1		307	5660347	6277 24 2		228	5662327	6277 62 1		238
5656944	6274 56 6		213	5658184	6274 91 2		307	5660408	6277 26 0		228	5662334	6277 62 2		238
5656951	6274 57 0		213	5658207	6274 92 0		308	5660415	6277 26 1		228	5662365	6277 64 0		239
5656968	6274 57 1		213	5658245	6274 92 1		308	5660422	6277 26 2		228	5662372	6277 64 1		239
5656975	6274 57 2		213	5658252	6274 92 2		308	5660484	6277 27 0		229	5662389	6277 64 2		239
5656982	6274 57 6		213	5658313	6274 93 1		308	5660521	6277 27 1		229	5662419	6277 66 0		239
5656999	6274 59 0		210	5658306	6274 93 0		308	5660538	6277 27 2		229	5662426	6277 66 1		239
5657002	6274 59 1		210	5658320	6274 93 2		308	5660590	6277 29 0		220	5662433	6277 66 2		239
5657019	6274 59 2		210	5658375	6274 94 0		308			/m		5662464	6277 67 0		240
5657026	6274 59 6		210	5658382	6274 94 1		308	5700852	6277 29 4		220	5662471	6277 67 1		240
5657033	6274 65 0		208	5658429	6274 94 2		308			/m		5662488	6277 67 2		240
		/m					309							/m	
5657040	6274 70 0		214	5658443	6274 95 0		309	5660606	6277 30 0		225	5662518	6277 70 0		236
5657057	6274 70 1		214	5658481	6274 95 1		309	5660644	6277 30 1		225	5662525	6277 70 1		236
5657064	6274 70 2		214	5658498	6274 95 2		309	5660651	6277 30 2		225	5662532	6277 70 2		236
5657071	6274 70 6		214	5658542	6274 96 0		309			/pc.				/pc.	
		/pc.		5658559	6274 96 1		309	5660767	6277 31 0		227	5662587	6277 71 0		238
5657101	6274 71 0		215	5658566	6274 96 2		309	5660774	6277 31 1		227	5662594	6277 71 1		238
5657118	6274 71 1		215	5658580	6274 97 0		309	5660781	6277 31 2		227	5662600	6277 71 2		238
5657125	6274 71 2		215	5658597	6274 97 1		309	5660811	6277 32 0		227	5662631	6277 72 0		238
5657132	6274 71 6		215	5658603	6274 97 2		310	5660828	6277 32 1		227	5662648	6277 72 1		238
5657149	6274 72 0		215	5658627	6274 98 0		310	5660835	6277 32 2		227	5662679	6277 72 2		238
5657156	6274 72 1		215	5658665	6274 98 1		310	5660866	6277 34 0		228	5662709	6277 74 0		239
5657163	6274 72 2		215	5658672	6274 98 2			5660873	6277 34 1		228	5662716	6277 74 1		239
5657170	6274 72 6		215			/m		5660880	6277 34 2		228	5662723	6277 74 2		239
5657187	6274 74 0		216	5658726	6277 00 0		220	5660941	6277 36 0		228	5662754	6277 76 0		239
5657194	6274 74 1		216	5658733	6277 00 1		220	5660958	6277 36 1		228	5662761	6277 76 1		239
5657200	6274 74 2		216	5658740	6277 00 2		220	5660965	6277 36 2		228	5662815	6277 76 2		239
5657217	6274 74 6		216			/pc.		5661023	6277 37 0		229	5662877	6277 77 0		240
5657224	6274 76 0		216	5658856	6277 01 0		222	5661061	6277 37 1		229	5662884	6277 77 1		240
5657231	6274 76 1		216	5658863	6277 01 1		222	5661078	6277 37 2		229	5662914	6277 77 2		240
5657248	6274 76 2		216	5658863	6277 01 1		222			/m				/m	
5657255	6274 76 6		216	5658900	6277 01 2		222	5661139	6277 40 0		230	5662945	6277 80 0		241
5657262	6274 77 0		216	5658962	6277 02 0		222	5661146	6277 40 1		230	5662976	6277 80 1		241
5657279	6274 77 1		216	5658979	6277 02 1		222	5661184	6277 40 2		230	5662983	6277 80 2		241
5657286	6274 77 2		216	5658986	6277 02 2		223			/pc.				/pc.	
5657293	6274 77 6		216	5659044	6277 04 0		223	5661269	6277 41 0		232	5663034	6277 81 0		243
5657309	6274 79 0		209	5659082	6277 04 1		223	5661306	6277 41 1		232	5663041	6277 81 1		243
5657347	6274 79 1		209	5659099	6277 04 2		223	5661313	6277 41 2		232	5663058	6277 81 2		243
5657354	6274 79 2		209	5659150	6277 06 0		223	5661375	6277 42 0		232	5663102	6277 82 0		243
5657361	6274 79 6		209	5659167	6277 06 1		223	5661382	6277 42 1		232	5663119	6277 82 1		243
5657408	6274 81 0		307	5659204	6277 06 2		224	5661429	6277 42 2		232	5663126	6277 82 2		243
5657415	6274 81 1		307	5659228	6277 07 0		224	5661443	6277 43 0		233	5663140	6277 83 0		244
5657422	6274 81 2		307	5659266	6277 07 1		224	5661481	6277 43 1		233	5663157	6277 83 1		244
5657460	6274 81 6		307	5659273	6277 07 2		224	5661498	6277 43 2		233	5663164	6277 83 2		244
5657477	6274 82 0		308			/m		5661559	6277 44 0		233	5663195	6277 84 0		244
5657484	6274 82 1		308	5659334	6277 09 0		224	5661566	6277 44 1		233	5663201	6277 84 1		244
5657521	6274 82 2		308	5659341	6277 09 5		220	5661603	6277 44 2		233	5663218	6277 84 2		244
5657538	6274 82 6		308	5659389	6277 10 0		220	5661665	6277 46 0		234	5663249	6277 86 0		245
5657545	6274 83 0		308	5659396	6277 10 1		220	5661672	6277 46 1		234	5663270	6277 86 1		245
5657583	6274 83 1		308	5659402	6277 10 2		220	5661689	6277 46 2		234	5663287	6277 86 2		245
5657590	6274 83 2		308			/pc.				/m				/m	
5657606	6274 83 6		308	5659518	6277 11 0		222	5661740	6277 50 0		230	5663317	6277 90 0		241
5657644	6274 84 0		308	5659525	6277 11 1		222	5661788	6277 50 1		230	5663324	6277 90 1		241
5657651	6274 84 1		308	5659563	6277 11 2		222	5661795	6277 50 2		230	5663331	6277 90 2		241
				5659624	6277 12 0		222								

Numeric directory

Structure of the EAN number: Country code **40**

Manufacturer code **1219** (for articles beginning with **0: 1010**)

Individual EAN-C **5647589**


EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page
5663409	6277 91 0	/pc.	243	5665083	6278 26 0	/pc.	250	5666776	6278 82 0	/pc.	311	5680864	6279 83 2	/pc.	306
5663416	6277 91 1		243	5665090	6278 26 1		250	5666783	6278 82 1		311	5680871	6279 83 4		306
5663423	6277 91 2		243	5665106	6278 26 2		250	5666820	6278 82 2		311	5680888	6279 83 6		306
5663478	6277 92 0		243			/m		5666875	6278 83 0		311	5680895	6279 83 8		306
5663485	6277 92 1		243	5665137	6278 30 0		247	5666882	6278 83 1		311	5680901	6279 84 0		306
5663515	6277 92 2		243	5665144	6278 30 1		247	5666899	6278 83 2		311	5680918	6279 84 2		306
5663539	6277 93 0		244	5665151	6278 30 2		247	5666929	6278 84 0		311				
5663546	6277 93 1		244			/pc.		5666936	6278 84 1		311			/m	
5663577	6277 93 2		244	5665205	6278 31 0		249	5666943	6278 84 2		311	5695813	6279 85 0		221
5663607	6277 94 0		244	5665212	6278 31 1		249	5666974	6278 85 0		312	5695820	6279 85 1		221
5663638	6277 94 1		244	5665229	6278 31 2		249	5666981	6278 85 1		312	5695868	6279 85 2		221
5663645	6277 94 2		244	5665250	6278 32 0		249	5666998	6278 85 2		312			/pc.	
5663690	6277 96 0		245	5665267	6278 32 1		249	5667025	6278 86 0		312	5695936	6279 86 0		223
5663706	6277 96 1		245	5665274	6278 32 2		249	5667056	6278 86 1		312	5695943	6279 86 1		223
5663713	6277 96 2		245	5665335	6278 33 0		249	5667063	6278 86 2		312	5695981	6279 86 2		223
				5665342	6278 33 1		249	5667094	6278 87 0		312	5696056	6279 87 0		222
		/m		5665380	6278 33 2		249	5667100	6278 87 1		312	5696063	6279 87 1		222
5663744	6278 00 0		252	5665458	6278 34 0		250	5667117	6278 87 2		312	5696100	6279 87 2		222
5663751	6278 00 1		252	5665465	6278 34 1		250	5667148	6278 88 0		310				
5663768	6278 00 2		252	5665472	6278 34 2		250	5667179	6278 88 1		310			/m	
		/pc.		5665502	6278 36 0		250	5667186	6278 88 2		310	5680925	6279 88 0		248
5663812	6278 01 0		254	5665519	6278 36 1		250	5667216	6278 89 0		310	5680932	6279 88 1		248
5663829	6278 01 1		254	5665526	6278 36 2		250	5667223	6278 89 1		310	5680949	6279 88 2		248
5663836	6278 01 2		254			/m		5667230	6278 89 2		310			/pc.	
5663867	6278 02 0		254	5665557	6278 40 0		258					5681090	6279 99 0		250
5663874	6278 02 1		254	5665564	6278 40 1		258	5667261	6279 00 0		311	5681106	6279 99 1		250
5663881	6278 02 2		254	5665571	6278 40 2		258	5667278	6279 00 1		311	5681113	6279 99 2		250
5663904	6278 03 0		255			/pc.		5667285	6279 00 2		311				
5663911	6278 03 1		255	5665625	6278 41 0		260	5667315	6279 01 0		311			/m	
5663928	6278 03 2		255	5665632	6278 41 1		260	5667322	6279 01 1		311	5140870	6284 40 0		272
5663959	6278 05 0		255	5665649	6278 41 2		260	5667353	6279 01 2		311	5140887	6284 40 3		272
5663966	6278 05 1		255	5665700	6278 42 0		260	5667384	6279 02 0		311			/pc.	
5663973	6278 05 2		255	5665755	6278 42 1		260	5667414	6279 02 1		311	5140917	6284 41 0		273
5664000	6278 06 0		256	5665762	6278 42 2		260	5667421	6279 02 2		311	5140924	6284 41 3		273
5664017	6278 06 1		256	5665816	6278 43 0		261	5667476	6279 03 0		312	5140931	6284 42 0		273
5664024	6278 06 2		256	5665823	6278 43 1		261	5667483	6279 03 1		312	5140948	6284 42 3		273
5664055	6278 07 0		256	5665878	6278 43 2		261	5667490	6279 03 2		312	5140979	6284 43 0		273
5664062	6278 07 1		256	5665939	6278 44 0		261	5667520	6279 04 0		312	5140986	6284 43 3		273
5664079	6278 07 2		256	5665946	6278 44 1		261	5667537	6279 04 1		312	5140993	6284 44 0		273
		/m		5665984	6278 44 2		261	5667544	6279 04 2		312	5141006	6284 44 3		273
5664109	6278 10 0		252	5666042	6278 46 0		262	5667599	6279 05 0		312	5141044	6284 46 0		273
5664116	6278 10 1		252	5666059	6278 46 1		262	5667605	6279 05 1		312	5141051	6284 46 3		273
5664123	6278 10 2		252	5666066	6278 46 2		262	5667612	6279 05 2		312	5141068	6284 47 0		274
		/pc.				/m		5667667	6279 76 0		221	5141099	6284 47 3		274
5664178	6278 11 0		254	5666097	6278 50 0		258	5667674	6279 76 1		221			/m	
5664185	6278 11 1		254	5666103	6278 50 1		258	5667681	6279 76 2		221	5141105	6284 50 0		275
5664192	6278 11 2		254	5666110	6278 50 2		258	5667704	6279 76 4		226	5141112	6284 50 3		275
5664222	6278 12 0		254			/pc.		5667711	6279 76 5		226			/pc.	
5664239	6278 12 1		254	5666165	6278 51 0		260	5667728	6279 76 6		226	5141129	6284 51 0		276
5664246	6278 12 2		254	5666172	6278 51 1		260	5667742	6279 76 8		237	5141150	6284 51 3		276
5664260	6278 13 0		255	5666189	6278 51 2		260	5667759	6279 76 9		237	5141167	6284 52 0		276
5664307	6278 13 1		255	5666219	6278 52 0		260	5667766	6279 77 0		237	5141174	6284 52 3		276
5664314	6278 13 2		255	5666226	6278 52 1		260	5667780	6279 77 2		253	5141181	6284 53 0		276
5664376	6278 14 0		255	5666233	6278 52 2		260	5667797	6279 77 3		253	5141211	6284 53 3		276
5664383	6278 14 1		255	5666257	6278 53 0		261	5667803	6279 77 4		253	5141228	6284 54 0		276
5664420	6278 14 2		255	5666264	6278 53 1		261	5667827	6279 77 6		221	5141235	6284 54 3		276
5664482	6278 16 0		256	5666271	6278 53 2		261	5667834	6279 77 7		221	5141242	6284 56 0		276
5664499	6278 16 1		256	5666301	6278 54 0		261	5667841	6279 77 8		221	5141273	6284 56 3		276
5664505	6278 16 2		256	5666318	6278 54 1		261	5667865	6279 78 0		226	5141280	6284 57 0		277
5664567	6278 17 0		256	5666325	6278 54 2		261	5667872	6279 78 1		226	5141297	6284 57 3		277
5664604	6278 17 1		256	5666356	6278 56 0		262	5667889	6279 78 2		226			/m	
5664611	6278 17 2		256	5666363	6278 56 1		262	5667902	6279 78 4		237	5141303	6284 60 0		278
		/m		5666370	6278 56 2		262	5667919	6279 78 5		237	5141334	6284 60 3		278
						/m		5667926	6279 78 6		237			/pc.	
5664666	6278 20 0		247					5667940	6279 78 8		253	5141341	6284 61 0		279
5664673	6278 20 1		247	5666400	6278 68 0		208	5667957	6279 78 9		253	5141358	6284 61 3		279
5664680	6278 20 2		247	5666417	6278 68 1		208	5667964	6279 79 0		253	5141365	6284 62 0		279
		/pc.		5666424	6278 68 2		208					5141396	6284 62 3		279
5664789	6278 21 0		248	5666486	6278 68 6		208	5680680	6279 80 0		305	5141402	6284 63 0		279
5664796	6278 21 1		248	5666530	6278 78 0		209	5680697	6279 80 2		304	5141419	6284 63 3		279
5664802	6278 21 2		248	5666547	6278 78 1		209	5680703	6279 80 4		304	5141426	6284 64 0		279
5664833	6278 22 0		249	5666554	6278 78 2		209	5680734	6279 80 6		304	5141457	6284 64 3		279
5664840	6278 22 1		249	5666578	6278 78 6		209	5680741	6279 81 0		304	5141464	6284 66 0		279
5664857	6278 22 2		249			/pc.		5680758	6279 81 2		304	5141471	6284 66 3		279
5664901	6278 23 0		249	5666585	6278 80 0		310	5680765	6279 82 0		305	5141488	6284 67 0		280
5664918	6278 23 1		249	5666592	6278 80 1		310	5680796	6279 82 2		305	5141518	6284 67 3		280
5664925	6278 23 2		249	5666608	6278 80 2		310	5680802	6279 82 4		305			/m	
5664987	6278 24 0		250	5666660	6278 81 0		310	5680819	6279 82 6		305				
5665021	6278 24 1		250	5666707	6278 81 1		310	5680826	6279 82 8		305	5141525	6284 70 0		281
5665038	6278 24 2		250	5666714	6278 81 2		310	5680857	6279 83 0		305	5141532	6284 70 3		281

06 LFS_Katalog_2010_Neuer_Stand / en / 22/02/2010 / LLEExport_00995

EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page	EAN-C.	Art. no.	Price	Page
5141549	6284 71 0	/pc.	282	5142201	6285 22 0	/pc.	297	5143734	6286 50 0	/pc.	334	5297260	6288 08 6	/pc.	306
5141570	6284 71 3		282	5142232	6285 22 3		297	5143741	6286 50 2		334	5297277	6288 08 8		306
5141587	6284 72 0		282	5142249	6285 23 0		297	5143758	6286 50 3		334	5297284	6288 09 0		306
5141594	6284 72 3		282	5142256	6285 23 3		297	5143765	6286 55 0		316	5297291	6288 09 2		306
5141600	6284 73 0		282	5142263	6285 24 0		297	5143819	6286 56 0		316	5147152	6288 10 0		305
5141631	6284 73 3		282	5142294	6285 24 3		297	5143888	6286 70 0		332	5147169	6288 10 2		305
5141648	6284 74 0		282	5142300	6285 26 0		297	5143918	6286 70 2		332	5147176	6288 10 4		305
5141655	6284 74 3		282	5142317	6285 26 3		297			/m		5147183	6288 10 6		305
5141662	6284 76 0		282	5142324	6285 27 0		298	5143925	6286 75 0		318	5147213	6288 10 8		305
5141693	6284 76 3		282	5142355	6285 27 3		298	5143932	6286 75 2		318	5147220	6288 11 0		305
5141709	6284 77 0		283			/m		5143949	6286 75 4		318	5147237	6288 11 2		305
5141716	6284 77 3		283	5142362	6285 30 0		299	5143970	6286 75 6		318	5147244	6288 11 4		305
		/m		5142379	6285 30 3		299	5143987	6286 75 8		318	5147275	6288 11 6		305
5141723	6284 80 0		284			/pc.				/pc.		5147282	6288 11 8		305
5141754	6284 80 3		284	5142386	6285 31 0		300	5143994	6286 77 0		318	5147299	6288 12 0		305
		/pc.		5142416	6285 31 3		300	5144007	6286 77 2		318	5147404	6288 18 0		306
5141761	6284 81 0		285	5142423	6285 32 0		300	5144038	6286 77 5		318	5616559	6288 36 5		357
5141778	6284 81 3		285	5142430	6285 32 3		300	5144045	6286 80 0		316				
5141785	6284 82 0		285	5142447	6285 33 0		300	5144052	6286 80 2		317	5694915	6288 36 9		357
5141815	6284 82 3		285	5142478	6285 33 3		300	5144090	6286 81 0		332				
5141822	6284 83 0		285	5142485	6285 34 0		300			/m		5148562	6288 57 0		331
5141839	6284 83 3		285	5142492	6285 34 3		300				291	5148579	6288 57 1		331
5141846	6284 84 0		285	5142508	6285 36 0		300	5157618	6287 16 0		291	5480969	6288 57 5		338
5141877	6284 84 3		285	5142539	6285 36 3		300	5157625	6287 16 3		266				
5141884	6284 86 0		285	5142546	6285 37 0		301	5145189	6287 17 0		266				
5141891	6284 86 3		285	5142553	6285 37 3		301	5145196	6287 17 3		266	5148586	6288 58 0		331
5141907	6284 87 0		286			/m				/pc.		5148593	6288 58 1		331
5141938	6284 87 3		286	5157069	6285 40 0		266	5145240	6287 20 0		267	5148678	6288 61 0		208
		/m		5157076	6285 40 3		266	5145257	6287 20 3		267	5148685	6288 61 1		208
5141945	6284 90 0		287			/pc.		5145264	6287 21 0		267	5148715	6288 61 2		356
5141952	6284 90 3		287	5157083	6285 41 0		267	5145295	6287 21 3		267	5148739	6288 61 4		357
		/pc.		5157120	6285 41 3		267	5157663	6287 22 0		292	5148746	6288 61 5		208
5141969	6284 91 0		288	5157137	6285 42 0		267	5157670	6287 22 3		292	5404385	6288 61 6		355
5141990	6284 91 3		288	5157144	6285 42 3		267	5157687	6287 23 0		291	5404392	6288 61 7		355
5142003	6284 92 0		288	5157182	6285 43 0		267	5157724	6287 23 3		291	5404408	6288 61 8		355
5142010	6284 92 3		288	5157199	6285 43 3		267			/m		5404415	6288 61 9		355
5142027	6284 93 0		288	5157205	6285 44 0		267	5146575	6287 70 0		307	5404422	6288 62 0		355
5142058	6284 93 3		288	5157243	6285 44 3		267	5146582	6287 70 1		307	5404439	6288 62 1		355
5142065	6284 94 0		288	5157250	6285 46 0		267	5146612	6287 70 2		307	5404446	6288 62 2		356
5142072	6284 94 3		288	5157267	6285 46 3		267	5146643	6287 71 0		307	5404453	6288 62 3		356
5142089	6284 96 0		288	5157304	6285 47 0		268	5146674	6287 71 1		307	5404460	6288 62 4		356
5142119	6284 96 3		288	5157311	6285 47 3		268	5146681	6287 71 2		307	5404477	6288 62 5		356
5142126	6284 97 0		289			/m		5146704	6287 72 3		307	5404484	6288 62 6		356
5142133	6284 97 3		289	5157328	6285 50 0		269	5146742	6287 73 3		307	5404491	6288 62 7		356
		/m		5157366	6285 50 3		269			/pc.		5404507	6288 62 8		356
5156581	6285 00 0		290	5157373	6285 51 0		270	5146766	6287 80 0		307	5404514	6288 62 9		356
5156598	6285 00 3		290	5157380	6285 51 3		270	5146797	6287 81 0		307	5404521	6288 63 0		356
		/pc.		5157427	6285 52 0		270	5676140	6288 00 1		304	5404538	6288 63 1		356
5156604	6285 01 0		291	5157434	6285 52 3		270	5676188	6288 00 3		304	5404545	6288 63 2		356
5156642	6285 01 3		291	5157441	6285 53 0		270	5676195	6288 00 5		304	5404552	6288 63 3		356
5156659	6285 02 0		291	5157489	6285 53 3		270	5676201	6288 00 7		304	5148777	6288 64 0		210
5156666	6285 02 3		291	5157496	6285 54 0		270	5146865	6288 03 0		306	5148791	6288 65 0		313
5156703	6285 03 0		291	5157502	6285 54 3		270	5146872	6288 03 2		306			/m	
5156710	6285 03 3		291	5157540	6285 56 0		270	5146889	6288 03 4		306	5685760	6288 65 1		313
5156727	6285 04 0		292	5157557	6285 56 3		270	5146919	6288 03 6		306			/pc.	
5156765	6285 04 3		292	5157564	6285 57 0		271	5146926	6288 03 8		306				
5156772	6285 06 0		292	5157601	6285 57 3		271	5146933	6288 04 0		306	5148913	6288 66 7		266
5156789	6285 06 3		292					5146940	6288 04 2		306	5149088	6288 70 0		221
		/m		5142560	6286 00 0		318	5146971	6288 04 4		306	5149101	6288 70 4		224
5156826	6285 10 0		293	5142607	6286 00 3		318	5146988	6288 04 6		306	5149460	6288 79 0		208
5156833	6285 10 3		293	5142980	6286 11 0		318	5146995	6288 04 8		306			/m	
		/pc.		5143017	6286 11 3		318	5147008	6288 05 0		306	5149521	6288 83 0		318
5156840	6285 11 0		294	5143079	6286 13 0		318	5147039	6288 05 2		306			/pc.	
5156888	6285 11 3		294	5143086	6286 13 3		318	5147046	6288 05 4		306	5160564	6288 92 0		320
5156895	6285 12 0		294	5143161	6286 16 0		318	5147053	6288 05 6		306	5160601	6288 92 3		320
5156901	6285 12 3		294	5143192	6286 16 3		318	5147060	6288 05 8		306	5160663	6288 93 0		319
5156949	6285 13 0		294	5143208	6286 17 0		318	5147091	6288 06 0		306	5160670	6288 93 3		319
5156956	6285 13 3		294	5143222	6286 17 3		318	5147107	6288 06 2		306	5160731	6288 94 0		322
5156963	6285 14 0		295	5143284	6286 19 0		318	5147114	6288 06 4		306	5160748	6288 94 3		322
5157007	6285 14 3		295	5143314	6286 19 3		318	5147121	6288 06 6		306	5160809	6288 95 0		323
5157014	6285 16 0		295	5143321	6286 20 0		318	5297185	6288 07 0		306	5160847	6288 95 3		323
5157021	6285 16 3		295	5143338	6286 20 3		318	5297192	6288 07 2		306	5160861	6288 96 0		324
		/m		5143383	6286 22 0		318	5297208	6288 07 4		306	5160908	6288 96 3		324
5142140	6285 20 0		296	5143406	6286 22 3		318	5297215	6288 07 6		306	5160960	6288 97 0		325
5142171	6285 20 3		296	5143451	6286 25 0		318	5297222	6288 07 8		306	5160977	6288 97 3		325
		/pc.		5143499	6286 25 3		318	5297239	6288 08 0		306				
5142188	6285 21 0		297	5143567	6286 29 0		318	5297246	6288 08 2		306	5477013	6289 04 0		328
5142195	6285 21 3		297	5143574	6286 29 3		318	5297253	6288 08 4		306	5477402	6289 04 3		328

Numeric directory

EAN-C.	Art. no.	Price	Page
		/pc.	
5477419	6289 05 0		329
5477020	6289 05 3		329
5477037	6289 06 0		327
5477426	6289 06 3		327
5477433	6289 07 0		329
5477044	6289 07 3		329
5161202	6290 01 0		321
5161219	6290 01 3		321
5161226	6290 02 0		333
5161264	6290 02 3		333
5161288	6290 03 0		333
5161325	6290 03 3		333
5161349	6290 04 0		333
5161387	6290 04 3		333
5161448	6290 05 0		333
5161455	6290 05 3		333
5161509	6290 06 0		333
5161516	6290 06 3		333
5161561	6290 07 3		334
5428077	6290 08 2		326
5428084	6290 08 3		326
5428091	6290 08 6		325
5428107	6290 08 7		325
5428138	6290 09 0		334
5428145	6290 09 1		334
5161578	6290 10 0		322
5161585	6290 10 4		322
5161639	6290 11 0		323
5161646	6290 11 4		323
5161691	6290 12 0		319
5161707	6290 12 4		319
5161752	6290 13 0		324
5161769	6290 13 4		324
5161813	6290 15 0		319
5161868	6290 16 0		319
5161882	6290 17 0		322
5161929	6290 17 2		323
5161936	6290 17 4		319
5161943	6290 17 6		324
5428152	6290 17 8		326
5161981	6290 18 0		331
5162001	6290 18 4		331
5459231	6290 19 6		326
5459248	6290 19 7		326
5459279	6290 19 8		326
5162063	6290 20 0		320
5465249	6290 20 1		331
5162117	6290 22 0		323
5162162	6290 24 0		322
5162179	6290 25 0		325
5418566	6290 26 0		320
5428169	6290 26 4		326
5448792	6290 26 9		327
5648963	6290 29 0		327
5733195	9002 09 7		307

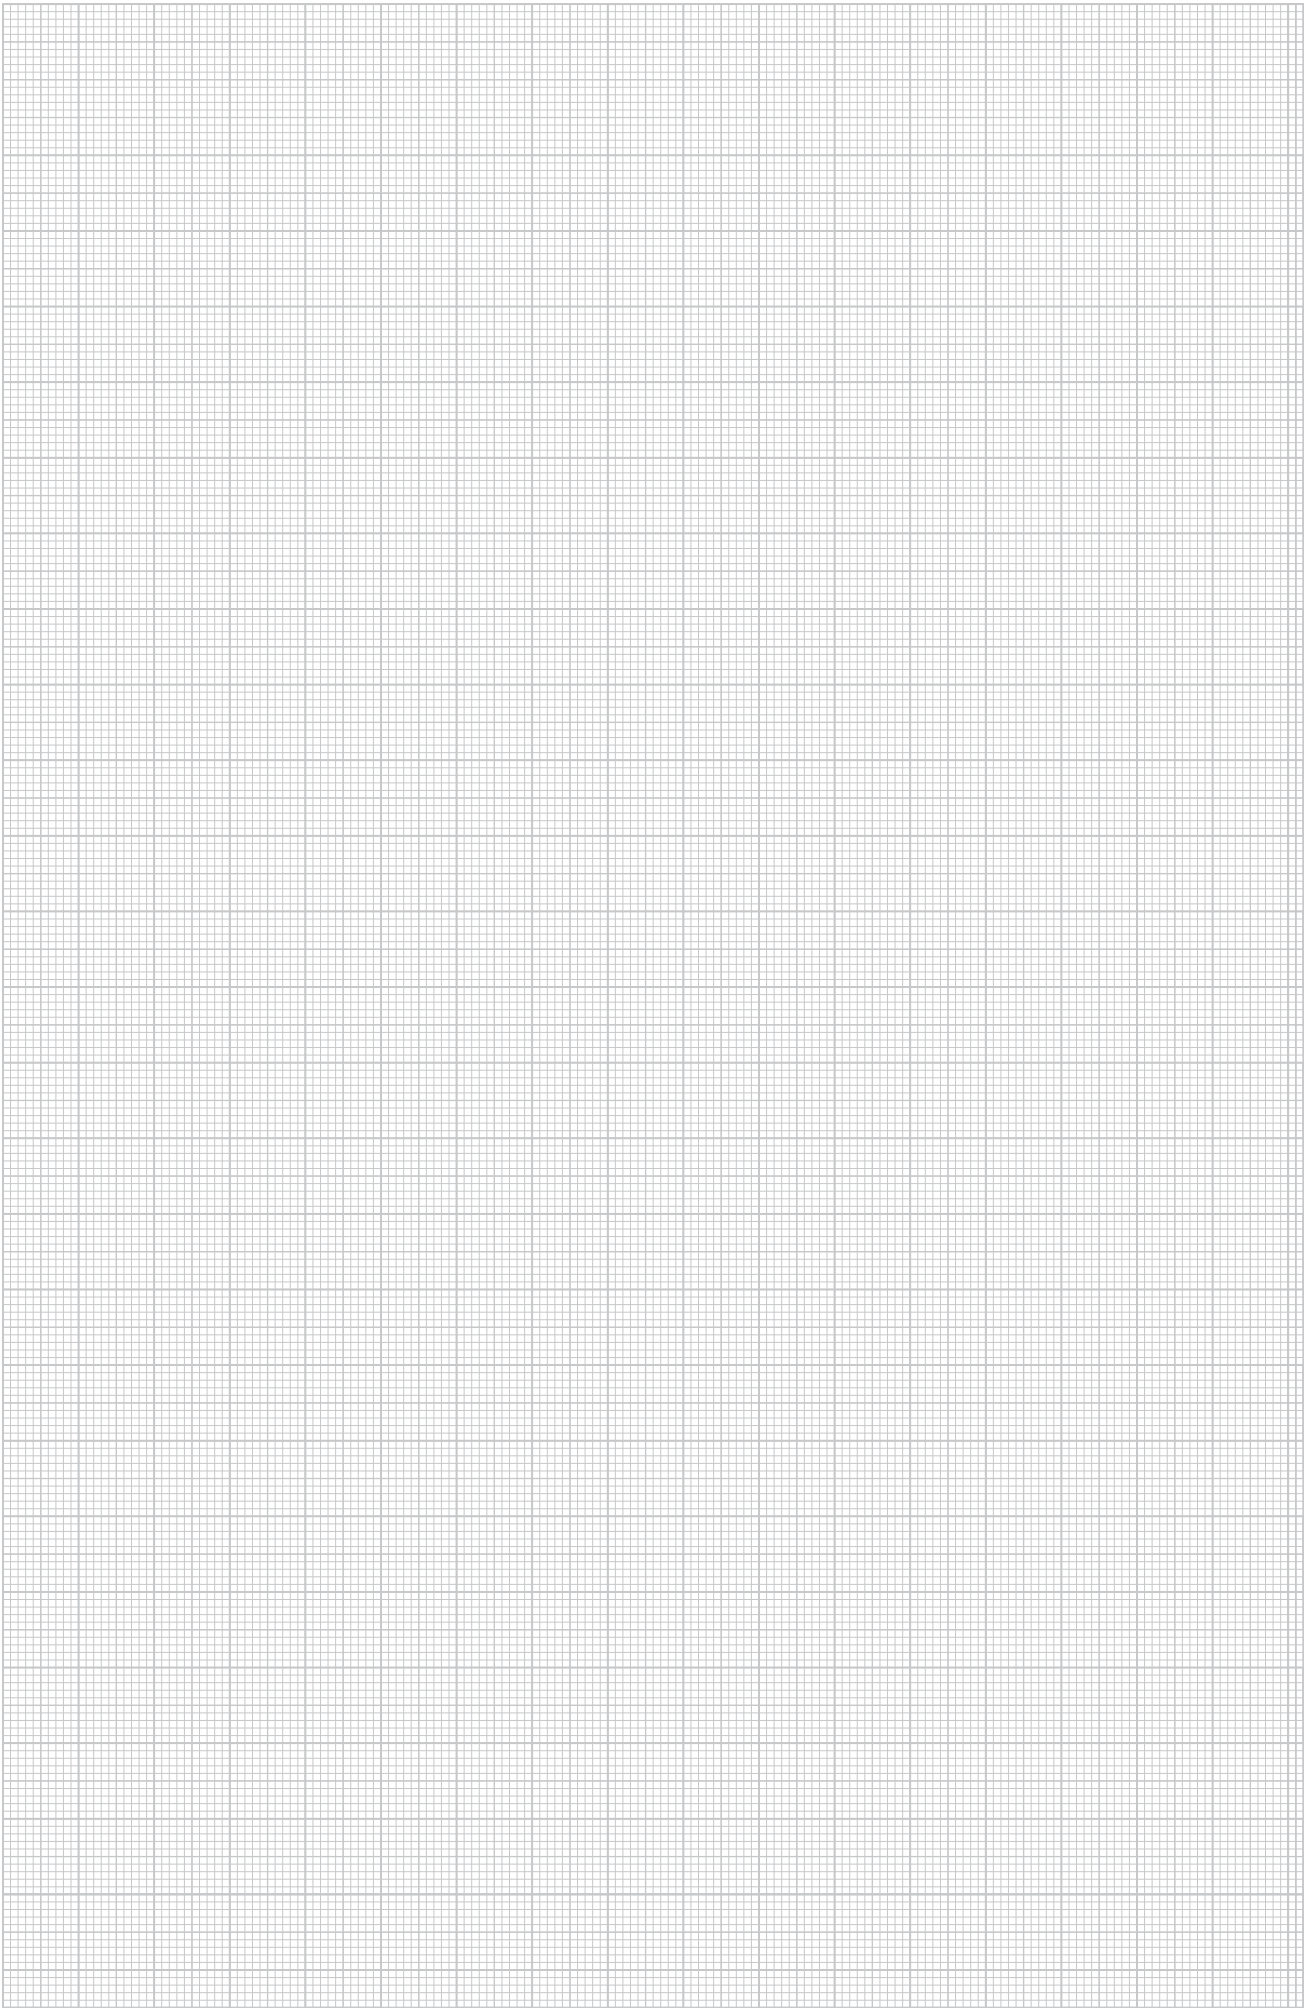

Type listing

Structure of the EAN number: Country code **40**

Manufacturer code **1219** (for articles beginning with **0: 1010**)

Individual EAN-C **5647589**

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
7LSB	300	5148791	6288 65 0	/pc.	313	71GD6	Grey/ PA	5148746	6288 61 5	/pc.	258
						71GD6	Grey/ PA	5148746	6288 61 5		266
						71GD6	Grey/ PA	5148746	6288 61 5		269
						71GD6	Grey/ PA	5148746	6288 61 5		272
7LSB M		5685760	6288 65 1	/m	313	71GD6	Grey/ PA	5148746	6288 61 5		275
						71GD6	Grey/ PA	5148746	6288 61 5		278
						71GD6	Grey/ PA	5148746	6288 61 5		281
						71GD6	Grey/ PA	5148746	6288 61 5		284
7ZE	/ PA	5149460	6288 79 0	/pc.	208	71GD6	Grey/ PA	5148746	6288 61 5		287
7ZE	/ PA	5149460	6288 79 0		211	71GD6	Grey/ PA	5148746	6288 61 5		290
7ZE	/ PA	5149460	6288 79 0		214	71GD6	Grey/ PA	5148746	6288 61 5		293
7ZE	/ PA	5149460	6288 79 0		221	71GD6	Grey/ PA	5148746	6288 61 5		296
7ZE	/ PA	5149460	6288 79 0		226	71GD6	Grey/ PA	5148746	6288 61 5		299
7ZE	/ PA	5149460	6288 79 0		231	71GD6	Grey/ PA	5148746	6288 61 5		331
7ZE	/ PA	5149460	6288 79 0		237	71GD6	Grey/ PA	5148746	6288 61 5		335
7ZE	/ PA	5149460	6288 79 0		242						
7ZE	/ PA	5149460	6288 79 0		248	71GD7	Grey/ PA	5148685	6288 61 1		208
7ZE	/ PA	5149460	6288 79 0		253	71GD7	Grey/ PA	5148685	6288 61 1		211
7ZE	/ PA	5149460	6288 79 0		259	71GD7	Grey/ PA	5148685	6288 61 1		214
7ZE	/ PA	5149460	6288 79 0		266	71GD7	Grey/ PA	5148685	6288 61 1		220
7ZE	/ PA	5149460	6288 79 0		269	71GD7	Grey/ PA	5148685	6288 61 1		225
7ZE	/ PA	5149460	6288 79 0		272	71GD7	Grey/ PA	5148685	6288 61 1		230
7ZE	/ PA	5149460	6288 79 0		275	71GD7	Grey/ PA	5148685	6288 61 1		236
7ZE	/ PA	5149460	6288 79 0		278	71GD7	Grey/ PA	5148685	6288 61 1		241
7ZE	/ PA	5149460	6288 79 0		281	71GD7	Grey/ PA	5148685	6288 61 1		247
7ZE	/ PA	5149460	6288 79 0		284	71GD7	Grey/ PA	5148685	6288 61 1		252
7ZE	/ PA	5149460	6288 79 0		287	71GD7	Grey/ PA	5148685	6288 61 1		258
7ZE	/ PA	5149460	6288 79 0		290	71GD7	Grey/ PA	5148685	6288 61 1		266
7ZE	/ PA	5149460	6288 79 0		293	71GD7	Grey/ PA	5148685	6288 61 1		269
7ZE	/ PA	5149460	6288 79 0		296	71GD7	Grey/ PA	5148685	6288 61 1		272
7ZE	/ PA	5149460	6288 79 0		299	71GD7	Grey/ PA	5148685	6288 61 1		275
7ZE	/ PA	5149460	6288 79 0		338	71GD7	Grey/ PA	5148685	6288 61 1		278
						71GD7	Grey/ PA	5148685	6288 61 1		281
8AWR	/ St / G	5149101	6288 70 4		224	71GD7	Grey/ PA	5148685	6288 61 1		284
8AWR	/ St / G	5149101	6288 70 4		229	71GD7	Grey/ PA	5148685	6288 61 1		287
8AWR	/ St / G	5149101	6288 70 4		235	71GD7	Grey/ PA	5148685	6288 61 1		290
8AWR	/ St / G	5149101	6288 70 4		240	71GD7	Grey/ PA	5148685	6288 61 1		293
8AWR	/ St / G	5149101	6288 70 4		246	71GD7	Grey/ PA	5148685	6288 61 1		296
8AWR	/ St / G	5149101	6288 70 4		251	71GD7	Grey/ PA	5148685	6288 61 1		299
8AWR	/ St / G	5149101	6288 70 4		257	71GD7	Grey/ PA	5148685	6288 61 1		331
8AWR	/ St / G	5149101	6288 70 4		263	71GD7	Grey/ PA	5148685	6288 61 1		335
8VS4		5146797	6287 81 0		307	71GD8	Grey/ PA	5148562	6288 57 0		331
						71GD8	Grey/ PA	5148562	6288 57 0		335
71GD6	Grey/ PA	5148678	6288 61 0		208	71GD8	Grey/ PA	5148562	6288 57 0		338
71GD6	Grey/ PA	5148678	6288 61 0		211	71GD8	Grey/ PA	5148579	6288 57 1		331
71GD6	Grey/ PA	5148678	6288 61 0		214	71GD8	Grey/ PA	5148579	6288 57 1		335
71GD6	Grey/ PA	5148678	6288 61 0		220	71GD8	Grey/ PA	5148579	6288 57 1		338
71GD6	Grey/ PA	5148678	6288 61 0		225						
71GD6	Grey/ PA	5148678	6288 61 0		230	71GD9	Grey/ PA	5148586	6288 58 0		331
71GD6	Grey/ PA	5148678	6288 61 0		236	71GD9	Grey/ PA	5148586	6288 58 0		335
71GD6	Grey/ PA	5148678	6288 61 0		241	71GD9	Grey/ PA	5148586	6288 58 0		338
71GD6	Grey/ PA	5148678	6288 61 0		247	71GD9	Grey/ PA	5148593	6288 58 1		331
71GD6	Grey/ PA	5148678	6288 61 0		252	71GD9	Grey/ PA	5148593	6288 58 1		335
71GD6	Grey/ PA	5148678	6288 61 0		258	71GD9	Grey/ PA	5148593	6288 58 1		338
71GD6	Grey/ PA	5148678	6288 61 0		266						
71GD6	Grey/ PA	5148678	6288 61 0		269						
71GD6	Grey/ PA	5148678	6288 61 0		272	71MT3 45	Grey/ PA	5480969	6288 57 5		338
71GD6	Grey/ PA	5148678	6288 61 0		275						
71GD6	Grey/ PA	5148678	6288 61 0		278						
71GD6	Grey/ PA	5148678	6288 61 0		281						
71GD6	Grey/ PA	5148678	6288 61 0		284	910 SD 6X35	6 35/ PA	5669197	2351 05 6	/100 pc.	125
71GD6	Grey/ PA	5148678	6288 61 0		287						
71GD6	Grey/ PA	5148678	6288 61 0		290						
71GD6	Grey/ PA	5148678	6288 61 0		293	2064 GTP 2M	1,5/ ST / GTP	5044291	1115 05 7	/100 m	185
71GD6	Grey/ PA	5148678	6288 61 0		296	2064 GTPL 2M	1,5/ ST / GTP	5044352	1115 06 5		185
71GD6	Grey/ PA	5148678	6288 61 0		299						
71GD6	Grey/ PA	5148678	6288 61 0		331	2069 2M GTP	1/ St / GTP	5045434	1115 65 0		185
71GD6	Grey/ PA	5148678	6288 61 0		335	2069 2M GTPL	1/ ST / GTP	5045496	1115 66 9		185
71GD6	Grey/ PA	5148746	6288 61 5		208						
71GD6	Grey/ PA	5148746	6288 61 5		211						
71GD6	Grey/ PA	5148746	6288 61 5		214						
71GD6	Grey/ PA	5148746	6288 61 5		220	2370 110	Stone grey 95,7/ PVC	6026173	6023 51 7	/100 pc.	121
71GD6	Grey/ PA	5148746	6288 61 5		225						
71GD6	Grey/ PA	5148746	6288 61 5		230	2370 130	Stone grey 116,2/ PVC	6026234	6023 52 5		121
71GD6	Grey/ PA	5148746	6288 61 5		236						
71GD6	Grey/ PA	5148746	6288 61 5		241	2370 150	Stone grey 136,2/ PVC	6637874	6023 53 3		121
71GD6	Grey/ PA	5148746	6288 61 5		247						
71GD6	Grey/ PA	5148746	6288 61 5		252	2370 170	Stone grey 156,7/ PVC	6026296	6023 54 1		121

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
2370 210	Stone grey 197,2/ PVC	6026357	6023 57 6	/100 pc.	121	ANT-2D AL1	Aluminium paint	5675181	6117 39 1	/pc.	347
2370 230	Stone grey 216,2/ PVC	6639250	6023 58 4		122	ANT-2D RW1	Pure white	5675167	6117 38 7		347
2370 60	Stone grey 48,8/ PVC	6023776	6022 99 5		121	ANT-2D SWGR1	Black-grey	5675174	6117 38 9		347
2370 90	Stone grey 75,7/ PVC	6026111	6023 50 9		121	ANT-2E AL1	Aluminium paint	5675150	6117 38 5		347
2371 100	Light grey 2000/ PVC	6030736	6026 99 0	/m	122	ANT-2E RW1	Pure white	5675112	6117 38 1		347
						ANT-2E SWGR1	Black-grey	5675129	6117 38 3		347
2371 40	Light grey 2000/ PVC	6024315	6023 09 6		122						
2371 40	Light grey 2000/ PVC	6024315	6023 09 6		188	ANT-3E AL1	Aluminium paint	5675235	6117 39 7		347
2371 40	Light grey 2000/ PVC	6024315	6023 09 6		191						
2371 40	Light grey 2000/ PVC	6024315	6023 09 6		194	ANT-3E RW1	Pure white	5675211	6117 39 3		347
2371 40	Light grey 2000/ PVC	6024315	6023 09 6		200						
2371 40	Light grey 2000/ PVC	6024315	6023 09 6		203	ANT-3E SWGR1	Black-grey	5675228	6117 39 5		347
2371 60	Light grey 2000/ PVC	6024377	6023 11 8		122	AO3VA50EL	/ Al / EL	5157724	6287 23 3		291
2371 80	Light grey 2000/ PVC	6030675	6026 98 2		122	AO3VA50EL	/ Al / EL	5157724	6287 23 3		294
				/pc.		AO3VA50RW	Pure white/ Al	5157687	6287 23 0		291
2390	Light grey/ PVC	6024919	6023 20 7		122	AO3VA50RW	Pure white/ Al	5157687	6287 23 0		294
2392	Light grey/ PA/GF	6027132	6024 00 9		124	AO3VA80EL	/ Al / EL	5145257	6287 20 3		267
2393 16	Stone grey 110/ PVC	6027255	6024 02 5		125	AO3VA80EL	/ Al / EL	5145257	6287 20 3		270
2393 32	Stone grey 110/ PVC	6027316	6024 03 3		125	AO3VA80EL	/ Al / EL	5145257	6287 20 3		273
				/m		AO3VA80EL	/ Al / EL	5145257	6287 20 3		276
2410 110GR	Stone grey 2000/ PVC	6023295	6022 71 5		126	AO3VA80EL	/ Al / EL	5145257	6287 20 3		279
2410 110LGR	Light grey 2000/ PVC	6669257	6028 15 2		126	AO3VA80EL	/ Al / EL	5145257	6287 20 3		282
2410 170GR	Stone grey 2000/ PVC	6023417	6022 75 8		126	AO3VA80EL	/ Al / EL	5145257	6287 20 3		285
2410 170LGR	Light grey 2000/ PVC	6773893	6028 18 7		126	AO3VA80EL	/ Al / EL	5145257	6287 20 3		288
				/pc.		AO3VA80RW	Pure white/ Al	5145240	6287 20 0		291
2425 150CW	Cream 300/ PVC	6782659	6168 52 3		125	AO3VA80RW	Pure white/ Al	5145240	6287 20 0		294
2425 150RW	Pure white 300/ PVC	6629350	6194 72 9		125	AO3VA80RW	Pure white/ Al	5145240	6287 20 0		297
				/m		AO3VA80RW	Pure white/ Al	5145240	6287 20 0		300
2650	Stone grey 2000/ PVC	6362530	6020 80 1		161	AO3VA80RW	Pure white/ Al	5145240	6287 20 0		267
AD-90G M45	/ St	5469148	6258 14 1	/pc.	346	AO3VA80RW	Pure white/ Al	5145240	6287 20 0		270
ADP-B AL0.5	Aluminium paint	6215652	6117 41 6		348	AS-B AL0.5	Aluminium paint	5275688	6117 62 1		344
ADP-B AL1	Aluminium paint	6214037	6117 40 8		348	AS-B RW0.5	Pure white	5275640	6117 62 0		344
ADP-B RW0.5	Pure white	6117550	6117 41 4		348	AS-B SWGR0.5	Black-grey	5701019	6117 62 2		344
ADP-B RW1	Pure white	6117499	6117 40 6		348	AS-B2P AL1	Aluminium paint	5275886	6117 64 5		345
ADP-B SWGR0.5	Black-grey	5701286	6117 41 5		348	AS-B2P RW1	Pure white	5275879	6117 64 4		345
ADP-B SWGR1	Black-grey	5701279	6117 40 7		348	AS-B2P SWGR1	Black-grey	5701088	6117 64 3		345
ADR-80 1 AL	Aluminium paint/ PC	6279739	6258 07 1	/100 pc.	355	ASM-C5		6235278	6117 33 7		348
ADR-80 1 RW	Pure white/ PC	6043156	6258 06 9		355	ASM-C5 G		6235155	6117 32 5		348
AH1	Grey 12/ PVC	6014873	6178 54 0	/pc.	185	ASM-C6		6235339	6117 34 1		348
AH2	Grey 20/ PVC	6014996	6178 54 2		185	ASM-C6 G		6235216	6117 32 9		349
AKZ	/ ST	6014750	6178 53 5		184	ASM-LWL K		6237319	6117 74 0		349
ANT-1S AL0.5	Aluminium paint	5406235	6117 60 7		347	BKN120 205	/ St / FS	5676195	6288 00 5		304
ANT-1S RW0.5	Pure white	5406204	6117 60 6		347	BKN200 350	/ St / FS	5676201	6288 00 7		304
ANT-1S SWGR0.5	Black-grey	5701316	6117 61 0		347						

Type listing

Structure of the EAN number: Country code **40**

Manufacturer code **1219** (for articles beginning with **0: 1010**)

Individual EAN-C **5647589**

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
BKN50 80	/ St / FS	5676140	6288 00 1	/pc.	304	DMG-1RM SWGR0.5	Black-grey	5701163	6117 29 1	/pc.	349
BKN75 125	/ St / FS	5676188	6288 00 3		304	DMG-2RM AL1	Aluminium paint	5006961	6117 32 0		349
BTA-SKS S1 SW	Black	5438069	6117 19 0		344	DMG-2RM RW1	Pure white	5006947	6117 31 9		349
BTA-SKS S1 W	White	5483540	6117 19 1		344	DMG-2RM SWGR1	Black-grey	5701200	6117 31 8		349
BVB125	/ ST	5146766	6287 80 0		307	DMS-2RM AL1	Aluminium paint/ PC	5006886	6117 31 6		349
BVL		5147404	6288 18 0		306	DMS-2RM RW1	Pure white/ PC	5006848	6117 31 5		349
CEE16E2	Grey/ PA	5148715	6288 61 2		356	DMS-2RM SWGR1	Black-grey/ PC	5701194	6117 31 4		349
CEE32E2	Grey/ PA	5148739	6288 61 4		357	DMZ-AVS GN	Green	6239054	6117 72 4		350
CPK-C5SF UTP10	Grey	5008569	6117 94 2		351	DMZ-AVS RO	Red	6239351	6117 72 6		350
CPK-C5SF UTP15	Grey	5008620	6117 94 4		351	DMZ-AVS W	White	6239474	6117 72 8		350
CPK-C5SF UTP2	Grey	5081005	6117 93 8		351	DMZ-ES AVS	Black	6239658	6117 74 5		350
CPK-C5SF UTP7.5	Grey	5008521	6117 94 0		351	DMZ-ESMV CB	White	6237913	6117 70 8		350
CPK-C6S FTP10	Grey	5008682	6117 95 0		351	DMZ-RR RJ11	Green	5677819	6117 97 2		349
CPK-C6S FTP15	Grey	5008743	6117 95 2		351	DMZ-SC GN	Green	5008767	6117 95 7		350
CPK-C6S FTP2	Grey	5081401	6117 94 6		351	DMZ-SC RO	Red	5008804	6117 95 8		350
CPK-C6S FTP7.5	Grey	5008644	6117 94 8		351	DMZ-SCHL AVS	Yellow	6239535	6117 73 2		350
CST-SKS	Black/ PC	5364610	6106 73 5		342	DMZ-STG GN	Green	5007562	6117 73 7		350
D2-1 110CW	Cream 300/ PVC	6111619	6169 30 9		122	DMZ-STG RO	Red	5007609	6117 73 8		350
D2-1 110RW	Pure white 300/ PVC	6448272	6194 03 6		122	DMZ-STG W	White	6239597	6117 73 6		350
D2-1 130CW	Cream 300/ PVC	6111671	6169 31 7		123	DTG-2A AL1	Aluminium paint/ pc	5696940	6119 20 6		351
D2-1 130RW	Pure white 300/ PVC	6448098	6194 04 4		123	DTG-2A RW1	Pure white/ pc	5696896	6119 20 2		351
D2-1 150CW	Cream 300/ PVC	6781393	6169 29 5		123	DTG-2A SWGR1	Black-grey/ pc	5696902	6119 20 4		351
D2-1 150RW	Pure white 300/ PVC	6447978	6194 05 2		123	DTG-2B AL1	Aluminium paint/ pc	5696971	6119 21 2		352
D2-1 170CW	Cream 300/ PVC	6111732	6169 32 5		124	DTG-2B RW1	Pure white/ pc	5696957	6119 20 8		352
D2-1 170RW	Pure white 300/ PVC	6447497	6194 06 0		124	DTG-2B SWGR1	Black-grey/ pc	5696964	6119 21 0		352
D2-2 110CW	Cream 300/ PVC	6111855	6169 37 6		123	DTG-2C AL1	Aluminium paint/ pc	5697008	6119 21 8		352
D2-2 110GR	Stone grey 300/ PVC	6103997	6159 37 0		123	DTG-2C RW1	Pure white/ pc	5696988	6119 21 4		352
D2-2 110RW	Pure white 300/ PVC	6628636	6194 10 9		123	DTG-2C SWGR1	Black-grey/ pc	5696995	6119 21 6		352
D2-2 130CW	Cream 300/ PVC	6111916	6169 38 4		123	DTG-2EP AL1	Aluminium paint/ pc	5697121	6119 23 6		352
D2-2 130RW	Pure white 300/ PVC	6628575	6194 11 7		123	DTG-2EP RW1	Pure white/ pc	5697077	6119 23 2		352
D2-2 150CW	Cream 300/ PVC	6782291	6169 36 8		123	DTG-2EP SWGR1	Black-grey/ pc	5697084	6119 23 4		352
D2-2 150RW	Pure white 300/ PVC	6628513	6194 12 5		123	DTG-2F AL1	Aluminium paint/ pc	5697039	6119 22 4		353
D2-2 170CW	Cream 300/ PVC	6111978	6169 39 2		124	DTG-2F RW1	Pure white/ pc	5697015	6119 22 0		353
D2-2 170RW	Pure white 300/ PVC	6628452	6194 13 3		124	DTG-2F SWGR1	Black-grey/ pc	5697022	6119 22 2		353
D2-2 210CW	Cream 300/ PVC	6112036	6169 40 6		124	DTG-2PA AL1	Aluminium paint/ pc	5697060	6119 23 0		353
D2-2 210RW	Pure white 300/ PVC	6628391	6194 14 1		124	DTG-2PA RW1	Pure white/ pc	5697046	6119 22 6		353
D2-3 110CW	Cream 300/ PVC	6112098	6169 43 0		123	DTG-2PA SWGR1	Black-grey/ pc	5697053	6119 22 8		353
D2-3 110RW	Pure white 300/ PVC	6628339	6194 18 4		123	DTS-2A AL1	Aluminium paint/ pc	5697183	6119 24 2		351
D2-3 130CW	Cream 300/ PVC	6112159	6169 44 9		123	DTS-2A RW1	Pure white/ pc	5697138	6119 23 8		351
D2-3 130RW	Pure white 300/ PVC	6618910	6194 19 2		123	DTS-2A SWGR1	Black-grey/ pc	5697145	6119 24 0		351
D2-3 150CW	Cream 300/ PVC	6782475	6169 42 2		124	DTS-2B AL1	Aluminium paint/ pc	5697244	6119 24 8		352
D2-3 150RW	Pure white 300/ PVC	6618859	6194 20 6		124	DTS-2B RW1	Pure white/ pc	5697190	6119 24 4		352
D2-3 170CW	Cream 300/ PVC	6112210	6169 45 7		124	DTS-2B SWGR1	Black-grey/ pc	5697206	6119 24 6		352
D2-3 170RW	Pure white 300/ PVC	6349814	6194 21 4		124						
DAB-F	Pure white/ St	5448792	6290 26 9		327						
DAB-F	Pure white/ St	5448792	6290 26 9		328						
DAB-F	Pure white/ St	5448792	6290 26 9		330						
DMG-1RM AL0.5	Aluminium paint	5006725	6117 29 3		349						
DMG-1RM RW0.5	Pure white	6233410	6117 29 2		349						

06 LFS_Katalog_2010_Neuer_Stand / en / 22/02/2010 (LLEExport_00995)

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
DTS-2C AL1	Aluminium paint/ pc	5697305	6119 25 4	/pc.	352	G-AWAG90210LGR	Light grey 278/ AI	5667612	6279 05 2	/pc.	312
DTS-2C RW1	Pure white/ pc	5697251	6119 25 0		352	G-AWAG90210RW	Pure white 278/ AI	5667599	6279 05 0		312
DTS-2C SWGR1	Black-grey/ pc	5697268	6119 25 2		352	G-AWAO70110CW	Cream 178/ AI	5666592	6278 80 1		310
DTS-2EP AL1	Aluminium paint/ pc	5697497	6119 27 2		353	G-AWAO70110LGR	Light grey 178/ AI	5666608	6278 80 2		310
DTS-2EP RW1	Pure white/ pc	5697442	6119 26 8		353	G-AWAO70110RW	Pure white 178/ AI	5666585	6278 80 0		310
DTS-2EP SWGR1	Black-grey/ pc	5697480	6119 27 0		353	G-AWAO70130CW	Cream 198/ AI	5666707	6278 81 1		310
DTS-2PA AL1	Aluminium paint/ pc	5697435	6119 26 6		353	G-AWAO70130LGR	Light grey 198/ AI	5666714	6278 81 2		310
DTS-2PA RW1	Pure white/ pc	5697381	6119 26 2		353	G-AWAO70130RW	Pure white 198/ AI	5666660	6278 81 0		310
DTS-2PA SWGR1	Black-grey/ pc	5697428	6119 26 4		353	G-AWAO70170CW	Cream 238/ AI	5666783	6278 82 1		311
					353	G-AWAO70170LGR	Light grey 238/ AI	5666820	6278 82 2		311
					353	G-AWAO70170RW	Pure white 238/ AI	5666776	6278 82 0		311
					353	G-AWAO70210CW	Cream 278/ AI	5666882	6278 83 1		311
					353	G-AWAO70210LGR	Light grey 278/ AI	5666899	6278 83 2		311
					353	G-AWAO70210RW	Pure white 278/ AI	5666875	6278 83 0		311
EDA45	Yellow green 400/ Cu	5030898	6257 59 8		200	G-AWAO90110CW	Cream 178/ AI	5667179	6278 88 1		310
EDA45	Yellow green 400/ Cu	5030898	6257 59 8		203	G-AWAO90110LGR	Light grey 178/ AI	5667186	6278 88 2		310
EDAKL	/ St / G	6800711	6257 60 3		200	G-AWAO90110RW	Pure white 178/ AI	5667148	6278 88 0		310
EDAKL	/ St / G	6800711	6257 60 3		203	G-AWAO90130CW	Cream 198/ AI	5667223	6278 89 1		310
EK300CW	Cream 850/ ST / FS	5126522	6246 05 2		313	G-AWAO90130LGR	Light grey 198/ AI	5667230	6278 89 2		310
EK300RW	Pure white 850/ ST / FS	5126539	6246 08 7		313	G-AWAO90130RW	Pure white 198/ AI	5667216	6278 89 0		310
FO3VEL	/ AI / EL	5145295	6287 21 3		267	G-AWAO90170CW	Cream 238/ AI	5667278	6279 00 1		311
FO3VEL	/ AI / EL	5145295	6287 21 3		270	G-AWAO90170LGR	Light grey 238/ AI	5667285	6279 00 2		311
FO3VEL	/ AI / EL	5145295	6287 21 3		273	G-AWAO90170RW	Pure white 238/ AI	5667261	6279 00 0		311
FO3VEL	/ AI / EL	5145295	6287 21 3		276	G-AWAO90210CW	Cream 278/ AI	5667322	6279 01 1		311
FO3VEL	/ AI / EL	5145295	6287 21 3		279	G-AWAO90210LGR	Light grey 278/ AI	5667353	6279 01 2		311
FO3VEL	/ AI / EL	5145295	6287 21 3		282	G-AWAO90210RW	Pure white 278/ AI	5667315	6279 01 0		311
FO3VEL	/ AI / EL	5145295	6287 21 3		285	GEK-A100213DEL	/ AI / EL	5142379	6285 30 3	/m	299
FO3VEL	/ AI / EL	5145295	6287 21 3		288	GEK-A100213DRW	Pure white/ AI / FS	5142362	6285 30 0		299
FO3VEL	/ AI / EL	5145295	6287 21 3		292	GEK-A53100EL	Aluminium/ AI / EL	6198252	6116 51 5		200
FO3VEL	/ AI / EL	5145295	6287 21 3		295	GEK-A53160EL	Aluminium/ AI / EL	6204199	6116 53 6		203
FO3VEL	/ AI / EL	5157670	6287 22 3		297	GEK-A70110EL	/ AI / EL	5157076	6285 40 3		266
FO3VEL	/ AI / EL	5145295	6287 21 3		300	GEK-A70110RW	Pure white/ AI / FS	5157069	6285 40 0		266
FO3VEL	/ AI / EL	5157670	6287 22 3		267	GEK-A70133EL	/ AI / EL	5140887	6284 40 3		272
FO3VEL	/ AI / EL	5145295	6287 21 3		270	GEK-A70133RW	Pure white/ AI / FS	5140870	6284 40 0		272
FO3VEL	/ AI / EL	5145295	6287 21 3		273	GEK-A70213DEL	/ AI / EL	5142171	6285 20 3		296
FO3VRW	Pure white/ AI	5145264	6287 21 0		276	GEK-A70213DRW	Pure white/ AI / FS	5142140	6285 20 0		296
FO3VRW	Pure white/ AI	5145264	6287 21 0		279	GEK-A90110EL	/ AI / EL	5157366	6285 50 3		269
FO3VRW	Pure white/ AI	5145264	6287 21 0		282	GEK-A90110RW	Pure white/ AI / FS	5157328	6285 50 0		269
FO3VRW	Pure white/ AI	5145264	6287 21 0		285	GEK-A90133EL	/ AI / EL	5141112	6284 50 3		275
FO3VRW	Pure white/ AI	5145264	6287 21 0		288	GEK-A90133RW	Pure white/ AI / FS	5141105	6284 50 0		275
FO3VRW	Pure white/ AI	5145264	6287 21 0		292	GEK-AA100213DEL	/ AI / EL	5142416	6285 31 3	/pc.	300
FO3VRW	Pure white/ AI	5157663	6287 22 0		295	GEK-AA100213DRW	Pure white/ AI / FS	5142386	6285 31 0		300
FO3VRW	Pure white/ AI	5145264	6287 21 0		297	GEK-AA53100	Aluminium/ AI / EL	6210251	6116 61 7		202
FO3VRW	Pure white/ AI	5157663	6287 22 0		300	GEK-AA53160	Aluminium/ AI / EL	6210558	6116 64 7		205
FO3VRW	Pure white/ AI	5145264	6287 21 0		311	GEK-AA70110EL	/ AI / EL	5157120	6285 41 3		267
G-AWAG70110CW	Cream 178/ AI	5666936	6278 84 1		311	GEK-AA70110RW	Pure white/ AI / FS	5157083	6285 41 0		267
G-AWAG70110LGR	Light grey 178/ AI	5666943	6278 84 2		311	GEK-AA70133EL	/ AI / EL	5140924	6284 41 3		273
G-AWAG70110RW	Pure white 178/ AI	5666929	6278 84 0		312	GEK-AA70133RW	Pure white/ AI / FS	5140917	6284 41 0	/m	273
G-AWAG70130CW	Cream 198/ AI	5666981	6278 85 1		312	GEK-AA70173DEL	/ AI / EL	5156598	6285 00 3		290
G-AWAG70130LGR	Light grey 198/ AI	5666998	6278 85 2		312	GEK-AA70173DRW	Pure white/ AI / FS	5156581	6285 00 0		290
G-AWAG70130RW	Pure white 198/ AI	5666974	6278 85 0		312	GEK-AA70173EL	/ AI / EL	5141334	6284 60 3		278
G-AWAG70170CW	Cream 238/ AI	5667056	6278 86 1		312	GEK-AA70173RW	Pure white/ AI / FS	5141303	6284 60 0		278
G-AWAG70170LGR	Light grey 238/ AI	5667063	6278 86 2		312	GEK-AA70213DEL	/ AI / EL	5142195	6285 21 3	/pc.	297
G-AWAG70170RW	Pure white 238/ AI	5667025	6278 86 0		312	GEK-AA70213DRW	Pure white/ AI / FS	5142188	6285 21 0	/m	297
G-AWAG70210CW	Cream 278/ AI	5667100	6278 87 1		312	GEK-AA70213EL	/ AI / EL	5141754	6284 80 3		284
G-AWAG70210LGR	Light grey 278/ AI	5667117	6278 87 2		311	GEK-AA70213RW	Pure white/ AI / FS	5141723	6284 80 0	/pc.	284
G-AWAG70210RW	Pure white 278/ AI	5667094	6278 87 0		311	GEK-AA90110EL	/ AI / EL	5157380	6285 51 3		270
G-AWAG90110CW	Cream 178/ AI	5667414	6279 02 1		312	GEK-AA90110RW	Pure white/ AI / FS	5157373	6285 51 0		270
G-AWAG90110LGR	Light grey 178/ AI	5667421	6279 02 2		312	GEK-AA90133EL	/ AI / EL	5141150	6284 51 3		276
G-AWAG90110RW	Pure white 178/ AI	5667384	6279 02 0		312	GEK-AA90133RW	Pure white/ AI / FS	5141129	6284 51 0	/m	276
G-AWAG90130CW	Cream 198/ AI	5667483	6279 03 1		312	GEK-AA90173DEL	/ AI / EL	5156833	6285 10 3		293
G-AWAG90130LGR	Light grey 198/ AI	5667490	6279 03 2		312	GEK-AA90173DRW	Pure white/ AI / FS	5156826	6285 10 0		293
G-AWAG90130RW	Pure white 198/ AI	5667476	6279 03 0		312						
G-AWAG90170CW	Cream 238/ AI	5667537	6279 04 1		312						
G-AWAG90170LGR	Light grey 238/ AI	5667544	6279 04 2		312						
G-AWAG90170RW	Pure white 238/ AI	5667520	6279 04 0		312						
G-AWAG90210CW	Cream 278/ AI	5667605	6279 05 1		312						

Type listing

Structure of the EAN number: Country code **40**

Manufacturer code **1219** (for articles beginning with **0: 1010**)

Individual EAN-C **5647589**

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
GEK-AA90173EL	/ AI / EL	5141532	6284 70 3	/m	281	GEK-AAT70213RW	Pure white / AI / FS	5141884	6284 86 0	/pc.	285
	Pure white / AI / FS	5141525	6284 70 0		281						
	/ AI / EL	5141952	6284 90 3		287		/ AI / EL	5157021	6285 16 3		295
	Pure white / AI / FS	5141945	6284 90 0		287		Pure white / AI / FS	5157014	6285 16 0		295
GEK-AA70173DEL	/ AI / EL	5156642	6285 01 3	/pc.	291	GEK-AAT90173EL	/ AI / EL	5141693	6284 76 3		282
	Pure white / AI / FS	5156604	6285 01 0		291		Pure white / AI / FS	5141662	6284 76 0		282
	/ AI / EL	5141358	6284 61 3		279		/ AI / EL	5142119	6284 96 3		288
	Pure white / AI / FS	5141341	6284 61 0		279		Pure white / AI / FS	5142089	6284 96 0		288
GEK-AA70173RW	Pure white / AI / FS	5141778	6284 81 3		285	GEK-AE70110EL	/ AI / EL	5157311	6285 47 3		268
	/ AI / EL	5141778	6284 81 3		285		Pure white / AI / FS	5157304	6285 47 0		268
	Pure white / AI / FS	5141761	6284 81 0		285		/ AI / EL	5141099	6284 47 3		274
					285		Pure white / AI / FS	5141068	6284 47 0		274
GEK-AA90173DEL	/ AI / EL	5156888	6285 11 3		294	GEK-AE70133RW	Pure white / AI / FS	5141068	6284 47 0		274
	Pure white / AI / FS	5156840	6285 11 0		294		/ AI / EL	5157601	6285 57 3		271
	/ AI / EL	5141990	6284 91 3		288		Pure white / AI / FS	5157564	6285 57 0		271
	Pure white / AI / FS	5141969	6284 91 0		288		/ AI / EL	5141297	6284 57 3		277
GEK-AA90213EL	/ AI / EL	5141570	6284 71 3		282	GEK-AE901EL	Pure white / AI / FS	5141280	6284 57 0		277
	Pure white / AI / FS	5141549	6284 71 0		282						
					301		/ AI / EL	5142478	6285 33 3		300
					301		Pure white / AI / FS	5142447	6285 33 0		300
GEK-AAE100213DEL	/ AI / EL	5142553	6285 37 3		280	GEK-AFF53100	Aluminium / AI / EL	6211272	6116 70 9		201
	Pure white / AI / FS	5142546	6285 37 0		280		Aluminium / AI / EL	6211395	6116 73 6		204
	/ AI / EL	5141518	6284 67 3		292						
	/ AI / EL	5141518	6284 67 3		292		/ AI / EL	5157199	6285 43 3		267
GEK-AAE70173RW	Pure white / AI / FS	5141488	6284 67 0		280	GEK-AFF70110EL	/ AI / EL	5157182	6285 43 0		267
	Pure white / AI / FS	5141488	6284 67 0		292		Pure white / AI / FS	5140986	6284 43 3		273
	/ AI / EL	5142355	6285 27 3		298		/ AI / EL	5140979	6284 43 0		273
	Pure white / AI / FS	5142324	6285 27 0		298		Pure white / AI / FS	5142256	6285 23 3		297
GEK-AAE70213DEL	/ AI / EL	5141938	6284 87 3		286	GEK-AFF70213DEL	/ AI / EL	5142256	6285 23 3		297
	/ AI / EL	5141907	6284 87 0		286		Pure white / AI / FS	5142249	6285 23 0		297
	Pure white / AI / FS				283		/ AI / EL	5157489	6285 53 3		270
					295		Pure white / AI / FS	5157441	6285 53 0		270
GEK-AAE90173EL	/ AI / EL	5141716	6284 77 3		283	GEK-AFF90133EL	/ AI / EL	5141211	6284 53 3		276
	Pure white / AI / FS	5141709	6284 77 0		295		Pure white / AI / FS	5141181	6284 53 0		276
	Pure white / AI / FS	5141709	6284 77 0		289						
	/ AI / EL	5142133	6284 97 3		289		/ AI / EL	5142430	6285 32 3		300
GEK-AAE90213RW	Pure white / AI / FS	5142126	6284 97 0		289	GEK-AFS100213DEL	/ AI / EL	5142430	6285 32 3		300
					291		Pure white / AI / FS	5142423	6285 32 0		300
	/ AI / EL	5156710	6285 03 3		291		Aluminium / AI / EL	6210671	6116 66 8		201
	Pure white / AI / FS	5156703	6285 03 0		285		Aluminium / AI / EL	6210978	6116 68 5		204
GEK-AAFF70173DEL	/ AI / EL	5141839	6284 83 3		285	GEK-AFS53160	Aluminium / AI / EL	6210978	6116 68 5		204
	Pure white / AI / FS	5141822	6284 83 0		279		/ AI / EL	5157144	6285 42 3		267
	/ AI / EL	5141419	6284 63 3		279		Pure white / AI / FS	5157137	6285 42 0		267
	Pure white / AI / FS	5141402	6284 63 0		294		/ AI / EL	5140948	6284 42 3		273
GEK-AAFF70213EL	/ AI / EL	5156956	6285 13 3		294	GEK-AFS70133EL	/ AI / EL	5140931	6284 42 0		273
	Pure white / AI / FS	5156949	6285 13 0		282		Pure white / AI / FS	5142232	6285 22 3		297
	/ AI / EL	5141631	6284 73 3		282		/ AI / EL	5142201	6285 22 0		297
	Pure white / AI / FS	5141600	6284 73 0		288		Pure white / AI / FS	5142201	6285 22 0		297
GEK-AAFF90173RW	Pure white / AI / FS	5142058	6284 93 3		288	GEK-AFS90110EL	/ AI / EL	5157434	6285 52 3		270
	/ AI / EL	5142027	6284 93 0		288		Pure white / AI / FS	5157427	6285 52 0		270
	Pure white / AI / FS				291		/ AI / EL	5141174	6284 52 3		276
					291		Pure white / AI / FS	5141167	6284 52 0		276
GEK-AAFS70173DEL	/ AI / EL	5156666	6285 02 3		279	GEK-AI53100	Aluminium / AI / EL	6210015	6116 57 9		201
	Pure white / AI / FS	5156659	6285 02 0		285		Aluminium / AI / EL	6210138	6116 59 5		204
	/ AI / EL	5141396	6284 62 3		285		/ AI / EL	5157502	6285 54 3		270
	Pure white / AI / FS	5141365	6284 62 0		294		Pure white / AI / FS	5157496	6285 54 0		270
GEK-AAFS70173RW	Pure white / AI / FS	5141815	6284 82 3		282	GEK-AI90110EL	/ AI / EL	5156765	6285 04 3		292
	/ AI / EL	5141785	6284 82 0		282		Pure white / AI / FS	5156727	6285 04 0		292
	Pure white / AI / FS	5141785	6284 82 0		288		/ AI / EL	5157243	6285 44 3		267
	/ AI / EL	5156901	6285 12 3		288		Pure white / AI / FS	5157205	6285 44 0		267
GEK-AAFS90173DEL	/ AI / EL	5156895	6285 12 0		279	GEK-AIA70173DEL	/ AI / EL	5157007	6285 14 3		295
	Pure white / AI / FS	5141594	6284 72 3		285		Pure white / AI / FS	5156963	6285 14 0		295
	/ AI / EL	5141587	6284 72 0		282		/ AI / EL	5142492	6285 34 3		300
	Pure white / AI / FS	5141587	6284 72 0		282		Pure white / AI / FS	5142485	6285 34 0		300
GEK-AAFS90213EL	/ AI / EL	5142010	6284 92 3		288	GEK-AIS100213DEL	/ AI / EL	5141006	6284 44 3		273
	Pure white / AI / FS	5142003	6284 92 0		288		Pure white / AI / FS	5140993	6284 44 0		273
					288		/ AI / EL	5142294	6285 24 3		297
					288		Pure white / AI / FS	5142263	6285 24 0		297
GEK-AAIS70173EL	/ AI / EL	5141457	6284 64 3		292	GEK-AIS70133EL	/ AI / EL	5141006	6284 44 3		273
	Pure white / AI / FS	5141426	6284 64 0		292		Pure white / AI / FS	5140993	6284 44 0		273
	/ AI / EL	5141877	6284 84 3		279		/ AI / EL	5142294	6285 24 3		297
	Pure white / AI / FS	5141846	6284 84 0		279		Pure white / AI / FS	5141228	6284 54 0		276
GEK-AAIS70213RW	Pure white / AI / FS	5141655	6284 74 3		285	GEK-AIS70213DEL	/ AI / EL	5141228	6284 54 0		276
	/ AI / EL	5141648	6284 74 0		282		Pure white / AI / FS				
	Pure white / AI / FS	5141648	6284 74 0		282		/ AI / EL				
	/ AI / EL	5142072	6284 94 3		288		Pure white / AI / FS				
GEK-AAIS90173RW	Pure white / AI / FS	5142065	6284 94 0		288	GEK-AIS70213RW	Pure white / AI / FS				
					292		/ AI / EL				
	/ AI / EL	5156789	6285 06 3		292		Pure white / AI / FS				
	Pure white / AI / FS	5156772	6285 06 0		292		/ AI / EL				
GEK-AAAT70173EL	/ AI / EL	5141471	6284 66 3		279	GEK-AIS90133EL	/ AI / EL	5141235	6284 54 3		276
	Pure white / AI / FS	5141464	6284 66 0		279		Pure white / AI / FS	5141228	6284 54 0		276
	/ AI / EL	5141891	6284 86 3		285						
					285						

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
GEK-AKU45	/ ST	6211456	6116 75 2	/pc.	200	GEK-KS45	Pure white/ PVC	6441259	6116 15 0	/pc.	188
GEK-AKU45	/ ST	6211456	6116 75 2		203	GEK-KS45	Pure white/ PVC	6441259	6116 15 0		191
						GEK-KS45	Aluminium/ PVC	6183739	6116 15 4		200
GEK-AOT45	Aluminium/ AI / EL	6202034	6116 55 8	/m	200	GEK-KS45	Aluminium/ PVC	6183739	6116 15 4		203
GEK-AOT45	Aluminium/ AI / EL	6202034	6116 55 8		203	GEK-KS45-3	Pure white/ PVC	5391647	6116 16 3		194
						GEK-KT53160-3	Pure white/ PVC	5391654	6116 19 3		195
GEK-AT100213DEL	/ AI / EL	5142539	6285 36 3	/pc.	300	GEK-KTF53100	Pure white/ PVC	5391982	6116 18 0		190
GEK-AT100213DRW	Pure white/ AI / FS	5142508	6285 36 0		300	GEK-KTF53100	Aluminium/ PVC	5392026	6116 18 1		202
						GEK-KTF53160	Pure white/ PVC	5392033	6116 18 4		193
GEK-AT70110EL	/ AI / EL	5157267	6285 46 3		267	GEK-KTF53160	Aluminium/ PVC	5392040	6116 18 5		205
GEK-AT70110RW	Pure white/ AI / FS	5157250	6285 46 0		267						
GEK-AT70133EL	/ AI / EL	5141051	6284 46 3		273	GEK-KTS53100	Pure white/ PVC	5391913	6116 16 7		189
GEK-AT70133RW	Pure white/ AI / FS	5141044	6284 46 0		273	GEK-KTS53100	Aluminium/ PVC	5391920	6116 16 9		202
GEK-AT70213DEL	/ AI / EL	5142317	6285 26 3		297	GEK-KTS53160	Pure white/ PVC	5391968	6116 17 2		193
GEK-AT70213DRW	Pure white/ AI / FS	5142300	6285 26 0		297	GEK-KTS53160	Aluminium/ PVC	5391975	6116 17 4		205
GEK-AT90110EL	/ AI / EL	5157557	6285 56 3		270	GEK-LZ		5427650	6270 67 0		196
GEK-AT90110RW	Pure white/ AI / FS	5157540	6285 56 0		270						
GEK-AT90133EL	/ AI / EL	5141273	6284 56 3		276					/m	
GEK-AT90133RW	Pure white/ AI / FS	5141242	6284 56 0		276	GK-70110CW	Cream 2000/ PVC	5656333	6274 30 1		208
				/m		GK-70110GR	Stone grey 2000/ PVC	5656371	6274 30 6		208
GEK-K53100	Pure white 2000/ PVC	6292578	6116 02 7		188	GK-70110LGR	Light grey 2000/ PVC	5656340	6274 30 2		208
GEK-K53160	Pure white 2000/ PVC	6292516	6116 05 1		191	GK-70110RW	Pure white 2000/ PVC	5655473	6274 30 0		208
GEK-K53160-3	Pure white 2000/ PVC	5391630	6116 07 3		194	GK-70130CW	Cream 2000/ PVC	5656746	6274 50 1		211
				/pc.		GK-70130GR	Stone grey 2000/ PVC	5656760	6274 50 6		211
GEK-KA53100	Pure white/ PVC	6441013	6116 26 4		189	GK-70130LGR	Light grey 2000/ PVC	5656753	6274 50 2		211
GEK-KA53100	Aluminium/ PVC	6184033	6116 26 9		201	GK-70130RW	Pure white 2000/ PVC	5656739	6274 50 0		211
GEK-KA53160	Pure white/ PVC	6616879	6116 28 0		192	GK-70170CW	Cream 2000/ PVC	5657057	6274 70 1		214
GEK-KA53160	Aluminium/ PVC	6184811	6116 28 5		204	GK-70170GR	Stone grey 2000/ PVC	5657071	6274 70 6		214
GEK-KA53160-3	Pure white/ PVC	5428695	6116 26 1		195	GK-70170LGR	Light grey 2000/ PVC	5657064	6274 70 2		214
						GK-70170RW	Pure white 2000/ PVC	5657040	6274 70 0		214
GEK-KAS53100	Pure white/ PVC	6192915	6116 27 2		189					/pc.	
GEK-KAS53160	Pure white/ PVC	6193158	6116 29 4		192	GK-A70110CW	Cream/ PVC	5656432	6274 31 1		209
GEK-KAS53160-3	Pure white/ PVC	5391678	6116 26 3		195	GK-A70110GR	Stone grey/ PVC	5656456	6274 31 6		209
GEK-KE53160-3	Pure white/ PVC	5391685	6116 40 3		195	GK-A70110LGR	Light grey/ PVC	5656449	6274 31 2		209
						GK-A70110RW	Pure white/ PVC	5656401	6274 31 0		209
GEK-KEL53100	Pure white/ PVC	6441075	6116 30 2		190	GK-A70130CW	Cream/ PVC	5656807	6274 51 1		212
GEK-KEL53100	Aluminium/ PVC	6184095	6116 30 7		202	GK-A70130GR	Stone grey/ PVC	5656821	6274 51 6		212
GEK-KEL53160	Pure white/ PVC	6441136	6116 32 9		193	GK-A70130LGR	Light grey/ PVC	5656814	6274 51 2		212
GEK-KEL53160	Aluminium/ PVC	6184873	6116 33 4		205	GK-A70130RW	Pure white/ PVC	5656791	6274 51 0		212
GEK-KER53100	Pure white/ PVC	6616930	6116 35 3		190	GK-A70170CW	Cream/ PVC	5657118	6274 71 1		215
GEK-KER53100	Aluminium/ PVC	6184217	6116 35 8		202	GK-A70170GR	Stone grey/ PVC	5657132	6274 71 6		215
GEK-KER53160	Pure white/ PVC	6441198	6116 38 8		193	GK-A70170LGR	Light grey/ PVC	5657125	6274 71 2		215
GEK-KER53160	Aluminium/ PVC	6184934	6116 39 3		205	GK-A70170RW	Pure white/ PVC	5657101	6274 71 0		215
GEK-KF53160-3	Pure white/ PVC	5391692	6116 49 3		194	GK-E70110CW	Cream/ PVC	5656647	6274 37 1		210
GEK-KFF53100	Pure white/ PVC	6184514	6116 46 4		188	GK-E70110GR	Stone grey/ PVC	5656685	6274 37 6		210
GEK-KFF53160	Pure white/ PVC	6191239	6116 48 0		191	GK-E70110LGR	Light grey/ PVC	5656678	6274 37 2		210
						GK-E70110RW	Pure white/ PVC	5656630	6274 37 0		210
GEK-KFS53100	Pure white/ PVC	6184330	6116 41 8		188	GK-E70130CW	Cream/ PVC	5656968	6274 57 1		213
GEK-KFS53160	Pure white/ PVC	6184996	6116 43 4		191	GK-E70130GR	Stone grey/ PVC	5656982	6274 57 6		213
GEK-KI53100	Pure white/ PVC	6709038	6116 20 5		189	GK-E70130LGR	Light grey/ PVC	5656975	6274 57 2		213
GEK-KI53100	Aluminium/ PVC	6183678	6116 21 0		201	GK-E70130RW	Pure white/ PVC	5656951	6274 57 0		213
GEK-KI53160	Pure white/ PVC	6440955	6116 22 1		192	GK-E70170CW	Cream/ PVC	5657279	6274 77 1		216
GEK-KI53160	Aluminium/ PVC	6184699	6116 22 6		204	GK-E70170GR	Stone grey/ PVC	5657293	6274 77 6		216
GEK-KI53160-3	Pure white/ PVC	5428688	6116 20 1		194	GK-E70170LGR	Light grey/ PVC	5657286	6274 77 2		216
						GK-E70170RW	Pure white/ PVC	5657262	6274 77 0		216
GEK-KIS53100	Pure white/ PVC	6192793	6116 21 3		189	GK-F70110CW	Cream/ PVC	5656463	6274 32 1		209
GEK-KIS53160	Pure white/ PVC	6192977	6116 24 8		192	GK-F70110GR	Stone grey/ PVC	5656500	6274 32 6		209
GEK-KIS53160-3	Pure white/ PVC	5391661	6116 20 3		195	GK-F70110LGR	Light grey/ PVC	5656494	6274 32 2		209
GEK-KK53100	Pure white/ PVC	5391883	6116 49 5		190	GK-F70110RW	Pure white/ PVC	5655664	6274 32 0		209
GEK-KK53100	Aluminium/ PVC	5391890	6116 49 6		202	GK-F70130CW	Cream/ PVC	5656845	6274 52 1		212
GEK-KK53160	Pure white/ PVC	5392088	6116 49 8		193	GK-F70130GR	Stone grey/ PVC	5656869	6274 52 6		212
GEK-KK53160	Aluminium/ PVC	5392095	6116 49 9		205	GK-F70130LGR	Light grey/ PVC	5656852	6274 52 2		212
				/m		GK-F70130RW	Pure white/ PVC	5656838	6274 52 0		212
GEK-KOT45	Pure white 2000/ PVC	6708970	6116 10 8		188	GK-F70170CW	Cream/ PVC	5657156	6274 72 1		215
GEK-KOT45	Pure white 2000/ PVC	6708970	6116 10 8		191	GK-F70170GR	Stone grey/ PVC	5657170	6274 72 6		215
GEK-KOT45	Pure white 2000/ PVC	6708970	6116 10 8		194	GK-F70170LGR	Light grey/ PVC	5657163	6274 72 2		215

Type listing

Structure of the EAN number: Country code **40**

Manufacturer code **1219** (for articles beginning with **0: 1010**)

Individual EAN-C **5647589**

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
GK-F70170RW	Pure white/ PVC	5657149	6274 72 0	/pc.	215	GK-OTGFCW	Cream/ PVC	5656708	6274 49 1	/pc.	261
GK-I70110CW	Cream/ PVC	5656524	6274 34 1		210	GK-OTGFGR	Stone grey/ PVC	5656722	6274 49 6		209
GK-I70110GR	Stone grey/ PVC	5656562	6274 34 6		210	GK-OTGFGR	Stone grey/ PVC	5656722	6274 49 6		212
GK-I70110LGR	Light grey/ PVC	5656555	6274 34 2		210	GK-OTGFGR	Stone grey/ PVC	5656722	6274 49 6		215
GK-I70110RW	Pure white/ PVC	5656517	6274 34 0		210	GK-OTGFLGR	Light grey/ PVC	5656715	6274 49 2		209
GK-I70130CW	Cream/ PVC	5656883	6274 54 1		213	GK-OTGFLGR	Light grey/ PVC	5656715	6274 49 2		212
GK-I70130GR	Stone grey/ PVC	5656906	6274 54 6		213	GK-OTGFLGR	Light grey/ PVC	5656715	6274 49 2		215
GK-I70130LGR	Light grey/ PVC	5656890	6274 54 2		213	GK-OTGFLGR	Light grey/ PVC	5656715	6274 49 2		223
GK-I70130RW	Pure white/ PVC	5656876	6274 54 0		213	GK-OTGFLGR	Light grey/ PVC	5656715	6274 49 2		228
GK-I70170CW	Cream/ PVC	5657194	6274 74 1		216	GK-OTGFLGR	Light grey/ PVC	5656715	6274 49 2		233
GK-I70170GR	Stone grey/ PVC	5657217	6274 74 6		216	GK-OTGFLGR	Light grey/ PVC	5656715	6274 49 2		239
GK-I70170LGR	Light grey/ PVC	5657200	6274 74 2		216	GK-OTGFLGR	Light grey/ PVC	5656715	6274 49 2		244
GK-I70170RW	Pure white/ PVC	5657187	6274 74 0		216	GK-OTGFLGR	Light grey/ PVC	5656715	6274 49 2		255
GK-KUP	Light grey/ ABS/ASA	5657033	6274 65 0		208	GK-OTGFRW	Pure white/ PVC	5656692	6274 49 0		261
GK-KUP	Light grey/ ABS/ASA	5657033	6274 65 0		211	GK-OTGFRW	Pure white/ PVC	5656692	6274 49 0		209
GK-KUP	Light grey/ ABS/ASA	5657033	6274 65 0		214	GK-OTGFRW	Pure white/ PVC	5656692	6274 49 0		212
GK-OTGACW	Cream/ PVC	5657347	6274 79 1		209	GK-OTGFRW	Pure white/ PVC	5656692	6274 49 0		215
GK-OTGACW	Cream/ PVC	5657347	6274 79 1		212	GK-OTGFRW	Pure white/ PVC	5656692	6274 49 0		223
GK-OTGACW	Cream/ PVC	5657347	6274 79 1		215	GK-OTGFRW	Pure white/ PVC	5656692	6274 49 0		228
GK-OTGACW	Cream/ PVC	5657347	6274 79 1		222	GK-OTGFRW	Pure white/ PVC	5656692	6274 49 0		233
GK-OTGACW	Cream/ PVC	5657347	6274 79 1		227	GK-OTGFRW	Pure white/ PVC	5656692	6274 49 0		239
GK-OTGACW	Cream/ PVC	5657347	6274 79 1		232	GK-OTGFRW	Pure white/ PVC	5656692	6274 49 0		244
GK-OTGACW	Cream/ PVC	5657347	6274 79 1		238	GK-OTGFRW	Pure white/ PVC	5656692	6274 49 0		255
GK-OTGACW	Cream/ PVC	5657347	6274 79 1		243	GK-OTGFRW	Pure white/ PVC	5656692	6274 49 0		261
GK-OTGACW	Cream/ PVC	5657347	6274 79 1		254	GK-OTGGR	Stone grey 2000/ PVC	5666486	6278 68 6	/m	208
GK-OTGACW	Cream/ PVC	5657347	6274 79 1		260	GK-OTGGR	Stone grey 2000/ PVC	5666486	6278 68 6		211
GK-OTGACW	Cream/ PVC	5657347	6274 79 1		209	GK-OTGGR	Stone grey 2000/ PVC	5666486	6278 68 6		214
GK-OTGAGR	Stone grey/ PVC	5657361	6274 79 6		212	GK-OTGLGR	Light grey 2000/ PVC	5666424	6278 68 2		208
GK-OTGAGR	Stone grey/ PVC	5657361	6274 79 6		215	GK-OTGLGR	Light grey 2000/ PVC	5666424	6278 68 2		211
GK-OTGAGR	Stone grey/ PVC	5657361	6274 79 6		209	GK-OTGLGR	Light grey 2000/ PVC	5666424	6278 68 2		214
GK-OTGALGR	Light grey/ PVC	5657354	6274 79 2		212	GK-OTGLGR	Light grey 2000/ PVC	5666424	6278 68 2		221
GK-OTGALGR	Light grey/ PVC	5657354	6274 79 2		215	GK-OTGLGR	Light grey 2000/ PVC	5666424	6278 68 2		226
GK-OTGALGR	Light grey/ PVC	5657354	6274 79 2		222	GK-OTGLGR	Light grey 2000/ PVC	5666424	6278 68 2		231
GK-OTGALGR	Light grey/ PVC	5657354	6274 79 2		227	GK-OTGLGR	Light grey 2000/ PVC	5666424	6278 68 2		237
GK-OTGALGR	Light grey/ PVC	5657354	6274 79 2		232	GK-OTGLGR	Light grey 2000/ PVC	5666424	6278 68 2		242
GK-OTGALGR	Light grey/ PVC	5657354	6274 79 2		238	GK-OTGLGR	Light grey 2000/ PVC	5666424	6278 68 2		253
GK-OTGALGR	Light grey/ PVC	5657354	6274 79 2		243	GK-OTGLGR	Light grey 2000/ PVC	5666424	6278 68 2		259
GK-OTGALGR	Light grey/ PVC	5657354	6274 79 2		254	GK-OTGRW	Pure white 2000/ PVC	5666400	6278 68 0		208
GK-OTGALGR	Light grey/ PVC	5657354	6274 79 2		260	GK-OTGRW	Pure white 2000/ PVC	5666400	6278 68 0		211
GK-OTGARW	Pure white/ PVC	5657309	6274 79 0		209	GK-OTGRW	Pure white 2000/ PVC	5666400	6278 68 0		214
GK-OTGARW	Pure white/ PVC	5657309	6274 79 0		212	GK-OTGRW	Pure white 2000/ PVC	5666400	6278 68 0		221
GK-OTGARW	Pure white/ PVC	5657309	6274 79 0		215	GK-OTGRW	Pure white 2000/ PVC	5666400	6278 68 0		226
GK-OTGARW	Pure white/ PVC	5657309	6274 79 0		222	GK-OTGRW	Pure white 2000/ PVC	5666400	6278 68 0		231
GK-OTGARW	Pure white/ PVC	5657309	6274 79 0		227	GK-OTGRW	Pure white 2000/ PVC	5666400	6278 68 0		237
GK-OTGARW	Pure white/ PVC	5657309	6274 79 0		232	GK-OTGRW	Pure white 2000/ PVC	5666400	6278 68 0		242
GK-OTGARW	Pure white/ PVC	5657309	6274 79 0		238	GK-OTGRW	Pure white 2000/ PVC	5666400	6278 68 0		253
GK-OTGARW	Pure white/ PVC	5657309	6274 79 0		243	GK-OTGRW	Pure white 2000/ PVC	5666400	6278 68 0		259
GK-OTGARW	Pure white/ PVC	5657309	6274 79 0		254	GK-OTKACW	Cream/ PVC	5658061	6274 89 1	/pc.	209
GK-OTGARW	Pure white/ PVC	5657309	6274 79 0		260	GK-OTKACW	Cream/ PVC	5658061	6274 89 1		212
GK-OTGCW	Cream 2000/ PVC	5666417	6278 68 1	/m	208	GK-OTKACW	Cream/ PVC	5658061	6274 89 1		215
GK-OTGCW	Cream 2000/ PVC	5666417	6278 68 1		211	GK-OTKACW	Cream/ PVC	5658061	6274 89 1		222
GK-OTGCW	Cream 2000/ PVC	5666417	6278 68 1		214	GK-OTKACW	Cream/ PVC	5658061	6274 89 1		227
GK-OTGCW	Cream 2000/ PVC	5666417	6278 68 1		221	GK-OTKACW	Cream/ PVC	5658061	6274 89 1		232
GK-OTGCW	Cream 2000/ PVC	5666417	6278 68 1		226	GK-OTKACW	Cream/ PVC	5658061	6274 89 1		238
GK-OTGCW	Cream 2000/ PVC	5666417	6278 68 1		231	GK-OTKACW	Cream/ PVC	5658061	6274 89 1		243
GK-OTGCW	Cream 2000/ PVC	5666417	6278 68 1		237	GK-OTKACW	Cream/ PVC	5658061	6274 89 1		254
GK-OTGCW	Cream 2000/ PVC	5666417	6278 68 1		242	GK-OTKACW	Cream/ PVC	5658061	6274 89 1		260
GK-OTGCW	Cream 2000/ PVC	5666417	6278 68 1		253	GK-OTKAGR	Stone grey/ PVC	5658085	6274 89 6		209
GK-OTGCW	Cream 2000/ PVC	5666417	6278 68 1		259	GK-OTKAGR	Stone grey/ PVC	5658085	6274 89 6		212
GK-OTGCW	Cream 2000/ PVC	5666417	6278 68 1		209	GK-OTKAGR	Stone grey/ PVC	5658085	6274 89 6		215
GK-OTGFCW	Cream/ PVC	5656708	6274 49 1	/pc.	209	GK-OTKALGR	Light grey/ PVC	5658078	6274 89 2		209
GK-OTGFCW	Cream/ PVC	5656708	6274 49 1		212	GK-OTKALGR	Light grey/ PVC	5658078	6274 89 2		212
GK-OTGFCW	Cream/ PVC	5656708	6274 49 1		215	GK-OTKALGR	Light grey/ PVC	5658078	6274 89 2		215
GK-OTGFCW	Cream/ PVC	5656708	6274 49 1		223	GK-OTKALGR	Light grey/ PVC	5658078	6274 89 2		222
GK-OTGFCW	Cream/ PVC	5656708	6274 49 1		228	GK-OTKALGR	Light grey/ PVC	5658078	6274 89 2		227
GK-OTGFCW	Cream/ PVC	5656708	6274 49 1		233	GK-OTKALGR	Light grey/ PVC	5658078	6274 89 2		232
GK-OTGFCW	Cream/ PVC	5656708	6274 49 1		239	GK-OTKALGR	Light grey/ PVC	5658078	6274 89 2		238
GK-OTGFCW	Cream/ PVC	5656708	6274 49 1		244	GK-OTKALGR	Light grey/ PVC	5658078	6274 89 2		243
GK-OTGFCW	Cream/ PVC	5656708	6274 49 1		255	GK-OTKALGR	Light grey/ PVC	5658078	6274 89 2		243

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
GK-OTKALGR	Light grey / PVC	5658078	6274 89 2	/pc.	254	GK-OTKRW	Pure white 2000 / PVC	5666530	6278 78 0	/m	209
	Light grey / PVC	5658078	6274 89 2		260	GK-OTKRW	Pure white 2000 / PVC	5666530	6278 78 0		212
GK-OTKARW	Pure white / PVC	5658023	6274 89 0	/m	209	GK-OTKRW	Pure white 2000 / PVC	5666530	6278 78 0	/pc.	215
	Pure white / PVC	5658023	6274 89 0		212	GK-OTKRW	Pure white 2000 / PVC	5666530	6278 78 0		221
	Pure white / PVC	5658023	6274 89 0		215	GK-OTKRW	Pure white 2000 / PVC	5666530	6278 78 0		226
	Pure white / PVC	5658023	6274 89 0		222	GK-OTKRW	Pure white 2000 / PVC	5666530	6278 78 0		231
	Pure white / PVC	5658023	6274 89 0		227	GK-OTKRW	Pure white 2000 / PVC	5666530	6278 78 0		237
	Pure white / PVC	5658023	6274 89 0		232	GK-OTKRW	Pure white 2000 / PVC	5666530	6278 78 0		242
	Pure white / PVC	5658023	6274 89 0		238	GK-OTKRW	Pure white 2000 / PVC	5666530	6278 78 0		253
	Pure white / PVC	5658023	6274 89 0		243						259
	Pure white / PVC	5658023	6274 89 0		254						
	Pure white / PVC	5658023	6274 89 0		260	GK-T70110CW	Cream / PVC	5656586	6274 36 1		210
GK-OTKCW	Cream 2000 / PVC	5666547	6278 78 1	/m	212	GK-T70110GR	Stone grey / PVC	5656623	6274 36 6	/pc.	210
	Cream 2000 / PVC	5666547	6278 78 1		215	GK-T70110LGR	Light grey / PVC	5656616	6274 36 2		210
	Cream 2000 / PVC	5666547	6278 78 1		209	GK-T70110RW	Pure white / PVC	5656579	6274 36 0		210
	Cream 2000 / PVC	5666547	6278 78 1		212						
	Cream 2000 / PVC	5666547	6278 78 1		215	GK-T70130CW	Cream / PVC	5656920	6274 56 1		213
	Cream 2000 / PVC	5666547	6278 78 1		221	GK-T70130GR	Stone grey / PVC	5656944	6274 56 6		213
	Cream 2000 / PVC	5666547	6278 78 1		226	GK-T70130LGR	Light grey / PVC	5656937	6274 56 2		213
	Cream 2000 / PVC	5666547	6278 78 1		231	GK-T70130RW	Pure white / PVC	5656913	6274 56 0		213
	Cream 2000 / PVC	5666547	6278 78 1		237						
	Cream 2000 / PVC	5666547	6278 78 1		242	GK-T70170CW	Cream / PVC	5657231	6274 76 1		216
GK-OTKFCW	Cream / PVC	5657002	6274 59 1	/pc.	210	GK-T70170GR	Stone grey / PVC	5657255	6274 76 6	/m	216
	Cream / PVC	5657002	6274 59 1		213	GK-T70170LGR	Light grey / PVC	5657248	6274 76 2		216
	Cream / PVC	5657002	6274 59 1		216	GK-T70170RW	Pure white / PVC	5657224	6274 76 0		216
	Cream / PVC	5657002	6274 59 1		223						
	Cream / PVC	5657002	6274 59 1		228	GK-TW70	2000 / PVC	5658122	6274 90 0		210
	Cream / PVC	5657002	6274 59 1		233	GK-TW70	2000 / PVC	5658122	6274 90 0		213
	Cream / PVC	5657002	6274 59 1		239	GK-TW70	2000 / PVC	5658122	6274 90 0		216
	Cream / PVC	5657002	6274 59 1		244						
	Cream / PVC	5657002	6274 59 1		255	G-KWAG70110CW	Cream 178 / ABS/ASA	5657729	6274 85 1		309
	Cream / PVC	5657002	6274 59 1		261	G-KWAG70110GR	Stone grey 178 / ABS/ASA	5657774	6274 85 6		309
GK-OTKFGR	Stone grey / PVC	5657026	6274 59 6	/m	210	G-KWAG70110LGR	Light grey 178 / ABS/ASA	5657767	6274 85 2	/pc.	309
	Stone grey / PVC	5657026	6274 59 6		213	G-KWAG70110RW	Pure white 178 / ABS/ASA	5657712	6274 85 0		309
	Stone grey / PVC	5657026	6274 59 6		216	G-KWAG70130CW	Cream 198 / ABS/ASA	5657828	6274 86 1		309
					213	G-KWAG70130GR	Stone grey 198 / ABS/ASA	5657842	6274 86 6		309
					216	G-KWAG70130LGR	Light grey 198 / ABS/ASA	5657835	6274 86 2		309
					216	G-KWAG70130RW	Pure white 198 / ABS/ASA	5657781	6274 86 0		309
					210	G-KWAG70170CW	Cream 238 / ABS/ASA	5657897	6274 87 1		309
					213	G-KWAG70170GR	Stone grey 238 / ABS/ASA	5657941	6274 87 6		309
					216	G-KWAG70170LGR	Light grey 238 / ABS/ASA	5657903	6274 87 2		309
					223	G-KWAG70170RW	Pure white 238 / ABS/ASA	5657880	6274 87 0		309
GK-OTKFLGR	Light grey / PVC	5657019	6274 59 2	/m	228	G-KWAG70210CW	Cream 278 / ABS/ASA	5657965	6274 88 1	/pc.	310
	Light grey / PVC	5657019	6274 59 2		233	G-KWAG70210LGR	Light grey 278 / ABS/ASA	5658009	6274 88 2		310
	Light grey / PVC	5657019	6274 59 2		239	G-KWAG70210RW	Pure white 278 / ABS/ASA	5657958	6274 88 0		310
	Light grey / PVC	5657019	6274 59 2		244						
	Light grey / PVC	5657019	6274 59 2		255	G-KWAG90110CW	Cream 178 / ABS/ASA	5658481	6274 95 1		309
	Light grey / PVC	5657019	6274 59 2		261	G-KWAG90110GR	Stone grey 178 / ABS/ASA	5658498	6274 95 2		309
	Light grey / PVC	5657019	6274 59 2		210	G-KWAG90110LGR	Light grey 178 / ABS/ASA	5658443	6274 95 0		309
	Light grey / PVC	5657019	6274 59 2		213	G-KWAG90130CW	Cream 198 / ABS/ASA	5658559	6274 96 1		309
	Light grey / PVC	5657019	6274 59 2		216	G-KWAG90130GR	Stone grey 198 / ABS/ASA	5658566	6274 96 2		309
	Light grey / PVC	5657019	6274 59 2		213	G-KWAG90130RW	Pure white 198 / ABS/ASA	5658542	6274 96 0		309
GK-OTKFRW	Pure white / PVC	5656999	6274 59 0	/m	216	G-KWAG90170CW	Cream 238 / ABS/ASA	5658597	6274 97 1	/pc.	309
	Pure white / PVC	5656999	6274 59 0		223	G-KWAG90170LGR	Light grey 238 / ABS/ASA	5658603	6274 97 2		309
	Pure white / PVC	5656999	6274 59 0		228	G-KWAG90170RW	Pure white 238 / ABS/ASA	5658580	6274 97 0		309
	Pure white / PVC	5656999	6274 59 0		233	G-KWAG90210CW	Cream 278 / ABS/ASA	5658665	6274 98 1		310
	Pure white / PVC	5656999	6274 59 0		239	G-KWAG90210LGR	Light grey 278 / ABS/ASA	5658672	6274 98 2		310
	Pure white / PVC	5656999	6274 59 0		244	G-KWAG90210RW	Pure white 278 / ABS/ASA	5658627	6274 98 0		310
	Pure white / PVC	5656999	6274 59 0		255						
	Pure white / PVC	5656999	6274 59 0		261	G-KWAO70110CW	Cream 178 / ABS/ASA	5657415	6274 81 1		307
	Pure white / PVC	5656999	6274 59 0		210	G-KWAO70110GR	Stone grey 178 / ABS/ASA	5657460	6274 81 6		307
	Pure white / PVC	5656999	6274 59 0		213	G-KWAO70110LGR	Light grey 178 / ABS/ASA	5657422	6274 81 2		307
GK-OTKGR	Stone grey 2000 / PVC	5666578	6278 78 6	/m	209	G-KWAO70110RW	Pure white 178 / ABS/ASA	5657408	6274 81 0	/pc.	307
	Stone grey 2000 / PVC	5666578	6278 78 6		212	G-KWAO70130CW	Cream 198 / ABS/ASA	5657484	6274 82 1		308
	Stone grey 2000 / PVC	5666578	6278 78 6		215	G-KWAO70130GR	Stone grey 198 / ABS/ASA	5657538	6274 82 6		308
					209	G-KWAO70130LGR	Light grey 198 / ABS/ASA	5657521	6274 82 2		308
					212	G-KWAO70130RW	Pure white 198 / ABS/ASA	5657477	6274 82 0		308
					215	G-KWAO70170CW	Cream 238 / ABS/ASA	5657583	6274 83 1		308
					221	G-KWAO70170GR	Stone grey 238 / ABS/ASA	5657606	6274 83 6		308
					226	G-KWAO70170LGR	Light grey 238 / ABS/ASA	5657590	6274 83 2		308
					231	G-KWAO70170RW	Pure white 238 / ABS/ASA	5657545	6274 83 0		308
					237	G-KWAO70210CW	Cream 278 / ABS/ASA	5657651	6274 84 1		308
GK-OTKLGR	Light grey 2000 / PVC	5666554	6278 78 2	/m	242	G-KWAO70210LGR	Light grey 278 / ABS/ASA	5657668	6274 84 2	/pc.	308
	Light grey 2000 / PVC	5666554	6278 78 2		253	G-KWAO70210RW	Pure white 278 / ABS/ASA	5657644	6274 84 0		308
	Light grey 2000 / PVC	5666554	6278 78 2		259						
	Light grey 2000 / PVC	5666554	6278 78 2		209	G-KWAO90110CW	Cream 178 / ABS/ASA	5658146	6274 91 1		307
	Light grey 2000 / PVC	5666554	6278 78 2		212						
	Light grey 2000 / PVC	5666554	6278 78 2		215						
	Light grey 2000 / PVC	5666554	6278 78 2		221						
	Light grey 2000 / PVC	5666554	6278 78 2		226						
	Light grey 2000 / PVC	5666554	6278 78 2		231						
	Light grey 2000 / PVC	5666554	6278 78 2		237						

Type listing

Structure of the EAN number: Country code **40**

Manufacturer code **1219** (for articles beginning with **0: 1010**)

Individual EAN-C **5647589**

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
G-KWAO90110LGR	Light grey 178 / ABS/ASA	5658184	6274 91 2	/pc.	307	GS-AFS70130CW	Cream / St / FS	5661382	6277 42 1	/pc.	232
	Pure white 178 / ABS/ASA	5658139	6274 91 0		307	GS-AFS70130LGR	Light grey / St / FS	5661429	6277 42 2		232
	Cream 198 / ABS/ASA	5658245	6274 92 1		308	GS-AFS70130RW	Pure white / St / FS	5661375	6277 42 0		232
	Light grey 198 / ABS/ASA	5658252	6274 92 2		308	GS-AFS70170CW	Cream / St / FS	5663119	6277 82 1		243
	Pure white 198 / ABS/ASA	5658207	6274 92 0		308	GS-AFS70170LGR	Light grey / St / FS	5663126	6277 82 2		243
	Cream 238 / ABS/ASA	5658313	6274 93 1		308	GS-AFS70170RW	Pure white / St / FS	5663102	6277 82 0		243
	Light grey 238 / ABS/ASA	5658320	6274 93 2		308	GS-AFS70210CW	Cream / St / FS	5663874	6278 02 1		254
	Pure white 238 / ABS/ASA	5658306	6274 93 0		308	GS-AFS70210LGR	Light grey / St / FS	5663881	6278 02 2		254
	Cream 278 / ABS/ASA	5658382	6274 94 1		308	GS-AFS70210RW	Pure white / St / FS	5663867	6278 02 0		254
	Light grey 278 / ABS/ASA	5658429	6274 94 2		308						
	Pure white 278 / ABS/ASA	5658375	6274 94 0		308	GS-AFS90130CW	Cream / St / FS	5661993	6277 52 1		232
GS-A70130CW	Cream 2000 / St / FS	5661146	6277 40 1	/m		GS-AFS90130LGR	Light grey / St / FS	5662006	6277 52 2		232
	Light grey 2000 / St / FS	5661184	6277 40 2			GS-AFS90130RW	Pure white / St / FS	5661986	6277 52 0		232
	Pure white 2000 / St / FS	5661139	6277 40 0		230	GS-AFS90170CW	Cream / St / FS	5663485	6277 92 1		243
					230	GS-AFS90170LGR	Light grey / St / FS	5663515	6277 92 2		243
					230	GS-AFS90170RW	Pure white / St / FS	5663478	6277 92 0		243
						GS-AFS90210CW	Cream / St / FS	5664239	6278 12 1		254
					241	GS-AFS90210LGR	Light grey / St / FS	5664246	6278 12 2		254
					241	GS-AFS90210RW	Pure white / St / FS	5664222	6278 12 0		254
					241						
					252	GS-AI70130CW	Cream / St / FS	5661566	6277 44 1		233
					252	GS-AI70130LGR	Light grey / St / FS	5661603	6277 44 2		233
					252	GS-AI70130RW	Pure white / St / FS	5661559	6277 44 0		233
					252	GS-AI70170CW	Cream / St / FS	5663201	6277 84 1		244
						GS-AI70170LGR	Light grey / St / FS	5663218	6277 84 2		244
					230	GS-AI70170RW	Pure white / St / FS	5663195	6277 84 0		244
GS-A90130CW	Cream 2000 / St / FS	5661788	6277 50 1		230						
	Light grey 2000 / St / FS	5661795	6277 50 2		230	GS-AI70210CW	Cream / St / FS	5663966	6278 05 1		255
	Pure white 2000 / St / FS	5661740	6277 50 0			GS-AI70210LGR	Light grey / St / FS	5663973	6278 05 2		255
					241	GS-AI70210RW	Pure white / St / FS	5663959	6278 05 0		255
					241						
					241	GS-AI90130CW	Cream / St / FS	5662082	6277 54 1		233
						GS-AI90130LGR	Light grey / St / FS	5662099	6277 54 2		233
					252	GS-AI90130RW	Pure white / St / FS	5662075	6277 54 0		233
					252	GS-AI90170CW	Cream / St / FS	5663638	6277 94 1		244
						GS-AI90170LGR	Light grey / St / FS	5663645	6277 94 2		244
					252	GS-AI90170RW	Pure white / St / FS	5663607	6277 94 0		244
GS-AA70130CW	Cream / St / FS	5661306	6277 41 1	/pc.	232	GS-AI90210CW	Cream / St / FS	5664383	6278 14 1		255
	Light grey / St / FS	5661313	6277 41 2		232	GS-AI90210LGR	Light grey / St / FS	5664420	6278 14 2		255
	Pure white / St / FS	5661269	6277 41 0		232	GS-AI90210RW	Pure white / St / FS	5664376	6278 14 0		255
	Cream / St / FS	5663041	6277 81 1		243						
	Light grey / St / FS	5663058	6277 81 2		243	GS-AT70130CW	Cream / St / FS	5661672	6277 46 1		234
	Pure white / St / FS	5663034	6277 81 0		243	GS-AT70130LGR	Light grey / St / FS	5661689	6277 46 2		234
						GS-AT70130RW	Pure white / St / FS	5661665	6277 46 0		234
					254	GS-AT70170CW	Cream / St / FS	5663270	6277 86 1		245
					254	GS-AT70170LGR	Light grey / St / FS	5663287	6277 86 2		245
					254	GS-AT70170RW	Pure white / St / FS	5663249	6277 86 0		245
GS-AA90130CW	Cream / St / FS	5661917	6277 51 1		232	GS-AT70210CW	Cream / St / FS	5664017	6278 06 1	/m	256
	Light grey / St / FS	5661924	6277 51 2		232	GS-AT70210LGR	Light grey / St / FS	5664024	6278 06 2		256
	Pure white / St / FS	5661900	6277 51 0		232	GS-AT70210RW	Pure white / St / FS	5664000	6278 06 0		256
	Cream / St / FS	5663416	6277 91 1		243						
	Light grey / St / FS	5663423	6277 91 2		243	GS-AT90130CW	Cream / St / FS	5662136	6277 56 1		234
	Pure white / St / FS	5663409	6277 91 0		243	GS-AT90130LGR	Light grey / St / FS	5662143	6277 56 2		234
						GS-AT90130RW	Pure white / St / FS	5662129	6277 56 0		234
					254	GS-AT90170CW	Cream / St / FS	5663706	6277 96 1		245
					254	GS-AT90170LGR	Light grey / St / FS	5663713	6277 96 2		245
					254	GS-AT90170RW	Pure white / St / FS	5663690	6277 96 0		245
GS-AFF70130CW	Cream / St / FS	5661481	6277 43 1		233	GS-AT90210CW	Cream / St / FS	5664499	6278 16 1		256
	Light grey / St / FS	5661498	6277 43 2		233	GS-AT90210LGR	Light grey / St / FS	5664505	6278 16 2		256
	Pure white / St / FS	5661443	6277 43 0		233	GS-AT90210RW	Pure white / St / FS	5664482	6278 16 0		256
	Cream / St / FS	5663157	6277 83 1		244						
	Light grey / St / FS	5663164	6277 83 2		244						
	Pure white / St / FS	5663140	6277 83 0		244	GS-D70170CW	Cream 2000 / St / FS	5664673	6278 20 1		247
						GS-D70170LGR	Light grey 2000 / St / FS	5664680	6278 20 2		247
					255	GS-D70170RW	Pure white 2000 / St / FS	5664666	6278 20 0		247
					255						
						GS-D70210CW	Pure white 2000 / St / FS	5665557	6278 40 0		258
					233	GS-D70210LGR	Light grey 2000 / St / FS	5665571	6278 40 2		258
					233	GS-D70210RW	Cream 2000 / St / FS	5665564	6278 40 1		258
					233						
					244	GS-D90170CW	Cream 2000 / St / FS	5665144	6278 30 1		247
					244	GS-D90170LGR	Light grey 2000 / St / FS	5665151	6278 30 2		247
					244	GS-D90170RW	Pure white 2000 / St / FS	5665137	6278 30 0		247
GS-AFF90130CW	Cream / St / FS	5662037	6277 53 1		255						
	Light grey / St / FS	5662044	6277 53 2			GS-D90210CW	Cream 2000 / St / FS	5666103	6278 50 1		258
	Pure white / St / FS	5662020	6277 53 0			GS-D90210LGR	Light grey 2000 / St / FS	5666110	6278 50 2		258
					255	GS-D90210RW	Pure white 2000 / St / FS	5666097	6278 50 0		258
					255						
					255						
					255						
					255						
					255						
					255						
					255						
					255						
					255						
					255						
					255						
					255						

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
				/pc.						/pc.	
GS-DA70170CW	Cream / St / FS	5664796	6278 21 1		248	GS-E70130CW	Cream / St / FS	5660521	6277 27 1		229
GS-DA70170LGR	Light grey / St / FS	5664802	6278 21 2		248	GS-E70130CW	Cream / St / FS	5660521	6277 27 1		234
GS-DA70170RW	Pure white / St / FS	5664789	6278 21 0		248	GS-E70130LGR	Light grey / St / FS	5660538	6277 27 2		229
						GS-E70130LGR	Light grey / St / FS	5660538	6277 27 2		234
GS-DA70210CW	Cream / St / FS	5665632	6278 41 1		260	GS-E70130RW	Pure white / St / FS	5660484	6277 27 0		229
GS-DA70210LGR	Light grey / St / FS	5665649	6278 41 2		260	GS-E70130RW	Pure white / St / FS	5660484	6277 27 0		234
GS-DA70210RW	Pure white / St / FS	5665625	6278 41 0		260						
						GS-E70170CW	Cream / St / FS	5662471	6277 67 1		240
GS-DA90170CW	Cream / St / FS	5665212	6278 31 1		249	GS-E70170CW	Cream / St / FS	5662471	6277 67 1		245
GS-DA90170LGR	Light grey / St / FS	5665229	6278 31 2		249	GS-E70170CW	Cream / St / FS	5662471	6277 67 1		250
GS-DA90170RW	Pure white / St / FS	5665205	6278 31 0		249	GS-E70170LGR	Light grey / St / FS	5662488	6277 67 2		240
						GS-E70170LGR	Light grey / St / FS	5662488	6277 67 2		245
GS-DA90210CW	Cream / St / FS	5666172	6278 51 1		260	GS-E70170LGR	Light grey / St / FS	5662488	6277 67 2		250
GS-DA90210LGR	Light grey / St / FS	5666189	6278 51 2		260	GS-E70170RW	Pure white / St / FS	5662464	6277 67 0		240
GS-DA90210RW	Pure white / St / FS	5666165	6278 51 0		260	GS-E70170RW	Pure white / St / FS	5662464	6277 67 0		245
						GS-E70170RW	Pure white / St / FS	5662464	6277 67 0		250
GS-DFF70170CW	Cream / St / FS	5664918	6278 23 1		249						
GS-DFF70170LGR	Light grey / St / FS	5664925	6278 23 2		249	GS-E70210CW	Cream / St / FS	5664062	6278 07 1		256
GS-DFF70170RW	Pure white / St / FS	5664901	6278 23 0		249	GS-E70210CW	Cream / St / FS	5664062	6278 07 1		262
GS-DFF70210CW	Cream / St / FS	5665823	6278 43 1		261	GS-E70210LGR	Light grey / St / FS	5664079	6278 07 2		256
GS-DFF70210LGR	Light grey / St / FS	5665878	6278 43 2		261	GS-E70210LGR	Light grey / St / FS	5664079	6278 07 2		262
GS-DFF70210RW	Pure white / St / FS	5665816	6278 43 0		261	GS-E70210RW	Pure white / St / FS	5664055	6278 07 0		256
						GS-E70210RW	Pure white / St / FS	5664055	6278 07 0		262
GS-DFF90170CW	Cream / St / FS	5665342	6278 33 1		249						
GS-DFF90170LGR	Light grey / St / FS	5665380	6278 33 2		249	GS-E90110CW	Cream / St / FS	5659938	6277 17 1		224
GS-DFF90170RW	Pure white / St / FS	5665335	6278 33 0		249	GS-E90110LGR	Light grey / St / FS	5659945	6277 17 2		224
GS-DFF90210CW	Cream / St / FS	5666264	6278 53 1		261	GS-E90110RW	Pure white / St / FS	5659921	6277 17 0		224
GS-DFF90210LGR	Light grey / St / FS	5666271	6278 53 2		261						
GS-DFF90210RW	Pure white / St / FS	5666257	6278 53 0		261	GS-E90130CW	Cream / St / FS	5661061	6277 37 1		229
						GS-E90130CW	Cream / St / FS	5661061	6277 37 1		234
GS-DFS70170CW	Cream / St / FS	5664840	6278 22 1		249	GS-E90130LGR	Light grey / St / FS	5661078	6277 37 2		229
GS-DFS70170LGR	Light grey / St / FS	5664857	6278 22 2		249	GS-E90130LGR	Light grey / St / FS	5661078	6277 37 2		234
GS-DFS70170RW	Pure white / St / FS	5664833	6278 22 0		249	GS-E90130RW	Pure white / St / FS	5661023	6277 37 0		229
GS-DFS70210CW	Cream / St / FS	5665755	6278 42 1		260	GS-E90130RW	Pure white / St / FS	5661023	6277 37 0		234
GS-DFS70210LGR	Light grey / St / FS	5665762	6278 42 2		260						
GS-DFS70210RW	Pure white / St / FS	5665700	6278 42 0		260	GS-E90170CW	Cream / St / FS	5662884	6277 77 1		240
						GS-E90170CW	Cream / St / FS	5662884	6277 77 1		245
GS-DFS90170CW	Cream / St / FS	5665267	6278 32 1		249	GS-E90170CW	Cream / St / FS	5662884	6277 77 1		251
GS-DFS90170LGR	Light grey / St / FS	5665274	6278 32 2		249	GS-E90170LGR	Light grey / St / FS	5662914	6277 77 2		240
GS-DFS90170RW	Pure white / St / FS	5665250	6278 32 0		249	GS-E90170LGR	Light grey / St / FS	5662914	6277 77 2		245
GS-DFS90210CW	Cream / St / FS	5666226	6278 52 1		260	GS-E90170LGR	Light grey / St / FS	5662914	6277 77 2		251
GS-DFS90210LGR	Light grey / St / FS	5666233	6278 52 2		260	GS-E90170RW	Pure white / St / FS	5662877	6277 77 0		240
GS-DFS90210RW	Pure white / St / FS	5666219	6278 52 0		260	GS-E90170RW	Pure white / St / FS	5662877	6277 77 0		245
						GS-E90170RW	Pure white / St / FS	5662877	6277 77 0		251
GS-DI70170CW	Cream / St / FS	5665021	6278 24 1		250						
GS-DI70170LGR	Light grey / St / FS	5665038	6278 24 2		250	GS-E90210CW	Cream / St / FS	5664604	6278 17 1		256
GS-DI70170RW	Pure white / St / FS	5664987	6278 24 0		250	GS-E90210CW	Cream / St / FS	5664604	6278 17 1		262
						GS-E90210LGR	Light grey / St / FS	5664611	6278 17 2		256
GS-DI70210CW	Cream / St / FS	5665946	6278 44 1		261	GS-E90210LGR	Light grey / St / FS	5664611	6278 17 2		262
GS-DI70210LGR	Light grey / St / FS	5665984	6278 44 2		261	GS-E90210RW	Pure white / St / FS	5664567	6278 17 0		256
GS-DI70210RW	Pure white / St / FS	5665939	6278 44 0		261	GS-E90210RW	Pure white / St / FS	5664567	6278 17 0		262
GS-DI90170CW	Cream / St / FS	5665465	6278 34 1		250	GS-KUP70	120 / V2A	5660590	6277 29 0		220
GS-DI90170LGR	Light grey / St / FS	5665472	6278 34 2		250	GS-KUP70	120 / V2A	5660590	6277 29 0		225
GS-DI90170RW	Pure white / St / FS	5665458	6278 34 0		250	GS-KUP70	120 / V2A	5660590	6277 29 0		230
						GS-KUP70	120 / V2A	5660590	6277 29 0		236
GS-DI90210CW	Cream / St / FS	5666318	6278 54 1		261	GS-KUP70	120 / V2A	5660590	6277 29 0		241
GS-DI90210LGR	Light grey / St / FS	5666325	6278 54 2		261	GS-KUP70	120 / V2A	5660590	6277 29 0		247
GS-DI90210RW	Pure white / St / FS	5666301	6278 54 0		261	GS-KUP70	120 / V2A	5660590	6277 29 0		252
						GS-KUP70	120 / V2A	5660590	6277 29 0		258
GS-DT70170CW	Cream / St / FS	5665090	6278 26 1		250						
GS-DT70170LGR	Light grey / St / FS	5665106	6278 26 2		250						
GS-DT70170RW	Pure white / St / FS	5665083	6278 26 0		250	GS-KUP90	/ V2A	5700852	6277 29 4		220
						GS-KUP90	/ V2A	5700852	6277 29 4		225
GS-DT70210CW	Cream / St / FS	5666059	6278 46 1		262	GS-KUP90	/ V2A	5700852	6277 29 4		230
GS-DT70210LGR	Light grey / St / FS	5666066	6278 46 2		262	GS-KUP90	/ V2A	5700852	6277 29 4		236
GS-DT70210RW	Pure white / St / FS	5666042	6278 46 0		262	GS-KUP90	/ V2A	5700852	6277 29 4		241
						GS-KUP90	/ V2A	5700852	6277 29 4		247
GS-DT90170CW	Cream / St / FS	5665519	6278 36 1		250	GS-KUP90	/ V2A	5700852	6277 29 4		252
GS-DT90170LGR	Light grey / St / FS	5665526	6278 36 2		250	GS-KUP90	/ V2A	5700852	6277 29 4		258
GS-DT90170RW	Pure white / St / FS	5665502	6278 36 0		250						
GS-DT90210CW	Cream / St / FS	5666363	6278 56 1		262					/m	
GS-DT90210LGR	Light grey / St / FS	5666370	6278 56 2		262	GS-OT50CW	Cream 2000 / St / FS	5680932	6279 88 1		248
GS-DT90210RW	Pure white / St / FS	5666356	6278 56 0		262	GS-OT50CW	Cream 2000 / St / FS	5680932	6279 88 1		249
GS-E70110CW	Cream / St / FS	5659266	6277 07 1		224					/pc.	
GS-E70110LGR	Light grey / St / FS	5659273	6277 07 2		224	GS-OT50FCW	Cream / St	5681106	6279 99 1		250
GS-E70110RW	Pure white / St / FS	5659228	6277 07 0		224	GS-OT50FLGR	Light grey / St	5681113	6279 99 2		250
						GS-OT50FRW	Pure white / St	5681090	6279 99 0		250

Type listing

Structure of the EAN number: Country code **40**

Manufacturer code **1219** (for articles beginning with **0: 1010**)

Individual EAN-C **5647589**

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
GS-OT50LGR	Light grey 2000/ St / FS	5680949	6279 88 2	/m	248	GS-OTLGR	Light grey 2000/ ST	5695868	6279 85 2	/m	248
GS-OT50LGR	Light grey 2000/ St / FS	5680949	6279 88 2		249	GS-OTLGR	Light grey 2000/ ST	5695868	6279 85 2		253
						GS-OTLGR	Light grey 2000/ ST	5695868	6279 85 2		259
GS-OT50RW	Pure white 2000/ St / FS	5680925	6279 88 0		248						
GS-OT50RW	Pure white 2000/ St / FS	5680925	6279 88 0		249	GS-OTRW	Pure white 2000/ ST	5695813	6279 85 0		221
						GS-OTRW	Pure white 2000/ ST	5695813	6279 85 0		226
						GS-OTRW	Pure white 2000/ ST	5695813	6279 85 0		231
						GS-OTRW	Pure white 2000/ ST	5695813	6279 85 0		237
GS-OTACW	Cream/ ST	5696063	6279 87 1	/pc.	222	GS-OTRW	Pure white 2000/ ST	5695813	6279 85 0		242
GS-OTACW	Cream/ ST	5696063	6279 87 1		227	GS-OTRW	Pure white 2000/ ST	5695813	6279 85 0		248
GS-OTACW	Cream/ ST	5696063	6279 87 1		232	GS-OTRW	Pure white 2000/ ST	5695813	6279 85 0		253
GS-OTACW	Cream/ ST	5696063	6279 87 1		238	GS-OTRW	Pure white 2000/ ST	5695813	6279 85 0		259
GS-OTACW	Cream/ ST	5696063	6279 87 1		243						
GS-OTACW	Cream/ ST	5696063	6279 87 1		249						
GS-OTACW	Cream/ ST	5696063	6279 87 1		254	GS-S70110CW	Cream 2000/ St / FS	5658733	6277 00 1		220
GS-OTACW	Cream/ ST	5696063	6279 87 1		260	GS-S70110LGR	Light grey 2000/ St / FS	5658740	6277 00 2		220
						GS-S70110RW	Pure white 2000/ St / FS	5658726	6277 00 0		220
GS-OTALGR	Light grey/ ST	5696100	6279 87 2		222						
GS-OTALGR	Light grey/ ST	5696100	6279 87 2		227	GS-S70130CW	Cream 2000/ St / FS	5660040	6277 20 1		225
GS-OTALGR	Light grey/ ST	5696100	6279 87 2		232	GS-S70130LGR	Light grey 2000/ St / FS	5660057	6277 20 2		225
GS-OTALGR	Light grey/ ST	5696100	6279 87 2		238	GS-S70130RW	Pure white 2000/ St / FS	5660002	6277 20 0		225
GS-OTALGR	Light grey/ ST	5696100	6279 87 2		243						
GS-OTALGR	Light grey/ ST	5696100	6279 87 2		249	GS-S70170CW	Cream 2000/ St / FS	5662181	6277 60 1		236
GS-OTALGR	Light grey/ ST	5696100	6279 87 2		254	GS-S70170LGR	Light grey 2000/ St / FS	5662198	6277 60 2		236
GS-OTALGR	Light grey/ ST	5696100	6279 87 2		260	GS-S70170RW	Pure white 2000/ St / FS	5662174	6277 60 0		236
GS-OTARW	Pure white/ ST	5696056	6279 87 0		222	GS-S90110CW	Cream 2000/ St / FS	5659396	6277 10 1		220
GS-OTARW	Pure white/ ST	5696056	6279 87 0		227	GS-S90110LGR	Light grey 2000/ St / FS	5659402	6277 10 2		220
GS-OTARW	Pure white/ ST	5696056	6279 87 0		232	GS-S90110RW	Pure white 2000/ St / FS	5659389	6277 10 0		220
GS-OTARW	Pure white/ ST	5696056	6279 87 0		238						
GS-OTARW	Pure white/ ST	5696056	6279 87 0		243	GS-S90130CW	Cream 2000/ St / FS	5660644	6277 30 1		225
GS-OTARW	Pure white/ ST	5696056	6279 87 0		249	GS-S90130LGR	Light grey 2000/ St / FS	5660651	6277 30 2		225
GS-OTARW	Pure white/ ST	5696056	6279 87 0		254	GS-S90130RW	Pure white 2000/ St / FS	5660606	6277 30 0		225
GS-OTARW	Pure white/ ST	5696056	6279 87 0		260						
						GS-S90170CW	Cream 2000/ St / FS	5662525	6277 70 1		236
						GS-S90170LGR	Light grey 2000/ St / FS	5662532	6277 70 2		236
GS-OTCW	Cream 2000/ ST	5695820	6279 85 1	/m	221	GS-S90170RW	Pure white 2000/ St / FS	5662518	6277 70 0		236
GS-OTCW	Cream 2000/ ST	5695820	6279 85 1		226						
GS-OTCW	Cream 2000/ ST	5695820	6279 85 1		231						
GS-OTCW	Cream 2000/ ST	5695820	6279 85 1		237	GS-SA70110CW	Cream/ St / FS	5658863	6277 01 1	/pc.	222
GS-OTCW	Cream 2000/ ST	5695820	6279 85 1		242	GS-SA70110LGR	Light grey/ St / FS	5658900	6277 01 2		222
GS-OTCW	Cream 2000/ ST	5695820	6279 85 1		248	GS-SA70110RW	Pure white/ St / FS	5658856	6277 01 0		222
GS-OTCW	Cream 2000/ ST	5695820	6279 85 1		253	GS-SA70130CW	Cream/ St / FS	5660170	6277 21 1		227
GS-OTCW	Cream 2000/ ST	5695820	6279 85 1		259	GS-SA70130LGR	Light grey/ St / FS	5660187	6277 21 2		227
						GS-SA70130RW	Pure white/ St / FS	5660163	6277 21 0		227
						GS-SA70170CW	Cream/ St / FS	5662259	6277 61 1		238
GS-OTFCW	Cream/ ST	5695943	6279 86 1	/pc.	223	GS-SA70170LGR	Light grey/ St / FS	5662266	6277 61 2		238
GS-OTFCW	Cream/ ST	5695943	6279 86 1		228	GS-SA70170RW	Pure white/ St / FS	5662242	6277 61 0		238
GS-OTFCW	Cream/ ST	5695943	6279 86 1		233						
GS-OTFCW	Cream/ ST	5695943	6279 86 1		239	GS-SA90110CW	Cream/ St / FS	5659525	6277 11 1		222
GS-OTFCW	Cream/ ST	5695943	6279 86 1		244	GS-SA90110LGR	Light grey/ St / FS	5659563	6277 11 2		222
GS-OTFCW	Cream/ ST	5695943	6279 86 1		250	GS-SA90110RW	Pure white/ St / FS	5659518	6277 11 0		222
GS-OTFCW	Cream/ ST	5695943	6279 86 1		255	GS-SA90130CW	Cream/ St / FS	5660774	6277 31 1		227
GS-OTFCW	Cream/ ST	5695943	6279 86 1		261	GS-SA90130LGR	Light grey/ St / FS	5660781	6277 31 2		227
						GS-SA90130RW	Pure white/ St / FS	5660767	6277 31 0		227
GS-OTFLGR	Light grey/ ST	5695981	6279 86 2		223	GS-SA90170CW	Cream/ St / FS	5662594	6277 71 1		238
GS-OTFLGR	Light grey/ ST	5695981	6279 86 2		228	GS-SA90170LGR	Light grey/ St / FS	5662600	6277 71 2		238
GS-OTFLGR	Light grey/ ST	5695981	6279 86 2		233	GS-SA90170RW	Pure white/ St / FS	5662587	6277 71 0		238
GS-OTFLGR	Light grey/ ST	5695981	6279 86 2		239						
GS-OTFLGR	Light grey/ ST	5695981	6279 86 2		244	GS-SFS70110CW	Cream/ St / FS	5658979	6277 02 1		222
GS-OTFLGR	Light grey/ ST	5695981	6279 86 2		250	GS-SFS70110LGR	Light grey/ St / FS	5658986	6277 02 2		222
GS-OTFLGR	Light grey/ ST	5695981	6279 86 2		255	GS-SFS70110RW	Pure white/ St / FS	5658962	6277 02 0		222
GS-OTFLGR	Light grey/ ST	5695981	6279 86 2		261	GS-SFS70130CW	Cream/ St / FS	5660286	6277 22 1		227
						GS-SFS70130LGR	Light grey/ St / FS	5660293	6277 22 2		227
GS-OTFRW	Pure white/ ST	5695936	6279 86 0		223	GS-SFS70130RW	Pure white/ St / FS	5660248	6277 22 0		227
GS-OTFRW	Pure white/ ST	5695936	6279 86 0		228	GS-SFS70170CW	Cream/ St / FS	5662327	6277 62 1		238
GS-OTFRW	Pure white/ ST	5695936	6279 86 0		233	GS-SFS70170LGR	Light grey/ St / FS	5662334	6277 62 2		238
GS-OTFRW	Pure white/ ST	5695936	6279 86 0		239	GS-SFS70170RW	Pure white/ St / FS	5662310	6277 62 0		238
GS-OTFRW	Pure white/ ST	5695936	6279 86 0		244						
GS-OTFRW	Pure white/ ST	5695936	6279 86 0		250	GS-SFS90110CW	Cream/ St / FS	5659631	6277 12 1		222
GS-OTFRW	Pure white/ ST	5695936	6279 86 0		255	GS-SFS90110LGR	Light grey/ St / FS	5659648	6277 12 2		222
GS-OTFRW	Pure white/ ST	5695936	6279 86 0		261	GS-SFS90110RW	Pure white/ St / FS	5659624	6277 12 0		222
						GS-SFS90130CW	Cream/ St / FS	5660828	6277 32 1		227
						GS-SFS90130LGR	Light grey/ St / FS	5660835	6277 32 2		227
GS-OTLGR	Light grey 2000/ ST	5695868	6279 85 2	/m	221	GS-SFS90130RW	Pure white/ St / FS	5660811	6277 32 0		227
GS-OTLGR	Light grey 2000/ ST	5695868	6279 85 2		226	GS-SFS90170CW	Cream/ St / FS	5662648	6277 72 1		238
GS-OTLGR	Light grey 2000/ ST	5695868	6279 85 2		231	GS-SFS90170LGR	Light grey/ St / FS	5662679	6277 72 2		238
GS-OTLGR	Light grey 2000/ ST	5695868	6279 85 2		237	GS-SFS90170RW	Pure white/ St / FS	5662631	6277 72 0		238
GS-OTLGR	Light grey 2000/ ST	5695868	6279 85 2		242						
						GS-SI70110CW	Cream/ St / FS	5659082	6277 04 1		223

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
GS-SI70110LGR	Light grey/ St / FS	5659099	6277 04 2	/pc.	223	G-SVS70210CW	Cream/ St	5667797	6279 77 3	/pc.	259
GS-SI70110RW	Pure white/ St / FS	5659044	6277 04 0		223	G-SVS70210LGR	Light grey/ St	5667803	6279 77 4		253
GS-SI70130CW	Cream/ St / FS	5660330	6277 24 1		228	G-SVS70210LGR	Light grey/ St	5667803	6279 77 4		259
GS-SI70130LGR	Light grey/ St / FS	5660347	6277 24 2		228	G-SVS70210RW	Pure white/ St	5667780	6279 77 2		253
GS-SI70130RW	Pure white/ St / FS	5660323	6277 24 0		228	G-SVS70210RW	Pure white/ St	5667780	6279 77 2		259
GS-SI70170CW	Cream/ St / FS	5662372	6277 64 1		239						
GS-SI70170LGR	Light grey/ St / FS	5662389	6277 64 2		239	G-SVS90110CW	Cream/ St	5667834	6279 77 7		221
GS-SI70170RW	Pure white/ St / FS	5662365	6277 64 0		239	G-SVS90110LGR	Light grey/ St	5667841	6279 77 8		221
						G-SVS90110RW	Pure white/ St	5667827	6279 77 6		221
GS-SI90110CW	Cream/ St / FS	5659747	6277 14 1		223	G-SVS90130CW	Cream/ St	5667872	6279 78 1		226
GS-SI90110LGR	Light grey/ St / FS	5659754	6277 14 2		223	G-SVS90130CW	Cream/ St	5667872	6279 78 1		231
GS-SI90110RW	Pure white/ St / FS	5659709	6277 14 0		223	G-SVS90130LGR	Light grey/ St	5667889	6279 78 2		226
GS-SI90130CW	Cream/ St / FS	5660873	6277 34 1		228	G-SVS90130LGR	Light grey/ St	5667889	6279 78 2		231
GS-SI90130LGR	Light grey/ St / FS	5660880	6277 34 2		228	G-SVS90130RW	Pure white/ St	5667865	6279 78 0		226
GS-SI90130RW	Pure white/ St / FS	5660866	6277 34 0		228	G-SVS90130RW	Pure white/ St	5667865	6279 78 0		231
GS-SI90170CW	Cream/ St / FS	5662716	6277 74 1		239	G-SVS90170CW	Cream/ St	5667919	6279 78 5		237
GS-SI90170LGR	Light grey/ St / FS	5662723	6277 74 2		239	G-SVS90170CW	Cream/ St	5667919	6279 78 5		242
GS-SI90170RW	Pure white/ St / FS	5662709	6277 74 0		239	G-SVS90170CW	Cream/ St	5667919	6279 78 5		248
						G-SVS90170LGR	Light grey/ St	5667926	6279 78 6		242
GS-ST70110CW	Cream/ St / FS	5659167	6277 06 1		223	G-SVS90170LGR	Light grey/ St	5667926	6279 78 6		237
GS-ST70110LGR	Light grey/ St / FS	5659204	6277 06 2		223	G-SVS90170LGR	Light grey/ St	5667926	6279 78 6		248
GS-ST70110RW	Pure white/ St / FS	5659150	6277 06 0		223	G-SVS90170RW	Pure white/ St	5667902	6279 78 4		237
GS-ST70130CW	Cream/ St / FS	5660415	6277 26 1		228	G-SVS90170RW	Pure white/ St	5667902	6279 78 4		242
GS-ST70130LGR	Light grey/ St / FS	5660422	6277 26 2		228	G-SVS90170RW	Pure white/ St	5667902	6279 78 4		248
GS-ST70130RW	Pure white/ St / FS	5660408	6277 26 0		228						
GS-ST70170CW	Cream/ St / FS	5662426	6277 66 1		239	G-SVS90210CW	Cream/ St	5667957	6279 78 9		253
GS-ST70170LGR	Light grey/ St / FS	5662433	6277 66 2		239	G-SVS90210CW	Cream/ St	5667957	6279 78 9		259
GS-ST70170RW	Pure white/ St / FS	5662419	6277 66 0		239	G-SVS90210LGR	Light grey/ St	5667964	6279 79 0		253
						G-SVS90210LGR	Light grey/ St	5667964	6279 79 0		259
GS-ST90110CW	Cream/ St / FS	5659822	6277 16 1		223	G-SVS90210RW	Pure white/ St	5667940	6279 78 8		253
GS-ST90110LGR	Light grey/ St / FS	5659860	6277 16 2		223	G-SVS90210RW	Pure white/ St	5667940	6279 78 8		259
GS-ST90110RW	Pure white/ St / FS	5659815	6277 16 0		223						
GS-ST90130CW	Cream/ St / FS	5660958	6277 36 1		228						
GS-ST90130LGR	Light grey/ St / FS	5660965	6277 36 2		228	HAT30	Blue/ PA	5465249	6290 20 1		331
GS-ST90130RW	Pure white/ St / FS	5660941	6277 36 0		228						
GS-ST90170CW	Cream/ St / FS	5662761	6277 76 1		239						
GS-ST90170LGR	Light grey/ St / FS	5662815	6277 76 2		239	IKR4RW		5616559	6288 36 5		357
GS-ST90170RW	Pure white/ St / FS	5662754	6277 76 0		239						
				/m		IKR6RW	/ PVC	5694915	6288 36 9		357
GS-TW70	2000/ St	5659334	6277 09 0		224						
GS-TW70	2000/ St	5659334	6277 09 0		229						
GS-TW70	2000/ St	5659334	6277 09 0		234						
GS-TW70	2000/ St	5659334	6277 09 0		240	ISS BP3GN	Green 3000	5143987	6286 75 8	/m	318
GS-TW70	2000/ St	5659334	6277 09 0		245	ISS BP3GR	Grey white 3000	5143949	6286 75 4		318
GS-TW70	2000/ St	5659334	6277 09 0		251						
GS-TW70	2000/ St	5659334	6277 09 0		256	ISS BP3RT	Red 3000	5143970	6286 75 6		318
GS-TW70	2000/ St	5659334	6277 09 0		262	ISS BP3SW	Black 3000	5143925	6286 75 0		318
GS-TW90	2000/ St	5659341	6277 09 5		224	ISS BP4SW	Black 4000	5143932	6286 75 2		318
GS-TW90	2000/ St	5659341	6277 09 5		229						
GS-TW90	2000/ St	5659341	6277 09 5		234						
GS-TW90	2000/ St	5659341	6277 09 5		240						
GS-TW90	2000/ St	5659341	6277 09 5		245	ISS110100FEL	/ AI / EL	5477402	6289 04 3	/pc.	328
GS-TW90	2000/ St	5659341	6277 09 5		251	ISS110100FRW	Pure white/ AI	5477013	6289 04 0		328
GS-TW90	2000/ St	5659341	6277 09 5		256	ISS110100REL	/ AI / EL	5477426	6289 06 3		327
GS-TW90	2000/ St	5659341	6277 09 5		262	ISS110100RRW	Pure white/ AI	5477037	6289 06 0		327
				/pc.		ISS120 245EL	2450/ AI / EL	5142607	6286 00 3		318
G-SVS70110CW	Cream/ St	5667674	6279 76 1		221	ISS120 245RW	Pure white 2450/ AI	5142560	6286 00 0		318
G-SVS70110LGR	Light grey/ St	5667681	6279 76 2		221						
G-SVS70110RW	Pure white/ St	5667667	6279 76 0		221	ISS120 300EL	3000/ AI / EL	5143017	6286 11 3		318
G-SVS70130CW	Cream/ St	5667711	6279 76 5		226	ISS120 300RW	Pure white 3000/ AI	5142980	6286 11 0		318
G-SVS70130CW	Cream/ St	5667711	6279 76 5		231	ISS120 310EL	3100/ AI / EL	5143086	6286 13 3		318
G-SVS70130LGR	Light grey/ St	5667728	6279 76 6		226	ISS120 310RW	Pure white 3100/ AI	5143079	6286 13 0		318
G-SVS70130LGR	Light grey/ St	5667728	6279 76 6		231	ISS120 325EL	3250/ AI / EL	5143192	6286 16 3		318
G-SVS70130RW	Pure white/ St	5667704	6279 76 4		226	ISS120 325RW	Pure white 3250/ AI	5143161	6286 16 0		318
G-SVS70130RW	Pure white/ St	5667704	6279 76 4		231	ISS120 330EL	3300/ AI / EL	5143222	6286 17 3		318
G-SVS70170CW	Cream/ St	5667759	6279 76 9		237	ISS120 330RW	Pure white 3300/ AI	5143208	6286 17 0		318
G-SVS70170CW	Cream/ St	5667759	6279 76 9		242	ISS120 340EL	3400/ AI / EL	5143314	6286 19 3		318
G-SVS70170CW	Cream/ St	5667759	6279 76 9		248	ISS120 340RW	Pure white 3400/ AI	5143284	6286 19 0		318
G-SVS70170LGR	Light grey/ St	5667766	6279 77 0		237	ISS120 345EL	3450/ AI / EL	5143338	6286 20 3		318
G-SVS70170LGR	Light grey/ St	5667766	6279 77 0		242	ISS120 345RW	Pure white 3450/ AI	5143321	6286 20 0		318
G-SVS70170RW	Pure white/ St	5667742	6279 76 8		248	ISS120 355EL	3550/ AI / EL	5143406	6286 22 3		318
G-SVS70170RW	Pure white/ St	5667742	6279 76 8		237	ISS120 355RW	Pure white 3550/ AI	5143383	6286 22 0		318
G-SVS70170RW	Pure white/ St	5667742	6279 76 8		242	ISS120 370EL	3700/ AI / EL	5143499	6286 25 3		318
G-SVS70170RW	Pure white/ St	5667742	6279 76 8		248	ISS120 370RW	Pure white 3700/ AI	5143451	6286 25 0		318
						ISS120 395EL	3950/ AI / EL	5143574	6286 29 3		318
G-SVS70210CW	Cream/ St	5667797	6279 77 3		253	ISS120 395RW	Pure white 3950/ AI	5143567	6286 29 0		318

Type listing

Structure of the EAN number: Country code **40**

Manufacturer code **1219** (for articles beginning with **0: 1010**)

Individual EAN-C **5647589**

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
ISS120DDF7035	Light grey/ ST	5144007	6286 77 2	/pc.	318	ISSO70140EL	/ AI / EL	5160601	6288 92 3	/pc.	320
ISS120DDF9010	Pure white/ ST	5143994	6286 77 0		318	ISSO70140RW	Pure white/ AI	5160564	6288 92 0		320
ISS120DDF9011RW	Graphite black/ ST	5144038	6286 77 5		318	ISSRGU	Black/ GUM	5428152	6290 17 8		326
ISS140100FEL	/ AI / EL	5477020	6289 05 3		329	ISSRHS45EL	/ AI / EL	5428145	6290 09 1		334
ISS140100FRW	Pure white/ AI	5477419	6289 05 0		329	ISSRHS45RW	Pure white/ AI	5428138	6290 09 0		334
ISS140100REL	/ AI / EL	5477044	6289 07 3		329	ISSRM45EL	/ AI / EL	5428107	6290 08 7		325
ISS140100RRW	Pure white/ AI	5477433	6289 07 0		324	ISSRM45FEL	/ AI / EL	5428084	6290 08 3		326
ISS140110EL	/ AI / EL	5160908	6288 96 3		324	ISSRM45FRW	Pure white/ AI	5428077	6290 08 2		326
ISS140110RW	Pure white/ AI	5160861	6288 96 0		325	ISSRM45RW	Pure white/ AI	5428091	6290 08 6		325
ISS140220EL	/ AI / EL	5160977	6288 97 3		322	ISSSF	Chrome black/ ST	5161981	6290 18 0		331
ISS140220RW	Pure white/ AI	5160960	6288 97 0		322	ISST70140BEL	/ AI / EL	5161219	6290 01 3		321
ISS70110EL	/ AI / EL	5160748	6288 94 3		323	ISST70140BRW	Pure white/ AI	5161202	6290 01 0		321
ISS70110RW	Pure white/ AI	5160731	6288 94 0		323	ISST70140EL	/ AI / EL	5160670	6288 93 3		319
ISS90110EL	/ AI / EL	5160847	6288 95 3		323	ISST70140RW	Pure white/ AI	5160663	6288 93 0		319
ISS90110RW	Pure white/ AI / EL	5160809	6288 95 0		316	ISSZ70140	Pure white/ ST / FSK	5161868	6290 16 0		319
ISS98 61OT3RW	Pure white/ ST	5143765	6286 55 0		316	ISSZ70140	Pure white/ ST / FSK	5161868	6290 16 0		321
ISS98 71OT3KRW	Pure white/ ST	5143819	6286 56 0		316	KA-ZKB AL1	Aluminium paint	5677888	6117 98 7		348
ISS98B	Pure white/ PVC	5144045	6286 80 0		317	KA-ZKB RW1	Pure white	5677864	6117 98 5		348
ISS98KF	/ ST / FS	5144052	6286 80 2		331	KA-ZKB SWGR1	Black-grey	5677871	6117 98 6		348
ISSAH	/ AI / EL	5162001	6290 18 4		324	ISSBP140110RW	Pure white/ ST / FSK	5161752	6290 13 0		307
ISSBP140110RW	Pure white/ ST / FSK	5161752	6290 13 0		324	ISSBP140110WAW	White aluminium/ ST / FSK	5161769	6290 13 4		307
ISSBP140110WAW	White aluminium/ ST / FSK	5161769	6290 13 4		322	ISSBP70110RW	Pure white/ ST / FSK	5161578	6290 10 0		307
ISSBP70110RW	Pure white/ ST / FSK	5161578	6290 10 0		322	ISSBP70110WAW	White aluminium/ ST / FSK	5161585	6290 10 4		307
ISSBP70110WAW	White aluminium/ ST / FSK	5161585	6290 10 4		319	ISSBP70140RW	Pure white/ ST / FSK	5161691	6290 12 0		307
ISSBP70140RW	Pure white/ ST / FSK	5161691	6290 12 0		320	ISSBP70140RW	Pure white/ ST / FSK	5161691	6290 12 0		307
ISSBP70140RW	Pure white/ ST / FSK	5161691	6290 12 0		321	ISSBP70140RW	Pure white/ ST / FSK	5161691	6290 12 0		307
ISSBP70140WA	White aluminium/ ST / FSK	5161707	6290 12 4		319	ISSBP70140WA	White aluminium/ ST / FSK	5161707	6290 12 4		307
ISSBP70140WA	White aluminium/ ST / FSK	5161707	6290 12 4		320	ISSBP70140WA	White aluminium/ ST / FSK	5161707	6290 12 4		307
ISSBP70140WA	White aluminium/ ST / FSK	5161707	6290 12 4		321	ISSBP90110RW	Pure white/ ST	5161639	6290 11 0		307
ISSBP90110RW	Pure white/ ST	5161639	6290 11 0		323	ISSBP90110WA	White aluminium/ ST	5161646	6290 11 4		307
ISSBP90110WA	White aluminium/ ST	5161646	6290 11 4		319	ISSBW70140RW	Pure white/ ST / FSK	5161813	6290 15 0		210
ISSBW70140RW	Pure white/ ST / FSK	5161813	6290 15 0		321	ISSBW70140RW	Pure white/ ST / FSK	5161813	6290 15 0		213
ISSGU140110	Black/ GUM	5161943	6290 17 6		324	KL80A	/ PA	5148777	6288 64 0		216
ISSGU70110	Black/ GUM	5161882	6290 17 0		322	KL80A	/ PA	5148777	6288 64 0		224
ISSGU70140	Black/ GUM	5161936	6290 17 4		319	KL80A	/ PA	5148777	6288 64 0		229
ISSGU70140	Black/ GUM	5161936	6290 17 4		320	KL80A	/ PA	5148777	6288 64 0		234
ISSGU70140	Black/ GUM	5161936	6290 17 4		321	KL80A	/ PA	5148777	6288 64 0		240
ISSGU90110	Black/ GUM	5161929	6290 17 2		323	KL80A	/ PA	5148777	6288 64 0		245
ISSHS140250EL	/ AI / EL	5161264	6290 02 3		333	KL80A	/ PA	5148777	6288 64 0		251
ISSHS140250RW	Pure white/ AI	5161226	6290 02 0		333	KL80A	/ PA	5148777	6288 64 0		256
ISSHS140500EL	Aluminium/ AI / EL	5161325	6290 03 3		333	KL80A	/ PA	5148777	6288 64 0		262
ISSHS140500RW	Pure white/ AI	5161288	6290 03 0		333	KNW1	150 Black/ POM	6014514	6178 52 7		184
ISSHS140700EL	Aluminium/ AI / EL	5161387	6290 04 3		333	KNW2	150 Black/ POM	6014637	6178 52 9		184
ISSHS140700RW	Pure white/ AI	5161349	6290 04 0		333	KS70110	/ St / FS	5680697	6279 80 2		304
ISSHS2D120EL	/ AI / EL	5143758	6286 50 3		334	KS70130	/ St / FS	5680703	6279 80 4		304
ISSHS2D120LGR	Light grey/ AI	5143741	6286 50 2		334	KS70170	/ St / FS	5680734	6279 80 6		304
ISSHS2D120RW	Pure white/ AI	5143734	6286 50 0		332	KS990GN1-0	Mint green	5404392	6288 61 7		355
ISSHS4 61OT3LGR	Light grey/ ST	5143918	6286 70 2		332	KS990GN2-0	Mint green	5404422	6288 62 0		355
ISSHS4 61OT3RW	Pure white/ ST	5143888	6286 70 0		332	KS990GN3-0	Mint green	5404453	6288 62 3		356
ISSHS4SR40	Graphite black/ ST	5144090	6286 81 0		333	KS990RT1-0	Signal red	5404408	6288 61 8		355
ISSHS6RW	/ AI / EL	5161561	6290 07 3		333	KS990RT2-0	Signal red	5404439	6288 62 1		355
ISSHSO270140EL	/ AI / EL	5161516	6290 06 3		333						
ISSHSO270140RW	Pure white/ AI	5161509	6290 06 0		333						
ISSHSO70140EL	/ AI / EL	5161455	6290 05 3		333						
ISSHSO70140RW	Pure white/ AI	5161448	6290 05 0		333						

06 LFS_Katalog_2010_Neuer_Stand / en / 22/02/2010 (LLEXP0095)

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
				/pc.						/m	
KS990RT3-0	Signal red	5404460	6288 62 4		356	LK4 15015	Stone grey 2000/ PVC	6000050	6178 00 1		164
KS990RW1-0	Pure white	5404385	6288 61 6		355	LK4 30015	Stone grey 2000/ PVC	6000173	6178 00 3		164
KS990RW2-0	Pure white	5404415	6288 61 9		355	LK4 30025	Stone grey 2000/ PVC	6000296	6178 00 5		164
KS990RW3-0	Pure white	5404446	6288 62 2		356	LK4 40025	Stone grey 2000/ PVC	6000418	6178 01 0		164
KS-B AL1	Aluminium paint	5405931	6117 63 8		345	LK4 40040	Stone grey 2000/ PVC	6000531	6178 01 2		165
KS-B RW1	Pure white	5405924	6117 63 7		345	LK4 40060	Stone grey 2000/ PVC	6000654	6178 01 4		165
KS-B SWGR1	Black-grey	5701064	6117 63 9		345	LK4 40080	Stone grey 2000/ PVC	6000777	6178 01 6		165
						LK4 40100	Stone grey 2000/ PVC	6000890	6178 01 8		165
KSB990GN1-0	Mint green	5404484	6288 62 6		356	LK4 60015	Stone grey 2000/ PVC	6001132	6178 02 6		166
KSB990GN2-0	Mint green	5404514	6288 62 9		356	LK4 60025	Stone grey 2000/ PVC	6001255	6178 02 8		166
KSB990GN3-0	Mint green	5404545	6288 63 2		356						
KSB990RT1-0	Signal red	5404491	6288 62 7	356	LK4 60040	Stone grey 2000/ PVC	6001378	6178 03 1	166		
KSB990RT2-0	Signal red	5404521	6288 63 0	356	LK4 60060	Stone grey 2000/ PVC	6001491	6178 03 3	166		
KSB990RT3-0	Signal red	5404552	6288 63 3	356							
KSB990RW1-0	Pure white	5404477	6288 62 5	356	LK4 60080	Stone grey 2000/ PVC	6001613	6178 03 5	167		
KSB990RW2-0	Pure white	5404507	6288 62 8	356	LK4 60100	Stone grey 2000/ PVC	6001736	6178 03 7	167		
KSB990RW3-0	Pure white	5404538	6288 63 1	356							
KSN1	Light grey 4,5/ PP	6014279	6178 52 0	/100 pc.	184	LK4 60120	Stone grey 2000/ PVC	6001859	6178 03 9	167	
						LK4 80025	Stone grey 2000/ PVC	6002214	6178 05 0		167
KSN2	Light grey 6/ PP	6014392	6178 52 2		184	LK4 80040	Stone grey 2000/ PVC	6002337	6178 05 2	168	
						LK4 80060	Stone grey 2000/ PVC	6002450	6178 05 4	168	
KSP170	152/ St / FS	5680741	6279 81 0		304	LK4 80080	Stone grey 2000/ PVC	6002573	6178 05 6	168	
						LK4 80100	Stone grey 2000/ PVC	6002696	6178 05 9	168	
KSR20020	Grey 28/ PE	6018598	6249 84 2		138	LK4 80120	Stone grey 2000/ PVC	6002818	6178 06 1	169	
KSR20030	Grey 34/ PE	6018710	6249 84 4		139	LK4 D 100	Stone grey 100/ PVC	6040803	6178 49 0	165	
						LK4 D 100	Stone grey 100/ PVC	6040803	6178 49 0	167	
						LK4 D 100	Stone grey 100/ PVC	6040803	6178 49 0	168	
KSR30030	Grey 34/ PE	5691020	6249 84 5		140	LK4 D 100	Stone grey 100/ PVC	6040803	6178 49 0	171	
				LK4 D 100		Stone grey 100/ PVC	6040803	6178 49 0	172		
KSR40040	Grey 47,7/ PE	6018833	6249 84 6	142	LK4 D 120	Stone grey 120/ PVC	6040926	6178 49 2	167		
KSR40060	Grey 47/ PE	6018956	6249 84 8	144	LK4 D 120	Stone grey 120/ PVC	6040926	6178 49 2	169		
					LK4 D 120	Stone grey 120/ PVC	6040926	6178 49 2	171		
KSR60060	Grey 67,7/ PE	6019076	6249 85 0	146	LK4 D 120	Stone grey 120/ PVC	6040926	6178 49 2	173		
KSR60100	Grey 104/ PE	5020325	6249 85 2	148	LK4 D 15	Stone grey 15/ PVC	6040209	6178 48 0	164		
					LK4 D 15	Stone grey 15/ PVC	6040209	6178 48 0	166		
					LK4 D 15	Stone grey 15/ PVC	6040209	6178 48 0	170		
KSR60150	Grey 154/ PE	5020387	6249 85 4	150	LK4 D 25	Stone grey 25/ PVC	6040322	6178 48 2	164		
KSR60200	Grey 204/ PE	5020394	6249 85 6	152	LK4 D 15	Stone grey 15/ PVC	6040209	6178 48 0	166		
					LK4 D 25	Stone grey 25/ PVC	6040322	6178 48 2	164		
					LK4 D 25	Stone grey 25/ PVC	6040322	6178 48 2	166		
					LK4 D 25	Stone grey 25/ PVC	6040322	6178 48 2	167		
KSR80080	Grey 84/ PE	5691037	6249 86 5	154	LK4 D 25	Stone grey 25/ PVC	6040322	6178 48 2	170		
					LK4 D 25	Stone grey 25/ PVC	6040322	6178 48 2	171		
KUPA	55/ V2A	5148913	6288 66 7		266	LK4 D 40	Stone grey 40/ PVC	6040445	6178 48 4	165	
KUPA	55/ V2A	5148913	6288 66 7		269	LK4 D 40	Stone grey 40/ PVC	6040445	6178 48 4	166	
KUPA	55/ V2A	5148913	6288 66 7		272	LK4 D 40	Stone grey 40/ PVC	6040445	6178 48 4	168	
KUPA	55/ V2A	5148913	6288 66 7		275	LK4 D 40	Stone grey 40/ PVC	6040445	6178 48 4	170	
KUPA	55/ V2A	5148913	6288 66 7		278	LK4 D 40	Stone grey 40/ PVC	6040445	6178 48 4	172	
KUPA	55/ V2A	5148913	6288 66 7		281	LK4 D 60	Stone grey 60/ PVC	6040568	6178 48 6		165
KUPA	55/ V2A	5148913	6288 66 7		284						
KUPA	55/ V2A	5148913	6288 66 7		287	LK4 D 60	Stone grey 60/ PVC	6040568	6178 48 6	166	
KUPA	55/ V2A	5148913	6288 66 7		290	LK4 D 60	Stone grey 60/ PVC	6040568	6178 48 6	168	
KUPA	55/ V2A	5148913	6288 66 7		293	LK4 D 60	Stone grey 60/ PVC	6040568	6178 48 6	170	
KUPA	55/ V2A	5148913	6288 66 7		296	LK4 D 60	Stone grey 60/ PVC	6040568	6178 48 6	172	
KUPA	55/ V2A	5148913	6288 66 7		299	LK4 D 80	Stone grey 80/ PVC	6040681	6178 48 8	165	
KVV	Pure white/ ST	5733195	9002 09 7		307	LK4 D 80	Stone grey 80/ PVC	6040681	6178 48 8	167	
						LK4 D 80	Stone grey 80/ PVC	6040681	6178 48 8	168	
						LK4 D 80	Stone grey 80/ PVC	6040681	6178 48 8	171	
						LK4 D 80	Stone grey 80/ PVC	6040681	6178 48 8	172	

Type listing

Structure of the EAN number: Country code **40**

Manufacturer code **1219** (for articles beginning with **0: 1010**)

Individual EAN-C **5647589**

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
LK4 DM 15	Stone grey 15/ PVC	5049531	6178 47 9	/m	164	LKM F80080FS	240/ ST / FS	5699026	6248 32 8	/pc.	153
						LKM F80080RW	Pure white 240/ ST / FSK	5699095	6248 42 8		153
LK4 H	Stone grey 56/ PS	6008339	6178 09 2	/100 pc.	184						
						LKM I40040FS	160/ ST / FS	6652150	6247 65 2		141
						LKM I40040RW	Pure white 160/ ST / FSK	6652211	6249 16 7		141
LK4 N 60015	Stone grey 2000/ PVC	6004850	6178 20 1	/m	170	LKM I40060FS	160/ ST / FS	6313150	6247 66 0		143
LK4 N 60025	Stone grey 2000/ PVC	6004973	6178 20 3		170	LKM I40060RW	Pure white 160/ ST / FSK	6314478	6249 17 5		143
LK4 N 60040	Stone grey 2000/ PVC	6005093	6178 20 5		170						
LK4 N 60060	Stone grey 2000/ PVC	6005215	6178 20 7		170	LKM I60060FS	180/ ST / FS	6977185	6248 12 8		145
LK4 N 60080	Stone grey 2000/ PVC	6005307	6178 20 9		171	LKM I60060RW	Pure white 180/ ST / FSK	6977123	6249 61 2		145
LK4 N 60100	Stone grey 2000/ PVC	6005406	6178 21 1		171						
LK4 N 60120	Stone grey 2000/ PVC	6005505	6178 21 3		171	LKM I60100FS	180/ ST / FS	6313396	6248 14 4		147
						LKM I60100RW	Pure white 180/ ST / FSK	6315079	6249 63 9		147
LK4 N 80025	Stone grey 2000/ PVC	6005802	6178 22 5		171	LKM I60150FS	180/ ST / FS	6313457	6248 15 2		149
LK4 N 80040	Stone grey 2000/ PVC	6005932	6178 22 7		172	LKM I60150RW	Pure white 180/ ST / FSK	6315130	6249 64 7		149
LK4 N 80060	Stone grey 2000/ PVC	6006052	6178 22 9		172						
LK4 N 80080	Stone grey 2000/ PVC	6006175	6178 23 1		172	LKM I60200FS	180/ ST / FS	6313518	6248 16 0		151
LK4 N 80100	Stone grey 2000/ PVC	6006298	6178 23 3		172	LKM I60200RW	Pure white 180/ ST / FSK	6315192	6249 65 5		151
LK4 N 80120	Stone grey 2000/ PVC	6006410	6178 23 6		173						
						LKM I80080FS	160/ ST / FS	5699040	6248 33 6		153
						LKM I80080RW	Pure white 160/ ST / FSK	5699118	6248 43 6		153
LKM A40040FS	160/ ST / FS	6652273	6247 56 3	/pc.	141						
LKM A40040RW	Pure white 160/ ST / FSK	6652334	6249 08 6		141						
LKM A40060FS	160/ ST / FS	6312733	6247 57 1		143						
LKM A40060RW	Pure white 160/ ST / FSK	6314232	6249 09 4		143	LKM K140	25 140/ ST / FS	6119295	6249 88 8	/100 pc.	155
LKM A60060FS	180/ ST / FS	6977062	6248 04 7		145	LKM K80	25 80/ ST / FS	6119233	6249 88 4		155
LKM A60060RW	Pure white 180/ ST / FSK	6503650	6249 55 8		145						
LKM A60100FS	180/ ST / FS	6312979	6248 06 3		147	LKM KF 60100	/ St / FS	5685081	6249 88 1	/pc.	148
LKM A60100RW	Pure white 180/ ST / FSK	6314898	6249 57 4		147						
LKM A60150FS	180/ ST / FS	6313037	6248 07 1		149	LKM SV20	45 19,7/ ST / G	6652754	6247 43 1		138
LKM A60150RW	Pure white 180/ ST / FSK	6314959	6249 58 2		149	LKM SV30	53,8 29,5/ ST / G	6118991	6247 43 4		139
LKM A60200FS	180/ ST / FS	6313099	6248 09 8		151	LKM SV30	53,8 29,5/ ST / G	6118991	6247 43 4		140
LKM A60200RW	Pure white 180/ ST / FSK	6315017	6249 59 0		151	LKM SV40	76 29,6/ V2A	6315253	6247 45 8		141
						LKM SV40	76 29,6/ V2A	6315253	6247 45 8		143
LKM A80080FS	200/ ST / FS	5699033	6248 33 2		153	LKM SV60	75 50/ V2A	6315314	6247 46 6		145
LKM A80080RW	Pure white 200/ ST / FSK	5699101	6248 43 2		153	LKM SV60	75 50/ V2A	6315314	6247 46 6		147
						LKM SV60	75 50/ V2A	6315314	6247 46 6		149
LKM E40040FS	40/ ST / FS	6652631	6247 88 1		141	LKM SV60	75 50/ V2A	6315314	6247 46 6		151
LKM E40040RW	Pure white 40/ ST / FSK	6652693	6249 41 8		141						
LKM E40060FS	60/ ST / FS	6575114	6247 90 3		144	LKM SV80	75 65,6/ ST	5699019	6247 47 2		153
LKM E40060RW	Pure white 60/ ST / FSK	6575350	6249 42 6		144						
LKM E60060FS	63/ ST / FS	6503353	6248 28 4		145	LKM T40040FS	280/ ST / FS	6652396	6247 72 5		141
LKM E60060RW	Pure white 63/ ST / FSK	6503292	6249 79 5		145	LKM T40040RW	Pure white 280/ ST / FSK	6652457	6249 25 6		141
LKM E60100FS	100/ ST / FS	6575596	6248 30 6		147	LKM T40060FS	300/ ST / FS	6317592	6247 73 3		143
LKM E60100RW	Pure white 100/ ST / FSK	6575770	6249 81 7		147	LKM T40060RW	Pure white 300/ ST / FSK	6318018	6249 26 4		143
LKM E60150FS	150/ ST / FS	6575657	6248 31 4		149						
LKM E60150RW	Pure white 150/ ST / FSK	6575831	6249 82 5		149	LKM T60060FS	300/ ST / FS	6503599	6248 18 7		145
						LKM T60060RW	Pure white 300/ ST / FSK	6503537	6249 67 1		145
LKM E60200FS	200/ ST / FS	6575718	6248 32 2		151	LKM T60100FS	340/ ST / FS	6317837	6248 20 9		147
LKM E60200RW	Pure white 200/ ST / FSK	6575893	6249 83 3		151	LKM T60100RW	Pure white 340/ ST / FSK	6318254	6249 70 1		147
						LKM T60150FS	390/ ST / FS	6317899	6248 21 7		149
LKM E80080FS	80/ ST / FS	5699064	6248 34 4		153	LKM T60150RW	Pure white 390/ ST / FSK	6318315	6249 72 8		149
LKM E80080RW	Pure white 80/ ST / FSK	5699156	6248 45 4		153						
						LKM T60200FS	440/ ST / FS	6317950	6248 22 5		151
LKM F40040FS	160/ ST / FS	6652518	6247 49 0		141	LKM T60200RW	Pure white 440/ ST / FSK	6318377	6249 73 6		151
LKM F40040RW	Pure white 160/ ST / FSK	6652570	6248 99 3		141						
LKM F40060FS	180/ ST / FS	6312313	6247 50 4		143	LKM T80080FS	300/ ST / FS	5699057	6248 34 0		153
LKM F40060RW	Pure white 180/ ST / FSK	6313990	6249 00 0		143	LKM T80080RW	Pure white 300/ ST / FSK	5699125	6248 45 0		153
LKM F60060FS	180/ ST / FS	6503476	6247 98 9		145						
LKM F60060RW	Pure white 180/ ST / FSK	6503414	6249 48 5		145	LKM TWS55	2000 55/ ST / FS	6644896	6249 87 6	/m	155
LKM F60100FS	220/ ST / FS	6312559	6248 00 4		147						
LKM F60100RW	Pure white 220/ ST / FSK	6314713	6249 50 7		147	LKM Z100	96 30/ ST / FS	6315499	6249 92 2	/pc.	155
LKM F60150FS	270/ ST / FS	6312610	6248 01 2		149	LKM Z150	146 30/ ST / FS	6315611	6249 96 5		155
LKM F60150RW	Pure white 270/ ST / FSK	6314775	6249 51 5		149						
LKM F60200FS	320/ ST / FS	6312672	6248 02 0		151	LKM Z200	166 30/ ST / FS	6315673	6249 98 1		155
LKM F60200RW	Pure white 320/ ST / FSK	6314836	6249 52 3		151						

06 LFS_Katalog_2010_Neuer_Stand / en / 22/02/2010 (LLEXP0095)

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
LKM Z60	46 30/ ST / FS	6315376	6249 90 6	/pc.	143	LKV D 25	Stone grey 25/ PVC	6041282	6178 50 4	/m	174
LKM Z60	46 30/ ST / FS	6315376	6249 90 6		155	LKV D 25	Stone grey 25/ PVC	6041282	6178 50 4		174
						LKV D 25	Stone grey 25/ PVC	6041282	6178 50 4		175
						LKV D 25	Stone grey 25/ PVC	6041282	6178 50 4		179
LKM20020FS	2000/ ST / FS	6651672	6246 96 6	/m	138						
LKM20020RW	Pure white 2000/ ST / FSK	6651795	6248 46 2		138	LKV D 37	Stone grey 37,5/ PVC	6041404	6178 50 6		174
						LKV D 37	Stone grey 37,5/ PVC	6041404	6178 50 6		175
LKM20030FS	2000/ ST / FS	6118878	6246 97 4		139	LKV D 37	Stone grey 37,5/ PVC	6041404	6178 50 6		176
LKM20030RW	Pure white 2000/ ST / FSK	6119059	6248 47 0		139	LKV D 37	Stone grey 37,5/ PVC	6041404	6178 50 6		177
						LKV D 37	Stone grey 37,5/ PVC	6041404	6178 50 6		179
						LKV D 37	Stone grey 37,5/ PVC	6041404	6178 50 6		180
LKM30030FS	2000/ ST / FS	5690955	6246 98 2		140						
LKM30030RW	Pure white 2000/ ST / FS	5690962	6248 48 2		140	LKV D 50	Stone grey 50/ PVC	6041527	6178 50 8		175
						LKV D 50	Stone grey 50/ PVC	6041527	6178 50 8		176
						LKV D 50	Stone grey 50/ PVC	6041527	6178 50 8		177
LKM40040FS	2000/ ST / FS	6651733	6246 99 0		141	LKV D 50	Stone grey 50/ PVC	6041527	6178 50 8		179
LKM40040RW	Pure white 2000/ ST / FSK	6651856	6248 49 7		141	LKV D 50	Stone grey 50/ PVC	6041527	6178 50 8		180
LKM40060FS	2000/ ST / FS	6311897	6247 01 6		143	LKV D 75	Stone grey 75/ PVC	6041640	6178 51 0		175
LKM40060RW	Pure white 2000/ ST / FSK	6313570	6248 51 9		143	LKV D 75	Stone grey 75/ PVC	6041640	6178 51 0		176
						LKV D 75	Stone grey 75/ PVC	6041640	6178 51 0		177
LKM60060FS	2000/ ST / FS	6977369	6247 09 1		145	LKV D 75	Stone grey 75/ PVC	6041640	6178 51 0		179
LKM60060RW	Pure white 2000/ ST / FSK	6977307	6248 60 8		145	LKV D 75	Stone grey 75/ PVC	6041640	6178 51 0		181
LKM60100FS	2000/ ST / FS	6312139	6247 11 3		147					/100 pc.	
LKM60100RW	Pure white 2000/ ST / FSK	6313815	6248 62 4		147	LKV H	Stone grey 56/ PS	6011285	6178 34 9		184
										/m	
LKM60150CRW	Pure white 2000/ ST / FSK	6313877	6248 64 0		149						
LKM60150FS	2000/ ST / FS	6312191	6247 14 8		149	LKV H 50037	Light grey 2000/ PPO	6016266	6178 61 2		182
						LKV H 50050	Light grey 2000/ PPO	6016389	6178 61 4		182
LKM60200FS	2000/ ST / FS	6312252	6247 16 4		151	LKV H 50075	Light grey 2000/ PPO	6016501	6178 61 6		182
LKM60200RW	Pure white 2000/ ST / FSK	6313938	6248 66 7		151						
						LKV H 75037	Light grey 2000/ PPO	6016747	6178 62 2		182
LKM80080FS	2000/ ST / FS	5691006	6247 19 4		153	LKV H 75050	Light grey 2000/ PPO	6016860	6178 62 4		182
LKM80080RW	Pure white 2000/ ST / FS	5691013	6248 69 4		153	LKV H 75075	Light grey 2000/ PPO	6016983	6178 62 6		182
						LKV H 75100	Light grey 2000/ PPO	6017102	6178 62 8		182
						LKV H 75125	Light grey 2000/ PPO	6017225	6178 63 0		183
										/100 pc.	
LKV 100100	Stone grey 2000/ PVC	6011162	6178 34 1		178						
LKV 10037	Stone grey 2000/ PVC	6010806	6178 33 4		177	LKV H H	Light grey 56/ PS	6017829	6178 65 0		184
										/m	
LKV 10050	Stone grey 2000/ PVC	6010929	6178 33 6		177	LKV N 100100	Stone grey 2000/ PVC	6015184	6178 44 1		181
LKV 10075	Stone grey 2000/ PVC	6011049	6178 33 8		177	LKV N 10037	Stone grey 2000/ PVC	6013913	6178 43 5		180
						LKV N 10050	Stone grey 2000/ PVC	6014033	6178 43 7		180
LKV 25025	Stone grey 2000/ PVC	6009411	6178 30 2		174	LKV N 10075	Stone grey 2000/ PVC	6014156	6178 43 9		181
LKV 37025	Stone grey 2000/ PVC	6009534	6178 30 5		174	LKV N 75025	Stone grey 2000/ PVC	6013197	6178 42 0		179
LKV 37037	Stone grey 2000/ PVC	6009657	6178 30 7		174	LKV N 75037	Stone grey 2000/ PVC	6013319	6178 42 2		179
						LKV N 75050	Stone grey 2000/ PVC	6013432	6178 42 4		179
LKV 50025	Stone grey 2000/ PVC	6009732	6178 31 0		174	LKV N 75075	Stone grey 2000/ PVC	6013555	6178 42 6		179
LKV 50037	Stone grey 2000/ PVC	6009831	6178 31 2		175	LKV N 75100	Stone grey 2000/ PVC	6013678	6178 42 8		180
						LKV N 75125	Stone grey 2000/ PVC	6013791	6178 43 0		180
LKV 50050	Stone grey 2000/ PVC	6009930	6178 31 4		175					/pc.	
LKV 50075	Stone grey 2000/ PVC	6010073	6178 31 6		175	MVKG70130	110/ St / FS	5680765	6279 82 0		305
						MVKG70170	150/ St / FS	5680796	6279 82 2		305
LKV 75025	Stone grey 2000/ PVC	6010196	6178 32 0		175	MVKG70210	190/ St / FS	5680802	6279 82 4		305
LKV 75037	Stone grey 2000/ PVC	6010318	6178 32 2		176	MVKG90130	110/ St / FS	5680819	6279 82 6		305
LKV 75050	Stone grey 2000/ PVC	6010400	6178 32 4		176	MVKG90170	150/ St / FS	5680826	6279 82 8		305
LKV 75075	Stone grey 2000/ PVC	6010509	6178 32 6		176	MVKG90210	190/ St / FS	5680857	6279 83 0		305
LKV 75100	Stone grey 2000/ PVC	6010608	6178 32 8		176	MVKV70130	/ St / FS	5680864	6279 83 2		306
LKV 75125	Stone grey 2000/ PVC	6010707	6178 33 0		177	MVKV70170	/ St / FS	5680871	6279 83 4		306
						MVKV70210	/ St / FS	5680888	6279 83 6		306
LKV D 100	Stone grey 100/ PVC	6041763	6178 51 2		176						
LKV D 100	Stone grey 100/ PVC	6041763	6178 51 2		178	MVKV90130	/ St / FS	5680895	6279 83 8		306
LKV D 100	Stone grey 100/ PVC	6041763	6178 51 2		180						
LKV D 100	Stone grey 100/ PVC	6041763	6178 51 2		181	MVKV90170	/ St / FS	5680901	6279 84 0		306
						MVKV90210	/ St / FS	5680918	6279 84 2		306
LKV D 125	Stone grey 125/ PVC	6041886	6178 51 4		177						
LKV D 125	Stone grey 125/ PVC	6041886	6178 51 4		180						
LKV D 25	Stone grey 25/ PVC	6041282	6178 50 4		174						

Type listing

Structure of the EAN number: Country code **40**

Manufacturer code **1219** (for articles beginning with **0: 1010**)

Individual EAN-C **5647589**

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
OK-K 45	/ V2A	6176236	6116 11 6	/pc.	188	PVV N2 500	500	5297253	6288 08 4	/pc.	306
OK-K 45	/ V2A	6176236	6116 11 6		191	PVV N2 525	525	5297260	6288 08 6		306
						PVV N2 550	550	5146988	6288 04 6		306
				/m		PVV N2 575	575	5146995	6288 04 8		306
OT3V GEKA50EL	/ AI / EL	5157625	6287 16 3		291						
OT3V GEKA50EL	/ AI / EL	5157625	6287 16 3		294	PVV N2 600	600	5147008	6288 05 0		306
OT3V GEKA50RW	Pure white/ AI	5157618	6287 16 0		291	PVV N2 625	625	5147039	6288 05 2		306
OT3V GEKA50RW	Pure white/ AI	5157618	6287 16 0		294	PVV N2 650	650	5147046	6288 05 4		306
OT3V GEKA80EL	/ AI / EL	5145196	6287 17 3		266	PVV N2 675	675	5147053	6288 05 6		306
OT3V GEKA80EL	/ AI / EL	5145196	6287 17 3		269						
OT3V GEKA80EL	/ AI / EL	5145196	6287 17 3		272	PVV N2 700	700	5147060	6288 05 8		306
OT3V GEKA80EL	/ AI / EL	5145196	6287 17 3		275	PVV N2 725	725	5147091	6288 06 0		306
OT3V GEKA80EL	/ AI / EL	5145196	6287 17 3		278	PVV N2 750	750	5147107	6288 06 2		306
OT3V GEKA80EL	/ AI / EL	5145196	6287 17 3		281	PVV N2 775	775	5297277	6288 08 8		306
OT3V GEKA80EL	/ AI / EL	5145196	6287 17 3		284						
OT3V GEKA80EL	/ AI / EL	5145196	6287 17 3		287	PVV N2 800	800	5297284	6288 09 0		306
OT3V GEKA80EL	/ AI / EL	5145196	6287 17 3		290	PVV N2 825	825	5297291	6288 09 2		306
OT3V GEKA80EL	/ AI / EL	5145196	6287 17 3		293	PVV N2 850	850	5147114	6288 06 4		306
OT3V GEKA80EL	/ AI / EL	5145196	6287 17 3		296	PVV N2 875	875	5147121	6288 06 6		306
OT3V GEKA80EL	/ AI / EL	5145196	6287 17 3		299						
OT3V GEKA80RW	Pure white/ AI	5145189	6287 17 0		266	PVV N2375	375	5297215	6288 07 6		306
OT3V GEKA80RW	Pure white/ AI	5145189	6287 17 0		269						
OT3V GEKA80RW	Pure white/ AI	5145189	6287 17 0		272						
OT3V GEKA80RW	Pure white/ AI	5145189	6287 17 0		275	RK-C5SF UTP1	Grey	5402466	6117 96 0		351
OT3V GEKA80RW	Pure white/ AI	5145189	6287 17 0		278	RK-C5SF UTP3	Grey	5402473	6117 96 2		351
OT3V GEKA80RW	Pure white/ AI	5145189	6287 17 0		281	RK-C5SF UTP5	Grey	5402480	6117 96 4		351
OT3V GEKA80RW	Pure white/ AI	5145189	6287 17 0		284						
OT3V GEKA80RW	Pure white/ AI	5145189	6287 17 0		287	RK-C6S FTP1	Grey	5402527	6117 96 6		351
OT3V GEKA80RW	Pure white/ AI	5145189	6287 17 0		290	RK-C6S FTP3	Grey	5402534	6117 96 8		351
OT3V GEKA80RW	Pure white/ AI	5145189	6287 17 0		293	RK-C6S FTP5	Grey	5402541	6117 97 0		351
OT3V GEKA80RW	Pure white/ AI	5145189	6287 17 0		296						
OT3V GEKA80RW	Pure white/ AI	5145189	6287 17 0		299						
				/pc.		RK-E1117GR	Stone grey 175/ PVC	6543137	6156 22 3		126
						RK-E1117LGR	Light grey 175/ PVC	6543076	6156 23 1		126
PAD-LQ6 AL1	Aluminium paint	5406549	6119 99 9		348						
PAD-LQ6 RW1	Pure white	5406532	6119 99 8		348	RK-K1117	120 166/ St / FS	6543199	6156 20 7		126
PAD-LQ6 SWGR1	Black-grey	5701507	6119 99 7		348						
						RKV3V		5149088	6288 70 0		221
						RKV3V		5149088	6288 70 0		226
PV N3 100H	100	5147176	6288 10 4		305	RKV3V		5149088	6288 70 0		231
						RKV3V		5149088	6288 70 0		237
PV N3 125H	125	5147183	6288 10 6		305	RKV3V		5149088	6288 70 0		242
						RKV3V		5149088	6288 70 0		248
PV N3 150H	150	5147213	6288 10 8		305	RKV3V		5149088	6288 70 0		253
						RKV3V		5149088	6288 70 0		259
PV N3 175H	175	5147220	6288 11 0		305						
						RS-BS1 AL1	Aluminium paint	5276005	6117 65 5		345
PV N3 200H	200	5147237	6288 11 2		305						
						RS-BS1 RW1	Pure white	5275992	6117 65 4		345
PV N3 225H	225	5147244	6288 11 4		305						
						RS-BS1 SWGR1	Black-grey	5701132	6117 65 3		345
PV N3 250H	250	5147275	6288 11 6		305						
						RT-BS1 AL1	Aluminium paint	5405955	6117 65 8		345
PV N3 275H	275	5147282	6288 11 8		305						
						RT-BS1 RW1	Pure white	5405948	6117 65 7		345
PV N3 300H	300	5147299	6288 12 0		305						
						RT-BS1 SWGR1	Black-grey	5701149	6117 65 6		345
PV N3 50H	50	5147152	6288 10 0		305						
						S990-AF1 AL	Aluminium paint/ pc	5405726	6107 00 8		353
PV N3 75H	75	5147169	6288 10 2		305						
						S990-AF1 RW	Pure white/ PC	5120957	6107 00 2		353
PVV N2 100	100	5146865	6288 03 0		306						
PVV N2 125	125	5146872	6288 03 2		306	S990-AF2 AL	Aluminium paint/ pc	5405740	6107 10 8		353
PVV N2 150	150	5146889	6288 03 4		306						
PVV N2 175	175	5146919	6288 03 6		306	S990-AF2 RW	Pure white/ PC	5121084	6107 10 2		353
PVV N2 200	200	5146926	6288 03 8		306						
PVV N2 225	225	5146933	6288 04 0		306	S990-AF3 AL	Aluminium paint/ pc	5405764	6107 20 8		354
PVV N2 275	275	5146940	6288 04 2		306						
						S990-AF3 RW	Pure white/ PC	5121244	6107 20 2		354
PVV N2 300	300	5297185	6288 07 0		306						
PVV N2 325	325	5297192	6288 07 2		306						
PVV N2 350	350	5297208	6288 07 4		306						
						S990-AFB1 AL	Aluminium paint/ pc	5405733	6107 05 8		354
PVV N2 400	400	5297222	6288 07 8		306						
PVV N2 425	425	5297239	6288 08 0		306	S990-AFB1 RW	Pure white/ PC	5121022	6107 05 2		354
PVV N2 450	450	5297246	6288 08 2		306						
PVV N2 475	475	5146971	6288 04 4		306						

06 LFS_Katalog_2010_Neuer_Stand / en / 22/02/2010 (LLEExport_00995)

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
S990-AFB2 AL	Aluminium paint/ pc	5405757	6107 15 8	/pc.	354	SKL-DS DBR	Sepia brown/ PVC	6157211	6199 42 5	/pc.	159
S990-AFB2 RW	Pure white/ PC	5121183	6107 15 2		354	SKL-DS DBR	Sepia brown/ PVC	6157211	6199 42 5		161
S990-AFB3 AL	Aluminium paint/ pc	5405771	6107 25 8		354	SKL-DS DBU	Beech/ PVC	6157570	6199 42 7		159
S990-AFB3 RW	Pure white/ PC	5121305	6107 25 2		354	SKL-DS DBU	Beech/ PVC	6157570	6199 42 7		161
S990-AR1 AL	Aluminium paint/ PC	5273288	6107 07 8		354	SKL-DS DCW	Cream/ PVC	6157099	6199 42 3		159
S990-AR1 RW	Pure white/ PC	5273240	6107 07 2		354	SKL-DS DCW	Cream/ PVC	6157099	6199 42 3		161
S990-AR2 AL	Aluminium paint/ PC	5273356	6107 17 8		354	SKL-DS DRW	Pure white/ PVC	6157037	6199 42 1		159
S990-AR2 RW	Pure white/ PC	5273349	6107 17 2		354	SKL-DS DRW	Pure white/ PVC	6157037	6199 42 1		161
S990-AR3 AL	Aluminium paint/ PC	5273424	6107 27 8		354	SKL-EL50DBR	Sepia brown/ PVC	6153435	6199 15 4		158
S990-AR3 RW	Pure white/ PC	5273417	6107 27 2		354	SKL-EL50DBU	Beech/ PVC	6153558	6199 15 6		158
S990-AR80 1 AL	Aluminium paint/ PC	5273479	6107 37 8		355	SKL-EL50DCW	Cream/ PVC	6153374	6199 15 2		158
S990-AR80 1 RW	Pure white/ PC	5273462	6107 37 2		355	SKL-EL50DRW	Pure white/ PVC	6153497	6199 15 0		158
SAISSF	/ St / VZ	5459279	6290 19 8		326	SKL-EL70DBR	Sepia brown/ PVC	6155958	6199 25 5		160
SAISSF	/ St / VZ	5459279	6290 19 8		328	SKL-EL70DBU	Beech/ PVC	6156016	6199 25 7		160
SAISSF	/ St / VZ	5459279	6290 19 8		330	SKL-EL70DCW	Cream/ PVC	6155897	6199 25 3		160
SE-B AL1	Aluminium paint	5405894	6117 61 6		345	SKL-EL70DRW	Pure white/ PVC	6155835	6199 25 1		160
SE-B RW1	Pure white	5405887	6117 61 5		345	SKL-ER50DBR	Sepia brown/ PVC	6153732	6199 16 7		158
SE-B SWGR1	Black-grey	5700999	6117 61 4		345	SKL-ER50DBU	Beech/ PVC	6153794	6199 16 9		158
SFISSFRW	Pure white/ St	5459231	6290 19 6		326	SKL-ER50DCW	Cream/ PVC	6153671	6199 16 5		158
SFISSFRW	Pure white/ St	5459231	6290 19 6		328	SKL-ER50DRW	Pure white/ PVC	6153619	6199 16 3		158
SFISSFRW	Pure white/ St	5459231	6290 19 6		330	SKL-ER70DBR	Sepia brown/ PVC	6156313	6199 26 6		160
SFISSFWAL	White aluminium/ St	5459248	6290 19 7		326	SKL-ER70DBU	Beech/ PVC	6156375	6199 26 8		160
SFISSFWAL	White aluminium/ St	5459248	6290 19 7		328	SKL-ER70DCW	Cream/ PVC	6156139	6199 26 4		160
SFISSFWAL	White aluminium/ St	5459248	6290 19 7		330	SKL-ER70DRW	Pure white/ PVC	6156078	6199 26 2		160
SG2545	/ ST	6628278	6028 41 1		85	SKL-I50DBR	Sepia brown/ PVC	6099993	6199 12 6		158
SK2545	/ ST	6628216	6028 40 3		85	SKL-I50DBU	Beech/ PVC	6100057	6199 12 8		158
SKL-45 DBR	Sepia brown/ PVC	6158898	6199 46 5		159	SKL-I50DCW	Cream/ PVC	6096268	6199 12 4		158
SKL-45 DBR	Sepia brown/ PVC	6158898	6199 46 5		161	SKL-I50DRW	Pure white/ PVC	6096503	6199 12 2		158
SKL-45 DBU	Beech/ PVC	6158959	6199 46 7		159	SKL-I70DBR	Sepia brown/ PVC	6154456	6199 22 7		160
SKL-45 DBU	Beech/ PVC	6158959	6199 46 7		161	SKL-I70DBU	Beech/ PVC	6154517	6199 22 9		160
SKL-45 DCW	Cream/ PVC	6158836	6199 46 3		159	SKL-I70DCW	Cream/ PVC	6154395	6199 22 5		160
SKL-45 DCW	Cream/ PVC	6158836	6199 46 3		161	SKL-I70DRW	Pure white/ PVC	6154333	6199 22 3		160
SKL-45 DRW	Pure white/ PVC	6158775	6199 46 1		159	SKL-R DBR	Sepia brown/ PVC	6156856	6199 40 6		159
SKL-45 DRW	Pure white/ PVC	6158775	6199 46 1		161	SKL-R DBR	Sepia brown/ PVC	6156856	6199 40 6		161
SKL-50DBR	Sepia brown 2000/ PVC	6096381	6199 10 7	/m	158	SKL-R DBU	Beech/ PVC	6156979	6199 40 8		159
SKL-50DBU	Beech 2000/ PVC	6096442	6199 10 9		158	SKL-R DBU	Beech/ PVC	6156979	6199 40 8		161
SKL-50DCW	Cream 2000/ PVC	6096206	6199 10 5		158	SKL-R DCW	Cream/ PVC	6156733	6199 40 4		159
SKL-50DRW	Pure white 2000/ PVC	6096329	6199 10 3		158	SKL-R DCW	Cream/ PVC	6156733	6199 40 4		161
SKL-70DBR	Sepia brown 2000/ PVC	6154210	6199 20 6		160	SKL-R DRW	Pure white/ PVC	6156795	6199 40 2		159
SKL-70DBU	Beech 2000/ PVC	6154272	6199 20 8		160	SKL-R DRW	Pure white/ PVC	6156795	6199 40 2		161
SKL-70DCW	Cream 2000/ PVC	6154159	6199 20 4		160	SKL-SA50DBR	Sepia brown/ PVC	6153978	6199 18 4		158
SKL-70DRW	Pure white 2000/ PVC	6154098	6199 20 2		160	SKL-SA50DBU	Beech/ PVC	6154036	6199 18 6		158
SKL-A50DBR	Sepia brown/ PVC	6153251	6199 13 7	/pc.	158	SKL-SA50DCW	Cream/ PVC	6153916	6199 18 2		158
SKL-A50DBU	Beech/ PVC	6153312	6199 13 9		158	SKL-SA50DRW	Pure white/ PVC	6153855	6199 18 0		158
SKL-A50DCW	Cream/ PVC	6153190	6199 13 5		158	SKL-SA70DBR	Sepia brown/ PVC	6156610	6199 28 5		160
SKL-A50DRW	Pure white/ PVC	6119615	6199 13 3		158	SKL-SA70DBU	Beech/ PVC	6156672	6199 28 7		160
SKL-A70DBR	Sepia brown/ PVC	6154692	6199 23 6		160	SKL-SA70DCW	Cream/ PVC	6156498	6199 28 3		160
SKL-A70DBU	Beech/ PVC	6155774	6199 23 8		160	SKL-SA70DRW	Pure white/ PVC	6156559	6199 28 1		160
SKL-A70DCW	Cream/ PVC	6154630	6199 23 4		160	SKL-Z DBR	Sepia brown/ PVC	6158652	6199 44 6		159
SKL-A70DRW	Pure white/ PVC	6154579	6199 23 2		160	SKL-Z DBR	Sepia brown/ PVC	6158652	6199 44 6		161
SKS-D0 AL1	Aluminium paint/ PC	6212774	6117 00 9		160	SKL-Z DBU	Beech/ PVC	6158713	6199 44 8		159
SKS-D0 AL2	Aluminium paint/ PC	6212835	6117 02 0		160	SKL-Z DBU	Beech/ PVC	6158713	6199 44 8		161
SKS-D0 AL3	Aluminium paint/ PC	6213078	6117 03 1		160	SKL-Z DCW	Cream/ PVC	6158294	6199 44 4		159
SKS-D0 MZGN1	Mint green/ PC	6458530	6117 00 5		160	SKL-Z DCW	Cream/ PVC	6158294	6199 44 4		161
						SKL-Z DRW	Pure white/ PVC	6157938	6199 44 2		159
						SKL-Z DRW	Pure white/ PVC	6157938	6199 44 2		161
						SKS-CH0 RW1	Pure white/ PC	5008866	6117 20 0		342
						SKS-D0 AL1	Aluminium paint/ PC	6212774	6117 00 9		338
						SKS-D0 AL2	Aluminium paint/ PC	6212835	6117 02 0		338
						SKS-D0 AL3	Aluminium paint/ PC	6213078	6117 03 1		339
						SKS-D0 MZGN1	Mint green/ PC	6458530	6117 00 5		338

Type listing

Structure of the EAN number: Country code **40**

Manufacturer code **1219** (for articles beginning with **0: 1010**)

Individual EAN-C **5647589**

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
SKS-D0 MZGN2	Mint green/ PC	6458837	6117 01 6	/pc.	338	SKS-F0 SWGR1	Black-grey/ PC	5700944	6117 10 9	/pc.	339
SKS-D0 MZGN3	Mint green/ PC	6458950	6117 02 7		339	SKS-F0 SWGR2	Black-grey/ PC	5433552	6117 11 8		340
SKS-D0 ROR1	Orange/ PC	6458356	6117 00 3		338	SKS-F0 SWGR3	Black-grey/ PC	5433569	6117 13 0		340
SKS-D0 ROR2	Orange/ PC	6458653	6117 01 4		338						
SKS-D0 ROR3	Orange/ PC	6645077	6117 02 5		339						
SKS-D0 RW1	Pure white/ PC	6458295	6117 00 1		338	SKS-F3 AL1	Aluminium paint/ PC	6213856	6117 14 8		340
SKS-D0 RW2	Pure white/ PC	6518531	6117 01 2		338	SKS-F3 AL2	Aluminium paint/ PC	6213917	6117 15 9		340
SKS-D0 RW3	Pure white/ PC	6458899	6117 02 3		339	SKS-F3 AL3	Aluminium paint/ PC	6213979	6117 17 0		340
SKS-D0 SRO1	Signal red/ PC	6458592	6117 00 7		338	SKS-F3 MZGN1	Mint green/ PC	6287291	6117 14 4		340
SKS-D0 SRO2	Signal red/ PC	6471072	6117 01 8		338	SKS-F3 MZGN2	Mint green/ PC	6637218	6117 15 5		340
SKS-D0 SRO3	Signal red/ PC	6597376	6117 02 9		339	SKS-F3 MZGN3	Mint green/ PC	6461356	6117 16 6		340
SKS-D0 SWGR1	Black-grey/ PC	5700883	6117 00 8		338	SKS-F3 ROR1	Orange/ PC	6189854	6117 14 2		340
SKS-D0 SWGR2	Black-grey/ PC	5648956	6117 01 9		338	SKS-F3 ROR2	Orange/ PC	6538690	6117 15 3		340
SKS-D0 SWGR3	Black-grey/ PC	5700890	6117 03 0		339	SKS-F3 ROR3	Orange/ PC	6461233	6117 16 4		340
						SKS-F3 RW1	Pure white/ PC	6189793	6117 14 0		340
						SKS-F3 RW2	Pure white/ PC	6460632	6117 15 1		340
						SKS-F3 RW3	Pure white/ PC	6461110	6117 16 2		340
SKS-D3 AL1	Aluminium paint/ PC	6213139	6117 04 9		339	SKS-F3 SRO1	Signal red/ PC	6287536	6117 14 6		340
SKS-D3 AL2	Aluminium paint/ PC	6213191	6117 06 0		339	SKS-F3 SRO2	Signal red/ PC	6461059	6117 15 7		340
SKS-D3 AL3	Aluminium paint/ PC	6213436	6117 07 1		339	SKS-F3 SRO3	Signal red/ PC	6461530	6117 16 8		340
SKS-D3 MZGN1	Mint green/ PC	6459131	6117 04 5		339	SKS-F3 SWGR1	Black-grey/ PC	5700968	6117 14 7		340
SKS-D3 MZGN2	Mint green/ PC	6459674	6117 05 6		339	SKS-F3 SWGR2	Black-grey/ PC	5700975	6117 15 8		340
SKS-D3 MZGN3	Mint green/ PC	6459971	6117 06 7		339	SKS-F3 SWGR3	Black-grey/ PC	5700982	6117 16 9		340
SKS-D3 ROR1	Orange/ PC	6459070	6117 04 3		339	SKS-FC0 AL1	Aluminium paint/ PC	5364191	6106 67 9		341
SKS-D3 ROR2	Orange/ PC	6459612	6117 05 4		339	SKS-FC0 AL2	Aluminium paint/ PC	5364269	6106 68 9		341
SKS-D3 ROR3	Orange/ PC	6459858	6117 06 5		339	SKS-FC0 AL3	Aluminium paint/ PC	5364375	6106 69 9		341
SKS-D3 RW1	Pure white/ PC	6459018	6117 04 1		339	SKS-FC0 MZGN1	Mint green/ PC	5364177	6106 67 5		341
SKS-D3 RW2	Pure white/ PC	6459551	6117 05 2		339	SKS-FC0 MZGN2	Mint green/ PC	5364245	6106 68 5		341
SKS-D3 RW3	Pure white/ PC	6459797	6117 06 3		339	SKS-FC0 MZGN3	Mint green/ PC	5364320	6106 69 5		341
						SKS-FC0 ROR1	Orange/ PC	5364146	6106 67 3		341
SKS-D3 SRO1	Signal red/ PC	6459377	6117 04 7		339	SKS-FC0 ROR2	Orange/ PC	5364238	6106 68 3		341
SKS-D3 SRO2	Signal red/ PC	6459735	6117 05 8		339	SKS-FC0 ROR3	Orange/ PC	5364313	6106 69 3		341
SKS-D3 SRO3	Signal red/ PC	6460038	6117 06 9		339	SKS-FC0 RW1	Pure white/ PC	5364139	6106 67 1		341
						SKS-FC0 RW2	Pure white/ PC	5364207	6106 68 1		341
SKS-D3 SWGR1	Black-grey/ PC	5700906	6117 04 8		339	SKS-FC0 RW3	Pure white/ PC	5364306	6106 69 1		341
SKS-D3 SWGR2	Black-grey/ PC	5700913	6117 05 9		339	SKS-FC0 SRO1	Signal red/ PC	5364184	6106 67 7		341
SKS-D3 SWGR3	Black-grey/ PC	5700920	6117 07 0		339	SKS-FC0 SRO2	Signal red/ PC	5364252	6106 68 7		341
						SKS-FC0 SRO3	Signal red/ PC	5364368	6106 69 7		341
SKS-DK0 RW1	Pure white/ PC	5462231	6117 20 2		342						
SKS-DKE0 RW1	Pure white/ PC	5616016	6117 20 3		342	SKS-FC3 AL1	Aluminium paint/ PC	5364443	6106 70 9		341
						SKS-FC3 AL2	Aluminium paint/ PC	5364535	6106 71 9		341
SKS-DS3 AL2	Aluminium paint/ PC	5437987	6117 08 2		343	SKS-FC3 AL3	Aluminium paint/ PC	5364603	6106 72 9		342
SKS-DS3 AL3	Aluminium paint/ PC	5670919	6119 86 0		343	SKS-FC3 MZGN1	Mint green/ PC	5364429	6106 70 5		341
SKS-DS3 MZGN2	Mint green/ PC	5437949	6117 07 8		343	SKS-FC3 MZGN2	Mint green/ PC	5364498	6106 71 5		341
SKS-DS3 MZGN3	Mint green/ PC	5670889	6119 85 4		343	SKS-FC3 MZGN3	Mint green/ PC	5364566	6106 72 5		342
SKS-DS3 ROR2	Orange/ PC	5437932	6117 07 6		343	SKS-FC3 ROR1	Orange/ PC	5364412	6106 70 3		341
SKS-DS3 ROR3	Orange/ PC	5670872	6119 85 2		343	SKS-FC3 ROR2	Orange/ PC	5364481	6106 71 3		341
SKS-DS3 RW2	Pure white/ PC	5437925	6117 07 4		343	SKS-FC3 ROR3	Orange/ PC	5364559	6106 72 3		342
SKS-DS3 RW3	Pure white/ PC	5670865	6119 85 0		343	SKS-FC3 RW1	Pure white/ PC	5364382	6106 70 1		341
SKS-DS3 SRO2	Signal red/ PC	5437970	6117 08 0		343	SKS-FC3 RW2	Pure white/ PC	5364474	6106 71 1		341
SKS-DS3 SRO3	Signal red/ PC	5670896	6119 85 6		343	SKS-FC3 RW3	Pure white/ PC	5364542	6106 72 1		342
SKS-DS3 SWGR2	Black-grey/ PC	5700937	6117 08 1		343	SKS-FC3 SRO1	Signal red/ PC	5364436	6106 70 7		341
SKS-DS3 SWGR3	Black-grey/ PC	5670902	6119 85 8		343	SKS-FC3 SRO2	Signal red/ PC	5364504	6106 71 7		341
						SKS-FC3 SRO3	Signal red/ PC	5364597	6106 72 7		342
SKS-F0 AL1	Aluminium paint/ PC	6213498	6117 11 0		339	SKS-FS3 AL2	Aluminium paint/ PC	5670995	6119 87 8		343
SKS-F0 AL2	Aluminium paint/ PC	6213559	6117 11 9		340	SKS-FS3 AL3	Aluminium paint/ PC	5671084	6119 89 0		343
SKS-F0 AL3	Aluminium paint/ PC	6213795	6117 13 1		340	SKS-FS3 MZGN2	Mint green/ PC	5670964	6119 87 2		343
						SKS-FS3 MZGN3	Mint green/ PC	5671022	6119 88 4		343
SKS-F0 MZGN1	Mint green/ PC	6460212	6117 10 6		339	SKS-FS3 ROR2	Orange/ PC	5670957	6119 87 0		343
SKS-F0 MZGN2	Mint green/ PC	6188956	6117 11 5		340	SKS-FS3 ROR3	Orange/ PC	5671015	6119 88 2		343
SKS-F0 MZGN3	Mint green/ PC	6189373	6117 12 7		340	SKS-FS3 RW2	Pure white/ PC	5670926	6119 86 8		343
						SKS-FS3 RW3	Pure white/ PC	5671008	6119 88 0		343
SKS-F0 ROR1	Orange/ PC	6460151	6117 10 4		339	SKS-FS3 SRO2	Signal red/ PC	5670971	6119 87 4		343
SKS-F0 ROR2	Orange/ PC	6460458	6117 11 3		340	SKS-FS3 SRO3	Signal red/ PC	5671039	6119 88 6		343
SKS-F0 ROR3	Orange/ PC	6189311	6117 12 5		340	SKS-FS3 SWGR2	Black-grey/ PC	5670988	6119 87 6		343
SKS-F0 RW1	Pure white/ PC	6460090	6117 10 2		339	SKS-FS3 SWGR3	Black-grey/ PC	5671046	6119 88 8		343
SKS-F0 RW2	Pure white/ PC	6460335	6117 11 1		340						
SKS-F0 RW3	Pure white/ PC	6189076	6117 12 3		340	SP3	/ St / FS	5680680	6279 80 0		305
SKS-F0 SRO1	Signal red/ PC	6460274	6117 10 8		339						
SKS-F0 SRO2	Signal red/ PC	6189014	6117 11 7		340	STA-SKS S1 SW	Black	5438090	6117 19 2		343
SKS-F0 SRO3	Signal red/ PC	6189618	6117 12 9		340						

06 LFS_Katalog_2010_Neuer_Stand / en / 22/02/2010 (LLEExport_00995)

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
STA-SKS S1 W	White	5483571	6117 19 3	/pc.	343	WDK HA100130CW	Cream 170/ PVC	6107650	6161 15 4	/pc.	118
STA-SKS SU1 SW	Black	5670933	6117 19 6		344	WDK HA100130GR	Stone grey 170/ PVC	6027798	6024 58 0		118
STA-SKS SU1 W	White	5670940	6117 19 7		344	WDK HA100130LGR	Light grey 170/ PVC	6676996	6182 74 7		118
						WDK HA100130RW	Pure white 170/ PVC	5042600	6192 42 4		118
TA-B AL0.5	Aluminium paint	5276050	6117 67 1		344	WDK HA10020CW	Cream 30/ PVC	6099979	6153 29 1		86
						WDK HA10020RW	Pure white 30/ PVC	6492015	6154 41 7		86
TA-B AL1	Aluminium paint	5623816	6117 67 4		344	WDK HA100230CW	Cream 170/ PVC	6501854	6161 17 0		120
						WDK HA100230GR	Stone grey 170/ PVC	6501915	6024 68 8		120
TA-B RW0.5	Pure white	5276043	6117 67 0		344	WDK HA100230LGR	Light grey 170/ PVC	6501793	6182 76 3		120
						WDK HA100230RW	Pure white 170/ PVC	5042693	6192 42 8		120
TA-B RW1	Pure white	5623809	6117 67 3		344	WDK HA10030CW	Cream 30/ PVC	6804498	6153 30 5		88
						WDK HA10030RW	Pure white 30/ PVC	6491537	6154 42 5		88
TA-B SWGR0.5	Black-grey	5701156	6117 66 8		344	WDK HA15030CW	Cream 38,5/ PVC	6579198	6160 61 1		91
TA-B SWGR1	Black-grey	5701323	6117 66 9		344	WDK HA15030GR	Stone grey 38,5/ PVC	6579136	6158 35 8		91
						WDK HA15030RW	Pure white 38,5/ PVC	6795253	6192 14 9		91
						WDK HA15040CW	Cream 42/ PVC	6579372	6160 63 8		93
TAE-6F AL1	Aluminium paint	6215959	6117 43 0		347	WDK HA15040GR	Stone grey 42/ PVC	6579310	6158 36 6		93
						WDK HA15040RW	Pure white 42/ PVC	6494712	6192 15 7		93
TAE-6F RW1	Pure white	6215713	6117 42 8		347	WDK HA20020CW	Cream 38,5/ PVC	6579013	6160 60 3		95
						WDK HA20020GR	Stone grey 38,5/ PVC	6578955	6158 33 1		95
						WDK HA20020LGR	Light grey 38,5/ PVC	6675197	6182 40 2		95
TW BR-A	Light grey/ PVC	6192670	6023 08 5		189	WDK HA20020RW	Pure white 38,5/ PVC	6795314	6192 16 5		95
TW BR-A	Light grey/ PVC	6192670	6023 08 5		192	WDK HA20050CW	Cream 45/ PVC	6507856	6153 37 2		97
TW BR-A	Light grey/ PVC	6192670	6023 08 5		195	WDK HA20050RW	Pure white 45/ PVC	6493210	6154 46 8		97
TW BR-A	Light grey/ PVC	6192670	6023 08 5		202						
					205	WDK HA25025CW	Cream 50/ PVC	6579556	6160 64 6		99
						WDK HA25025GR	Stone grey 50/ PVC	6579495	6158 37 4		99
TW BR-F	Light grey/ PVC	6192731	6023 08 9		188	WDK HA25025LGR	Light grey 50/ PVC	6675258	6182 44 5		99
TW BR-F	Light grey/ PVC	6192731	6023 08 9		192	WDK HA25025RW	Pure white 50/ PVC	6504855	6192 17 3		99
TW BR-F	Light grey/ PVC	6192731	6023 08 9		194	WDK HA25040CW	Cream 52/ PVC	6579730	6160 65 4		100
TW BR-F	Light grey/ PVC	6192731	6023 08 9		201	WDK HA25040GR	Stone grey 52/ PVC	6579679	6158 38 2		100
					204	WDK HA25040RW	Pure white 52/ PVC	6795376	6192 18 1		100
TW BR-I	Light grey/ PVC	6192618	6023 08 1		189	WDK HA30030CW	Cream 57/ PVC	6580095	6160 67 0		102
TW BR-I	Light grey/ PVC	6192618	6023 08 1		192	WDK HA30030GR	Stone grey 57/ PVC	6580033	6158 40 4		102
TW BR-I	Light grey/ PVC	6192618	6023 08 1		195	WDK HA30030LGR	Light grey 57/ PVC	6675319	6182 48 8		102
TW BR-I	Light grey/ PVC	6192618	6023 08 1		201	WDK HA30030RW	Pure white 57/ PVC	6795437	6192 21 1		102
					204	WDK HA30045CW	Cream 57/ PVC	6641598	6160 68 9		103
						WDK HA30045GR	Stone grey 57/ PVC	6641536	6158 42 0		103
						WDK HA30045LGR	Light grey 57/ PVC	6675371	6182 49 6		103
TW ISS120	2000/ ST / FS	5149521	6288 83 0	/m	318	WDK HA30045RW	Pure white 57/ PVC	6497171	6192 23 8		103
						WDK HA40040CW	Cream 66/ PVC	6580279	6160 69 7		104
TWVRW	Pure white/ Al	5162162	6290 24 0	/pc.	322	WDK HA40040GR	Stone grey 66/ PVC	6580217	6158 41 2		104
TWVRW	Pure white/ Al	5162162	6290 24 0		324	WDK HA40040LGR	Light grey 66/ PVC	6675432	6182 52 6		104
						WDK HA40040RW	Pure white 66/ PVC	6795499	6192 24 6		104
						WDK HA40060CW	Cream 100/ PVC	6106813	6160 70 0		105
						WDK HA40060GR	Stone grey 100/ PVC	6019212	6021 69 7		105
ULS	Grey 3/ PVC	6015061	6178 54 8	/100 pc.	185	WDK HA40060LGR	Light grey 100/ PVC	6675494	6182 53 4		105
						WDK HA40060RW	Pure white 100/ PVC	6795550	6192 25 4		105
						WDK HA40090CW	Cream 100/ PVC	6106875	6160 71 9		106
						WDK HA40090GR	Stone grey 100/ PVC	6017171	6021 09 3		106
ÜSM-A		5080886	5092 45 1	/pc.	346	WDK HA40090LGR	Light grey 100/ PVC	6675555	6182 54 2		106
						WDK HA40090RW	Pure white 100/ PVC	6795611	6192 26 2		106
ÜSS 45-A-ALU	Aluminium paint	5006220	6117 46 7		346	WDK HA40110CW	Cream 100/ PVC	6106936	6160 72 7		107
ÜSS 45-A-RW	Pure white	6117611	6117 46 5		346	WDK HA40110GR	Stone grey 100/ PVC	6019274	6021 70 0		107
						WDK HA40110LGR	Light grey 100/ PVC	6675616	6182 55 0		107
ÜSS 45-O-ALU	Aluminium paint	5006213	6117 47 5		346	WDK HA40110RW	Pure white 100/ PVC	6220878	6192 27 0		107
ÜSS 45-O-RW	Pure white	6117673	6117 47 3		346						
VB-SKS S	Black	5438113	6117 19 8		344	WDK HA60060CW	Cream 100/ PVC	6107179	6160 90 5		108
						WDK HA60060GR	Stone grey 100/ PVC	6020539	6022 07 3		108
						WDK HA60060LGR	Light grey 100/ PVC	6676392	6182 59 3		108
						WDK HA60060RW	Pure white 100/ PVC	6360970	6192 31 9		108
						WDK HA60090CW	Cream 100/ PVC	6107230	6160 91 3		109
						WDK HA60090GR	Stone grey 100/ PVC	6020713	6022 11 1		109
WAG140100RRW	Pure white/ St	5648963	6290 29 0		327	WDK HA60090LGR	Light grey 100/ PVC	6676453	6182 60 7		109
WAG140100RRW	Pure white/ St	5648963	6290 29 0		329	WDK HA60090RW	Pure white 100/ PVC	6801558	6192 32 7		109
						WDK HA60110CW	Cream 100/ PVC	6107292	6160 92 1		111
WAG14022ARW	Pure white/ Al	5162179	6290 25 0		325	WDK HA60110GR	Stone grey 100/ PVC	6020836	6022 14 6		111
						WDK HA60110LGR	Light grey 100/ PVC	6676514	6182 61 5		111
WAG70140O	Pure white/ St	5418566	6290 26 0		320	WDK HA60110RW	Pure white 100/ PVC	6354559	6192 33 5		111
WAG70140TRW	Pure white/ ST	5162063	6290 20 0		320	WDK HA60130CW	Cream 100/ PVC	6107353	6160 94 8		112
WAG70140TRW	Pure white/ ST	5162063	6290 20 0		322	WDK HA60130GR	Stone grey 100/ PVC	6020959	6022 16 2		112
						WDK HA60130LGR	Light grey 100/ PVC	6676576	6182 62 3		112
WAG90110ARW	Pure white/ Al	5162117	6290 22 0		323	WDK HA60130RW	Pure white 100/ PVC	6353057	6192 34 3		112
						WDK HA60150CW	Cream 100/ PVC	6638352	6160 97 2		113
WAGRM45	Pure white/ St	5428169	6290 26 4		326	WDK HA60150GR	Stone grey 100/ PVC	6638291	6024 52 1		113

Type listing

Structure of the EAN number: Country code **40**

Manufacturer code **1219** (for articles beginning with **0: 1010**)

Individual EAN-C **5647589**

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
				/pc.						/pc.	
WDK HA60150LGR	Light grey 100/ PVC	6676637	6182 63 1		113	WDK HE40040RW	Pure white 40/ PVC	6712939	6193 21 8		104
WDK HA60150RW	Pure white 100/ PVC	6492312	6192 35 1		113	WDK HE40060CW	Cream 60/ PVC	6109517	6162 60 6		105
WDK HA60170CW	Cream 100/ PVC	6107414	6160 95 6		114	WDK HE40060GR	Stone grey 60/ PVC	6018857	6021 49 2		105
WDK HA60170GR	Stone grey 100/ PVC	6021079	6022 18 9		114	WDK HE40060LGR	Light grey 60/ PVC	6674350	6183 73 5		105
WDK HA60170LGR	Light grey 100/ PVC	6676699	6182 65 8		114	WDK HE40060RW	Pure white 60/ PVC	6797479	6193 22 6		105
WDK HA60170RW	Pure white 100/ PVC	6351855	6192 37 8		114	WDK HE40090CW	Cream 90/ PVC	6109579	6162 61 4		106
WDK HA60210CW	Cream 100/ PVC	6107476	6160 96 4		115	WDK HE40090GR	Stone grey 90/ PVC	6018918	6021 50 6		106
WDK HA60210GR	Stone grey 100/ PVC	6021130	6022 19 7		115	WDK HE40090LGR	Light grey 90/ PVC	6674411	6183 74 3		106
WDK HA60210LGR	Light grey 100/ PVC	6676750	6182 66 6		115	WDK HE40090RW	Pure white 90/ PVC	6797530	6193 23 4		106
WDK HA60210RW	Pure white 100/ PVC	6795673	6192 38 6		115	WDK HE40110CW	Cream 110/ PVC	6109630	6162 62 2		107
WDK HA60230CW	Cream 100/ PVC	6639731	6160 98 0		110	WDK HE40110GR	Stone grey 110/ PVC	6018970	6021 51 4		107
WDK HA60230GR	Stone grey 100/ PVC	6639670	6024 54 8		110	WDK HE40110LGR	Light grey 110/ PVC	6674473	6183 75 1		107
WDK HA60230LGR	Light grey 100/ PVC	6676811	6182 67 4		110	WDK HE40110RW	Pure white 110/ PVC	6974788	6193 24 2		107
WDK HA60230RW	Pure white 100/ PVC	6492374	6192 39 4		110						
						WDK HE60060CW	Cream 60/ PVC	6109876	6162 80 0		108
WDK HA80170CW	Cream 150/ PVC	6107537	6161 10 3		119	WDK HE60060GR	Stone grey 60/ PVC	6022694	6022 49 9		108
WDK HA80170GR	Stone grey 150/ PVC	6027675	6024 56 4		119	WDK HE60060LGR	Light grey 60/ PVC	6678372	6183 80 8		108
WDK HA80170LGR	Light grey 150/ PVC	6676873	6182 71 2		119	WDK HE60060RW	Pure white 60/ PVC	6712991	6193 28 5		108
WDK HA80170RW	Pure white 150/ PVC	5042464	6192 41 6		119	WDK HE60090CW	Cream 90/ PVC	6109937	6162 81 9		109
WDK HA80210CW	Cream 150/ PVC	6107599	6161 11 1		117	WDK HE60090GR	Stone grey 90/ PVC	6022755	6022 50 2		109
WDK HA80210GR	Stone grey 150/ PVC	6027736	6024 57 2		117	WDK HE60090LGR	Light grey 90/ PVC	6678433	6183 81 6		109
WDK HA80210LGR	Light grey 150/ PVC	6676934	6182 72 0		117	WDK HE60090RW	Pure white 90/ PVC	6492794	6193 29 3		109
WDK HA80210RW	Pure white 150/ PVC	5042532	6192 42 0		117	WDK HE60110CW	Cream 110/ PVC	6109999	6162 82 7		111
						WDK HE60110GR	Stone grey 110/ PVC	6022991	6022 58 8		111
WDK HE100130CW	Cream 150/ PVC	6110353	6163 04 1		118	WDK HE60110LGR	Light grey 110/ PVC	6678495	6183 82 4		111
WDK HE100130GR	Stone grey 150/ PVC	6028337	6024 88 2		118	WDK HE60110RW	Pure white 110/ PVC	6713059	6193 30 7		111
WDK HE100130LGR	Light grey 150/ PVC	6678976	6183 95 6		118	WDK HE60130CW	Cream 130/ PVC	6110056	6162 83 5		112
WDK HE100130RW	Pure white 150/ PVC	5042655	6193 39 5		118	WDK HE60130GR	Stone grey 130/ PVC	6022816	6022 52 9		112
WDK HE10020CW	Cream 22/ PVC	6100392	6153 59 3		87	WDK HE60130LGR	Light grey 130/ PVC	6678566	6183 83 2		112
WDK HE10020RW	Pure white 22/ PVC	6491834	6154 51 4		87	WDK HE60130RW	Pure white 130/ PVC	6713110	6193 31 5		112
WDK HE100230CRW	Cream 230/ PVC	6651436	6163 07 6		120	WDK HE60150CW	Cream 150/ PVC	6637997	6162 87 8		113
WDK HE100230GR	Stone grey 230/ PVC	6651375	6024 90 4		120	WDK HE60150GR	Stone grey 150/ PVC	6637935	6024 82 3		113
WDK HE100230LGR	Light grey 230/ PVC	6679034	6183 98 0		120	WDK HE60150LGR	Light grey 150/ PVC	6678617	6183 84 0		113
WDK HE100230RW	Pure white 230/ PVC	5042723	6193 39 9		120	WDK HE60150RW	Pure white 150/ PVC	6492855	6193 32 3		113
WDK HE10030CW	Cream 32/ PVC	6100453	6153 60 7		89	WDK HE60170CW	Cream 170/ PVC	6110117	6162 84 3		114
WDK HE10030GR	Cream 17/ PVC	6583454	6162 50 9		95	WDK HE60170GR	Stone grey 170/ PVC	6022878	6022 54 5		114
WDK HE10030LGR	Stone grey 17/ PVC	6434473	6158 70 6		95	WDK HE60170LGR	Light grey 170/ PVC	6678679	6183 85 9		114
WDK HE10030RW	Pure white 32/ PVC	6491353	6154 52 2		89	WDK HE60170RW	Pure white 170/ PVC	6713172	6193 33 1		114
						WDK HE60210CW	Cream 210/ PVC	6110179	6162 85 1		116
WDK HE15015CW	Cream 15/ PVC	6642670	6162 49 5		90	WDK HE60210GR	Stone grey 210/ PVC	6022939	6022 56 1		116
WDK HE15015GR	Stone grey 15/ PVC	6642618	6158 69 2		90	WDK HE60210LGR	Light grey 210/ PVC	6678730	6183 86 7		116
WDK HE15015LGR	Light grey 15/ PVC	6673933	6183 60 3		90	WDK HE60210RW	Pure white 210/ PVC	6797592	6193 35 8		116
WDK HE15015RW	Pure white 15/ PVC	6797172	6193 09 9		90	WDK HE60230CW	Cream 230/ PVC	6639373	6162 88 6		110
WDK HE15030CW	Cream 30/ PVC	6683577	6162 51 7		92	WDK HE60230GR	Stone grey 230/ PVC	6639311	6024 81 7		110
WDK HE15030GR	Stone grey 30/ PVC	6434534	6158 71 4		92	WDK HE60230LGR	Light grey 230/ PVC	6678792	6183 87 5		110
WDK HE15030RW	Pure white 30/ PVC	6797233	6193 10 2		92	WDK HE60230RW	Pure white 230/ PVC	6492916	6193 36 6		110
WDK HE15040CW	Cream 40/ PVC	6583690	6162 52 5		94						
WDK HE15040GR	Stone grey 40/ PVC	6434596	6158 72 2		94	WDK HE80170CW	Cream 150/ PVC	6110230	6163 00 9		119
WDK HE15040RW	Pure white 40/ PVC	6975624	6193 11 0		94	WDK HE80170GR	Stone grey 150/ PVC	6028214	6024 85 8		119
						WDK HE80170LGR	Light grey 150/ PVC	6678853	6183 91 3		119
WDK HE20020LGR	Light grey 17/ PVC	6673995	6183 61 1		95	WDK HE80170RW	Pure white 150/ PVC	5042518	6193 38 7		119
WDK HE20020RW	Pure white 17/ PVC	6797295	6193 12 9		95	WDK HE80210CW	Cream 150/ PVC	6110292	6163 01 7		117
WDK HE20035CW	Cream 35/ PVC	6643219	6162 48 7		96	WDK HE80210GR	Stone grey 150/ PVC	6028276	6024 87 4		117
WDK HE20035GR	Stone grey 35/ PVC	6643158	6158 78 1		96	WDK HE80210LGR	Light grey 150/ PVC	6678914	6183 92 1		117
WDK HE20035LGR	Light grey 35/ PVC	6674053	6183 65 4		96	WDK HE80210RW	Pure white 150/ PVC	5042587	6193 39 1		117
WDK HE20035RW	Pure white 35/ PVC	6976768	6193 13 7		96						
WDK HE20050CW	Cream 50/ PVC	6507672	6153 67 4		98	WDK HF100130CW	Cream 166/ PVC	6108558	6161 75 8		118
WDK HE20050RW	Pure white 50/ PVC	6493395	6154 55 7		98	WDK HF100130GR	Stone grey 166/ PVC	6027972	6024 63 7		118
						WDK HF100130LGR	Light grey 166/ PVC	6678310	6183 55 7		118
WDK HE25025CW	Cream 25/ PVC	6583812	6162 53 3		99	WDK HF100130RW	Pure white 166/ PVC	5042648	6193 02 9		118
WDK HE25025GR	Stone grey 25/ PVC	6434657	6158 73 0		99	WDK HF10020CW	Cream 40/ PVC	6099139	6152 60 0		86
WDK HE25025LGR	Light grey 25/ PVC	6674114	6183 66 2		99	WDK HF10020RW	Pure white 40/ PVC	6491896	6154 21 2		86
WDK HE25025RW	Pure white 25/ PVC	6504794	6193 14 5		99	WDK HF100230CW	Cream 266/ PVC	6501250	6161 77 4		120
WDK HE25040CW	Cream 40/ PVC	6583935	6162 54 1		101	WDK HF100230GR	Stone grey 266/ PVC	6501311	6024 65 3		120
WDK HE25040GR	Stone grey 40/ PVC	6434718	6158 74 9		101	WDK HF100230LGR	Light grey 266/ PVC	6222131	6183 57 3		120
WDK HE25040RW	Pure white 40/ PVC	6797356	6193 15 3		101	WDK HF100230RW	Pure white 266/ PVC	5042716	6193 03 3		120
						WDK HF10030CW	Cream 50/ PVC	6099191	6152 61 9		88
WDK HE30030CW	Cream 30/ PVC	6584239	6162 57 6		102	WDK HF10030RW	Pure white 50/ PVC	6491414	6154 22 0		88
WDK HE30030GR	Stone grey 30/ PVC	6584178	6158 76 5		102						
WDK HE30030LGR	Light grey 30/ PVC	6674176	6183 69 7		102	WDK HF15030CW	Cream 53/ PVC	6582075	6161 21 9		91
WDK HE30030RW	Pure white 30/ PVC	6797417	6193 18 8		102	WDK HF15030GR	Stone grey 53/ PVC	6582013	6158 59 5		91
WDK HE30045CW	Cream 45/ PVC	6641239	6162 58 4		103	WDK HF15030RW	Pure white 53/ PVC	6796694	6192 75 0		91
WDK HE30045GR	Stone grey 45/ PVC	6434831	6158 80 3		103	WDK HF15040CW	Cream 63/ PVC	6582259	6161 22 7		93
WDK HE30045LGR	Light grey 45/ PVC	6674237	6183 70 0		103	WDK HF15040GR	Stone grey 63/ PVC	6582198	6158 60 9		93
WDK HE30045RW	Pure white 45/ PVC	6497355	6193 19 6		103	WDK HF15040RW	Pure white 63/ PVC	6494835	6192 76 9		93
WDK HE40040CW	Cream 40/ PVC	6583331	6162 59 2		104	WDK HF20020CW	Cream 38/ PVC	6581894	6161 20 0		95
WDK HE40040GR	Stone grey 40/ PVC	6583270	6158 77 3		104	WDK HF20020GR	Stone grey 38/ PVC	6581832	6158 58 7		95
WDK HE40040LGR	Light grey 40/ PVC	6674299	6183 72 7		104	WDK HF20020LGR	Light grey 38/ PVC	6673391	6183 21 2		95

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
				/pc.						/pc.	
WDK HF20020RW	Pure white 38/ PVC	6796755	6192 77 7		95	WDK HI100130CW	Cream 170/ PVC	6106752	6160 52 2		118
WDK HF20050CW	Cream 73/ PVC	6507733	6152 68 6		97	WDK HI100130GR	Stone grey 170/ PVC	6027613	6024 48 3		118
WDK HF20050RW	Pure white 73/ PVC	6493333	6154 25 5		97	WDK HI100130LGR	Light grey 170/ PVC	6676330	6182 34 8		118
						WDK HI100130RW	Pure white 170/ PVC	5042594	6192 11 4		118
WDK HF25025CW	Cream 48/ PVC	6582433	6161 23 5		99	WDK HI10020CW	Cream 30/ PVC	6099559	6153 00 3		86
WDK HF25025GR	Stone grey 48/ PVC	6582372	6158 61 7		99	WDK HI10020RW	Pure white 30/ PVC	6492077	6154 32 8		86
WDK HF25025LGR	Light grey 48/ PVC	6673452	6183 25 5		99	WDK HI100230CW	Cream 170/ PVC	6502035	6160 54 9		120
WDK HF25025RW	Pure white 48/ PVC	6504916	6192 78 5		99	WDK HI100230GR	Stone grey 170/ PVC	6502097	6024 50 5		120
WDK HF25040CW	Cream 63/ PVC	6582617	6161 24 3		100	WDK HI100230LGR	Light grey 170/ PVC	6501977	6182 36 4		120
WDK HF25040GR	Stone grey 63/ PVC	6582556	6158 62 5		100	WDK HI100230RW	Pure white 170/ PVC	5042662	6192 11 8		120
WDK HF25040RW	Pure white 63/ PVC	6796816	6192 79 3		100	WDK HI10030CW	Cream 30/ PVC	6099610	6153 01 1		88
						WDK HI10030RW	Pure white 30/ PVC	6491599	6154 33 6		88
WDK HF30030CW	Cream 53/ PVC	6582976	6161 27 8		102						
WDK HF30030GR	Stone grey 53/ PVC	6582914	6158 64 1		102	WDK HI15030CW	Cream 38,5/ PVC	6577811	6160 02 6		91
WDK HF30030LGR	Light grey 53/ PVC	6673513	6183 29 8		102	WDK HI15030GR	Stone grey 38,5/ PVC	6577750	6158 23 4		91
WDK HF30030RW	Pure white 53/ PVC	6796878	6192 81 5		102	WDK HI15030RW	Pure white 38,5/ PVC	6794652	6191 84 3		91
WDK HF30045CW	Cream 68/ PVC	6641772	6161 28 6		103	WDK HI15040CW	Cream 42/ PVC	6577996	6160 03 4		93
WDK HF30045GR	Stone grey 68/ PVC	6641710	6158 67 6		103	WDK HI15040GR	Stone grey 42/ PVC	6577934	6158 24 2		93
WDK HF30045LGR	Light grey 68/ PVC	6673575	6183 30 1		103	WDK HI15040RW	Pure white 42/ PVC	6494651	6191 85 1		93
WDK HF30045RW	Pure white 68/ PVC	6497294	6192 82 3		103						
						WDK HI20020CW	Cream 38,5/ PVC	6577637	6160 01 8		95
WDK HF40040CW	Cream 63/ PVC	6583157	6161 29 4		104	WDK HI20020GR	Stone grey 38,5/ PVC	6577576	6158 22 6		95
WDK HF40040GR	Stone grey 63/ PVC	6583096	6158 66 8		104	WDK HI20020LGR	Light grey 38,5/ PVC	6674657	6182 01 1		95
WDK HF40040LGR	Light grey 63/ PVC	6673636	6183 33 6		104	WDK HI20020RW	Pure white 38,5/ PVC	6794713	6191 87 8		95
WDK HF40040RW	Pure white 63/ PVC	6796939	6192 83 1		104	WDK HI20050CW	Cream 45/ PVC	6507917	6153 08 9		97
WDK HF40060CW	Cream 101/ PVC	6107711	6161 30 8		105	WDK HI20050RW	Pure white 45/ PVC	6974542	6154 36 0		97
WDK HF40060GR	Stone grey 101/ PVC	6019458	6021 73 5		105						
WDK HF40060LGR	Light grey 101/ PVC	6673698	6183 34 4		105	WDK HI25025CW	Cream 50/ PVC	6578177	6160 04 2		99
WDK HF40060RW	Pure white 101/ PVC	6796991	6192 85 8		105	WDK HI25025GR	Stone grey 50/ PVC	6578115	6158 25 0		99
WDK HF40090CW	Cream 129/ PVC	6107773	6161 31 6		106	WDK HI25025LGR	Light grey 50/ PVC	6674718	6182 06 2		99
WDK HF40090GR	Stone grey 129/ PVC	6018253	6021 33 6		106	WDK HI25025RW	Pure white 50/ PVC	6502219	6191 88 6		99
WDK HF40090LGR	Light grey 129/ PVC	6673759	6183 35 2		106	WDK HI25040CW	Cream 50/ PVC	6578351	6160 05 0		100
WDK HF40090RW	Pure white 129/ PVC	6797059	6192 86 6		106	WDK HI25040GR	Stone grey 50/ PVC	6578290	6158 26 9		100
WDK HF40110CW	Cream 110/ PVC	6107834	6161 32 4		107	WDK HI25040RW	Pure white 50/ PVC	6794775	6191 89 4		100
WDK HF40110GR	Stone grey 110/ PVC	6019519	6021 74 3		107						
WDK HF40110LGR	Light grey 110/ PVC	6673810	6183 36 0		107	WDK HI30030CW	Cream 52/ PVC	6578719	6160 07 7		102
WDK HF40110RW	Pure white 110/ PVC	6496990	6192 87 4		107	WDK HI30030GR	Stone grey 52/ PVC	6578658	6158 28 5		102
						WDK HI30030LGR	Light grey 52/ PVC	6674770	6182 09 7		102
WDK HF60060CW	Cream 101/ PVC	6108077	6161 50 2		108	WDK HI30030RW	Pure white 52/ PVC	6794836	6191 92 4		102
WDK HF60060GR	Stone grey 101/ PVC	6022519	6022 44 8		108	WDK HI30045CW	Cream 52/ PVC	6641413	6160 08 5		103
WDK HF60060LGR	Light grey 101/ PVC	6677719	6183 40 9		108	WDK HI30045GR	Stone grey 52/ PVC	6641352	6158 30 7		103
WDK HF60060RW	Pure white 101/ PVC	6712694	6192 91 2		108	WDK HI30045LGR	Light grey 52/ PVC	6674831	6182 10 0		103
WDK HF60090CW	Cream 129/ PVC	6108138	6161 51 0		109	WDK HI30045RW	Pure white 52/ PVC	6976829	6191 93 2		103
WDK HF60090GR	Stone grey 129/ PVC	6021796	6022 31 6		109						
WDK HF60090LGR	Light grey 129/ PVC	6677771	6183 41 7		109	WDK HI40040CW	Cream 65/ PVC	6584598	6160 09 3		104
WDK HF60090RW	Pure white 129/ PVC	6492619	6192 92 0		109	WDK HI40040GR	Stone grey 65/ PVC	6578832	6158 29 3		104
WDK HF60110CW	Cream 149/ PVC	6108190	6161 52 9		111	WDK HI40040LGR	Light grey 65/ PVC	6674893	6182 11 9		104
WDK HF60110GR	Stone grey 149/ PVC	6021918	6022 33 2		111	WDK HI40040RW	Pure white 65/ PVC	6794898	6191 94 0		104
WDK HF60110LGR	Light grey 149/ PVC	6677832	6183 42 5		111	WDK HI40060CW	Cream 110/ PVC	6105915	6160 10 7		105
WDK HF60110RW	Pure white 149/ PVC	6712755	6192 93 9		111	WDK HI40060GR	Stone grey 110/ PVC	6019335	6021 71 9		105
WDK HF60130CW	Cream 170/ PVC	6108251	6161 53 7		112	WDK HI40060LGR	Light grey 110/ PVC	6674954	6182 12 7		105
WDK HF60130GR	Stone grey 170/ PVC	6022038	6022 35 9		112	WDK HI40060RW	Pure white 110/ PVC	6794959	6191 95 9		105
WDK HF60130LGR	Light grey 170/ PVC	6677894	6183 43 3		112	WDK HI40090CW	Cream 109/ PVC	6105977	6160 11 5		106
WDK HF60130RW	Pure white 170/ PVC	6712816	6192 94 7		112	WDK HI40090GR	Stone grey 109/ PVC	6017652	6021 19 0		106
WDK HF60150CW	Cream 190/ PVC	6638536	6161 56 1		113	WDK HI40090LGR	Light grey 109/ PVC	6675012	6182 13 5		106
WDK HF60150GR	Stone grey 190/ PVC	6638475	6024 59 9		113	WDK HI40090RW	Pure white 109/ PVC	6795017	6191 96 7		106
WDK HF60150LGR	Light grey 190/ PVC	6677955	6183 44 1		113	WDK HI40110CW	Cream 110,5/ PVC	6106035	6160 12 3		107
WDK HF60150RW	Pure white 190/ PVC	6492671	6192 95 5		113	WDK HI40110GR	Stone grey 110,5/ PVC	6019397	6021 72 7		107
WDK HF60170CW	Cream 211/ PVC	6108312	6161 54 5		114	WDK HI40110LGR	Light grey 110,5/ PVC	6675074	6182 14 3		107
WDK HF60170GR	Stone grey 211/ PVC	6022151	6022 37 5		114	WDK HI40110RW	Pure white 110,5/ PVC	6221110	6191 97 5		107
WDK HF60170LGR	Light grey 211/ PVC	6678013	6183 46 8		114						
WDK HF60170RW	Pure white 211/ PVC	6712878	6192 96 3		114	WDK HI60060CW	Cream 130/ PVC	6106271	6160 30 1		108
WDK HF60210CW	Cream 250/ PVC	6108374	6161 55 3		115	WDK HI60060GR	Stone grey 130/ PVC	6022212	6022 38 3		108
WDK HF60210GR	Stone grey 250/ PVC	6022274	6022 39 1		115	WDK HI60060LGR	Light grey 130/ PVC	6675739	6182 19 4		108
WDK HF60210LGR	Light grey 250/ PVC	6678075	6183 47 6		115	WDK HI60060RW	Pure white 130/ PVC	6362950	6192 01 7		108
WDK HF60210RW	Pure white 250/ PVC	6797110	6192 97 1		115	WDK HI60090CW	Cream 130/ PVC	6106332	6160 32 8		109
WDK HF60230CW	Cream 270/ PVC	6639915	6161 59 6		110	WDK HI60090GR	Stone grey 130/ PVC	6021253	6022 21 9		109
WDK HF60230GR	Stone grey 270/ PVC	6639854	6024 60 2		110	WDK HI60090LGR	Light grey 130/ PVC	6675791	6182 20 8		109
WDK HF60230LGR	Light grey 270/ PVC	6678136	6183 48 4		110	WDK HI60090RW	Pure white 130/ PVC	6799879	6192 02 5		109
WDK HF60230RW	Pure white 270/ PVC	6492732	6192 99 8		110	WDK HI60110CW	Cream 130/ PVC	6106394	6160 33 6		111
						WDK HI60110GR	Stone grey 130/ PVC	6021376	6022 23 5		111
WDK HF80170CW	Cream 206/ PVC	6108435	6161 70 7		119	WDK HI60110LGR	Light grey 130/ PVC	6675852	6182 21 6		111
WDK HF80170GR	Stone grey 206/ PVC	6027859	6024 61 0		119	WDK HI60110RW	Pure white 130/ PVC	6362776	6192 03 3		111
WDK HF80170LGR	Light grey 206/ PVC	6678198	6183 52 2		119	WDK HI60130CW	Cream 130/ PVC	6106455	6160 34 4		112
WDK HF80170RW	Pure white 206/ PVC	5042488	6193 02 1		119	WDK HI60130GR	Stone grey 130/ PVC	6021499	6022 25 1		112
WDK HF80210CW	Cream 247/ PVC	6108497	6161 71 5		117	WDK HI60130LGR	Light grey 130/ PVC	6675913	6182 22 4		112
WDK HF80210GR	Stone grey 247/ PVC	6027910	6024 62 9		117	WDK HI60130RW	Pure white 130/ PVC	6362479	6192 04 1		112
WDK HF80210LGR	Light grey 247/ PVC	6678259	6183 53 0		117	WDK HI60150CW	Cream 130/ PVC	6638178	6160 37 9		113
WDK HF80210RW	Pure white 247/ PVC	5042570	6193 02 5		117	WDK HI60150GR	Stone grey 130/ PVC	6638116	6024 43 2		113

Type listing

Structure of the EAN number: Country code 40

Manufacturer code 1219 (for articles beginning with 0: 1010)

Individual EAN-C 5647589

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
				/pc.						/pc.	
WDK HI60150LGR	Light grey 130/ PVC	6675975	6182 23 2		113	WDK HK80170CW	Cream 282/ PVC	6109333	6162 40 1		119
WDK HI60150RW	Pure white 130/ PVC	6800056	6192 06 8		113	WDK HK80170GR	Stone grey 282/ PVC	6028030	6024 79 3		119
WDK HI60170CW	Cream 130/ PVC	6106516	6160 35 2		114	WDK HK80170LGR	Light grey 282/ PVC	6677535	6183 12 3		119
WDK HI60170GR	Stone grey 130/ PVC	6021611	6022 28 6		114	WDK HK80170RW	Pure white 282/ PVC	5042471	6192 71 8		119
WDK HI60170LGR	Light grey 130/ PVC	6676033	6182 24 0		114	WDK HK80210CW	Cream 282/ PVC	6109395	6162 42 8		117
WDK HI60170RW	Pure white 130/ PVC	6362233	6192 07 6		114	WDK HK80210GR	Stone grey 282/ PVC	6028092	6024 80 7		117
WDK HI60210CW	Cream 130/ PVC	6106578	6160 36 0		115	WDK HK80210LGR	Light grey 282/ PVC	6677597	6183 13 1		117
WDK HI60210GR	Stone grey 130/ PVC	6021673	6022 29 4		115	WDK HK80210RW	Pure white 282/ PVC	5042549	6192 72 2		117
WDK HI60210LGR	Light grey 130/ PVC	6676095	6182 25 9		115						
WDK HI60210RW	Pure white 130/ PVC	6795079	6192 08 4		115	WDK HS10020CW	Cream 22/ PVC	6098293	6152 00 7		86
WDK HI60230CW	Cream 130/ PVC	6639557	6160 39 5		110	WDK HS10020RW	Pure white 22/ PVC	6492138	6154 02 6		86
WDK HI60230GR	Stone grey 130/ PVC	6639496	6024 44 0		110	WDK HS10030CW	Cream 32/ PVC	6098354	6152 01 5		88
WDK HI60230LGR	Light grey 130/ PVC	6676156	6182 26 7		110	WDK HS10030RW	Pure white 32/ PVC	6491650	6154 03 4		88
WDK HI60230RW	Pure white 130/ PVC	6800896	6192 09 2		110						
						WDK HS15030CW	Cream 32/ PVC	6507610	6152 03 1		91
WDK HI80170CW	Cream 150/ PVC	6106639	6160 48 4		119	WDK HS15030GR	Stone grey 32/ PVC	6507559	6158 83 8		91
WDK HI80170GR	Stone grey 150/ PVC	6027491	6024 46 7		119	WDK HS15030RW	Pure white 32/ PVC	6223695	6193 50 1		91
WDK HI80170LGR	Light grey 150/ PVC	6676217	6182 30 5		119	WDK HS15040CW	Cream 42/ PVC	6098477	6152 05 8		93
WDK HI80170RW	Pure white 150/ PVC	5042457	6192 10 6		119	WDK HS15040GR	Stone grey 42/ PVC	6507498	6158 84 6		93
WDK HI80210CW	Cream 150/ PVC	6106691	6160 49 2		117	WDK HS15040RW	Pure white 42/ PVC	6975266	6193 52 8		93
WDK HI80210GR	Stone grey 150/ PVC	6027552	6024 47 5		117						
WDK HI80210LGR	Light grey 150/ PVC	6676279	6182 31 3		117	WDK HS20050CW	Cream 53/ PVC	6507252	6152 10 4		97
WDK HI80210RW	Pure white 150/ PVC	5042525	6192 11 0		117	WDK HS20050RW	Pure white 53/ PVC	6974481	6154 06 9		97
WDK HK100130CW	Cream 282/ PVC	6109456	6162 45 2		118	WDK HS25040CW	Cream 42/ PVC	6507375	6152 08 2		100
WDK HK100130GR	Stone grey 282/ PVC	6028153	6024 81 5		118	WDK HS25040GR	Stone grey 42/ PVC	6507436	6158 88 9		100
WDK HK100130LGR	Light grey 282/ PVC	6677658	6183 16 6		118	WDK HS25040RW	Pure white 42/ PVC	6507313	6193 56 0		100
WDK HK100130RW	Pure white 282/ PVC	5042631	6192 72 6		118						
WDK HK100230CW	Cream 282/ PVC	6501618	6162 47 9		120	WDK HT10020CW	Cream 45/ PVC	6098712	6152 30 9		86
WDK HK100230GR	Stone grey 282/ PVC	6501670	6024 71 8		120	WDK HT10020RW	Pure white 45/ PVC	6491957	6154 11 5		86
WDK HK100230LGR	Light grey 282/ PVC	6501373	6183 18 2		120	WDK HT10030CW	Cream 55/ PVC	6098774	6152 31 7		88
WDK HK100230RW	Pure white 282/ PVC	5042709	6192 73 0		120	WDK HT10030RW	Pure white 55/ PVC	6491476	6154 12 3		88
WDK HK40060CW	Cream 190/ PVC	6108619	6162 00 2		105	WDK HT15030CW	Cream 73/ PVC	6580637	6161 92 8		92
WDK HK40060GR	Stone grey 190/ PVC	6025459	6023 31 2		105	WDK HT15030GR	Stone grey 73/ PVC	6580576	6158 46 3		92
WDK HK40060LGR	Light grey 190/ PVC	6673155	6182 92 5		105	WDK HT15030RW	Pure white 73/ PVC	6796212	6192 45 9		92
WDK HK40060RW	Pure white 190/ PVC	6796519	6192 55 6		105	WDK HT15040CW	Cream 83/ PVC	6580811	6161 93 6		94
WDK HK40090CW	Cream 230/ PVC	6108671	6162 01 0		106	WDK HT15040GR	Stone grey 83/ PVC	6580750	6158 47 1		94
WDK HK40090GR	Stone grey 230/ PVC	6024551	6023 14 2		106	WDK HT15040RW	Pure white 83/ PVC	6494774	6192 46 7		94
WDK HK40090LGR	Light grey 230/ PVC	6673216	6182 93 3		106						
WDK HK40090RW	Pure white 230/ PVC	6796571	6192 56 4		106	WDK HT20020CW	Cream 57/ PVC	6580453	6161 90 1		95
WDK HK40110CW	Cream 272/ PVC	6108732	6162 02 9		107	WDK HT20020GR	Stone grey 57/ PVC	6580392	6158 45 5		95
WDK HK40110GR	Stone grey 272/ PVC	6025572	6023 33 9		107	WDK HT20020LGR	Light grey 57/ PVC	6672851	6182 80 1		95
WDK HK40110LGR	Light grey 272/ PVC	6673278	6182 94 1		107	WDK HT20020RW	Pure white 57/ PVC	6796274	6192 47 5		95
WDK HK40110RW	Pure white 272/ PVC	6500833	6192 57 2		107	WDK HT20050CW	Cream 93/ PVC	6507795	6152 38 4		97
						WDK HT20050RW	Pure white 93/ PVC	6493272	6154 16 6		97
WDK HK60060CW	Cream 190/ PVC	6108978	6162 20 7		108	WDK HT25025CW	Cream 68/ PVC	6580996	6161 94 4		99
WDK HK60060GR	Stone grey 190/ PVC	6025039	6023 22 3		108	WDK HT25025GR	Stone grey 68/ PVC	6580934	6158 49 8		99
WDK HK60060LGR	Light grey 190/ PVC	6677054	6183 01 8		108	WDK HT25025LGR	Light grey 68/ PVC	6672912	6182 85 2		99
WDK HK60060RW	Pure white 190/ PVC	6351794	6192 61 0		108	WDK HT25025RW	Pure white 68/ PVC	6504978	6192 48 3		99
WDK HK60090CW	Cream 230/ PVC	6109036	6162 21 5		109	WDK HT25040CW	Cream 83/ PVC	6581177	6161 95 2		101
WDK HK60090GR	Stone grey 230/ PVC	6023837	6023 00 2		109	WDK HT25040GR	Stone grey 83/ PVC	6581115	6158 50 1		101
WDK HK60090LGR	Light grey 230/ PVC	6677115	6183 02 6		109	WDK HT25040RW	Pure white 83/ PVC	6796335	6192 49 1		101
WDK HK60090RW	Pure white 230/ PVC	6492435	6192 62 9		109						
WDK HK60110CW	Cream 272/ PVC	6109098	6162 22 3		111	WDK HT30030CW	Cream 50/ PVC	6581535	6161 97 9		102
WDK HK60110GR	Stone grey 272/ PVC	6023950	6023 02 9		111	WDK HT30030GR	Stone grey 50/ PVC	6581474	6158 53 6		102
WDK HK60110LGR	Light grey 272/ PVC	6677177	6183 03 4		111	WDK HT30030LGR	Light grey 50/ PVC	6672974	6182 88 7		102
WDK HK60110RW	Pure white 272/ PVC	6712519	6192 63 7		111	WDK HT30030RW	Pure white 50/ PVC	6796397	6192 51 3		102
WDK HK60130CW	Cream 272/ PVC	6109159	6162 23 1		112	WDK HT30045CW	Cream 88/ PVC	6641956	6161 98 7		103
WDK HK60130GR	Stone grey 272/ PVC	6024070	6023 04 5		112	WDK HT30045GR	Stone grey 88/ PVC	6641895	6158 55 2		103
WDK HK60130LGR	Light grey 272/ PVC	6677238	6183 04 2		112	WDK HT30045LGR	Light grey 88/ PVC	6673032	6182 89 5		103
WDK HK60130RW	Pure white 272/ PVC	6712571	6192 64 5		112	WDK HT30045RW	Pure white 88/ PVC	6497232	6192 52 1		103
WDK HK60150CW	Cream 291/ PVC	6638710	6162 27 4		113						
WDK HK60150GR	Stone grey 291/ PVC	6638659	6024 76 9		113	WDK HT40040CW	Cream 83/ PVC	6581719	6161 99 5		104
WDK HK60150LGR	Light grey 291/ PVC	6677290	6183 05 0		113	WDK HT40040GR	Stone grey 83/ PVC	6581658	6158 54 4		104
WDK HK60150RW	Pure white 291/ PVC	6492497	6192 65 3		113	WDK HT40040LGR	Light grey 83/ PVC	6673094	6182 91 7		104
WDK HK60170CW	Cream 291/ PVC	6109210	6162 25 8		114	WDK HT40040RW	Pure white 83/ PVC	6796458	6192 54 8		104
WDK HK60170GR	Stone grey 291/ PVC	6024193	6023 06 1		114						
WDK HK60170LGR	Light grey 291/ PVC	6677351	6183 06 9		114						
WDK HK60170RW	Pure white 291/ PVC	6712632	6192 66 1		114	WDK100130CW	Cream 2000/ PVC	6030132	6026 27 3		118
WDK HK60210CW	Cream 291/ PVC	6109272	6162 26 6		115	WDK100130GR	Stone grey 2000/ PVC	6030194	6026 28 1		118
WDK HK60210GR	Stone grey 291/ PVC	6024438	6023 12 6		115	WDK100130LGR	Light grey 2000/ PVC	6668595	6027 24 5		118
WDK HK60210LGR	Light grey 291/ PVC	6677412	6183 07 7		115	WDK100130RW	Pure white 2000/ PVC	5042297	6191 34 7		118
WDK HK60210RW	Pure white 291/ PVC	6796632	6192 68 8		115						
WDK HK60230CW	Cream 291/ PVC	6640096	6162 29 0		110	WDK10020CW	Cream 2000/ PVC	6098170	6150 75 6		86
WDK HK60230GR	Stone grey 291/ PVC	6640034	6024 77 7		110	WDK10020RW	Pure white 2000/ PVC	6492251	6150 76 4		86
WDK HK60230LGR	Light grey 291/ PVC	6677474	6183 08 5		110						
WDK HK60230RW	Pure white 291/ PVC	6492558	6192 69 6		110	WDK100230CW	Cream 2000/ PVC	6642137	6026 33 8		120
						WDK100230GR	Stone grey 2000/ PVC	6642076	6026 31 1		120

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
WDK100230LGR	Light grey 2000 / PVC	6668656	6027 25 3	/m	120	WDK60110CW	Cream 2000 / PVC	6019816	6021 84 0	/m	111
WDK100230RW	Pure white 2000 / PVC	5042303	6191 35 5		120	WDK60110GR	Stone grey 2000 / PVC	6020294	6022 01 4		111
						WDK60110LGR	Light grey 2000 / PVC	6668113	6027 12 1		111
WDK10030CW	Cream 2000 / PVC	6508037	6150 77 2		88	WDK60110RW	Pure white 2000 / PVC	6363438	6191 21 5		111
WDK10030RW	Pure white 2000 / PVC	6491773	6150 78 0		88						
WDK15015CW	Cream 2000 / PVC	6642311	6024 96 3		90	WDK60130CW	Cream 2000 / PVC	6019878	6021 85 9		112
WDK15015GR	Stone grey 2000 / PVC	6642250	6024 95 5		90	WDK60130GR	Stone grey 2000 / PVC	6020355	6022 02 2		112
WDK15015LGR	Light grey 2000 / PVC	6667338	6024 94 7		90	WDK60130LGR	Light grey 2000 / PVC	6668175	6027 14 8		112
WDK15015RW	Pure white 2000 / PVC	6794058	6191 00 2		90	WDK60130RW	Pure white 2000 / PVC	6363377	6191 22 3		112
WDK15030CW	Cream 2000 / PVC	6332830	6025 01 3		91	WDK60150CW	Cream 2000 / PVC	6637577	6021 88 3		113
WDK15030GR	Stone grey 2000 / PVC	6332779	6025 00 5		91	WDK60150GR	Stone grey 2000 / PVC	6637515	6022 03 0		113
WDK15030RW	Pure white 2000 / PVC	6794119	6191 01 0		91	WDK60150LGR	Light grey 2000 / PVC	6668236	6027 15 6		113
						WDK60150RW	Pure white 2000 / PVC	6491230	6191 23 1		113
WDK15040CW	Cream 2000 / PVC	6028634	6025 16 1		93	WDK60170CW	Cream 2000 / PVC	6019939	6021 86 7		114
WDK15040GR	Stone grey 2000 / PVC	6028511	6025 13 7		93	WDK60170GR	Stone grey 2000 / PVC	6020416	6022 04 9		114
WDK15040RW	Pure white 2000 / PVC	6494590	6191 02 9		93	WDK60170LGR	Light grey 2000 / PVC	6668298	6027 16 4		114
						WDK60170RW	Pure white 2000 / PVC	6363193	6191 25 8		114
WDK20020CW	Cream 2000 / PVC	6028573	6025 15 3		95						
WDK20020GR	Stone grey 2000 / PVC	6028399	6025 11 0		95	WDK60210CW	Cream 2000 / PVC	6019991	6021 87 5		115
WDK20020LGR	Light grey 2000 / PVC	6667390	6025 10 2		95	WDK60210GR	Stone grey 2000 / PVC	6020478	6022 06 5		115
WDK20020RW	Pure white 2000 / PVC	6794171	6191 03 7		95	WDK60210LGR	Light grey 2000 / PVC	6668359	6027 17 2		115
						WDK60210RW	Pure white 2000 / PVC	6794478	6191 26 6		115
WDK20035CW	Cream 2000 / PVC	6642854	6026 37 0		96						
WDK20035GR	Stone grey 2000 / PVC	6642793	6026 36 2		96	WDK60230CW	Cream 2000 / PVC	6638956	6021 89 1		110
WDK20035LGR	Light grey 2000 / PVC	6667451	6026 35 4		96	WDK60230GR	Stone grey 2000 / PVC	6638895	6022 05 7		110
WDK20035RW	Pure white 2000 / PVC	6496938	6191 04 5		96	WDK60230LGR	Light grey 2000 / PVC	6668410	6027 18 0		110
						WDK60230RW	Pure white 2000 / PVC	6799459	6191 27 4		110
WDK20050CW	Cream 2000 / PVC	6438433	6168 70 1		97						
WDK20050RW	Pure white 2000 / PVC	6801671	6168 73 6		97	WDK80170CW	Cream 2000 / PVC	6029778	6026 17 6		119
						WDK80170GR	Stone grey 2000 / PVC	6029839	6026 18 4		119
WDK25025CW	Cream 2000 / PVC	6030316	6026 42 7		99	WDK80170LGR	Light grey 2000 / PVC	6668472	6027 22 9		119
WDK25025GR	Stone grey 2000 / PVC	6030255	6026 41 9		99	WDK80170RW	Pure white 2000 / PVC	5042273	6191 30 4		119
WDK25025LGR	Light grey 2000 / PVC	6667512	6026 40 0		99						
WDK25025RW	Pure white 2000 / PVC	6505036	6191 05 3		99	WDK80210CW	Cream 2000 / PVC	6029952	6026 20 6		117
						WDK80210GR	Stone grey 2000 / PVC	6029891	6026 19 2		117
WDK25040CW	Cream 2000 / PVC	6030491	6026 45 1		100	WDK80210LGR	Light grey 2000 / PVC	6668533	6027 23 7		117
WDK25040GR	Stone grey 2000 / PVC	6030439	6026 44 3		100	WDK80210RW	Pure white 2000 / PVC	5042280	6191 31 2		117
WDK25040RW	Pure white 2000 / PVC	6794232	6191 06 1		100						
						WDK-H20020	Pure white 2000 / PC/ABS	5237396	6175 00 2		128
WDK30030CW	Cream 2000 / PVC	6333011	6026 82 6		102						
WDK30030GR	Stone grey 2000 / PVC	6332953	6026 81 8		102	WDK-H30045	Pure white 2000 / PC/ABS	5237402	6175 00 8		129
WDK30030LGR	Light grey 2000 / PVC	6667574	6026 79 6		102						
WDK30030RW	Pure white 2000 / PVC	6794294	6191 09 6		102	WDK-H40060	Pure white 2000 / PC/ABS	5237419	6175 01 4		130
						WDK-H40061	Pure white 2000 / PC/ABS	5237426	6175 02 0		131
WDK30045CW	Cream 2000 / PVC	6640935	6026 86 9		103						
WDK30045GR	Stone grey 2000 / PVC	6640874	6026 85 0		103	WDK-H60090	Pure white 2000 / PC/ABS	5237457	6175 02 6		132
WDK30045LGR	Light grey 2000 / PVC	6667635	6026 84 2		103						
WDK30045RW	Pure white 2000 / PVC	6497058	6191 11 8		103	WDK-H60110	Pure white 2000 / PC/ABS	5237464	6175 03 2		133
						WDK-H60150	Pure white 2000 / PC/ABS	5237471	6175 03 8		134
WDK40040CW	Cream 2000 / PVC	6028870	6025 41 2		104						
WDK40040GR	Stone grey 2000 / PVC	6028993	6025 44 7		104						
WDK40040LGR	Light grey 2000 / PVC	6667697	6027 01 6		104	WDK-HA30045	Pure white 60 / PC/ABS	5237549	6175 10 3	/pc.	129
WDK40040RW	Pure white 2000 / PVC	6363490	6191 12 6		104						
						WDK-HA40060	Pure white 85 / PC/ABS	5237556	6175 10 9		130
WDK40060CW	Cream 2000 / PVC	6016273	6020 88 7		105	WDK-HA40061	Pure white 85 / PC/ABS	5237563	6175 11 5		131
WDK40060GR	Stone grey 2000 / PVC	6029112	6025 63 3		105						
WDK40060LGR	Light grey 2000 / PVC	6667758	6027 02 4		105	WDK-HA60090	Pure white 130 / PC/ABS	5237570	6175 12 1		132
WDK40060RW	Pure white 2000 / PVC	6794355	6191 13 4		105	WDK-HA60110	Pure white 130 / PC/ABS	5237587	6175 12 7		133
						WDK-HA60150	Pure white 130 / PC/ABS	5237594	6175 13 3		134
WDK40090CW	Cream 2000 / PVC	6016334	6020 89 5		106						
WDK40090GR	Stone grey 2000 / PVC	6016877	6021 01 8		106	WDK-HE20020	Pure white 19 / PC/ABS	5237600	6175 15 0		128
WDK40090LGR	Light grey 2000 / PVC	6667819	6027 03 2		106						
WDK40090RW	Pure white 2000 / PVC	6794416	6191 14 2		106	WDK-HE30045	Pure white 45 / PC/ABS	5237631	6175 15 6		129
WDK40110CW	Cream 2000 / PVC	6016396	6020 90 9		107	WDK-HE40060	Pure white 60 / PC/ABS	5237648	6175 16 2		130
WDK40110GR	Stone grey 2000 / PVC	6016990	6021 03 4		107	WDK-HE40061	Pure white 60 / PC/ABS	5237655	6175 16 8		131
WDK40110LGR	Light grey 2000 / PVC	6667871	6027 04 0		107						
WDK40110RW	Pure white 2000 / PVC	6501199	6191 15 0		107	WDK-HE60090	Pure white 90 / PC/ABS	5237662	6175 17 4		132
						WDK-HE60110	Pure white 110 / PC/ABS	5237693	6175 18 0		133
WDK60060CW	Cream 2000 / PVC	6020171	6021 94 8		108	WDK-HE60150	Pure white 150 / PC/ABS	5237709	6175 18 6		134
WDK60060GR	Stone grey 2000 / PVC	6029174	6025 66 8		108						
WDK60060LGR	Light grey 2000 / PVC	6667994	6027 10 5		108	WDK-HF30045	Pure white 60 / PC/ABS	5237716	6175 20 4		129
WDK60060RW	Pure white 2000 / PVC	6363018	6191 19 3		108						
						WDK-HF40060	Pure white 85 / PC/ABS	5237723	6175 21 0		130
WDK60090CW	Cream 2000 / PVC	6020119	6021 91 3		109	WDK-HF40061	Pure white 85 / PC/ABS	5237730	6175 21 6		131
WDK60090GR	Stone grey 2000 / PVC	6020232	6022 00 6		109						
WDK60090LGR	Light grey 2000 / PVC	6668052	6027 11 3		109	WDK-HF60090	Pure white 120 / PC/ABS	5237747	6175 22 2		132
WDK60090RW	Pure white 2000 / PVC	6491292	6191 20 7		109	WDK-HF60110	Pure white 140 / PC/ABS	5237754	6175 22 8		133

Type listing

Structure of the EAN number: Country code **40**

Manufacturer code **1219** (for articles beginning with **0: 1010**)

Individual EAN-C **5647589**

Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page	Type	Dimensions/Colour/Div.	EAN-C.	Art. no.	Price	Page
WDK-HF60150	Pure white 180 / PC/ABS	5237778	6175 23 4	/pc.	134	ZP-80 1RW	Pure white	5406006	6258 07 3	/pc.	355
WDK-HI30045	Pure white 60 / PC/ABS	5237488	6175 05 1		129						
WDK-HI40060	Pure white 85 / PC/ABS	5237495	6175 05 7		130						
WDK-HI40061	Pure white 85 / PC/ABS	5237501	6175 06 3		131						
WDK-HI60090	Pure white 130 / PC/ABS	5237518	6175 06 9		132						
WDK-HI60110	Pure white 130 / PC/ABS	5237525	6175 07 5		133						
WDK-HI60150	Pure white 130 / PC/ABS	5237532	6175 08 1		134						
WDK-HT30045	Pure white 130 / PC/ABS	5237785	6175 25 5		129						
WDK-HT40060	Pure white 170 / PC/ABS	5237815	6175 26 1		130						
WDK-HT40061	Pure white 170 / PC/ABS	5237822	6175 26 7		131						
WDK-HT60090	Pure white 170 / PC/ABS	5237839	6175 27 3		132						
WDK-HT60110	Pure white 190 / PC/ABS	5237846	6175 27 9		133						
WDK-HT60150	Pure white 250 / PC/ABS	5237877	6175 28 5		134						
WDKM11	Pure white 2000 / PVC	6798193	6150 10 1	/m	84						
WDKM7	Pure white 2000 / PVC	6798070	6150 07 1		84						
WDKM9	Pure white 2000 / PVC	6798131	6150 09 8		84						
WDKMD12CW	Cream 2000 / PVC	6097692	6150 17 9		84						
WDKMD12RW	Pure white 2000 / PVC	6493036	6150 28 4		84						
WDKMD17CW	Cream 2000 / PVC	6097753	6150 18 7		84						
WDKMD17RW	Pure white 2000 / PVC	6492978	6150 29 2		84						
WDKMD4CW	Cream 2000 / PVC	6097579	6150 15 2		84						
WDKMD4RW	Pure white 2000 / PVC	6493159	6150 26 8		84						
WDKMD7CW	Cream 2000 / PVC	6097630	6150 16 0		84						
WDKMD7RW	Pure white 2000 / PVC	6493098	6150 27 6		84						
WDK-N10020CW	Cream 2000 / PVC	6097814	6150 40 3		86						
WDK-N10020RW	Pure white 2000 / PVC	6492190	6150 41 1		86						
WDK-N10030CW	Cream 2000 / PVC	6097876	6150 44 6		88						
WDK-N10030RW	Pure white 2000 / PVC	6491711	6150 45 4		88						
WDK-N15030CW	Cream 2000 / PVC	6507979	6150 51 9		91						
WDK-N15030RW	Pure white 2000 / PVC	6493456	6150 52 7		91						
WDK-N15040CW	Cream 2000 / PVC	6097999	6150 53 5		93						
WDK-N15040RW	Pure white 2000 / PVC	6494477	6150 54 3		93						
WDK-N20050CW	Cream 2000 / PVC	6438495	6168 72 8		97						
WDK-N20050RW	Pure white 2000 / PVC	6802159	6168 74 4		97						
WDK-N25040CW	Cream 2000 / PVC	6507191	6150 63 2		100						
WDK-N25040RW	Pure white 2000 / PVC	6975686	6150 64 0		100						
WS-B AL0.5	Aluminium paint	5275756	6117 62 8	/pc.	345						
WS-B AL1	Aluminium paint	5275862	6117 64 1		345						
WS-B RW0.5	Pure white	5275749	6117 62 7		345						
WS-B RW1	Pure white	5275824	6117 64 0		345						
WS-B SWGR0.5	Black-grey	5701033	6117 62 6		345						
WS-B SWGR1	Black-grey	5701071	6117 64 2		345						
ZL-SKS	Cream	6180196	6117 20 5		342						
ZL-SKS	Cream	6180196	6117 20 5		344						
ZP-80 1AL	Aluminium paint	5406013	6258 07 4		355						

06 LFS_Katalog_2010_Neuer_Stand / en / 22/02/2010 (LLEXP00995)

Terms and conditions of sale and delivery

of OBO BETTERMANN GmbH & Co. KG, OBO BETTERMANN Projekt und Systemtechnik GmbH and OBO Befestigungselemente GmbH, Menden.

1. All our supplies and services shall be governed exclusively by the following terms and conditions, including our additional terms and conditions for cable tray business transactions. Any terms and conditions of business and purchasing of the customer shall be valid only if we have acknowledged them in writing. Our quotations are without engagement; they are mere invitations to submit contract offers. Any and all transactions and agreements, including those entered into by our employees and agents shall only be binding upon our written confirmation or invoicing. The foregoing provision shall also apply to any modifications of the agreed formal requirements.

2. The documents and data pertaining to the quotation, such as illustrations, brochures, drawings, dimensions, loading capacity values and weight details are approximate only, unless they are expressly stipulated to be binding.

Samples are non-binding samples for inspection. Any purchase according to sample will be subject to customary deviations and deviations resulting from normal production processes. The properties of the sample shall be no guaranteed quality of the purchase object unless expressly stated otherwise in the confirmation of order. Samples must be returned to us at the latest within four weeks in perfect condition. If they are not returned within this period in proper condition, we shall be entitled to charge the purchase price for the sample in accordance with our current price list. All information on our products, in particular the illustrations, drawings, weight, dimension and performance data included in our quotations and printed matter shall be regarded as approximate average values and shall not represent any quality guarantee.

With regard to products made according to customer drawings, samples and other instructions of the customer, we will not provide any warranty nor assume any liability for the due and proper functioning of the product or for any other defects if and to the extent they are based upon the customer's specifications. The customer shall indemnify us from any third party claims, including claims for product liability as may be asserted against us for damages resulting from the products unless we have caused such damages by intent or gross negligence. The customer shall warrant that the manufacture and supply of products made in accordance with his instructions will not infringe any proprietary rights of third parties. Should any proprietary rights be asserted against us, we shall be entitled, without any legal review of the third party claims, to withdraw from the contract after hearing the customer, unless the third party withdraws the claims asserted against us under its proprietary rights within eight days by written declaration. The customer shall compensate us for any damage sustained as a result of the assertion of proprietary rights. In case of withdrawal, the work we have carried out so far shall be remunerated. Further rights under the statutory provisions shall not be affected thereby.

Any moulds, tools and design data produced by us for the execution of the order shall be our exclusive property. Unless expressly agreed otherwise, the customer shall not have any claims thereto, even if he has contributed to the costs of producing any such moulds, tools and design data.

3. The packing, shipping route and means of transportation shall be left to our discretion in the absence of any other agreements. They shall be charged at their cost price. We will take back undamaged cases, when being returned carriage paid, at 2/3 of the amount invoiced. The one-way or pool pallets used for transport shall be either exchanged upon taking delivery or returned. The smallest packing units stocked and listed may not be broken up for rationalisation reasons. In case of orders for different quantities, the nearest packing unit will be supplied.

We reserve the right to deviate from the agreed delivery quantity, in particular in the case of custom-made products, to a customary extent or in conformity with national or international standards. In case of a demand for adhering to a precise quantity, an express reference is necessary and subject to confirmation.

Master and call orders shall oblige the customer to accept the total quantity on which the master/call order is based. Where no particular call orders are specified in the contract, the total quantity of the master call order must be called within twelve months. If the customer fails to adhere to call deadlines, we shall be entitled to deliver and charge the total quantity in full after four weeks from written notice with reference to the consequences of any failure to call. Our rights arising from any default of the customer shall not be affected thereby.

4. Unless otherwise agreed, our prices are quoted ex works and do not include packing and insurance. The value added tax at the rate applicable on the date of dispatch will be added to our prices. The purchaser shall ensure the correctness of his VAT identification number, which he must notify to us immediately without being asked. He shall undertake to inform both us and the competent domestic tax authority without delay of any change in his name, address and VAT identification number.

Delivery shall be franco domicile within Germany, i.e. carriage and packing prepaid, if the net order value is in excess of € 1,200. For small orders below € 100 (net excluding value added tax), we shall invoice a lower quantity surcharge of € 10 (net) per order. Upon transfer of our supplies and services to a carrier or forwarding agent, at the latest upon their leaving our warehouse or supply plant, the risk shall pass to the recipient, even in case of deliveries free place of destination.

5. Delivery periods and delivery deadlines shall be approximate only unless we have expressly stated in writing that they are binding. Delivery periods shall commence upon receipt of our confirmation of order, but not before clarification of all execution details, ex place of delivery. The customer shall only be entitled to withdraw from the contract after having granted a reasonable extension of time. We reserve the right to make partial deliveries. Claims for damages and reimbursement of expenses - for any reason whatsoever - shall be subject to the provisions set out in article 10.

In the event of any circumstances that are beyond our control within the scope of normal operating risks and obstruct or make impracticable any delivery, we shall be entitled to suspend delivery by the duration of such obstruction plus a reasonable start-up period or to withdraw from the contract for the part not yet fulfilled. The purchaser can demand a statement from us as to whether we wish to deliver within a reasonable period or withdraw. If we fail to make such a statement, the purchaser may withdraw. Our notice to the purchaser shall be deemed to be sufficient evidence that we have been prevented from delivering.

Delivery time is extended in case of such events as labour disputes, strikes and lockouts, orders from the authorities, difficulties with the procurement of materials, spoiled work or post-processing, shutdowns and staff shortage as well as shortage of means of transport, and general occurrence of unforeseen events beyond our scope of influence, by the length of duration of these events.

6. Payments shall be made upon receipt of invoice less a 3% cash discount for payment within 10 days or net after 30 days from date of invoice. Erection work and all paid labour work must be paid within 10 days without deduction of any cash discount. In case of non-cash payments, the date of the credit note will be deemed to be the date of receipt of payment. Payments received shall always be credited first against costs, then against interest and then against the earliest liability. Cheques and bills of exchange shall only be accepted as means of payment. Any payment by bill of exchange shall be subject to a prior separate and written agreement, whereby all bill costs shall be borne by the customer and no discount can be granted. The customer shall have no right to refuse performance and no right of retention - for any legal reason whatsoever - unless we have acknowledged his claim beforehand in writing or his claim has the force of law.

The customer shall only be entitled to set off claims which have the force of law, are undisputed or acknowledged by us in writing.

7. We shall retain title to the goods supplied by us until all our claims arising from our business transactions with the customer have been satisfied - current account clause - and all bills of exchange or cheques submitted for payment by the customer have been honoured.

Any treatment or processing of goods subject to our retention of title (reserved goods) shall be carried out for us as the manufacturer in accordance with § 950 BGB (German Civil Code) without any obligation on our part. If our reserved goods are to be regarded as the main item or the main item is owned by the customer, full title to the new item shall pass to us when it is created. In other cases, we shall acquire a co-ownership interest in the new item in the proportion of the sales value of our reserved goods to the other goods used for the new item at the time of processing, intermingling, joining or mixing. The customer shall take custody of our ownership or co-ownership interest free of charge; it shall be treated as reserved goods.

Before transfer of title, our goods shall be neither pledged nor assigned as collateral without our prior consent. In addition, any third party rights or pledges shall be notified to us immediately and we shall be given all details and provided all documents necessary for intervention; otherwise the customer must bear our loss. In the latter case, our total claims against the customer shall also be immediately payable.

The customer shall be entitled to sell or to use our reserved goods in the ordinary course of business subject to the condition that the relevant claims are transferred in accordance with article 8 below. This right shall lapse upon the customer's failure to promptly meet his payment obligations towards us or in the event of any cheque or bill protests or his suspension of payments. In such cases, we shall be entitled to take back the goods provisionally at the

customer's expense and to sell them at our duly exercised discretion after a corresponding reminder has been sent to the customer. We will then pass the due amount to the customer's credit.

8. If our goods are sold before payment of our claim, the customer shall be obliged to retain our title against his purchaser until the goods have been paid for in full by the purchaser. The claim arising against the purchaser from such resale as well as any other ancillary rights or security interests of the customer resulting from the sale and any claims for compensation in case of damage to or destruction of our reserved property, including the relevant insurance sum shall hereby be assigned to us. We hereby accept this assignment. Where our co-ownership interest is sold, the relevant claims shall be assigned in the amount corresponding to the value of our interest.

The customer shall, at our request, inform us of his purchasers, notify them of the assignment made and provide us with any and all documents required to assert our rights.

As long as the customer meets his contractual obligations without delay, he shall be authorised to collect the claims assigned. He shall keep the amounts collected on our behalf separately and remit them to us immediately as soon and as far as our claims become due. The authorisation shall lapse in case of any cheque or bill protest of the customer or his definite suspension of payments. The customer shall bear the costs incurred for any action taken against third parties and shall advance them upon request.

If the security provided to us by the retention of title and the anticipatory assignment should exceed the claims to be secured by more than 20%, we shall, at the customer's request, release paid supplies of our choice. Upon payment of all our claims by the customer, assigned claims shall pass to the customer.

9. Any complaints for obvious defects regarding the quantity or quality of our supplies and services that are identifiable upon careful inspection shall without delay, but at the latest within the period of limitation of eight days from arrival of the goods at the address of the customer or the person appointed by him, be notified in writing to us, not to our representatives. Slight deviations in dimensions and designs within the scope of defined technical tolerances shall not give rise to any right of complaint. Any rejected goods may only be returned to us with our prior written authorisation.

In case of justified complaints within the prescribed period, we shall, at our option, take remedial action by way of subsequent performance, by rectifying the defect, supplying non-defective goods or providing a credit note for the lower value calculated.

We shall be entitled to refuse subsequent performance in accordance with the statutory provisions. If we refuse subsequent performance, if any subsequent performance remains unsuccessful or if the customer cannot be reasonably expected to accept any subsequent performance, the latter shall be entitled to withdraw from the contract in compliance with the provisions of the following sentences. The customer shall only be entitled to withdraw from the contract - where a withdrawal is not excluded by law - upon the unsuccessful expiry of a reasonable period for subsequent performance set by him, unless this period was not required under the statutory provisions (§§ 281 para. 2, 323 para. 2, 440, 441 para. 1 BGB (German Civil Code)).

In case of his withdrawal, the customer shall be liable for any deterioration, destruction or loss of use resulting from any negligence or intent on his part. Any claims for damages or reimbursement of expenses of the customer shall be subject to the provisions set out in article 10.

In the case of any fraudulent concealment of a defect or in the case of any provision of a quality guarantee for the goods sold at the time of the passing of risk within the meaning of § 444 BGB (German Civil Code) (seller's declaration that the object sold has a specific property at the time of the passing of risk and that the seller, regardless of any fault on his part, intends to be answerable for any and all consequences resulting from its absence), the customer's rights shall be exclusively governed by the statutory provisions.

We shall - in addition to the statutory grounds for refusal - also be entitled to refuse subsequent performance if and as long as the customer fails to send us, at our request, the rejected goods or a sample thereof; the customer shall have no right of withdrawal for any such refusal. We may further refuse any subsequent performance if the goods concerned have been altered or modified without our consent unless the customer can prove that the defect was not caused by such alteration or modification.

The limitation period for any claims arising from defects shall be one year; in the case of goods which have been used in accordance with their intended purpose for a building and have caused its defectiveness, the limitation period shall be two years. The provisions of §§ 478, 479 BGB (German Civil Code) on recourse in the chain of suppliers shall not be affected thereby.

10. In the case of a pre-contractual, contractual or non-contractual breach of duty, including unsatisfactory delivery, tortious conduct and producer's liability, we shall only be liable for compensatory damages and reimbursement of expenses - subject to further contractual or statutory liability requirements - in the case of intent, gross negligence or slightly negligent breach of a material contractual duty (contractual duty the infringement of which jeopardises the fulfilment of the object of the contract). However - except in the case of intent - our liability shall be limited to the typical contractual damage that was foreseeable at the time the contract was entered into.

The purchaser shall not be permitted to make a claim for expenses incurred in vain.

Except for any breach of material duties, our liability for slight negligence shall be excluded, but in any case be limited to the amount of the purchase price.

Any claim asserted by the customer or a third party for payment of a contractual penalty shall be excluded.

With regard to damages caused by delay, we shall only be liable for slight negligence up to the amount of 5% of the purchase price agreed with us.

The exclusions and limitations of liability set forth above shall not apply in the event that a guarantee is given with respect to the quality of the object sold within the meaning of § 444 BGB (German Civil Code) if a defect is fraudulently concealed or in the event of injury to life, physical injury or injury to health, or strict liability under the German Product Liability Act.

Any and all claims for damages against us, for any legal reason whatsoever, shall become statute-barred at the latest after one year from delivery of the goods to the customer, in the case of tortious liability from the time of knowledge, or grossly negligent ignorance, of the circumstances giving rise to the claim and the person liable to pay damages. This provision shall not apply in the case of liability for intent and in the event that a guarantee is given for the quality of the object sold, in the case of fraudulent concealment of a defect or in the event of injury to life, physical injury or injury to health, or strict liability under the German Product Liability Act. Any shorter limitation periods shall take precedence.

11. We shall be entitled to process and store any customer data obtained with regard to or in connection with the business relationship in accordance with the German Federal Data Protection Act, irrespective of whether such data is provided by the purchaser himself or by any third parties.

12. Place of performance for delivery and payment is Menden/Sauerland. The court of competent jurisdiction for any and all disputes, including disputes with regard to bills of exchange and cheques, is the Local Court (Amtsgericht) of Menden or, at our option, the District Court (Landgericht) of Arnsberg, irrespective of the value of the object in dispute. We shall, however, also be entitled to take legal proceedings against the customer at the place of his registered office.

German law shall be exclusively applicable. The application of international purchase laws is hereby excluded.

Should, for any reason whatsoever, individual provisions of our terms and conditions of sale and delivery be invalid, the validity and binding nature of the other provisions shall not be affected thereby. The customer agrees, that the invalid provision shall be replaced by a valid provision that comes as close as possible to the economic meaning of the invalid provision.

13. The prices of products made of brass and copper are subject to certain fluctuations that are based on the relevant DEL listings. The prices of our brass articles are based on a DEL listing of € 150 for Ms 58, those of our copper products on a DEL value for electrolyte copper of € 200.

In case of any increase or reduction in these prices by more than € 15, a five per cent surcharge or deduction shall be made for each 15 points. The calculation of any such surcharges or deductions shall be based on the DEL listing of the date of our receipt of the order.

Valid from August 2004



QR-Code

With the QR Code you have direct access to our products on the Internet.

You can find further information on the QR Code at www.obo-bettermann.com.

OBO Bettermann GmbH & Co. KG

P.O. Box 1120
58694 Menden, Germany

Customer Service Germany

Tel. +49 (0)2373 891 500
Fax +49 (0)2373 897 777
E-mail: info@obo.de

www.obo-bettermann.com