

OETIKER



Swing Couplings SC

DN6
DN8
DN11

technical flow economical



Connecting Technology

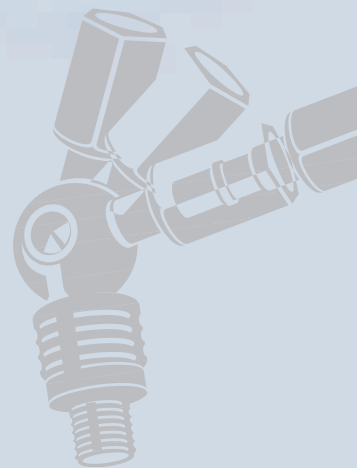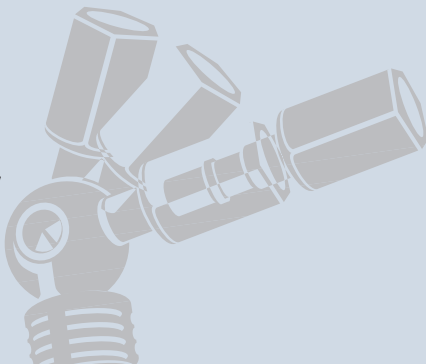



OETIKER Connecting Technology Swing Couplings SC

full flow

Contents

2-3	OETIKER Worldwide Connecting Technology
4-5	OETIKER SC – Product Chart
6	OETIKER SC Swing to Connect
7	OETIKER SC Full Flow
8-9	OETIKER SC Compatibility
10	OETIKER SC Series A1
11	OETIKER SC Series B1
12	OETIKER SC Series K
13	OETIKER SC S Series N
14	OETIKER SC Series P
15	OETIKER SC Series C
16	OETIKER SC Series D
17	OETIKER SC Series DL
18	OETIKER SC Series E
19	OETIKER SC Series E1
20	OETIKER SC Series M
21	OETIKER SC Series G
22	OETIKER SC Series H
23	OETIKER SC Series HB
24	OETIKER SC Series I
25	OETIKER Air Consumption of Pneumatic Hand Tools
26	OETIKER SC Accessories
27	SC Materials and Seals

The OETIKER Group Worldwide

The primary objective of the OETIKER Group is to supply customers with safe and reliable products.

For over 60 years, OETIKER has revolutionized clamping of hoses, pipes and other objects with a great variety of clamps and rings for a wide range of materials – all of it complemented by a full choice of Quick Action and Swing Couplings. The OETIKER Group was founded in Switzerland in 1943 and is now a multinational company with a worldwide network of companies which together offer their customers comprehensive planning, construction, design and service support.

OETIKER companies are strategically placed throughout the world to produce and supply connecting products. Manufacturing is standardized across all OETIKER production companies. OETIKER products are sold both by companies within the OETIKER Group and via a specially selected distributor network.

The OETIKER name is a protected trademark which stands for quality, innovation and continuous improvement, both literally and in the spirit intended by the founder of the company, Hans Oetiker. Numerous connecting technology patents are directly related to the OETIKER name.



OETIKER

Worldwide Connecting Technology Safe and of the Highest Quality



Connecting the World

Selected Raw Materials

Future-Oriented Development

Practical Manufacturing Methods

High Quality Standards

OETIKER Quality Standards

All companies within the OETIKER Group have quality certificates according to ISO/TS 16949. OETIKER products are manufactured in OETIKER's own factories. OETIKER companies already comply with the newly formulated environmental guidelines detailed in ISO 14001 which involve the careful use of resources, the use of recyclable materials and minimal use of chemical additives.

In order to ensure optimum quality throughout the world, all OETIKER companies use the latest in production and inspection equipment.

Safe is Safe – as Officially Confirmed

The safety of using OETIKER Swing Couplings SC is confirmed by independent official institutions.


ISO/TS 16949

ISO 9001

ISO 14001



OETIKER Swing Couplings SC Product Chart

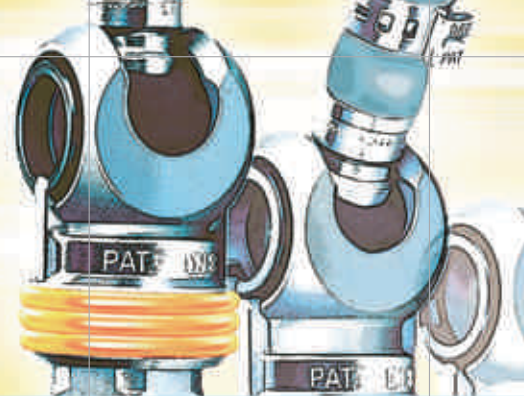

Safely swing to connect

With full flow. No force required or loss of pressure in the system.

Just a turn and the air vent ensures that the hose is ventilated – thus rendering it harmless.

OETIKER Swing Couplings SC are available in nominal sizes DN6 to DN11 and in different models. They are compatible with most popular plug systems. The many different types and models and a wide choice of seals and lubricants mean that OETIKER Couplings are suitable for numerous applications throughout industry.

Durability, reliability, simple and safe handling are features of all OETIKER Swing Couplings.

OETIKER Swing Couplings fulfill all the requirements of current quality standards and have also been awarded a type examination certificate from the Swiss Accident Insurance Institute SUVA.

Features

- In accordance with safety standard ISO 4414, EN 983
- Pressure always automatically off during the coupling process
- Full flow, negligible loss of pressure
- Simple operation, no force required
- Compact design
- Eco-design



DN6 1/4"

Series A1 Page 10

Series B1 Page 11

Series K Page 12

Series N Page 13

Series P Page 14



OETIKER Swing Couplings SC Product Chart



The OETIKER SC Series



DN8
3/8"

Series C Page 15

Series D Page 16

Series DL Page 17

Series E Page 18

Series E1 Page 19

Series M Page 20



DN11
1/2"

Series G Page 21

Series H Page 22

Series HB Page 23

DN19
3/4"

Series I Page 24





OETIKER Swing Couplings SC Swing to Connect

save

Simple and quick connection with no force or loss of pressure in the system



Connection

Push suitable plug into coupling and swing approximately 90° until the orange ring engages in the groove.



Disconnection

Pull back orange ring and swing plug to stop. Remove plug from coupling.



Full flow with no restrictions.

In order to prevent the hose from ejecting dangerously, the plug must be held in the hand until the hose is completely ventilated.



OETIKER Swing Couplings SC Full Flow



More efficient, low energy consumption and safe

The new generation of OETIKER Couplings, the valveless SC coupling model – result of innovative development and many years of experience – free flow guaranteed in every case.

When using compressed air operated equipment, for instance, in conjunction with OETIKER Swing Couplings SC, the result will always be a method of operation which is more efficient with low energy consumption, thus making it very economical.

Application

Throughput media


Compressed air, gases, liquids and media with low to medium viscosity due to free flow with no restrictions. Easy to clean.

Pressure


Operating pressure up to 360 psi (25 bar)
– connection and disconnection up to 200 psi (15 bar) – also suitable for technical vacuums up to approximately 3 inHg (100 mbar).

Temperature

Standard model from -20° to +100°C (-4° to +212°F). Higher temperatures possible depending upon media with the use of FPM or EPDM seals (see page 26).



**Full flow
with negligible loss of pressure**

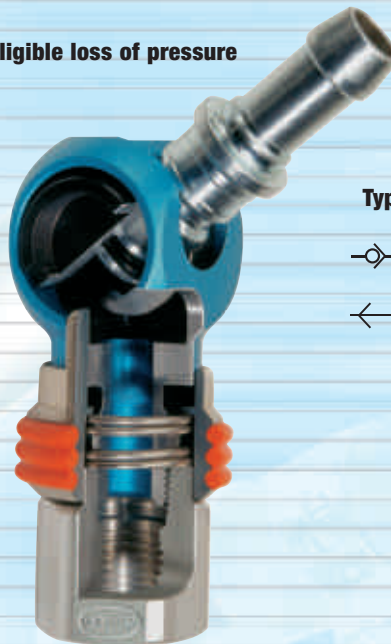


Cross Section Model SC

Types and symbols

⊗ Coupling

← Plug

SC Performance Graph for Air

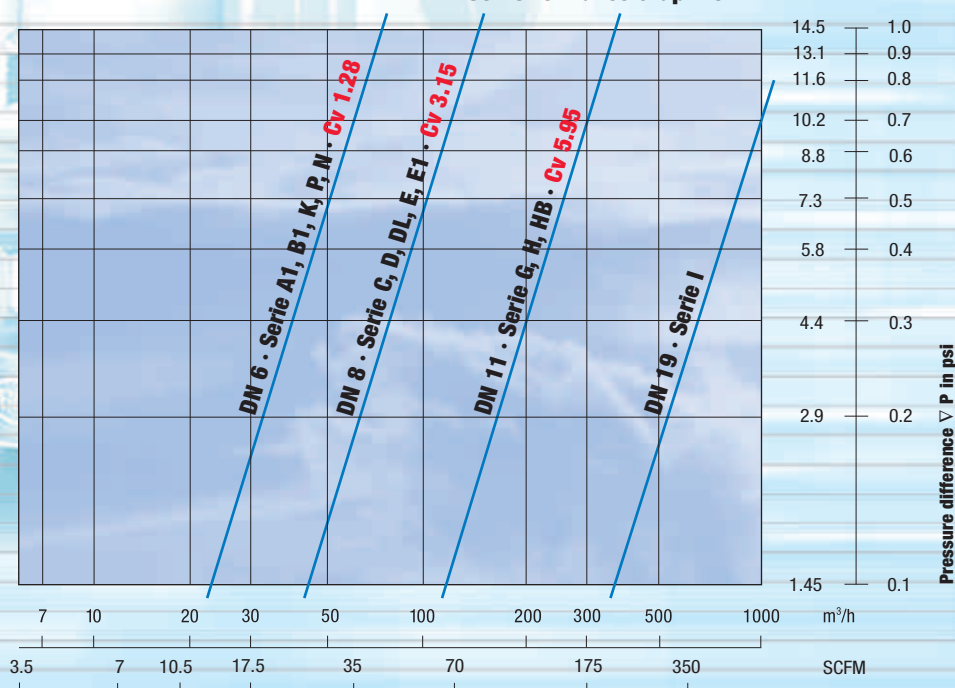

Flow rate at 20°C (68°F), operating pressure 87 psi (6 bar)



08901999 OETIKER reserves the right to make technical changes in the interest of further development

www.oetiker.com



OETIKER Swing Couplings SC Compatibility

Full compatibility with most popular plug systems

Plug form 1:1



Nominal Bore	SC Series	Standards	Compatible with*	Information Page
6 mm 1/4"	Series A1		AMFLO ARO Cejn Foster Parker Rectus	C38 210 300 210 B53 14, 22



6 mm 1/4"	Series B1	Plug in accordance with: ISO 6150-B-12 AFNOR: B-12 NF E 49-053 US: MIL-C-4109	Industrial Interchange AMFLO Hansen Foster Parker Cejn	1/4" C20B 1000 3003 B23 310
--------------	------------------	--	---	--



6 mm 1/4"	Series K	Plug in accordance with: ISO 6150-C-10 AFNOR: C-10 NF E 49-053	OETIKER Stäubli	DN6 06
--------------	-----------------	--	--------------------	-----------



6 mm 1/4"	Series N		Imopac	CD25 , -S , -N
--------------	-----------------	--	--------	----------------



6 mm 1/4"	Series P		PCL	AC21, AC29, AC91
--------------	-----------------	--	-----	------------------



8 mm 3/8"	Series C		Cejn Prevost Rectus	320 E.. 07 25, 26
--------------	-----------------	--	---------------------------	-------------------------

OETIKER Swing Couplings SC Compatibility



Guide for determining the most suitable OETIKER Swing Coupling SC

Plug form 1:1



Nominal Bore	SC Series	Standards	Compatible with*	Information Page
8 mm 3/8"	Series D / DL		Nitto	20, 30, 40 16-17



8 mm 3/8"	Series E	Plug in accordance with: ISO 6150-B -15 AFNOR: B-15 NF E 49-053 US: MIL-C-4109	Industrial Interchange AMFLO Cejn Hansen Foster Parker	3/8" C26 430 440 4404 25F	18
--------------	-----------------	---	---	--	----



8 mm 3/8"	Series E1	Plug in accordance with: ISO 6150-C-14 AFNOR: C-14 NF E 49-053	OETIKER Stäubli	DN8 08	19
--------------	------------------	--	--------------------	-----------	----



8 mm 3/8"	Series M		Cejn Rectus	344, *342 95 KS, *96 KS *Coupling only	20
--------------	-----------------	--	----------------	--	----



11 mm 1/2"	Series G	Plug in accordance with: ISO 6150-C-17 AFNOR: C-17 NF E 49-053	OETIKER Stäubli	DN11 11	21
19 mm 3/4"	Series I	Plug in accordance with: ISO 6150-C-27 AFNOR: C-27 NF E 49-053	Stäubli Stäubli	ADS 19 RBE 19	24



11 mm 1/2"	Series H / HB	Plug in accordance with: ISO 6150-B-17 AFNOR: B-17 NF E 49-053 US: MIL-C-4109	Industrial Interchange AMFLO Hansen Foster Parker Prevost	1/2" C10 520 5205 17 IRM 11	22-23
---------------	----------------------	--	--	--	-------

* The list is not conclusive. Names and references are, in some instances, registered trademarks of other manufacturers.




OETIKER

SC Series A1

DN6

1/4"

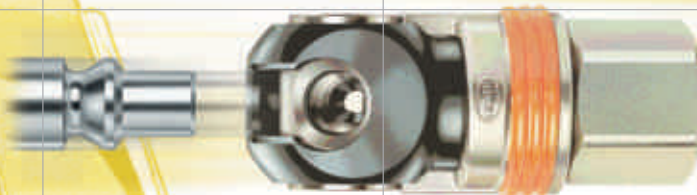

Original size

Features

- In accordance with safety standard ISO 4414, EN 983
- Full flow, negligible loss of pressure
- Simple operation, no force required
- Compact design

Temperature Range


-20° to + 100°C (NBR)
-4° to + 212°F

Operating Pressure

3 inHg (100 mbar) to
360 psi (25 bar), connection/disconnection to
maximum 200 psi (15 bar)

Materials, Seals

Guide to selection and ordering (see page 27).

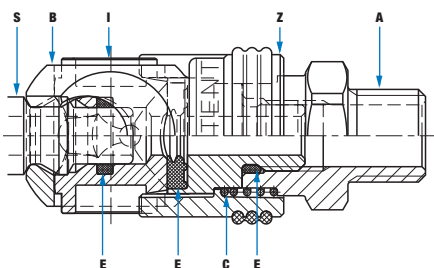

Material Code

A = Steel, nickel plated / aluminum
B = Steel, tenifer treated
C = Stainless steel
E = Nitrile elastomer (NBR)
I = Surface hardened steel, nickel plated
S = Surface hardened steel, galvanized
Z = Zinc diecast, nickel plated,
orange plastic coating

Compatible with


AMFLO	C38
ARO	210
Cejn	300
Foster	210
Parker	B53
Rectus	14, 22




See page 8.

Swing Coupling


with female thread




with male thread



with hose stem




with PUR compression fitting

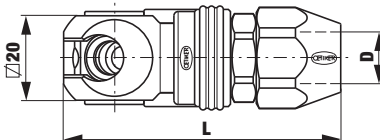


Plug


with male thread



with female thread



with hose stem



A	Part No.	L
G1/4	205 00 287	56.1
G3/8	205 00 288	57.6
G1/2	205 00 289	61.1
NPT1/4	205 00 291	56.1
NPT3/8	205 00 292	58.6
NPT1/2	205 00 293	64.6

G1/4	205 00 294	47.6
G3/8	205 00 295	47.6
G1/2	205 00 296	48.6
NPT1/4	205 00 297	48.8
NPT3/8	205 00 298	48.8
NPT1/2	205 00 299	48.6

D	Part No.	L
6 mm 1/4"	205 00 300	68.1
8 mm 5/16"	205 00 301	68.1
10 mm 3/8"	205 00 302	68.1

6.5 x 10	205 00 304	62.6
8 x 12	205 00 305	65.6


A	Part No.	L	SW
G1/8	255 00 000	34.0	14
G1/4	255 00 001	31.0	14
NPT1/4	255 00 003	30.7	14
NPT3/8	255 00 066	32.7	19

G1/4	255 00 005	43.0	17
NPT1/4	255 00 007	43.0	17
NPT3/8	255 00 068	45.0	19

D	Part No.	L	Ø
6 mm 1/4"	255 00 008	51.0	14
8 mm 5/16"	255 00 009	51.0	14
10 mm 3/8"	255 00 010	51.0	14

OETIKER SC Series B1


DN6 1/4"




Original size

Swing Coupling


— with female thread




— with male thread

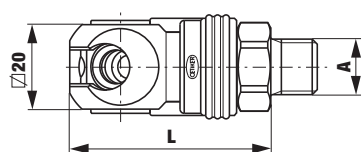

— with hose stem

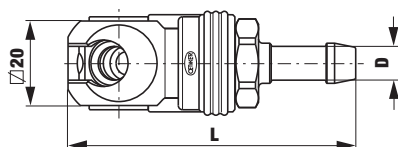


— with PUR compression fitting

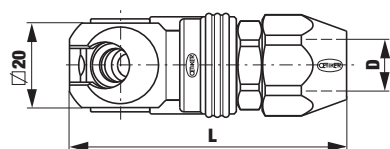


Plug


— with male thread



— with female thread



— with hose stem



A	Part No.	L
G1/4	205 00 307	56.1
G3/8	205 00 308	57.6
G1/2	205 00 309	61.1
NPT1/4	205 00 311	56.1
NPT3/8	205 00 312	58.6
NPT1/2	205 00 313	64.6

G1/4	205 00 314	47.6
G3/8	205 00 315	47.6
G1/2	205 00 316	48.6
NPT1/4	205 00 317	48.8
NPT3/8	205 00 318	48.8
NPT1/2	205 00 319	48.6

D	Part No.	L
6 mm 1/4"	205 00 320	68.1
8 mm 5/16"	205 00 321	68.1
10 mm 3/8"	205 00 322	68.1

6.5x10	205 00 324	62.6
8x12	205 00 325	65.6

A	Part No.	L	SW
G1/8	255 00 011	34.0	14
G1/4	255 00 012	31.0	14
NPT1/4	255 00 014	30.7	14
NPT3/8	255 00 069	32.7	19

G1/4	255 00 016	43.0	17
NPT1/4	255 00 018	43.0	17
NPT3/8	255 00 274	45.0	19

D	Part No.	L	Ø
6 mm 1/4"	255 00 019	51.0	14
8 mm 5/16"	255 00 020	51.0	14
10 mm 3/8"	255 00 021	51.0	14

Features

- In accordance with safety standard ISO 4414, EN 983
- Plug in accordance with ISO 6150-B-12, AFNOR: B-12 NF E 49-053 and US: MIL-C-4109
- Full flow, negligible loss of pressure
- Simple operation, no force required
- Compact design

Temperature Range


-20° to + 100°C (NBR)
-4° to + 212°F

Operating Pressure

3 inHg (100 mbar) to
360 psi (25 bar), connection/disconnection to
maximum 200 psi (15 bar)

Materials, Seals

Guide to selection and ordering (see page 27).

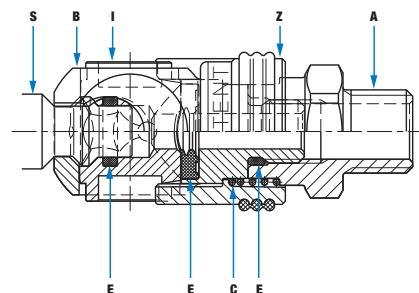


Material Code

A = Steel, nickel plated / aluminum
B = Steel, tenifer treated
C = Stainless steel
E = Nitrile elastomer (NBR)
I = Surface hardened steel, nickel plated
S = Surface hardened steel, galvanized
Z = Zinc diecast, nickel plated,
orange plastic coating

Compatible with

Industrial Interchange	1/4"
AMFLO	C20B
Hansen	1000
Foster	3003
Parker	B23
Cejn	310




See page 8.



OETIKER SC Series K

DN6 1/4"

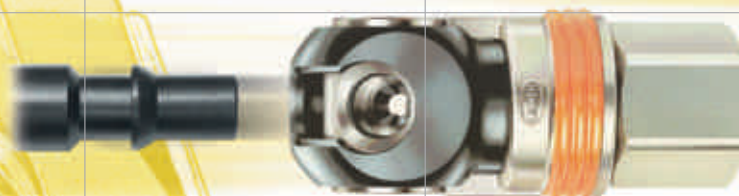

Original size

Features

- In accordance with safety standard ISO 4414, EN 983
- Plug in accordance with ISO 6150-C-10 and AFNOR: C-10 NF E 49-053
- Full flow, negligible loss of pressure
- Simple operation, no force required
- Compact design



Temperature Range


-20° to + 100°C (NBR)
-4° to + 212°F

Operating Pressure

3 inHg (100 mbar) to
360 psi (25 bar), connection/disconnection to
maximum 200 psi (15 bar)

Materials, Seals

Guide to selection and ordering (see page 27).

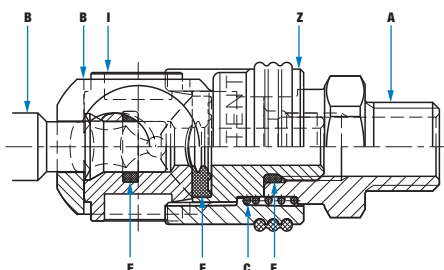

Material Code

A = Steel, nickel plated / aluminum
B = Steel, tenifer treated
C = Stainless steel
E = Nitrile elastomer (NBR)
I = Surface hardened steel, nickel plated
Z = Zinc diecast, nickel plated,
orange plastic coating

Compatible with


OETIKER DN6
Stäubli 06




See page 8.

Swing Coupling


with female thread

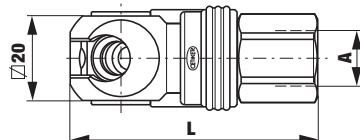


with male thread

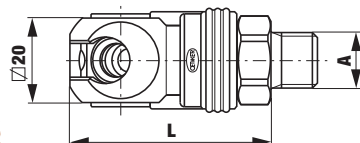

with hose stem

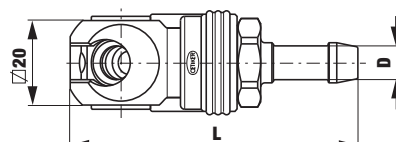


with PUR compression fitting

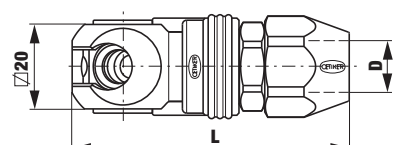


Plug


with male thread



with female thread



with hose stem



A	Part No.	L
G1/4	205 00 156	56.1
G3/8	205 00 157	57.6
G1/2	205 00 158	61.1
NPT1/4	205 00 160	56.1
NPT3/8	205 00 161	58.6
NPT1/2	205 00 162	64.6

G1/4	205 00 163	47.6
G3/8	205 00 164	47.6
G1/2	205 00 165	48.6
NPT1/4	205 00 166	48.8
NPT3/8	205 00 167	48.8
NPT1/2	205 00 168	48.6

D	Part No.	L
6 mm 1/4"	205 00 169	68.1
8 mm 5/16"	205 00 170	68.1
10 mm 3/8"	205 00 171	68.1

6.5x10	205 00 276	62.6
8x12	205 00 277	65.6

A	Part No.	L	SW
G1/8	255 00 093	38.0	14
G1/4	255 00 091	35.0	14
G3/8	255 00 092	38.0	17
NPT1/4	255 00 112	35.7	14
NPT3/8	255 00 117	38.7	17

G1/8	255 00 100	46.0	14
G1/4	255 00 088	47.0	17
NPT1/4	255 00 119	48.0	17

D	Part No.	L	Ø
6 mm 1/4"	255 00 113	55.0	14
8 mm 5/16"	255 00 114	55.0	14
10 mm 3/8"	255 00 115	55.0	14
13 mm 1/2"	255 00 116	55.0	16

OETIKER

SC Series N

DN6


1/4"




Original size

Swing Coupling


— with female thread




— with male thread



— with hose stem



— with PUR compression fitting

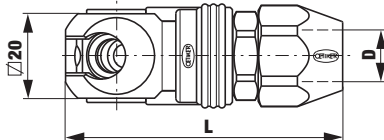

A	Part No.	L
G1/4	205 00 726	56.1
G3/8	205 00 727	57.6
G1/2	205 00 728	61.1

G1/4	205 00 729	47.6
G3/8	205 00 730	47.6
G1/2	205 00 731	48.6

D	Part No.	L
6 mm 1/4"	205 00 732	68.1
8 mm 5/16"	205 00 733	68.1
10 mm 3/8"	205 00 734	68.1

6.5 x 10	205 00 735	62.6
8 x 12	205 00 736	65.6

Features

- In accordance with safety standard ISO 4414, EN 983
- Full flow, negligible loss of pressure
- Simple operation, no force required
- Compact design

Temperature Range


-20° to + 100°C (NBR)
-4° to + 212°F

Operating Pressure

3 inHg (100 mbar) to
360 psi (25 bar), connection/disconnection to
maximum 200 psi (15 bar)

Materials, Seals

Guide to selection and ordering (see page 27).

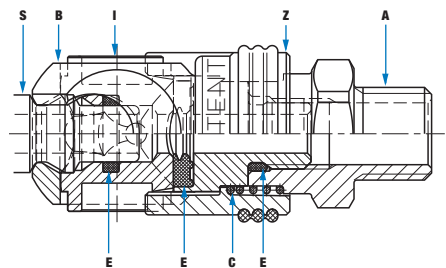

Material Code

A = Steel, nickel plated / aluminum
B = Steel, tenifer treated
C = Stainless steel
E = Nitrile elastomer (NBR)
I = Surface hardened steel, nickel plated
S = Surface hardened steel, galvanized
Z = Zinc diecast, nickel plated,
orange plastic coating

Compatible with

Imopac CD25, -S, -N



See page 8.



OETIKER

SC Series P

DN6

1/4"



Original size

Features

- In accordance with safety standard ISO 4414, EN 983
- Full flow, negligible loss of pressure
- Simple operation, no force required
- Compact design



Temperature Range


-20° to + 100°C (NBR)
-4° to + 212°F

Operating Pressure

3 inHg (100 mbar) to
360 psi (25 bar), connection/disconnection to
maximum 200 psi (15 bar)

Materials, Seals

Guide to selection and ordering (see page 27).

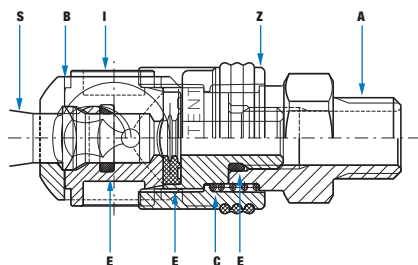


Material Code

A = Steel, nickel plated / aluminum
B = Steel, tenifer treated
C = Stainless steel
E = Nitrile elastomer (NBR)
I = Surface hardened steel, nickel plated
S = Surface hardened steel, galvanized
Z = Zinc diecast, nickel plated,
orange plastic coating

Compatible with

PCL


AC21, AC29, AC91




See page 8.

Swing Coupling


↺ with female thread



↺ with male thread

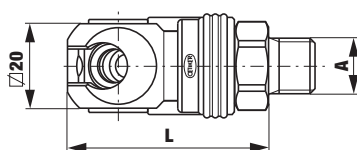

↺ with hose stem

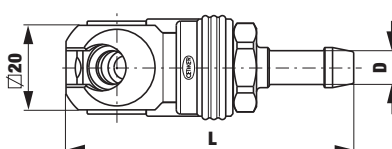


A	Part No.	L
G1/4	205 00 438	56.1
G3/8	205 00 439	57.6
G1/2	205 00 440	61.1

G1/4	205 00 434	47.6
G3/8	205 00 441	47.6
G1/2	205 00 442	48.6


D	Part No.	L
6 mm 1/4"	205 00 443	68.1
8 mm 5/16"	205 00 444	68.1
10 mm 3/8"	205 00 445	68.1

Plug


↺ with male thread



↺ with female thread

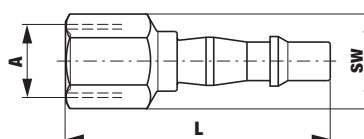

↺ with hose stem



A	Part No.	L	SW
G1/4	255 00 320	43.0	14
G3/8	255 00 321	45.5	17

G1/4	255 00 318	55.0	17
G3/8	255 00 319	57.5	19

D	Part No.	L	Ø
6 mm 1/4"	255 00 322	63.0	14
8 mm 5/16"	255 00 323	63.0	14
10 mm 3/8"	255 00 324	63.0	14

OETIKER SC Series C


DN8 3/8"




Original size

Swing Coupling


— with female thread

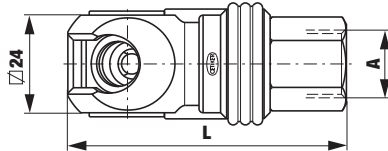


— with male thread

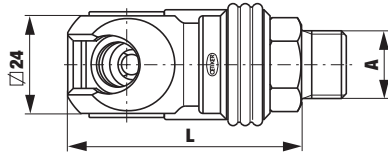

— with hose stem

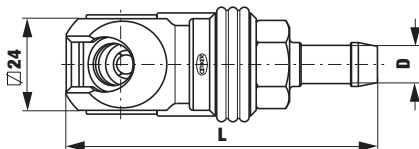


— with PUR compression fitting

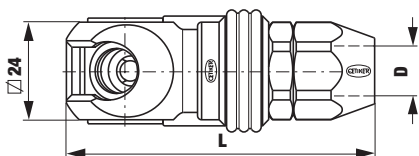


Plug


— with male thread



— with female thread



— with hose stem



A	Part No.	L
G1/4	205 00 345	68.5
G3/8	205 00 346	68.5
G1/2	205 00 347	69.5
NPT1/4	205 00 348	68.5
NPT3/8	205 00 349	68.5
NPT1/2	205 00 350	73.5

G1/4	205 00 351	57.5
G3/8	205 00 352	57.5
G1/2	205 00 353	58.5
NPT1/4	205 00 375	56.2
NPT3/8	205 00 354	56.2
NPT1/2	205 00 355	58.5

D	Part No.	L
8 mm 5/16"	205 00 356	81.5
10 mm 3/8"	205 00 357	81.5
13 mm 1/2"	205 00 358	81.5

8x12	205 00 360	75.8
11x16	205 00 361	80.8

A	Part No.	L	SW
G1/4	255 00 023	31.0	14
G3/8	255 00 024	31.0	19
NPT1/4	255 00 275	28.7	14
NPT3/8	255 00 177	28.7	19

G1/4	255 00 026	42.0	17
G3/8	255 00 027	43.0	19
NPT1/4	255 00 276	42.0	17
NPT3/8	255 00 178	43.0	19

D	Part No.	L	Ø
8 mm 5/16"	255 00 029	50.0	14
10 mm 3/8"	255 00 030	50.0	14
13 mm 1/2"	255 00 031	50.0	16

Features

- In accordance with safety standard ISO 4414, EN 983
- Full flow, negligible loss of pressure
- Simple operation, no force required
- Compact design

Temperature Range


-20° to + 100°C (NBR)
-4° to + 212°F

Operating Pressure

3 inHg (100 mbar) to
360 psi (25 bar), connection/disconnection to
maximum 200 psi (15 bar)

Materials, Seals

Guide to selection and ordering (see page 27).

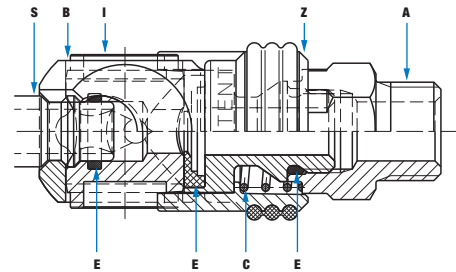

Material Code

A = Steel, nickel plated / aluminum
B = Steel, tenifer treated
C = Stainless steel
E = Nitrile elastomer (NBR)
I = Surface hardened steel, nickel plated
S = Surface hardened steel, galvanized
Z = Zinc diecast, nickel plated,
orange plastic coating

Compatible with

Cejn	320
Prevost	E.. 07
Rectus	25, 26



See page 8.



OETIKER SC Series D

DN8 3/8"



Original size

Features

- In accordance with safety standard ISO 4414, EN 983
- Full flow, negligible loss of pressure
- Simple operation, no force required
- Compact design



Temperature Range


-20° to + 100°C (NBR)
-4° to + 212°F

Operating Pressure

3 inHg (100 mbar) to
360 psi (25 bar), connection/disconnection to
maximum 200 psi (15 bar)

Materials, Seals

Guide to selection and ordering (see page 27).

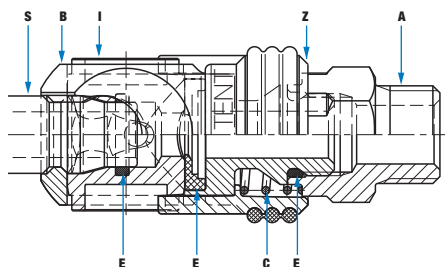

Material Code

A = Steel, nickel plated / aluminum
B = Steel, tenifer treated
C = Stainless steel
E = Nitrile elastomer (NBR)
I = Surface hardened steel, nickel plated
S = Surface hardened steel, galvanized
Z = Zinc diecast, nickel plated,
orange plastic coating

Compatible with


Nitto 20, 30, 40




See page 9.

Swing Coupling


with female thread

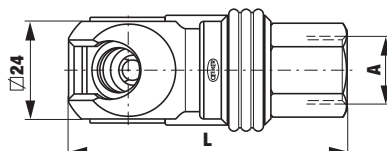


with male thread

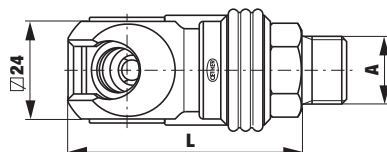

with hose stem

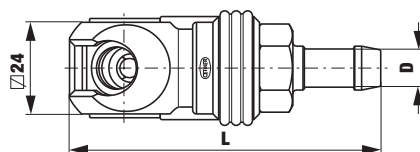


with PUR compression fitting

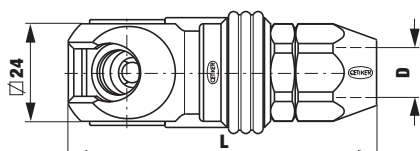


Plug


with male thread



with female thread



with hose stem



A	Part No.	L
G1/4	205 00 018	68.5
G3/8	205 00 019	68.5
G1/2	205 00 020	69.5
NPT1/4	205 00 034	68.5
NPT3/8	205 00 035	68.5
NPT1/2	205 00 036	73.5

G1/4	205 00 053	57.5
G3/8	205 00 021	57.5
G1/2	205 00 022	58.5
NPT1/4	205 00 426	56.2
NPT3/8	205 00 037	56.2
NPT1/2	205 00 038	58.5

D	Part No.	L
8 mm 5/16"	205 00 054	81.5
10 mm 3/8"	205 00 055	81.5
13 mm 1/2"	205 00 056	81.5

6.5x10	205 00 057	72.8
8x12	205 00 058	75.8
11x16	205 00 059	80.8

A	Part No.	L	SW
G1/4	255 00 032	32.0	14
G3/8	255 00 033	32.0	19
G1/2	255 00 034	32.0	24
NPT1/4	255 00 058	28.7	14
NPT3/8	255 00 059	28.7	19
NPT1/2	255 00 060	33.0	24

G1/4	255 00 035	43.0	17
G3/8	255 00 036	44.0	19
G1/2	255 00 037	48.5	27
NPT1/4	255 00 061	43.0	17
NPT3/8	255 00 062	44.0	19
NPT1/2	255 00 063	49.0	27

D	Part No.	L	Ø
8 mm 5/16"	255 00 038	51.0	14
10 mm 3/8"	255 00 039	51.0	14
13 mm 1/2"	255 00 040	51.0	16


Original size

OETIKER

SC Series DL


DN8

3/8"




Swing Coupling


— with female thread

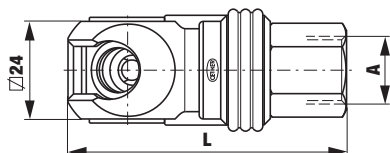


— with male thread

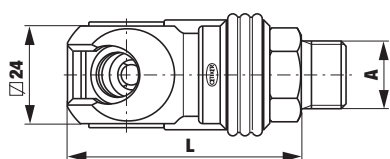

— with hose stem

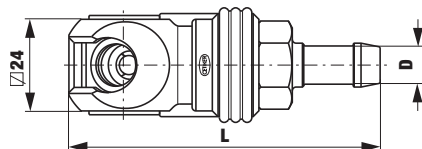


— with PUR compression fitting

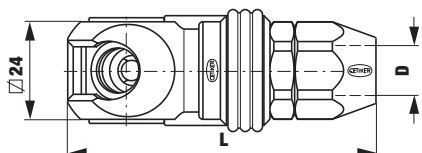


Plug


— with male thread



— with female thread



— with hose stem



A	Part No.	L
G1/4	205 00 060	68.0
G3/8	205 00 061	68.0
G1/2	205 00 062	69.0
NPT1/4	205 00 072	68.0
NPT3/8	205 00 073	68.0
NPT1/2	205 00 074	73.0

G1/4	205 00 063	57.0
G3/8	205 00 064	57.0
G1/2	205 00 065	58.0
NPT1/4	205 00 427	55.7
NPT3/8	205 00 075	55.7
NPT1/2	205 00 076	58.0

D	Part No.	L
8 mm 5/16"	205 00 077	81.0
10 mm 3/8"	205 00 078	81.0
13 mm 1/2"	205 00 079	81.0

8x12	205 00 081	75.3
11x16	205 00 082	80.3

A	Part No.	L	SW
G1/4	255 00 032	32.0	14
G3/8	255 00 033	32.0	19
G1/2	255 00 034	32.0	24
NPT1/4	255 00 058	28.7	14
NPT3/8	255 00 059	28.7	19
NPT1/2	255 00 060	33.0	24

G1/4	255 00 035	43.0	17
G3/8	255 00 036	44.0	19
G1/2	255 00 037	48.5	27
NPT1/4	255 00 061	43.0	17
NPT3/8	255 00 062	44.0	19
NPT1/2	255 00 063	49.0	27

D	Part No.	L	Ø
8 mm 5/16"	255 00 038	51.0	14
10 mm 3/8"	255 00 039	51.0	14
13 mm 1/2"	255 00 040	51.0	16

Features

- In accordance with safety standard ISO 4414, EN 983
- Full flow, negligible loss of pressure
- Simple operation, no force required
- Compact design
- Light weight 75 g

Not suitable for knocking, pulsating and vibrating compressed air tools

Temperature Range


-20° to + 100°C (NBR)
-4° to + 212°F

Operating Pressure

3 inHg (100 mbar) to 360 psi (25 bar), connection/disconnection to maximum 200 psi (15 bar)

Materials, Seals

Guide to selection and ordering (see page 27).

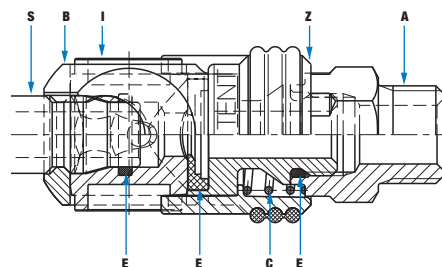

Material Code

A = Aluminum
B = Aluminum
C = Aluminum
E = Nitrile elastomer (NBR)
I = Surface hardened steel, nickel plated
S = Surface hardened steel, galvanized
Z = Zinc diecast, nickel plated, orange plastic coating

Compatible with

Nitto 20, 30, 40



See page 9.





OETIKER

SC Series E

DN8

3/8"



Original size

Features

- In accordance with safety standard ISO 4414, EN 983
- Plug in accordance with ISO 6150-B-15, AFNOR: B-15 NF E 49-053 and US: MIL-C-4109
- Full flow, negligible loss of pressure
- Simple operation, no force required
- Compact design



Temperature Range


-20° to + 100°C (NBR)
-4° to + 212°F

Operating Pressure

3 inHg (100 mbar) to
360 psi (25 bar), connection/disconnection to
maximum 200 psi (15 bar)

Materials, Seals

Guide to selection and ordering (see page 27).

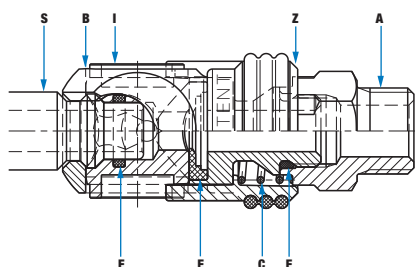

Material Code

A = Steel, nickel plated / aluminum
B = Steel, tenifer treated
C = Stainless steel
E = Nitrile elastomer (NBR))
I = Surface hardened steel, nickel plated
S = Surface hardened steel, galvanized
Z = Zinc diecast, nickel plated, orange
orange plastic coating

Compatible with


Industrial Interchange	3/8"
AMFLO	C26
Cejn	430
Hansen	440
Foster	4404
Parker	25F




See page 9.

Swing Coupling


with female thread

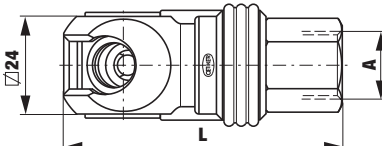


with male thread

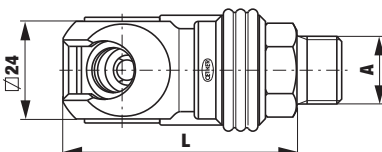

with hose stem

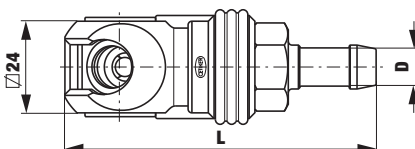


with PUR compression fitting

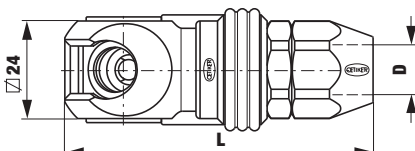


Plug


with male thread



with female thread



with hose stem



A	Part No.	L
G1/4	205 00 023	68.5
G3/8	205 00 024	68.5
G1/2	205 00 025	69.5
NPT1/4	205 00 052	68.5
NPT3/8	205 00 026	68.5
NPT1/2	205 00 027	73.5

G1/4	205 00 028	57.5
G3/8	205 00 029	57.5
G1/2	205 00 045	58.5
NPT1/4	205 00 214	56.2
NPT3/8	205 00 030	56.2
NPT1/2	205 00 031	58.5

D	Part No.	L
8 mm 5/16"	205 00 083	81.5
10 mm 3/8"	205 00 084	81.5
13 mm 1/2"	205 00 085	81.5

8x12	205 00 087	75.8
11x16	205 00 088	80.8


A	Part No.	L	SW
G1/4	255 00 041	35.0	17
G3/8	255 00 042	35.0	19
NPT1/4	255 00 236	31.7	17
NPT3/8	255 00 044	31.7	19
NPT1/2	255 00 045	36.0	24

G1/4	255 00 046	46.0	17
G3/8	255 00 047	47.0	24
NPT1/4	255 00 237	46.0	17
NPT3/8	255 00 049	47.0	24
NPT1/2	255 00 050	52.0	27

D	Part No.	L	Ø
8 mm 5/16"	255 00 051	52.0	16
10 mm 3/8"	255 00 052	52.0	16
13 mm 1/2"	255 00 053	52.0	16

OETIKER SC Series E1


DN8 3/8"




Original size

Swing Coupling


— with female thread

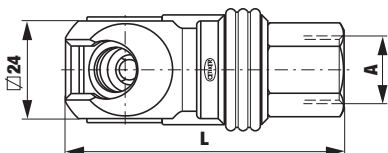


— with male thread

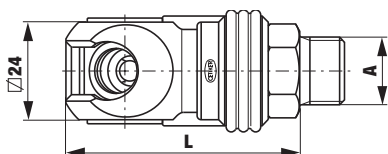

— with hose stem

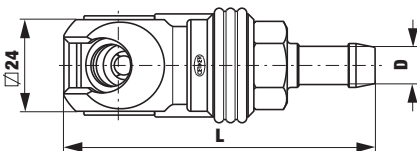


— with PUR compression fitting

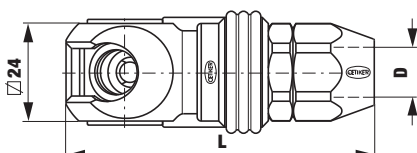


Plug


— with male thread



— with female thread



— with hose stem



A	Part No.	L
G1/4	205 00 115	69.5
G3/8	205 00 116	69.5
G1/2	205 00 117	70.5
NPT1/4	205 00 118	69.5
NPT3/8	205 00 119	69.5
NPT1/2	205 00 120	74.5

G1/4	205 00 121	58.5
G3/8	205 00 122	58.5
G1/2	205 00 123	59.5
NPT1/4	205 00 383	57.2
NPT3/8	205 00 124	57.2
NPT1/2	205 00 125	59.5

D	Part No.	L
8 mm 5/16"	205 00 126	82.5
10 mm 3/8"	205 00 127	82.5
13 mm 1/2"	205 00 128	82.5

8x12	205 00 130	76.8
11x16	205 00 131	81.8

A	Part No.	L	SW
G1/4	255 00 101	44.5	17
G3/8	255 00 102	44.5	19
NPT1/4	255 00 090	44.7	17
NPT3/8	255 00 089	44.7	19

G1/4	255 00 103	55.5	17
G3/8	255 00 105	57.5	24
NPT1/4	255 00 104	56.5	17
NPT3/8	255 00 106	57.5	24

D	Part No.	L	Ø
8 mm 5/16"	255 00 107	62.0	14
10 mm 3/8"	255 00 108	62.0	14
13 mm 1/2"	255 00 109	62.0	16
16 mm 5/8"	255 00 110	63.0	22

Features

- In accordance with safety standard ISO 4414, EN 983
- Plug in accordance with ISO 6150-C-14 and AFNOR: C-14 NF E 49-053
- Full flow, negligible loss of pressure
- Simple operation, no force required
- Compact design

Temperature Range


-20° to + 100°C (NBR)
-4° to + 212°F

Operating Pressure

3 inHg (100 mbar) to
360 psi (25 bar), connection/disconnection to
maximum 200 psi (15 bar)

Materials, Seals

Guide to selection and ordering (see page 27).

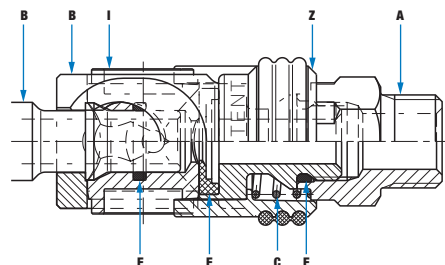


Material Code

A = Steel, nickel plated / aluminum
B = Steel, tenifer treated
C = Stainless steel
E = Nitrile elastomer (NBR)
I = Surface hardened steel, nickel plated
Z = Zinc diecast, nickel plated,
orange rubber coating

Compatible with

OETIKER DN8
Stäubli 08



See page 9.




OETIKER SC Series M

DN 8 3/8"



Original size



Features

- Coupling for breathing air apparatus
- BBG approved (German mining employer's liability insurance association)
- Plug according to EN 139 and EN 270
- Full flow, negligible loss of pressure
- Simple operation, no force required
- 1/4" body size



Temperature Range

-20° to + 100°C (NBR)


-4° to + 212°F

Operating Pressure

3 inHg (100 mbar) to
360 psi (25 bar), connection/disconnection to
maximum 200 psi (15 bar)

Materials, Seals

Guide to selection and ordering (see page 27).

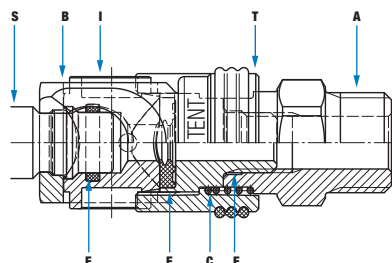

Material Code

A = Chrome plated

B = Chrome plated

C = Stainless steel, 1.4310

E = Nitrile elastomer (NBR)

I = Brass, chrome plated

S = Brass, chrome plated

T = Zinc diecast, nickel plated

Compatible with

Cejn

344, *342

Rectus

95 KS, *96 KS


* Coupling only




See page 9.

Swing Coupling


← with female thread



← with male thread




← with hose stem

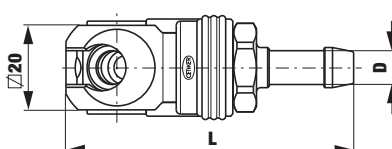


Plug


← with male thread



← with female thread



← with hose stem

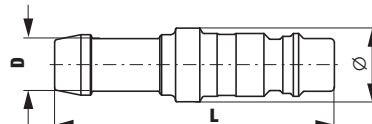

A	Part No.	L
G1/4	205 00 738	56.1
G3/8	205 00 691	57.6
NPT1/4	205 00 696	56.1
NPT3/8	205 00 697	58.6

G1/4	205 00 739	47.6
G3/8	205 00 717	47.6
NPT1/4	205 00 740	48.8
NPT3/8	205 00 699	48.8

D	Part No.	L
6 mm 1/4"	205 00 741	68.1
8 mm 5/16"	205 00 671	68.1
10 mm 3/8"	205 00 698	68.1
13 mm 1/2"	205 00 742	68.1

A	Part No.	L	SW
G1/4	255 00 420	34.2	14
G3/8	255 00 421	34.2	19
G1/2	255 00 422	35.2	24
NPT1/4	255 00 433	31.9	14
NPT3/8	255 00 434	31.9	19

G1/4	255 00 423	45.2	17
G3/8	255 00 424	46.2	19
G1/2	255 00 425	51.2	27
NPT1/4	255 00 435	45.2	17
NPT3/8	255 00 430	46.2	19

D	Part No.	L	Ø
6 mm 1/4"	255 00 426	53.2	14
8 mm 5/16"	255 00 418	53.2	14
10 mm 3/8"	255 00 427	53.2	14
13 mm 1/2"	255 00 428	53.2	16

OETIKER

SC Series G

DN11


1/2"




75% of original size

Swing Coupling


with female thread

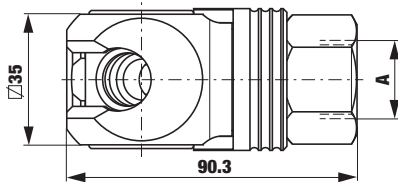

with male thread

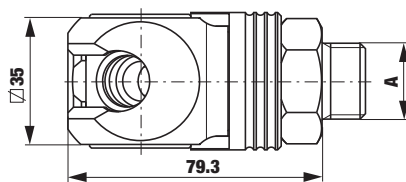


with hose stem

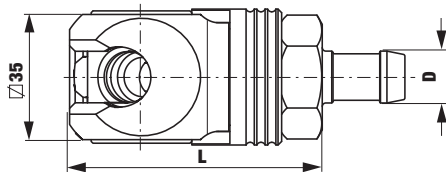


Plug


with male thread



with female thread

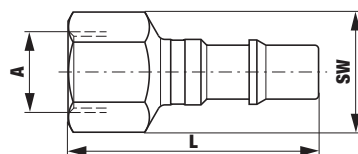

with hose stem



A	Part No.	L
G3/8	205 00 132	73.8
G1/2	205 00 133	77.8
G3/4	205 00 134	80.3
NPT3/8	205 00 138	78.8
NPT1/2	205 00 139	82.3
NPT3/4	205 00 140	83.3

G3/8	205 00 135	70.3
G1/2	205 00 136	70.3
G3/4	205 00 137	70.3
NPT3/8	205 00 141	70.3
NPT1/2	205 00 142	70.3
NPT3/4	205 00 143	70.3

D	Part No.	L
13 mm 1/2"	205 00 737	93.3

A	Part No.	L	SW
G3/8	255 00 131	51.0	24
G1/2	255 00 132	51.0	24
G3/4	255 00 133	51.0	27
NPT3/8	255 00 137	50.7	24
NPT1/2	255 00 138	50.0	24
NPT3/4	255 00 139	51.0	27

G3/8	255 00 128	65.0	24
G1/2	255 00 129	65.0	27
G3/4	255 00 130	69.0	32
NPT3/8	255 00 134	65.0	24
NPT1/2	255 00 135	67.0	27
NPT3/4	255 00 136	69.0	32

D	Part No.	L	Ø
10 mm 3/8"	255 00 140	64.0	17
13 mm 1/2"	255 00 141	64.0	17
16 mm 5/8"	255 00 142	66.0	22

Features

- In accordance with safety standard ISO 4414, EN 983
- Plug in accordance with ISO 6150-C-17 and AFNOR: C-17 NF E 49-053
- Full flow, negligible loss of pressure
- Simple operation, no force required
- Compact design

Temperature Range


-20° to + 100°C (NBR)
-4° to + 212°F

Operating Pressure

3 inHg (100 mbar) to 360 psi (25 bar), connection/disconnection to maximum 200 psi (15 bar)

Materials, Seals

Guide to selection and ordering (see page 27).

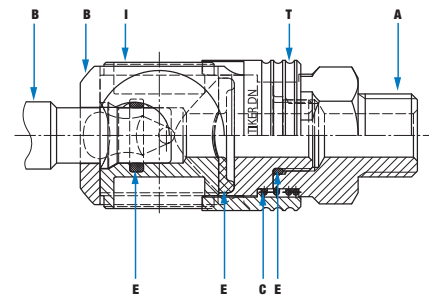


Material Code

A = Steel, nickel plated
B = Steel, tenifer treated
C = Stainless steel
E = Nitrile elastomer (NBR)
I = Surface hardened steel, nickel plated
T = Steel, nickel plated, orange painted

Compatible with

OETIKER DN11
Stäubli 11



See page 9.



OETIKER

SC Series H

DN 11

1/2"



75% of original size

Features

- In accordance with safety standard ISO 4414, EN 983
- Plug in accordance with ISO 6150-C-17, AFNOR: C-17 NF E 49-053, US: MIL-C-4109
- Full flow, negligible loss of pressure
- Simple operation, no force required
- Compact design



Temperature Range


-20° to + 100°C (NBR)
-4° to + 212°F

Operating Pressure

3 inHg (100 mbar) to
360 psi (25 bar), connection/disconnection to
maximum 200 psi (15 bar)

Materials, Seals

Guide to selection and ordering (see page 27).

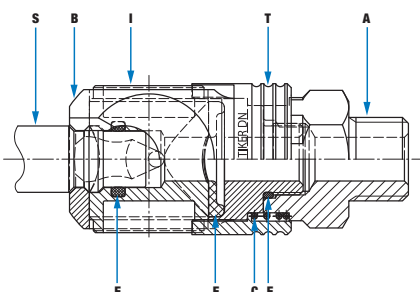


Material Code

A = Steel, nickel plated
B = Steel, tenifer treated
C = Stainless steel
E = Nitrile elastomer (NBR)
I = Surface hardened steel, nickel plated
S = Surface hardened steel, galvanized
T = Steel, nickel plated, orange painted

Compatible with


Industrial Interchange 1/2"
AMFLO C10
Hansen 520
Foster 5205
Parker 17
Prevost IRM 11




See page 9.

Swing Coupling


with female thread

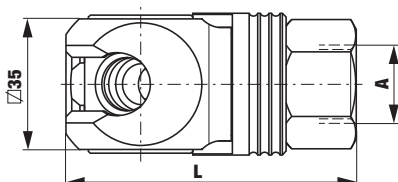

with male thread

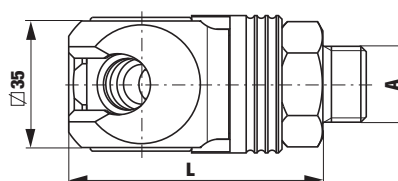


with hose stem

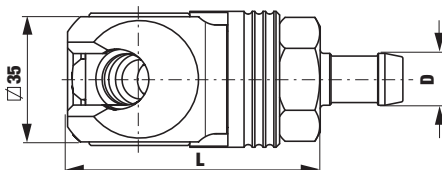


Plug


with male thread



with female thread



with hose stem



A	Part No.	L
G3/8	205 00 103	73.8
G1/2	205 00 104	77.8
G3/4	205 00 105	80.3
NPT3/8	205 00 109	78.8
NPT1/2	205 00 110	82.3
NPT3/4	205 00 111	83.3

G3/8	205 00 106	70.3
G1/2	205 00 107	70.3
G3/4	205 00 108	70.3
NPT3/8	205 00 112	70.3
NPT1/2	205 00 113	70.3
NPT3/4	205 00 114	70.3

D	Part No.	L
13 mm 1/2"	205 00 712	93.3

A	Part No.	L	SW
G3/8	255 00 074	45.0	19
G1/2	255 00 075	45.0	24
G3/4	255 00 290	45.0	27
NPT3/8	255 00 277	44.7	19
NPT1/2	255 00 278	44.0	24
NPT3/4	255 00 291	45.0	27

G3/8	255 00 076	59.0	19
G1/2	255 00 077	59.0	27
G3/4	255 00 078	63.0	32
NPT3/8	255 00 279	59.0	19
NPT1/2	255 00 280	61.0	27
NPT3/4	255 00 292	63.0	32

D	Part No.	L	Ø
10 mm 3/8"	255 00 079	64.0	22
13 mm 1/2"	255 00 080	62.0	22
16 mm 5/8"	255 00 081	64.0	22

OETIKER SC Series HB


DN 1 1/2"




75% of original size

Swing Coupling

with female thread

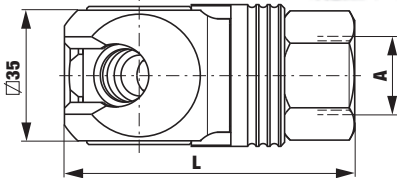

with male thread

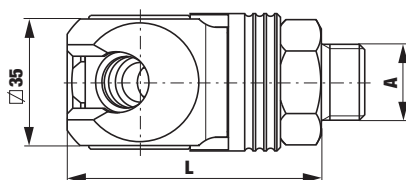

A	Part No.	L
G1/2	205 00 685	83.3
G3/4	205 00 684	90.3
NPT1/2	205 00 687	83.3
NPT3/4	205 00 686	90.3

G1/2	205 00 743	80.3
G3/4	205 00 744	80.3
NPT1/2	205 00 745	79.3
NPT3/4	205 00 746	79.3

Features

- In accordance with ISO 4414, EN 983
- Plug in accordance with ISO 6150-C-17, AFNOR: C-17 NF E 49-053, US: MIL-C-4109
- Full flow, negligible loss of pressure
- Simple operation, no force required
- Easy grip release ring
- Corrosion and ozone proof
- Suitable for internal and external applications

Temperature Range

-15° to + 200°C (FPM)
+5° to + 392°F

Operating Pressure

3 inHg (100 mbar) to
360 psi (25 bar), connection/disconnection to
maximum 200 psi (15 bar)




Materials, Seals


Guide to selection and ordering (see page 27).

Plug


with male thread



with female thread




with hose stem



A	Part No.	L	SW
G3/8	355 00 250	45.0	19
G1/2	355 00 075	45.0	24
G3/4	355 00 327	45.0	27
NPT1/2	355 00 328	44.0	24
NPT3/4	355 00 253	45.0	27

G3/8	355 00 076	59.0	19
G1/2	355 00 077	59.0	27
G3/4	355 00 078	63.0	32
NPT1/2	355 00 255	61.0	27
NPT3/4	355 00 256	63.0	32

D	Part No.	L	Ø
10 mm 3/8"	355 00 079	64.0	22
13 mm 1/2"	355 00 080	62.0	22
16 mm 5/8"	355 00 081	64.0	22

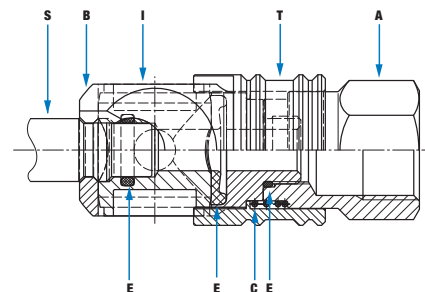

Material Code

A = Brass, nickel plated
B = Brass, nickel plated
C = Stainless steel, 1.4310
E = FPM
I = Aluminum
S = Stainless steel, 1.4305
T = Brass, nickel plated

Compatible with

Industrial Interchange	1/2"
AMFLO	C10
Hansen	520
Foster	5205
Parker	17
Prevost	IRM 11



See page 9.





OETIKER

SC Series I

DN19

3/4"



Features

- In accordance with safety standard ISO 4414, EN 983
- Plug in accordance with ISO 6150-C-27 and AFNOR: C-27 NF E 49-053
- Full flow, negligible loss of pressure
- Simple operation, no force required
- Compact design

Temperature Range


-20° to + 100°C (NBR)
-4° to + 212°F

Operating Pressure

3 inHg (100 mbar) to
360 psi (25 bar), connection/disconnection to
maximum 170 psi (12 bar)

Materials, Seals

Guide to selection and ordering (see page 27).

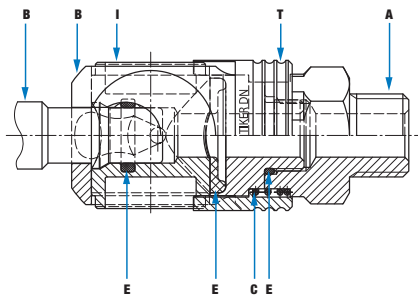


Material Code

A = Steel, nickel plated
B = Steel, tenifer treated
C = Stainless steel
E = Nitrile elastomer (NBR)
I = Surface hardened steel, nickel plated
T = Steel, nickel plated, orange painted

Compatible with


Stäubli ADS 19, RBE 19




See page 9.

Swing Coupling

with female thread

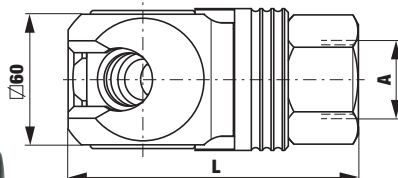


with male thread

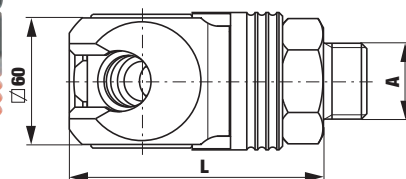


Plug


with male thread

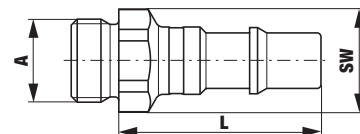

with female thread

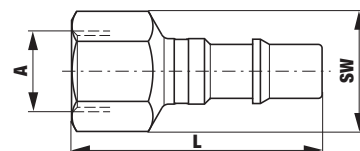

with hose stem



A	Part No.	L
G3/4	205 00 144	116.0
G1	205 00 145	116.0
NPT3/4	205 00 148	118.0
NPT1	205 00 149	121.0

G3/4	205 00 146	112.0
G1	205 00 147	112.0
NPT3/4	205 00 150	112.0
NPT1	205 00 151	112.0

A	Part No.	L	SW
G3/4	255 00 082	81.0	36
G1	255 00 083	81.0	36

G3/4	255 00 084	89.0	36
G1	255 00 085	94.0	41

D	Part No.	L	Ø
LW19	255 00 086	105.0	32
LW25	255 00 087	111.0	32

Air Consumption of Pneumatic Hand Tools

OETIKER



Excellent Seal

Even small leaks can lead to big losses and they can also cause serious accidents.


It has been shown that in the case of compressed air, leaking couplings account for an energy loss of 8-15%.

Applications for OETIKER Couplings Series A1, B1, K, P, N DN6 / 1/4" Series C, D, E, E1 DN8 / 3/8"

Flow rate at 20°C (68°F) and 87 psi (6 bar)



Applications for OETIKER Couplings Series G, H, HB DN11 / 1/2" Serie I DN19 / 3/4"

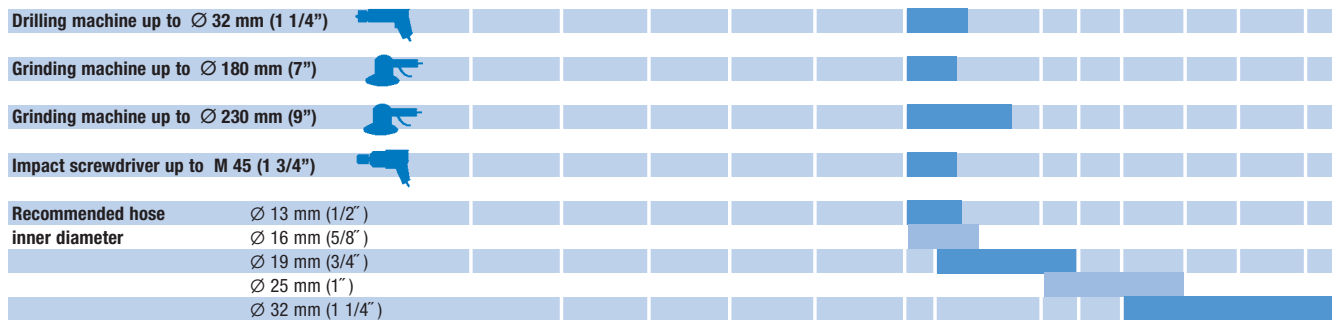



OETIKER SC Accessories

Kink Prevention Spirals, Covers, Protective Covers

Kink Prevention Spirals for OETIKER Swing Couplings SC

Prevents kinking of the hose in the area of the connection or attachment and allows for a neat, professional look. For OETIKER Swing Couplings SC in nominal sizes DN6 and DN8, kink prevention spirals are supplied instead of the valve nuts which normally come with PUR connections.

Material

Unbreakable polyamide, black.



Suitable for hose

PUR 8 x 12 mm
PUR 11 x 16 mm

Art. No.


295 00 337
295 00 401

Covers for OETIKER Swing Couplings SC

The plastic cover is slipped over the housing of the OETIKER Swing Coupling SC to protect the work piece, e.g. for work on car body parts, furniture, etc.

Material

Unbreakable polyamide, orange.

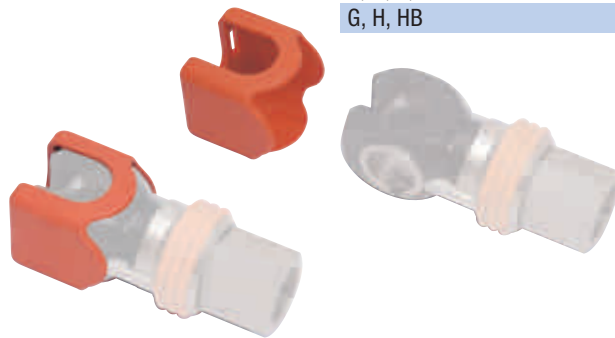

Suitable for series

A1, B1, K, M, P, N
C, D, E, E1
G, H, HB

Art. No.

295 00 385
295 00 340
295 00 531

Protective Covers for OETIKER Swing Couplings SC

Slides over airline coupling installation. Provides complete protective coverage of coupling and plug.

Material

Vinyl.



Suitable for series

A1, B1, K, M, P, N
C, D, E, E1
G, H, HB

Art. No.

295 00 480
295 00 481
295 00 482

Further information about OETIKER accessories is available upon request.

OETIKER SC Materials and Seals



Guide to Selection and Ordering

Materials

OETIKER Swing Couplings are manufactured from high quality materials. Additional special surface treatments guarantee greater durability with less wear and tear and high resistance to corrosion.

The orange coating denotes safety – the plastic sleeve gives increased grip and protects the work piece from possible damage.

The cross section and material codes give details of the composition of each individual part.

In the case of air, gas and oil – as long as they are not mixed with any additives – OETIKER Couplings made from standard materials will be suitable.

These details are not binding. Where there is any doubt, tests must be carried out.

Seals

The following quality seals are available for OETIKER Couplings. Various seals can be used depending upon the throughput media. All details are not binding. Before use, please contact OETIKER for information about the concentration, mixture or temperature of media. If there is any doubt, tests should be carried out. All legislation relating to food-stuffs must be observed.

Type N

Nitrile elastomer (NBR)

Good ageing resistance, high mechanical strength, resistant to oil and petrol, poor resistance against ozone.

Temperature from -20° to +100°C
(-4° to +212°F).

Type V

Fluorine elastomer (FPM)

Very good resistance at high temperatures (except for hot water and steam).

Good resistance to many chemicals, ozone, weather. Limited for low temperature range.

Temperature from -15° to +200°C
(+5° to +392°F).

Type P

Ethylene propylene elastomer (EPDM)

Very good resistance against hot water and steam, resistant to ageing and weather, not resistant to mineral oils and grease.

Temperature from -40° to +150°C
(-40° to +302°F).

Selection and Handling

Incorrect handling or the wrong choice of Swing Couplings or accessories can result in damage to property and/or personal injury. The maximum operating pressure for each model as specified by the manufacturer must not be exceeded. The throughput medium is a critical factor in the choice of seal and coupling material. External mechanical impact and/or vibration will have an adverse effect on the durability of couplings and accessories and should therefore be avoided or, where this is not possible, limited.

OETIKER recommends that couplings and accessories should be checked periodically for excessive wear and leaks.

OETIKER Customer Services Department will be happy to give you further details about the use of OETIKER Couplings.

For more detailed information, please follow the operating instructions.

Note about Safety

ISO 6150 §7.1 recommends that a hose of at least 300 mm in length should be used between the coupling and a vibrating tool. Please also read the operating instructions which are supplied with the coupling.

Note about Ordering

If, instead of the standard version, a special seal is required, please specify this when ordering.



OETIKER International

OETIKER Product Lines and Companies

Clamps and Rings

Permanent, tight connection – will only be released if required.

For all clamping and pressure ranges, hard or soft materials, hoses, cables or ropes. Made from tube or band, Stepless®, Self-Tensioning or reusable. Also in rust and acid-resistant materials.

Simple and straightforward installation.

Couplings

Swing Couplings SC – Full flow. Safely swing to connect.

Connects easily and quickly with no force required and no loss of pressure in the system.

Quick Action Couplings SV – Two-stage uncoupling.

Non-interchangeable and heavy duty ranges also available.

Quick-Connectors – a system to connect supply lines simply, fast and safe.

Hinged Steel Belts and Conveyor Chains

Hinged Steel Belts in a wide range of pitches and widths. Flat, dimpled, perforated, slotted – customer-specific production.

Conveyor Chains and sprockets for a wide variety of applications in industry and mechanical engineering. There are also rust, acid and heat-resistant versions.

Formed and Stamped Parts

Holders, rings, special clamps, and many other fastening components for a wide variety of industries. Manufactured using multi-stage tools in presses with up to 4000 kN load capacity.

Surface Technique*

ROTOL – Deburring and polishing machines, design and construction of plants for rational surface treatment and finishing.

Special Products*

Research and development of products as well as solutions for them to be integrated into assembly procedures internally or on customer's request repeatedly lead to innovative special products.

* Not available in all countries

The addresses of all OETIKER companies and agencies are included on our website.

www.oetiker.com

OETIKER has been developing connecting technology for over 60 years.

OETIKER products are manufactured by its own companies in line with ISO/TS 16949 and sold worldwide in over 40 countries. Numerous patents are proof of continuous innovation.



Connecting Technology

Headquarters
SWITZERLAND



Hans Oetiker AG
Maschinen- und
Apparatefabrik
Oberdorfstrasse 21
CH-8812 Horgen (Zürich)
Tel. +41 44 728 55 55
Fax +41 44 728 55 15
e-mail info@ch.oetiker.com

AUSTRIA
Hans Oetiker
Maschinen- und Apparatebau
Ges.m.b.H.
Eduard-Klinger-Strasse 19
A-3423 St. Andrä-Wördern
Tel. +43 2242 33 994-0
Fax +43 2242 33 997
e-mail info@at.oetiker.com

BELGIUM
Oetiker Benelux B.V.
Sales Office Belgium
Wellingsstraat 102, P.B. 55
B-9070 Heusden/Destelbergen (Gent)
Tel. +32 9 252 25 55
Fax +32 9 252 25 56
e-mail info@be.oetiker.com

CANADA
Oetiker Limited
203 Dufferin Street South
P.O. Box 5500
Alliston, Ontario L9R 1W7 – Canada
Tel. +1 705 435 4394
Fax +1 705 435 3155
e-mail info@ca.oetiker.com

P. R. CHINA
Oetiker Industries
(Tianjin) Ltd.
10 Shuangchenzhong Road
Beichen High Tech Industrial Park
Tianjin 300400 – P.R. China
Tel. +86 22 26 97 11 83
Fax +86 22 26 97 13 80
e-mail info@cn.oetiker.com

CZECH REPUBLIC
Hans Oetiker spol s.r.o.
Videnska 116
CZ-37833 Nová Bystrice
Tel. +420 384 386513
Fax +420 384 386386
e-mail info@cz.oetiker.com

FRANCE
Oetiker Sàrl
9, rue Jean Moulin
ZA du Pré Fusé
F-77348 Pontault-Combault Cedex
Tel. +33 1 60 29 90 39
Fax +33 1 64 40 90 23
e-mail info@fr.oetiker.com

GERMANY
Hans Oetiker Metallwaren- & Apparatefabrik GmbH
Üsenbergerstrasse 13
D-79346 Endingen a.K.
Tel. +49 76 42 6 84-0
Fax +49 76 42 6 84-1 25
e-mail info@de.oetiker.com

Kurt Allert GmbH & Co. KG
Postfach 1160
Austrasse 36
D-78727 Oberndorf a.N.
Tel. +49 74 23 87 70-0
Fax +49 74 23 87 70-87
e-mail info@allert.oetiker.com

HUNGARY
Oetiker Hungaria KFT
Vasvári P.U.11
H-9800 Vasvár
Tel. +36 94 370 630
Fax +36 94 370 533
e-mail info@hu.oetiker.com

INDIA
Oetiker India Private Ltd.
N-14, Additional Patalganga Industrial Area
Village Chavane, Khalapur
Rasayani 410 220
Dist. Raigad, India
Tel. +91 2192 250107-12
Fax +91 2192 250105
e-mail info@in.oetiker.com

JAPAN
Oetiker Japan Co. Ltd.
Kaneko Bldg. A
5-3-5 Nakamachi-dai, Tsuzuki-ku
Yokohama 224-0041, Japan
Tel. +81 45 949 3151
Fax +81 45 949 3152
e-mail info@jp.oetiker.com

NETHERLANDS
Oetiker Benelux B.V.
Hertzstraat 38
NL-6716 BT Ede
Tel. +31 318 63 71 71
Fax +31 318 63 34 89
e-mail info@nl.oetiker.com

SPAIN
Oetiker España, S.A.
Pol. Ind. Las Salinas
C/Puente, 18
E-11500 El Puerto de Santa Maria (Cádiz)
Tel. +34 956 86 04 40
Fax +34 956 87 17 07
e-mail info@es.oetiker.com

UNITED KINGDOM
Oetiker UK Limited
Foundry Close
GB-Horsham, Sussex RH13 5PX
Tel. +44 1403 26 04 78
Fax +44 1403 24 06 90
e-mail info@uk.oetiker.com

USA
Oetiker, Inc.
6317 Euclid Street
Marlette, Michigan
48453-0217 – USA
Tel. +1 989 635 3621
Fax +1 989 635 2157
e-mail info@us.oetiker.com