


Section E: Wiring Devices

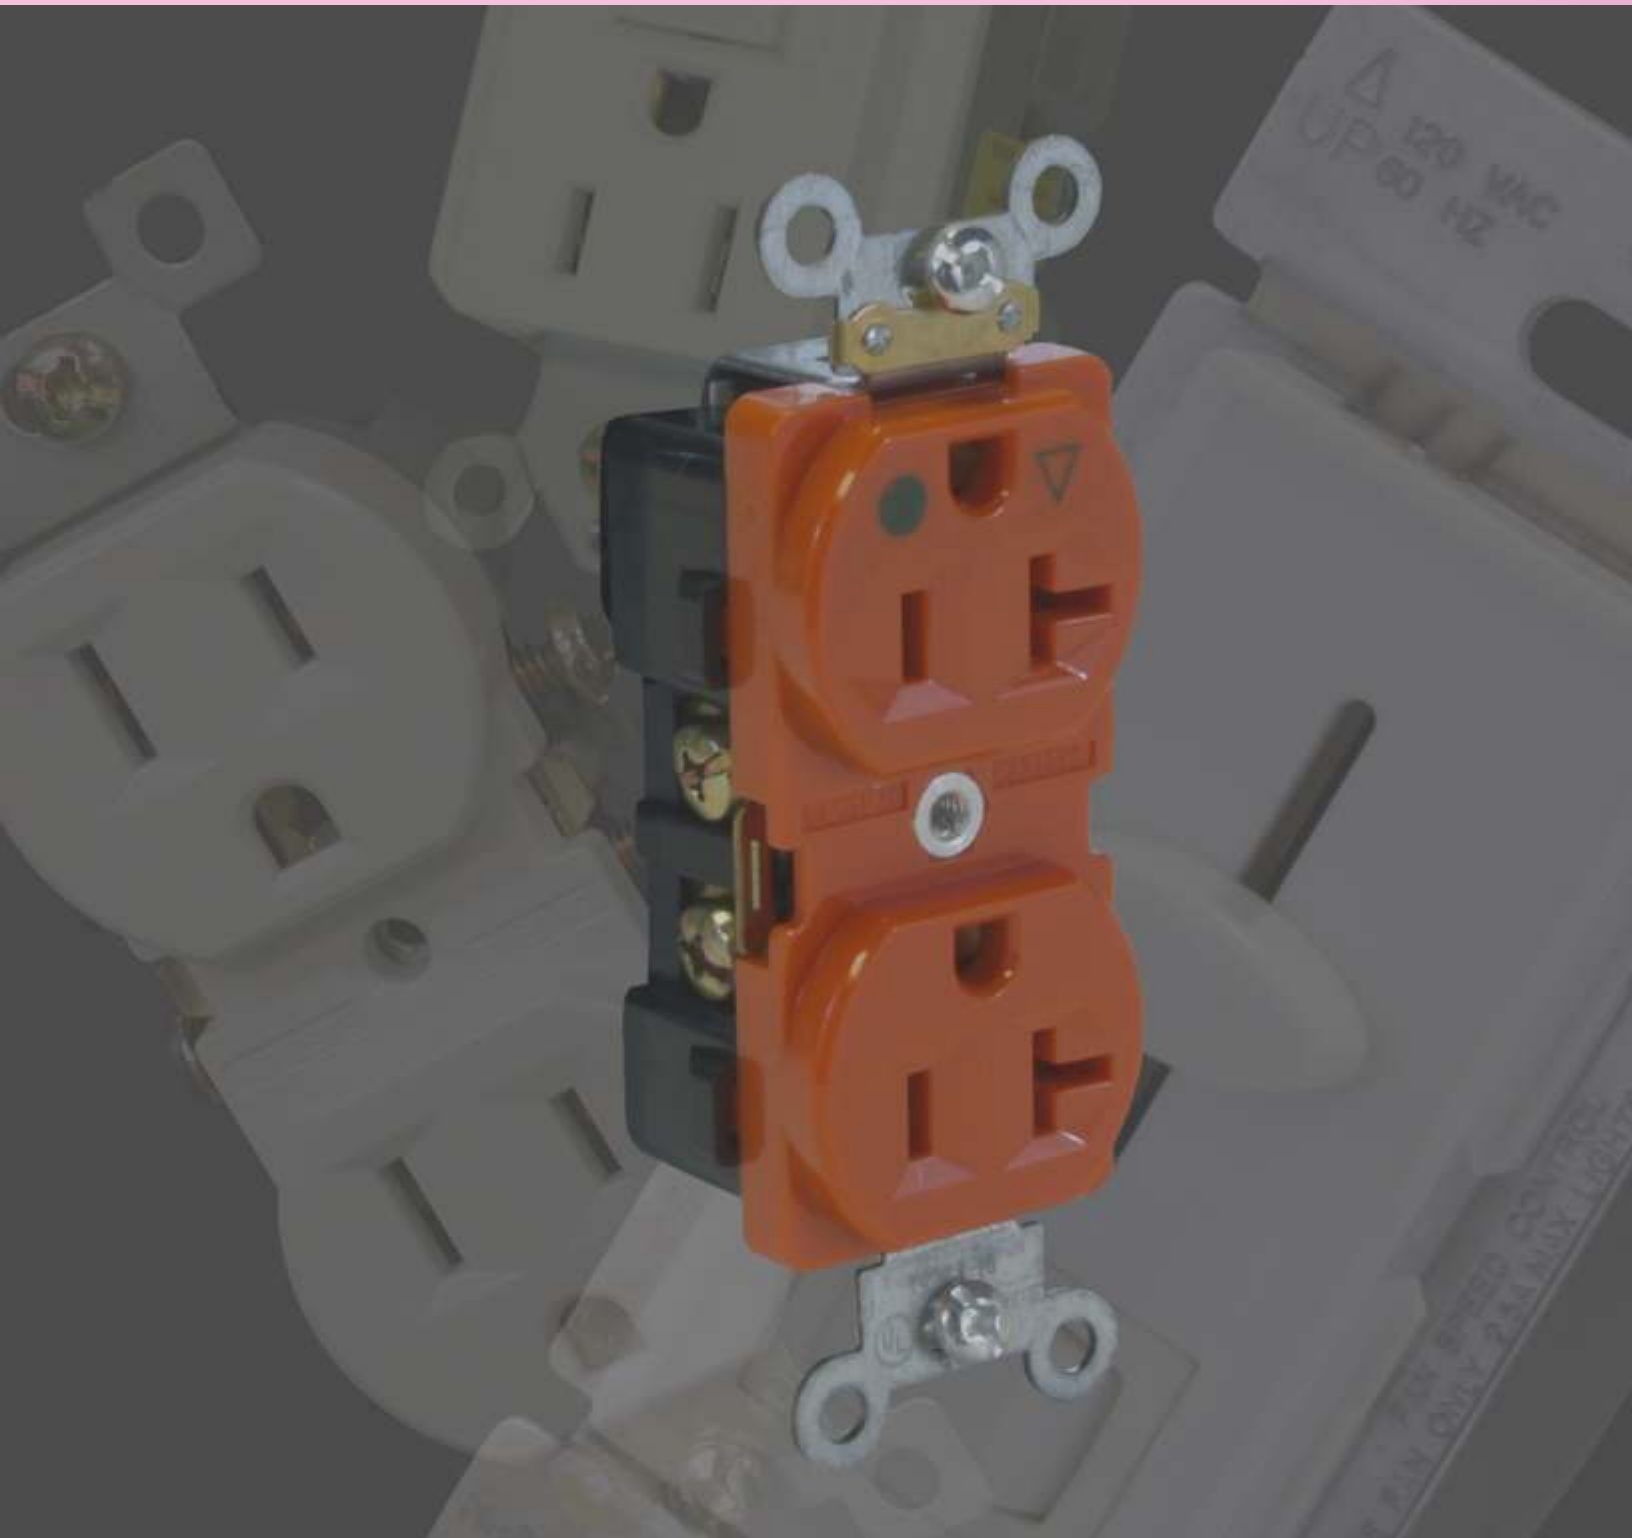

Occupancy & Vacancy Sensors

VACANCY SENSORS

- **California Title 24 Compliant**
- Manual ON
- Automatic OFF after time delay expires and manual OFF option
- Adjustable time delay from 15 seconds to 30 minutes
- Adjustable sensitivity settings
- Passive Infrared Technology
- 2 year warranty
- Standard decorative wall plate included
- Compatible with **MAGNETIC** and **ELECTRONIC BALLAST**
- Neutral Wire Required



Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.
		White	Ivory	Almond	
T24VSD-S	Passive Infrared Vacancy Sensor, 180°, 650 Sq. Ft. Coverage RATING: Incandescent: 800W @120VAC Fluorescent: 800VA @120VAC 1600VA @ 277VAC Motor: 1/4HP@ 120VAC	T24VSD-S-W	T24VSD-S-I	T24VSD-S-A	10
T24VS-S	Passive Infrared Vacancy Sensor, 150°, 450 Sq. Ft. Coverage RATING: Incandescent: 500W @120VAC Fluorescent: 500VA @120VAC Motor: 1/8HP@ 120VAC	T24VS-S-W	T24VS-S-I	-	10



T24VSD



T24VS

OCCUPANCY SENSORS

- **California Title 24 Compliant**
- Turn lights ON/OFF automatically
- With manual ON/OFF pushbutton
- Adjustable time delay from 15 seconds to 30 minutes
- 5 year warranty
- Standard decorative wall plate included
- Compatible with **MAGNETIC** and **ELECTRONIC BALLAST**
- **NEUTRAL** wire required



Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.
		White	Ivory	Almond	
OSD-S	Passive Infrared Occupancy Sensor, 180°, 650 Sq. Ft. Coverage RATING: Incandescent: 800W @120VAC Fluorescent: 800VA @120VAC Motor: 1/4HP@ 120VAC	OSD-S-W	OSD-S-I	OSD-S-A	10



OSD-S

Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.
		White	Ivory	Almond	
OSD-S-2W	Passive Infrared Occupancy Sensor, 180°, 1200 Sq. Ft. Coverage RATING: Incandescent: 800W @120VAC Fluorescent: 800VA @120VAC Motor: 1/4HP@ 120VAC	OSD-S-2W-W	OSD-S-2W-I	-	10



OSD-S-2W

- **California Title 24 Compliant**
- Turn lights ON/OFF automatically
- With manual ON/OFF pushbutton
- Built-in VAC selection side button switch
- Adjustable time delay from 15 seconds to 30 minutes
- "Walk-through" sensing mode increases energy savings by turning light OFF shortly after momentary occupancy
- Self adaptive feature automatically adjust time delay based on occupants behavior patterns
- 5 year warranty
- Standard decorative wall plate included
- Compatible with **MAGNETIC** and **ELECTRONIC BALLAST**
- **NO NEUTRAL** wire required
- **GROUND WIRE** connection required.



NOTE: Vacancy and Occupancy Sensors should be initially left ON for 4-5 minutes for first time to function properly.

Occupancy Sensors

OCCUPANCY SENSORS

- **California Title 24 Compliant**
- Turn lights ON/OFF automatically
- With manual ON/OFF pushbutton
- Built-in VAC selection side button switch
- Adjustable time delay from 15 seconds to 30 minutes
- "Walk-through" sensing mode increases energy savings by turning light OFF shortly after momentary occupancy
- Self adaptive feature automatically adjust time delay based on occupants behavior patterns
- 5 year warranty
- Standard decorative wall plate included
- Compatible with **MAGNETIC** and **ELECTRONIC BALLAST**
- **NO NEUTRAL** wire required
- **GROUND WIRE** connection required.
- Dual Relay(control two separate load)



Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.
		White	Ivory	Almond	
OSD-S-D	Passive Infrared Occupancy Sensor, 180°, 1200 Sq. Ft. Coverage Dual Relay RATING: Incandescent: 800W @120VAC Fluorescent: 800VA @120VAC Motor: 1/4HP@ 120VAC	OSD-S-D-W	OSD-S-D-I	-	10



OSD-S-D

Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.
		White	Ivory	Almond	
OS-P	Passive Infrared Occupancy Sensor, 150°, 450 Sq. Ft. Coverage RATING: Incandescent: 500W @120VAC Fluorescent: 500VA @120VAC Motor: 1/8HP@ 120VAC	OS-P-W	OS-P-I	-	10



OS-P

Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.
		White	Ivory	Almond	
OS-S	Passive Infrared Occupancy Sensor, 150°, 450 Sq. Ft. Coverage RATING: Incandescent: 500W @120VAC Fluorescent: 500VA @120VAC Motor: 1/8HP@ 120VAC	OS-S-W	OS-S-I	-	10



OS-S

- Turn lights ON/OFF automatically
- With manual ON/OFF setting allows use as regular switch
- Adjustable time delay from 15 seconds to 30 minutes
- Adjustable sensitivity settings
- 2 year warranty
- Standard decorative wall plate included
- **NO NEUTRAL** wire required
- For **MAGNETIC BALLAST** only



NOTE: Vacancy and Occupancy Sensors should be initially left ON for 4-5 minutes for first time to function properly.

Decorative Receptacles & Rocker Switches

RESIDENTIAL GRADE DECORATIVE RECEPTACLES

- 125 VAC
- Self-Grounding (Except DR-20)
- #14 to #10AWG Side Wire or #14AWG Push-In Back Wire (DR15)
- #14 to #12AWG Back Wire (DR20)
- Nylon Body Construction
- With Combination Head Screws

Cat. No.	Description	Color (Cat. No. - Color Code)				Std. Pkg.	Master Carton
		White	Ivory	Black	Almond		
DR15	15A Decorative Receptacle	DR15-SW	DR15-SI	DR15-SBK	DR15-SA	10	200
DR15-TR	15A Decorative Receptacle, Tamper Resistant	DR15-TR-SW	DR15-TR-SI	DR15-TR-SBK	DR15-TR-SA	10	200
DR20	20A Decorative Receptacle	DR20-SW	DR20-SI	DR20-SBK	DR20-SA	10	200



DR15

DR15-TR
Tamper Resistant

DR20

Tamper Resistant:

- Tamper resistant outlets feature an internal shutter system that prevents children from sticking objects into outlets



RESIDENTIAL GRADE DECORATIVE SWITCHES

- Rocker-Type
- 120/277 VAC
- 1/2 HP @ 120V
- #14 AWG Push-In Back Wire or #14 to #10 AWG Side Wire
- Nylon Body Construction
- With Combination Head Screws

Cat. No.	Description	Color (Cat. No. - Color Code)				Std. Pkg.	Master Carton
		White	Ivory	Black	Almond		
DS15	15A Single-Pole	DS15-W	DS15-I	DS15-BK	DS15-A	10	200
DS315	15A Three-Way	DS315-W	DS315-I	DS315-BK	DS315-A	10	200
DS415	15A Four-Way with Pigtail	DS415-W	DS415-I	DS415-BK	DS415-A	10	200
DSL15	15A Single-Pole, Illuminated	DSL15-W	DSL15-I	-	-	10	200
DSL315	15A Three-Way, Illuminated	DSL315-W	DSL315-I	-	-	10	200

DS15
DS315DSL15
DSL315
Illuminated

DS415

Illuminated Switches:

- Light glows through the top portion of the switch when in the off position
- **NO NEUTRAL** wire required



RESIDENTIAL GRADE DECORATIVE SWITCHES

- Rocker-Type
- 120/277 VAC
- Nylon Body Construction
- With Combination Head Screws

Cat. No.	Description	Color (Cat. No. - Color Code)				Std. Pkg.	Master Carton
		White	Ivory	Black	Almond		
2DS15	Double Rocker Switch, 15A Single-Pole	2DS15-W	2DS15-I	2DS15-BK	2DS15-A	10	200
3DS15	Triple Rocker Switch, 15A Single-Pole Back wire only, with ground pigtail	3DS15-W	3DS15-I	3DS15-BK	3DS15-A	10	200
DRDS15	Rocker Switch, 15A Receptacle	DRDS15-W	DRDS15-I	DRDS15-BK	DRDS15-A	10	200



2DS15



3DS15



DRDS15

Certification:

- File E224781

Toggle Switches

RESIDENTIAL GRADE TOGGLE SWITCHES

- 120 VAC
- #14AWG Push-In Back Wire or
- #14 to #10 AWG Side Wire
- Nylon Toggle & Frame Construction
- Smooth Toggle Action
- With Combination Head Screws



Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.	Master Carton
		White	Ivory	Gray		
TS15	15A Single Pole	TS15-W	TS15-I	TS15-G	10	200
TS315	15A Three-Way	TS315-W	TS315-I	TS315-G	10	200
TS415	15A Four-Way	TS415-W	TS415-I	-	10	200



TS15



TS315



TS415

COMMERCIAL GRADE TOGGLE SWITCHES

- 120/277 VAC
- #14 to #10 AWG Side Wire
- Nylon Toggle & Frame Construction
- Smooth Toggle Action
- With Combination Head Screws



Cat. No.	Description	Color (Cat. No. - Color Code)		Std. Pkg.	Master Carton
		White	Ivory		
TS20	20A Single Pole	TS20-W	TS20-I	10	200



TS20

RESIDENTIAL GRADE TOGGLE SWITCHES

- 120 VAC
- #14AWG Push-In Back Wire or
- #14 to #10 AWG Side Wire
- Nylon Toggle & Frame Construction
- Smooth Toggle Action
- With Combination Head Screws



Cat. No.	Description	Std. Pkg.	Master Carton
TSL15-CL	15A Single Pole with Pilot Light , Clear	10	200
TSL315-CL	15A Three-Way with Pilot Light , Clear	10	200



TS15-CL



TS315-CL

Certification:

- File E224781

Duplex Receptacles

RESIDENTIAL GRADE DUPLEX RECEPTACLES


- 120 VAC
- Nylon Body Construction
- Self-Grounding (Except R20)
- #14 to #10 AWG Side Wire or #14AWG Push-In Back Wire (R15)
- #14 to #12 AWG Back Wire (R20)
- Nylon Body Construction
- With Combination Head Screws

Tamper Resistant:

- See Page F2 for more Tamper Resistant Information



Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.	Master Carton
		White	Ivory	Gray		
R15	15A Duplex Receptacle	R15-SW	R15-SI	R15-SG	10	200
R15-TR	15A Duplex Receptacle, Tamper Resistant	R15-TR-SW	R15-TR-SI	-	10	200
R20	20A Duplex Receptacle	R20-SW	R20-SI	-	10	200



COMMERCIAL GRADE DUPLEX RECEPTACLES

- 125 VAC
- Impact-Resistant Nylon Body
- Self-Grounding to Metal Boxes
- #14 to #10 AWG Side Wire
- With Combination Head Screws
- **With One-Piece, nickel-plated brass strap**



Cat. No.	Description	Color (Cat. No. - Color Code)		Std. Pkg.	Master Carton
		White	Ivory		
CR15	15A Duplex Receptacle	CR15-W	CR15-I	10	200
CR20	20A Duplex Receptacle	CR20-W	CR20-I	10	200



INDUSTRIAL GRADE DUPLEX RECEPTACLES

- 125 VAC
- Impact-Resistant Nylon Body
- Self-Grounding to Metal Boxes
- #14 to #10 AWG Side or Back Wiring Options
- 8-hole back wiring for feed thru wiring
- With Combination Head Screws
- **With One-Piece, nickel-plated brass strap, with integral ground contacts locked into back body & face to prevent strap separation.**



Cat. No.	Description	Color (Cat. No. - Color Code)		Std. Pkg.	Master Carton
		White	Ivory		
IR15	15A Duplex Receptacle	I15-W	I15-I	10	200
IR20	20A Duplex Receptacle	I20-W	I20-I	10	200



HOSPITAL GRADE DUPLEX RECEPTACLES

- 125 VAC
- Thermoplastic Shutter for reliable
- Tamper-resistant design
- Impact-Resistant Nylon Body
- One-piece Brass Alloy Grounding
- High Performance Copper Alloy Contacts
- Encapsulated Ground Contacts
- #14 to #10 AWG Side or Back Wiring
- 8-hole back wiring for feed thru wiring
- With Combination Head Screws



Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.	Master Carton
		White	Ivory	Red		
HR15	15A Duplex Receptacle	HR15-W	HR15-I	HR15-R	10	200
HR20	20A Duplex Receptacle	HR20-W	HR20-I	HR20-R	10	200



Certification:

- File E224780

Receptacles & Stack Devices

INDUSTRIAL GRADE

DUPLEX RECEPTACLE with ISOLATED GROUND

- 125 VAC
- Impact-Resistant Nylon Body
- Self-Grounding to Metal Boxes
- #14 to #10 AWG Side or
- Back Wiring Options
- 8-hole back wiring for feed thru wiring
- With Combination Head Screws
- **With One-Piece, nickel-plated brass strap, with integral ground contacts locked into back body & face to prevent strap separation.**



Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.	Master Carton
		Orange	White	Ivory		
IGR15	15A Duplex Receptacle	IGR15-O	IGR15-W	IGR15-I	10	200
IGR20	20A Duplex Receptacle	IGR20-O	IGR20-W	IGR20-I	10	200



5-15R



5-20R



(Back View)

Note:
Isolated Ground Receptacles (IGR) provide protection to critical equipment by providing an isolated ground path to a building's isolated ground system.

COMMERCIAL GRADE SINGLE RECEPTACLES

- Impact-Resistant Nylon Body
- Up to #10AWG Side Wire
- With Combination Head Screws
- **With One-Piece, nickel-plated brass strap, with integral ground contacts locked into back body & face to prevent strap separation.**



Cat. No.	Description	Color (Cat. No. - Color Code)		Std. Pkg.	Master Carton
		White	Ivory		
SR15	15A, 125V Single Receptacle	SR15-W	SR15-I	10	200
SR20	20A, 125V Single Receptacle	SR20-W	SR20-I	10	200
SR15-250	15A, 250V Single Receptacle	SR15-250-W	SR15-250-I	10	200
SR20-250	20A, 250V Single Receptacle	SR20-250-W	SR20-250-I	10	200



5-15R



5-20R



6-15R



6-20R

COMMERCIAL GRADE STACK DEVICES

- 125 VAC
- Impact-Resistant Nylon Body
- Up to #10AWG Side Wire
- With Combination Head Screws
- **With One-Piece, nickel-plated brass strap, with integral ground contacts locked into back body & face to prevent strap separation.**



Cat. No.	Description	Color (Cat. No. - Color Code)		Std. Pkg.	Master Carton
		White	Ivory		
2TS15	Two 15A Single Pole Toggle Switches	2TS15-W	2TS15-I	10	200
RTS15	15A Single Pole Toggle Switch & 15A Receptacle	RTS15-W	RTS15-I	10	200
PLTS15	15A Single Pole Toggle Switch & Neon Pilot Light	PLTS15-W	PLTS15-I	10	200



2TS15



RTS15



PLTS15

Certification:

- File E224780

Floor Box Receptacles

FLOOR PLATE COVERS

- Floor boxes may be used on both wood and concrete floors
- All Orbit floor boxes are complete assemblies with steel box included
- Steel floor boxes must be installed flush with finished floor prior to final installation of Orbit Floor plate assembly (except for FLB-D)



Shown In Stainless Steel

Cat. No.	Description	Std. Pkg.
FLBPU-D-BR	Floor Box Pop-Up with Duplex Receptacle, Brass	10
FLBPU-D-SS	Floor Box Pop-Up with Duplex Receptacle, Stainless Steel	10
FLBPU-L-BR	Floor Box Pop-Up with Low-Voltage (RJ45), Brass	10
FLBPU-DL-BR	Floor Box Pop-Up with Duplex Receptacle & Low-Voltage (RJ45), Brass	10
FLBPU-DL-SS	Floor Box Pop-Up with Duplex Receptacle & Low-Voltage (RJ45), Stainless Steel	10
FLB-D-BR	Floor Box with Duplex Receptacle Cover and Adjustable Box, Brass	10
FLB-D-SS	Floor Box with Duplex Receptacle Cover and adjustable box, Stainless Steel	10




FLBPU-D



FLBPU-L



FLBPU-DL

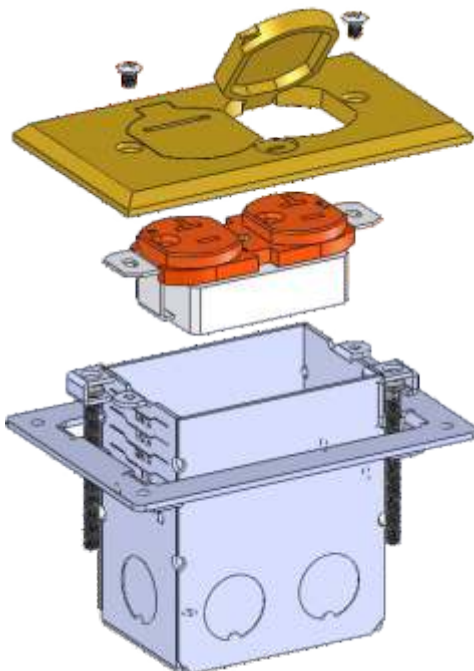

EXPLODED DRAWING



FLB-D

Dimmers & Toggle Switches

RESIDENTIAL GRADE INCANDESCENT ROTARY DIMMERS

- 120 VAC
- 600W
- With 18AWG Cable Leads



Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.
		White	Ivory	Almond	
RD600	Single-Pole Rotary Dimmer, Turn to On	RD600-W	RD600-I	-	10
RDP603	Single-Pole/3-Way, Rotary Dimmer, Push On/Off Preset	RDP603-W	-	-	10
RDK	Replacement Knob for Rotary Dimmers	RDK-W	RDK-I	-	10

RD600
RDP603

RDK

RESIDENTIAL GRADE INCANDESCENT SLIDE DIMMERS

- 120 VAC
- 700W Max. Rating
- Fits Decorator/GFCI Wall plates



Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.
		White	Ivory	Almond	
D600	700W, Single-Pole	D600-W	D600-I	-	10
D603SL	700W, Single-Pole/3-Way with Preset Switch With LED Light, glows when lights are off	D603SL-W	D603SL-I	D603SL-A	10
SDH	Slide Dimmer Replacement Handle	SDH-W	SDH-I	SDH-A	10



D600



D603SL



SDH

RESIDENTIAL GRADE SLIDE DECORATOR DIMMERS PRESET

- 120 VAC
- 700W
- Fits Decorator/GFCI Wallplates
- With 18AWG Cable Leads



Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.
		White	Ivory	Almond	
DD703	Single-Pole/3-Way Decorator Dimmer Switch	DD703-W	-	DD703-A	10
DD703L	Single-Pole/3-Way Decorator Dimmer Switch Illuminated, glows through top portion when lights are off	DD703L-W	-	-	10
DDL503L	Low Voltage, Single-Pole/3-Way Decorator Dimmer Switch, Illuminated, glows through top portion when lights are off	DDL503L-W	-	DDL503L-A	10



DD703



DD703L

DDL503L
Low Voltage

Slide Dimmer & Fan Speed Control

RESIDENTIAL GRADE FLUORESCENT PRESET SLIDE DIMMER

- 120 VAC
- 600VA
- Fits Decorator/GFCI Wallplates



Cat. No.	Description	Std. Pkg.
FD503	Single-Pole/3-Way Slide and Switch with Light	10



FD503

RESIDENTIAL GRADE FAN SPEED & FAN AND LIGHT CONTROLS

- 120 VAC
- Fits Decorator/GFCI Wallplates
- Except RFSC5
- With 18AWG Cable Leads



Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.
		White	Ivory	Almond	
RFSC5	Rotary Fan Speed Control, 5A	RFSC5-W	RFSC5-I	-	10
FSC5	Single Slide Fan Speed Control, 5A	FSC5-W	FSC5-I	FSC5-A	10
FSCLS25	Dual Slide Fan Speed Control 2.5A & Light Switch 300W	FSCLS25-W	FSCLS25-I	FSCLS25-A	10
FSCLD25	Dual Slide Fan Speed Control 2.5A & Light Dimmer 300W	FSCLD25-W	FSCLD25-I	FSCLD25-A	10



RFSC5



FSC5



FSCLS25



FSCLD25

RESIDENTIAL GRADE DIGITAL TIMERS

TIE-7

- Automatic or Manual operation
- Push control cover to switch ON/OFF at any time
- Program up to 16 ON/OFF settings per week
- Large digital LCD display
- 3 year warranty
- Standard decorative wall plate included
- Built-in memory holds settings indefinitely without power

TIE-7B

- Automatic or Manual operation
- Push control ON/OFF at any time
- 3 year warranty
- Standard decorative wall plate included
- 7-Button countdown timer
- Preset time delay 1,5,10,20,30 & 60 min.



Cat. No.	Description		Std. Pkg.
TIE-7	7-Day Heavy Duty Digital In-Wall Timer, 120VAC, 60Hz	Resistive rating: 15A, 1800Watts Tungsten rating: 1200Watts Motor Load: 1/2HP	10
TIE-7B	7-Button Preset Time Delay Switch		10



TIE-7



TIE-7B

E10 Industrial Receptacles & Lampholders

INDUSTRIAL GRADE


STRAIGHT BLADE RECEPTACLES

- 125 / 250 VAC
- #14 to #10 AWG Back Terminals
- Durable Thermoplastic
- Fits OS703, 4407, 5507 Covers

Cat. No.	Description	Color (Cat. No. - Color Code)		Dia.	Std. Pkg.	Master Carton
		Black	White			
R50-3	50A, 3-Pole, 3-Wire Range Receptacle , NEMA 10-50R	R50-3-BK	-	2.11"	10	60
R30-3	30A, 3-Pole, 3-Wire Dryer Receptacle , NEMA 10-30R	R30-3-BK	-	2.11"	10	60
R50-4	50A, 3-Pole, 4-Wire Range Receptacle , NEMA 14-50R	R50-4-BK	R50-4-W	2.44"	10	60
R30-4	30A, 3-Pole, 4-Wire Dryer Receptacle , NEMA 14-30R	R30-4-BK	R30-4-W	2.44"	10	60



R50-3-BK



10-50R



R30-3-BK



10-30R



R50-4-BK




14-50R



R50-4-WH



R30-4-BK



14-30R



R30-4-WH

PORCELAIN & PLASTIC LAMPHOLDERS

- 125 / 250 VAC
- 660W
- With Guard Neck
- Fits 3-1/4" and 4" Boxes

Cat. No.	Description	Color	Std. Pkg.
P-1	Porcelain Lampholder	White	50
PPC-1	Porcelain Lampholder with Pullchain Switch	White	50
PPR-1	Porcelain Lampholder with Pullchain Switch & 15A Receptacle	White	50
P-2	Plastic (Phenolic) Lampholder	White	50
PPC-2	Plastic (Phenolic) Lampholder with Pullchain Switch	White	50



P-1



PPC-1



PPR-1



5-15R



P-2



PPC-2

Certification:

- File E245079

Wall Jacks

MODULAR WALL JACKS

Features:

- Standard Wallplate Size (2-3/4" W x 4-1/2" H)
- Smooth Finish
- Includes Mounting Hardware

RJ11 Jacks Specifications:

- 6 Positions, 4 Conductors
- Screw Terminals

F-Coupling Specifications:

- F-Type Coupler Bulkhead
- Female to Female

RJ45 CAT5e Specifications:

- 110 Type LAN
- 8 Positions, 8 Conductors
- Keystone Jacks



Cat. No.	Description	Color (Cat. No. - Color Code)		Std. Pkg.	Master Carton
		White	Ivory		
WJ-64	1 - RJ11 Jack	WJ-64-W	WJ-64-I	50	200
WJ-642	2 - RJ11 Jacks	WJ-642-W	WJ-642-I	50	200
WJ-F	1 - F-Connector	WJ-F-W	WJ-F-I	50	200
WJ-F2	2 - F-Connector	WJ-F2-W	WJ-F2-I	25	200
WJ-64F	1 - RJ11 Jack & F-Connector	WJ-64F-W	WJ-64F-I	25	200
WJ-64F2	1 - RJ11 Jack & 2 - F-Connector	WJ-64F2-W	WJ-64F2-I	25	200



WJ-64



WJ-642



WJ-F



WJ-F2



WJ-64F



WJ-64F2

DECORATIVE MODULAR WALL JACKS

Features:

- Two-Piece
- Standard-Size Decorative Wallplate Size (2-3/4" W x 4-1/2" H)
- Smooth Finish
- Includes Mounting Hardware



Cat. No.	Description	Color (Cat. No. - Color Code)			Std. Pkg.	Master Carton
		White	Ivory	Almond		
DWJ-64	1 - RJ11 Jack	DWJ-64-W	DWJ-64-I	DWJ-64-A	25	200
DWJ-642	2 - RJ11 Jacks	DWJ-642-W	DWJ-642-I	DWJ-642-A	25	200
DWJ-F	1 - F-Connector	DWJ-F-W	DWJ-F-I	DWJ-F-A	25	200
DWJ-64F	1 - RJ11 Jack & 1 - F-Connector	DWJ-64F-W	DWJ-64F-I	DWJ-64F-A	25	200



DWJ-64



DWJ-642



DWJ-F



DWJ-64F

MODULAR WALL JACKS

Features:

- Standard Wallplate Size (2-3/4" W x 4-1/2" H)
- Smooth Finish
- Includes Mounting Hardware
- Inserted Modular Plates With Decorative Groove



Cat. No.	Description	Color (Cat. No. - Color Code)	Std. Pkg.	Master Carton
		White		
WJ-88	1 - RJ45 CAT5e Jack	WJ-88-W	25	200
WJ-882	2 - RJ45 CAT5e Jacks	WJ-882-W	25	200
WJ-8864	1 - RJ45 CAT5e Jack & 1 - RJ11 Jack	WJ-8864-W	25	200



WJ-88



WJ-882



WJ-8864

Lexan Wallplates

SNAP-ON DECORATIVE LEXAN® WALLPLATES

- 2-Piece (Bracket & Snap-On Face)
- Commercial Grade
- Resistant to High Abuse



Cat. No.	Description	Color (Catalog Number - Color Code)				Std. Pkg.	Master Carton
		White	Amond	Black	Ivory		
OPS26	2-Piece, 1-GANG	OPS26-W	OPS26-A	OPS26-B	OPS26-I	25	200
OPS262	2-Piece, 2-GANG	OPS262-W	OPS262-A	OPS262-B	OPS262-I	25	200
OPS263	2-Piece, 3-GANG	OPS263-W	OPS263-A	-	-	10	200
OPS264	2-Piece, 4-GANG	OPS264-W	OPS264-A	-	-	10	200
OPS265	2-Piece, 5-GANG	OPS265-W	OPS265-A	-	-	10	200



OPS26



OPS262




OPS263



OPS264



OPS265

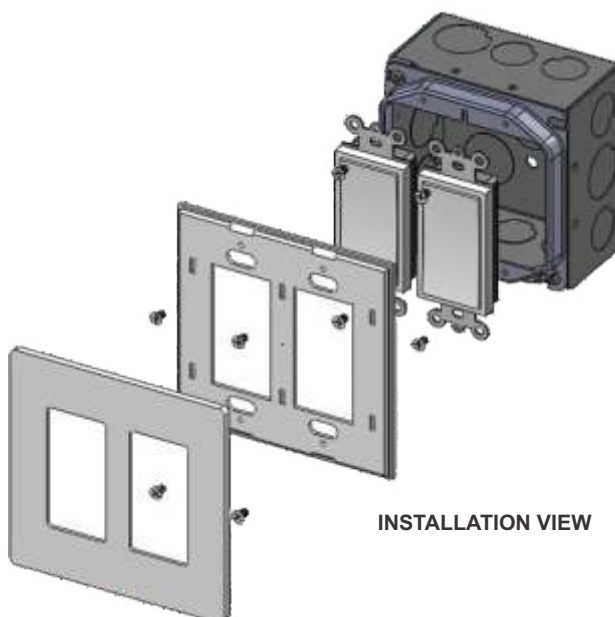

INSTALLATION VIEW

Certification:



Lexan Wallplates

LEXAN* WALLPLATES

Standard Size

- Commercial Grade
- Resistant to High Abuse
- Painted Screws Included



For Mid-Size and Jumbo-Size Wallplates, refer to Page E16 & E17

Cat. No.	No. of Gangs	Description	Color (Cat. No. - Color Code)					Std. Pkg.	Master Carton
			White	Ivory	Gray	Orange	Red		
OP1	1	Toggle Switch	OP1-W	OP1-I	OP1-G	-	-	25	200
OP2	2	Toggle Switch	OP2-W	OP2-I	OP2-G	-	-	25	200
OP3	3	Toggle Switch	OP3-W	OP3-I	-	-	-	10	200
OP4	4	Toggle Switch	OP4-W	OP4-I	-	-	-	10	200
OP5	5	Toggle Switch	OP5-W	OP5-I	-	-	-	10	200
OP6	6	Toggle Switch	OP6-W	OP6-I	-	-	-	10	200
OP8	1	Duplex Receptacle	OP8-W	OP8-I	OP8-G	OP8-O	OP8-R	25	200
OP82	2	Duplex Receptacle	OP82-W	OP82-I	OP82-G	OP82-O	OP82-R	25	200
OP83	3	Duplex Receptacle	OP83-W	OP83-I	-	-	-	10	200
OP84	4	Duplex Receptacle	OP84-W	OP84-I	-	-	-	10	200
OP85	5	Duplex Receptacle	OP85-W	OP85-I	-	-	-	10	200
OP86	6	Duplex Receptacle	OP86-W	OP86-I	-	-	-	10	200



OP1



OP2



OP3



OP4



OP5



OP6



OP8



OP82



OP83



OP84



OP85



OP86

Certification:



File E327021

* Lexan and GE Lexan Logo are registered Trademarks of General Electric Company, GE Plastics Division.

Lexan Wallplates


LEXAN* WALLPLATES
Standard Size

- Commercial Grade
- Resistant to High Abuse
- Painted Screws Included



For Mid-Size and Jumbo-Size
Wallplates, refer to Page
E16 & E17

Cat. No.	No. of Gangs	Description	Color (Cat. No. - Color Code)					Std. Pkg.	Master Carton
			White	Ivory	Black	Almond	Gray		
OP26	1	Decorative Switch or GFI	OP26-W	OP26-I	OP26-BK	OP26-A		25	200
OP262	2	Decorative Switch or GFI	OP262-W	OP262-I	OP262-BK	OP262-A		25	200
OP263	3	Decorative Switch or GFI	OP263-W	OP263-I	OP263-BK	OP263-A		10	200
OP264	4	Decorative Switch or GFI	OP264-W	OP264-I	OP264-BK	OP264-A		10	200
OP265	5	Decorative Switch or GFI	OP265-W	OP265-I	OP265-BK	OP265-A		10	200
OP266	6	Decorative Switch or GFI	OP266-W	OP266-I	OP266-BK	OP266-A		10	200
OP13	1	Blank (Box Mount)	OP13-W	OP13-I	OP13-BK	OP13-A	OP13-G	25	200
OP23	2	Blank (Box Mount)	OP23-W	OP23-I	OP23-BK	OP23-A	OP23-G	25	200
OP33	3	Blank (Box Mount)	OP33-W	OP33-I	OP33-BK	OP33-A	-	10	200
OP43	4	Blank (Box Mount)	OP43-W	OP43-I	OP43-BK	OP43-A	-	10	200
OP11	1	0.406" Dia. Phone / Cable	OP11-W	OP11-I	OP11-BK	OP11-A		25	200
OP21	2	0.406" Dia. Phone / Cable	OP21-W	OP21-I	OP21-BK	OP21-A		25	200
OP737	1	For Use with 0.625" Dia. Doorbell Push Button	OP737-W	OP737-I	-	-		25	200
OP7	1	1.406" Single Receptacle	OP7-W	OP7-I	-	-		25	200
OP72	2	1.406" Single Receptacle	OP72-W	OP72-I	-	-		25	200

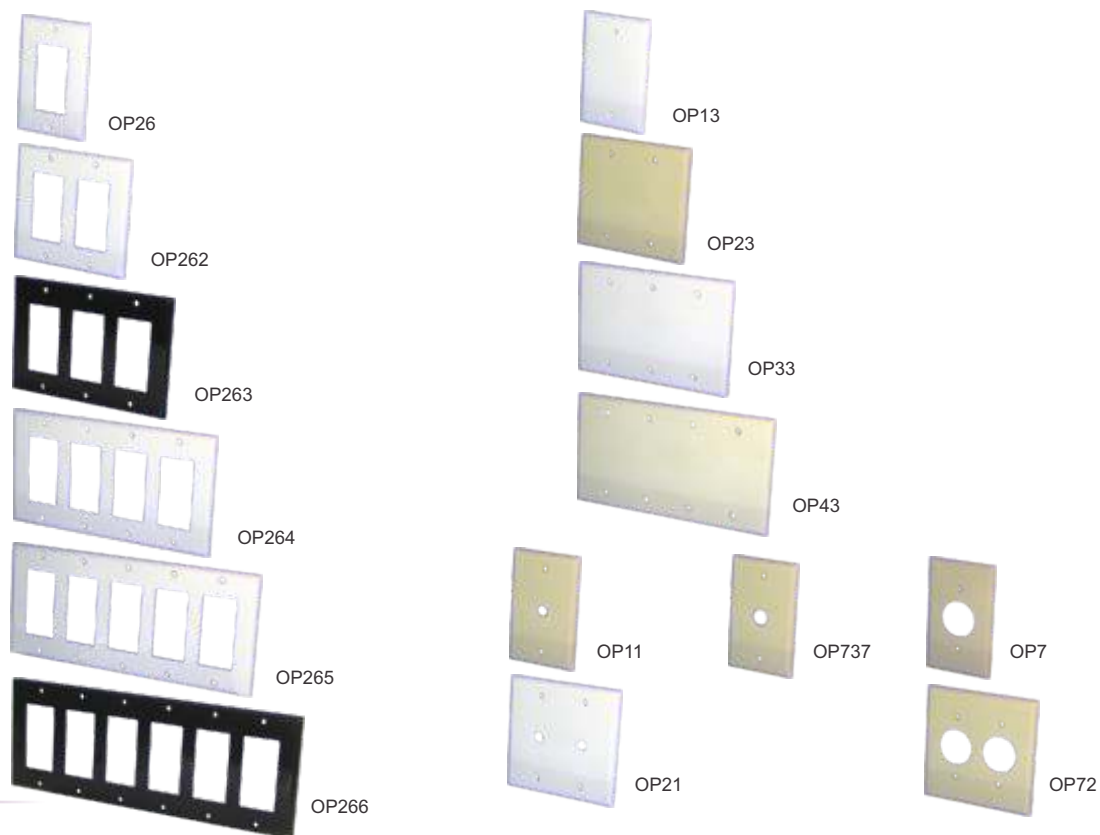

Certification:



File E327021

Lexan Wallplates

LEXAN* WALLPLATES

Standard Size

- Commercial Grade
- Resistant to High Abuse
- Painted Screws Included



For Mid-Size and Jumbo-Size Wallplates, refer to Page E16 & E17

Cat. No.	No. of Gangs	Description	Color (Cat. No. - Color Code)				Std. Pkg.	Master Carton
			White	Ivory	Black	Almond		
OP113	2	Blank/Toggle Switch	OP113-W	OP113-I	-	-	25	200
OP813	2	Blank/Duplex	OP813-W	OP813-I	-	-	25	200
OP17***	2	Toggle Switch/1.406" S.R.	OP17-W	OP17-I	-	-	25	200
OP1426	2	Blank (Strap) / GFI	OP1426-W	OP1426-I	OP1426-BK	OP1426-A	25	200
OP18	2	Toggle Switch/Duplex	OP18-W	OP18-I	-	-	25	200
OP126	2	Toggle Switch/GFI	OP126-W	OP126-I	-	-	25	200
OP826	2	Duplex/GFI	OP826-W	OP826-I	-	-	25	200
OP87	2	Duplex / 1.406" S.R.	OP87-W	OP87-I	-	-	25	200
OP226	3	2 Toggle Switches & 1 GFI	OP226-W	OP226-I	-	-	10	200
OP28***	3	2 Switches & 1 Duplex	OP28-W	OP28-I	-	-	10	200
OS724**	1	Power Outlet, 2.156" Dia.	OS724-W	OS724-I	-	-	25	100
OS703**	2	Power Outlet, 2.156" Dia.	OS703-W	OS703-I	-	-	25	100

**Painted Steel Only

***Available in Plastic or Painted Steel




OP113



OP813



OP17***



OP1426



OP18



OP126



OP826



OP87



OP226



OP28***



OS724**



OS703**

Certification:



File E327021

Lexan Wallplates

LEXAN* WALLPLATES

Mid-Size

- 3/8" Wider and 3/8" Higher than Standard Size Wallplates
- Commercial Grade
- Resistant to High Abuse
- Painted Screws Included



Cat. No.	No. of Gangs	Description	Color (Cat. No. - Color Code)		Std. Pkg.	Master Carton
			White	Ivory		
OPM1	1	Toggle Switch	OPM1-W	OPM1-I	25	200
OPM2	2	Toggle Switch	OPM2-W	OPM2-I	25	200
OPM8	1	Duplex Receptacle	OPM8-W	OPM8-I	25	200
OPM82	2	Duplex Receptacle	OPM82-W	OPM82-I	25	200
OPM26	1	Decorative Switch or GFCI	OPM26-W	OPM26-I	25	200
OPM262	2	Decorative Switch or GFCI	OPM262-W	OPM262-I	25	200
OPM13	1	Blank (Box Mount)	OPM13-W	OPM13-I	25	200
OPM23	2	Blank (Box Mount)	OPM23-W	OPM23-I	25	200
OPM126	2	Toggle Switch and GFCI	OPM126-W	OPM126-I	25	200
OPM18	2	Toggle Switch and Duplex Receptacle	OPM18-W	OPM18-I	25	200
OPM826	2	Duplex Receptacle and GFCI	OPM826-W	OPM826-I	25	200



OPM1



OPM2



OPM26



OPM262



OPM8



OPM82



OPM13



OPM23



OPM126



OPM18



OPM826

Certification:



File E327021

Lexan Wallplates

LEXAN* WALLPLATES

Jumbo

- 3/4" Wider and 3/4" Higher than Standard Size Wallplates
- Commercial Grade
- Resistant to High Abuse
- Painted Screws Included



Cat. No.	No. of Gangs	Description	Color (Cat. No. - Color Code)		Std. Pkg.	Master Carton
			White	Ivory		
OPJ1	1	Toggle Switch	OPJ1-W	OPJ1-I	25	200
OPJ8	1	Duplex Receptacle	OPJ8-W	OPJ8-I	25	200
OPJ26	1	Decorative Switch or GFI	OPJ26-W	OPJ26-I	25	200
OPJ13	1	Blank (Box Mount)	OPJ13-W	OPJ13-I	25	200



OPJ1



OPJ8



OPJ26



OPJ13

WALLPLATE SCREWS

- #6-32 Slot Painted Screws

Cat. No.	Description	Color (Catalog Number - Color Code)		Std. Pkg.	Master Carton
		White	Ivory		
CPS-516	5/16" Cover Plate Screw, Painted	CPS-516-W	CPS-516-I	100	1000
CPS-50	1/2" Cover Plate Screw, Painted	CPS-50-W	CPS-50-I	100	1000
CPS-75	3/4" Cover Plate Screw, Painted	CPS-75-W	CPS-75-I	100	1000
CPS-100	1" Cover Plate Screw, Painted	CPS-100-W	CPS-100-I	100	1000



CPS-516



CPS-50



CPS-75



CPS-100

Certification:



File E327021

Stainless Steel Wallplates

STAINLESS STEEL
WALLPLATES

- Commercial Grade
- Fine Brushed Finish
- Resistant to High Abuse
- Stainless Screws Included

Cat. No.	No. of Gangs	Description	Std. Pkg.	Master Carton
OS13	1	Blank (Box Mount)	25	200
OS23	2	Blank (Box Mount)	25	100
OS33	3	Blank (Box Mount)	10	100
OS43	4	Blank (Box Mount)	10	100
OS1	1	Toggle Switch	25	200
OS2	2	Toggle Switch	25	100
OS3	3	Toggle Switch	10	100
OS4	4	Toggle Switch	10	100
OS8	1	Duplex Receptacle	25	200
OS82	2	Duplex Receptacle	25	100
OS83	3	Duplex Receptacle	10	100
OS84	4	Duplex Receptacle	10	100
OS26	1	Decorative or GFCI	25	200
OS262	2	Decorative or GFCI	25	100
OS263	3	Decorative or GFCI	10	100
OS264	4	Decorative or GFCI	10	100



OS13



OS1



OS8



OS26




OS23



OS2



OS82



OS262



OS33



OS3



OS83



OS263



OS43



OS4



OS84



OS264

Certification:



File E2277970

Stainless Steel Wallplates

STAINLESS STEEL
WALLPLATES

- Commercial Grade
- Fine Brushed Finish
- Resistant to High Abuse
- Stainless Screws Included

Cat. No.	No. of Gangs	Description	Std. Pkg.	Master Carton
OS7	1	1.406" Dia. Single Receptacle	25	200
OS705	1	1.625" Dia. Single Receptacle	25	200
OS11	1	Phone/Cable 0.406" Dia.	25	200
OS737	1	For Use With 0.625" Dia. Doorbell Push Button	25	200
OS724	1	Power Outlet, 2.156" Dia.	25	200
OS113	2	One Toggle Switch / Blank	25	100
OS18	2	Toggle Switch / Duplex Receptacle	25	100
OS126	2	Toggle Switch / GFCI	25	100
OS826	2	Duplex Receptacle / GFCI	25	100
OS21	2	Phone/Cable 0.406" Dia.	25	100
OS703	2	One Power Outlet, 2.156" Dia.	25	100
OS701	2	Power Outlet, 2.468" Dia.	25	100
OS226	3	Two Toggle Switches / One GFCI	10	100



OS7



OS705



OS11



OS737



OS724



OS113



OS18



OS126



OS826



OS21



OS703



OS701



OS226

Certification:



File E327021

Replacement Cords & Lamp Socket

UNIVERSAL PROTECTIVE COVER

Cat. No.	Description	Std. Pkg.
UPC	Gangable, Steel Universal Protective Cover protects any device during drywall, painting, routing, mudding & plastering.	25
UPCTS	Optional Plastic Insert for UPC to protect Toggle Switch.	25



UPC



UPCTS

GARBAGE DISPOSAL REPLACEMENT CORDS

- 3-Conductor
- 16/3 AWG
- 125V/250V

Cat. No.	Description	Length Ft.	AMPS	Watts	Color	Product Packaging	Std. Pkg.
PT163S-3	Straight U-Ground Plug	3	13	1625	Gray	Wrapper	60
PT163S-6	Straight U-Ground Plug	6	13	1625	Gray	Wrapper	40
PT163A-3	Right Angle U-Ground Plug	3	13	1625	Gray	Wrapper	60
PT163A-6	Right Angle U-Ground Plug	6	13	1625	Gray	Wrapper	40

PT163S-3
PT163S-6PT163A-3
PT163A-6

CONSTRUCTION LAMP SOCKET

- 250V, 660W
- Heavy Duty
- Nickel-Plated Brass Screw Shell
- Bakelite/Plastic Housing
- With 6"-Long #14AWG Leads
- Sealed in Rubber Booth

Cat. No.	Description	Color	Std. Pkg.
CLS	Medium-Base Lamp Socket	Black	25



CLS



Emergency Ballasts/ Under Cabinet Lights








FLUORESCENT EMERGENCY LIGHTING BALLASTS

- 120/277 VAC, Fully Automatic Operation
- 280mA Charging current
- 24Hr Recharging Time
- 90 minutes of emergency operation
- Wireway or Fixture Mount
- Battery, Charger, Inverter Circuit in a Single Package
- For more information see page F18

**BAL650C****BAL500****BAL700****BAL1400****BAL3000**

FLUORESCENT EMERGENCY LIGHTING BALLASTS LAMP COMPATIBILITY CHART

For more information see page F19

Cat. No.	Description
BAL650C-2PIN	For 2-Pin Compact Fluorescent Lamp Operates One 13W - 42W or Two 13W - 39W Twin, Quad Lamps  
BAL650C-4PIN	For 4-Pin Compact Fluorescent Lamp Operates One 13W - 42W or Two 13W - 39W Twin, Quad, Triple-Twin, Long Compact or 2D Lamps  
BAL500	Operates One 17W - 40W (2' - 4') T8, T10, or T12 Lamp 
BAL700	Operates One 17W - 215W (2' - 8'), or Two 17W - 40W (2' - 4') T8, T9, T10, or T12 Lamps 
BAL1400	Operates One 17W - 215W (2' - 8'), or Two 17W - 40W (2' - 4') T8, T9, T10, or T12 Lamps 
BAL3000	Operates One of: F025, FB024 T8, F032, FB031 T8, F096 T8, F017, FB016, F40T12, F40/U, F48T12/HO, F96T12, HO, VHO  Or Two of: F025, FB024 T8, F032, FB031 T8, F017, FB016, F40T12, F40/U 

UNDER CABINET LIGHTS

- 120~125 VAC
- T5 Fluorescent Lamp
- Electronic Class P Ballast
- Turn Switch Included
- Heavy Gage Steel with Flush Ends
- K.O.s on Top, Sides, and Back
- Baked white enamel
- With Rust Inhibiting Phosphate Coat
- For more information see page F20

**UCL-12****UCL-21****UCL-24****UCL-33****UCL-42**