

Amflo

Over 50 years of Quality

Air Hoses & Reels

For Home, Industrial & Professional Use



Nylon Recoil Air Hose

Nylon Recoil Hose retains its self-coiling properties and stores itself when finished. Can be used with all air-powered equipment on the job site and in garages, plants and service stations. The swivel end fittings reduce hose twist. Temperature Range: +32°F to +120°F. One year warranty.

Catalog Number	Hose Diam.	Hose Length	Working Pressure	Hose Color	Fittings Size	Extras
4-12	1/4"	12'	200 PSI	Yellow	1/4" MNPT	Swivel End Fittings
4-25E-RET	1/4"	25'	200 PSI	Yellow	1/4" MNPT	Swivel End Fittings
4-50E-RET	1/4"	50'	200 PSI	Yellow	1/4" MNPT	Swivel End Fittings
6-12	3/8"	12'	200 PSI	Yellow	3/8" MNPT	Swivel End Fittings
6-25	3/8"	25'	200 PSI	Yellow	3/8" MNPT	Swivel End Fittings
8-25	1/2"	25'	200 PSI	Yellow	1/2" MNPT	Swivel End Fittings
8-50	1/2"	50'	200 PSI	Yellow	1/2" MNPT	Swivel End Fittings
14-25	1/4"	25'	280 PSI	Blue	1/4" MNPT	Swivel End Fittings
16-25	3/8"	25'	280 PSI	Blue	3/8" MNPT	Swivel End Fittings



Polyurethane Recoil Air Hose

Polyurethane Recoil Hose retains its self-coiling properties and stores itself when finished. Can be used with all air-powered equipment on the job site and in garages, plants and service stations. The swivel end fittings reduce hose twist. Bend restrictors reduce kinking and increase the life of the hose. The soft polyurethane finish is less likely to scratch surfaces. Temperature Range: -30°F to +150°F. Three year warranty.

Catalog Number	Hose Diam.	Hose Length	Working Pressure	Hose Color	Fittings Size	Extras
24-25E-RET	1/4"	25'	120 PSI	Blue	1/4" MNPT	With Pigtails. Bend Restrictors
24-50E-RET	1/4"	50'	120 PSI	Blue	1/4" MNPT	With Pigtails. Bend Restrictors



WARNING: KEEP OUT OF REACH OF CHILDREN. This product is designed for use on regulated compressed air lines or on air compressors where pressure does not exceed 300 PSI. Do not exceed the pressure limitation of the hose and/or air operated devices being used. Failure to follow these specifications and directions exactly may result in personal injury and/or property damage. **WARNING:** This product contains or produces a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.

Polyurethane Air Hose

The light weight of polyurethane hose makes it ideal for applications where dragging a heavy hose is an issue, like roofing. The smooth, non-marring finish also makes it ideal for indoor trim work where scratching surfaces could create damage. Maintains very good cold weather flexibility. Swivel end fittings reduce hose twist and bend restrictors reduce kinking and help increase the life of the hose. Temperature Range: -30°F to +150°F. Four year warranty.

Catalog Number	Hose Diam.	Hose Length	Working Pressure	Hose Color	Fittings Size	Extras
12-25E	1/4"	25'	300 PSI	Blue	1/4" MNPT	Swivel End Fittings Bend Restrictors
12-50E	1/4"	50'	300 PSI	Blue	1/4" MNPT	Swivel End Fittings Bend Restrictors
12-100E	1/4"	100'	300 PSI	Blue	1/4" MNPT	Swivel End Fittings Bend Restrictors
13-50AE	3/8"	50'	300 PSI	Blue	1/4" MNPT	Swivel End Fittings Bend Restrictors
13-50E	3/8"	50'	300 PSI	Blue	3/8" MNPT	Swivel End Fittings Bend Restrictors
13-100AE	3/8"	100'	300 PSI	Blue	1/4" MNPT	Swivel End Fittings Bend Restrictors
13-100E	3/8"	100'	300 PSI	Blue	3/8" MNPT	Swivel End Fittings Bend Restrictors
14-50ER	1/4"	50'	300 PSI	Blue	1/4" MNPT	Industrial Coupler & Plug Field Repairable Ends Swivel End Fittings Bend Restrictors
14-50	1/4"	50'	300 PSI	Blue	1/4" MNPT	Field Repairable End Fittings
14-100	1/4"	100'	300 PSI	Blue	1/4" MNPT	Field Repairable End Fittings
15-50AR	3/8"	50'	300 PSI	Blue	1/4" MNPT	Industrial Coupler & Plug Field Repairable Ends Swivel End Fittings Bend Restrictors

HOSE MATERIAL	LIGHT WEIGHT	COLD WEATHER FLEXIBILITY	RESISTS TWISTING	NON-MARRING
Poly	●	●	●	●

○ Good ● Very Good ● Excellent

HOSE MATERIAL	LIGHT WEIGHT	COLD WEATHER FLEXIBILITY	RESISTS TWISTING	NON-MARRING
Premium Poly	●	●	●	●

○ Good ● Very Good ● Excellent

Premium Polyurethane Air Hose

Offers many of the benefits of our standard "Poly" hose, plus increased cold weather flexibility and includes a bundling strap. Temperature Range: -40°F to +160°F. Five year warranty.

Catalog Number	Hose Diam.	Hose Length	Working Pressure	Hose Color	Fittings Size	Extras
16-50E	1/4"	50'	200 PSI	Gold	1/4" MNPT	Industrial Coupler & Plug Bend Restrictors
16-100E	1/4"	100'	200 PSI	Gold	1/4" MNPT	Industrial Coupler & Plug Bend Restrictors



WARNING: KEEP OUT OF REACH OF CHILDREN. This product is designed for use on regulated compressed air lines or on air compressors where pressure does not exceed 300 PSI. Do not exceed the pressure limitation of the hose and/or air operated devices being used. Failure to follow these specifications and directions exactly may result in personal injury and/or property damage. **WARNING:** This product contains or produces a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.

Rubber Air Hose

Amflo Rubber Air Hose is ideal for rugged applications where hoses may be dragged over concrete or other rough surfaces. The rubber construction offers very good cold weather flexibility and coils easily for storage. It is ideal for garage, shop, industry, home and many other uses. Temperature Range: -20°F to +165°F. Three year warranty.

Catalog Number	Hose Diam.	Hose Length	Working Pressure	Hose Color	Fittings Size	Extras
512-25E	1/4"	25'	300 PSI	Red	1/4" MNPT	N/A
512-50E	1/4"	50'	300 PSI	Red	1/4" MNPT	N/A
552-25AE	3/8"	25'	300 PSI	Red	1/4" MNPT	N/A
552-50AE	3/8"	50'	300 PSI	Red	1/4" MNPT	N/A
515-50	1/2"	50'	300 PSI	Red	1/2" MNPT	N/A

HOSE MATERIAL	LIGHT WEIGHT	COLD WEATHER FLEXIBILITY	RESISTS TWISTING	NON-MARRING
Rubber	○	○	●	○

○ Good ○ Very Good ● Excellent

Premium Rubber Air Hose

Our quality Rubber Air Hose with additional features for professional-level performance. Temperature Range: -40°F to +130°F. Five year warranty.

Catalog Number	Hose Diam.	Hose Length	Working Pressure	Hose Color	Fittings Size	Extras
516-50E	1/4"	50'	300 PSI	Gray	1/4" MNPT	Industrial Coupler & Plug Field Repairable Ends

HOSE MATERIAL	LIGHT WEIGHT	COLD WEATHER FLEXIBILITY	RESISTS TWISTING	NON-MARRING
Premium Rubber	○	●	●	○

○ Good ○ Very Good ● Excellent

Rubber/PVC Air Hose

Amflo Rubber/PVC Air Hose is ideal for general purpose applications. The blend of materials offers the best of both worlds – lighter in weight than rubber and more flexible than PVC. Its bright florescent green color reduces chances of tripping while on a job site. The bend restrictors reduce kinking and increase the life of the hose. Temperature Range: -10°F to +150°F. Three year warranty.

Catalog Number	Hose Diam.	Hose Length	Working Pressure	Hose Color	Fittings Size	Extras
577-50A	3/8"	50'	300 PSI	Green	1/4" MNPT	Bend Restrictors

HOSE MATERIAL	LIGHT WEIGHT	COLD WEATHER FLEXIBILITY	RESISTS TWISTING	NON-MARRING
Rubber/PVC	○	○	○	○

○ Good ○ Very Good ● Excellent



WARNING: KEEP OUT OF REACH OF CHILDREN. This product is designed for use on regulated compressed air lines or on air compressors where pressure does not exceed 300 PSI. Do not exceed the pressure limitation of the hose and/or air operated devices being used. Failure to follow these specifications and directions exactly may result in personal injury and/or property damage. **WARNING:** This product contains or produces a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.

PVC Air Hose

Amflo PVC Air Hose is ideal for general purpose applications. It features a lightweight, flexible, kink-resistant design. Its bright florescent color reduces chances of tripping while on a job site. Temperature Range: +20°F to +145°F. Two year warranty.

Catalog Number	Hose Diam.	Hose Length	Working Pressure	Hose Color	Fittings Size	Extras
522-100	1/4"	100'	300 PSI	Yellow	1/4" MNPT	N/A
558-25A	3/8"	25'	300 PSI	Orange	1/4" MNPT	Bend Restrictors
558-50A	3/8"	50'	300 PSI	Orange	1/4" MNPT	Bend Restrictors
576-25A	3/8"	25'	300 PSI	Orange	1/4" MNPT	N/A
576-50A	3/8"	50'	300 PSI	Orange	1/4" MNPT	N/A
576-100A	3/8"	100'	300 PSI	Orange	1/4" MNPT	N/A

HOSE MATERIAL	LIGHT WEIGHT	COLD WEATHER FLEXIBILITY	RESISTS TWISTING	NON-MARRING
PVC	○	○	○	○

○ Good ○ Very Good ○ Excellent



Premium PVC Air Hose

Amflo Premium PVC Air Hose offers all the quality and features of our standard PVC Air Hose, with the added benefit of sturdy bend restrictors for increased hose life. Temperature Range: -20°F to +145°F. Two year warranty.

Catalog Number	Hose Diam.	Hose Length	Working Pressure	Hose Color	Fittings Size	Extras
554-25A	3/8"	25'	300 PSI	Blue	1/4" MNPT	Bend Restrictors
554-50A	3/8"	50'	300 PSI	Blue	1/4" MNPT	Bend Restrictors
554-100A	3/8"	100'	300 PSI	Blue	1/4" MNPT	Bend Restrictors

HOSE MATERIAL	LIGHT WEIGHT	COLD WEATHER FLEXIBILITY	RESISTS TWISTING	NON-MARRING
Premium PVC	○	○	○	○

○ Good ○ Very Good ○ Excellent



WARNING: KEEP OUT OF REACH OF CHILDREN. This product is designed for use on regulated compressed air lines or on air compressors where pressure does not exceed 300 PSI. Do not exceed the pressure limitation of the hose and/or air operated devices being used. Failure to follow these specifications and directions exactly may result in personal injury and/or property damage. **WARNING:** This product contains or produces a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.

Bulk Air Hose


Catalog Number	Hose Diam.	Hose Length	Working Pressure	Hose Color	Fittings Size	Extras
Nylon Recoil Hose						
6-100	3/8"	100'	200 PSI	Yellow	None	N/A
Rubber Signal Bell Tubing						
494-100	3/8"	100'	200 PSI	Black	None	N/A
494-500	3/8"	500'	200 PSI	Black	None	N/A
Rubber Air Hose						
506L-500	1/4"	500'	250 PSI	Gray	None	Lock-On Hose
512-500	1/4"	500'	300 PSI	Red	None	N/A
514-500	3/8"	500'	300 PSI	Red	None	N/A
515-500	1/2"	500'	300 PSI	Red	None	N/A



Lead-In Air Hose

Amflo Lead-In Air Hose absorbs the vibrations and pulsations from air compressors and air impact tools, providing longer life for the balance of the pneumatic system. Ball swivels allow for greater flexibility and bend restrictors prevent the hose from weakening and breaking after frequent sharp bends.

Catalog Number	Hose Diam.	Hose Length	Working Pressure	Hose Color	Fittings Size	Extras
PVC Lead-In Hose						
25-24-RET	1/4"	24"	300 PSI	Blue	1/4" MNPT X 1/4" FNPT	Ball Swivel
Rubber Lead-In Hose						
25L-24BD	1/4"	24"	300 PSI	Red	1/4" MNPT X 1/4" FNPT	Ball Swivel Bend Restrictors
25L-60BD	1/4"	60"	300 PSI	Red	1/4" MNPT X 1/4" FNPT	Ball Swivel Bend Restrictors
37L-24B	3/8"	24"	300 PSI	Red	1/4" MNPT X 1/4" FNPT	Ball Swivel Bend Restrictors
37L-30B-RET	3/8"	30"	300 PSI	Red	1/4" MNPT X 1/4" FNPT	Ball Swivel Bend Restrictors
37L-72BD	3/8"	72"	300 PSI	Red	1/4" MNPT X 1/4" FNPT	Ball Swivel Bend Restrictors

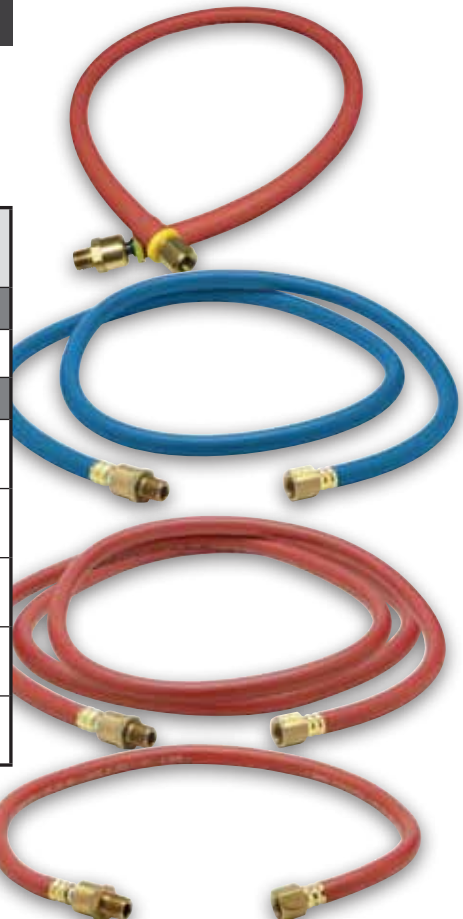

WARNING: KEEP OUT OF REACH OF CHILDREN. This product is designed for use on regulated compressed air lines or on air compressors where pressure does not exceed 300 PSI. Do not exceed the pressure limitation of the hose and/or air operated devices being used. Failure to follow these specifications and directions exactly may result in personal injury and/or property damage. **WARNING:** This product contains or produces a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.

Manual Hose Reels




Features all-steel construction and a spring tension brake to prevent accidental unwinding. Comfortable handle grip makes recoiling the hose a breeze. Mounts in either direction.

Catalog Number	Hose Diam.	Hose Length	Working Pressure	Hose Color	Fittings Size	Extras
501HR-RET	3/8"	50'	250 PSI	Orange	1/4" FNPT	Manually retractable 3/8" x 50' PVC Hose
502HR-RET	N/A	N/A	250 PSI	N/A	1/4" FNPT	N/A
545HR-RET	3/8"	75'	200 PSI	Gold	1/4" MNPT	Dual Output Fittings Polyurethane Air Hose

Automatic Hose Reels

Features a spring-wound auto-rewind mechanism and a locking ratchet brake. Mounts on wall, floor or ceiling. Guide arm is adjustable to dispense hose at various angles.

Catalog Number	Hose Diam.	Hose Length	Working Pressure	Hose Color	Fittings Size	Extras
505HR-RET	3/8"	50'	250 PSI	Red	1/4" MNPT X 1/4" FNPT	3/8" x 50' Rubber Air Hose
510HR-RET	3/8"	25'	250 PSI	Red	1/4" MNPT X 1/4" FNPT	3/8" x 25' Rubber Air Hose
515HR-RET	1/2"	50'	250 PSI	Red	1/4" MNPT X 1/4" FNPT	1/2" x 50' Rubber Air Hose
Enclosed Reels						
525HR-RET	3/8"	50'	250 PSI	Black	1/4" MNPT X 1/4" FNPT	3/8" x 50' PVC Air Hose
530HR-RET	1/4"	50'	300 PSI	Blue	1/4" MNPT X 1/4" FNPT	1/4" x 50' Polyurethane Air Hose
535HR-RET	3/8"	50'	250 PSI	Blue	3/8" MNPT X 3/8" FNPT	3/8" x 50' Polyurethane Air Hose
550HR-RET	1/2"	65'	N/A	Green	3/4" M X 3/4" F	1/2" x 65' Garden Hose with Hose Bib Fittings

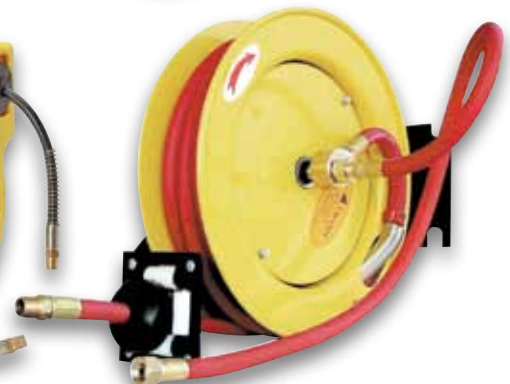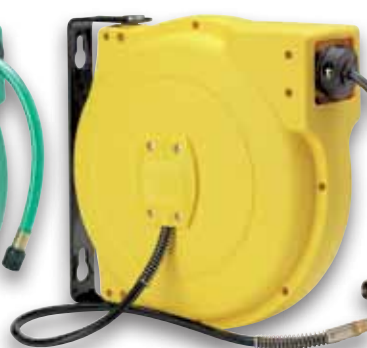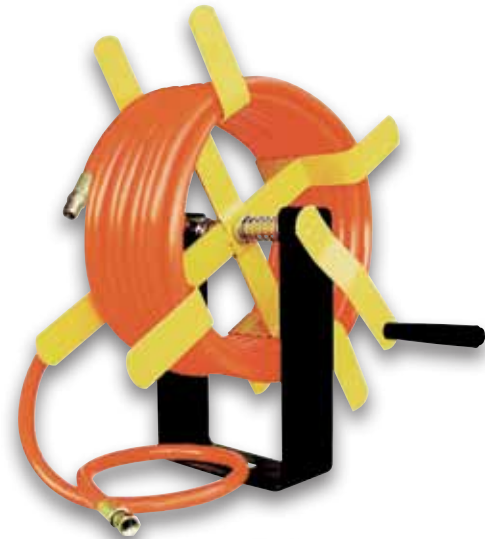

WARNING: KEEP OUT OF REACH OF CHILDREN. This product is designed for use on regulated compressed air lines or on air compressors where pressure does not exceed 300 PSI. Do not exceed the pressure limitation of the hose and/or air operated devices being used. Failure to follow these specifications and directions exactly may result in personal injury and/or property damage. **WARNING:** This product contains or produces a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.

Kits & Bonus Packs

Catalog Number	Hose Diam.	Hose Length	Working Pressure	Hose Material	Hose Color	Fittings Size	Extras
10-11K	1/4"	11 1/2'	N/A	Type A Nylon	Gray	Compression Tee x 1/4" MNPT	Compression Tee to splice into Air Seat Supply line, Blow Gun Kit with two nozzles
12-100GHK	1/4"	100'	300 PSI	Poly	Blue	1/4" FNPT	Universal high-flow blow gun 0-220 PSI Inflator Gauge Tire Tread Depth Gauge 1/4" Quick-Disconnect Coupler Canvas storage bag
13-50AK	3/8"	50'	300 PSI	Poly	Blue	3/8" MNPT	Swivel End Fittings Bend Restrictors 1/4" Industrial Coupler and Plug 4 oz. Air Tool Oil
552-50AK	3/8"	50'	300 PSI	Rubber	Red	1/4" MNPT	9-Piece Blow Gun Kit
554-50AK	3/8"	50'	300 PSI	PVC	Blue	1/4" MNPT	Swivel End Fittings Bend Restrictors 1/4" Industrial Coupler and Plug 4 oz. Air Tool Oil
574-50GH	3/8"	50'	300 PSI	PVC	Red	1/4" MNPT X Glad Hand	Universal glad-hand kit Dual-foot Air Chuck

WARNING: KEEP OUT OF REACH OF CHILDREN. This product is designed for use on regulated compressed air lines or on air compressors where pressure does not exceed 300 PSI. Do not exceed the pressure limitation of the hose and/or air operated devices being used. Failure to follow these specifications and directions exactly may result in personal injury and/or property damage. **WARNING:** This product contains or produces a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.



Visit our website to learn more or contact your AMFLO® representative.

Amflo®

Distributed by

Plews & Edelmann

1550 Franklin Grove Road, Dixon IL 61021 USA

Telephone: 800-770-4639, Fax: 815-288-3388

www.plews-edelmann.com