

## FLEXIBLE METAL CONDUIT FITTINGS

### MALLEABLE IRON - COMBINATION COUPLINGS

#### Applications


- For use when coupling flexible metal conduit to rigid/IMC conduit
- Use RACO® Cat. Nos. 1552-1554 when coupling threaded rigid/IMC conduit to flexible metal conduit

#### Product Features

- Rugged metallic construction insures mechanical protection
- Steel/malleable components are electro zinc plated for added corrosion protection

#### Compliance

- 

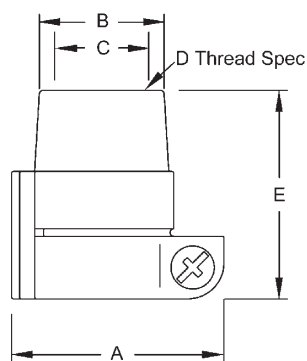

A = Width across flex side  
 B = Hub O.D.  
 C = Hub I.D.  
 D = Thread spec hub  
 E = Overall length



Flex - Rigid Couplings  
Malleable Iron

RACO COMMERCIAL  
FITTINGS

### ORDERING INFORMATION - DIMENSIONS

#### FLEX - RIGID COUPLINGS - MALLEABLE IRON

| CATALOG NUMBER | TRADE SIZE | UNIT. CTN. QTY. | SHIP. CTN. QTY. | UPC BAR CODE |
|----------------|------------|-----------------|-----------------|--------------|
| 1552           | 1/2"       | 25              | 100             | —            |
| 1553           | 3/4"       | —               | 25              | —            |
| 1554           | 1"         | —               | 25              | —            |

#### DIMENSIONS

| CATALOG NUMBER | A        | B        | C        | D THD. SPEC.  | E        |
|----------------|----------|----------|----------|---------------|----------|
| 1552           | 1-43/64" | 1-13/64" | 31/32"   | 1/2"-14 NPT   | 1-1/2"   |
| 1553           | 1-3/4"   | 1-23/64" | 1-1/8"   | 3/4"-14 NPT   | 1-3/4"   |
| 1554           | 2-5/16"  | 1-21/32" | 1-13/32" | 1"-11-1/2 NPT | 1-53/64" |

**B76****FLEXIBLE METAL CONDUIT FITTINGS****MALLEABLE IRON - COMBINATION COUPLINGS****RACO COMMERCIAL  
FITTINGS****Applications**


- For use when coupling flexible metal conduit to EMT Conduit
- Use RACO® Cat. Nos. 1941-1943 when coupling flexible metal conduit to EMT conduit

**Product Features**


- Rugged metallic construction insures mechanical protection
- Steel/malleable components are electro zinc plated for added corrosion protection
- UPC bar coded fittings are individually polybagged with a preprinted UPC-A bar code and packaged in pre-scored tear top cartons for an attractive presentation

**Compliances**

-  US – Standard 514B  
– C22.2 #18

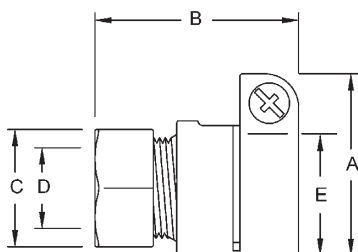

A = Width across flex side  
B = Overall length  
C = Nut O.D.  
D = Nut I.D.  
E = Clamping range (flex side)



Flex - EMT Couplings  
Squeeze - Malleable Iron

**ORDERING INFORMATION - DIMENSIONS**

| FLEX - EMT COUPLINGS SQUEEZE - MALLEABLE IRON |           |          |                |                |              |
|-----------------------------------------------|-----------|----------|----------------|----------------|--------------|
| CATALOG NUMBER                                | FLEX SIZE | EMT SIZE | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
| 1941*                                         | 3/8"      | 1/2"     | —              | 25             | —            |
| 1942                                          | 1/2"      | 1/2"     | —              | 25             | —            |
| 1942-8                                        | 1/2"      | 1/2"     | 1              | 25             |              |
| 1943                                          | 3/4"      | 3/4"     | —              | 25             | —            |
| 1943-8                                        | 3/4"      | 3/4"     | 1              | 20             |              |

\*Not U.L. Listed

| DIMENSIONS     |        |          |         |        |                |
|----------------|--------|----------|---------|--------|----------------|
| CATALOG NUMBER | A      | B        | C       | D      | E              |
| 1941           | 1-1/4" | 1-5/16"  | 1-7/64" | 23/32" | 17/32"-5/8"    |
| 1942           | 1-1/2" | 1-3/4"   | 1-7/64" | 23/32" | 13/16"-15/16"  |
| 1942-8         | 1-1/2" | 1-3/4"   | 1-7/64" | 23/32" | 13/16"-15/16"  |
| 1943           | 1-3/4" | 1-53/64" | 1-3/8"  | 15/16" | 1-1/32"-1-1/8" |
| 1943-8         | 1-3/4" | 1-53/64" | 1-3/8"  | 15/16" | 1-1/32"-1-1/8" |

## FLEXIBLE METAL CONDUIT FITTINGS

### DIE CAST ZINC/STEEL COMBINATION COUPLINGS AND NAIL-UP STRAPS

#### Combination Couplings Applications

- For use when coupling flexible metal conduit to EMT conduit
- Use RACO® Cat. Nos. 1482-1484 when coupling flexible metal conduit to EMT conduit

#### Combination Couplings Product Feature

- Rugged metallic construction insures mechanical protection

#### Compliances

-  – Standard 514B
-  – Certified for Canada

#### Nail-Up Straps Application


- For use in mounting flexible metal conduit, armored cable, and MC cable

#### Nail-Up Straps Product Feature


- Stamped steel straps are pregalvanized for added corrosion protection

#### Nail-Up Straps Compliance

- 

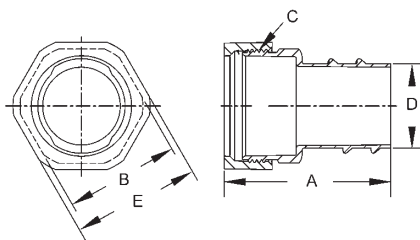

A = Overall length  
B = Body across flat  
C = Thread spec  
D = Throat I.D.  
E = Nut across flat



A = Width of strap  
B = Height of strap



Flex-EMT Couplings  
Screw-in/Compression  
Die Cast Zinc



Nail-up Straps  
Steel

RACO COMMERCIAL  
FITTINGS

### ORDERING INFORMATION - DIMENSIONS

#### FLEX-EMT COUPLINGS SCREW-IN/COMPRESSION - DIE CAST ZINC

| CATALOG NUMBER | FLEX SIZE | EMT SIZE | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|-----------|----------|----------------|----------------|--------------|
| 1482           | 1/2"      | 1/2"     | 50             | 500            | —            |
| 1483           | 3/4"      | 3/4"     | 25             | 250            | —            |
| 1484           | 1"        | 1"       | 25             | 250            | —            |

#### DIMENSIONS

| CATALOG NUMBER | A        | B A/F    | C THREAD SPEC   | D      | E A/F    |
|----------------|----------|----------|-----------------|--------|----------|
| 1482           | 1-21/32" | 59/64"   | 7/8"-18 UNS     | 5/8"   | 31/32"   |
| 1483           | 1-51/64" | 1-1/8"   | 1-5/64"-18 UNS  | 13/16" | 1-7/32"  |
| 1484           | 1-63/64" | 1-23/64" | 1-23/64"-18 UNS | 1"     | 1-33/64" |

#### NAIL-UP STRAPS - STEEL

| CATALOG NUMBER | TRADE SIZE | UNIT. CTN. QTY. | SHIP. CTN. QTY. | UPC BAR CODE |
|----------------|------------|-----------------|-----------------|--------------|
| 2252*          | 3/8" *     | 100             | 1000            | —            |
| 2253*          | 1/2" **    | 100             | 1000            | —            |

\*For 3/8" flexible metal conduit. Also suitable for AC and MC cable

\*\*For 1/2" flexible metal conduit. Also suitable for AC and MC cable

#### DIMENSIONS

| CATALOG NUMBER | A       | B        |
|----------------|---------|----------|
| 2252           | 1-1/16" | 2-3/16"  |
| 2253           | 1-1/4"  | 2-19/64" |

**B78****ARMORED CABLE CONNECTORS****ZINC DIE CAST - CONNECTORS****RACO COMMERCIAL  
FITTINGS****Application**


- For use in dry locations to bond armored cable to a box or enclosure

**Product Feature**


- Rugged metallic construction insures mechanical protection for the raceway

**Compliance**

-  – Standard 514B
-  – C22.2 #18



Set Screw  
Die Cast Zinc

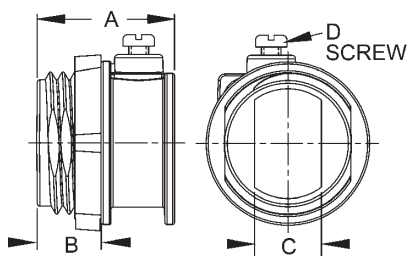

A = Overall length  
B = Thread length  
C = Throat I.D.  
D = Screw spec

**ORDERING INFORMATION - DIMENSIONS****SET SCREW - DIE CAST ZINC**

| CATALOG NUMBER | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|----------------|----------------|--------------|
| 2511           | 100            | 1000           | —            |

1/2" Hub size suitable for use with steel armored cable sizes 2#14, 3#14, 2#12, 3#12, 2#10, and 3#10 all with ground wire

**DIMENSIONS**

| CATALOG NUMBER | A      | B     | THREAD SPEC. | C    | D SCREW      |
|----------------|--------|-------|--------------|------|--------------|
| 2511           | 25/32" | 3/8"* | 1/2-14 NPSM  | 3/8" | 10-24 x 1/2" |

\* For 1/2" knockout

## ARMORED CABLE CONNECTORS

### ZINC DIE CAST - CONNECTORS

#### Application

- For use in dry locations to bond armored cable to a box or enclosure

#### Product Feature


- Rugged metallic construction insures mechanical protection for the raceway

#### Compliance

- UL – Standard 514B
- CSA – C22.2 #18




Clamp Type  
Die Cast Zinc



Squeeze Type  
Uninsulated  
Die Cast Zinc


RACO COMMERCIAL  
FITTINGS

2661

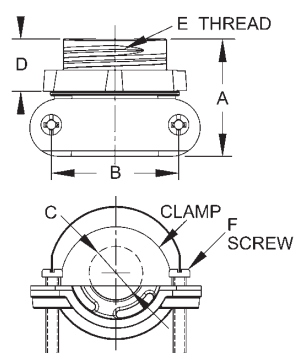

A = Length  
B = Screw centerlines  
C = Clamping range  
D = Thread length  
E = Thread spec.  
F = Screw

2191 - 2194

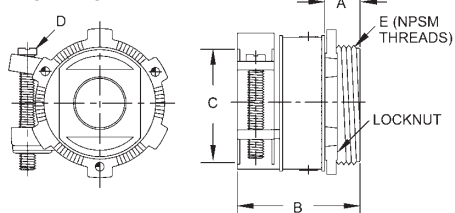

A = Thread length  
B = Overall length  
C = Conduit opening  
D = Screw spec  
E = Thread spec

### ORDERING INFORMATION - DIMENSIONS

#### CLAMP TYPE - DIE CAST ZINC

| CATALOG NUMBER | TRADE SIZE | UNIT. CTN. QTY. | SHIP. CTN. QTY. | UPC BAR CODE |
|----------------|------------|-----------------|-----------------|--------------|
| 2661           | 3/8"       | 100             | 1000            | —            |

For 1/2" knockout. Suitable for use with steel armored cable sizes 2#14, 3#14, 2#12, 3#12, 2#10, and 3#10 all with ground wire

#### DIMENSIONS

| CATALOG NUMBER | A      | B    | C      | D    | E            | F           |
|----------------|--------|------|--------|------|--------------|-------------|
| 2661           | 27/32" | 7/8" | 23/64" | 3/8" | 1/2"-14 NPSM | 8-32 x 3/4" |

#### SQUEEZE TYPE - UNINSULATED - DIE CAST ZINC

| CATALOG NUMBER | TRADE SIZE | UNIT. CTN. QTY. | SHIP. CTN. QTY. | UPC BAR CODE |
|----------------|------------|-----------------|-----------------|--------------|
| 2191           | 3/8"*      | 50              | 500             | —            |
| 2192           | 1/2"       | 25              | 250             | —            |
| 2193           | 3/4"       | 25              | 250             | —            |
| 2194           | 1"         | 10              | 100             | —            |

\* For 1/2" knockout. Suitable for steel armored cable and flexible metal conduit

#### DIMENSIONS

| CATALOG NUMBER | A      | B        | C        | D             | E              |
|----------------|--------|----------|----------|---------------|----------------|
| 2191           | 13/32" | 1"       | 21/32"   | No. 10 x 1.00 | 1/2"-14 NPSM   |
| 2192           | 1/2"   | 1-1/2"   | 63/64"   | No. 10 x 1.00 | 1/2"-14 NPSM   |
| 2193           | 1/2"   | 1-19/32" | 1-3/16"  | No. 12 x 1.00 | 3/4"-14 NPSM   |
| 2194           | 9/16"  | 1-49/64" | 1-29/64" | No. 12 x 1.25 | 1"-11-1/2 NPSM |

**B80****ARMORED CABLE CONNECTORS****MALLEABLE IRON - 90 DEGREE CONNECTORS****RACO COMMERCIAL  
FITTINGS****Application**


- For use in dry locations to bond armored cable to a box or enclosure

**Product Features**

- Rugged metallic construction insures mechanical protection for the raceway
- UPC bar coded fittings are individually polybagged with a preprinted UPC-A bar code and packaged in pre-scored tear top cartons for an attractive presentation

**Compliance**


- 

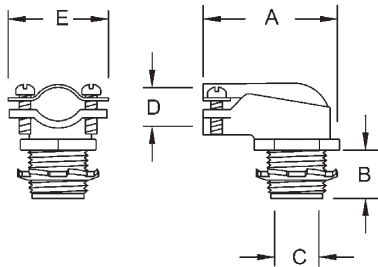

A = Overall length  
 B = Thread length and thread spec  
 C = Throat I.D.  
 D = Clamping range  
 E = Maximum width body



90 Degree Squeeze  
Insulated Throat  
Malleable Iron



90 Degree Squeeze  
Uninsulated Throat  
Malleable Iron

**ORDERING INFORMATION - DIMENSIONS****90 DEGREE SQUEEZE - INSULATED THROAT - MALLEABLE IRON**

| CATALOG NUMBER | TRADE SIZE | UNIT. CTN. QTY. | SHIP. CTN. QTY. | UPC BAR CODE |
|----------------|------------|-----------------|-----------------|--------------|
| 3201           | 3/8" *     | —               | 50              | —            |
| 3202           | 1/2"       | —               | 25              | —            |
| 3202-8         | 1/2"       | 1               | 25              |              |
| 3203           | 3/4"       | —               | 25              | —            |
| 3203-8         | 3/4"       | 1               | 20              |              |

\* For 1/2" knockout

**90 DEGREE SQUEEZE - UNINSULATED - MALLEABLE IRON**

| CATALOG NUMBER | TRADE SIZE | UNIT. CTN. QTY. | SHIP. CTN. QTY. | UPC BAR CODE |
|----------------|------------|-----------------|-----------------|--------------|
| 2201           | 3/8" *     | —               | 50              | —            |
| 2202           | 1/2"       | 25              | 100             | —            |
| 2202-8         | 1/2"       | 1               | 25              |              |
| 2203           | 3/4"       | —               | 25              | —            |
| 2203-8         | 3/4"       | 1               | 20              |              |

\* For 1/2" knockout

**DIMENSIONS**

| CAT. NO. INSULATED | CAT. NO. UNINSLTD. | A        | B      | THD. SPEC. | C    | D          | E        |
|--------------------|--------------------|----------|--------|------------|------|------------|----------|
| 3201               | 2201               | 2-1/64"  | 23/64" | 1/2-14 NPS | .570 | .390-.630  | 1-3/8"   |
| 3202<br>3202-8     | 2202<br>2202-8     | 2-15/64" | 27/64" | 1/2-14 NPS | .570 | .817-.950  | 1-51/64" |
| 3203<br>3203-8     | 2203<br>2203-8     | 2-1/2"   | 1/2"   | 3/4-14 NPS | .822 | .830-1.110 | 1-31/32" |



## ARMORED CABLE CONNECTORS

### DIE CAST ZINC - 90 DEGREE AND DUPLEX CONNECTORS

#### Application

- For use in dry locations to bond armored cable to a box or enclosure

#### Product Feature

- Rugged metallic construction insures mechanical protection for the raceway

#### Compliance

-  – Standard 514B
-  – C22.2 #18




90 Degree Squeeze  
Uninsulated  
Die Cast Zinc



Duplex  
Die Cast Zinc


RACO COMMERCIAL  
FITTINGS

2691 - 2693

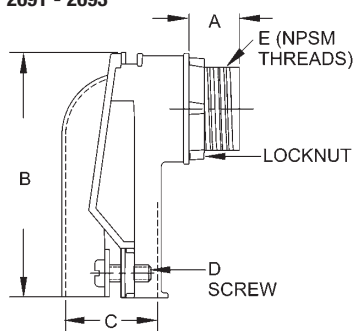

A = Thread length  
B = Overall length  
C = Clamping range  
D = Screw  
E = Thread spec

2611



A = Overall length  
B = Width  
C = Thread length

### ORDERING INFORMATION - DIMENSIONS

#### 90 DEGREE SQUEEZE - UNINSULATED - DIE CAST ZINC

| CATALOG NUMBER | TRADE SIZE | UNIT. CTN. QTY. | SHIP. CTN. QTY. | UPC BAR CODE |
|----------------|------------|-----------------|-----------------|--------------|
| 2691           | 3/8"*      | 50              | 500             | —            |
| 2692           | 1/2"       | 25              | 250             | —            |
| 2693           | 3/4"       | 10              | 100             | —            |

\* For 1/2" knockout

#### DIMENSIONS

| CATALOG NUMBER | A      | B        | C      |          | D<br>SCREW SIZE | E<br>THD. SPEC. |
|----------------|--------|----------|--------|----------|-----------------|-----------------|
|                |        |          | MIN.   | MAX.     |                 |                 |
| 2691           | 25/64" | 1-25/32" | 29/64" | 25/32"   | NO. 8 X 1/2"    | 1/2"-14 NPSM    |
| 2692           | 7/16"  | 2-1/8"   | 45/64" | 1-5/32"  | NO. 8 X 5/8"    | 1/2"-14 NPSM    |
| 2693           | 7/16"  | 2-3/32"  | 63/64" | 1-13/32" | NO. 8 X 5/8"    | 3/4"-14 NPSM    |

#### DUPLEX - DIE CAST ZINC

| CATALOG NUMBER | TRADE SIZE | UNIT. CTN. QTY. | SHIP. CTN. QTY. | UPC BAR CODE |
|----------------|------------|-----------------|-----------------|--------------|
| 2611           | 3/8" *     | 25              | 250             | —            |

\*For 1/2" knockout

#### DIMENSIONS

| CATALOG NUMBER | A      | B        | C     |
|----------------|--------|----------|-------|
| 2611           | 1-1/2" | 1-21/32" | 7/16" |

## METAL CABLE CLAD CONNECTORS

## STEEL - REDI-LOC® CONNECTORS

## Application

- For use in dry locations to connect MCI, MCI-A (2700AJ only) AC and HCF cable to a box or enclosure

## Product Features


- Patented snap-in design. MCI, AC and HCF Cable can be securely in-stalled in outlet boxes or enclosures in seconds, **without tools or locknuts**
- Redi-Loc® Connectors cut installation time by 33% over competing termination methods
- Compact single unit design — no need to worry about loose components or fumbling with protruding hardware
- Snaps tightly into the knockout - no need to worry about a loose connection
- Reusable design — installation can be reversed just as easily as it was originally installed
- Integral red insuliner provides for maximum wire protection and liner visibility for inspecting authorities
- Durable all steel construction
- Zinc electroplated for corrosion protection
- Tri-lingual (English, Spanish & French) installation instructions included in each unit carton
- UPC bar coded fittings are individually polybagged with a preprinted UPC-A bar code, packaged in pre-scored tear top cartons for an attractive presentation

## Compliance


- UL — Standard 514B
- CSA — C22.2 #18

## Reference Data

- REDI-LOC® connectors (2700, 2700AJ & 2701) U.S. Patent 5,731,543



A = Overall length  
B = Body O.D.  
C = Throat I.D.



REDI-LOC® Connectors  
Connectors for MCI, AC and HCF Cables  
Steel

## ORDERING INFORMATION - DIMENSIONS

| REDI-LOC® CONNECTORS - CONNECTORS FOR MCI, AC AND HCF CABLES STEEL |            |                                                                                                                         |                |                |              |
|--------------------------------------------------------------------|------------|-------------------------------------------------------------------------------------------------------------------------|----------------|----------------|--------------|
| CATALOG NUMBER                                                     | TRADE SIZE | CABLE SIZE                                                                                                              | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
| 2700                                                               | 1/2"       | MCI Cable: .434"-.530" Alum. or .430-.530 Steel, Armored Cable (AC): 14/2 (.430) to 12/3 Alum. & Steel                  | 50             | 500            | —            |
| 2700-8                                                             | 1/2"       | Same info. as above                                                                                                     | 1              | 25             |              |
| 2700AJ                                                             | 1/2"       | MCI Cable: .475"-.575" MCI-A Cable Alum .430 - .560 Alum & Steel. Armored Cable (AC): 14-2 (.475) to 12-4 Alum. & Steel | 50             | 500            | —            |
| 2701                                                               | 3/4"       | MCI Cable: .590"-.680" Alum. or .565"-.659" Steel, Armored Cable (AC): 10/3 (.590") to 8/3 Alum. & Steel                | 25             | 250            | —            |
| 2701-8                                                             | 3/4"       | Same info. as above                                                                                                     | 1              | 20             |              |

| DIMENSIONS     |        |        |       |
|----------------|--------|--------|-------|
| CATALOG NUMBER | A      | B      | C     |
| 2700, 2700AJ   | 1.070" | .840"  | .375" |
| 2700-8         | 1.070" | .840"  | .375" |
| 2701           | 1.070" | 1.074" | .500" |
| 2701-8         | 1.070" | 1.074" | .500" |

| REDI-LOC™ SELECTION GUIDE                              |                                |                                            |                                          |
|--------------------------------------------------------|--------------------------------|--------------------------------------------|------------------------------------------|
| CABLE TYPE                                             | 2700, 2700-8<br>1/2" KO        | 2700AJ<br>1/2" KO                          | 2701, 2701-8<br>3/4" KO                  |
| AC Steel                                               | 14/2, 14/3, 14/4, 12/2<br>12/3 | 14/2, 14/3, 14/4, 14/5                     | 12/5, 10/2, 10/3,<br>10/4                |
| HCF Steel Health Care Facilities                       | 14/2, 14/3, 12/2, 12/3         | 14/2, 14/3, 12/2, 12/3                     | 12/3, 12/5, 10/2,<br>10/3, 10/4 w/Ground |
| AC Aluminum                                            | 14/2, 14/3, 14/4, 12/2<br>12/3 | 14/2, 14/3, 14/4, 14/5<br>12/2, 12/3, 10/2 | 12/5, 10/2, 10/3,<br>10/4                |
| MCI Steel (MCI Cables include an add'l ground wire)    | 14/2, 14/3, 12/2               | 14/3, 14/4, 12/2, 12/3<br>10/2             | 12/4, 12/5, 12/6,<br>10/2, 10/3          |
| MCI Aluminum (MCI Cables include an add'l ground wire) | 14/2, 14/3, 12/2               | 14/3, 14/4, 12/2, 12/3<br>10/2             | 12/4, 12/5, 12/6,<br>10/2, 10/3          |
| MCI-A Aluminum                                         | —                              | 14/3, 14/4, 12/2, 12/3<br>10/2             | —                                        |

NOTE: Cable diameters may vary



## METAL CLAD CABLE CONNECTORS

### STEEL

#### Application


- For use in dry locations to connect MCI, MCI-A (2800 only) AC and HCF cable to a box or enclosure

#### Product Features


- Easy to install, just tilt, insert and snap down
- Tri-head screw/clamp design — connector can be installed by using a slotted, Phillips or Robertson head screwdriver
- Integral insuliner — provides for maximum wire protection
- Durable all-steel construction
- Zinc electroplated — for corrosion protection

#### Compliances

- 

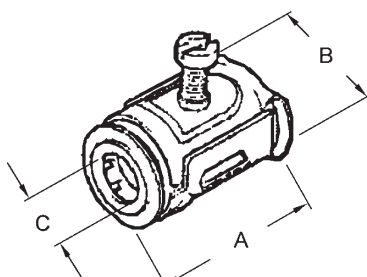

A = Overall length  
B = Body O.D.  
C = Throat I.D.



2800, 2801

RACO COMMERCIAL  
FITTINGS

### ORDERING INFORMATION - DIMENSIONS

#### CONNECTORS - FOR MCI, AC AND HCF CABLES - STEEL

| CATALOG NUMBER | TRADE SIZE | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|------------|----------------|----------------|--------------|
| 2800           | 1/2"       | 50             | 500            | —            |
| 2801           | 3/4"       | 25             | 250            | —            |

#### SELECTION GUIDE

| CABLE TYPE     | 2800<br>1/2" KO                                | 2801<br>3/4" KO           |
|----------------|------------------------------------------------|---------------------------|
| AC Steel       | 14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3 | 10/4, 10/5, 8/3, 8/4, 6/3 |
| HCF Steel      | 14/2, 14/3, 12/2, 12/3, 10/2                   | —                         |
| AC Aluminum    | 14/2, 14/3, 14/4, 12/2, 12/3, 12/4             | 10/4, 8/3, 8/4            |
| MCI Steel      | 14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2       | 10/3, 10/4, 8/2, 8/3      |
| MCI Aluminum   | 14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2       | 10/3, 10/4, 8/2           |
| MC Aluminum    | 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3       | —                         |
| MCI-A Aluminum | 12/8, 10/3, 10/4, 10/6                         | —                         |

#### DIMENSIONS

| CATALOG NUMBER | A        | B       | C     |
|----------------|----------|---------|-------|
| 2800           | 1-7/16"  | 7/8"    | 7/16" |
| 2801           | 1-11/16" | 1-5/16" | 9/16" |

**B84****METAL CLAD CABLE CONNECTORS****STEEL - REDI-LOC® CONNECTORS****RACO COMMERCIAL FITTINGS****Application**


- For use in dry locations to connect MCI, MCI-A, AC and HCF cable to a box or enclosure

**Product Features**


- Tri-Head screw/clamp design — can accommodate two runs of MCI, AC and HCF Cable. Connector can be installed by using a slotted, Phillips or Robertson head screwdriver
- Reusable design — installation can be reversed just as easily as it was originally installed
- Integral red insuliner — provides for maximum wire protection and liner visibility for inspecting authorities
- Durable all steel construction
- Zinc electroplated for corrosion protection
- Tri-lingual (English, Spanish and French) installation instructions included in each unit carton
- UPC bar coded fittings are individually polybagged with a preprinted UPC A bar code and packaged in prescored tear top cartons for an attractive presentation

**Compliances**

- cUL<sub>us</sub>

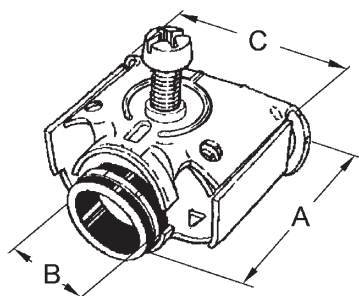

A = Overall length  
B = Throat I.D.  
C = Body width



**REDI-LOC® Duplex Connector**  
For MCI, AC and HFC Cables  
Steel

**ORDERING INFORMATION - DIMENSIONS**

| REDI-LOC® DUPLEX CONNECTOR - FOR MCI, AC AND HCF CABLES - STEEL |            |                                                                                                                                                |                |                |              |
|-----------------------------------------------------------------|------------|------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------|--------------|
| CATALOG NUMBER                                                  | TRADE SIZE | CABLE SIZE                                                                                                                                     | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
| 2715                                                            | 1/2"       | MCI Cable<br>.450"-.545" Alum., .425"-.550" Steel<br>MCC Cable<br>.380"-.550" Alum., Armored Cable (AC)<br>14/2 to 12/3 w/Grnd., Alum. & Steel | 25             | 250            | —            |
| 2715-8                                                          | 1/2"       | Same info. as above                                                                                                                            | 1              | 10             |              |

| REDI-LOC® SELECTION CHART                                 |                                                |
|-----------------------------------------------------------|------------------------------------------------|
| CABLE TYPE                                                | 1/2" KO DUPLEX                                 |
| AC Steel                                                  | 14/2, 14/3, 12/2, 12/3                         |
| HCF Steel - Health Care Facilities                        | 14/2, 14/3, 12/2, 12/3                         |
| AC Aluminum                                               | 14/2, 14/3, 12/2, 12/3                         |
| MCI steel<br>(MCI Cables include an add'l ground wire)    | 14/2, 14/3, 12/2, 12/3                         |
| MCI Aluminum<br>(MCI Cables include an add'l ground wire) | 14/2, 14/3, 12/2, 12/3                         |
| MCI-A Aluminum                                            | 14/4, 12/2, 12/3, 12/4, 12/6, 10/2, 10/3, 10/4 |

| DIMENSIONS     |        |       |          |
|----------------|--------|-------|----------|
| CATALOG NUMBER | A      | B     | C        |
| 2715           | 1-5/8" | 9/16" | 1-11/16" |
| 2715-8         | 1-5/8" | 9/16" | 1-11/16" |

## METAL CLAD CABLE CONNECTORS

### DIE CAST ZINC - CLAMP TYPE

#### Application


- For use in dry locations to connect MC/MCI cable to a box or enclosure

#### Product Feature

- Rugged metallic construction insures mechanical protection for the raceway


#### Compliance

-  – Standard 514B
-  – C22.2 #18



CLAMP TYPE  
DIE CAST ZINC

RACO COMMERCIAL  
FITTINGS

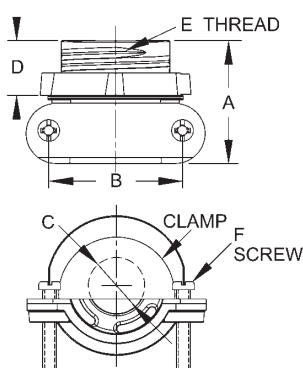

A = Length  
B = Screw centerlines  
C = Clamping range  
D = Thread length  
E = Thread spec.  
F = Screw

### ORDERING INFORMATION - DIMENSIONS

#### CLAMP TYPE - DIE CAST ZINC

| CATALOG NUMBER | TRADE SIZE | UNIT. CTN. QTY. | SHIP. CTN. QTY. | UPC BAR CODE |
|----------------|------------|-----------------|-----------------|--------------|
| 2661           | 3/8"*      | 100             | 1000            | —            |

\*For 1/2" knockout.

#### 1/2" HUB SIZE FOR MC CABLE – 2661 SELECTION CHART

| CABLE TYPE                      | DIAMETER    |
|---------------------------------|-------------|
| Rectangular Aluminum Corrugated | .277"-.375" |
| Aluminum Corrugated             | .365"-.510" |
| Aluminum Smooth                 | .345"-.525" |
| Aluminum Interlocked            | .455"-.575" |
| Steel Interlocked               | .435"-.547" |

#### DIMENSIONS

| CATALOG NUMBER | A      | B    | C      | D    | E           | F           |
|----------------|--------|------|--------|------|-------------|-------------|
| 2661           | 27/32" | 7/8" | 23/64" | 3/8" | 1/2-14 NPSM | 8-32 x 3/4" |

**B86****METAL CLAD CABLE CONNECTORS****DIE CAST ZINC - DUPLEX CONNECTOR****RACO COMMERCIAL  
FITTINGS****Application**


- For use in dry locations to connect MC/MCI cable to a box or enclosure

**Product Feature**


- Rugged metallic construction insures mechanical protection for the raceway

**Compliance**

-  – Standard 514B
-  – C22.2 #18



**DUPLEX  
DIE CAST ZINC**



A = Overall length  
B = Width  
C = Thread length  
D = Clamping range

**ORDERING INFORMATION - DIMENSIONS****DUPLEX - DIE CAST ZINC**

| CATALOG NUMBER | TRADE SIZE | UNIT. CTN. QTY. | SHIP. CTN. QTY. | UPC BAR CODE |
|----------------|------------|-----------------|-----------------|--------------|
| 2611           | 3/8"*      | 25              | 250             | —            |

\* For 1/2" knockout

**1/2" HUB SIZE FOR MC CABLE – 2611 SELECTION CHART**

| CABLE TYPE           | DIAMETER    |
|----------------------|-------------|
| Aluminum Smooth      | .410"-.500" |
| Aluminum Interlocked | .460"-.538" |
| Steel Interlocked    | .438"-.560" |

**DIMENSIONS**

| CATALOG NUMBER | A      | B        | C     | D      |
|----------------|--------|----------|-------|--------|
| 2611           | 1-1/2" | 1-21/32" | 7/16" | 27/32" |

## NONMETALLIC SHEATHED CABLE CONNECTORS

### THERMOPLASTIC CONNECTORS - THE INSIDER®

#### Application

- Use THE INSIDER® in dry locations to connect one or two runs of Nonmetallic Sheathed Cable (NMSC) to a box.
- THE INSIDER and NMSC can be used with steel boxes, panel boxes or plastic boxes with knockouts.

#### Product Features

- Installs from inside the box – The unique design allows the installer to run the NMSC through the knockout to the desired length before snapping the connector into the knockout. No need to cut an oversized hole for an old work box and connector installation
- The only NMSC Connector that is UL tested for use with an eccentric knockout.
- Accepts single and dual runs of NMSC and accommodates one of the widest ranges of NMSC combinations in the industry. No need to stock any other connector.
- Snap-in locking tab design secures THE INSIDER into the removed 1/2" knockout securely.
- One piece nonmetallic construction – resists corrosion and offers insulation protection. THE INSIDER is made of a tough engineered thermoplastic and can be used in exposed and concealed ceilings and walls.
- Can be easily removed by pushing one of the locking wing tabs with a screwdriver.

#### Compliance

-  – Standard 514B and 514C
-  – C22.2 #18

#### Reference Data

- THE INSIDER U.S. Patent 7,211,744




Nonmetallic Sheathed  
Cable Connector

RACO COMMERCIAL  
FITTINGS


### ORDERING INFORMATION - DIMENSIONS

#### THE INSIDER® FOR USE WITH NONMETALLIC SHEATHED CABLE

| SINGLE       | TWO CABLE COMBINATIONS |                                     |
|--------------|------------------------|-------------------------------------|
| 14-2 w/grnd. | (2) 14-2 w/grnd.       | (1) 14-2 w/grnd. & (1) 12-2 w/grnd. |
| 14-3 w/grnd. |                        |                                     |
| 12-2 w/grnd. | (2) 12-2 w/grnd.       | (1) 12-2 w/grnd. & (1) 10-2 w/grnd. |
| 12-3 w/grnd. |                        |                                     |
| 10-2 w/grnd. | (2) 10-2 w/grnd.       | (1) 14-2 w/grnd. & (1) 10-2 w/grnd. |
| 10-3 w/grnd. |                        |                                     |



A = Overall length  
B = Flange O.D.

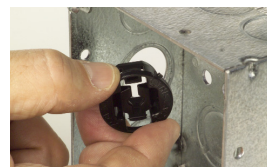

**Step 1: Easy Installation**  
Remove desired knockout.  
Insert THE INSIDER into the  
knockout from inside the box.



**Step 2: Done**



**Easy Removal**  
Push the wing tab of the con-  
nector with a screwdriver.  
Push the connector through the  
knockout towards the  
inside of the box.



**Large Cable**  
For two cable installations  
insert the cables through the  
connector together or one by  
one. Ideal for circuit breaker  
panel use.

#### THE INSIDER® SPECIFICATIONS

| Catalog Number | Trade Size | Description    | Color | Material      | Unit Ctn. Qty. | Ship Ctn. Qty. | WT. (100 Pcs) | I Two of Five Bar Code Unit Ctn. | I Two of Five Bar Code Ship Ctn. |
|----------------|------------|----------------|-------|---------------|----------------|----------------|---------------|----------------------------------|----------------------------------|
| 4714           | 1/2"       | NMSC Connector | Black | Thermoplastic | 100            | 1000           | 0.861         | 3 0050169 04714 0                | 5 0050169 04714 4                |



**B88****NONMETALLIC SHEATHED CABLE CONNECTORS****DIE CAST ZINC - CLAMP TYPE****RACO COMMERCIAL  
FITTINGS****Application**

- For use in dry locations for connecting Nonmetallic Sheathed Cable (NMSC) to a box or an enclosure

**Product Feature**

- Rugged metallic construction will last the lifetime of the installation

**Compliance**


-  – Standard 514B
-  – C22.2 #18





Clamp Type  
Die Cast Zinc



Clamp Type  
Die Cast Zinc

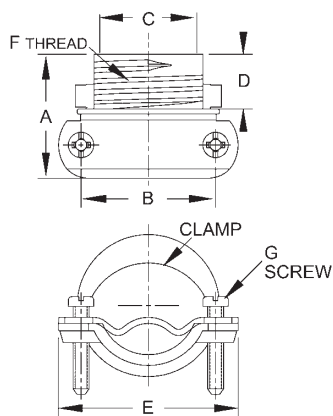

A = Length  
B = Screw centerlines  
C = Throat I.D.  
D = Thread length  
E = Max. body width  
F = Thread spec.  
G = Screw



A = Length  
B = Screw centerlines  
C = Throat I.D.  
D = Thread length  
E = Thread spec.  
F = Screw

**ORDERING INFORMATION - DIMENSIONS****CLAMP TYPE - DIE CAST ZINC**

| CATALOG NUMBER | TRADE SIZE | NONMETALLIC CABLE SIZE                             | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|------------|----------------------------------------------------|----------------|----------------|--------------|
| 2711           | 1/2"       | 2 #14-2 #10, 3 #14 or 3 #12 with or without ground | 100            | 1000           | —            |
| 2863           | 3/4"       | 3 #12, 3 #10, 2 #8                                 | 50             | 500            | —            |
| 2864           | 1"         | 4 #12, 3 #12, 4 #10, 3 #10, 3 #8, 2 #8, 2 #6, 2 #4 | 25             | 250            | —            |

**DIMENSIONS**

| CATALOG NUMBER | A       | B       | C       | D      | E        | F              | G               |
|----------------|---------|---------|---------|--------|----------|----------------|-----------------|
| 2711           | 13/16"  | 7/8"    | 5/8"    | 23/64" | 1-11/64" | 1/2"-1/4 NPSM  | NO. 8-32 x 3/4" |
| 2863           | 15/16"  | 1-3/16" | 27/32"  | 27/64" | 1-21/32" | 3/4"-1/4 NPSM  | NO.10-24 x 1"   |
| 2864           | 1-7/64" | 1-7/16" | 1-3/64" | 33/64" | 1-15/16" | 1"-11-1/2 NPSM | NO.10-24 x 1"   |

**CLAMP TYPE - DIE CAST ZINC**

| CATALOG NUMBER | TRADE SIZE | UNIT. CTN. QTY. | SHIP. CTN. QTY. | UPC BAR CODE |
|----------------|------------|-----------------|-----------------|--------------|
| 2661           | 3/8"*      | 100             | 1000            | —            |

\*For 1/2" knockout.

**DIMENSIONS**

| CATALOG NUMBER | A      | B    | C      | D    | E            | F           |
|----------------|--------|------|--------|------|--------------|-------------|
| 2661           | 27/32" | 7/8" | 23/64" | 3/8" | 1/2"-14 NPSM | 8-32 x 3/4" |

## NONMETALLIC SHEATHED CABLE CONNECTORS

### STEEL - ACCESSORIES

#### Application


- For use when protection is required for cable passing through a wood stud

#### Product Features

- Extra large plate provides a greater area of protection
- Pregalvanized for added corrosion protection
- Meets 2008 NEC 334.15 (B)
- UPC bar coded fittings are individually polybagged with a preprinted UPC-A bar code and packaged in pre-scored tear top cartons for an attractive presentation

#### Compliances

-  US

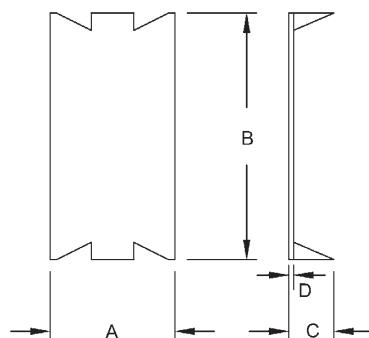

A = Width

B = Height

C = Thickness – measured from the tip of the tang

D = Thickness of material



Cable Protector  
Steel

RACO COMMERCIAL  
FITTINGS

### ORDERING INFORMATION - DIMENSIONS

#### CABLE PROTECTOR - STEEL

| CATALOG NUMBER | DESCRIPTION     | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|-----------------|----------------|----------------|--------------|
| 2709           | Cable Protector | —              | 100            |              |
| 2709-9         | Cable Protector | —              | 100            | *            |
| 2710           | Cable Protector | —              | 200            | —            |

\*Project pack sold as a UPC-A bar coded carton of 100

#### DIMENSIONS

| CATALOG NUMBER | A      | B       | C    | D     |
|----------------|--------|---------|------|-------|
| 2709           | 1-1/2" | 2-9/16" | 1/2" | 1/16" |
| 2709-9         | 1-1/2" | 2-9/16" | 1/2" | 1/16" |
| 2710           | 1-1/2" | 2-9/16" | 1/2" | 1/16" |

**B90****SERVICE ENTRANCE FITTINGS****ALUMINUM - SERVICE ENTRANCE HEADS****RACO COMMERCIAL  
FITTINGS****Application**

- For use to bring overhead electrical service into buildings

**Product Features**


- Lightweight aluminum body construction eases installation and provides corrosion resistance
- Plastic insulator snaps out easily for quick cable insertion

**Compliance**

-  – Standard 514B



Entrance Heads – Clamp Type For  
Rigid/IMC or EMT – Aluminum

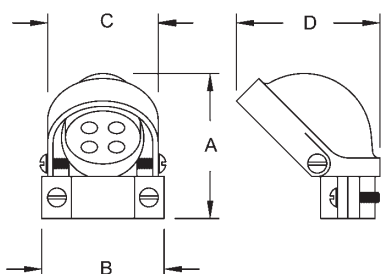

A = Height

B = Width of clamp

C = Width of head

D = Depth of head

**ORDERING INFORMATION - DIMENSIONS****ENTRANCE HEADS – CLAMP TYPE FOR RIGID/IMC OR EMT - ALUMINUM**

| CATALOG NUMBER | TRADE SIZE | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|------------|----------------|----------------|--------------|
| 2402           | 1/2"       | —              | 10             |              |
| 2403           | 3/4"       | —              | 10             |              |
| 2404           | 1"         | —              | 5              |              |
| 2405           | 1-1/4"     | —              | 10             |              |
| 2406           | 1-1/2"     | —              | 5              |              |
| 2408           | 2"         | —              | 5              |              |
| 2410           | 2-1/2"     | —              | 1              | —            |
| 2412           | 3"         | —              | 1              | —            |
| 2414           | 3-1/2"     | —              | 1              | —            |
| 2416           | 4"         | —              | 1              | —            |

**DIMENSIONS**

| CATALOG NUMBER | A        | B        | C        | D        | INSULATING HOLE DIA.                                            |
|----------------|----------|----------|----------|----------|-----------------------------------------------------------------|
| 2402           | 2-11/16" | 2-1/4"   | 2-1/8"   | 2-37/64" | 4 Holes 19/64" Dia.                                             |
| 2403           | 2-55/64" | 2-1/4"   | 2-9/32"  | 2-63/64" | 2 Holes 3/8" Dia.,<br>3 Holes 13/32" Dia.                       |
| 2404           | 3-9/32"  | 2-39/64" | 2-39/64" | 3-3/8"   | 3 Holes 1/2" Dia.,<br>2 Holes 7/16" Dia.                        |
| 2405           | 3-1/4"   | 3-3/32"  | 3-3/32"  | 4-7/32"  | 3 Holes 5/8" Dia.,<br>2 Holes 7/16" Dia.                        |
| 2406           | 4-43/64" | 3-3/4"   | 3-13/32" | 5-3/32"  | 3 Holes 3/4" Dia.,<br>2 Holes 19/32" Dia.,<br>1 Hole 7/16" Dia. |
| 2408           | 6"       | 4-1/2"   | 4-23/32" | 6-19/32" | 3 Holes 1" Dia.,<br>2 Holes 3/4" Dia.,<br>1 Hole 17/32" Dia.    |
| 2410           | 8"       | 5-13/16" | 6-7/16"  | 9-57/64" | 3 Holes 1-5/16" Dia.,<br>3 Holes 7/8" Dia.,<br>1 Hole 1" Dia.   |
| 2412           | 8-7/64"  | 6-3/8"   | 6-7/16"  | 10-1/64" | 3 Holes 1-5/16" Dia.,<br>3 Holes 7/8" Dia.,<br>1 Hole 1" Dia.   |
| 2414           | 9-9/16"  | 7-7/64"  | 8-5/32"  | 13-1/16" | 3 Holes 1-5/16" Dia.,<br>4 Holes 1-1/8" Dia.                    |
| 2416           | 9-11/32" | 7-61/64" | 8-5/32"  | 13-7/32" | 3 Holes 1-3/4" Dia.,<br>4 Holes 1-1/8" Dia.                     |

## SERVICE ENTRANCE FITTINGS

### ALUMINUM - SERVICE ENTRANCE HEADS

#### Aluminum Service Entrance Heads Application


- For use to bring overhead electrical service into buildings

#### Aluminum Service Entrance Heads Product Features


- Lightweight aluminum body construction eases installation and provides corrosion resistance
- Plastic insulator snaps out easily for quick cable insertion

#### Compliance

-  – Standard 514B



Entrance Heads – Clamp Type For SEU Cable  
Aluminum

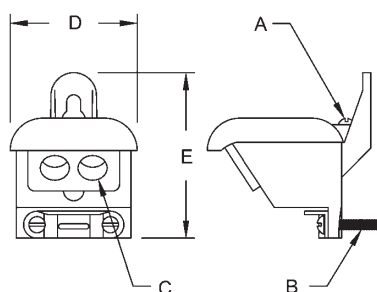

A = Cover screw spec  
B = Clamp screw spec  
C = Hole size  
D = Depth of head  
E = Height

### ORDERING INFORMATION - DIMENSIONS

#### ENTRANCE HEADS – CLAMP TYPE FOR SEU CABLE - ALUMINUM

| CATALOG NUMBER | NOMINAL CABLE SIZES                            | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|------------------------------------------------|----------------|----------------|--------------|
| 2430           | 3-#8 Through 3-#1<br>1-#6 Through 1-#3         | —              | 10             | —            |
| 2440           | 3-#3/0 Through 3-#4/0<br>1-#1/0 Through 1-#2/0 | —              | 10             | —            |

#### DIMENSIONS

| CATALOG NUMBER | A            | B          | C      | D       | E       |
|----------------|--------------|------------|--------|---------|---------|
| 2430           | 8-32 x 1/2"  | 10-24 x 1" | 17/32" | 3-5/16" | 3-5/16" |
| 2440           | 12-24 x 1/2" | 12-24 x 1" | 13/16" | 4-1/2"  | 5"      |

**B92****SERVICE ENTRANCE FITTINGS****ALUMINUM/NYLON/STEEL - UNDERGROUND FEEDER (UF) CONNECTORS****RACO COMMERCIAL  
FITTINGS****Application**


- For use with underground feeder (UF) cable to provide a liquid tight connection to meters and enclosures

**Product Features**

- Rugged metallic construction will last the life of the installation
- Use a nylon connector when a light-weight corrosion resistant connection is required

**Compliance**

-  – Standard 514B
-  – C22.2 #18



A = Nut O.D.  
B = Length  
C = Thread spec



UF Connectors  
Liquid Tight Aluminum



UF Connectors  
Liquid Tight Nylon



UF Connectors  
Liquid Tight Steel

**ORDERING INFORMATION - DIMENSIONS****UF CONNECTORS - LIQUID TIGHT - ALUMINUM**

| CATALOG NUMBER | TRADE SIZE | GROMMET OPENING                            | UF* WIRE SIZE | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|------------|--------------------------------------------|---------------|----------------|----------------|--------------|
| 4899-9         | 1/2"       | Minimum .20" x .40"<br>Maximum .25" x .55" | 2#14          | —              | 10             | —            |
|                |            |                                            | 2#12          |                |                |              |
|                |            |                                            | 2#10          |                |                |              |

\*Wire sizes vary among manufacturers

**UF CONNECTORS - LIQUID TIGHT - NYLON**

| CATALOG NUMBER | TRADE SIZE | GROMMET OPENING                            | UF* WIRE SIZE | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|------------|--------------------------------------------|---------------|----------------|----------------|--------------|
| 4799-1         | 1/2"       | Minimum .20" x .40"<br>Maximum .25" x .55" | 2#14          | —              | 25             | —            |
|                |            |                                            | 2#12          |                |                |              |
|                |            |                                            | 2#10          |                |                |              |
| 4799-3         | 3/4"       | Minimum .20" x .60"<br>Maximum .26" x .78" | 3#14          | —              | 15             | —            |
|                |            |                                            | 3#12          |                |                |              |
|                |            |                                            | 3#10          |                |                |              |

\*Wire sizes vary among manufacturers

**UF CONNECTORS - LIQUID TIGHT - STEEL**

| CATALOG NUMBER | TRADE SIZE | GROMMET OPENING                | UF* WIRE SIZE | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|------------|--------------------------------|---------------|----------------|----------------|--------------|
| 2462           | 1/2"       | Minimum .225"<br>Maximum .425" | 2#14<br>2#12  | 25             | 100            | —            |

\*Wire sizes vary among manufacturers

**DIMENSIONS**

| TRADE SIZE | A      | B     | C         |
|------------|--------|-------|-----------|
| 4899-9     | 1.25"  | 1.65" | 1/2" - 14 |
| 4799-1     | 1.32"  | 2.03" | 1/2" - 14 |
| 4799-3     | 1.56"  | 2.15" | 3/4" - 14 |
| 2462       | 1-1/4" | 3/4"  | 1/2" - 14 |



## SERVICE ENTRANCE FITTINGS

### DIE CAST ZINC - SERVICE ENTRANCE CABLE CONNECTORS

#### Application

- For use with service entrance cable to provide a liquid tight connection to meters and enclosures

#### Product Feature

- Rugged metallic construction will last the life of the installation


#### Compliance

- UL – Standard 514B



UF Connectors - Liquid Tight  
Die Cast Zinc

RACO COMMERCIAL  
FITTINGS

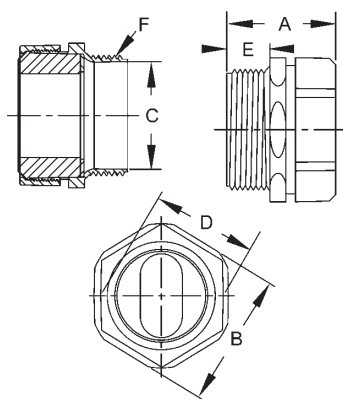

A = Overall length  
B = Nut across flat  
C = Throat dia.  
D = Body across flat  
E = Thread length  
F = Thread spec

### ORDERING INFORMATION - DIMENSIONS

#### SERVICE ENTRANCE CABLE CONNECTORS - LIQUID TIGHT - DIE CAST ZINC

| CATALOG NUMBER | TRADE SIZE | MAX. GROMMET OPENING | UF* WIRE SIZE | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|------------|----------------------|---------------|----------------|----------------|--------------|
| 2475           | 1-1/4"     | .57" x .85"          | 3#2           | —              | 10             | —            |
| 2485           | 1-1/4"     | .51" x .85"          | 3#3           | —              | 10             | —            |
| 2486           | 1-1/2"     | .74" x 1.23"         | 3#2/0         | —              | 10             | —            |
| 2498           | 2"         | .83" x 1.41"         | 3#3/0         | —              | 10             | —            |
| 2468           | 2"         | .89" x 1.54"         | 3#4/0         | —              | 10             | —            |

\*Wire sizes vary among manufacturers

#### DIMENSIONS

| CATALOG NUMBER | A        | B        | C        | D        | E      | F               |
|----------------|----------|----------|----------|----------|--------|-----------------|
| 2475           | 2"       | 1-27/32" | 1-23/64" | 1-49/64" | 39/64" | 1-1/4" -11-1/2" |
| 2485           | 2"       | 1-27/32" | 1-23/64" | 1-49/64" | 39/64" | 1-1/4" -11-1/2" |
| 2486           | 2-3/16"  | 2-5/32"  | 1-19/32" | 2-7/64"  | 39/64" | 1-1/2" -11-1/2" |
| 2498           | 2-13/32" | 2-37/64" | 2-1/16"  | 2-21/32" | 49/64" | 2" -11-1/2"     |
| 2468           | 2-13/32" | 2-37/64" | 2-1/16"  | 2-21/32" | 49/64" | 2" -11-1/2"     |

**B94****SERVICE ENTRANCE FITTINGS****DIE CAST ZINC - NON-WATERTIGHT CONNECTORS****RACO COMMERCIAL  
FITTINGS****Application**

- For use with underground feeder (UF) cable to provide a non-watertight connection to meters and enclosures

**Product Feature**


- Rugged metallic construction will last the lifetime of the installation

**Compliance**


- UL – Standard 514B



Connectors For Oval Cable  
Die Cast Zinc



Connectors For Oval or Round Cable  
Die Cast Zinc

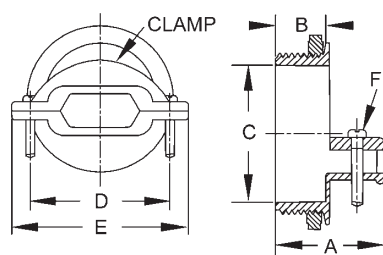

A = Overall length  
B = Thread length and thread spec  
C = Throat I.D.  
D = Screw center to center  
E = Maximum body width  
F = Screw size

**ORDERING INFORMATION - DIMENSIONS****CONNECTORS FOR OVAL CABLE - DIE CAST ZINC**

| CATALOG NUMBER | TRADE SIZE | NOMINAL CABLE SIZE | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|------------|--------------------|----------------|----------------|--------------|
| 2853           | 3/4"       | 3#8, 3#6           | —              | 25             | —            |
| 2854           | 1"         | 3#6, 3#4           | —              | 25             | —            |
| 2855           | 1-1/4"     | 3#6, 3#2           | —              | 10             | —            |
| 2856           | 1-1/2"     | 3#1/0, 3#2/0, 3#1  | —              | 10             | —            |
| 2858           | 2"         | 3#3/0, 3#4/0       | —              | 10             | —            |

**CONNECTORS FOR OVAL OR ROUND CABLE - DIE CAST ZINC**

| CATALOG NUMBER | TRADE SIZE | NOMINAL CABLE SIZE | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|------------|--------------------|----------------|----------------|--------------|
| 2863           | 3/4"       | 3#10, 3#6, 2#6     | 50             | 500            | —            |
| 2864           | 1"         | 3#6, 3#4           | 25             | 250            | —            |

**DIMENSIONS**

| CATALOG NUMBER | A        | B      | C                   | D        | E        | F              |
|----------------|----------|--------|---------------------|----------|----------|----------------|
| 2853/2863      | 15/16"   | 27/64" | 3/4"- 14 NPSM       | 1-3/16"  | 1-21/32" | No. 10-24 x 1" |
| 2854/2864      | 1-7/64"  | 33/64" | 1"- 11-1/2 NPSM     | 1-7/16"  | 1-15/16" | No. 10-24 x 1" |
| 2855           | 1-5/16"  | 39/64" | 1-1/4"- 11-1/2 NPSM | 1-5/8"   | 2-1/4"   | No. 10-24 x 1" |
| 2856           | 1-21/64" | 19/32" | 1-1/2"- 11-1/2 NPSM | 2-13/64" | 2-27/32" | No. 10-24 x 1" |
| 2858           | 1-37/64" | 47/64" | 2"- 11-1/2 NPSM     | 2-3/4"   | 3-1/2"   | No. 12-24 x 1" |

## SERVICE ENTRANCE FITTINGS

### STEEL - STRAPS

#### Application

- For use in mounting service entrance cable

#### Product Features

- All steel construction provides durability of installation
- Electro zinc plated for added corrosion protection


#### Compliances

-  <sup>US</sup>



Straps Steel

RACO COMMERCIAL  
FITTINGS

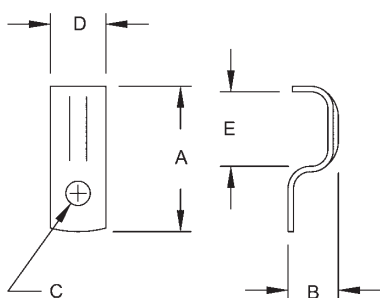

A = Overall length  
B = Height  
C = Hole size  
D = Width of strap  
E = Inside length

### ORDERING INFORMATION - DIMENSIONS

| STRAPS – STEEL |                    |                |                |              |
|----------------|--------------------|----------------|----------------|--------------|
| CATALOG NUMBER | NOMINAL CABLE SIZE | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
| 2441           | 3#8, 3#6           | —              | 100            | —            |
| 2442           | 3#4, 3#3, 3#2      | —              | 100            | —            |
| 2443           | 3#1, 3#1/0, 3#2/0  | —              | 50             | —            |
| 2444           | 3#3/0, 3#4/0       | —              | 50             | —            |

| DIMENSIONS     |          |         |       |      |          |
|----------------|----------|---------|-------|------|----------|
| CATALOG NUMBER | A        | B       | C     | D    | E        |
| 2441           | 1-5/8"   | 37/64"  | 9/32" | 5/8" | 13/16"   |
| 2442           | 1-55/64" | 3/4"    | 9/32" | 5/8" | 1-3/64"  |
| 2443           | 1-21/32" | 1"      | 9/32" | 1"   | 1-7/16"  |
| 2444           | 2-59/64" | 1-9/64" | 9/32" | 1"   | 1-45/64" |

**B96****MISCELLANEOUS FITTINGS****BRONZE - GROUND CLAMPS****RACO COMMERCIAL  
FITTINGS****Application**

- For use in grounding wire or conduit to water pipes or ground rods

**Product Feature**

- Bronze cast construction assures ground path continuity and provides corrosion resistance

**Compliance**


-  – Standard 514B




For Bare Ground Wires  
Bronze Alloy



For Bare Armored Ground Wire  
Bronze Alloy



A = Width  
B = Hole diameter  
C = Height  
D = Min./Max. clamping range

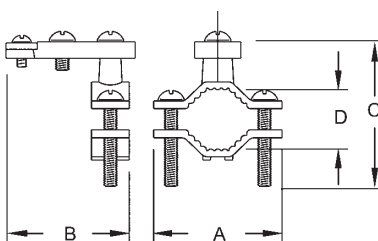

A = Width  
B = Length  
C = Height  
D = Min./Max. clamping range

**ORDERING INFORMATION - DIMENSIONS****FOR BARE GROUND WIRES - BRONZE ALLOY**

| CATALOG NUMBER | PIPE SIZE | GROUNDING CONDUCTOR SIZE | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|-----------|--------------------------|----------------|----------------|--------------|
| 2504           | 1/2"-1"   | No. 2 Str./No. 10 Sol.   | —              | 25             | —            |
| 2505           | 1-1/4"-2" | No. 2 Str./No. 10 Sol.   | —              | 25             | —            |

**DIMENSIONS**

| CATALOG NUMBER | A       | B     | C       | D              |
|----------------|---------|-------|---------|----------------|
| 2504           | 2-1/4"  | 5/16" | 2-5/16" | 11/16"-1-5/16" |
| 2505           | 3-9/16" | 5/16" | 3-1/8"  | 1-3/8"-2-1/2"  |

**FOR BARE ARMORED GROUND WIRE - BRONZE ALLOY**

| CATALOG NUMBER | PIPE SIZE | GROUNDING CONDUCTOR SIZE | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|-----------|--------------------------|----------------|----------------|--------------|
| 2507           | 1/2"-1"   | No. 6 Str./No. 10 Sol.   | —              | 25             | —            |
| 2508           | 1-1/4"-2" | No. 6 Str./No. 10 Sol.   | —              | 25             | —            |

**DIMENSIONS**

| CATALOG NUMBER | A      | B      | C      | D             |
|----------------|--------|--------|--------|---------------|
| 2507           | 2-1/4" | 2-3/8" | 2-3/4" | 9/16"-1-5/16" |
| 2508           | 3-5/8" | 2-1/4" | 3-5/8" | 1-3/8"-2-1/2" |

## MISCELLANEOUS FITTINGS

### BRONZE - GROUND CLAMPS

#### Application

- For use in grounding wire or conduit to water pipes or ground rods

#### Product Feature

- Bronze cast construction assures ground path continuity and provides corrosion resistance


#### Compliance

-  – Standard 514B



For 1/2" Rigid Conduit  
Bronze Alloy

RACO COMMERCIAL  
FITTINGS

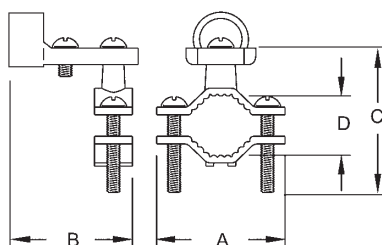

A = Width  
B = Length  
C = Height  
D = Min./Max. clamping range

### ORDERING INFORMATION - DIMENSIONS

#### FOR 1/2" RIGID CONDUIT - BRONZE ALLOY

| CATALOG NUMBER | PIPE SIZE | GROUNDING CONDUCTOR SIZE | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|-----------|--------------------------|----------------|----------------|--------------|
| 2512           | 1/2"-1"   | No. 6 Str./No. 10 Sol.   | —              | 25             | —            |
| 2522           | 1-1/4"-2" | No. 6 Str./No. 10 Sol.   | —              | 25             | —            |

#### FOR 3/4" RIGID CONDUIT - BRONZE ALLOY

| CATALOG NUMBER | PIPE SIZE | GROUNDING CONDUCTOR SIZE | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|-----------|--------------------------|----------------|----------------|--------------|
| 2513           | 1/2"-1"   | No. 2/0 Str./No. 10 Sol. | —              | 25             | —            |
| 2523           | 1-1/4"-2" | No. 2/0 Str./No. 10 Sol. | —              | 25             | —            |

#### DIMENSIONS

| CATALOG NUMBER | A       | B        | C      | D              |
|----------------|---------|----------|--------|----------------|
| 2512           | 2-1/4"  | 2-1/2"   | 3-1/8" | 5/8"-1-3/8"    |
| 2522           | 3-9/16" | 1-15/16" | 3-1/2" | 1-1/4"-2-1/2"  |
| 2513           | 2-5/16" | 2-1/8"   | 3-1/2" | 11/16"-1-3/8"  |
| 2523           | 3-5/8"  | 2-3/16"  | 4-3/8" | 1-7/16"-2-1/2" |



**B98****MISCELLANEOUS FITTINGS****STEEL - KNOCKOUT SEALS****RACO COMMERCIAL  
FITTINGS****Application**

- For use in closing off unused openings in boxes or panelboards

**Product Features**

- All steel construction provides installation integrity
- Zinc electroplated for added corrosion protection

**Compliance**


-  – Standard 514B (1037-1041)




**Knockout Seals  
One-Piece  
Steel**



**Knockout Seals  
Two-Piece  
Steel**

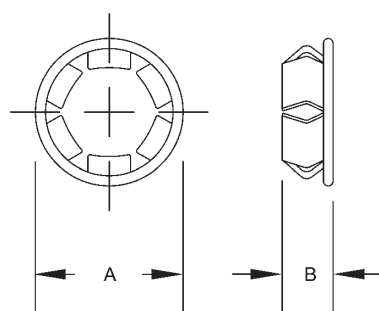

A = O.D.      B = Height

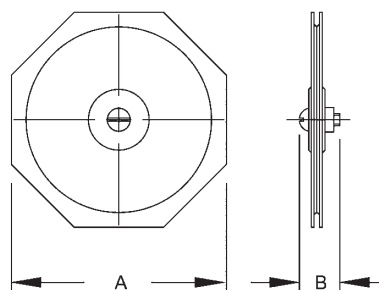

A = O.D.      B = Height

**ORDERING INFORMATION - DIMENSIONS****KNOCKOUT SEALS ONE-PIECE - STEEL**

| CATALOG NUMBER | TRADE SIZE | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|------------|----------------|----------------|--------------|
| 1042           | 1/2"       | 100            | 1000           | —            |
| 1043           | 3/4"       | 100            | 1000           | —            |
| 1044           | 1"         | 100            | 400            | —            |
| 1045           | 1-1/4"     | 50             | 200            | —            |
| 1046           | 1-1/2"     | —              | 50             | —            |
| 1048           | 2"         | —              | 25             | —            |

**DIMENSIONS**

| TRADE SIZE | A        | B      |
|------------|----------|--------|
| 1/2"       | 1-5/64"  | 23/64" |
| 3/4"       | 1-15/64" | 5/16"  |
| 1"         | 1-29/64" | 11/32" |
| 1-1/4"     | 1-13/16" | 11/32" |
| 1-1/2"     | 2-13/64" | 11/32" |
| 2"         | 2-43/64" | 3/8"   |

**KNOCKOUT SEALS TWO-PIECE - STEEL**

| CATALOG NUMBER | TRADE SIZE | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|------------|----------------|----------------|--------------|
| 1037           | 2-1/2"     | —              | 10             | —            |
| 1039           | 3"         | —              | 10             | —            |
| 1040           | 3-1/2"     | —              | 10             | —            |
| 1041           | 4"         | —              | 10             | —            |

Set includes two-discs, bolt & nut in poly bag

**DIMENSIONS**

| TRADE SIZE | A        | B    |
|------------|----------|------|
| 2-1/2"     | 3-3/16"  | 5/8" |
| 3"         | 3-13/16" | 5/8" |
| 3-1/2"     | 4-3/8"   | 5/8" |
| 4"         | 4-29/32" | 5/8" |

## MISCELLANEOUS FITTINGS

### STEEL/MALLEABLE IRON - BEAM CLAMPS AND CABLE PROTECTORS

#### Beam Clamps Application


- For use with hangers, bridle rings and drop rods to support conduit from I-beams

#### Beam Clamps Product Features


- Rugged steel/malleable iron construction will last the lifetime of the installation
- Zinc electro plated for corrosion resistance

#### Compliance

-  US



A = Base length  
B = Thread size  
C = Inside opening



Beam Clamps  
Steel/Malleable Iron



Cable Protector  
Steel

RACO COMMERCIAL  
FITTINGS

### ORDERING INFORMATION - DIMENSIONS

#### BEAM CLAMPS - STEEL - MALLEABLE IRON

| CATALOG NUMBER | TRADE SIZE | MAX LOAD LBS. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|------------|---------------|----------------|--------------|
| 2500*          | 1"         | 125           | 100            | —            |
| 2524           | 1"         | 335           | 100            | —            |
| 2536           | 1-1/2"     | 525           | 50             | —            |
| 2538           | 2"         | 750           | 25             | —            |
| 2510           | 2-1/2"     | 900           | 25             | —            |

\* Cat. No. 2500 is steel

#### DIMENSIONS

| CATALOG NUMBER | A        | B         | C       |
|----------------|----------|-----------|---------|
| 2500           | 1-23/32" | 1/4" - 20 | 21/32"  |
| 2524           | 1-11/32" | 5/16" - 8 | 27/32"  |
| 2536           | 1-1/2"   | 3/8" - 16 | 15/16"  |
| 2538           | 1-27/32" | 3/8" - 16 | 1-3/16" |
| 2510           | 2-11/32" | 1/2" - 13 | 1-1/4"  |

#### Steel Cable Protector Application


- For use when protection is required for cable passing through a wood stud

#### Steel Cable Protector Product Features

- Extra large plate provides a greater area of protection
- Pregalvanized for added corrosion protection
- Meets 2005 NEC 334.15 (B)

#### Compliances

-  US

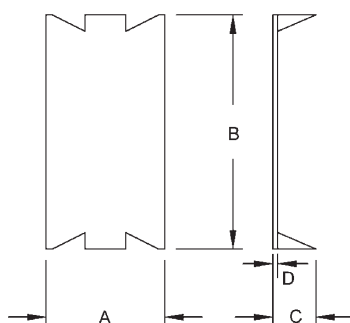

A = Width  
B = Height  
C = Thickness – measured from the tip of the tang  
D = Material thickness

#### CABLE PROTECTOR - STEEL

| CATALOG NUMBER | DESCRIPTION     | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|-----------------|----------------|----------------|--------------|
| 2709           | Cable Protector | —              | 100            |              |
| 2709-9         | Cable Protector | —              | 100            |              |
| 2710           | Cable Protector | —              | 200            | —            |

#### DIMENSIONS

| CATALOG NUMBER | A      | B       | C    | D     |
|----------------|--------|---------|------|-------|
| 2709           | 1-1/2" | 2-9/16" | 1/2" | 1/16" |
| 2709-9         | 1-1/2" | 2-9/16" | 1/2" | 1/16" |
| 2710           | 1-1/2" | 2-9/16" | 1/2" | 1/16" |




**RACO**

**B100****MISCELLANEOUS FITTINGS****STEEL - REDUCING WASHERS****RACO COMMERCIAL  
FITTINGS****Application**

- For use when a raceway is smaller in trade size than the trade size of the knockout it is intended to enter
- Use reducing washers in pairs. One inside and one outside the box or enclosure

**Product Features**

- All steel construction provides installation integrity
- Reducing washer is stamped with trade size information for ease of product identification
- Zinc electro plated for added corrosion protection

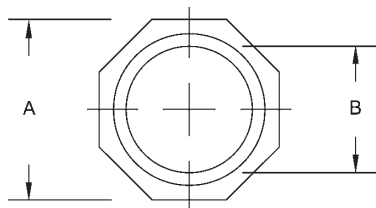

A = Across flats  
B = I.D.



Reducing Washers  
Steel

**ORDERING INFORMATION - DIMENSIONS**

| REDUCING WASHERS - STEEL |               |            |          |                   |                   |                 |
|--------------------------|---------------|------------|----------|-------------------|-------------------|-----------------|
| CATALOG<br>NUMBER        | TRADE<br>SIZE | DIMENSIONS |          | UNIT<br>CTN. QTY. | SHIP<br>CTN. QTY. | UPC<br>BAR CODE |
|                          |               | A          | B        |                   |                   |                 |
| 1365                     | 3/4"-1/2"     | 1-1/4"     | 7/8"     | 200               | 1000              | —               |
| 1366                     | 1"-1/2"       | 1-17/32"   | 7/8"     | 100               | 1000              | —               |
| 1367                     | 1"-3/4"       | 1-17/32"   | 1-3/32"  | 100               | 1000              | —               |
| 1368                     | 1-1/4"-1/2"   | 1-31/32"   | 7/8"     | —                 | 100               | —               |
| 1369                     | 1-1/4"-3/4"   | 1-31/32"   | 1-3/32"  | —                 | 100               | —               |
| 1370                     | 1-1/4"-1"     | 1-31/32"   | 1-3/8"   | —                 | 100               | —               |
| 1371                     | 1-1/2"-1/2"   | 2-5/32"    | 7/8"     | —                 | 50                | —               |
| 1372                     | 1-1/2"-3/4"   | 2-5/32"    | 1-3/32"  | —                 | 50                | —               |
| 1373                     | 1-1/2"-1"     | 2-5/32"    | 1-3/8"   | —                 | 50                | —               |
| 1374                     | 1-1/2"-1-1/4" | 2-5/32"    | 1-3/4"   | —                 | 50                | —               |
| 1375                     | 2"-1/2"       | 2-11/16"   | 7/8"     | —                 | 50                | —               |
| 1376                     | 2"-3/4"       | 2-11/16"   | 1-3/32"  | —                 | 50                | —               |
| 1377                     | 2"-1"         | 2-11/16"   | 1-3/8"   | —                 | 50                | —               |
| 1378                     | 2"-1-1/4"     | 2-11/16"   | 1-3/4"   | —                 | 50                | —               |
| 1379                     | 2"-1-1/2"     | 2-11/16"   | 1-31/32" | —                 | 50                | —               |
| 1380                     | 2-1/2"-1"     | 3-3/16"    | 1-3/8"   | —                 | 50                | —               |
| 1381                     | 2-1/2"-1-1/4" | 3-3/16"    | 1-3/4"   | —                 | 50                | —               |
| 1382                     | 2-1/2"-1-1/2" | 3-3/16"    | 1-31/32" | —                 | 50                | —               |
| 1383                     | 2-1/2"-2"     | 3-3/16"    | 2-15/32" | —                 | 50                | —               |
| 1384                     | 3"-1-1/4"     | 3-13/16"   | 1-3/4"   | —                 | 25                | —               |
| 1385                     | 3"-1-1/2"     | 3-13/16"   | 1-31/32" | —                 | 25                | —               |
| 1386                     | 3"-2"         | 3-13/16"   | 2-15/32" | —                 | 25                | —               |
| 1387                     | 3"-2-1/2"     | 3-13/16"   | 3"       | —                 | 25                | —               |
| 1389                     | 3-1/2"-2"     | 4-3/8"     | 2-15/32" | —                 | 10                | —               |
| 1390                     | 3-1/2"-2-1/2" | 4-3/8"     | 3"       | —                 | 10                | —               |
| 1391                     | 3-1/2"-3"     | 4-3/8"     | 3-5/8"   | —                 | 10                | —               |
| 1392                     | 4"-2"         | 4-29/32"   | 2-15/32" | —                 | 10                | —               |
| 1393                     | 4"-2-1/2"     | 4-29/32"   | 3"       | —                 | 10                | —               |
| 1394                     | 4"-3"         | 4-29/32"   | 3-5/8"   | —                 | 10                | —               |

## MISCELLANEOUS FITTINGS

### DIE CAST ZINC - OFFSET NIPPLES

#### Application

- For use when connecting two boxes or panels when the knock-outs are not in line.

#### Product Feature

- Rugged metallic construction provides mechanical protection for the conductors.


#### Compliance

-  - Standard 514B
-  - C22.2 #18



3/4" Offset Nipples  
Die Cast Zinc

RACO COMMERCIAL  
FITTINGS

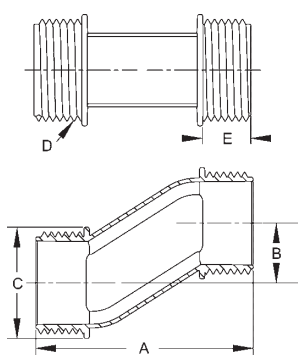

A = Overall length

B = Offset

C = Hub dia.

D = Thread spec

E = Thread length

### ORDERING INFORMATION - DIMENSIONS

#### 3/4" OFFSET NIPPLES - DIE CAST ZINC

| CATALOG NUMBER | TRADE SIZE | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
|----------------|------------|----------------|----------------|--------------|
| 1452           | 1/2"       | —              | 50             | —            |
| 1453           | 3/4"       | —              | 20             | —            |
| 1454           | 1"         | —              | 15             | —            |
| 1455           | 1-1/4"     | —              | 10             | —            |
| 1456           | 1-1/2"     | —              | 10             | —            |
| 1458           | 2"         | —              | 6              | —            |

#### DIMENSIONS

| CATALOG NUMBER | A        | B    | C        | D                    | E      |
|----------------|----------|------|----------|----------------------|--------|
| 1452           | 2-27/64" | 3/4" | 15/16"   | 1/2" - 14 NPSM       | 7/16"  |
| 1453           | 2-13/32" | 3/4" | 1-3/16"  | 3/4" - 14 NPSM       | 7/16"  |
| 1454           | 2-23/32" | 3/4" | 1-25/64" | 1" - 11/12 NPSM      | 39/64" |
| 1455           | 2-13/16" | 3/4" | 1-13/16" | 1-1/4" - 11-1/2 NPSM | 19/32" |
| 1456           | 3-1/32"  | 3/4" | 2-1/16"  | 1-1/2" - 11-1/2 NPSM | 11/16" |
| 1458           | 3-5/32"  | 3/4" | 2-9/16"  | 2" - 11-1/2 NPSM     | 3/4"   |

**B102****MISCELLANEOUS FITTINGS****DIE CAST ZINC - UNINSULATED NIPPLES****RACO COMMERCIAL  
FITTINGS****Application**

- For use with a conduit coupling to connect conduit to a box or, with a locknut to connect two boxes

**Product Feature**


- Rugged metallic construction

**Compliance**

-  – Standard 514B
-  – C22.2 #18



Uninsulated Nipples  
Die Cast Zinc

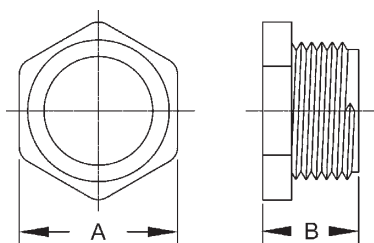

A = Across flats  
B = Length

**ORDERING INFORMATION - DIMENSIONS**

| UNINSULATED NIPPLES - DIE CAST ZINC |            |                |                |              |
|-------------------------------------|------------|----------------|----------------|--------------|
| CATALOG NUMBER                      | TRADE SIZE | UNIT CTN. QTY. | SHIP CTN. QTY. | UPC BAR CODE |
| 1662                                | 1/2"       | 100            | 1000           | —            |
| 1663                                | 3/4"       | 50             | 500            | —            |
| 1664                                | 1"         | 25             | 250            | —            |
| 1665                                | 1-1/4"     | 25             | 250            | —            |
| 1666                                | 1-1/2"     | 25             | 100            | —            |
| 1668                                | 2"         | 10             | 40             | —            |
| 1670                                | 2-1/2"     | 10             | 40             | —            |
| 1672                                | 3"         | 10             | 40             | —            |
| 1674                                | 3-1/2"     | 10             | 40             | —            |
| 1676                                | 4"         | 5              | 20             | —            |

| DIMENSIONS     |            |          |         |
|----------------|------------|----------|---------|
| CATALOG NUMBER | TRADE SIZE | A        | B       |
| 1662           | 1/2"       | 15/16"   | 19/32"  |
| 1663           | 3/4"       | 1-3/16"  | 23/32"  |
| 1664           | 1"         | 1-3/8"   | 55/64"  |
| 1665           | 1-1/4"     | 1-47/64" | 7/8"    |
| 1666           | 1-1/2"     | 2-1/8"   | 29/32"  |
| 1668           | 2"         | 2-35/64" | 1-5/32" |
| 1670           | 2-1/2"     | 3-7/32"  | 1-7/16" |
| 1672           | 3"         | 3-51/64" | 1-7/16" |
| 1674           | 3-1/2"     | 4-17/64" | 1-7/16" |
| 1676           | 4"         | 4-51/64" | 1-7/16" |



## MISCELLANEOUS FITTINGS

### STEEL - CONDUIT HANGERS WITH BOLTS

#### Application


- For use in wet or dry locations to support runs of rigid/IMC and EMT conduit from ceilings and walls

#### Product Features

- Furnished with nut and bolt to speed installation
- Pregalvanized finish provides corrosion protection

#### Compliances

-  – Standard 514B (trade sizes 0-9)
-  – Canada (trade sizes 0-9)



Conduit Hangers With Bolts  
Steel

RACO COMMERCIAL  
FITTINGS

### ORDERING INFORMATION - DIMENSIONS

| CONDUIT HANGERS WITH BOLTS - STEEL |            |                  |          |                |              |
|------------------------------------|------------|------------------|----------|----------------|--------------|
| CATALOG NUMBER                     | TRADE SIZE | RIGID & IMC SIZE | EMT SIZE | SHIP CTN. QTY. | UPC BAR CODE |
| 2052                               | 0          | 3/8" -1/2"       | 1/2"     | 100            | —            |
| 2053                               | 1          | 3/4"             | 3/4"     | 100            | —            |
| 2054                               | 2          | 1"               | 1"       | 100            | —            |
| 2041                               | 2-1/2      | —                | 1-1/4"   | 100            | —            |
| 2055                               | 3          | 1-1/4"           | 1-1/2"   | 100            | —            |
| 2056                               | 4          | 1-1/2"           | —        | 100            | —            |
| 2058                               | 5          | 2"               | 2"       | 50             | —            |
| 2057                               | 6          | 2-1/2"           | 2-1/2"   | 25             | —            |
| 2059                               | 7          | 3"               | 3"       | 25             | —            |
| 2060                               | 8          | 3-1/2"           | 3-1/2"   | 10             | —            |
| 2061                               | 9          | 4"               | 4"       | 10             | —            |