



ROSS CONTROLS®

LUBRICATORS



LUBRICATORS – KEY FEATURES

- Sight-feed and wick-feed design options
- Sight-feed Lubricators are easy to adjust, and an indicator on the sight dome measures the amount of oil dispensed
- The adjusting knob can be removed to make the lubricator “tamper-resistant”
- All working parts are in an easily replaceable cartridge
- Modular and inline mounting options
- Metal and High Strength polycarbonate bowl options
- External tamper resistant adjustment
- Quick-fill cap option for full size, MD3™, and MD4™ series
- Extended bowls available for MD3™ and MD4™ series

LUBRICATOR TYPE/SERIES	AVAILABLE PORT SIZES								FLOW	DESIGN		BOWL TYPE		Page
	1/8	1/4	3/8	1/2	3/4	1	1¼	1½	MAX FLOW (scfm)	SIGHT FEED	WICK FEED	Polycarbonate	METAL	
BANTAM									27					E4.3
MINIATURE									25					E4.4
MID-SIZE									110					E4.5
MD3™									150					E4.6
FULL-SIZE									140					E4.7
MD4™									205					E4.8
HIGH-CAPACITY									500					E4.9

Port Sizes: 1/8 & 1/4, and Tube Fittings – Flow to 27 scfm

Port Size	Model Numbers*			
	Threaded Ports*		Tube Fittings*	
	Polycarbonate bowl	Metal Bowl	Polycarbonate bowl	Metal Bowl
FILL PORT				
1/8	5B01B0005	5B01B0006	–	–
1/4	5B02B0005	5B02B0006	5B03B0005	5B03B0006
3/8	–	–	5B04B0005	5B04B0006
4mm	–	–	5B05B0005	5B05B0006
6mm	–	–	5B06B0005	5B06B0006
8mm	–	–	5B07B0005	5B07B0006
10mm	–	–	5B08B0005	5B08B0006
QUICK-FILL CAP				
1/8	5B01B0007	5B01B0008	–	–
1/4	5B02B0007	5B02B0008	5B03B0007	5B03B0008
3/8	–	–	5B04B0007	5B04B0008
4mm	–	–	5B05B0007	5B05B0008
6mm	–	–	5B06B0007	5B06B0008
8mm	–	–	5B07B0007	5B07B0008
10mm	–	–	5B08B0007	5B08B0008

* NPT port threads. For BSPP threads add a "C" prefix to the model number e.g., C5B01B0005.





ISO Symbol
Lubricator



Port Size	Bowl Capacity	Dimensions inches (mm)				Weight lb (kg)
		A	B**	C	Depth	
No Port	2-oz (60-ml)	1.7 (43)	3.6 (91)	0.9 (22)	1.8 (45)	0.17 (0.08)
1/8, 1/4	2-oz (60-ml)	3.0 (76)	3.6 (91)	0.9 (22)	1.8 (45)	0.37 (0.17)
Models below have quick-connect tube fittings.						
1/4	2-oz (60-ml)	3.4 (86)	3.6 (91)	0.9 (22)	1.8 (45)	0.37 (0.17)
3/8	2-oz (60-ml)	3.9 (99)	3.6 (91)	0.9 (22)	1.8 (45)	0.37 (0.17)
4 mm	2-oz (60-ml)	3.4 (86)	3.6 (91)	0.9 (22)	1.8 (45)	0.37 (0.17)
6 mm	2-oz (60-ml)	3.4 (86)	3.6 (91)	0.9 (22)	1.8 (45)	0.37 (0.17)
8 mm	2-oz (60-ml)	3.4 (86)	3.6 (91)	0.9 (22)	1.8 (45)	0.37 (0.17)
10 mm	2-oz (60-ml)	3.9 (99)	3.6 (91)	0.9 (22)	1.8 (45)	0.37 (0.17)

** Dimension for polycarbonate bowl; metal bowl is 3.8 (97).

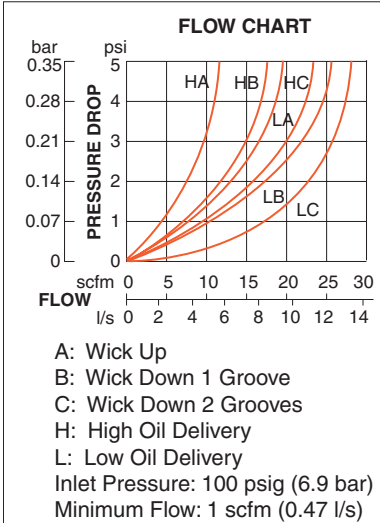

Accessories ordered separately, refer to page E6.3-4.

STANDARD SPECIFICATIONS (for products on this page):

Construction: Wick-Feed.

Ambient/Media Temperature:

Polycarbonate bowl: 40° to 125°F (4° to 52°C).

Metal bowl: 40° to 150°F (4° to 66°C).

Fluid Media: Compressed air.

Inlet Pressure:

Polycarbonate bowl: 150 psig (10 bar) maximum.

Metal bowl: 200 psig (14 bar) maximum.

Oil Adjustment: External, no shutoff.

Body: Acetal.

Bowl: Polycarbonate or aluminum.

Seals: Nitrile.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

Port Sizes: 1/8 & 1/4 – Flow to 25 scfm


Port Size	Fill Type	Model Numbers*			
		Polycarbonate bowl		Metal Bowl	
		High Flow	Low Flow	High Flow	Low Flow
1/8	Fill Port	5111B1010	5111B1012	5112B1010	5112B1012
1/4	Fill Port	5111B2010	5111B2012	5112B2010	5112B2012
1/8	Quick-Fill Cap	5111B1110	5111B1112	5112B1110	5112B1112
1/4	Quick-Fill Cap	5111B2110	5111B2112	5112B2110	5112B2112

* NPT port threads. For BSPP threads add a "C" prefix to the model number e.g., C5111B1010.



Port Size	Bowl Type	Bowl Capacity	Dimensions inches (mm)				Weight lb (kg)
			A	B	C	Depth	
1/8, 1/4	Polycarbonate	2-oz (60-ml)	1.6 (41)	3.6 (92)	0.7 (17)	1.6 (41)	0.21 (0.10)
1/8, 1/4	Aluminum	2-oz (60-ml)	1.6 (41)	3.8 (97)	0.7 (17)	1.6 (41)	0.21 (0.10)


ISO Symbol
Lubricator



FLOW CHARTS


HIGH FLOW MODELS

Minimum Flow: 1/8 port, 2 scfm (0.94 l/s)
1/4 port, 6 scfm (2.8 l/s)

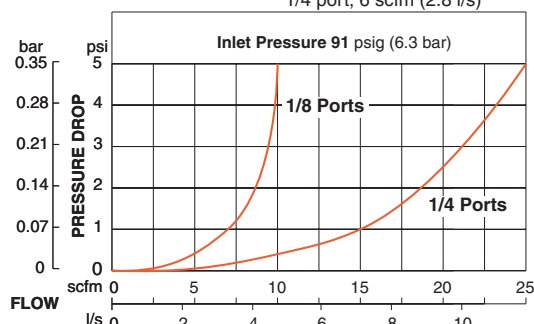

LOW FLOW MODELS

Minimum Flow: 1 scfm (0.47 l/s)

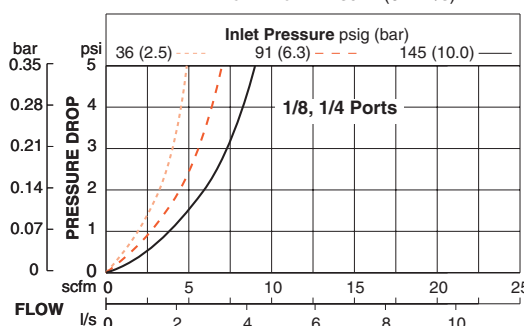

Accessories ordered separately, refer to page E6.3-4.

STANDARD SPECIFICATIONS (for products on this page):

Construction: Wick-Feed.

Ambient/Media Temperature:

Polycarbonate bowl: 40° to 125°F (4° to 52°C).

Metal bowl: 40° to 150°F (4° to 66°C).

Fluid Media: Compressed air.

Inlet Pressure:

Polycarbonate bowl: 150 psig (10 bar) maximum.

Metal bowl: 200 psig (14 bar) maximum.

Oil Adjustment: Internal, tamper-proof.

Body: Aluminum.

Bowl: Polycarbonate or aluminum.

Seals: Nitrile.


IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

Port Sizes: 1/4, 3/8 & 1/2 – Flow to 110 scfm

Port Size	Fill Type	Model Numbers*	
		Sight-Feed	
		Polycarbonate Bowl	Metal Bowl
1/4	Fill Port	5111B2007	5112B2007
3/8	Fill Port	5111B3007	5112B3007
1/2	Fill Port	5111B4007	5112B4007
1/4	Quick-Fill Cap	5111B2107	5112B2107
3/8	Quick-Fill Cap	5111B3107	5112B3107
1/2	Quick-Fill Cap	5111B4107	5112B4107

* NPT port threads. For BSPP threads add a "C" prefix to the model number e.g., C5111B2007.


Port Size	Bowl Type	Bowl Capacity	Dimensions inches (mm)				Weight lb (kg)
			A	B	C	Depth	
1/4, 3/8, 1/2	Polycarbonate	4-oz (120-ml)	2.7 (68)	4.1 (103)	1.8 (46)	2.4 (60)	1.06 (0.48)
1/4, 3/8, 1/2	Zinc	4-oz (120-ml)	2.7 (68)	4.1 (103)	1.8 (46)	2.4 (60)	1.50 (0.68)



ISO Symbol
Lubricator



FLOW CHART

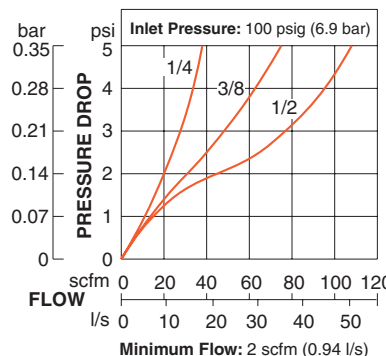

Accessories ordered separately, refer to page E6.3-4.

STANDARD SPECIFICATIONS (for products on this page):

Construction: Sight-Feed.

Ambient/Media Temperature:

Polycarbonate bowl: 40° to 125°F (4° to 52°C).

Metal bowl: 40° to 175°F (4° to 80°C).

Inlet Pressure:

Polycarbonate bowl: 150 psig (10 bar) maximum.

Metal bowl: 200 psig (14 bar) maximum.

Fluid Media: Compressed air.

Oil Adjustment: External, tamper-resistant.

Body: Zinc.

Bowl: Polycarbonate bowl with zinc shatterguard, or zinc bowl.

Sight Dome: Nylon.

Seals: Nitrile.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com

Port Sizes: 1/4, 3/8 & 1/2 – Flow to 150 scfm

HOW TO ORDER

(Choose your options (in red) to configure your model number.)

MD3 **51P** **Q** **C** **2** **2**

BOWL SIZE	
Polycarbonate Bowl 5.1-oz (151-ml)	51P
Metal Bowl 6-oz (177-ml)	51M
Extended Metal Bowl 10-oz (295-ml)	51E

LUBRICATOR FILL TYPE	
Quick Fill Cap	Q
Fill Port	S

PIPE SIZE	
1/4 NPTF	2
3/8 NPTF	3
1/2 NPTF	4
1/4 BSPP	B
3/8 BSPP	C
1/2 BSPP	D

CAP COLOR	
Gold	2
Gray	G
Yellow	Y
Red	R
Blue	B




ISO Symbol
Lubricator




Bowl Type	Dimensions inches (mm)				Weight lb (kg)
	A	B**	C	Depth	
Polycarbonate	3.0 (76.2)	4.72 (119.9)	2.21 (56.1)	2.51 (63.8)	1.30 (0.59)
Aluminum	3.0 (76.2)	6.02 (152.9)	2.21 (56.1)	2.76 (70.1)	1.42 (0.64)
Extended Aluminum	3.0 (76.2)	9.37 (238)	2.21 (56.1)	2.76 (70.1)	1.54 (0.70)

** Bowl removal clearance: add 3.1 (79).
Extended Bowl removal clearance: add 6.1 (155).

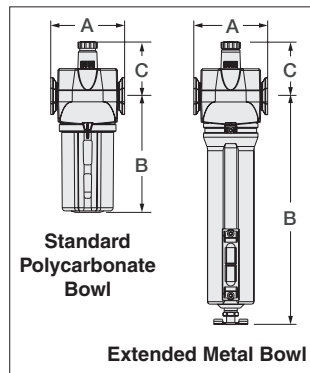

E

E4

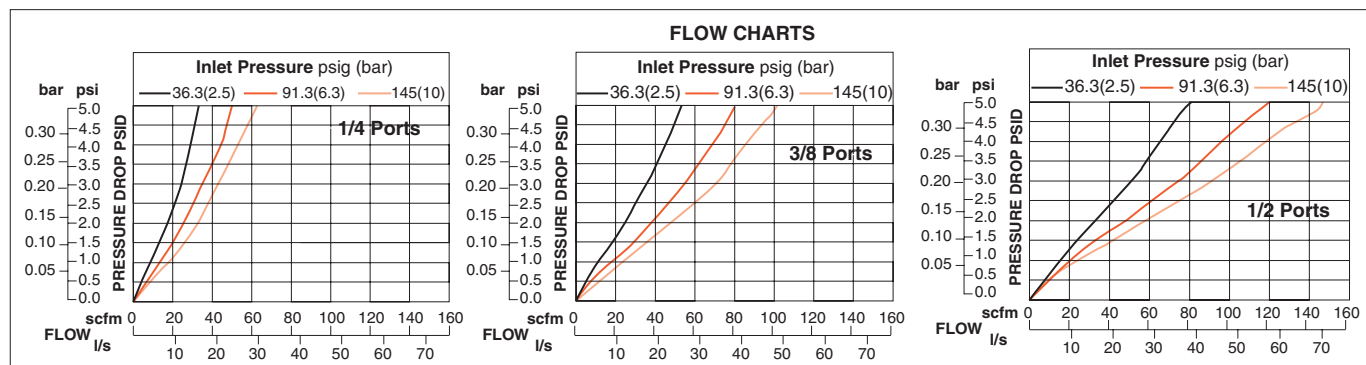

Accessories ordered separately, refer to page E6.3-5.

STANDARD SPECIFICATIONS (for products on this page):

Construction: Sight-Feed.

Ambient/Media Temperature:

Polycarbonate bowl: 40° to 125°F (4° to 52°C).

Metal bowl: 40° to 175°F (4° to 80°C).

Fluid Media: Compressed air.

Inlet Pressure:

Polycarbonate bowl: 150 psig (10 bar) maximum.

Metal bowl: 250 psig (17 bar) maximum.

Oil Adjustment: External; tamper resistant.

Body: Zinc.

Bowl: Polycarbonate with nylon shatterguard, or aluminum bowl with clear nylon sight glass.

Sight-Feed Dome: Nylon.

Seals: Nitrile.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

Port Sizes: 1/4, 3/8, 1/2 & 3/4 – Flow to 140 scfm


Port Size	Fill Type	Model Numbers*			
		Sight-Feed		Wick-Feed	
		Polycarbonate Bowl	Metal Bowl	Polycarbonate Bowl	Metal Bowl
1/4	Fill Port	5111B2008	5112B2008	5111B2014	5112B2014
3/8	Fill Port	5111B3008	5112B3008	5111B3014	5112B3014
1/2	Fill Port	5111B4008	5112B4008	5111B4014	5112B4014
3/4	Fill Port	5111B5008	5112B5008	5111B5014	5112B5014
1/4	Quick-Fill Cap	5111B2108	5112B2108	5111B2114	5112B2114
3/8	Quick-Fill Cap	5111B3108	5112B3108	5111B3114	5112B3114
1/2	Quick-Fill Cap	5111B4108	5112B4108	5111B4114	5112B4114
3/4	Quick-Fill Cap	5111B5108	5112B5108	5111B5114	5112B5114


* NPT port threads. For BSPP threads add a "C" prefix to the model number e.g., C5111B2008.




ISO Symbol
Lubricator



Port Size	Bowl Type	Bowl Capacity	Dimensions inches (mm)				Weight lb (kg)	
			A	B**	C	Depth		
With Sight-Feed								
1/4, 3/8, 1/2, 3/4	Polycarbonate	8-oz (240-ml)	3.5 (88)	5.2 (132)	1.3 (32)	3.5 (89)	2.06 (0.94)	
1/4, 3/8, 1/2, 3/4	Zinc	8-oz (240-ml)	3.5 (88)	5.3 (135)	1.3 (32)	3.5 (89)	2.90 (1.32)	
With Wick-Feed								
1/4, 3/8, 1/2, 3/4	Polycarbonate	8-oz (240-ml)	3.5 (88)	5.2 (132)	0.7 (17)	3.5 (89)	2.25 (1.02)	
1/4, 3/8, 1/2, 3/4	Zinc	8-oz (240-ml)	3.5 (88)	5.3 (135)	0.7 (17)	3.5 (89)	2.85 (1.30)	
** Bowl removal clearance: add 3.1 (79).								



FLOW CHART

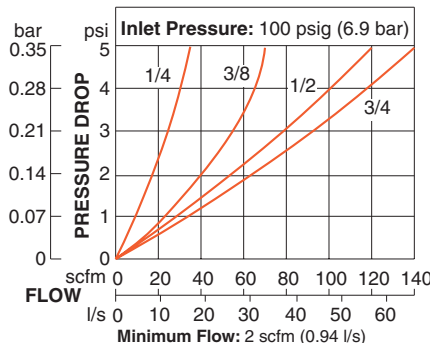

Accessories ordered separately, refer to page E6.3-4.

STANDARD SPECIFICATIONS (for products on this page):

Construction: Sight-Feed.

Ambient/Media Temperature:

Polycarbonate bowl: 40° to 125°F (4° to 52°C).

Metal bowl: 40° to 175°F (4° to 80°C).

Fluid Media: Compressed air.

Inlet Pressure:

Polycarbonate bowl: 150 psig (10 bar) maximum.

Metal bowl: 200 psig (14 bar) maximum.

Oil Adjustment: External, tamper-resistant.

Adjusting Knob: Acetal.

Body: Zinc.

Bowl: Polycarbonate with steel shatterguard, or zinc bowl with sight glass.

Bowl Ring: Aluminum.

Seals: Nitrile.

Sight Dome: Nylon. External, tamper-proof.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com

Port Sizes: 3/8, 1/2 & 3/4 – Flow to 205 scfm

HOW TO ORDER

(Choose your options (in red) to configure your model number.)

MD4 **51P** **S** **B** **3** **2**

BOWL SIZE	
Polycarbonate Bowl 9-oz (266-ml)	51P
Metal Bowl 9-oz (266-ml)	51M
Extended Metal Bowl 15-oz (443-ml)	51E

LUBRICATOR FILL TYPE	
Quick Fill Cap	Q
Fill Port	S

PIPE SIZE	
3/8 NPTF	3
1/2 NPTF	4
3/4 NPTF	5
3/8 BSPP	C
1/2 BSPP	D
3/4 BSPP	E

CAP COLOR	
Gold	2
Gray	G
Yellow	Y
Red	R
Blue	B






ISO Symbol
Lubricator



Bowl Size	Bowl Type	Dimensions inches (mm)				Weight lb (kg)
		A	B**	C	Depth	
3/8, 1/2, 3/4	Polycarbonate	3.5 (88)	7.1 (179)	2.2 (56)	2.9 (73)	2.0 (0.91)
	Aluminum	3.5 (88)	7.4 (188)	2.2 (56)	3.1 (79)	2.0 (0.91)

** Bowl removal clearance: add 3.1 (79).

Extended Bowl removal clearance: add 6.1 (155).

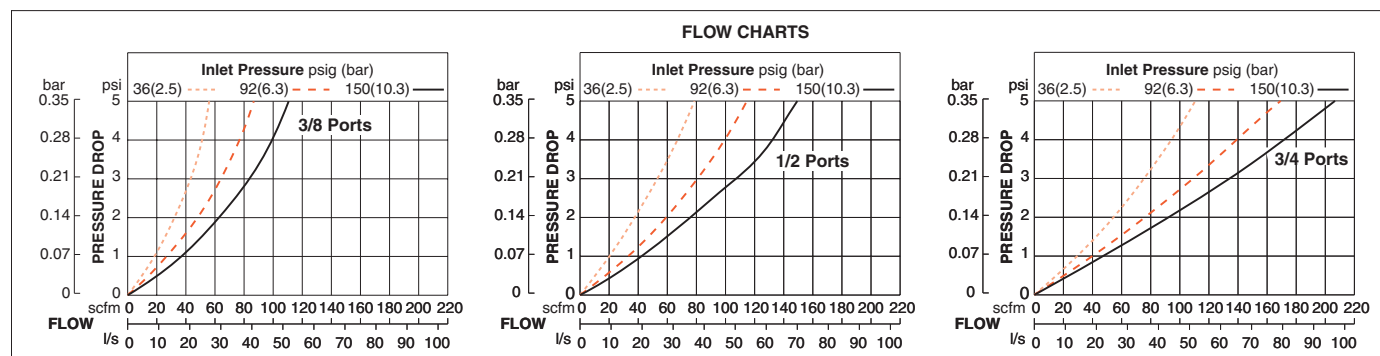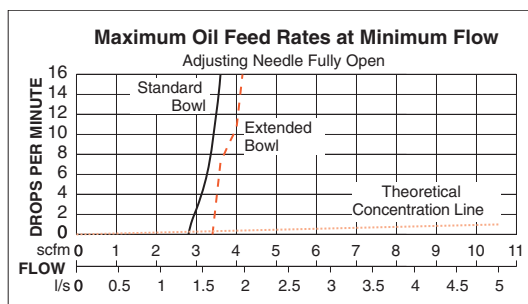

Accessories ordered separately, refer to page E6.3-4.

STANDARD SPECIFICATIONS (for products on this page):

Construction: Sight-Feed.

Ambient/Media Temperature:

Polycarbonate bowl: 40° to 125°F (4° to 52°C).

Metal bowl: 40° to 175°F (4° to 80°C).

Fluid Media: Compressed air.

Inlet Pressure:

Polycarbonate bowl: 150 psig (10 bar).

Metal bowl: 200 psig (14 bar).

Oil Adjustment: External; tamper resistant.

Body: Zinc.

Bowl: Polycarbonate with steel shatterguard, aluminum bowl with clear nylon sight glass, or extended aluminum bowl with two clear nylon sight glass.

Bowl Ring: Nylon.

Sight-Feed Dome: Nylon.



Seals: Nitrile.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

Port Sizes: 3/4, 1, 1¼ & 1½ – Flow to 500 scfm

Port Size	Bowl Size oz (ml)	Model Numbers*			
		Metal Bowl			
		FILL-PORT		QUICK-FILL CAP	
		Sight-Feed	Wick-Feed	Sight-Feed	Wick-Feed
3/4	16 (473.2)	5112B5009	—	5112B5109	—
	35 (1035.1)	5112B5019	—	5112B5119	—
	62 (1833.6)	5112B5029	—	5112B5129	—
1	16 (473.2)	5112B6009	5112B6011	5112B6109	5112B6111
	35 (1035.1)	5112B6019	—	5112B6119	—
	62 (1833.6)	5112B6029	—	5112B6129	—
1¼	16 (473.2)	5112B7009	—	5112B7109	—
	35 (1035.1)	5112B7019	—	5112B7119	—
	62 (1833.6)	5112B7029	—	5112B7129	—
1½	16 (473.2)	5112B8009	—	5112B8109	—
	35 (1035.1)	5112B8019	—	5112B8119	—
	62 (1833.6)	5112B8029	—	5112B8129	—
Port Size	Bowl Size oz (ml)	Polycarbonate Bowl			
3/4	16 (473.2)	5111B5009	—	5111B5109	—
1	16 (473.2)	5111B6009	5111B6011	5111B6109	5111B6111
1¼	16 (473.2)	5111B7009	—	5111B7109	—
1½	16 (473.2)	5111B8009	—	5111B8109	—


* NPT port threads. For BSP threads add a "C" prefix to the model number e.g., C5111B5009.

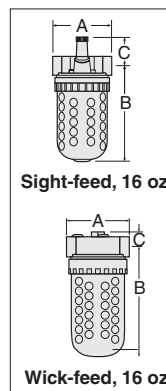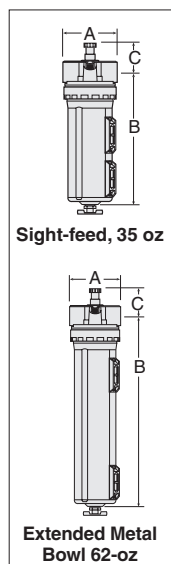

ISO Symbol
Lubricator



Port Size	Bowl Type	Dimensions inches (mm)				Weight lb (kg)
		A	B**	C	Depth	
With Sight-Feed, 16 oz (473.2 ml)						
3/4, 1, 1¼, 1½	Polycarbonate	4.3 (108)	8.2 (208)	1.4 (37)	4.2 (106)	2.63 (1.21)
3/4, 1, 1¼, 1½	Aluminum	4.3 (108)	7.3 (185)	1.4 (37)	4.2 (106)	2.85 (1.30)
With Wick-Feed, 16 oz (473.2 ml)						
1/4, 3/8, 1/2, 3/4	Polycarbonate	4.5 (114)	7.7 (195)	0.8 (21)	4.3 (108)	2.88 (1.31)
1/4, 3/8, 1/2, 3/4	Aluminum	4.5 (114)	8.2 (208)	0.8 (21)	4.3 (108)	3.00 (1.36)
With Sight-Feed, 35 oz (1035.1 ml)						
3/4, 1	Aluminum	4.3 (108)	10.2 (259)	2.0 (51)	4.2 (106)	2.56 (1.16)
1¼, 1½	Aluminum	4.3 (108)	10.6 (268)	1.6 (41)	4.2 (106)	2.53 (1.16)
Extended Bowls, 35oz (1035ml)						
3/4, 1	Aluminum	4.3 (108)	15.8 (400)	2.0 (51)	4.2 (106)	3.38 (1.64)
1¼, 1½	Aluminum	4.3 (108)	16.1 (410)	1.6 (41)	4.2 (106)	3.38 (1.64)
** Bowl removal clearance: add 3.1 (79).						

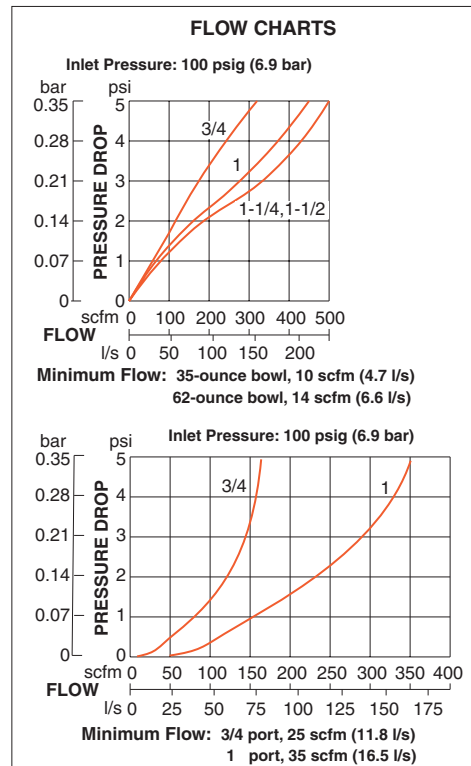

Accessories ordered separately, refer to page E6.3-4.

STANDARD SPECIFICATIONS (for products on this page):

Construction: Sight-Feed, or Wick-Feed.

Ambient/Media Temperature:

Polycarbonate bowl: 40° to 125°F (4° to 52°C).

Metal bowl: 40° to 175°F (4° to 80°C).

Fluid Media: Compressed air.

Inlet Pressure: Polycarbonate bowl: 150 psig (10 bar) maximum.

Metal bowl: 200 psig (14 bar) maximum.

Oil Adjustment: External, tamper-resistant or internal.

Body: Aluminum.

Bowl: Polycarbonate with steel shatterguard; aluminum bowl with sight glass, or extended aluminum bowl with sight glass.

Bowl Ring: Aluminum.

Sight Dome: Nylon.

Seals: Nitrile.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com

E4.9

E



ROSS CONTROLS®



**FILTER, REGULATOR, AND LUBRICATOR
ACCESSORIES**



www.rosscontrols.com

CONTENT	Page
Mounting Accessories	E6.3
Modular Assembly Components	E6.4
Clamp, Brackets, End Ports & Port Blocks	E6.5
Pressure Gauges	E6.6
External Drains, Silencers	E6.7

Mounting Screws for BANTAM Models


Usage Models	Kit Number
BANTAM	859K77

BANTAM models mounts with long screws that extend through end plates.

Mounting Brackets for Regulators and Integrated Filter/Regulators

Regulators and integrated filter/regulators can be mounted to a surface with a bracket that attaches to the regulator. Brackets and mounting panel nuts can be ordered separately or in a kit which includes both bracket and mounting panel nut.


Usage Models	Part Number			Dimensions inches (mm)					
	Kit	Bracket	Panel Nut	A	B	C	D	E	Panel Mounting Hole Diameter
MINIATURE	873K77	872K77	874K77	1.375 (35)	1.125 (29)	0.31 (8)	0.31 (8)	0.69 (17)	1.19 (30)
MID-SIZE	876K77	875K77	877K77	2.38 (60)	1.00 (25)	1.50 (38)	—	—	1.56 (40)
MD3™	R-A127-11	—	R-127-11	2.38 (60)	1.00 (25)	1.50 (38)	—	—	1.56 (40)
FULL-SIZE, MD4™	879K77	878K77	880K77	2.38 (60)	1.00 (25)	1.50 (38)	—	—	2.06 (52)

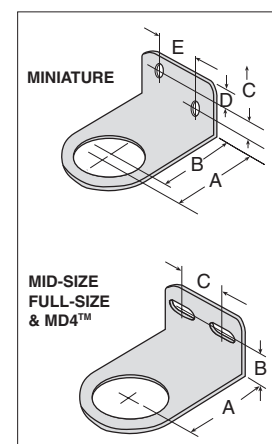

Modular Mounting Brackets for Filters, Regulators, Lubricators, FRL's, or Clean Air Packages

Two L-shaped metal brackets as shown at the right can be used for wall mounting of modular FRLs or Clean Air Packages. A single bracket can be used to mount individual filters or lubricators. Kits include two brackets and four screws for attaching the brackets to the modules.

Usage Models	Kit Number	Dimensions inches (mm)			
		A	B	C	D
MID-SIZE & FULL-SIZE	915K77	3.0 (76)	0.88 (22)	1.00 (25)	1.20 (31)




E

FRLs Inline Mounting Pipe Brackets

Two pipe brackets can be used for wall mounting of FRLs assemblies that use pipe nipples to join the components. The bracket kits listed below include two sets of brackets.

Nipple Size	Kit Number	Dimensions inches (mm)		
		A	B	C
1/4	887K77	2.72 (28)	0.50 (13)	1.00 (25)
3/8	888K77	2.72 (28)	0.50 (13)	1.00 (25)
1/2	889K77	2.72 (28)	0.50 (13)	1.00 (25)
3/4	890K77	3.69 (94)	1.13 (29)	1.25 (32)
1	891K77	3.69 (94)	1.13 (29)	1.25 (32)



E6

Bracket Assembly Kit for HIGH-RELIEF Pilot Operated Regulator

High-Relief Pilot Operated Regulator with 1/4- thru 1 1/4 inch ports can be mounted to a vertical surface using a bracket assembly kit.

Kit Number	R-A37-381
------------	-----------




IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

MID-SIZE and FULL-SIZE Units

The modular designs of the MID-SIZE and FULL-SIZE series offer maximum flexibility in customizing FRLs assemblies. As shown at the right, connector kits are required to interconnect units. Various port kits (shown below) can be used to connect the assemblies to the inlet and outlet piping. Note that all FRLs components have threaded ports so that conventional pipe fittings may be used where desired.


Female Port Block

Used to connect to piping at inlet or outlet.

Port Size	Part Number		
	NPT Threads	BSPP Threads	
1/4	897K77	D897K77	
3/8	898K77	D898K77	
1/2	899K77	D899K77	
3/4	900K77	D900K77	

Male Port Block


Used to connect modular to non-modular units.

Port Size	Part Number		
	NPT Threads	BSPP Threads	
1/4	893K77	D893K77	
3/8	894K77	D894K77	
1/2	895K77	D895K77	
3/4	896K77	D896K77	

Connector Kit

Used to connect units to one another as well as to any of the ports shown on this page.

Kit Number	892K77
------------	--------

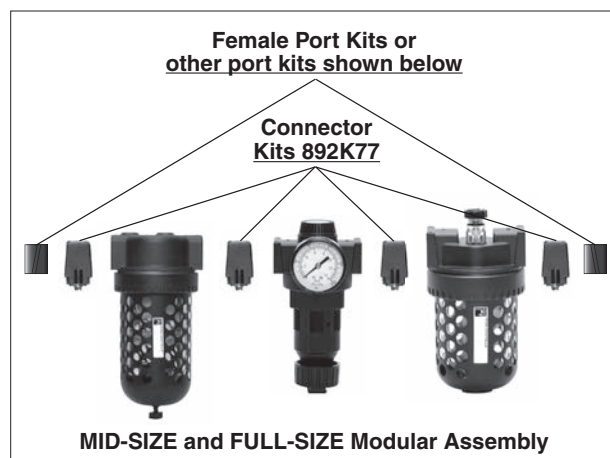

BANTAM Units


BANTAM modular units use end plates secured with screws to hold the pipe or tubing ports (see below), and also to serve as mounting brackets. Short screws are used to secure the end plates when a single BANTAM unit is used. If two or more units are combined, long screws extend through an end plate and thread into the next unit.


Screw kits required are as follows:


Single Unit: Two short screw kits.


Two-Unit Combination: One each short screw kit and long screw kit.

Three-Unit Combination: Two long screw kits.

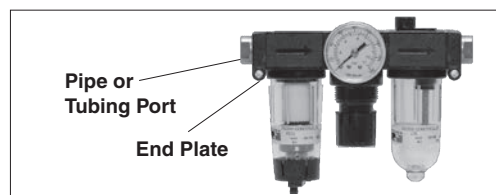

Pipe Ports		
Kit Description	Part Number	
END PLATE (1)	857K77	
Short Screw (2)	858K77	
Long Screw (2)	859K77	
Small O-Ring (for inlet or mating ports)	860K77	
Large O-Ring (for outlet or mating ports)	861K77	

Pipe Ports		
Port Size	Part Number	
1/8 NPT	862K77	
1/4 NPT	863K77	
1/8 BSPP	D864K77	
1/4 BSPP	D865K77	

Tube Ports		
Port Size	Part Number	
1/4	866K77	
3/8	867K77	
4 mm	868K77	
6 mm	869K77	
8 mm	870K77	
10 mm	871K77	


IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

Modular Assemblies


Accessories: Clamp, Brackets, End Ports & Port Blocks

MD Series

MD3™ Series

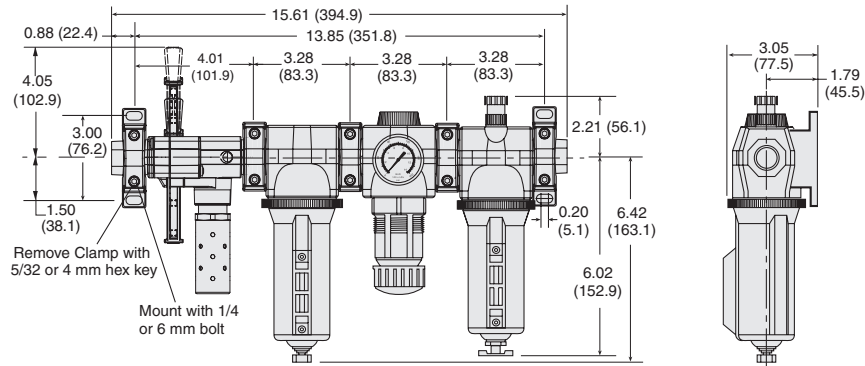

MD4™ Series

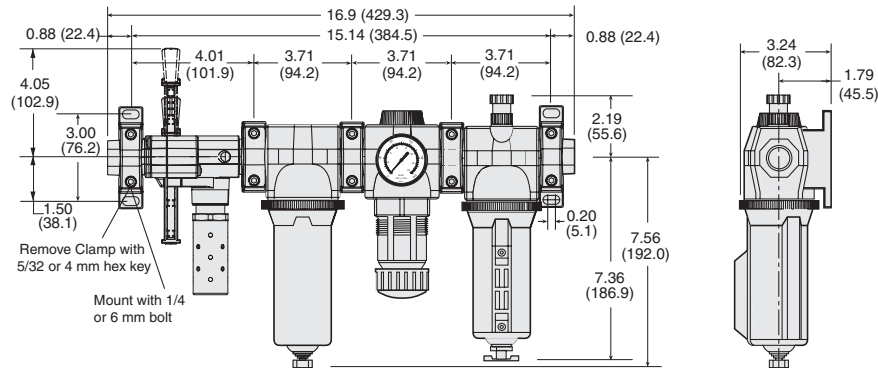

Clamp for Module Connections

Specially designed clamps provide a quick and easy assembly or disassembly of MD modules. Two allen-head bolts quickly tighten or loosen the clamp using a 5/32 or 4mm hex key. The clamp contains a plate carrying two O-rings to provide positive sealing between modules.

Order clamp by part number **R-A118-105**.


Combined clamp and bracket (below) can be ordered by part number **R-A118-105M**.

Mounting Brackets

Two brackets are normally used to mount an FRL to a vertical surface. The mounting bracket attaches to the module connecting clamp (see above) with a single screw. Each bracket then employs two bolts (1/4" or 6mm) to connect the assembly to the mounting surface.

Order bracket and screw by part number **R-A118-103**.

Combined bracket and clamp (above) can be ordered by part number **R-A118-105M**.

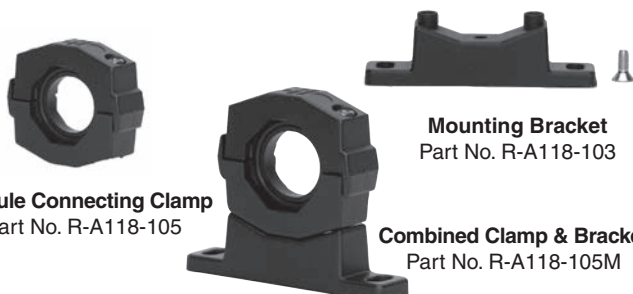



Module Connecting Clamp
Part No. R-A118-105

Mounting Bracket
Part No. R-A118-103

Combined Clamp & Bracket
Part No. R-A118-105M

Male and Female End Ports


Either male or female end ports can be attached to threaded inlet and outlet lines. This allows all modules of an FRL assembly to be removed easily and quickly without having to unthread the end modules. The end ports are attached to the modules with clamps (see at left). End ports can be included in an assembled FRL or ordered separately by the following part numbers:

Port Size	Male Part Number*		Port Size	Female Part Number*	
1/4	R-118-109-2F		1/4	R-118-100-2	
3/8	R-118-109-3F		3/8	R-118-100-3	
1/2	R-118-109-4F		1/2	R-118-100-4	
3/4	R-118-109-6F		3/4	R-118-100-6	

* For BSPP threads, add a "W" suffix to the model number, e.g., R-118-109-2FW.

Extra Port Blocks


An extra port block can be placed between modules to provide two auxiliary 1/4 NPTF ports. Its mounting position can be rotated to obtain the most convenient operating orientation. If only one auxiliary port is to be used, the unused port must be closed with a pipe plug. (The inlet and outlet are not threaded.)

Port Size	Part Number*	
1/4	R-118-106-2	
3/8	R-118-106-3	
1/2	R-118-106-4	

* For BSPP threads, add a "W" suffix to the model number, e.g., R-118-106-2W.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

Pressure Gauges

Port Size	Model Number*	Pressure Range psig (bar)	Case Diameter inches (mm)	
1/8	5400A1002	0-160 (0-11)	1.5 (38)	
1/4	5400A2010	0-60 (0-4)	2.0 (51)	
1/4	5400A2011	0-200 (0-14)	2.0 (51)	
1/4	5400A2012	0-300 (0-20)	2.0 (51)	
1/4	5400A2014**	0-160 (0-11)	2.5 (64)	
1/4	5400A2015***	0-160 (0-11)	2.0 (51)	






* Center back mounting; male pipe threads.

** 5400A2014 - Stainless steel case liquid filled.

*** 5400A2015 - Green shade between 40-70 psi (2.7-4.8 bar).



Differential Pressure Gauges

	Small Slide Gauge	Small Slide Gauge	Large Dual Face Gauge	Large Dual Face Gauge with Reed Switch (Normally Open)	Large Dual Face Gauge with Reed Switch (Normally Closed)
DIFFERENTIAL PRESSURE GAUGE TYPE/SERIES	R-A60F-28	R-K103-151	R-106-35	R-106-35E	R-106-35C
					
FILTERS					
BANTAM	—	—	—	—	—
MINIATURE	—	—	—	—	—
MID-SIZE	—	—	—	—	—
MD3™		—	—	—	—
FULL-SIZE	—	—	—	—	—
MD4™	—				
HIGH-CAPACITY	—	—	—	—	—
COALESCING FILTERS					
BANTAM	—	—	—	—	—
MINIATURE	—	—	—	—	—
MID-SIZE		—	—	—	—
FULL-SIZE	—				
MD3™		—	—	—	—
MD4™	—				
HIGH-CAPACITY	—				
OIL VAPOR REMOVAL (ADSORBING) FILTERS					
MD3™	—	—	—	—	—
MD4™	—	—	—	—	—
CLEAN AIR PACKAGES					
MD3™		—	—	—	—
MD4™	—				

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.


External Automatic Drains

Pipe Size	Model Number*	
	Polycarbonate Bowl**	Metal Bowl
1/8	5057B1001	5058B1001
1/4*	5057B2001	5058B2001

*Use 1/4 size with FULL-SIZE, HIGH-CAPACITY, MD3™ & MD4™ filters.
Use kit 1076K77 to convert standard bowl to accept auto drain unit.

**Available for FULL-SIZE filters only. Polycarbonate bowl includes metal bowl guard.


Port Size	Dimensions inches (mm)			Weight lb (kg)
	A	B	C	
1/8, 1/4	3.5 (89)	4.2 (107)	8.3 (211)	2.6 (1.2)



Electronically Controlled Drain

Pipe Size	Voltage	Model Number**
1/4	110-120 volts AC, 50/60 Hz	R-DED-115V-2
3/8	110-120 volts AC, 50/60 Hz	R-DED-115V-3
1/2	110-120 volts AC, 50/60 Hz	R-DED-115V-4
1/4	24 volts DC	R-DED-24V-2
3/8	24 volts DC	R-DED-24V-3
1/2	24 volts DC	R-DED-24V-4

** NPT port threads. For BSPP threads, add a "W" suffix to the model number, e.g., R-DED-115V-2W.

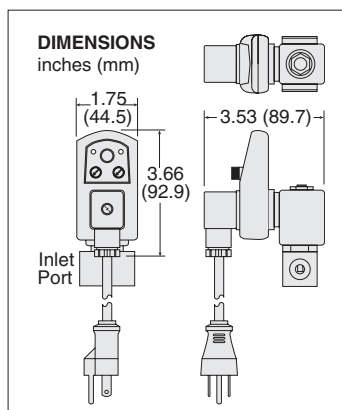

E

STANDARD SPECIFICATIONS (for electronically controlled drain):

Drain Time: Adjustable 0.5 to 10 seconds.
Drain Interval: Adjustable 0.5 to 45 minutes.
Current Consumption: 4 ma maximum.
Ambient Temperature: 35° to 130°F (2° to 54°C).
Media Temperature: 35° to 190°F (2° to 88°C).


Electrical Connection: DIN 43650A, ISO 440/6952.
Valve Type: 2/2 direct acting, normally closed.
Valve Body: Forged brass; 3/16-inch (4.8 mm) orifice.
Maximum Pressure: 230 psig (15.8 bar).

Silencers



Port Size	Thread Type	Model Number*		Avg. C _v	Dimensions inches (mm)		Weight lb (kg)
		NPT Threads	BSPT Threads		A	B	
3/8	Male	5500A3003	D5500A3003	4.3	1.3 (32)	3.5 (88)	0.2 (0.1)
3/4	Male	5500A5013	D5500A5013	5.1	1.3 (32)	3.6 (92)	0.2 (0.1)
3/4	Male	5500A5003	D5500A5003	11.5	2.0 (51)	5.3 (135)	0.6 (0.3)

Flow Media: Filtered air; 5 micron recommended.
Pressure Range: 0 to 150 psig (0 to 10.3 bar) maximum.



E6

Lubricants, Polycarbonate Bowl Cautions

Compatible Lubricants

Although air line lubrication is not required for most ROSS valves, other mechanisms in the system may need such lubrication. When a lubricator is used, it should be supplied only with oils which are compatible with the materials used in the valves for seals and poppets. Generally speaking, these are petroleum base oils with oxidation inhibitors, and aniline point between 180°F (82°C) and 220°F (104°C) and an ISO 32, or lighter, viscosity. Oils with phosphate type additives, such as zinc dithiophosphate, must be avoided because they can harm polyurethane valve components. The best oils to use in pneumatic systems are those specifically compounded for air line lubricator service.

Cautions on the Use of Polycarbonate Bowls

Use Only with Compressed Air. Filters and lubricators with polycarbonate bowls are specifically designed for compressed air service, and their use with any other fluid (liquid or gas) is a misapplication. The use with or injection of certain hazardous fluids in the system (e.g., alcohol or liquefied petroleum gas) could be harmful to the polycarbonate bowl or result in a combustible condition or hazardous leakage. Before using with a fluid other than air, or for nonindustrial applications, or for life support systems, consult ROSS.

Use Metal Bowl Guard When Supplied. A metal bowl guard is supplied with all but the smallest bowls, and must always be used to minimize danger from fragmentation in the event of failure of a polycarbonate bowl.

Avoid Harmful Substances. Some compressor oils, chemical cleaners, solvents, paints, and fumes will attack polycarbonate bowls and can cause bowl failure. Do not use with or near these materials. When a bowl becomes dirty, replace the bowl or wipe it with a clean dry cloth. Immediately replace any polycarbonate bowl which is crazed, cracked, or deteriorated.



Substances HARMFUL to Polycarbonate Bowls

Acetaldehyde	Carbon disulfide	Ethylene dichloride	Phosphorous trichloride
Acetic acid	Carbon tetrachloride	Ethylene glycol	Propionic acid
Acetone	Caustic potash solution	Formic acid	Pyridine
Acrylonitrile	Caustic soda solution	Freon (refrigerant & propellant)	Sodium hydroxide
Ammonia	Chlorobenzene	Gasoline (high aromatic)	Sodium sulfide
Ammonium fluoride	Chloroform	Hydrazine	Styrene
Ammonium hydroxide	Cresol	Hydrochloric acid	Sulfuric acid
Ammonium sulfide	Cyclohexanol	Lacquer thinner	Sulfural chloride
Anaerobic adhesives & sealants	Cyclohexanone	Methyl alcohol	Tetrahydronaphthalene
Antifreeze	Cyclohexene	Methylene chloride	Thiophene
Benzene	Dimethyl formamide	Methylene salicylate	Toluene
Benzoic acid	Dioxane	Milk of lime (CaOH)	Turpentine
Benzyl alcohol	Ethane tetrachloride	Nitric acid	Xylene
Brake fluids	Ethyl acetate	Nitrobenzene	Perchloroethylene
Bromobenzene	Ethyl ether	Nitrocellulose lacquer	
Butyric acid	Ethylamine	Phenol	
Carbolic acid	Ethylene chlorohydrin	Phosphorous hydroxyl chloride	

Trade Names of Substances HARMFUL to Polycarbonate Bowls




- Atlas Perma-Guard • Buna N • Cellulube #150 & #220 • Crylex #5 cement • Eastman 910 • Garlock 98403 (polyurethane)
- Haskel 568-023 • Hilgard Company's hil phene • Houghton & Co. oil 1120, 1130, 1055 • Houtosafe 1000 • Kano Kroil
- Keystone penetrating oil #2 • Loctite 271, 290, 601 • Loctite Teflon sealant • Marvel Mystery Oil • Minn. Rubber 366Y
- National Compound N11 • Nylock VC-3 • Parco 1306 Neoprene • Permabond 910 • Petron PD287 • Prestone • Pydraul AC
- Sears Regular Motor Oil • Sinclair oil "Lily White" • Stauffer Chemical FYRQUEL 150 • Stillman SR 269-75 (polyurethane)
- Stillman SR 513-70 (neoprene) • Tannergas • Telar • Tenneco anderol 495 & 500 oils • Titon • Vibra-tite • Zerex

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

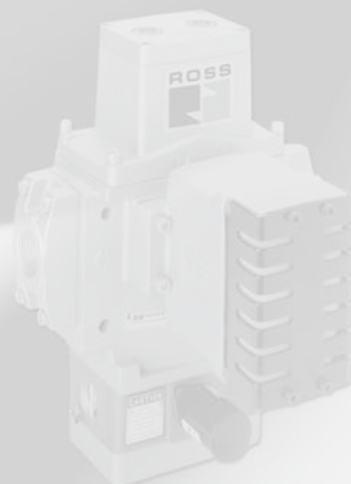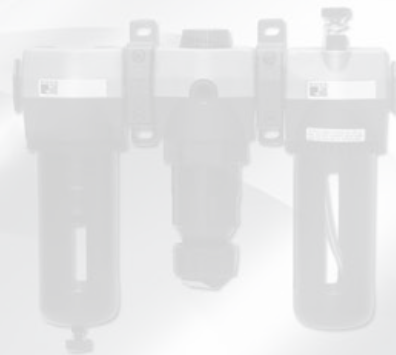

E

E

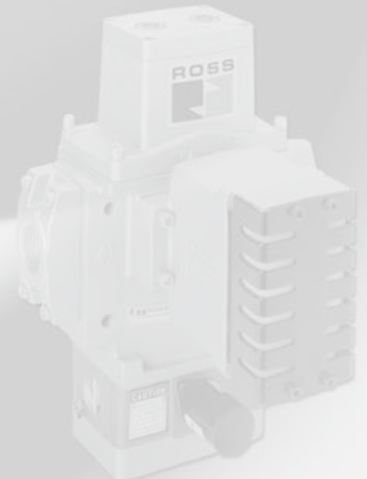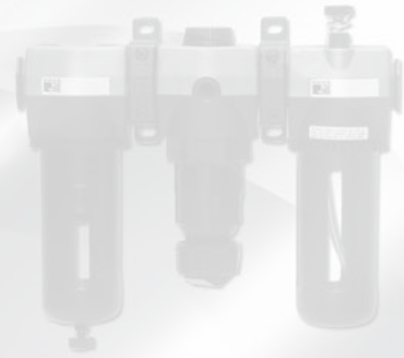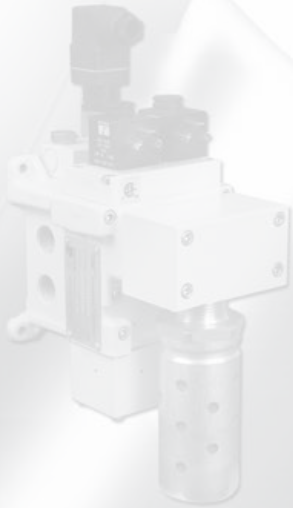

General Information

Standard Specifications

The standard specifications for the products on each page of this catalog are given on the same page or referenced. For solenoid pilot valves, models with internal pilot supply are listed. Most models are also available for use with external pilot supply or have a built-in pilot supply selector valve.

The products in this catalog are intended for use in industrial pneumatic systems. Most products are adaptable to other uses and conditions not covered by the standard specifications given in this catalog. Weights shown are approximate and are subject to change. Dimensions given, unless otherwise noted, are envelope dimensions (not for mounting). Consult ROSS for further information.

Port Threads

Ports of valves and bases described in this catalog have NPT (ANSI B2.1) threads. Other thread types can be specified by putting an appropriate prefix letter on the model or part number when ordering.

Thread Types by Model Prefix Letter

Pneumatic Port Threads	Prefix Letter	Threaded Electrical Opening
NPT (ANSI B2.1)	None	NPT
ISO 228 - DIN 259 Parallel, BSPP [#]	C*	—
ISO 228 - DIN 259 Parallel, BSPP [#]	D	G
ISO 228 - JIS B0203 Tapered [#]	J	ISO
SAE 1926- ISO 11926	S	NPT

* Used only for filters, regulators, lubricators.

[#] ISO 228 threads supersedes BSPP, G and JIS thread types.

Flow Ratings

Flow ratings are expressed as C_v where $C_v = 1$ corresponds to a steady state air flow of approximately 32 scfm under the following conditions:

Inlet pressure = 100 psig (6.7 bar)
Pressure drop = 10 psi (0.69 bar)
Air temperature = 68°F (20°C)
Relative humidity = 36 percent

Note: Because widely differing test standards are used to measure C_v values, the figures given in this catalog should not be used to compare ROSS valves with those of other makers. The C_v ratings given here are intended only for use with performance charts published by ROSS. The C_v ratings are averages for the various flow paths through the valve and are for steady flow conditions.

Approvals and Certifications

ROSS products are designed to meet a number of industrial standards, including the Canadian Standards Association (C.S.A.) guidelines. For more information on specific product approvals, contact your local distributor or ROSS.

Solenoids

All ROSS standard solenoids are rated for continuous duty (unless noted otherwise) and will operate the valve within the air pressure range specified in this catalog.

Explosion-Proof Solenoid Pilot available, for more information consult ROSS.

Voltage & Hertz

When ordering a solenoid valve, also specify the desired solenoid voltage and hertz.

Voltage Types by Model Suffix Letter

Voltage	Suffix Letter
120 volts AC	Z
220 volts AC	Y
12 volts DC	H
24 volts DC	W
48 volts DC	M
90 volts DC	K
110 volts DC	P
125 volts DC	C

Recommended Solenoid Voltages: 100-110 volts, 50 Hz; 100-120 volts, 60 Hz; 24 volts DC; 110 volts DC.

In addition, the following voltages are available:

200, 220 volts, 50 Hz
200, 240, 480 volts, 60 Hz
24, 48, 220 volts, 50 Hz
240 volts, 60 Hz
200, 220 volts, 50 Hz
200, 240 volts, 60 Hz.

For example: Model 2773B5001, 120 volts, 60 Hz.
Model W6076B2401, 220 volts, 50 Hz.

Please note that not all configurations are available for all models.

For additional information or help with voltage configuration, please contact your local distributor or ROSS.

Port Identification

Valve symbols in this catalog conform to the ISO 1219-1:1991 standard of the International Organization for Standardization (ISO) and the SAE J2051 standard of the Society of Automotive Engineers (SAE) respectively.

Information or Technical Assistance

For additional information or application assistance concerning ROSS products, consult ROSS or your local ROSS distributor (see contact information on the back cover).

Order Placement

For order placement, consult ROSS or your local ROSS distributor.

For a current list of countries and local distributors, visit ROSS' website at www.rosscontrols.com.

CAUTIONS, WARNINGS and STANDARD WARRANTY

PRE-INSTALLATION or SERVICE

1. Before servicing a valve or other pneumatic component, be sure that all sources of energy are turned off, the entire pneumatic system is shut off and exhausted, and all power sources are locked out (ref: OSHA 1910.147, EN 1037).
2. All ROSS products, including service kits and parts, should be installed and/or serviced only by persons having training and experience with pneumatic equipment. Because any installation can be tampered with or need servicing after installation, persons responsible for the safety of others or the care of equipment must check every installation on a regular basis and perform all necessary maintenance.
3. All applicable instructions should be read and complied with before using any fluid power system in order to prevent harm to persons or equipment. In addition, overhauled or serviced valves must be functionally tested prior to installation and use. If you have any questions, call your nearest ROSS location listed on the cover of this document.
4. Each ROSS product should be used within its specification limits. In addition, use only ROSS parts to repair ROSS products.

WARNING: *Failure to follow these directions can adversely affect the performance of the product or result in the potential for human injury or damage to property.*

FILTRATION and LUBRICATION

5. Dirt, scale, moisture, etc. are present in virtually every air system. Although some valves are more tolerant of these contaminants than others, best performance will be realized if a filter is installed to clean the air supply, thus preventing contaminants from interfering with the proper performance of the equipment. ROSS recommends a filter with a 5-micron rating for normal applications.
6. All standard ROSS filters and lubricators with polycarbonate plastic bowls are designed for compressed air applications only. Do *not* fail to use the metal bowl guard, where provided, to minimize danger from high pressure fragmentation in the event of bowl failure. Do not expose these products to certain fluids, such as alcohol or liquefied petroleum gas, as they can cause bowls to rupture, creating a combustible condition, hazardous leakage, and the potential for human injury or damage to property. Immediately replace a crazed, cracked, or deteriorated bowl. When bowl gets dirty, replace it or wipe it with a clean dry cloth.

7. Only use lubricants which are compatible with materials used in the valves and other components in the system. Normally, compatible lubricants are petroleum based oils with oxidation inhibitors, an aniline point between 180°F (82°C) and 220°F (104°C), and an ISO 32, or lighter, viscosity. Avoid oils with phosphate type additives which can harm polyurethane components, potentially leading to valve failure which risks human injury, and/or damage to property.

AVOID INTAKE/EXHAUST RESTRICTION

8. Do not restrict the air flow in the supply line. To do so could reduce the pressure of the supply air below the minimum requirements for the valve and thereby cause erratic action.
9. Do not restrict a valve's exhaust port as this can adversely affect its operation. Exhaust silencers must be resistant to clogging and must have flow capacities at least as great as the exhaust capacities of the valves. Contamination of the silencer can result in reduced flow and increased back pressure.

WARNING: *ROSS expressly disclaims all warranties and responsibility for any unsatisfactory performance or injuries caused by the use of the wrong type, wrong size, or an inadequately maintained silencer installed with a ROSS product.*

POWER PRESSES

10. Mechanical power presses and other potentially hazardous machinery using a pneumatically controlled clutch and brake mechanism must use a press control double valve with a monitoring device. A double valve without a self-contained monitoring device should be used only in conjunction with a control system which assures monitoring of the valve. All double valve installations involving hazardous applications should incorporate a monitoring system which inhibits further operation of the valve and machine in the event of a failure within the valve mechanism.

ENERGY ISOLATION/EMERGENCY STOP

11. Per specifications and regulations, ROSS L-O-X® and L-O-X® with EEZ-ON® operation products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

STANDARD WARRANTY

limited to repair or replacement of the product or refund of the purchase price paid solely at the discretion of ROSS and provided such product is returned to ROSS freight prepaid and upon examination by ROSS is found to be defective. This warranty becomes void in the event that product has been subject to misuse, misapplication, improper maintenance, modification or tampering.

THE WARRANTY EXPRESSED ABOVE IS IN LIEU OF AND EXCLUSIVE OF ALL OTHER WARRANTIES AND ROSS EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES EITHER EXPRESSED OR IMPLIED WITH RESPECT TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. ROSS MAKES NO WARRANTY WITH RESPECT TO ITS PRODUCTS MEETING THE PROVISIONS OF ANY GOVERNMENTAL OCCUPATIONAL SAFETY AND/OR HEALTH LAWS OR REGULATIONS. IN NO EVENT IS ROSS LIABLE TO PURCHASER, USER, THEIR EMPLOYEES OR OTHERS FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM A BREACH OF THE WARRANTY DESCRIBED ABOVE OR THE USE OR MISUSE OF THE PRODUCTS. NO STATEMENT OF ANY REPRESENTATIVE OR EMPLOYEE OF ROSS MAY EXTEND THE LIABILITY OF ROSS AS SET FORTH HEREIN.

All products sold by ROSS CONTROLS are warranted for a one-year period [with the exception of all Filters, Regulators and Lubricators ("FRLs") which are warranted for a period of seven years] from the date of purchase to be free of defects in material and workmanship. ROSS' obligation under this warranty is





ROSS CONTROLS
U.S.A.

Tel: +1-248-764-1800
Customer Svs. 1-800-GET-ROSS
Technical Svs. 1-888-TEK-ROSS
sales@rosscontrols.com
www.rosscontrols.com

ROSS EUROPA GmbH
Germany

Tel: +49-6103-7597-0
sales@rosseuropa.com
www.rosseuropa.com

ROSS ASIA K.K.
Japan

Tel: +81-42-778-7251
www.rossasia.co.jp

ROSS UK Ltd.
United Kingdom

Tel: +44-1543-671495
sales.uk@rosscontrols.com
www.rossuk.co.uk

ROSS CONTROLS INDIA Pvt. Ltd.
India

Tel: +91-44-2624-9040
ross.chennai@rosscontrols.com

ROSS SOUTH AMERICA Ltda.
Brazil

Tel: +55-11-4335-2200
vendas@rosscontrols.com

ROSS FRANCE S.A.S.
France

Tel: +33-1-49-45-65-65
www.rossfrance.com

ROSS CONTROLS(CHINA) Ltd.
China

Tel: +86-21-6915-7961
sales@rosscontrols.com.cn
www.rosscontrolschina.com

ROSS CANADA
Canada

Tel: +1-416-251-7677
sales@rosscanada.com
www.rosscanada.com

6077170 CANADA INC.
AN INDEPENDENT REPRESENTATIVE



Full-Service Global Locations

There are ROSS Distributors Throughout the World

To meet your requirements across the globe, ROSS distributors are located throughout the world. Through ROSS or its distributors, guidance is available for the selection of ROSS products, both for those using pneumatic components for the first time and those designing complex pneumatic systems.

Other literature is available for engineering, maintenance, and service requirements. If you need products or specifications not shown here, please contact ROSS or your ROSS distributor. They will be happy to assist you in selecting the best product for your application.

For a current list of countries and local distributors, visit ROSS' website at www.rosscontrols.com.