





ROSS CONTROLS®

ROSS SAFETY-RELATED PRODUCTS




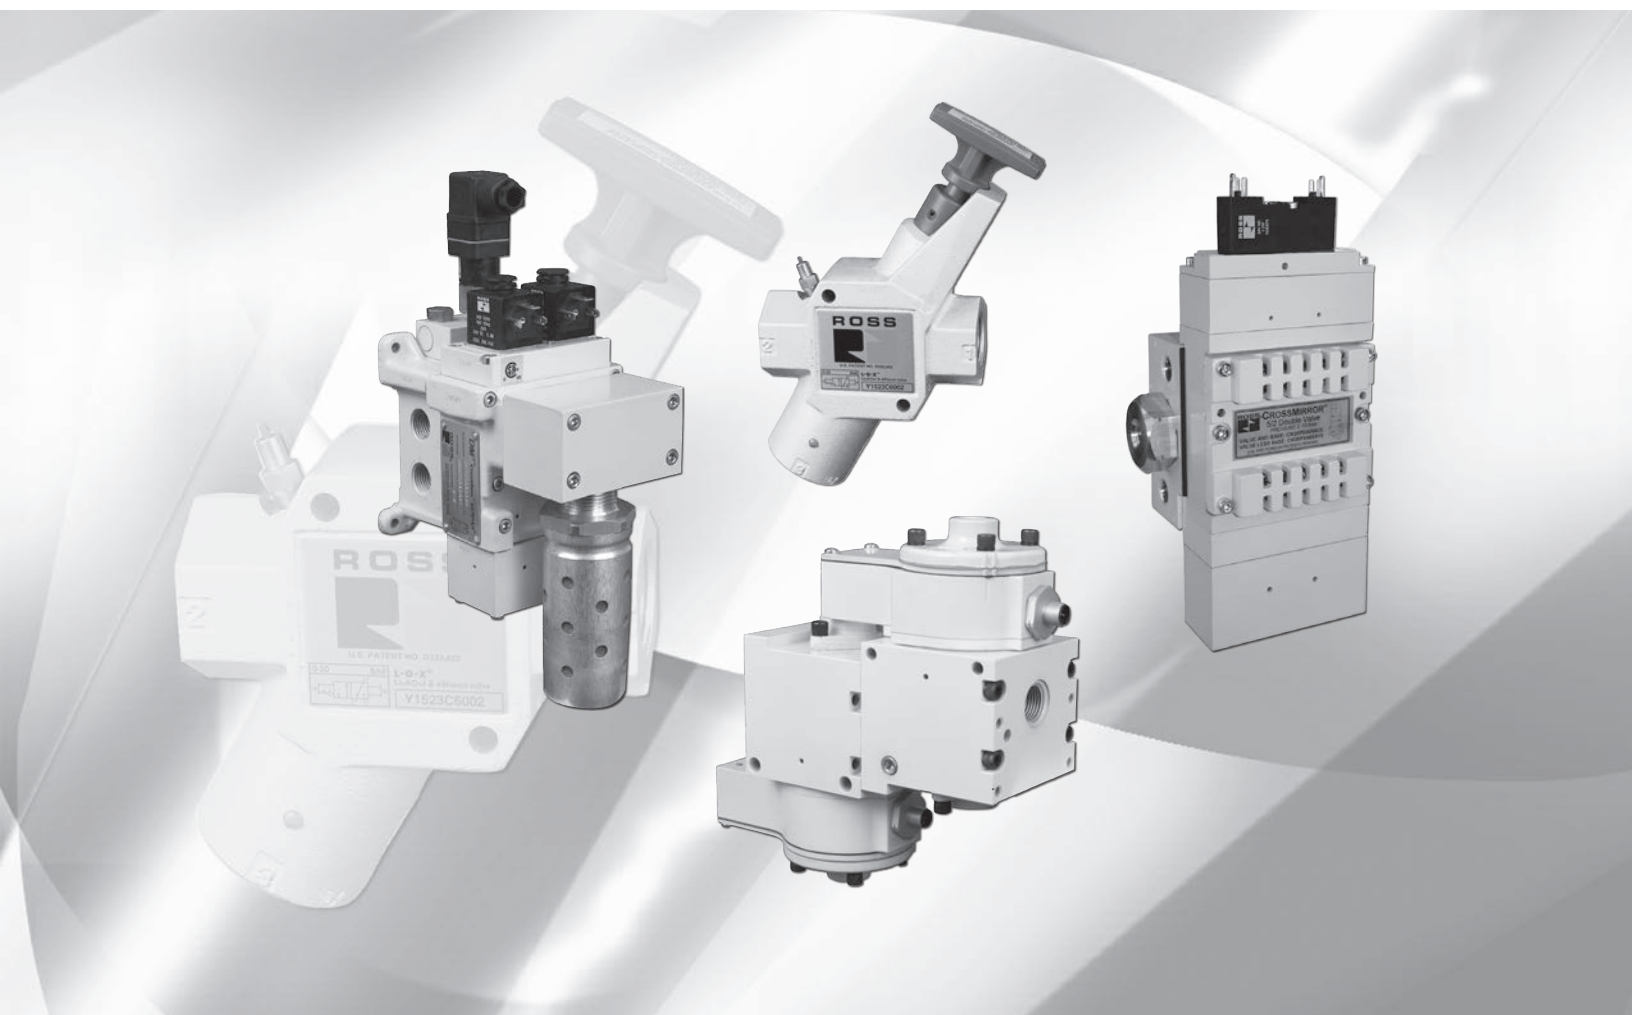

Lockout and Soft Start Valves

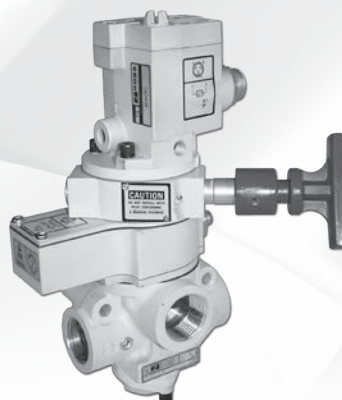

Sensing Valves

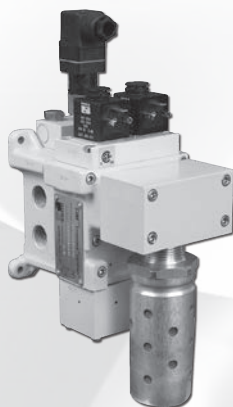

Double Valves for Control Reliable Energy Isolation



Pilot Operated Check Valves



Double Valves for Cylinder Return to Home Position



Explosion Proof Valves

F

Lockout and Soft Start Valves

- Manual Lockout L-O-X® 15 Series
- Piloted Valves with Manual Lockout 27 Series
- Soft Start EEZ-ON® 19 & 27 Series
- Modular Lockout Valves 15 Series
- Manual Lockout with Soft Start 15 & 27 Series

F1.1 - F1.25

Sensing Valves

- Sensing Valves SV27 Series
- Sensing Valves with manual Lockout
- Air Entry Packages

F2.1 - F2.10

Double Valves for Control Reliable Energy Isolation

- With Dynamic Monitoring DM1 Series E
- With Dynamic Monitoring & Memory DM2® Series E & C
- With Integrated Soft Start M DM2® Series C
- Air Entry Packages

F3.1 - F3.20

Pilot Operated Check Valves

- Right Angle 19 Series
- 27 Series
- With Sensing SV27 Series

F4.1 - F4.16

Double Valves for Cylinder Return to Home Position

- CROSSMIRROR® 77 SERIES
- CROSSMIRROR® CM SERIES

F5.1 - F5.13

F

Explosion Proof Valves

- 27 Series Poppet Valves
- 21 Series Poppet Valves for High and Low Temperature Applications
- 27 & 21 Series Poppet Valves ATEX Certified TUV SUD
- ISO

F6.1 - F6.13

AIR-FUSE Flow Diffusers

- 19 Series

F7.1 - F7.3

Cautions and Warranty

- Compatible Lubricants
- Cautions and Warnings

Inside Cover






F



ROSS CONTROLS®

**LOCKOUT L-O-X® AND SOFT START EEZ-ON®
VALVES
15 AND 27 SERIES**

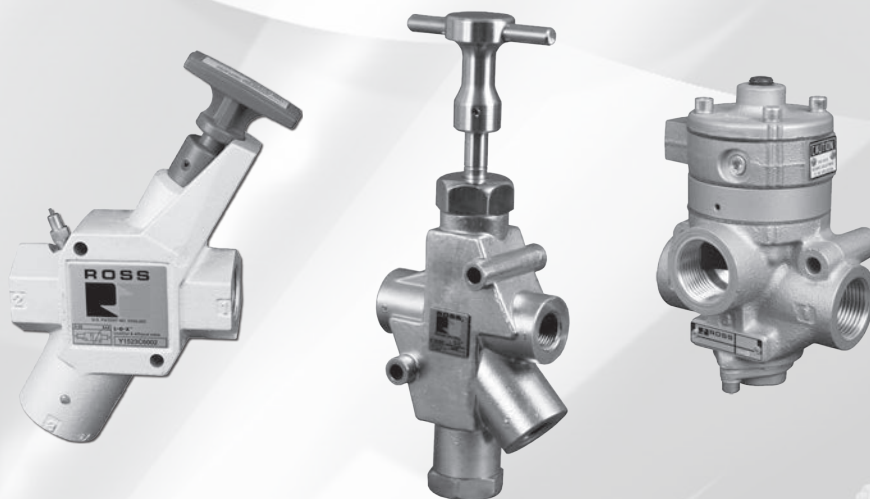

www.rosscontrols.com

MANUAL LOCKOUT L-O-X® VALVES – KEY FEATURES

- Fluorocarbon slipper seals for easy shifting, even after long periods of inactivity
- Easily identified by yellow body with red handle
- Integrated sensing port for pressure verification
- Lockable only in the OFF position
- Has a full size exhaust port (equal to or larger than supply)
- Simple push/pull of the large handle provides positive direct manual operation

MANUAL LOCKOUT L-O-X® VALVES WITH SOFT START EEZ-ON® – KEY FEATURES

- Easily identified by blue handle
- Gradual re-application of pneumatic pressure prevents rapid equipment movement at startup
- Lockable only in the OFF position
- Has a full size exhaust port (equal to or larger than supply)
- Positive action (2 positions only)
- Simple push/pull of the large blue handle provides positive direct manual operation
- Integrated sensing port for pressure verification

VALVE TYPE	VALVE SERIES	AVAILABLE PORT SIZES											FUNCTIONS					Page
		1/4	3/8	1/2	3/4	1	1¼	1½	2	2½	3			Max Flow (Cv)	Solenoid Control	Pressure Control		
Manual Lockout L-O-X® Valves																		
Slim Line	15													2.67			F1.3	
Modular	15													5.6			F1.4	
Classic	15													19.25			F1.5	
High Capacity	L-O-X®													40.38			F1.6	
Stainless Steel	15													39			F1.7	
Stainless Steel with Integrated Filter/Regulator	RCO													9			F1.8 - F1.10	
Piloted Valves with Manual Lockout L-O-X® Control																		
														70			F1.11 - F1.12	
														70			F1.13	
														140			F1.14	
														140			F1.15	
Soft Start EEZ-ON® Valves																		
Right Angle	19													1.8			F1.16	
	27													30			F1.17 - F1.18	
	27													29			F1.19	
	27																F1.20	
Manual Lockout L-O-X® Valves with Soft Start EEZ-ON® Operation																		
Modular	15													5.6			F1.21	
Classic	15													16.2			F1.22	
Piloted Valves with Manual Lockout L-O-X® & Soft Start EEZ-ON® Operation																		
Manual Pilot Controlled	27													30			F1.23 - F1.24	
Solenoid Pilot Controlled	27													30			F1.25	


3-Way 2-Position Valve					
Port Size		Valve Model Number*	C _v		Weight lb (kg)
1, 2	3		1-2	2-3	
1/4	3/8	Y1523D2002	1.84	1.79	0.9 (0.4)
3/8	3/8	Y1523D3012	2.67	2.64	0.9 (0.4)

* NPT port threads. For BSPP threads, insert a "D" after "Y" to the model number, e.g., YD1523D2002.



F1

Valve Dimensions – inches (mm)

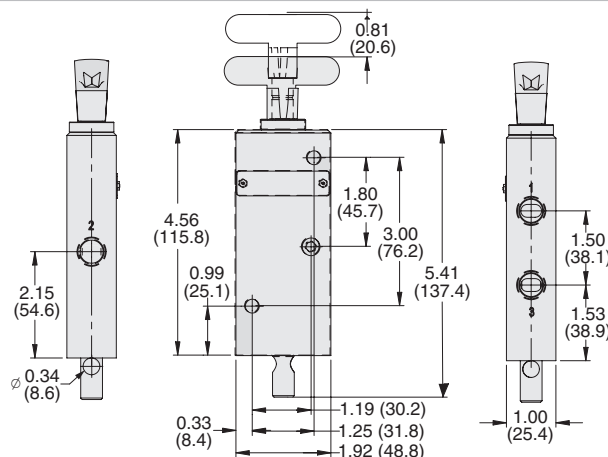

ACCESSORIES & OPTIONS

Silencers



Port Size	Thread Type	Model Number	Avg. C _v
3/8	Male - NPT	5500A3013	2.7
3/8	Male - BSPT	D5500A3013	2.7

Pressure Range: 0 to 150 psig (0 to 10.3 bar) maximum. **Flow Media:** Filtered air.


Pressure Switches

Connection Type	Model Number*	Port Threads
DIN 43650 Form A	586A86	1/8 NPT
M12 Micro-DC	1153A30	1/8 NPT


*Pressure switch closes on falling pressure of 5 psig (0.34 bar).



DIN Connector Pinout



M12 Connector Pinout



Multiple Lock-out Device

Model Number	356A30
--------------	--------



Pop-Up Indicator



Model Number** 988A30


** 1/8 NPT port threads.

F

VALVE OPERATION


Valved Closed

When the red handle is pushed inward, the flow of supply air is blocked and downstream air is exhausted via the exhaust port. While servicing or maintaining machinery, the L-O-X® valve should be padlocked in this position to prevent the handle from being pulled outward inadvertently where potential for human injury exists.



Valve Open

When the red handle is pulled outward, supply air flows freely from inlet to outlet and flow to exhaust is blocked. A detent keeps the handle in the open position.



If a system requires gradual buildup of downstream pressure, see manual L-O-X® valves with EEZ-ON® operation.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Spool.

Mounting Type: In-Line.

Ambient/Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: 0 to 145 psig (0 to 10 bar).

Lock Hole Diameter: 0.27 inch (7.0 mm).

Length of Hole: 0.43 inch (10.9 mm).

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16


www.rosscontrols.com

F1.3

F1

3-Way 2-Position Valve,


Port Size		Valve Model Number*	C _v		Weight lb (kg)
1, 2	3		1-2	2-3	
1/4	3/4	Y1523A2003	3.7	7.8	1.7 (0.8)
3/8	3/4	Y1523A3003	5.1	8.3	1.7 (0.8)
1/2	3/4	Y1523A4003	5.5	8.6	1.8 (0.8)
3/4	3/4	Y1523A5013	5.6	8.1	1.8 (0.8)



* NPT port threads. For BSPP threads, insert a "D" after "Y" to the model number, e.g., YD1523A2003.



Valve Dimensions – inches (mm)

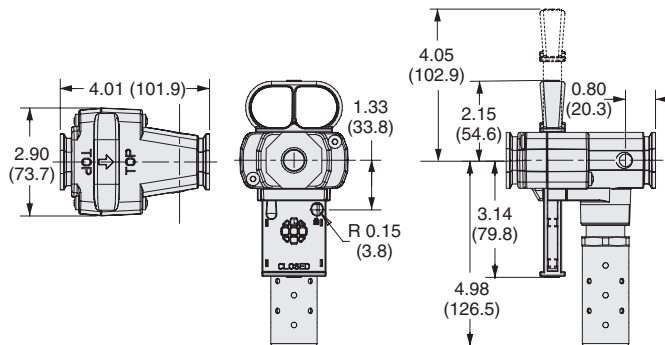

ACCESSORIES & OPTIONS

Silencers



Port Size	Thread Type	Model Number*	Avg. C _v
3/4	Male - NPT	5500A5003	11.5
3/4	Male - BSPT	D5500A5003	11.5

Pressure Range: 0 to 150 psig (0 to 10.3 bar) maximum. **Flow Media:** Filtered air.


Pressure Switches




Connection Type	Model Number*	Port Threads
DIN 43650 Form A	586A86	1/8 NPT
M12 Micro-DC	1153A30	1/8 NPT

* Pressure switch closes on falling pressure of 5 psig (0.34 bar).

DIN Connector Pinout



M12 Connector Pinout



Multiple Lock-out Device



Model Number	356A30
--------------	--------

Pop-Up Indicator

Model Number**	988A30
----------------	--------


** 1/8 NPT port threads.



VALVE OPERATION


Valved Closed

When the red handle is pushed inward, the flow of supply air is blocked and downstream air is exhausted via the exhaust port. While servicing or maintaining machinery, the L-O-X® valve should be padlocked in this position to prevent the handle from being pulled outward inadvertently where potential for human injury exists.



Valve Open

When the red handle is pulled outward supply air flows freely from inlet to outlet and flow to exhaust is blocked. A detent keeps the handle in the open position.



If a system requires gradual buildup of downstream pressure, see manual L-O-X® valves with EEZ-ON® operation.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Spool.
Mounting Type: Modular, In-Line.
Ambient/Media Temperature: 40° to 175°F (4° to 80°C).
Flow Media: Filtered air.

Inlet Pressure: 0 to 200 psig (0 to 14 bar).
Lock Hole Diameter: 0.27 inch (7.0 mm).
Length of Hole: 0.43 inch (10.9 mm).


NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.




3-Way 2-Position Valve						
Port Size		Body Size	Valve Model Number*	C _v		Weight lb (kg)
1, 2	3			1-2	2-3	
3/8	3/4	1/2	Y1523C3002	4.74	3.57	1.5 (0.7)
1/2	3/4	1/2	Y1523C4002	7.10	4.00	1.5 (0.7)
3/4	3/4	1/2	Y1523C5012	8.26	4.10	1.5 (0.7)
3/4	1 1/4	1	Y1523C5002	13.12	8.98	2.5 (1.1)
1	1 1/4	1	Y1523C6002	16.56	9.52	2.5 (1.1)
1 1/4	1 1/4	1	Y1523C7012	19.25	9.74	2.5 (1.1)

*NPT port threads. For BSPP threads, insert a "D" after "Y" to the model number, e.g., YD1523D3002.



F1

Valve Dimensions – inches (mm)

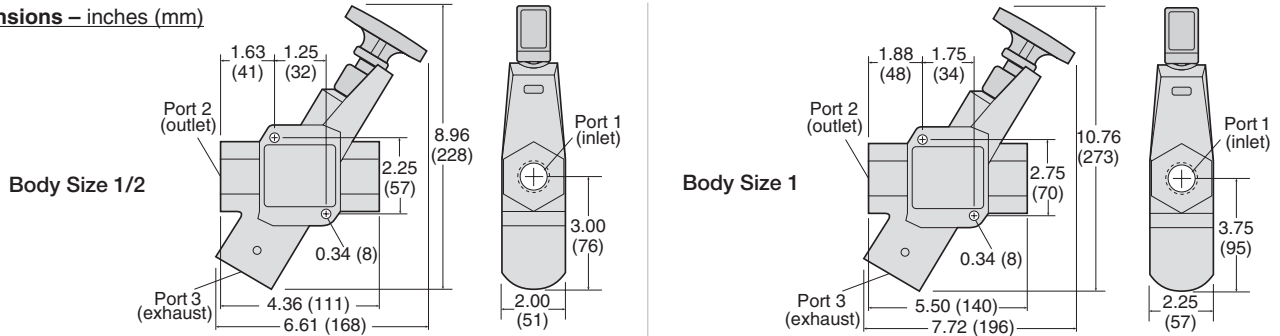

ACCESSORIES & OPTIONS

Silencers



Port Size	Thread Type	Model Number*	Avg. C _v
3/4	Male - NPT	5500A5003	11.5
3/4	Male - BSPT	D5500A5003	11.5
1 1/4	Male - NPT	5500A7013	16.4
1 1/4	Male - BSPT	D5500A7013	16.4

Pressure Range: 0 to 150 psig (0 to 10.3 bar) maximum. **Flow Media:** Filtered air.


Pressure Switches




Connection Type	Model Number*	Port Threads
DIN 43650 Form A	586A86	1/8 NPT
M12 Micro-DC	1153A30	1/8 NPT

*Pressure switch closes on falling pressure of 5 psig (0.34 bar).

DIN Connector Pinout



M12 Connector Pinout



F

Multiple Lock-out Device



Model Number	356A30
--------------	--------

Model Number** 988A30


** 1/8 NPT port threads.



VALVE OPERATION


Valved Closed

With a short push of the red handle inward, the flow of supply air is blocked and downstream air is exhausted via the exhaust port at the bottom of the valve. The L-O-X® valve should be padlocked in this position to prevent the handle from being pulled outward inadvertently where potential for human injury exists or while servicing machinery.



Valve Open

When the red handle is pulled out, supply air flows freely from inlet to outlet and flow to exhaust is blocked. A detent keeps the handle in the open position. The handle is not designed to be locked in this position, thereby providing for ready shut-off when necessary.



If a system requires gradual buildup of downstream pressure, see manual L-O-X® valves with EEZ-ON® operation.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Spool.

Mounting Type: In-Line.

Ambient/Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: 0 to 300 psig (0 to 20.7 bar).

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com


F1.5

Manual Lockout L-O-X® Valves, High Capacity

15 Series


F1

3-Way 2-Position Valve					
Port Size		Valve Model Number*	C _v		Weight lb (kg)
1, 2	3		1-2	2-3	
1½	2	Y1523C8002	35.53	50.98	8.3 (3.7)
2	2	Y1523C9012	40.38	52.23	8.3 (3.7)



* NPT port threads. For BSPP threads, insert a "D" after "Y" to the model number, e.g., YD1523C8002.

Valve Dimensions – inches (mm)

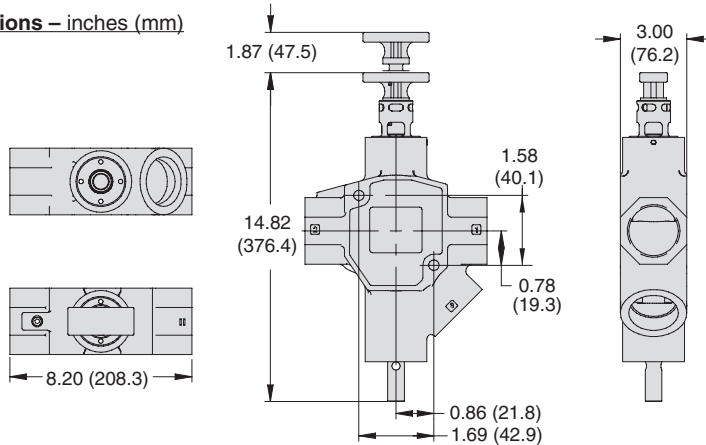

Valves can be padlocked in two locations, at the handle or at the end of the spool.

ACCESSORIES & OPTIONS

Silencers



Port Size	Thread Type	Model Number	Avg. C _v
2	Female - NPT	5500B9001	34.2
2	Female - BSPT	D5500B9001	34.2

Pressure Range: 0 to 150 psig (0 to 10.3 bar) maximum. **Flow Media:** Filtered air.


Pressure Switches

Connection Type	Model Number*	Port Threads
DIN 43650 Form A	586A86	1/8 NPT
M12 Micro-DC	1153A30	1/8 NPT


*Pressure switch closes on falling pressure of 5 psig (0.34 bar).



DIN Connector Pinout



M12 Connector Pinout



Multiple Lock-out Device


Model Number 356A30



Pop-Up Indicator

Model Number** 988A30


** 1/8 NPT port threads.



VALVE OPERATION


Valved Closed

With a short push of the red handle inward, the flow of supply air is blocked and downstream air is exhausted via the exhaust port while servicing or maintaining machinery. Padlock the L-O-X® valve in this position to prevent the handle from being pulled outward inadvertently to avoid potential for human injury while servicing machinery.



Valve Open

When the red handle is pulled out, supply air flows freely from inlet to outlet and flow to exhaust is blocked. A detent keeps the handle in the open position. The handle is not designed to be locked in this position, thereby providing for ready shut-off when necessary.



If a system requires gradual buildup of downstream pressure, see manual L-O-X® valves with EEZ-ON® operation.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Spool.
Mounting Type: In-Line.
Ambient/Media Temperature: 40° to 175°F (4° to 80°C).
Flow Media: Filtered air.

Inlet Pressure: 0 to 300 psig (0 to 20.7 bar).
Lock Hole Diameter: 0.27 inch (7.0 mm).
Length of Hole: 0.43 inch (10.9 mm).

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.




3-Way 2-Position Valve					
Port Size		Valve Model Number*	C _v		Weight lb (kg)
1, 2	3		1-2	2-3	
1/4	1/4	1523B2004	2.14	2.08	3.75 (1.70)
3/8	1/2	1523B3004	5.79	6.24	6.0 (2.72)
1/2	1/2	1523B4004	5.79	6.24	6.0 (2.72)
3/4	1	1523B5004	14.30	17.00	13.0 (5.89)
1	1	1523B6004	14.30	17.00	13.0 (5.89)
1½	2	1523B8004	39.00	45.00	35.0 (15.87)
2	2	1523B9004	39.00	45.00	35.0 (15.87)

* NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D1523B2004.



F1

Valve Dimensions – inches (mm)

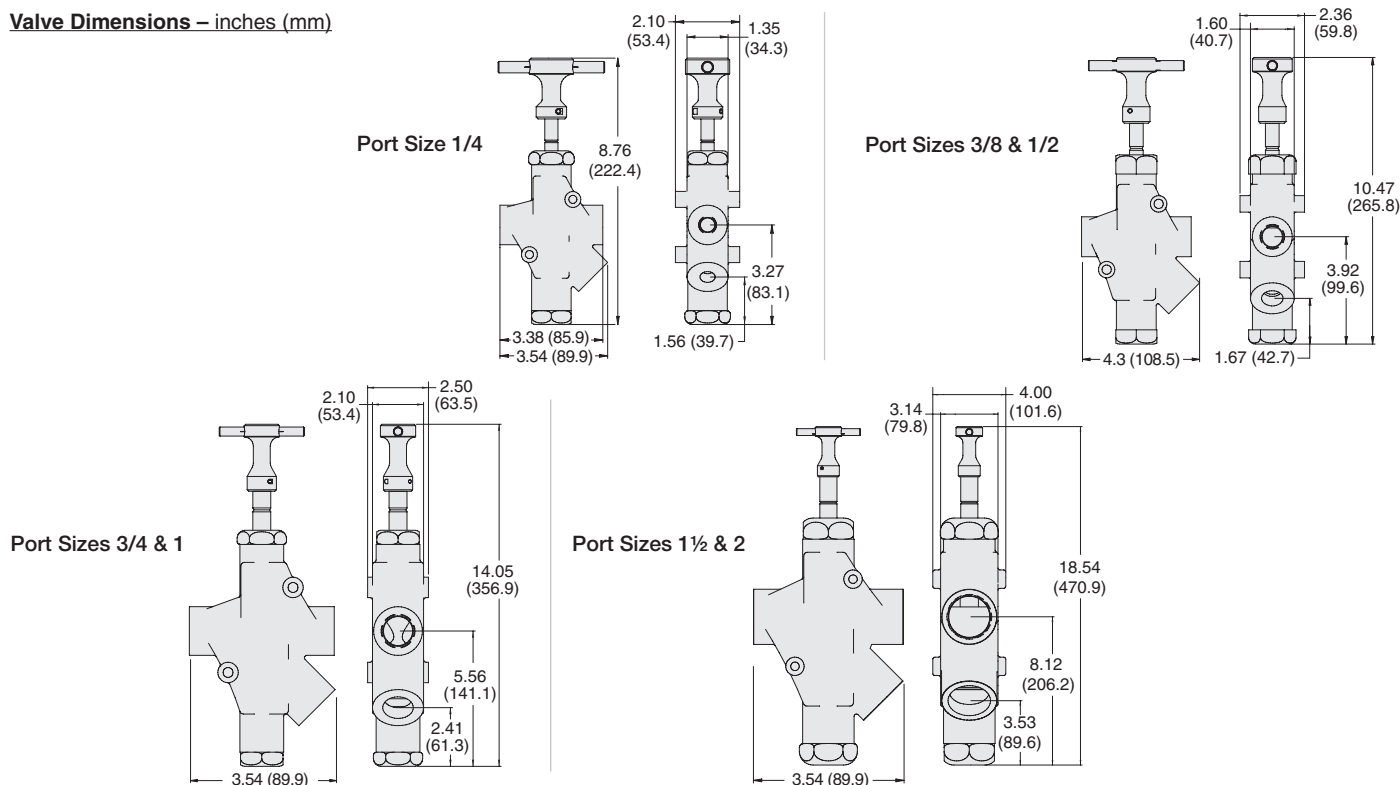


F

VALVE OPERATION


Valve Closed

With a push of the handle inward, the flow of supply air is blocked and downstream air is exhausted via the exhaust port while servicing or maintaining machinery. Padlock the L-O-X® valve in this position to prevent the handle from being pulled outward inadvertently to avoid potential for human injury while servicing machinery.



Valve Open

When the handle is pulled out, supply air flows freely from inlet to outlet and flow to exhaust is blocked. A detent keeps the handle in the open position. The handle is not designed to be locked in this position, thereby providing for ready shut-off when necessary.



STANDARD SPECIFICATIONS (for valves on this page):

Construction: Spool, 316 Stainless Steel.

Mounting Type: In-Line.

Ambient/Media Temperature: 30° to 175°F (-1° to 80°C).

Note: For lower temperature ratings, consult ROSS.

Flow Media: Filtered air.

Inlet Pressure: 0 to 300 psig (0 to 20.7 bar).

Lock Hole Diameter: Port sizes 1/4 thru 2: 0.34 inch (8.64 mm).

Length of Hole: Port size 1/4: 0.44 in (11.17 mm).

Port size 1/2: 0.47 in (11.93 mm)

Port size 1 and 2: 0.55 inch (13.97 mm).

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com

F1.7

Stainless Steel Lockout L-O-X[®] Valves with Integrated Filter/Regulator



Air Entry Combination Pneumatic Energy Isolation (LOTO)

F1

Port Size			Model Number*	C _v	
1, 2	3			1-2	2-3
1/4	1/4		RC010-13	2.14	2.08
1/2	1/2		RC011-13	4.4	6.24
3/4	1		RC012-13	5.0	17.0
1	1		RC013-13	8.0	17.0


Lockout/Filter/Regulator
Lockout Manual Drain Self-relieving

* NPT port threads. For BSP threads, consult ROSS.




Dimensions – inches (mm)


Port Size 1/4

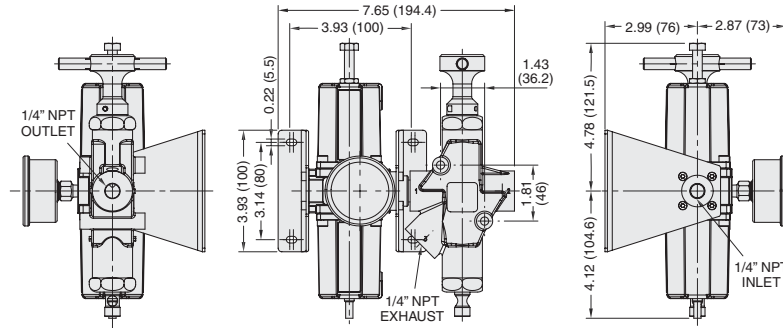

Port Size 1/2

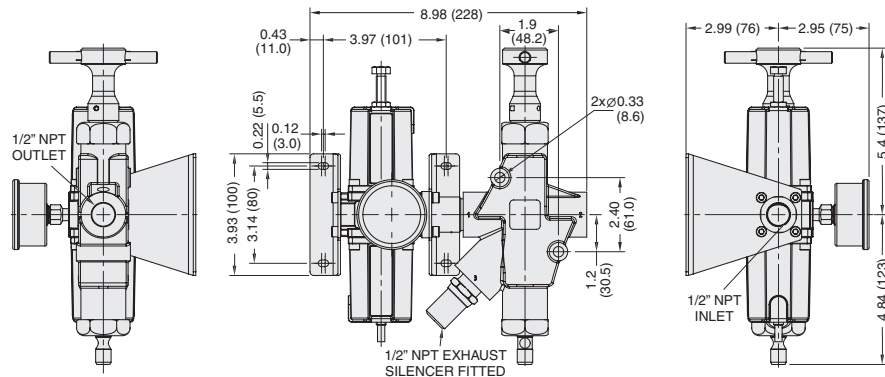

Port Size 3/4

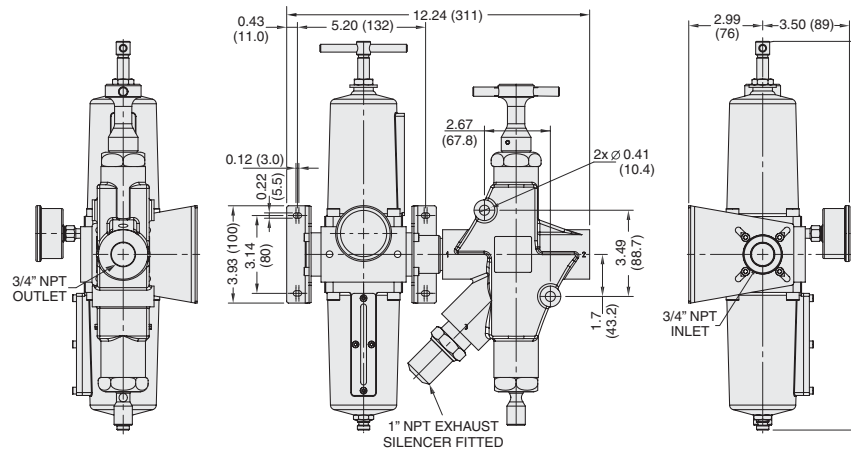

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Spool, 316 Stainless Steel.
Mounting Type: In-Line.
Ambient/Media Temperature: 30° to 175°F (-1° to 80°C).
Note: For lower temperature ratings, consult ROSS.
Flow Media: Filtered air.
Inlet Pressure: 0 to 300 psig (0 to 20.7 bar).

Secondary Pressure: 7 to 174 psig (0.5 to 12 bar).
Seals: Fluorocarbon (Viton).
Lock Hole Diameter: Port sizes 1/4 thru 2: 0.34 inch (8.64 mm).
Length of Hole: Port size 1/4: 0.44 in (11.17 mm).
 Port size 1/2: 0.47 in (11.93 mm)
 Port size 1 and 2: 0.55 inch (13.97 mm).

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.


IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Stainless Steel Lockout L-O-X[®] Valves with Integrated Filter/Regulator

Air Entry Combination Pneumatic Energy Isolation (LOTO)

Port Size 1

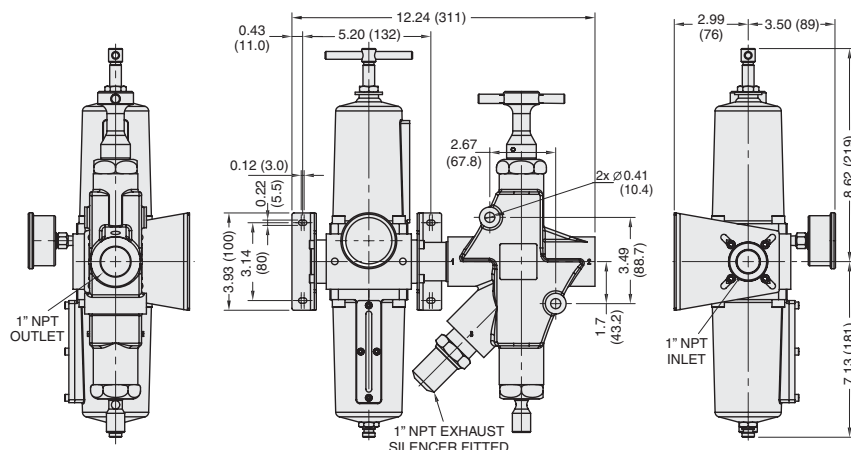

F1




Stainless Steel Cabinet for Wash-Down Applications

- Stainless steel control cabinet includes filter/regulator and Category 4 DM²⁰ Series valve for Air Entry Control
- Stainless steel construction, designed for wash-down areas
- Control cabinet is built with slanted top to avoid pooling
- Control Reliable Energy Isolation

CONTROL
CATEGORY
2

CONTROL
CATEGORY
3

CONTROL
CATEGORY
4

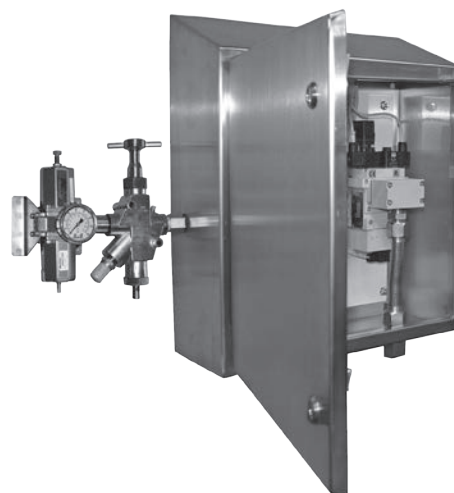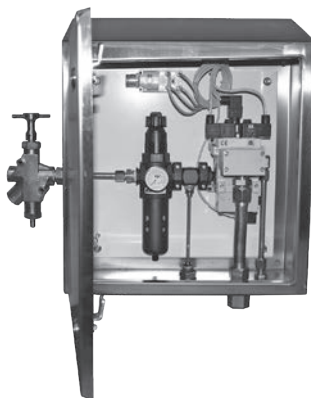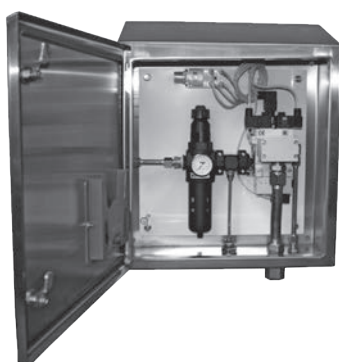

F

APPLICATIONS:

- Chemical Processing • Forestry • Mining • Pharmaceutical
- Pulp and Paper • Oil and Gas • Off-shore Industries

Will build to your specifications!

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com

F1.9



F1

Stainless Steel Silencers

- Port sizes 1/4 thru 1 have all stainless steel construction
- Port size 2 have standard construction consisting of nickel plated bodies and stainless internals
- Supplied with a standard pipe thread fitting for attaching directly to the exhaust ports of air-operated equipment

Port Size	Thread Type	Model Number		Avg. C _v	Dimensions inches (mm)		Weight lb (kg)
		NPT Threads	BSPT Threads		A	B	
1/4	Male	5500B2004	D5500B2004	1.44	0.56 (14.2)	1.75 (44.5)	0.05 (0.23)
1/2	Male	5500B4004	D5500B4004	3.01	0.87 (22.1)	2.75 (69.7)	0.25 (0.11)
1	Male	5500B6004	D5500B6004	10.41	1.31 (33.3)	3.87 (98.3)	0.45 (0.20)
2	Male	5500B9004	D5500B9004	28.11	2.37 (60.2)	5.50 (139.7)	1.5 (0.68)

Pressure Range: 0 to 150 psig (0 to 10.3 bar) maximum.
Flow Media: Filtered air; 5 micron recommended.






Silencers for Stainless Steel L-O-X® Air Entry Combinations

- 316 Stainless Steel sintered element silencers used to protect ports open to the atmosphere.

Port Size	Thread Type	Model Number		Avg. C _v	Dimensions inches (mm)	
		NPT Threads	BSPT Threads		A	B
1/4	Male	5500A2005	D5500A2005	1.44	0.67 (17)	1.50 (38)
1/2	Male	5500A4005	D5500A4005	3.01	0.94 (24)	2.17 (55)
1	Male	5500A6005	D5500A6005	10.41	1.41 (36)	2.95 (75)

Pressure Range: 0 to 174 psig (0 to 12 bar) maximum.
Flow Media: Filtered air; 5 micron recommended.
Seals: Nitrile.





Stainless Steel Pressure Switch

- 316 Stainless Steel Body
- Nitrile Seals
- DPDT (Double-Pole Double-Throw Switch)
- Factory preset 5 psi (falling)

Inlet Port Size	Model Number	Weight lb (kg)
1/8	1162A30	0.23 (.01)

NPT port threads.

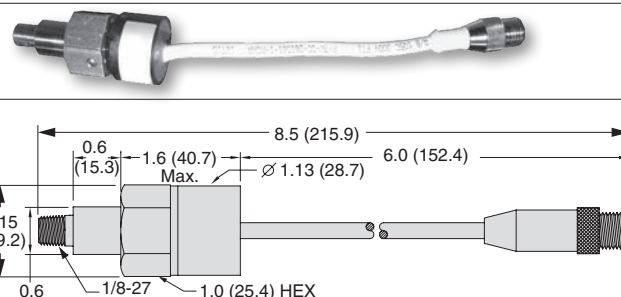

Pin Configuration


1 Red/White Circuit 1
 2 All Red
 3 Green
 4 Red/Yellow Circuit 2
 5 Red/Black
 6 Red/Blue

Stainless Steel Visual Indicator

- 316 Stainless Steel Body, internals and Springs
- Nitrile Seals
- Visual Indicator piston, Acetal
- Visual Indicator assembly, Acetal with acrylic lens

Inlet Port Size	Model Number	Dimensions inches (mm)		Weight lb (kg)
		A	B	
1/8	1155H30	2.33 (59.3)	1.00 (25.4)	0.22 (0.1)

NPT port threads.




IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

3-Way 2-Position Valve, Solenoid Pilot Controlled						
Port Size		Body Size	Valve Model Number*	C _v		Weight lb (kg)
1, 2	3			1-2	2-3	
1/4	1/2	3/8	Y2773A2072**	2.5	3.1	3.5 (1.6)
3/8	1/2	3/8	Y2773A3072**	3.6	5.3	3.5 (1.6)
1/2	1/2	3/8	Y2773A4082**	3.3	5.3	3.5 (1.6)
1/2	1	3/4	Y2773A4072**	6.3	9.2	4.3 (1.9)
3/4	1	3/4	Y2773A5072**	7.7	11	4.3 (1.9)
1	1	3/4	Y2773A6082**	8.0	12	4.3 (1.9)
1	1½	1¼	Y2773A6072**	23	34	8.0 (3.6)
1¼	1½	1¼	Y2773A7072**	30	32	8.0 (3.6)
1½	1½	1¼	Y2773A8082**	30	31	8.0 (3.6)
1½	2½	2	Y2773A8072**	68	70	17.5 (7.9)
2	2½	2	Y2773A9072**	70	70	17.5 (7.9)
2½	2½	2	Y2773A9082**	70	71	17.5 (7.9)

* NPT port threads. For BSPP threads, insert a "D" after "Y" to the model number, e.g., YD2773A2072W.
 ** Insert voltage code: "W" = 24 volts DC; "Z" = 110-120 volts AC, 50/60 Hz; e.g., Y2773A2072W.
 For other voltages, consult ROSS.



F1



ACCESSORIES & OPTIONS

Silencers



Port size 1/2 thru 2

Port size 2½


Port Size	Thread Type	Model Number		Avg. C _v
		NPT Threads	BSPT Threads	
1/2	Male	5500A4003	D5500A4003	4.7
1	Male	5500A6003	D5500A6003	14.6
1½	Female	5500A8001	D5500A8001	29.9
2½	Female	5500A9002	D5500A9002	103.7

Pressure Range: 0 to 150 psig (0 to 10.3 bar) maximum.

Flow Media: Filtered air.

Indicator Light Kit

Kit Number		Indicator Light
24 volts DC	110-120 volts AC 50-60 Hz	
862K87-W	862K87-Z	




Pressure Switches

Connection Type	Model Number*	Port Threads
DIN 43650 Form A	586A86	1/8 NPT
M12 Micro-DC	1153A30	1/8 NPT


* Pressure switch closes on falling pressure of 5 psig (0.34 bar).



DIN Connector Pinout



M12 Connector Pinout



Pop-Up Indicator

Model Number** 988A30

** 1/8 NPT port threads.



Multiple Lock-out Device

Model Number 356A30



STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Solenoids: AC or DC power. Rated for continuous duty.

Standard Voltages: 24 volts DC; 110-120 volts AC, 50/60 Hz.

Power Consumption: 87 VA inrush, 30 VA holding on 50 or 60 Hz; 14 watts on DC.

Ambient Temperature: 40° to 120°F (4° to 50°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: Port sizes 1/4 to 1½: 15 to 150 psig (1 to 10 bar).

Port sizes 1½ to 2½: 30 to 150 psig (2 to 10 bar).

Pilot Pressure: Must be equal to or greater than inlet pressure.

Safety Integrity Level (SIL) – Certified by TÜV Rheinland in accordance to IEC 61508 and IEC 61511 safety integrity level 2 (SIL 2) and EN ISO 13849-1, PL c or PL d (with application specific diagnosis) in singular application with HFT = 0 and SIL 3 and PL e in redundant application with HFT ≥ 1.

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16


www.rosscontrols.com

F1.11


Valve Dimensions – inches (mm)

F1


Body Size 3/8

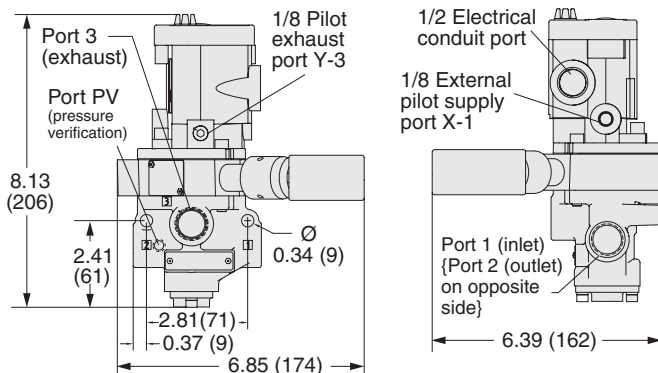


Body Size 3/4

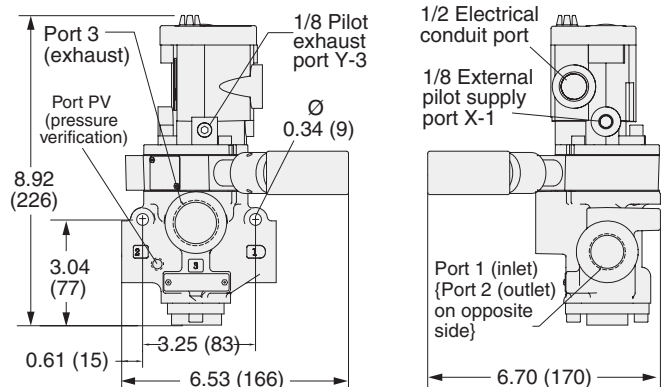

Body Size 1 1/4

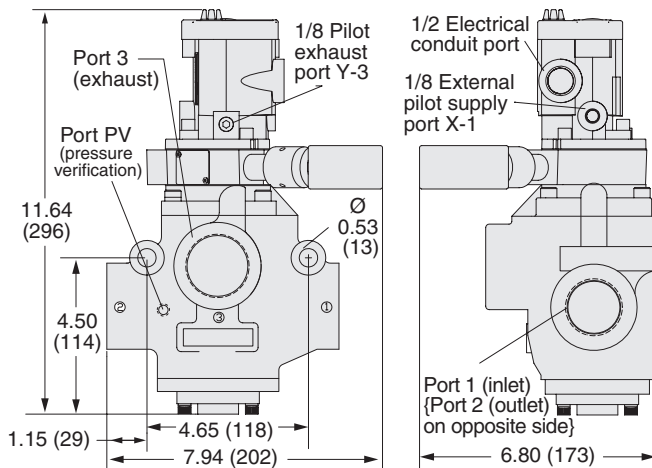


Body Size 2

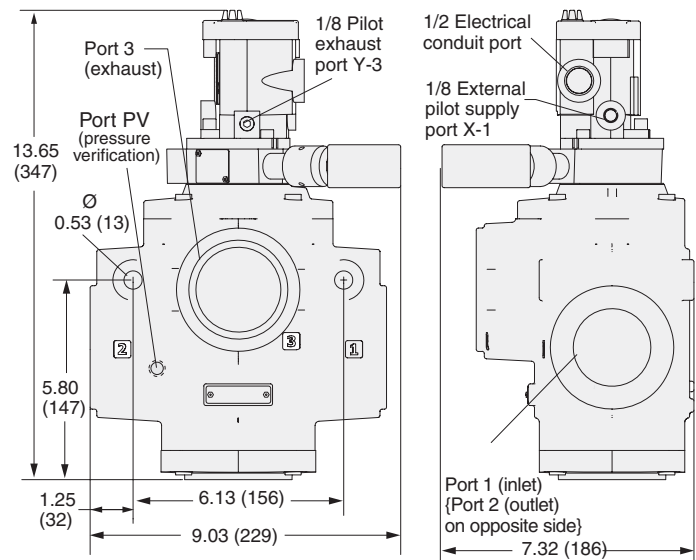

VALVE OPERATION


Pilot De-energized

With the solenoid pilot de-energized (regardless of the position of the L-O-X® handle) the inlet poppet remains closed. The outlet port is connected to the exhaust port so that pressure in the downstream lines is vented to atmosphere.




Pilot Energized

With the solenoid pilot energized and the L-O-X® control in the open position, air can flow from inlet to outlet port. The exhaust port is closed.



L-O-X® Valve Closed

With the handle pushed inward, the L-O-X® control is closed, and air to the valve piston is cut off. This allows the inlet poppet to be closed by its spring and the pressure of the inlet air. The outlet is connected to exhaust so downstream pressure is vented.



IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.


3-Way 2-Position Valve, Internal Pressure Controlled						
Port Size		Body Size	Valve Model Number*	C _v		Weight lb (kg)
1, 2	3			1-2	2-3	
1	1½	1¼	Y2783A6006	23	34	7.0 (3.2)
1¼	1½	1¼	Y2783A7006	30	32	7.0 (3.2)
1½	1½	1¼	Y2783A8016	30	31	7.0 (3.2)
1½	2½	2	Y2783A8006	68	70	15.3 (6.9)
2	2½	2	Y2783A9006	70	70	15.3 (6.9)
2½	2½	2	Y2783A9016	70	71	15.3 (6.9)

* NPT port threads. For BSPP threads, insert a "D" after "Y" to the model number, e.g., YD2783A6006.



F1

Valve Dimensions – inches (mm)

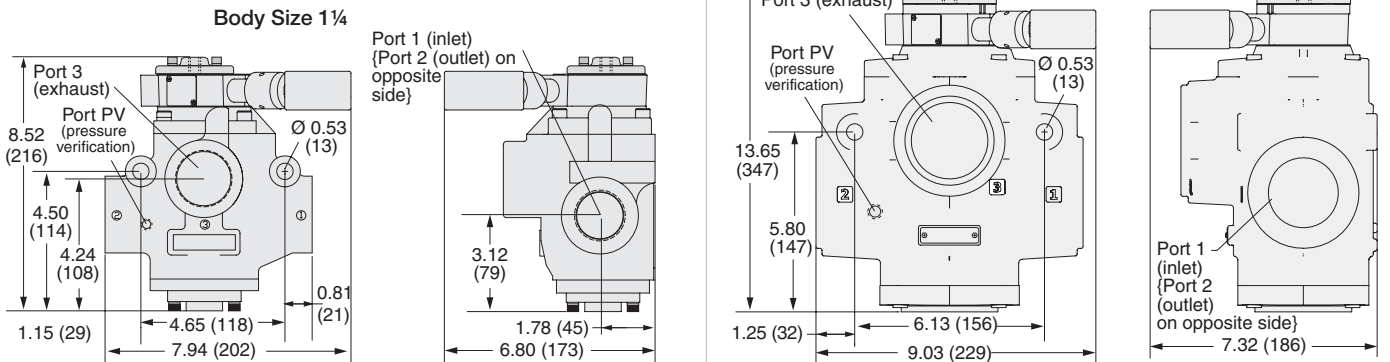

ACCESSORIES & OPTIONS

Silencers



Port size 1½ thru 2 Port size 2½

Port Size	Thread Type	Model Number		Avg. C _v
		NPT Threads	BSPT Threads	
1½	Female	5500A8001	D5500A8001	29.9
2½	Female	5500A9002	D5500A9002	103.7

Pressure Range: 0 to 150 psig (0 to 10.3 bar) maximum.
Flow Media: Filtered air.


Pressure Switch

Connection Type	Model Number*	Port Threads
DIN 43650 Form A	586A86	1/8 NPT
M12 Micro-DC	1153A30	1/8 NPT


* Pressure switch closes on falling pressure of 5 psig (0.34 bar).



DIN Connector Pinout



M12 Connector Pinout



Pop-Up Indicator

Model Number**	988A30
** 1/8 NPT port threads.	




Multiple Lock-out Device

Model Number	356A30
--------------	--------




VALVE OPERATION

Valve Closed With a short push of the red handle inward the flow of supply air is blocked and downstream air is exhausted via the exhaust port. Air pressure on the inlet and exhaust poppets produces a large closing force. The L-O-X® valve should be padlocked in this position to prevent the handle from being pulled outward inadvertently when potential for human injury exists or servicing machinery.



Valve Open With the red handle pulled out, pilot air flows to the top of the actuating piston, causing it to open the inlet poppet. Supply air then flows freely from inlet to outlet, and the exhaust port is blocked. A detent keeps the L-O-X® handle in the open position. The handle is designed not to be locked in the open position, thereby allowing for quick shut-off when necessary.



STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.
Mounting Type: In-Line.
Ambient/Media Temperature: 40° to 175°F (4° to 80°C).
Flow Media: Filtered air.
Inlet Pressure: Basic Size 1¼: 15 to 150 psig (1 to 10 bar).
Basic Size 2: 30 to 150 psig (2 to 10 bar).

Pilot Pressure: Must be equal to or greater than inlet pressure.

Safety Integrity Level (SIL) – Certified by TÜV Rheinland in accordance to IEC 61508 and IEC 61511 safety integrity level 2 (SIL 2) and EN ISO 13849-1, PL c or PL d (with application specific diagnosis) in singular application with HFT = 0 and SIL 3 and PL e in redundant application with HFT ≥ 1.

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com

F1.13



F1

3 Inch L-O-X® Valve for Lockout


3-Way 2-Position Valve, Solenoid Pilot Controlled

Port Size		Valve Model Number	C _v		Weight lb (kg)
1, 2	3		1-2	2-3	
3	2½	Y3900A0896**	140	71	115 (53.0)

** Insert voltage code: "W" = 24 volts DC; "Z" = 110-120 volts AC, 50/60 Hz; e.g., Y3900A0896W. For other voltages, consult ROSS.



Valve Dimensions – inches (mm)

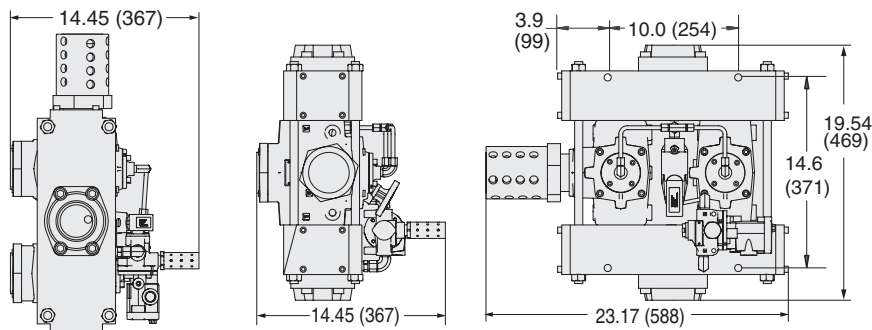

OPTIONS

Multiple Lock-out Device


Model Number 356A30



VALVE OPERATION


Pilot De-energized

With the solenoid pilot de-energized (regardless of the position of the L-O-X® handle) the inlet poppet remains closed. The outlet port is connected to the exhaust port so that pressure in the downstream lines is vented to atmosphere.




Pilot Energized

With the solenoid pilot energized and the L-O-X® control in the open position, air can flow from inlet to outlet port. The exhaust port is closed.



L-O-X® Valve Closed

With the handle pushed inward, the L-O-X® control is closed, and air to the valve piston is cut off. This allows the inlet poppet to be closed by its spring and the pressure of the inlet air. The outlet is connected to exhaust so downstream pressure is vented.



STANDARD SPECIFICATIONS (for valves on this page):

Construction: Spool.
Mounting Type: In-Line.
Solenoids: AC or DC power. Rated for continuous duty.
Power Consumption: 87 VA inrush, 30 VA holding on 50 or 60 Hz; 14 watts on DC.

Ambient Temperature: 40 to 120°F (4 to 50°C).
Media Temperature: 40 to 175°F (4 to 80°C).
Flow Media: Filtered air; 5 micron filter recommended.
Inlet Pressure: 30 to 150 psig (2 to 10 bar).
Pilot Pressure: Must be equal to or greater than inlet pressure.
Port Threads: NPT.

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.


IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



3 Inch L-O-X® Valve for Lockout


3-Way 2-Position Valve, Pressure Controlled

Port Size		Valve Model Number	C _v		Weight lb (kg)
1, 2	3		1-2	2-3	
3	2½	Y3900A0829	140	71	110 (49.9)



F1

Valve Dimensions – inches (mm)

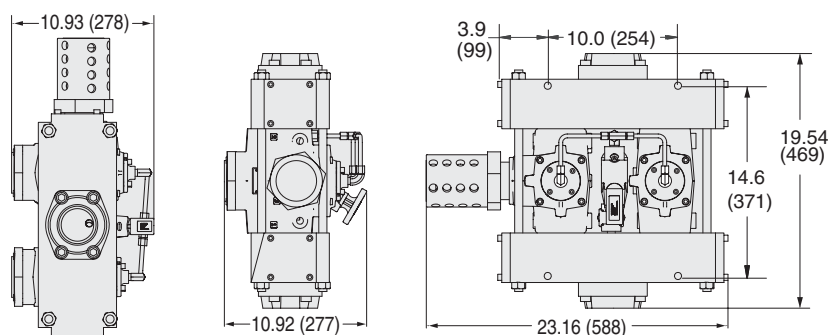

OPTIONS

Multiple Lock-out Device

Model Number 356A30




VALVE OPERATION

F


Valve Closed

With a short push of the red handle inward the flow of supply air is blocked and downstream air is exhausted via the exhaust port. Air pressure on the inlet and exhaust poppets produces a large closing force. The L-O-X® valve should be padlocked in this position to prevent the handle from being pulled outward inadvertently when potential for human injury exists or servicing machinery.



Valve Open

With the red handle pulled out, pilot air flows to the top of the actuating piston, causing it to open the inlet poppet. Supply air then flows freely from inlet to outlet, and the exhaust port is blocked. A detent keeps the L-O-X® handle in the open position. The handle is designed not to be locked in the open position, thereby allowing for quick shut-off when necessary.



STANDARD SPECIFICATIONS (for valves on this page):

Construction: Spool.

Mounting Type: In-Line.

Ambient/Media Temperature: 40 to 175° F (4 to 80°C).

Flow Media: Filtered air; 5 micron filter recommended.

Inlet Pressure: 30 to 150 psig (2 to 10 bar).

Pilot Pressure: Must be equal to or greater than inlet pressure.

Port Threads: NPT.

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.




Online Version
Rev. 05/16

www.rosscontrols.com


F1.15

F1

Models with Threaded Banjo				
2-Way Normally Closed EEZ-ON®				
Port Size		Valve Model Number	Avg. C _v	Weight lb (kg)
Port 1 (female threads)	Port 2 (male threads)			
1/4	1/4	1969B2010	1.2	0.38 (0.15)
3/8	3/8	1969B3010	1.7	0.38 (0.15)
G1/4	G1/4	D1969B2010	1.2	0.38 (0.15)
G3/8	G3/8	D1969B3010	1.7	0.38 (0.15)



Valve Dimensions – inches (mm)



F

- Gradual re-application of pneumatic pressure prevents rapid equipment movement at startup
- Right angle style mounts directly in cylinder ports
- Available with threaded ports
- Point of use Soft Start

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Spool.

Mounting Type: Port Mounted.

Ambient/Media Temperature: 15° to 160°F (-10° to 70°C).

Flow Media: Filtered air.

Operating Pressure: 45 to 150 psig (3 to 10.3 bar).

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.


3-Way 2-Position Valve, Solenoid Pilot Controlled

Port Size		Body Size	Valve Model Number*	C _v		Weight lb (kg)
				1-2	2-3	
1/4	1/2	3/8	2773B2037**	2.5	3.1	4.5 (2.0)
3/8	1/2	3/8	2773B3037**	3.6	5.3	4.5 (2.0)
1/2	1/2	3/8	2773B4047**	3.3	5.3	4.5 (2.0)
1/2	1	3/4	2773B4037**	10.0	13.0	5.0 (2.3)
3/4	1	3/4	2773B5037**	12.0	15.0	5.0 (2.3)
1	1	3/4	2773B6047**	12.0	16.0	5.0 (2.3)
1	1½	1¼	2773A6037**	23.0	34.0	8.8 (4.0)
1¼	1½	1¼	2773A7037**	30.0	32.0	8.8 (4.0)
1½	1½	1¼	2773A8047**	30.0	31.0	8.8 (4.0)

* NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D2773B2037.

**Insert voltage code: "W" = 24 volts DC; "Z" = 110-120 volts AC, 50/60 Hz; e.g., 2773B2037W.

For other voltages, consult ROSS.



1/4 thru 1
Exhaust Port Size



1 thru 1½
Exhaust Port Size



F1

ACCESSORIES & OPTIONS

Silencers



Port Size	Thread Type	Model Number*		Avg. C _v
		NPT Threads	BSPT Threads	
1/2	Male	5500A4003	D5500A4003	4.7
1	Male	5500A6003	D5500A6003	14.6
1½	Female	5500A8001	D5500A8001	29.9

Pressure Range: 0 to 150 psig (0 to 10.3 bar) maximum. **Flow Media:** Filtered air.

Indicator Light Kit

Kit Number		Indicator Light
24 volts DC	110-120 volts AC 50-60 Hz	
862K87-W	862K87-Z	

Manual Overrides

FLUSH BUTTON		
Locking Type	Kit Number	
Locking	792K87	

EXTENDED BUTTON		
Locking Type	Kit Number	
Non-Locking	791K87	

EXTENDED BUTTON with PALM		
Locking Type	Kit Number	
Non-Locking	984H87	

NOTE: The 3/2 EEZ-ON® valve is also available with a L-O-X® adapter so that both L-O-X® and EEZ-ON® functions are consolidated in a single valve.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Solenoid Pilot: AC or DC power. Rated for continuous duty.

Standard Voltages: 24 volts DC; 110-120 volts AC, 50/60 Hz.

Power Consumption: 87 VA inrush, 30 VA holding on 50 or 60 Hz; 14 watts on DC.

Ambient Temperature: 40° to 120°F (4° to 50°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: 15 to 150 psig (1 to 10.3 bar).

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16


www.rosscontrols.com

F1.17


Valve Dimensions – inches (mm)

F1


Body Size 3/8

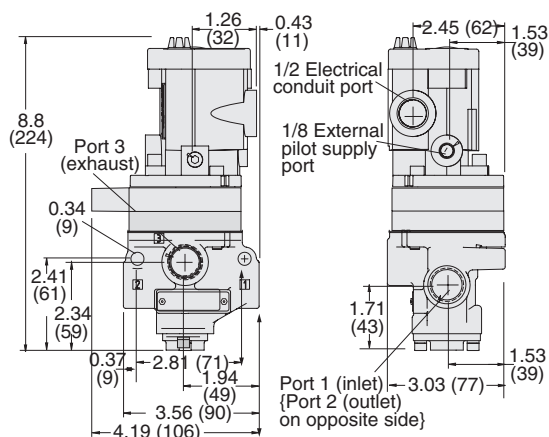

Body Size 3/4

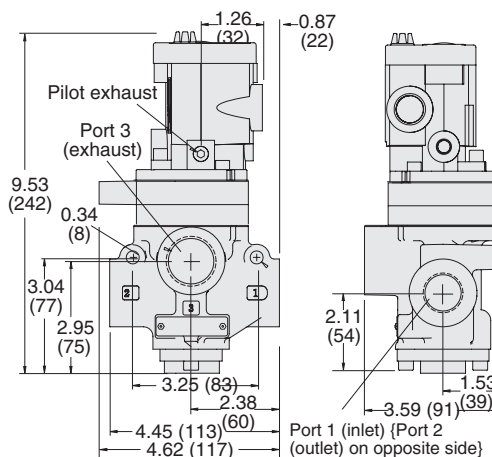

Body Size 1 1/4

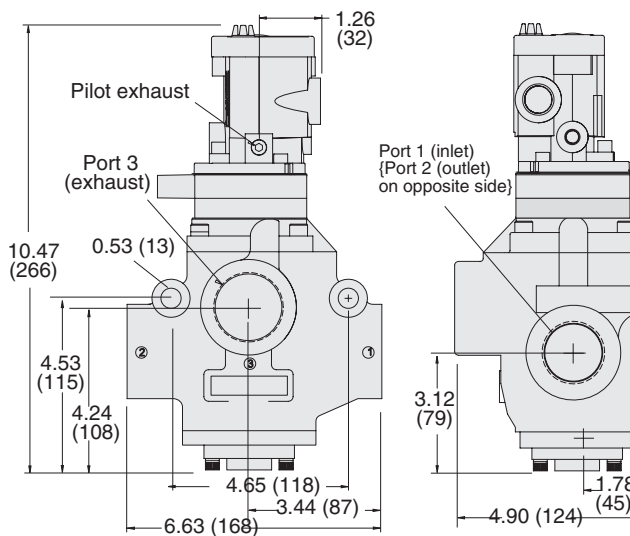


F

VALVE OPERATION


Pilot Not Energized

Pilot air is blocked by the pilot. Any downstream pressure forces piston B (which slides on the valve stem) upward. This opens the exhaust port and vents the downstream line.




Full Pressure

When the pressure on piston A reaches approximately 50 percent of inlet pressure, it is forced downward and opens inlet poppet C. Full inlet pressure now flows freely to the outlet port.




Pilot Energized

Pilot air forces piston B downward to close the exhaust port. Pilot air also flows past the adjusting needle, opens the ball check and begins slowly to pressurize the outlet line. At the same time, pressure is building up on piston A.



Pilot De-energized

Air above pistons A and B is exhausted through the exhaust port of the pilot valve. Air above poppet C forces sliding piston B upward so that the main exhaust port is opened and the pressurized air is exhausted.



IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

2-Way 2-Position Valves, Pressure Controlled


Port Size 1, 2	Body Size	Valve Model Number*	C _v	Weight lb (kg)
1/4	3/8	2781A2007	2.3	1.5 (0.7)
3/8	3/8	2781A3007	3.8	1.5 (0.7)
1/2	3/8	2781A4017	4.0	1.5 (0.7)
1/2	3/4	2781A4007	13.0	2.3 (1.0)
3/4	3/4	2781A5007	15.0	2.3 (1.0)
1	3/4	2781A6017	16.0	2.3 (1.0)
1	1¼	2781A6007	24.0	6.0 (2.7)
1¼	1¼	2781A7007	29.0	6.0 (2.7)
1½	1¼	2781A8017	29.0	6.0 (2.7)

* NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D2781A2007.



F1


Valve Dimensions – inches (mm)

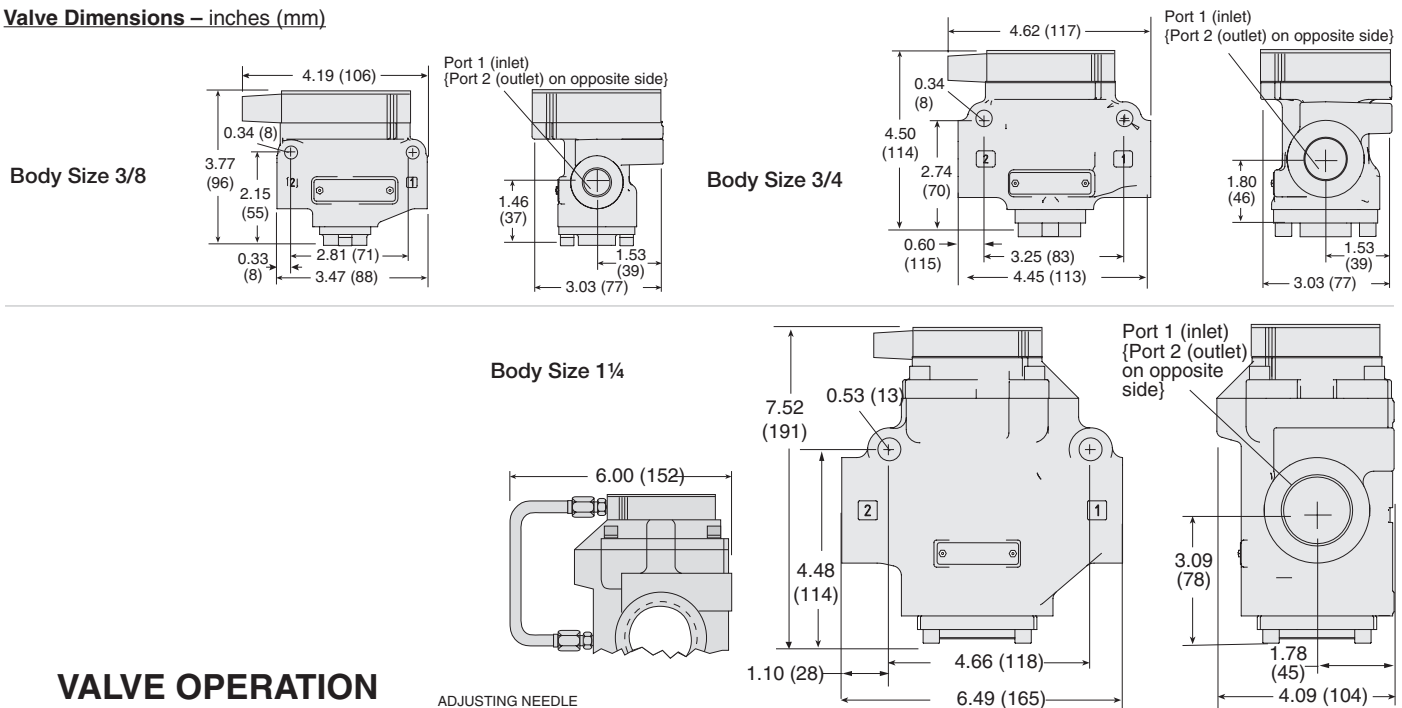

VALVE OPERATION


Air Pressure to Inlet

When air pressure is first applied to the inlet, air flow to the piston is restricted by the adjustable needle in the delay orifice. Downstream air pressure gradually builds up at a rate determined by the setting of the adjustable needle.




Valve Opens to Full Flow

When downstream air pressure reaches approximately 40 to 60 percent of inlet pressure, the valve element shifts to the full open position and there is full air flow to the downstream components. This condition continues as long as inlet air pressure is present.



Inlet Pressure Removed

When inlet pressure is removed, the exhausting downstream air pressure keeps the inlet poppet open until the downstream pressure drops by approximately 90 percent. The remaining pressure is exhausted via the delay orifice.



STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Ambient/Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: 15 to 150 psig (1 to 10.3 bar).

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com

F1.19


F1

3-Way 2-Position Valve, Pressure Controlled


Port Size	1, 2	3	Body Size	Valve Model Number*	C _v		Weight lb (kg)
					1-2	2-3	
1/4	1/2	3/8		2783C2037	2.5	3.1	4.5 (2.0)
3/8	1/2	3/8		2783C3037	3.6	5.3	4.5 (2.0)
1/2	1/2	3/8		2783C4047	3.3	5.3	4.5 (2.0)
1/2	1	3/4		2783C4037	10.0	13.0	5.0 (2.3)
3/4	1	3/4		2783C5037	12.0	15.0	5.0 (2.3)
1	1	3/4		2783C6047	12.0	16.0	5.0 (2.3)
1	1½	1¼		2783B6037	23.0	34.0	8.8 (4.0)
1¼	1½	1¼		2783B7037	30.0	32.0	8.8 (4.0)
1½	1½	1¼		2783B8047	30.0	31.0	8.8 (4.0)

* NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D2781A2007.


1/4 thru 1
Exhaust Port Size




1 thru 1½
Exhaust Port Size



Body Size 3/8

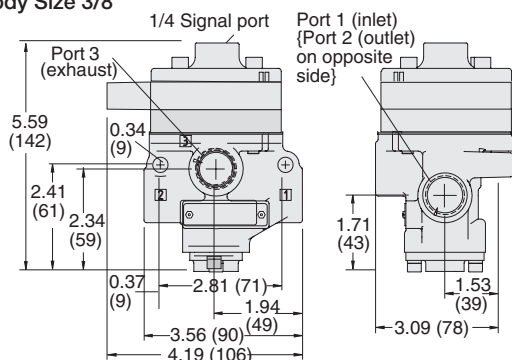


Body Size 1¼

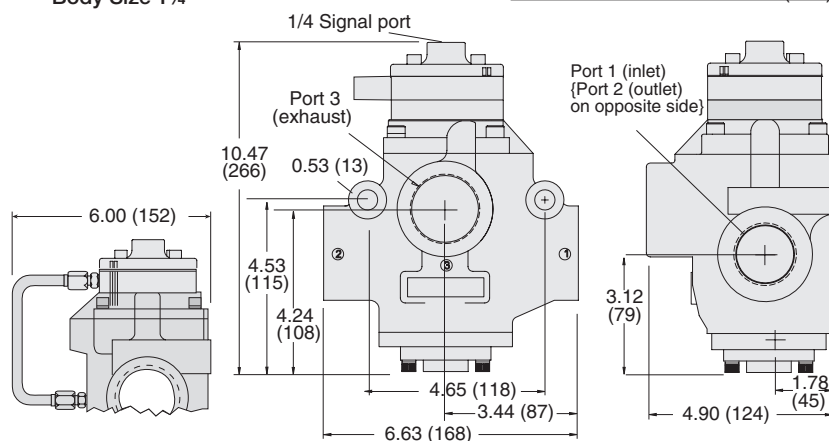

Valve Dimensions – inches (mm)

Body Size 3/4

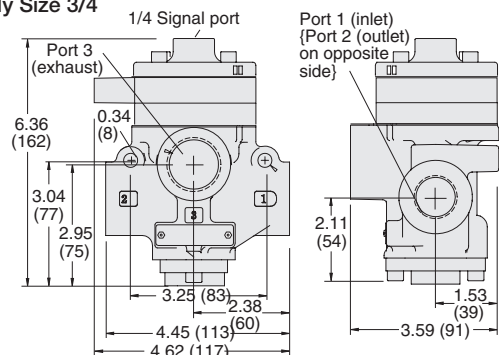

ACCESSORIES & OPTIONS

Silencers



Port Size	Thread Type	Model Number*		Avg. C _v
		NPT Threads	BSPT Threads	
1/2	Male	5500A4003	D5500A4003	4.7
1	Male	5500A6003	D5500A6003	14.6
1½	Female	5500A8001	D5500A8001	29.9

Pressure Range: 0 to 150 psig (0 to 10.3 bar) maximum.
Flow Media: Filtered air.

VALVE OPERATION



Air Pressure to Inlet

When air pressure is first applied to the inlet, air flow to the piston is restricted by the adjustable needle in the delay orifice. Downstream air pressure gradually builds up at a rate determined by the setting of the adjustable needle.

Valve Opens to Full Flow


When downstream air pressure reaches approximately 40 to 60 percent of inlet pressure, the valve element shifts to the full open position and there is full air flow to the downstream components. This condition continues as long as inlet air pressure is present.

ADJUSTING NEEDLE



Inlet Pressure Removed

When inlet pressure is removed, the exhausting downstream air pressure keeps the inlet poppet open until the downstream pressure drops by approximately 90 percent. The remaining pressure is exhausted via the delay orifice.



STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Ambient/Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: 15 to 150 psig (1 to 10.3 bar).

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.




3-Way 2-Position Valve, Modular					
Port Size		Valve Model Number*	C _v		Weight lb (kg)
1, 2	3		1-2	2-3	
1/4	3/4	Y1523A2103	3.7	7.8	1.7 (0.8)
3/8	3/4	Y1523A3103	5.1	8.3	1.7 (0.8)
1/2	3/4	Y1523A4103	5.5	8.6	1.8 (0.8)
3/4	3/4	Y1523A5113	5.6	8.1	1.8 (0.8)

* NPT port threads. For BSPP threads, insert a "D" after "Y" to the model number, e.g., YD1523A3102.



F1

Valve Dimensions – inches (mm)

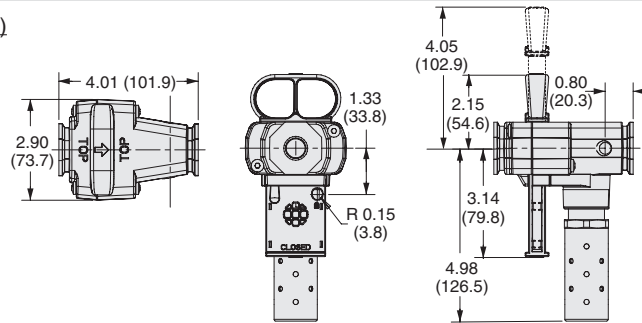

ACCESSORIES & OPTIONS

Silencers



Port Size	Thread Type	Model Number*	Avg. C _v
3/4	Male - NPT	5500A5003	11.5
3/4	Male - BSPT	D5500A5003	11.5

Pressure Range: 0 to 150 psig (0 to 10.3 bar) maximum. **Flow Media:** Filtered air.


Pressure Switches

Connection Type	Model Number*	Port Threads
DIN 43650 Form A	586A86	1/8 NPT
M12 Micro-DC	1153A30	1/8 NPT


*Pressure switch closes on falling pressure of 5 psig (0.34 bar).



DIN Connector Pinout



M12 Connector Pinout



Multiple Lock-out Device

Model Number	356A30
--------------	--------



Pop-Up Indicator

Model Number**	988A30
----------------	--------


** 1/8 NPT port threads.




VALVE OPERATION

Valved Closed

With a short push of the blue handle inward, the flow of supply is blocked and downstream air is exhausted via the exhaust port at the bottom of the valve. It is required by OSHA that the L-O-X[®] valves with EEZ-ON[®] operation be padlocked in this position to prevent the handle from being pulled outward inadvertently when potential for human injury exists or servicing machinery.


EEZ-ON[®] Function

The blue handle will only shift part way due to a mechanical stop button allowing only partial flow from inlet to downstream causing the pressure to increase at a slower rate.



Valve Open

Pressing the mechanical stop button allows the blue handle to be shifted completely open allowing full flow from inlet to downstream.



STANDARD SPECIFICATIONS (for valves on this page):

Construction: Spool.**Mounting Type:** In-Line.**Ambient/Media Temperature:** 40° to 175°F (4° to 80°C).**Flow Media:** Filtered air.**Inlet Pressure:** 0 to 200 psig (0 to 14 bar).**Lock Hole Diameter:** 0.27 inch (7.0 mm).**Length of Hole:** 0.43 inch (10.9 mm).

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com


F1.21

F1


3-Way 2-Position Valve, Classic

Port Size		Body Size	Valve Model Number*	C _v		Weight lb (kg)
1, 2	3			1-2	2-3	
3/8	3/4	1/2	Y1523B3102	3.64	2.81	1.5 (0.7)
1/2	3/4	1/2	Y1523B4102	4.86	3.51	1.5 (0.7)
3/4	3/4	1/2	Y1523B5112	5.09	2.91	1.5 (0.7)
3/4	1 1/4	1	Y1523B5102	10.08	8.56	3.2 (1.5)
1	1 1/4	1	Y1523B6102	11.07	8.45	3.2 (1.5)
1 1/4	1 1/4	1	Y1523B7112	11.86	8.46	3.2 (1.5)

* NPT port threads. For BSPP threads, insert a "D" after "Y" to the model number, e.g., YD1523B3102.



Valve Dimensions – inches (mm)

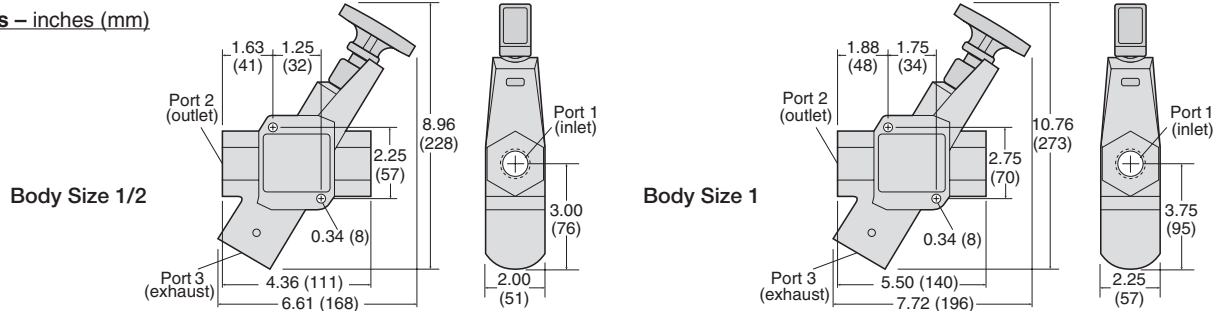

ACCESSORIES & OPTIONS

Silencers



Port Size	Thread Type	Model Number*	Avg. C _v
3/4	Male - NPT	5500A5003	11.5
3/4	Male - BSPT	D5500A5003	11.5
1 1/4	Male - NPT	5500A7013	16.4
1 1/4	Male - BSPT	D5500A7013	16.4

Pressure Range: 0 to 150 psig (0 to 10.3 bar) maximum. **Flow Media:** Filtered air.


Pressure Switches

Connection Type	Model Number*	Port Threads
DIN 43650 Form A	586A86	1/8 NPT
M12 Micro-DC	1153A30	1/8 NPT


* Pressure switch closes on falling pressure of 5 psig (0.34 bar).



DIN Connector Pinout



M12 Connector Pinout



Pop-Up Indicator

Model Number**	988A30
----------------	--------

** 1/8 NPT port threads.



Multiple Lock-out Device


Model Number	356A30
--------------	--------



VALVE OPERATION


Valved Closed

With a short push of the blue handle inward, the flow of supply is blocked and downstream air is exhausted via the exhaust port at the bottom of the valve. It is required by OSHA that the L-O-X® valves with EEZ-ON® operation be padlocked in this position to prevent the handle from being pulled outward inadvertently when potential for human injury exists or servicing machinery.




EEZ-ON® Function

With the blue handle pulled out, the adjustable needle valve (accessed through top of handle) setting determines the rate of pressure buildup.



Valve Open

After the blue handle is pulled out and pressure downstream has gradually increased, the valve automatically changes to a fully open state, allowing full flow from inlet to downstream. Full flow is achieved at approximately 50% of inlet pressure.



STANDARD SPECIFICATIONS (for valves on this page):

Construction: Spool.
Mounting Type: In-Line.
Ambient/Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.
Inlet Pressure: 0 to 150 psig (0 to 10 bar).

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Manual Lockout L-O-X® Valves with Soft Start EEZ-ON®

3/2 Valves – Pressure Controlled

27 Series





3-Way 2-Position Valve, Manual Lockout Controlled						
Port Size		Body Size	Valve Model Number*	C _v		Weight lb (kg)
1, 2	3			1-2	2-3	
1/4	1/2	3/8	Y2783B2055	2.5	3.1	4.3 (2.0)
3/8	1/2	3/8	Y2783B3055	3.6	5.3	4.3 (2.0)
1/2	1/2	3/8	Y2783B4065	3.3	5.3	4.3 (2.0)
1/2	1	3/4	Y2783B4055	10.0	13.0	4.8 (2.2)
3/4	1	3/4	Y2783B5055	12.0	15.0	4.8 (2.2)
1	1	3/4	Y2783B6065	12.0	16.0	4.8 (2.2)
1	1½	1¼	Y2783A6055	23.0	34.0	7.9 (3.6)
1½	1½	1¼	Y2783A7055	30.0	32.0	7.9 (3.6)
1½	1½	1¼	Y2783A8065	30.0	31.0	7.9 (3.6)

* NPT port threads. For BSPP threads, insert a "D" after "Y" to the model number, e.g., YD2783A6055.



F1

Valve Dimensions – inches (mm)

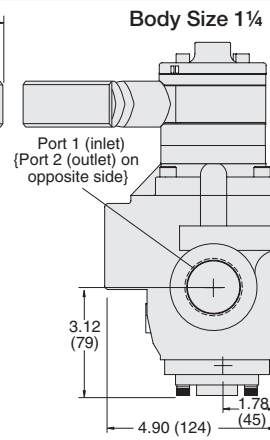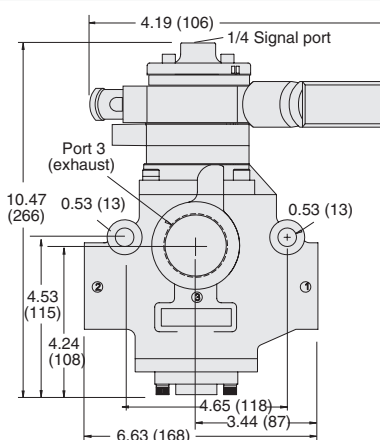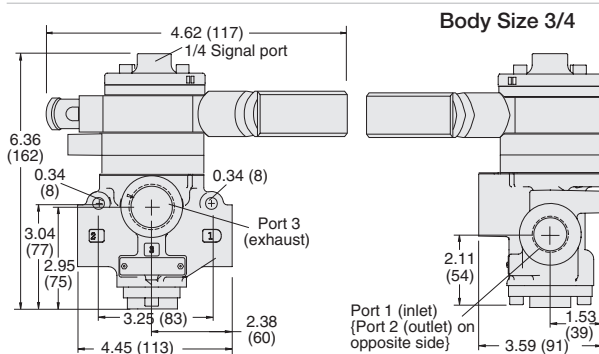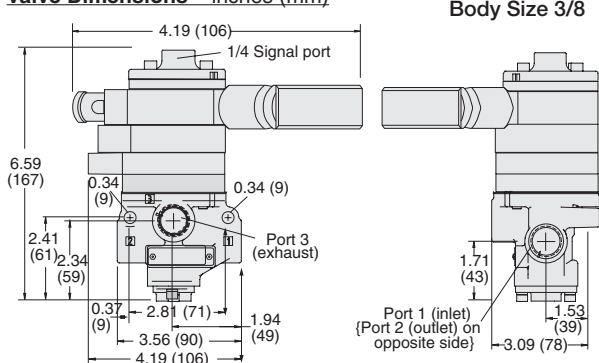

ACCESSORIES & OPTIONS

Silencers



Port Size	Thread Type	Model Number*		Avg. C _v
		NPT Threads	BSPT Threads	
1/2	Male	5500A4003	D5500A4003	4.7
1	Male	5500A6003	D5500A6003	14.6
1½	Female	5500A8001	D5500A8001	29.9

Pressure Range: 0 to 150 psig (0 to 10.3 bar) maximum. **Flow Media:** Filtered air.

Multiple Lock-out Device




Model Number 356A30

VALVE OPERATION


L-O-X® Valve (Handle) Open

Pilot air forces piston B downward to close the exhaust port. Pilot air flows past the adjusting needle, opens the ball check and begins slowly to pressurize the outlet line. At the same time, pressure is building up on piston A.




Full Pressure

With a short push of the red handle inward the flow of supply air is blocked and downstream air is exhausted via the exhaust port. Air pressure on the inlet and exhaust poppets produces a large closing force. The L-O-X® valve should be padlocked in this position to prevent the handle from being pulled outward inadvertently when potential for human injury exists or servicing machinery.



L-O-X® Valve (Handle) Closed

Pilot air forces piston B downward to close the exhaust port. Pilot air flows past the adjusting needle, opens the ball check and begins slowly to pressurize the outlet line. At the same time, pressure is building up on piston A.



STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Ambient/Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: 40 to 150 psig (2.8 to 10.3 bar).

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com

F1.23

Manual Lockout L-O-X® Valves with Soft Start EEZ-ON®

3/2 Valves – Solenoid Controlled

27 Series


F1

3-Way 2-Position Valve, Solenoid Pilot Controlled

Port Size		Body Size	Valve Model Number*	C _v		Weight lb (kg)
1, 2	3			1-2	2-3	
1/4	1/2	3/8	Y2773B2075**	2.5	3.1	5.3 (2.4)
3/8	1/2	3/8	Y2773B3075**	3.6	5.3	5.3 (2.4)
1/2	1/2	3/8	Y2773B4085**	3.3	5.3	5.3 (2.4)
1/2	1	3/4	Y2773B4075**	10.0	13.0	6.0 (2.7)
3/4	1	3/4	Y2773B5075**	12.0	15.0	6.0 (2.7)
1	1	3/4	Y2773B6085**	12.0	16.0	6.0 (2.7)
1	1½	1¼	Y2773B6075**	23.0	34.0	9.5 (4.3)
1¼	1½	1¼	Y2773B7075**	30.0	32.0	9.5 (4.3)
1½	1½	1¼	Y2773B8085**	30.0	31.0	9.5 (4.3)


* NPT port threads. For BSPP threads, insert a "D" after "Y" to the model number, e.g., YD2773B2075.

**Insert voltage code: "W" = 24 volts DC; "Z" = 110-120 volts AC, 50/60 Hz; e.g., Y2773B2075W.
For other voltages, consult ROSS.




Valve Dimensions – inches (mm)

Body Size 3/8

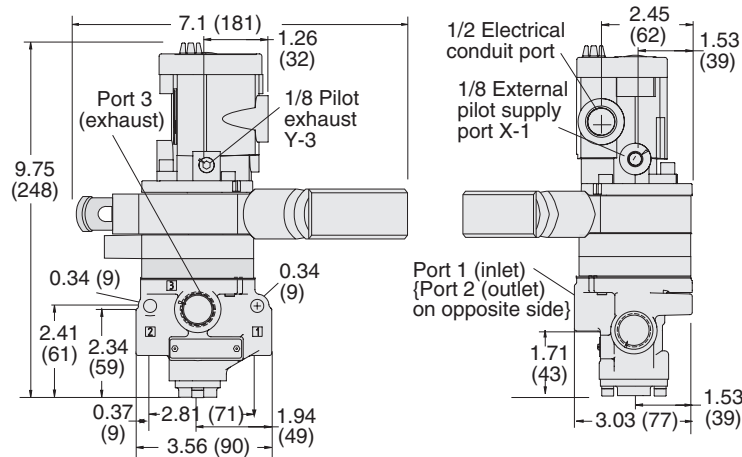

Body Size 3/4

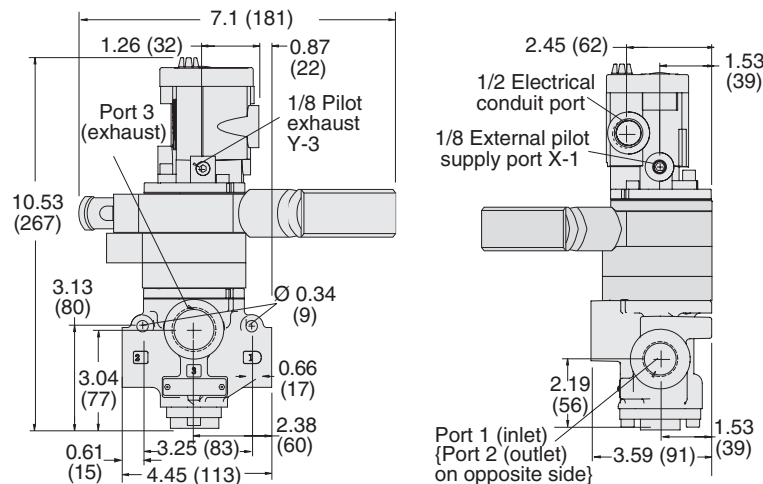

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Standard Voltages: 24 volts DC; 110-120 volts AC, 50/60 Hz.

Power Consumption: 87 VA inrush, 30 VA holding on 50 or 60 Hz; 14 watts on DC.

Ambient Temperature: 40° to 120°F (4° to 50°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: 40 to 150 psig (2.8 to 10.3 bar).

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.




Manual Lockout L-O-X® Valves with Soft Start EEZ-ON®

3/2 Valves – Solenoid Controlled

27 Series

Valve Dimensions – inches (mm)

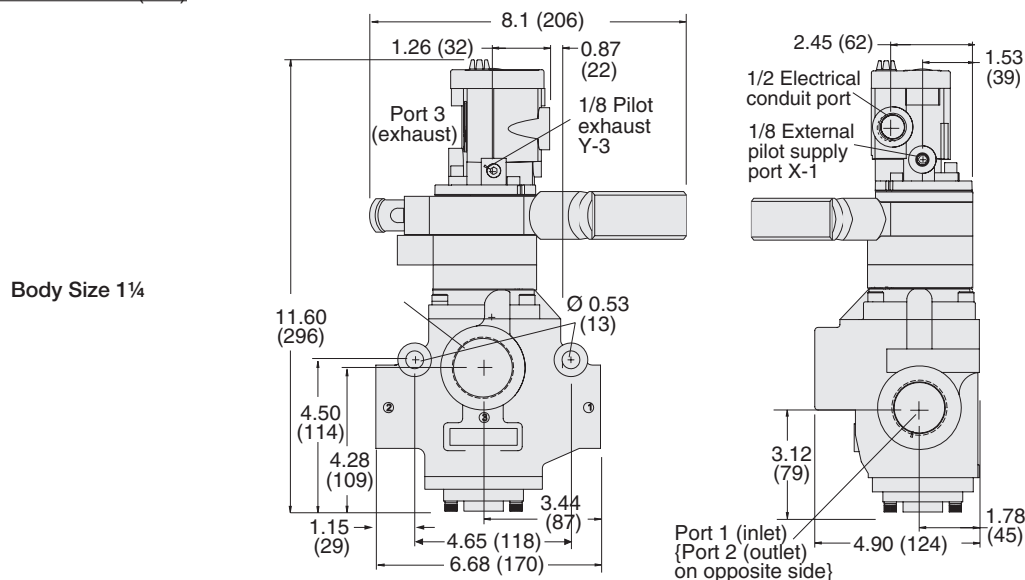

F1

ACCESSORIES & OPTIONS

Silencers



Indicator Light Kit

Kit Number		Indicator Light
24 volts DC	110-120 volts AC 50-60 Hz	
862K87-W	862K87-Z	



Port Size	Thread Type	Model Number*		Avg. C _v
		NPT Threads	BSPT Threads	
1/2	Male	5500A4003	D5500A4003	4.7
1	Male	5500A6003	D5500A6003	14.6
1 1/2	Female	5500A8001	D5500A8001	29.9

Pressure Range: 0 to 150 psig (0 to 10.3 bar) maximum.
Flow Media: Filtered air.

Multiple Lock-out Device

Model Number 356A30




VALVE OPERATION

F


L-O-X® Handle Open and Pilot Not Energized

Pilot air is blocked by the pilot. Any downstream pressure forces piston B (which slides on the valve stem) upward. This opens the exhaust port and vents the downstream line.




Full Pressure

When the pressure on piston A reaches approximately 50 percent of inlet pressure, it is forced downward and opens inlet poppet C. Full inlet pressure now flows freely to the outlet port.




L-O-X® Handle Open and Pilot Energized

Pilot air forces piston B downward to close the exhaust port. Pilot air also flows past the adjusting needle, opens the ball check and begins slowly to pressurize the outlet line. At the same time, pressure is building up on piston A.



L-O-X® Handle Closed

At any time the L-O-X® handle can be pushed inward, thereby closing off the flow of pilot air. Pilot air above pistons A and B is then vented to atmosphere. Piston A moves upward and closes inlet poppet C. Sliding piston B also moves upward to open the exhaust port and vents the downstream line.



IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com

F1.25



F

ROSS CONTROLS®



SENSING VALVES SV27 SERIES

www.rosscontrols.com

SENSING VALVES – KEY FEATURES

- Senses internal position & state
- Electrical feedback via DPST switch (Double-Pole Single-Throw)
- Directly operated safety-rated force-guided positive-break status switch (DPST)
- Poppet construction for near zero leakage & dirt tolerance
- A diagnostic coverage (DC) of 90% can be obtained by monitoring the safety switch status
- *Explosion proof solenoid pilot available, for more information consult ROSS*

VALVE TYPE/SERIES	DESCRIPTION		AVAILABLE INLET PORT SIZES										FUNCTIONS										Page		
	Spool & Sleeve	Poppet	1/8	1/4	3/8	1/2	3/4	1	1¼	1½	2	2½	2/2	3/2	3/4	4/2	5/2 Single	5/2 Double	5/3 Closed Center	5/3 Open Center	5/3 Pressure Center	Max Flow (Cv)		Solenoid Control	Pressure Controlled
SV27 Series																						29			F2.3 - F2.6
SV27 Series																						71			F2.4 - F2.7
SV27 Series with Lockout Valve																						32			F2.8 - F2.9
Air Entry Packages																								F2.10	

2-Way 2-Position Valves, Solenoid Pilot Controlled					
Port Size 1, 2	Body Size	Valve Model Number*	C _v 1-2	Weight lb (kg)	
1/2	3/4	SV27NC105407PSAA1A**	7.7	4.6 (2.1)	
3/4	3/4	SV27NC105507PSAA1A**	9.0	4.6 (2.1)	
1	3/4	SV27NC105607PSAA1A**	9.0	4.6 (2.1)	
1	1 1/4	SV27NC107607PSAA1A**	24	8.1 (3.7)	
1 1/4	1 1/4	SV27NC107707PSAA1A**	29	8.1 (3.7)	
1 1/2	1 1/4	SV27NC107807PSAA1A**	29	8.1 (3.7)	




* NPT port threads. For BSPP threads, replace "N" in the model number with a "D", e.g., SV27DC105407PSAA1A1A.


** Insert voltage code: "1A"=110-120 volts, 50/60 Hz; "1D"= 24 volts DC; .e.g., SV27NC105407PSAA1A1A. For other voltages, consult ROSS.

Valve Dimensions – inches (mm)

Body Size 3/4

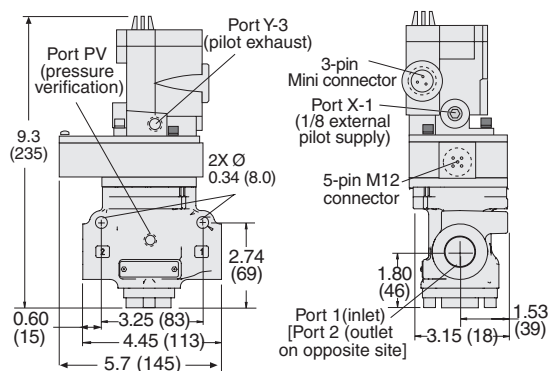


Body Size 1 1/4

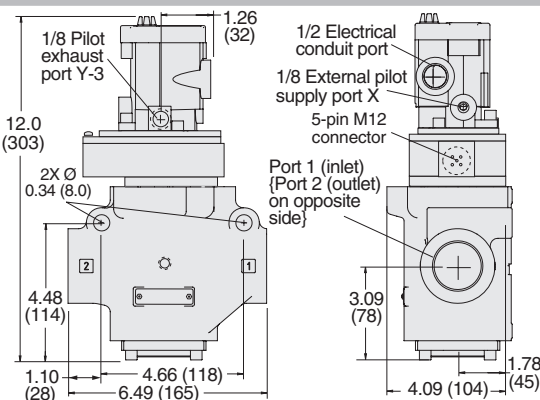

ACCESSORIES & OPTIONS

Pressure Switch Kit

Kit Number* 608A86



*Pressure switch closes on falling pressure of 5 psig (0.34 bar).

Pop-Up Indicator

Model Number** 988A30

** 1/8 NPT port threads.



Indicator Light Kit

Kit Number

24 volts DC	110-120 volts AC 50-60 Hz
862K87-W	862K87-Z

Manual Override Kits


FLUSH BUTTON

Locking Type	Kit Number
Non-Locking	790K87
Locking	792K87




EXTENDED BUTTON

Locking Type	Kit Number
Non-Locking	791K87



EXTENDED BUTTON with PALM

Locking Type	Kit Number
Non-Locking	984H87




Preassembled Wiring Kits

Kit Number*	Length meters (feet)
2239H77	4 (13.1)
2240H77	10 (32.8)


* Cable has one connector.

These kits include two cables with a cord grip on each cable. One cable has a 3-pin MINI connector for the solenoid, and one has a 5-pin M12 (Micro) connector for the sensing switch.

Solenoid Cable with 3-pin MINI Connector




Sensing Switch Cable with 5-pin M12 Connector



Integrated Double-Pole Single-Throw Switch (DPST) Switch States

Contact conditions during switch travel (0 to 6 mm).



For valves basic size 3/4 & 1-1/4, the DPST switch is actuated whenever the valve is not in the normal home position.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Solenoid Pilot: AC or DC power. Rated for continuous duty.

Standard Voltages: 24 volts DC; 110-120 volts AC, 50/60 Hz.

Power Consumption: 87 VA inrush, 30 VA holding on 50 or 60 Hz; 14 watts on DC.

Ambient Temperature: 40° to 120°F (4° to 50°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: 40 to 150 psig (2.8 to 10.3 bar).

Pilot Pressure: Must be equal to or greater than inlet pressure.

Switch Current/Voltage Max.: 2.5 A/120 volts AC.

Switch Current/Voltage Min.: 50 mA/24 volts DC.

NOTE: Electrical life of switch varies with conditions and voltage; rated in excess of 15 million cycles.

Functional Safety Data: Category 2 PL d; B10d:

Valve - 20,000,000, Switch - 2,000,000; PFHd: 2.35x10⁻⁷; MTTFd: 98.15 (n_{op}: 7360); DC (obtained by monitoring safety switch status): 3/2 valves - 99%, 2/2 and PO Check valves - 90%; ROSS recommends testing the switch function and sealing for load holding valves every 8 hours.

Vibration/Impact Resistance: Calculated to BS EN 60068-2-27.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.




Online Version
Rev. 05/16

www.rosscontrols.com

F2.3

3-Way 2-Position Valve, Solenoid Pilot Controlled

Port Size 1, 2	3	Body Size	Valve Model Number*	C _v		Weight lb (kg)
				1-2	2-3	
1/2	1	3/4	SV27NC305407PSAA1A**	6.3	9.2	4.5 (2.0)
3/4	1	3/4	SV27NC305507PSAA1A**	7.7	11	4.5 (2.0)
1	1	3/4	SV27NC305607PSAA1A**	8.0	12	4.5 (2.0)
1	1½	1¼	SV27NC307607PSAA1A**	23	34	7.8 (3.5)
1¼	1½	1¼	SV27NC307707PSAA1A**	30	32	7.8 (3.5)
1½	1½	1¼	SV27NC307807PSAA1A**	30	31	7.8 (3.5)
1½	2½	2	SV27NC309807PSAA1A**	68	70	18.1 (8.2)
2	2½	2	SV27NC309907PSAA1A**	70	70	18.1 (8.2)
2½	2½	2	SV27NC309957PSAA1A**	70	71	18.1 (8.2)




* NPT port threads. For BSPP threads, replace "N" in the model number with a "D", e.g., SV27DC305407PSAA1A1A1A.


** Insert voltage code: "1A"=110-120 volts, 50/60 Hz; "1D"= 24 volts DC; e.g., SV27NC305407PSAA1A1A1A. For other voltages, consult ROSS.

Valve Dimensions – inches (mm)


Body Size 3/4

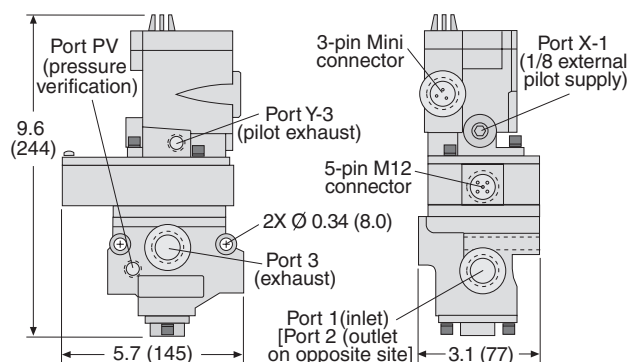

Body Size 1¼

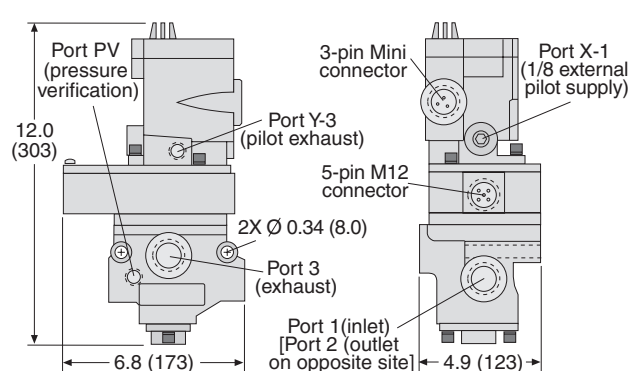

Body Size 2

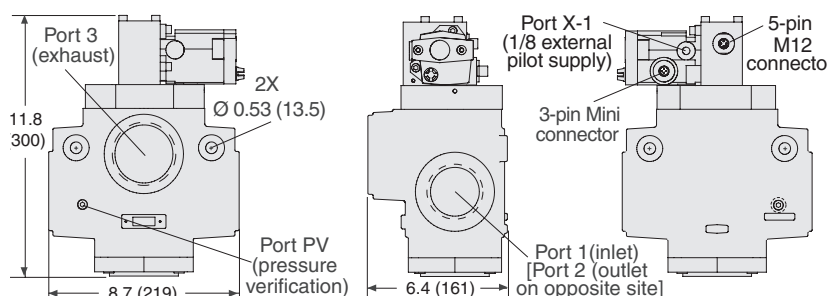

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Solenoid Pilot: AC or DC power. Rated for continuous duty.

Standard Voltages: 24 volts DC; 110-120 volts AC, 50/60 Hz.

Power Consumption: 87 VA inrush, 30 VA holding on 50 or 60 Hz; 14 watts on DC.

Ambient Temperature: 40° to 120°F (4° to 50°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: 40 to 150 psig (2.8 to 10.3 bar).

Pilot Pressure: Must be equal to or greater than inlet pressure.

Switch Current/Voltage Max.: 2.5 A/120 volts AC.

Switch Current/Voltage Min.: 50 mA/24 volts DC.

NOTE: Electrical life of switch varies with conditions and voltage; rated in excess of 15 million cycles.

Functional Safety Data: Category 2 PL d; B10d:

Valve - 20,000,000, Switch - 2,000,000; PFHd: 2.35×10^{-7} ; MTTFd: 98.15 (n_{op} : 7360); DC (obtained by monitoring safety switch status): 3/2 valves - 99%, 2/2 and PO Check valves - 90%; ROSS recommends testing the switch function and sealing for load holding valves every 8 hours.

Vibration/Impact Resistance: Calculated to BS EN 60068-2-27.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Silencers

Port Size	Thread Type	Model Number*		Avg. C _v
		NPT Threads	BSPT Threads	
1	Male	5500A6003	D5500A6003	14.6
1½	Female	5500A8001	D5500A8001	29.9
2½	Female	5500A9002	D5500A9002	103.7

Pressure Range: 0 to 150 psig (0 to 10.3 bar) maximum.
Flow Media: Filtered air.



Port size 1 thru 1½

Port size 2½

Pop-Up Indicator




Model Number** 988A30

** 1/8 NPT port threads.

Pressure Switch Kit

Kit Number* 608A86



*Pressure switch closes on falling pressure of 5 psig (0.34 bar).

Indicator Light Kit

Kit Number		Indicator Light
24 volts DC	110-120 volts AC 50-60 Hz	
862K87-W	862K87-Z	

Manual Overrides

FLUSH BUTTON		
Locking Type	Kit Number	
Non-Locking	790K87	
Locking	792K87	

EXTENDED BUTTON		
Locking Type	Kit Number	
Non-Locking	791K87	

EXTENDED BUTTON with PALM		
Locking Type	Kit Number	
Non-Locking	984H87	


Preassembled Wiring Kits

These kits include two cables with a cord grip on each cable. One cable has a 3-pin MINI connector for the solenoid, and one has a 5-pin M12 (Micro) connector for the sensing switch.


Kit Number*	Length meters (feet)
2239H77	4 (13.1)
2240H77	10 (32.8)

* Cable has one connector.


Solenoid Cable with 3-pin MINI Connector



Sensing Switch Cable with 5-pin M12 Connector for valves basic size 3/4 & 1¼




Sensing Switch Cable with 5-pin M12 Connector for valves basic size 2




Integrated Double-Pole Single-Throw Switch (DPST) Switch States
 Contact conditions during switch travel (0 to 6 mm).

For basic size 3/4 & 1-1/4



For basic size 2




For valves basic size 3/4 & 1-1/4, the DPST switch is actuated whenever the valve is not in the normal home position.
 For valves basic size 2, the DPST switch is only actuated whenever the valve is in the normal home position.



2-Way 2-Position Valves, Pressure Controlled


Port Size 1, 2	Body Size	Valve Model Number*	C _v 1-2	Weight lb (kg)
1/2	3/4	SV27NC105405ASAA	7.7	3.4 (1.6)
3/4	3/4	SV27NC105505ASAA	9.0	3.4 (1.6)
1	3/4	SV27NC105605ASAA	9.0	3.4 (1.6)
1	1 1/4	SV27NC107605ASAA	24	6.7 (3.0)
1 1/4	1 1/4	SV27NC107705ASAA	29	6.7 (3.0)
1 1/2	1 1/4	SV27NC107805ASAA	29	6.7 (3.0)




* NPT port threads. For BSPP threads, replace "N" in the model number with a "D", e.g., SV27ND105405ASAA.

Valve Dimensions – inches (mm)

Body Size 3/4

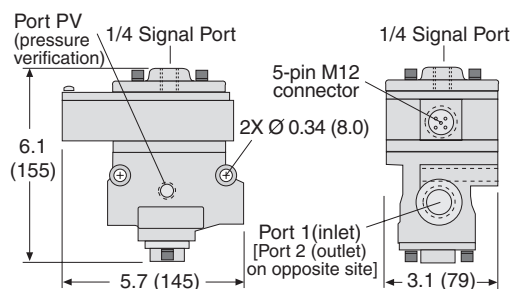

Body Size 1 1/4

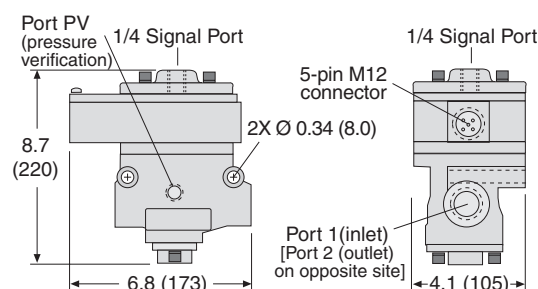


Not intended as a pressure trapping device; Please see Pilot Operated Check Sensing Valves, pages F4.13-F4.16.

ACCESSORIES & OPTIONS

Pressure Switch Kit

Kit Number* 608A86



*Pressure switch closes on falling pressure of 5 psig (0.34 bar).

Pop-Up Indicator



Model Number** 988A30

** 1/8 NPT port threads.

F


Preassembled Wiring Kits

Kit Number*	Length meters (feet)
2241H77	4 (13.1)
2242H77	10 (32.8)


* Cable has one connector.

These kits include one cable with a cord grip. Cable has a 5-pin M12 (Micro) connector for the sensing switch.

Sensing Switch Cable
with 5-pin M12
Connector

Integrated Double-Pole
Single-Throw Switch (DPST)
Switch States

Contact conditions during
switch travel (0 to 6 mm).



For valves basic size 3/4 & 1-1/4, the DPST switch is actuated whenever the valve is not in the normal home position.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Ambient Temperature: 40° to 120°F (4° to 50°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: 40 to 150 psig (2.8 to 10.3 bar).

Pilot Pressure: Must be equal to or greater than inlet pressure.

Switch Current/Voltage Max.: 2.5 A/120 volts AC.

Switch Current/Voltage Min.: 50 mA/24 volts DC.

NOTE: Electrical life of switch varies with conditions and voltage; rated in excess of 15 million cycles.

Functional Safety Data: Category 2 PL d; B10d:


Valve - 20,000,000, Switch - 2,000,000; PFHd: 2.35×10^{-7} ; MTTFd: 98.15 (n_{op} : 7360); DC (obtained by monitoring safety switch status): 3/2 valves - 99%, 2/2 and PO Check valves - 90%; ROSS recommends testing the switch function and sealing for load holding valves every 8 hours.

Vibration/Impact Resistance: Calculated to BS EN 60068-2-27.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.






3-Way 2-Position Valve, Pressure Controlled						
Port Size	1, 2	3	Body Size	Valve Model Number*	C _v	
					1-2	2-3
1/2	1	3/4		SV27NC305405ASAA	6.3	9.2
3/4	1	3/4		SV27NC305505ASAA	7.7	11
1	1	3/4		SV27NC305605ASAA	8.0	12
1	1½	1¼		SV27NC307605ASAA	23	34
1¼	1½	1¼		SV27NC307705ASAA	30	32
1½	1½	1¼		SV27NC307805ASAA	30	31
1½	2½	2		SV27NC309805ASAA	68	70
2	2½	2		SV27NC309905ASAA	70	70
2½	2½	2		SV27NC309955ASAA	70	71



* NPT port threads. For BSPP threads, replace "N" in the model number with a "D", e.g., SV27DC305405ASAA.

Valve Dimensions – inches (mm)

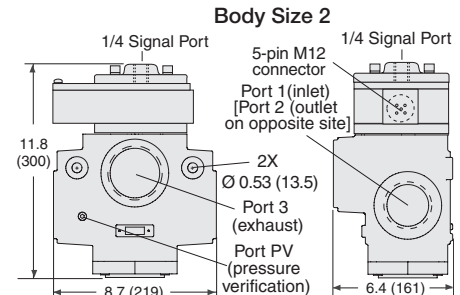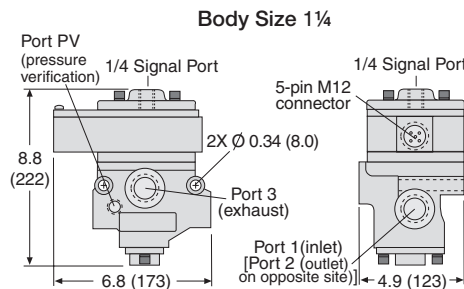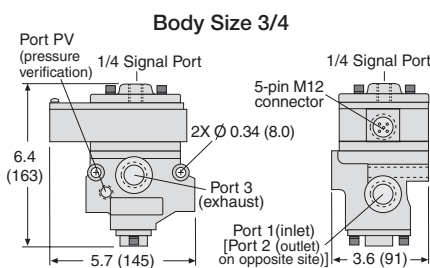

F2

ACCESSORIES & OPTIONS

Silencers

Port Size	Thread Type	Model Number*		Avg. C _v
		NPT Threads	BSPT Threads	
1	Male	5500A6003	D5500A6003	14.6
1½	Female	5500A8001	D5500A8001	29.9
2½	Female	5500A9002	D5500A9002	103.7

Pressure Range: 0 to 150 psig (0 to 10.3 bar) maximum. **Flow Media:** Filtered air.



Port size 1 & 1½



Port size 2½

Pop-Up Indicator



Model Number** 988A30

** 1/8 NPT port threads.

Pressure Switch Kit

Kit Number* 608A86



*Pressure switch closes on falling pressure of 5 psig (0.34 bar).

F


Preassembled Wiring Kits

Kit Number*	Length meters (feet)
2241H77	4 (13.1)
2242H77	10 (32.8)


* Cable has one connector.

These kits include one cable with a cord grip. Cable has a 5-pin M12 (Micro) connector for the sensing switch.

Sensing Switch Cable with 5-pin M12 Connector for valves basic size 3/4 & 1¼




Sensing Switch Cable with 5-pin M12 Connector for valves basic size 2



Integrated Double-Pole Single-Throw Switch (DPST) Switch States

Contact conditions during switch travel (0 to 6 mm).

For basic size 3/4 & 1-1/4



For basic size 2



For valves basic size 3/4 & 1-1/4, the DPST switch is actuated whenever the valve is not in the normal home position.

For valves basic size 2, the DPST switch is only actuated whenever the valve is in the normal home position.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Ambient Temperature: 40° to 120°F (4° to 50°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: 40 to 150 psig (2.8 to 10.3 bar).

Pilot Pressure: Must be equal to or greater than inlet pressure.

Switch Current/Voltage Max.: 2.5 A/120 volts AC.

Switch Current/Voltage Min.: 50 mA/24 volts DC.

NOTE: Electrical life of switch varies with conditions and voltage; rated in excess of 15 million cycles.

Functional Safety Data: Category 2 PL d; B10d:

Valve - 20,000,000, Switch - 2,000,000; PFHd: 2.35x10⁻⁷; MTTFd: 98.15 (n_{op}: 7360); DC (obtained by monitoring safety switch status): 3/2 valves - 99%, 2/2 and PO Check valves - 90%; ROSS recommends testing the switch function and sealing for load holding valves every 8 hours.

Vibration/Impact Resistance: Calculated to BS EN 60068-2-27.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.





Online Version
Rev. 05/16

www.rosscontrols.com

F2.7

3-Way 2-Position Valve, Solenoid Pilot Controlled


Port Size		Body Size	Valve Model Number*	C _v		Weight lb (kg)
1, 2	3			1-2	2-3	
1/2	1	3/4	SV27NC3L5407PSAA1A**	6.3	9.2	5.5 (2.5)
3/4	1	3/4	SV27NC3L5507PSAA1A**	7.7	11	5.5 (2.5)
1	1	3/4	SV27NC3L5607PSAA1A**	8.0	12	5.5 (2.5)
1	1½	1¼	SV27NC3L7607PSAA1A**	23	34	9.0 (4.0)
1¼	1½	1¼	SV27NC3L7707PSAA1A**	30	32	9.0 (4.0)
1½	1½	1¼	SV27NC3L7807PSAA1A**	30	32	9.0 (4.0)



* NPT port threads. For BSPP threads, replace "N" in the model number with a "D", e.g., SV27DC3L5407PSAA1A1A.

**Insert voltage code: "1A"=110-120 volts AC, 50/60 Hz; "1D" for 24 volts DC; e.g., SV27NC3L5407PSAA1A. For other voltages, consult ROSS.

Valve Dimensions – inches (mm)

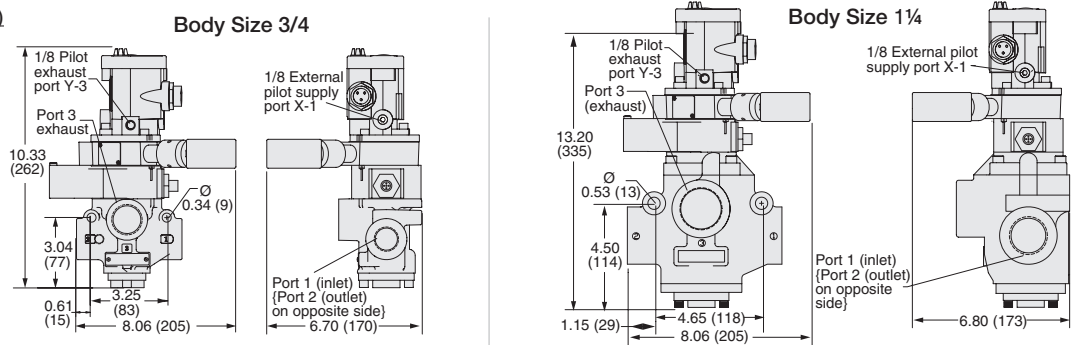

ACCESSORIES & OPTIONS

Silencers

Port size
1 & 1½



Port size
2½



Port Size	Thread Type	Model Number*		Avg. C _v
		NPT Threads	BSPT Threads	
1	Male	5500A6003	D5500A6003	14.6
1½	Female	5500A8001	D5500A8001	29.9
2½	Female	5500A9002	D5500A9002	103.7

Indicator Light Kit

Kit Number	
24 volts DC	110-120 volts AC 50-60 Hz
862K87-W	862K87-Z

Pop-Up Indicator



Model Number** 988A30

** 1/8 NPT port threads.

Multiple Lock-out Device



Model Number 356A30

Pressure Switch Kit

Kit Number* 608A86



*Pressure switch closes on falling pressure of 5 psig (0.34 bar).


Preassembled Wiring Kits

Kit Number*	Length meters (feet)
2239H77	4 (13.1)
2240H77	10 (32.8)


* Cable has one connector.

These kits include two cables with a cord grip on each cable. One cable has a 3-pin MINI connector for the solenoid, and one has a 5-pin M12 (Micro) connector for the sensing switch.

Solenoid Cable with 3-pin MINI Connector




Sensing Switch Cable with 5-pin M12 Connector



Integrated Double-Pole Single-Throw Switch (DPST) Switch States

Contact conditions during switch travel (0 to 6 mm).



For valves basic size 3/4 & 1-1/4, the DPST switch is actuated whenever the valve is not in the normal home position.

STANDARD SPECIFICATIONS (for valves on this page):


Construction: Poppet.
Mounting Type: In-Line.
Solenoid Pilot: AC or DC power. Rated for continuous duty.
Standard Voltages: 24 volts DC; 110-120 volts AC, 50/60 Hz.
Power Consumption: 87 VA inrush, 30 VA holding on 50 or 60 Hz; 14 watts on DC.
Ambient Temperature: 40° to 120°F (4° to 50°C).
Media Temperature: 40° to 175°F (4° to 80°C).
Flow Media: Filtered air.
Inlet Pressure: 40 to 150 psig (2.8 to 10.3 bar).
Pilot Pressure: Must be equal to or greater than inlet pressure.

Switch Current/Voltage Max.: 2.5 A/120 volts AC.
Switch Current/Voltage Min.: 50 mA/24 volts DC.
Manual Override: Flush; rubber, non-locking.
NOTE: Electrical life of switch varies with conditions and voltage; rated in excess of 15 million cycles.
Functional Safety Data: Category 2 PL d; B10d: Valve - 20,000,000, Switch - 2,000,000; PFHd: 2.35x10⁻⁷; MTTFd: 98.15 (n_{op}: 7360); DC (obtained by monitoring safety switch status): 3/2 valves - 99%, 2/2 and PO Check valves - 90%; ROSS recommends testing the switch function and sealing for load holding valves every 8 hours.
Vibration/Impact Resistance: Calculated to BS EN 60068-2-27.


NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.





3-Way 2-Position Valve, Pressure Controlled							
Port Size		Body Size	Valve Model Number*	C _v		Weight	
1, 2	3			1-2	2-3	lb (kg)	
1/2	1	3/4	SV27NC3L5405ASAA	6.3	9.2	4.3 (2.0)	
3/4	1	3/4	SV27NC3L5505ASAA	7.7	11	4.3 (2.0)	
1	1	3/4	SV27NC3L5605ASAA	8.0	12	4.3 (2.0)	
1	1½	1¼	SV27NC3L7605ASAA	23	34	7.4 (3.4)	
1¼	1½	1¼	SV27NC3L7705ASAA	30	32	7.4 (3.4)	
1½	1½	1¼	SV27NC3L7805ASAA	30	32	7.4 (3.4)	

* NPT port threads. For BSP threads, replace "N" in the model number with a "D", e.g., SV27DC3L5405ASAA.



Valve Dimensions – inches (mm)

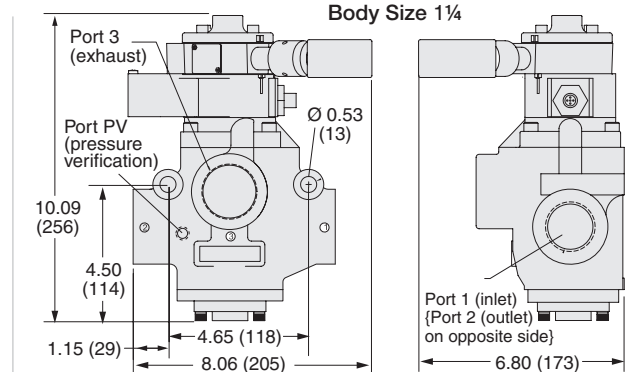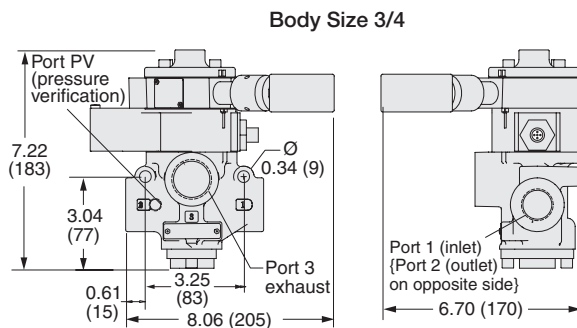

F2

ACCESSORIES & OPTIONS


Silencers



Port Size	Thread Type	Model Number*		Avg. C _v
		NPT Threads	BSP Threads	
1	Male	5500A6003	D5500A6003	14.6
1½	Female	5500A8001	D5500A8001	29.9

Pressure Range: 0 to 150 psig (0 to 10.3 bar) maximum. **Flow Media:** Filtered air.

Pop-Up Indicator



Model Number**	988A30
** 1/8 NPT port threads.	

Multiple Lock-out Device



Model Number	356A30
--------------	--------

Pressure Switch Kit

Kit Number*	608A86
-------------	--------



* Pressure switch closes on falling pressure of 5 psig (0.34 bar).


Preassembled Wiring Kits

Kit Number*	Length meters (feet)
2241H77	4 (13.1)
2242H77	10 (32.8)

* Cable has one connector.

These kits include one cable with a cord grip. Cable has a 5-pin M12 (Micro) connector for the sensing switch.


Sensing Switch Cable with 5-pin M12 Connector



F

Integrated Double-Pole Single-Throw Switch (DPST) Switch States

Contact conditions during switch travel (0 to 6 mm).



For valves basic size 3/4 & 1-1/4, the DPST switch is actuated whenever the valve is not in the normal home position.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.
Mounting Type: In-Line.
Ambient Temperature: 40° to 120°F (4° to 50°C).
Media Temperature: 40° to 175°F (4° to 80°C).
Flow Media: Filtered air.
Inlet Pressure: 40 to 150 psig (2.8 to 10.3 bar).
Pilot Pressure: Must be equal to or greater than inlet pressure.
Switch Current/Voltage Max.: 2.5 A/120 volts AC.
Switch Current/Voltage Min.: 50 mA/24 volts DC.

NOTE: Electrical life of switch varies with conditions and voltage; rated in excess of 15 million cycles.

Functional Safety Data: Category 2 PL d; B10d:
 Valve - 20,000,000, Switch - 2,000,000; PFHd: 2.35×10^{-7} ; MTTFd: 98.15 (n_{op} : 7360); DC (obtained by monitoring safety switch status): 3/2 valves - 99%, 2/2 and PO Check valves - 90%; ROSS recommends testing the switch function and sealing for load holding valves every 8 hours.
Vibration/Impact Resistance: Calculated to BS EN 60068-2-27.

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com

F2.9

SV27 Sensing Valves, Manual Lockout L-O-X® Valves with Integrated Filter/Regulator




Pre-engineered panel-mounted design with air entry via filter and regulator "FR", or filter, regulator, and lubricator "FRL".

Includes 3/2 Normally Closed Sensing Valve which senses poppet position and state.

Electrical feedback via DPST switch (Double-Pole Single-Throw).

Applications include Air Dump and Trapped-Pressure Release.

Mounting plate included.

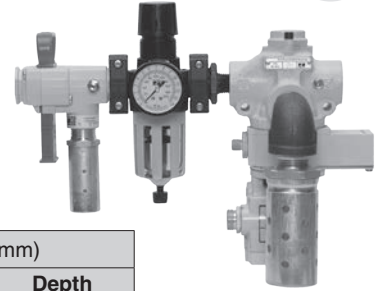

F2

Air Entry Combination	Port Size		Model Number*	Air Entry Type	C _v		Dimensions inches (mm)		
	1, 2	3			1-2	2-3	Length	Width	Depth
Cat-2 with SV27	1/2	1	RC208-09**	FR	6.3	9.2	14.80 (374.9)	11.00 (279.0)	6.60 (167.7)
Cat-2 with SV27	1/2	1	RC208L-09**	FRL	6.3	9.2	14.80 (374.9)	11.00 (279.0)	6.60 (167.7)

* NPT pressure port threads.

** Specify voltage when ordering. Insert voltage code: "W" = 24 volts DC; "Z" = 110-120 volts AC, 50/60 Hz; e.g., RC208-09W. M12 connectors available, consult ROSS.

Standard Air Entry Packages supplied with metal bowl and manual drain. For automatic drain insert an "A" before the dash (-) in the model number, e.g., RC208A-09.

Custom designs available, consult ROSS.

Explosion proof solenoid pilot available, for more information consult ROSS.

SV27 Sensing Valves, Manual Lockout L-O-X® Valves with Filter and Regulator




Pre-engineered panel-mounted design with air entry via filter and regulator "FR", or filter, regulator, and lubricator "FRL"

Includes 3/2 Normally Closed Sensing Valve .

Applications include Air Dump and Trapped-Pressure Release.

Mounting plate included.

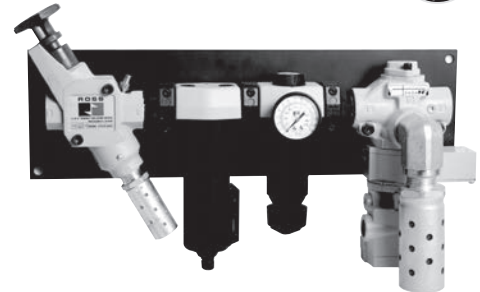

F

Air Entry Combination	Port Size		Model Number*	Air Entry Type	C _v		Dimensions inches (mm)		
	1, 2	3			1-2	2-3	Length	Width	Depth
Cat-2 with SV27	1/2	1/2	RC208-06**	FR	6.3	9.2	23.0 (585)	12.8 (326)	6.7 (171)
Cat-2 with SV27	1/2	1/2	RC208L-06**	FRL	7.7	11	23.0 (585)	12.8 (326)	6.7 (171)
Cat-2 with SV27	3/4	3/4	RC212-06**	FR	8.0	12	28.0 (712)	17.0 (432)	9.5 (242)
Cat-2 with SV27	3/4	3/4	RC212L-06**	FR	6.3	9.2	23.0 (585)	12.8 (326)	6.7 (171)
Cat-2 with SV27	1	1	RC216-06**	FRL	7.7	11	23.0 (585)	12.8 (326)	6.7 (171)
Cat-2 with SV27	1	1	RC216L-06**	FRL	8.0	12	31.8 (808)	17.0 (432)	9.5 (242)

* NPT pressure port threads.

** Specify voltage when ordering. Insert voltage code: "W" = 24 volts DC; "Z" = 110-120 volts AC, 50/60 Hz; e.g., RC208-06W. M12 connectors available, consult ROSS.

Standard Air Entry Packages supplied with metal bowl and manual drain. For automatic drain insert an "A" before the dash (-) in the model number, e.g., RC208A-06.



Custom designs available, consult ROSS.

Explosion proof solenoid pilot available, for more information consult ROSS.

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



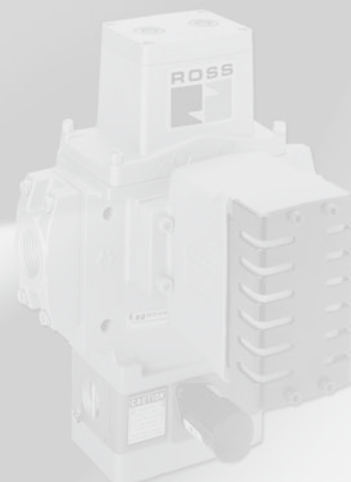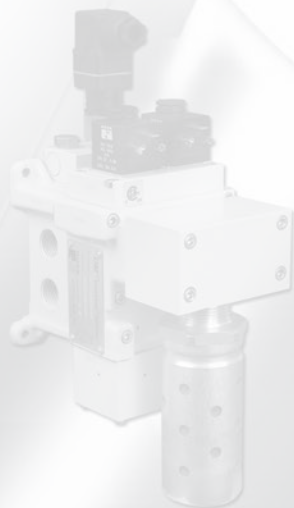

F2

F



www.rosscontrols.com





F

ROSS CONTROLS®



**DOUBLE VALVES FOR CONTROL RELIABLE
ENERGY ISOLATION
DM¹ AND DM²® SERIES**

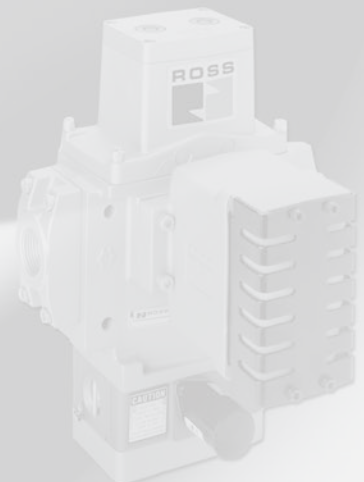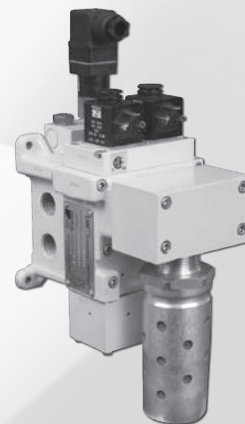

www.rosscontrols.com


CONTROL RELIABLE DOUBLE VALVES DM SERIES – KEY FEATURES

- Rapid response time to minimize stopping time
- Status Indicator switch for valve condition (ready to run) feedback
- Highly contaminant tolerant poppet construction
- Explosion proof solenoid pilot available, for more information consult ROSS

This valves are not designed for controlling clutch/brake mechanisms on mechanical power presses, see DM2[®] series D valves for mechanical power press applications.




Control Reliable Double Valves
with Dynamic Monitoring




Control Reliable Double Valves
With Dynamic Monitoring & Memory



Control Reliable Modular Double Valves
with Integrated Soft Start



Air Entry Packages
Control Reliable Energy Isolation
Lockout L-O-X[®] Valves
with Integrated Filter/Regulator

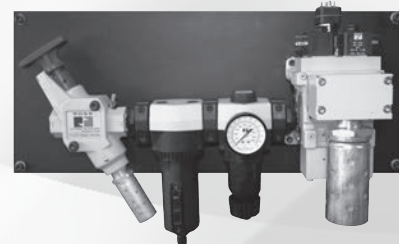

VALVE TYPE/SERIES	Category	AVAILABLE PORT SIZES						MAX. FLOW Cv						RESET			Page
		1/4	3/8	1/2	3/4	1	1½	Port Size						Integrated Soft Start	Remote	Solenoid	
								1/4	3/8	1/2	3/4	1	1½				
DM ¹ E	4							2.43	2.43								F3.3 - F3.4
DM ¹ C	4									10	13	13					F3.5 - F3.7
DM ¹ Series E & C Preassembled Wiring Kits																	F3.8
DM ²⁰ E	4							2.43	2.43								F3.9 - F3.10
DM ²⁰ Series C Preassembled Wiring Kits																	F3.11
DM ²⁰ C	4									10	13	20	64				F3.12 - F3.14
DM ²⁰ Series C Preassembled Wiring Kits																	F3.15
M DM ²⁰	4										8.4						F3.16 - F3.18
Air Entry Packages																	F3.19 - F3.20

Control Reliable Double Valves with Dynamic Monitoring

DM¹ Series E Air Dump / Release

Dynamic Monitoring: Monitoring and air flow control functions are integrated into two identical valve elements for CAT 4 applications. The valve exhausts downstream air if asynchronous movement of valve elements occurs during actuation or de-actuation, resulting in a residual outlet pressure of less than 1% of supply. If the abnormality clears itself, the valve will return to the ready-to-run state; there is no memory of the abnormal behavior, as in the ROSS DM² Series E and DM² Series C products that require an intentional reset following lockout.


Basic 3/2 Normally Closed Valve Function: Dirt tolerant, wear compensating poppet design for quick response and high flow capacity. PTFE back-up rings on pistons to enhance valve endurance – operates with or without inline lubrication.

Ready-to-run: If an abnormality clears itself upon the removal of electricity to both solenoids, it will be ready-to-run again. It does not remember the abnormality and stay in a locked-out state until intentionally reset. Therefore, cumulative abnormalities may go undetected.

Status Indicator: Includes a pressure switch with both normally open (NO) and normally closed (NC) contacts to provide status feedback to the control system indicating whether the valve is in the “ready-to-run” condition or has experienced abnormal function. This indicator only reports status, it is not part of a lockout function.

Silencers: All models include high flow, clog resistant silencers.

Mounting: Inline mounted with BSPP or NPT pipe threads. Inlet and outlet ports on both sides provide for flexible piping (plugs for unused ports included).



ISO 13849-1:2006
Category 4
PL e applications



HOW TO ORDER

(Choose your options (in red) to configure your valve model number.)


DM1E	N	A	2	0	A	3	1	
Thread	Revision Level		Basic Size		Automatic Reset Type		Status Indicator	
BSPP D							Yes 1 No X	
NPT N								
Base Port Size								
2 1/4 inlet – 1/4 outlet 0 3/8 inlet – 3/8 outlet 1 Exhaust port size 1/2"								
Voltage*								
24 volts DC A 110 volts AC, 50 Hz 120 volts AC, 50/60 Hz B								
* For other voltages consult ROSS.								

Connection Type	
DIN 43650 Form A*	Blank
(connector not included)	
M12 (connector included)	005
*See options for connectors or wiring kits.	

Inlet Port Size	Cv		Weight lb (Kg)
	1-2	2-3	
1/4	1.3	2.4	5.0 (2.27)
3/8	2.2	2.4	5.0 (2.27)

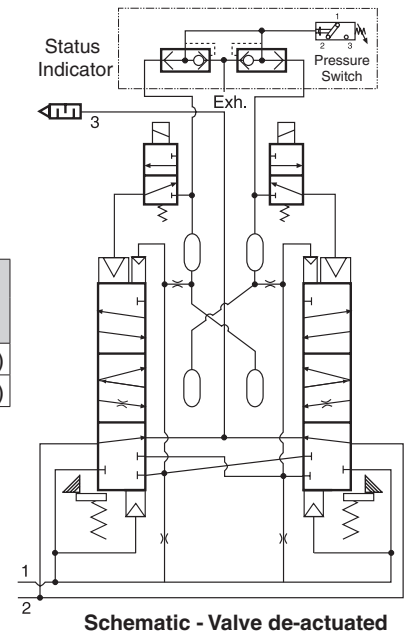

Valve Dimensions – inches (mm)

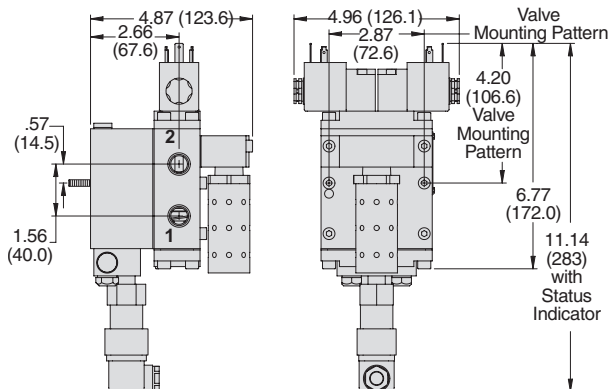

Explosion proof solenoid pilot available, for more information consult ROSS.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Dual poppet.

Mounting Type: Line mounted.

Pilot Solenoid: According to VDE 0580. Enclosure rating according to DIN 400 50 IP 65. Connector socket according to DIN 43650 Form A. Three solenoids, rated for continuous duty.

Standard Voltages/Pilot Solenoids Power Consumption (each solenoid): 24 volts DC; 110 volts AC, 50 Hz; 120 volts AC, 50/60 Hz. 5.8 watts nominal on AC and DC; 6.5 watts maximum on AC and DC.

Enclosure Rating: IP65, IEC 60529.

Electrical Connection: DIN 43650 or M12 Micro-DC.

Ambient Temperature: 15° to 122°F (-10° to 50°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered, lubricated or unlubricated air (mineral oils according to DIN 51519, viscosity classes 32-46).

Inlet Pressure: 30 to 120 psig (2 to 8.3 bar).

Pressure Switch (Status Indicator) Rating:

Contacts - 5 amps at 250 volts AC, or 5 amps at 30 volts DC.

Monitoring: Dynamically, cyclically, internally during each actuating and de-actuating movement.

Mounting orientation: Preferably horizontally (valve on top of base) or vertically with pilot solenoids on top.

Functional Safety Data: Category 4 PL e; B10d: 20,000,000; PFHd: 4.29x10⁻⁸; MTTFd: 100 (n_{op}: 662400).

Certifications: CE Marked for applicable directives, BG, CSA/UL, TSSA for appropriately tested valves.

Vibration/Impact Resistance: Tested to BS EN 60068-2-27.

This valve is not designed for controlling clutch/brake mechanisms on mechanical power presses, see DM² series D for mechanical power press applications.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16


www.rosscontrols.com

F3.3


Control Reliable Double Valves with Dynamic Monitoring

DM¹ Series E Valve Operation & Options


Valve de-actuated (ready-to-run): The flow of inlet air pressure into the crossover passages from the inlet chamber is restricted by orifices that allow air pressure to bypass the lower inlet poppets. Flow is sufficient to quickly pressurize the pilot supply/timing chambers on both sides A and B. The upper inlet poppets prevent air flow from the crossover passages into the outlet chamber. Air pressure acting on the inlet poppets and return pistons securely hold the valve elements in the de-actuated position. (Internal air passages shown out of the valve body for clarity.)



Valve actuated: Energizing the pilot solenoids simultaneously applies pressure to both pistons, forcing the internal parts to move to their actuated position, where inlet air flow to outlet is open and both exhaust poppets are closed. The outlet is then quickly pressurized, and pressure in the inlet, crossovers, outlet, and timing chambers are quickly equalized. De-energizing the main solenoids causes the valve elements to return to the ready-to-run (de-actuated) position.




Asynchronous Operation: If the valve elements operate in a sufficiently asynchronous manner on ACTUATION, the valve will shift into a position where one crossover and its related timing chambers will be exhausted, and the other crossover and its related timing chambers will be pressurized. In the illustration, side B is in the de-actuated position, but has no pilot air available to actuate with and has full pressure on its upper and lower inlet poppets and return piston to hold it in place. Inlet air flow on side B into its crossover is restricted and flows through the open upper inlet poppet on side A, through the outlet into the exhaust port, and from the exhaust port to atmosphere. Residual pressure in the outlet is less than 1% of inlet pressure. Once the main solenoids are de-energized, actuating pressure is removed from the top of the main pistons and then the lower inlet poppet return spring along with inlet air pressure acting on the side A return piston will push side A back into the de-actuated position. Inlet air pressurizes the crossovers and volume chambers. Pressure in the crossovers helps hold the upper inlet poppets on seat. The valve will then be in the ready-to-run position. On the next attempt to actuate normally, if side B is still unable to actuate synchronously with side A, the same sequence of events described above will occur again.



Valve in restricted outlet to exhaust state

WARNING: If asynchronous operation occurs while DE-ACTUATING, the pilot supply/timing chambers on one side will still be exhausted as described above. However, this could be a temporary situation because the cause of the asynchronous operation may be able to correct itself allowing the stuck or slow acting side of the valve to eventually move back into the de-actuated position. Once the slow or stuck side has de-actuated, the pilot supply/timing chambers that were exhausted will then repressurize. If an external monitoring system is only checking the status indicator periodically this fault signal could be missed. The machine's safety system must be designed to ensure that this does not cause a hazardous situation.

Status Indicator: The status indicator pressure switch will actuate when the main valve is operating normally, and will de-actuate when the main valve operation is sufficiently asynchronous or inlet pressure is removed. This device is not part of the valve lockout function, but, rather, only reports the status of the main valve.



Status indicator in normal ready-to-run position

OPTIONS

Electrical Connectors	Electrical Connector Form	Electrical Connector Type	Cord Length meters (feet)	Cord Diameter	Electrical Connector Model Number		
					Without Light	24 Volts DC	120 Volts AC
	DIN 43650 Form A	Prewired Connector (18 gauge)	2 (6½)	6-mm	721K77	720K77-W	720K77-Z
	DIN 43650 Form A	Prewired Connector (18 gauge)	2 (6½)	10-mm	371K77	383K77-W	383K77-Z
	DIN 43650 Form A	Connector for threaded conduit (1/2 inch electrical conduit fittings)	—	—	723K77	724K77-W	724K77-Z
	DIN 43650 Form A	Connector Only	—	—	937K87	936K87-W	936K87-Z

CAUTIONS: Do not use electrical connectors with surge suppressors, as this may increase valve response time when de-actuating the solenoids.


Downstream Pressure Monitoring

Pressure Switches		
Connection Type	Model Number	Port Threads
DIN 43650 Form A	586A86	1/8 NPT
M12 Micro-DC	1153A30	1/8 NPT


*Pressure switch closes on falling pressure of 5 psig (0.34 bar).



DIN Connector Pinout




M12 Connector Pinout



Redundant Downstream Feedback Switch	Model Number	Port Threads
	RC26-13	3/8 NPT

- May be installed downstream on all double valves
- Provides a redundant means to verify the release of downstream pressure to next obstruction
- Factory preset, 5 psi (0.3 bar) - falling




High-Flow, High Reduction Silencer Kits

Port Size	Kit Number*		Avg. C _v	Dimensions inches (mm)			
	NPT Threads	BSP Threads		A	B (NPT)	B (BSP)	C
2	2323H77	2328H77	256 (121)	4.96 (126.1)	14.24 (361.7)	16.05 (407.7)	5.68 (144.3)

* Kits include all plumbing required for installation. **Pressure Range:** 125 psig (8.6 bar) maximum.

Designed to improve equipment performance and reduce the Exponentially Perceived Noise (EPNdB) in the 35–40 dB range.

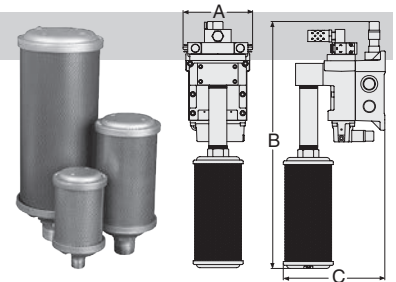

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Control Reliable Double Valves with Dynamic Monitoring

DM¹ Series C Air Dump / Release

Dynamic Monitoring: Monitoring and air flow control functions are integrated into two identical valve elements for CAT 4 applications. The valve exhausts downstream air if asynchronous movement of valve elements occurs during actuation or de-actuation, resulting in a residual outlet pressure of less than 1% of supply. If the abnormality clears itself, the valve will return to the ready-to-run state; there is no memory of the abnormal behavior, as in the ROSS DM²⁰ Series E and DM²⁰ Series C products that require an intentional reset following lockout.

Basic 3/2 Normally Closed Valve Function: Dirt tolerant, wear compensating poppet design for quick response and high flow capacity. PTFE back-up rings on pistons to enhance valve endurance – operates with or without inline lubrication.

Ready-to-run: If an abnormality clears itself upon the removal of electricity to both solenoids, it will be ready-to-run again. It does not remember the abnormality and stay in a locked-out state until intentionally reset. Therefore, cumulative abnormalities may go undetected.

Status Indicator: Includes a pressure switch with both normally open (NO) and normally closed (NC) contacts to provide status feedback to the control system indicating whether the valve is in the “ready-to-run” condition or has experienced abnormal function. MUST be integrated into machine controls in order to prevent run signal until fault is cleared in valve. This indicator only reports status, it is not part of a lockout function.

Silencers: All models include high flow, clog resistant silencers.

Mounting: Base mounted – with BSPP or NPT pipe threads. Inlet and outlet ports on both sides provide for flexible piping (plugs for unused ports included). Captive valve-to-base mounting screws.



(Certification pending)




(Certification pending)



(Certification pending)


ISO 13849-1:2006
Category 4 PL e
applications



HOW TO ORDER

(Choose your options (in red) to configure your valve model number.)

DM1C	N	A	4	2	A	3	1	
Thread	Revision Level	Basic Size	Base Port Size		Automatic Reset Type	Status Indicator		
BSPP D		4 4	4 1/2 inlet – 1/2 outlet 2			Yes 1		
NPT N		8 5	3/4 inlet – 3/4 outlet 4			No X		
			8 1 inlet – 1 outlet 5					
					Voltage*			
					24 volts DC A			
					110 volts AC, 50 Hz			
					120 volts AC, 50/60 Hz B			
					* For other voltages consult ROSS.			
					Connection Type			
					DIN 43650 Form A* Blank			
					(connector not included)			
					M12 (connector included) 005			
					*See options for connectors or wiring kits.			



Simplified Schematic

Valve Basic Size	C _v		Weight lb (Kg)
	1-2	2-3	
4	3	10	8.4 (3.7)
8	4.4	13	8.4 (3.7)

Explosion proof solenoid pilot available for basic size 4 valves, for more information consult ROSS.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Dual poppet.

Mounting Type: Base mounted.

Pilot Solenoids: According to VDE 0580. Enclosure rating according to DIN 400 50 IP 65. Connector socket according to DIN 43650 Form A. Three solenoids, rated for continuous duty.

Standard Voltages/Pilot Solenoids Power Consumption (each solenoid):

Basic Size 4:

24 volts DC; 110 volts AC, 50 Hz; 120 volts AC, 50/60 Hz.

5.8 watts nominal on AC and DC; 6.5 watts maximum on AC and DC.

Basic Size 8:

15 watts on DC; 36 VA inrush and 24.6 VA holding on AC.

Enclosure Rating: IP65, IEC 60529.

Electrical Connection: DIN 43650 or M12 Micro-DC.

Ambient Temperature: 15° to 122°F (-10° to 50°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered, lubricated or unlubricated (mineral oils according to DIN 51519, viscosity classes 32-46).

Inlet Pressure: 30 to 120 psig (2 to 8.3 bar).

Pressure Switch (Status Indicator) Rating: Contacts - 5 amps at 250 volts AC, or 5 amps at 30 volts DC.

Monitoring: Dynamically, cyclically, internally during each actuating and de-actuating movement.

Mounting orientation: Preferably horizontally (valve on top of base) or vertically with pilot solenoids on top.

Product data for Sistema Library users, pending.

This valve is not designed for controlling clutch/brake mechanisms on mechanical power presses, see DM2⁰ series D for mechanical power press applications.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.




Online Version
Rev. 05/16

www.rosscontrols.com


F3.5

Schematic - Valve de-actuated

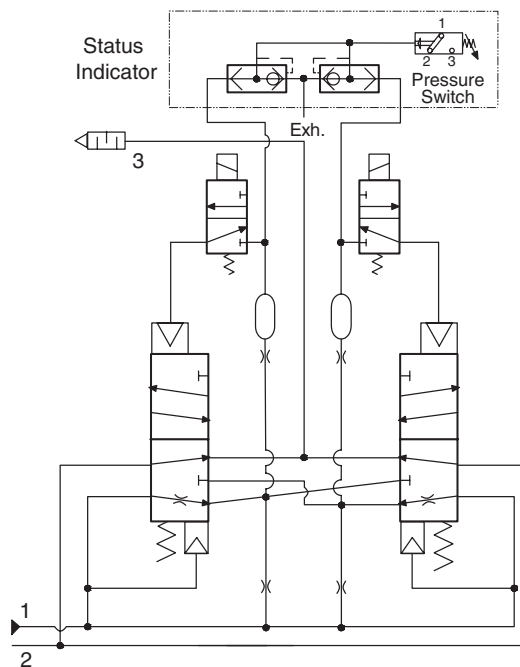


Valve Dimensions – inches (mm)

Basic Size 4

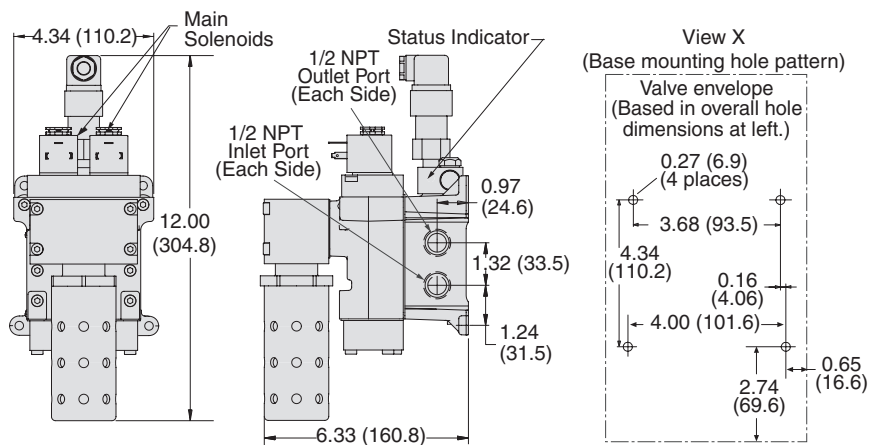

Basic Size 8

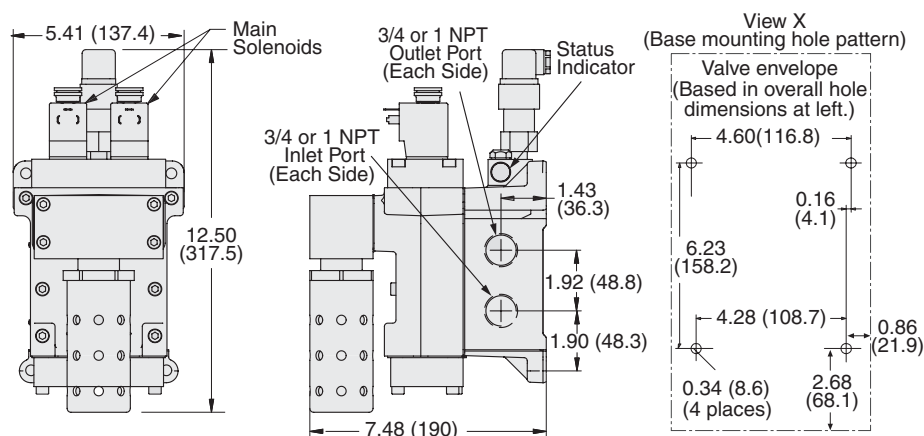


IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.


Control Reliable Double Valves with Dynamic Monitoring

DM¹ Series C Valve Operation & Options

Valve de-actuated (ready-to-run): The flow of inlet air pressure into the crossover passages from the inlet chamber is restricted by orifices that allow air pressure to bypass the lower inlet poppets. Flow is sufficient to quickly pressurize the pilot supply/timing chambers on both sides A and B. The upper inlet poppets prevent air flow from the crossover passages into the outlet chamber. Air pressure acting on the inlet poppets and return pistons securely hold the valve elements in the de-actuated position. (Internal air passages shown out of the valve body for clarity.)




Valve actuated: Energizing the pilot solenoids simultaneously applies pressure to both pistons, forcing the internal parts to move to their actuated position, where inlet air flow to outlet is open and both exhaust poppets are closed. The outlet is then quickly pressurized, and pressure in the inlet, crossovers, outlet, and timing chambers are quickly equalized. De-energizing the main solenoids causes the valve elements to return to the ready-to-run (de-actuated) position.




Asynchronous Operation: If the valve elements operate in a sufficiently asynchronous manner on ACTUATION, the valve will shift into a position where one crossover and its related timing chambers will be exhausted, and the other crossover and its related timing chambers will be pressurized.


In the illustration, side B is in the de-actuated position, but has no pilot air available to actuate with and has full pressure on its upper and lower inlet poppets and return piston to hold it in place. Inlet air flow on side B into its crossover is restricted and flows through the open upper inlet poppet on side A, through the outlet into the exhaust port, and from the exhaust port to atmosphere. Residual pressure in the outlet is less than 1% of inlet pressure. Once the main solenoids are de-energized, actuating pressure is removed from the top of the main pistons and then the lower inlet poppet return spring along with inlet air pressure acting on the side A return piston will push side A back into the de-actuated position. Inlet air pressurizes the crossovers and volume chambers. Pressure in the crossovers helps hold the upper inlet poppets on seat. The valve will then be in the ready-to-run position. On the next attempt to actuate normally, if side B is still unable to actuate synchronously with side A, the same sequence of events described above will occur again.



WARNING: If asynchronous operation occurs while DE-ACTUATING, the pilot supply/timing chambers on one side will still be exhausted as described above. However, this could be a temporary situation because the cause of the asynchronous operation may be able to correct itself allowing the stuck or slow acting side of the valve to eventually move back into the de-actuated position. Once the slow or stuck side has de-actuated, the pilot supply/timing chambers that were exhausted will then repressurize. If an external monitoring system is only checking the status indicator periodically this fault signal could be missed. The machine's safety system must be designed to ensure that this does not cause a hazardous situation.



Status Indicator: The status indicator pressure switch will actuate when the main valve is operating normally, and will de-actuate when the main valve operation is sufficiently asynchronous or inlet pressure is removed. This device is not part of the valve lockout function, but, rather, only reports the status of the main valve.



F3

OPTIONS

Electrical Connectors	Electrical Connector Form	Electrical Connector Type	Cord Length meters (feet)	Cord Diameter	Electrical Connector Model Number		
					Without Light	Lighted Connector	
						24 Volts DC	120 Volts AC
	DIN 43650 Form A	Prewired Connector (18 gauge)	2 (6½)	6-mm	721K77	720K77-W	720K77-Z
	DIN 43650 Form A	Prewired Connector (18 gauge)	2 (6½)	10-mm	371K77	383K77-W	383K77-Z
	DIN 43650 Form A	Connector for threaded conduit (1/2 inch electrical conduit fittings)	—	—	723K77	724K77-W	724K77-Z
	DIN 43650 Form A	Connector Only	—	—	937K87	936K87-W	936K87-Z


CAUTIONS: Do not use electrical connectors with surge suppressors, as this may increase valve response time when de-actuating the solenoids.

F


Downstream Pressure Monitoring

Pressure Switches		
Connection Type	Model Number	Port Threads
DIN 43650 Form A	586A86	1/8 NPT
M12 Micro-DC	1153A30	1/8 NPT


*Pressure switch closes on falling pressure of 5 psig (0.34 bar).



DIN Connector Pinout




M12 Connector Pinout



Redundant Downstream Feedback Switch	Model Number	Port Threads
	RC26-13	3/8 NPT


- May be installed downstream on all double valves
- Provides a redundant means to verify the release of downstream pressure to next obstruction
- Factory preset, 5 psi (0.3 bar) - falling



High-Flow, High Reduction Silencer Kits

Port Size	Kit Number*		Avg. C _v	Dimensions inches (mm)			
	NPT threads	BSPP threads		A	B (NPT)	B (BSPP)	C
4	2324H77	2329H77	800 (378)	4.34 (110.2)	19.06 (484.1)	21.40 (543.6)	7.27 (184.7)
8	2325H77	2329H77	800 (378)	5.41 (137.4)	21.18 (538.0)	23.52 (597.4)	8.41 (213.6)

* Kits include all plumbing required for installation. **Pressure Range:** 125 psig (8.6 bar) maximum.

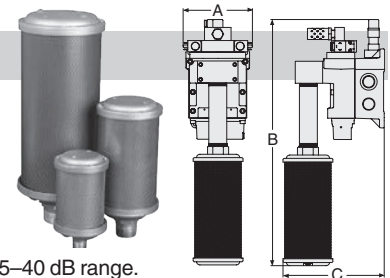

Designed to improve equipment performance and reduce the Exponentially Perceived Noise (EPNdB) in the 35–40 dB range.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com

F3.7

Control Reliable Double Valves with Dynamic Monitoring

DM¹ Series E & C Preassembled Wiring Kits


These kits include 2 cables with either DIN or M12 connectors for the solenoids. All cables include cord grips.

Kit Number	Solenoid Connector Type	Length meters (feet)
2243H77	DIN 43650 Form A	5 (16.4)
2244H77	DIN 43650 Form A	10 (32.8)
2245H77	M12 Micro-DC	5 (16.4)
2246H77	M12 Micro-DC	10 (32.8)

Status Indicator kit ordered separately.

Status Indicator Kits	Kit Number	Length meters (feet)
	2247H77	5 (16.4)
	2248H77	10 (32.8)

Status Indicator kits include one cable with DIN connector and a cord grip.

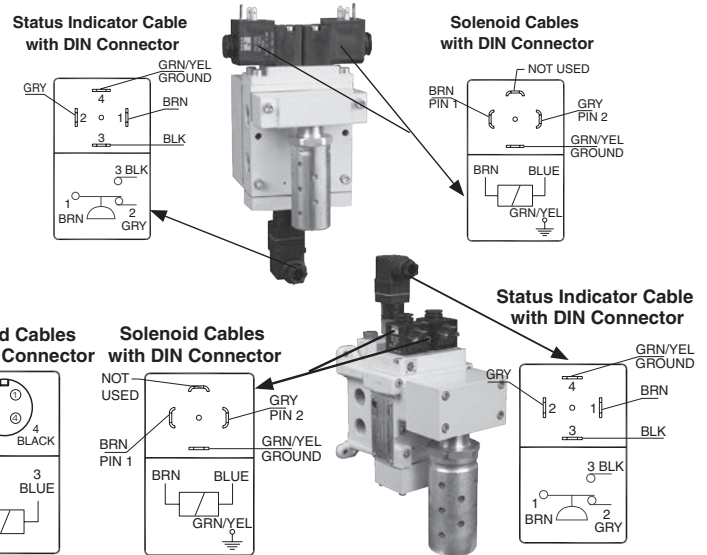


F3



Wiring Kits with J-Box

Kit Number*	Connector Types	Length meters (feet)
2249H77	M12 - DIN	1 (3.3)
2250H77	M12 - M12	1 (3.3)

*24 volts DC only.



A J-Box is a junction box with a 10-pin MINI connector for connecting to the user's control system and (4) 5-pin M12 ports for connecting to the 3 solenoids and the status indicator on the DM² Series valve. The J-Box kits include the J-Box as described above and (4) 1-meter cables for connecting to the valve. These cables have a connector on each end. The status indicator cable and the (3) solenoid cables have an M12 connector on one end and a DIN connector on the other end (M12-DIN). Standard valves come with DIN type solenoid connections, but could be bought with M12 type connections as well. Therefore we also offer a kit that provides solenoid cables with an M12 connector on each end (M12-M12).

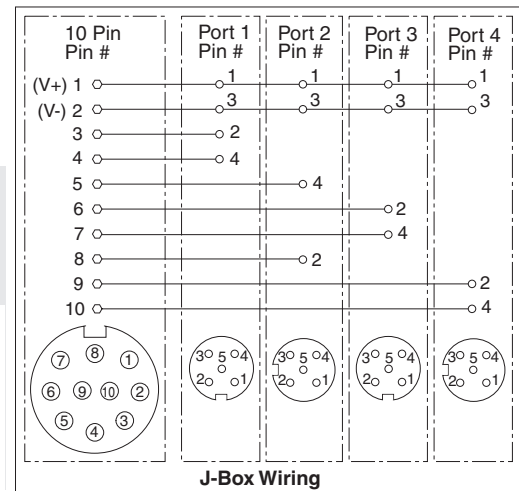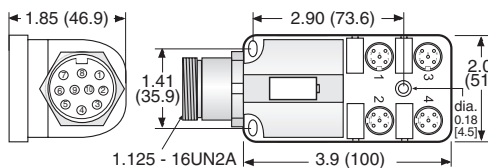

F

10 PIN MINI Cable

Kit Number	Length meters (feet)
2253H77	3.66 (12)
2254H77	6.1 (20)
2255H77	9.1 (30)
2256H77	15.2 (50)

These cables have a 10-pin MINI connector for connecting the J-Box kits above to the user's control system. Kits include one cable with connector and cord grip. Cable conductors are 18-gauge wire.



PIN #	PIN #	Wire Colors:	Wire Colors:
1 +24 volts DC	6 -	Orange	Orange w/Black
2 Common volts DC	7 Remote Reset	Blue	Red
3 -	8 -	White w/Black	Green/Yellow
4 Solenoid A	9 Remote Valve Fault Light	Red w/Black	Black
5 Solenoid B	10 Remote System OK Light	Green w/Black	White



Outlet Port Pressure Monitoring Wiring Kit

Kit Number	Length meters (feet)
2251H77	1 (3.3)

Some customers prefer to monitor downstream pressure in addition to using the DM² or DM¹ Series valve. A convenient way to do this is to install a pressure switch in the extra outlet port that is provided on the valve. The Outlet Port Pressure Monitoring kit can be used with one of the J-Box kits above to split one of the M12 ports on the J-Box so that a pressure switch can be wired in as well. These kits consist of one port splitter (a Tee with three M12 connectors) and one M12-DIN cable (1 meter).

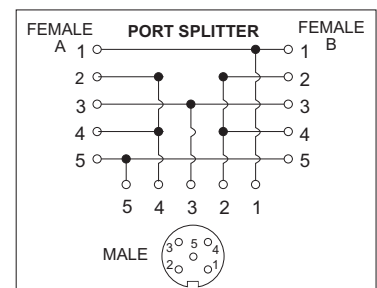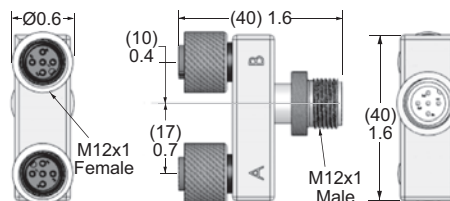

Pressure switch available separately, see valve options.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Control Reliable Double Valves With Dynamic Monitoring & Memory

DM²® Series E Air Dump / Release

Dynamic Monitoring with Memory: Memory, monitoring, and air flow control functions are integrated into two identical valve elements for CAT 4 applications, except control of the clutch/brake mechanism on mechanical power press. Valves lock-out if asynchronous movement of valve elements occurs during actuation or de-actuation, resulting in a residual outlet pressure of less than 1% of supply.

An Action is Required for Reset – cannot be reset by removing and re-applying supply pressure or electrical power. Reset can only be accomplished by the integrated electrical (solenoid) reset.

Basic 3/2 Normally Closed Valve Function: Dirt tolerant, wear compensating poppet design for quick response and high flow capacity. PTFE back-up rings on pistons to enhance valve endurance – operates with or without inline lubrication.

Status Indicator: Includes a pressure switch with both normally open (NO) and normally closed (NC) contacts to provide status feedback to the control system indicating whether the valve is in the lockout or ready-to-run condition.

Silencers: All models include high flow, clog resistant silencers.

Mounting: Inline mounted with BSPP or NPT pipe threads. Inlet and outlet ports on both sides provide for flexible piping (plugs for unused ports included).





HOW TO ORDER

(Choose your options (in red) to configure your valve model number.)

DM2E	N	A	2	0	A	2	1	
Thread	Revision Level		Basic Size		Solenoid Reset Type		Status Indicator	
BSPP D							Yes 1 No X	
NPT N								
			Base Port Size					
			2 1/4 inlet – 1/4 outlet 0 3/8 inlet – 3/8 outlet 1					
					Voltage*			
					24 volts DC A 110 volts AC, 50 Hz 120 volts AC, 50/60 Hz B			
					* For other voltages consult ROSS.			
					Connection Type			
					DIN 43650 Form A* Blank (connector not included)			
					M12 (connector included) 005			
					*See options for connectors or wiring kits.			


Valve Dimensions – inches (mm)

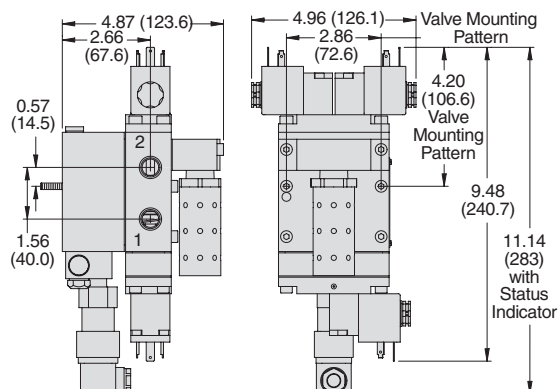

Simplified Schematic

Inlet Port Size	C _v		Weight lb (Kg)
	1-2	2-3	
1/4	1.3	2.4	5.6 (2.43)
3/8	2.2	2.4	5.6 (2.43)

ISO 13849-1:2006
Category 4 PL e applications

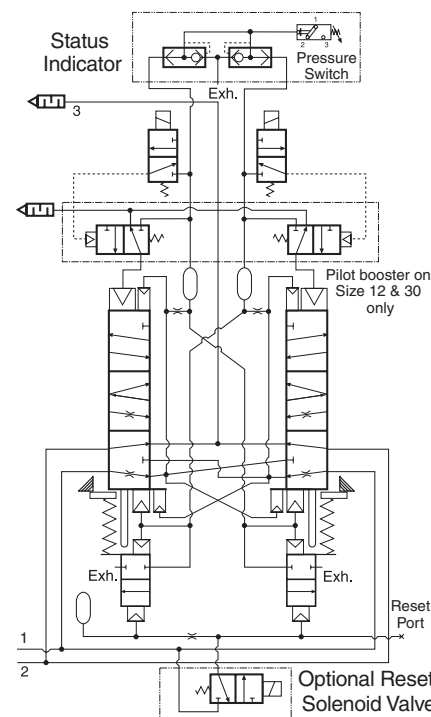

Schematic - Valve de-actuated

Explosion proof solenoid pilot available, for more information consult ROSS.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Dual poppet.

Mounting Type: Line mounted.

Pilot Solenoid: According to VDE 0580. Enclosure rating according to DIN 400 50 IP 65. Connector socket according to DIN 43650 Form A. Three solenoids, rated for continuous duty.

Standard Voltages/Pilot Solenoids Power Consumption (each solenoid): 24 volts DC; 110 volts AC, 50 Hz; 120 volts AC, 50/60 Hz. 5.8 watts nominal on AC and DC; 6.5 watts maximum on AC and DC.

Enclosure Rating: IP65, IEC 60529.

Electrical Connection: DIN 43650 or M12 Micro-DC.

Ambient Temperature: 15° to 122°F (-10° to 50°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered, lubricated or unlubricated air (mineral oils according to DIN 51519, viscosity classes 32-46).

Inlet Pressure: 30 to 120 psig (2 to 8.3 bar).

Pressure Switch (Status Indicator) Rating:

Contacts - 5 amps at 250 volts AC, or 5 amps at 30 volts DC.

Monitoring: Dynamically, cyclically, internally during each actuating and de-actuating movement. Monitoring function has memory and requires an overt act to reset unit after lockout.

Mounting orientation: Preferably horizontally (valve on top of base) or vertically with pilot solenoids on top.

Functional Safety Data: Category 4 PL e; B10d: 20,000,000; PFHd: 7.71x10⁻⁹; MTTFd: 301.9 (n_{op}: 662400).

Certifications: CE Marked for applicable directives, BG, CSA/UL, TSSA for appropriately tested valves.

Vibration/Impact Resistance: Tested to BS EN 60068-2-27.

This valve is not designed for controlling clutch/brake mechanisms on mechanical power presses, see DM²® series D for mechanical power press applications.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16


www.rosscontrols.com

F3.9



Control Reliable Double Valves With Dynamic Monitoring & Memory

DM^{2®} Series E Valve Operation & Options

Valve de-actuated (ready-to-run): The flow of inlet air pressure into the crossover passages from the inlet chamber is restricted by orifices that allow air pressure to bypass the lower inlet poppets. Flow is sufficient to quickly pressurize the pilot supply/timing chambers on both sides A and B. The upper inlet poppets prevent air flow from the crossover passages into the outlet chamber. Air pressure acting on the inlet poppets and return pistons securely hold the valve elements in the de-actuated position. (Air passages shown out of position for clarity.)




Valve actuated: Energizing the pilot solenoids simultaneously applies pressure to both pistons, forcing the internal parts to move to their actuated position, where inlet air flow to outlet is open and both exhaust poppets are closed. The outlet is then quickly pressurized, and pressure in the inlet, crossovers, outlet, and timing chambers are quickly equalized. De-energizing the main solenoids causes the valve elements to return to the ready-to-run (de-actuated) position.



Asynchronous Operation: Whenever the valve elements operate in a sufficiently asynchronous manner, either on actuation or de-actuation, the valve will shift into a locked-out position. In the locked-out position, one crossover and its related timing chambers will be exhausted, and the other crossover and its related timing chambers will be pressurized. The valve element (side A) that is partially actuated has pilot air available to actuate it, but there is no air pressure on the return piston to de-actuate that valve element. Air pressure in the crossover acts on the differential of side A stem diameters creating a latching force. Side B is in the de-actuated position, but has no pilot air available to actuate with and has full pressure on its upper and lower inlet poppets and return piston to hold it in place. Inlet air flow on side B into its crossover is restricted and flows through the open upper inlet poppet on side A, through the outlet into the exhaust port, and from the exhaust port to atmosphere. Residual pressure in the outlet is less than 1% of inlet pressure. Also, the return springs can only return the valve elements to the intermediate (locked-out) position. Therefore, the valve will remain in the locked-out position even if the inlet air supply is removed and re-applied. A reset signal must be applied intentionally in order to reset the valve.


Resetting the valve: Reset is accomplished by momentarily energizing the reset solenoid. Actuation of the reset solenoid provides inlet air pressure to the reset pistons which physically push the main valve elements to their de-actuated position. Inlet air pressurizes the crossovers and volume chambers, thereby applying air to the return pistons which then hold the upper inlet poppets on seat. De-actuation of the reset solenoid removes pressure from the lower side of the reset pistons, thus allowing them to return to their de-actuated position.

Reset anti-tie-down feature: Attempting to energize the valve's main solenoids while the reset solenoid is energized will cause side B to shift (overcoming the pressure on the small reset piston), but side A will not move due to the pressure on the larger reset piston on that side. This will cause the valve to go into and remain in the locked-out position until a reset signal is applied while the main solenoids are de-energized.



Status Indicator:

The status indicator pressure switch will actuate when the main valve is operating normally, and will de-actuate when the main valve is in the locked-out position or when inlet pressure is removed. This device is not part of the valve lockout function, but, rather, only reports the status of the main valve.



OPTIONS

Electrical Connectors	Electrical Connector Form	Electrical Connector Type	Cord Length meters (feet)	Cord Diameter	Electrical Connector Model Number		
					Without Light	Lighted Connector	
	DIN 43650 Form A	Prewired Connector (18 gauge)	2 (6½)	6-mm	721K77	720K77-W	720K77-Z
	DIN 43650 Form A	Prewired Connector (18 gauge)	2 (6½)	10-mm	371K77	383K77-W	383K77-Z
	DIN 43650 Form A	Connector for threaded conduit (1/2 inch electrical conduit fittings)	—	—	723K77	724K77-W	724K77-Z
	DIN 43650 Form A	Connector Only	—	—	937K87	936K87-W	936K87-Z

CAUTIONS: Do not use electrical connectors with surge suppressors, as this may increase valve response time when de-actuating the solenoids.


Downstream Pressure Monitoring

Pressure Switches		
Connection Type	Model Number	Port Threads
DIN 43650 Form A	586A86	1/8 NPT
M12 Micro-DC	1153A30	1/8 NPT


*Pressure switch closes on falling pressure of 5 psig (0.34 bar).



DIN Connector Pinout



M12 Connector Pinout



Redundant Downstream Feedback Switch

Model Number	Port Threads
RC26-13	3/8 NPT


- May be installed downstream on all double valves
- Provides a redundant means to verify the release of downstream pressure to next obstruction
- Factory preset, 5 psi (0.3 bar) - falling



High-Flow, High Reduction Silencer Kits

Port Size	Kit Number*		Avg. C _v	Dimensions inches (mm)			
	NPT threads	BSPT threads		A	B (NPT)	B (BSPT)	C
2	2323H77	2328H77	256 (121)	4.96 (126.1)	14.24 (361.7)	16.05 (407.7)	5.68 (144.3)

* Kits include all plumbing required for installation. **Pressure Range:** 125 psig (8.6 bar) maximum.

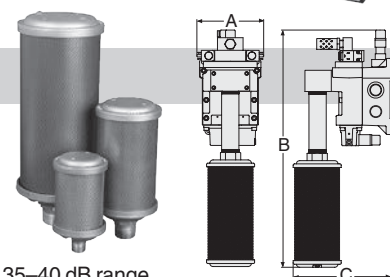

Designed to improve equipment performance and reduce the Exponentially Perceived Noise (EPNdB) in the 35–40 dB range.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Control Reliable Double Valves with Dynamic Monitoring & Memory


DM^{2®} Series E Preassembled Wiring Kits

Preassembled Wiring Kits

These kits include 1 cable for the status indicator, and 3 cables with connector plus a cord grip for each.

Connector without Light	Kit Number*		Solenoid Connector Type	Length meters (feet)
	24 Volts DC	120 Volts AC		
2283H77	2532H77-W	2532H77-Z	DIN 43650 Form A	5 (16.4)
2284H77	2533H77-W	2533H77-Z	DIN 43650 Form A	10 (32.8)
2288H77**	—	—	M12 Micro-DC	5 (16.4)
2289H77**	—	—	M12 Micro-DC	10 (32.8)


* Each cable has one connector. **Coil includes light.

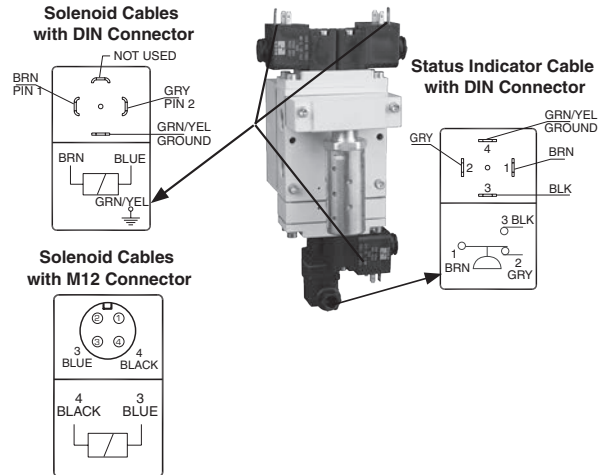

Wiring Kits with J-Box



Kit Number*	Connector Types	Length meters (feet)
2249H77	M12 - DIN	1 (3.3)
2250H77	M12 - M12	1 (3.3)

*24 volts DC only.



A J-Box is a junction box with a 10-pin MINI connector for connecting to the user's control system and (4) 5-pin M12 ports for connecting to the 3 solenoids and the status indicator on the DM^{2®} Series valve. The J-Box kits include the J-Box as described above and (4) 1-meter cables for connecting to the valve. These cables have a connector on each end. The status indicator cable and the (3) solenoid cables have an M12 connector on one end and a DIN connector on the other end (M12-DIN).

Standard valves come with DIN type solenoid connections, but could be bought with M12 type connections as well. Therefore we also offer a kit that provides solenoid cables with an M12 connector on each end (M12-M12).

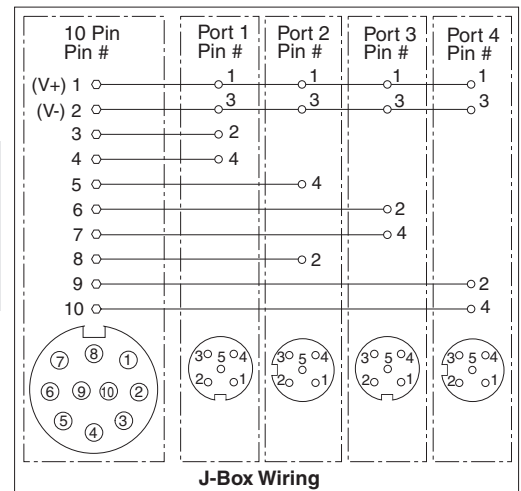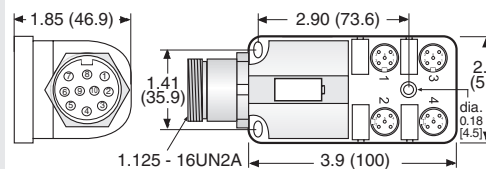

F3

10 PIN MINI Cable

Kit Number	Length meters (feet)
2253H77	3.66 (12)
2254H77	6.1 (20)
2255H77	9.1 (30)
2256H77	15.2 (50)

These cables have a 10-pin MINI connector for connecting the J-Box kits above to the user's control system. Kits include one cable with connector and cord grip. Cable conductors are 18-gauge wire.

PIN #	PIN #
1 +24 volts DC	6 -
2 Common volts DC	7 Remote Reset
3 -	8 -
4 Solenoid A	9 Remote Valve Fault Light
5 Solenoid B	10 Remote System OK Light

Wire Colors:	Wire Colors:
Orange	Orange w/Black
Blue	Red
White w/Black	Green/Yellow
Red w/Black	Black
Green w/Black	White





F

Outlet Port Pressure Monitoring Wiring Kit

Kit Number	Length meters (feet)
2251H77	1 (3.3)

Some customers prefer to monitor downstream pressure in addition to using the DM^{2®} or DM¹ Series valve. A convenient way to do this is to install a pressure switch in the extra outlet port that is provided on the valve. The Outlet Port Pressure Monitoring kit can be used with one of the J-Box kits above to split one of the M12 ports on the J-Box so that a pressure switch can be wired in as well. These kits consist of one port splitter (a Tee with three M12 connectors) and one M12-DIN cable (1 meter).

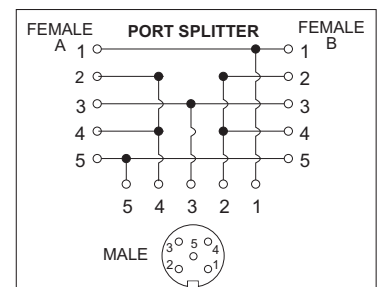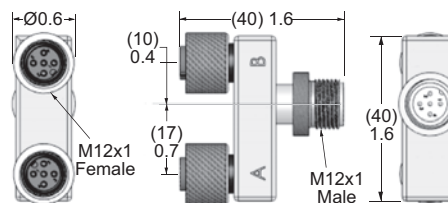

Pressure switch available separately, see valve options.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com

F3.11

Control Reliable Double Valves with Dynamic Monitoring & Memory

DM²® Series C Air Dump / Release

Basic Size 4, 8, 12 and 30

Dynamic Monitoring With Complete Memory: Memory, monitoring, and air flow control functions are simply integrated into two identical valve elements. Valves lock-out due to asynchronous movement of valve elements during actuation or de-actuation, resulting in a residual outlet pressure of less than 1% of supply.

An Action is Required for Reset – cannot be reset by removing and re-applying supply pressure. Reset can only be accomplished by the optional integrated electrical (solenoid) reset.

Basic 3/2 Normally Closed Valve Function: Dirt tolerant, wear compensating poppet design for quick response and high flow capacity. PTFE back-up rings on pistons to enhance valve endurance – operates with or without inline lubrication.

Status Indicator: Includes a pressure switch with both normally open (NO) and normally closed (NC) contacts to provide status feedback to the control system indicating whether the valve is in the lockout or ready-to-run condition.

Silencers: All models include high flow, clog resistant silencers.


Mounting: Base mounted – with BSPP or NPT pipe threads. Inlet and outlet ports on both sides provide for flexible piping (plugs for unused ports included). Captive valve-to-base mounting screws.

Basic Size 12 and 30

Intermediate Pilots: Increases pilot air flow for fast valve response, making it possible to use the same size solenoids as valve sizes 2, 4 & 8, thereby reducing electrical power requirements for these larger valves.




ISO 13849-1:2006
Category 4 PL e
applications



HOW TO ORDER

(Choose your options (in red) to configure your valve model number.)

DM2C	N	A	4	2	A	2	1	
Thread	Revision Level				Solenoid Reset Type	Status Indicator		
BSPP D					Yes 1	Yes 1		
NPT N					No X	No X		
Basic Size			Base Port Size			Voltage*		
4 4			4 1/2 inlet – 1/2 outlet 2			24 volts DC A		
8 5			8 3/4 inlet – 3/4 outlet 4			110 volts AC, 50 Hz		
12 6			12 1 inlet – 1 outlet 5			120 volts AC, 50/60 Hz B		
30 8			30 1 1/2 inlet – 2 outlet 8			* For other voltages consult ROSS.		
					Connection Type			
					DIN 43650 Form A* Blank			
					(connector not included)			
					M12 (connector included) 005			
					*See options for connectors or wiring kits.			



Simplified Schematic

Valve Basic Size	Cv		Weight lb (Kg)
	1-2	2-3	
4	3	10	5.9 (2.6)
8	4.4	13	8.4 (3.7)
12	8.5	20	15.3 (3.7)
30	22	64	34.7 (15.1)

Explosion proof solenoid pilot available, for more information consult ROSS.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Dual poppet.

Mounting Type: Base mounted.

Pilot Solenoids: According to VDE 0580. Enclosure rating according to DIN 400 50 IP 65. Connector socket according to DIN 43650 Form A. Three solenoids, rated for continuous duty.

Standard Voltages/Pilot Solenoids Power Consumption (each solenoid):

Basic Size 2, 4, 12 & 30: Primary and reset solenoids:

24 volts DC; 110 volts AC, 50 Hz; 120 volts AC, 50/60 Hz.

5.8 watts nominal on AC and DC; 6.5 watts maximum on AC and DC.

Basic Size 8:

Primary solenoids:

15 watts on DC; 36 VA inrush and 24.6 VA holding on AC.

Reset solenoid:

6.0 watts on DC; 15.8 VA inrush and 10.4 VA holding on AC.

Enclosure Rating: IP65, IEC 60529.

Electrical Connection: DIN 43650 or M12 Micro-DC.

Ambient Temperature: 15° to 122°F (-10° to 50°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered, lubricated or unlubricated (mineral oils according to DIN 51519, viscosity classes 32-46).

Inlet Pressure: 30 to 120 psig (2 to 8 bar).

Reset Pressure: For remote reset option – equal to inlet pressure.

Pressure Switch (Status Indicator) Rating: Contacts - 5 amps at 250 volts AC, or 5 amps at 30 volts DC.

Monitoring: Dynamically, cyclically, internally during each actuating and de-actuating movement. Monitoring function has memory and requires an overt act to reset unit after lockout.

Mounting orientation: Preferably horizontally (valve on top of base) or vertically with pilot solenoids on top.

Functional Safety Data: Category 4 PL e; B10d: 20,000,000; PFHd: 7.71x10⁻⁹; MTTFd: 301.9 (n_{op}: 662400).

Certifications: CE Marked for applicable directives, BG, CSA/UL, TSSA for appropriately tested valves.

Vibration/Impact Resistance: Tested to BS EN 60068-2-27.

This valve is not designed for controlling clutch/brake mechanisms on mechanical power presses, see DM2® series D for mechanical power press applications.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.




Control Reliable Double Valves with Dynamic Monitoring & Memory



DM^{2®} Series C Valve Technical Data

Valve Dimensions – inches (mm)

Basic Size 4

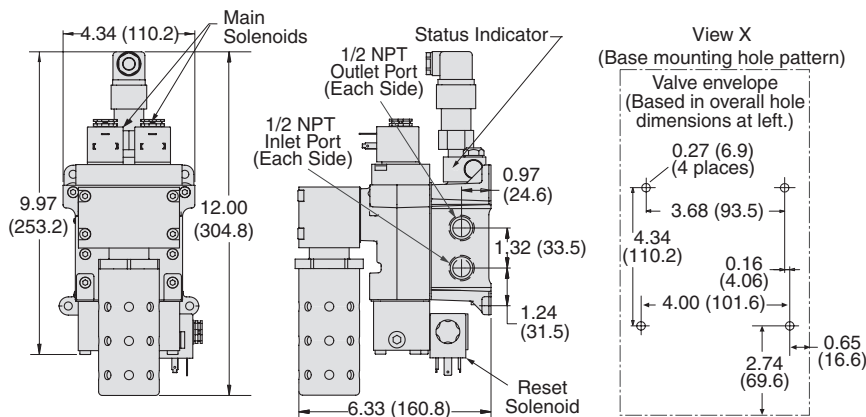


Basic Size 8

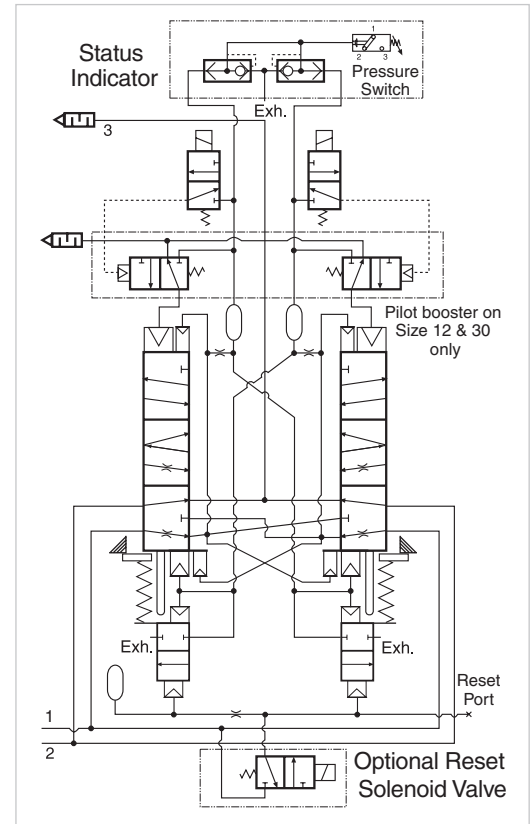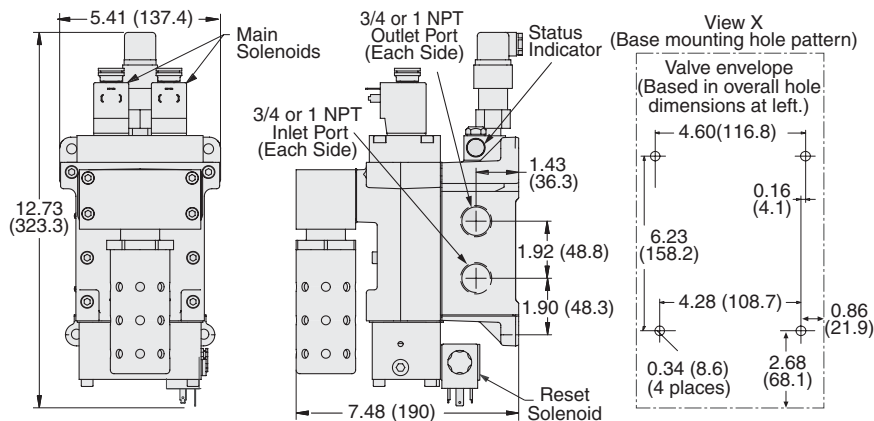


Schematic - Valve de-actuated

Basic Size 12

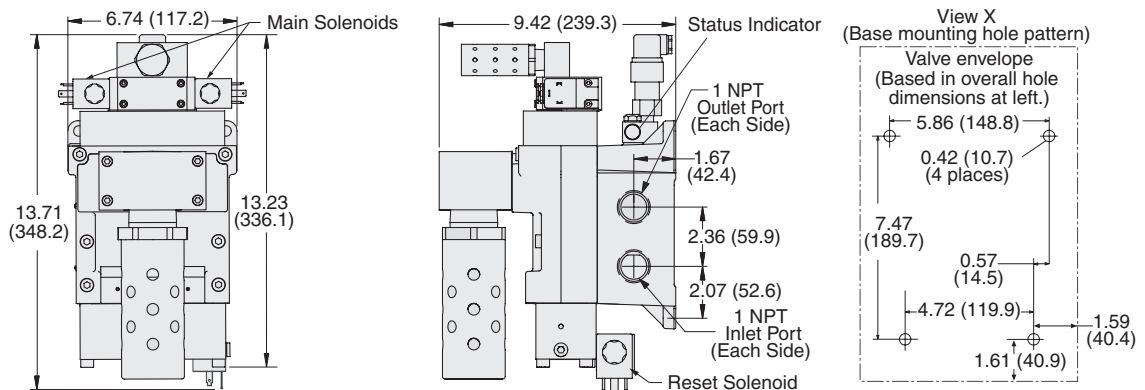


Basic Size 30

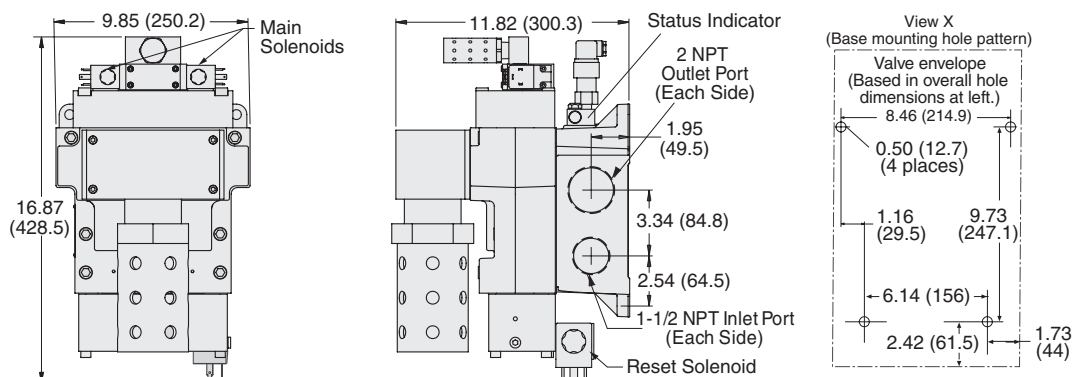


Control Reliable Double Valves with Dynamic Monitoring & Memory

DM²® Series C Valve Operation


Valve de-actuated (ready-to-run): The flow of inlet air pressure into the crossover passages is restricted by the size of the passage between the stem and the valve body opening. Flow is sufficient to quickly pressurize pilot supply/timing chambers A and B. The inlet poppets prevent air flow from crossover passages into the outlet chamber. Air pressure acting on the inlet poppets and return pistons securely hold the valve elements in the closed position. (Air passages shown out of position and reset adapter omitted for clarity.)




Valve actuated: Energizing the pilot valves simultaneously applies pressure to both pistons, forcing the internal parts to move to their actuated (open) position, where inlet air flow to crossover passages is fully open, inlet poppets are fully open and exhaust poppets are fully closed. The outlet is then quickly pressurized, and pressure in the inlet, crossovers, outlet, and timing chambers are quickly equalized. De-energizing the pilots quickly causes the valve elements to return to the ready-to-run position.




Valve locked-out: Whenever the valve elements operate in a sufficiently asynchronous manner, either on actuation or de-actuation, the valve will move to a locked-out position. In the locked-out position, one crossover and its related timing chamber will be exhausted, and the other crossover and its related timing chamber will be fully pressurized. The valve element (side B) that is partially actuated has pilot air available to fully actuate it, but no air pressure on the return piston to fully de-actuate the valve element. Air pressure in the crossover acts on the differential of side B stem diameters creating a latching force. Side A is in a fully closed position, and has no pilot air available to actuate, but has full pressure on the inlet poppet and return piston to hold the element in the fully closed position. Inlet air flow on side A into its crossover is restricted, and flows through the open inlet poppet on side B, through the outlet into the exhaust port, and from the exhaust port to atmosphere. Residual pressure in the outlet is less than 1% of inlet pressure. The return springs are limited in travel, and can only return the valve elements to the intermediate (locked-out) position. Sufficient air pressure acting on the return pistons is needed to return the valve elements to a fully closed position.



Resetting the valve: The valve will remain in the locked-out position, even if the inlet air supply is removed and re-applied. A remote reset signal must be applied to reset the valve. Reset is accomplished by momentarily pressurizing the reset port. Actuation of the reset piston physically pushes the main valve elements to their closed position. Inlet air fully pressurizes the crossovers and holds the inlet poppets on seat. Actuation of the reset piston opens the reset poppet, thereby, immediately exhausting pilot supply air, thus, preventing valve operation during reset (Reset adapter added to illustration.). De-actuation of reset pistons causes the reset poppets to close and pilot supply to fully pressurize. Reset pressure can be applied by a remote 3/2 normally closed valve, or from an optional 3/2 normally closed solenoid mounted on the reset adapter. De-actuation of reset pistons causes the reset poppets to close and pilot supply to fully pressurize. Reset air pressure can be applied by a remote 3/2 normally closed valve, or from an optional 3/2 normally closed solenoid, or a manual push button mounted on the reset adapter.



Status Indicator: The status indicator pressure switch will actuate when the main valve is operating normally, and will de-actuate when the main valve is in the locked-out position or inlet pressure is removed. This device is not part of the valve lockout function, but, rather, only reports the status of the main valve.



Status indicator in normal ready-to-run position.

Basic Size 12 and 30 valves require relatively large pilots to actuate and de-actuate the main valve elements. In order to achieve extremely quick valve response for such large pilots, a 2-stage solenoid pilot system is incorporated into the design. This keeps the required electrical current to operate the pilots to a minimum.

Basic Size 12 & 30 pilots

ACCESSORIES & OPTIONS


Electrical Connectors	Electrical Connector Form	Electrical Connector Type	Cord Length meters (feet)	Cord Diameter	Electrical Connector Model Number		
					Without Light	Lighted Connector	
	DIN 43650 Form A	Prewired Connector (18 gauge)	2 (6½)	6-mm	721K77	720K77-W	720K77-Z
	DIN 43650 Form A	Prewired Connector (18 gauge)	2 (6½)	10-mm	371K77	383K77-W	383K77-Z
	DIN 43650 Form A	Connector for threaded conduit (1/2 inch electrical conduit fittings)	—	—	723K77	724K77-W	724K77-Z
	DIN 43650 Form A	Connector Only	—	—	937K87	936K87-W	936K87-Z

CAUTIONS: Do not use electrical connectors with surge suppressors, as this may increase valve response time when de-actuating the solenoids.

Downstream Pressure Monitoring


Pressure Switches		
Connection Type	Model Number	Port Threads
DIN 43650 Form A	586A86	1/8 NPT
M12 Micro-DC	1153A30	1/8 NPT

*Pressure switch closes on falling pressure of 5 psig (0.34 bar).

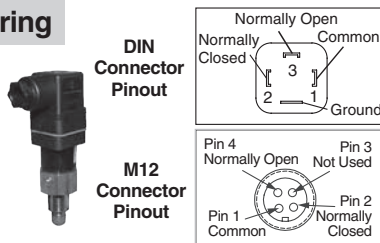

Redundant Downstream Feedback Switch	Model Number	Port Threads
	RC26-13	3/8 NPT

- May be installed downstream on all double valves
- Provides a redundant means to verify the release of downstream pressure to next obstruction
- Factory preset, 5 psi (0.3 bar) - falling




High-Flow, High Reduction Silencer Kits

Port Size	Kit Number*		Avg. C _v	Dimensions inches (mm)			
	NPT threads	BSPT threads		A	B (NPT)	B (BSPT)	C
4	2324H77	2329H77	800 (378)	4.34 (110.2)	19.06 (484.1)	21.40 (543.6)	7.27 (184.7)
8	2325H77	2329H77	800 (378)	5.41 (137.4)	21.18 (538.0)	23.52 (597.4)	8.41 (213.6)
12	2326H77	2330H77	2080 (982)	6.74 (117.2)	25.85 (656.6)	28.20 (716.3)	10.66 (270.8)
30	2327H77	2331H77	7200 (3398)	9.85 (250.2)	41.55 (1055.4)	41.55 (1055.4)	13.47 (342.1)

* Kits include all plumbing required for installation. **Pressure Range:** 125 psig (8.6 bar) maximum.

Designed to improve equipment performance and reduce the Exponentially Perceived Noise (EPNdB) in the 35–40 dB range.

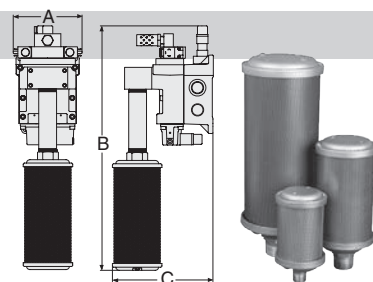

Control Reliable Double Valves with Dynamic Monitoring & Memory


DM^{2®} Series C Preassembled Wiring Kits

Preassembled Wiring Kits

These kits include 1 cable for the status indicator, and 3 cables with connector plus a cord grip for each.

Connector without Light	Kit Number*		Solenoid Connector Type	Length meters (feet)
	24 Volts DC	120 Volts AC		
2283H77	2532H77-W	2532H77-Z	DIN 43650 Form A	5 (16.4)
2284H77	2533H77-W	2533H77-Z	DIN 43650 Form A	10 (32.8)
2288H77**	—	—	M12 Micro-DC	5 (16.4)
2289H77**	—	—	M12 Micro-DC	10 (32.8)


* Each cable has one connector. **Coil includes light.

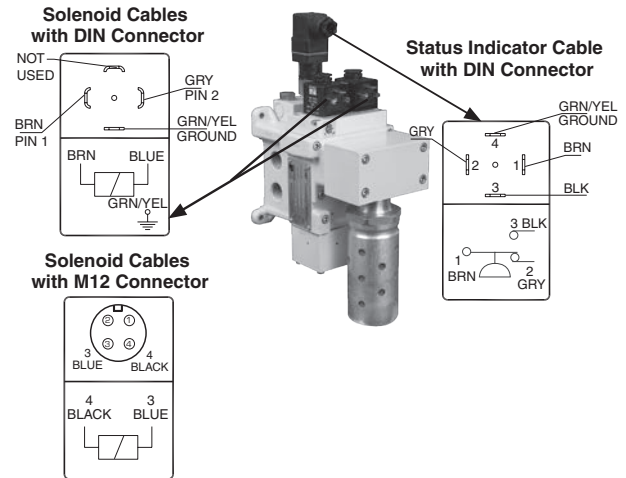

Wiring Kits with J-Box



Kit Number*	Connector Types	Length meters (feet)
2249H77	M12 - DIN	1 (3.3)
2250H77	M12 - M12	1 (3.3)

*24 volts DC only.



A J-Box is a junction box with a 10-pin MINI connector for connecting to the user's control system and (4) 5-pin M12 ports for connecting to the 3 solenoids and the status indicator on the DM^{2®} Series valve. The J-Box kits include the J-Box as described above and (4) 1-meter cables for connecting to the valve. These cables have a connector on each end. The status indicator cable and the (3) solenoid cables have an M12 connector on one end and a DIN connector on the other end (M12-DIN).

Standard valves come with DIN type solenoid connections, but could be bought with M12 type connections as well. Therefore we also offer a kit that provides solenoid cables with an M12 connector on each end (M12-M12).

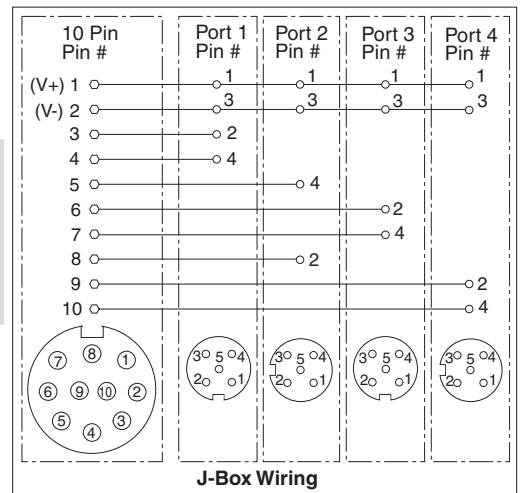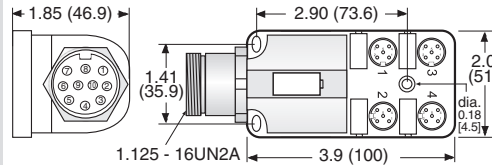

F3

10 PIN MINI Cable

Kit Number	Length meters (feet)
2253H77	3.66 (12)
2254H77	6.1 (20)
2255H77	9.1 (30)
2256H77	15.2 (50)

These cables have a 10-pin MINI connector for connecting the J-Box kits above to the user's control system. Kits include one cable with connector and cord grip. Cable conductors are 18-gauge wire.

PIN #	PIN #
1 +24 volts DC	6 -
2 Common volts DC	7 Remote Reset
3 -	8 -
4 Solenoid A	9 Remote Valve Fault Light
5 Solenoid B	10 Remote System OK Light

Wire Colors:	Wire Colors:
Orange	Orange w/Black
Blue	Red
White w/Black	Green/Yellow
Red w/Black	Black
Green w/Black	White





F

Outlet Port Pressure Monitoring Wiring Kit

Kit Number	Length meters (feet)
2251H77	1 (3.3)

Some customers prefer to monitor downstream pressure in addition to using the DM^{2®} or DM¹ Series valve. A convenient way to do this is to install a pressure switch in the extra outlet port that is provided on the valve. The Outlet Port Pressure Monitoring kit can be used with one of the J-Box kits above to split one of the M12 ports on the J-Box so that a pressure switch can be wired in as well. These kits consist of one port splitter (a Tee with three M12 connectors) and one M12-DIN cable (1 meter).

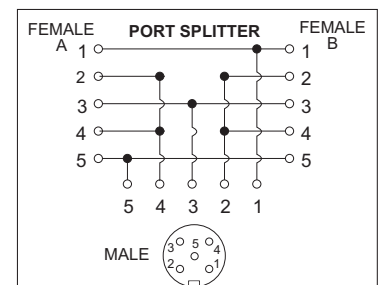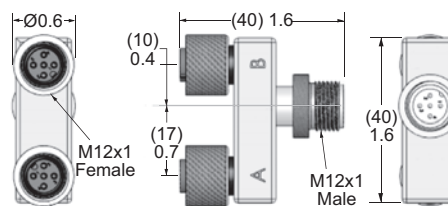

Pressure switch available separately, see valve options.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com

F3.15

Control Reliable Modular Double Valves with Integrated Soft Start

M DM²® Series C Air Dump / Release

Double Valves with Dynamic Monitoring & Memory

Dynamic Monitoring With Memory: Memory, monitoring, and air flow control functions are integrated into two identical valve elements. Valves lock-out if asynchronous movement of valve elements occurs during actuation or de-actuation, resulting in a residual outlet pressure of less than 1% of supply.

An Action is Required for Reset: Cannot be reset by removing and re-applying supply pressure. Reset can be accomplished by the integrated electrical (solenoid) reset or by the manual reset button.

Basic 3/2 Normally Closed Valve Function: Dirt tolerant, wear compensating poppet design for quick response and high flow capacity. PTFE back-up rings on pistons to enhance valve endurance – operates with or without inline lubrication.

LED Indication: Light-emitting diode (LED) indicators of main solenoid operation, reset solenoid operation, and status indicator condition.

Status Indicator: Includes a pressure switch with both normally open (NO) and normally closed (NC) contacts to provide status feedback to the control system indicating whether the valve is in the lockout or ready-to-run condition.

Transducer (optional): For monitoring of downstream pressure in the system.

Silencers: All models include high flow, clog resistant silencers.





Category 4
Performance Level e
(certification pending)

U.S. Patent
No. 6840258, 6840259
(Worldwide Patents
Pending)

Port Size		Basic Size	Transducer	Valve Model Number*	C _v		Weight lb (Kg)
Inlet	Outlet				1 to 2	2 to 3	
3/4	3/4	8	With	MDM2CNA55A23	3.7	8.5	16.3 (7.4)
3/4	3/4	8	Without	MDM2CNA55A21	3.7	8.5	16.1 (7.3)



* NPT port threads. For BSPP threads, replace "N" in the model number with a "D", e.g., MDM2CDA55A23.

Valve Dimensions – inches (mm)

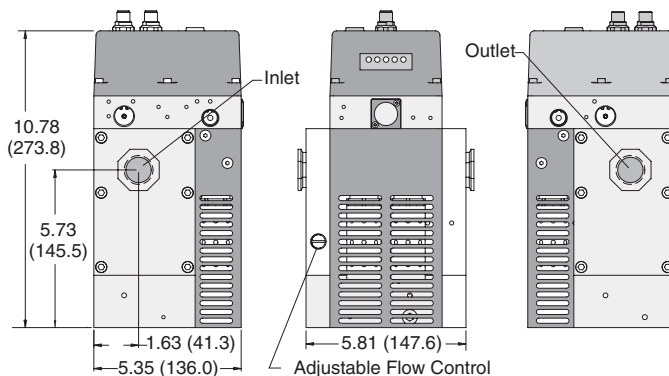

Simplified Schematic

Valve Wiring



Mounting brackets are required to install valve in the system, see M DM²® Series C accessories for ordering information page F3.18.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Dual Poppet.

Mounting Type: Base mounted.

Pilot Solenoids: According to VDE 0580. Enclosure rating according to DIN 400 50 IP 65. Three solenoids, rated for continuous duty.

Standard Voltages: 24 volts DC.

Pilot Solenoids Power Consumption (each solenoid):

Primary and reset solenoids: 1.2 watts on DC.

Enclosure Rating: IP65, IEC 60529.

Solenoid & Status Indicator Connection:

M12, 5-pin Male Receptacle, A-Coded.

Ambient Temperature: 15° to 122°F (-10° to 50°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered, lubricated or unlubricated (mineral oils according to DIN 51519, viscosity classes 32-46); 5-micron recommended.

Inlet Pressure: 30 to 150 psig (2 to 10 bar). Under certain circumstances, such as maximum restriction of the adjustable flow control or a very large downstream system volume, the minimum inlet pressure may need to be set up to 60 psig (4 bar) to prevent nuisance valve faults.

Pressure Switch (Status Indicator) Rating: 5 amps at 30 volts DC.

Monitoring: Dynamically, cyclically, internally during each actuating and de-actuating movement. Monitoring function has memory and requires an overt act to reset unit after lockout.

Mounting orientation: Vertically with pilot solenoids on top.

Functional Safety Data: Category 4 PL e; B10d: 20,000,000; PFHd: 7.71x10⁻⁹; MTTFd: 301.9 (n_{op}: 662400).

Certifications: CE Marked for applicable directives, BG, CSA/UL, TSSA for appropriately tested valves.

Vibration/Impact Resistance: Tested to BS EN 60068-2-27.


IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Control Reliable Modular Double Valves with Integrated Soft Start


M DM^{2®} Series C Valve Operation

Valve de-actuated (ready-to-run): The flow of inlet air pressure to the inlet chamber of the main valve internals is restricted by a fixed orifice and an adjustable flow control as well as an air piloted 2-way normally closed poppet valve. The flow of inlet air pressure into the crossover passages is restricted by the size of the passage between the stem and the valve body opening. Flow is sufficient to quickly pressurize pilot supply/timing chambers A and B. The inlet poppets prevent air flow from crossover passages into the outlet chamber. Air pressure acting on the inlet poppets and return pistons securely hold the valve elements in the closed position. (Reset adapter omitted for clarity.)




Valve actuated: Energizing the pilot valves simultaneously applies pressure to both pistons, forcing the internal parts to move to their actuated (open) position, where inlet air flow to crossover passages is fully open, inlet poppets are fully open and exhaust poppets are fully closed. The outlet is then pressurized at a rate allowed by the fixed orifice and the adjusted flow control. Once the air pressure in the outlet chamber reaches approximately 60% of inlet pressure, the air piloted 2-way normally closed poppet valve opens fully and the pressure in the inlet, crossovers, outlet, and timing chambers are quickly equalized. The adjustable flow control will control the time it takes for the outlet air pressure to reach approximately 60% of inlet pressure. Green "SOL. 1" and SOL. 2" LEDs will be displayed when the main solenoids are energized.

De-energizing the pilots quickly causes the valve elements to return to the ready-to-run position.



Valve locked-out: Whenever the valve elements operate in a sufficiently asynchronous manner, either on actuation or de-actuation, the valve will move to a locked-out position. In the locked-out position, one crossover and its related timing chamber will be exhausted, and the other crossover and its related timing chamber will be fully pressurized. The valve element (side B) that is partially actuated has pilot air available to fully actuate it, but no air pressure on the return piston to fully de-actuate the valve element.

Air pressure in the crossover acts on the differential of side B stem diameters creating a latching force. Side A is in a fully closed position, and has no pilot air available to actuate, but has full pressure on the inlet poppet and return piston to hold the element in the fully closed position. Inlet air flow on side A into its crossover is restricted, and flows through the open inlet poppet on side B, through the outlet into the exhaust port, and from the exhaust port to atmosphere. Residual pressure in the outlet is less than 1% of inlet pressure. The return springs are limited in travel, and can only return the valve elements to the intermediate (locked-out) position. Sufficient air pressure acting on the return pistons is needed to return the valve elements to a fully closed position.




Resetting the valve: The valve will remain in the locked-out position, even if the inlet air supply is removed and re-applied.

A remote reset signal must be applied to reset the valve. A momentary, remote electrical signal must be applied to the reset solenoid to apply pressure to the reset pistons in the valve. Actuation of the reset piston physically pushes the main valve elements to their closed position. Inlet air fully pressurizes the crossovers and holds the inlet poppets on seat. Actuation of the reset piston opens the reset poppet, thereby, immediately exhausting pilot supply air, thus, preventing valve operation during reset (Reset adapter added to illustration.). De-actuation of reset pistons causes the reset poppets to close and pilot supply to fully pressurize. Reset air pressure is applied by a 3/2 normally closed solenoid, or a manual push button mounted on the reset adapter in the top valve cover. A green "RESET SOL." LED will be displayed when the reset solenoid is energized.


The reset procedure is as follows:

- Remove the electrical signals to the main coils
- Ensure there is air supplied to the valve
- Energize the reset solenoid for a minimum of 200 ms
- Allow a 200 ms delay after de-energizing the reset solenoid and re-energizing the main solenoids




Status Indicator:

The status indicator pressure switch will actuate when the main valve is operating normally, and will de-actuate when the main valve is in the locked-out position or inlet pressure is removed. This device is not part of the valve lockout function, but, rather, only reports the status of the main valve. If the valve is in a ready-to-run condition, a green "STATUS" LED will be displayed. If the valve is faulted or there is no air pressure at the inlet, a red "STATUS" LED will be displayed.



Status indicator
in normal
ready-to-run position

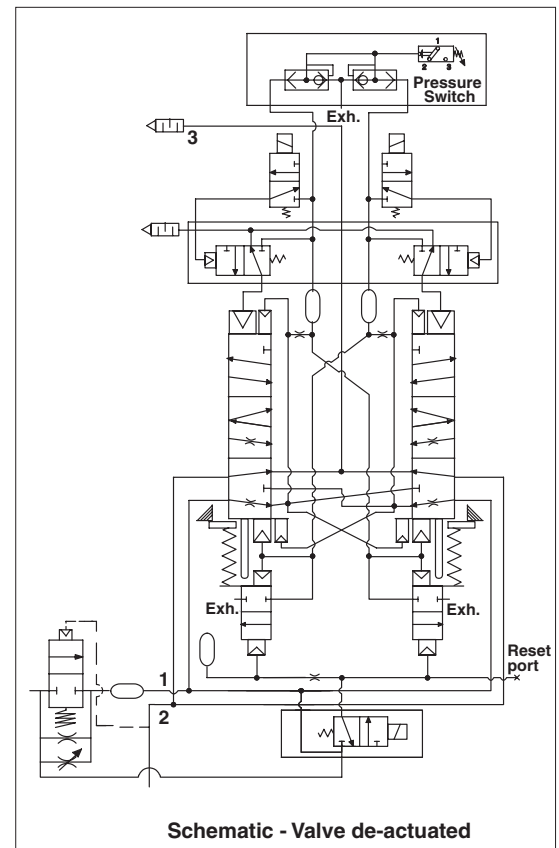

Schematic - Valve de-actuated

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com


F3.17

Control Reliable Modular Double Valves with Integrated Soft Start

M DM²® Series C Accessories & Options

Digital Pressure Transducer

Model Number 2447H77



Precision digital pressure transducer with 5 pin female connection

- Two PNP digital outputs which may be set individually, 4-20 mA analog output
- Three operation modes: Easy, Window and Hysteresis
- Selectable response times to eliminate output chattering
- Powered by 12-24 volts DC
- 6 pressure unit conversions
- Lockable keypad
- Fast zero reset

Wiring Kits

Kit Number	Length
2431H77	Wiring Kit - 5 meters (16.4 feet). Includes two cords, and the cord grips.
2432H77	Wiring Kit with Transducer - 5 meters (16.4 feet). Includes three cords, and the cord grips.

Mounting Accessories

At least two mounting brackets should be used.

This can consist of two clamp mounting brackets or one clamp mounting bracket and one mounting bracket Kit Number 2433H77.

Clamp for Module Connections

Specially designed clamps provide a quick and easy assembly or disassembly of MD3™ modules. Two allen-head bolts quickly tighten or loosen the clamp using a 5/32 or 4mm hex key. The clamp contains a plate carrying two O-rings to provide positive sealing between modules.

Order clamp by part number **R-A118-105**.

Combined clamp and bracket (below) can be ordered by part number **R-A118-105M**.

Mounting Brackets

Two brackets are normally used to mount an FRL to a vertical surface. The mounting bracket attaches to the module connecting clamp (see above) with a single screw. Each bracket then employs two bolts (1/4" or 6mm) to connect the assembly to the mounting surface.

Order bracket and screw by part number **R-A118-103**.

Combined bracket and clamp (above) can be ordered by part number **R-A118-105M**.

Male and Female End Ports

Either male or female end ports can be attached to threaded inlet and outlet lines. This allows all modules of an FRL assembly to be removed easily and quickly without having to unthread the end modules. The end ports are attached to the modules with clamps (see at left). End ports can be included in an assembled FRL or ordered separately by the following part numbers:

Port Size	Male Part Number*	Port Size	Female Part Number*
1/4	R-118-109-2F	1/4	R-118-100-2
3/8	R-118-109-3F	3/8	R-118-100-3
1/2	R-118-109-4F	1/2	R-118-100-4
3/4	R-118-109-6F	3/4	R-118-100-6

* For BSPP threads, add a "W" suffix to the model number, e.g., R-118-109-2FW.

Extra Port Blocks

An extra port block can be placed between modules to provide two auxiliary 1/4 NPTF ports. Its mounting position can be rotated to obtain the most convenient operating orientation. If only one auxiliary port is to be used, the unused port must be closed with a pipe plug. (The inlet and outlet are not threaded.)


Port Size	Part Number*
1/4	R-118-106-2
3/8	R-118-106-3
1/2	R-118-106-4

* For BSPP threads, add a "W" suffix to the model number, e.g., R-118-106-2W.

Mounting Bracket Kit

Mounting Bracket Kit includes bracket and bolts to mount to the valve end plate.

Kit Number 2433H77

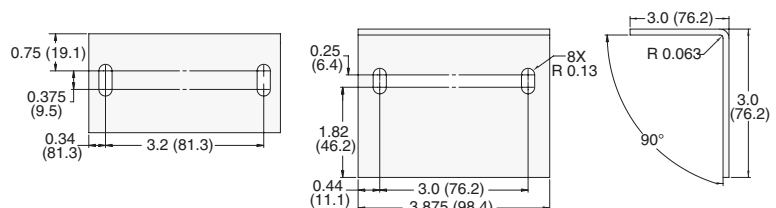

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Air Entry Packages

with DM Series E Double Valves - Control Reliable Energy Isolation

RC Series

DM¹ Series E Double Valves, Manual Lockout L-O-X[®] Valves with Integrated Filter/Regulator


CONTROL
CATEGORY
4

Pre-engineered panel-mounted design with air entry via a filter and regulator “FR”, or filter, regulator and lubricator “FRL”.

Includes DM¹ Series E Double Valve with Monitoring:

- Self-contained dynamic monitoring system requires no further valve monitoring controls,
- Ready-to-run: If an abnormality clears itself upon the removal of electricity to both solenoids, it will be ready-to-run again. It does not remember the abnormality & stay in a locked-out state until intentionally reset. Therefore, cumulative abnormalities may go undetected,
- Status indicator switch for valve condition (ready-to-run) feedback.

Mounting plate included.



Air Entry Combination	Port Size		Model Number*	Air Entry Type	C _v		Dimensions inches (mm)		
	1, 2	3			1-2	2-3	Length	Width	Depth
Cat-4 with DM1 Series E	1/4	1/2	RC304-09**	FR	1.3	2.4	13.00 (330.0)	11.00 (279.0)	5.40 (134.7)
Cat-4 with DM1 Series E	3/8	1/2	RC306-09**	FR	2.2	2.4	13.00 (330.0)	11.00 (279.0)	5.40 (134.7)
Cat-4 with DM1 Series E	1/4	1/2	RC304L-09**	FRL	1.3	2.4	13.00 (330.0)	11.00 (279.0)	5.40 (134.7)
Cat-4 with DM1 Series E	3/8	1/2	RC306L-09**	FRL	2.2	2.4	13.00 (330.0)	11.00 (279.0)	5.40 (134.7)

* NPT pressure port threads.

** Specify voltage when ordering. Insert voltage code: “W” = 24 volts DC; “Z” = 110-120 volts AC, 50/60 Hz; e.g., RC304-09W. M12 connectors available, consult ROSS.

Standard Air Entry Packages supplied with metal bowl and manual drain. For automatic drain insert an “A” before the dash (-) in the model number, e.g., RC304A-09.

Custom designs available, consult ROSS.

F3

DM²⁰ Series E Double Valves, Manual Lockout L-O-X[®] Valves with Integrated Filter/Regulator


CONTROL
CATEGORY
4

Pre-engineered panel-mounted design with air entry via a filter and regulator “FR”, or filter, regulator and lubricator “FRL”.

Includes DM²⁰ Series E Double Valve with Monitoring & Memory:

- Self-contained dynamic monitoring system requires no further valve monitoring controls,
 - Dynamic memory of abnormal function prevents unintentional reset with removal of air or electricity.
- All necessary features for safety applications are included:
- Electrical reset valve,
 - Status indicator switch for valve condition (ready-to-run) feedback.

Mounting plate included.



F

Air Entry Combination	Port Size		Model Number*	Air Entry Type	C _v		Dimensions inches (mm)		
	1, 2	3			1-2	2-3	Length	Width	Depth
Cat-4 with DM2 [®] Series E	1/4	1/2	RC404-09**	FR	1.3	2.4	13.00 (330.0)	11.00 (279.0)	5.40 (134.7)
Cat-4 with DM2 [®] Series E	3/8	1/2	RC406-09**	FR	2.2	2.4	13.00 (330.0)	11.00 (279.0)	5.40 (134.7)
Cat-4 with DM2 [®] Series E	1/4	1/2	RC404L-09**	FRL	1.3	2.4	13.00 (330.0)	11.00 (279.0)	5.40 (134.7)
Cat-4 with DM2 [®] Series E	3/8	1/2	RC406L-09**	FRL	2.2	2.4	13.00 (330.0)	11.00 (279.0)	5.40 (134.7)

* NPT pressure port threads.

** Specify voltage when ordering. Insert voltage code: “W” = 24 volts DC; “Z” = 110-120 volts AC, 50/60 Hz; e.g., RC404-09W. M12 connectors available, consult ROSS.

Standard Air Entry Packages supplied with metal bowl and manual drain. For automatic drain insert an “A” before the dash (-) in the model number, e.g., RC404A-09.

Custom designs available, consult ROSS.

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com

F3.19

Air Entry Packages

DM Series C Double Valves - Control Reliable Energy Isolation

RC Series

DM2® Series C Double Valves, Manual Lockout L-O-X® Valves with Filter and Regulator

CONTROL
CATEGORY
4


Pre-engineered panel-mounted design with air entry via a filter and regulator "FR", or filter, regulator and lubricator "FRL"

Includes DM2® Series C Double Valve with Monitoring & Memory:

- a) Self-contained dynamic monitoring system requires no further valve monitoring controls,
- b) Dynamic memory of abnormal function prevents unintentional reset with removal of air or electricity

All necessary features for safety applications are included:

- a) Electrical reset valve,
- b) Status indicator switch for valve condition (ready to run) feedback

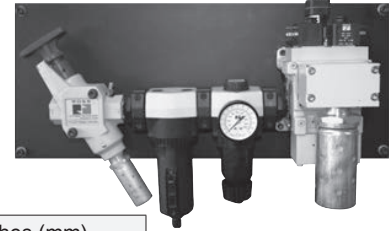

Air Entry Combination	Port Size		Model Number*	Air Entry Type	C _v		Dimensions inches (mm)		
	1, 2	3			1-2	2-3	Length	Width	Depth
Cat-4 with DM2® Series C	1/2	1/2	RC408-06**	FR	3	10	24.0 (610)	14.5 (369)	7.4 (187)
Cat-4 with DM2® Series C	1/2	1/2	RC408L-06**	FRL	4.4	13	24.0 (610)	15.7 (399)	8.3 (211)
Cat-4 with DM2® Series C	3/4	3/4	RC412-06**	FR	4.4	13	27.0 (686)	19.0 (483)	9.0 (229)
Cat-4 with DM2® Series C	3/4	3/4	RC412L-06**	FR	3	10	24.0 (610)	14.5 (369)	7.4 (187)
Cat-4 with DM2® Series C	1	1	RC416-06**	FRL	4.4	13	24.0 (610)	15.7 (399)	8.3 (211)
Cat-4 with DM2® Series C	1	1	RC416L-06**	FRL	4.4	13	31.0 (788)	19.0 (483)	9.0 (229)

* NPT pressure port threads.

** Specify voltage when ordering. Insert voltage code: "W" = 24 volts DC; "Z" = 110-120 volts AC, 50/60 Hz; e.g., RC408-06W. M12 connectors available, consult ROSS.

Standard Air Entry Packages supplied with metal bowl and manual drain. For automatic drain insert an "A" before the dash (-) in the model number, e.g., RC408A-06.

Custom designs available, consult ROSS.

Explosion proof solenoid pilot available, for more information consult ROSS.

M DM2® Series C Double Valves with Integrated Soft Start, Manual Lockout L-O-X® Valves with Integrated Filter/Regulators

CONTROL
CATEGORY
4


Pre-engineered panel mountable design with air entry via a filter and regulator "FR", or filter, regulator and lubricator "FRL"

Includes M DM2® Series C Double Valve with Monitoring & Memory:

- a) Self-contained dynamic monitoring system requires no further valve monitoring controls,
- b) Dynamic memory of abnormal function prevents unintentional reset with removal of air or electricity

All necessary features for safety applications are included:

- a) Electrical reset valve,
- b) Status indicator switch for valve condition (ready to run) feedback

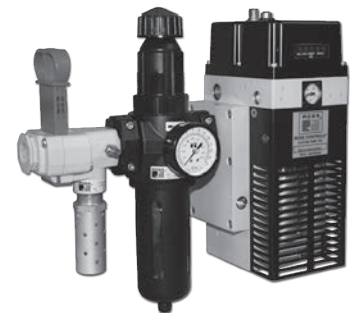

HOW TO ORDER

(Choose your options (in red) to configure your valve assembly model number.)




PIPE SIZE	LOCKOUT VALVE TYPE	LUBRICATOR FILL TYPE	DOWNSTREAM PRESSURE SWITCH (includes 1/4" Extra Port)	CABLE OPTIONS
1/2 NPTF 4	Modular L-O-X® 1	Fill Port 2	586A86 1	Yes 1
3/4 NPTF 5	L-O-X® 2	No lubricator X	None X	No X
1/2 BSPP D	No L-O-X® X			
3/4 BSPP E				
FILTER-REGULATOR (0-125 psi with 0-200 gauge)	EXTRA PORTS (Prior to M DM2® Exhaust Valve)	M DM2® VALVE	EXTRA PORTS (Downstream of M DM2®)	
5 Micron, Manual Drain, Metal Bowl 1	1/4 2	Without Transducer 1	1/4 2	
5 Micron, Auto Drain, Metal Bow 2	3/8 3	With Transducer 3	3/8 3	
None X	1/2 4		1/2 4	
	None X		None X	

Custom designs available, consult ROSS.

NOTE: Per specifications and regulations, these products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



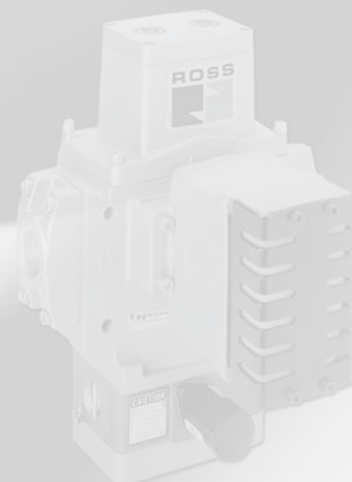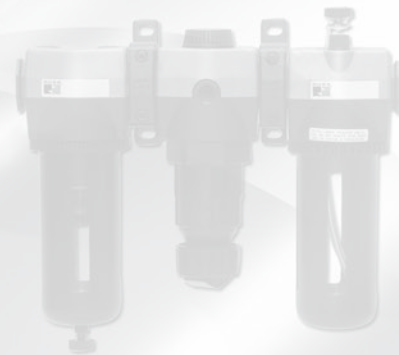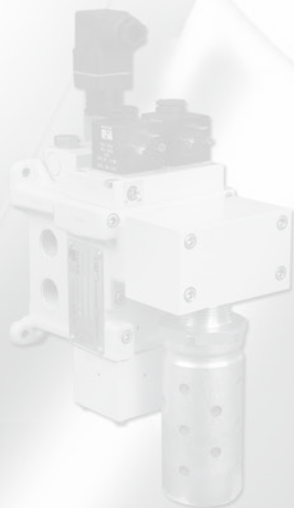

F3

F






www.rosscontrols.com

F

ROSS CONTROLS®



PILOT OPERATED CHECK VALVES 19, 27 AND SV27 SERIES

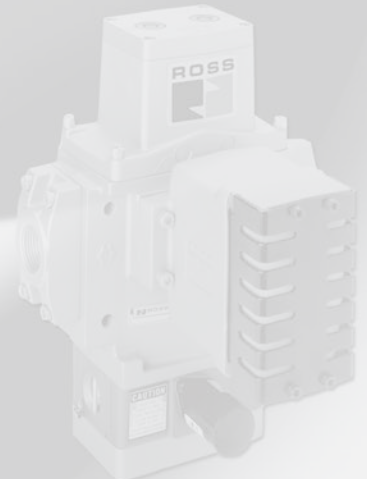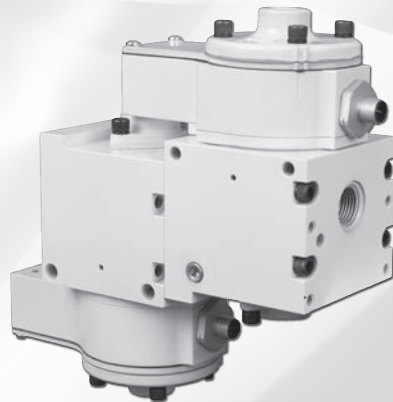

www.rosscontrols.com

PILOT OPERATED CHECK VALVES RIGHT ANGLE – KEY FEATURES

- Right angle design for easy positioning of pipe or tubing
- Threaded outlet ports available with NPT or G threads
- Inlet ports available with NPTF threaded or push-to-connect fittings
- Quick and easy installation
- Galvanized zinc plated brass body construction
- Lube or non-lube operation

PILOT OPERATED CHECK VALVES – KEY FEATURES

- Available with automatic or manual trapped pressure release when pressure is removed from the Blowdown Signal Port (BP)
- Poppet construction for near zero leakage
- Applications include Air Holding and Cylinder Load Holding


VALVE SERIES	Category	OPERATION				AVAILABLE PORT SIZES								MAX. FLOW (Cv)								Integrated Trapped Pressure Relief	Page	
		Air Pilot	Solenoid	Single	Dual	1/8	1/4	3/8	1/2	3/4	1	1¼	1½	Port Size										
														1/8	1/4	3/8	1/2	3/4	1	1¼	1½			
19	1													0.4	0.8	1.2							Optional	F4.4
27	1														2.2	2.9	3.2							F4.5
27	1													2.3	3.8	4	7.7	9	24	29	29			F4.6
27	1														2.2	2.9	3.2						Remote	F4.7
27	1															2.6	2.8	9.2					Remote	F4.7
27	1															2.6	2.8	9.2					Manual	F4.8
27	1															2.9	3.2	8.5	8.5					F4.9
27	1															2.9	3.2	8.5	8.5				Remote	F4.10
27	1															2.9	3.2	8.5	8.5				Manual	F4.11
27	1															2.9	3.2	8.5	8.5				Solenoid	F4.12
SV27	2															4.5	8.3	20	29	33				F4.13
SV27	3															4.5	8.3	20	29	33				F4.14
SV27	2															4.5	8.3	20	29	33				F4.15
SV27	3															4.5	8.3	20	29	33				F4.16

Pilot Operated Check Valves Right Angle

19 Series Cylinder Position Holding


Models with Threaded Banjo						
Port Size		Valve Model Number	Port 12	C _v		Tightening Torque Max. Ft-lb (Nm)
Port 1 (female threads)	Port 2 (male threads)			1-2	2-1	
1/8	1/8	1958A1010	10-32 UNF	0.4	0.4	22.13 (30)
1/4	1/4	1958A2010	10-32 UNF	0.8	0.7	14.75 (20)
3/8	3/8	1958A3010	10-32 UNF	1.2	1.3	22.13 (30)
1/2	1/2	1958A4010	10-32 UNF	2.3	2.2	29.50 (40)
G1/8	G1/4	D1958A1010*	M5	0.4	0.4	7.38 (10)
G1/4	G1/4	D1958A2010*	M5	0.8	0.7	8.85 (12)
G3/8	G3/8	D1958A3010*	M5	1.2	1.3	14.75 (20)
G1/2	G1/2	D1958A4010*	M5	2.3	2.2	22.13 (30)

* BSPP port threads.




Valve Dimensions – inches (mm)


Port Size 1/8




Port Size 1/4







Port Size 3/8



Port Size 1/2



Signal Pressure: The charts below show the minimum signal pilot port pressure to open the valve versus port 2 pressure (P_2) when there is no pressure at port 1 ($P_1 = 0$ bar).



F4

F

ACCESSORIES & OPTIONS

Manual Override	Manual Trapped Pressure Relief Adapter			
	Port 1	Port 2	Port Threads	Model Number*
	5/32	10-32 Manual Operated Check	NPT	1998A1015
	M5	M5 Manual Operated Check	BSPP	D1998A1010

* Adapter threads into the signal port.



Valve Illustrated with
Optional Manual Trapped
Pressure Relief Adapter

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Ambient/Media Temperature: 15° to 160°F (-10° to 70°C).

Flow Media: Filtered air.

Operating Pressure: 15 to 150 psig (1 to 10 bar).

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com


F4.3

Pilot Operated Check Valves Right Angle




19 Series Cylinder Position Holding

Models with Push-to-Connect Fitting						
Port Size		Valve Model Number	Port 12	C _v		Tightening Torque Max. Ft-lb (Nm)
Port 1# (tube fittings)	Port 2 (male threads)			1-2	2-1	
5/32"	1/8	1958A1115	10-32 UNF	0.4	0.4	11.06 (15)
1/4"	1/8	1958A1120	10-32 UNF	0.4	0.4	11.06 (15)
1/4"	1/4	1958A2120	10-32 UNF	0.8	0.7	14.75 (20)
3/8"	1/4	1958A2130	10-32 UNF	0.8	0.7	14.75 (20)
3/8"	3/8	1958A3130	10-32 UNF	1.2	1.3	22.13 (30)
4 mm	G1/8	D1958A1140*	M5	0.4	0.4	7.38 (10)
6 mm	G1/8	D1958A1160*	M5	0.4	0.4	7.38 (10)
8 mm	G1/8	D1958A1180*	M5	0.4	0.4	7.38 (10)
6 mm	G1/4	D1958A2160*	M5	0.8	0.7	8.85 (12)
8 mm	G1/4	D1958A2180*	M5	0.8	0.7	8.85 (12)
10 mm	G1/4	D1958A2110*	M5	0.8	0.7	8.85 (12)
8 mm	G3/8	D1958A3180*	M5	1.2	1.3	14.75 (20)
10 mm	G3/8	D1958A3110*	M5	1.2	1.3	14.75 (20)





Port 1 tubing size in inches (") or millimeters (mm).
** BSPP port threads.



Valve Dimensions – inches (mm)

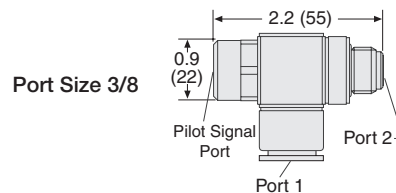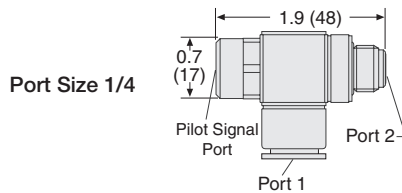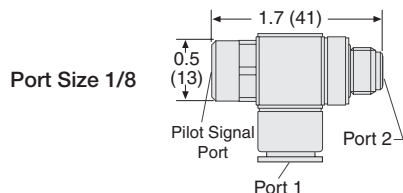

Signal Pressure: The charts below show the minimum signal pilot port pressure to open the valve versus port 2 pressure (P_2) when there is no pressure at port 1 ($P_1 = 0$ bar).



OPTIONS

Manual Override	Manual Trapped Pressure Relief Adapter			
	Port 1	Port 2	Port Threads	Model Number*
	5/32	10-32 Manual Operated Check	NPT	1998A1015
	M5	M5 Manual Operated Check	BSPP	D1998A1010

* Adapter threads into the signal port.



Valve Illustrated with
Optional Manual Trapped
Pressure Relief Adapter

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Ambient/Media Temperature: 15° to 160°F (-10° to 70°C).

Flow Media: Filtered air.

Operating Pressure: 15 to 150 psig (1 to 10.3 bar).

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Pilot Operated Check Valves

Single, without Trapped Pressure Relief

27 Series Load Holding


2-Way 2-Position, Pressure Controlled				
Ports Size	Valve Model Number*	Signal Port	C _v	Weight lb (kg)
1/4	2751A2908	1/8-27 NPT	2.2	2.3 (1.0)
3/8	2751A3908	1/8-27 NPT	2.9	2.3 (1.0)
1/2	2751A4915	1/8-27 NPT	3.2	2.3 (1.0)

* NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D2751A2908.




Valve Dimensions – inches (mm)


Port Size 1/4

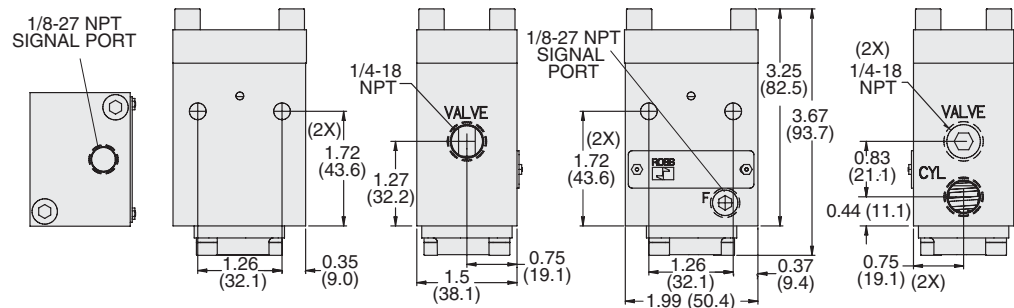

Port Size 3/8

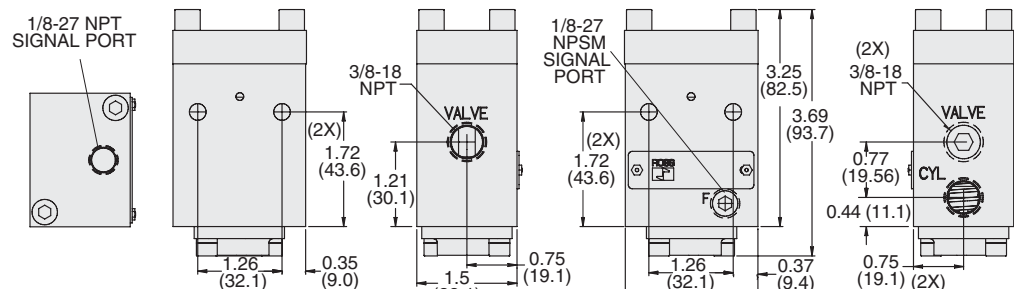

Port Size 1/2

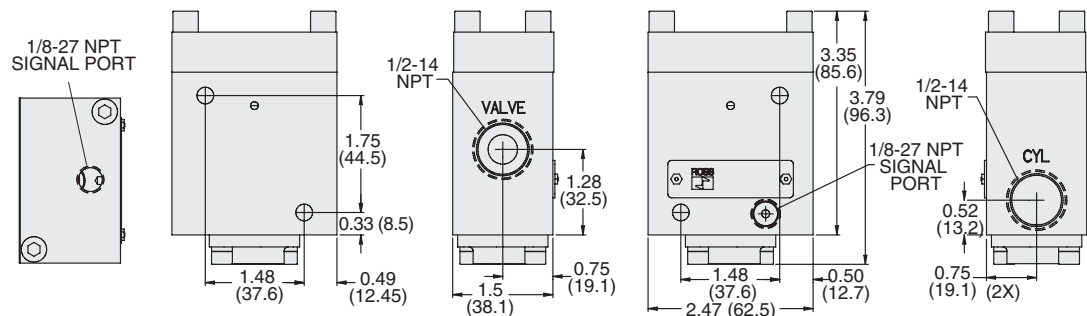


F4

F

Single Pilot Operated Check Valve Application

CIRCUIT FEATURES:

- Cylinder moves as long as the control valve solenoid is energized. Use for continuous motion or jogging.
- Cylinder remains stationary if neither control valve solenoid is energized, or if electrical signal is lost.

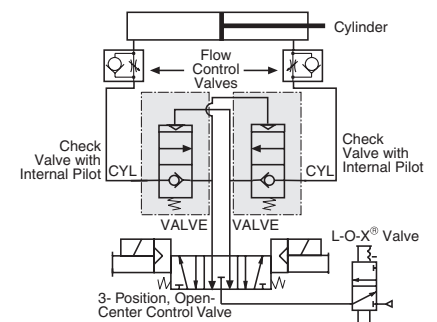

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Ambient/Media Temperature: 40° to 175°F (4° to 80°C).

Inlet Pressure: 15 to 150 psig (1 to 10.3 bar).

Flow Media: Filtered air.

Signal Pressure: Must be equal to or greater than inlet pressure.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com

F4.5

Pilot Operated Check Valves

Single, without Trapped Pressure Relief

27 Series

Load Holding



2-Way 2-Position, Pressure Controlled					
Ports Size	Body Size	Valve Model Number*	Signal Port	C _v	Weight lb (kg)
1/4	3/8	2751A2903	1/4	2.3	1.3 (0.6)
3/8	3/8	2751A3901	1/4	3.8	1.3 (0.6)
1/2	3/8	2751A4902	1/4	4.0	1.3 (0.6)
1/2	3/4	2751A4905	1/4	7.7	2.3 (1.0)
3/4	3/4	2751A5903	1/4	9.0	2.3 (1.0)
1	3/4	2751A6901	1/4	9.0	2.3 (1.0)
1	1 1/4	2751B6904	1/4	24	6.0 (2.7)
1 1/4	1 1/4	2751B7901	1/4	29	6.0 (2.7)
1 1/2	1 1/4	2751B8902	1/4	29	6.0 (2.7)

* NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D2751A2903.




Valve Dimensions – inches (mm)



Body Size 3/8



Body Size 3/4

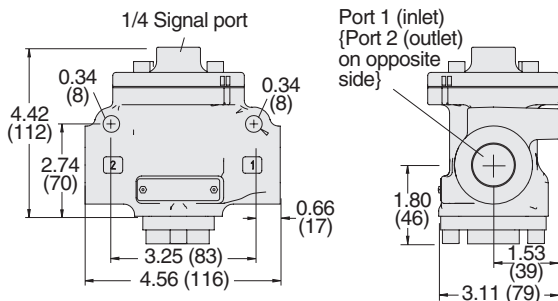


Body Size 1 1/2

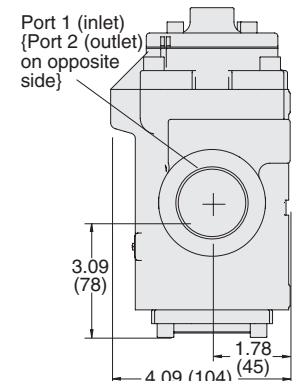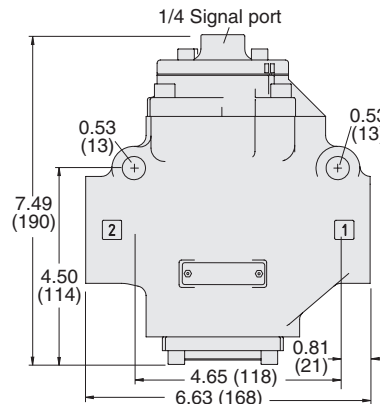

Single Pilot Operated Check Valve Application

CIRCUIT FEATURES:

- Cylinder moves as long as the control valve solenoid is energized. Use for continuous motion or jogging.
- Cylinder remains stationary if neither control valve solenoid is energized, or if electrical signal is lost.

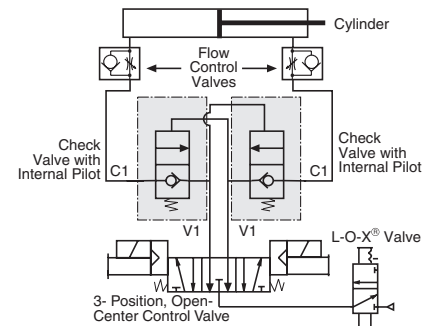

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Ambient/Media Temperature: 40° to 175°F (4° to 80°C).

Inlet Pressure: 15 to 150 psig (1 to 10.3 bar).

Flow Media: Filtered air.

Signal Pressure: Must be equal to or greater than inlet pressure.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.




Pilot Operated Check Valves Single, with Remote Trapped Pressure Relief

27 Series Load Holding

2-Way 2-Position, Pressure Controlled				
Ports Size	Valve Model Number*	Signal Port	C _v	Weight lb (kg)
3/8	2751A3922	1/8-27 NPT	2.6	1.8 (0.8)
1/2	2751A4922	1/8-27 NPT	2.8	1.8 (0.8)
3/4	2751A5917	1/8-27 NPT	9.2	2.9 (3.1)


* NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D2751A3922.



**Type A Single
PO Check Valve
(Remote Trapped
Pressure Relief)**



Valve Dimensions – inches (mm)

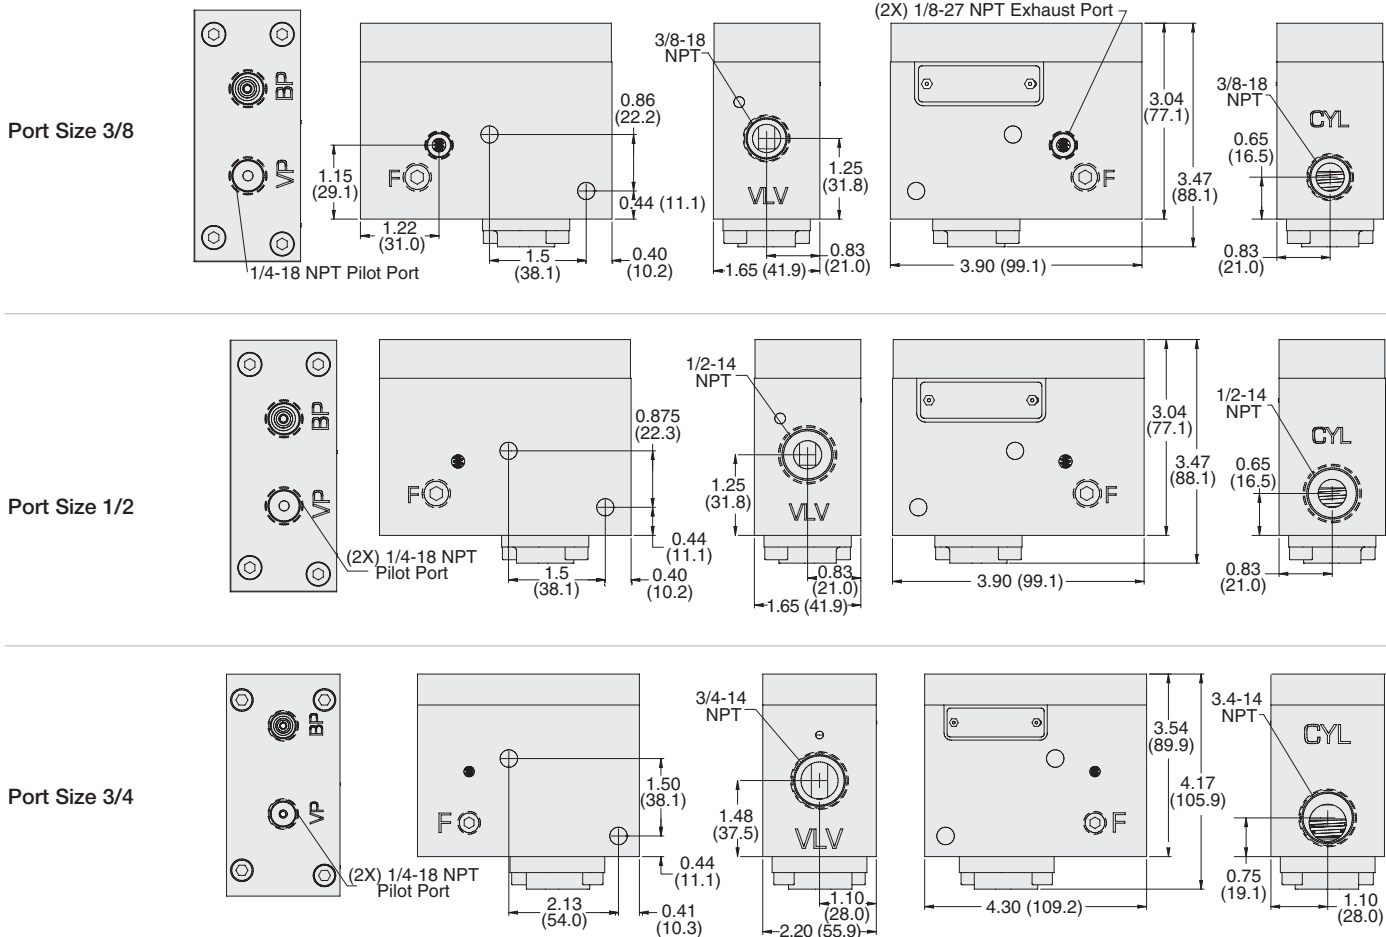


F4

F

Single Pilot Operated Check Valve with Trapped Pressure Relief Application

CIRCUIT FEATURES:

- Trapped pressure between check valve and cylinder is exhausted when the air supply at the Blowdown Signal Port (BP) is lost or locked-out.
- Cylinder moves as long as the control valve solenoid is energized. Use for continuous motion or jogging.
- Cylinder remains stationary if neither control valve solenoid is energized, or if electrical signal is lost.

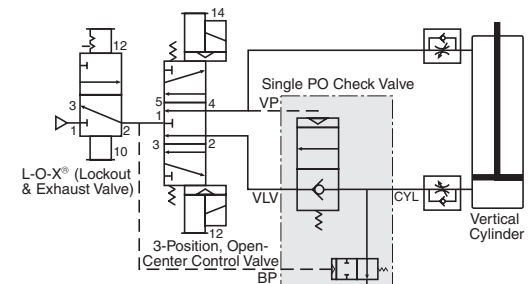

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.
Mounting Type: In-Line.
Ambient/Media Temperature: 40° to 175°F (4° to 80°C).

Inlet Pressure: 15 to 150 psig (1 to 10.3 bar).
Flow Media: Filtered air.
Signal Pressure: Must be equal to or greater than inlet pressure.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com

F4.7


Pilot Operated Check Valves

Single, with Manual Trapped Pressure Relief

27 Series
Load Holding


2-Way 2-Position, Pressure Controlled			
Ports Size	Valve Model Number*	C _v	Weight lb (kg)
3/8	2751A3920	2.6	1.8 (0.8)
1/2	2751A4920	2.8	1.8 (0.8)
3/4	2751A5919	9.2	2.9 (3.1)

* NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D2751A3920.




Valve Dimensions – inches (mm)


Port Size 3/8

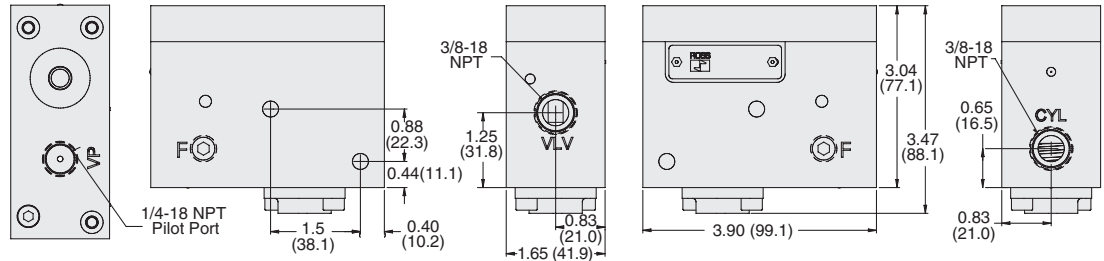

F4 Port Size 1/2

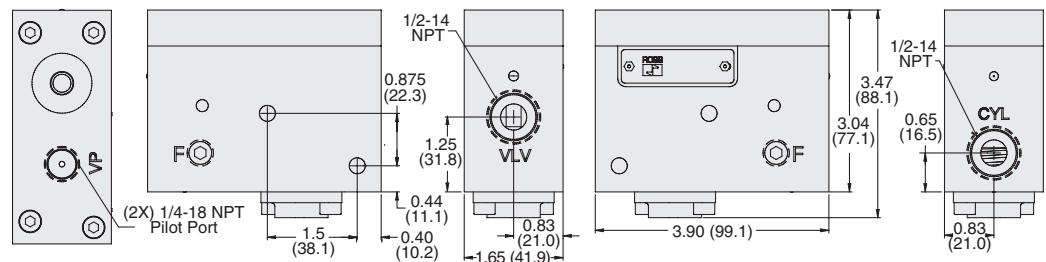


F Port Size 3/4

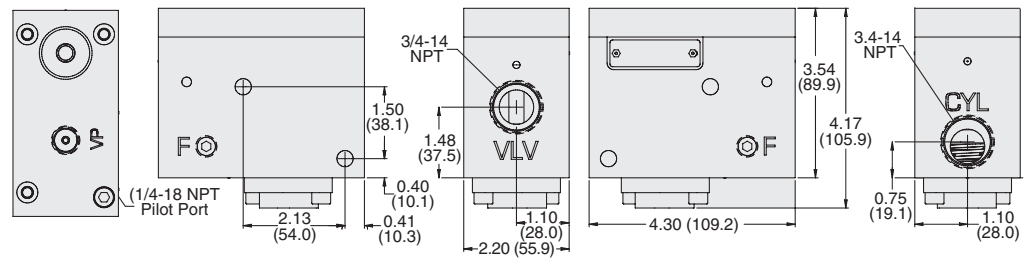

CIRCUIT FEATURES:

- Trapped pressure between check valve and cylinder is exhausted when the manual relief button is pressed.
- Cylinder moves as long as the control valve solenoid is energized. Use for continuous motion or jogging.
- Cylinder remains stationary if neither control valve solenoid is energized, or if electrical signal is lost.

Single Pilot Operated Check Valve with Manual Trapped Pressure Relief Application

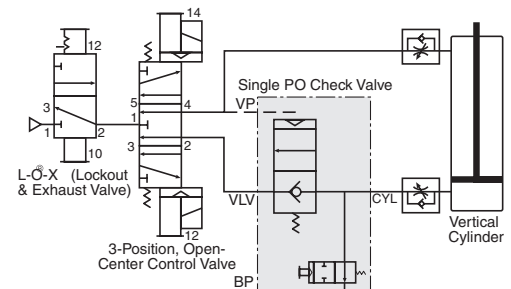

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.
Mounting Type: In-Line.
Ambient/Media Temperature: 40° to 175°F (4° to 80°C).

Inlet Pressure: 15 to 150 psig (1 to 10.3 bar).
Flow Media: Filtered air.
Signal Pressure: Must be equal to or greater than inlet pressure.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.





Pilot Operated Check Valves

Dual, without Trapped Pressure Relief

27 Series
Load Holding


2-Way 2-Position, Pressure Controlled				
Ports Size	Valve Model Number*	Signal Port	C _v	Weight lb (kg)
3/8	2768C3900	1/8-27 NPT	2.9	2.0 (0.9)
1/2	2768C4900	1/8-27 NPT	3.2	2.4 (1.1)
3/4	2768C5900	1/8-27 NPT	8.5 #	3.8 (1.7)
1	2768A6900	1/8-27 NPT	8.5 #	6.8 (3.1)

* NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D2768C3900.
Effective C_v varies with load and pressure drop. Consult ROSS for specifics on your system.




Valve Dimensions – inches (mm)


Port Size 3/8

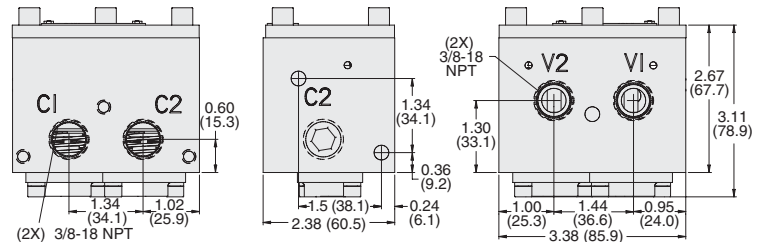


Port Size 1/2

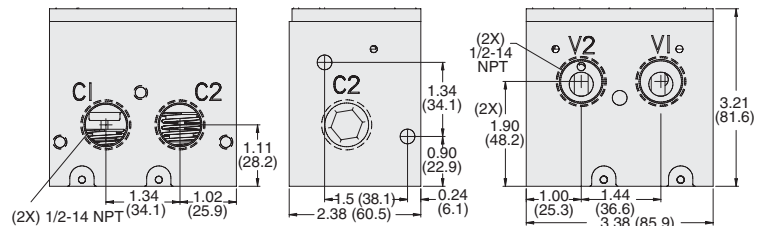

Port Size 3/4

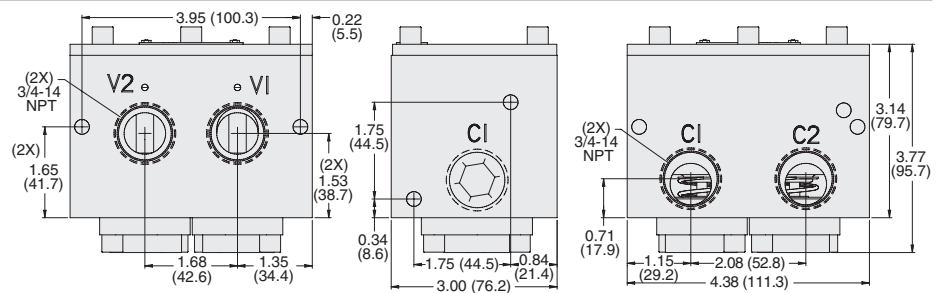

Port Size 1

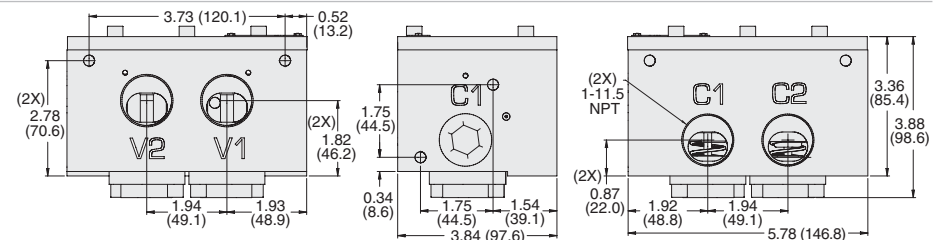


F4

F

Dual Pilot Operated Check Valve Application

CIRCUIT FEATURES:

- Cylinder moves as long as the control valve solenoid is energized. Use for continuous motion or jogging.
- Cylinder remains stationary if neither control valve solenoid is energized, or if electrical signal is lost.

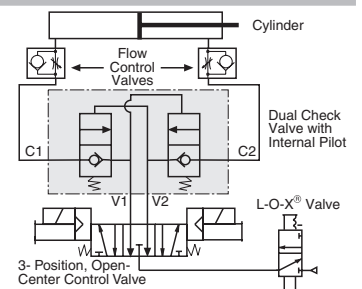

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Ambient/Media Temperature: 40° to 175°F (4° to 80°C).

Inlet Pressure: 15 to 150 psig (1 to 10.3 bar).

Flow Media: Filtered air.

Signal Pressure: Must be equal to or greater than inlet pressure.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com

F4.9


Pilot Operated Check Valves

Dual, with Remote Trapped Pressure Relief

27 Series
Load Holding


2-Way 2-Position, Pressure Controlled				
Ports Size	Valve Model Number*	Signal Port	C _v	Weight lb (kg)
3/8	2768D3901	1/8-27 NPT	2.9	3.5 (14.6)
1/2	2768D4901	1/8-27 NPT	3.2	3.5 (14.6)
3/4	2768D5901	1/8-27 NPT	8.5 #	5.2 (2.3)
1	2768D6901	1/8-27 NPT	8.5 #	8.8 (4.0)

* NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D2768D3901.
Effective C_v varies with load and pressure drop. Consult ROSS for specifics on your system.




Valve Dimensions – inches (mm)

Port Size 3/8

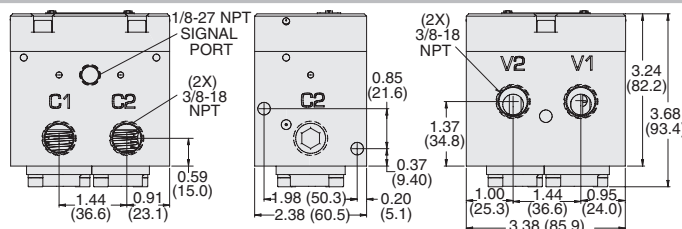


Port Size 1/2

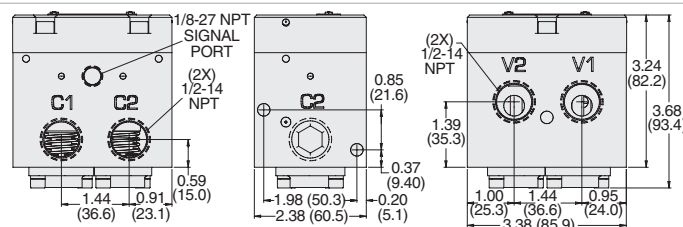


F4

Port Size 3/4

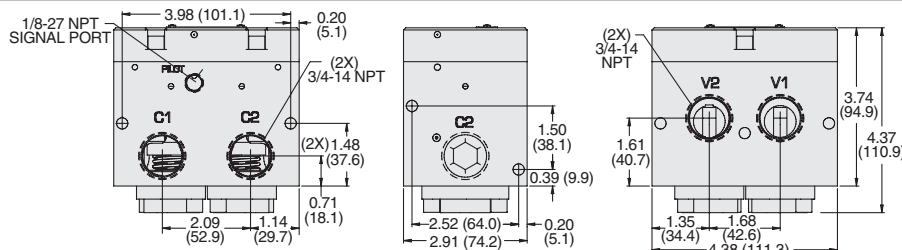

F


Port Size 1

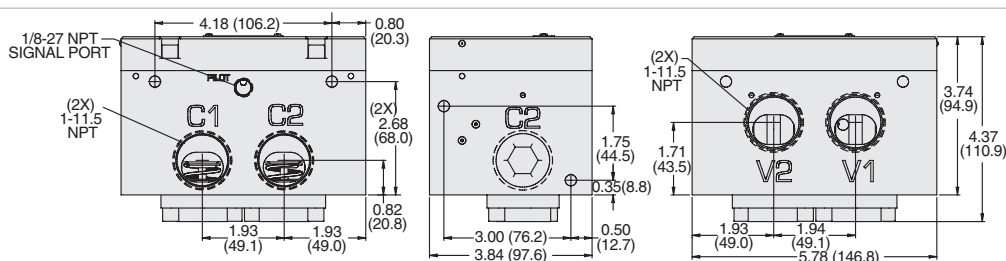

Dual Pilot Operated Check Valve
Remote Trapped
Pressure Relief Application

CIRCUIT FEATURES:

- Trapped pressure between check valve and cylinder is exhausted when the air supply at the port "P" is lost or locked-out.
- Cylinder moves as long as the control valve solenoid is energized. Use for continuous motion or jogging.
- Cylinder remains stationary if neither control valve solenoid is energized, or if electrical signal is lost.

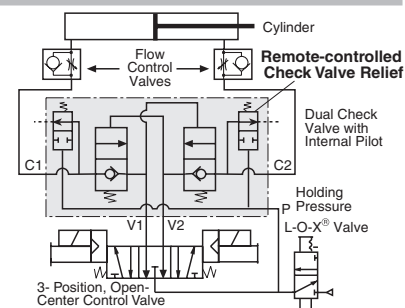

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Ambient/Media Temperature: 40° to 175°F (4° to 80°C).

Inlet Pressure: 15 to 150 psig (1 to 10.3 bar).

Flow Media: Filtered air.

Signal Pressure: Must be equal to or greater than inlet pressure.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.




Pilot Operated Check Valves

Dual, with Manual Trapped Pressure Relief

27 Series
Load Holding


2-Way 2-Position, Pressure Controlled			
Ports Size	Valve Model Number	C _v	Weight lb (kg)
3/8	2768D3904	2.9	3.2 (1.4)
1/2	2768D4904	3.2	3.5 (1.6)
3/4	2768D5904	8.5 #	5.2 (2.3)
1	2768D6904	8.5 #	8.8 (4.0)

* NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D2768D3904.
Effective C_v varies with load and pressure drop. Consult ROSS for specifics on your system.




Valve Dimensions – inches (mm)


Port Size 3/8

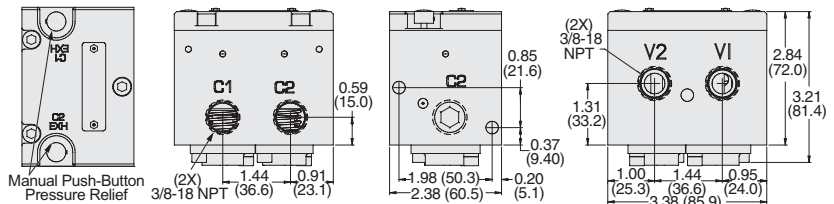


Port Size 1/2

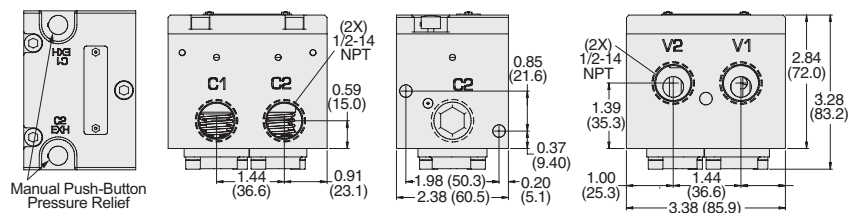

Port Size 3/4

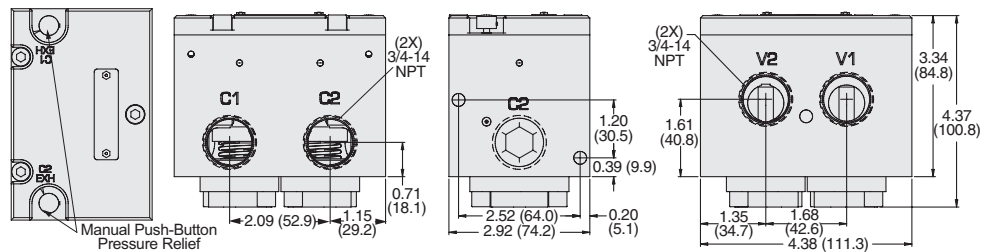


Port Size 1

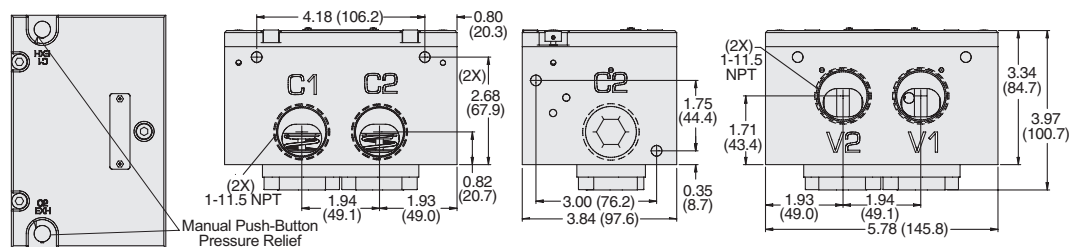

Dual Pilot Operated Check Valve Manual Trapped Pressure Relief Application

CIRCUIT FEATURES:

- Trapped pressure between check valve and cylinder is exhausted when push buttons A and B are pressed.
- Cylinder moves as long as the control valve solenoid is energized. Use for continuous motion or jogging.
- Cylinder remains stationary if neither control valve solenoid is energized, or if electrical signal is lost.

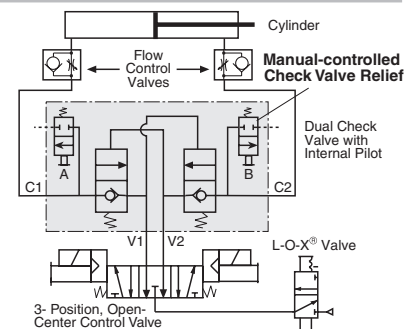

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Ambient/Media Temperature: 40° to 175°F (4° to 80°C).

Inlet Pressure: 15 to 150 psig (1 to 10.3 bar).

Flow Media: Filtered air.

Signal Pressure: Must be equal to or greater than inlet pressure.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com


F4.11

Pilot Operated Check Valves

Dual Solenoid Controlled, with Remote Trapped Pressure Relief


27 Series
Load Holding

2-Way 2-Position, Solenoid Pilot Controlled						
Ports Size	Valve Model Number*				Signal Port	C _v
	DIN Connector	3-Pin Mini Connector	24 Volts DC 3-Pin Mini	24 Volts DC 4-Pin Micro		
3/8	2778D3900**	2778D3901**	2778D3902	2778D3904	1/8-27 NPT	2.9
1/2	2778D4900**	2778D4901**	2778D4902	2778D4904	1/8-27 NPT	3.2
3/4	2778D5900**	2778D5901**	2778D5902	2778D5904	1/8-27 NPT	8.5 #
1	2778D6900**	2778D6901**	2778D6902	2778D6904	1/8-27 NPT	8.5 #



* NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D2778D3900W.
 **Insert voltage code: "W" = 24 volts DC; "Z" = 110-120 volts AC, 50/60 Hz; e.g., D2778D3900W. For other voltages, consult ROSS.
 # Effective C_v varies with load and pressure drop. Consult ROSS for specifics on your system.


Valve Dimensions – inches (mm)

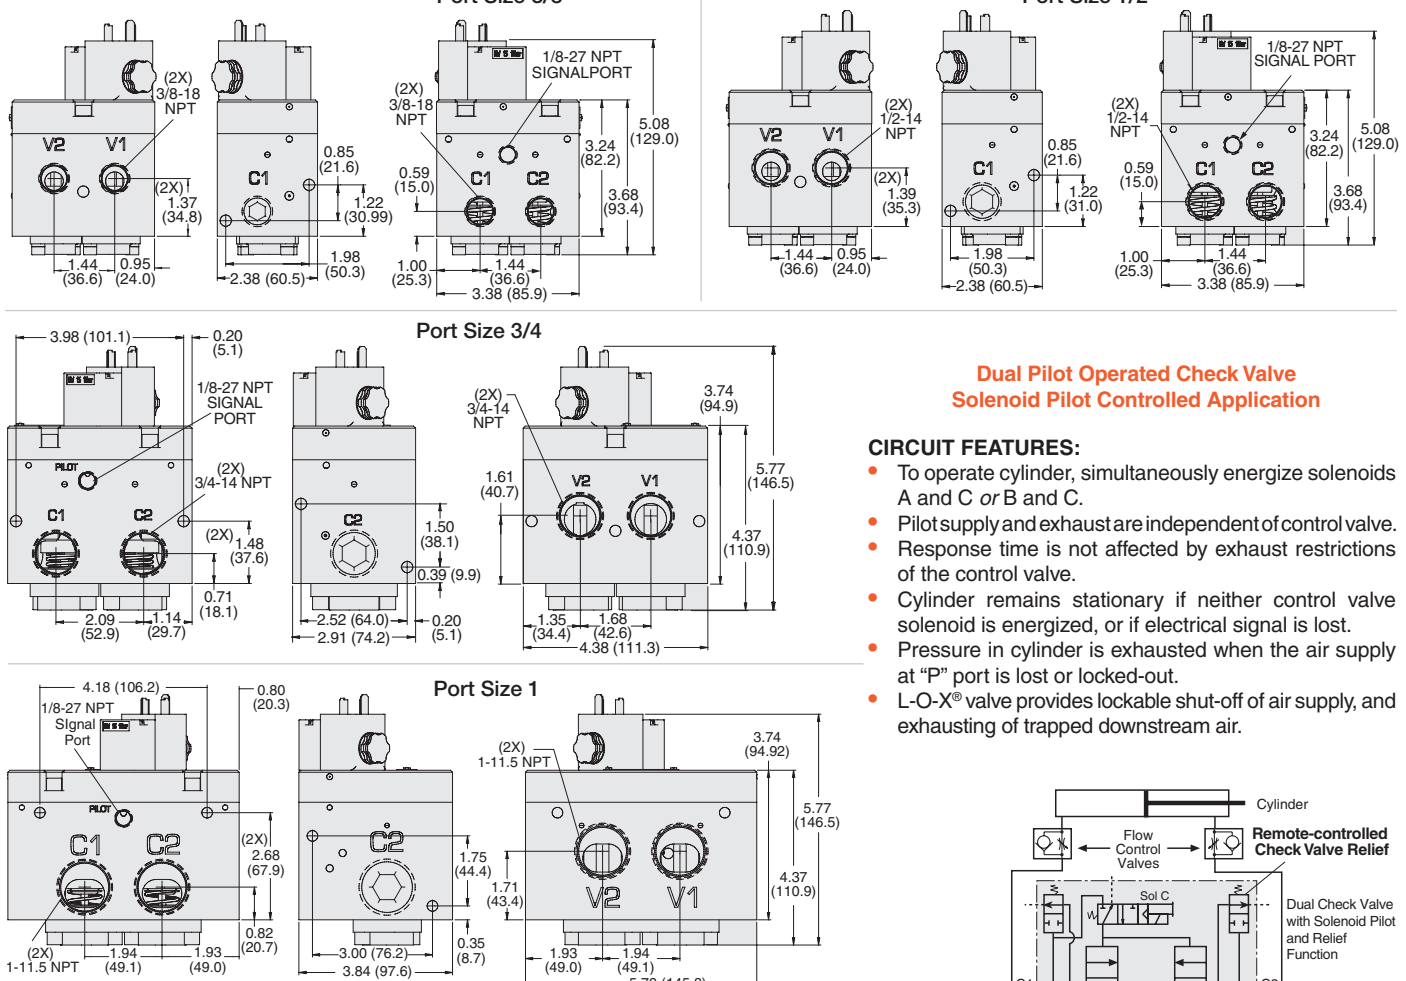

Dual Pilot Operated Check Valve Solenoid Pilot Controlled Application

CIRCUIT FEATURES:

- To operate cylinder, simultaneously energize solenoids A and C or B and C.
- Pilot supply and exhaust are independent of control valve.
- Response time is not affected by exhaust restrictions of the control valve.
- Cylinder remains stationary if neither control valve solenoid is energized, or if electrical signal is lost.
- Pressure in cylinder is exhausted when the air supply at "P" port is lost or locked-out.
- L-O-X® valve provides lockable shut-off of air supply, and exhausting of trapped downstream air.

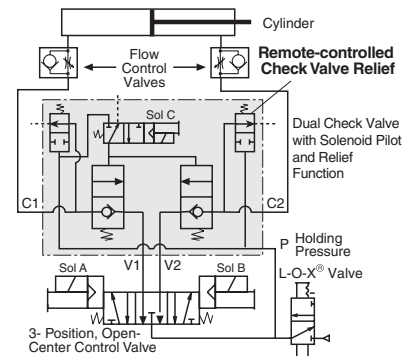

Connector Wiring



STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.
Mounting Type: In-Line.
Solenoids: AC or DC power.
Standard Voltages: 24 volts DC; 110-120 volts AC, 50/60 Hz.
Power Consumption: 8 VA inrush, 6 VA holding on AC; on DC 4.5 watts with 4-pin Micro connector, 60 watts with 3-pin connector.


Ambient Temperature: 40° to 120°F (4° to 50°C).
Media Temperature: 40° to 175°F (4° to 80°C).
Inlet Pressure: 30 to 150 psig (2 to 10 bar).
Pilot Pressure: Must be equal to or greater than inlet pressure.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Pilot Operated Check Sensing Valves

SV27 Series Load Holding


2-Way 2-Position Valves, Solenoid Pilot Controlled					
Port Size	Body Size	Valve Model Number*	C _v	Weight lb (kg)	
1, 2			1-2		
1/2	3/4	SV27NC115408CSAA1A**	4.5	5.0 (2.3)	
3/4	3/4	SV27NC115508CSAA1A**	8.3	5.0 (2.3)	
1	3/4	SV27NC115608CSAA1A**	10.3	5.0 (2.3)	
1	1 1/4	SV27NC117608CSAA1A**	20	12.5 (5.6)	
1 1/4	1 1/4	SV27NC117708CSAA1A**	29	12.5 (5.6)	
1 1/2	1 1/4	SV27NC117808CSAA1A**	33	12.5 (5.6)	

* NPT port threads. For BSPP threads, replace "N" in the model number with a "D", e.g., SV27DC115408CSAA1A1A.
 ** Insert voltage code: "1A"=110-120 volts AC, 50/60 Hz; "1D"= 24 volts DC; .e.g., SV27NC115408CSAA1A1A.
 For other voltages, consult ROSS.




Valve Dimensions – inches (mm)

Body Size 3/4 (CNOMO Style Pilot)

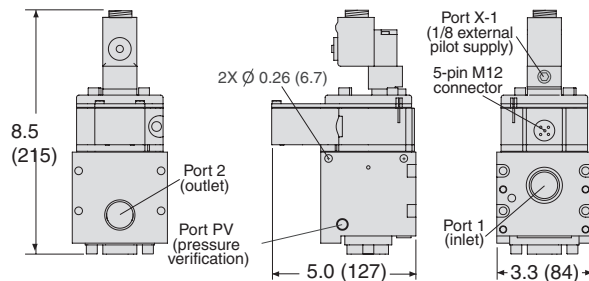

Body Size 1 1/4 (Pacer Style Pilot)

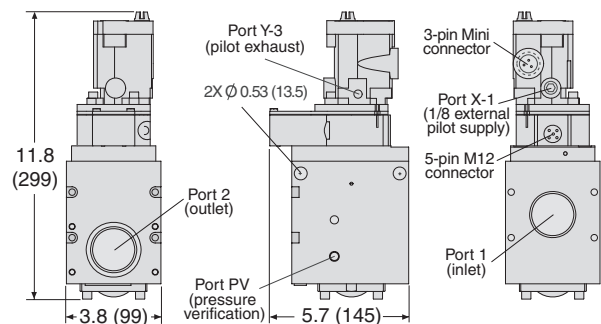

ACCESSORIES & OPTIONS


Preassembled Wiring Kits

Kit Number*	Length meters (feet)	Number of Cables
2239H77	4 (13.1)	2
2240H77	10 (32.8)	2


* Each cable has one connector.

The wiring kits come with a cord grip on each cable. One cable has a 3-pin MINI connector for the solenoid and one has a 5-pin M12 (Micro) connector for the sensing switch.

Solenoid Cable with 3-pin MINI Connector





Sensing Switch Cable with 5-pin M12 Connector



Optional Pressure Switch Kit

Kit Number*	608A86
-------------	--------

*Pressure switch closes on falling pressure of 5 psig (0.34 bar).



STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Solenoid: AC or DC power. Rated for continuous duty.

Standard Voltages: 24 volts DC; 110-120 volts AC, 50/60 Hz.

Power Consumption:

CNOMO Style: 11 VA inrush, 8.5 VA holding on 50 or 60 Hz; 6 watts on DC.

Pacer Style: 87 VA inrush, 30 VA holding on 50 or 60 Hz; 14 watts on DC.

Ambient Temperature: 40° to 120°F (4° to 50°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: 40 to 150 psig (2.8 to 10.3 bar).

Pilot Pressure: Must be equal to or greater than inlet pressure.

Switch Current/Voltage Max.: 2.5 A/120 volts AC.

Switch Current/Voltage Min.: 50 mA/24 volts DC.

NOTE: Electrical life of switch varies with conditions and voltage; rated in excess of 15 million cycles.

Functional Safety Data: Category 2 PL d; B10d: Valve - 20,000,000, Switch - 2,000,000; PFHd: 2.35×10^{-7} ; MTTFd: 98.15 (n_{op} : 7360); DC (obtained by monitoring safety switch status): 3/2 valves - 99%, 2/2 and PO Check valves - 90%; ROSS recommends testing the switch function and sealing for load holding valves every 8 hours.

Vibration/Impact Resistance: Calculated to BS EN 60068-2-27.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16


www.rosscontrols.com

F4.13

Pilot Operated Check Sensing Valves Redundant

SV27 Series Load Holding

2-Way 2-Position Redundant Valves, Solenoid Pilot Controlled				
Port Size 1, 2	Body Size	Valve Model Number*	C _v 1-2	Weight lb (kg)
1/2	3/4	SV27NC555408CSAA1A**	3.8	10.0 (4.5)
3/4	3/4	SV27NC555508CSAA1A**	5.6	10.0 (4.5)
1	3/4	SV27NC555608CSAA1A**	8	10.0 (4.5)
1	1¼	SV27NC557608CSAA1A**	12	25.0 (11.3)
1¼	1¼	SV27NC557708CSAA1A**	19	25.0 (11.3)
1½	1¼	SV27NC557808CSAA1A**	22	25.0 (11.3)




* NPT port threads. For BSPP threads, replace "N" in the model number with a "D", e.g., SV27DC555408CSAA1A1A.


** Insert voltage code: "1A"=110-120 volts AC, 50/60 Hz; "1D"= 24 volts DC; e.g., SV27NC555408CSAA1A1A. For other voltages, consult ROSS.

Valve Dimensions – inches (mm)

Body Size 3/4 (CNOMO Style Pilot)

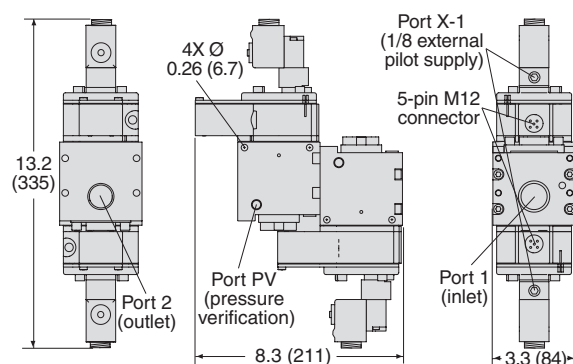

Body Size 1¼ (Pacer Style Pilot)

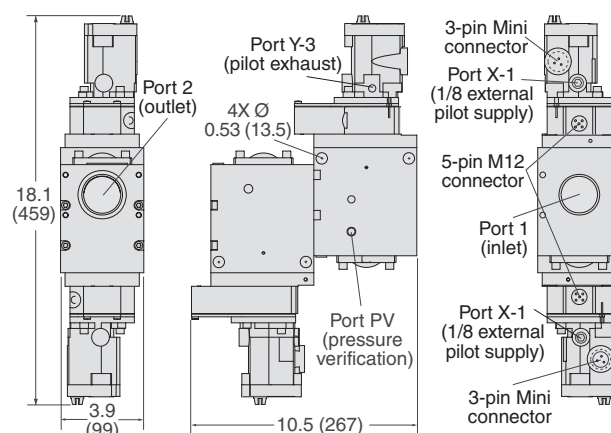

ACCESSORIES & OPTIONS

Preassembled Wiring Kits

The wiring kits come with a cord grip on each cable. One cable has a 3-pin MINI connector for the solenoid and one has a 5-pin M12 (Micro) connector for the sensing switch.

SV27 Redundant PO Check valves (CAT 3), requires 2 kits.

Kit Number*	Length meters (feet)	Number of Cables
2239H77	4 (13.1)	2
2240H77	10 (32.8)	2


* Each cable has one connector.

Optional Pressure Switch Kit



Kit Number*	608A86
-------------	--------

*Pressure switch closes on falling pressure of 5 psig (0.34 bar).

Solenoid Cable
with 3-pin
MINI Connector



Sensing Switch Cable
with 5-pin
M12 Connector



STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Solenoid: AC or DC power. Rated for continuous duty.

Standard Voltages: 24 volts DC; 110-120 volts AC, 50/60 Hz.

Power Consumption:

CNOMO Style: 11 VA inrush, 8.5 VA holding on 50 or 60 Hz; 6 watts on DC.

Pacer Style: 87 VA inrush, 30 VA holding on 50 or 60 Hz; 14 watts on DC.

Ambient Temperature: 40° to 120°F (4° to 50°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: 40 to 150 psig (2.8 to 10.3 bar).

Pilot Pressure: Must be equal to or greater than inlet pressure.

Switch Current/Voltage Max.: 2.5 A/120 volts AC.

Switch Current/Voltage Min.: 50 mA/24 volts DC.

NOTE: Electrical life of switch varies with conditions and voltage; rated in excess of 15 million cycles.

Functional Safety Data: Category 3 PL e; B10d: Valve - 20,000,000, Switch - 2,000,000; PFHd: 2.47x10⁻⁸; MTTFd: 100 (n_{op}: 7360);

DC (obtained by monitoring safety switch status): 3/2 valves - 99%, 2/2 and PO Check valves - 90%; ROSS recommends testing the switch function and sealing for load holding valves every 8 hours.


Vibration/Impact Resistance: Calculated to BS EN 60068-2-27.


IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Pilot Operated Check Sensing Valves



SV27 Series Load Holding

2-Way 2-Position Valves, Pressure Controlled					
Port Size	Body Size	Valve Model Number*	C _v	Weight lb (kg)	
1, 2			1-2		
1/2	3/4	SV27NC115405ASAA	4.5	4.0 (1.8)	
3/4	3/4	SV27NC115505ASAA	8.3	4.0 (1.8)	
1	3/4	SV27NC115605ASAA	10.3	4.0 (1.8)	
1	1 1/4	SV27NC117605ASAA	20	11.0 (5.0)	
1 1/4	1 1/4	SV27NC117705ASAA	29	11.0 (5.0)	
1 1/2	1 1/4	SV27NC117805ASAA	33	11.0 (5.0)	



* NPT port threads. For BSPP threads, replace "N" in the model number with a "D", e.g., SV27DC115405ASAA.

Valve Dimensions – inches (mm)

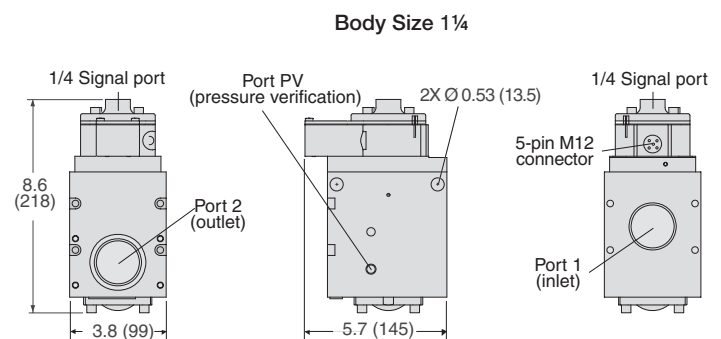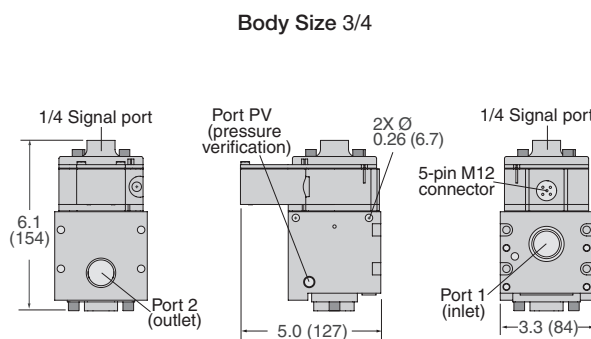

F4

ACCESSORIES & OPTIONS

Preassembled Wiring Kits


Kit Number*	Length meters (feet)	Number of Cables
2241H77	4 (13.1)	1
2242H77	10 (32.8)	1

* Each cable has one connector.

Optional Pressure Switch Kit



Kit Number*	608A86
-------------	--------

* Pressure switch closes on falling pressure of 5 psig (0.34 bar).



The wiring kits include one cable with a 5-pin M12 connector for the sensing switch, and a cord grip.

Sensing Switch Cable with 5-pin M12 Connector



F

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.
Mounting Type: In-Line.
Ambient Temperature: 40° to 120°F (4° to 50°C).
Media Temperature: 40° to 175°F (4° to 80°C).
Flow Media: Filtered air.
Inlet Pressure: 40 to 150 psig (2.8 to 10.3 bar).
Pilot Pressure: Must be equal to or greater than inlet pressure.
Switch Current/Voltage Max.: 2.5 A/120 volts AC.
Switch Current/Voltage Min.: 50 mA/24 volts DC.

NOTE: Electrical life of switch varies with conditions and voltage; rated in excess of 15 million cycles.

Functional Safety Data: Category 2 PL d; B10d: Valve - 20,000,000, Switch - 2,000,000; PFHd: 2.35×10^{-7} ; MTTFd: 98.15 (n_{op} : 7360); DC (obtained by monitoring safety switch status): 3/2 valves - 99%, 2/2 and PO Check valves - 90%; ROSS recommends testing the switch function and sealing for load holding valves every 8 hours.

Vibration/Impact Resistance: Calculated to BS EN 60068-2-27.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16



www.rosscontrols.com

F4.15

Pilot Operated Check Sensing Valves Redundant

SV27 Series Load Holding


2-Way 2-Position Valves, Pressure Controlled				
Port Size	Body Size	Valve Model Number*	C _v	Weight lb (kg)
1, 2			1-2	
1/2	3/4	SV27NC555405ASAA	3.8	9.0 (4.1)
3/4	3/4	SV27NC555505ASAA	5.6	9.0 (4.1)
1	3/4	SV27NC555605ASAA	8	9.0 (4.1)
1	1¼	SV27NC557605ASAA	12	22.0 (10.0)
1¼	1¼	SV27NC557705ASAA	19	22.0 (10.0)
1½	1¼	SV27NC557805ASAA	22	22.0 (10.0)




* NPT port threads. For BSPP threads, replace "N" in the model number with a "D", e.g., SV27DC555405ASAA.

Valve Dimensions – inches (mm)

Body Size 3/4

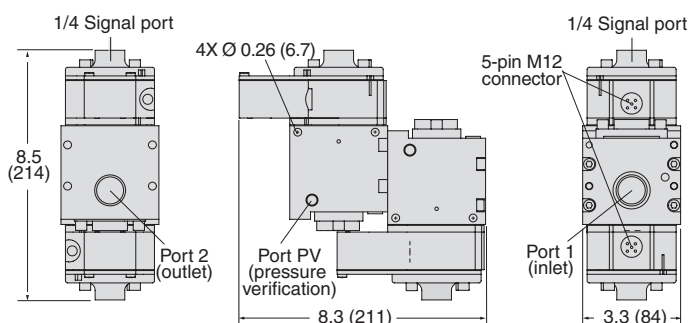

Body Size 1¼

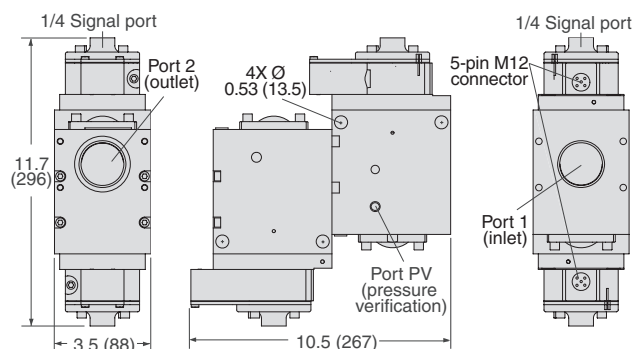

ACCESSORIES & OPTIONS

Preamsembled Wiring Kits

SV27 Redundant PO Check valves (CAT 3), requires 2 kits.

Kit Number*	Length meters (feet)	Number of Cables
2241H77	4 (13.1)	1
2242H77	10 (32.8)	1

* Each cable has one connector.



Optional Pressure Switch Kit

Kit Number*	608A86
-------------	--------

* Pressure switch closes on falling pressure of 5 psig (0.34 bar).

The wiring kits include one cable with a 5-pin M12 connector for the sensing switch, and with a cord grip.

Sensing Switch Cable with 5-pin M12 Connector



STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet.

Mounting Type: In-Line.

Ambient Temperature: 40° to 120°F (4° to 50°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: 40 to 150 psig (2.8 to 10.3 bar).

Pilot Pressure: Must be equal to or greater than inlet pressure.

Switch Current/Voltage Max.: 2.5 A/120 volts AC.

Switch Current/Voltage Min.: 50 mA/24 volts DC.

NOTE: Electrical life of switch varies with conditions and voltage; rated in excess of 15 million cycles.



Functional Safety Data: Category 3 PL e; B10d: Valve - 20,000,000, Switch - 2,000,000; PFHd: 2.47x10⁻⁸; MTTFd: 100 (n_{op}: 7360);

DC (obtained by monitoring safety switch status): 3/2 valves - 99%, 2/2 and PO Check valves - 90%; ROSS recommends testing the switch function and sealing for load holding valves every 8 hours.

Vibration/Impact Resistance: Calculated to BS EN 60068-2-27.


IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



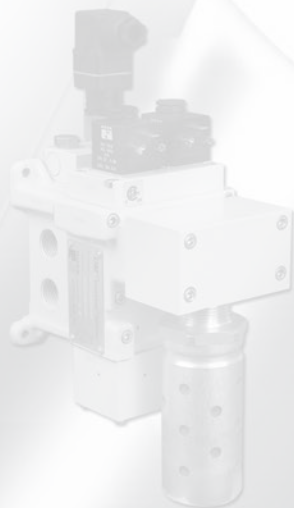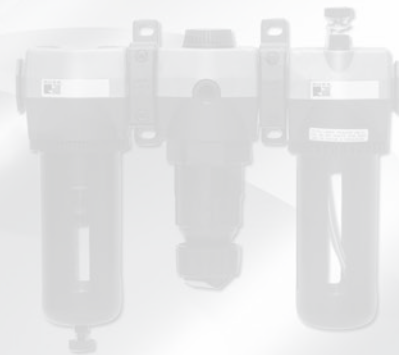

F4

F

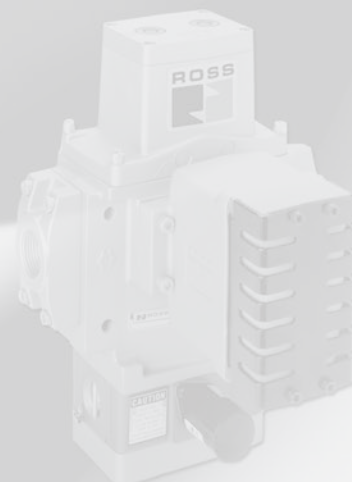

www.rosscontrols.com



F

ROSS CONTROLS®



**DOUBLE VALVES FOR CYLINDER RETURN
TO HOME POSITION
CROSSMIRROR® 77 AND CM SERIES**



5/2 PRESSURE RETURN – KEY FEATURES

- Can be used as 3/2 Normally Closed or 3/2 Normally Open valve function by plugging the unused outlet port
- Self-contained dynamic monitoring system; no additional monitoring required
- Valve fault results in a lockout condition and prevents unintentional reset with removal of air or electricity
- Reset can be electrical solenoid or remote pneumatic signal
- Status indication switch (ready-to-run) to inform machine controller of valve condition
- Base mounted, stainless steel spool valve construction
- Manifoldable for multi valve applications
- Includes non-clogging safety mufflers; for applications requiring ported exhaust, consult ROSS

VALVE TYPE	VALVE SERIES	AVAILABLE PORT SIZES				MAX. FLOW Cv				RESET		Page
		1/4	3/8	1/2	3/4	Port Size				REMOTE	SOLENOID	
						1/4	3/8	1/2	3/4			
SOLENOID PILOT CONTROLLED												
with Pressure Switch	77						2.8	7.2	7.2			F5.3 - F5.4
without Pressure Switch	77						2.8	7.2	7.2			F5.3 - F5.4
PRESSURE CONTROLLED												
with Pressure Switch	77						2.8	7.2	7.2			F5.5 - F5.6
without Pressure Switch	77						2.8	7.2	7.2			F5.5 - F5.6
SOLENOID PILOT CONTROLLED												
with Pressure Switch	CM						1.1	1.1	3.9			F5.7 - F5.10
without Pressure Switch	CM						1.1	1.1	3.9			F5.7 - F5.10
COMPONENTS FOR MANIFOLD ASSEMBLIES - SOLENOID PILOT CONTROLLED												
Valves, Manifold Bases and End Stations for Manifold Assemblies												F5.7
PRESSURE CONTROLLED												
with Pressure Switch	CM						1.1	1.1	3.9			F5.11 - F5.13
without Pressure Switch	CM						1.1	1.1	3.9			F5.11 - F5.13
COMPONENTS FOR MANIFOLD ASSEMBLIES - PRESSURE CONTROLLED												
Valves, Manifold Bases and End Stations for Manifold Assemblies												F5.11

CROSSMIRROR® Double Valves Solenoid Pilot Control

77 Series Cylinder Return to Home Position

5 Ports, 4-Way 2-Position Valve, Solenoid Pilot Controlled									
Port Sizes		Basic Size	Pressure Switch	Model Number	C _v				Weight lb (kg)
1	2, 4				1-2	1-4	2-3	4-5	
1/2	3/8	2*	With##	Y7776A3411**	2.0	1.6	1.6	2.8	8.4 (3.8)
1/2	3/8	2*	Without	Y7776A3410**	2.0	1.6	1.6	2.8	7.6 (3.4)
3/4	1/2	4*	With##	Y7776A4421**	3.2	3.4	2.7	7.2	11.2 (5.1)
3/4	1/2	4*	Without	Y7776A4420**	3.2	3.4	2.7	7.2	10.2 (4.6)
3/4	3/4	4*	With##	Y7776A5411**	3.2	3.4	2.7	7.2	11.2 (5.1)
3/4	3/4	4*	Without	Y7776A5410**	3.2	3.4	2.7	7.2	10.2 (4.6)
SAE 12	SAE 12	4 #	With##	SY7776A4H10**	3.2	3.4	2.7	7.2	11.2 (5.1)
SAE 12	SAE 12	4 #	Without	SY7776A4H11**	3.2	3.4	2.7	7.2	10.2 (4.6)

* NPT port threads. For BSPP threads, add a “D” prefix to the model number, e.g., YD7776A3411W.

** Insert voltage code: “W” = 24 volts DC; “Z” = 110 volts AC, 120 volts AC ; e.g., Y7776A3411W.

Model number includes base.

##Valve include pressure switches with DIN type connection, for pressure switches with M12 Micro-DC type connection consult ROSS.

This valve is constructed with precision, stainless steel spools as the main valve elements, and is designed to offer added safety to the operation of many pneumatically controlled machines. The Pressure switch provides a signal when valve is in a faulted position.

ACCESSORIES & OPTIONS

Valve Only Pressure Switches & Pressure Switch Connectors	Valve Basic Size	Valve Model Number (without base)	Pressure Switch		Pressure Switch Connector
			24 Volts DC	120 Volts AC	
	2	Y7786A3400	N/A	N/A	N/A
		Y7786A3401	798E30	518E30	522E30
	4	Y7786A4400	N/A	N/A	N/A
		Y7786A4401	798E30	518E30	522E30

Electrical Connectors

Electrical Connector Form	Electrical Connector Type	Cord Length meters (feet)	Cord Diameter	Electrical Connector Model Number		
				Without Light	Lighted Connector	
					24 Volts DC	120 Volts AC
DIN 43650 Form A	Prewired Connector (18 gauge)	2 (6½)	6-mm	721K77	720K77-W	720K77-Z
DIN 43650 Form A	Prewired Connector (18 gauge)	2 (6½)	10-mm	371K77	383K77-W	383K77-Z
DIN 43650 Form A	Connector for threaded conduit (1/2 inch electrical conduit fittings)	—	—	723K77	724K77-W	724K77-Z
DIN 43650 Form A	Connector Only	—	—	937K87	936K87-W	936K87-Z

CAUTIONS: Do not use electrical connectors with surge suppressors, as this may increase valve response time when de-actuating the solenoids.

Explosion proof solenoid pilot available, for more information consult ROSS.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Double spool and sleeve.

Mounting Type: Base mounted.

Pilot Solenoid: According to VDE 0580. Enclosure rating according to DIN 400 50 IP 65. Connector socket according to DIN 43650 Form A. Three (with pressure switch) or two solenoids (without pressure switch), rated for continuous duty.

Standard Voltages: 24 volts DC; 110-120 volts AC, 50/60 Hz.

Power Consumption (each solenoid): 6 watts on DC; 18 VA inrush, 14 VA holding on 50 or 60 Hz.

Electrical Connections: Uses cord-grip connectors at solenoids.

Ambient Temperature: 40° to 120°F (4° to 50°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: 40 to 150 psig (2.5 to 10.3 bar).

Functional Safety Data: Category 4 PL e; B10d: 20,000,000; PFHd: 7.71x10⁻⁹; MTTFd: 301.9 (n_{op}: 662400).

Certifications: CE Marked for applicable directives, BG.

Vibration/Impact Resistance: Tested to BS EN 60068-2-27.

Meets Standards EN13736 and ANSI B11.2, Safety requirements for Pneumatic Cylinder Presses and other hazardous pneumatic cylinder applications.

This valve is not designed for controlling clutch/brake mechanisms on mechanical power presses.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com


F5.3



ISO 13849-1:2006
Category 4 PL e
applications



5/2 CrossMIRROR®
double valve
with pressure switch

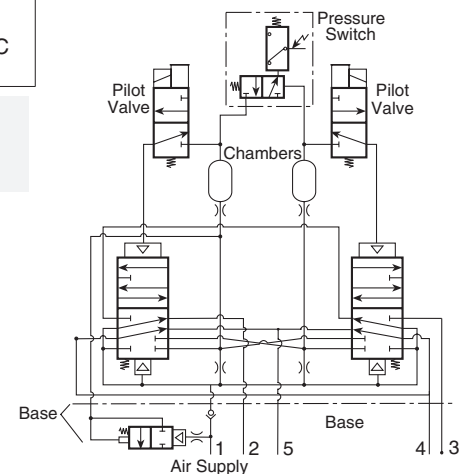


F5

F




Valve Dimensions – inches (mm)


Basic Size 2 – Valve and base assembly, with remote reset and pressure switch.

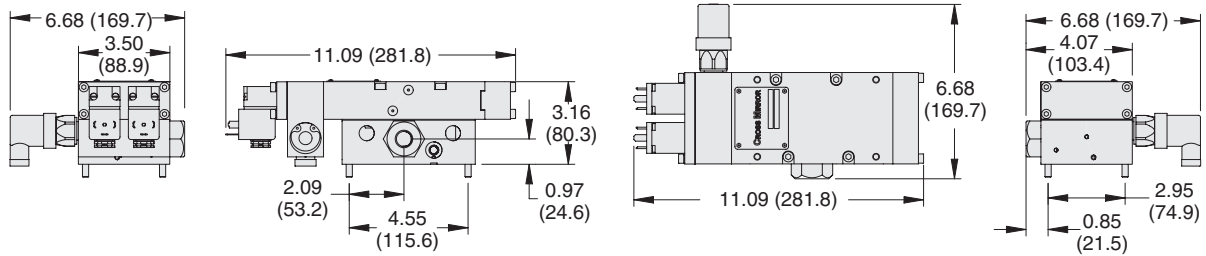


Basic Size 2 – Valve and base assembly, with remote reset and without pressure switch.

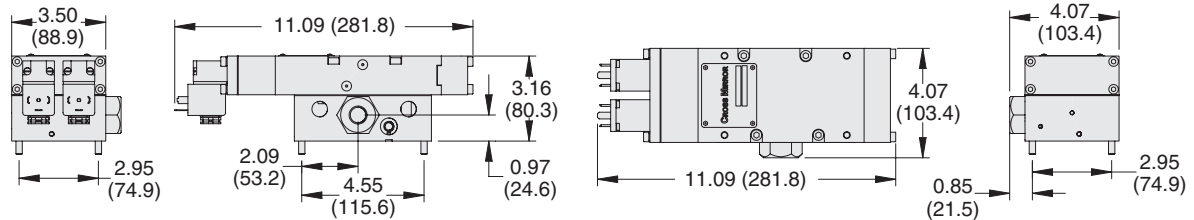

Basic Size 4 – Valve and base assembly, with remote reset and pressure switch.

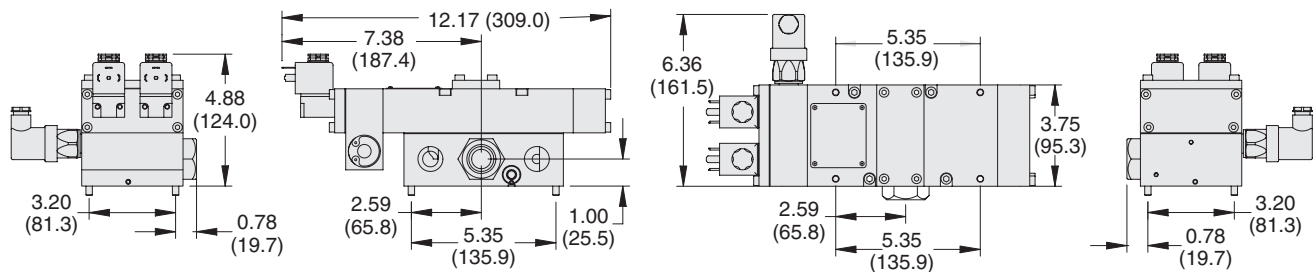

Basic Size 4 – Valve and base assembly, with remote reset and without pressure switch.

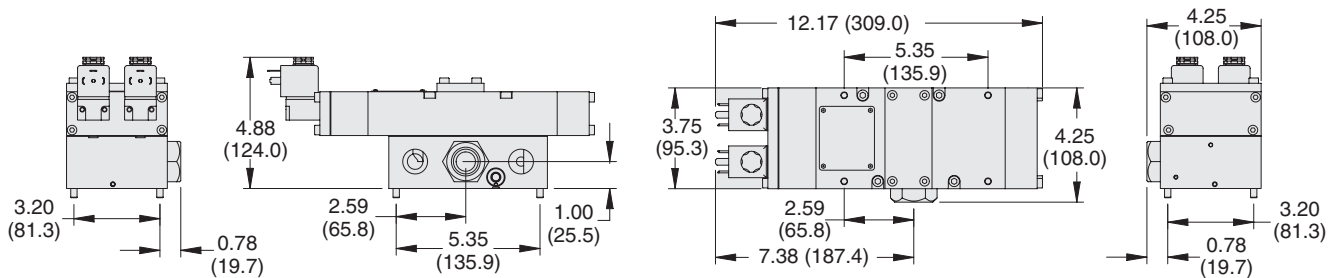

Valve Operation

Normal Operation:

After installation the valve is operated by energizing both solenoid pilots (S1 and S2) simultaneously. This causes both main valve elements to be actuated so that air from inlet port 1 flows to outlet port 4. Air downstream of port 2 is exhausted through port 3.

When the solenoid pilots are de-energizing, both valve elements are de-actuated, and air then flows from inlet port 1 to outlet port 2. Air downstream of port 4 is exhausted through port 5.

Pressure Switch:

Valves with model numbers ending in the number 1 have a pressure switch to provide user feedback when movement of the main valve elements was asynchronous.

Safety Function:

If the two main valve elements are not actuated or de-actuated synchronously, within 500 ms, the valve defaults so that outlet port 2 receives full inlet pressure, and outlet port 4 is exhausted through port 5. If this abnormal operation is the result of a temporary circumstance, the valve will be ready to resume normal operation as soon as both pilot signal ports have been de-energized and both main valve elements have returned to their normal ready-to-run position. Applying the electrical signal to both solenoids simultaneously will resume normal operation.

If the cause of the abnormal operation is still present, the valve will either remain in the default position (pressure on port 2 and not port 4) or will again go into this position on the next actuation attempt. The source of the abnormality must be investigated and corrected before further operation.

5 Ports, 4-Way 2-Position Valve									
Port Sizes		Basic Size	Pressure Switch	Model Number	C _v				Weight lb (kg)
1	2, 4				1-2	1-4	2-3	4-5	
1/2	3/8	2*	With##	Y7786A3411**	2.0	1.6	1.6	2.8	8.4 (3.8)
1/2	3/8	2*	Without	Y7786A3410	2.0	1.6	1.6	2.8	7.6 (3.4)
3/4	1/2	4*	With##	Y7786A4421**	3.2	3.4	2.7	7.2	11.6 (5.3)
3/4	1/2	4*	Without	Y7786A4420	3.2	3.4	2.7	7.2	10.6 (4.8)
3/4	3/4	4*	With##	Y7786A5411**	3.2	3.4	2.7	7.2	11.6 (5.3)
3/4	3/4	4*	Without	Y7786A5410	3.2	3.4	2.7	7.2	10.6 (4.8)
SAE 12	SAE 12	4 #	With##	SY7786A4H11**	3.2	3.4	2.7	7.2	11.6 (5.3)
SAE 12	SAE 12	4 #	Without	SY7786A4H10	3.2	3.4	2.7	7.2	10.6 (4.8)

* NPT port threads. For BSPP threads, add a “D” prefix to the model number, e.g., YD7778A3411W.

** Insert voltage code: “W” = 24 volts DC; “Z” = 110-120 volts AC, 50/60 Hz; e.g., Y7778A3411W.

For other voltages consult ROSS.

Model number includes base.

##Valve include pressure switches with DIN type connection, for pressure switches with M12 Micro-DC type connection consult ROSS.




ISO 13849-1:2006
Category 4 PL e
applications

This 77 Series 5/2 CROSSMIRROR® valve is a control reliable, two hand pressure controlled 4-way double valve that is controlled by two separate pneumatic signals essentially providing "AND" gate control for the output ports. Both pilot signals must be provided within approximately 500 milliseconds of each other to actuate the valve.

Proper actuation shifts output pressure to port 4. If the valve is not actuated, not provided appropriate pneumatic signals within the discordance window or if the valve actuates abnormally, inlet pressure will only be passed to port 2 - cylinder retracted.

This valve is constructed with precision, stainless steel spools as the main valve elements, and is designed to offer added safety to the operation of many pneumatically controlled machines.


Typical 2-Hand-Anti-Tie-Down Application

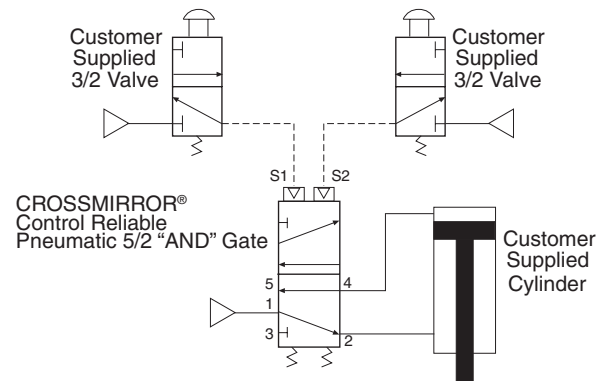

Status Indicator (pressure switch)

Terminals 1 and 4 are connected when air pressure is present and the valve is "Ready-to-Run". If an abnormal operation has occurred or pressure is removed from the valve inlet, terminals 1 and 2 are connected.

Note: DC voltage pressure switches do not have a ground terminal.



Pin 1: Common
Pin 2: Normally Closed
Pin G: Not used
Pin 4: Normally Open

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Double spool and sleeve.

Mounting Type: Base mounted.

Ambient Temperature: 40° to 120°F (4° to 50°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: 40 to 100 psig (2.7 to 7 bar).

Pilot Pressure: Must be equal or greater than inlet pressure, but should not exceed maximum inlet pressure.

Pressure Switch Rating: Max Current 4A, Max 250 volts AC.

Max Current 50 mA, Max 24 volts DC.

Pressure Switch: Pressure Switch signal indicates when the input signals or parts movement is asynchronous.

Functional Safety Data: Category 4 PL e; B10d: 20,000,000; PFHd: 7.71x10⁻⁹; MTTFd: 301.9 (n_{op}: 662400).

Certifications: CE Marked for applicable directives, BG.

Vibration/Impact Resistance: Tested to BS EN 60068-2-27.

Meets Standards EN13736 and ANSI B11.2, Safety requirements for Pneumatic Cylinder Presses and other hazardous pneumatic cylinder applications.

This valve is not designed for controlling clutch/brake mechanisms on mechanical power presses.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.




Online Version
Rev. 05/16

www.rosscontrols.com


F5.5

Basic Size 2 – Valve and base assembly, with remote reset and pressure switch.


Valve Dimensions – inches (mm)

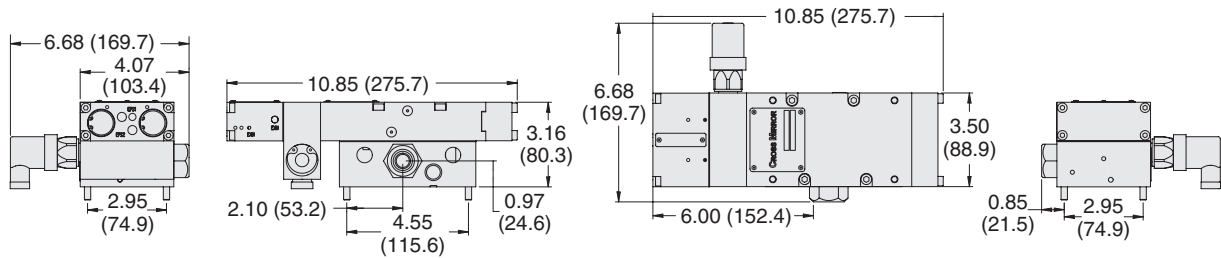


Basic Size 2 – Valve and base assembly, with remote reset and without pressure switch.

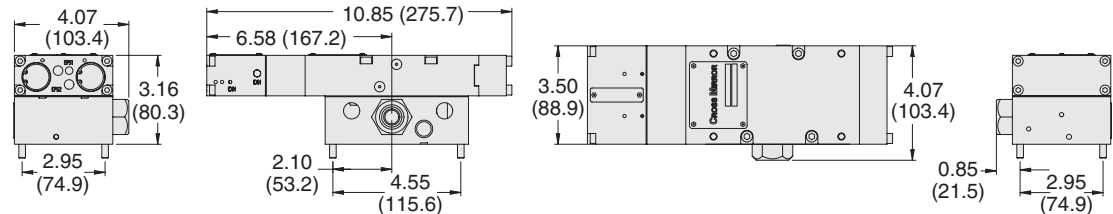

Basic Size 4 – Valve and base assembly, with remote reset and pressure switch.

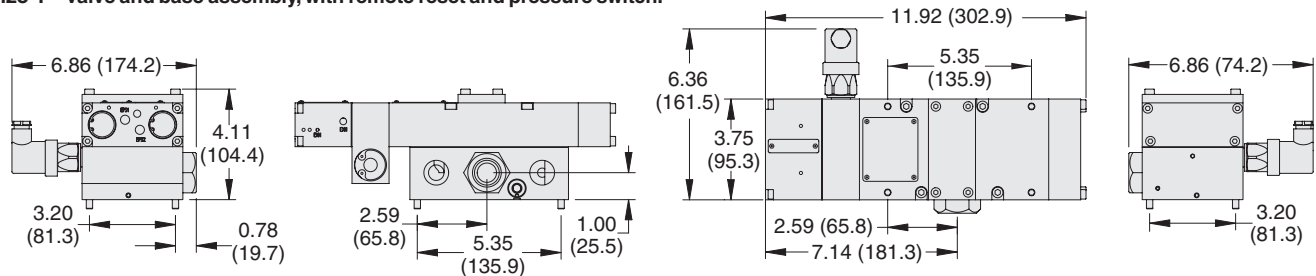

Basic Size 4 – Valve and base assembly, with remote reset and without pressure switch.

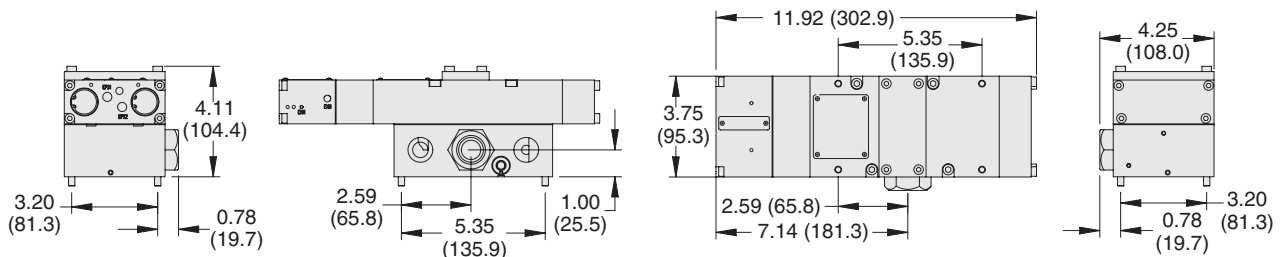

Valve Operation

Normal Operation: After installation the valve is operated by pressurizing both pilot supply ports (S1 and S2) simultaneously. This causes both main valve elements to be actuated so that air from inlet port 1 flows to outlet port 4. Air downstream of port 2 is exhausted through port 3.

When the pilot supply ports are de-pressurized, both valve elements are de-actuated, and air then flows from inlet port 1 to outlet port 2. Air downstream of port 4 is exhausted through port 5.

Pressure Switch: Valves with model numbers ending in the number 1 have a pressure switch to provide user feedback when movement of the main valve elements was asynchronous.

Safety Function: If the two main valve elements are not actuated or de-actuated synchronously, within 500 ms, the valve defaults so that outlet port 2 receives full inlet pressure, and outlet port 4 is exhausted through port 5. If this abnormal operation is the result of a temporary circumstance, the valve will be ready to resume normal operation as soon as both pilot signal ports have been de-pressurized and both main valve elements have returned to their normal ready-to-run position. Applying pressure to both signal ports simultaneously will resume normal operation.

If the cause of the abnormal operation is still present, the valve will either remain in the default position (pressure on port 2 and not port 4) or will again go into this position on the next actuation attempt. The source of the abnormality must be investigated and corrected before further operation.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.


Valve and Base Assembly

5 Ports, 4-Way 2-Position Valve, Pressure Return

Port Sizes		Basic Size	Pressure Switch	Model Number*		C _v				Weight lb (kg)
1	2, 4			With Remote Reset	With Solenoid Reset	1-2	1-4	2-3	4-5	
1/4	1/4	0	With#	CM26PNA00**11	CM26PNA00**21	0.8	0.6	0.5	1.1	5.85 (2.7)
1/4	1/4	0	Without	CM26PNA00**1X	CM26PNA00**2X	0.8	0.6	0.5	1.1	5.30 (2.4)
3/8	3/8	0	With#	CM26PNA01**11	CM26PNA01**21	0.8	0.6	0.5	1.1	5.75 (2.6)
3/8	3/8	0	Without	CM26PNA01**1X	CM26PNA01**2X	0.8	0.6	0.5	1.1	5.20 (2.4)
1/2	1/2	2	With#	CM26PNA22**11	CM26PNA22**21	3.0	2.5	2.0	3.9	14.45 (6.56)
1/2	1/2	2	Without	CM26PNA22**1X	CM26PNA22**2X	3.0	2.5	2.0	3.9	13.80 (6.26)

* Includes base supplied with NPT port threads. For BSPP threads, replace "N" with a "D" in the model number, e.g., CM26PDA00A1X. ** Insert voltage code: "A" = 24 volts DC; "B" = 110 volts AC, 120 volts AC; e.g., CM26PNA00A1X.

Valve include pressure switches with DIN type connection, for pressure switches with M12 Micro-DC type connection consult ROSS.

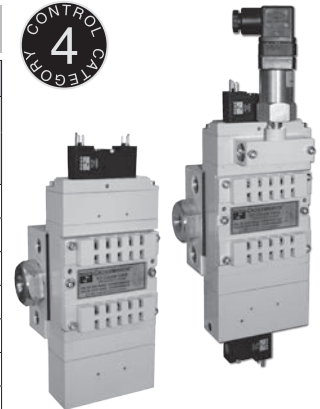

ISO 13849-1:2006
Category 4 PL e
applications Pending

Valves, Manifold Bases, and End Stations for Manifold Assemblies

In addition to the manifold, an end station kit with a check valve must be ordered for each assembly. The number of manifolds with a single supply inlet will be limited to the pressure and flow rate of the system. Too many manifolds may result in too large of an internal pressure drop resulting in valve faults. The manifold end station kit with dual inlet check will allow the manifold to be supplied with air from both ends of the assembly.

Port Size		Basic Size	Pressure Switch	Valve without Sub-Base		Manifold Base Model Number#	Manifold End Station w/ Check Valve Kit Number##	Dual Supply Manifold End Station w/ Check Valves Kit Number##
1	2, 4			With Remote Reset	With Solenoid Reset			
1/4	1/4	0	With*	CM26PXA0X**11	CM26PXA0X**21	Y1951D91	699K86	701K86
1/4	1/4	0	Without	CM26PXA0X**1X	CM26PXA0X**2X	Y1951D91	699K86	701K86
3/8	3/8	0	With*	CM26PXA0X**11	CM26PXA0X**21	Y1949D91	698K86	700K86
3/8	3/8	0	Without	CM26PXA0X**1X	CM26PXA0X**2X	Y1949D91	698K86	700K86
1/2	1/2	2	With*	CM26PXA2X**11	CM26PXA2X**21	Y1955D91	702K86	704K86
1/2	1/2	2	Without	CM26PXA2X**1X	CM26PXA2X**2X	Y1955D91	702K86	704K86

* Valve include pressure switches with DIN type connection, for pressure switches with M12 Micro-DC type connection consult ROSS. ** Insert voltage code: "A" = 24 volts DC; "B" = 110 volts AC, 120 volts AC; e.g., CM26PXA0XA1X.


#NPT port threads. For BSPP threads, insert a "D" after "Y" in the model number, e.g., YD1951D91.

##NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D699K86, D701K86.

End Station



End Station with Check Valve



Manifold Base

For other voltages consult ROSS.

Explosion proof solenoid pilot available, for more information consult ROSS.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Double spool and sleeve.

Mounting Type: Base mounted.

Pilot Solenoid: According to VDE 0580. Enclosure rating according to DIN 400 50 IP 65. Two solenoids, rated for continuous duty.

Size 0: Connector socket according to EN 175301-803 Form C.

Size 2: Connector socket according to DIN 43650 Form A.

Standard Voltages/Pilot Solenoids Power Consumption (each solenoid):

Size 0: 24 volts DC: 1.2 watts on DC.

110 volts AC, 50 Hz: 5.4 VA; 120 volts AC, 60 Hz: 5.0 VA.

Size 2: 24 volts DC; 110 volts AC, 50 Hz; 120 volts AC, 50/60 Hz.

5.8 watts nominal on AC and DC, 6.5 watts maximum on AC and DC.

Ambient Temperature: 15° to 122°F (-10° to 50°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: 40 to 150 psig (3 to 10 bar).

Pressure Switch (Status Indicator) Rating: 5 amps at 250 volts AC, or 5 amps at 30 volts DC.

Monitoring: Dynamically, cyclically, internally during each actuating and de-actuating movement. Monitoring function has memory and requires an overt act to reset unit after lockout.

Solenoid Reset: Units with solenoid reset include a 3/2 solenoid valve. Energize this solenoid momentarily to reset valve after lock-out condition occurs.

Remote Reset: Remote signal to be supplied by customer's 3/2 valve (connect remote signal line to remote RESET port in valve). Apply signal momentarily to reset valve after fault condition occurs.

NOTE: Main solenoids must be off when performing reset procedure.

Product data for Sistema Library users. For Basic Size 0 only:

Functional Safety Data: Category 4 PL e; B10d: 20,000,000; PFHd: 7.71x10⁻⁹; MTTFd: 301.9 (n_{op}: 662400).

Certifications: CE Marked for applicable directives, BG.

Vibration/Impact Resistance: Tested to BS EN 60068-2-27.

For Basic Size 2, Product data for Sistema Library users, pending.

Meets Standards EN13736 and ANSI B11.2, Safety requirements for Pneumatic Cylinder Presses and other hazardous pneumatic cylinder applications.

This valve is not designed for controlling clutch/brake mechanisms on mechanical power presses.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.




Online Version
Rev. 05/16

www.rosscontrols.com


F5.7

Valve Dimensions – inches (mm)


Basic Size 0 - Valve and base assembly, with remote reset and with pressure switch.

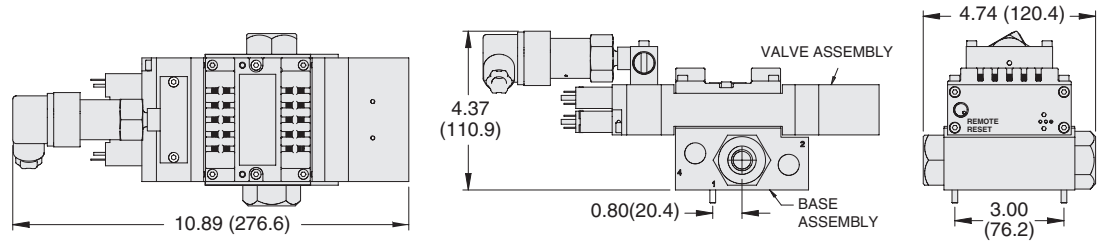


Basic Size 0 - Valve and base assembly, with solenoid reset and with pressure switch.

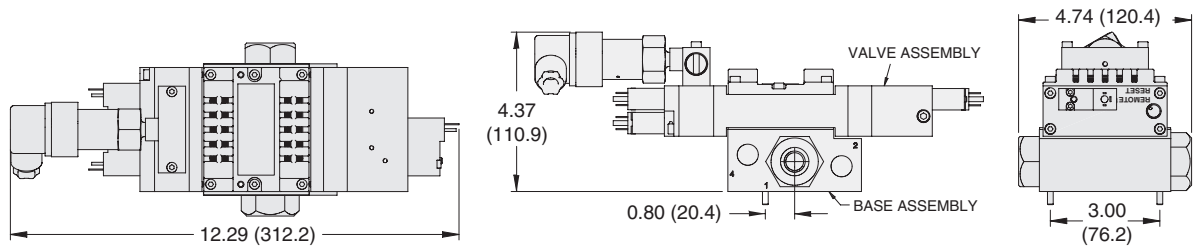

Basic Size 0 - Valve and base assembly, with remote reset and without pressure switch.

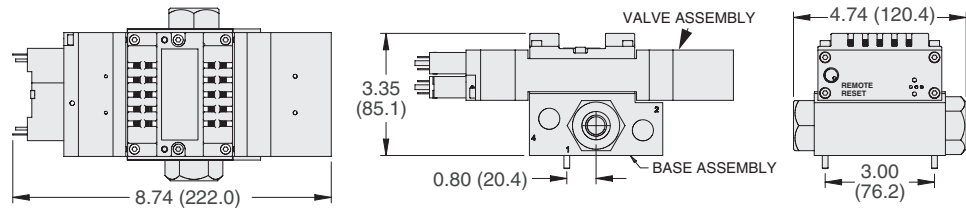


Basic Size 0 - Valve and base assembly, with solenoid reset and without pressure switch.

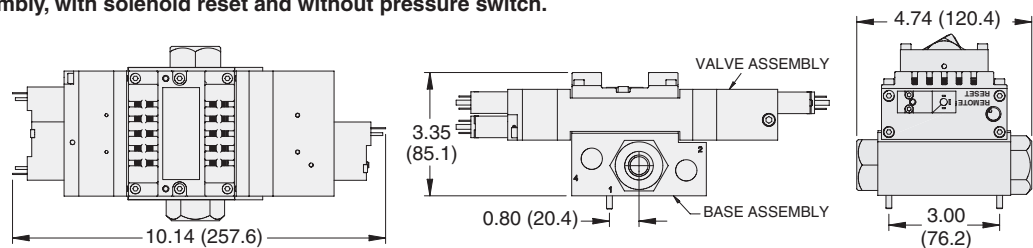


Dimensions – inches (mm)


Manifold Base for Basic Size 0

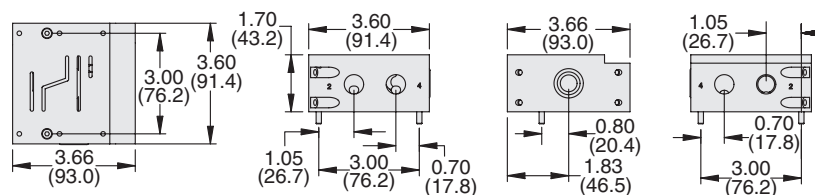

End Station for Basic Size 0

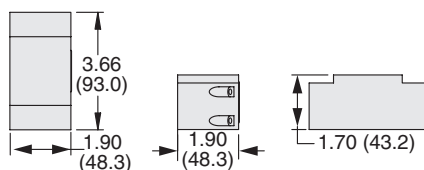


End Station with Check Valve for Basic Size 0

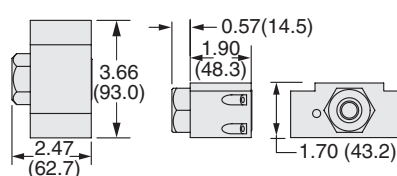


Basic Size 2 - Valve and base assembly, with remote reset and with pressure switch.


Valve Dimensions – inches (mm)

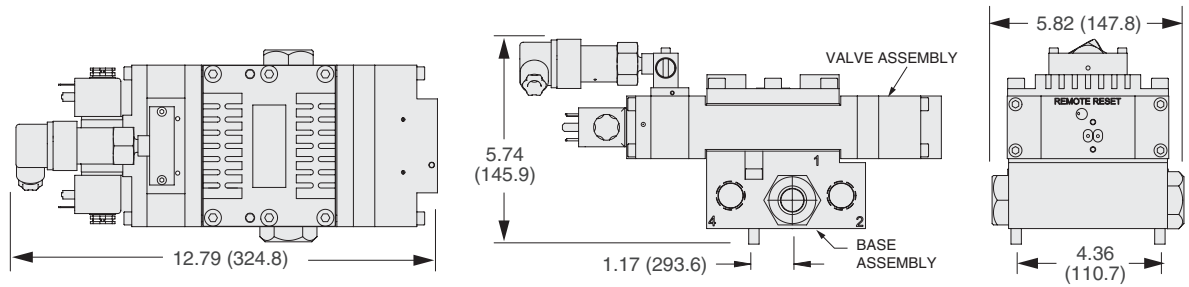


Basic Size 2 - Valve and base assembly, with solenoid reset and with pressure switch.

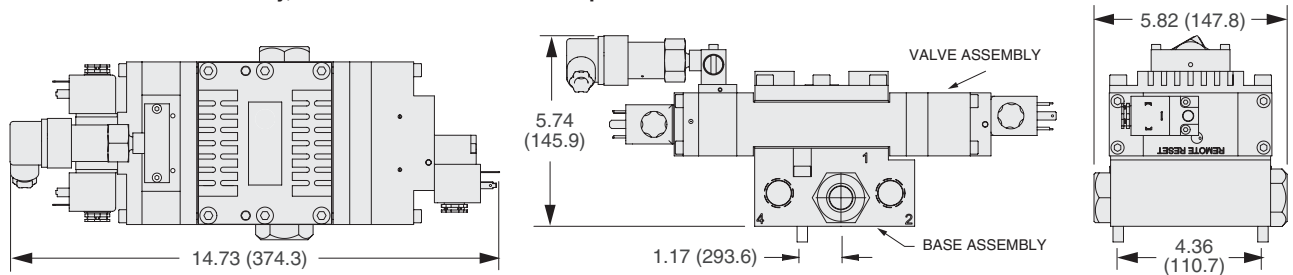

Basic Size 2 - Valve and base assembly, with remote reset and without pressure switch.

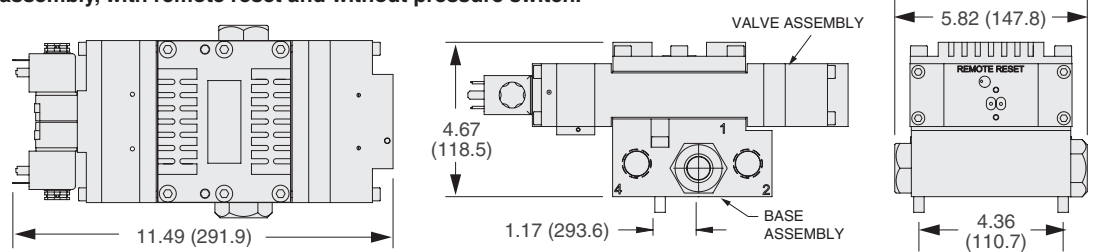


Basic Size 2 - Valve and base assembly, with solenoid reset and without pressure switch.

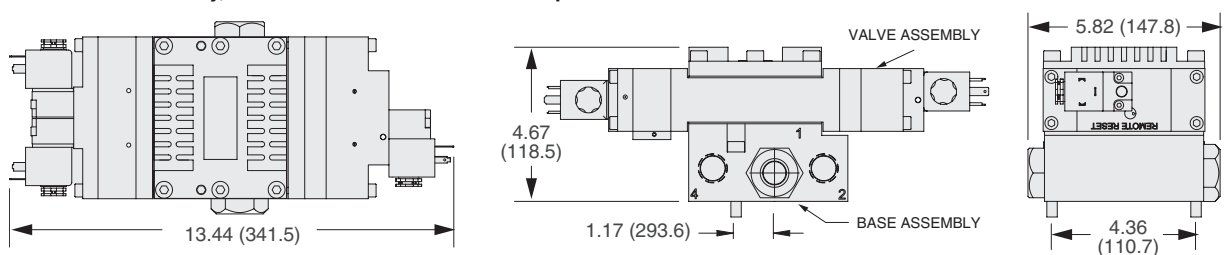


Manifold Base for Basic Size 2

Dimensions – inches (mm)

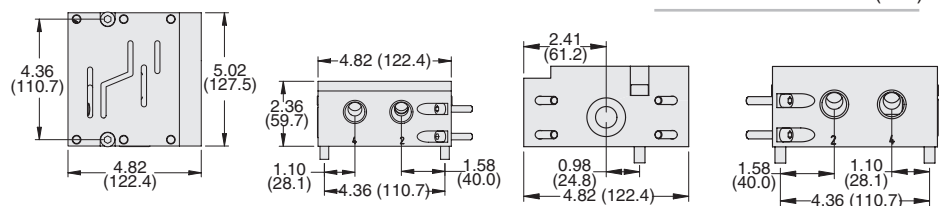

End Station for Basic Size 2

End Station with Check Valve for Basic Size 2

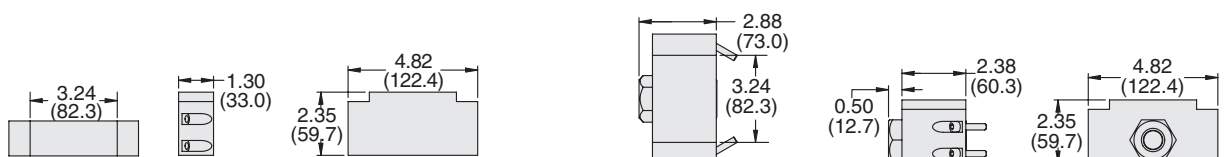

CROSSMIRROR® Double Valves Solenoid Pilot Controlled


CM Series Valve Operation & Options

Normal Operation: The valve is operated by energizing both pilot solenoids simultaneously. This causes both main valve elements to be actuated so that air from inlet port 1 flows to outlet port 4, but not to port 2. Air downstream of port 2 is exhausted through port 3. When the solenoids are de-energized, both valve elements are de-actuated, and air then flows from inlet port 1 to outlet port 2, but no longer to outlet port 4. Air downstream of port 4 is exhausted through port 5. On first operation, or after repair, the pilot valve supply circuit and inherent monitoring elements may need to be reset.

Valve Locked-out: Whenever the valve elements operate in a sufficiently asynchronous manner, either on actuation or de-actuation, the valve will move to a locked-out position. In the locked-out position, one crossover and its related timing chamber will be exhausted, and the other crossover and its related timing chamber will be fully pressurized. The valve element (side B) that is partially actuated has pilot air available to fully actuate it, but no air pressure on the return piston to fully de-actuate the valve element. The return springs are limited in travel, and can only return the valve elements to the intermediate (locked-out) position. Sufficient air pressure acting on the return pistons is needed to return the valve elements to a fully home position.



Detecting a Malfunction: If the main valve elements are not both actuated or de-actuated synchronously, the valve defaults to the locked-out position so that outlet port 2 receives full inlet pressure, and outlet port 4 is exhausted through port 5. The valve must now be "reset" to resume normal operation.

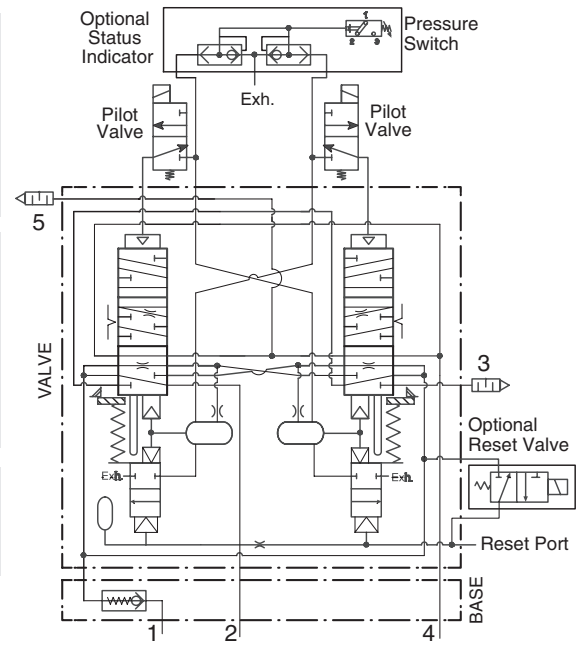Resetting the Valve: The valve will remain in the locked-out position, even if the inlet air supply is removed and re-applied. A remote reset signal must be applied to reset the valve. Reset is accomplished by momentarily pressurizing the reset port. Actuation of the reset piston physically pushes the main valve elements to their home position. Actuation of the reset piston also opens the reset poppet, thereby, immediately exhausting pilot supply air, thus, preventing valve operation during reset. De-actuation of reset pistons causes the reset poppets to close and pilot supply timing chambers to fully pressurize. Reset pressure can be applied by a remote 3/2 normally closed valve, or from an optional 3/2 normally closed solenoid (which includes an integral manual reset button) mounted on the reset adapter.



Status Indicator: The optional status indicator pressure switch will actuate when the main valve is operating normally, and will de-actuate when the main valve is in the locked-out position or inlet pressure is removed. This device is not part of the valve lockout function, but, rather, only reports the status of the main valve.

Electrical Connectors

Basic Valve Size	Electrical Connector Form	Electrical Connector Type	Cord Length meters (feet)	Cord Diameter	Electrical Connector Model Number			
					Without Light	Lighted Connector		
						24 Volts DC	120 Volts AC	
0	DIN EN 175308-803 Form C	Prewired Connector	3 (10)	8-mm	2449K77	2450K77-W	2450K77-Z	
0	DIN 43650 Form C	Connector Only	—	—	2452K77	2453K77-W	2453K77-Z	
2	DIN 43650 Form A	Prewired Connector (18 gauge)	2 (6½)	6-mm	721K77	720K77-W	720K77-Z	
2	DIN 43650 Form A	Prewired Connector (18 gauge)	2 (6½)	10-mm	371K77	383K77-W	383K77-Z	
2	DIN 43650 Form A	Connector for threaded conduit (1/2 inch electrical conduit fittings)	—	—	723K77	724K77-W	724K77-Z	
2	DIN 43650 Form A	Connector Only	—	—	937K87	936K87-W	936K87-Z	
CAUTIONS: Do not use electrical connectors with surge suppressors, as this may increase valve response time when de-actuating the solenoids.								

CAUTIONS: Do not use electrical connectors with surge suppressors, as this may increase valve response time when de-actuating the solenoids.

Preassembled Wiring Kits


Basic Valve Size	Kit Number			Solenoid Connector Type	Length meters (feet)
	Connector without Light	Lighted Connector			
		24 Volts DC	120 Volts AC		
0*	2526H77	2529H77-W	2529H77-Z	DIN 43650 Form C	5 (16.4)
	2527H77	2530H77-W	2530H77-Z	DIN 43650 Form A	10 (32.8)
2#	2283H77	2532H77-W	2532H77-Z	DIN 43650 Form A	5 (16.4)
	2284H77	2533H77-W	2533H77-Z	DIN 43650 Form A	10 (32.8)
	2288H77**	—	—	M12 Micro-DC	5 (16.4)
	2289H77**	—	—	M12 Micro-DC	10 (32.8)

* Each cable has one connector. Kits include 1 cable for the status indicator (DIN 43650 Form A), and 3 cables (DIN 43650 Form C) with connector plus a cord grip for each.


Each cable has one connector. **Coil includes light.

Kits include 1 cable for the status indicator, and 3 cables with connector plus a cord grip for each.


Solenoid Cables with DIN Connector



Solenoid Cables with M12 Connector




Status Indicator Cable with DIN Connector



IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

Valve and Base Assembly

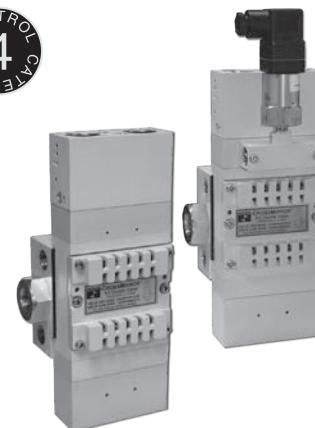

ISO 13849-1:2006
Category 4 PL e
applications Pending

5 Ports, 4-Way 2-Position Valve, Pressure Return

Port Sizes		Basic Size	Pressure Switch	Valve Model Number*	C _v				Weight lb (kg)
1	2, 4				1-2	1-4	2-3	4-5	
1/4	1/4	0	With#	CM26PNA00P11	0.8	0.6	0.5	1.1	6.15 (2.79)
1/4	1/4	0	Without	CM26PNA00P1X	0.8	0.6	0.5	1.1	5.60 (2.54)
3/8	3/8	0	With#	CM26PNA01P11	0.8	0.6	0.5	1.1	6.05 (2.74)
3/8	3/8	0	Without	CM26PNA01P1X	0.8	0.6	0.5	1.1	5.50 (2.49)
1/2	1/2	2	With#	CM26PNA22P1X	3.0	2.5	2.0	3.9	14.45 (6.56)
1/2	1/2	2	Without	CM26PNA22P11	3.0	2.5	2.0	3.9	13.80 (6.26)

* Model number includes base supplied with NPT port threads. For BSPP threads, replace "N" with a "D" in the model number, e.g., CM26PDA00P11.


Valve include pressure switches with DIN type connection, for pressure switches with M12 Micro-DC type connection consult ROSS.

Valves, Manifold Bases, and End Stations for Manifold Assemblies

In addition to the manifold, an end station kit with a check valve must be ordered for each assembly. The number of manifolds with a single supply inlet will be limited to the pressure and flow rate of the system. Too many manifolds may result in too large of an internal pressure drop resulting in valve faults. The manifold end station kit with dual inlet check will allow the manifold to be supplied with air from both ends of the assembly.



End Station
End Station with Check Valve



Manifold Base

Port Size		Basic Size	Valve without Sub-Base		Manifold Base Model Number#	Manifold End Station w/ Check Valve Kit Number##	Dual Supply Manifold End Station w/ Check Valves Kit Number##
1	2, 4		Pressure Switch	Valve Model Number			
1/4	1/4	0	With*	CM26PNA0XP11	Y1951D91	699K86	701K86
1/4	1/4	0	Without	CM26PNA0XP1X	Y1951D91	699K86	701K86
3/8	3/8	0	With*	CM26PNA0XP11	Y1949D91	698K86	700K86
3/8	3/8	0	Without	CM26PNA0XP1X	Y1949D91	698K86	700K86
1/2	1/2	2	With*	CM26PNA22P11	Y1955D91	702K86	704K86
1/2	1/2	2	Without	CM26PNA22P1X	Y1955D91	702K86	704K86

* Valve include pressure switches with DIN type connection, for pressure switches with M12 Micro-DC type connection consult ROSS.

#NPT port threads. For BSPP threads, insert a "D" after "Y" in the model number, e.g., YD1951D91.

##NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D699K86, D701K86.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Double spool and sleeve.

Mounting Type: Base mounted.

Ambient Temperature: 15° to 122°F (-10° to 50°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: 40 to 150 psig (3 to 10 bar).

Pilot Pressure: Must be equal or greater than inlet pressure, but should not exceed maximum inlet pressure.

Pressure Switch Rating: Max Current 4A, Max 250 volts AC.

Max Current 50 mA, Max 24 volts DC.

Pressure Switch: Pressure Switch signal indicates when the input signals or parts movement is asynchronous.

Monitoring: Dynamically, cyclically, internally during each actuating and de-actuating movement. Monitoring function has memory and requires an overt act to reset unit after lockout.

Product data for Sistema Library users, For Basic Size 0 only:

Functional Safety Data: Category 4 PL e; B10d: 20,000,000; PFHd: 7.71x10⁻⁹; MTTFd: 301.9 (n_{op}: 662400).

Certifications: CE Marked for applicable directives, BG.

Vibration/Impact Resistance: Tested to BS EN 60068-2-27.

For Basic Size 2, Product data for Sistema Library users, pending.

Meets Standards EN13736 and ANSI B11.2, Safety requirements for Pneumatic Cylinder Presses and other hazardous pneumatic cylinder applications.

This valve is not designed for controlling clutch/brake mechanisms on mechanical power presses.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com


F5.11

CROSSMIRROR® Double Valves Pressure Controlled


CM Series Valve Technical Data

Valve Dimensions – inches (mm)


Size 0 – Valve and base assembly,
with remote reset and pressure switch

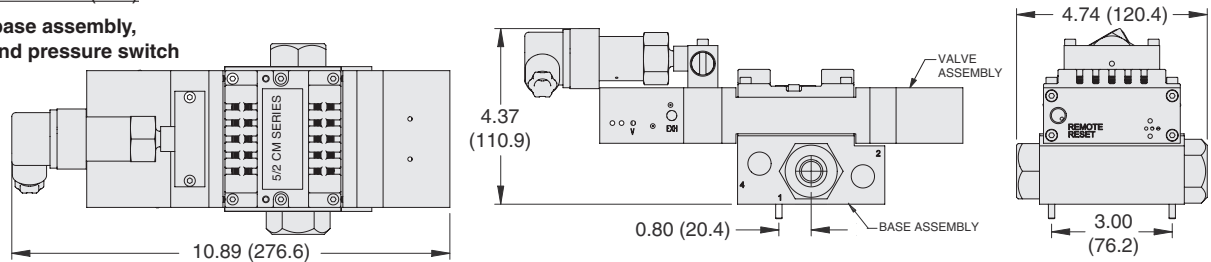


Size 0 – Valve and base assembly,
with remote reset and without pressure switch

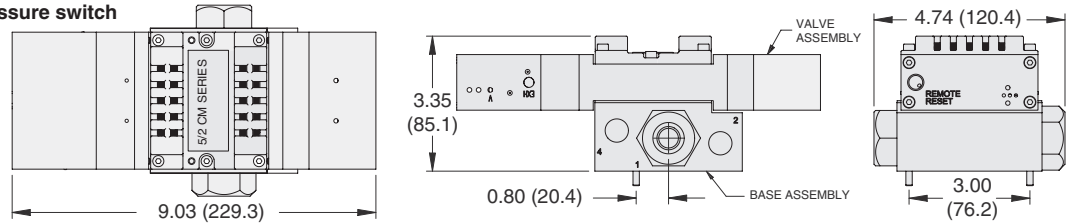

Size 2 – Valve and base assembly,
with remote reset and pressure switch

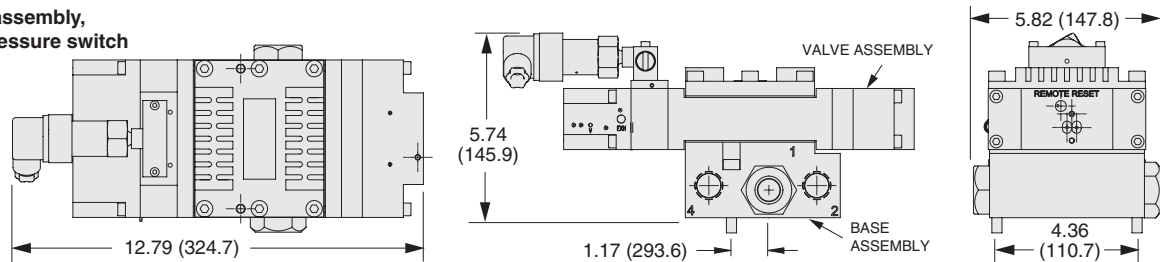


Size 2 – Valve and base assembly,
with remote reset and without pressure switch

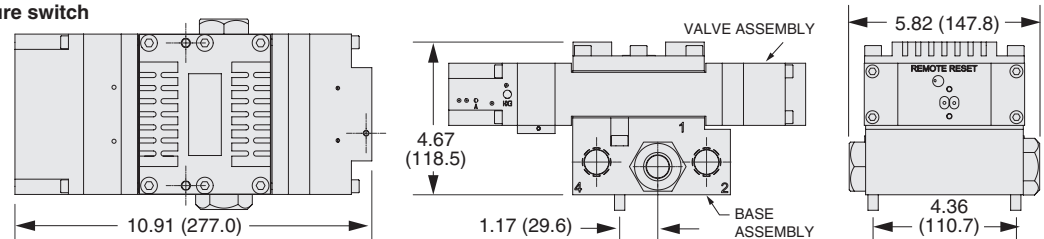


Dimensions – inches (mm)


Manifold Base for Basic Size 0

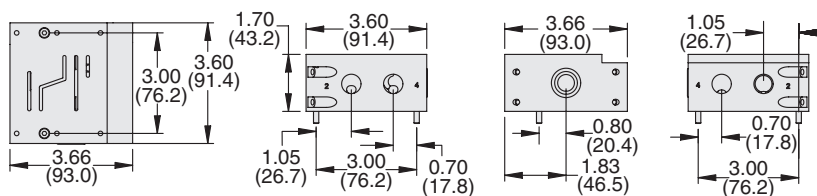


End Station for Basic Size 0

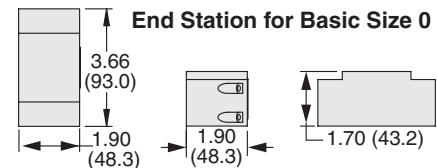


Manifold Base for Basic Size 2

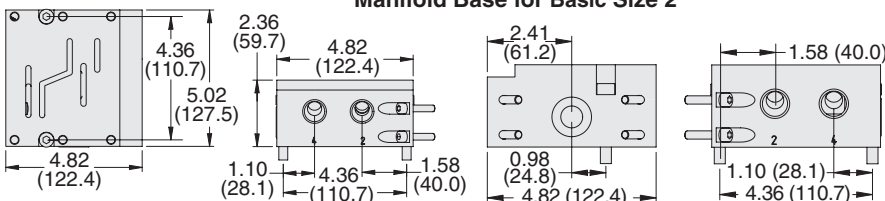


End Station with Check Valve for BasicSize 0

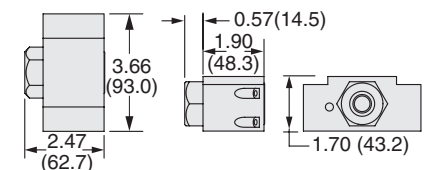

End Station for Basic Size 2

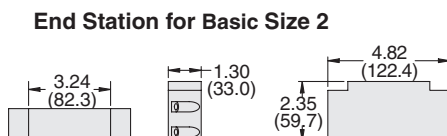

End Station with Check Valve for Basic Size 2

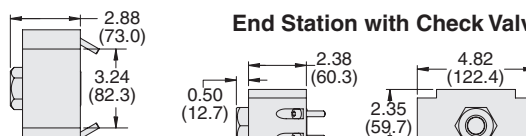


Normal Operation: The valve is operated by pressurizing both pilot supply ports simultaneously. This causes both main valve elements to be actuated so that air from inlet port 1 flows to outlet port 4, but not to port 2. Air downstream of port 2 is exhausted through port 3. When the pilot supply ports are de-pressurized, both valve elements are de-actuated, and air then flows from inlet port 1 to outlet port 2, but no longer to outlet port 4. Air downstream of port 4 is exhausted through port 5. On first operation, or after repair, the pilot valve supply circuit and inherent monitoring elements may need to be reset.

Valve Locked-out: Whenever the valve elements operate in a sufficiently asynchronous manner, either on actuation or de-actuation, the valve will move to a locked-out position. In the locked-out position, one crossover and its related timing chamber will be exhausted, and the other crossover and its related timing chamber will be fully pressurized. The valve element (side B) that is partially actuated has pilot air available to fully actuate it, but no air pressure on the return piston to fully de-actuate the valve element. The return springs are limited in travel, and can only return the valve elements to the intermediate (locked-out) position. Sufficient air pressure acting on the return pistons is needed to return the valve elements to a fully home position.

Detecting a Malfunction: If the main valve elements are not both actuated or de-actuated synchronously, the valve defaults to the locked-out position so that outlet port 2 receives full inlet pressure, and outlet port 4 is exhausted through port 5. The valve must now be "reset" to resume normal operation.

Resetting the Valve: The valve will remain in the locked-out position, even if the inlet air supply is removed and re-applied. A remote reset signal must be applied to reset the valve. Reset is accomplished by momentarily pressurizing the reset port. Actuation of the reset piston physically pushes the main valve elements to their home position. Actuation of the reset piston also opens the reset poppet, thereby, immediately exhausting pilot supply air, thus, preventing valve operation during reset. De-actuation of reset pistons causes the reset poppets to close and pilot supply timing chambers to fully pressurize. Reset pressure can be applied by a remote 3/2 normally closed valve.

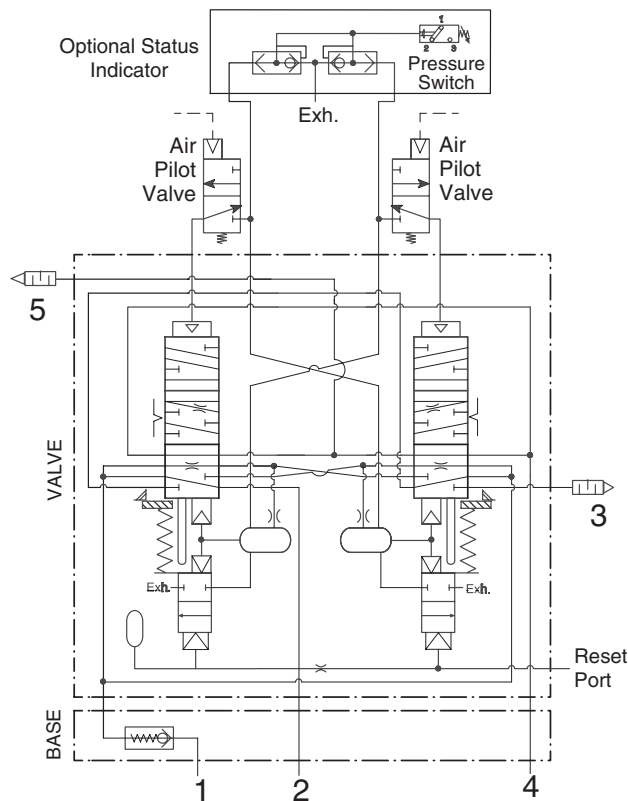

Valve Schematic

Status Indicator: The optional status indicator pressure switch will actuate when the main valve is operating normally, and will de-actuate when the main valve is in the locked-out position or inlet pressure is removed. This device is not part of the valve lockout function, but, rather, only reports the status of the main valve.



F5

F

OPTIONS


PRESSURE SWITCHES For Verification Of Downstream Pressure Release

Pressure Switches		
Connection Type	Model Number	Port Threads
DIN 43650 Form A	586A86	1/8 NPT
M12 Micro-DC	1153A30	1/8 NPT



- May be installed downstream on all double valves
- Provides means to verify the release of downstream pressure to next obstruction
- Factory preset, 5 psi (0.3 bar) - falling

Redundant Pressure Switch		
Connection Types	Model Number	Port Threads
DIN 43650 Form A	RC26-13	3/8 NPT



- May be installed downstream on all double valves
- Provides a redundant means to verify the release of downstream pressure to next obstruction
- Factory preset, 5 psi (0.3 bar) - falling

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.






F



ROSS CONTROLS®

EXPLOSION PROOF VALVES
27 & 21 SERIES, DM²® SERIES C
ISO VALVES W60 & W64 SERIES

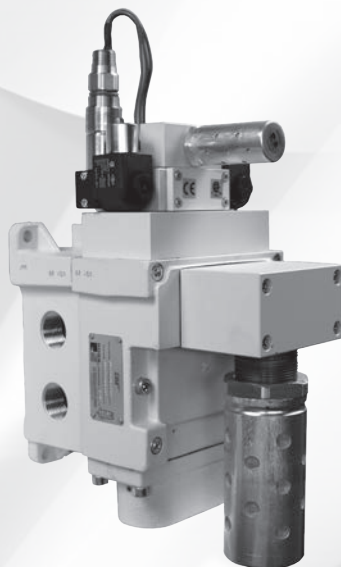

www.rosscontrols.com

POPPET 27 & 21 SERIES EXPLOSION PROOF VALVES – KEY FEATURES

- 27 Series - Construction - Acetal internals
- 21 Series - Construction - Metal, Aluminum
- Poppet construction for near zero leakage and high dirt tolerance
- Pilot can rotate, giving the ability to change orientation
- Self-cleaning
- Wear compensating
- Repeatability throughout the life of the valve

VALVE TYPE/ SERIES	DESCRIPTION		AVAILABLE INLET PORT SIZES										FUNCTIONS									Explosion Proof Certifications		Page	
	Spool & Sleeve	Poppet	1/8	1/4	3/8	1/2	3/4	1	1¼	1½	2	2½	2/2	3/2	3/4	4/2	5/2 Single	5/2 Double	Max Flow (Cv)	Solenoid Control	Normally Closed	Normally Open	CSA/UL		ATEX#
27 SERIES Poppet Valves																									
27																			72						F6.3
27																			71						F6.4
27																			25						F6.5
21 SERIES for Low Temperature																									
21																			29						F6.6
21																			31						F6.7
21																			25						F6.8
Accessories																									F6.9

For ATEX Certified valves order placement, consult ROSS.

CONTROL RELIABLE DOUBLE VALVES DM²⁰ SERIES – KEY FEATURES

- Rapid response time to minimize stopping time
- Status Indicator switch for valve condition (ready to run) feedback
- Highly contaminant tolerant poppet construction

VALVE TYPE/ SERIES	Category	Available Port Sizes						MAX. FLOW Cv						Reset			Explosion Proof Certifications		Page
		1/4	3/8	1/2	3/4	1	1½	Port Size						Integrated Soft Start	Remote	Solenoid	CSA/UL	ATEX	
								1/4	3/8	1/2	3/4	1	1½						
Control Reliable Explosion Proof Double Valves																			
DM ²⁰ C	4									10		20	64						F6.10 -F6.12

Solenoid Pilot Controlled Explosion-Proof Valves


27 Series

2-Way 2-Position Valves, Spring Return						
Port Size 1, 2	Body Size	Valve Model Number*		C _v		Weight lb (kg)
		Normally Closed	Normally Open	NC	NO	
1/4	3/8	2771B2002**	2772B2002**	2.3	2.3	3.0 (1.4)
3/8	3/8	2771B3002**	2772B3002**	3.8	3.3	3.0 (1.4)
1/2	3/8	2771B4012**	2772B4012**	4.0	3.5	3.0 (1.4)
1/2	3/4	2771B4002**	2772B4002**	7.7	6.5	3.6 (1.6)
3/4	3/4	2771B5002**	2772B5002**	9.0	7.3	3.6 (1.6)
1	3/4	2771B6012**	2772B6012**	9.0	7.9	3.6 (1.6)
1	1 1/4	2771B6002**	2772B6002**	24	21	7.5 (3.4)
1 1/4	1 1/4	2771B7002**	2772B7002**	29	20	7.5 (3.4)
1 1/2	1 1/4	2771B8012**	2772B8012**	29	21	7.5 (3.4)
1 1/2	2	2771B8002**	2772B8002**	49	49	16.0 (7.3)
2	2	2771B9002**	2772B9002**	57	57	16.0 (7.3)
2 1/2	2	2771B9012**	2772B9012**	64	72	16.0 (7.3)

* NPT port threads. For BSPP threads add a "D" prefix to the model number e.g., D2772B2002.
 ** Insert voltage code: "W" = 24 volts DC; "Z" = 120 volts AC, 60 Hz; e.g., 2771B2002W. For other voltages, consult ROSS.



Normally Closed (NC)




Normally Open (NO)




Valve Dimensions – inches (mm)


Body Size 3/8

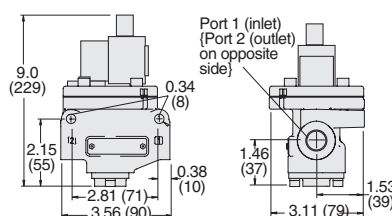


Body Size 3/4

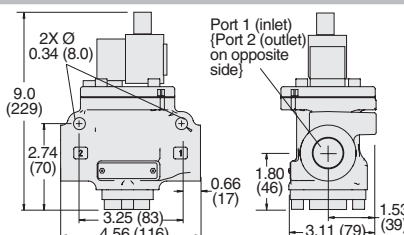

Body Size 1 1/4

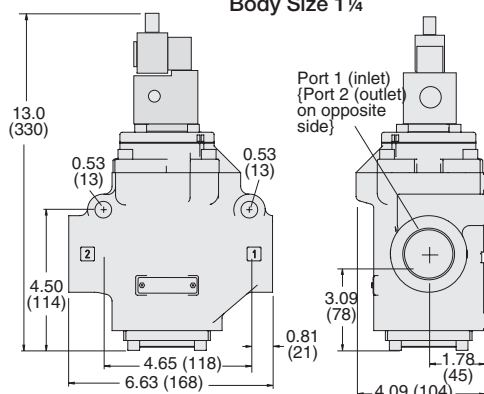

Body Size 2

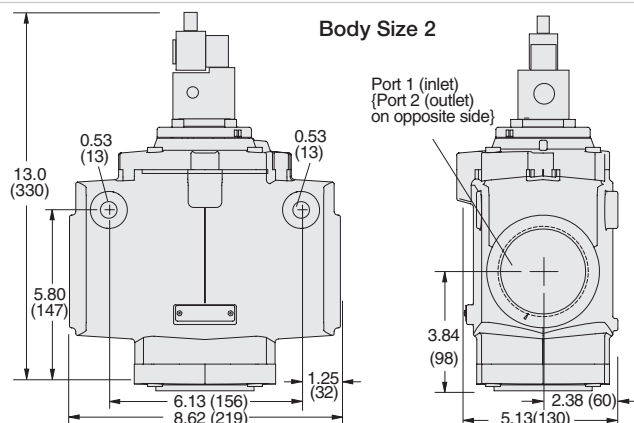

Applicable Requirements: C22.2 No. 0-10 - General Requirements - Canadian Electrical Code, Part II; CSA C22.2 No. 25-1966 - Enclosures for use in Class II Groups E, F and G Hazardous Locations; CSA C22.2 No. 142-M1987 - Process Control Equipment; C22.2 No. 213-M1987 - Nonincendive Electrical Equipment for Use in Class I, Division 2 Hazardous Locations; CAN/CSA E79-0-95 - Electrical apparatus for explosive atmospheres, Part 0: General requirements; CAN/CSA E79-18-95 - Electrical apparatus for explosive atmospheres, Part 18: Encapsulation "m".

APPROVED for use in the following Hazardous Locations – Ex m II T4 and Division 1 –

Specifications in accordance to CSA certificate: Class I, Division 1, Groups A, B, C and D; Class II, Groups E, F and G; Class III; Class I, Division 2, Groups A, B, C, D.

Specifications in accordance to FM certificate: Explosion-proof Class I, Division 1, Groups A, B, C, D, T4, Ta = 60 °C (encapsulation/explosion-proof Class I, Zone 1, AEx m II T4, Ta = 60 °C; dust-ignition-proof for Class II/III, Division 1, Groups E, F and G, T4, Ta = 60 °C); Nonincendive Class I, Division 2, Groups A, B, C, D, T4, Ta = 60 °C; Suitable for Class II, III, Division 2, Groups E, F, G, T4, Ta = 60 °C

CSA CLASS 2258 02 – process control equipment – for hazardous locations; **FM CLASS 3600, 3611, 3615, 3810** – hazardous (classified) location electrical equipment

For ATEX Certified valves order placement, consult ROSS.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet; Acetal.

Mounting Type: In-Line.

Standard Voltages/Pilot Solenoids Power Consumption (each solenoid): 24 volts DC, 4.6 watts; 120 volts AC, 60 Hz, 6.8 volt amps.

Ambient Temperature: 40° to 140°F (4° to 60°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: Body Size 3/8, 3/4, 1 1/2: 15 to 150 psig (1 to 10 bar).
Body Size 2: 30 to 150 psig (2 to 10 bar).

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.





Online Version
Rev. 05/16


www.rosscontrols.com

F6.3


3-Way 2-Position Valves, Spring Return										
Port Size		Body Size	Valve Model Number*		C _v				Weight lb (kg)	
					NC		NO			
1, 2	3		Normally Closed	Normally Open	1-2	2-3	1-2	2-3		
1/4	1/2	3/8	2773B2002**	2774B2002**	2.5	3.1	2.3	2.7	2.5 (1.2)	
3/8	1/2	3/8	2773B3002**	2774B3002**	3.6	5.3	2.8	3.2	2.5 (1.2)	
1/2	1/2	3/8	2773B4012**	2774B4012**	3.3	5.3	2.8	3.2	2.5 (1.2)	
1/2	1	3/4	2773B4002**	2774B4002**	6.3	9.2	6.3	8.0	3.3 (1.5)	
3/4	1	3/4	2773B5002**	2774B5002**	7.7	11	6.9	7.4	3.3 (1.5)	
1	1	3/4	2773B6012**	2774B6012**	8	12	6.8	7.5	3.3 (1.5)	
1	1½	1¼	2773B6002**	2774B6002**	23	34	17	24	7.0 (3.2)	
1¼	1½	1¼	2773B7002**	2774B7002**	30	32	19	24	7.0 (3.2)	
1½	1½	1¼	2773B8012**	2774B8012**	30	31	19	23	7.0 (3.2)	
1½	2½	2	2773B8002**	2774B8002**	68	70	57	59	16.5 (7.4)	
2	2½	2	2773B9002**	2774B9002**	70	70	58	61	16.5 (7.4)	
2½	2½	2	2773B9012**	2774B9012**	70	71	54	55	16.5 (7.4)	







Normally Closed (NC)




Normally Open (NO)

* NPT port threads. For BSP threads add a "D" prefix to the model number e.g., D2773B2002.

** Insert voltage code: "W" = 24 volts DC; "Z" = 120 volts AC, 60 Hz; e.g., 2773B2002W. For other voltages, consult ROSS.



Valve Dimensions – inches (mm)

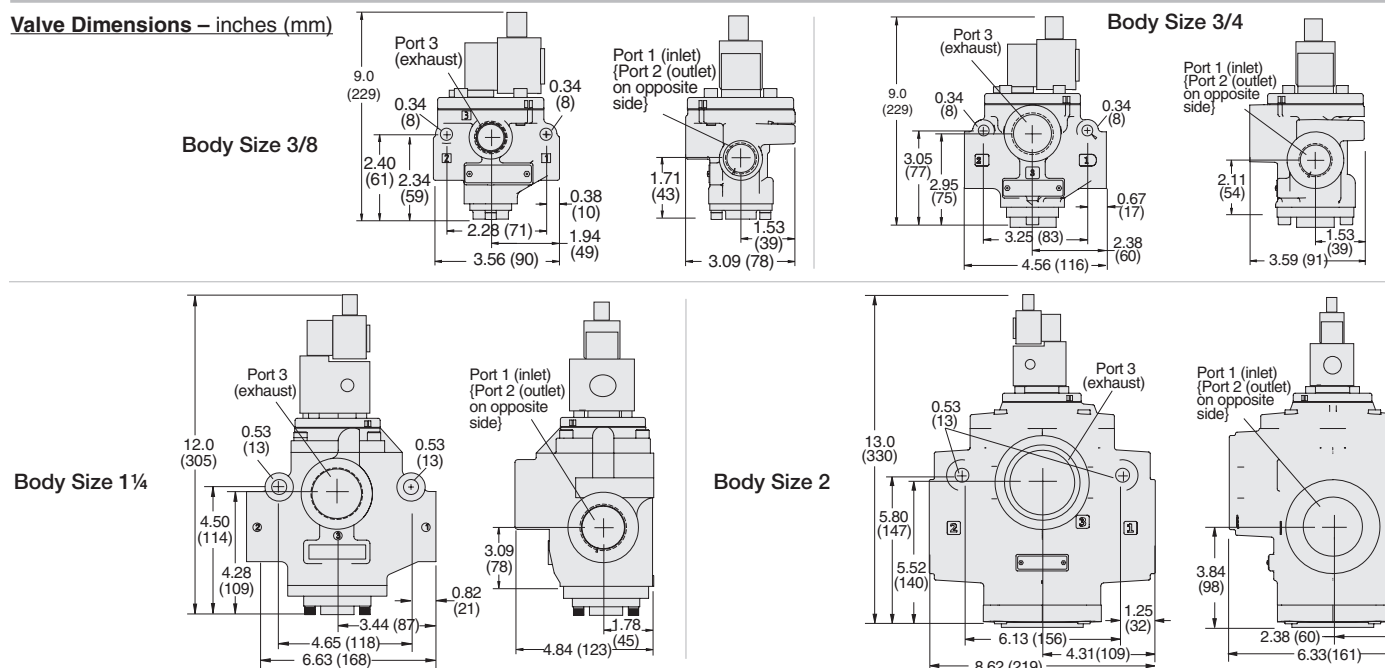

Applicable Requirements: C22.2 No. 0-10 - General Requirements - Canadian Electrical Code, Part II; CSA C22.2 No. 25-1966 - Enclosures for use in Class II Groups E, F and G Hazardous Locations; CSA C22.2 No. 142-M1987 - Process Control Equipment; C22.2 No. 213-M1987 - Nonincendive Electrical Equipment for Use in Class I, Division 2 Hazardous Locations; CAN/CSA E79-0-95 - Electrical apparatus for explosive atmospheres, Part 0: General requirements; CAN/CSA E79-18-95 - Electrical apparatus for explosive atmospheres, Part 18: Encapsulation "m".

APPROVED for use in the following Hazardous Locations – Ex m II T4 and Division 1 –

Specifications in accordance to CSA certificate: Class I, Division 1, Groups A, B, C and D; Class II, Groups E, F and G; Class III; Class I, Division 2, Groups A, B, C, D.

Specifications in accordance to FM certificate: Explosion-proof Class I, Division 1, Groups A, B, C, D, T4, Ta = 60 °C (encapsulation/explosion-proof Class I, Zone 1, AEx m II T4, Ta = 60 °C; dust-ignition-proof for Class II/III, Division 1, Groups E, F and G, T4, Ta = 60 °C); Nonincendive Class I, Division 2, Groups A, B, C, D, T4, Ta = 60 °C; Suitable for Class II, III, Division 2, Groups E, F, G, T4, Ta = 60 °C

CSA CLASS 2258 02 – process control equipment – for hazardous locations; **FM CLASS 3600, 3611, 3615, 3810** – hazardous (classified) location electrical equipment

For ATEX Certified valves order placement, consult ROSS.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet; Acetal.

Mounting Type: In-Line.

Solenoid Pilot: Rated for continuous duty.

Standard Voltages/Pilot Solenoids Power Consumption (each solenoid): 24 volts DC, 4.6 watts; 120 volts AC, 60 Hz, 6.8 volt amps.

Ambient Temperature: 40° to 140°F (4° to 60°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: Body Size 3/8, 3/4, 1½: 15 to 150 psig (1 to 10 bar).
Body Size 2: 30 to 150 psig (2 to 10 bar).

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.




Solenoid Pilot Controlled Explosion-Proof Valves

27 Series

4-Way 2-Position Valves, Spring Return						
Port Size		Body Size	Valve Model Number*	C _v		Weight lb (kg)
1, 2, 4	3			1-2, 1-4	4-3, 2-3	
1/4	1/2	3/8	2776B2002**	2.1	2.9	1.9 (0.9)
3/8	1/2	3/8	2776B3002**	2.9	4.2	1.9 (0.9)
1/2	1/2	3/8	2776B4012**	3.1	4.3	1.9 (0.9)
1/2	1	3/4	2776B4002**	5.6	8.1	4.2 (1.9)
3/4	1	3/4	2776B5002**	7.0	9.3	4.2 (1.9)
1	1	3/4	2776B6012**	7.8	10	4.2 (1.9)
1	1½	1¼	2776B6002**	19	26	11.0 (5.0)
1¼	1½	1¼	2776B7002**	21	27	11.0 (5.0)
1½	1½	1¼	2776B8012**	22	27	11.0 (5.0)


* NPT port threads. For BSPP threads add a "D" prefix to the model number e.g., D2776B2002.

** Insert voltage code: "W" = 24 volts DC; "Z" = 120 volts AC, 60 Hz; e.g., 2776B2002W. For other voltages, consult ROSS.




Port Sizes 1 to 1½

Body Size 3/8

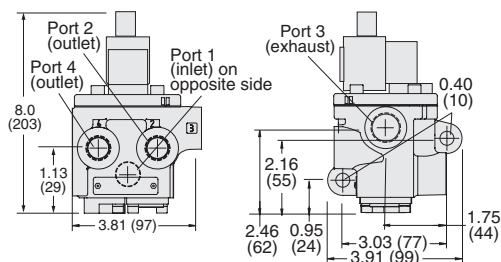


Valve Dimensions – inches (mm)

Body Size 3/4

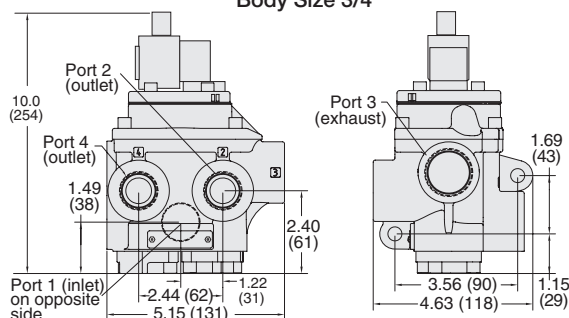

Body Size 1¼

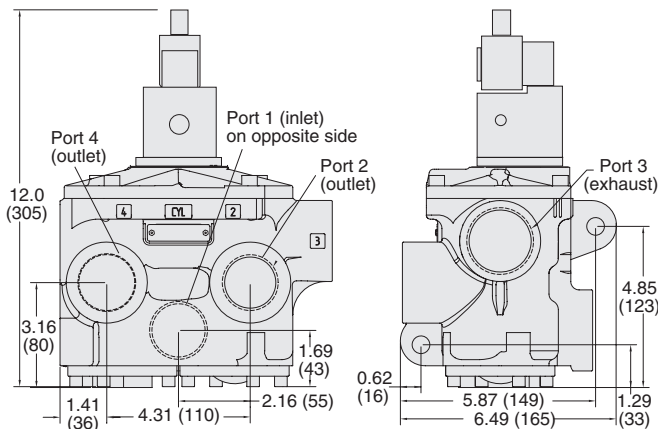

Applicable Requirements: C22.2 No. 0-10 - General Requirements - Canadian Electrical Code, Part II; CSA C22.2 No. 25-1966 - Enclosures for use in Class II Groups E, F and G Hazardous Locations; CSA C22.2 No. 142-M1987 - Process Control Equipment; C22.2 No. 213-M1987 - Nonincendive Electrical Equipment for Use in Class I, Division 2 Hazardous Locations; CAN/CSA E79-0-95 - Electrical apparatus for explosive atmospheres, Part 0: General requirements; CAN/CSA E79-18-95 - Electrical apparatus for explosive atmospheres, Part 18: Encapsulation "m".

APPROVED for use in the following Hazardous Locations – Ex m II T4 and Division 1 –

Specifications in accordance to CSA certificate: Class I, Division 1, Groups A, B, C and D; Class II, Groups E, F and G; Class III; Class I, Division 2, Groups A, B, C, D.

Specifications in accordance to FM certificate: Explosion-proof Class I, Division 1, Groups A, B, C, D, T4, Ta = 60 °C (encapsulation/explosion-proof Class I, Zone 1, AEx m II T4, Ta = 60 °C; dust-ignition-proof for Class II/III, Division 1, Groups E, F and G, T4, Ta = 60 °C); Nonincendive Class I, Division 2, Groups A, B, C, D, T4, Ta = 60 °C; Suitable for Class II, III, Division 2, Groups E, F, G, T4, Ta = 60 °C

CSA CLASS 2258 02 – process control equipment – for hazardous locations; **FM CLASS 3600, 3611, 3615, 3810** – hazardous (classified) location electrical equipment

For ATEX Certified valves order placement, consult ROSS.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet; Acetal.

Mounting Type: In-Line.

Solenoid Pilot: Rated for continuous duty.

Standard Voltages/Pilot Solenoids Power Consumption (each solenoid): 24 volts DC, 4.6 watts; 120 volts AC, 60 Hz, 6.8 volt amps.

Ambient Temperature: 40° to 140°F (4° to 60°C).

Media Temperature: 40° to 175°F (4° to 80°C).

Flow Media: Filtered air.

Inlet Pressure: 15 to 150 psig (1 to 10 bar).

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com

F6.5


Solenoid Pilot Controlled Explosion-Proof Valves

For Low Temperature Applications


21 Series

2-Way 2-Position Valves, Spring Return						
Port Size 1,2	Body Size	Valve Model Number*		Avg. C _v		Weight lb (kg)
		Normally Closed	Normally Open	NC	NO	
1/4	3/8	2171B2005**	2172B2005**	2.3	2.3	3.0 (1.4)
3/8	3/8	2171B3005**	2172B3005**	3.8	3.3	3.0 (1.4)
1/2	3/8	2171B4015**	2172B4015**	4.0	3.5	3.0 (1.4)
1/2	3/4	2171B4005**	2172B4005**	7.7	6.5	3.3 (1.5)
3/4	3/4	2171B5005**	2172B5005**	9.0	7.3	3.3 (1.5)
1	3/4	2171B6015**	2172B6015**	9.0	7.9	3.3 (1.5)
1	1 1/4	2171B6005**	2172B6005**	24	21	7.5 (3.4)
1 1/4	1 1/4	2171B7005**	2172B7005**	29	20	7.5 (3.4)
1 1/2	1 1/4	2171B8015**	2172B8015**	29	21	7.5 (3.4)

* NPT port threads. For BSPP threads add a "D" prefix to the model number e.g., D2171B2004.
 ** Insert voltage code: "W" = 24 volts DC; "Z" = 120 volts AC, 60 Hz; e.g., 2171B2004W. For other voltages, consult ROSS.



Normally Closed (NC)




Normally Open (NO)




Valve Dimensions – inches (mm)


Body Size 3/8

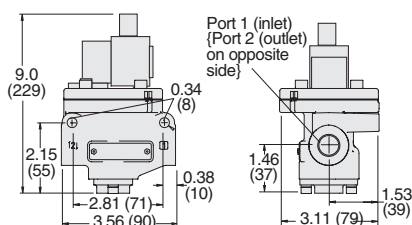

Body Size 3/4

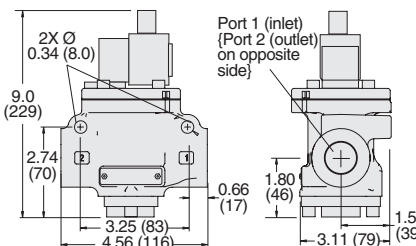

Body Size 1 1/4

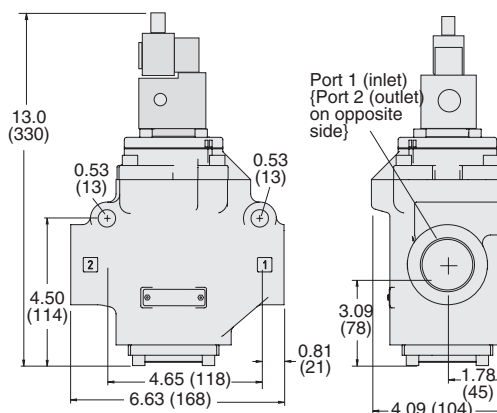

Applicable Requirements: C22.2 No. 0-10 - General Requirements - Canadian Electrical Code, Part II; CSA C22.2 No. 25-1966 - Enclosures for use in Class II Groups E, F and G Hazardous Locations; CSA C22.2 No. 142-M1987 - Process Control Equipment; C22.2 No. 213-M1987 - Nonincendive Electrical Equipment for Use in Class I, Division 2 Hazardous Locations; CAN/CSA E79-0-95 - Electrical apparatus for explosive atmospheres, Part 0: General requirements; CAN/CSA E79-18-95 - Electrical apparatus for explosive atmospheres, Part 18: Encapsulation "m".

APPROVED for use in the following Hazardous Locations – Ex m II T4 and Division 1 –

Specifications in accordance to CSA certificate: Class I, Division 1, Groups A, B, C and D; Class II, Groups E, F and G; Class III; Class I, Division 2, Groups A, B, C, D.

Specifications in accordance to FM certificate: Explosion-proof Class I, Division 1, Groups A, B, C, D, T4, Ta = 60 °C (encapsulation/explosion-proof Class I, Zone 1, AEx m II T4, Ta = 60 °C; dust-ignition-proof for Class II/III, Division 1, Groups E, F and G, T4, Ta = 60 °C); Nonincendive Class I, Division 2, Groups A, B, C, D, T4, Ta = 60 °C; Suitable for Class II, III, Division 2, Groups E, F, G, T4, Ta = 60 °C

CSA CLASS 2258 02 – process control equipment – for hazardous locations; **FM CLASS 3600, 3611, 3615, 3810** – hazardous (classified) location electrical equipment

For ATEX Certified valves order placement, consult ROSS.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet; Metal.

Mounting Type: Inline.

Solenoid Pilot: Rated for continuous duty.

Standard Voltages/Pilot Solenoids Power Consumption (each solenoid): 24 volts DC, 4.6 watts; 120 volts AC, 60 Hz, 6.8 volt amps.

Ambient Temperature: -4° to 140°F (-20° to 60°C).

Media Temperature: -4° to 175°F (-20° to 80°C).

For temperatures below 40°F (4°C) air must be free of water vapor to prevent formation of ice.

Flow Media: Filtered air.

Inlet Pressure: 30 to 150 psig (2 to 10 bar).

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.






Solenoid Pilot Controlled Explosion-Proof Valves

For Low Temperature Applications


21 Series

3-Way 2-Position Valves, Spring Return									
Port Size		Body Size	Valve Model Number*		C _v				Weight lb (kg)
			Low Temperature		NC		NO		
1, 2	3		Normally Closed	Normally Open	1-2	2-3	1-2	2-3	
1/4	1/2	3/8	2173B2005**	2174B2005**	2.4	3.4	2.0	2.1	3.0 (1.4)
3/8	1/2	3/8	2173B3005**	2174B3005**	3.0	5.8	2.3	2.4	3.0 (1.4)
1/2	1/2	3/8	2173B4015**	2174B4015**	3.0	5.2	2.9	2.8	3.0 (1.4)
1/2	1	3/4	2173B4005**	2174B4005**	6.6	12	6.5	7.0	3.3 (1.5)
3/4	1	3/4	2173B5005**	2174B5005**	7.8	13	7.5	7.5	3.3 (1.5)
1	1	3/4	2173B6015**	2174B6015**	7.5	12	7.7	7.6	3.3 (1.5)
1	1½	1¼	2173B6005**	2174B6005**	24	40	15	17	7.5 (3.4)
1¼	1½	1¼	2173B7005**	2174B7005**	29	39	21	23	7.5 (3.4)
1½	1½	1¼	2173B8015**	2174B8015**	30	38	22	23	7.5 (3.4)






Normally Closed (NC)




Normally Open (NO)

* NPT port threads. For BSPP threads add a "D" prefix to the model number e.g., D2171B2004.

** Insert voltage code: "W" = 24 volts DC; "Z" = 120 volts AC, 60 Hz; e.g., 2173B2004W. For other voltages, consult ROSS.




Normally Closed (NC)



Normally Open (NO)



Valve Dimensions – inches (mm)

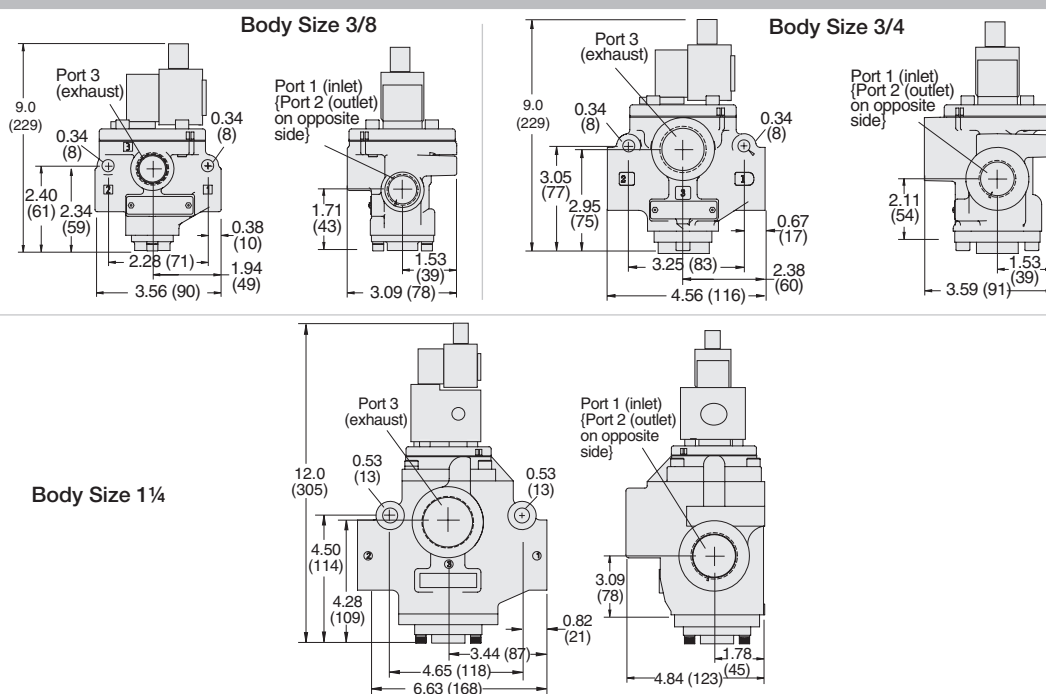

Applicable Requirements: C22.2 No. 0-10 - General Requirements - Canadian Electrical Code, Part II; CSA C22.2 No. 25-1966 - Enclosures for use in Class II Groups E, F and G Hazardous Locations; CSA C22.2 No. 142-M1987 - Process Control Equipment; C22.2 No. 213-M1987 - Nonincendive Electrical Equipment for Use in Class I, Division 2 Hazardous Locations; CAN/CSA E79-0-95 - Electrical apparatus for explosive atmospheres, Part 0: General requirements; CAN/CSA E79-18-95 - Electrical apparatus for explosive atmospheres, Part 18: Encapsulation "m".

APPROVED for use in the following Hazardous Locations – Ex m II T4 and Division 1 –

Specifications in accordance to CSA certificate: Class I, Division 1, Groups A, B, C and D; Class II, Groups E, F and G; Class III; Class I, Division 2, Groups A, B, C, D.

Specifications in accordance to FM certificate: Explosion-proof Class I, Division 1, Groups A, B, C, D, T4, Ta = 60 °C (encapsulation/explosion-proof Class I, Zone 1, AEx m II T4, Ta = 60 °C; dust-ignition-proof for Class II/III, Division 1, Groups E, F and G, T4, Ta = 60 °C); Nonincendive Class I, Division 2, Groups A, B, C, D, T4, Ta = 60 °C; Suitable for Class II, III, Division 2, Groups E, F, G, T4, Ta = 60 °C

CSA CLASS 2258 02 – process control equipment – for hazardous locations; **FM CLASS 3600, 3611, 3615, 3810** – hazardous (classified) location electrical equipment

For ATEX Certified valves order placement, consult ROSS.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet; Metal.

Mounting Type: Inline.

Solenoid Pilot: Rated for continuous duty.

Standard Voltages/Pilot Solenoids Power Consumption (each solenoid): 24 volts DC, 4.6 watts; 120 volts AC, 60 Hz, 6.8 volt amps.

Ambient Temperature: -4° to 140°F (-20° to 60°C).

Media Temperature: -4° to 175°F (-20° to 80°C).

For temperatures below 40°F (4°C) air must be free of water vapor to prevent formation of ice.

Flow Media: Filtered air.

Inlet Pressure: 30 to 150 psig (2 to 10 bar).

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



Online Version
Rev. 05/16

www.rosscontrols.com

F6.7

Solenoid Pilot Controlled Explosion-Proof Valves


For Low Temperature Applications

21 Series

4-Way 2-Position Valves, Spring Return							
Port Size		Body Size	Valve Model Number*		C _v		Weight lb (kg)
1, 2, 4	3		Low Temperature		1-2, 1-4	4-3, 2-3	
1/4	1/2	3/8	2176B2005**		2.1	2.2	3.0 (1.4)
3/8	1/2	3/8	2176B3005**		2.5	3.1	3.0 (1.4)
1/2	1/2	3/8	2176B4015**		2.9	3.8	3.0 (1.4)
1/2	1	3/4	2176B4005**		5.7	6.5	5.8 (2.6)
3/4	1	3/4	2176B5005**		7.1	8.7	5.8 (2.6)
1	1	3/4	2176B6015**		7.7	10	5.8 (2.6)
1	1½	1¼	2176B6005**		18	23	12.0 (5.4)
1¼	1½	1¼	2176B7005**		20	28	12.0 (5.4)
1½	1½	1¼	2176B8015**		21	29	12.0 (5.4)


* NPT port threads. For BSPP threads add a "D" prefix to the model number e.g., D2176B2004.

** Insert voltage code: "W" = 24 volts DC; "Z" = 120 volts AC, 60 Hz; e.g., 2176B2004W. For other voltages, consult ROSS.




Port Sizes 1 to 1½

Body Size 3/8

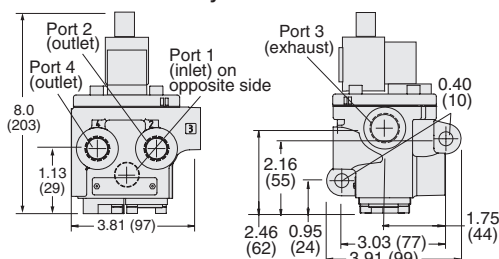


Valve Dimensions – inches (mm)

Body Size 3/4

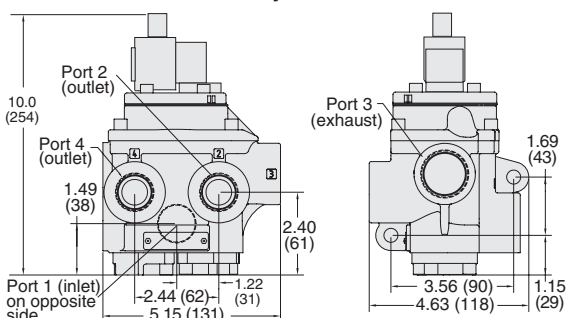

Body Size 1¼

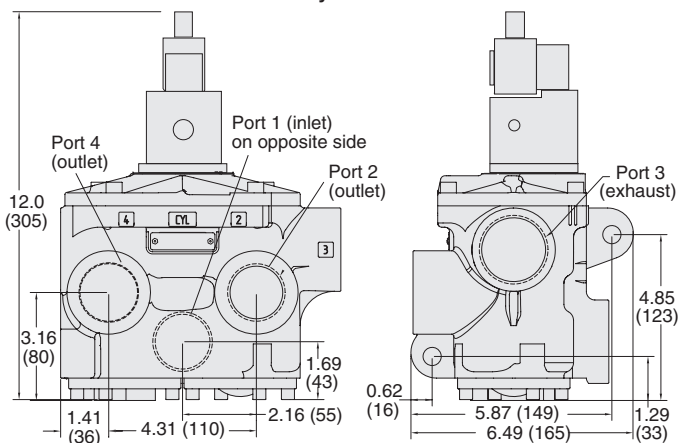

Applicable Requirements: C22.2 No. 0-10 - General Requirements - Canadian Electrical Code, Part II; CSA C22.2 No. 25-1966 - Enclosures for use in Class II Groups E, F and G Hazardous Locations; CSA C22.2 No. 142-M1987 - Process Control Equipment; C22.2 No. 213-M1987 - Nonincendive Electrical Equipment for Use in Class I, Division 2 Hazardous Locations; CAN/CSA E79-0-95 - Electrical apparatus for explosive atmospheres, Part 0: General requirements; CAN/CSA E79-18-95 - Electrical apparatus for explosive atmospheres, Part 18: Encapsulation "m".

APPROVED for use in the following Hazardous Locations – Ex m II T4 and Division 1 –

Specifications in accordance to CSA certificate: Class I, Division 1, Groups A, B, C and D; Class II, Groups E, F and G; Class III; Class I, Division 2, Groups A, B, C, D.

Specifications in accordance to FM certificate: Explosion-proof Class I, Division 1, Groups A, B, C, D, T4, Ta = 60 °C (encapsulation/explosion-proof Class I, Zone 1, AEx m II T4, Ta = 60 °C; dust-ignition-proof for Class II/III, Division 1, Groups E, F and G, T4, Ta = 60 °C); Nonincendive Class I, Division 2, Groups A, B, C, D, T4, Ta = 60 °C; Suitable for Class II, III, Division 2, Groups E, F, G, T4, Ta = 60 °C

CSA CLASS 2258 02 – process control equipment – for hazardous locations; **FM CLASS 3600, 3611, 3615, 3810** – hazardous (classified) location electrical equipment

For ATEX Certified valves order placement, consult ROSS.

STANDARD SPECIFICATIONS (for valves on this page):

Construction: Poppet; Metal.

Mounting Type: Inline.

Solenoid Pilot: Rated for continuous duty.

Standard Voltages/Pilot Solenoids Power Consumption (each solenoid): 24 volts DC, 4.6 watts; 120 volts AC, 60 Hz, 6.8 volt amps.

Ambient Temperature: -4° to 140°F (-20° to 60°C).

Media Temperature: -4° to 175°F (-20° to 80°C).

For temperatures below 40°F (4°C) air must be free of water vapor to prevent formation of ice.

Flow Media: Filtered air.

Inlet Pressure: 30 to 150 psig (2 to 10 bar).

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.






Silencers



Port size 1/8 thru 2



Port size 2 1/2

Port Size	Thread Type	Model Number*		Avg. C _v	Dimensions inches (mm)		Weight lb (kg)		 Male Pipe Threads	 Female Pipe Threads
		NPT Threads	BSPT Threads		A	B				
1/2	Male	5500A4003	D5500A4003	4.7	1.3 (32)	3.6 (91)	0.2 (0.1)			
1	Male	5500A6003	D5500A6003	14.6	2.0 (51)	5.4 (138)	0.6 (0.3)			
1½	Female	5500A8001	D5500A8001	29.9	2.5 (64)	5.7 (144)	1.0 (0.5)			
2½	Female	5500A9002	D5500A9002	103.7	4.0 (102)	5.7 (145)	2.9 (1.4)			
Pressure Range: 0 to 150 psig (0 to 10.3 bar) maximum. Flow Media: Filtered air.										

Conversion Kits

ROSS Controls standard poppet solenoid pilot controlled valves for line mounting can be easily field-converted into an explosion-proof solenoid pilot poppet valve. Listed below are the conversion kit numbers to replace the obsolete ROSS explosion proof pilot, or to convert a standard in-line valve to an explosion-proof valve.

Valve Basic Size	Kit Number
1/4" - 1" (Cv up to 10)	2370K77W
1" (Cv up to 29) - 2½"	2371K77W



Control Reliable Explosion Proof Double Valves with Dynamic Monitoring & Memory

DM²® Series C Air Dump / Release

Basic Size 4, 12 and 30

Dynamic Monitoring With Complete Memory: Memory, monitoring, and air flow control functions are simply integrated into two identical valve elements. Valves lock-out due to asynchronous movement of valve elements during actuation or de-actuation, resulting in a residual outlet pressure of less than 1% of supply.

An Action is Required for Reset – cannot be reset by removing and re-applying supply pressure. Reset can only be accomplished by the optional integrated electrical (solenoid) reset.

Basic 3/2 Normally Closed Valve Function: Dirt tolerant, wear compensating poppet design for quick response and high flow capacity. PTFE back-up rings on pistons to enhance valve endurance – operates with or without inline lubrication.


Status Indicator: Includes a pressure switch with both normally open (NO) and normally closed (NC) contacts to provide status feedback to the control system indicating whether the valve is in the lockout or ready-to-run condition.

Silencers: All models include high flow, clog resistant silencers.

Mounting: Base mounted – with BSPP or NPT pipe threads. Inlet and outlet ports on both sides provide for flexible piping (plugs for unused ports included). Captive valve-to-base mounting screws.

Basic Size 12 and 30

Intermediate Pilots: Increases pilot air flow for fast valve response, making it possible to use the same size solenoids as valve sizes 4, thereby reducing electrical power requirements for these larger valves.

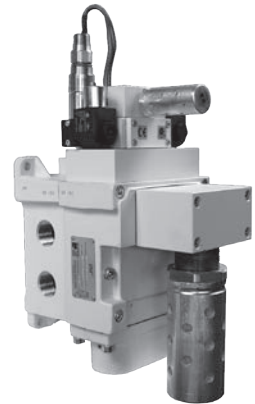


ISO 13849-1:2006
Category 4 PL e
applications

HOW TO ORDER


(Choose your options (in red) to configure your valve model number.)

DM2C	N	A	4	2	A	2	1	019
Thread		Basic Size		Reset Type		Pilot Type		
BSPP D		4 4		Solenoid 2		Explosion Proof 019		
NPT N		12 6						
Revision Level		30 8						
All Sizes A								
Base Port Size				Status Indicator				
4 1/2 inlet – 1/2 outlet 2				Yes 1				
12 1 inlet – 1 outlet 6				No X				
30 1 1/2 inlet – 2 outlet 8								
				Voltage*				
				24 volts DC A				
				120 volts AC, 60 Hz B				
				* For other voltages consult ROSS.				

Schematic -
Valve de-actuated

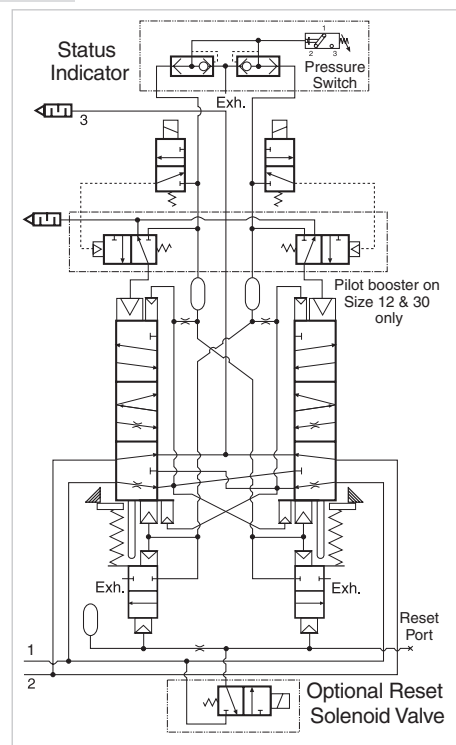

Simplified
Schematic



Valve Basic Size	Cv		Weight lb (Kg)
	1-2	2-3	
4	4.4	13	5.9 (2.6)
12	8.5	20	15.3 (3.7)
30	22	64	34.7 (15.1)

Applicable Requirements: C22.2 No. 0-10 - General Requirements - Canadian Electrical Code, Part II; CSA C22.2 No. 25-1966 - Enclosures for use in Class II Groups E, F and G Hazardous Locations; CSA C22.2 No. 142-M1987 - Process Control Equipment; C22.2 No. 213-M1987 - Nonincendive Electrical Equipment for Use in Class I, Division 2 Hazardous Locations; CAN/CSA E79-0-95 - Electrical apparatus for explosive atmospheres, Part 0: General requirements; CAN/CSA E79-18-95 - Electrical apparatus for explosive atmospheres, Part 18: Encapsulation "m".

APPROVED for use in the following Hazardous Locations – Ex m II T4 and Division 1

Specifications in accordance to CSA certificate: Class I, Division 1, Groups A, B, C and D; Class II, Groups E, F and G; Class III; Class I, Division 2, Groups A, B, C, D.

Specifications in accordance to FM certificate: Explosion-proof Class I, Division 1, Groups A, B, C, D, T4, Ta = 60 °C (encapsulation/explosion-proof Class I, Zone 1, AEx m II T4, Ta = 60 °C; dust-ignition-proof for Class II/III, Division 1, Groups E, F and G, T4, Ta = 60 °C); Nonincendive Class I, Division 2, Groups A, B, C, D, T4, Ta = 60 °C; Suitable for Class II, III, Division 2, Groups E, F, G, T4, Ta = 60 °C

CSA CLASS 2258 02 – process control equipment – for hazardous locations

FM CLASS 3600, 3611, 3615, 3810 – hazardous (classified) location electrical equipment

This valve is not designed for controlling clutch/brake mechanisms on mechanical power presses, see DM2® Series D for mechanical power press applications.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.




DM²® Series C Valve Technical Data


Control Reliable Explosion Proof Double Valves with Dynamic Monitoring & Memory

DM²® Series C Valve Operation & Options

Valve de-actuated (ready-to-run): The flow of inlet air pressure into the crossover passages from the inlet chamber is restricted by orifices that allow air pressure to bypass the lower inlet poppets. Flow is sufficient to quickly pressurize the pilot supply/timing chambers on both sides A and B. The upper inlet poppets prevent air flow from the crossover passages into the outlet chamber. Air pressure acting on the inlet poppets and return pistons securely hold the valve elements in the de-actuated position. (Internal air passages shown out of the valve body for clarity.)




Valve actuated: Energizing the pilot solenoids simultaneously applies pressure to both pistons, forcing the internal parts to move to their actuated position, where inlet air flow to outlet is open and both exhaust poppets are closed. The outlet is then quickly pressurized, and pressure in the inlet, crossovers, outlet, and timing chambers are quickly equalized. De-energizing the main solenoids causes the valve elements to return to the ready-to-run (de-actuated) position.




Asynchronous Operation: If the valve elements operate in a sufficiently asynchronous manner on ACTUATION, the valve will shift into a position where one crossover and its related timing chambers will be exhausted, and the other crossover and its related timing chambers will be pressurized.

In the illustration, side B is in the de-actuated position, but has no pilot air available to actuate with and has full pressure on its upper and lower inlet poppets and return piston to hold it in place.

Inlet air flow on side B into its crossover is restricted and flows through the open upper inlet poppet on side A, through the outlet into the exhaust port, and from the exhaust port to atmosphere. Residual pressure in the outlet is less than 1% of inlet pressure. Once the main solenoids are de-energized, actuating pressure is removed from the top of the main pistons and then the lower inlet poppet return spring along with inlet air pressure acting on the side A return piston will push side A back into the de-actuated position. Inlet air pressurizes the crossovers and volume chambers. Pressure in the crossovers helps hold the upper inlet poppets on seat. The valve will then be in the ready-to-run position. On the next attempt to actuate normally, if side B is still unable to actuate synchronously with side A, the same sequence of events described above will occur again.




WARNING: If asynchronous operation occurs while DE-ACTUATING, the pilot supply/timing chambers on one side will still be exhausted as described above. However, this could be a temporary situation because the cause of the asynchronous operation may be able to correct itself allowing the stuck or slow acting side of the valve to eventually move back into the de-actuated position. Once the slow or stuck side has de-actuated, the pilot supply/timing chambers that were exhausted will then repressurize. If an external monitoring system is only checking the status indicator periodically this fault signal could be missed. The machine's safety system must be designed to ensure that this does not cause a hazardous situation.



Status Indicator:

The status indicator pressure switch will actuate when the main valve is operating normally, and will de-actuate when the main valve operation is sufficiently asynchronous or inlet pressure is removed. This device is not part of the valve lockout function, but, rather, only reports the status of the main valve.



Status indicator in normal ready-to-run position

ACCESSORIES & OPTIONS


F

High-Flow, High Reduction Silencer KITS

Designed to improve equipment performance and reduce the Exponentially Perceived Noise (EPNdB) in the 35–40 dB range.

Basic Size	Kit Number*		Avg. C _v	Dimensions inches (mm)			
	NPT threads	BSPT threads		A	B (NPT)	B (BSPT)	C
4	2324H77	2329H77	800 (378)	4.34 (110.2)	20.68 (525.3)	23.02 (584.7)	7.27 (184.7)
12	2326H77	2330H77	2080 (982)	6.74 (117.2)	29.3 (744.2)	31.65 (803.91)	10.66 (270.8)
30	2327H77	2331H77	7200 (3398)	9.85 (250.2)	42.69 (1084.3)	42.69 (1084.3)	13.47 (342.1)

* Kits include all plumbing required for installation. **Pressure Range:** 125 psig (8.6 bar) maximum.

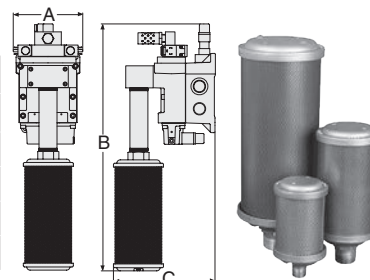

F6

Status Indicator

The Status Indicator pressure switch actuates when the valve is in a ready-to-run condition and de-actuates when the valve is in a lockout condition or when the inlet air pressure has been removed. Although, the valves can be purchased with this option already installed, the Status Indicator can be purchased separately.

Model Number

Y739B94

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



VALVE TYPE	Series	DESCRIPTION			AVAILABLE PORT SIZES								FUNCTIONS									Explosion Proof Certifications		Page	
		ISO Size	Spool & Sleeve	Poppet	1/8	1/4	3/8	1/2	3/4	1	1¼	1½	3/2 Single	5/2 Single	5/2 Double	5/3 Closed Center	5/3 Open Center	5/3 Pressure Center	Max Flow (Cv)	Solenoid Control	Direct Solenoid Control	Pressure Control	CSA/ UL		ATEX
ISO																									
ISO 5599/I	W60 & W64	1																0.8							A2.3 - A2.7
	W60 & W64	2																1.9							A2.3 - A2.7
	W60 & W64	3																3.8							A2.3 - A2.7

For Explosion-proof ISO Valves order placement, consult ROSS.



F




ROSS CONTROLS®

AIR-FUSE FLOW DIFFUSERS



www.rosscontrols.com

The ROSS AIR-FUSE Flow Diffuser automatically reduces air flow to minimize hose whip. After a hose failure has occurred, the AIR-FUSE is designed to minimize the whip effect of the hose. A minimal amount of media flow will occur after the AIR-FUSE is triggered. This pilot flow will escape to atmosphere and continue until the AIR-FUSE is reset, therefore, the AIR-FUSE is intended to be used only with non-corrosive, non-flammable, non-hazardous gases. To reset the AIR-FUSE, simply shut-off the air supply.




Ordering Information

Proper sizing of the Air-Fuse unit is guided by the air-operated work elements. Required flow rating must be ensured; i.e., flow capacity of the pneumatic element (pressure regulator, ball valve) installed upstream of the Air-Fuse must be larger, than that of the used hose-break protection.

Port Size	Porting Type	Model Number*	Shut-off Flow Rate at 100 psi (7 bar) scfm (dm³/s)	Flow at 100 psi (7 bar) ΔP 1 psi (0.07 bar) scfm (dm³/s)	Weight lb (kg)	
1/4	Female-Female	1969D2002	29.7 (14)	13.8 (8)	0.09 (0.04)	
3/8	Female-Female	1969D3002	68.2 (32)	28.6 (14)	0.15 (0.07)	
1/2	Female-Female	1969D4002	102.3 (48)	49.2 (23)	0.33 (0.15)	
3/4	Female-Female	1969D5002	169.5 (80)	91.1 (43)	0.28 (0.13)	
1	Female-Female	1969D6002	271.0 (128)	144 (68)	1.19 (0.54)	
1½	Female-Female	1969D8002	568.0 (268)	307 (145)	2.20 (1.00)	

*NPT port threads. For BSPP threads add a "D" prefix to the model number, e.g., D1969D2002.

Valve Dimensions – inches (mm)

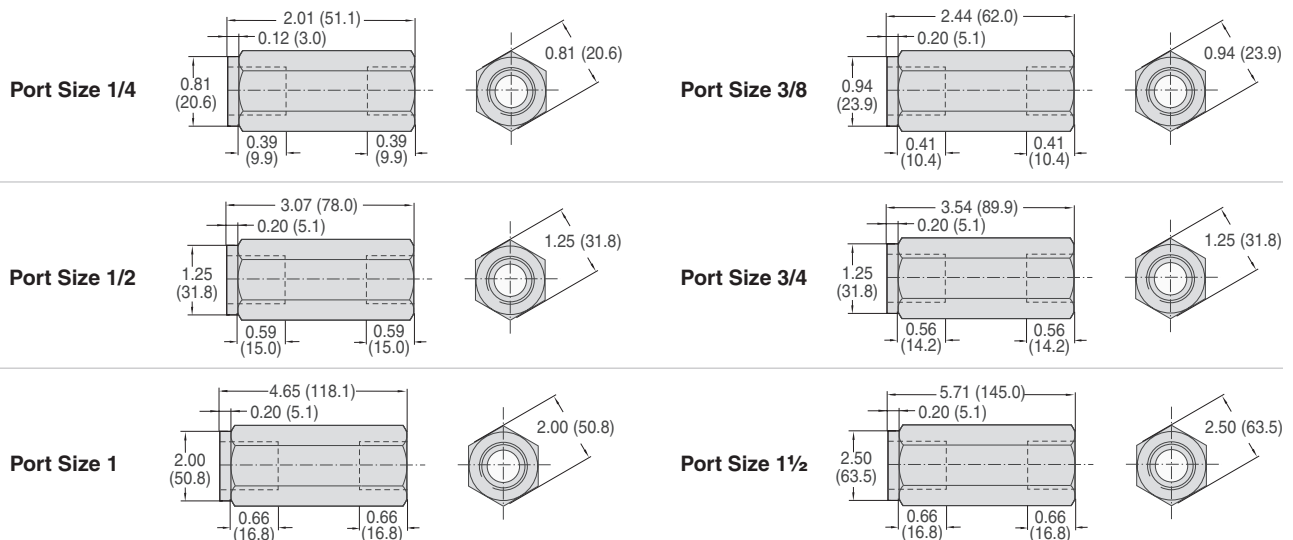

Reduces the Dangers of Hose and Plastic Tubing Failure

STANDARD SPECIFICATIONS (for valves on this page):

Ambient/Media Temperature: 35° to 175°F (2° to 80°C).

For temperature below 35°F (2°C), consult ROSS.

Flow Media: Filtered air.

Operating Pressure: Maximum 232 psi (16 bar).

Minimum according to hose length.

Drop pressure at shut-off flow: 4.4 psi (0.3 bar).

Mounting: In-line two-way valve. To be inserted between fixed air supply and flexible air lines

Material: Housing: Aluminum.

Inner parts: Brass.

Spring: Stainless Steel.

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.




Coiled Hose Selection Information

Minimum Supply Working pressure based on hose length and diameter psig (bar)												
Model Number	Port Size	Hose Length feet (meter)	Internal Hose Diameter inch (mm)									
			0.25	0.313	0.370	0.470	0.500	0.590	0.750	1.000	1.250	1.500
1969D2002	1/4	12 (3.65)	70 (4.82)	31 (2.13)	17 (1.17)	10 (0.69)	9 (0.62)	8 (0.55)	7 (0.48)	7 (0.48)	7 (0.48)	7 (0.48)
		25 (7.62)	137 (9.45)	57 (3.93)	27 (1.86)	13 (0.90)	11 (0.76)	9 (0.62)	8 (0.55)	7 (0.48)	7 (0.48)	7 (0.48)
		50 (15.24)		107 (7.38)	47 (3.24)	19 (1.31)	15 (1.03)	11 (0.76)	8 (0.55)	7 (0.48)	7 (0.48)	7 (0.48)
		100 (30.48)		207 (14.27)	87 (6)	30 (2.10)	23 (1.58)	14 (0.96)	9 (0.62)	8 (0.55)	7 (0.48)	7 (0.48)
1969D3002	3/8	12 (3.65)		132 (9.10)	57 (3.93)	21 (1.45)	17 (1.17)	11 (0.76)	8 (0.55)	8 (0.55)	7 (0.48)	7 (0.48)
		25 (7.62)			111 (7.65)	37 (2.55)	28 (1.93)	16 (1.10)	10 (0.69)	8 (0.55)	7 (0.48)	7 (0.48)
		50 (15.24)			215 (14.82)	67 (4.61)	49 (3.38)	25 (1.72)	12 (0.83)	8 (0.55)	8 (0.55)	7 (0.48)
		100 (30.48)				126 (8.69)	91 (6.27)	42 (2.90)	17 (1.17)	9 (0.62)	8 (0.55)	7 (0.48)
1969D4002	1/2	12 (3.65)			119 (8.20)	39 (2.69)	30 (2.07)	17 (1.17)	10 (0.69)	8 (0.55)	7 (0.48)	7 (0.48)
		25 (7.62)				74 (5.10)	54 (3.72)	27 (1.86)	13 (0.90)	8 (0.55)	8 (0.55)	7 (0.48)
		50 (15.24)				141 (9.72)	102 (7.03)	46 (3.17)	19 (1.31)	10 (0.69)	8 (0.55)	8 (0.55)
		100 (30.48)					196 (13.51)	85 (5.86)	29 (2)	12 (0.83)	9 (0.62)	8 (0.55)
1969D5002	3/4	12 (3.65)				96 (6.62)	70 (4.83)	33 (2.27)	15 (1.03)	9 (0.62)	8 (0.55)	7 (0.48)
		25 (7.62)				193 (13.31)	139 (9.58)	62 (4.27)	23 (1.58)	11 (0.76)	8 (0.55)	8 (0.55)
		50 (15.24)						116 (8)	38 (2.62)	14 (0.97)	9 (0.62)	8 (0.55)
		100 (30.48)						224 (15.44)	69 (4.76)	20 (1.38)	11 (0.76)	9 (0.62)
1969D6002	1	12 (3.65)				231 (15.93)	166 (8)	73 (15.03)	26 (1.79)	11 (0.76)	8 (0.55)	8 (0.55)
		25 (7.62)						144 (9.93)	47 (3.24)	16 (1.10)	10 (0.69)	8 (0.55)
		50 (15.24)							85 (5.86)	24 (1.65)	12 (0.83)	9 (0.62)
		100 (30.48)							163 (11.24)	14 (0.96)	17 (1.17)	11 (0.76)
1969D8002	1½	12 (3.65)							89 (6.14)	25 (1.72)	13 (0.89)	9 (0.62)
		25 (7.62)							179 (12.34)	44 (3.03)	18 (1.24)	12 (0.83)
		50 (15.24)								81 (5.58)	20 (1.38)	16 (1.10)
		100 (30.48)								154 (10.62)	52 (3.58)	24 (1.65)

Important Notes:

Flow is automatically reduced to a non-hazardous level after the ROSS AIR-FUSE has sensed a broken hose or tube. Until the supply of the compressed media is turned off, a nominal amount of flow will occur through the AIR-FUSE, therefore use only with non-corrosive, non-flammable and non-hazardous gases (check material compatibility). AIR-FUSE size should equal hose inside diameter. No reduced fittings should be used downstream of the AIR-FUSE before the tool. Flow-reducing fittings may only be used if they are directly connected with the work element. When applying the AIR-FUSE to a directional valve application, the valve should be oversized to eliminate excessive back pressure.

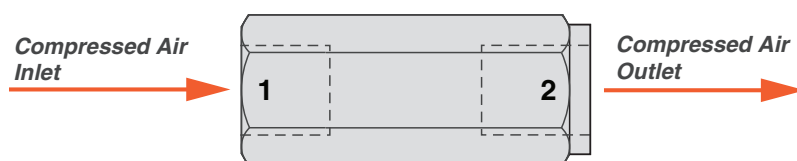

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.








F

ROSS CONTROLS®



ACCESSORIES



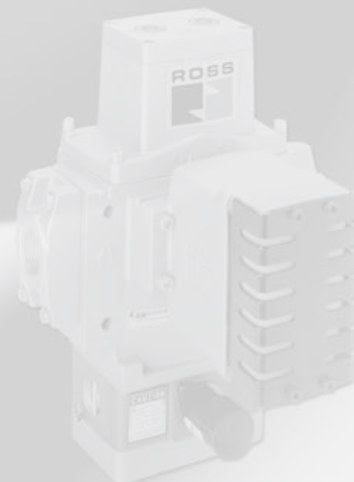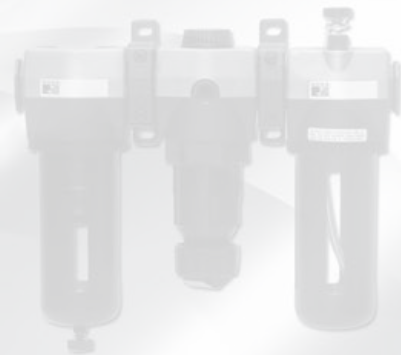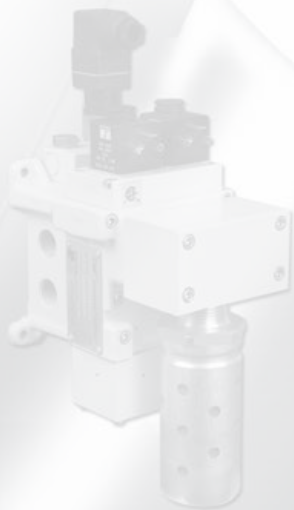

H

SILENCERS							
Port Size	Thread Type	Model Number		Avg. C _v	Dimensions inches (mm)		Weight lb (kg)
		NPT Threads	BSPT Threads		A	B	
1/8	Male	5500A1003	D5500A1003	1.2	0.9 (21)	2.0 (51)	0.1 (0.1)
1/4	Male	5500A2003	D5500A2003	2.1	0.9 (21)	2.2 (55)	0.1 (0.1)
3/8	Male	5500A3013	D5500A3013	2.7	0.9 (21)	2.2 (55)	0.1 (0.1)
3/8	Male	5500A3003	D5500A3003	4.3	1.3 (32)	3.5 (88)	0.2 (0.1)
1/2	Male	5500A4003	D5500A4003	4.7	1.3 (32)	3.6 (91)	0.2 (0.1)
3/4	Male	5500A5013	D5500A5013	5.1	1.3 (32)	3.6 (92)	0.2 (0.1)
3/4	Male	5500A5003	D5500A5003	11.5	2.0 (51)	5.3 (135)	0.6 (0.3)
1	Male	5500A6003	D5500A6003	14.6	2.0 (51)	5.4 (138)	0.6 (0.3)
1¼	Male	5500A7013	D5500A7013	16.4	2.0 (51)	5.5 (140)	0.6 (0.3)
1¼	Female	5500A7001	D5500A7001	24.0	2.5 (64)	5.7 (144)	1.0 (0.5)
1½	Female	5500A8001	D5500A8001	29.9	2.5 (64)	5.7 (144)	1.0 (0.5)
2	Female	5500B9001	D5500B9001	34.2	3.0 (76)	6.6 (168)	1.5 (0.7)
2½	Female	5500A9002	D5500A9002	103.7	4.0 (102)	5.7 (145)	2.9 (1.4)

Port size 1/8 thru 2

Port size 2½

Male Pipe Threads
For ports 1/8 through 1¼

Female Pipe Threads
For ports 1¼ through 2½

Pressure Range: 0 to 150 psig (0 to 10.3 bar) maximum. **Flow Media:** Filtered air.

HIGH-FLOW, HIGH-REDUCTION SILENCERS for DM ¹ , DM ²⁰ Series E & DM ²⁰ Series C Double Valves							
Valve Model	Basic Size	Thread Type	Kit Number*	Avg. C _v	Dimensions inches (mm)		
					A	B	C
DM Series E	2	NPT	2323H77	256 (121)	4.96 (126.1)	14.24 (361.7)	5.68 (144.3)
	2	BSPT	2328H77	256 (121)	4.96 (126.1)	16.05 (407.7)	5.73 (145.5)
DM Series C	4	NPT	2324H77	800 (378)	4.34 (110.2)	19.06 (484.1)	7.27 (184.7)
	8	NPT	2325H77	800 (378)	5.41 (137.4)	21.18 (538.0)	8.41 (213.6)
	12	NPT	2326H77	2080 (982)	6.74 (117.2)	25.85 (656.6)	10.66 (270.8)
	30	NPT	2327H77	7200 (3398)	9.85 (250.2)	41.55 (1055.4)	13.47 (342.1)
	4	BSPT	2329H77	800 (378)	4.34 (110.2)	21.40 (543.6)	7.27 (184.7)
	8	BSPT	2329H77	800 (378)	5.41 (137.4)	23.52 (597.4)	8.41 (213.6)
	12	BSPT	2330H77	2080 (982)	6.74 (117.2)	28.20 (716.3)	10.66 (270.8)
	30	BSPT	2331H77	7200 (3398)	9.85 (250.2)	41.55 (1055.4)	13.47 (342.1)



* Kits include all plumbing required for installation.

Pressure Range: 125 psig (8.6 bar) maximum.

PRESSURE GAUGES			
Port Size	Model Number	Range psig (bar)	Case Diameter inches (mm)
1/8	5400A1002	0-160 (0-11)	1.7 (43)
1/4	5400A2010	0-60 (0-4)	2.2 (56)
1/4	5400A2011	0-200 (0-14)	2.2 (56)

IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

ELECTRICAL CONNECTORS


Electrical Connector Form	Electrical Connector Type	Cord Length meters (feet)	Cord Diameter	Electrical Connector Model Number			
				Without Light	Lighted Connector		
					24 Volts DC	120 Volts AC	
DIN 43650 Form C	Prewired Connector	3 (10)	8-mm	2449K77	2450K77-W	2450K77-Z	
DIN 43650 Form C	Connector Only	—	—	2452K77	2453K77-W	2453K77-Z	
DIN 43650 Form A	Prewired Connector (18 gauge)	2 (6½)	6-mm	721K77	720K77-W	720K77-Z	
DIN 43650 Form A	Prewired Connector (18 gauge)	2 (6½)	10-mm	371K77	383K77-W	383K77-Z	
DIN 43650 Form A	Connector for threaded conduit (1/2 inch electrical conduit fittings)	—	—	723K77	724K77-W	724K77-Z	
DIN 43650 Form A	Connector Only	—	—	937K87	936K87-W	936K87-Z	
CAUTIONS: Do not use electrical connectors with surge suppressors, as this may increase valve response time when de-actuating the solenoids.							

CAUTIONS: Do not use electrical connectors with surge suppressors, as this may increase valve response time when de-actuating the solenoids.


PRESSURE SWITCHES For Verification Of DOWNSTREAM PRESSURE RELEASE

Pressure Switches		
Connection Type	Model Number	Port Threads
DIN 43650 Form A	586A86	1/8 NPT
M12 Micro-DC	1153A30	1/8 NPT

DIN Connector Pinout




M12 Connector Pinout



- May be installed downstream on all double valves
- Provides means to verify the release of downstream pressure to next obstruction
- Factory preset, 5 psi (0.3 bar) - falling

Redundant Pressure Switch		
Connection Types	Model Number	Port Threads
DIN 43650 Form A	RC26-13	3/8 NPT



- May be installed downstream on all double valves
- Provides a redundant means to verify the release of downstream pressure to next obstruction
- Factory preset, 5 psi (0.3 bar) - falling




STATUS INDICATOR

The Status Indicator pressure switch actuates when the valve is in a ready-to-run condition and de-actuates when the valve is in a lockout condition or when the inlet air pressure has been removed. Although, the valves can be purchased with this option already installed, the Status Indicator can be purchased separately.

Model Number	670B94
--------------	--------



IMPORTANT NOTE: Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

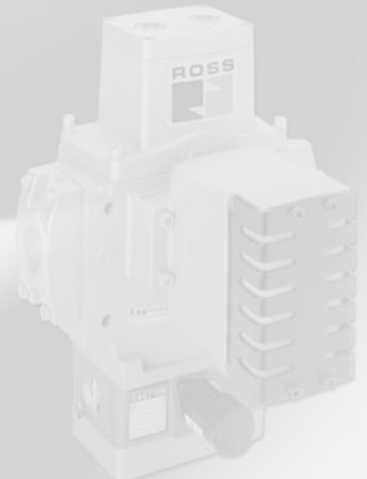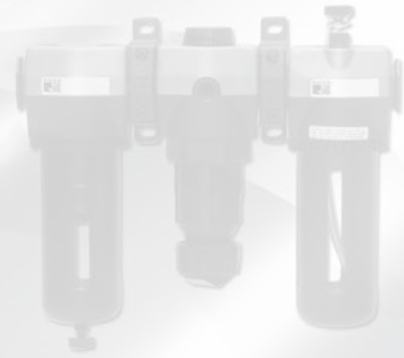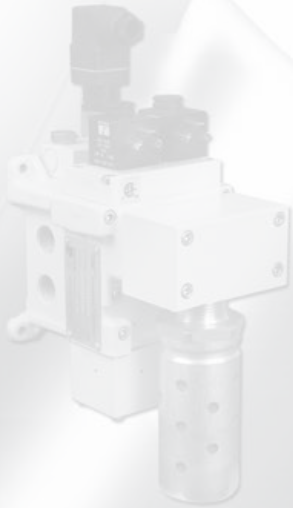

General Information

Standard Specifications

The standard specifications for the products on each page of this catalog are given on the same page or referenced. For solenoid pilot valves, models with internal pilot supply are listed. Most models are also available for use with external pilot supply or have a built-in pilot supply selector valve.

The products in this catalog are intended for use in industrial pneumatic systems. Most products are adaptable to other uses and conditions not covered by the standard specifications given in this catalog. Weights shown are approximate and are subject to change. Dimensions given, unless otherwise noted, are envelope dimensions (not for mounting). Consult ROSS for further information.

Port Threads

Ports of valves and bases described in this catalog have NPT (ANSI B2.1) threads. Other thread types can be specified by putting an appropriate prefix letter on the model or part number when ordering.

Thread Types by Model Prefix Letter

Pneumatic Port Threads	Prefix Letter	Threaded Electrical Opening
NPT (ANSI B2.1)	None	NPT
ISO 228 - DIN 259 Parallel, BSPP [#]	C*	—
ISO 228 - DIN 259 Parallel, BSPP [#]	D	G
ISO 228 - JIS B0203 Tapered [#]	J	ISO
SAE 1926- ISO 11926	S	NPT

* Used only for filters, regulators, lubricators.

[#] ISO 228 threads supersedes BSPP, G and JIS thread types.

Flow Ratings

Flow ratings are expressed as C_v where $C_v = 1$ corresponds to a steady state air flow of approximately 32 scfm under the following conditions:

Inlet pressure = 100 psig (6.7 bar)
Pressure drop = 10 psi (0.69 bar)
Air temperature = 68°F (20°C)
Relative humidity = 36 percent

Note: Because widely differing test standards are used to measure C_v values, the figures given in this catalog should not be used to compare ROSS valves with those of other makers. The C_v ratings given here are intended only for use with performance charts published by ROSS. The C_v ratings are averages for the various flow paths through the valve and are for steady flow conditions.

Approvals and Certifications

ROSS products are designed to meet a number of industrial standards, including the Canadian Standards Association (C.S.A.) guidelines. For more information on specific product approvals, contact your local distributor or ROSS.

Solenoids

All ROSS standard solenoids are rated for continuous duty (unless noted otherwise) and will operate the valve within the air pressure range specified in this catalog.

Explosion-Proof Solenoid Pilot available, for more information consult ROSS.

Voltage & Hertz

When ordering a solenoid valve, also specify the desired solenoid voltage and hertz.

Voltage Types by Model Suffix Letter

Voltage	Suffix Letter
120 volts AC	Z
220 volts AC	Y
12 volts DC	H
24 volts DC	W
48 volts DC	M
90 volts DC	K
110 volts DC	P
125 volts DC	C

Recommended Solenoid Voltages: 100-110 volts, 50 Hz; 100-120 volts, 60 Hz; 24 volts DC; 110 volts DC.

In addition, the following voltages are available:

200, 220 volts, 50 Hz
200, 240, 480 volts, 60 Hz
24, 48, 220 volts, 50 Hz
240 volts, 60 Hz
200, 220 volts, 50 Hz
200, 240 volts, 60 Hz.

For example: Model 2773B5001, 120 volts, 60 Hz.
Model W6076B2401, 220 volts, 50 Hz.

Please note that not all configurations are available for all models.

For additional information or help with voltage configuration, please contact your local distributor or ROSS.

Port Identification

Valve symbols in this catalog conform to the ISO 1219-1:1991 standard of the International Organization for Standardization (ISO) and the SAE J2051 standard of the Society of Automotive Engineers (SAE) respectively.

Information or Technical Assistance

For additional information or application assistance concerning ROSS products, consult ROSS or your local ROSS distributor (see contact information on the back cover).

Order Placement

For order placement, consult ROSS or your local ROSS distributor.

For a current list of countries and local distributors, visit ROSS' website at www.rosscontrols.com.

CAUTIONS, WARNINGS and STANDARD WARRANTY

PRE-INSTALLATION or SERVICE

1. Before servicing a valve or other pneumatic component, be sure that all sources of energy are turned off, the entire pneumatic system is shut off and exhausted, and all power sources are locked out (ref: OSHA 1910.147, EN 1037).
2. All ROSS products, including service kits and parts, should be installed and/or serviced only by persons having training and experience with pneumatic equipment. Because any installation can be tampered with or need servicing after installation, persons responsible for the safety of others or the care of equipment must check every installation on a regular basis and perform all necessary maintenance.
3. All applicable instructions should be read and complied with before using any fluid power system in order to prevent harm to persons or equipment. In addition, overhauled or serviced valves must be functionally tested prior to installation and use. If you have any questions, call your nearest ROSS location listed on the cover of this document.
4. Each ROSS product should be used within its specification limits. In addition, use only ROSS parts to repair ROSS products.

WARNING: *Failure to follow these directions can adversely affect the performance of the product or result in the potential for human injury or damage to property.*

FILTRATION and LUBRICATION

5. Dirt, scale, moisture, etc. are present in virtually every air system. Although some valves are more tolerant of these contaminants than others, best performance will be realized if a filter is installed to clean the air supply, thus preventing contaminants from interfering with the proper performance of the equipment. ROSS recommends a filter with a 5-micron rating for normal applications.
6. All standard ROSS filters and lubricators with polycarbonate plastic bowls are designed for compressed air applications only. Do *not* fail to use the metal bowl guard, where provided, to minimize danger from high pressure fragmentation in the event of bowl failure. Do not expose these products to certain fluids, such as alcohol or liquefied petroleum gas, as they can cause bowls to rupture, creating a combustible condition, hazardous leakage, and the potential for human injury or damage to property. Immediately replace a crazed, cracked, or deteriorated bowl. When bowl gets dirty, replace it or wipe it with a clean dry cloth.

7. Only use lubricants which are compatible with materials used in the valves and other components in the system. Normally, compatible lubricants are petroleum based oils with oxidation inhibitors, an aniline point between 180°F (82°C) and 220°F (104°C), and an ISO 32, or lighter, viscosity. Avoid oils with phosphate type additives which can harm polyurethane components, potentially leading to valve failure which risks human injury, and/or damage to property.

AVOID INTAKE/EXHAUST RESTRICTION

8. Do not restrict the air flow in the supply line. To do so could reduce the pressure of the supply air below the minimum requirements for the valve and thereby cause erratic action.
9. Do not restrict a valve's exhaust port as this can adversely affect its operation. Exhaust silencers must be resistant to clogging and must have flow capacities at least as great as the exhaust capacities of the valves. Contamination of the silencer can result in reduced flow and increased back pressure.

WARNING: *ROSS expressly disclaims all warranties and responsibility for any unsatisfactory performance or injuries caused by the use of the wrong type, wrong size, or an inadequately maintained silencer installed with a ROSS product.*

POWER PRESSES

10. Mechanical power presses and other potentially hazardous machinery using a pneumatically controlled clutch and brake mechanism must use a press control double valve with a monitoring device. A double valve without a self-contained monitoring device should be used only in conjunction with a control system which assures monitoring of the valve. All double valve installations involving hazardous applications should incorporate a monitoring system which inhibits further operation of the valve and machine in the event of a failure within the valve mechanism.

ENERGY ISOLATION/EMERGENCY STOP

11. Per specifications and regulations, ROSS L-O-X® and L-O-X® with EEZ-ON® operation products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

STANDARD WARRANTY

limited to repair or replacement of the product or refund of the purchase price paid solely at the discretion of ROSS and provided such product is returned to ROSS freight prepaid and upon examination by ROSS is found to be defective. This warranty becomes void in the event that product has been subject to misuse, misapplication, improper maintenance, modification or tampering.

THE WARRANTY EXPRESSED ABOVE IS IN LIEU OF AND EXCLUSIVE OF ALL OTHER WARRANTIES AND ROSS EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES EITHER EXPRESSED OR IMPLIED WITH RESPECT TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. ROSS MAKES NO WARRANTY WITH RESPECT TO ITS PRODUCTS MEETING THE PROVISIONS OF ANY GOVERNMENTAL OCCUPATIONAL SAFETY AND/OR HEALTH LAWS OR REGULATIONS. IN NO EVENT IS ROSS LIABLE TO PURCHASER, USER, THEIR EMPLOYEES OR OTHERS FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM A BREACH OF THE WARRANTY DESCRIBED ABOVE OR THE USE OR MISUSE OF THE PRODUCTS. NO STATEMENT OF ANY REPRESENTATIVE OR EMPLOYEE OF ROSS MAY EXTEND THE LIABILITY OF ROSS AS SET FORTH HEREIN.

All products sold by ROSS CONTROLS are warranted for a one-year period [with the exception of all Filters, Regulators and Lubricators ("FRLs") which are warranted for a period of seven years] from the date of purchase to be free of defects in material and workmanship. ROSS' obligation under this warranty is





ROSS CONTROLS
U.S.A.

Tel: +1-248-764-1800
Customer Svs. 1-800-GET-ROSS
Technical Svs. 1-888-TEK-ROSS
sales@rosscontrols.com
www.rosscontrols.com

ROSS EUROPA GmbH
Germany

Tel: +49-6103-7597-0
sales@rosseuropa.com
www.rosseuropa.com

ROSS ASIA K.K.
Japan

Tel: +81-42-778-7251
www.rossasia.co.jp

ROSS UK Ltd.
United Kingdom

Tel: +44-1543-671495
sales.uk@rosscontrols.com
www.rossuk.co.uk

ROSS CONTROLS INDIA Pvt. Ltd.
India

Tel: +91-44-2624-9040
ross.chennai@rosscontrols.com

ROSS SOUTH AMERICA Ltda.
Brazil

Tel: +55-11-4335-2200
vendas@rosscontrols.com

ROSS FRANCE S.A.S.
France

Tel: +33-1-49-45-65-65
www.rossfrance.com

ROSS CONTROLS(CHINA) Ltd.
China

Tel: +86-21-6915-7961
sales@rosscontrols.com.cn
www.rosscontrolschina.com

ROSS CANADA
Canada

Tel: +1-416-251-7677
sales@rosscanada.com
www.rosscanada.com

6077170 CANADA INC.
AN INDEPENDENT REPRESENTATIVE



Full-Service Global Locations
There are ROSS Distributors Throughout the World

To meet your requirements across the globe, ROSS distributors are located throughout the world. Through ROSS or its distributors, guidance is available for the selection of ROSS products, both for those using pneumatic components for the first time and those designing complex pneumatic systems.

Other literature is available for engineering, maintenance, and service requirements. If you need products or specifications not shown here, please contact ROSS or your ROSS distributor. They will be happy to assist you in selecting the best product for your application.

For a current list of countries and local distributors, visit ROSS' website at www.rosscontrols.com.