




# **RUST-OLEUM** INDUSTRIAL BRANDS

# PRODUCT GUIDE



**PRODUCTS THAT WORK AS HARD AS YOU DO®**



# QUALITY PRODUCTS ARE JUST THE BEGINNING

## Since 1921...

Rust-Oleum Corporation was founded on the principle of producing the highest quality labor saving coatings; and for over 90 years, Rust-Oleum has been the trusted name for superior solutions that promises long-lasting protection and superior coverage. Today, Rust-Oleum Corporation, backed by the resources of its parent company, RPM International Inc., is a worldwide leader in protective paints and coatings for both the home and industry.

## Products That Work As Hard As You Do®

Rust-Oleum Industrial Brands is dedicated specifically to meeting the diverse needs of the industrial and commercial markets including providing solutions to problems caused by rust, heat, abrasion, chemicals and corrosive environments. This Product Guide showcases our distinct brands of protective paints, floor coatings and cleaners.

## Rust-Oleum Coating Economics

Our service and expertise does not stop with product. While material cost varies, it generally accounts for only 15-20% of the total investment of a project. The remaining 80-85% is made up of surface preparation and application.

All of Rust-Oleum's products are formulated with this in mind. Our products are designed to reduce preparation time, application time and downtime, and lengthen the life of the asset being coated. Rust-Oleum's Coating Economics are about value and reducing your cost per square foot, per year of protection.

For more information about the Rust-Oleum Coating Economics Model, contact your Rust-Oleum Sales Representative.



# **RUST-OLEUM**

## INDUSTRIAL BRANDS

Formulated to reduce **Preparation time**, reduce **Application time**, reduce **Downtime**, and lengthen the **Lifetime** of the assets they protect.

### HIGH PERFORMANCE

The ultimate protection for industrial environments. Formulated with the highest quality pigments and resins, the High Performance brand of coatings has the highest paint solids in the industry. These proprietary formulations are designed for severe industrial environments and are backed by a Rust-Proof Guarantee. The High Performance brand is the foundation of Rust-Oleum Corporation.



### INDUSTRIAL CHOICE®

The best performing multi-purpose line of coatings. When you do not need the ultimate protection for severe industrial environments that our High Performance brand provides, we offer Industrial Choice. Industrial Choice by Rust-Oleum is our multi-purpose line of coatings that outperforms the competition. This complete line of coatings is designed for mild to moderate industrial environments, and complements our High Performance offering, making Rust-Oleum the best choice for all of your coating needs.



### COMMERCIAL

Don't let rust ruin your reputation. Sometimes looks are everything. Protect your company's assets with Rust-Oleum Commercial Coatings. Rust-Oleum Commercial Coatings are the perfect solution for all types of commercial environments. From light duty to the most demanding, Rust-Oleum coatings provide long-lasting rust protection and a professional, high gloss finish. For that first impression and lasting reputation, demand the durability of Rust-Oleum Commercial Coatings.



### MATHYS®

The ultimate water-based, low VOC protection for industrial environments. Developed in 1845, Mathys is a leading brand of corrosion resistant, water-proofing coatings throughout the world. These premium state-of-the-art coatings are ideal for the protection of metal and concrete in severe industrial environments.



### SIERRA PERFORMANCE™ COATINGS

The only industrial strength epoxies and acrylics that have no solvent odor and are free of VOCs and hazardous air pollutants. Using proprietary technology, these coatings dry fast and contain no solvents, letting you paint wherever you want, whenever you want. Sierra Performance coatings are ideal for mild to moderate industrial environments. Offered to you and backed by Rust-Oleum, you can trust that they are also durable as they are safe.



### CONCRETE PROTECTION SYSTEMS

The most durable floor toppings and coatings on the market that protect concrete in the harshest industrial environments. Most of the systems are 100% solids with low odor and VOC compliant nationwide, enabling application during work hours.



### CONCRETE SAVER®

The most durable floor coatings on the market that protect concrete in mild to moderate industrial environments. Concrete Saver floor coatings are easy to apply and can be installed by in-house maintenance personnel or by painting contractors. Concrete Saver offers a complete range of floor coatings including anti-slip textures for your safety needs.



### PURE STRENGTH®

The one solution for all of your industrial cleaning, degreasing, and pre-painting needs. This all-natural product is as powerful as solvent-based cleaners, but much safer to use. Pure Strength is a non-toxic cleaner for tough-cleaning and surface preparation needs in mild to severe industrial environments.



# PRODUCT GUIDE CONTENTS

|                                                     |   |
|-----------------------------------------------------|---|
| Industrial Coatings Selection Guide                 | 3 |
| Industrial Coatings Chemical & Corrosion Resistance | 6 |
| Safety Color Coding & Pipe Identification Guides    | 8 |

## HIGH PERFORMANCE AEROSOLS & GALLONS 9

| System                                                                                           | Description                          |    |
|--------------------------------------------------------------------------------------------------|--------------------------------------|----|
| V2100 System                                                                                     | Rust-Preventive Enamel Aerosol       | 11 |
| V2100 System                                                                                     | Enamel Primer Aerosol                | 11 |
| V2100 System                                                                                     | Galvanizing Compound Aerosol         | 12 |
| V2100 System                                                                                     | High Heat Coating Aerosol            | 12 |
| V2100 System                                                                                     | Rust Reformer® Aerosol               | 12 |
| VK9300 System                                                                                    | Two Component Epoxy Primer Aerosol   | 13 |
| 2600 System                                                                                      | GlowMax® Luminescent Enamel Aerosols | 13 |
| 2300 System                                                                                      | Inverted Striping Paint Aerosol      | 14 |
| 2300 System                                                                                      | Traffic Zone Striping Paint          | 14 |
| V2300 System                                                                                     | Inverted Marking Paint Aerosol       | 15 |
|                                                                                                  | Companion Products                   | 15 |
| 7400 System                                                                                      | 450 VOC DTM Alkyd Enamel             | 16 |
| 7400 System                                                                                      | 450 VOC Alkyd Enamel Primers         | 17 |
| V7400 System                                                                                     | 340 VOC DTM Alkyd Enamel             | 18 |
| V7400 System                                                                                     | 340 VOC Alkyd Enamel Primers         | 18 |
| 3400 System                                                                                      | 340 VOC DTM Alkyd Enamel             | 19 |
| 2500 System                                                                                      | 250 VOC DTM Alkyd Enamel             | 19 |
| 8400 System                                                                                      | Food & Beverage Alkyd Enamel         | 20 |
|  V8400 System   | Food & Beverage Alkyd Enamel         | 20 |
| 1500 System                                                                                      | Speedy-Dry Alkyd Enamel              | 20 |
| 3700 System                                                                                      | DTM Acrylic Enamel                   | 21 |
| 3100 System                                                                                      | Speedy-Dry DTM Acrylic Enamel        | 21 |
| 9100 System                                                                                      | DTM Epoxy Mastic                     | 22 |
| V9100 System                                                                                     | 250 VOC DTM Epoxy Mastic             | 22 |
|  SC9100 System | 100 VOC DTM Epoxy Mastic             | 23 |
| HS9300 System                                                                                    | Epoxy Primer                         | 24 |
| 5300 System                                                                                      | Water-Based Epoxy                    | 24 |
| 9800 System                                                                                      | DTM Urethane Mastic                  | 25 |
| 9700 System                                                                                      | 250 VOC Acrylic Polyester Urethane   | 26 |
| 9400 System                                                                                      | High Gloss Polyester Urethane        | 27 |
| C9578 System                                                                                     | Coal Tar Epoxy                       | 27 |
| 4200/4300 System                                                                                 | High Heat Coatings                   | 28 |
| 7000 System                                                                                      | Cold Galvanizing Compound            | 29 |
| 3575 System                                                                                      | Rust Reformer®                       | 29 |
| W9200 System                                                                                     | Potable Water Coating                | 29 |
| 5100 System                                                                                      | Acrylic Dryfall Coating              | 30 |
| 9900 System                                                                                      | Anti-Graffiti Barrier & Remover      | 30 |

## INDUSTRIAL CHOICE® AEROSOLS & GALLONS 33

| System             | Description                                    |    |
|--------------------|------------------------------------------------|----|
| 1600 System        | Multi-Purpose Enamel Aerosol                   | 35 |
| 1600 System        | Galvanizing Compound Aerosol                   | 36 |
| AS2100 System      | Anti-Slip Aerosol                              | 36 |
| S1600 System       | Inverted Striping Paint Aerosol                | 37 |
| AF1600 System      | Athletic Field Inverted Striping Paint Aerosol | 37 |
| M1600/M1800 System | Precision Line Inverted Marking Paint Aerosol  | 38 |
| M1900 System       | 360° Marking Paint Aerosol                     | 39 |
| M1700 System       | High Output Inverted Marking Paint Aerosol     | 39 |
| MC1800 System      | Precision Line Inverted Marking Chalk Aerosol  | 40 |
| R1600 System       | Reflective Finish Aerosol                      | 41 |
| P1600 System       | Paint for Plastic Aerosol                      | 41 |
|                    | Companion Products                             | 42 |
| 6400 System        | 450 VOC DTM Alkyd Enamel                       | 43 |
| V6400 System       | 340 VOC DTM Alkyd Enamel                       | 44 |
| 6100 System        | Shop Coat Primer                               | 44 |
| 5200 System        | DTM Acrylic                                    | 45 |
| 3200 System        | Clear Blue Undercoat                           | 45 |

## COMMERCIAL 47

| System       | Description              |    |
|--------------|--------------------------|----|
| C740 System  | 400 VOC DTM Alkyd Enamel | 49 |
| CV740 System | 100 VOC DTM Alkyd Enamel | 49 |

## MATHYS® 51

| Description |    |
|-------------|----|
| Noxyde®     | 52 |
| Peganox™    | 53 |
| Pegalink    | 53 |

## SIERRA PERFORMANCE™ 55

| System         | Description                           |    |
|----------------|---------------------------------------|----|
| Beyond™        | Acrylic Enamel                        | 57 |
| Griptec™       | Acrylic Primer                        | 57 |
| MetalMax®      | DTM Acrylic Enamel                    | 58 |
| S60 System     | Water-Based Epoxy Maintenance Coating | 58 |
| S40/S42 System | Water-Based Epoxy Floor Coating       | 59 |
| S70/S71 System | Epoxy Primer                          | 59 |

## CONCRETE PROTECTION SYSTEMS 61

| System      | Product Name         | Description                   |    |
|-------------|----------------------|-------------------------------|----|
| 8000 System | OverKrete®           | 100% Solids Epoxy             | 63 |
| 8100 System | OverKrete® Xtra      | Premium 100% Solids Epoxy     | 64 |
| 8200 System | OverKote®            | Chemical Resistant Epoxy      | 64 |
| 8300 System | OverKote® Plus       | Novolac Epoxy                 | 65 |
| 8600 System | OverKrete® 45/65     | Low Temp Epoxy                | 65 |
| 8700 System | FastKote®            | 100% Solids Polyurea          | 66 |
| 8900 System | ThermaKrete™         | Urethane Concrete             | 66 |
| 9000 System | FlorClad™            | Epoxy Mortar Topping          | 67 |
| 9600 System | BriteCast™           | Decorative Quartz             | 68 |
| 4600 System | BriteCast™ SC        | ESD Control Decorative Quartz | 68 |
| 4700 System | UltraPlex™           | ESD Control Coating           | 69 |
|             | Grind 'N Go® Machine |                               | 70 |
|             | Companion Products   |                               | 70 |

## CONCRETE SAVER® 73

| System                                                                                          | Description                      |    |
|-------------------------------------------------------------------------------------------------|----------------------------------|----|
| AS5400 System                                                                                   | Anti-Slip One-Step Epoxy         | 75 |
| AS6000 System                                                                                   | Anti-Slip Low Profile Epoxy      | 75 |
| AS9100 System                                                                                   | Anti-Slip High Performance Epoxy | 76 |
| AS6500 System                                                                                   | Anti-Slip 100% Solids Epoxy      | 76 |
| 5500 System                                                                                     | Acrylic Dustproofer Floor Sealer | 77 |
| 5600 System                                                                                     | Acrylic Urethane Floor Paint     | 77 |
| 6000 System                                                                                     | Water-Based Epoxy                | 78 |
|  6200 System | Fast-Cure Epoxy Floor Coating    | 78 |
| 6500 System                                                                                     | 100% Solids Epoxy                | 79 |
|  EasyClear™  | Epoxy Maintenance Floor Coating  | 80 |
|  TurboKrete® | Concrete Patching Compound       | 81 |
|  TurboKrete® | All-Purpose Epoxy Repair         | 81 |
| 6711 System                                                                                     | Clear Water-Based Polyurethane   | 82 |
| Rust-Oleum                                                                                      | Grind 'N Go® Machine             | 82 |
|                                                                                                 | Companion Products               | 83 |

## PURE STRENGTH® 85

| System      | Description       |    |
|-------------|-------------------|----|
| 3500 System | Cleaner/Degreaser | 86 |
| Index       |                   | 87 |

Contact your Rust-Oleum Sales Representative for additional information or technical data on any of the product lines featured in this catalog. For immediate technical information, visit [www.rustoleum.com/industrial](http://www.rustoleum.com/industrial).

**Need a product recommendation? Visit our Virtual Solutions™ interactive website: [www.rustoleum.com/industrial/virtualsolutions](http://www.rustoleum.com/industrial/virtualsolutions)**



# INDUSTRIAL COATINGS SELECTION GUIDE

See Technical Data Sheets for detailed product information.

## MILD ENVIRONMENTS

Outdoor weathering, mild industrial fumes and normal humidity with mold and mildew conditions.

## MODERATE ENVIRONMENTS

Frequent fumes and spills of mild chemicals, occasional product spills, occasional chemical cleaning. Intermittent high humidity, moisture, mold and mildew conditions.

## SEVERE ENVIRONMENTS

Frequent fumes and spills of strong chemicals (acids, alkalis and solvents), high humidity and moisture conditions. Frequent product spills and frequent chemical cleaning.

## METAL/STEEL APPLICATIONS

|          | FEATURES                                                                                                                | RECOMMENDED PRODUCT                                       | PAGE | PRIMER                                                                                       | SURFACE PREPARATION*           |
|----------|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|------|----------------------------------------------------------------------------------------------|--------------------------------|
| SEVERE   | Direct-To-Metal; high build; excellent adhesion and hiding; low temp. cure; ultimate protection of metal.               | 9800 System – DTM Urethane Mastic                         | 25   | HS9300 System – Epoxy Primer or self-priming                                                 | SP1+SP3                        |
|          | Thin film; ultimate color and gloss retention; extremely durable against abrasion; low temp. cure.                      | 9700 System – 250 VOC Acrylic Polyester Urethane          | 26   | V9100 System – Low VOC DTM Epoxy Mastic                                                      | SP1+SP3                        |
|          | Super high-gloss finish; superior corrosion, chemical, impact and abrasion resistance; low temp. cure.                  | 9400 System – High Gloss Polyester Urethane               | 27   | HS9300 System – Epoxy Primer or 9100 System – DTM Epoxy Mastic                               | SP1+SP3                        |
|          | Direct-To-Metal; superior long-term solvent, chemical and abrasion resistance; maximum corrosion protection.            | 9100 System – DTM Epoxy Mastic                            | 22   | HS9300 System – Epoxy Primer or self-priming                                                 | SP1+SP3                        |
|          | Low odor; applies to damp surfaces; excellent resistance to chemicals, abrasion and corrosion; high gloss finish.       | 5300 System – Water-Based Epoxy                           | 24   | 5300 System – Water-Based Epoxy Primer                                                       | Mod.: SP1+SP3<br>Sev.: SP1+SP6 |
|          | A single-component, high-build, water-based acrylic elastomeric suitable for use with only minimal surface preparation. | Mathys Noxyde®                                            | 52   | Self-priming                                                                                 | SP1+ SP3                       |
|          | Direct-To-Metal; superior resistance to blistering and water spotting; applies in low temp./high humidity.              | 3700 System – DTM Acrylic Enamel                          | 21   | 3700 System – DTM Acrylic Enamel Primer or self-priming                                      | SP1+SP3                        |
|          | No solvent odor, zero VOC, zero HAP; Direct-To-Metal; high performance; corrosion & humidity resistant.                 | MetalMax® DTM Acrylic Urethane                            | 58   | Self-priming, or S70/71 Epoxy Primer in extreme situations                                   | SP1+SP3                        |
| MODERATE | Protects metal from rust and corrosion; superior color and gloss retention; excellent hiding.                           | 7400 System – 450 VOC DTM Alkyd Enamel                    | 16   | 7400 System – 450 VOC Alkyd Enamel Primer or self-priming                                    | SP1+SP3                        |
|          | VOC <340 g/l; protects metal from rust and corrosion; superior color and gloss retention; excellent hiding.             | 3400 System – 340 VOC DTM Alkyd Enamel                    | 19   | 3400 System – 340 VOC Alkyd Enamel Primer or self-priming                                    | SP1+SP3                        |
|          | VOC <250 g/l; protects metal from rust and corrosion; superior color and gloss retention; excellent hiding.             | 2500 System – 250 VOC DTM Alkyd Enamel                    | 19   | 2500 System – 250 VOC Alkyd Enamel Primer or self-priming                                    | SP1+SP3                        |
|          | No solvent odor, zero VOC, zero HAP; attractive and durable; extremely versatile topcoat; interior or exterior use.     | Beyond™ Multi-Purpose Acrylic Enamel                      | 57   | MetalMax® DTM Acrylic Urethane                                                               | SP1+SP3                        |
|          | A single-component, water-based acrylic elastomeric suitable for use with only minimal surface preparation.             | Mathys Peganox™                                           | 53   | Self-priming                                                                                 | SP1+SP3                        |
|          | Resists corrosion, mold, mildew and repeated washing, disinfectants and cleaning compounds.                             | 8400 System – Food & Beverage Alkyd Enamel                | 20   | 8400 System – Food & Beverage Alkyd Enamel Primer                                            | SP1+SP3                        |
|          | Direct-To-Metal; fast drying; high gloss; resists mild chemical spills, fumes, oil, grease and abrasion.                | 3100 System – Speedy-Dry DTM Acrylic Enamel               | 21   | 3100 System – Speedy-Dry DTM Acrylic Enamel Primer or self-priming                           | SP1+SP3                        |
|          | Direct-To-Metal; low odor; withstands mild chemical fumes and spills.                                                   | 5200 System – DTM Acrylic                                 | 45   | 5200 System – DTM Acrylic Primer                                                             | SP1+SP3                        |
| MILD     | Good hiding and smooth coverage; withstands mild chemical fumes and spills.                                             | 6400 System – 450 VOC DTM Alkyd Enamel                    | 43   | 6400 System – 450 VOC Alkyd Enamel Primer or 6100 System – Shop Coat Primer or self-priming  | SP1+SP3                        |
|          | VOC <340 g/l; good hiding and smooth coverage; withstands mild chemical fumes and spills.                               | V6400 System – 340 VOC DTM Alkyd Enamel                   | 44   | V6400 System – 340 VOC Alkyd Enamel Primer or 6100 System – Shop Coat Primer or self-priming | SP1+SP3                        |
|          | Multi-purpose direct-to-metal; resists chipping, cracking, peeling; durable formula; excellent coverage & hide.         | C740 System 400 VOC/CV740 System 100 VOC DTM Alkyd Enamel | 49   | C740 System/CV740 System or self-priming                                                     | SP1+SP3                        |

\* Minimum surface preparation required.

Industrial Coatings Selection Guide continued on following page.

# INDUSTRIAL COATINGS SELECTION GUIDE

## GALVANIZED / ALUMINUM APPLICATIONS

|          | FEATURES                                                                                                            | RECOMMENDED PRODUCT                                                               | PAGE | PRIMER                                                         | SURFACE PREPARATION* |
|----------|---------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|----------------------------------------------------------------|----------------------|
| SEVERE   | Direct-To-Metal; high build; excellent adhesion and hiding; low temp. cure; ultimate protection of metal.           | 9800 System – DTM Urethane Mastic                                                 | 25   | 9100 System – DTM Epoxy Mastic or HS9300 System – Epoxy Primer | SP1+SP3              |
|          | Thin film; ultimate color and gloss retention; extremely durable against abrasion; low temp. cure.                  | 9700 System – 250 VOC Acrylic Polyester Urethane                                  | 26   | V9100 System – Low VOC DTM Epoxy Mastic                        | SP1+SP3              |
|          | Low odor; applies to damp surfaces; excellent resistance to chemicals, abrasion and corrosion; high gloss finish.   | 5300 System – Water-Based Epoxy                                                   | 24   | 5300 System – Water-Based Epoxy Primer                         | SP1+SP3              |
|          | Direct-To-Metal; superior resistance to blistering and water spotting; applies in low temp./high humidity.          | 3700 System – DTM Acrylic Enamel                                                  | 21   | 3700 System – DTM Acrylic Enamel Primer                        | SP1+SP3              |
| MODERATE | No solvent odor, zero VOC, zero HAP; Direct-To-Metal; high performance; corrosion & humidity resistant.             | MetalMax® DTM Acrylic Enamel                                                      | 58   | Self-priming, or S70/71 Epoxy Primer in extreme situations     | SP1+SP3              |
|          | Direct-To-Metal; fast drying; high gloss; resists mild chemical spills, fumes, oil, grease and abrasion.            | 3100 System – Speedy-Dry DTM Acrylic Enamel                                       | 21   | 3100 System – Speedy-Dry DTM Acrylic Enamel Primer             | SP1+SP3              |
|          | No solvent odor, zero VOC, zero HAP; attractive and durable; extremely versatile product; interior or exterior use. | Beyond™ Acrylic Enamel                                                            | 57   | MetalMax® DTM Acrylic Enamel or S70/S71 in extreme conditions  | SP1+SP3              |
|          | Good hiding and smooth coverage; withstands mild chemical fumes and spills.                                         | 6400 System – DTM 450 VOC Alkyd Enamel or V6400 System – 340 VOC DTM Alkyd Enamel | 43   | 3200 System – Clear Blue Undercoat                             | SP1+SP3              |
| MILD     | Direct-To-Metal; low odor; withstands mild chemical fumes and spills.                                               | 5200 System – DTM Acrylic                                                         | 45   | 5200 System – DTM Acrylic Primer                               | SP1+SP3              |
|          | 95% pure zinc in dry film; maximum corrosion resistance; excellent adhesion.                                        | 7000 System – Cold Galvanizing Compound                                           | 29   | Self-priming                                                   | SP1+SP3              |

## VEHICLE / MOBILE EQUIPMENT REFINISHING APPLICATIONS

|      | FEATURES                                                                                               | RECOMMENDED PRODUCT                         | PAGE | PRIMER                                       | SURFACE PREPARATION |
|------|--------------------------------------------------------------------------------------------------------|---------------------------------------------|------|----------------------------------------------|---------------------|
| SEV. | Super high-gloss finish; superior corrosion, chemical, impact and abrasion resistance; low temp. cure. | 9400 System – High Gloss Polyester Urethane | 27   | HS9300 System – Epoxy Primer                 | SP1+SP3             |
| MILD | Fast dry coating gets equipment back into service quickly; tough, high gloss fade resistant.           | 1500 System – Speedy-Dry Alkyd Enamel       | 20   | 1500 System – Speedy-Dry Alkyd Enamel Primer | SP1+SP3             |

## CONCRETE / MASONRY APPLICATIONS

|             | FEATURES                                                                                               | RECOMMENDED PRODUCT                         | PAGE | PRIMER                       | SURFACE PREPARATION                        |
|-------------|--------------------------------------------------------------------------------------------------------|---------------------------------------------|------|------------------------------|--------------------------------------------|
| MOST SEVERE | SEE CONCRETE PROTECTION SYSTEMS STARTING ON PAGE 61.                                                   |                                             |      |                              |                                            |
| SEVERE      | High build; excellent adhesion and hiding; low temp. cure.                                             | 9800 System – DTM Urethane Mastic           | 25   | HS9300 System – Epoxy Primer | chemical clean or abrasive blast           |
|             | Superior long-term solvent, chemical and abrasion resistance.                                          | 9100 System – DTM Epoxy Mastic              | 22   | Self-priming                 | chemical clean or abrasive blast           |
|             | No solvent odor, zero VOC, zero HAP; excellent corrosion, chemical and stain resistance.               | S60 System – Epoxy Maintenance Coating      | 58   | Self-priming                 | chemical clean or abrasive blast           |
| MODERATE    | Low odor; applies to damp surfaces; excellent resistance to chemicals and abrasion; high gloss finish. | 5300 System – Water-Based Epoxy             | 24   | Self-priming                 | chemical clean or abrasive blast           |
|             | Resists blistering; low temp./high humidity application.                                               | 3700 System – DTM Acrylic Enamel            | 21   | Self-priming                 | chemical clean                             |
|             | Fast drying; high gloss; resists mild chemical spills, fumes, oil, grease and abrasion.                | 3100 System – Speedy-Dry DTM Acrylic Enamel | 21   | Self-priming                 | chemical and hand tool or power tool clean |
| MILD        | Low odor; withstands mild chemical fumes.                                                              | 5200 System – DTM Acrylic                   | 45   | Self-priming                 | chemical and hand tool or power tool clean |

\* Minimum surface preparation required.

## FLOORING APPLICATIONS

|                    | FEATURES                                                                                                                | RECOMMENDED PRODUCT                                     | PAGE      | PRIMER                                                               | SURFACE PREPARATION*                             |
|--------------------|-------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|-----------|----------------------------------------------------------------------|--------------------------------------------------|
| <b>CONCRETE</b>    |                                                                                                                         |                                                         |           |                                                                      |                                                  |
| <b>MOST SEVERE</b> | <b>SEE CONCRETE PROTECTION SYSTEMS STARTING ON PAGE 61.</b>                                                             |                                                         |           |                                                                      |                                                  |
| <b>SEVERE</b>      | 2-3 times tougher than concrete; superior abrasion, impact and chemical resistance.                                     | <b>6500 System – High Traffic Epoxy Floor Coating</b>   | <b>79</b> | Self-priming or <b>Penetrating Prime &amp; Seal™ Primer S6511413</b> | chemical clean and abrasive blast or acid etch   |
|                    | Superior long-term solvent, chemical and abrasion resistance; resists light to moderate wheeled traffic.                | <b>9100 System – DTM Epoxy Mastic</b>                   | <b>22</b> | Self-priming                                                         | chemical clean and abrasive blast or acid etch   |
|                    | Fast curing, excellent chemical and abrasion protection; fork lift traffic and mild chemical spills.                    | <b>6200 System – Fast-Cure Epoxy Floor Coating</b>      | <b>78</b> | Self-priming                                                         | chemical clean and abrasive blast or acid etch   |
|                    | No solvent odor, zero VOC, zero HAP; gloss finish; light to med. vehicle traffic; where spills of mild chem. may occur. | <b>S40 System – Water-based Epoxy Floor Coating</b>     | <b>59</b> | Self-priming or <b>S42 Epoxy Floor Coating</b>                       | chemical clean and abrasive blast or acid etch   |
|                    | Resists heavy foot traffic and lightweight rubber tire vehicle traffic; withstands intermittent mild chemical spills.   | <b>6000 System – Water-Based Epoxy</b>                  | <b>78</b> | Self-priming                                                         | chemical clean and abrasive blast or acid etch   |
|                    | For interior/exterior concrete floors. Protects against wear, dusting, staining. Fast cure formula.                     | <b>6200 System – Fast Cure Epoxy Floor Coating</b>      | <b>78</b> | Self-priming                                                         | chemical clean and abrasive blast or acid etch   |
|                    | For interior/exterior concrete and wood floors; protects against light traffic, weather and staining.                   | <b>6711 System – Clear Water-Based Polyurethane</b>     | <b>82</b> | Self-priming                                                         | chemical clean and abrasive blast or acid etch   |
|                    | For interior concrete floors. Protects new or old concrete or previously coated floors.                                 | <b>EasyClear™ – Epoxy Maintenance Coating</b>           | <b>80</b> | Self-priming                                                         | chemical clean and abrasive blast or acid etch   |
|                    | Low odor, UV resistant, satin finish; resists light traffic, mild stains and eliminates dusting.                        | <b>5500 System – Acrylic Dustproof Floor Sealer</b>     | <b>77</b> | Self-priming                                                         | Clean/degrease and hand tool or power tool clean |
| <b>MILD</b>        | Low odor, resists lightweight rubber wheel traffic, mild stains, mildew and eliminates dusting.                         | <b>5600 System – Acrylic Urethane Floor Paint</b>       | <b>77</b> | Self-priming                                                         | Clean/degrease and hand tool or power tool clean |
|                    |                                                                                                                         |                                                         |           |                                                                      |                                                  |
| <b>STEEL DECK</b>  |                                                                                                                         |                                                         |           |                                                                      |                                                  |
| <b>SEV.</b>        | Direct-To-Metal; superior long-term solvent, chemical and abrasion resistance; maximum corrosion protection.            | <b>9100 System – DTM Epoxy Mastic</b>                   | <b>22</b> | Self-priming                                                         | SP1+SP3                                          |
| <b>ANTI-SLIP</b>   |                                                                                                                         |                                                         |           |                                                                      |                                                  |
| <b>SEVERE</b>      | For continuous vehicle and equipment traffic; strong chemical exposure.                                                 | <b>AS6500 System – Anti-Slip 100% Solids Epoxy</b>      | <b>76</b> | Self-priming                                                         | SP1 and abrasive blast or acid etch              |
| <b>MOD.</b>        | For heavy vehicle and equipment traffic; strong chemical exposure.                                                      | <b>AS9100 System – Anti-Slip High Performance Epoxy</b> | <b>76</b> | Self-priming                                                         | SP1 and abrasive blast or acid etch              |
|                    | For heavy foot traffic and/or light vehicle traffic.                                                                    | <b>AS5400 System – Anti-Slip One-Step Epoxy</b>         | <b>75</b> | Self-priming                                                         | SP1 and abrasive blast or acid etch              |
| <b>MILD</b>        | For barefoot and light recreational pedestrian traffic; low odor.                                                       | <b>AS6000 System – Anti-Slip Low-Profile Epoxy</b>      | <b>75</b> | Self-priming                                                         | SP1 and abrasive blast or acid etch              |

## WATER-IMMERSION ENVIRONMENTS

|               | FEATURES                                                                            | RECOMMENDED PRODUCT                   | PAGE      | PRIMER       | SURFACE PREPARATION |
|---------------|-------------------------------------------------------------------------------------|---------------------------------------|-----------|--------------|---------------------|
| <b>SEVERE</b> | Apply above 60°F (15°C). Not recommended for potable water tanks. Use with 9102402. | <b>9100 System – DTM Epoxy Mastic</b> | <b>22</b> | Self-priming | SP1+SP10            |
|               | Protects against severe abrasion, strong chemicals and non-potable water immersion. | <b>C9578 System – Coal Tar Epoxy</b>  | <b>27</b> | Self-priming | SP1+SP10            |

## HIGH HEAT ENVIRONMENTS

|               | FEATURES                                                                                                           | RECOMMENDED PRODUCT                                                  | PAGE      | PRIMER                                | SURFACE PREPARATION |
|---------------|--------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|-----------|---------------------------------------|---------------------|
| <b>SEVERE</b> | Resists heat from 500-1200°F (260-649°C).                                                                          | <b>4300 System – High Heat Coating Pure Silicone Aluminum (4315)</b> | <b>28</b> | Self-priming                          | SP1+SP10            |
|               | Resists heat from 300-800°F (149-426°C); fights corrosion through cathodic sacrificial action; two coats required. | <b>4200 System – High Heat Coating Gray Zinc-Sele (4285)</b>         | <b>28</b> | Self-priming                          | SP1+SP6             |
|               | Resists heat from 300-800°F (149-426°C).                                                                           | <b>4200 System – High Heat Coatings</b>                              | <b>28</b> | <b>4200 System – High Heat Primer</b> | SP1+SP6             |
|               | Resists heat up to 350°F (177°C); no heat cure required.                                                           | <b>Leafing/Heavy-Duty Aluminum (470/473)</b>                         | <b>28</b> | <b>X60402</b>                         | SP1+SP3             |

## WALLS, DOORWAYS, TRIM

|                 | FEATURES                                                                                                 | RECOMMENDED PRODUCT                           | PAGE      | PRIMER                                         | SURFACE PREPARATION |
|-----------------|----------------------------------------------------------------------------------------------------------|-----------------------------------------------|-----------|------------------------------------------------|---------------------|
| <b>MODERATE</b> | No solvent odor, zero VOC, zero HAP; high durability epoxy for use in extreme areas.                     | <b>S60 System – Epoxy Maintenance Coating</b> | <b>58</b> | <b>GRIPTEC™ Acrylic Primer</b>                 | SP1+SP3             |
|                 | No solvent odor, zero VOC, zero HAP; attractive; durable; extremely versatile; interior or exterior use. | <b>Beyond™ Acrylic Enamel</b>                 | <b>57</b> | Self-priming or <b>GRIPTEC™ Acrylic Primer</b> | SP1+SP3             |

\* Minimum surface preparation required.

# INDUSTRIAL COATINGS CHEMICAL & CORROSION RESISTANCE

## ● EXCELLENT RESISTANCE

The color and film integrity of the coating is generally unaffected by exposure to this condition. Long-term protection can be expected.

## ▲ GOOD RESISTANCE

The film integrity of the coating is generally unaffected by exposure to this condition. Color and gloss may be slightly affected with longer exposure; however, long-term protection can be expected.

## ◆ FAIR RESISTANCE

The film integrity of the coating is generally unaffected by exposure to this condition, however color and gloss will be affected with longer exposure.

## ■ NOT RECOMMENDED

Film integrity and color are affected by exposure to this condition, greatly reducing protection.

| CHEMICAL & CORROSION RESISTANCE GUIDE                                                                                                                                 |                      |                  |                 |                      |                         |                |                      |                          |               |                                 |                          |                    |                            |            |                      |                     |                                         |                                                             |                    |                |  |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------------|-----------------|----------------------|-------------------------|----------------|----------------------|--------------------------|---------------|---------------------------------|--------------------------|--------------------|----------------------------|------------|----------------------|---------------------|-----------------------------------------|-------------------------------------------------------------|--------------------|----------------|--|--|
| This chart represents the general chemical resistance of Rust-Oleum finish coats. For more details, call the Rust-Oleum Technical Service Department at 847-816-2248. | CORROSIVE CONDITIONS |                  |                 |                      |                         |                |                      | FUMES, SPILLAGE & SPRAYS |               |                                 |                          |                    |                            |            |                      |                     |                                         | IMMERSION<br>CONTINUOUS WET HEAT<br>RESISTANCE 125°F (52°C) |                    |                |  |  |
|                                                                                                                                                                       | GENERAL WEATHERING   | INDUSTRIAL FUMES | SALT ATMOSPHERE | MOLD, MILDEW, FUNGUS | LIGHT-MODERATE ABRASION | HEAVY ABRASION | DRY HEAT             | WATER                    | SALT & BRINES | MILD ALKALI, SOAPS & DETERGENTS | STRONG ALKALI & CAUSTICS | MILD, DILUTE ACIDS | STRONG, CONCENTRATED ACIDS | FOOD ACIDS | GREASES, OILS & FATS | GASOLINE & SOLVENTS | CUTTING OILS, COOLANT & HYDRAULIC FLUID | FRESH WATER                                                 | SALT WATER & BRINE | SEWAGE         |  |  |
|                                                                                                                                                                       |                      |                  |                 |                      |                         |                |                      |                          |               |                                 |                          |                    |                            |            |                      |                     |                                         |                                                             |                    |                |  |  |
| HIGH PERFORMANCE                                                                                                                                                      |                      |                  |                 |                      |                         |                |                      |                          |               |                                 |                          |                    |                            |            |                      |                     |                                         |                                                             |                    |                |  |  |
| 7400 System – DTM 450 VOC Alkyd Enamel <sup>1</sup> and V7400 System – DTM 340 VOC Alkyd Enamel                                                                       | ▲                    | ●                | ●               | ■                    | ▲                       | ■              | 212°F 100°C          | ▲                        | ▲             | ▲                               | ■                        | ▲                  | ■                          | ▲          | ●                    | ▲                   | ▲                                       | ■                                                           | ■                  | ■              |  |  |
| 8400 System – Food & Beverage Alkyd Enamel                                                                                                                            | ▲                    | ●                | ●               | ●                    | ▲                       | ■              | 212°F 100°C          | ▲                        | ▲             | ▲                               | ■                        | ▲                  | ■                          | ▲          | ●                    | ▲                   | ▲                                       | ■                                                           | ■                  | ■              |  |  |
| 3400 System – 340 VOC DTM Alkyd Enamel <sup>1</sup>                                                                                                                   | ▲                    | ●                | ●               | ■                    | ▲                       | ■              | 212°F 100°C          | ▲                        | ▲             | ▲                               | ■                        | ▲                  | ■                          | ▲          | ●                    | ▲                   | ▲                                       | ■                                                           | ■                  | ■              |  |  |
| 2500 System – 250 VOC DTM Alkyd Enamel <sup>1</sup>                                                                                                                   | ▲                    | ●                | ●               | ■                    | ▲                       | ■              | 212°F 100°C          | ▲                        | ▲             | ▲                               | ■                        | ▲                  | ■                          | ▲          | ●                    | ▲                   | ▲                                       | ■                                                           | ■                  | ■              |  |  |
| 1500 System – Speedy-Dry Alkyd Enamel                                                                                                                                 | ▲                    | ●                | ●               | ■                    | ▲                       | ■              | 212°F 100°C          | ▲                        | ▲             | ▲                               | ■                        | ▲                  | ■                          | ▲          | ●                    | ▲                   | ▲                                       | ■                                                           | ■                  | ■              |  |  |
| 3700 System – DTM Acrylic Enamel                                                                                                                                      | ●                    | ●                | ●               | ●                    | ▲                       | ■              | 200°F 93°C           | ●                        | ●             | ▲                               | ■                        | ▲                  | ■                          | ▲          | ●                    | ■                   | ▲                                       | ■                                                           | ■                  | ■              |  |  |
| 3100 System – Speedy-Dry DTM Acrylic Enamel                                                                                                                           | ●                    | ▲                | ▲               | ●                    | ▲                       | ■              | 200°F 93°C           | ▲                        | ▲             | ▲                               | ■                        | ▲                  | ■                          | ▲          | ●                    | ■                   | ▲                                       | ■                                                           | ■                  | ■              |  |  |
| 9100 System – DTM Epoxy Mastic                                                                                                                                        | ◆                    | ●                | ●               | ▲                    | ●                       | ●              | 300°F 149°C          | ●                        | ●             | ●                               | ●                        | ●                  | ●                          | ▲          | ●                    | ●                   | ●                                       | ● <sup>2</sup>                                              | ● <sup>2</sup>     | ● <sup>2</sup> |  |  |
| 5300 System – Water-Based Epoxy                                                                                                                                       | ◆                    | ●                | ●               | ▲                    | ●                       | ▲              | 300°F 149°C          | ●                        | ●             | ●                               | ●                        | ●                  | ■                          | ▲          | ●                    | ●                   | ●                                       | ■                                                           | ■                  | ■              |  |  |
| C9578 System – Coal Tar Epoxy                                                                                                                                         | ◆                    | ●                | ●               | ▲                    | ●                       | ●              | 300°F 149°C          | ●                        | ●             | ●                               | ●                        | ●                  | ▲                          | ●          | ●                    | ●                   | ●                                       | ●                                                           | ●                  | ●              |  |  |
| W9200 System – Potable Water Coating                                                                                                                                  | ◆                    | ●                | ●               | ▲                    | ●                       | ●              | 300°F 149°C          | ●                        | ●             | ●                               | ●                        | ●                  | ▲                          | ●          | ●                    | ●                   | ●                                       | ●                                                           | ●                  | ●              |  |  |
| 9800 System – DTM Urethane Mastic                                                                                                                                     | ●                    | ●                | ●               | ▲                    | ●                       | ●              | 300°F 149°C          | ●                        | ●             | ●                               | ●                        | ▲                  | ◆                          | ◆          | ●                    | ◆                   | ▲                                       | ■                                                           | ■                  | ■              |  |  |
| 9700 System – 250 VOC Acrylic Polyester Urethane                                                                                                                      | ●                    | ●                | ●               | ▲                    | ●                       | ●              | 300°F 149°C          | ●                        | ●             | ●                               | ●                        | ●                  | ●                          | ●          | ●                    | ●                   | ▲                                       | ■                                                           | ■                  | ■              |  |  |
| 9400 System – High Gloss Polyester Urethane                                                                                                                           | ●                    | ●                | ●               | ▲                    | ●                       | ●              | 300°F 149°C          | ●                        | ●             | ●                               | ●                        | ●                  | ▲ <sup>3</sup>             | ●          | ●                    | ●                   | ▲                                       | ■                                                           | ■                  | ■              |  |  |
| 7000 System – Cold Galvanizing Compound                                                                                                                               | ●                    | ●                | ●               | ■                    | ▲                       | ■              | 350°F 177°C          | ▲                        | ▲             | ▲                               | ■                        | ■                  | ■                          | ▲          | ●                    | ▲                   | ▲                                       | ■                                                           | ■                  | ■              |  |  |
| 4200/4300 System – High Heat Coatings                                                                                                                                 | ▲                    | ●                | ■               | ■                    | ■                       | ■              | 800-1200°F 427-649°C | ▲                        | ■             | ■                               | ■                        | ■                  | ■                          | ■          | ■                    | ■                   | ■                                       | ■                                                           | ■                  | ■              |  |  |
| INDUSTRIAL CHOICE®                                                                                                                                                    |                      |                  |                 |                      |                         |                |                      |                          |               |                                 |                          |                    |                            |            |                      |                     |                                         |                                                             |                    |                |  |  |
| 6400 System – 450 VOC DTM Alkyd Enamel and V6400 System – 340 VOC DTM Alkyd Enamel                                                                                    | ▲                    | ●                | ●               | ■                    | ▲                       | ■              | 212°F 100°C          | ▲                        | ▲             | ▲                               | ■                        | ▲                  | ■                          | ▲          | ●                    | ▲                   | ▲                                       | ■                                                           | ■                  | ■              |  |  |
| 5200 System – DTM Acrylic                                                                                                                                             | ●                    | ▲                | ●               | ●                    | ▲                       | ■              | 200°F 93°C           | ▲                        | ▲             | ▲                               | ■                        | ▲                  | ■                          | ▲          | ●                    | ■                   | ●                                       | ■                                                           | ■                  | ■              |  |  |

1 For high gloss finishes only. 2 Use with 9102402 Immersion Activator. 3 Long-term exposure to acids may cause some discoloration.

# CHEMICAL & CORROSION RESISTANCE GUIDE (CONT.)

This chart represents the general chemical resistance of Rust-Oleum finish coats. For more details, call the Rust-Oleum Technical Service Department at 847-816-2248.

## CORROSIVE CONDITIONS

## FUMES, SPILLAGE & SPRAYS

## IMMERSION CONTINUOUS WET HEAT RESISTANCE 125°F (52°C)

| GENERAL WEATHERING | INDUSTRIAL FUMES | SALT ATMOSPHERE | MOLD, MILDEW, FUNGUS | LIGHT-MODERATE ABRASION | HEAVY ABRASION | DRY HEAT | WATER | SALT & BRINES | MILD ALKALI, SOAPS & DETERGENTS | STRONG ALKALI & CAUSTICS | MILD, DILUTE ACIDS | STRONG, CONCENTRATED ACIDS | FOOD ACIDS | GREASES, OILS & FATS | GASOLINE & SOLVENTS | CUTTING OILS, COOLANT & HYDRAULIC FLUID | FRESH WATER | SALT WATER & BRINE | SEWAGE |
|--------------------|------------------|-----------------|----------------------|-------------------------|----------------|----------|-------|---------------|---------------------------------|--------------------------|--------------------|----------------------------|------------|----------------------|---------------------|-----------------------------------------|-------------|--------------------|--------|
|--------------------|------------------|-----------------|----------------------|-------------------------|----------------|----------|-------|---------------|---------------------------------|--------------------------|--------------------|----------------------------|------------|----------------------|---------------------|-----------------------------------------|-------------|--------------------|--------|

## COMMERCIAL

|                                       |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---------------------------------------|---|---|---|---|---|---|----------------|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C740 System 400 VOC DTM Alkyd Enamel  | ▲ | ● | ● | ■ | ▲ | ■ | 212°F<br>100°C | ▲ | ▲ | ▲ | ■ | ▲ | ■ | ▲ | ● | ▲ | ▲ | ■ | ■ | ■ |
| CV740 System 100 VOC DTM Alkyd Enamel | ▲ | ● | ● | ■ | ▲ | ■ | 212°F<br>100°C | ▲ | ▲ | ▲ | ■ | ▲ | ■ | ▲ | ● | ▲ | ▲ | ■ | ■ | ■ |

## MATHYS®

|         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Noxyde® | ● | ● | ● | ● | ● | ▲ | — | ● | ● | ▲ | ◆ | ▲ | ▲ | ▲ | ◆ | ◆ | ◆ | ■ | ■ | ■ |
|---------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|

## SIERRA PERFORMANCE™

|                                        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------------------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Beyond™ Acrylic Enamel                 | ● | ● | ● | ● | ● | ■ | — | ▲ | ▲ | ● | ■ | ▲ | ■ | ▲ | ▲ | ■ | ■ | ■ | ■ | ■ |
| MetalMax® DTM Acrylic Enamel           | ● | ● | ● | ● | ● | ■ | — | ● | ● | ● | ▲ | ▲ | ▲ | ▲ | ▲ | ▲ | ▲ | ■ | ■ | ■ |
| S40/42 System – Epoxy Floor Coating    | ▲ | ● | ● | ● | ● | ▲ | — | ● | ● | ● | ▲ | ● | ▲ | ● | ● | ▲ | ▲ | ■ | ■ | ■ |
| S60 System – Epoxy Maintenance Coating | ▲ | ● | ● | ● | ● | ▲ | — | ● | ● | ● | ▲ | ● | ▲ | ● | ● | ▲ | ▲ | ■ | ■ | ■ |

## CONCRETE SAVER®

|                                                  |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |
|--------------------------------------------------|---|---|---|---|---|---|----------------|---|---|---|---|---|---|---|---|---|---|---|---|---|
| AS6000 System – Anti-Slip Low-Profile Epoxy      | ◆ | ● | ● | ▲ | ● | ● | —              | ● | ● | ● | ● | ■ | ● | ▲ | ▲ | ▲ | ▲ | ■ | ■ | ■ |
| AS5400 System – Anti-Slip One-Step Epoxy         | ▲ | ● | ▲ | ▲ | ● | ● | —              | ● | ● | ● | ● | ■ | ● | ● | ● | ● | ■ | ■ | ■ | ■ |
| AS9100 System – Anti-Slip High Performance Epoxy | ◆ | ● | ● | ▲ | ● | ● | —              | ● | ● | ● | ● | ▲ | ▲ | ▲ | ▲ | ▲ | ■ | ■ | ■ | ■ |
| AS6500 System – Anti-Slip 100% Solids Epoxy      | ◆ | ● | ● | ▲ | ● | ● | —              | ● | ● | ● | ● | ▲ | ▲ | ▲ | ▲ | ▲ | ■ | ■ | ■ | ■ |
| 5500 System – Acrylic Dustproofer Floor Sealer   | ● | ▲ | ● | ● | ▲ | ■ | 200°F<br>93°C  | ● | ▲ | ▲ | ■ | ▲ | ■ | ◆ | ▲ | ■ | ■ | ■ | ■ | ■ |
| 5600 System – Acrylic Urethane Floor Paint       | ● | ▲ | ● | ● | ▲ | ■ | 200°F<br>93°C  | ▲ | ▲ | ▲ | ■ | ▲ | ■ | ▲ | ● | ■ | ◆ | ■ | ■ | ■ |
| 6000 System – Water-Based Epoxy                  | ◆ | ● | ● | ▲ | ● | ▲ | —              | ● | ● | ● | ● | ■ | ● | ● | ● | ● | ■ | ■ | ■ | ■ |
| EasyClear™ – Epoxy Maintenance Floor Coating     | ◆ | ● | ● | ● | ● | ● | 300°F<br>149°C | ● | ● | ● | ● | ● | ▲ | ● | ● | ● | ▲ | ▲ | ▲ | ▲ |
| 6200 System – Fast-Cure Epoxy Floor Coating      | ◆ | ● | ● | ▲ | ● | ● | 300°F<br>149°C | ● | ● | ● | ● | ● | ▲ | ▲ | ● | ● | ▲ | ▲ | ▲ | ▲ |
| 6500 System – 100% Solids Epoxy                  | ▲ | ● | ● | ● | ● | ● | —              | ● | ● | ● | ● | ▲ | ● | ● | ● | ● | ■ | ■ | ■ | ■ |
| 6711 System – Clear Water-Based Polyurethane     | ▲ | ▲ | ▲ | ▲ | ● | ■ | —              | ● | ● | ● | ▲ | ▲ | ▲ | ▲ | ● | ▲ | ■ | ■ | ■ | ■ |
| TurboKrete® Concrete Patching Compound           | ▲ | ● | ● | ● | ● | ● | 200°F<br>93°C  | ● | ● | ● | ● | ▲ | ◆ | ● | ● | ▲ | ● | ● | ● | ▲ |

## CONCRETE PROTECTION SYSTEMS (CPS)

CPS offers protection for the most severe industrial environment. Ask your Rust-Oleum Sales Representative for a complete Concrete Protection Systems Chemical & Corrosion Resistance Guide.



# SAFETY COLOR CODING & PIPE IDENTIFICATION GUIDES

## SAFETY COLOR CODING GUIDE

Based on the original OSHA code.

|                                                                                   |                             |                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------------------------------------------|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <b>EMERGENCY</b>            | Use <b>RED</b> for the identification of fire protection equipment and apparatus, danger and stop.                                                                                                                                                                                                                                                        |
|  | <b>WARNING</b>              | Use <b>ORANGE</b> for designating dangerous parts of machines or energized equipment which may cut, crush, shock, or otherwise injure, and to emphasize such hazards when enclosure doors are open or removed, or when gear, belt or other guards around moving equipment are open or removed, exposing unguarded hazards.                                |
|  | <b>CAUTION</b>              | Use <b>YELLOW</b> for designating caution and for marking physical hazards such as striking against, stumbling, falling, tripping, and "caught in between". Solid yellow, and yellow with black stripes or checkers should be used interchangeably, using the combination which will attract the most attention in the particular area.                   |
|  | <b>SAFETY EQUIPMENT</b>     | Use <b>GREEN</b> or similar color for designating safety and the location of First Aid equipment (other than firefighting equipment). Green background with a white cross is accepted as identifying First Aid equipment.                                                                                                                                 |
|  | <b>SAFETY INFORMATION</b>   | Use <b>BLUE</b> for identification of safety information used on informational signs and bulletin boards. In railroad areas only, blue shall be the color for designating caution, limited to warning against the starting, the use of, or the movement of equipment under repair or being worked on.                                                     |
|  | <b>TRAFFIC/HOUSEKEEPING</b> | Use <b>BLACK &amp; WHITE</b> to designate traffic and housekeeping markings. Solid white, solid black, single color striping, alternate stripes of black and white, or black and white checkers should be used in accordance with local conditions. (Purple, gray and brown may be used to accentuate color contrast and make other colors more visible.) |

## IDENTIFICATION OF PIPING SYSTEMS

Complies with the American National Standards Institute ANSI A13.1-1981 recommendations.

|                                                                                     |                                               |                                                                                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <b>FIRE PROTECTION &amp; SPRINKLER PIPING</b> | <b>RED</b> is for ANSI Class F-FIRE. This classification includes sprinkler systems and other fire protection equipment.                                                                                                                           |
|  | <b>DANGEROUS MATERIALS</b>                    | <b>YELLOW</b> is for ANSI Class D. This group includes materials which are hazardous to life or property because they are easily ignited, toxic, corrosive at high temperatures and pressures, produce poisonous gas, or are themselves poisonous. |
|  | <b>SAFE MATERIALS</b>                         | <b>GREEN</b> is for ANSI Class S. This group includes those materials involving little or no hazard to life or property in their handling.                                                                                                         |
|  | <b>PROTECTIVE MATERIALS</b>                   | <b>BLUE</b> is for ANSI Class P. This group includes materials which are piped through plants for the express purpose of being able to prevent or minimize the hazard of dangerous materials.                                                      |

• TRUSTED QUALITY SINCE 1921 •

# RUST-OLEUM®


















Working hard to provide ultimate protection for industrial environments, our High Performance brand is rich with Rust-Oleum® quality. Long-lasting, yet labor-saving, High Performance coatings are easy to apply with generous, colorful coverage. Successfully maintain metal surfaces, from machinery to pipes with top-end results.





Contact your Rust-Oleum representative for information regarding our Rust-Proof Guarantee.

# HIGH PERFORMANCE

## ENAMELS

|                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |  |  |  |
| Almond                                                                            | Tan,<br>Dunes Tan                                                                 | Chestnut Brown                                                                    | Light Blue,<br>Marlin Blue                                                        | Blue                                                                              | Deep Blue,<br>National Blue                                                        | Bright Green                                                                        | Dark Green,<br>Forest Green                                                         |
|  |  |  |  |  |  |  |  |
| Hunter Green                                                                      | Pleasant Green                                                                    | Vista Green                                                                       | High Heat Green                                                                   | Yellow                                                                            | Dark Yellow                                                                        | Industrial Yellow                                                                   | Red, Regal Red, Fire<br>Hydrant Red, Bright Red                                     |
|  |  |  |  |  |  |  |  |
| Tile Red                                                                          | Dark Machine Gray,<br>Navy Gray                                                   | Smoke Gray                                                                        | Light Machine Gray,<br>Silver Gray                                                | Dove Gray                                                                         | Anodized Bronze                                                                    | Light Neutral Gray                                                                  | Machine Tool Gray                                                                   |
|  |  |  |  |  |  |  |  |
| Chrome                                                                            | Heavy-Duty Aluminum                                                               | Aluminum,<br>Alumi-NON®                                                           | Stainless Steel,<br>Bright Galvanizing                                            | High Heat Alum., Silver<br>Alum., Cold Galvanizing                                | Green Aluminum                                                                     | Blue Aluminum                                                                       | Black, HH Black, Rust<br>Reformer, Jet Black                                        |
|  |  |  |  |  |  |  |  |
| White, Dairy White                                                                | Crystal Clear, Clear                                                              | Gray Primer                                                                       | Red Primer, Red<br>Rusted Metal Primer                                            | White Clean Metal<br>Primer                                                       | 2K Gray Primer                                                                     | 2K Beige Primer                                                                     | Light Gray Primer                                                                   |




## OSHA SAFETY

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |  |
| Safety Blue                                                                         | Safety Purple                                                                       | Safety Green                                                                        | Fluorescent Red                                                                     | Fluorescent Orange                                                                  | Metal Black                                                                          | Metal Silver                                                                          |
|  |  |  |  |  |  |  |
| Safety Orange                                                                       | Safety Red                                                                          | Safety Yellow                                                                       | Fluorescent Green                                                                   | Fluorescent Yellow                                                                  | Metal Gold                                                                           | Metal Bronze                                                                          |

## FLUORESCENTS



## HAMMERED

## EQUIPMENT COLORS

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |  |  |
| John Deere Green                                                                    | John Deere Yellow                                                                   | Equipment Yellow                                                                    | New Caterpillar Yellow                                                              | Old Caterpillar Yellow                                                              | Blue                                                                                 | Yellow                                                                                | Red                                                                                   |
|  |  |  |  |  |  |  |                                                                                       |
| International<br>Harvester Red                                                      | Ford Blue                                                                           | Equipment Orange                                                                    | Allis Chalmers Orange                                                               | International Orange                                                                | Black                                                                                | White                                                                                 |                                                                                       |

## STRIPING


## MARKING\*

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |  |  |
| Caution Blue                                                                        | Caution Yellow                                                                      | High Visibility Yellow                                                              | Safety Red                                                                          | Alert Orange                                                                        | Fluorescent Orange                                                                   | Fluorescent Green                                                                     | Fluorescent<br>Red-Orange                                                             |

\*White and clear also available

Colors are printing approximations and may vary. Color may vary slightly between product systems and between aerosols and gallons.

## V2100 SYSTEM RUST-PREVENTIVE ENAMEL AEROSOL

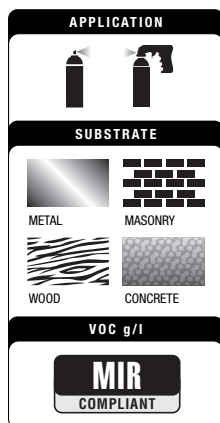

The ultimate spray paint for industrial applications. Provides maximum corrosion protection and long lasting durability.

- High paint solids provide excellent coverage in one-coat
- New any-angle spray can be sprayed in any direction, even upside down
- New high output tip covers 50% faster, requiring less downtime
- Dries fast — 20 minutes to touch
- Superior gloss retention
- Tough, professional finish provides superior resistance to chipping, cracking and peeling
- Can be used on surfaces that reach temperatures up to 200°F
- Available in a hammered finish to conceal flaws on scratched, rusted or pitted metal
- USDA acceptable\* and Agriculture Canada\*\* approved

### COLORS (15 oz.)

V2170838 Almond  
V2171838 Tan  
V2175838 Chestnut Brown  
209565 Anodized Bronze  
V2125838 Deep Blue  
V2123838 Light Blue  
V2137838 Dark Green  
V2134838 Bright Green  
V2138838 Hunter Green  
V2147838 Industrial Yellow  
V2164838 Bright Red  
V2187838 Dark Machine Gray  
V2184838 Dove Gray  
V2183838 Light Machine Gray  
V2188838 Smoke Gray  
V2115838 Silver Aluminum (14 oz.)  
V2119838 Stainless Steel (14 oz.)  
V2179838 Gloss Black  
V2177838 Semi-Gloss Black

### V2178838 Flat Black

V2192838 Gloss White  
209567 Semi-Gloss White  
V2190838 Flat White  
V2196838 Fleet White  
V2102838 Crystal Clear (14 oz.)

### SAFETY COLORS (15 oz.)

V2124838 Safety Blue  
V2133838 Safety Green  
V2155838 Safety Orange  
V2167838 Safety Purple  
V2163838 Safety Red  
V2143838 Safety Yellow

### FLUORESCENTS (14 oz.)

2233838 Fluorescent Green  
2255838 Fluorescent Orange  
2264838 Fluorescent Red  
2242838 Fluorescent Yellow

### HAMMERED (15 oz.)

209590 Metal Black  
209562 Metal Silver  
209563 Metal Gold  
209564 Metal Dark Bronze

### EQUIPMENT

209713 John Deere Green  
209714 John Deere Yellow  
209715 Caterpillar Yellow (old)  
209716 Allis Chalmers Org.  
209717 Int'l Harvester Red  
209718 Ford Blue  
V2148838 Equipment Yellow  
V2156838 Equipment Orange

### COMPANION PRODUCTS

243456 Spray Grip (p. 15)  
241526 Comfort Grip (p. 15)



**TYPICAL APPLICATIONS** Structural steel, handrails, piping, storage tanks, equipment, machinery, doors and any surface requiring superior protection.

## V2100 SYSTEM ENAMEL PRIMER AEROSOL



Fast-drying primer adds twice the protection and enhances the appearance of the topcoat.

- Can be topcoated any time
- Use anywhere extra protection is needed on rusted, bare or previously painted metal
- Better corrosion protection than other industrial rust-preventive aerosol primers
- USDA acceptable\* and Agriculture Canada\*\* approved

### COLORS (15 oz.)

V2169838 Red Primer  
V2182838 Gray Primer  
209566 White Clean Metal Primer

### COMPANION PRODUCTS

243546 Spray Grip (p. 15)  
241526 Comfort Grip (p. 15)


**TYPICAL APPLICATIONS** Structural steel, handrails, piping, storage tanks, equipment, machinery, doors and any surface requiring superior protection.





**TYPICAL APPLICATIONS** Use for touch-up and repair to damaged galvanized steel, production welds, ducts, fences, bridges, tanks, vehicles, trailers, utility towers and more.

## V2100 SYSTEM GALVANIZING COMPOUND AEROSOL



Zinc-rich coatings contain up to 93% pure zinc to provide maximum corrosion protection through galvanic protection.

- Excellent adhesion to galvanized metal
- Dries fast — 20 minutes to touch
- Maximum corrosion protection ideal for use in moderate to severe environments
- Meets the performance requirements of Federal Specifications DOD-P-21035A; MIL-P-26915C
- Can be used on surfaces that reach temperatures up to 200°F
- USDA acceptable\* and Agriculture Canada\*\* approved


### COLORS (20 oz.)

V2185838 Cold Galvanizing Compound  
 V2117838 Bright Galvanizing Compound

### COMPANION PRODUCTS

243546 Spray Grip (p. 15)  
 241526 Comfort Grip (p. 15)

## V2100 SYSTEM HIGH HEAT COATING AEROSOL



Heat-resistant coating for objects that reach temperatures up to 1000°F.

- Direct-to-metal (DTM) spray protects against corrosion
- Dries fast — 20 minutes to touch
- Durable, long-lasting finish
- USDA acceptable\* and Agriculture Canada\*\* approved

### COLORS (15 oz.)

V2116838 High Heat Aluminum  
 V2176838 High Heat Black

### COMPANION PRODUCTS

243546 Spray Grip (p. 15)  
 241526 Comfort Grip (p. 15)




**TYPICAL APPLICATIONS** Boilers, steam pipes, vents, kilns and exhaust pipes.



**TYPICAL APPLICATIONS** Equipment, railings, complex shapes, seams, hard to reach areas and minimal surface prep projects.

## V2100 SYSTEM RUST REFORMER® AEROSOL



Convenient aerosol rust-converter instantly stops existing and future corrosion in one step.

- Neutralizes rust and prevents it from coming back
- Dries fast — 12 minutes to touch
- Dries to a hard, flat-black finish that can be topcoated with oil or latex coatings
- Protects against corrosion better than other rust converters on the market
- Can be used on surfaces that reach temperatures up to 200°F
- USDA acceptable\*

### COLORS (15 oz.)

215634 Rust Reformer

### COMPANION PRODUCTS

243546 Spray Grip (p. 15)  
 241526 Comfort Grip (p. 15)



## VK9300 SYSTEM TWO COMPONENT EPOXY PRIMER AEROSOL



**APPLICATION**

**SUBSTRATE**

METAL ALUMINUM

GALVANIZED RUSTED METAL

**VOC g/l**

**MIR COMPLIANT**

Two component (2K) Epoxy Primer contains the base and activator in one can to give true epoxy corrosion protection with easy, no mess aerosol convenience.

- Enhances the performance of any topcoat in mild to severe environments
- Easy activation with patented 2K technology
- Fast direct-to-metal (DTM), sound rust and previously coated surface application
- Extended pot life for 4 days after activation
- Exceptional chemical and corrosion resistance
- USDA acceptable\*

### COLORS (15 oz.)

247597 Gray  
247598 Beige

### COMPANION PRODUCTS

243546 Spray Grip (p. 15)  
241526 Comfort Grip (p. 15)



**TYPICAL APPLICATIONS** Hard to reach areas like welds, seams, bolts, edges, machinery, equipment, pipelines and more.



Rust-Oleum® GlowMax® safety coatings provide long-lasting safety illumination in power-outage or low light situations. They are designed to mark exit paths to aid in evacuation of buildings in the event of power failure and to illuminate areas in low-level lighting conditions. Using advanced pigment and coating technologies, Rust-Oleum® GlowMax® provides an 8-12 hour glow time with all the premium industrial coating properties that you expect from Rust-Oleum®.



**TYPICAL APPLICATIONS** Handrails, doorways, trim, stairwells, hazards, exits, entrances, ship decks, and more.

## 2600 SYSTEM LUMINESCENT ENAMEL AEROSOL

**APPLICATION**

**SUBSTRATE**

METAL WOOD

MASONRY CONCRETE

**VOC g/l**

**MIR COMPLIANT**

Multi-purpose glow-in-the-dark spray provides long-lasting safety illumination and protects against wear, chemicals and solvents in everyday industrial applications.

- Quick and easy to apply
- Dries fast — 30 minutes to touch
- Excellent durability and protection — outperforms tapes
- Safety Yellow provides vivid safety designations in daylight but glows luminescent green in the dark
- Requires only 2-3 coats versus competitive paints that require 4 or more
- Easy to clean up and maintain
- Low installation costs versus tapes and stair noses
- USDA acceptable\*

### COLORS (20 oz.)

223886 Luminescent Green  
223885 Safety Yellow

### COMPANION PRODUCTS

243546 Spray Grip (p. 15)  
241526 Comfort Grip (p. 15)



**TYPICAL APPLICATIONS** Aisles, lift truck routes, pallet positions, hazardous areas, commercial parking lots, playgrounds, stadiums and athletic facilities.

## 2300 SYSTEM INVERTED STRIPING PAINT AEROSOL

**APPLICATION**



**SUBSTRATE**

 CONCRETE
  GRASS

 PAVEMENT
  GRAVEL

 DIRT
 **AND MORE!**

**VOC g/l**

**MIR**

COMPLIANT

Solvent-based inverted striping paint for durable and bright long-lasting lines.

- Highest solids for complete coverage
- Dries fast — less than 10 minutes
- Guaranteed not to clog
- Use with Striping Machine or Striping Wand
- USDA acceptable\* and Agriculture Canada\*\* approved

### COLORS (18 oz.)

|         |        |
|---------|--------|
| 2326838 | Blue   |
| 2348838 | Yellow |
| 2364838 | Red    |
| 2378838 | Black  |
| 2391838 | White  |

### COMPANION PRODUCTS

|         |                          |
|---------|--------------------------|
| 2395000 | Striping Machine (p. 15) |
| 2388000 | Striping Wand (p. 15)    |

## 2300 SYSTEM TRAFFIC ZONE STRIPING PAINT

**APPLICATION**



**SUBSTRATE**

 CONCRETE
  GRASS

 PAVEMENT
  GRAVEL

 DIRT
 **AND MORE!**

**VOC g/l**

**VOC <100**

Water-based acrylic coating for large striping jobs such as parking lots, stadiums, and athletic facilities.

- Dries fast — 30 minutes touch and tack free
- Durable and long lasting formula creates bright stripes
- Creates up to 410 linear feet with a 4" stripe
- Use with bulk striping machine (Rust-Oleum® Striping Machine is not compatible)
- USDA acceptable\*

### COLORS

|         |        |
|---------|--------|
| 2326402 | Blue   |
| 2348402 | Yellow |
| 243276  | Red    |
| 2391402 | White  |
| 246774  | Black  |




**TYPICAL APPLICATIONS** Parking lots, stadiums, curbs and athletic facilities.



**TYPICAL APPLICATIONS** Utility locating, surveying, construction sites, excavation sites, landscape and golf course markings.

## V2300 SYSTEM INVERTED MARKING PAINT AEROSOL

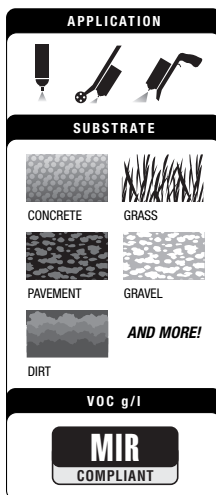

High output inverted marking paint for bold, easy-to-see markings.

- High solids for bold and bright markings
- Dries fast — less than 5 minutes
- Guaranteed not to clog
- Convenient spray through cap
- Use with Marking Wand or Pistol for comfortable and accurate site marking
- USDA acceptable\*

### COLORS (15 oz.)

- V2324838 Caution Blue
- V2345838 Caution Yellow
- V2354838 Alert Orange
- V2344838 High Visibility Yellow
- V2392838 White
- V2301838 Clear

### FLUORESCENTS (15 oz.)

- V233838 Fluorescent Green
- V2355838 Fluorescent Orange
- V2358838 Fluorescent Red-Orange

### COMPANION PRODUCTS

- 2393000 Marking Wand (see below)
- 210188 Marking Pistol (see below)

### SAFETY COLORS (15 oz.)

- V2363838 Safety Red

## COMPANION PRODUCTS



### STRIPING MACHINE

- Create 2-4" straight lines quickly and easily
- Cover a larger area in a shorter time
- Convenient storage compartment holds 12 extra cans
- Sturdy steel construction
- Collapsible handle for easy storage

2395000 Striping Machine



### STRIPING WAND

- Use for convenient touch-up of lines or stenciling
- Sturdy, lightweight construction

2388000 Striping Wand



### COMFORT GRIP®

- Ergonomic design provides maximum control while spraying
- Large soft touch trigger reduces finger fatigue
- Durable construction withstands repetitive use

241526 Comfort Grip



### MARKING WAND

- Easy, upright site marking
- Quick and convenient with no mess
- Comfortable grip
- Lightweight, yet durable construction
- Use with Rust-Oleum Inverted Marking Paint

2393000 Marking Wand



### MARKING PISTOL

- Easy, accurate marking
- Light touch spray control
- Comfortable grip

210188 Marking Pistol



### SPRAY GRIP®

- Turns any spray can into a spray gun
- Two finger trigger minimizes fatigue
- Unique locking collar keeps can tightly attached
- Trigger safety lock prevents accidental use
- Keeps hands clean

243546 Spray Grip

## ALKYD

### 7400 SYSTEM 450 VOC DTM ALKYD ENAMEL



**APPLICATION**

**SUBSTRATE**  
  
METAL WOOD

**VOC g/l**  
**VOC <450**

Rust-Oleum's original rust preventative direct-to-metal (DTM) coating provides metal surfaces with the ultimate protection from the ravages of rust and corrosion.

- Excellent coverage in one coat
- High solids content provides better coverage compared to competitive enamels
- High gloss, durable finish with good color and gloss retention
- Superior resistance to chipping, cracking and peeling
- Protects against mild chemical spills, fumes, oil and grease
- USDA acceptable\* and Agriculture Canada\*\* approved

#### COLORS

|         |                           |
|---------|---------------------------|
| 865402  | Dunes Tan                 |
| 977402  | Chestnut Brown            |
| 721402  | National Blue             |
| 866402  | Marlin Blue               |
| 935402  | Vista Green               |
| 1282402 | Forest Green              |
| 7232402 | Semi-Gloss Pleasant Green |
| 7434402 | John Deere Green          |
| 7446402 | Yellow                    |
| 7448402 | Old Caterpillar Yellow    |
| 7447402 | New Caterpillar Yellow    |
| 559402  | International Orange      |
| 1210402 | Fire Hydrant Red          |
| 745402  | Tile Red                  |

|         |                               |
|---------|-------------------------------|
| 7280402 | Semi-Gloss Light Neutral Gray |
| 904402  | Machine Tool Gray             |
| 975402  | Navy Gray                     |
| 906402  | Silver Gray                   |
| 470402  | Aluminum                      |
| 473402  | Heavy-Duty Aluminum           |
| 1030402 | Green Aluminum                |
| 1020402 | Blue Aluminum                 |
| 634402  | High Gloss Black              |
| 412402  | Flat Black                    |
| 7290402 | Semi-Gloss White              |
| 2764402 | Flat White                    |
| 2766402 | High Gloss White              |
| 717402  | Clear (Clear-Sele®)           |

#### SAFETY COLORS


|        |               |
|--------|---------------|
| 925402 | Safety Blue   |
| 933402 | Safety Green  |
| 956402 | Safety Orange |
| 964402 | Safety Red    |
| 944402 | Safety Yellow |

Tint Bases also available for custom colors.

**TYPICAL APPLICATIONS** General plant maintenance including machinery, equipment, structural steel, pipes, metal cabinets and lockers, railings, trim, doors and gates, vents, outdoor signage. Also water towers, agriculture, drilling, coastal applications, vehicle refinishing.



# 7400 SYSTEM 450 VOC ALKYD ENAMEL PRIMERS



## 769® DAMP PROOF RED PRIMER

VOC <420


Designed for extreme rust-producing conditions.

- Minimizes prep time — Apply direct-to-rust
- Superior adhesion to sound, rusted metal
- Protects against further rust and corrosion
- Can be exposed up to one year without topcoating
- USDA acceptable\* and Agriculture Canada\*\* approved


### COLORS

769402 Red

## RUST-OLEUM 769® PRIMER VS. ORDINARY PRIMERS




**769 DAMP PROOF RED PRIMER**  
drives out trapped air and moisture.



**ORDINARY PRIMERS**  
trap air and moisture in.

Rust-Oleum 769 Primer, with unique penetrating power, soaks right through rust to bare metal, driving out trapped air and moisture that cause rust. Ordinary primers without the penetrating properties merely "bridge" rust, trapping rust-producing air and moisture inside so rusting continues.



## HEAVY DUTY RUST INHIBITIVE PRIMERS

VOC <340

Special high solids alkyd primers for higher film build for use under severe rust-producing conditions.

- USDA acceptable\*

### COLORS

1060402 Gray

1069402 Red

## SHOP COAT PRIMER


VOC <450

Quick drying primer that is great for production operations.

- Tack-free in 15-30 minutes when spray applied
- USDA acceptable\*

### COLORS

7069402 Red



## ZINC CHROMATE PRIMERS

VOC <450

General purpose rust-inhibitor that provides maximum corrosion protection through use of rust inhibitive pigments.

- USDA acceptable\*

### COLORS

960402 Yellow††

X60402

Red††

† Touch-ups only

## QUICK DRY PRIMERS

VOC <450

Fast-drying primers that are excellent for general maintenance and shop coat applications.

- Tack-free in 30-60 minutes when spray applied
- Can be exposed up to 6 months without topcoating
- USDA acceptable\*

### COLORS

7086402 Gray

678402

Red

## HIGH SOLIDS, QUICK DRY LOW VOC PRIMERS

VOC <340

Excellent for general maintenance, transportation and shop applications.

- Features 60% high solids content for better coverage
- Tack-free in 30-60 minutes when spray applied
- Can be exposed up to 6 months without topcoating
- USDA acceptable\*

### COLORS

2082402 Light Gray

2068402 Red

††Not available in Minnesota.




**ALKYD**

**NEW**

## V7400 SYSTEM 340 VOC DTM ALKYD ENAMEL



**TYPICAL APPLICATIONS** General maintenance, industrial/commercial, interior/exterior, equipment, pipes, railings, vehicle refinishing, structural steel, metal cabinets, gates, fences, lockers, vents, towers, drill platforms and more



A lower VOC version (340 g/l) of Rust-Oleum's original direct-to-metal rust preventive coating that provides metal surfaces with the ultimate protection from the ravages of rust and corrosion.

- Improved dry time over the 3400 System
- Excellent coverage in one coat
- High solids content provides better coverage compared to competitive enamels
- High gloss, durable finish provides good color and gloss retention
- Superior resistance to chipping, cracking and peeling
- Full standard color selection
- Protects against mild chemical spills, fumes, oil and grease
- USDA acceptable\* and Agriculture Canada\*\*\* pending

### COLORS

|        |                           |
|--------|---------------------------|
| 245308 | Almond                    |
| 245382 | Dunes Tan                 |
| 245380 | Chestnut Brown            |
| 245441 | National Blue             |
| 245440 | Marlin Blue               |
| 245487 | Vista Green               |
| 245388 | Forest Green              |
| 245482 | Semi-Gloss Pleasant Green |
| 245400 | John Deere Green          |
| 245488 | Yellow                    |
| 245500 | Old Caterpillar Yellow    |
| 245489 | New Caterpillar Yellow    |
| 245408 | International Orange      |


|        |                               |
|--------|-------------------------------|
| 245385 | Fire Hydrant Red              |
| 245486 | Tile Red                      |
| 245481 | Semi-Gloss Light Neutral Gray |
| 245409 | Machine Tool Gray             |
| 245443 | Navy Gray                     |
| 245484 | Silver Gray                   |
| 245309 | Aluminum                      |
| 245402 | Heavy-Duty Aluminum           |
| 245403 | High Gloss Black              |
| 245387 | Flat Black                    |
| 245483 | Semi-Gloss White              |
| 245533 | Flat White                    |
| 245406 | High Gloss White              |
| 245381 | Clear (Clear-Sele®)           |

### SAFETY COLORS

|        |               |
|--------|---------------|
| 245474 | Safety Blue   |
| 245476 | Safety Green  |
| 245477 | Safety Orange |
| 245478 | Safety Red    |
| 245479 | Safety Yellow |

Tint Bases also available for custom colors.

## V7400 SYSTEM 340 VOC ALKYD ENAMEL PRIMERS



### 340 VOC FAST RECOAT RUST-INHIBITIVE PRIMERS

**VOC <340**

Special high solids alkyd primers with higher film build for use under severe rust-producing conditions.

- Fast recoat; recoats in one hour
- Proven corrosion protection
- Superior adhesion
- USDA acceptable\* and Agriculture Canada\*\*\* pending


### COLORS

|          |       |
|----------|-------|
| V7086402 | Gray  |
| V769402  | Red   |
| 258887   | White |

## ALKYD

## 3400 SYSTEM

### 340 VOC DTM ALKYD ENAMEL\*



A lower VOC version (<340 g/l) of Rust-Oleum's original direct-to-metal (DTM) rust preventive coating that provides metal surfaces with ultimate protection from the ravages of rust and corrosion.

- Excellent coverage in one coat
- High solids content provides better coverage compared to competitive industrial enamels
- High gloss, durable finish that provides good color and gloss retention
- Superior resistance to chipping, cracking and peeling
- Protects against mild chemical spills, fumes, oil and grease
- Available Alkyd Accelerator speeds dry time
- USDA acceptable\*

## COLORS

|         |                  |
|---------|------------------|
| 3470402 | Almond           |
| 3471402 | Dunes Tan        |
| 3477402 | Chestnut Brown   |
| 3427402 | National Blue    |
| 3423402 | Marlin Blue      |
| 3438402 | Forest Green     |
| 3446402 | Yellow           |
| 3445402 | Equipment Yellow |
| 3456402 | Equipment Orange |
| 3465402 | Regal Red        |
| 3486402 | Navy Gray        |

3482402 Silver Gray

3415402 Aluminum

3479402 Gloss Black

3478402 Flat Black

3492402 Gloss White

## SAFETY COLORS

3425402 Safety Blue

3433402 Safety Green

3455402 Safety Orange

3464402 Safety Red

3444402 Safety Yellow

Tint Bases also available for custom colors.

## PRIMERS

3481402 Gray Primer

3469402 Red Primer

### COMPANION PRODUCTS NEED SPEED?

239503 Alkyd Accelerator  
Accelerates cure time and  
increases film hardness.


**TYPICAL APPLICATIONS** General plant maintenance: machinery, equipment, structural steel, pipes, metal cabinets and lockers, railings, trim, doors and gates, vents, outdoor signage. Also, water towers, agriculture, drilling, coastal applications, vehicle refinishing.

\*Available only until January 1, 2012. Alternative system V7400.

## ALKYD

## 2500 SYSTEM

### 250 VOC DTM ALKYD ENAMEL



The lowest VOC version (<250 g/l) of Rust-Oleum's original direct-to-metal (DTM) rust preventive coating that provides metal surfaces with ultimate protection from the ravages of rust and corrosion.

- Excellent coverage in one coat
- High solids content provides better coverage compared to competitive industrial enamels
- High gloss, durable finish that provides good color and gloss retention
- Superior resistance to chipping, cracking and peeling
- Protects against mild chemical spills, fumes, oil and grease
- Available Alkyd Accelerator speeds dry time
- USDA acceptable\*

## COLORS

|        |              |
|--------|--------------|
| 215758 | White        |
| 215759 | Black        |
| 215952 | Navy Gray    |
| 215954 | Forest Green |
| 215955 | Dunes Tan    |

## SAFETY COLORS

|        |               |
|--------|---------------|
| 215950 | Safety Yellow |
| 215951 | Safety Red    |
| 215956 | Safety Orange |
| 215957 | Safety Blue   |

Tint Bases also available for custom colors.

## PRIMERS

|        |                    |
|--------|--------------------|
| 215959 | Gray Primer        |
| 215958 | Rusty Metal Primer |

### COMPANION PRODUCTS NEED SPEED?

239503 Alkyd Accelerator  
Accelerates cure time and  
increases film hardness.



**TYPICAL APPLICATIONS** General plant maintenance: machinery, equipment, structural steel, pipes, metal cabinets and lockers, railings, trim, doors and gates, vents, outdoor signage. Also, water towers, agriculture, drilling, coastal applications, vehicle refinishing.

## ALKYD



**TYPICAL APPLICATIONS** Equipment, structural steel, pipes, metal cabinets and lockers, railings, trim, doors and gates, vents and more.

## 8400 SYSTEM & V8400 SYSTEM FOOD & BEVERAGE ALKYD ENAMEL



**APPLICATION**

• Spray gun  
• Brush  
• Roller

**SUBSTRATE**

METAL WOOD

**VOC g/l**

VOC <450 VOC <340

A unique, modified alkyd designed specifically for the food and beverage industry.

- Provides all the benefits of Rust-Oleum Industrial Alkyd Enamels plus mold and mildew resistance
- Resistant to humidity and high heat (up to 212°F /100°C)
- Cold temperature cure: can be applied to cold surfaces as low as 18°F (-7°C)
- Withstands corrosion from repeated washing, disinfectants and cleaning compounds
- USDA acceptable\* and Agriculture Canada\*\* approved

### 8400 COLORS (<450 VOC)

8494402 High Gloss Dairy White

### 8400 PRIMERS (<450 VOC)

8469402 Red Rusted Metal Primer  
8492402 White Clean Metal Primer

### V8400 COLORS (<340 VOC)

NEW 259158 High Gloss Dairy White

### V8400 PRIMERS (<340 VOC)

NEW 259157 White Clean Metal Primer

## ALKYD

## 1500 SYSTEM SPEEDY-DRY ALKYD ENAMEL



**APPLICATION**

• Spray gun

**SUBSTRATE**

METAL WOOD

**VOC g/l**

VOC <600 AUTO REFINISH VOC <420 HS1573

Fast-drying enamel minimizes down time for vehicle refinishing.

- Prime, coat and return vehicles to service within 4 hours
- Durable, fade resistant, high-gloss finish
- Maximum durability and corrosion protection
- Designed to meet VOC limit of 600 g/l by the Automotive Refinishing Rule
- USDA acceptable\* and Agriculture Canada\*\* approved

### COLORS

1547402 New Caterpillar Yellow  
1565402 International Red  
1586402 Navy Gray  
1584402 Silver Gray  
1510402 Chrome  
1579402 Jet Black  
1590402 White

Tint Bases also available for custom colors.

### PRIMERS

1573402 Rust Inhibitive Primer  
HS1573402 Low VOC, High Solids Rust Inhibitive Primer  
2083402 Gray Primer

### SAFETY COLORS

1545402 Safety Yellow




**TYPICAL APPLICATIONS** Forklift trucks, airport ground support vehicles, trucks, tractors and trailers.



## ACRYLIC

## 3700 SYSTEM DTM ACRYLIC ENAMEL

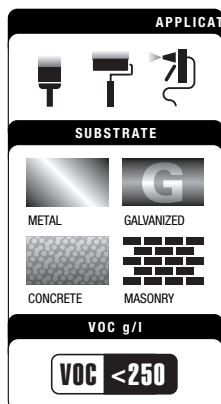

A break-through acrylic formulation that outperforms competitive industrial acrylics.

- Superior corrosion resistance, gloss and color retention, adhesion, early water resistance and chemical resistance as proven by independent testing
- Excellent coverage in one coat
- Excellent early block resistance
- Protects against mild acids, alkalis and solvents
- Efficient direct-to-metal (DTM) coating — no primer required
- USDA acceptable\* and Agriculture Canada\*\* approved

## COLORS

|         |              |
|---------|--------------|
| 3771402 | Dunes Tan    |
| 3737402 | Forest Green |
| 3786402 | Navy Gray    |
| 3782402 | Silver Gray  |
| 206164  | Alumi-NON®   |
| 3779402 | Black        |
| 206166  | Flat Black   |
| 3792402 | White        |

## SAFETY COLORS

|         |               |
|---------|---------------|
| 3725402 | Safety Blue   |
| 206165  | Safety Orange |
| 3764402 | Safety Red    |
| 3744402 | Safety Yellow |

Tint Bases also available for custom colors.


## PRIMERS

|         |             |
|---------|-------------|
| 3769402 | Red Primer  |
| 3781402 | Gray Primer |

**TYPICAL APPLICATIONS** General plant maintenance: machinery, equipment, structural steel, pipes, metal cabinets and lockers, railings, trim, doors and gates, vents, outdoor signage, and any items that require corrosion control due to high humidity environments.

## ACRYLIC

## 3100 SYSTEM SPEEDY-DRY DTM ACRYLIC ENAMEL

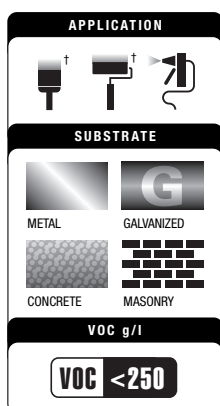

† Touch-ups only

A fast-drying, water-based acrylic for applications that require minimal downtime.

- Dries fast — 15-60 minutes to touch and tack free
- Provides maximum corrosion protection and excellent gloss and color retention
- Protects against mild chemical spills, fumes, oil, corrosion, grease and abrasion
- Efficient direct-to-metal (DTM) coating — no primer required
- Excellent coverage in one coat
- USDA acceptable\* and Agriculture Canada\*\* approved

## COLORS

|         |            |
|---------|------------|
| 3171402 | Dunes Tan  |
| 3165402 | Red        |
| 3186402 | Navy Gray  |
| 3115402 | Alumi-NON® |
| 3179402 | Black      |
| 3192402 | White      |

## SAFETY COLORS

|         |               |
|---------|---------------|
| 3125402 | Safety Blue   |
| 3144402 | Safety Yellow |

Tint Bases also available for custom colors.

## PRIMERS

|         |             |
|---------|-------------|
| 3169402 | Red Primer  |
| 3181402 | Gray Primer |



**TYPICAL APPLICATIONS** Line equipment and machinery, forklifts and conveyors, light poles, misc. metal parts, vents and more.

**EPOXY**

## 9100 SYSTEM & V9100 SYSTEM DTM EPOXY MASTIC



**TYPICAL APPLICATIONS** Steel beams, structural steel, towers, concrete floors, conveyors, industrial equipment, storage tanks, sewage treatment basins and non-potable water storage facilities, steel handrails and more.

**APPLICATION**



**SUBSTRATE**

 METAL
  RUSTED METAL

 MASONRY
  CONCRETE

**VOC g/l**

 VOC <340  
9100
  VOC <250  
V9100

Versatile epoxy system is perfect for direct-to-metal (DTM), direct-to-tightly adhered rust, concrete floors, pools and more. A high solids, next generation polyamine converted epoxy.

- Minimizes prep — Apply direct-to-metal and tightly adhered rust
- Self-priming, single coat provides service life equal to multiple coats of competitive epoxy
- Maximum corrosion protection
- Superior long-term solvent, chemical and abrasion resistance
- Outstanding impact resistance
- Convenient 1:1 mixing ratio of base and activator
- Versatile base formula — Works with all activators (Standard, Immersion, Low Temp or Fast Cure) at VOC <340 g/l or <250 g/l
- USDA acceptable\* and Agriculture Canada\*\* approved

### STANDARD ACTIVATOR:

- For air and surface temperatures of 50-100°F (10-38°C)

### IMMERSION ACTIVATOR:

- For fresh or salt water immersion of steel or concrete where water temperatures do not exceed 125°F (52°C)
- Great for use in floor coating applications
- Produces slightly lower gloss than standard activator
- Not for use in potable water tanks

### LOW TEMPERATURE ACTIVATOR:

- For air and surface temperatures of 40-60°F (5-15°C)

### FAST CURE ACTIVATOR:

- Faster cure to minimize downtime
- Recoat in 4 hours at 70°F (21°C) and 50% RH
- For air and surface temperature of 50-100°F (10-38°C)
- Produces slightly lower gloss than standard activator

*This is a two-component system. Order base and activator separately.*

### COLORS

|         |                  |
|---------|------------------|
| 9171402 | Dunes Tan        |
| 9122402 | Marlin Blue      |
| 9145402 | Equipment Yellow |
| 9165402 | Regal Red        |
| 9168402 | Tile Red         |
| 9186402 | Navy Gray        |
| 9182402 | Silver Gray      |
| 9115402 | Aluminum         |
| 9179402 | Black            |
| 9192402 | White            |

### SAFETY COLORS

|                                              |               |
|----------------------------------------------|---------------|
| 9125402                                      | Safety Blue   |
| 9133402                                      | Safety Green  |
| 9144402                                      | Safety Yellow |
| Tint Bases also available for custom colors. |               |

### ACTIVATORS

|          |                      |
|----------|----------------------|
| 9101402  | Standard (<340 g/l)  |
| 205015   | Standard (<250 g/l)  |
| 9102402† | Immersion (<340 g/l) |
| 214430†  | Immersion (<250 g/l) |
| 9103402  | Low Temp. (<250 g/l) |
| 9104402† | Fast Cure (<340 g/l) |
| 214432   | Fast Cure (<250 g/l) |

† Not for use with Tint Bases.



## EPOXY

**NEW**


# SC9100 SYSTEM 100 VOC DTM EPOXY MASTIC



**APPLICATION**



**SUBSTRATE**



METAL    RUSTED METAL  
CONCRETE    MASONRY

**VOC g/l**

**VOC <100**  
Compliant Nationwide

Versatile, low VOC epoxy system is perfect for direct-to-metal (DTM), direct to tightly adhered rust, concrete floors and more. A high solids, next generation polyamine converted epoxy.

- VOC compliant nationwide
- High solids epoxy coating is formulated for use in moderate to severe environments
- Minimizes prep — apply direct-to-metal and tightly adhered rust
- Self priming, single coat provides service life equal to multiple coats of competitive epoxy
- Maximum corrosion protection
- Superior long-term solvent, chemical and abrasion resistance
- Outstanding impact resistance
- Convenient 1:1 mixing ratio of base and activator
- Use Oxsol Thinner (#254266) for thinning
- USDA acceptable\* and Agriculture Canada\*\*\* pending

**COLORS**

254157 White  
254159 Silver Gray

5 gallons also available.

Tint Bases also available  
for custom colors.

**ACTIVATOR**

258455 Activator



**TYPICAL APPLICATIONS** Steel beams, structural steel, towers, concrete floors, conveyors, industrial equipment, storage tanks, sewage treatment basins and non-potable water storage facilities, handrails and more.


## HS9300 SYSTEM EPOXY PRIMER



**APPLICATION**



**SUBSTRATE**



**VOC g/l**

**VOC <420** STANDARD

**VOC <340**

Maximum protection primers for use with High Performance Epoxy and Topcoats (9100 System DTM Epoxy Mastic, 9800 System DTM Urethane Mastic, 9400 High Gloss Urethane).

- Unsurpassed adhesion to metal surfaces and intercoat adhesion
- Maximum corrosion protection
- Resists heavy abrasion and high moisture exposure
- Can be used on surfaces that reach up to 300°F (149°C)
- USDA acceptable\* and Agriculture Canada\*\* approved

*This is a two-component system. Order base and activator separately.*

*For recoat times less than 16 hours*

### STANDARD PRIMERS

HS9369407 Red Primer  
 HS9381407 Gray Primer

### ACTIVATOR

HS9303604 Primer Activator

*For recoat times of 16 hours to 30 days*

### EXTENDED RECOAT LOW VOC PRIMERS

9360402 Red Primer  
 9370402 Buff Primer

### ACTIVATOR

9304402 Low VOC Primer Activator

**TYPICAL APPLICATIONS** Steel beams, structural steel, towers, conveyors, industrial equipment, storage tanks, sewage treatment basins and non-potable water storage facilities, steel handrails, floors and more.

## EPOXY


## 5300 SYSTEM WATER-BASED EPOXY



**APPLICATION**



**SUBSTRATE**



**VOC g/l**

**VOC <250**

An exceptional polyamine-cured water-based epoxy coating that provides a hard finish and protection.

- Provides excellent resistance to chemicals, abrasion, and corrosion
- Can be applied to damp surfaces for minimal downtime
- Excellent adhesion
- Durable high gloss finish
- USDA acceptable\* and Agriculture Canada\*\* approved

*System and primer are two-component systems. Order base and activator separately.*

### COLORS

5371408 Dunes Tan  
 5323408 Marlin Blue  
 5368408 Tile Red  
 5382408 Silver Gray  
 5379408 Black  
 5392408 White

### ACTIVATOR

5301604 Finish Coat Activator

### PRIMERS

5369405 Red Primer  
 5381405 Gray Primer

### PRIMER ACTIVATOR

5303502 Primer Activator

### SAFETY COLORS

5344408 Safety Yellow


Tint Bases also available for custom colors.



**TYPICAL APPLICATIONS** Steel beams, structural steel, conveyors, industrial equipment, machinery, piping and areas that are subjected to frequent washdowns or abrasive environments.

## URETHANE

## 9800 SYSTEM DTM URETHANE MASTIC

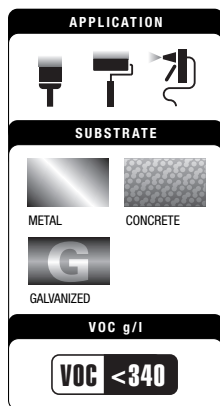

High solids, high-build, direct-to-metal (DTM) acrylic urethane provides the ultimate corrosion protection for excellent long-term appearance in aggressive environments.

- Self-priming with excellent adhesion and coverage in one coat
- Extremely durable finish for superior color and gloss retention compared to other DTM urethanes
- Low temperature cure down to 32°F (0°C)
- Excellent sag resistance (can be applied at high-film builds, 3-5 mils recommended DFT)
- Use accelerator to speed drying time
- USDA acceptable\* (except 9815419 Alumi-NON®) and Agriculture Canada\*\* approved
- If primer is desired, use 9300 or HS9300 System primers or 9100 System DTM Epoxy Mastic

*This is a two-component system. Order base and activator separately.*

### COLORS

|         |             |
|---------|-------------|
| 9871419 | Dunes Tan   |
| 9865419 | Regal Red   |
| 9886419 | Navy Gray   |
| 9882419 | Silver Gray |
| 9815419 | Alumi-NON®  |
| 9879419 | Black       |
| 9892419 | White       |

### SAFETY COLORS

|         |               |
|---------|---------------|
| 9825419 | Safety Blue   |
| 9844419 | Safety Yellow |

Tint Bases also available for custom colors.

### ACTIVATOR

|         |           |
|---------|-----------|
| 9801501 | Activator |
|---------|-----------|

### COMPANION PRODUCTS

|        |                      |
|--------|----------------------|
| 202548 | Urethane Accelerator |
|--------|----------------------|



**TYPICAL APPLICATIONS** Tanks, towers, equipment, metal buildings, structural steel and other rusted surfaces.

## URETHANE

### 9700 SYSTEM 250 VOC ACRYLIC POLYESTER URETHANE



**APPLICATION**



**SUBSTRATE**

 METAL
  CONCRETE †

 GALVANIZED

**VOC g/l**

**VOC <250**

† May require epoxy primer  
(see Technical Data Sheet)

This low VOC, high solids, thin film, aliphatic acrylic polyurethane provides the ultimate corrosion protection for excellent long-term appearance in severe environments.

- Ultimate color and gloss retention
- Ultimate corrosion, chemical, impact and abrasion resistance for extreme durability
- Excellent coverage in one coat
- Thin film application (1-2 mils DFT)
- Available accelerator speeds dry time
- USDA acceptable\*

*This is a two-component system. Order base and activator separately.*

#### COLORS

|        |               |
|--------|---------------|
| 207278 | Silver Gray   |
| 207277 | Gloss Black   |
| 207279 | Gloss White   |
| 207273 | Crystal Clear |

Tint Bases also available  
for custom colors.

#### SAFETY COLORS

|        |             |
|--------|-------------|
| 207274 | Safety Blue |
|--------|-------------|

#### ACTIVATOR

|        |                 |
|--------|-----------------|
| 207243 | Activator (qt.) |
|--------|-----------------|

#### COMPANION PRODUCTS

|        |                      |
|--------|----------------------|
| 202548 | Urethane Accelerator |
|--------|----------------------|



**TYPICAL APPLICATIONS** Chemical plants, power plants, utilities, vehicles and transportation equipment, equipment in heavy industrial, severe coastal and offshore environments.




## URETHANE



**TYPICAL APPLICATIONS** Vehicle refinishing, structural steel, conveyors, tanks and aggressive maintenance applications.

## 9400 SYSTEM HIGH GLOSS POLYESTER URETHANE



<sup>†</sup> Touch-ups only

Super high gloss polyester polyurethane is highly aesthetic and durable. Excellent for vehicle refinishing.

- Extremely high color and gloss retention
- Superior appearance and depth of image
- Superior corrosion, chemical, impact and abrasion resistance
- Acid resistant — stands up to muriatic acid and toughest chemical washdowns
- Convenient 1:1 mixing ratio of base and activator
- Low temperature cure down to 32°F (0°C)
- Available accelerator speeds dry time
- USDA acceptable\* and Agriculture Canada\*\* approved
- If primer is desired, use 9300, HS9300 System primers or 9100 System DTM Epoxy Mastic

*This is a two-component system. Order base and activator separately.*

## COLORS

|         |       |
|---------|-------|
| 9425402 | Blue  |
| 9465402 | Red   |
| 9483402 | Gray  |
| 9479402 | Black |
| 9492402 | White |
| 9410402 | Clear |

Tint Bases also available for custom colors.

## COMPANION PRODUCTS

|         |                      |
|---------|----------------------|
| 202548  | Urethane Accelerator |
| 9404730 | Leveling Additive    |

## ACTIVATORS


|           |                        |
|-----------|------------------------|
| 9401402   | VOC <600 g/l Activator |
| HS9401402 | VOC <420 g/l Activator |

## SPECIALTY



**TYPICAL APPLICATIONS** Heavy-duty tanks, barges, sump and pipelines.

## C9578 SYSTEM COAL TAR EPOXY



High solids converted epoxy with refined coal tar pitch for maximum protection for use in severe industrial or marine environments.

- Protects against severe abrasion, strong chemicals and non-potable water immersion
- Self-priming, high-build coating (8-10 mils/200-250μ DFT)
- Meets Corps of Engineers Specs C-200, C-200A, Steel Tank Institute Corrosion Control System STI-P3, AWWA Spec C210-84, and SSPC-Paint 16

*This is a two-component system. Order base and activator separately.*

## AVAILABLE PRODUCTS

|          |                |
|----------|----------------|
| C9578402 | Coal Tar Epoxy |
|----------|----------------|

## ACTIVATOR

|          |                          |
|----------|--------------------------|
| C9502504 | Coal Tar Epoxy Activator |
|----------|--------------------------|

**SPECIALTY**

## 4200/4300 SYSTEM HIGH HEAT COATINGS




### TYPICAL APPLICATIONS

**High Heat Coatings:** General purpose applications including boilers, incinerators, kilns and more.

**Gray Zinc-Sele:** Boilers, incinerators, silos, smoke stacks and kilns.

**Pure Silicone Aluminum:** Incinerators, drying kilns, stacks and similar high heat equipment.

**General Purpose Leafing Aluminum & Heavy-Duty Aluminum:** Tanks, fences.



### HIGH HEAT COATINGS

**VOC <650**  
HIGH TEMP

Modified silicone coating protects surfaces subject to temperatures 300-800°F (149-427°C).

- USDA acceptable\*

#### COLORS

4233402 Green  
 4279402 Black  
 4215303 Aluminum (2 gallon kit)  
 4286402 Gray

#### PRIMER

4268402 Red Primer

### GRAY ZINC-SELE® (300°-800°F)

**VOC <340**

Zinc coating contains 81% metallic zinc in dry film and protects surfaces subject to temperatures 300-800°F (149-426°C).

- Fights corrosion through cathodic sacrificial action
- Self-priming
- USDA acceptable\*

#### COLORS

4285402 Gray Zinc-Sele®

### PURE SILICONE ALUMINUM (500°-1200°F)

**VOC <650**  
HIGH TEMP

Unmodified pure silicone protects surfaces subject to temperatures 500-1200°F (260-649°C).

- Self-priming
- USDA acceptable\*

#### COLORS

4315402 Aluminum

### GENERAL PURPOSE LEAFING ALUMINUM & HEAVY-DUTY ALUMINUM (UP TO 350°F)

**VOC <500**  
METALLIC

Modified alkyd enamel protects surfaces subject to temperatures up to 350°F (177°C).

- Use where beauty and brilliance of a metallic finish are desired
- Prevents moisture from reaching the primer
- Excellent resistance to general weathering, salt air, mild chemical fumes and light abrasion
- No heat cure required
- USDA acceptable\*

#### COLORS


470402 Leafing Aluminum

473402 Heavy-Duty Aluminum

## SPECIALTY



## 7000 SYSTEM COLD GALVANIZING COMPOUND



Zinc-rich epoxy ester contains 95% pure zinc in the dry film for maximum corrosion resistance through galvanic protection.

- Excellent adhesion to galvanized metal
- Self-priming
- Protects iron and steel and repairs worn or damaged galvanized steel
- Meets Federal Specification Mil P26915B and DOD P21035A
- USDA acceptable\*


## COLORS

- 206193 Cold Galvanizing Compound (Gallon)  
206194T Cold Galvanizing Compound (Quart)

**TYPICAL APPLICATIONS** Bare sheet metal, production welds, galvanized ducts, storage tanks, fences, gutters, trucks, trailers, offshore drilling rigs, utility towers.

## SPECIALTY

## 3575 SYSTEM RUST REFORMER® RUST CONVERTER



Water-based rust-converter that instantly stops existing and future corrosion in one easy step.

- Neutralizes rust on metal surfaces into a tough barrier against further corrosion
- Dries quickly — 40 minutes to touch; 3 hours to sand
- Dries to a hard, flat-black finish that can be top-coated with Rust-Oleum High Performance Enamels or Industrial Choice Alkyd Enamels for additional color and protection
- Easy soap and water clean-up
- USDA acceptable\*

## COLORS

- 3575402 Rust Reformer


BEFORE

AFTER

**TYPICAL APPLICATIONS** Equipment, railings, complex shapes, seams, hard-to-reach areas, and minimal surface prep projects.

## SPECIALTY

## W9200 SYSTEM POTABLE WATER COATING



Specially-formulated epoxy for potable water tanks.

- Self-priming, high build coating
- Minimum of 2 coats required for water immersion
- Meets ANSI/NSF Std. 61 UL Control No. 1P07 for potable water storage tanks with 6,000 gallon minimum capacity; complies with FDA 21 CFR 175.300 for direct dry food contact; meets ANSI/AWWA C210-92 for Interior and Exterior of Steel Potable Water Pipes; meets proposed AWWA D102 Inside Coating Systems 1 & 2
- Approved by Canadian Food Inspection Agency for direct dry food contact
- Agriculture Canada\*\* approved

## COLORS

- W9223300 Tank Blue Base  
W9293300 Tank White Base

## ACTIVATOR

- W9202300 Activator

\* Touch-ups only



**TYPICAL APPLICATIONS** Water tanks, valves, pipes and other equipment immersed in water



**SPECIALTY**



**TYPICAL APPLICATIONS** Ceilings, walls, roof trusses, HVAC ductwork and pipes.

## 5100 SYSTEM ACRYLIC DRYFALL COATING

**APPLICATION**



**SUBSTRATE**

|                                                                                               |                                                                                               |
|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| <br>CONCRETE | <br>METAL    |
| <br>DRYWALL  | <br>WOOD     |
| <br>ALUMINUM | <br>ALUMINUM |

**VOC g/l**

**VOC <100**  
Compliant Nationwide

Low VOC easy-to-apply acrylic dryfall coating with maximum adhesion.

- Falls dry in 10 feet with easy sweep clean up
- Adheres to glossy surfaces
- Improves light reflectivity
- High hide formula requires fewer coats
- Long-lasting durable protection
- Resistant to flash rusting

**AVAILABLE PRODUCTS**

251280 White (5 gallon)

**SPECIALTY**



**TYPICAL APPLICATIONS** Bridges, benches, retaining walls, sound walls, railcars, buses, municipal parks and buildings, dock doors and stairwells.

## 9900 SYSTEM ANTI-GRAFFITI URETHANE BARRIER & REMOVER

**APPLICATION**



**SUBSTRATE**

|                                                                                                 |                                                                                                      |
|-------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| <br>CONCRETE | <br>MASONRY/BRICK |
|-------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|

**VOC g/l**

**VOC <100**

Protective non-sacrificial water-based aliphatic acrylic polyurethane barrier coat and fast-acting soy-based remover.

- Low VOC, UV stable clear barrier coat allows quick and easy graffiti removal
- For use on a variety of surfaces with only 2-3 coats
- Remains intact and effective through multiple cleanings with the ready-to-use High Performance Graffiti Remover
- Long lasting protection saves time and money
- High Performance Graffiti Remover removes spray paints, markers, crayons, inks and adhesive residue from surfaces pre-treated with the 9900 System Water-Based Urethane barrier coat
- The Graffiti Remover is recognized by the EPA Design for the Environment (DFE) Program for the integration of a cleaner and smarter solution

*The barrier coat is a two-component system. Order base and activator separately.*

**BARRIER COAT**

243506 Clear Basecoat

**REMOVER**

244580 Soy-based Graffiti Remover

**ACTIVATOR**

243507 Clear Basecoat Activator





# HIGH PERFORMANCE TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of High Performance Coatings. For more detailed information, see Rust-Oleum technical data sheets for individual products.

| The data contained in this chart is presented for the comparison of basic physical characteristics of High Performance Coatings. For more detailed information, see Rust-Oleum technical data sheets for individual products. | RECOMMENDED FILM THICKNESS |             |         |           | PERCENT VOLUME SOLIDS | COVERAGE                               |                   |                              |                   | DRY TIME<br>HRS. AT 70°F (21°C)–80°F (27°C) & 50% HUMIDITY |           |                    | THINNING AS NEEDED           |                         |                         | CLEAN-UP               | MIX RATIO / ACTIVATOR NO. | POT LIFE<br>HRS. AT 70°F (21°C)–80°F (27°C) & 50% HUMIDITY | DRY HEAT RESISTANCE (°F/°C) | VOC LEVEL (g/l)<br>VOLATILE ORGANIC COMPOUND | FLASH POINT (°F/°C) | USDA ACCEPTABLE <sup>1</sup> | APPLICATION TEMPERATURE RANGE |  |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-------------|---------|-----------|-----------------------|----------------------------------------|-------------------|------------------------------|-------------------|------------------------------------------------------------|-----------|--------------------|------------------------------|-------------------------|-------------------------|------------------------|---------------------------|------------------------------------------------------------|-----------------------------|----------------------------------------------|---------------------|------------------------------|-------------------------------|--|--|
|                                                                                                                                                                                                                               | WET                        |             | DRY     |           |                       | PRACTICAL<br>ASSUMES 15% MATERIAL LOSS |                   | THEORETICAL<br>AT 1 MIL DFT. |                   | TACK-FREE                                                  | HANDLE    | RECOAT             | BRUSH / ROLLER               | AIRLESS SPRAY           | AIR-ATOMIZED SPRAY      |                        |                           |                                                            |                             |                                              |                     |                              |                               |  |  |
|                                                                                                                                                                                                                               | MILS                       | MICRONS     | MILS    | MICRONS   |                       | ft. <sup>2</sup> /gal.                 | m <sup>2</sup> /l | ft. <sup>2</sup> /gal.       | m <sup>2</sup> /l |                                                            |           |                    |                              |                         |                         |                        |                           |                                                            |                             |                                              |                     |                              |                               |  |  |
|                                                                                                                                                                                                                               |                            |             |         |           |                       |                                        |                   |                              |                   |                                                            |           |                    |                              |                         |                         |                        |                           |                                                            |                             |                                              |                     |                              |                               |  |  |
| COATINGS                                                                                                                                                                                                                      |                            |             |         |           |                       |                                        |                   |                              |                   |                                                            |           |                    |                              |                         |                         |                        |                           |                                                            |                             |                                              |                     |                              |                               |  |  |
| 7400 System –<br>DTM 450 VOC Alkyd Enamel                                                                                                                                                                                     | 3.5-6.0                    | 87.5-150    | 1.5-2.5 | 37.5-62.5 | 42-43                 | 230-390                                | 5.7-9.6           | 675-690                      | 16.6-17.0         | 2-4                                                        | 5-9       | 24                 | —                            | 333402<br>5%            | 333402<br>15%           | 333402<br>or<br>641402 | —                         | —                                                          | 212°F<br>100°C              | <450 <sup>2</sup>                            | 104°F<br>40°C       | Yes                          | 32-100°F<br>0-38°C            |  |  |
| V7400 System –<br>DTM 340 VOC Alkyd Enamel                                                                                                                                                                                    | 2.0-3.5                    | 50-87.5     | 1-2     | 25-50     | 58-61                 | 400-830                                | 9.8-20.4          | 930-975                      | 22.9-24           | 3-5                                                        | 8-12      | 24                 | —                            | 333402<br>5-10%         | 333402<br>10%           | 333402                 | —                         | —                                                          | 212°F<br>100°C              | <340                                         | 104°F<br>40°C       | Yes                          | 32-100°F<br>0-38°C            |  |  |
| 3400 System –<br>DTM 340 VOC Alkyd Enamel                                                                                                                                                                                     | 2.5-4.5                    | 62.5-112.5  | 1.5-2.5 | 37.5-62.5 | 58-58.5               | 315-530                                | 7.7-13.0          | 930-940                      | 22.9-23.1         | 3-5                                                        | 8-12      | 24                 | —                            | 333402<br>5-10%         | 333402<br>10%           | 333402                 | —                         | —                                                          | 212°F<br>100°C              | <340                                         | 104°F<br>40°C       | Yes                          | 32-100°F<br>0-38°C            |  |  |
| 2500 System –<br>DTM 250 VOC Alkyd Enamel                                                                                                                                                                                     | 2.5-4.0                    | 62.5-100    | 1.5-2.5 | 37.5-62.5 | 61-64                 | 335-580                                | 8.2-14.3          | 985-1023                     | 24.2-25.2         | 5-7                                                        | 8-12      | 24                 | —                            | 333402<br>5-10%         | 333402<br>10%           | 333402                 | —                         | —                                                          | 212°F<br>100°C              | <250                                         | 23°F<br>-50°C       | Yes                          | 32-100°F<br>0-38°C            |  |  |
| 8400 System –<br>Food & Beverage Alkyd Enamel                                                                                                                                                                                 | 2.5-4.5                    | 62.5-112.5  | 1-2     | 25-50     | 39                    | 265-530                                | 6.5-13            | 625                          | 15.3              | 2-4                                                        | 4-6       | 24                 | 633402<br>up to 6%           | 333402<br>5-10%         | 333402<br>10-15%        | 633402/<br>641402      | —                         | —                                                          | 212°F<br>100°C              | <450                                         | 104°F<br>40°C       | Yes                          | 18-100°F<br>-8-38°C           |  |  |
| V8400 System –<br>DTM 340 VOC Food and<br>Beverage Alkyd Enamel                                                                                                                                                               | 3.5-5.5                    | 37.5-62.5   | 1.5-2.5 | 37.5-62.5 | 47                    | 250-425                                | 6.2-10.5          | 750                          | 18.5              | 2-4                                                        | 4-8       | 24                 | —                            | 333402<br>5-10%         | 333402<br>10%           | 333402                 | —                         | —                                                          | 212°F<br>100°C              | <340                                         | 104°F<br>40°C       | Yes                          | 32-100°F<br>0-38°C            |  |  |
| 1500 System –<br>Speedy-Dry Alkyd Enamel                                                                                                                                                                                      | 3-6                        | 75-150      | 1-2     | 25-50     | 32-38                 | 220-520                                | 5.4-12.8          | 515-610                      | 12.7-15.0         | 1-2                                                        | 2-4       | —                  | 150402 <sup>4</sup><br>5-10% | 150402<br>5-10%         | 150402<br>10%           | 150402                 | —                         | —                                                          | 212°F<br>100°C              | <600                                         | 81°F<br>27°C        | Yes                          | 32-100°F<br>0-38°C            |  |  |
| 3700 System –<br>DTM Acrylic Enamel                                                                                                                                                                                           | 5-8                        | 125-200     | 2-3     | 50-75     | 38-40                 | 170-275                                | 4.2-6.7           | 609-641                      | 15.0-15.8         | 1-2                                                        | 2-4       | 1-3                | —                            | Water<br>6%             | Water<br>12%            | Soap/<br>Water         | —                         | —                                                          | 200°F<br>93°C               | <250                                         | 212°F<br>100°C      | Yes                          | 35-100°F<br>2-38°C            |  |  |
| 3100 System –<br>Speedy-Dry DTM Acrylic Enamel                                                                                                                                                                                | 4-7                        | 100-175     | 1.5-2.5 | 37.5-62.5 | 36-39                 | 200-350                                | 4.9-8.6           | 575-625                      | 14.1-15.4         | 1/4-1                                                      | 1-1 1/2   | 1 1/2-2            | —                            | —                       | Water<br>5-10%          | Soap/<br>Water         | —                         | —                                                          | 200°F<br>93°C               | <250                                         | >212°F<br>100C      | Yes                          | 50-100°F<br>10-38°C           |  |  |
| 9100 System –<br>DTM Epoxy Mastic<br>w/9101402 Activator                                                                                                                                                                      | 6.5-10.5                   | 162.5-262.5 | 5-8     | 125-200   | 78-81                 | 125-225                                | 3.1-5.5           | 1250-1300                    | 30.8-32.0         | 6-8                                                        | 6-12      | 16-72              | —                            | —                       | 160402<br>10%           | 160402                 | 1:1                       | 2-4 <sup>1</sup><br>70°F                                   | 300°F<br>149°C              | <340                                         | 110°F<br>43°C       | Yes                          | 50-100°F<br>10-38°C           |  |  |
| V9100 System –<br>Low VOC DTM Epoxy Mastic<br>w/205015 Activator                                                                                                                                                              | 6.5-10.0                   | 162.5-250   | 5-8     | 125-200   | 77.8-80.4             | 130-220                                | 3.2-5.4           | 1250-1290                    | 30.7-31.7         | 6-8                                                        | 6-12      | 16-72              | —                            | —                       | 333402<br>10%           | 333402                 | 1:1                       | 2.5-3<br>70°F                                              | 300°F<br>149°C              | <250                                         | 71°F<br>21°C        | Yes                          | 50-100°F<br>10-38°C           |  |  |
| SC9100 System –<br>100 VOC DTM Epoxy Mastic                                                                                                                                                                                   | 6.5-10.0                   | 162.5-250   | 5-8     | 125-200   | 75-80                 | 130-215                                | 3.2-5.3           | 1214-1278                    | 29.9-31.4         | 8-10                                                       | 10-16     | 24                 | —                            | 333402<br>5-10%         | 333402<br>10%           | 333402                 | —                         | 2-4                                                        | 212°F<br>100°C              | <100                                         | 104°F<br>40°C       | Yes                          | 32-100°F<br>0-38°C            |  |  |
| 5300 System –<br>Water-Based Epoxy<br>w/5301604 Activator                                                                                                                                                                     | 4-6.5                      | 100-162.5   | 1.5-2.5 | 37.5-62.5 | 38                    | 200-350                                | 4.9-8.6           | 600                          | 14.8              | 1/2-1                                                      | 2-5       | 1-2                | —                            | —                       | Water<br>10%            | Soap/<br>Water         | 7:1                       | 6-8                                                        | 300°F<br>149°C              | <250 <sup>5</sup>                            | 132°F<br>55°C       | Yes                          | 60-100°F<br>16-38°C           |  |  |
| 9800 System –<br>DTM Urethane Mastic<br>w/9801501 Activator                                                                                                                                                                   | 5-8                        | 125-200     | 3-5     | 75-125    | 58-62                 | 160-280                                | 3.9-6.9           | 930-990                      | 22.9-24.4         | 4-6                                                        | 6-9       | 16-24              | —                            | —                       | —                       | 190402                 | 5:1                       | 2-3<br>70°F                                                | 300°F<br>149°C              | <340                                         | 95°F<br>36°C        | Yes                          | 40-100°F<br>5-38°C            |  |  |
| 9700 System –<br>250 VOC Acrylic Polyester<br>Urethane w/207243 Activator                                                                                                                                                     | 2-4                        | 50-100      | 1-2     | 25-50     | 52.6-62.8             | 360-860                                | 8.9-21.2          | 845-1010                     | 20.8-24.8         | 2-4                                                        | 3-6       | 16-24              | —                            | —                       | —                       | Xylene or<br>MEK       | 4:1                       | 3-4<br>77°F                                                | 300°F<br>149°C              | <250                                         | 20°F<br>-7°C        | Yes                          | 40-100°F<br>4-38°C            |  |  |
| 9400 System –<br>High Gloss Polyester Urethane<br>w/9401402 Activator                                                                                                                                                         | 3-5                        | 75-125      | 1-2     | 25-50     | 37-41                 | 260-560                                | 6.4-13.8          | 595-660                      | 14.6-16.2         | 2-4                                                        | 4-6       | 16                 | —                            | 190402<br>15%           | 190402<br>15%           | 190402                 | 1:1                       | 8-16                                                       | 300°F<br>149°C              | <450                                         | 50°F<br>10°C        | Yes                          | 32-100°F<br>0-38°C            |  |  |
| 9400 System –<br>High Gloss Polyester Urethane<br>w/HS9401402 Activator                                                                                                                                                       | 2-4                        | 50-100      | 1-2     | 25-50     | 54-58                 | 370-790                                | 9.1-19.4          | 866-930                      | 21.3-22.9         | 2-4                                                        | 6-8       | 16                 | —                            | 195402<br>10-15%        | 195402<br>15-20%        | 190402                 | 1:1                       | 2-4                                                        | 300°F<br>149°C              | <450                                         | 50°F<br>10°C        | Yes                          | 32-100°F<br>0-38°C            |  |  |
| C9578 System –<br>Coal Tar Epoxy                                                                                                                                                                                              | 10.5-13.5                  | 262.5-337.5 | 8-10    | 200-250   | 75-77                 | 100-130                                | 2.5-3.2           | 1203-1235                    | 29.6-30.4         | 3-4                                                        | 18-36     | 16-25 <sup>3</sup> | —                            | 160402<br>0-16%         | 160402<br>0-16%         | 160402<br>or MEK       | 4:1                       | 2                                                          | 140°F<br>60°C               | <250                                         | 86°F<br>30°C        | No                           | 50-100°F<br>10-38°C           |  |  |
| 4200 System –<br>High Heat Coatings                                                                                                                                                                                           | 2.5-6                      | 62.5-150    | 1-2     | 25-50     | 35-40                 | 240-550                                | 5.9-13.5          | 560-640                      | 13.8-15.7         | 1/2-1                                                      | 1-2       | 8-24               | 140402<br>5-10%              | 140402<br>5-10%         | 140402<br>10-20%        | 140402                 | —                         | —                                                          | 300-800°F<br>149-427°C      | <500                                         | 104°F<br>40°C       | Yes                          | 32-125°F<br>0-52°C            |  |  |
| 4200 System –<br>Gray Zinc-Sele<br>High Heat Coating                                                                                                                                                                          | 2.5-5                      | 62.5-125    | 1.5-3   | 38-75     | 65                    | 275-550                                | 6.5-13.5          | 964                          | 23.7              | 3-4                                                        | 6-8       | 24                 | 140402<br>10%                | 140402<br>10%           | 140402<br>20%           | 140402                 | —                         | —                                                          | 800°F<br>427°C              | <340                                         | 104°F<br>40°C       | Yes                          | 32-125°F<br>0-52°C            |  |  |
| 7000 System –<br>Cold Galvanizing Compound                                                                                                                                                                                    | 3.5-4.5                    | 87.5-112.5  | 2.5-3.5 | 62.5-87.5 | 54.1                  | 310-440                                | 7.6-10.8          | 1280                         | 21.3              | 1/2-1                                                      | 1-2       | 12                 | —                            | 633402<br>5-10%         | 633402<br>10-15%        | 633402<br>or<br>641402 | —                         | —                                                          | 212°F<br>100°C              | <500                                         | 95°F<br>35°C        | Yes                          | 32-100°F<br>0-38°C            |  |  |
| W9200 System –<br>Potable Water Coating                                                                                                                                                                                       | 6.5-11.0                   | 162.5-275   | 5-8     | 125-200   | 73-77                 | 125-210                                | 3.1-5.2           | 1170-1235                    | 28.8-30.4         | 3-5                                                        | 8-12      | 24                 | —                            | 333402<br>5-10%         | 333402<br>10%           | 333402                 | —                         | —                                                          | 212°F<br>100°C              | <340                                         | 104°F<br>40°C       | Yes                          | 32-100°F<br>0-38°C            |  |  |
| 9900 System –<br>Anti-Graffiti Barrier Coat                                                                                                                                                                                   | 5                          | 125         | 2       | 50        | 40                    | 275                                    | 6.8               | 642                          | 15.8              | 2                                                          | 4         | 5                  | —                            | —                       | —                       | Soap/<br>water         | 5.25:1                    | 2                                                          | 100°F<br>38°C               | <100                                         | 200°F<br>93°C       | Yes                          | 40-100°F<br>5-38°C            |  |  |
| 5100 System –<br>Acrylic Dryfall Coating                                                                                                                                                                                      | 5.5-6.5                    | 137.5-162.5 | 2.0-2.5 | 50-62.5   | 38                    | 210-260                                | 5.2-6.4           | 610                          | 15                | —                                                          | 35<br>min | 1                  | —                            | Water 10<br>fl. oz./gal | Water 10<br>fl. oz./gal | Soap/<br>water         | —                         | —                                                          | 200°F<br>93°C               | <100                                         | 212°F<br>93°C       | Yes                          | 50-90°F<br>10-32°C            |  |  |

<sup>1</sup> May vary by temperature.

<sup>2</sup> The VOC for 470 and 473 Aluminum is <500 g/l.

<sup>3</sup> If 48 hour recoat is exceeded, brush blast surface or previous coating to create a surface profile.

<sup>4</sup> The VOC unthinned as supplied is <250 g/l.

\* This product meets the requirements set by the USDA for use in food and beverage establishments or processing plants.

\*\* Agriculture Canada (also known as Canadian Food Inspection Agency).

\*\*\* Agriculture Canada pending.

# HIGH PERFORMANCE TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of High Performance Primers. For more detailed information, see Rust-Oleum technical data sheets for individual products.

## RECOMMENDED FILM THICKNESS

## WET DRY

## MILS MICRONS MILS MICRONS

## PERCENT VOLUME SOLIDS

## COVERAGE

## PRACTICAL THEORETICAL

## ft.²/gal. m²/l. ft.²/gal. m²/l.

## DRY TIME

## HRS. AT 70°F (21°C) - 80°F (27°C) & 50% HUMIDITY

## THINNING AS NEEDED

## TACK-FREE HANDLE RECOAT

## BRUSH / ROLLER AIRLESS SPRAY AIR-ATOMIZED SPRAY

## CLEAN-UP

## MIX RATIO (BASE TO ACTIVATOR)

## POT LIFE

## HRS. AT 70°F (21°C) - 80°F (27°C) & 50% HUMIDITY

## DRY HEAT RESISTANCE (°F/°C)

## VOC LEVEL (g/l) VOLATILE ORGANIC COMPOUND

## FLASH POINT (°F/°C)

## USDA ACCEPTABLE¹

## APPLICATION TEMPERATURE RANGE

## PRIMERS

|                                                                               |         |             |         |           |           |          |           |         |           |            |         |            |              |                                |                                 |                                 |     |      |             |      |              |     |                  |
|-------------------------------------------------------------------------------|---------|-------------|---------|-----------|-----------|----------|-----------|---------|-----------|------------|---------|------------|--------------|--------------------------------|---------------------------------|---------------------------------|-----|------|-------------|------|--------------|-----|------------------|
| <b>769° Red Damp Proof Primer</b>                                             | 2.0-4.5 | 50-112.5    | 1-2     | 25-50     | 45.2      | 305-615  | 7.5-15.1  | 725     | 17.8      | 3-5        | 5-9     | 24-48      | —            | 333402 5-10%                   | 333402 10-20%                   | 333402 or 641402                | —   | —    | 212°F 100°C | <450 | 104°F 40°C   | Yes | 32-100°F 0-38°C  |
| <b>Heavy-Duty Rust Inhibitive Primer 1060402 Gray, 1069402 Red</b>            | 2.5-4.5 | 62.5-112.5  | 1.5-2.5 | 37.5-62.5 | 57-58     | 310-520  | 7.6-12.8  | 914-930 | 22.5-22.9 | 3-5        | 5-10    | 24-48      | —            | 333402 5-10%                   | 333402 10-20%                   | 633402, 641402 or 333402        | —   | —    | 212°F 100°C | <340 | 104°F 40°C   | Yes | 32-100°F 0-38°C  |
| <b>Zinc Chromate Primer 960402 Yellow</b>                                     | 2.5-5   | 62.5-125    | 1-2     | 25-50     | 40-43     | 270-585  | 6.6-14.4  | 914-930 | 22.5-22.9 | 2-4        | 4-6     | 24         | —            | 333402 5-10%                   | 333402 10-20%                   | 333402                          | —   | —    | 212°F 100°C | <450 | 104°F 40°C   | Yes | 32-100°F 0-38°C  |
| <b>Zinc Chromate Primer X60402 Red</b>                                        | 2.5-5   | 62.5-125    | 1-2     | 25-50     | 40-43     | 270-585  | 6.6-14.4  | 640-690 | 15.7-17.0 | 2-4        | 4-6     | 24         | —            | 333402 5-10%                   | 333402 10-20%                   | 333402                          | —   | —    | 350°F 177°C | <450 | 104°F 40°C   | Yes | 32-100°F 0-38°C  |
| <b>Quick-Dry Primer 678402 Red</b>                                            | 2.5-5.0 | 62.5-125    | 1-2     | 25-50     | 43        | 290-585  | 7.1-14.4  | 690     | 17.0      | 1/2-2      | 1-2     | 24         | —            | 333402 5-10%                   | 333402 10-20%                   | 333402 or 641402                | —   | —    | 212°F 100°C | <450 | 51°F 11°C    | Yes | 32-100°F 0-38°C  |
| <b>Quick-Dry Primer 7086402 Gray</b>                                          | 2.5-5.0 | 62.5-125    | 1-2     | 25-50     | 44        | 300-600  | 7.4-14.8  | 705     | 17.4      | 1/2-1      | 1-2     | 24         | —            | 333402 5-10%                   | 333402 10-20%                   | 333402 or 641402                | —   | —    | 212°F 100°C | <450 | 52°F 11°C    | Yes | 32-100°F 0-38°C  |
| <b>High Solids, Quick Dry Low VOC Primers 2068 &amp; 2082</b>                 | 2.5-4   | 62.5-100    | 1.5-2.5 | 37.5-62.5 | 60        | 325-550  | 8.0-13.5  | 960     | 23.6      | 1/2-1      | 1-2     | 1          | 333402 5-10% | 333402 5-10%                   | 333402 10-20%                   | 333402                          | —   | —    | 212°F 100°C | <340 | 84°F 29°C    | Yes | 32-100°F 0-38°C  |
| <b>Quick Dry Primer White 258887, Red V769402 Gray V7086402</b>               | 2.5-4.0 | 62.5-100    | 1.5-2.5 | 37.5-62.5 | 60.7-60.8 | 300-550  | 7.4-13.5  | 975     | 24.0      | 1/4-1/2    | 1/2-1   | 24         | —            | 333402 5-10%                   | 333402 10-20%                   | 333402 or 641402                | —   | —    | 212°F 100°C | <340 | 98°F 37°C    | Yes | 32-100°F 0-38°C  |
| <b>Shop Coat Primer 7069402 Red</b>                                           | 2.5-5   | 62.5-125    | 1-2     | 25-50     | 42        | 285-575  | 7.0-14.0  | 675     | 16.6      | 1/4-1/2    | 1/2-1   | 24         | —            | 333402 5-10%                   | 333402 10-20%                   | 333402 or 641402                | —   | —    | 212°F 100°C | <450 | 80°F 27°C    | Yes | 32-100°F 0-38°C  |
| <b>Low VOC Primer 3469402 Red, 3481402 Gray</b>                               | 2.5-4.5 | 62.5-112.5  | 1.5-2.5 | 37.5-62.5 | 58        | 320-530  | 7.9-13.0  | 930     | 22.9      | 3-5        | 5-10    | 24         | —            | 150402, 641402 or 333402 5-10% | 150402, 641402 or 333402 10-20% | 150402, 633402, 641402 or 33402 | —   | —    | 212°F 100°C | <340 | 88°F 31°C    | Yes | 32-100°F 0-38°C  |
| <b>250 VOC Alkyd Primer 215958 Rusty Metal, 215959 Gray</b>                   | 1.5-3   | 37.5-75     | 1-2     | 25-50     | 61.4      | 420-870  | 10.3-21.4 | 985     | 24.2      | 3-5        | 5-10    | 24-48      | —            | 333402 5-10%                   | 333402 10%                      | 333402                          | —   | —    | 212°F 100°C | <250 | 11°F -12°C   | Yes | 32-100°F 0-38°C  |
| <b>Rust Inhibitive Primer HS1573402</b>                                       | 3-5     | 75-125      | 1.5-2.5 | 37.5-62.5 | 52        | 275-475  | 6.8-11.7  | 834     | 20.5      | 1/3-1/2    | 4-5     | 1/2-1      | —            | 333402 5-10%                   | 333402 10-20%                   | 333402                          | —   | —    | 212°F 100°C | <420 | 70°F 21°C    | Yes | 32-100°F 0-38°C  |
| <b>Rust Inhibitive Primer for Vehicle Refinishing 1573402</b>                 | 3.5-6   | 87.5-150    | 1.5-2.5 | 37.5-62.5 | 41        | 225-375  | 5.5-9.2   | 657     | 16.2      | 1/4-1/3    | 2-4     | 1/2-1      | 150402 10%   | 150402 20%                     | 150402 20%                      | 150402 or Xylene                | —   | —    | 212°F 100°C | <600 | 81°F 27°C    | Yes | 32-100°F 0-38°C  |
| <b>Acrylic Primer 3169402 Red, 3181402 Gray</b>                               | 4.0-6.5 | 100-162.5   | 1.5-2.5 | 37.5-62.5 | 40-41.5   | 220-380  | 5.4-9.3   | 640-665 | 15.7-16.4 | 3/4-1      | 1-1 1/2 | 1-1 1/2    | —            | —                              | Water 10%                       | Soap/Water                      | —   | —    | 200°F 93°C  | <250 | >212°F 100°C | Yes | 50-100°F 10-38°C |
| <b>Acrylic Primer 3769402 Red Acrylic Primer 3781402 Gray</b>                 | 4-7     | 100-175     | 1.5-2.5 | 37.5-62.5 | 41        | 225-375  | 5.5-9.2   | 660     | 16.2      | 1-2        | 2-4     | 1-3        | —            | Water 6%                       | Water 12%                       | Soap/Water                      | —   | —    | 200°F 93°C  | <250 | >212°F 100°C | Yes | 35-100°F 2-38°C  |
| <b>Water-Based Epoxy Primer 5369405 Red, 5381405 Gray w/Activator 5303504</b> | 4-6.5   | 100-162.5   | 1.5-2.5 | 37.5-62.5 | 36        | 200-350  | 4.9-8.6   | 600     | 14.8      | 1/2-1      | 2-5     | 1-2        | Water 6%     | —                              | Water 12%                       | Soap/Water                      | 3:1 | 6-8  | 300°F 149°C | <250 | 132°F 56°C   | Yes | 60-100°F 16-38°C |
| <b>Ext. Recoat Epoxy Primer 9360402 Red, 9370402 Buff w/Activator 9304402</b> | 4.5-7.5 | 112.5-187.5 | 3-5     | 75-125    | 68        | 185-310  | 4.4-7.4   | 1091    | 25.8      | 4-6        | 10-13   | 16-30 days | —            | —                              | —                               | 160402 or 333402                | 1:1 | 3-5  | 300°F 149°C | <340 | 88°F 31°C    | Yes | 55-100°F 13-38°C |
| <b>Epoxy Primer HS9369407 Red, HS9381407 Gray w/Activator HS9303604</b>       | 3-5     | 75-125      | 1.5-2.5 | 37.5-62.5 | 53        | 275-475  | 6.5-11.3  | 835     | 19.9      | 1-2        | 3-4     | After 1    | —            | 333402 10%                     | 333402 20%                      | 333402                          | 7:1 | 8-16 | 300°F 149°C | <420 | 88°F 31°C    | Yes | 60-100°F 16-38°C |
| <b>High Heat Primer 4268402 Red</b>                                           | 2.5-5.5 | 62.5-137.5  | 1-2     | 25-50     | 38        | 260-520  | 6.4-12.8  | 610     | 15.0      | 1/2-1      | 8-12    | 8-24       | 140402 5-10% | 140402 5-10%                   | 140402 10-20%                   | 140402                          | —   | —    | 800°F 427°C | <650 | 94°F 34°C    | Yes | 32-125°F 0-52°C  |
| <b>Rust Reformer 3575402</b>                                                  | 1-2.5   | 25-62.5     | 0.5-1   | 12.5-25   | 43        | 590-1175 | 14.5-28.9 | 690     | 17.0      | 20-40 min. | 1       | 3          | Water 5-10%  | Water 5-10%                    | Water 10-20%                    | Soap/Water                      | —   | —    | 200°F 93°C  | N/A  | —            | Yes | 50-90°F 10-32°C  |

\* This product meets the requirements set by the USDA for use in food and beverage establishments or processing plants.

\*\* Agriculture Canada (also known as Canadian Food Inspection Agency).

\*\*\* Agriculture Canada pending.

• TRUSTED QUALITY SINCE 1921 •

# RUST-OLEUM®


















## INDUSTRIAL — CHOICE® —



Working hard every day, our complete systems of multi-purpose coatings, from enamels to inverted marking paints, are perfect for your next project. Count on cost-effective Industrial Choice® for wood, metal, masonry and more, indoors and out.

# INDUSTRIAL CHOICE

## ENAMELS

|                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                                                    |                                                                                                    |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |                                   |                  |  |  |
| Almond                                                                            | Antique White                                                                     | Beige                                                                             | Bronze                                                                            | Tan, Dunes Tan                                                                                                     | Leather Brown                                                                                      | Bronzestone                                                                         | Chestnut Brown                                                                      |
|  |  |  |  |                                   |                  |  |  |
| Blue, Marlin Blue                                                                 | Caution Blue,<br>National Blue                                                    | True Blue                                                                         | Regal Blue                                                                        | Vista Green                                                                                                        | Machine Green                                                                                      | Forest Green                                                                        | Hunter Green                                                                        |
|  |  |  |  |                                   |                  |  |  |
| Electric Green                                                                    | Sun Yellow                                                                        | Yellow                                                                            | School Bus Yellow,<br>Caution Yellow                                              | Orange,<br>Alert Orange                                                                                            | International Orange,<br>Tower Orange                                                              | Banner Red                                                                          | Fire Hydrant Red                                                                    |
|  |  |  |  |                                   |                  |  |  |
| Cherry Red,<br>Red                                                                | Dusty Pink                                                                        | Cold Galvanizing<br>Compound                                                      | Aluminum, Alumi-NON,<br>Dull Aluminum                                             | Silver Gray                                                                                                        | Dove Gray                                                                                          | Silver                                                                              | Smoke Gray                                                                          |
|  |  |  |  |                                   |                  |  |  |
| Universal Gray,<br>Gray                                                           | Navy Gray                                                                         | Machinery Gray                                                                    | Machine Tool Gray                                                                 | Black, Gloss Black,<br>Ultra-Flat Black, Semi-<br>Gloss Black, Ultra-Flat<br>Black, Semi-Flat<br>Black, Flat Black | White, Glossy White,<br>Flat White, Semi-Gloss<br>White, Flat White,<br>Tower White,<br>APWA White | Crystal Clear,<br>Clear                                                             | Reflective                                                                          |

## OSHA SAFETY

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |  |  |
| Safety Blue (5225402)                                                               | Safety Blue (206301,<br>206326, 207957)                                             | Safety Blue,<br>APWA Blue                                                           | Safety Green,<br>APWA Green                                                         | Safety Orange,<br>APWA Orange                                                       | Safety Red,<br>APWA Red,<br>APWA Safety Red                                          | Safety Yellow,<br>High Visibility Yellow,<br>APWA Yellow                              | Safety Purple                                                                         |

## ANSI COLORS

|                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |
| ANSI 61 Light Gray                                                                  | ANSI 49 Med. Lt. Gray                                                               | ANSI 70 Light Gray                                                                  |


## EQUIPMENT COLORS

|                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |
| New Caterpillar Yellow                                                              | John Deere Green                                                                     |

## FLUORESCENTS

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |  |  |
| Fluorescent<br>Red-Orange                                                           | Fluorescent Green                                                                   | Fluorescent Orange                                                                  | Fluorescent Pink                                                                    | Fluorescent Yellow                                                                  | Fluorescent Purple                                                                   | Fluorescent Red                                                                       | Fluorescent Blue                                                                      |


## PRIMERS

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| Gray Primer                                                                         | Red Primer                                                                          | Green Primer                                                                        | White Primer                                                                        |

Colors are printing approximations and may vary. Color may vary slightly between product systems and between aerosols and gallons.



## 1600 SYSTEM MULTI-PURPOSE ENAMEL AEROSOL

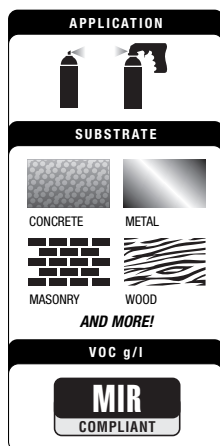

From Rust-Oleum, the most trusted name in spray paint, Industrial Choice is a multi-purpose spray paint developed for everyday industrial maintenance applications.

- Ultra-coverage formula provides up to two times the coverage of competitive brands – paint more area faster using fewer cans!
- New 360° Any Angle Spray allows you to spray in any direction
- New comfort tip reduces finger fatigue
- Dries to touch in only 12 minutes
- High solids formula delivers complete, even coverage
- Protects against chipping, cracking and peeling
- Can be used on surfaces that reach temperatures up to 200°F
- USDA acceptable\*



### COLORS (12 oz.)

1672830 Almond  
 1671830 Beige  
 242657 Bronze (11 oz.)  
 1674830 Leather Brown  
 NEW 257399 Purple  
 1626830 True Blue  
 1622830 Regal Blue  
 1638830 Hunter Green  
 214644 Electric Green  
 202211 Machine Green  
 NEW 257401 Emerald Green  
 1643830 School Bus Yellow  
 202212 Sun Yellow  
 202216 Dusty Pink  
 1666830 Banner Red  
 1664830 Cherry Red  
 1686830 Universal Gray  
 1684830 Dove Gray  
 1688830 Smoke Gray  
 202214 Machinery Gray

1614830 Dull Aluminum  
 1679830 Gloss Black  
 1676830 Ultra-Flat Black  
 1678830 Semi-Flat Black  
 1692830 Gloss White  
 1690830 Flat White  
 NEW 257402 Semi-Gloss White  
 1696830 Antique White  
 1610830 Crystal Clear

### SAFETY COLORS (12 oz.)

1624830 Safety Blue  
 1633830 Safety Green  
 1653830 Safety Orange  
 1670830 Safety Purple  
 1660830 Safety Red  
 1644830 Safety Yellow

### FLUORESCENTS (12 oz.)

1632830 Fluorescent Green  
 1654830 Fluorescent Orange

1655830 Fluorescent Red-Orange  
 1659830 Fluorescent Pink  
 1642830 Fluorescent Yellow

### ANSI COLORS (12 oz.)

214645 ANSI 61 Light Gray  
 214646 ANSI 49 Med. Lt. Gray  
 214647 ANSI 70 Light Gray

### PRIMERS

1667830 Red Primer  
 1680830 Gray Primer  
 1681830 White Primer  
 NEW 257400 Black Primer


### COMPANION PRODUCTS

243546 Spray Grip (p. 42)  
 241526 Comfort Grip (p. 42)



**TYPICAL APPLICATIONS** Tools, lockers, motors, drums, ladders, stenciling, furniture, equipment and color coding.

## 1600 SYSTEM GALVANIZING COMPOUND AEROSOL



Zinc-rich coating contains a high zinc content for excellent galvanic protection.

- Excellent adhesion to galvanized metal
- Dries fast — 20 minutes to touch
- Meets the performance requirements of Federal Specifications DOD-P-21035A; MIL-P-26915C
- Can be used on surfaces that reach temperatures up to 200°F
- USDA acceptable\*

### COLORS (14 oz.)

1685830 Cold Galvanizing Compound  
244305 Bright Galvanizing Compound

### COMPANION PRODUCTS

243546 Spray Grip (p. 42)  
241526 Comfort Grip (p. 42)




**TYPICAL APPLICATIONS** Touch-up and repair to damaged galvanized steel, production welds, ducts, fences, bridges, tanks, vehicles, trailers, utility towers and more.



**TYPICAL APPLICATIONS** Stair treads, ramps, walkways, pool decks, ladders, railings, tools and more.

## AS2100 SYSTEM ANTI-SLIP AEROSOL

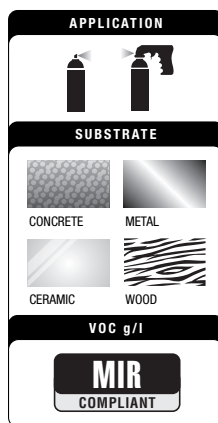

Creates a durable, slip-resistant surface in minutes that resists cracking, peeling and mild chemicals.

- Easy to touch up or reapply
- More convenient and lower cost per square foot than anti-slip tapes
- Coefficient of friction — dry 0.72, wet 0.85
- USDA acceptable\*


### COLORS (15 oz.)

AS2144838 Yellow  
AS2178838 Black  
AS2102838 Clear

### COMPANION PRODUCTS

243546 Spray Grip (p. 42)  
241526 Comfort Grip (p. 42)

## S1600 SYSTEM INVERTED STRIPING PAINT AEROSOL

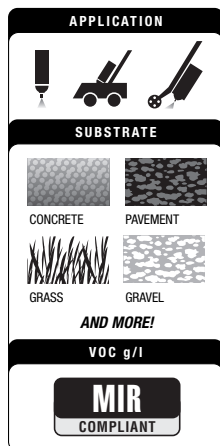

Solvent-based inverted striping paint for crisp, long-lasting lines for use in athletic facilities, stadiums, parking lots and more.

- Dries fast — less than 10 minutes
- Guaranteed not to clog
- Use with Striping Machine or Striping Wand (p. 42)
- USDA acceptable\*

### COLORS (18 oz.)

|         |        |
|---------|--------|
| 1627838 | Blue   |
| 1648838 | Yellow |
| 1665838 | Red    |
| 1677838 | Black  |
| 1691838 | White  |

### COMPANION PRODUCTS

|         |                          |
|---------|--------------------------|
| 2395000 | Striping Machine (p. 42) |
| 2388000 | Striping Wand (p. 42)    |




**TYPICAL APPLICATIONS** Athletic facilities, stadiums, parking lots, school grounds, warehouses, pallet positions, truck routes and more.



**TYPICAL APPLICATIONS** Athletic fields, playgrounds, golf courses and more.

## AF1600 SYSTEM ATHLETIC FIELD INVERTED STRIPING PAINT AEROSOL

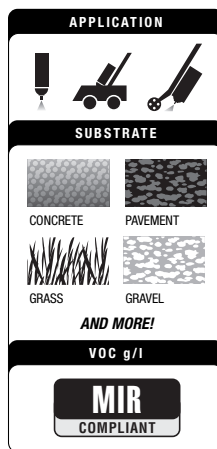

Water-based striping paint formula specially designed for use on athletic fields, playgrounds, golf courses and more.

- Fast drying formula creates bright, durable lines
- Will not harm grass
- Guaranteed not to clog
- USDA acceptable\*

### COLORS (17 oz.)

|        |                    |
|--------|--------------------|
| 206045 | Yellow             |
| 206044 | Orange             |
| 206043 | White              |
| 257403 | Fluorescent Green  |
| 257406 | Fluorescent Orange |

### COMPANION PRODUCTS

|         |                                         |
|---------|-----------------------------------------|
| 206346  | Athletic Field Striping Machine (p. 42) |
| 2388000 | Striping Wand (p. 42)                   |



## TOTAL LINEAR FEET COMPARISON




## APWA UNIFORM COLOR CODE

|               |                                                        |
|---------------|--------------------------------------------------------|
| <b>YELLOW</b> | Gas, oil, steam, petroleum, gaseous materials          |
| <b>RED</b>    | Electric power lines, cables, conduit, lighting cables |
| <b>PURPLE</b> | Reclaimed water, irrigation, slurry lines              |
| <b>BLUE</b>   | Potable water                                          |
| <b>GREEN</b>  | Sewers and drain lines                                 |
| <b>WHITE</b>  | Proposed excavation                                    |
| <b>PINK</b>   | Temporary survey markings                              |
| <b>ORANGE</b> | Communication, alarm/signal lines, cables, conduit     |

**TYPICAL APPLICATIONS** Utility, construction, excavation, surveying, landscape and golf course markings.

## M1600/M1800 SYSTEM PRECISION LINE® INVERTED MARKING PAINT AEROSOL

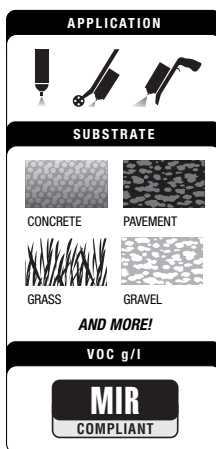

Water and solvent-based marking paints feature a precision-line spray tip for easy-to-read bright, vivid markings for utility, construction, excavation, surveying, landscape, and golf course markings.

- Best resistance against premature fading
- Marks more linear feet per can than other brands
- No mess spray tip keeps paint off fingers
- Locking tip does not pop off
- Virtually no overspray
- Dries fast — less than 5 minutes
- Convenient spray-through cap
- Guaranteed not to clog
- USDA acceptable\*

### M1600 SOLVENT-BASED COLORS (17 oz.)

|         |                        |
|---------|------------------------|
| 203022  | APWA / Caution Blue    |
| 203024  | Caution Yellow         |
| 203025  | High Visibility Yellow |
| 203026  | Alert Orange           |
| 201516  | APWA Orange            |
| 1675838 | Black                  |
| 203030  | White                  |
| 1601838 | Clear                  |
| 239007  | Silver (16 oz.)        |

### SAFETY COLORS (17 oz.)

|         |                     |
|---------|---------------------|
| 1634838 | APWA / Safety Green |
| 203029  | Safety Red          |

### FLUORESCENTS (17 oz.)

|         |                        |
|---------|------------------------|
| 1669838 | Fluorescent Purple     |
| 1662838 | Fluorescent Red        |
| 203028  | Fluorescent Red-Orange |

|         |                    |
|---------|--------------------|
| 203023  | Fluorescent Green  |
| 203027  | Fluorescent Orange |
| 1661838 | Fluorescent Pink   |

### M1800 WATER-BASED COLORS (17 oz.)

|         |                        |
|---------|------------------------|
| 203031  | APWA / Caution Blue    |
| 203033  | Caution Yellow         |
| 203034  | High Visibility Yellow |
| 203035  | APWA / Alert Orange    |
| 1875838 | Black                  |
| 203039  | White                  |
| 1801838 | Clear (16 oz.)         |

### SAFETY COLORS (17 oz.)

|         |                     |
|---------|---------------------|
| 1834838 | APWA / Safety Green |
| 1868838 | Safety Purple       |
| 203038  | Safety Red          |

### FLUORESCENTS (17 oz.)


|         |                        |
|---------|------------------------|
| 205176  | Fluorescent Blue       |
| 1869838 | Fluorescent Purple     |
| 1862838 | Fluorescent Red        |
| 203037  | Fluorescent Red-Orange |
| 203032  | Fluorescent Green      |
| 203036  | Fluorescent Orange     |
| 1861838 | Fluorescent Pink       |

### COMPANION PRODUCTS

|         |                        |
|---------|------------------------|
| 2393000 | Marking Wand (p. 40)   |
| 210188  | Marking Pistol (p. 40) |
| 203912  | Marking Bag (p. 40)    |



## M1900 SYSTEM 360° MARKING PAINT AEROSOL

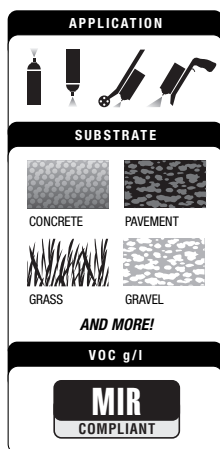

The only can of water-based marking paint needed for any job or landscape. Sprays at any angle: upright, horizontal, inverted or any angle in between.

- Ready to spray at any angle without messy tip adjustments
- Bold, easy to see markings for excellent visibility
- Non-clogging, locking spray tip won't pop off
- Virtually no overspray
- Excellent visibility on concrete, dirt, gravel, grass, wood and more
- Best resistance against early fading and chalking
- Dries fast — less than 5 minutes

### COLORS (17 oz.)

|        |                        |
|--------|------------------------|
| 247832 | High Visibility Yellow |
| 247833 | Fluorescent Red        |
| 247834 | Fluorescent Green      |
| 247835 | Fluorescent Orange     |
| 247836 | Fluorescent Red-Orange |
| 247837 | White                  |

### COMPANION PRODUCTS

|         |                           |
|---------|---------------------------|
| 203912  | Marking Paint Bag (p. 42) |
| 2393000 | Marking Wand (p. 42)      |
| 210188  | Marking Pistol (p. 42)    |



**TYPICAL APPLICATIONS** Bold, easy to see markings for construction, mines, overpasses, tunnels, quarries, hazards, excavation, surveying, landscape, and golf courses.

## M1700 SYSTEM HIGH OUTPUT INVERTED MARKING PAINT AEROSOL



Solvent-based marking paint for bold, easy to see markings for construction, excavation, surveying, landscape, and golf course markings.

- High delivery for extra durability
- Creates 2"-3" wide marks
- Excellent visibility on dirt, gravel and grass
- Best resistance against early fading and chalking
- Dries fast — less than 5 minutes
- Penetrates and adheres to hot surfaces
- Convenient and comfortable spray-through cap
- Guaranteed not to clog
- Can be applied down to 25°F
- USDA acceptable\*

### COLORS (16 oz.)

|        |                   |
|--------|-------------------|
| 240650 | APWA White        |
| 240640 | APWA Caution Blue |
| 240644 | APWA Safety Red   |

### COMPANION PRODUCTS

|         |                        |
|---------|------------------------|
| 2393000 | Marking Wand (p. 42)   |
| 210188  | Marking Pistol (p. 42) |
| 203912  | Marking Bag (p. 42)    |

### FLUORESCENTS (16 oz.)

|        |                    |
|--------|--------------------|
| 240647 | Fluorescent Orange |
| 240649 | Fluorescent Pink   |




**TYPICAL APPLICATIONS** Utility, construction, excavation, surveying, landscape and golf course markings.



**TYPICAL APPLICATIONS** Utility, construction, excavation, surveying, landscape and golf course markings.

## MC1800 SYSTEM PRECISION LINE® INVERTED MARKING CHALK AEROSOL

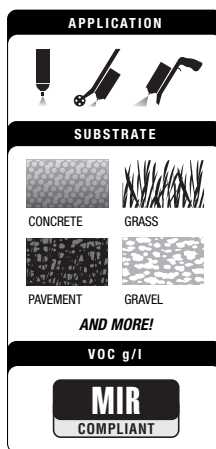

Marking chalk for temporary markings that last up to 30 days.

- Can be easily removed with a wire brush and water or pressure washing
- Precision-line spray tip creates clean, easy-to-read markings
- Virtually no overspray
- Scuff resistant in 10 minutes
- Convenient spray-through cap
- Locking tip does not pop off
- Guaranteed not to clog
- USDA acceptable\*


### COLORS (17 oz.)

|        |             |
|--------|-------------|
| 205236 | APWA Blue   |
| 205238 | APWA Green  |
| 205234 | APWA Yellow |
| 205233 | APWA Orange |
| 205235 | APWA Red    |
| 205237 | APWA White  |

### COMPANION PRODUCTS

|         |                           |
|---------|---------------------------|
| 203912  | Marking Paint Bag (p. 42) |
| 2393000 | Marking Wand (p. 42)      |
| 210188  | Marking Pistol (p. 42)    |

## R1600 SYSTEM REFLECTIVE FINISH AEROSOL

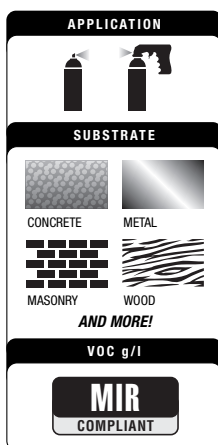

A clear and semi-transparent, glass bead finish that reflects direct light for safety and visibility in the dark.

- Enhances visibility of objects
- Illuminates in the dark when exposed to direct light such as headlights and flashlights
- Can be applied over an existing finish on a variety of surfaces
- A great alternative to costly reflective tapes
- USDA acceptable\*

### COLORS (12 oz.)

223884 Reflective Finish

### COMPANION PRODUCTS

7899003 Spray Grip (p. 42)  
 243546 Comfort Grip (p. 42)




**TYPICAL APPLICATIONS** Hand rails, electrical boxes, first aid kits, gates, fire extinguishers, pipes and underground utilities.



**TYPICAL APPLICATIONS** Piping, bollards, conduit, bins, signs, cabinets, bollards, golf carts, barrels and more.

## P1600 SYSTEM PAINT FOR PLASTIC AEROSOL



A one-step, direct-to-plastic paint with long-lasting and superior adhesion on plastic surfaces such as PVC, polypropylene, fiberglass and vinyl.

- No priming or sanding needed
- Ideal for enhancing or color coding piping, conduit, bins, signs, cabinets, golf carts, barrels and more
- USDA acceptable\*

### COLORS (12 oz.)

223838 Black  
 223839 White  
 223883 Tan

### SAFETY COLORS (12 oz.)

223880 Safety Blue  
 223881 Safety Green  
 223882 Safety Yellow

### PRIMERS (12 oz.)

223837 White Primer

### COMPANION PRODUCTS

243546 Spray Grip (p. 42)  
 241526 Comfort Grip (p. 42)

## COMPANION PRODUCTS



### MARKING PAINT BAG

- Durable material, zippers and fasteners
- Handy design holds 3 cans of marking paint for extended jobs
- Extra compartments perfect for keys, phone, water bottle and more
- Comfortable, adjustable strap
- Blaze Orange color for visibility

203912 Marking Paint Bag



### STRIPING MACHINE

- Create 2-4" straight lines quickly and easily
- Cover a larger area in a shorter time
- Convenient storage compartment holds 12 extra cans
- Sturdy steel construction
- Collapsible handle for easy storage

2395000 Striping Machine



### ATHLETIC FIELD STRIPING MACHINE

- Create 3-6" straight lines quickly and easily
- Cover a larger area in a shorter time
- Convenient storage compartment holds 12 extra cans
- Sturdy steel construction
- Collapsible handle for easy storage
- Large diameter wheels to accommodate high grass conditions

206346 Athletic Field Striping Machine



### STRIPING WAND

- Use for convenient touch-up of lines or stenciling
- Sturdy, lightweight construction

2388000 Striping Wand



### MARKING WAND

- Easy, upright site marking
- Quick and convenient with no mess
- Comfortable grip
- Lightweight, yet durable construction
- Use with Rust-Oleum Inverted Marking Paint

2393000 Marking Wand



### MARKING PISTOL

- Easy, accurate marking
- Light touch spray control
- Comfortable grip

210188 Marking Pistol



### SPRAY GRIP®

- Turns any spray can into a spray gun
- Two finger trigger minimizes fatigue
- Unique locking collar keeps can tightly attached
- Trigger safety lock prevents accidental use
- Keeps hands clean

243546 Spray Grip



### COMFORT GRIP®


- Ergonomic design provides maximum control while spraying
- Large soft touch trigger reduces finger fatigue
- Durable construction withstands repetitive use

241526 Comfort Grip



## ALKYD

## 6400 SYSTEM 450 VOC DTM ALKYD ENAMEL\*

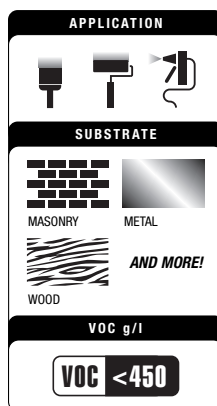

An oil-modified direct-to-metal (DTM) alkyd enamel developed for general purpose plant maintenance and new construction applications.

- Excellent resistance to general weathering, salt air, mild chemical fumes and light abrasion
- Good hiding with complete, even coverage
- Good color and gloss retention
- Durable finish protects against chipping, cracking and peeling
- USDA acceptable\* and Agriculture Canada\*\* approved

## COLORS

|        |                        |
|--------|------------------------|
| 207839 | Beige                  |
| 207837 | True Blue              |
| 207840 | John Deere Green       |
| 207835 | Hunter Green           |
| 207841 | New Caterpillar Yellow |
| 206287 | Banner Red             |
| 206288 | Machine Green          |
| 206300 | Universal Gray         |
| 206302 | Aluminum (500 VOC)     |
| 206283 | Glossy Black           |
| 207838 | Ultra-Flat Black       |
| 206285 | Glossy White           |
| 208118 | Silver Gray            |
| 208120 | Forest Green           |

## SAFETY COLORS

|        |               |
|--------|---------------|
| 206301 | Safety Blue   |
| 206303 | Safety Yellow |
| 207836 | Safety Orange |
| 206304 | Safety Red    |

Tint bases also available for custom colors.

## PRIMER

|        |             |
|--------|-------------|
| 206282 | Gray Primer |
|--------|-------------|




**TYPICAL APPLICATIONS** General plant maintenance including machinery, equipment, pipes, metal cabinets and lockers, railings, trim, doors and gates, drums, vents, outdoor signage.

\*Available until 1/1/2012. Alternate systems: V7400, 2500, C740.

## ALKYD

### V6400 SYSTEM DTM 340 VOC ALKYD ENAMEL\*

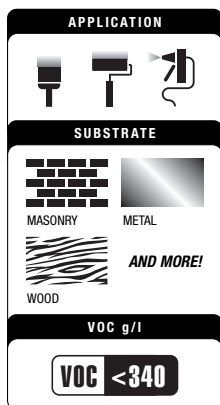

The low 340 VOC version of the modified direct-to-metal (DTM) alkyd enamel, developed for general purpose plant maintenance and new construction applications.

- Excellent resistance to general weathering, salt air, mild chemical fumes and light abrasion
- Good hiding with complete, even coverage
- Good color and gloss retention
- Durable finish protects against chipping, cracking and peeling
- USDA acceptable\* and Agriculture Canada\*\* approved

#### COLORS

|        |                |
|--------|----------------|
| 206324 | Machine Green  |
| 206325 | Universal Gray |
| 206309 | Glossy Black   |
| 206321 | Glossy White   |

Tint bases also available for custom colors.

#### PRIMERS

|        |             |
|--------|-------------|
| 206308 | Gray Primer |
|--------|-------------|

#### SAFETY COLORS


|        |               |
|--------|---------------|
| 206326 | Safety Blue   |
| 206327 | Safety Yellow |
| 206328 | Safety Red    |



**TYPICAL APPLICATIONS** General plant maintenance including machinery, equipment, pipes, metal cabinets and lockers, railings, trim, doors and gates, drums, vents, outdoor signage.

\*Available until 1/1/2012. Alternate systems: V7400, 2500, C740.

### 6100 SYSTEM SHOP COAT PRIMER



Fast-drying, low 340 VOC modified alkyd primer for low-cost metal protection.

**VOC <340**

- Excellent adhesion on structural steel and fabricated metal
- For indoor and outdoor use
- USDA acceptable\*


#### COLORS

|        |            |        |             |
|--------|------------|--------|-------------|
| 206329 | Red Primer | 206331 | Gray Primer |
|--------|------------|--------|-------------|

**TYPICAL APPLICATIONS** General plant maintenance including machinery, equipment, pipes, metal cabinets.

## ACRYLIC

## 5200 SYSTEM DTM ACRYLIC

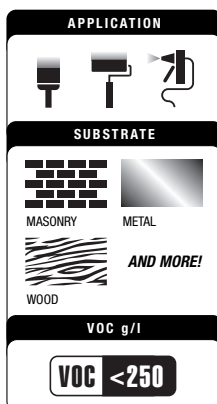

Multi-purpose, low VOC water-based acrylic enamel that allows for convenient direct-to-metal (DTM) coating with minimal odor.

- Efficient direct-to-metal coating — no primer required
- Withstands mild chemical fumes and spills
- Resists chalking and fading
- USDA acceptable\* and Agriculture Canada\*\* approved

## COLORS

|         |                      |
|---------|----------------------|
| 5271402 | Dunes Tan            |
| 5275402 | Bronzetone           |
| 5277402 | Chestnut Brown       |
| 5222402 | Marlin Blue          |
| 5227402 | National Blue        |
| 5234402 | John Deere Green     |
| 5235402 | Vista Green          |
| 5237402 | Forest Green         |
| 5258402 | Tower Orange         |
| 5256402 | International Orange |

|         |                   |
|---------|-------------------|
| 5265402 | Fire Hydrant Red  |
| 5282402 | Silver Gray       |
| 5286402 | Navy Gray         |
| 5288402 | Machine Tool Gray |
| 5274402 | Semi-Gloss Black  |
| 5278402 | Flat Black        |
| 5279402 | Gloss Black       |
| 5290402 | Flat White        |
| 5291402 | Tower White       |
| 5292402 | Gloss White       |
| 5293402 | Semi-Gloss White  |
| 5215402 | Alumi-NON®        |

|         |               |
|---------|---------------|
| 5244402 | Safety Yellow |
| 5255402 | Safety Orange |
| 5264402 | Safety Red    |

Tint bases also available for custom colors.

## PRIMERS


|         |             |
|---------|-------------|
| 5269402 | Red Primer  |
| 5281402 | Gray Primer |

## SAFETY COLORS

|         |              |
|---------|--------------|
| 5225402 | Safety Blue  |
| 5233402 | Safety Green |

**TYPICAL APPLICATIONS** Highly populated areas requiring low odor and mild chemical and corrosion resistance: machinery, equipment, pipes, metal cabinets and lockers, railings, trim, doors and gates, drums, vents, outdoor signage.

## 3200 SYSTEM CLEAR BLUE UNDERCOAT



Wherever adhesion is needed, this thermoplastic acrylic bonding agent promotes adhesion on clean, extremely smooth surfaces.

- Ideal undercoating to help adhesion of subsequent topcoats
- Must be top-coated after one hour of flash off time
- Excellent primer for galvanized steel

## COLORS

|         |                              |
|---------|------------------------------|
| 3202502 | Clear Blue Undercoat (Quart) |
|---------|------------------------------|

**TYPICAL APPLICATIONS** Porcelain, fiberglass, ceramic tile, glass and stainless steel, or as barrier coat on galvanized metal.

# INDUSTRIAL CHOICE TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of Industrial Choice Coatings and Primers. For more detailed information, see Rust-Oleum technical data sheets for individual products.

## RECOMMENDED FILM THICKNESS

### WET

### DRY

### MILS

### MICRONS

### MILS

### MICRONS

## COVERAGE

### PRACTICAL

### THEORETICAL

### ASSUMES 15% MATERIAL LOSS

### AT 1 MIL DFT.

### ft.²/gal.

### m²/l

### ft.²/gal.

### m²/l

## DRY TIME

### HRS. AT 70°F (21°C)–

### 80°F (27°C)

### & 50% HUMIDITY

### TACK-FREE

### HANDLE

### RECOAT

### BRUSH / ROLLER

### AIRLESS SPRAY

### AIR-ATOMIZED SPRAY

## THINNING AS NEEDED

### CLEAN-UP

### MIX RATIO (BASE TO ACTIVATOR)

### POT LIFE HRS. AT 70°F (21°C)–80°F (27°C) & 50% HUMIDITY

### DRY HEAT RESISTANCE (°F/°C)

### VOC LEVEL (g/l)

### VOLATILE ORGANIC COMPOUND

### FLASH POINT (°F/°C)

### USDA ACCEPTABLE<sup>1</sup>

### APPLICATION TEMPERATURE RANGE

## COATINGS

|                                                |         |            |     |       |       |         |          |         |           |     |      |       |   |                |                  |                  |   |   |             |      |             |     |                  |
|------------------------------------------------|---------|------------|-----|-------|-------|---------|----------|---------|-----------|-----|------|-------|---|----------------|------------------|------------------|---|---|-------------|------|-------------|-----|------------------|
| <b>6400 System – 450 VOC DTM Alkyd Enamel</b>  | 2.5-4.5 | 62.5-112.5 | 1-2 | 25-50 | 42-43 | 285-585 | 7.0-14.4 | 670-690 | 16.5-17.0 | 2-4 | 5-9  | 24-48 | — | 333402 5%      | 333402 Up to 15% | 333402 or 633402 | — | — | 212°F 100°C | <450 | 104°F 40°C  | Yes | 32-100°F 0-38°C  |
| <b>V6400 System – 340 VOC DTM Alkyd Enamel</b> | 2.0-3.5 | 50-87.5    | 1-2 | 25-50 | 57-60 | 390-820 | 9.6-20.2 | 915-960 | 22.5-23.6 | 3-5 | 5-10 | 24-48 | — | 333402 5%      | 333402 Up to 15% | 333402 or 633402 | — | — | 212°F 100°C | <340 | 104°F 40°C  | Yes | 32-100°F 0-38°C  |
| <b>5200 System – DTM Acrylic</b>               | 5-9     | 125-225    | 2-3 | 50-75 | 33-38 | 150-260 | 3.7-6.4  | 530-610 | 13-15     | 1-2 | 2-4  | 1-3   | — | Water Up to 6% | Water Up to 12%  | Soap/ Water      | — | — | 200°F 93°C  | <250 | >200°F 93°C | Yes | 50-100°F 10-38°C |

## PRIMERS

|                                                   |         |            |         |           |       |         |          |         |           |         |     |                        |   |                 |                  |                  |   |   |             |      |             |     |                  |
|---------------------------------------------------|---------|------------|---------|-----------|-------|---------|----------|---------|-----------|---------|-----|------------------------|---|-----------------|------------------|------------------|---|---|-------------|------|-------------|-----|------------------|
| <b>6400 System Alkyd Enamel Primer</b>            | 2.5-4.5 | 62.5-112.5 | 1.0-2.0 | 25-50     | 43.7  | 300-600 | 7.3-14.6 | 700     | 17.2      | 1/2-1   | 1-2 | 16-24                  | — | 333402 Up to 5% | 333402 Up to 15% | 333402 or 633402 | — | — | 212°F 100°C | <450 | 104°F 40°C  | Yes | 32-100°F 0-38°C  |
| <b>V6400 System Low VOC Alkyd Enamel Primer</b>   | 2.0-3.5 | 50-87.5    | 1.0-2.0 | 25-50     | 58    | 400-800 | 9.8-19.6 | 930     | 22.9      | 2-4     | 6-8 | 16-24                  | — | 333402 Up to 5% | 333402 Up to 15% | 333402 or 633402 | — | — | 212°F 100°C | <340 | 104°F 40°C  | Yes | 32-100°F 0-38°C  |
| <b>5200 System Acrylic Primer</b>                 | 5.0-9.0 | 125-225    | 2.0-3.0 | 50-75     | 38-39 | 250-350 | 5.9-8.3  | 610-625 | 14.5-14.9 | 1-2     | 2-4 | 1-3                    | — | —               | WATER 10-12%     | SOAP / WATER     | — | — | 200°F 93°C  | <250 | >200°F 93°C | Yes | 50-100°F 10-38°C |
| <b>6100 System – Shop Coat Primer</b>             | 2.5-4.5 | 62.5-112.5 | 1.5-2.5 | 37.5-62.5 | 58    | 315-525 | 7.7-12.9 | 930     | 22.9      | 1/4-1/2 | 1   | 4                      | — | 333402 Up to 5% | 333402 10-20%    | 333402 or 633402 | — | — | 212°F 100°C | <340 | 52°F 11°C   | Yes | 32-100°F 0-38°C  |
| <b>3200 System – Clear Blue Undercoat (Quart)</b> | 0.5-1.0 | 12.5-25.0  | 0.5-1.0 | 12.5-25   | 4     | 1500    | 37       | 640     | 15.8      | —       | —   | After 1 hr, before 24. | — | —               | 160 50%          | 160              | — | — | 212°F 100°C | —    | 24°F -4°C   | No  | 32-100°F 0-38°C  |

<sup>1</sup> The VOC for 206302 Aluminum is <500 g/l (4.2 lbs/gal).

\* This product meets the requirements set by the USDA for use in food and beverage establishments or processing plants.

\*\* Agriculture Canada (also known as Canadian Food Inspection Agency).



• TRUSTED QUALITY SINCE 1921 •

# RUST-OLEUM®

## COMMERCIAL



Don't let rust ruin your reputation. Sometimes looks are everything. Protect your company's assets with Rust-Oleum Commercial Coatings. Rust-Oleum Commercial Coatings are the perfect solution for all types of commercial environments. From light duty to the most demanding, Rust-Oleum coatings provide long-lasting rust protection and a professional, high gloss finish. For that first impression and lasting reputation, demand the durability of Rust-Oleum Commercial Coatings.

# COMMERCIAL


Colors are printing approximations and may vary. Custom colors available upon request.



Forest Green



Navy Gray



Safety Yellow




Safety Red



Safety Blue



Black




White



Gray Primer



Red Primer




White Primer



**NEW**

## C740 SYSTEM 400 VOC DTM ALKYD ENAMEL



Multi-purpose direct-to-metal coating that provides everyday and heavy-duty rust protection in mild to moderate commercial environments.

- Ready-to-use with no measuring or mixing
- Applies direct-to-metal for an easy to maintain high gloss surface
- Durable formula with excellent coverage and hide
- Can be applied by brush, roller or spray
- Resists chipping, cracking and peeling
- USDA acceptable\* and Agriculture Canada\*\*\* pending

### COLORS

|        |                 |
|--------|-----------------|
| 255549 | Forest Green    |
| 255556 | Gloss Navy Gray |
| 255554 | Gloss Black     |
| 255553 | Flat Black      |
| 255558 | Gloss White     |

### PRIMERS

|        |                   |
|--------|-------------------|
| 255555 | Flat Gray Primer  |
| 255552 | Flat Red Primer   |
| 255544 | Flat White Primer |

Tint Bases also available for custom colors.


### SAFETY COLORS

|        |               |
|--------|---------------|
| 255550 | Safety Yellow |
| 255551 | Safety Red    |
| 255548 | Safety Blue   |

**TYPICAL APPLICATIONS** For everyday interior and exterior commercial metal applications like metal trim, doors, structural steel, handrails, fixtures, fire escapes, vents fences, hydrants, cabinets, channels and more.

## CV740 SYSTEM 100 VOC DTM ALKYD ENAMEL

**NEW**

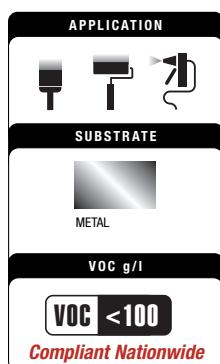

Low VOC, multi-purpose direct-to-metal coating that provides everyday and heavy-duty rust protection in mild to moderate commercial environments.

- Ready-to-use with no measuring or mixing
- Applies direct-to-metal for an easy to maintain high gloss surface
- Durable formula with excellent coverage and hide
- Brush roller or spray applied
- Resists chipping, cracking and peeling
- USDA acceptable\* and Agriculture Canada\*\*\* pending

### COLORS

|        |                 |
|--------|-----------------|
| 255612 | Forest Green    |
| 255613 | Gloss Navy Gray |
| 255611 | Gloss Black     |
| 255609 | Flat Black      |
| 255614 | Gloss White     |

### SAFETY COLORS

|        |               |
|--------|---------------|
| 255616 | Safety Yellow |
| 255615 | Safety Red    |

### PRIMERS

|        |                   |
|--------|-------------------|
| 255610 | Flat Red Primer   |
| 255617 | Flat White Primer |



**TYPICAL APPLICATIONS** For everyday interior and exterior commercial metal applications like metal trim, doors, structural steel, handrails, fixtures, fire escapes, vents fences, hydrants, cabinets, channels and more.

## COMMERCIAL TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of Commercial coatings and primers. For more detailed information, see Rust-Oleum technical data sheets for individual products.

### RECOMMENDED FILM THICKNESS

#### WET

MILS  
MICRONS

#### DRY

MILS  
MICRONS

### PERCENT VOLUME SOLIDS

### COVERAGE

#### PRACTICAL ASSUMES 15% MATERIAL LOSS

ft.<sup>2</sup>/gal.  
m<sup>2</sup>/l

#### THEORETICAL AT 1 MIL DFT

ft.<sup>2</sup>/gal.  
m<sup>2</sup>/l

#### TACK-FREE

#### HANDLE

#### RECOAT

2-4  
8-12  
24

—  
333402  
5%

333402  
Up to 15%

#### CLEAN-UP

#### MIX RATIO (BASE TO ACTIVATOR)

#### POT LIFE HRS. AT 70°F (21°C)– 80°F (27°C) & 50% HUMIDITY

#### DRY HEAT RESISTANCE (°F/°C)

#### VOC LEVEL (g/l) VOLATILE ORGANIC COMPOUND

#### FLASH POINT (°F/°C)

#### USDA ACCEPTABLE<sup>1</sup>

#### APPLICATION TEMPERATURE RANGE

### COATINGS

#### C740 System – 400 VOC DTM Alkyd Enamel

3.0-  
5.0

75-  
125

1.5-  
2.5

37.5-  
62.5

48

265-  
440

6.5-  
10.8

775-  
780

19.1-  
19.2

2-4

8-12

24

—

333402  
5%

333402  
Up to 15%

333402  
or  
633402

—

—

212°F  
100°C

<400

104°F  
40°C

Yes

32-100°F  
0-38°C

#### CV740 System – 100 VOC DTM Alkyd Enamel

3.5-  
5.5

87.5-  
137.5

1.5-  
2.5

37.5-  
62.5

46-  
48

255-  
435

6.3-  
10.7

750-  
770

18.5-  
18.9

4-6

8-12

24

—

333402  
5%

333402  
Up to 15%

333402  
or  
633402

—

—

212°F  
100°C

<100

104°F  
40°C

Yes

32-100°F  
0-38°C

### PRIMERS

#### C740 System – 400 VOC DTM Alkyd Enamel Primers

2.0-  
4.0

50-  
100

1.0-  
2.0

25-  
50

48.6

330-  
660

8.1-  
16.2

780

19.2

2-4

8-12

24

—

333402  
Up to 5%

333402  
Up to 15%

333402  
or  
633402

—

—

212°F  
100°C

<400

104°F  
40°C

Yes

32-100°F  
0-38°C

#### CV740 System – 100 VOC DTM Alkyd Enamel Primers

2.0-  
4.0

50-  
100

1.0-  
2.0

25-  
50

48

325-  
650

8.0-  
16.0

770

18.9

4-6

8-12

24

—

333402  
Up to 5%

333402  
Up to 15%

333402  
or  
633402

—

—

212°F  
100°C

<100

104°F  
40°C

Yes

32-100°F  
0-38°C

\* This product meets the requirements set by the USDA for use in food and beverage establishments or processing plants.

\*\* Agriculture Canada (also known as Canadian Food Inspection Agency).



# MATHYS

BY RUST-OLEUM



Working hard to protect against corrosion and weather, Rust-Oleum® offers Mathys coatings for everything from industrial maintenance to large industrial projects such as bridges, coastal structures, stadiums, roofs, and tank exteriors. Included in the product line is Noxyde®, known worldwide for its unrivaled corrosion, rust, and weather-proofing protection. Mathys products are built tough to withstand even the most aggressive environments.

Colors are printing approximations and may vary. Custom colors available upon request.



English Red



Reseda Green



Moss Green



Blue



Green Gray



Brown



Beige Gray



Gray Green




Blue Gray




Gravel Gray



Black



White



Off White

## ACRYLIC

## NOXYDE®



**TYPICAL APPLICATIONS** Structural steel, bridges, machinery and equipment, areas with heavy corrosion, tank exteriors, metal roofs, cladding, etc. Ideal for anywhere that edge coverage is essential and high protection, adhesion, or elasticity is needed.

**APPLICATION**

**SUBSTRATE**

ALUMINUM

GALVANIZED

METAL

RUSTED METAL

CONCRETE

VOC g/l

**VOC <100**

*Compliant Nationwide*

Heavy-duty, water-based, elastomeric acrylic coating system that provides unsurpassed long-term corrosion protection in aggressive environments.

- Proven, thirty+ year track record for protection against corrosion, rust and water
- Backed by a 10 year warranty
- Reduces project costs with minimal surface preparation
- Superior flexibility — 200% elasticity that moves with structure and doesn't delaminate
- Primer and topcoat in one easy spray application

### COLORS

|        |              |            |             |
|--------|--------------|------------|-------------|
| 202770 | English Red  | NEW 261657 | Gray Green  |
| 201634 | Reseda Green | 201631     | Blue Gray   |
| 261659 | Moss Green   | NEW 261201 | Gravel Gray |
| 261198 | Blue         | 201630     | Off White   |
| 210120 | Brown        | 202541     | Black       |
| 201632 | Beige Gray   | 201638     | White       |



## ACRYLIC



**TYPICAL APPLICATIONS** Structural steel, bridges, areas with heavy corrosion, tank exteriors, metal roofs, cladding, etc. Ideal for anywhere that edge coverage is essential and high protection, adhesion, or elasticity is needed.

## PEGANOX™

**APPLICATION**

**SUBSTRATE**

|                      |                        |
|----------------------|------------------------|
| <b>A</b><br>ALUMINUM | <b>G</b><br>GALVANIZED |
| <br>METAL            | <br>CONCRETE           |

**VOC g/l**

**VOC <100**

*Compliant Nationwide*

Brush or roller applied, water-based, elastomeric acrylic maintenance coating designed for high protection, adhesion, or elasticity.

- Utilizes similar technology as Noxyde® but specifically designed to brush and roll
- Provides excellent long-term corrosion protection
- Reduces project costs with minimal surface preparation
- Ideal for maintenance projects
- USDA acceptable\*

### COLORS

|        |            |
|--------|------------|
| 225321 | White      |
| 225322 | Off White  |
| 225323 | Green Gray |
| 225324 | Black      |

## PEGALINK

**APPLICATION**

**SUBSTRATE**

|                      |                        |
|----------------------|------------------------|
| <b>A</b><br>ALUMINUM | <b>G</b><br>GALVANIZED |
| <br>METAL            | <br>CONCRETE           |

**VOC g/l**

**VOC <250**

*Compliant Nationwide*

Water-based, primer provides superior adhesion to very smooth surfaces.

- UV resistant
- Reduces project costs with minimal surface preparation
- Can be top-coated with all acrylics and most alkyds
- USDA acceptable\*

### COLORS

|        |              |
|--------|--------------|
| 202550 | Light Gray   |
| 202600 | Primer White |

**TYPICAL APPLICATIONS** On difficult substrates such as steel, PVC, aluminum, plastic and metal.

## MATHYS TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of Mathys Coatings and Primers. For more detailed information, see Rust-Oleum technical data sheets for individual products.

### RECOMMENDED FILM THICKNESS

#### WET

#### DRY

MILS  
MICRONS

MILS  
MICRONS

### PERCENT VOLUME SOLIDS

### COVERAGE

#### PRACTICAL ASSUMES 15% MATERIAL LOSS

#### THEORETICAL AT 1 MIL DFT.

ft.<sup>2</sup>/gal.  
m<sup>2</sup>/l

ft.<sup>2</sup>/gal.  
m<sup>2</sup>/l

TACK-FREE

HANDLE

RECOAT

### DRY TIME HRS. AT 70°F (21°C)– 80°F (27°C) & 50% HUMIDITY

### THINNING AS NEEDED

BRUSH / ROLLER

AIRLESS SPRAY

AIR-ATOMIZED SPRAY

CLEAN-UP

MIX RATIO (BASE TO ACTIVATOR)

POT LIFE HRS. AT 70°F (21°C)–80°F (27°C)  
& 50% HUMIDITY

DRY HEAT RESISTANCE (°F/°C)

VOC LEVEL (g/l)  
VOLATILE ORGANIC COMPOUND

FLASH POINT (°F/°C)

USDA ACCEPTABLE<sup>1</sup>

APPLICATION TEMPERATURE  
RANGE

## COATINGS

|                 |     |       |   |     |    |     |     |     |      |   |     |   |   |             |             |                |   |   |               |      |                |     |                    |
|-----------------|-----|-------|---|-----|----|-----|-----|-----|------|---|-----|---|---|-------------|-------------|----------------|---|---|---------------|------|----------------|-----|--------------------|
| <b>Noxyde®</b>  | 12  | 300   | 7 | 175 | 55 | 110 | 2.7 | 880 | 21.6 | 2 | 2-4 | 4 | — | —           | —           | Soap/<br>Water | — | — | 176°F<br>80°C | <100 | >200°F<br>93°C | Yes | 46-130°F<br>8-55°C |
| <b>Peganox™</b> | 6.5 | 162.5 | 3 | 75  | 48 | 220 | 5.4 | 770 | 18.9 | 1 | 2-3 | 6 | — | Water<br>3% | Water<br>5% | Soap/<br>Water | — | — | 200°F<br>93°C | <100 | >200°F<br>93°C | Yes | 46-130°F<br>8-55°C |

## PRIMERS

|                 |           |               |           |             |    |             |           |     |      |            |     |   |   |   |   |                |   |   |               |      |                |     |                    |
|-----------------|-----------|---------------|-----------|-------------|----|-------------|-----------|-----|------|------------|-----|---|---|---|---|----------------|---|---|---------------|------|----------------|-----|--------------------|
| <b>Pegalink</b> | 4-<br>5.5 | 100-<br>137.5 | 1.5-<br>2 | 37.5<br>-50 | 36 | 245-<br>330 | 6-<br>8.1 | 580 | 14.3 | 20<br>min. | 1-2 | 2 | — | — | — | Soap/<br>Water | — | — | 200°F<br>93°C | <100 | >200°F<br>93°C | Yes | 41-100°F<br>5-38°C |
|-----------------|-----------|---------------|-----------|-------------|----|-------------|-----------|-----|------|------------|-----|---|---|---|---|----------------|---|---|---------------|------|----------------|-----|--------------------|

\* This product meets the requirements set by the USDA for use in food and beverage establishments or processing plants.

\*\* Agriculture Canada (also known as Canadian Food Inspection Agency).



**RUST-OLEUM**

**SIERRA**  
**PERFORMANCE™**



Sierra Performance™ coatings are the water-based alternative to traditional solvent-based coatings. You get all the industrial performance you demand without the odor, VOCs or hazardous air pollutants (HAPs). Sierra provides a full line of industrial epoxies and acrylics that protect against abrasion, chemicals and corrosion while being worker and environmentally safe. No solvent odor. No VOC. No HAP. No worries.

# SIERRA PERFORMANCE


Colors are printing approximations and may vary. Custom colors available upon request.




Dunes Tan



New Green



Tile Red



Safety Yellow



Safety Red




Safety Blue




Classic Gray




Navy Gray




Stone Gray




Almond



Black



White



Oyster White




Clear

## PRIMERS




Gray Primer



White Primer

## ACRYLIC URETHANE

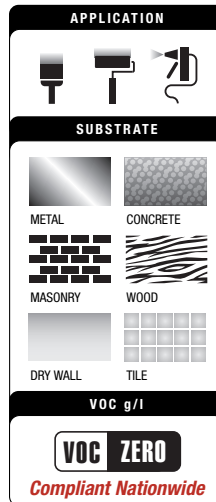BEYOND™  
ACRYLIC ENAMEL

A water-based, urethane modified acrylic provides excellent color retention and durability.

- Zero VOCs, zero HAPs and no solvent odor
- Dries fast — 30 minutes to touch and tack free
- Multiple coats can be applied in one day
- Superior resistance to chipping, cracking and peeling
- Non-blocking and mar resistant
- Results in a smooth, washable, professional finish
- Meets LEED product requirements for Indoor Air Quality
- USDA acceptable\* and Agriculture Canada\*\* approved

## COLORS

## Satin Finishes:

|        |                   |
|--------|-------------------|
| 208040 | White Pastel Base |
| 208042 | Tint Base         |
| 208044 | Deep Base         |
| 208046 | Accent Base       |
| 208048 | Black             |
| 210479 | Clear             |
| 238749 | White             |

|        |           |
|--------|-----------|
| 208058 | Black     |
| 210491 | Clear     |
| 238748 | White     |
| 238750 | Navy Gray |

## SAFETY COLORS


## Gloss Finishes:

## Gloss Finishes:

|        |                   |
|--------|-------------------|
| 208050 | White Pastel Base |
| 208052 | Tint Base         |
| 208054 | Deep Base         |
| 208056 | Accent Base       |

|        |                              |
|--------|------------------------------|
| 238751 | Safety Blue                  |
| 210493 | Safety Red                   |
| 210495 | Safety Yellow                |
| 213081 | Safety Red<br>(Sample Quart) |

**TYPICAL APPLICATIONS** Anywhere paint odors or VOC could cause a problem: food and beverage plants, schools, healthcare, warehouses, food service, office buildings, and hotels. Can be used on walls, doors, cabinets, trim, furniture, equipment, tanks, and more.

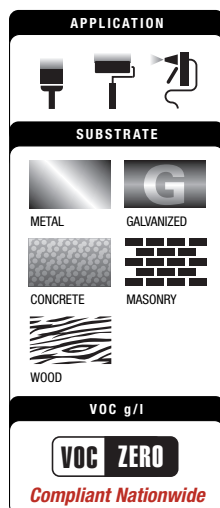GRIPTEC™  
ACRYLIC PRIMER

A water-based, acrylic primer that is ideal for general purpose priming applications.

- Zero VOCs, zero HAPs and no solvent odor
- Provides outstanding adhesion on difficult to paint surfaces
- Dries fast — 30 minutes to touch and tack free
- Provides excellent stain-blocking power
- Immediately sandable when dry
- Tolerates pH levels up to 13
- Meets LEED product requirements for Indoor Air Quality
- USDA acceptable\*

## COLORS

|        |                      |
|--------|----------------------|
| 208028 | White (tintable)     |
| 208555 | Gray                 |
| 213082 | White (Sample Quart) |

## TYPICAL APPLICATIONS

Anywhere paint odors or VOC could cause a problem: food and beverage plants, schools, healthcare, warehouses, food service, office buildings, and hotels. Can be used on concrete, masonry, metal, galvanized steel, plastic, wallboard, wood, plaster, stucco and previously coated surfaces.

**ACRYLIC URETHANE**

# METALMAX® DTM ACRYLIC ENAMEL

**APPLICATION**



**SUBSTRATE**

METAL GALVANIZED

ALUMINUM

VOC g/l

**VOC ZERO**

*Compliant Nationwide*

Direct-to-metal (DTM), water-based, urethane modified acrylic provides excellent corrosion and humidity resistance.

- Zero VOCs, zero HAPs and no solvent odor
- Dries fast — 30 minutes to touch and tack free
- Excellent color retention
- Protects new and previously painted metal
- Can be used as a primer under Beyond™ finishes
- Results in a smooth, washable, professional finish
- Meets LEED product requirements for Indoor Air Quality
- USDA acceptable\*

## COLORS

### Semi-gloss Finishes:

|        |                      |
|--------|----------------------|
| 208031 | White Pastel Base    |
| 208033 | Tint Base            |
| 208035 | Deep Base            |
| 208037 | Accent Base          |
| 208039 | Black                |
| 238752 | White                |
| 238754 | Navy Gray            |
| 213080 | Black (Sample Quart) |

## SAFETY COLORS

### Semi-gloss Finishes:

|        |               |
|--------|---------------|
| 210477 | Safety Yellow |
| 210475 | Safety Red    |
| 238753 | Safety Blue   |

## PRIMERS

|        |             |
|--------|-------------|
| 238755 | Gray Primer |
|--------|-------------|



**TYPICAL APPLICATIONS** Anywhere paint odors or VOC could cause a problem: food and beverage plants, schools, healthcare, warehouses, food service, office buildings, and hotels. Can be used on metal structures, handrails, fencing, line equipment, machinery and other misc. applications.

**EPOXY**

**NEW**

# S60 SYSTEM WATER-BASED EPOXY MAINTENANCE COATING



**TYPICAL APPLICATIONS** Anywhere paint odors or VOC could cause a problem: food and beverage plants, schools, healthcare, warehouses, food service, office buildings, and hotels. Can be used on equipment, machinery, steel surfaces, general maintenance and areas subject to frequent washdowns.

**APPLICATION**



**SUBSTRATE**

CONCRETE MASONRY

WOOD

VOC g/l

**VOC ZERO**

*Compliant Nationwide*

Versatile, high performance water-based epoxy maintenance coating kit.

- Zero VOCs, zero HAPs and no solvent odor
- Green Seal® certified under the GS-11 environmental standard
- Convenient, ready-to-mix industrial maintenance coating kit formulated to stand up to frequent washdowns and cleaning
- Fast return to service (30 minutes dry to the touch, return to service in 24 hours)
- Meets LEED product requirements for Indoor Air Quality
- USDA acceptable\*



*This is a two-component system. Kits contain base and activator. Tint base and activator sold separately.*

## KITS

|        |                    |
|--------|--------------------|
| 248216 | Stone Gray         |
| 248215 | Almond             |
| 248287 | OSHA Safety Red    |
| 248288 | OSHA Safety Yellow |
| 248291 | OSHA Safety Blue   |
| 248289 | Oyster White       |
| 248290 | Black              |

## GLOSS TINT BASES

|        |                   |
|--------|-------------------|
| 248273 | White Pastel Base |
| 248274 | Tint Base         |
| 248275 | Deep Base         |
| 248276 | Accent Base       |

## ACTIVATOR

|        |           |
|--------|-----------|
| 248284 | Activator |
|--------|-----------|




## FLOOR COATINGS

## S40/42 SYSTEM WATER-BASED EPOXY FLOOR COATING



**TYPICAL APPLICATIONS** Anywhere paint odors or VOC could cause a problem: food and beverage plants, schools, healthcare, warehouses, food service, office buildings, and hotels. Can be used on concrete floors with light to medium vehicle traffic and occasional, mild chemical spills.

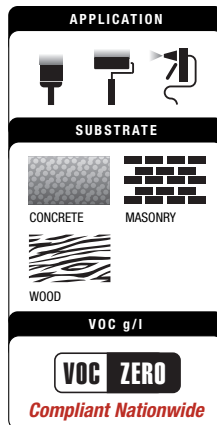

Easy-to-use, water-based, concrete epoxy floor coating provides tough, high gloss finish and excellent durability.

- Zero VOCs, zero HAPs and no solvent odor
- Highly resistant to most chemicals and abrasion
- Dries fast — 30 minutes to touch and tack free
- Can accept light traffic in 24 hours
- Multiple coats can be applied in one day
- Green Seal® certified under the GS-11 Environmental Standard
- Meets LEED product requirements for Indoor Air Quality
- USDA acceptable\*



*This is a two-component system. Order base and activator separately.*

### COLORS (S40)

#### Gloss Finishes:

|        |                     |
|--------|---------------------|
| 208060 | White Pastel Base   |
| 208062 | Tint Base           |
| 208064 | Deep Base           |
| 208066 | Clear               |
| 208070 | Black               |
| 208072 | Classic Gray        |
| 208074 | Light Gray          |
| 208076 | Tile Red            |
| 208078 | Dunes Tan           |
| 208080 | Almond              |
| 208082 | New Green           |
| 213078 | Gray (Sample Quart) |

#### Satin Finishes:

|        |       |
|--------|-------|
| 208084 | Clear |
|--------|-------|

### SAFETY COLORS (S40)

#### Gloss Finishes:

|        |               |
|--------|---------------|
| 208557 | Safety Red    |
| 208068 | Safety Yellow |

### ACTIVATORS (S40)

|        |                           |
|--------|---------------------------|
| 208086 | S40 Activator             |
| 213079 | S40 Activator (sample qt) |

### KITS (S40)

|        |              |
|--------|--------------|
| 251212 | Classic Gray |
| 251173 | Dunes Tan    |

### COLORS (S42 Medium Build)


#### Satin Finishes:

|        |                   |
|--------|-------------------|
| 208088 | White Pastel Base |
| 208090 | Classic Gray      |
| 208092 | Light Gray        |

### ACTIVATOR (S42)

|        |               |
|--------|---------------|
| 208096 | S42 Activator |
|--------|---------------|

## S70/S71 SYSTEM WATER-BASED EPOXY PRIMER

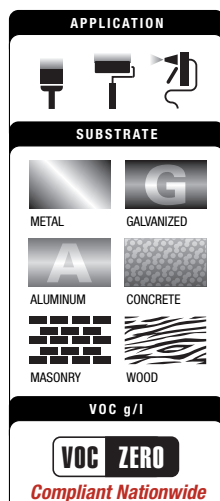

Water-based, epoxy primer with outstanding chemical and corrosion resistance.

- Zero VOCs, zero HAPs and no solvent odor
- Superior adhesion
- Dries fast — 30 minutes to touch and tack free
- Meets LEED product standards for Indoor Air Quality
- USDA acceptable\*

*This is a two-component system. Order base and activator separately.*

### PRIMERS

| Brush:       | Spray:      |
|--------------|-------------|
| 208110 White | 208113 Gray |

### ACTIVATOR

|        |                   |
|--------|-------------------|
| 208112 | S70/S71 Activator |
|--------|-------------------|

### TYPICAL APPLICATIONS

Anywhere paint odors or VOC could cause a problem: food and beverage plants, schools, healthcare, warehouses, food service, office buildings, and hotels. Can be used on equipment, machinery, steel surfaces and general maintenance.

# SIERRA PERFORMANCE COATINGS TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of Sierra Performance Coatings and Primers. For more detailed information, see Rust-Oleum technical data sheets for individual products.

| RECOMMENDED FILM THICKNESS |            |       |          | PERCENT VOLUME SOLIDS | COVERAGE                                  |                   |                              |                   | DRY TIME<br>HRS. AT 70°F (21°C)–<br>80°F (27°C)<br>& 50% HUMIDITY |        |              | THINNING AS NEEDED |               |                    | CLEAN-UP   | MIX RATIO / ACTIVATOR NO. | POT LIFE<br>HRS. AT 70°F (21°C)–80°F (27°C)<br>& 50% HUMIDITY | VOC LEVEL (g/l)<br>VOLATILE ORGANIC COMPOUND | FLASH POINT (°F/°C) | USDA ACCEPTABLE <sup>1</sup> | APPLICATION TEMPERATURE<br>RANGE |
|----------------------------|------------|-------|----------|-----------------------|-------------------------------------------|-------------------|------------------------------|-------------------|-------------------------------------------------------------------|--------|--------------|--------------------|---------------|--------------------|------------|---------------------------|---------------------------------------------------------------|----------------------------------------------|---------------------|------------------------------|----------------------------------|
| WET                        |            | DRY   |          |                       | PRACTICAL<br>ASSUMES 15%<br>MATERIAL LOSS |                   | THEORETICAL<br>AT 1 MIL DFT. |                   | TACK-FREE                                                         | RECOAT | FOOT TRAFFIC | BRUSH / ROLLER     | AIRLESS SPRAY | AIR-ATOMIZED SPRAY |            |                           |                                                               |                                              |                     |                              |                                  |
| MILS                       | MICRONS    | MILS  | MICRONS  |                       | ft. <sup>2</sup> /gal.                    | m <sup>2</sup> /l | ft. <sup>2</sup> /gal.       | m <sup>2</sup> /l |                                                                   |        |              |                    |               |                    |            |                           |                                                               |                                              |                     |                              |                                  |
|                            |            |       |          |                       |                                           |                   |                              |                   |                                                                   |        |              |                    |               |                    |            |                           |                                                               |                                              |                     |                              |                                  |
| 3-8                        | 75-200     | 1-3   | 25-75    | 36-38                 | 165-520                                   | 4.1-12.8          | 580-610                      | 14.3-15           | 30 min.                                                           | 2-4    | —            | Water              | Water         | Water              | Soap/Water | —                         | —                                                             | 0                                            | >200°F<br>93°C      | Yes                          | 50-100°F<br>10-38°C              |
| 2.5-7.5                    | 62.5-187.5 | 1-3   | 25-75    | 40                    | 180-545                                   | 4.4-13.4          | 640                          | 15.8              | 30 min.                                                           | 2-4    | —            | Water              | Water         | Water              | Soap/Water | —                         | —                                                             | 0                                            | >200°F<br>93°C      | Yes                          | 50-100°F<br>10-38°C              |
| 7-10                       | 175-250    | 3.5-5 | 87.5-125 | 50                    | 135-195                                   | 3.3-4.8           | 800                          | 19.7              | 30 min.                                                           | 1-2    | 24           | Water              | Water         | Water              | Soap/Water | 2:1                       | 2                                                             | 0                                            | >200°F<br>93°C      | Yes                          | 50-90°F<br>10-32°C               |
| 4-6                        | 100-150    | 2-3   | 50-75    | 50                    | 225-340                                   | 5.5-8.4           | 800                          | 19.7              | 30 min.                                                           | 1-2    | 24           | Water              | Water         | Water              | Soap/Water | 2:1                       | 2                                                             | 0                                            | >200°F<br>93°C      | Yes                          | 50-90°F<br>10-32°C               |
| 10-17                      | 200-425    | 5-8   | 125-200  | 48.3                  | 80-130                                    | 2.0-3.2           | 775                          | 19.1              | 30 min.                                                           | 1-3    | 24           | Water              | Water         | Water              | Soap/Water | 1:1                       | 2                                                             | 0                                            | >200°F<br>93°C      | Yes                          | 50-90°F<br>10-32°C               |
| 4-6                        | 100-150    | 2-3   | 50-75    | 50                    | 230-340                                   | 5.7-8.4           | 800                          | 19.7              | 30 min.                                                           | 1-3    | —            | Water              | Water         | Water              | Soap/Water | 2:1                       | 2                                                             | 0                                            | >200°F<br>93°C      | Yes                          | 50-100°F<br>10-38°C              |
| COATINGS                   |            |       |          |                       |                                           |                   |                              |                   |                                                                   |        |              |                    |               |                    |            |                           |                                                               |                                              |                     |                              |                                  |
| 2.5-7.5                    | 62.5-187.5 | 1-3   | 25-75    | 40                    | 180-545                                   | 4.4-13.4          | 640                          | 15.8              | 30 min.                                                           | 1-2    | —            | Water              | Water         | Water              | Soap/Water | —                         | —                                                             | 0                                            | >212°F<br>100°C     | Yes                          | 50-100°F<br>10-38°C              |
| 5-7                        | 125-175    | 2-3   | 50-75    | 43                    | 200-300                                   | 4.9-7.4           | 690                          | 17                | 30 min.                                                           | 1-2    | —            | Water              | —             | —                  | Soap/Water | 1:1                       | 2                                                             | 0                                            | >212°F<br>100°C     | Yes                          | 50-100°F<br>10-38°C              |
| 4.5-7                      | 112.5-175  | 2-3   | 50-75    | 47                    | 215-320                                   | 5.3-7.9           | 755                          | 18.5              | 30 min.                                                           | 1-2    | —            | —                  | Water         | Water              | Soap/Water | 1:1                       | 2                                                             | 0                                            | >212°F<br>100°C     | Yes                          | 50-100°F<br>10-38°C              |

\* This product meets the requirements set by the USDA for use in food and beverage establishments or processing plants.

\*\* Agriculture Canada (also known as Canadian Food Inspection Agency).

• TRUSTED QUALITY SINCE 1921 •

# RUST-OLEUM®



Working hard to protect concrete in every area of an active industrial facility, Rust-Oleum® Concrete Protection Systems has a solution just for you... whatever your floor problem. Our Flooring Experts will work directly with you and your customers to ensure that the proper selection and application recommendations meet your flooring needs.



# CONCRETE PROTECTION SYSTEMS

Colors are printing approximations and may vary. Custom colors available upon request.

## STANDARD PRODUCT COLORS



National Blue




Dark Gray



Light Gray




Navy Gray



Super Light Gray



Light Green




Tile Red




Dunes Tan




Safety Yellow



Black



Natural



White\*

\* White color may vary.

## ADDITIONAL COLORS (Not available in all product lines)



Pastel Blue



Clear


## 9600 SYSTEM – BRITECAST™ COLORS



BC-103



BC-105



BC-109



BC-112



BC-117



BC-119



BC-120



BC-121



BC-122

## 4600 SYSTEM – BRITECAST™ SC COLORS




BCSC-103



BCSC-108



BCSC-112



BCSC-113



BCSC-119



BCSC-120



BCSC-122




BCSC-123



BCSC-124




BCSC-125



BCSC-126

## COMPANION PRODUCT: EPOXY GROUT



Epoxy Grout QS  
Dark Blue



Epoxy Grout GP  
Medium Gray



Epoxy Grout CR  
Dark Red

## COMPANION PRODUCT: VINYLCAST DECORATIVE VINYL CHIPS



VC-01



VC-02



VC-03



VC-04



VC-05



VC-06




VC-07



VC-08



VC-09



VC-10



VC-11



VC-12



VC-13



VC-14



VC-15



VC-16



## CONCRETE PROTECTION SYSTEMS (CPS) NOMENCLATURE

|            |                               |           |                                |
|------------|-------------------------------|-----------|--------------------------------|
| <b>CB</b>  | Cove Base                     | <b>P</b>  | Primer                         |
| <b>CPS</b> | Concrete Protection Systems   | <b>QS</b> | Quick Set                      |
| <b>CR</b>  | Corrosion Resistant           | <b>S</b>  | Smooth (Glaze/Topcoat)         |
| <b>C</b>   | Conductive                    | <b>SC</b> | Static Control                 |
| <b>ESD</b> | Electrostatic Discharge       | <b>SD</b> | Static Dissipative             |
| <b>GP</b>  | General Purpose               | <b>SL</b> | Self-Leveling                  |
| <b>HD</b>  | Heavy-Duty Topping/Resurfacer | <b>TX</b> | Textured (Extreme Orange Peel) |
| <b>HDV</b> | Heavy-Duty Vertical           | <b>V</b>  | Vertical                       |
| <b>OP</b>  | Orange Peel                   |           |                                |

### APPLICATION TYPE CLASSIFICATION

**Application Type I** CPS products that can be applied by properly trained in-house maintenance crews.

**Application Type II** CPS products typically contractor installed by our independent national contractor network.

## EPOXY

### 8000 SYSTEM - OVERKRETE® 100% SOLIDS EPOXY



#### TYPICAL APPLICATIONS

**Toppings:** Flooring for secondary containment, machine shops, warehousing and other physically abusive environments.

**Coatings:** Floor coating for warehousing and as a topcoat in heavy-duty environments.

**APPLICATION**

SEE APPLICATION INSTRUCTIONS

**SUBSTRATE**

CONCRETE

**VOC g/l**

**VOC <100**

Compliant Nationwide

Heavy-duty, 100% solids epoxy floor toppings and coatings are designed to withstand moderate chemicals and severe mechanical abuse.

- Low odor for use in all regulated areas
- VOC compliant, so safe for people, products and processes

#### Toppings:

- High abrasion resistance — OverKrete® HD is the Contractors' choice for warehousing
- Economical, high-build system with fast turnaround and long-lasting service life
- Easy to apply with no primers required

#### Coatings:

- Resist light chemical and severe mechanical abuse
- New and improved coating resists blushing and chemicals
- USDA acceptable\* and Agriculture Canada\*\* approved

#### AVAILABLE 8000 SYSTEM PRODUCTS

**Toppings:**  
OverKrete® HD - Type II  
OverKrete® CB - Type II

**Coatings:**  
OverKrete® S - Type I  
OverKrete® OP - Type I  
OverKrete® V - Type I

#### COLORS

Reference CPS Catalog #237616


## EPOXY



### TYPICAL APPLICATIONS

**Coatings:** Floor coating for warehousing, showrooms, laboratories, clean rooms, aircraft hangars, mechanical areas, storage facilities and as a topcoat in heavy-duty environments.

## 8100 SYSTEM – OVERKRETE® XTRA PREMIUM 100% SOLIDS EPOXY



Premium 100% solids epoxy floor coatings are industrial end-users' choice for aesthetically-pleasing, easy-to-maintain high gloss, color stability and performance.

- Great alternative to heavy-duty toppings for relative performance
- Easily combined with other systems for additional protection and appeal
- Protects against light to moderate chemical splash and spills and foot and rubber wheeled traffic
- Excellent anti-slip properties (with aggregate or aluminum oxide) or VinylCast vinyl chips
- Low odor for use in all regulated areas
- VOC compliant, so safe for people, products and processes
- USDA acceptable\* and Agriculture Canada\*\* approved

### AVAILABLE 8100 SYSTEM PRODUCTS

**Coatings:**  
 OverKrete® Xtra S - Type I  
 OverKrete® Xtra OP - Type I  
 OverKrete® Xtra V - Type I


**105 mil:**  
 OverKrete® Xtra SL - Type II

### COLORS

**Reference CPS Catalog**  
**#237616**

## EPOXY

## 8200 SYSTEM – OVERKOTE® CHEMICAL RESISTANT EPOXY



100% solids epoxy floor coatings and toppings for maximum chemical resistance in the most extreme industrial environments.

- Low odor for use in all regulated areas
- VOC compliant, so safe for people, products and processes
- USDA acceptable\* and Agriculture Canada\*\* approved

### Toppings:

- Choice of Food & Beverage end users for durability in severe chemical (alkalis and acids) and mechanically abusive environments
- Resin-rich, high-build system with fast turnaround and long-lasting service life
- Easy to apply with no primers required
- Severe abrasion resistance to steel-wheeled traffic
- OverKote® HD tested in over 350 chemicals for 1 year immersion

### Coatings:

- Can be combined with other systems for maximum chemical resistance and protection:
  - OverKote® TX with FlorClad™ combines abrasion resistance with aesthetics and low maintenance

### AVAILABLE 8200 SYSTEM PRODUCTS

**Toppings:**  
 OverKote® HD - Type II  
 OverKote® HDV - Type II  
 OverKote® CB - Type II

**Coatings:**  
 OverKote® S - Type I  
 OverKote® TX - Type I  
 OverKote® V - Type I

### COLORS

**Reference CPS Catalog**  
**#237616**



### TYPICAL APPLICATIONS

**Toppings:** Flooring for dairies, CIP, rendering, breweries, wineries, processing areas, secondary containment, trench liners and tank farms.

**Coatings:** Floor coating for laboratories, offices, corridors, warehousing, locker rooms, shower rooms, restaurants, restrooms, cafeterias, schools, hospitals and as a chemically resistant topcoat in heavy-duty environments.

## EPOXY



### TYPICAL APPLICATIONS

**Toppings:** Flooring for secondary containment, tank farms, trench liners, sump lining, plating facilities and battery storage areas.

**Coatings:** Floor coating for secondary containment, tank farms, trench liners, sump lining, plating facilities and battery storage areas and as a chemically resistant topcoat in heavy-duty environments.

## 8300 SYSTEM – OVERKOTE® PLUS NOVOLAC EPOXY

|                                                              |
|--------------------------------------------------------------|
| <b>APPLICATION</b><br>SEE APPLICATION INSTRUCTIONS           |
| <b>SUBSTRATE</b><br><br>CONCRETE                             |
| <b>VOC g/l</b><br><b>VOC &lt;100</b><br>Compliant Nationwide |

Heavy-duty, 100% solids Novolac epoxy toppings and coatings stand up to the harshest chemicals in extreme industrial environments.

- Offers the highest level of protection against the most corrosive industrial chemicals — even 98% sulfuric acid
- Easy to apply viscosity and one coat finish requires half the labor of a typical novolac epoxy
- Withstands steel-wheeled traffic and mechanical abuse
- Low odor for use in all regulated areas
- VOC compliant, so safe for people, products and processes
- OverKote® Plus HD tested in 350 chemicals for one year immersion
- USDA acceptable\* and Agriculture Canada\*\* approved

### AVAILABLE 8300 SYSTEM PRODUCTS

**Toppings:**  
OverKote® Plus HD - Type II  
OverKote® Plus HDV - Type II  
OverKote® Plus CB - Type II

**Coatings:**  
OverKote® Plus S - Type I  
OverKote® Plus V - Type I

### COLORS

Reference CPS Catalog #237616

## EPOXY



### TYPICAL APPLICATIONS

**Toppings:** Flooring for cold storage areas and outdoor secondary containment.

**Coatings:** Floor coating for cold storage areas, outdoor secondary containment and as a topcoat in heavy-duty environments.

## 8600 SYSTEM – OVERKRETE® 45/65 LOW TEMP EPOXY

|                                                              |
|--------------------------------------------------------------|
| <b>APPLICATION</b><br>SEE APPLICATION INSTRUCTIONS           |
| <b>SUBSTRATE</b><br><br>CONCRETE                             |
| <b>VOC g/l</b><br><b>VOC &lt;100</b><br>Compliant Nationwide |

100% solids epoxy floor coatings and toppings for low temperature applications, or faster turnaround in normal temperatures, in severe industrial environments.

**Toppings:**

- Offers high degree of abrasion resistance
- High-build system with fast turnaround and long-lasting service life
- Resists moderate chemical and severe mechanical abuse
- Low odor for use in all regulated areas
- VOC compliant, so safe for people, products and processes
- USDA acceptable\* and Agriculture Canada\*\* approved

### AVAILABLE 8600 SYSTEM PRODUCTS

**Toppings:**  
OverKrete® 45/65 HD - Type II  
OverKrete® 45/65 HDV - Type II  
OverKrete® 45/65 CB - Type II

**Coatings:**  
OverKrete® 45/65 S - Type II  
OverKrete® 45/65 V - Type II

### COLORS

Reference CPS Catalog #237616



## POLYUREA

### 8700 SYSTEM – FASTKOTE® HIGH SOLIDS POLYASPARTIC

|                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------|
| <b>APPLICATION</b><br>SEE<br>APPLICATION<br>INSTRUCTIONS                                                          |
| <b>SUBSTRATE</b><br><br>CONCRETE |
| <b>VOC g/l</b><br><b>VOC &lt;100</b><br><i>Compliant Nationwide</i>                                               |

Fast flooring protection for mild to moderate environments. Cures fast, UV stable with steadfast protection against corrosion, chemicals, and abrasion.

- Cures faster than typical 100% solids epoxies, even in cold temperatures
- Low odor and VOC compliant for continuous work in adjacent areas
- Excellent topcoat over primers, epoxy base coats, decorative and anti-slip broadcasts
- UV stable protection with better yellowing and staining resistance
- Withstands hot tire, skydrol, gas, brake fluid, and other chemicals common in automotive areas
- USDA acceptable\*

#### AVAILABLE 8700 SYSTEM PRODUCTS

FastKote™ - Type II

#### COLORS

Light Gray  
Clear



#### TYPICAL APPLICATIONS

**Coatings:** Floor coating for service bays, laboratories, cafeterias, offices, airplane hangars and storage areas.

## URETHANE CONCRETE



### 8900 SYSTEM – THERMAKRETE® URETHANE CONCRETE

|                                                                                                                     |
|---------------------------------------------------------------------------------------------------------------------|
| <b>APPLICATION</b><br>SEE<br>APPLICATION<br>INSTRUCTIONS                                                            |
| <b>SUBSTRATE</b><br><br>CONCRETE |
| <b>VOC g/l</b><br><b>VOC &lt;100</b><br><i>Compliant Nationwide</i>                                                 |

Heavy-duty, easy to apply, water-based urethane concrete topping stands up to the most extreme industrial environments.

- Food & Beverage end users' choice for ultimate resistance against extreme thermal shock, abrasion and high impact
- Easy to apply — no primer required and fast-curing in cold operations
- Can be modified for trowel or patching applications
- Resistant to typical chemicals found in Food & Beverage plants
- Seamless composition resists corrosion and bacteria
- VOC compliant nationwide
- USDA acceptable\* and Agriculture Canada\*\* approved

#### AVAILABLE 8900 SYSTEM PRODUCTS

ThermaKrete® HP - Type II  
(Self-Leveling Slurry)

#### COLORS

Reference CPS Catalog #237616

#### TYPICAL APPLICATIONS

**Toppings:** Flooring for caustic washdown areas, cold storage, bottling, sanitizing, bakeries, food processing, rendering, loading docks and all areas subjected to thermal shock.

**Coatings:** Floor coating used as a topcoat for easy to clean areas subjected to thermal shock.



## EPOXY

## 9000 SYSTEM – FLORCLAD™ EPOXY MORTAR TOPPING

|                                                                                               |
|-----------------------------------------------------------------------------------------------|
| <b>APPLICATION</b>                                                                            |
| SEE APPLICATION INSTRUCTIONS                                                                  |
| <b>SUBSTRATE</b>                                                                              |
| <br>CONCRETE |
| <b>VOC g/l</b>                                                                                |
| <b>VOC &lt;100</b><br><i>Compliant Nationwide</i>                                             |

Powerful, 100% solids epoxy mortar topping for seamless protection against mechanical and impact abrasion and moderate chemicals in severe industrial environments (1/3 more resin than competitive troweled systems).

- Choice of flooring contractors for highest resin content in the industry
- Offers superior durability and twice the load-carrying capacity of uncoated concrete
- Easy to apply, fast turnaround with screed box and power or hand trowel
- Combine with coatings from other systems for perfect blend of aesthetics, anti-slip and high performance
- Low odor for use in all regulated areas
- VOC compliant nationwide
- USDA acceptable\* and Agriculture Canada\*\* approved

### AVAILABLE 9000 SYSTEM PRODUCTS

Toppings:  
 FlorClad™ HD - Type II

### COMPANION PRODUCTS

FlorClad™ Primer  
 FlorClad™ Aggregate

### COLORS

Reference CPS Catalog #237616

*Topcoat with 8200 OverKote TX for the perfect blend of labor savings, performance and aesthetics!*



**TYPICAL APPLICATIONS** Flooring for dry process areas, packaging (wrap and inventory), manufacturing and warehousing.

## EPOXY

### 9600 SYSTEM – BRITECAST™ DECORATIVE QUARTZ

|                              |
|------------------------------|
| <b>APPLICATION</b>           |
| SEE APPLICATION INSTRUCTIONS |
| <b>SUBSTRATE</b>             |
| CONCRETE                     |
| <b>VOC g/l</b>               |
| <b>VOC &lt;100</b>           |
| <i>Compliant Nationwide</i>  |

Heavy-duty coating of epoxy resin blend and decorative quartz that provides both beauty and safety for institutional, commercial and pharmaceutical environments.

- Protects against slips and falls
- Aesthetically pleasing with multi-colored decorative quartz
- Easy-to-maintain and resists bacterial growth and corrosion
- Superior compressive strength and chemical resistance with splash and spill protection against many acids, alkalis and solvents
- Choice of profile to adapt to COF specifications
- VOC compliant nationwide
- USDA acceptable\* and Agriculture Canada\*\* approved

#### AVAILABLE 9600 SYSTEM PRODUCTS

BriteCast™ Base Coat - Type I  
 BriteCast™ CB - Type II  
 BriteCast™ Sealer - Type I

#### COMPANION PRODUCTS

BriteCast™ Aggregate

#### COLORS

Reference CPS Catalog  
 #237616



**TYPICAL APPLICATIONS** Decorative floor coating for laboratories, offices, corridors, locker rooms, shower rooms, restrooms, cafeterias, schools, hospitals and areas requiring anti-slip.

## EPOXY

### 4600 SYSTEM – BRITECAST™ SC ELECTROSTATIC DISCHARGE CONTROL DECORATIVE QUARTZ



**TYPICAL APPLICATIONS** Decorative floor coating for laboratories, clean rooms, computer control rooms, electronic assembly areas and areas requiring ESD control.

|                              |
|------------------------------|
| <b>APPLICATION</b>           |
| SEE APPLICATION INSTRUCTIONS |
| <b>SUBSTRATE</b>             |
| CONCRETE                     |
| <b>VOC g/l</b>               |
| <b>VOC &lt;100</b>           |
| <i>Compliant Nationwide</i>  |

Heavy-duty, decorative electrostatic discharge control coating.

- Electrostatic discharge control
- Easy-to-maintain decorative appeal
- Resists chemicals, vehicle traffic and impact
- USDA acceptable\* and Agriculture Canada\*\* approved

#### AVAILABLE 4600 SYSTEM PRODUCTS

BriteCast™ SC Base Coat - Type II  
 BriteCast™ SC Sealer - Type II

#### COMPANION PRODUCTS

BriteCast™ SC Aggregate

#### COLORS

Reference CPS Catalog  
 #237616

## EPOXY

### 4700 SYSTEM – ULTRAPLEX™ ESD CONTROL COATING

#### APPLICATION

SEE  
APPLICATION  
INSTRUCTIONS

#### SUBSTRATE



CONCRETE

VOC g/l

**VOC <100**

*Compliant Nationwide*

100% solids, epoxy coatings for critical environments requiring seamless ESD control protection against static and sparking.

- C (Conductive) floor coatings protect areas requiring low resistance
- SD (Static Dissipative) floor coatings protect areas where electrostatic discharge build-up hinders productivity
- Custom solutions in 105 mil (self-leveling) or 32 mil of SD S protection tailored to specific needs
- Easy maintenance without dusting or waxing
- Low odor for use in all regulated areas
- VOC compliant nationwide
- USDA acceptable\*

#### AVAILABLE 4700 SYSTEM PRODUCTS

UltraPlex™ C SL - Type II  
 UltraPlex™ SD SL - Type II  
 UltraPlex™ SD S - Type II

#### COMPANION PRODUCTS

Primer ESD - Type II  
 WB Primer™ ESD - Type II

#### COLORS

Reference CPS Catalog  
 #237616



#### TYPICAL APPLICATIONS

**Coatings:** Floor coating for electronics assembly, computer control rooms, pyrotechnic processing areas, powdered production areas, airbag production, clean rooms, hospitals, semi-conductor and relay assembly areas, printing press production and other areas requiring conductive or static dissipative control.

Whether your project is a 1 ft<sup>2</sup> patch repair or a 100,000 ft<sup>2</sup> production floor, Concrete Protection Systems (CPS) by Rust-Oleum offers you superior quality and protection designed to reduce prep time, application time and downtime while extending life time of your substrate...for maximum return on your investment!

## RUST-OLEUM GRIND 'N GO® MACHINE



The quick and easy way to prepare any concrete surface and achieve optimal results.

**Type II**

- Carbide scarifiers remove mastics, adhesives and old coatings
- Diamond-head attachments mechanically prepare new or old concrete floors for coating
- Vacuum attachment greatly reduces dust
- Portable and lightweight
- Easy-to-use with stabilizing counter rotation
- Available in 16" (110V) and 20" (220V)

### AVAILABLE PRODUCTS

238592 Rust-Oleum 20" Grind 'N Go®

### ATTACHMENTS FOR 20" GRIND 'N GO®

237806 Cobalt Bond Diamond Segments (Set of 3)  
 238636 Carbide Scrapers (Set of 3)  
 237808 Concrete Scarifier (Set of 3)  
 237809 Machine Weight (25 lbs)

238637 20" Timing Kevlar Belt  
 238632 Dust Skirt  
 237805 Carbide Scarifier Replacement Kit  
 238593 Vacuum  
 211237 Vacuum Bags  
 211243 Cloth Filter  
 211244 Intermediary Filter

See page 82 for 16" Grind 'N Go® details.

## ADDITIONAL CPS COMPANION PRODUCTS

### PATCH & REPAIR

#### Rust-Oleum TurboKrete® Concrete Patching Compound

**Type I**



This high-performance, 100% solids epoxy patch kit repairs damaged concrete, fills deep holes, and protects against abrasion, impact, and most chemicals. TurboKrete® restores damaged curbs and severely spalled floors, with 3-4 times the

strength of the concrete. This easy-mix, fast-cure formula meets USDA requirements for use in food and beverage facilities. Fast cure for foot traffic in 1½-4 hours and for vehicle traffic in 6-8 hours.

5494323 .30 cu. ft. Kit • 253479 .15 cu. ft. kit

#### Rust-Oleum BlokFil™ Concrete Epoxy & Block Filler

**Type I**



This heavy-duty, 100% solids formula of epoxy resin polymer and polyamine curative fills the voids in concrete walls or floors, exceeding the tensile strength of the concrete. BlokFil prevents bubbling

and smooths rough surfaces. Cures in only 1-2 hours.

#### Rust-Oleum OverFlex E™ Flexible Epoxy

**Type II**

This tough, 100% solids epoxy formula of copolymer resin repairs cracks in concrete floors and walls, indoors and out. This flexible membrane helps insulate the topcoat from movement in the substrate with 77% elongation, maintaining the integrity of the chemical barrier, and extending the life of the concrete. Cures in only 8-10 hours.

#### Rust-Oleum OverDrive®

**Type II**

This non-porous epoxy grout rebuilds severely eroded concrete floors with tremendous bonding and load-bearing properties exceeding the tensile strength of concrete. Can be applied to damp, 10-day old concrete, curing in only 6-8 hours.



## ADDITIONAL CPS COMPANION PRODUCTS

### Epoxy Grouts

Type II



These three-component, high-tensile epoxy grouts keep valuable machinery and equipment perfectly aligned for years of service. Our fast-curing grouts can be easily poured to form under hard-to-reach foundations. Low-exotherm cure minimizes

shrinkage. Low dusting aggregate provides a cleaner and safer work area. General purpose (Medium Gray), 2-hour Quick Set (Dark Blue) and Corrosion Resistant (Dark Red) grouts are available.

### FLOOR PRIMERS

#### Rust-Oleum TurboPrime®

Type I

TurboPrime is an easy-to-mix, easy to apply, fast-curing high solids epoxy primer/concrete sealer. It can be used as a fast cure primer or as a stand-alone concrete sealer. VOC compliant protection against dust, water, mild chemicals, and an easy-to-clean surface make TurboPrime the right choice for fast jobs. Available in Amber Clear.

#### Rust-Oleum Prime & Seal™ Primer

Type I

This two-component, virtually 100% solids epoxy resin polymer seals the substrate and securely bonds it to the floor coating or patching materials. May be used before applying floor coatings, toppings, patching materials, or alone as a concrete sealer. Exceeds the tensile and shear strength of the concrete, and cures in only 6-8 hours. Available in Natural, Light Gray and Super Light Gray.

#### Rust-Oleum Penetrating Prime & Seal™ Primer

Type I

This two-component, virtually 100% solids epoxy resin polymer shares the same strong qualities of our Prime & Seal Primer. Designed for covering worn concrete, our penetrating formula seals small voids and pinholes to reduce bubbles in the topcoat. Available in Natural, Light Gray and Super Light Gray.

### Rust-Oleum Green Concrete Prime & Seal™ Primer

Type II

This all-in-one curing compound, sealer and primer can be applied to green concrete (after 8 hours of pouring the slab, or as soon as concrete can be walked on without marring). Topcoat can be applied 8 hours later. It strengthens the concrete through hydration, and provides excellent bond strength. It dramatically reduces project turn-around time and maximizes return on your investment.

### BROADCAST MEDIUM

#### Rust-Oleum Aluminum Oxide


Stronger than diamonds, fine grit aluminum oxide can be (fully or sparsely) broadcast into various CPS systems for additional slip resistance.

### Decorative Vinyl Chips

VinylCast vinyl chips can be (full or sparsely) broadcast into various CPS systems for decorative, easy-to-maintain terrazzo-like finishes.



Full Broadcast



Sparse Broadcast

Commonly used in light manufacturing, schools, cafeterias, showrooms and locker room floors.

Ask us about our complete line of application equipment and accessories.

## RUST-OLEUM FLOORING SOLUTIONS

**Let Rust-Oleum customize a flooring solution that stands up to your biggest flooring challenges!**

- **85 years experience in industrial coating solutions** for the Food & Beverage, Chemical Processing and Industrial Manufacturing environments
- **Wide range of mild to severe industrial labor-saving products** with performance backed by the name you trust
- **Unrivaled chemical resistance** — tested in over 350 chemicals for over 1 year immersion
- **Easy to apply products** that reduce downtime
- **Installation options** — contain labor with your in-house crew, use your preferred professional contractor, or have Rust-Oleum provide a turnkey solution

**Rust-Oleum Concrete Protection Systems makes buying and installing concrete protection easy.**

- 1 Call 877-703-5007.** Rust-Oleum offers a wide range of mild to severe industrial floor coatings and toppings, and installation options to fit your timeline, budget and level of expertise.
- 2 Set up a site survey with one of Rust-Oleum's experienced industrial Flooring Specialists.** Our flooring specialists will assess the condition of your concrete and the industrial environment, and then specify a customized solution designed for your business needs.
- 3 Stand up to your concrete challenges today!**

• TRUSTED QUALITY SINCE 1921 •

# RUST-OLEUM®




Working hard to preserve concrete, our complete system of floor coatings protects in all types of industrial environments. Utilize your in-house application crew, contain labor costs, and reduce downtime as you extend the life of your floors. For protection against light pedestrian to heavy vehicular traffic, there is a Concrete Saver® product that is in step with your needs.

# CONCRETE SAVER

Colors are printing approximations and may vary.



Dunes Tan



Tile Red



Safety Blue



Safety Green



Safety Orange



Safety Red



Safety Yellow




Navy Gray



Silver Gray



Black



White




Clear


## DECORATIVE VINYL CHIPS




Black/White



Black/White/Blue



Blue/White




Black/White/Gray



## EPOXY

### AS5400 SYSTEM ANTI-SLIP ONE-STEP EPOXY

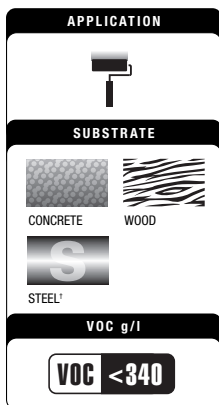

<sup>1</sup> When primed with 9100 System – DTM Epoxy Mastic

Labor-saving, anti-slip epoxy, in one step, protects pedestrian grade floors with ease.

- Easy-to-use, single component for fast application
- Ridged profile handles heavy foot traffic and/or light vehicle traffic
- Can be resealed for multi-use areas subjected to mild chemicals, occasional steam and chemical cleaning
- For indoor and outdoor use
- Dries quickly — return to service in 24 hr. for heavy traffic
- Coefficient of friction — Dry: 1.17, Wet: 1.00
- USDA acceptable\* and Agriculture Canada\*\* compliant

#### COLORS

AS5471402 Dunes Tan  
 AS5468402 Tile Red  
 AS5486402 Navy Gray  
 AS5482402 Silver Gray  
 AS5479402 Black

#### SAFETY COLORS

AS5444402 Safety Yellow



**COATING PROFILE**

**TYPICAL APPLICATIONS** Floor coating for aisles, decks, walkways, stairs, machine operating areas and entrances/exits.


## EPOXY

### AS6000 SYSTEM ANTI-SLIP LOW PROFILE EPOXY



**COATING PROFILE**

**TYPICAL APPLICATIONS** Floor coating for barefoot recreational areas, locker rooms, hotel pools, restrooms, showers, laundries and walkways.



Low VOC, water-based anti-slip floor epoxy acts as a safeguard on barefoot grade floors.

- Use anywhere extra protection is needed from slips and falls in barefoot and wet recreational environments
- For indoor and outdoor use
- Dries quickly — return to service in 24 hr. for light traffic/48 hr. heavy traffic
- Coefficient of friction — Dry: 0.78, Wet: 0.86
- USDA acceptable\* and Agriculture Canada\*\* compliant


*Available in two-component (1 gallon activated) kit of base and activator.*

#### COLORS

AS6086425 Navy Gray  
 AS6082425 Silver Gray

## EPOXY

### AS9100 SYSTEM ANTI-SLIP HIGH PERFORMANCE EPOXY



<sup>†</sup> When primed with 9100 System – DTM Epoxy Mastic

Low VOC, extreme profile anti-slip epoxy offers maximum protection for vehicle grade floors.

- Protects against chemicals and abrasion in heavy traffic environments
- Highly ridged profile endures heavy wear, frequent power cleaning and constant high humidity
- For indoor and outdoor use
- Dries quickly — return to service in 12 hr. for light traffic/ 72 hr. heavy traffic
- Coefficient of friction — Dry: 1.05, Wet: 1.05
- USDA acceptable\* and Agriculture Canada\*\* compliant

Available in two-component (1 gallon activated) kit of base and activator.


#### COLORS

AS9171425 Dunes Tan  
 AS9168425 Tile Red

AS9186425 Navy Gray  
 AS9182425 Silver Gray

#### SAFETY COLORS

AS9144425 Safety Yellow

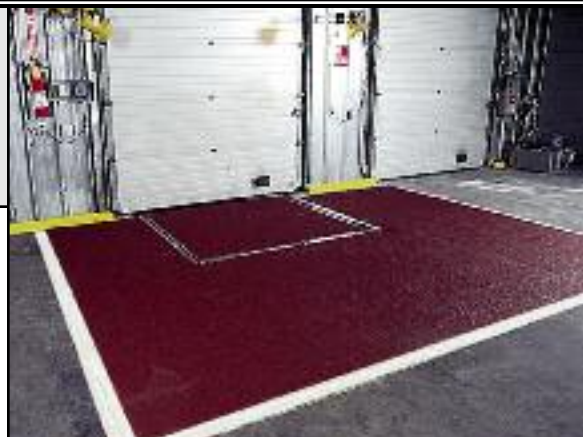

COATING PROFILE

**TYPICAL APPLICATIONS** Floor coating for vehicle routes, forklift traffic, ramps, walkways and loading docks.


## EPOXY

### AS6500 SYSTEM ANTI-SLIP 100% SOLIDS EPOXY



COATING PROFILE

**TYPICAL APPLICATIONS** Floor coating for food processing, preparation areas and wash areas, and where regular power cleaning and high humidity is common.



<sup>†</sup> When primed with 9100 System DTM Epoxy Mastic

Extra heavy-duty, 100% solids epoxy maintains the anti-slip, chemical, and abrasion resistance required in food processing where regular power cleaning and high humidity is common.

- Protects against chemicals and abrasion in heavy traffic environments
- Low odor ideal for use in confined, low ventilation areas
- For indoor and outdoor use
- Dries quickly — return to service in 12 hr. for light traffic/72 hr. heavy traffic
- Coefficient of friction — Dry: 1.1, Wet: 1.0
- USDA acceptable\* and Agriculture Canada\*\* compliant

Available in two-component kit of base and activator.


#### COLORS

AS6586425 Navy Gray  
 AS6582425 Silver Gray

## ACRYLIC

**NEW**

### 5500 SYSTEM ACRYLIC DUSTPROOFER FLOOR SEALER

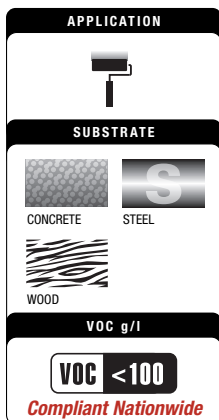

Roll and go concrete dustproofer/sealer.

- Convenient, ready-to-use with no measuring or mixing
- Minimal prep required
- Use direct to concrete or as a clear topcoat for an easier to clean and maintain surface
- Seals out water and mild chemicals — prevents dusting
- Excellent coverage over new and previously coated surfaces
- Fast drying (recoat in one hour, traffic in 12 hours)
- Ideal for interior and exterior concrete floors, walkways, decks and patios in mild industrial and commercial environments
- USDA acceptable\*

#### COLORS

251282 Clear



**TYPICAL APPLICATIONS** Floor coating for warehouses, walkways; over stained and painted concrete; retail and commercial.


## ACRYLIC URETHANE

**NEW**

### 5600 SYSTEM ACRYLIC URETHANE FLOOR PAINT



**TYPICAL APPLICATIONS** Floor coatings for interior and exterior concrete floors, walkways, decks and patios in mild industrial and commercial environments exposed to heavy and light rubber wheeled traffic.

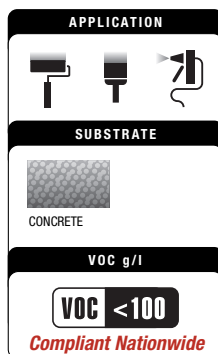

Spruce up your floor with low odor, roll and go floor paint

- Convenient, ready-to-use with no measuring or mixing
- Protects concrete floors from dusting, water damage, staining and mildew
- Excellent coverage over new and previously coated surfaces
- Accepts next day foot traffic
- Use for improved aesthetics, 5S, safety and organization markings and for easy maintenance
- USDA acceptable\*


#### COLORS



|        |               |        |               |
|--------|---------------|--------|---------------|
| 261117 | Safety Blue   | 251286 | Safety Yellow |
| 261118 | Safety Green  | 251289 | White         |
| 261116 | Safety Orange | 251291 | Silver Gray   |
| 261115 | Safety Red    |        |               |

## EPOXY

### 6000 SYSTEM WATER-BASED EPOXY



† Prime with Rust-Oleum  
5381405 Gray Primer

Low VOC, water-based epoxy for industrial floors that features high gloss and is easy to clean.

- Cleans with soap and water
- Extended pot life for longer working time
- Protects against heavy foot traffic and lightweight rubber-wheeled traffic
- Handles occasional mild chemicals, steam, hot water, humidity and moisture
- USDA acceptable\* and Agriculture Canada\*\* compliant

*Base and activator ordered separately. Combine for 1 gallon activated.*

#### COLORS

6071408 Dunes Tan  
6068408 Tile Red  
6086408 Navy Gray

6082408 Silver Gray

6092408 White

6010408 Clear

#### ACTIVATOR

6001604 Activator




**TYPICAL APPLICATIONS** Floor coating for food processing, clean rooms, laboratories, schools, cafeterias and hospitals.

## EPOXY

**NEW**

### 6200 SYSTEM FAST-CURE EPOXY FLOOR COATING



High performance, easy maintenance flooring for mild to moderate environments

- Convenient ready-to-mix industrial flooring kit
- Excellent two-component chemical and abrasion protection — long lasting protection against dusting, staining and wear
- Fast curing formulation gets you back in service fast (4 hour recoat, 5 hour light traffic)
- Ideal for interior and exterior concrete floors in industrial and commercial environments like warehouses, showrooms, manufacturing, garages and storage facilities
- USDA acceptable\*

*Base and activator included in two-component kit.  
Combine for 1 gallon activated.*

#### KITS

251763 Silver Gray

251765 Dunes Tan



**TYPICAL APPLICATIONS** Floor coating for warehousing, storage facilities, garages, showrooms and manufacturing.



## EPOXY

### 6500 SYSTEM 100% SOLIDS EPOXY



**TYPICAL APPLICATIONS** Floor coating for warehousing, showrooms, laboratories, clean rooms, aircraft hangars, mechanical areas, storage facilities and as a topcoat in heavy-duty environments.

APPLICATION



SUBSTRATE

 CONCRETE
  STEEL<sup>†</sup>

VOC g/l

**VOC <100**  
*Compliant Nationwide*

<sup>†</sup> When primed with 9100 System – DTM Epoxy Mastic

100% solids, high-build epoxy provides heavy-duty protection for industrial floors.

- Protects against heavy foot and rubber wheel traffic, occasional chemical spills, splashes, power washes, abrasion and impact
- Low odor ideal for use in confined, low ventilation areas
- Easy to maintain high gloss finish
- Dries quickly — return to service in 10 hr. for light traffic/72 hr. heavy traffic
- USDA acceptable\* and Agriculture Canada\*\* compliant

*Base and activator ordered separately. Combine for 1 gallon activated.*

#### COLORS

|          |             |
|----------|-------------|
| S6571413 | Dunes Tan   |
| S6568413 | Tile Red    |
| S6586413 | Navy Gray   |
| S6582413 | Silver Gray |
| S6592413 | White       |
| S6510413 | Clear       |

#### ACTIVATOR

|          |           |
|----------|-----------|
| S6501410 | Activator |
|----------|-----------|

#### PRIMERS

|          |                                   |
|----------|-----------------------------------|
| S6511413 | Penetrating Prime and Seal Primer |
| 241099   | TurboPrime™ Low VOC Primer Base   |

#### PRIMER ACTIVATORS

|          |                                             |
|----------|---------------------------------------------|
| S6502410 | Penetrating Prime and Seal Primer Activator |
| 241200   | TurboPrime™ Low VOC Primer Activator        |

## EPOXY

**NEW**

# EASYCLEAR™ EPOXY MAINTENANCE FLOOR COATING



**TYPICAL APPLICATIONS** Interior concrete floors in mild to moderate industrial and commercial environments like warehouses, showrooms, garages, manufacturing and storage facilities

|                                                                                                 |
|-------------------------------------------------------------------------------------------------|
| <b>APPLICATION</b>                                                                              |
|                |
| <b>SUBSTRATE</b>                                                                                |
| <br>CONCRETE |
| <b>VOC g/l</b>                                                                                  |
| <b>VOC &lt; 100</b>                                                                             |
| <i>Compliant Nationwide</i>                                                                     |

High performance, easy maintenance flooring for mild to moderate environments.

- Convenient, ready to mix industrial flooring kit
- Excellent protection over new or old concrete or previously coated floors
- Easy roller application
- High gloss finish

*Base and activator included in two-component kit.  
Combine for 1 gallon activated.*

### KIT

256673 Clear

## EPOXY PATCH



### TURBOKRETE® CONCRETE PATCHING COMPOUND

#### APPLICATION



#### SUBSTRATE



CONCRETE

High performance, 100% solids epoxy patch kit repairs damaged concrete, fills deep holes, and protects against abrasion, impact and most chemicals.

- Restores damaged curbs and severely spalled floors
- 3-4 times stronger than concrete
- Easy-mix, trowel — applied fast-cure formula
- Dries quickly — return to service in 1½-4 hours for light traffic and 6-8 hours for heavy traffic
- For indoor and outdoor use

**TYPICAL APPLICATIONS** Floor patch and repair for spalled or damaged concrete floors, curbs, ramps, walkways, decks and traffic routes.

#### COLORS (2 gallon)



253479

Light Gray kit  
(.15 cu. ft.)

#### COLORS (3.5 gallon)

5494323

Light Gray kit  
(.30 cu. ft.)

## EPOXY PATCH



### TURBOKRETE® ALL-PURPOSE EPOXY REPAIR

**NEW**

#### APPLICATION



#### SUBSTRATE



CONCRETE



CERAMIC



MASONRY



STEEL



TILE

The ultimate 100% solids non-sag epoxy repair.

- Easy to use — convenient 2K cartridge
- Superior non-sag formula excellent for bridging horizontal or vertical cracks, even under water
- Twice as strong as concrete
- Works on concrete, masonry, brick, steel and more
- Low odor, low VOC

**TYPICAL APPLICATIONS** Interior and exterior concrete or masonry for cracks, spalls and leaks on vertical, horizontal or overhead surfaces. Also great as an adhesive.

#### COLORS (9 oz. cartridge)

257395

Light Gray

#### COMPANION PRODUCTS

257397

Replacement Static  
Mixers (pack of 3)

261292


Heavy-Duty  
Caulk Gun

## POLYURETHANE



**TYPICAL APPLICATIONS** Floor coating for wood or concrete floors, office areas, warehousing, gymnasiums or as a glossy topcoat over anti-slip coatings.

## 6711 SYSTEM CLEAR WATER-BASED POLYURETHANE



Clear, water-based polyurethane for protection of wood and concrete floors.

- Easy-to-use, single component clear gloss topcoat or sealer
- Protects against light traffic, weather, and staining
- For indoor and outdoor use
- VOC compliant and low odor for use in all regulated areas
- USDA acceptable\* and Agriculture Canada\*\* compliant

### COLORS

6711402 Clear

## RUST-OLEUM GRIND 'N GO® MACHINE



The quick and easy way to prepare any concrete surface and achieve optimal results.

- Carbide scarifiers remove mastics, adhesives and old coatings
- Diamond-head attachments mechanically prepare new or old concrete floors for coating
- Vacuum attachment greatly reduces dust
- Portable and lightweight
- Easy-to-use with stabilizing counter rotation
- Available in 16" (110V) or 20" (220V)

### AVAILABLE PRODUCTS

207434 Rust-Oleum 16" Grind 'N Go®

### ATTACHMENTS FOR 16" GRIND 'N GO®

205318 Cobalt Bond Diamond Segments (Set of 3)  
 210692 Carbide Scrapers (Set of 3)  
 205319 Concrete Scarifier (Set of 3)  
 206432 Machine Weight (20 lbs)

210511 Machine Belts (Set of 3)

210693 Dust Skirt

210510 Carbide Scarifier Replacement Kit

207435 Vacuum

211237 Vacuum Bags

211243 Cloth Filter

211244 Intermediary Filter

See page 70 for 20" Grind 'N Go® details.



## CONCRETE SAVER COMPANION PRODUCTS

### 5499 SYSTEM CONCRETE PATCHING COMPOUND

100% solids epoxy patch kit specially formulated for repairing small holes or pores.

- Works on concrete, wood, fiberglass and brick with no priming
- Dries quickly — return to service in 12 hours for light traffic
- Virtually odor-free
- For indoor and outdoor use

#### AVAILABLE PRODUCTS

5499499 2 Gallon Kit (Base and Activator)

### 200 ANTI-SKID FLOOR COATING ADDITIVE

Specially refined aggregate provides increased skid resistance.

- Formulated for use with our 6000 System Water-Based Epoxy or 6500 System 100% Solids Epoxy
- Can be added directly to the liquid coating or broadcast over the final finish

#### AVAILABLE PRODUCTS

200504 Anti-Skid Floor Coating Additive

### ULTRAWEAR® ADDITIVE

- Use with industrial floor coatings to achieve greater durability and an anti-slip surface
- Blend one bag per gallon

#### AVAILABLE PRODUCTS

213898 UltraWear Additive

### 108 CLEANING & ETCHING SOLUTION

- Dual action solution — cleans and etches
- Helps dissolve grease, dirt and oil; then etches concrete for improved coating adhesion
- Covers approximately 400 sq. ft. of concrete with just one pre-mixed, ready-to-use gallon

#### AVAILABLE PRODUCTS

108402 Cleaning & Etching Solution

### DECORATIVE VINYL CHIPS

- Use with 6500 and 6000 Systems for a decorative finish
- Available in 1 lb. bags

#### AVAILABLE PRODUCTS

|        |                  |        |                  |
|--------|------------------|--------|------------------|
| 205220 | Black/White      | 205178 | Blue/White       |
| 205177 | Black/White/Blue | 205179 | Black/White/Gray |

See page 68 for available colors.

### RUST-OLEUM MIXERS & ROLLERS

|         |                                       |
|---------|---------------------------------------|
| 6695023 | Jiffler Mixer                         |
| 6696024 | 9" Candy Stripe Roller Cover 1/4" Nap |
| 6697005 | 9" Phenolic "No Nap" Roller Cover     |

# CONCRETE SAVER TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of Concrete Saver Floor Coatings. For more detailed information, see Rust-Oleum technical data sheets for individual products.

## RECOMMENDED FILM THICKNESS

### WET DRY

MILS MICRONS MILS MICRONS

## PERCENT VOLUME SOLIDS

## COVERAGE

### PRACTICAL THEORETICAL

ft.²/gal. m²/l. ft.²/gal. m²/l.

## DRY TIME

HRS. AT 70°F (21°C) - 80°F (27°C) & 50% HUMIDITY

## THINNING AS NEEDED

BRUSH / ROLLER AIRLESS SPRAY AIR-ATOMIZED SPRAY

## CLEAN-UP

MIX RATIO / ACTIVATOR NO.

POT LIFE - HRS. AT 70°F (21°C) - 80°F (27°C) & 50% HUMIDITY

## DRY HEAT RESISTANCE (°F/°C)

VOC LEVEL (g/l) VOLATILE ORGANIC COMPOUND

FLASH POINT (°F/°C)

USDA ACCEPTABLE<sup>1</sup>

APPLICATION TEMPERATURE RANGE

## FLOOR COATINGS

|                                                         |         |          |         |            |        |                 |          |         |           |     |   |       |       |   |   |                |                   |                |     |             |      |              |     |                   |
|---------------------------------------------------------|---------|----------|---------|------------|--------|-----------------|----------|---------|-----------|-----|---|-------|-------|---|---|----------------|-------------------|----------------|-----|-------------|------|--------------|-----|-------------------|
| <b>AS5400 System – Anti-Slip One-Step Epoxy</b>         | 30-35   | 750-875  | 17-20   | 425-500    | 60-62  | 50              | 1.23     | —       | —         | —   | — | 12    | 24    | — | — | —              | 160402            | —              | —   | —           | <340 | 81°F 27°C    | Yes | 50-100°F 10-38°C  |
| <b>AS6000 System – Anti-Slip Low-Profile Epoxy</b>      | 16-20   | 400-500  | 10-15   | 250-375    | 65-75  | 80-100          | 1.9-2.4  | —       | —         | —   | — | —     | 48    | — | — | —              | Soap/Water        | 3.7:1 AS60     | 1   | —           | <70  | >200°F 93°C  | Yes | 50-100°F 10-38°C  |
| <b>AS9100 System – Anti-Slip High Performance Epoxy</b> | 27-40   | 675-1000 | 17-25   | 425-625    | 62     | 40-60           | 1-1.5    | —       | —         | —   | — | —     | 72    | — | — | —              | 160402            | 9.6:1 AS91     | 4   | —           | <250 | 81°F 27°C    | Yes | 50-100°F 10-38°C  |
| <b>AS6500 System – Anti-Slip 100% Solids Epoxy</b>      | 27-40   | 675-1000 | 26-40   | 650-1000   | 96-100 | 25-35           | 0.6-0.9  | —       | —         | —   | — | —     | 48    | — | — | —              | 160402            | 4.1:1 AS65     | 1   | —           | <30  | >200°F 93°C  | Yes | 50-100°F 10-38°C  |
| <b>5600 System – Acrylic Urethane Floor Paint</b>       | 5-8     | 125-200  | 1.5-2.0 | 37.5-50    | 25-30  | 170-270         | 4.2-6.6  | 400-480 | 9.8-11.8  | 1-2 | — | 4-6   | 24    | — | — | —              | Soap/Water        | —              | —   | —           | <100 | >200°F 93°C  | Yes | 50-90°F 10-32°C   |
| <b>5500 System* – Acrylic Dustproofer Floor Sealer</b>  | —       | —        | —       | —          | —      | 150-400         | —        | —       | —         | —   | — | 3     | 12    | — | — | —              | Soap/Water        | —              | —   | —           | <100 | >200°F 93°C  | Yes | 50-100°F 10-38°C  |
| <b>6000 System – Water-Based Epoxy</b>                  | 4-6.5   | 100-1625 | 1.5-2.5 | 37.5-62.5  | 33-37  | 200-350         | 4.9-8.6  | 500-600 | 12.3-14.8 | —   | — | 1-2   | 16-72 | — | — | —              | Soap/Water        | 7:1 8001804    | 6-8 | —           | <250 | 205°F 96°C   | Yes | 60-100°F 15-38°C  |
| <b>6200 System – Water-Based Epoxy</b>                  | 3.5-8.0 | 87.5-200 | 2.5-5.5 | 62.5-137.5 | 69     | 300-350         | 7.4-8.6  | —       | —         | —   | — | 4     | 5     | — | — | —              | 160402            | 1:1            | 2-4 | 300°F 149°C | <250 | 8.8°F A15F   | Yes | 50-100°F 10-38°C  |
| <b>EasyClear™ Epoxy Maintenance Floor Coating</b>       | 3.0-7.0 | 75-175   | 2.0-5.0 | 50-125     | 76     | 400             | 9.8      | 1,221   | 30.0      | —   | — | 10-24 | 10-96 | — | — | —              | 160402            | 2:1            | 1.5 | —           | <100 | 8.3°F A234F  | —   | 60-85°F 15.5-29°C |
| <b>6500 System – 100% Solids Epoxy</b>                  | 16      | 400      | 16      | 400        | 100    | 100             | 2.5      | 1604    | 39.5      | —   | — | 10-24 | 10-72 | — | — | —              | 160402            | 1.6:1 96501410 | 1/2 | —           | <100 | >212°F 100°C | Yes | 60-90°F 16-32°C   |
| <b>6711 System – Clear Water-Based Polyurethane</b>     | 2-3.5   | 50-87.5  | 0.5-1.0 | 12.5-25    | 29     | 400-800         | 9.8-19.7 | 465     | 11.4      | 1/4 | — | 1/2   | 24    | — | — | Water up to 5% | 190402 Soap/Water | —              | —   | —           | <250 | >200°F 93°C  | Yes | 50-100°F 10-38°C  |
| <b>Turbokrete® Concrete Patching Compound</b>           | —       | —        | —       | —          | 100    | .15-.30 cu. ft. | —        | —       | —         | —   | — | 2-4   | 1.5-8 | — | — | —              | 160402            | —              | 1/2 | —           | N/A  | 185°F 85°C   | No  | 45-90°F 7-32°C    |
| <b>5499 System – Concrete Patching Compound</b>         | —       | —        | —       | —          | 94     | 12.5            | 0.3      | —       | —         | 2-3 | — | 16    | 16-72 | — | — | —              | 160402            | 1:1            | 5/6 | 140°F 60°C  | N/A  | 140°F 60°C   | No  | 50-100°F 10-38°C  |

\* This product meets the requirements set by the USDA for use in food and beverage establishments or processing plants.

\*\* Agriculture Canada (also known as Canadian Food Inspection Agency).

# Pure Strength®

## Cleaner/Degreaser



Rust-Oleum® values the importance of proper surface preparation to assure maximum performance from Rust-Oleum® Industrial Brands. Pure Strength® is an easy to use cleaner/degreaser to help prepare surfaces before painting. Pure Strength® is powerful, yet pleasant to use.



**TYPICAL APPLICATIONS** Walls, floors, machinery, dip tanks, equipment. Ideal for use on painted, unpainted, and rusted steel surfaces, as well as aluminum, bronze, stainless steel, fiberglass, tile, grout, and concrete.

## 3500 SYSTEM CLEANER/DEGREASER

- Powerful cleaner/degreaser
- Extremely effective for preparing surfaces prior to painting
- Excellent for removing tough grime, smoke, spills, grease, diesel oil, adhesive gum, road tar, food products, and more
- Safe to use — non-caustic, non-abrasive, and non-acidic
- Use full strength for industrial cleaning or diluted strength for general purpose cleaning
- USDA acceptable\*

### AVAILABLE PRODUCTS

#### Ready To Use:

3590402 1 Gallon Bottle

#### 100% Concentrate:

3599507 1 Quart Bottle

3599402 1 Gallon Bottle

3599300 5 Gallon Pail

3599100 55 Gallon Drum

3599838 14 oz. Aerosol



| PROD. NO. | SYSTEM                                  | SIZE & COLOR             | PAGE | PROD. NO. | SYSTEM                                | SIZE & COLOR            | PAGE |
|-----------|-----------------------------------------|--------------------------|------|-----------|---------------------------------------|-------------------------|------|
| 108402    | CS Companion Products                   | 1 Gal. Cln & Etch Sol    | 83   | 206164    | HP 3700 DTM Acrylic Enamel            | 1 Gal. Alumi-NON        | 21   |
| 140402    | Thinner                                 | 1 Gal. Thinner           | CS   | 206165    | HP 3700 DTM Acrylic Enamel            | 1 Gal. Safety Orange    | 21   |
| 150300    | Thinner                                 | 5 Gal. Thinner           | CS   | 206166    | HP 3700 DTM Acrylic Enamel            | 1 Gal. Flat Black       | 21   |
| 150402    | Thinner                                 | 1 Gal. Thinner           | CS   | 206169    | IC 6400 DTM Alkyd Enamel Tint Bases   | 1 Gal. Masstone Base    | 43   |
| 160300    | Thinner                                 | 5 Gal. Thinner           | CS   | 206193    | HP 7000 Cold Galvanizing Compound     | 1 Gal. Cold Galv Cmpnd  | 29   |
| 160402    | Thinner                                 | 1 Gal. Thinner           | CS   | 206201    | HP 3100 Speedy-Dry DTM Acrylic Enamel | 10 oz. Acrylic Hdnr     | 21   |
| 160402    | Thinner                                 | 1 Gal. Thinner           | CS   | 206232    | HP 9100 DTM Epoxy Activators          | 5 Gal. Low VOC Actvr    | 22   |
| 165402    | Thinner                                 | 1 Gal. Thinner (lmsn)    | CS   | 206280    | IC 6400 DTM Alkyd Enamel Tint Bases   | 1 Gal. Deep Base        | 43   |
| 190402    | Thinner                                 | 1 Gal. Thinner           | CS   | 206281    | IC 6400 DTM Alkyd Enamel Tint Bases   | 1 Gal. Light Base       | 43   |
| 200504    | CS Companion Products                   | 1 lb. Anti-Skid Add      | 83   | 206282    | IC 6400 VOC Alkyd Enamel Primer       | 1 Gal. Gray Primer      | 43   |
| 201516    | IC M1600 Precision Line Marking Paint   | 20 oz. APWA Orange       | 38   | 206283    | IC 6400 DTM Alkyd Enamel              | 1 Gal. Glossy Black     | 43   |
| 201630    | Mathys Noxyde                           | 4.23 Gal. Off White      | 52   | 206284    | IC 6400 DTM Alkyd Enamel              | 5 Gal. Glossy Black     | 43   |
| 201631    | Mathys Noxyde                           | 4.23 Gal. Blue Gray      | 52   | 206285    | IC 6400 DTM Alkyd Enamel              | 1 Gal. Glossy White     | 43   |
| 201632    | Mathys Noxyde                           | 4.23 Gal. Beige Gray     | 52   | 206286    | IC 6400 DTM Alkyd Enamel              | 5 Gal. Glossy White     | 43   |
| 201634    | Mathys Noxyde                           | 4.23 Gal. Reseda Green   | 52   | 206287    | IC 6400 DTM Alkyd Enamel              | 1 Gal. Banner Red       | 43   |
| 201638    | Mathys Noxyde                           | 4.23 Gal. White          | 52   | 206288    | IC 6400 DTM Alkyd Enamel              | 1 Gal. Machine Green    | 43   |
| 202211    | IC 1600 Enamel                          | 12 oz. Machine Green     | 35   | 206300    | IC 6400 DTM Alkyd Enamel              | 1 Gal. Universal Gray   | 43   |
| 202212    | IC 1600 Enamel                          | 12 oz. Sun Yellow        | 35   | 206301    | IC 6400 DTM Alkyd Enamel              | 1 Gal. Safety Blue      | 43   |
| 202214    | IC 1600 Enamel                          | 12 oz. Machinery Gray    | 35   | 206302    | IC 6400 DTM Alkyd Enamel              | 1 Gal. Aluminum         | 43   |
| 202216    | IC 1600 Enamel                          | 12 oz. Dusty Pink        | 35   | 206303    | IC 6400 DTM Alkyd Enamel              | 1 Gal. Saf Yel          | 43   |
| 202541    | Mathys Noxyde                           | 4.23 Gal. Black          | 52   | 206304    | IC 6400 DTM Alkyd Enamel              | 1 Gal. Safety Red       | 43   |
| 202544    | Mathys Pegarust                         | 5.28 Gal. Gray Green     | 53   | 206305    | IC V6400 DTM Alkyd Enamel Tint Bases  | 1 Gal. Masstone Base    | 44   |
| 202548    | HP 9700 Acrylic Polyester Urethane      | 1 Qt. Accelerator        | 26   | 206306    | IC V6400 DTM Alkyd Enamel Tint Bases  | 1 Gal. Deep Base        | 44   |
| 202550    | Mathys Pegalink                         | 3.96 Gal. Light Gray     | 53   | 206307    | IC V6400 DTM Alkyd Enamel Tint Bases  | 1 Gal. Light Base       | 44   |
| 202600    | Mathys Pegalink                         | 3.96 Gal. Primer White   | 53   | 206308    | IC V6400 DTM Alkyd Enamel Primer      | 1 Gal. Gray Primer      | 44   |
| 202770    | Mathys Noxyde                           | 4.23 Gal. English Red    | 52   | 206309    | IC V6400 DTM Alkyd Enamel             | 1 Gal. Glossy Black     | 44   |
| 203022    | IC M1600 Precision Line Marking Paint   | 17 oz. Caution/APWA Blue | 38   | 206321    | IC V6400 DTM Alkyd Enamel             | 1 Gal. Glossy White     | 44   |
| 203023    | IC M1600 Precision Line Marking Paint   | 17 oz. Fl. Green         | 38   | 206324    | IC V6400 DTM Alkyd Enamel             | 1 Gal. Machine Green    | 44   |
| 203024    | IC M1600 Precision Line Marking Paint   | 17 oz. Caution Yellow    | 38   | 206325    | IC V6400 DTM Alkyd Enamel             | 1 Gal. Universal Gray   | 44   |
| 203025    | IC M1600 Precision Line Marking Paint   | 17 oz. High Vis. Yellow  | 38   | 206326    | IC V6400 DTM Alkyd Enamel             | 1 Gal. Safety Blue      | 44   |
| 203026    | IC M1600 Precision Line Marking Paint   | 17 oz. Alert Orange      | 38   | 206327    | IC V6400 DTM Alkyd Enamel             | 1 Gal. Saf Yel          | 44   |
| 203027    | IC M1600 Precision Line Marking Paint   | 17 oz. Fl. Orange        | 38   | 206328    | IC V6400 DTM Alkyd Enamel             | 1 Gal. Safety Red       | 44   |
| 203028    | IC M1600 Precision Line Marking Paint   | 17 oz. Fl. Red-Orange    | 38   | 206329    | IC 6100 Shop Coat Primers             | 1 Gal. Red              | 44   |
| 203029    | IC M1600 Precision Line Marking Paint   | 17 oz. Safety Red        | 38   | 206330    | IC 6100 Shop Coat Primers             | 5 Gal. Red              | 44   |
| 203030    | IC M1600 Precision Line Marking Paint   | 17 oz. White             | 38   | 206331    | IC 6100 Shop Coat Primers             | 1 Gal. Gray             | 44   |
| 203031    | IC M1800 Precision Line Marking Paint   | 17 oz. Caution/APWA Blue | 38   | 206332    | IC 6100 Shop Coat Primers             | 5 Gal. Gray             | 44   |
| 203032    | IC M1800 Precision Line Marking Paint   | 17 oz. Fl. Green         | 38   | 206346    | Companion Products                    | AF Striping Machine     | 42   |
| 203033    | IC M1800 Precision Line Marking Paint   | 17 oz. Caution Yellow    | 38   | 206432    | Rust-Oleum Grind 'N Go Machine        | 20 lb. Weight           | 70   |
| 203034    | IC M1800 Precision Line Marking Paint   | 17 oz. High Vis Yel      | 38   | 207243    | HP 9700 Acrylic Polyester Urethane    | 1 Qt. Actvr for 1 Gal.  | 26   |
| 203035    | IC M1800 Precision Line Marking Paint   | 17 oz. Alert Orange      | 38   | 207247    | HP 9700 Acrylic Polyester Urethane    | 1 Gal. Masstone Base    | 26   |
| 203036    | IC M1800 Precision Line Marking Paint   | 17 oz. Fl. Orange        | 38   | 207271    | HP 9700 Acrylic Polyester Urethane    | 1 Gal. Deep Base        | 26   |
| 203037    | IC M1800 Precision Line Marking Paint   | 17 oz. Fl. Red-Orange    | 38   | 207272    | HP 9700 Acrylic Polyester Urethane    | 1 Gal. Light Base       | 26   |
| 203038    | IC M1800 Precision Line Marking Paint   | 17 oz. Safety Red        | 38   | 207273    | HP 9700 Acrylic Polyester Urethane    | 1 Gal. Crystal Clear    | 26   |
| 203039    | IC M1800 Precision Line Marking Paint   | 17 oz. White             | 36   | 207274    | HP 9700 Acrylic Polyester Urethane    | 1 Gal. Safety Blue      | 26   |
| 203912    | Companion Products                      | Marking Paint Bag        | 42   | 207277    | HP 9700 Acrylic Polyester Urethane    | 1 Gal. Gloss Black      | 26   |
| 205015    | HP 9100 DTM Epoxy Mastic                | 1 Gal. Low VOC Std       | 22   | 207278    | HP 9700 Acrylic Polyester Urethane    | 1 Gal. Silver Gray      | 26   |
| 205176    | IC M1800 Precision Line Marking Paint   | 20 oz. Fl. Blue          | 38   | 207279    | HP 9700 Acrylic Polyester Urethane    | 1 Gal. Gloss White      | 26   |
| 205177    | CS Companion Products                   | 1 lb. VC-02              | 83   | 207434    | Rust-Oleum Grind 'N Go Machine        | 16" Grind 'N Go Machine | 70   |
| 205178    | CS Companion Products                   | 1 lb. VC-08              | 83   | 207435    | Rust-Oleum Grind 'N Go Machine        | 16" Vacuum              | 70   |
| 205179    | CS Companion Products                   | 1 lb. VC-14              | 83   | 207835    | IC 6400 DTM Alkyd Enamel              | 1 Gal. Hunter Green     | 43   |
| 205220    | CS Companion Products                   | 1 lb. VC-01              | 83   | 207836    | IC 6400 DTM Alkyd Enamel              | 1 Gal. Safety Orange    | 43   |
| 205233    | IC MC1800 Precision Line Marking Chalk  | 17 oz. APWA Orange       | 40   | 207837    | IC 6400 DTM Alkyd Enamel              | 1 Gal. True Blue        | 43   |
| 205234    | IC MC1800 Precision Line Marking Chalk  | 17 oz. APWA Yellow       | 40   | 207838    | IC 6400 DTM Alkyd Enamel              | 1 Gal. Ultra-Fit black  | 43   |
| 205235    | IC MC1800 Precision Line Marking Chalk  | 17 oz. APWA Red          | 40   | 207839    | IC 6400 DTM Alkyd Enamel              | 1 Gal. Beige            | 43   |
| 205236    | IC MC1800 Precision Line Marking Chalk  | 17 oz. APWA Blue         | 40   | 207840    | IC 6400 DTM Alkyd Enamel              | 1 Gal. John Der Grn     | 43   |
| 205237    | IC MC1800 Precision Line Marking Chalk  | 17 oz. APWA White        | 40   | 207841    | IC 6400 DTM Alkyd Enamel              | 1 Gal. New Cat. Yellow  | 43   |
| 205238    | IC MC1800 Precision Line Marking Chalk  | 17 oz. APWA Green        | 40   | 208028    | Sierra Griptec Acrylic Primer         | 1 Gal. Hi-Hide White    | 57   |
| 205318    | Rust-Oleum Grind 'N Go Machine          | Cobalt Diamond Seg       | 82   | 208029    | Sierra Griptec Acrylic Primer         | 5 Gal. Hi-Hide White    | 57   |
| 205319    | Rust-Oleum Grind 'N Go Machine          | Concrete Scarifier       | 82   | 208031    | Sierra MetalMax DTM Acrylic Enamel    | 1 Gal. S-Gl Wht Psl Bs  | 58   |
| 205580    | Additional CPS Companion Products       | 10 lb. VC-01             | 70   | 208032    | Sierra MetalMax DTM Acrylic Enamel    | 5 Gal. S-Gl Wht Psl Bs  | 58   |
| 205581    | Additional CPS Companion Products       | 10 lb. VC-02             | 70   | 208033    | Sierra MetalMax DTM Acrylic Enamel    | 1 Gal. Semi-Gl Tint Bs  | 58   |
| 205582    | Additional CPS Companion Products       | 10 lb. VC-08             | 70   | 208035    | Sierra MetalMax DTM Acrylic Enamel    | 1 Gal. Semi-Gl Deep Bs  | 58   |
| 205583    | Additional CPS Companion Products       | 10 lb. VC-14             | 70   | 208037    | Sierra MetalMax DTM Acrylic Enamel    | 1 Gal. Semi-Gl Acct Bs  | 58   |
| 206043    | IC AF1600 Athletic Field Striping Paint | 17 oz. White             | 37   | 208039    | Sierra MetalMax DTM Acrylic Enamel    | 1 Gal. Semi-Gl Black    | 58   |
| 206044    | IC AF1600 Athletic Field Striping Paint | 17 oz. Orange            | 37   | 208040    | Sierra Beyond Acrylic Enamel          | 1 Gal. Sat Wht Pstl Bs  | 57   |
| 206045    | IC AF1600 Athletic Field Striping Paint | 17 oz. Yellow            | 37   | 208041    | Sierra Beyond Acrylic Enamel          | 5 Gal. Sat Wht Pstl Bs  | 57   |

| PROD. NO. | SYSTEM                                  | SIZE & COLOR           | PAGE  | PROD. NO. | SYSTEM                                  | SIZE & COLOR           | PAGE |
|-----------|-----------------------------------------|------------------------|-------|-----------|-----------------------------------------|------------------------|------|
| 208042    | Sierra Beyond Acrylic Enamel            | 1 Gal. Sat Tint Base   | 57    | 210693    | Rust-Oleum Grind 'N Go Machine          | Dust Skirt             | 70   |
| 208044    | Sierra Beyond Acrylic Enamel            | 1 Gal. Sat Dp Tint Bs  | 57    | 211237    | Rust-Oleum Grind 'N Go Machine          | Vacuum Bags - 5 Pk     | 70   |
| 208046    | Sierra Beyond Acrylic Enamel            | 1 Gal. Sat Acct Base   | 57    | 211243    | Rust-Oleum Grind 'N Go Machine          | Cloth Filter           | 70   |
| 208048    | Sierra Beyond Acrylic Enamel            | 1 Gal. Satin Black     | 57    | 211244    | Rust-Oleum Grind 'N Go Machine          | Intermediary Filter    | 70   |
| 208050    | Sierra Beyond Acrylic Enamel            | 1 Gal. Gl Wht Pstl Bs  | 57    | 211354    | Mathys Noxyde                           | 1 Gal. Off White Samp  | 52   |
| 208051    | Sierra Beyond Acrylic Enamel            | 5 Gal. Gl Wht Pstl Bs  | 57    | 212691    | IC 6400 DTM Alkyd Enamel Tint Bases     | 5 Gal. Masstone Base   | 43   |
| 208052    | Sierra Beyond Acrylic Enamel            | 1 Gal. Gloss Tint Base | 57    | 212692    | IC 6400 DTM Alkyd Enamel Tint Bases     | 5 Gal. Deep Base       | 43   |
| 208054    | Sierra Beyond Acrylic Enamel            | 1 Gal. Gloss Deep Base | 57    | 212693    | IC 6400 DTM Alkyd Enamel Tint Bases     | 5 Gal. Light Base      | 43   |
| 208056    | Sierra Beyond Acrylic Enamel            | 1 Gal. Gloss Acct Base | 57    | 213078    | S40/S42 Epoxy Floor Coating             | 1 Qt. Classic Gray     | 59   |
| 208058    | Sierra Beyond Acrylic Enamel            | 1 Gal. Gloss Black     | 57    | 213079    | S40/S42 Epoxy Floor Coating             | 1 Qt. Activator        | 59   |
| 208060    | S40/S42 Epoxy Floor Coating             | 1 Gal. Gl Wht Pstl Bs  | 59    | 213080    | Sierra MetalMax DTM Acrylic Enamel      | 1 Qt. Semi-Gl Black    | 58   |
| 208061    | S40/S42 Epoxy Floor Coating             | 5 Gal. Gl Wht Pstl Bs  | 59    | 213081    | Sierra Beyond Acrylic Enamel            | 1 Qt. Gl's Safety Red  | 57   |
| 208062    | S40/S42 Epoxy Floor Coating             | 1 Gal. Gloss Tint Base | 59    | 213082    | Sierra Griptec Acrylic Primer           | 1 Qt. White            | 57   |
| 208064    | S40/S42 Epoxy Floor Coating             | 1 Gal. Gloss Deep Base | 59    | 213898    | S40/S42 Epoxy Floor Coating             | White Alum AS Add      | 59   |
| 208066    | S40/S42 Epoxy Floor Coating             | 1 Gal. Gloss Clear     | 59    | 213898    | CS Companion Products                   | White Al AS Add        | 83   |
| 208067    | S40/S42 Epoxy Floor Coating             | 5 Gal. Gloss Clear     | 59    | 214430    | HP 9100 DTM Epoxy Activators            | 1 Gal. Immsn Actvr     | 22   |
| 208068    | S40/S42 Epoxy Floor Coating             | 1 Gal. Gloss Saf Yel   | 59    | 214432    | HP 9100 DTM Epoxy Activators            | 1 Gal. Ft Cure Actvr   | 22   |
| 208070    | S40/S42 Epoxy Floor Coating             | 1 Gal. Gloss Black     | 59    | 214461    | ColorTrend Plus 802 Universal Colorants | 1 Liter Brown Oxide    | CS   |
| 208072    | S40/S42 Epoxy Floor Coating             | 1 Gal. Gloss Clas Gray | 59    | 214462    | ColorTrend Plus 802 Universal Colorants | 1 Liter Lamp Black     | CS   |
| 208073    | S40/S42 Epoxy Floor Coating             | 5 Gal. Gloss Clas Gray | 59    | 214463    | ColorTrend Plus 802 Universal Colorants | 1 Liter Magenta        | CS   |
| 208074    | S40/S42 Epoxy Floor Coating             | 1 Gal. Gloss Lt Gray   | 59    | 214464    | ColorTrend Plus 802 Universal Colorants | 1 Liter Medium Yellow  | CS   |
| 208075    | S40/S42 Epoxy Floor Coating             | 5 Gal. Gloss Lt Gray   | 59    | 214465    | ColorTrend Plus 802 Universal Colorants | 1 Liter Organic Red    | CS   |
| 208076    | S40/S42 Epoxy Floor Coating             | 1 Gal. Gloss Tile Red  | 59    | 214466    | ColorTrend Plus 802 Universal Colorants | 1 Liter Organic Yellow | CS   |
| 208078    | S40/S42 Epoxy Floor Coating             | 1 Gal. Gloss Sand      | 59    | 214467    | ColorTrend Plus 802 Universal Colorants | 1 Liter Phthalo Blue   | CS   |
| 208080    | S40/S42 Epoxy Floor Coating             | 1 Gal. Gloss Neutral   | 59    | 214468    | ColorTrend Plus 802 Universal Colorants | 1 Liter Phthalo Green  | CS   |
| 208082    | S40/S42 Epoxy Floor Coating             | 1 Gal. Gloss New Green | 59    | 214469    | ColorTrend Plus 802 Universal Colorants | 1 Liter Raw Umber      | CS   |
| 208084    | S40/S42 Epoxy Floor Coating             | 1 Gal. Satin Clear     | 59    | 214540    | ColorTrend Plus 802 Universal Colorants | 1 Liter Red Oxide      | CS   |
| 208086    | S40/S42 Epoxy Floor Coating             | 1 Gal. S40 Activator   | 59    | 214541    | ColorTrend Plus 802 Universal Colorants | 1 Liter Titm White     | CS   |
| 208087    | S40/S42 Epoxy Floor Coating             | 5 Gal. S40 Activator   | 59    | 214542    | ColorTrend Plus 802 Universal Colorants | 1 Liter Yel Oxide      | CS   |
| 208088    | S40/S42 Epoxy Floor Coating             | 1 Gal. Sat Wht Pstl Bs | 59    | 214644    | IC 1600 Enamel                          | 12 oz. Electric Green  | 35   |
| 208090    | S40/S42 Epoxy Floor Coating             | 1 Gal. Satin Cl Gray   | 59    | 214645    | IC 1600 Enamel                          | 12 oz. ANSI 61 Lt Gray | 35   |
| 208092    | S40/S42 Epoxy Floor Coating             | 1 Gal. Satin Lt Gray   | 59    | 214646    | IC 1600 Enamel                          | 12 oz. ANSI49 MdLt Gry | 35   |
| 208096    | S40/S42 Epoxy Floor Coating             | 1 Gal. S42 Activator   | 59    | 214647    | IC 1600 Enamel                          | 12 oz. ANSI70 Lt Gry   | 35   |
| 208112    | Sierra S70/S71 Water-Based Epoxy Primer | 1 Gal. S70/S71 Actvr   | 59    | 214669    | Mathys Pegarust                         | 5.28 Gal. White        | CS   |
| 208112    | Sierra S70/S71 Water-Based Epoxy Primer | 1 Gal. S70/S71 Actvr   | 59    | 215404    | Overall                                 | 10 oz. Beige           | CS   |
| 208113    | Sierra S70/S71 Water-Based Epoxy Primer | 1 Gal. Gray            | 59    | 215405    | Overall                                 | 10 oz. Red Primer      | CS   |
| 208118    | IC 6400 DTM Alkyd Enamel                | 1 Gal. Sil Gry         | 43    | 215406    | Overall                                 | 10 oz. Medium Blue     | CS   |
| 208120    | IC 6400 DTM Alkyd Enamel                | 1 Gal. Forest Green    | 43    | 215407    | Overall                                 | 10 oz. Sky Blue        | CS   |
| 208555    | Sierra Griptec Acrylic Primer           | 1 Gal. Gray            | 57    | 215408    | Overall                                 | 10 oz. Pink            | CS   |
| 208556    | Sierra MetalMax DTM Acrylic Enamel      | 5 Gal. Semi-Gl Black   | 58    | 215409    | Overall                                 | 10 oz. Light Gray      | CS   |
| 208557    | S40/S42 Epoxy Floor Coating             | 1 Gal. Gl Saf Red      | 59    | 215634    | HP V2100 Rust Reformer                  | 20 oz. Black           | 12   |
| 209562    | HP V2100 Hammered                       | 15 oz. Metal Silver    | 11    | 215758    | HP 2500 DTM Alkyd Enamel                | 1 Gal. White           | 19   |
| 209563    | HP V2100 Hammered                       | 15 oz. Metal Gold      | 11    | 215759    | HP 2500 DTM Alkyd Enamel                | 1 Gal. Black           | 19   |
| 209564    | HP V2100 Hammered                       | 15 oz. Metal Dk Bronze | 11    | 215950    | HP 2500 DTM Alkyd Enamel                | 1 Gal. Saf Yel         | 19   |
| 209565    | HP V2100 Enamel                         | 15 oz. Anodized Bronze | 11    | 215951    | HP 2500 DTM Alkyd Enamel                | 1 Gal. Safety Red      | 19   |
| 209566    | HP V2100 Enamel Primer                  | 15 oz. White Primer    | 11    | 215952    | HP 2500 DTM Alkyd Enamel                | 1 Gal. Nav Gry         | 19   |
| 209567    | HP V2100 Enamel                         | 15 oz. SemiGloss White | 11    | 215954    | HP 2500 DTM Alkyd Enamel                | 1 Gal. Forest Green    | 19   |
| 209568    | HP V2100 Enamel                         | 14 oz. Fl. Pink        | 11    | 215955    | HP 2500 DTM Alkyd Enamel                | 1 Gal. Dun Tan         | 19   |
| 209590    | HP V2100 Hammered                       | 15 oz. Metal Black     | 11    | 215956    | HP 2500 DTM Alkyd Enamel                | 1 Gal. Safety Orange   | 19   |
| 209713    | HP V2100 Farm Equipment                 | 15 oz. John Der Green  | 11    | 215957    | HP 2500 DTM Alkyd Enamel                | 1 Gal. Safety Blue     | 19   |
| 209714    | HP V2100 Farm Equipment                 | 15 oz. John Der Yellow | 11    | 215958    | HP 2500 Alkyd Enamel Primer             | 1 Gal. Rst Mtl Primer  | 19   |
| 209715    | HP V2100 Farm Equipment                 | 15 oz. Cat. Yellow     | 11    | 215959    | HP 2500 Alkyd Enamel Primer             | 1 Gal. Gray Primer     | 19   |
| 209716    | HP V2100 Farm Equipment                 | 15 oz. AC Orange       | 11    | 215960    | HP 2500 DTM Alkyd Enamel Tint Bases     | 1 Gal. Masstone Base   | 19   |
| 209717    | HP V2100 Farm Equipment                 | 15 oz. IH Red          | 11    | 215961    | HP 2500 DTM Alkyd Enamel Tint Bases     | 1 Gal. Deep Base       | 19   |
| 209718    | HP V2100 Farm Equipment                 | 15 oz. Ford Blue       | 11    | 215962    | HP 2500 DTM Alkyd Enamel Tint Bases     | 1 Gal. Light Base      | 19   |
| 210120    | Mathys Noxyde                           | 4.23 Gal. Brown        | 52    | 223837    | IC P1600 Plastic Primer                 | 12 oz. White Primer    | 41   |
| 210188    | Companion Products                      | Marking Pistol         | 15/42 | 223838    | IC P1600 Paint for Plastic              | 12 oz. Black           | 41   |
| 210475    | Sierra MetalMax DTM Acrylic Enamel      | 1 Gal. Semi-Gl Saf Red | 58    | 223839    | IC P1600 Paint for Plastic              | 12 oz. White           | 41   |
| 210477    | Sierra MetalMax DTM Acrylic Enamel      | 1 Gal. Semi-Gl Saf Yel | 58    | 223880    | IC P1600 Paint for Plastic              | 12 oz. Safety Blue     | 41   |
| 210479    | Sierra Beyond Acrylic Enamel            | 1 Gal. Satin Clear     | 57    | 223881    | IC P1600 Paint for Plastic              | 12 oz. Safety Green    | 41   |
| 210491    | Sierra Beyond Acrylic Enamel            | 1 Gal. Gloss Clear     | 57    | 223882    | IC P1600 Paint for Plastic              | 12 oz. Safety Yellow   | 41   |
| 210493    | Sierra Beyond Acrylic Enamel            | 1 Gal. Gl Safety Red   | 57    | 223883    | IC P1600 Paint for Plastic              | 12 oz. Tan             | 41   |
| 210495    | Sierra Beyond Acrylic Enamel            | 1 Gal. Gloss Saf Yel   | 57    | 223884    | IC R1600 Reflective Finish              | 12 oz. Clear           | 41   |
| 210510    | Rust-Oleum Grind 'N Go Machine          | Carbide Scarifier Rep  | 70    | 223885    | GlowMax 2600 Luminescents               | 15 oz. Safety Yellow   | 13   |
| 210511    | Rust-Oleum Grind 'N Go Machine          | Mach Belts (3)         | 70    | 223886    | GlowMax 2600 Luminescents               | 15 oz. Lum Green       | 13   |
| 210692    | Rust-Oleum Grind 'N Go Machine          | Carbide Scrprs (3)     | 70    | 225321    | Mathys Peganox                          | 1.06 Gal. White        | 53   |

| PROD. NO. | SYSTEM                                 | SIZE & COLOR         | PAGE | PROD. NO. | SYSTEM                     | SIZE & COLOR         | PAGE |
|-----------|----------------------------------------|----------------------|------|-----------|----------------------------|----------------------|------|
| 225322    | Mathys Peganox                         | 1.06 Gal. Off-White  | 53   | 236270    | CPS 8200 - OverKote S      | 3 Gal. National Blue | 64   |
| 225323    | Mathys Peganox                         | 1.06 Gal. Green Gray | 53   | 236273    | CPS 8200 - OverKote S      | 1 Gal. Light Green   | 64   |
| 225324    | Mathys Peganox                         | 1.06 Gal. Black      | 53   | 236274    | CPS 8200 - OverKote S      | 3 Gal. Light Green   | 64   |
| 234671    | Companion Products - Equipment & Tools | EC Spike Rollers 10" | CS   | 236277    | CPS 8200 - OverKote S      | 1 Gal. Saf Yel       | 64   |
| 234672    | Companion Products - Equipment & Tools | EC Spike Rollers 18" | CS   | 236278    | CPS 8200 - OverKote S      | 3 Gal. Saf Yel       | 64   |
| 234673    | Companion Products - Equipment & Tools | Serrated Rollers     | CS   | 236281    | CPS 8200 - OverKote S      | 1 Gal. Tile Red      | 64   |
| 234674    | Companion Products - Equipment & Tools | Spike Rollers        | CS   | 236282    | CPS 8200 - OverKote S      | 3 Gal. Tile Red      | 64   |
| 234675    | Companion Products - Equipment & Tools | Grounding Connectors | CS   | 236285    | CPS 8200 - OverKote S      | 1 Gal. Black         | 64   |
| 234676    | Companion Products - Equipment & Tools | Hand Screed Rake     | CS   | 236286    | CPS 8200 - OverKote S      | 3 Gal. Black         | 64   |
| 234677    | Companion Products - Equipment & Tools | Spike Roller Handles | CS   | 236289    | CPS 8200 - OverKote S      | 1 Gal. Dun Tan       | 64   |
| 234678    | Companion Products - Equipment & Tools | EC Adaptor Kit       | CS   | 236290    | CPS 8200 - OverKote S      | 3 Gal. Dun Tan       | 64   |
| 234679    | Companion Products - Equipment & Tools | Scraper Paddle       | CS   | 236293    | CPS 8200 - OverKote S      | 1 Gal. Dark Gray     | 64   |
| 235627    | Additional CPS Companion Products      | 100 lb. Wedron 480   | 70   | 236294    | CPS 8200 - OverKote S      | 3 Gal. Dark Gray     | 64   |
| 236027    | CPS 8000 - OverKrete OP                | 1 Gal. Natural       | 63   | 236297    | CPS 8200 - OverKote S      | 1 Gal. Light Gray    | 64   |
| 236028    | CPS 8000 - OverKrete OP                | 4 Gal. Natural       | 63   | 236298    | CPS 8200 - OverKote S      | 3 Gal. Light Gray    | 64   |
| 236031    | CPS 8000 - OverKrete OP                | 1 Gal. Activator     | 63   | 236305    | CPS 8200 - OverKote S      | 1 Gal. Super Lt Gray | 64   |
| 236032    | CPS 8000 - OverKrete OP                | 4 Gal. Activator     | 63   | 236306    | CPS 8200 - OverKote S      | 3 Gal. Super Lt Gray | 64   |
| 236034    | CPS 8000 - OverKrete OP                | 1 Gal. National Blue | 63   | 236309    | CPS 8200 - OverKote S      | 1 Gal. Nav Gry       | 64   |
| 236035    | CPS 8000 - OverKrete OP                | 4 Gal. National Blue | 63   | 236310    | CPS 8200 - OverKote S      | 3 Gal. Nav Gry       | 64   |
| 236038    | CPS 8000 - OverKrete OP                | 1 Gal. Light Green   | 63   | 236313    | CPS 8200 - OverKote S      | 1 Gal. White         | 64   |
| 236039    | CPS 8000 - OverKrete OP                | 4 Gal. Light Green   | 63   | 236314    | CPS 8200 - OverKote S      | 3 Gal. White         | 64   |
| 236042    | CPS 8000 - OverKrete OP                | 1 Gal. Saf Yel       | 63   | 236321    | CPS 8200 - OverKote V      | 1 Gal. Natural       | 64   |
| 236043    | CPS 8000 - OverKrete OP                | 4 Gal. Saf Yel       | 63   | 236322    | CPS 8200 - OverKote V      | 3 Gal. Natural       | 64   |
| 236046    | CPS 8000 - OverKrete OP                | 1 Gal. Tile Red      | 63   | 236325    | CPS 8200 - OverKote V      | 1 Gal. Activator     | 64   |
| 236047    | CPS 8000 - OverKrete OP                | 4 Gal. Tile Red      | 63   | 236326    | CPS 8200 - OverKote V      | 3 Gal. Activator     | 64   |
| 236050    | CPS 8000 - OverKrete OP                | 1 Gal. Black         | 63   | 236327    | CPS 8200 - OverKote V      | 1 Gal. National Blue | 64   |
| 236051    | CPS 8000 - OverKrete OP                | 4 Gal. Black         | 63   | 236328    | CPS 8200 - OverKote V      | 3 Gal. National Blue | 64   |
| 236054    | CPS 8000 - OverKrete OP                | 1 Gal. Dun Tan       | 63   | 236331    | CPS 8200 - OverKote V      | 1 Gal. Light Green   | 64   |
| 236055    | CPS 8000 - OverKrete OP                | 4 Gal. Dun Tan       | 63   | 236332    | CPS 8200 - OverKote V      | 3 Gal. Light Green   | 64   |
| 236058    | CPS 8000 - OverKrete OP                | 1 Gal. Dark Gray     | 63   | 236335    | CPS 8200 - OverKote V      | 1 Gal. Saf Yel       | 64   |
| 236059    | CPS 8000 - OverKrete OP                | 4 Gal. Dark Gray     | 63   | 236336    | CPS 8200 - OverKote V      | 3 Gal. Saf Yel       | 64   |
| 236064    | CPS 8000 - OverKrete OP                | 1 Gal. Light Gray    | 63   | 236339    | CPS 8200 - OverKote V      | 1 Gal. Tile Red      | 64   |
| 236065    | CPS 8000 - OverKrete OP                | 4 Gal. Light Gray    | 63   | 236340    | CPS 8200 - OverKote V      | 3 Gal. Tile Red      | 64   |
| 236068    | CPS 8000 - OverKrete OP                | 1 Gal. Nav Gry       | 63   | 236343    | CPS 8200 - OverKote V      | 1 Gal. Black         | 64   |
| 236069    | CPS 8000 - OverKrete OP                | 4 Gal. Nav Gry       | 63   | 236344    | CPS 8200 - OverKote V      | 3 Gal. Black         | 64   |
| 236072    | CPS 8000 - OverKrete OP                | 1 Gal. White         | 63   | 236347    | CPS 8200 - OverKote V      | 1 Gal. Dun Tan       | 64   |
| 236073    | CPS 8000 - OverKrete OP                | 4 Gal. White         | 63   | 236348    | CPS 8200 - OverKote V      | 3 Gal. Dun Tan       | 64   |
| 236082    | CPS 8000 - OverKrete V                 | 1 Gal. Natural       | 63   | 236351    | CPS 8200 - OverKote V      | 1 Gal. Dark Gray     | 64   |
| 236083    | CPS 8000 - OverKrete V                 | 4 Gal. Natural       | 63   | 236352    | CPS 8200 - OverKote V      | 3 Gal. Dark Gray     | 64   |
| 236086    | CPS 8000 - OverKrete V                 | 1 Gal. Activator     | 63   | 236355    | CPS 8200 - OverKote V      | 1 Gal. Light Gray    | 64   |
| 236087    | CPS 8000 - OverKrete V                 | 4 Gal. Activator     | 63   | 236356    | CPS 8200 - OverKote V      | 3 Gal. Light Gray    | 64   |
| 236088    | CPS 8000 - OverKrete V                 | 1 Gal. National Blue | 63   | 236359    | CPS 8200 - OverKote V      | 1 Gal. Nav Gry       | 64   |
| 236089    | CPS 8000 - OverKrete V                 | 4 Gal. National Blue | 63   | 236360    | CPS 8200 - OverKote V      | 3 Gal. Nav Gry       | 64   |
| 236092    | CPS 8000 - OverKrete V                 | 1 Gal. Light Green   | 63   | 236363    | CPS 8200 - OverKote V      | 1 Gal. White         | 64   |
| 236093    | CPS 8000 - OverKrete V                 | 4 Gal. Light Green   | 63   | 236364    | CPS 8200 - OverKote V      | 3 Gal. White         | 64   |
| 236096    | CPS 8000 - OverKrete V                 | 1 Gal. Saf Yel       | 63   | 236371    | CPS 8200 - OverKote TX     | 1 Gal. Activator     | 64   |
| 236097    | CPS 8000 - OverKrete V                 | 4 Gal. Saf Yel       | 63   | 236372    | CPS 8200 - OverKote TX     | 3 Gal. Activator     | 64   |
| 236100    | CPS 8000 - OverKrete V                 | 1 Gal. Tile Red      | 63   | 236373    | CPS 8200 - OverKote TX     | 1 Gal. Saf Yel       | 64   |
| 236101    | CPS 8000 - OverKrete V                 | 4 Gal. Tile Red      | 63   | 236374    | CPS 8200 - OverKote TX     | 3 Gal. Saf Yel       | 64   |
| 236104    | CPS 8000 - OverKrete V                 | 1 Gal. Black         | 63   | 236377    | CPS 8200 - OverKote TX     | 1 Gal. Pastel Blue   | 64   |
| 236105    | CPS 8000 - OverKrete V                 | 4 Gal. Black         | 63   | 236378    | CPS 8200 - OverKote TX     | 3 Gal. Pastel Blue   | 64   |
| 236108    | CPS 8000 - OverKrete V                 | 1 Gal. Dun Tan       | 63   | 236381    | CPS 8200 - OverKote TX     | 1 Gal. Tile Red      | 64   |
| 236109    | CPS 8000 - OverKrete V                 | 4 Gal. Dun Tan       | 63   | 236382    | CPS 8200 - OverKote TX     | 3 Gal. Tile Red      | 64   |
| 236112    | CPS 8000 - OverKrete V                 | 1 Gal. Dark Gray     | 63   | 236385    | CPS 8200 - OverKote TX     | 1 Gal. Black         | 64   |
| 236113    | CPS 8000 - OverKrete V                 | 4 Gal. Dark Gray     | 63   | 236386    | CPS 8200 - OverKote TX     | 3 Gal. Black         | 64   |
| 236116    | CPS 8000 - OverKrete V                 | 1 Gal. Light Gray    | 63   | 236389    | CPS 8200 - OverKote TX     | 1 Gal. Dun Tan       | 64   |
| 236117    | CPS 8000 - OverKrete V                 | 4 Gal. Light Gray    | 63   | 236390    | CPS 8200 - OverKote TX     | 3 Gal. Dun Tan       | 64   |
| 236120    | CPS 8000 - OverKrete V                 | 1 Gal. Nav Gry       | 63   | 236393    | CPS 8200 - OverKote TX     | 1 Gal. Dark Gray     | 64   |
| 236121    | CPS 8000 - OverKrete V                 | 4 Gal. Nav Gry       | 63   | 236394    | CPS 8200 - OverKote TX     | 3 Gal. Dark Gray     | 64   |
| 236124    | CPS 8000 - OverKrete V                 | 1 Gal. White         | 63   | 236397    | CPS 8200 - OverKote TX     | 1 Gal. Light Gray    | 64   |
| 236125    | CPS 8000 - OverKrete V                 | 4 Gal. White         | 63   | 236398    | CPS 8200 - OverKote TX     | 3 Gal. Light Gray    | 64   |
| 236263    | CPS 8200 - OverKote S                  | 1 Gal. Natural       | 64   | 236401    | CPS 8200 - OverKote TX     | 1 Gal. Super Lt Gray | 64   |
| 236264    | CPS 8200 - OverKote S                  | 3 Gal. Natural       | 64   | 236402    | CPS 8200 - OverKote TX     | 3 Gal. Super Lt Gray | 64   |
| 236267    | CPS 8200 - OverKote S                  | 1 Gal. Activator     | 64   | 236405    | CPS 8200 - OverKote TX     | 1 Gal. Nav Gry       | 64   |
| 236268    | CPS 8200 - OverKote S                  | 3 Gal. Activator     | 64   | 236406    | CPS 8200 - OverKote TX     | 3 Gal. Nav Gry       | 64   |
| 236269    | CPS 8200 - OverKote S                  | 1 Gal. National Blue | 64   | 236547    | CPS 8300 - OverKote Plus S | 1 Gal. Natural       | 65   |

| PROD. NO. | SYSTEM                         | SIZE & COLOR         | PAGE | PROD. NO. | SYSTEM                            | SIZE & COLOR           | PAGE |
|-----------|--------------------------------|----------------------|------|-----------|-----------------------------------|------------------------|------|
| 236548    | CPS 8300 - OverKote Plus S     | 3 Gal. Natural       | 65   | 237223    | CPS 8100 - OverKrete Xtra OP      | 1 Gal. Tile Red        | 64   |
| 236551    | CPS 8300 - OverKote Plus S     | 1 Gal. Activator     | 65   | 237224    | CPS 8100 - OverKrete Xtra OP      | 3 Gal. Tile Red        | 64   |
| 236552    | CPS 8300 - OverKote Plus S     | 3 Gal. Activator     | 65   | 237227    | CPS 8100 - OverKrete Xtra OP      | 1 Gal. Black           | 64   |
| 236553    | CPS 8300 - OverKote Plus S     | 1 Gal. National Blue | 65   | 237228    | CPS 8100 - OverKrete Xtra OP      | 3 Gal. Black           | 64   |
| 236554    | CPS 8300 - OverKote Plus S     | 3 Gal. National Blue | 65   | 237231    | CPS 8100 - OverKrete Xtra OP      | 1 Gal. Dun Tan         | 64   |
| 236557    | CPS 8300 - OverKote Plus S     | 1 Gal. Light Green   | 65   | 237232    | CPS 8100 - OverKrete Xtra OP      | 3 Gal. Dun Tan         | 64   |
| 236558    | CPS 8300 - OverKote Plus S     | 3 Gal. Light Green   | 65   | 237235    | CPS 8100 - OverKrete Xtra OP      | 1 Gal. Dark Gray       | 64   |
| 236561    | CPS 8300 - OverKote Plus S     | 1 Gal. Saf Yel       | 65   | 237236    | CPS 8100 - OverKrete Xtra OP      | 3 Gal. Dark Gray       | 64   |
| 236562    | CPS 8300 - OverKote Plus S     | 3 Gal. Saf Yel       | 65   | 237239    | CPS 8100 - OverKrete Xtra OP      | 1 Gal. Light Gray      | 64   |
| 236565    | CPS 8300 - OverKote Plus S     | 1 Gal. Tile Red      | 65   | 237240    | CPS 8100 - OverKrete Xtra OP      | 3 Gal. Light Gray      | 64   |
| 236566    | CPS 8300 - OverKote Plus S     | 3 Gal. Tile Red      | 65   | 237243    | CPS 8100 - OverKrete Xtra OP      | 1 Gal. Nav Gry         | 64   |
| 236569    | CPS 8300 - OverKote Plus S     | 1 Gal. Black         | 65   | 237244    | CPS 8100 - OverKrete Xtra OP      | 3 Gal. Nav Gry         | 64   |
| 236570    | CPS 8300 - OverKote Plus S     | 3 Gal. Black         | 65   | 237247    | CPS 8100 - OverKrete Xtra OP      | 1 Gal. White           | 64   |
| 236573    | CPS 8300 - OverKote Plus S     | 1 Gal. Dun Tan       | 65   | 237248    | CPS 8100 - OverKrete Xtra OP      | 3 Gal. White           | 64   |
| 236574    | CPS 8300 - OverKote Plus S     | 3 Gal. Dun Tan       | 65   | 237255    | CPS 8100 - OverKrete Xtra V       | 1 Gal. Activator       | 64   |
| 236577    | CPS 8300 - OverKote Plus S     | 1 Gal. Dark Gray     | 65   | 237256    | CPS 8100 - OverKrete Xtra V       | 3 Gal. Activator       | 64   |
| 236578    | CPS 8300 - OverKote Plus S     | 3 Gal. Dark Gray     | 65   | 237257    | CPS 8100 - OverKrete Xtra V       | 1 Gal. Clear           | 64   |
| 236581    | CPS 8300 - OverKote Plus S     | 1 Gal. Light Gray    | 65   | 237258    | CPS 8100 - OverKrete Xtra V       | 3 Gal. Clear           | 64   |
| 236582    | CPS 8300 - OverKote Plus S     | 3 Gal. Light Gray    | 65   | 237261    | CPS 8100 - OverKrete Xtra V       | 1 Gal. National Blue   | 64   |
| 236585    | CPS 8300 - OverKote Plus S     | 1 Gal. Nav Gry       | 65   | 237262    | CPS 8100 - OverKrete Xtra V       | 3 Gal. National Blue   | 64   |
| 236586    | CPS 8300 - OverKote Plus S     | 3 Gal. Nav Gry       | 65   | 237265    | CPS 8100 - OverKrete Xtra V       | 1 Gal. Light Green     | 64   |
| 236589    | CPS 8300 - OverKote Plus S     | 1 Gal. White         | 65   | 237266    | CPS 8100 - OverKrete Xtra V       | 3 Gal. Light Green     | 64   |
| 236590    | CPS 8300 - OverKote Plus S     | 3 Gal. White         | 65   | 237269    | CPS 8100 - OverKrete Xtra V       | 1 Gal. Saf Yel         | 64   |
| 236597    | CPS 8300 - OverKote Plus V     | 1 Gal. Natural       | 65   | 237270    | CPS 8100 - OverKrete Xtra V       | 3 Gal. Saf Yel         | 64   |
| 236598    | CPS 8300 - OverKote Plus V     | 3 Gal. Natural       | 65   | 237273    | CPS 8100 - OverKrete Xtra V       | 1 Gal. Tile Red        | 64   |
| 236601    | CPS 8300 - OverKote Plus V     | 1 Gal. Activator     | 65   | 237274    | CPS 8100 - OverKrete Xtra V       | 3 Gal. Tile Red        | 64   |
| 236602    | CPS 8300 - OverKote Plus V     | 3 Gal. Activator     | 65   | 237277    | CPS 8100 - OverKrete Xtra V       | 1 Gal. Black           | 64   |
| 236603    | CPS 8300 - OverKote Plus V     | 1 Gal. National Blue | 65   | 237278    | CPS 8100 - OverKrete Xtra V       | 3 Gal. Black           | 64   |
| 236604    | CPS 8300 - OverKote Plus V     | 3 Gal. National Blue | 65   | 237281    | CPS 8100 - OverKrete Xtra V       | 1 Gal. Dun Tan         | 64   |
| 236607    | CPS 8300 - OverKote Plus V     | 1 Gal. Light Green   | 65   | 237282    | CPS 8100 - OverKrete Xtra V       | 3 Gal. Dun Tan         | 64   |
| 236608    | CPS 8300 - OverKote Plus V     | 3 Gal. Light Green   | 65   | 237285    | CPS 8100 - OverKrete Xtra V       | 1 Gal. Dark Gray       | 64   |
| 236611    | CPS 8300 - OverKote Plus V     | 1 Gal. Saf Yel       | 65   | 237286    | CPS 8100 - OverKrete Xtra V       | 3 Gal. Dark Gray       | 64   |
| 236612    | CPS 8300 - OverKote Plus V     | 3 Gal. Saf Yel       | 65   | 237289    | CPS 8100 - OverKrete Xtra V       | 1 Gal. Light Gray      | 64   |
| 236615    | CPS 8300 - OverKote Plus V     | 1 Gal. Tile Red      | 65   | 237290    | CPS 8100 - OverKrete Xtra V       | 3 Gal. Light Gray      | 64   |
| 236616    | CPS 8300 - OverKote Plus V     | 3 Gal. Tile Red      | 65   | 237294    | CPS 8100 - OverKrete Xtra V       | 1 Gal. Nav Gry         | 64   |
| 236619    | CPS 8300 - OverKote Plus V     | 1 Gal. Black         | 65   | 237295    | CPS 8100 - OverKrete Xtra V       | 3 Gal. Nav Gry         | 64   |
| 236620    | CPS 8300 - OverKote Plus V     | 3 Gal. Black         | 65   | 237298    | CPS 8100 - OverKrete Xtra V       | 1 Gal. White           | 64   |
| 236623    | CPS 8300 - OverKote Plus V     | 1 Gal. Dun Tan       | 65   | 237299    | CPS 8100 - OverKrete Xtra V       | 3 Gal. White           | 64   |
| 236624    | CPS 8300 - OverKote Plus V     | 3 Gal. Dun Tan       | 65   | 237321    | Additional CPS Companion Products | 1 Gal. BlokFil Base    | 70   |
| 236627    | CPS 8300 - OverKote Plus V     | 1 Gal. Dark Gray     | 65   | 237323    | Additional CPS Companion Products | 6-PK BlokFil Base      | 70   |
| 236628    | CPS 8300 - OverKote Plus V     | 3 Gal. Dark Gray     | 65   | 237327    | Additional CPS Companion Products | 1 Gal. BlokFil Act     | 70   |
| 236631    | CPS 8300 - OverKote Plus V     | 1 Gal. Light Gray    | 65   | 237329    | Additional CPS Companion Products | 6-PK BlokFil Activator | 70   |
| 236632    | CPS 8300 - OverKote Plus V     | 3 Gal. Light Gray    | 65   | 237330    | Additional CPS Companion Products | 1 Gal. Natural         | 70   |
| 236635    | CPS 8300 - OverKote Plus V     | 1 Gal. Nav Gry       | 65   | 237331    | Additional CPS Companion Products | 5 Gal. Natural         | 70   |
| 236636    | CPS 8300 - OverKote Plus V     | 3 Gal. Nav Gry       | 65   | 237336    | Additional CPS Companion Products | 1 Gal. Activator       | 70   |
| 236639    | CPS 8300 - OverKote Plus V     | 1 Gal. White         | 65   | 237337    | Additional CPS Companion Products | 5 Gal. Activator       | 70   |
| 236640    | CPS 8300 - OverKote Plus V     | 3 Gal. White         | 65   | 237339    | Additional CPS Companion Products | 1 Gal. Light Gray      | 70   |
| 236864    | CPS 9600 - BriteCast Base Coat | 4 Gal. Activator     | 68   | 237340    | Additional CPS Companion Products | 5 Gal. Light Gray      | 70   |
| 236867    | CPS 9600 - BriteCast Base Coat | 4 Gal. Clear         | 68   | 237345    | Additional CPS Companion Products | 1 Gal. Super Lt Gray   | 70   |
| 236873    | CPS 9600 - BriteCast Base Coat | 4 Gal. Super Lt Gray | 68   | 237346    | Additional CPS Companion Products | 5 Gal. Super Lt Gray   | 70   |
| 236887    | CPS 9600 - BriteCast Sealer    | 1 Gal. Activator     | 68   | 237351    | Additional CPS Companion Products | 1 Gal. Natural         | 70   |
| 236888    | CPS 9600 - BriteCast Sealer    | 3 Gal. Activator     | 68   | 237352    | Additional CPS Companion Products | 5 Gal. Natural         | 70   |
| 236891    | CPS 9600 - BriteCast Sealer    | 1 Gal. Clear         | 68   | 237357    | Additional CPS Companion Products | 1 Gal. Activator       | 70   |
| 236892    | CPS 9600 - BriteCast Sealer    | 3 Gal. Clear         | 68   | 237358    | Additional CPS Companion Products | 5 Gal. Activator       | 70   |
| 237201    | CPS 8100 - OverKrete Xtra OP   | 1 Gal. Natural       | 64   | 237360    | Additional CPS Companion Products | 1 Gal. Light Gray      | 70   |
| 237202    | CPS 8100 - OverKrete Xtra OP   | 3 Gal. Natural       | 64   | 237361    | Additional CPS Companion Products | 5 Gal. Light Gray      | 70   |
| 237205    | CPS 8100 - OverKrete Xtra OP   | 1 Gal. Activator     | 64   | 237366    | Additional CPS Companion Products | 1 Gal. Super Lt Gray   | 70   |
| 237206    | CPS 8100 - OverKrete Xtra OP   | 3 Gal. Activator     | 64   | 237367    | Additional CPS Companion Products | 5 Gal. Super Lt Gray   | 70   |
| 237207    | CPS 8100 - OverKrete Xtra OP   | 1 Gal. Clear         | 64   | 237463    | CPS 8100 - OverKrete Xtra S       | 1 Gal. Natural         | 64   |
| 237208    | CPS 8100 - OverKrete Xtra OP   | 3 Gal. Clear         | 64   | 237464    | CPS 8100 - OverKrete Xtra S       | 3 Gal. Natural         | 64   |
| 237211    | CPS 8100 - OverKrete Xtra OP   | 1 Gal. National Blue | 64   | 237467    | CPS 8100 - OverKrete Xtra S       | 1 Gal. Activator       | 64   |
| 237212    | CPS 8100 - OverKrete Xtra OP   | 3 Gal. National Blue | 64   | 237468    | CPS 8100 - OverKrete Xtra S       | 3 Gal. Activator       | 64   |
| 237215    | CPS 8100 - OverKrete Xtra OP   | 1 Gal. Light Green   | 64   | 237470    | CPS 8100 - OverKrete Xtra S       | 1 Gal. Clear           | 64   |
| 237216    | CPS 8100 - OverKrete Xtra OP   | 3 Gal. Light Green   | 64   | 237471    | CPS 8100 - OverKrete Xtra S       | 3 Gal. Clear           | 64   |
| 237219    | CPS 8100 - OverKrete Xtra OP   | 1 Gal. Saf Yel       | 64   | 237474    | CPS 8100 - OverKrete Xtra S       | 1 Gal. National Blue   | 64   |
| 237220    | CPS 8100 - OverKrete Xtra OP   | 3 Gal. Saf Yel       | 64   | 237475    | CPS 8100 - OverKrete Xtra S       | 3 Gal. National Blue   | 64   |



| PROD. NO. | SYSTEM                                 | SIZE & COLOR           | PAGE | PROD. NO. | SYSTEM                            | SIZE & COLOR            | PAGE  |
|-----------|----------------------------------------|------------------------|------|-----------|-----------------------------------|-------------------------|-------|
| 237478    | CPS 8100 - OverKrete Xtra S            | 1 Gal. Light Green     | 64   | 240917    | CPS 8000 - OverKrete S            | 1 Gal. Dark Gray        | 63    |
| 237479    | CPS 8100 - OverKrete Xtra S            | 3 Gal. Light Green     | 64   | 240918    | CPS 8000 - OverKrete S            | 1 Gal. Dun Tan          | 63    |
| 237482    | CPS 8100 - OverKrete Xtra S            | 1 Gal. SafetyYellow    | 64   | 240919    | CPS 8000 - OverKrete S            | 1 Gal. Light Green      | 63    |
| 237483    | CPS 8100 - OverKrete Xtra S            | 3 Gal. Safety Yellow   | 64   | 240920    | CPS 8000 - OverKrete S            | 4 Gal. Saf Yel          | 63    |
| 237486    | CPS 8100 - OverKrete Xtra S            | 1 Gal. Tile Red        | 64   | 240921    | CPS 8000 - OverKrete S            | 4 Gal. Tile Red         | 63    |
| 237487    | CPS 8100 - OverKrete Xtra S            | 3 Gal. Tile Red        | 64   | 240922    | CPS 8000 - OverKrete S            | 4 Gal. White            | 63    |
| 237490    | CPS 8100 - OverKrete Xtra S            | 1 Gal. Black           | 64   | 240970    | CPS 8000 - OverKrete S            | 1 Gal. National Blue    | 63    |
| 237491    | CPS 8100 - OverKrete Xtra S            | 3 Gal. Black           | 64   | 240971    | CPS 8000 - OverKrete S            | 1 Gal. Natural          | 63    |
| 237495    | CPS 8100 - OverKrete Xtra S            | 1 Gal. Dun Tan         | 64   | 240972    | CPS 8000 - OverKrete S            | 1 Gal. Nav Gry          | 63    |
| 237496    | CPS 8100 - OverKrete Xtra S            | 3 Gal. Dun Tan         | 64   | 240973    | CPS 8000 - OverKrete S            | 1 Gal. Saf Yel          | 63    |
| 237501    | CPS 8100 - OverKrete Xtra S            | 1 Gal. Dark Gray       | 64   | 240974    | CPS 8000 - OverKrete S            | 1 Gal. Super Lt Gray    | 63    |
| 237502    | CPS 8100 - OverKrete Xtra S            | 3 Gal. Dark Gray       | 64   | 240975    | CPS 8000 - OverKrete S            | 1 Gal. Tile Red         | 63    |
| 237505    | CPS 8100 - OverKrete Xtra S            | 1 Gal. Light Gray      | 64   | 240976    | CPS 8000 - OverKrete S            | 1 Gal. White            | 63    |
| 237506    | CPS 8100 - OverKrete Xtra S            | 3 Gal. Light Gray      | 64   | 240990    | CPS 8000 - OverKrete S            | 1 Gal. Activator        | 63    |
| 237515    | CPS 8100 - OverKrete Xtra S            | 1 Gal. Super Lt Gray   | 64   | 240991    | CPS 8000 - OverKrete S            | 1 Gal. Light Gray       | 63    |
| 237516    | CPS 8100 - OverKrete Xtra S            | 3 Gal. Super Lt Gray   | 64   | 241526    | Companion Products                | Comfort Grip            | 15/42 |
| 237519    | CPS 8100 - OverKrete Xtra S            | 1 Gal. Nav Gry         | 64   | 241555    | CPS 8000 - OverKrete S            | 1 Gal. Pastel Blue      | 63    |
| 237520    | CPS 8100 - OverKrete Xtra S            | 3 Gal. Nav Gry         | 64   | 241557    | CPS 8000 - OverKrete S            | 4 Gal. Pastel Blue      | 63    |
| 237523    | CPS 8100 - OverKrete Xtra S            | 1 Gal. White           | 64   | 241559    | CPS 8000 - OverKrete OP           | 1 Gal. Super Lt Gray    | 63    |
| 237524    | CPS 8100 - OverKrete Xtra S            | 3 Gal. White           | 64   | 241631    | CPS 8000 - OverKrete OP           | 4 Gal. Super Lt Gray    | 63    |
| 237550    | Companion Products - Equipment & Tools | Bird Cage Mixer        | CS   | 241633    | CPS 8000 - OverKrete V            | 1 Gal. Super Lt Gray    | 63    |
| 237551    | Companion Products - Equipment & Tools | Cam Screed Rake        | CS   | 241635    | CPS 8000 - OverKrete V            | 4 Gal. Super Lt Gray    | 63    |
| 237553    | Companion Products - Equipment & Tools | Vapor Emission Test    | CS   | 241645    | CPS 8100 - OverKrete Xtra OP      | 1 Gal. Super Lt Gray    | 64    |
| 237554    | Companion Products - Equipment & Tools | Spike Wheel Rep        | CS   | 241647    | CPS 8100 - OverKrete Xtra OP      | 3 Gal. Super Lt Gray    | 64    |
| 237555    | Companion Products - Equipment & Tools | 5 Gal. Mixer (M-60)    | CS   | 241649    | CPS 8100 - OverKrete Xtra V       | 1 Gal. Super Lt Gray    | 64    |
| 237556    | Companion Products - Equipment & Tools | Rep. Pins for Screed   | CS   | 241651    | CPS 8100 - OverKrete Xtra V       | 3 Gal. Super Lt Gray    | 64    |
| 237557    | Companion Products - Equipment & Tools | Rep. Cam Screed Rake   | CS   | 241655    | CPS 8200 - OverKote V             | 1 Gal. Super Lt Gray    | 64    |
| 237558    | Companion Products - Equipment & Tools | TX Roller Covers       | CS   | 241657    | CPS 8200 - OverKote V             | 3 Gal. Super Lt Gray    | 64    |
| 237559    | Companion Products - Equipment & Tools | TX Roller Cages        | CS   | 241669    | CPS 8300 - OverKote Plus S        | 1 Gal. Super Lt Gray    | 65    |
| 237560    | Companion Products - Equipment & Tools | Ardex Smoother T-25    | CS   | 241671    | CPS 8300 - OverKote Plus S        | 3 Gal. Super Lt Gray    | 65    |
| 237805    | Rust-Oleum Grind 'N Go Machine         | Scarifier Rep          | 70   | 241673    | CPS 8300 - OverKote Plus V        | 1 Gal. Super Lt Gray    | 65    |
| 237806    | Rust-Oleum Grind 'N Go Machine         | Diamond 3 Button       | 70   | 241675    | CPS 8300 - OverKote Plus V        | 3 Gal. Super Lt Gray    | 65    |
| 237808    | Rust-Oleum Grind 'N Go Machine         | Scarifier Blades       | 70   | 241800    | Additional CPS Companion Products | 10 lb. VC-03            | 70    |
| 237809    | Rust-Oleum Grind 'N Go Machine         | 25 lb. Weight          | 70   | 241801    | Additional CPS Companion Products | 10 lb. VC-04            | 70    |
| 238592    | Rust-Oleum Grind 'N Go Machine         | 20" Grind 'N Go Mach   | 70   | 241802    | Additional CPS Companion Products | 10 lb. VC-05            | 70    |
| 238593    | Rust-Oleum Grind 'N Go Machine         | Vacuum                 | 70   | 241803    | Additional CPS Companion Products | 10 lb. VC-06            | 70    |
| 238632    | Rust-Oleum Grind 'N Go Machine         | Dust Skirt             | 70   | 241804    | Additional CPS Companion Products | 10 lb. VC-07            | 70    |
| 238634    | Rust-Oleum Grind 'N Go Machine         | Velcro Strip           | 70   | 241805    | Additional CPS Companion Products | 10 lb. VC-09            | 70    |
| 238636    | Rust-Oleum Grind 'N Go Machine         | Carbide Blades         | 70   | 241806    | Additional CPS Companion Products | 10 lb. VC-10            | 70    |
| 238637    | Rust-Oleum Grind 'N Go Machine         | Timing Kevlar Belt     | 70   | 241807    | Additional CPS Companion Products | 10 lb. VC-11            | 70    |
| 238748    | Sierra Beyond Acrylic Enamel           | 1 Gal. Gloss White     | 57   | 241808    | Additional CPS Companion Products | 10 lb. VC-12            | 70    |
| 238749    | Sierra Beyond Acrylic Enamel           | 1 Gal. Satin White     | 57   | 241809    | Additional CPS Companion Products | 10 lb. VC-13            | 70    |
| 238750    | Sierra Beyond Acrylic Enamel           | 1 Gal. Gloss Nav Gry   | 57   | 241810    | Additional CPS Companion Products | 10 lb. VC-15            | 70    |
| 238751    | Sierra Beyond Acrylic Enamel           | 1 Gal. Gloss Sf Blue   | 57   | 241811    | Additional CPS Companion Products | 10 lb. VC-16            | 70    |
| 238752    | Sierra MetalMax DTM Acrylic Enamel     | 1 Gal. Semi-Gl White   | 58   | 241813    | Additional CPS Companion Products | 10 lb. VC-01            | 70    |
| 238753    | Sierra MetalMax DTM Acrylic Enamel     | 1 Gal. Semi-Gl Sf Blue | 58   | 241814    | Additional CPS Companion Products | 55 lb. VC-02            | 70    |
| 238754    | Sierra MetalMax DTM Acrylic Enamel     | 1 Gal. Semi-Gl Nav Gry | 58   | 241815    | Additional CPS Companion Products | 55 lb. VC-03            | 70    |
| 238755    | Sierra MetalMax DTM Acrylic Enamel     | 1 Gal. Gray Primer     | 58   | 241816    | Additional CPS Companion Products | 55 lb. VC-04            | 70    |
| 238772    | CPS 8000 - OverKrete S                 | 4 Gal. Light Gray      | 63   | 241817    | Additional CPS Companion Products | 55 lb. VC-05            | 70    |
| 238773    | CPS 8000 - OverKrete S                 | 4 Gal. Activator       | 63   | 241818    | Additional CPS Companion Products | 55 lb. VC-06            | 70    |
| 239007    | IC M1600 Precision Line Marking Paint  | 16 oz. Silver          | 38   | 241819    | Additional CPS Companion Products | 55 lb. VC-07            | 70    |
| 239008    | CPS 8000 - OverKrete S                 | 4 Gal. Super Lt Gray   | 63   | 241820    | Additional CPS Companion Products | 55 lb. VC-08            | 70    |
| 239503    | HP Alkyd Accelerator                   | 1 Qt. Clear            | 19   | 241821    | Additional CPS Companion Products | 55 lb. VC-09            | 70    |
| 239746    | CPS 8000 - OverKrete S                 | 4 Gal. Nav Gry         | 63   | 241822    | Additional CPS Companion Products | 55 lb. VC-10            | 70    |
| 240640    | IC M1700 High Output Marking Paint     | 16 oz. Caution Blue    | 39   | 241823    | Additional CPS Companion Products | 55 lb. VC-11            | 70    |
| 240644    | IC M1700 High Output Marking Paint     | 16 oz. Safety Red      | 39   | 241824    | Additional CPS Companion Products | 55 lb. VC-12            | 70    |
| 240647    | IC M1700 High Output Marking Paint     | 16 oz. Fl. Orange      | 39   | 241825    | Additional CPS Companion Products | 55 lb. VC-13            | 70    |
| 240649    | IC M1700 High Output Marking Paint     | 16 oz. Fl. Pink        | 39   | 241826    | Additional CPS Companion Products | 55 lb. VC-14            | 70    |
| 240650    | IC M1700 High Output Marking Paint     | 16 oz. White           | 39   | 241827    | Additional CPS Companion Products | 55 lb. VC-15            | 70    |
| 240871    | CPS 8000 - OverKrete S                 | 4 Gal. Black           | 63   | 241828    | Additional CPS Companion Products | 55 lb. VC-16            | 70    |
| 240875    | CPS 8000 - OverKrete S                 | 4 Gal. Dark Gray       | 63   | 241830    | CPS 9600 - BriteCast Aggregate    | 50 lb. BriteCast BC-103 | 68    |
| 240876    | CPS 8000 - OverKrete S                 | 4 Gal. Dun Tan         | 63   | 241831    | CPS 9600 - BriteCast Aggregate    | 50 lb. BriteCast BC-105 | 68    |
| 240877    | CPS 8000 - OverKrete S                 | 4 Gal. Light Green     | 63   | 241832    | CPS 9600 - BriteCast Aggregate    | 50 lb. BriteCast BC-109 | 68    |
| 240878    | CPS 8000 - OverKrete S                 | 4 Gal. National Blue   | 63   | 241833    | CPS 9600 - BriteCast Aggregate    | 50 lb. BriteCast BC-112 | 68    |
| 240879    | CPS 8000 - OverKrete S                 | 4 Gal. Natural         | 63   | 241834    | CPS 9600 - BriteCast Aggregate    | 50 lb. BriteCast BC-117 | 68    |
| 240915    | CPS 8000 - OverKrete S                 | 1 Gal. Black           | 63   | 241835    | CPS 9600 - BriteCast Aggregate    | 50 lb. BriteCast BC-119 | 68    |

| PROD. NO. | SYSTEM                                  | SIZE & COLOR               | PAGE | PROD. NO. | SYSTEM                                  | SIZE & COLOR            | PAGE |
|-----------|-----------------------------------------|----------------------------|------|-----------|-----------------------------------------|-------------------------|------|
| 241836    | CPS 9600 - BriteCast Aggregate          | 50 lb. BriteCast BC-120    | 68   | 251289    | CS 5600 Acrylic Urethane Floor Paint    | 1 Gal. White            | 77   |
| 241837    | CPS 9600 - BriteCast Aggregate          | 50 lb. BriteCast BC-121    | 68   | 251291    | CS 5600 Acrylic Urethane Floor Paint    | 1 Gal. Silver Gray      | 77   |
| 241838    | CPS 9600 - BriteCast Aggregate          | 50 lb. BriteCast BC-122    | 68   | 251293    | CS 5600 Acrylic Urethane Floor Paint    | 5 Gal. Silver Gray      | 77   |
| 242657    | IC 1600 Enamel                          | 11 oz. Metallic Bronze     | 35   | 251763    | CS 6200 Fast-Cure Epoxy Floor Coating   | 2 Gal. Kit Silver Gray  | 78   |
| 243276    | HP V7400 Traffic Zone Striping Paint    | 1 Gal. Red                 | 14   | 251765    | CS 6200 Fast-Cure Epoxy Floor Coating   | 2 Gal. Kit Dunes Tan    | 78   |
| 243506    | HP 9900 Anti-Graffiti Barrier           | 1 Gal. Clear Basecoat      | 30   | 253479    | CS Concrete Patching Compound           | 2.0 Gal. Kit Light Gray | 81   |
| 243507    | HP 9900 Anti-Graffiti Barrier           | 1 Qt. Clear Base Activator | 30   | 254157    | HP SC9100 100 VOC DTM Epoxy Mastic      | White                   | 23   |
| 243754    | Sierra Beyond Acrylic Enamel            | 5 Gal. Sat Wht             | 57   | 254159    | HP SC9100 100 VOC DTM Epoxy Mastic      | Silver Gray             | 23   |
| 243755    | Sierra Beyond Acrylic Enamel            | 5 Gal. Gl's Wht            | 57   | 256673    | CS EasyClear™ Epoxy Maint. Coating      | Clear                   | 80   |
| 244580    | HP 9900 Anti-Graffiti Barrier           | 1 Qt. Soy Graffiti Remover | 30   | 257395    | CS All-Purpose Epoxy Repair             | 9 oz. Light Gray        | 81   |
| 245308    | HP V7400 340 VOC Alkyd Enamel           | Almond                     | 18   | 257396    | CS All-Purpose Companion Products       | Caulk Gun               | 81   |
| 245309    | HP V7400 340 VOC Alkyd Enamel           | Aluminum                   | 18   | 257397    | CS All-Purpose Companion Products       | Replacement Mixers      | 81   |
| 245380    | HP V7400 340 VOC Alkyd Enamel           | Chestnut Brown             | 18   | 257399    | IC 1600 Enamel                          | 12 oz. Purple           | 35   |
| 245381    | HP V7400 340 VOC Alkyd Enamel           | Clear (Clear-Sele®)        | 18   | 257400    | IC 1600 Enamel Primers                  | 12 oz. Black            | 35   |
| 245382    | HP V7400 340 VOC Alkyd Enamel           | Dunes Tan                  | 18   | 257401    | IC 1600 Enamel                          | 12 oz. Emerald Green    | 35   |
| 245385    | HP V7400 340 VOC Alkyd Enamel           | Fire Hydrant Red           | 18   | 257402    | IC 1600 Enamel                          | 12 oz. Semi-Gloss White | 35   |
| 245387    | HP V7400 340 VOC Alkyd Enamel           | Flat Black                 | 18   | 257403    | IC AF1600 Athletic Field Striping Paint | 17 oz. Fluor. Green     | 37   |
| 245388    | HP V7400 340 VOC Alkyd Enamel           | Forest Green               | 18   | 257406    | IC AF1600 Athletic Field Striping Paint | 17 oz. Fluor. Orange    | 37   |
| 245400    | HP V7400 340 VOC Alkyd Enamel           | John Deere Green           | 18   | 258887    | HP V7400 340 VOC Alkyd Enamel Primers   | White                   | 18   |
| 245402    | HP V7400 340 VOC Alkyd Enamel           | Heavy-Duty Aluminum        | 18   | 259157    | HP V8400 340 VOC Food & Beverage Primer | White                   | 20   |
| 245403    | HP V7400 340 VOC Alkyd Enamel           | High Gloss Black           | 18   | 259158    | HP V8400 340 VOC Food & Beverage        | High Gloss Dairy White  | 20   |
| 245406    | HP V7400 340 VOC Alkyd Enamel           | High Gloss White           | 18   | 268402    | HP 4200 High Heat Coatings              | 1 Gal. Red Primer       | 28   |
| 245408    | HP V7400 340 VOC Alkyd Enamel           | International Orange       | 18   | 333402    | Thinner                                 | 1 Gal. Thnr - Exmp Sol  | CS   |
| 245409    | HP V7400 340 VOC Alkyd Enamel           | Machine Tool Gray          | 18   | 412402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. Flat Black       | 16   |
| 245440    | HP V7400 340 VOC Alkyd Enamel           | Marlin Blue                | 18   | 470402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. Aluminum         | 16   |
| 245441    | HP V7400 340 VOC Alkyd Enamel           | National Blue              | 18   | 470402    | HP 4200/4300 High Heat Coatings         | 1 Gal. Leafg Aluminum   | 28   |
| 245443    | HP V7400 340 VOC Alkyd Enamel           | Navy Gray                  | 18   | 473402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. HD Aluminum      | 16   |
| 245474    | HP V7400 340 VOC Alkyd Enamel           | Safety Blue                | 18   | 473402    | HP 4200/4300 High Heat Coatings         | 1 Gal. HD Aluminum      | 28   |
| 245476    | HP V7400 340 VOC Alkyd Enamel           | Safety Green               | 18   | 559402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. Intl Orange      | 16   |
| 245477    | HP V7400 340 VOC Alkyd Enamel           | Safety Orange              | 18   | 633402    | Thinner                                 | 1 Gal. Thnr - Br Ap     | CS   |
| 245478    | HP V7400 340 VOC Alkyd Enamel           | Safety Red                 | 18   | 634300    | HP 7400 DTM Alkyd Enamel                | 5 Gal. High Gl Black    | 16   |
| 245479    | HP V7400 340 VOC Alkyd Enamel           | Safety Yellow              | 18   | 634402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. High Gl Black    | 16   |
| 245481    | HP V7400 340 VOC Alkyd Enamel           | SG Light Neutral Gray      | 18   | 641300    | Thinner                                 | 5 Gal. Thinner          | CS   |
| 245482    | HP V7400 340 VOC Alkyd Enamel           | SG Pleasant Green          | 18   | 641402    | Thinner                                 | 1 Gal. Thnr-Spray Ap    | CS   |
| 245483    | HP V7400 340 VOC Alkyd Enamel           | SG White                   | 18   | 678300    | HP 7400 Alkyd Enamel Primers            | 5 Gal. QkDry Rd Primer  | 17   |
| 245484    | HP V7400 340 VOC Alkyd Enamel           | Silver Gray                | 18   | 678402    | HP 7400 Alkyd Enamel Primers            | 1 Gal. QkDry Rd Primer  | 17   |
| 245486    | HP V7400 340 VOC Alkyd Enamel           | Tile Red                   | 18   | 717402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. Clr (Clr-Sele)   | 16   |
| 245487    | HP V7400 340 VOC Alkyd Enamel           | Vista Green                | 18   | 721300    | HP 7400 DTM Alkyd Enamel                | 5 Gal. National Blue    | 16   |
| 245488    | HP V7400 340 VOC Alkyd Enamel           | Yellow                     | 18   | 721402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. National Blue    | 16   |
| 245489    | HP V7400 340 VOC Alkyd Enamel           | New Caterpillar Yellow     | 18   | 745402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. Tile Red         | 16   |
| 245500    | HP V7400 340 VOC Alkyd Enamel           | Old Caterpillar Yellow     | 18   | 769300    | HP 7400 Alkyd Enamel Primers            | 5 Gal. D-Pf Red Primer  | 17   |
| 245533    | HP V7400 340 VOC Alkyd Enamel           | Flat White                 | 18   | 769402    | HP 7400 Alkyd Enamel Primers            | 1 Gal. D-Pf Red Primer  | 17   |
| 247597    | HP VK9300 Two Component Epoxy           | 14 oz.Gray                 | 13   | 865300    | HP 7400 DTM Alkyd Enamel                | 5 Gal. Dun Tan          | 16   |
| 247598    | HP VK9300 Two Component Epoxy           | 14 oz.Beige                | 13   | 865402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. Dun Tan          | 16   |
| 247832    | IC 360° Marking Paint                   | 17 oz. Hi. Vis. Yellow     | 39   | 866402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. Marlin Blue      | 16   |
| 247833    | IC 360° Marking Paint                   | 17 oz. Fluor. Red          | 39   | 904402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. Mach Tool Gray   | 16   |
| 247834    | IC 360° Marking Paint                   | 17 oz. Fluor. Green        | 39   | 906300    | HP 7400 DTM Alkyd Enamel                | 5 Gal. Sil Gry          | 16   |
| 247835    | IC 360° Marking Paint                   | 17 oz. Fluor. Orange       | 39   | 906402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. Sil Gry          | 16   |
| 247836    | IC 360° Marking Paint                   | 17 oz. Fluor. Red-Orange   | 39   | 925300    | HP 7400 DTM Alkyd Enamel                | 5 Gal. Safety Blue      | 16   |
| 247837    | IC 360° Marking Paint                   | 17 oz. White               | 39   | 925402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. Safety Blue      | 16   |
| 248273    | Sierra S60 WB Epoxy Maintenance Coating | 1 Gal. White Pastel Base   | 58   | 933402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. Safety Green     | 16   |
| 248274    | Sierra S60 WB Epoxy Maintenance Coating | 1 Gal. White Tint Base     | 58   | 935402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. Vista Green      | 16   |
| 248275    | Sierra S60 WB Epoxy Maintenance Coating | 1 Gal. White Deep Base     | 58   | 944300    | HP 7400 DTM Alkyd Enamel                | 5 Gal. Saf Yel          | 16   |
| 248276    | Sierra S60 WB Epoxy Maintenance Coating | 1 Gal. White Accent Base   | 58   | 944402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. Saf Yel          | 16   |
| 248284    | Sierra S60 WB Epoxy Maintenance Coating | 1 Gal. Activator           | 58   | 956402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. Safety Orange    | 16   |
| 248285    | Sierra S60 WB Epoxy Maintenance Coating | 2 Gal. Kit Almond          | 58   | 960300    | HP 7400 Alkyd Enamel Primers            | 5 Gal. ZnCr Yel Primer  | 17   |
| 248286    | Sierra S60 WB Epoxy Maintenance Coating | 2 Gal. Kit Stone Gray      | 58   | 960402    | HP 7400 Alkyd Enamel Primers            | 1 Gal. ZnCr Yel Primer  | 17   |
| 248287    | Sierra S60 WB Epoxy Maintenance Coating | 2 Gal. Kit OSHA Saf. Red   | 58   | 964402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. Safety Red       | 16   |
| 248288    | Sierra S60 WB Epoxy Maintenance Coating | 2 Gal. Kit OSHA Saf. Yel.  | 58   | 975300    | HP 7400 DTM Alkyd Enamel                | 5 Gal. Nav Gry          | 16   |
| 248289    | Sierra S60 WB Epoxy Maintenance Coating | 2 Gal. Kit Oyster White    | 58   | 975402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. Nav Gry          | 16   |
| 248290    | Sierra S60 WB Epoxy Maintenance Coating | 2 Gal. Kit Black           | 58   | 977402    | HP 7400 DTM Alkyd Enamel                | 1 Gal. Chestnut Brown   | 16   |
| 248291    | Sierra S60 WB Epoxy Maintenance Coating | 2 Gal. Kit OSHA Saf. Blk.  | 58   | 1020402   | HP 7400 DTM Alkyd Enamel                | 1 Gal. Blue Aluminum    | 16   |
| 251280    | HP 5100 Acrylic Dryfall Coating         | 5 Gal. White               | 30   | 1030402   | HP 7400 DTM Alkyd Enamel                | 1 Gal. Green Aluminum   | 16   |
| 251282    | CS 5500 Acrylic Dustproof Sealer        | 1 Gal. Clear               | 77   | 1060402   | HP 7400 Alkyd Enamel Primers            | 1 Gal. HDRst Gry Primr  | 17   |
| 251283    | CS 5500 Acrylic Dustproof Sealer        | 5 Gal. Clear               | 77   | 1069300   | HP 7400 Alkyd Enamel Primers            | 5 Gal. HDRst Red Primr  | 17   |
| 251286    | CS 5600 Acrylic Urethane Floor Paint    | 1 Gal. Safety Yellow       | 77   | 1069402   | HP 7400 Alkyd Enamel Primers            | 1 Gal. HDRst Red Primr  | 17   |

| PROD. NO. | SYSTEM                                | SIZE & COLOR             | PAGE | PROD. NO. | SYSTEM                                | SIZE & COLOR           | PAGE  |
|-----------|---------------------------------------|--------------------------|------|-----------|---------------------------------------|------------------------|-------|
| 1210300   | HP 7400 DTM Alkyd Enamel              | 5 Gal. Fire Hyd Red      | 16   | 1686830   | IC 1600 Enamel                        | 12 oz. Universal Gray  | 35    |
| 1210402   | HP 7400 DTM Alkyd Enamel              | 1 Gal. Fire Hyd Red      | 16   | 1688830   | IC 1600 Enamel                        | 12 oz. Smoke Gray      | 35    |
| 1282300   | HP 7400 DTM Alkyd Enamel              | 5 Gal. Forest Green      | 16   | 1690830   | IC 1600 Enamel                        | 12 oz. Flat White      | 35    |
| 1282402   | HP 7400 DTM Alkyd Enamel              | 1 Gal. Forest Green      | 16   | 1691838   | IC S1600 Striping Paint               | 18 oz. White           | 37    |
| 1505408   | HP 1500 Speedy-Dry Enamel             | 1 Gal. Red               | 20   | 1692830   | IC 1600 Enamel                        | 12 oz. Glossy White    | 35    |
| 1506408   | HP 1500 Speedy-Dry Enamel             | 1 Gal. Yellow            | 20   | 1696830   | IC 1600 Enamel                        | 12 oz. Antique White   | 35    |
| 1507388   | HP 1500 Speedy-Dry Enamel             | 5 Gal. Masstone          | 20   | 1801838   | IC M1800 Precision Line Marking Paint | 16 oz. Clear           | 38    |
| 1507408   | HP 1500 Speedy-Dry Enamel             | 1 Gal. Masstone          | 20   | 1834838   | IC M1800 Precision Line Marking Paint | 17 oz. Safety Green    | 38    |
| 1508391   | HP 1500 Speedy-Dry Enamel             | 5 Gal. Deep              | 20   | 1861838   | IC M1800 Precision Line Marking Paint | 17 oz. Fl. Pink        | 38    |
| 1508411   | HP 1500 Speedy-Dry Enamel             | 1 Gal. Deep              | 20   | 1862838   | IC M1800 Precision Line Marking Paint | 17 oz. Fl. Red         | 38    |
| 1509394   | HP 1500 Speedy-Dry Enamel             | 5 Gal. Light             | 20   | 1868838   | IC M1800 Precision Line Marking Paint | 17 oz. Safety Purple   | 38    |
| 1509418   | HP 1500 Speedy-Dry Enamel             | 1 Gal. Light             | 20   | 1869838   | IC M1800 Precision Line Marking Paint | 17 oz. Fl. Purple      | 38    |
| 1510402   | HP 1500 Speedy-Dry Enamel             | 1 Gal. Chrome            | 20   | 1875838   | IC M1800 Precision Line Marking Paint | 17 oz. Black           | 38    |
| 1545402   | HP 1500 Speedy-Dry Enamel             | 1 Gal. Saf Yel           | 20   | 2068402   | HP 7400 High Solids Quick Dry Primers | 1 Gal. Red HSQD Primr  | 17    |
| 1547300   | HP 1500 Speedy-Dry Enamel             | 5 Gal. New Cat Yellow    | 20   | 2082402   | HP 7400 High Solids Quick Dry Primers | 1 Gal. LtGr HSQD Primr | 17    |
| 1547402   | HP 1500 Speedy-Dry Enamel             | 1 Gal. New Cat Yellow    | 20   | 2083402   | HP 1500 Speedy-Dry Enamel             | 1 Gal. Gray Primer     | 20    |
| 1565402   | HP 1500 Speedy-Dry Enamel             | 1 Gal. Intl Red          | 20   | 2233838   | HP V2100 Enamel                       | 14 oz. Fl. Green       | 11    |
| 1573300   | HP 1500 Speedy-Dry Enamel             | 5 Gal. Rst Inh Primer    | 20   | 2242838   | HP V2100 Enamel                       | 14 oz. Fl. Yellow      | 11    |
| 1573402   | HP 1500 Speedy-Dry Enamel             | 1 Gal. Rst Inh Primer    | 20   | 2255838   | HP V2100 Enamel                       | 14 oz. Fl. Orange      | 11    |
| 1579300   | HP 1500 Speedy-Dry Enamel             | 5 Gal. Jet Black         | 20   | 2264838   | HP V2100 Enamel                       | 14 oz. Fl. Red         | 11    |
| 1579402   | HP 1500 Speedy-Dry Enamel             | 1 Gal. Jet Black         | 20   | 2326402   | HP 2300 Striping Paint                | 1 Gal. Blue            | 14    |
| 1584300   | HP 1500 Speedy-Dry Enamel             | 5 Gal. Sil Gry           | 20   | 2326838   | HP 2300 Striping Paint                | 18 oz. Blue            | 14    |
| 1584402   | HP 1500 Speedy-Dry Enamel             | 1 Gal. Sil Gry           | 20   | 2348300   | HP 2300 Striping Paint                | 5 Gal. Yellow          | 14    |
| 1586402   | HP 1500 Speedy-Dry Enamel             | 1 Gal. Nav Gry           | 20   | 2348402   | HP 2300 Striping Paint                | 1 Gal. Yellow          | 14    |
| 1590300   | HP 1500 Speedy-Dry Enamel             | 5 Gal. White             | 20   | 2348838   | HP 2300 Striping Paint                | 18 oz. Yellow          | 14    |
| 1590402   | HP 1500 Speedy-Dry Enamel             | 1 Gal. White             | 20   | 2364838   | HP 2300 Striping Paint                | 18 oz. Red             | 14    |
| 1601838   | IC M1600 Precision Line Marking Paint | 17 oz. Clear             | 38   | 2378838   | HP 2300 Striping Paint                | 18 oz. Flat Black      | 14    |
| 1610830   | IC 1600 Enamel                        | 12 oz. Crystal Clear     | 35   | 2388000   | Companion Products                    | Striping Wand          | 15/42 |
| 1614830   | IC 1600 Enamel                        | 12 oz. Dull Aluminum     | 35   | 2391300   | HP 2300 Traffic Zone Striping Paint   | 5 Gal. White           | 14    |
| 1622830   | IC 1600 Enamel                        | 12 oz. Regal Blue        | 35   | 2391402   | HP 2300 Traffic Zone Striping Paint   | 1 Gal. White           | 14    |
| 1624830   | IC 1600 Enamel                        | 12 oz. Safety Blue       | 35   | 2391838   | HP 2300 Striping Paint                | 18 oz. White           | 14    |
| 1626830   | IC 1600 Enamel                        | 12 oz. True Blue         | 35   | 2393000   | Companion Products                    | Marking Wand           | 15/42 |
| 1627838   | IC S1600 Striping Paint               | 18 oz. Blue              | 37   | 2395000   | Companion Products                    | Striping Machine       | 15/42 |
| 1632830   | IC 1600 Enamel                        | 12 oz. Fl. Green         | 35   | 2400402   | Thinner                               | 1 Gal. Thinner         | CS    |
| 1633830   | IC 1600 Enamel                        | 12 oz. Safety Green      | 35   | 2764402   | HP 7400 DTM Alkyd Enamel              | 1 Gal. Flat White      | 16    |
| 1634838   | IC M1600 Precision Line Marking Paint | 17 oz. Safety/APWA Green | 38   | 2766300   | HP 7400 DTM Alkyd Enamel              | 5 Gal. High GI White   | 16    |
| 1638830   | IC 1600 Enamel                        | 12 oz. Hunter Green      | 35   | 2766402   | HP 7400 DTM Alkyd Enamel              | 1 Gal. High GI White   | 16    |
| 1642830   | IC 1600 Enamel                        | 12 oz. Fl. Yellow        | 35   | 3107411   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 1 Gal. Masstone        | 21    |
| 1643830   | IC 1600 Enamel                        | 12 oz. S. Bus Yellow     | 35   | 3108418   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 1 Gal. Deep            | 21    |
| 1644830   | IC 1600 Enamel                        | 12 oz. Safety Yellow     | 35   | 3109397   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 5 Gal. Light           | 21    |
| 1648838   | IC S1600 Striping Paint               | 18 oz. Yellow            | 37   | 3109417   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 1 Gal. Light           | 21    |
| 1653830   | IC 1600 Enamel                        | 12 oz. Safety Orange     | 35   | 3115300   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 5 Gal. Alumi-Non       | 21    |
| 1654830   | IC 1600 Enamel                        | 12 oz. Fl. Orange        | 35   | 3115402   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 1 Gal. Alumi-Non       | 21    |
| 1655830   | IC 1600 Enamel                        | 12 oz. Fl. Red-Orange    | 35   | 3125402   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 1 Gal. Safety Blue     | 21    |
| 1659830   | IC 1600 Enamel                        | 12 oz. Fl. Pink          | 35   | 3144300   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 5 Gal. Saf Yel         | 21    |
| 1660830   | IC 1600 Enamel                        | 12 oz. Safety Red        | 35   | 3144402   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 1 Gal. Saf Yel         | 21    |
| 1661838   | IC M1600 Precision Line Marking Paint | 17 oz. Fl. Pink          | 38   | 3147402   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 1 Gal. New Cat. Yellow | 21    |
| 1662838   | IC M1600 Precision Line Marking Paint | 17 oz. Fl. Red           | 38   | 3165402   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 1 Gal. Red             | 21    |
| 1664830   | IC 1600 Enamel                        | 12 oz. Cherry Red        | 35   | 3169402   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 1 Gal. Red Primer      | 21    |
| 1665838   | IC S1600 Striping Paint               | 18 oz. Red               | 37   | 3171402   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 1 Gal. Dun Tan         | 21    |
| 1666830   | IC 1600 Enamel                        | 12 oz. Banner Red        | 35   | 3179300   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 5 Gal. Black           | 21    |
| 1667830   | IC 1600 Enamel Primer                 | 12 oz. Red Primer        | 35   | 3179402   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 1 Gal. Black           | 21    |
| 1669838   | IC M1600 Precision Line Marking Paint | 17 oz. Fl. Purple        | 38   | 3181300   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 5 Gal. Gray Primer     | 21    |
| 1670830   | IC 1600 Enamel                        | 12 oz. Safety Purple     | 35   | 3181402   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 1 Gal. Gray Primer     | 21    |
| 1671830   | IC 1600 Enamel                        | 12 oz. Beige             | 35   | 3186402   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 1 Gal. Nav Gry         | 21    |
| 1672830   | IC 1600 Enamel                        | 12 oz. Almond            | 35   | 3192300   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 5 Gal. White           | 21    |
| 1674830   | IC 1600 Enamel                        | 12 oz. Leather Brown     | 35   | 3192402   | HP 3100 Speedy-Dry DTM Acrylic Enamel | 1 Gal. White           | 21    |
| 1675838   | IC M1600 Precision Line Marking Paint | 17 oz. Black             | 38   | 3202502   | IC 3200 Clear Blue Undercoat          | 1 Qt. Clr Blue Underct | 45    |
| 1676830   | IC 1600 Enamel                        | 12 oz. UltraFlat Black   | 35   | 3405408   | HP 3400 DTM Alkyd Enamel Tint Bases   | 1 Gal. Red Base        | 19    |
| 1677838   | IC S1600 Striping Paint               | 18 oz. Black             | 37   | 3406408   | HP 3400 DTM Alkyd Enamel Tint Bases   | 1 Gal. Yellow          | 19    |
| 1678830   | IC 1600 Enamel                        | 12 oz. Semi-Flat Black   | 35   | 3407388   | HP 3400 DTM Alkyd Enamel Tint Bases   | 5 Gal. Masstone        | 19    |
| 1679830   | IC 1600 Enamel                        | 12 oz. Glossy Black      | 35   | 3407408   | HP 3400 DTM Alkyd Enamel Tint Bases   | 1 Gal. Masstone        | 19    |
| 1680830   | IC 1600 Enamel Primer                 | 12 oz. Gray Primer       | 35   | 3408391   | HP 3400 DTM Alkyd Enamel Tint Bases   | 5 Gal. Deep            | 19    |
| 1681830   | IC 1600 Enamel Primer                 | 12 oz. White Primer      | 35   | 3408411   | HP 3400 DTM Alkyd Enamel Tint Bases   | 1 Gal. Deep            | 19    |
| 1684830   | IC 1600 Enamel                        | 12 oz. Dove Gray         | 35   | 3409394   | HP 3400 DTM Alkyd Enamel Tint Bases   | 5 Gal. Light           | 19    |
| 1685830   | IC 1600 Galvanizing Compound          | 14 oz. Cold Galv         | 36   | 3409418   | HP 3400 DTM Alkyd Enamel Tint Bases   | 1 Gal. Light           | 19    |

| PROD. NO. | SYSTEM                               | SIZE & COLOR           | PAGE | PROD. NO. | SYSTEM                                 | SIZE & COLOR            | PAGE |
|-----------|--------------------------------------|------------------------|------|-----------|----------------------------------------|-------------------------|------|
| 3415402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. Aluminum        | 19   | 5213417   | IC 5200 DTM Acrylic                    | 1 Gal. Light            | 45   |
| 3423402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. Marlin Blue     | 19   | 5215402   | IC 5200 DTM Acrylic                    | 1 Gal. Alumi-Non        | 45   |
| 3425402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. Safety Blue     | 19   | 5217411   | IC 5200 DTM Acrylic                    | 1 Gal. Masstn Semi-Gl   | 45   |
| 3427402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. National Blue   | 19   | 5218418   | IC 5200 DTM Acrylic                    | 1 Gal. Deep Semi-Gl     | 45   |
| 3433402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. Safety Green    | 19   | 5219417   | IC 5200 DTM Acrylic                    | 1 Gal. Lt Semi-Gl       | 45   |
| 3438402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. Forest Green    | 19   | 5222402   | IC 5200 DTM Acrylic                    | 1 Gal. Marlin Blue      | 45   |
| 3444402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. Saf Yel         | 19   | 5225402   | IC 5200 DTM Acrylic                    | 1 Gal. Safety Blue      | 45   |
| 3445402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. Equip. Yellow   | 19   | 5227402   | IC 5200 DTM Acrylic                    | 1 Gal. National Blue    | 45   |
| 3446402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. Yellow          | 19   | 5233402   | IC 5200 DTM Acrylic                    | 1 Gal. Safety Green     | 45   |
| 3455402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. Safety Orange   | 19   | 5234402   | IC 5200 DTM Acrylic                    | 1 Gal. Green (John De)  | 45   |
| 3456402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. Equip. Orange   | 19   | 5235402   | IC 5200 DTM Acrylic                    | 1 Gal. Vista Green      | 45   |
| 3464402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. Safety Red      | 19   | 5237402   | IC 5200 DTM Acrylic                    | 1 Gal. Forest Green     | 45   |
| 3465402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. ReGal. Red      | 19   | 5244402   | IC 5200 DTM Acrylic                    | 1 Gal. Saf Yel          | 45   |
| 3469300   | HP 3400 Alkyd Enamel Primer          | 5 Gal. Red Primer      | 19   | 5255402   | IC 5200 DTM Acrylic                    | 1 Gal. Safety Orange    | 45   |
| 3469402   | HP 3400 Alkyd Enamel Primer          | 1 Gal. Red Primer      | 19   | 5256402   | IC 5200 DTM Acrylic                    | 1 Gal. Intl Orange      | 45   |
| 3470402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. Almond          | 19   | 5258300   | IC 5200 DTM Acrylic                    | 5 Gal. Tower Orange     | 45   |
| 3471402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. Dun Tan         | 19   | 5258402   | IC 5200 DTM Acrylic                    | 1 Gal. Tower Orange     | 45   |
| 3477402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. Chestnut Brown  | 19   | 5264402   | IC 5200 DTM Acrylic                    | 1 Gal. Safety Red       | 45   |
| 3478402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. Flat Black      | 19   | 5265402   | IC 5200 DTM Acrylic                    | 1 Gal. Fire Hyd Red     | 45   |
| 3479300   | HP 3400 DTM Alkyd Enamel             | 5 Gal. Gloss Black     | 19   | 5269402   | IC 5200 DTM Acrylic                    | 1 Gal. Red Primer       | 45   |
| 3479402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. Gloss Black     | 19   | 5271300   | IC 5200 DTM Acrylic                    | 5 Gal. Dun Tan          | 45   |
| 3481402   | HP 3400 Alkyd Enamel Primer          | 1 Gal. Gray Primer     | 19   | 5271402   | IC 5200 DTM Acrylic                    | 1 Gal. Dun Tan          | 45   |
| 3482402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. Sil Gry         | 19   | 5274402   | IC 5200 DTM Acrylic                    | 1 Gal. Semi-Gl Black    | 45   |
| 3486402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. Nav Gry         | 19   | 5275402   | IC 5200 DTM Acrylic                    | 1 Gal. Bronzestone      | 45   |
| 3492300   | HP 3400 DTM Alkyd Enamel             | 5 Gal. Gloss White     | 19   | 5277402   | IC 5200 DTM Acrylic                    | 1 Gal. Chestnut Brown   | 45   |
| 3492402   | HP 3400 DTM Alkyd Enamel             | 1 Gal. Gloss White     | 19   | 5278402   | IC 5200 DTM Acrylic                    | 1 Gal. Flat Black       | 45   |
| 3575402   | HP 3575 Rust Reformer                | 1 Gal. Rust Reformer   | 29   | 5279402   | IC 5200 DTM Acrylic                    | 1 Gal. Gloss Black      | 45   |
| 3590402   | Pure Strength 3500 Cleaner/Degreaser | 1 Gal. Pure Strength   | 86   | 5281300   | IC 5200 DTM Acrylic                    | 5 Gal. Gray Primer      | 45   |
| 3599100   | Pure Strength 3500 Cleaner/Degreaser | 55 Gal. Pure Strength  | 86   | 5281402   | IC 5200 DTM Acrylic                    | 1 Gal. Gray Primer      | 45   |
| 3599300   | Pure Strength 3500 Cleaner/Degreaser | 5 Gal. Pure Strength   | 86   | 5282300   | IC 5200 DTM Acrylic                    | 5 Gal. Sil Gry          | 45   |
| 3599402   | Pure Strength 3500 Cleaner/Degreaser | 1 Gal. Pure Strength   | 86   | 5282402   | IC 5200 DTM Acrylic                    | 1 Gal. Sil Gry          | 45   |
| 3599507   | Pure Strength 3500 Cleaner/Degreaser | 1 Qt Pure Strength     | 86   | 5286402   | IC 5200 DTM Acrylic                    | 1 Gal. Nav Gry          | 45   |
| 3599838   | Pure Strength 3500 Cleaner/Degreaser | 20 oz. Cleaner         | 86   | 5288402   | IC 5200 DTM Acrylic                    | 1 Gal. Machine TI Gray  | 45   |
| 3707411   | HP 3700 DTM Acrylic Enamel           | 1 Gal. Masstone        | 21   | 5290402   | IC 5200 DTM Acrylic                    | 1 Gal. Flat White       | 45   |
| 3708418   | HP 3700 DTM Acrylic Enamel           | 1 Gal. Deep            | 21   | 5291300   | IC 5200 DTM Acrylic                    | 5 Gal. Tower White      | 45   |
| 3709417   | HP 3700 DTM Acrylic Enamel           | 1 Gal. Light           | 21   | 5291402   | IC 5200 DTM Acrylic                    | 1 Gal. Tower White      | 45   |
| 3725300   | HP 3700 DTM Acrylic Enamel           | 5 Gal. Safety Blue     | 21   | 5292300   | IC 5200 DTM Acrylic                    | 5 Gal. Gloss White      | 45   |
| 3725402   | HP 3700 DTM Acrylic Enamel           | 1 Gal. Safety Blue     | 21   | 5292402   | IC 5200 DTM Acrylic                    | 1 Gal. Gloss White      | 45   |
| 3737402   | HP 3700 DTM Acrylic Enamel           | 1 Gal. Forest Green    | 21   | 5293300   | IC 5200 DTM Acrylic                    | 5 Gal. SemiGloss White  | 45   |
| 3744402   | HP 3700 DTM Acrylic Enamel           | 1 Gal. Saf Yel         | 21   | 5293402   | IC 5200 DTM Acrylic                    | 1 Gal. SemiGloss White  | 45   |
| 3764402   | HP 3700 DTM Acrylic Enamel           | 1 Gal. Safety Red      | 21   | 5301604   | HP 5300 Water-Based Epoxy              | 1 Pt. Activator         | 24   |
| 3769402   | HP 3700 DTM Acrylic Enamel           | 1 Gal. Red Primer      | 21   | 5303502   | HP 5300 Water-Based Epoxy              | 1 Qt. Primer Activator  | 24   |
| 3771402   | HP 3700 DTM Acrylic Enamel           | 1 Gal. Dun Tan         | 21   | 5308421   | HP 5300 Water-Based Epoxy              | 1 Gal. Deep             | 24   |
| 3779402   | HP 3700 DTM Acrylic Enamel           | 1 Gal. Black           | 21   | 5309404   | HP 5300 Water-Based Epoxy              | 1 Gal. Light            | 24   |
| 3781402   | HP 3700 DTM Acrylic Enamel           | 1 Gal. Gray Primer     | 21   | 5323408   | HP 5300 Water-Based Epoxy              | 1 Gal. Marlin Blue      | 24   |
| 3782402   | HP 3700 DTM Acrylic Enamel           | 1 Gal. Sil Gry         | 21   | 5344408   | HP 5300 Water-Based Epoxy              | 1 Gal. Safety Yellow    | 24   |
| 3786402   | HP 3700 DTM Acrylic Enamel           | 1 Gal. Nav Gry         | 21   | 5368408   | HP 5300 Water-Based Epoxy              | 1 Gal. Tile Red         | 24   |
| 3792300   | HP 3700 DTM Acrylic Enamel           | 5 Gal. White           | 21   | 5369405   | HP 5300 Water-Based Epoxy              | 1 Gal. Red Primer       | 24   |
| 3792402   | HP 3700 DTM Acrylic Enamel           | 1 Gal. White           | 21   | 5371408   | HP 5300 Water-Based Epoxy              | 1 Gal. Dun Tan          | 24   |
| 3990300   | Roof Coatings                        | 5 Gal. High Bld Elastm | CS   | 5379408   | HP 5300 Water-Based Epoxy              | 1 Gal. Black            | 24   |
| 4215303   | HP 4200/4300 High Heat Coatings      | 2 Gal. Kit Aluminum    | 28   | 5381405   | HP 5300 Water-Based Epoxy              | 1 Gal. Gray Primer      | 24   |
| 4233402   | HP 4200/4300 High Heat Coatings      | 1 Gal. Green           | 28   | 5382408   | HP 5300 Water-Based Epoxy              | 1 Gal. Sil Gry          | 24   |
| 4279402   | HP 4200/4300 High Heat Coatings      | 1 Gal. Black           | 28   | 5392408   | HP 5300 Water-Based Epoxy              | 1 Gal. White            | 24   |
| 4285402   | HP 4200/4300 High Heat Coatings      | 1 Gal. Gray (Zn-Sele)  | 28   | 5494323   | CS Concrete Patching Compound          | 3.5 Gal. Kit Light Gray | 81   |
| 4286402   | HP 4200/4300 High Heat Coatings      | 1 Gal. Gray            | 28   | 5499499   | CS Companion Products                  | 2 Gal. Kit Patch        | 83   |
| 4315402   | HP 4200/4300 High Heat Coatings      | 1 Gal. Aluminum        | 28   | 6001604   | CS 6000 Water-Based Epoxy              | 1 Pt. Activator         | 78   |
| 5205411   | IC 5200 DTM Acrylic                  | 1 Gal. Red             | 45   | 6010408   | CS 6000 Water-Based Epoxy              | 1 Gal. Clear            | 78   |
| 5206411   | IC 5200 DTM Acrylic                  | 1 Gal. Yellow          | 45   | 6068408   | CS 6000 Water-Based Epoxy              | 1 Gal. Tile Red         | 78   |
| 5207391   | IC 5200 DTM Acrylic                  | 5 Gal. Masstone        | 45   | 6071408   | CS 6000 Water-Based Epoxy              | 1 Gal. Dun Tan          | 78   |
| 5207411   | IC 5200 DTM Acrylic                  | 1 Gal. Masstone        | 45   | 6082408   | CS 6000 Water-Based Epoxy              | 1 Gal. Sil Gry          | 78   |
| 5208394   | IC 5200 DTM Acrylic                  | 5 Gal. Deep            | 45   | 6086408   | CS 6000 Water-Based Epoxy              | 1 Gal. Nav Gry          | 78   |
| 5208418   | IC 5200 DTM Acrylic                  | 1 Gal. Deep            | 45   | 6092408   | CS 6000 Water-Based Epoxy              | 1 Gal. White            | 78   |
| 5209397   | IC 5200 DTM Acrylic                  | 5 Gal. Light           | 45   | 6672000   | Companion Products - Equipment & Tools | 30" Bird Cage Mixer     | CS   |
| 5209417   | IC 5200 DTM Acrylic                  | 1 Gal. Light           | 45   | 6686000   | Companion Products - Equipment & Tools | Screed Rake Handle      | CS   |
| 5211411   | IC 5200 DTM Acrylic                  | 1 Gal. Masstone        | 45   | 6693000   | Companion Products - Equipment & Tools | Spiked Shoes            | CS   |
| 5212418   | IC 5200 DTM Acrylic                  | 1 Gal. Deep            | 45   | 6694000   | Companion Products - Equipment & Tools | Screed Rake             | CS   |



| PROD. NO. | SYSTEM                                | SIZE & COLOR            | PAGE  | PROD. NO.  | SYSTEM                                | SIZE & COLOR            | PAGE |
|-----------|---------------------------------------|-------------------------|-------|------------|---------------------------------------|-------------------------|------|
| 6695023   | CS Companion Products                 | Each Jiffier Mixer      | 83    | 9406405    | HP 9400 High Gloss Polyester Urethane | 1 Gal. Yellow           | 27   |
| 6696024   | CS Companion Products                 | Each 9" Candy Stripe    | 83    | 9407405    | HP 9400 High Gloss Polyester Urethane | 1 Gal. High Gl Masstrn  | 27   |
| 6697005   | CS Companion Products                 | Each 9" Phenolic        | 83    | 9408421    | HP 9400 High Gloss Polyester Urethane | 1 Gal. High Gl Deep     | 27   |
| 6711402   | CS 6711 Clear WB Polyurethane         | 1 Gal. WB Polyurethane  | 82    | 9409408    | HP 9400 High Gloss Polyester Urethane | 1 Gal. High Gl Light    | 27   |
| 7069402   | HP 7400 Alkyd Enamel Primers          | 1 Gal. Red ShpC Primer  | 17    | 9410402    | HP 9400 High Gloss Polyester Urethane | 1 Gal. Clear            | 27   |
| 7086402   | HP 7400 Alkyd Enamel Primers          | 1 Gal. QKD Gray Primer  | 17    | 9425402    | HP 9400 High Gloss Polyester Urethane | 1 Gal. Blue             | 27   |
| 7232402   | HP 7400 DTM Alkyd Enamel              | 1 Gal. Semi-Gl PI Grm   | 16    | 9465402    | HP 9400 High Gloss Polyester Urethane | 1 Gal. Red              | 27   |
| 7280402   | HP 7400 DTM Alkyd Enamel              | 1 Gal. Semi-Gl LN Gray  | 16    | 9479402    | HP 9400 High Gloss Polyester Urethane | 1 Gal. Black            | 27   |
| 7290402   | HP 7400 DTM Alkyd Enamel              | 1 Gal. Semi-Gl White    | 16    | 9483402    | HP 9400 High Gloss Polyester Urethane | 1 Gal. Gray             | 27   |
| 7405408   | HP 7400 DTM Alkyd Enamel Tint Bases   | 1 Gal. Red              | 16    | 9492402    | HP 9400 High Gloss Polyester Urethane | 1 Gal. White            | 25   |
| 7406408   | HP 7400 DTM Alkyd Enamel Tint Bases   | 1 Gal. Yellow           | 16    | 9801419    | HP 9800 DTM Urethane Mastic           | 1 Gal. Activator        | 25   |
| 7407388   | HP 7400 DTM Alkyd Enamel Tint Bases   | 5 Gal. Masstone         | 16    | 9801501    | HP 9800 DTM Urethane Mastic           | 1 Qt. Activator         | 25   |
| 7407408   | HP 7400 DTM Alkyd Enamel Tint Bases   | 1 Gal. Masstone         | 16    | 9805470    | HP 9800 DTM Urethane Mastic           | 1 Gal. Red              | 25   |
| 7408391   | HP 7400 DTM Alkyd Enamel Tint Bases   | 5 Gal. Deep             | 16    | 9806470    | HP 9800 DTM Urethane Mastic           | 1 Gal. Yellow           | 25   |
| 7408411   | HP 7400 DTM Alkyd Enamel Tint Bases   | 1 Gal. Deep             | 16    | 9807370    | HP 9800 DTM Urethane Mastic           | 5 Gal. Masstone         | 25   |
| 7409394   | HP 7400 DTM Alkyd Enamel Tint Bases   | 5 Gal. Light            | 16    | 9807470    | HP 9800 DTM Urethane Mastic           | 1 Gal. Masstone         | 25   |
| 7409418   | HP 7400 DTM Alkyd Enamel Tint Bases   | 1 Gal. Light            | 16    | 9808375    | HP 9800 DTM Urethane Mastic           | 5 Gal. Deep             | 25   |
| 7434300   | HP 7400 DTM Alkyd Enamel              | 5 Gal. Green (John De)  | 16    | 9808405    | HP 9800 DTM Urethane Mastic           | 1 Gal. Deep             | 25   |
| 7434402   | HP 7400 DTM Alkyd Enamel              | 1 Gal. Green (John De)  | 16    | 9809377    | HP 9800 DTM Urethane Mastic           | 5 Gal. Light            | 25   |
| 7446402   | HP 7400 DTM Alkyd Enamel              | 1 Gal. Yellow           | 16    | 9809415    | HP 9800 DTM Urethane Mastic           | 1 Gal. Light            | 25   |
| 7447402   | HP 7400 DTM Alkyd Enamel              | 1 Gal. Yellow(New Cat)  | 16    | 9815419    | HP 9800 DTM Urethane Mastic           | 1 Gal. Alumi-NON        | 25   |
| 7448402   | HP 7400 DTM Alkyd Enamel              | 1 Gal. Yellow(Old Cat)  | 16    | 9825419    | HP 9800 DTM Urethane Mastic           | 1 Gal. Safety Blue      | 25   |
| 7899003   | Companion Products                    | Spray Grip              | 15/42 | 9844419    | HP 9800 DTM Urethane Mastic           | 1 Gal. Saf Yel          | 25   |
| 8469402   | HP 8400 Food & Beverage Alkyd Enamel  | 1 Gal. Red Rst M Primr  | 20    | 9865419    | HP 9800 DTM Urethane Mastic           | 1 Gal. Regal Red        | 25   |
| 8492402   | HP 8400 Food & Beverage Alkyd Enamel  | 1 Gal. Wt Cl Mit Primer | 20    | 9871419    | HP 9800 DTM Urethane Mastic           | 1 Gal. Dun Tan          | 25   |
| 8494402   | HP 8400 Food & Beverage Alkyd Enamel  | 1 Gal. H Gl Dairy Wht   | 20    | 9879419    | HP 9800 DTM Urethane Mastic           | 1 Gal. Black            | 25   |
| 9101300   | HP 9100 DTM Epoxy Mastic              | 5 Gal. Standard Actvr   | 22    | 9882383    | HP 9800 DTM Urethane Mastic           | 5 Gal. Sil Gry          | 25   |
| 9101402   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Activator        | 22    | 9882419    | HP 9800 DTM Urethane Mastic           | 1 Gal. Sil Gry          | 25   |
| 9102300   | HP 9100 DTM Epoxy Mastic              | 5 Gal. Immersion Actvr  | 22    | 9886419    | HP 9800 DTM Urethane Mastic           | 1 Gal. Nav Gry          | 25   |
| 9102402   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Immersion Actvr  | 22    | 9892383    | HP 9800 DTM Urethane Mastic           | 5 Gal. White            | 25   |
| 9103402   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Low Temp. Actvr  | 22    | 9892419    | HP 9800 DTM Urethane Mastic           | 1 Gal. White            | 25   |
| 9104402   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Fast Dry Actvr   | 22    | 206194T    | HP 7000 Cold Galvanizing Compound     | 1 Qt. Cold Galvanizing  | 29   |
| 9105405   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Red              | 22    | A2020502   | Colorants                             | 1 Qt. Light Org Yellow  | CS   |
| 9106405   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Yellow           | 22    | A2030502   | Colorants                             | 1 Qt. Light Org Yellow  | CS   |
| 9107375   | HP 9100 DTM Epoxy Mastic              | 5 Gal. Masstone         | 22    | A910008300 | HP 9100 DTM Epoxy Mastic              | 5 Gal. Fast Cure Actvr  | 22   |
| 9107405   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Masstone         | 22    | AS2102838  | IC AS2100 Anti-Slip                   | 15 oz. Clear            | 36   |
| 9108381   | HP 9100 DTM Epoxy Mastic              | 5 Gal. Deep             | 22    | AS2144838  | IC AS2100 Anti-Slip                   | 15 oz. Yellow           | 36   |
| 9108421   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Deep             | 22    | AS2178838  | IC AS2100 Anti-Slip                   | 15 oz. Black            | 36   |
| 9109388   | HP 9100 DTM Epoxy Mastic              | 5 Gal. Light            | 22    | AS5444402  | CS AS5400 AS One-Step Epoxy           | 1 Gal. Saf Yel          | 75   |
| 9109408   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Light            | 22    | AS5468402  | CS AS5400 AS One-Step Epoxy           | 1 Gal. Tile Red         | 75   |
| 9115402   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Aluminum         | 22    | AS5471402  | CS AS5400 AS One-Step Epoxy           | 1 Gal. Dun Tan          | 75   |
| 9122402   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Marlin Blue      | 22    | AS5479402  | CS AS5400 AS One-Step Epoxy           | 1 Gal. Black            | 75   |
| 9125402   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Safety Blue      | 22    | AS5482402  | CS AS5400 AS One-Step Epoxy           | 1 Gal. Sil Gry          | 75   |
| 9133402   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Safety Green     | 22    | AS5486402  | CS AS5400 AS One-Step Epoxy           | 1 Gal. Nav Gry          | 75   |
| 9144402   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Safety Yellow    | 22    | AS6082425  | CS AS6000 AS Low Profile Epoxy        | 1 Gal. Kit Sil Gry Kit  | 75   |
| 9145402   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Equip. Yellow    | 22    | AS6086425  | CS AS6000 AS Low Profile Epoxy        | 1 Gal. Kit Nav Gry Kit  | 75   |
| 9165402   | HP 9100 DTM Epoxy Mastic              | 1 Gal. ReGal. Red       | 22    | AS6582425  | CS AS6500 AS 100% Solids Epoxy        | 1 Gal. Kit Sil Gry Kit  | 76   |
| 9168402   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Tile Red         | 22    | AS6586425  | CS AS6500 AS 100% Solids Epoxy        | 1 Gal. Kit Nav Gry Kit  | 76   |
| 9171300   | HP 9100 DTM Epoxy Mastic              | 5 Gal. Dun Tan          | 22    | AS9144425  | CS AS9100 AS HP Epoxy                 | 1 Gal. Kit Saf Yel Kit  | 76   |
| 9171402   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Dun Tan          | 22    | AS9168425  | CS AS9100 AS HP Epoxy                 | 1 Gal. Kit Tile Red Kit | 76   |
| 9179402   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Black            | 22    | AS9171425  | CS AS9100 AS HP Epoxy                 | 1 Gal. Kit Dun Tan Kit  | 76   |
| 9182300   | HP 9100 DTM Epoxy Mastic              | 5 Gal. Sil Gry          | 22    | AS9182425  | CS AS9100 AS HP Epoxy                 | 1 Gal. Kit Sil Gry Kit  | 76   |
| 9182402   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Sil Gry          | 22    | AS9186425  | CS AS9100 AS HP Epoxy                 | 1 Gal. Kit Nav Gry Kit  | 76   |
| 9186300   | HP 9100 DTM Epoxy Mastic              | 5 Gal. Nav Gry          | 22    | B2020502   | Colorants                             | 1 Qt. Black             | CS   |
| 9186402   | HP 9100 DTM Epoxy Mastic              | 1 Gal. Nav Gry          | 22    | B2030502   | Colorants                             | 1 Qt. Black             | CS   |
| 9192300   | HP 9100 DTM Epoxy Mastic              | 5 Gal. White            | 22    | C2020502   | Colorants                             | 1 Qt. Yel Iron Oxide    | CS   |
| 9192402   | HP 9100 DTM Epoxy Mastic              | 1 Gal. White            | 22    | C2030502   | Colorants                             | 1 Qt. Yel Iron Oxide    | CS   |
| 9304300   | HP HS9300 Epoxy Primers               | 5 Gal. Primer Actvr     | 24    | C9502402   | HP C9578 Coal Tar Epoxy               | 1 Gal. Coal Tar Actvr   | 27   |
| 9304402   | HP HS9300 Epoxy Primers               | 1 Gal. Primer Actvr     | 24    | C9502504   | HP C9578 Coal Tar Epoxy               | 1 Qt. Coal Tar Actvr    | 27   |
| 9360402   | HP HS9300 Epoxy Primers               | 1 Gal. Red Primer       | 24    | C9578380   | HP C9578 Coal Tar Epoxy               | 5 Gal. Coal Tar Epoxy   | 27   |
| 9370300   | HP HS9300 Epoxy Primers               | 5 Gal. Buff Primer      | 24    | C9578402   | HP C9578 Coal Tar Epoxy               | 1 Gal. Coal Tar Epoxy   | 27   |
| 9370402   | HP HS9300 Epoxy Primers               | 1 Gal. Buff Primer      | 24    | D2020502   | Colorants                             | 1 Qt. Phthalo Green     | CS   |
| 9401402   | HP 9400 High Gloss Polyester Urethane | 1 Gal. Activator        | 27    | D2030502   | Colorants                             | 1 Qt. Phthalo Green     | CS   |
| 9402730   | HP 9400 High Gloss Polyester Urethane | 1/2 Pt. Dry Time Accl   | 27    | E2020502   | Colorants                             | 1 Qt. Phthalo Blue      | CS   |
| 9404730   | HP 9400 High Gloss Polyester Urethane | 1/2 Pt. Leveling Addv   | 27    | E2030502   | Colorants                             | 1 Qt. Phthalo Blue      | CS   |
| 9405405   | HP 9400 High Gloss Polyester Urethane | 1 Gal. Red              | 27    | F2020502   | Colorants                             | 1 Qt. Dark Red Oxide    | CS   |

| PROD. NO. | SYSTEM                                | SIZE & COLOR            | PAGE |
|-----------|---------------------------------------|-------------------------|------|
| F2030502  | Colorants                             | 1 Qt. Red Iron Oxide    | CS   |
| G2020502  | Colorants                             | 1 Qt. Org Yel-Red Shd   | CS   |
| G2030502  | Colorants                             | 1 Qt. Med Org Yellow    | CS   |
| H2020502  | Colorants                             | 1 Qt. Organic Red       | CS   |
| H2030502  | Colorants                             | 1 Qt. Organic Red       | CS   |
| HS1573300 | HP 1500 Speedy-Dry Enamel             | 5 Gal. HS S-Dry Primer  | 20   |
| HS1573402 | HP 1500 Speedy-Dry Enamel             | 1 Gal. HS S-Dry Primer  | 20   |
| HS9303604 | HP HS9300 Epoxy Primers               | 1 Pint HS Primer Actvr  | 24   |
| HS9369407 | HP HS9300 Epoxy Primers               | 1 Gal. HS Red Primer    | 24   |
| HS9381407 | HP HS9300 Epoxy Primers               | 1 Gal. HS Gr Primer     | 24   |
| HS9401402 | HP 9400 High Gloss Polyester Urethane | 1 Gal. Activator        | 27   |
| J2020502  | Colorants                             | 1 Qt. Quinacdn Violet   | CS   |
| J2030502  | Colorants                             | 1 Qt. Quinacdn Violet   | CS   |
| K2020502  | Colorants                             | 1 Qt. Quinacdn Red      | CS   |
| K2030502  | Colorants                             | 1 Qt. Quinacdn Red      | CS   |
| L2020502  | Colorants                             | 1 Qt. Organic Orange    | CS   |
| L2030502  | Colorants                             | 1 Qt. Organic Orange    | CS   |
| M2020502  | Colorants                             | 1 Qt. Lt Red Oxide      | CS   |
| N2020502  | Colorants                             | 1 Qt. Ferrite Yellow    | CS   |
| S6501410  | CS 6500 100% Solids Epoxy             | 1 Gal. Activator        | 79   |
| S6502410  | CS 6500 100% Solids Epoxy             | 1 Gal. Pen P&S Act      | 79   |
| S6510413  | CS 6500 100% Solids Epoxy             | 1 Gal. Clear            | 79   |
| S6511413  | CS 6500 100% Solids Epoxy             | 1 Gal. Pen P&S Base     | 79   |
| S6568413  | CS 6500 100% Solids Epoxy             | 1 Gal. Tile Red         | 79   |
| S6571413  | CS 6500 100% Solids Epoxy             | 1 Gal. Dun Tan          | 79   |
| S6582413  | CS 6500 100% Solids Epoxy             | 1 Gal. Sil Gry          | 79   |
| S6586413  | CS 6500 100% Solids Epoxy             | 1 Gal. Nav Gry          | 79   |
| S6592413  | CS 6500 100% Solids Epoxy             | 1 Gal. White            | 79   |
| T2030502  | Colorants                             | 1 Qt. Neutral           | CS   |
| V2102838  | HP V2100 Enamel                       | 14 oz. Crystal Clear    | 11   |
| V2115838  | HP V2100 Enamel                       | 14 oz. Silver Aluminum  | 11   |
| V2116838  | HP V2100 High Heat Coating            | 15 oz. High Heat Alum.  | 12   |
| V2117838  | HP V2100 Galvanizing Compound         | 20 oz. Br. Galvanizing  | 12   |
| V2119838  | HP V2100 Enamel                       | 14 oz. Stainless Steel  | 11   |
| V2123838  | HP V2100 Enamel                       | 15 oz. Light Blue       | 11   |
| V2124838  | HP V2100 Enamel                       | 15 oz. Safety Blue      | 11   |
| V2125838  | HP V2100 Enamel                       | 15 oz. Deep Blue        | 11   |
| V2133838  | HP V2100 Enamel                       | 15 oz. Safety Green     | 11   |
| V2134838  | HP V2100 Enamel                       | 15 oz. Bright Green     | 11   |
| V2137838  | HP V2100 Enamel                       | 15 oz. Dark Green       | 11   |
| V2138838  | HP V2100 Enamel                       | 15 oz. Hunter Green     | 11   |
| V2143838  | HP V2100 Enamel                       | 15 oz. Saf Yel          | 11   |
| V2147838  | HP V2100 Enamel                       | 15 oz. Ind. Yellow      | 11   |
| V2148838  | HP V2100 Enamel                       | 15 oz. Equip. Yellow    | 11   |
| V2155838  | HP V2100 Enamel                       | 15 oz. Safety Orange    | 11   |
| V2156838  | HP V2100 Enamel                       | 15 oz. Equip. Orange    | 11   |
| V2163838  | HP V2100 Enamel                       | 15 oz. Safety Red       | 11   |
| V2164838  | HP V2100 Enamel                       | 15 oz. Bright Red       | 11   |
| V2167838  | HP V2100 Enamel                       | 15 oz. Safety Purple    | 11   |
| V2169838  | HP V2100 Enamel Primer                | 15 oz. Red Primer       | 11   |
| V2170838  | HP V2100 Enamel                       | 15 oz. Almond           | 11   |
| V2171838  | HP V2100 Enamel                       | 15 oz. Tan              | 11   |
| V2175838  | HP V2100 Enamel                       | 15 oz. Chestnut Brown   | 11   |
| V2176838  | HP V2100 High Heat Coating            | 15 oz. High Heat Black  | 12   |
| V2177838  | HP V2100 Enamel                       | 15 oz. SemiGloss Black  | 11   |
| V2178838  | HP V2100 Enamel                       | 15 oz. Flat Black       | 11   |
| V2179838  | HP V2100 Enamel                       | 15 oz. Black            | 11   |
| V2182838  | HP V2100 Enamel Primer                | 15 oz. Gray Primer      | 11   |
| V2183838  | HP V2100 Enamel                       | 15 oz. Lt Machine Gray  | 11   |
| V2184838  | HP V2100 Enamel                       | 15 oz. Dove Gray        | 11   |
| V2185838  | HP V2100 Galvanizing Compound         | 20 oz. Cold Galvanizing | 12   |
| V2187838  | HP V2100 Enamel                       | 15 oz. Dk Machine Gray  | 11   |
| V2188838  | HP V2100 Enamel                       | 15 oz. Smoke Gray       | 11   |
| V2190838  | HP V2100 Enamel                       | 15 oz. Flat White       | 11   |
| V2192838  | HP V2100 Enamel                       | 15 oz. Gloss White      | 11   |
| V2196838  | HP V2100 Enamel                       | 15 oz. Fleet White      | 11   |


| PROD. NO. | SYSTEM                               | SIZE & COLOR           | PAGE |
|-----------|--------------------------------------|------------------------|------|
| V2301838  | HP V2300 Marking Paint               | 15 oz. Clear           | 15   |
| V2324838  | HP V2300 Marking Paint               | 15 oz. Caution Blue    | 15   |
| V2333838  | HP V2300 Marking Paint               | 15 oz. Fl. Green       | 15   |
| V2344838  | HP V2300 Marking Paint               | 15 oz. High Vis Yellow | 15   |
| V2345838  | HP V2300 Marking Paint               | 15 oz. Caution Yellow  | 15   |
| V2354838  | HP V2300 Marking Paint               | 15 oz. Alert Orange    | 15   |
| V2355838  | HP V2300 Marking Paint               | 15 oz. Fl. Orange      | 15   |
| V2358838  | HP V2300 Marking Paint               | 15 oz. Fl. Red-Orange  | 15   |
| V2363838  | HP V2300 Marking Paint               | 15 oz. Safety Red      | 15   |
| V2392838  | HP V2300 Marking Paint               | 15 oz. White           | 15   |
| V2401830  | Overall                              | 10 oz. Gray Primer     | CS   |
| V2402830  | Overall                              | 10 oz. Black           | CS   |
| V2403830  | Overall                              | 10 oz. White           | CS   |
| V2404830  | Overall                              | 10 oz. Flat Black      | CS   |
| V2405830  | Overall                              | 10 oz. Flat White      | CS   |
| V2407830  | Overall                              | 10 oz. Red             | CS   |
| V2408830  | Overall                              | 10 oz. Blue            | CS   |
| V2409830  | Overall                              | 10 oz. Yellow          | CS   |
| V2410830  | Overall                              | 10 oz. Green           | CS   |
| V2411830  | Overall                              | 10 oz. Brown           | CS   |
| V2412830  | Overall                              | 10 oz. Aluminum        | CS   |
| V2413830  | Overall                              | 10 oz. Machine Gray    | CS   |
| V2414830  | Overall                              | 10 oz. Orange          | CS   |
| V7086402  | HP 7400 340 VOC Alkyd Enamel Primers | Gray                   | 18   |
| V769402   | HP 7400 340 VOC Alkyd Enamel Primers | Red                    | 18   |
| W0102402  | Thinner                              | 1 Gal. Thinner         | CS   |
| W2020502  | Colorants                            | 1 Qt. White            | CS   |
| W2030502  | Colorants                            | 1 Qt. White            | CS   |
| X0060402  | HP 7400 Alkyd Enamel Primers         | 1 Gal Zn Cr Red Primer | 17   |

**NOTE: Product Numbers (Prod. No.) are not listed for 5 gallon sizes on system pages.**

# VIRTUAL SOLUTIONS<sup>SM</sup>

## INTERACTIVE WEBSITE

COATING RECOMMENDATIONS MADE EASY!

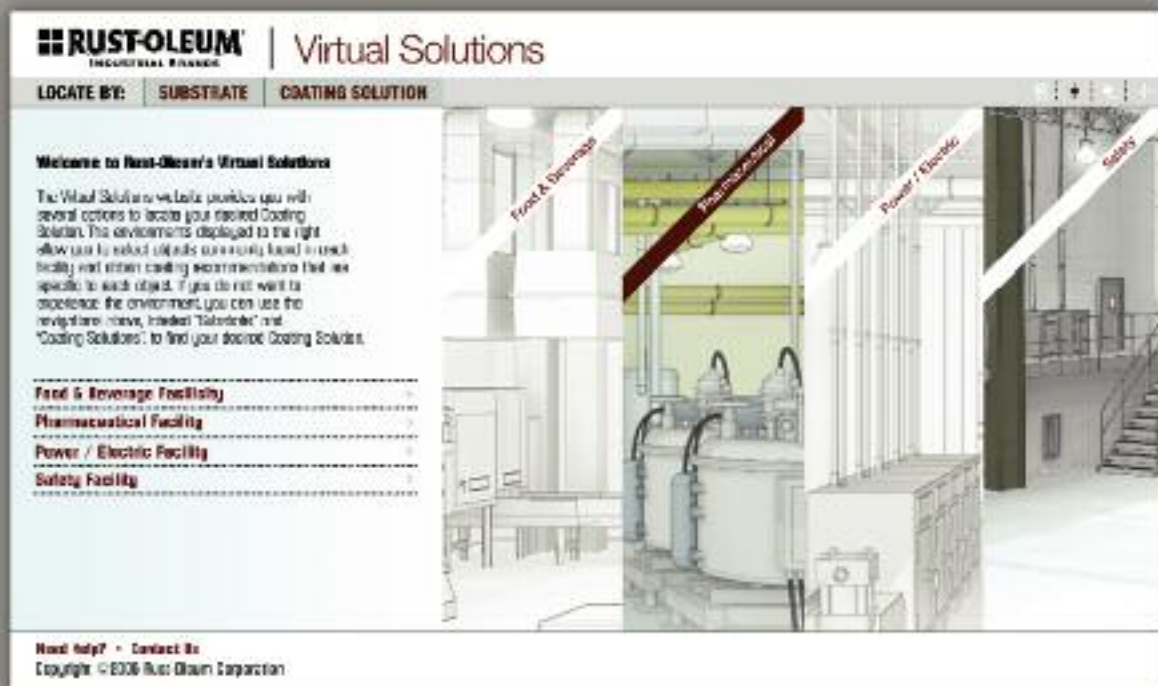

Get connected now!  
[www.rustoleum.com/virtualsolutions](http://www.rustoleum.com/virtualsolutions)

Virtual Solutions  
INTERACTIVE WEB SITE

COATING RECOMMENDATIONS MADE EASY!  
[www.rustoleum.com/virtualsolutions](http://www.rustoleum.com/virtualsolutions)

**DISTRIBUTED BY:**

Rust-Oleum® Industrial Brands are stocked for immediate delivery by distributors located throughout the United States, Canada, and in over 80 other countries around the world. Your Rust-Oleum Distributor will provide additional literature, information, or specific coating recommendations. For instant technical information, visit us at [www.rustoleum.com/industrial](http://www.rustoleum.com/industrial).



Rust-Oleum Corporation 11 Hawthorn Parkway Vernon Hills, IL 60061

**Toll-free Customer Service: (800) 553-8444 Fax: (800) 782-3369**

[www.rustoleum.com/industrial](http://www.rustoleum.com/industrial)

