



1.5

## Light-fittings

■ MIZAR Series

■ HYDRA Series

■ HALE Series

 **SCAME**

1.5



■ RECTANGULAR BULKHEAD LIGHT FOR INCANDESCENT LAMPS - IP44

MIZAR Series



Lamp power	Lampholder	Colour of diffuser		
Max 60W	E27	opal	12	780.2762
Max 60W	B22	opal	12	780.2262

- Thermoplastic diffuser. For continuous use, use the version with polycarbonate diffuser.

- Lamp not supplied.

■ RECTANGULAR BULKHEAD LIGHT FOR INCANDESCENT LAMPS

MIZAR Series



Lamp power	Lampholder	Colour of diffuser		IP44	IP65
Max 60W	E27	transparent	1/12	781.2760	786.2760
Max 60W	E27	red	1/12	781.2761	786.2761
Max 60W	B22	transparent	1/12	781.2260	786.2260
Max 60W	B22	red	1/12	781.2261	786.2261

- Polycarbonate diffuser.

- Lamp not supplied.

■ DISTRIBUTION ASSEMBLIES FOR NIGHT-TIME POWER SUPPLY OF LIGHTS INDICATING WORKING AREAS - IP44

LV-LUX Series





Description	Plug		
Safety transformer 220/24V~-SELV 150VA	2P+E - 16A - 220V	1	630.001
Safety transformer 220/24V~-SELV 300VA	2P+E - 16A - 220V	1	630.002

- A light sensor turns the lights (see p.181) on and off according to the amount of atmospheric light.

- 2 socket outlets, 2P 24V~, 16A.

- With twilight switch.

- Assembled with SCABOX enclosures.



■ FLASHING RED BULKHEAD LIGHT FOR INDICATING WORK SITES - IP55

MIZAR Series



Description		
Batteries powered (autonomy 300h)	1/12	786.0100

- Battery not included.

- Power supply: four 1.5V "AA" batteries (not included).

- Switching on: automatic with twilight switch.

- Double operation: fixed light and flashing with switch that selects the desired function.

■ RED BULKHEAD LIGHT FOR INDICATING WORK SITES - IP55

MIZAR Series



Description		
Automatic twilight turn-on and fixed light	1	786.0200
Automatic twilight turn-on Two operation modes: fixed light or flashing light With mode selector switch	1	786.0210
Direct turn-on (without twilight turn-on) and fixed light	1	786.0220

- With 220V-powered LED flasher.

■ RED BULKHEAD LIGHTS FOR INDICATING WORKING AREAS - IP44

MIZAR Series



Descrizione		
1 Bulkhead light 10m cable	1	781.2761/1
2 Bulkhead lights 10+6m cable	1	781.2761/2
3 Bulkhead lights 10+6+6+1m cable	1	781.2761/3

- Wired with IEC 309 standard plug, 2P, 24V~ 16A.

- Bulb included, E27 25W 24V~.

- Rubber cable, 2x1.5mm².

- Diffuser colour, red.

BULKHEAD LIGHT ROUND

HYDRA Series



Coupling	Lamp		IP44	IP65
E27	100W	1/6	791.12710	796.12710
B22	100W	1/6	791.12210	796.12210

BULKHEAD LIGHT SQUARE

HYDRA Series



Coupling	Lamp		IP44	IP65
E27	100W	1/6	791.22710	796.22710
B22	100W	1/6	791.22210	796.22210

BULKHEAD LIGHT OVAL

HYDRA Series



Coupling	Lamp		IP44	IP65
E27	100W	1/6	791.32710	796.32710
B22	100W	1/6	791.32210	796.32210

- Lighting devices for fixed installation
- Diffuser and shell in polycarbonate.
  - Reflecting parabola in aluminium.
  - Steel screws with galvanised anti-rust treatment.
  - Lampholder in resin (in porcelain for B22).



E27



B22



CLASS II


DECORATIVE FRAME

HYDRA Series



	Colour		
Round		1/6	790.101
		1/6	790.102
Oval		1/6	790.301
		1/6	790.302


- Available in black or white.
- Thermoplastic material.

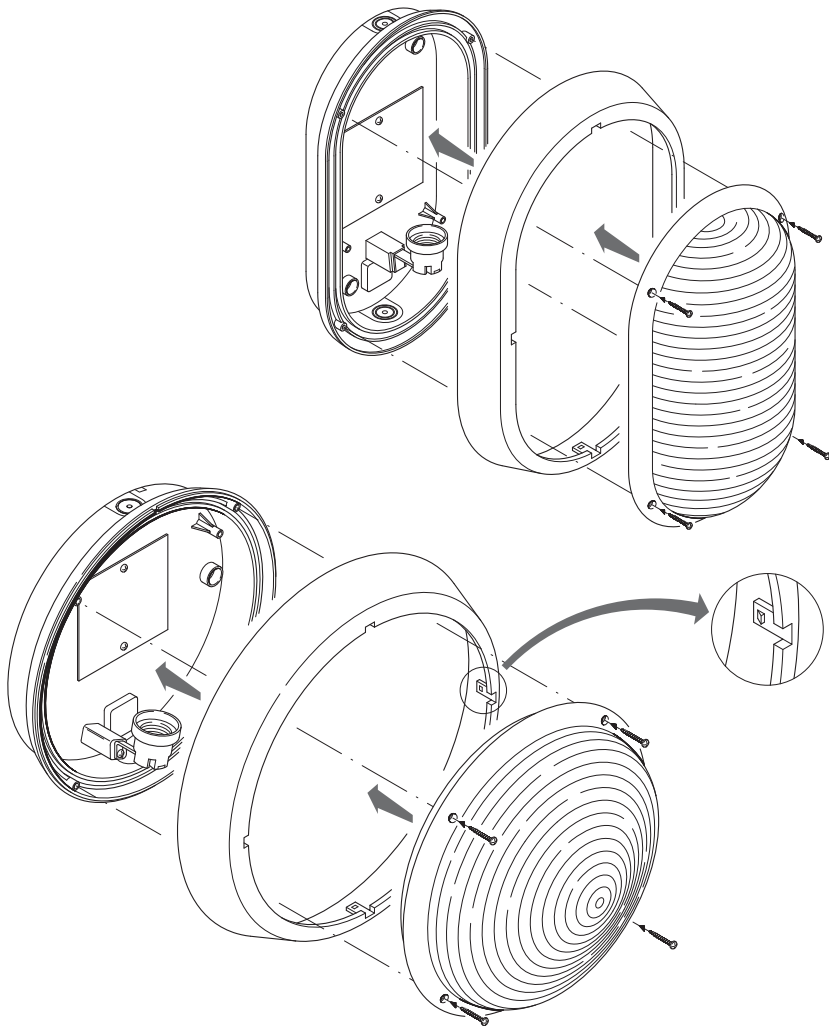


HYDRA Series, ROUND and OVAL types.  
Installations with decorative frames.

WITH PROTECTIVE GUARD AND ZINC - PLATED STEEL REFLECTOR - IP20

HALE Series

Cable	Plug	Supply	Lampholder				
					STANDARD VERSION	STANDARD VERSION	HD VERSION
Without cable and plug	-	-	E27	1/24	<b>770.200</b>		
5m 2x0,75mm²	Italian	2P-10A-250V	E27	1/24	🔌 <b>770.207</b>		
10m 2x0,75mm²	Italian	2P-10A-250V	E27	1/18	🔌 <b>770.208</b>		

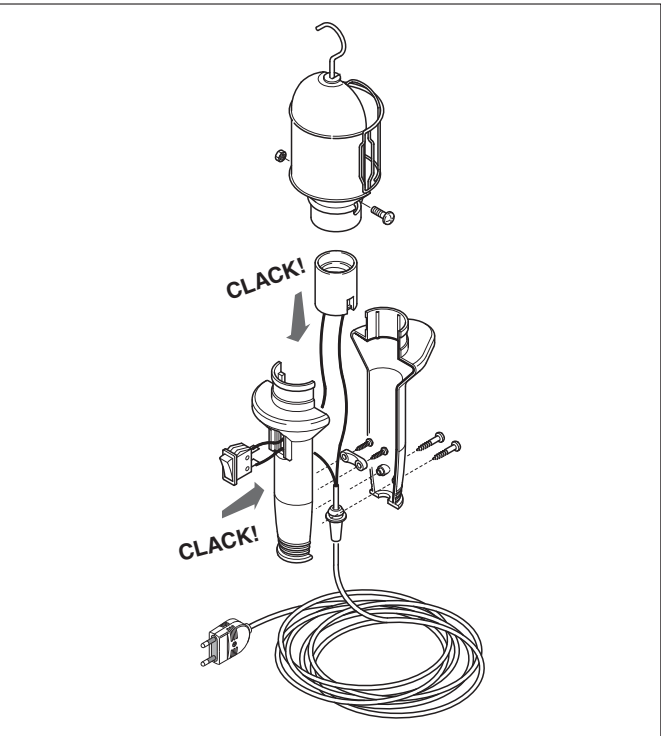



HALE Series - IP20

Lighting devices with protective guard and zinc-plated steel reflector:

- Handgrip in insulating, non-hygroscopic thermoplastic material with tilting system that prevents the lamp, when placed on a flat surface, to directly irradiate said surface and thus prevent dangerous overheating.
  - Tapered cable gland.
  - Screw cable stay.
- Adjustable hook.
  - Rocker switch and screw clamp for cable replacement.
  - Protective guard that can be opened for light bulb replacement.
  - Cable in PVC H05VV-F.
  - For lamps up to 60W (incandescent).

WITH PROTECTIVE GUARD AND ZINC - PLATED STEEL REFLECTOR - IP20 (•)






HALE Series


Cable	Plug	Supply	Lampholder		
5m 2x1mm <sup>2</sup>	Italian	2P-10A-250V	E27	1/6	
10m 2x1mm <sup>2</sup>	Italian	2P-10A-250V	E27	1/6	

• The degree of protection IP20 is due to the plug for domestic use, while the apparatus is IP65; for example, if plugged into a socket in the garage the lamp can be used in the garden.

WITH PROTECTIVE GUARD AND ZINC - PLATED STEEL REFLECTOR - IP65

HALE Series

					
Cable	Plug	Supply	Lampholder	□	
Without cable and plug	-	-	E27	1/6	<b>770.400</b>
5m 2x1mm²	IEC309	2P 16A-24V	E27	1/6	 <b>770.405</b>
10m 2x1mm²	IEC309	2P 16A-24V	E27	1/6	 <b>770.406</b>
5m 2x1mm²	IEC309 (●)	2P+E 16A-250V	E27	1/6	 <b>770.409</b>
10m 2x1mm²	IEC309 (●)	2P+E 16A-250V	E27	1/6	 <b>770.410</b>
● EUREKA Series plug (the earth pole is not connected). For safety supply with transformer unit 24V~ (SELV) g see: - ADVANCE2 Series interlocked-switch socket outlets - MEGA Series					distribution assemblies - DOMINO400 Series distribution assemblies - BLOCK4 Series distribution assemblies - ROLLER450 Series cable reels.

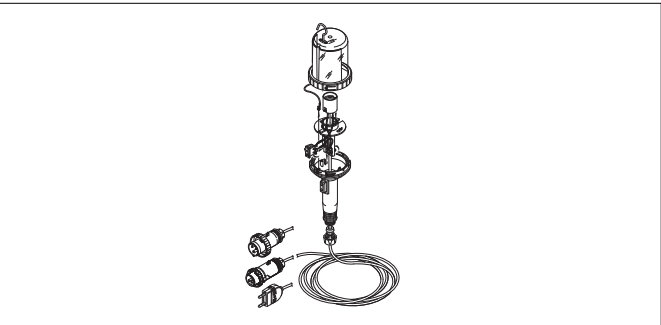

HALE Series - IP65

Lighting devices with protective shell.

- Handgrip in non-hygroscopic technopolymer.
- Cable gland.
- Screw cable stay.
- Rocker switch and screw clamp for cable replacement.
- Reflecting parabola in aluminium.
- Protective shell in collision-proof technopolymer.

- For lamps up to 60W (incandescent).
- Cable in rubber H05RN-F.

