



The Leader in Innovative Access Control Accessories



2012 CATALOG

About Securitron®

As one of the world's most complete suppliers of electric locking systems and access control components, Securitron excels in manufacturing a wide range of quality products. From electromagnetic locks and accessories, to exit bars and devices, power supplies, digital entry systems and much more, Securitron is known for its continued commitment to excellence in customer service and product quality.

»» An Industry Leader.

Securitron was the first electric lock manufacturer to receive the prestigious ISO 9001 certification for its international Quality Management System. Securitron was also first in the industry with its "no strings attached" MagnaCare® warranty program.

The award-winning MagnaCare® warranty replaces any product that we manufacture, for any failure reason, for the life of the installation. The Security Industry

Association recently honored Securitron's MagnaCare® warranty program with its Business Product Achievement Award.

»» A Bright Future.

Backed by the strength of ASSA ABLOY, Securitron continues to grow. Our new, LEED Silver designed, eco-friendly manufacturing facility in Phoenix, AZ features improved energy efficiency, air quality and sustainability.

»» Our Customers Come First.

At Securitron, we pay special attention to the needs of our customers. Our 1-800 MAGLOCK sales and service support line puts you in touch with the most knowledgeable and friendly team to assist you with the smallest detail, or the most difficult application. For more information, visit www.securitron.com

Visit Our Website
securitron.com



Our website offers complete product information including:

Latest Product Releases
Installation Instructions
Installation Presentations
Mounting Templates
Architectural Specifications
Wiring Diagrams
Quick Tips
Troubleshooting Tips
Product Literature
Product Images
Training Opportunities
Events Calendar
Door Control Wizard Download
and More!

Electromagnetic Locks & Accessories

M680, M670, M38, M68, M34R, M32, M62, DM62, M82B, SAM, iMXDa, Component EXD, Brackets & Accessories, Vista® VM300, VM600, VM1200/VM1290



7

MAG LOCKS

Electromechanical Locks

MM15, UNL



37

ELECTROMECH
LOCKS

Gate Locks, Cabinet Locks & Accessories

SAM2-24, M62FG-SASM, GL1, FMK, MCL, M32-SS



41

SPECIALTY LOCKS

Exit Devices

DSB, TSB, TSH, SP-1, EMB, EMH



49

EXIT DEVICES

Entry Devices

PB Series, EEB Series, XMS, DK-12, DK-16, DK-26, Keyswitch Series



56

ENTRY DEVICES

Access Control Accessories

DPS, LM-Latch Monitor, MSS, DPA/DT-7, TM-2/TM-9, RLP/PZ-1, RB-Relay Board



66

ACCESS CONTROL
ACCESSORIES

Power Supplies

BPS-12/24-1, BPS, BPSM, BPSS, PSM, PSP, BACS, AQD3, AQD5, AQM20, AQU126, AQU128, AQU243, AQU244, PDB, PDB-1R, PDB-8C1R, PDB-8F8R/8C8R



77

POWER SUPPLIES

Power Transfer

CEPT, EPT, SEPT, EH, TSB-C



96

POWER TRANSFER

Power Accessories

FAR, TP-12-3, TP-24-2, B-12-5, B-24-5, BR-4, CCB-8, CKL



101

POWER
ACCESSORIES

Resources & Extras

AHJ Handbook information, Icon Glossary, Demo Mounts, Code-Compliant Systems, Index, Terms and Conditions



105

RESOURCES

Securitron Magnalock® Glossary

»» **Anti-Tamper Sensor (T)**

The Anti-Tamper option provides an SPDT (Single Pole Double Throw) switch output that indicates if the wire access chamber cover has been tampered with or removed. When connected to an alarm point on an alarm panel or access control system it offers real-time notification of tampering attempts. To add this upgrade kit to existing M38 or M68 locks, choose part M38T-KIT or M68T-KIT.

»» **BondSTAT (B)** Patented

BondSTAT is the next generation of electromagnetic lock monitoring. BondSTAT delivers unparalleled peace of mind by detecting an armature plate and notifying access control and/or alarm systems that a door is properly secured. BondSTAT's sensitive magnetic field monitors the entire surface of the armature plate, providing maximum assurance that the lock is engaged. Movement in the armature's position beyond the set tolerance alerts the access control system that the Magnalock® may not be generating its full holding force.

»» **Camera (C)**

Some Securitron models offer an integrated video surveillance camera. Camera options are available in black-and-white or color with analog output for use with existing video surveillance systems.

»» **Conduit Fitting (G)**

The conduit fitting option is offered on some Magnalocks that can be used for gate-mounting applications and features a ¾" outer diameter and ½" inner diameter.

»» **Door Position (D)**

The DPS Door Position Switch provides a signal to an access control system indicating whether the door is open or closed. When used in conjunction with BondSTAT or Senstat, it provides layered status indication for precise information about the door state. The DPS may be ordered included with many Securitron Magnalocks - or as an upgrade kit.

»» **Face Mount (F)**

Face Mount Magnalock options provide the holes for the mounting bolts through the face of the magnet in a front-to-back orientation rather than through the magnet bottom-to-top.

»» **LED (L)**

The LED provides a local visual indicator of the status of the lock. On locks with the Senstat option, the LED will be green when the lock is powered but not secure, and red when the lock is secure. Locks without the Senstat option will only indicate green when powered.

»» **Request to Exit (X)**

Some Securitron Magnalock models offer an integrated motion detector that automatically signals the lock to disengage when it detects approaching traffic.

»» **Senstat (S)**

Unlike commonly used door position switches that indicate only that a door is closed, Senstat detects the presence of an armature plate and notifies the access control or alarm system that the magnet is engaged. All Senstat Magnalocks use Form 'c' isolated contacts.

LOCKING PRODUCTS

SECURITRON[®]
ASSA ABLOY

MAG LOCKS	<div>»</div> <div>Electromagnetic Locks & Accessories</div> <div>M680, M670, M38, M68, M34R, M32, M62, DM62, M82B, SAM, iMXDa, Component EXD, Brackets & Accessories, Vista® VM300, VM600, VM1200/VM1290</div>
ELECTROMECH LOCKS	<div>»</div> <div>Electromechanical Locks</div> <div>MM15, UNL</div>
SPECIALTY LOCKS	<div>»</div> <div>Gate Locks, Cabinet Locks & Accessories</div> <div>M62FG-SASM, GL1, FMK, MCL, M32-SS, SAM2-24</div>
EXIT DEVICES	<div>»</div> <div>Exit Devices</div> <div>DSB, TSB, TSH, SP-1, EMB, EMH</div>
ENTRY DEVICES	<div>»</div> <div>Entry Devices</div> <div>PB Series, EEB Series, XMS, DK-12, DK-16, DK-26, Keyswitch Series</div>
ACCESS CONTROL ACCESSORIES	<div>»</div> <div>Access Control Accessories</div> <div>DPS, LM-Latch Monitor, MSS, DPA/DT-7, TM-2/TM-9, RLP/PZ-1, RB-Relay Board</div>
POWER SUPPLIES	<div>»</div> <div>Power Supplies</div> <div>BPS-12/24-1, BPS, BPSM, BPSS, PSM, PSP, BACS, AQD3, AQD5, AQM20, AQU126, AQU128, AQU243, AQU244, PDB, PDB-1R, PDB-8C1R, PDB-8F8R/8C8R</div>
POWER TRANSFER	<div>»</div> <div>Power Transfer</div> <div>CEPT, EPT, SEPT, EH</div>
POWER ACCESSORIES	<div>»</div> <div>Power Accessories</div> <div>FAR, TP-12-3, TP-24-2, B-12-5, B-24-5, BR-4, CCB-8, CKL</div>
RESOURCES	<div>»</div> <div>Resources & Extras</div> <div>AHJ Handbook information, Icon Glossary, Demo Mounts, Code-Compliant Systems, Index, Terms and Conditions</div>

Genuine Magalock® Selection Guide

Out-Swing Door Magalock Selection Guide

Locks Mount on the Secure Side of the Door & Door Swings Away from Secure Side.
Dual Doors Will Require Two Locks (X2), One for Each Leaf Except for DM62.

Preferred Application = **X** Also Acceptable for Application = **X**

DOOR TYPE	M32	M38	M62	DM62	M68	M82B	SAM	SAM2-24
Glass Door (w/ Aluminum Frame)	X	X	X*				X	X**
Wooden Door (Traffic Control)	X	X						X
Wooden Door (High Security)			X	X	X	X	X	
Metal Door (Traffic Control)	X	X						X**
Metal Door (High Security)			X	X	X	X	X	
Herculite Door (w/out Top or Bottom Rail)	X	X	X		X			
Herculite Door (w/Top or Bottom Rail)			X		X		X	X**
* Requires an Offset Strike for proper installation. **Not for use with Open Channel doors								

In-Swing Door Magalock Selection Guide

Locks Mounted on the Secure Side of the Door & Door Swings Toward Secure Side.
Dual Doors Will Require Two Locks (X2), One for Each Leaf.

Preferred Application = **X** Also Acceptable for Application = **X**

DOOR TYPE	M32F	M38	M62F	M68	M82FB	SAM	SAM2-24
Glass Door (w/ Aluminum Frame)	X	X	X	X		X	X
Wooden Door (Traffic Control)	X	X					
Wooden Door (High Security)			X	X	X	X	
Metal Door (Traffic Control)	X	X					X
Metal Door (High Security)			X	X	X	X	
In-Swing Door Magalocks (except SAM & SAM2-24) will require a corresponding "Z" Bracket to mount the Strike Plate (Armature). M38 and M68 will require TJ-38 or TJ-68 Top Jamb Mounting Kit respectively.							

Sliding Door Magalock Selection Guide

Preferred Application = **X** Also Acceptable for Application = **X**

DOOR TYPE	M34R	SAM	SAM2-24
All Sliding Door Types (Dual)	X	X (X2)	X (X2)
All Sliding Door Types (Single)	X	X	X

All Securitron Magalocks are Fail Safe Electric Locking Devices

M680 SERIES

1100lbs Holding Force



Specifications:

- UL 10C Listed
- CAN4-S104, CAN/ULC Listed
- UL 1034 Burglary-Resistant Listed
- ANSI/BHMA A156.23, Grade 1; E180501-1000
- NFPA 101
- CSFM- California State Fire Marshal Approved
- Holding Force: 1100lbs [499 kg]
- Patents Pending

Electrical:



600mA at 12VDC
325mA at 24VDC

Operating Temperature:

+32 to +110F
[0 to +43C]

Finishes:

US03/605 - Polished Brass
US04/606 - Satin Brass
US10/612 - Satin Bronze
US10B/613 - Satin Brown
US19/622 - Satin Black
US26D/626 - Satin Chrome (Standard)

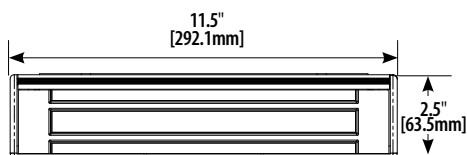

SECURITRON™
ASSA ABLOY



The Smart, Stylish and Secure Magnalock®

The new M680 from Securitron delivers unsurpassed intelligence, style and modularity.

Intelligence. A built-in, smart voltage sensing microprocessor controls Securitron's patented BondSTAT and door position status monitoring.

Style. The aesthetics of the M680 are refined enough for the most discriminating designer openings.


Modularity. An integrated camera option provides a unique perspective for discreet surveillance and clear facial views.

Use the integrated motion sensor exit device alone, or with the camera for advanced access control.

Easy installation. The fastest, easiest, most secure installation of any bracket-mount maglock.

PRODUCT FEATURES

- Bracket mounting provides the easiest install for out-swing doors
- Innovative install templating for an effortlessly accurate alignment between magnet and armature plate
- Sleek, low profile and refined lines for improved aesthetics
- LED visual locked status with configurable red/green color output
- BondSTAT lock bond sensor - Patented
- Integrated door position switch
- Autosensing dual voltage with microprocessor technology
- Adjustable automatic relock timer (0 to 30 seconds)
- Wire chamber anti-tamper switch
- Instant release circuit - no residual magnetism
- Efficient, low power usage
- Size optimized for use with door closers
- MagnaCare Lifetime Replacement No Fault Warranty

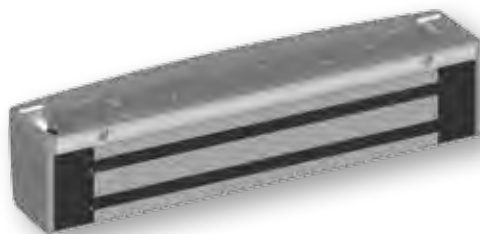

MODELS Part # Description

M680BD
Satin Chrome Finish

M680BD-605
Polished Brass Finish

M680BD-606
Satin Brass Finish

M680BD-612
Satin Bronze Finish

M680BD-613
Satin Brown Finish

M680BD-622
Satin Black Finish

The Smart, Stylish and Secure Maglock® with Integrated Video Surveillance Camera

Product Features and Specifications:

- All M680 features and standards from page 8

Special Product Features:

- Analog black/white CCTV camera
- 112 degree view angle
- 420 TV line resolution
- 48db S/N ratio
- 0.1 LUX minimum illumination day/night operation
- 2.5W at 9V power
- Supports BNC connection

Optional Features:

- Analog color CCTV camera
- 112 degree view angle
- 520 TV line resolution
- 48db S/N ratio
- 1.5 LUX minimum illumination day/night operation
- 2.5W at 9V power
- Supports BNC connection

Electrical:

- 825mA at 12VDC
- 550mA at 24VDC
- Requires three wires for installation. (A continuous power input is required to power the camera.)

MODELS Part # Description

Magnalock model M680 with B&W camera

M680BDC

Satin Chrome Finish

M680BDC-605

Polished Brass Finish

M680BDC-606

Satin Brass Finish

M680BDC-612

Satin Bronze Finish

M680BDC-613

Satin Brown Finish

M680BDC-622

Satin Black Finish

Magnalock model M680 with color camera

M680BDC2

Satin Chrome Finish

M680BDC2-605

Polished Brass Finish

M680BDC2-606

Satin Brass Finish

M680BDC2-612


Satin Bronze Finish

M680BDC2-613


Satin Brown Finish

M680BDC2-622

Satin Black Finish

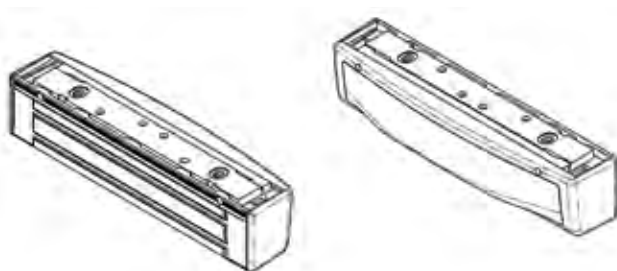


M680BDC and Options

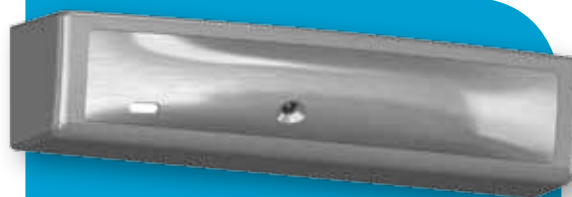

Embedded CCTV captures full facial view of persons exiting door





As viewed from the Security Video Screen

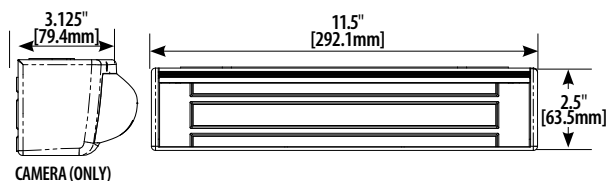

SECURITRON®
ASSA ABLOY



M680BDX

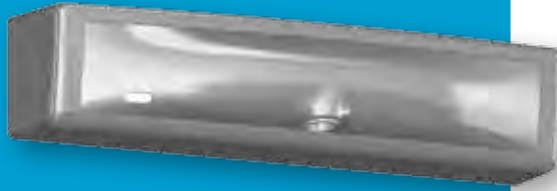

Motion sensor shown adjusted for hallways



Motion sensor shown adjusted for door approach

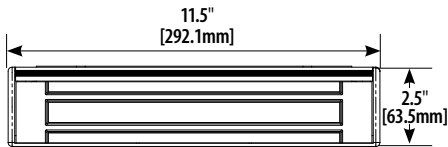

PIR (ONLY)

SECURITRON™
ASSA ABLOY



The Smart, Stylish and Secure Magnalock® with Integrated Adjustable Passive Infrared Motion Detector

The M680BDX with Integrated Motion Detector provides optimum coverage for detecting an approaching person so the door unlocks for egress. The configurability of the passive infrared beam allows the detection area to be tailored to your environment, for better accuracy.

Product Features and Specifications:

- All M680 features and standards from page 8

Special Product Features:

- Adjustable passive infrared (PIR) exit motion detector
 - › Automatically cuts power to the M680 for egress
 - › Request to exit (REX) output
 - › Easily adjustable beam pattern
 - › Adjustable relock timer

Electrical:

- 650mA at 12VDC
- 350mA at 24VDC
- Requires three wires for installation. (A continuous power input is required to power the motion detector.)



MODELS

Part #
Description


Magnalock model M680 with PIR

M680BDX
Satin Chrome Finish
M680BDX-605
Polished Brass Finish

M680BDX-606
Satin Brass Finish
M680BDX-612
Satin Bronze Finish

M680BDX-613
Satin Brown Finish
M680BDX-622
Satin Black Finish

Safety Note: Securitron recommends an emergency exit button be used in conjunction with the M680BDX to meet applicable building and life safety codes.

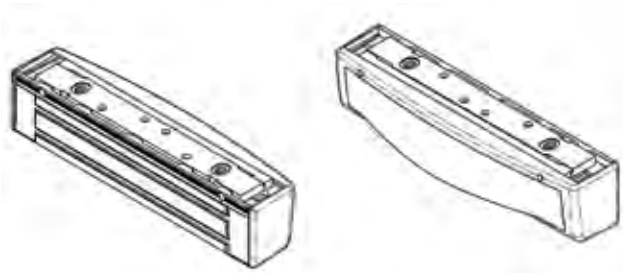

The Smart, Stylish and Secure Magalock® with Integrated Video Surveillance Camera and Passive Infrared Motion Detector

Product Features and Specifications:

- All M680 features and standards from page 8

Special Product Features:

- Analog black/white CCTV camera
 - › 112 degree view angle
 - › 420 TV line resolution
 - › 48db S/N ratio
 - › 0.1 LUX minimum illumination day/night operation
 - › 2.5W at 9V power
 - › Supports BNC connection
- Adjustable passive infrared (PIR) exit motion detector
 - › Automatically cuts power to the M680 for egress
 - › Request to exit (REX) output
 - › Easily adjustable beam pattern
 - › Adjustable relock timer

Optional Features:

- Analog color CCTV camera
 - › 112 degree view angle
 - › 520 TV line resolution
 - › 48db S/N ratio
 - › 1.5 LUX minimum illumination day/night operation
 - › 2.5W at 9V power
 - › Supports BNC connection

Electrical:

- 875mA at 12VDC
- 600mA at 24VDC
- Requires three wires for installation. (A continuous power input is required to power the camera and motion detector.)

MODELS Part # Description


Magalock model M680 with B&W camera and REX

M680BDCX Satin Chrome Finish	M680BDCX-606 Satin Brass Finish	M680BDCX-613 Satin Brown Finish
M680BDCX-605 Polished Brass Finish	M680BDCX-612 Satin Bronze Finish	M680BDCX-622 Satin Black Finish

Magalock model M680 with color camera and REX

M680BDC2X Satin Chrome Finish	M680BDC2X-606 Satin Brass Finish	M680BDC2X-613 Satin Brown Finish
M680BDC2X-605 Polished Brass Finish	M680BDC2X-612 Satin Bronze Finish	M680BDC2X-622 Satin Black Finish

Safety Note: Securitron recommends an emergency exit button be used in conjunction with the M680BDCX to meet applicable building and life safety codes.

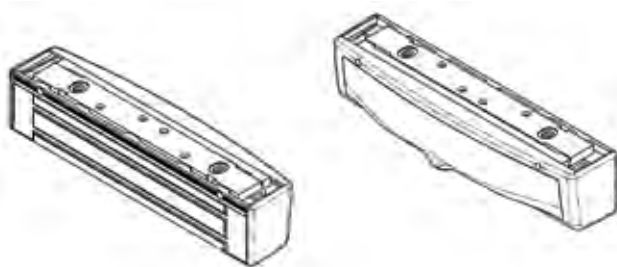


M680BDCX



Integrated Video Surveillance Camera




Integrated Adjustable Motion Detector

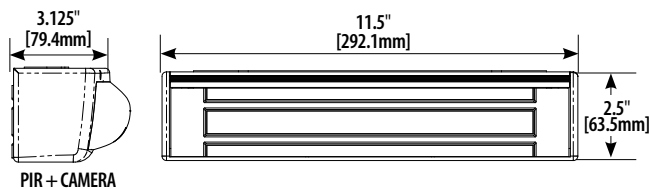

SECURITRON®
ASSA ABLOY

M670 SERIES

1100lbs Holding Force

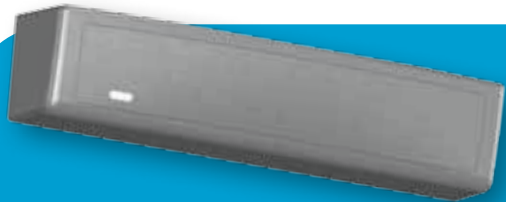

Specifications:

- UL 10C Listed
- CAN4-S104, CAN/ULC Listed
- UL 1034 Burglary-Resistant Listed
- ANSI/BHMA A156.23, Grade 1; E180501-1000
- NFPA 101
- CSFM- California State Fire Marshal Approved
- Holding Force: 1100lbs [499 kg]
- Dimensions: 11-1/2" L x 2-9/16" D x 2-1/2" H
- Patents Pending


Electrical:

550mA at 12VDC
275mA at 24VDC

Operating Temperature:
+32 to +110F
[0 to +43C]

Finishes:

US19/622 - Satin Black
US26D/626 - Satin Chrome (Standard)

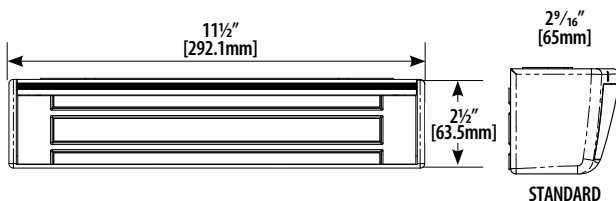

SECURITRON™
ASSA ABLOY



DUAL VOLTAGE

The Simple, Stylish and Secure Magnalock®



The new M670 from Securitron delivers unsurpassed style and ease of installation.

Style. The aesthetics of the M670 are refined enough for the most discriminating designer openings.

Easy installation. The fastest, easiest, most secure installation of any bracket-mount maglock.

PRODUCT FEATURES

- Bracket mounting provides the easiest install for out-swing doors
- Innovative templating for an effortlessly accurate alignment between magnet and armature plate
- Sleek, low profile and refined lines for improved aesthetics
- LED shows red or green for lock status indication
- Autosensing dual voltage with microprocessor technology
- Wire chamber anti-tamper switch
- Instant release circuit - no residual magnetism
- Efficient, low power usage
- Size optimized for use with door closers
- MagnaCare Lifetime Replacement No Fault Warranty



MODELS Part # Description

M670
Satin Chrome Finish

M670-622
Satin Black Finish

Bracket Mounted with Easy Installation for Interior Applications


The M38 electromagnetic lock is ideal for traffic control in high-use areas within secured or monitored perimeters. Offerings include solutions for interior rooms, closets and hallways where reliability, high durability and low-maintenance are required. Bracket mounting and wiring chamber provide quick, accurate installation.

PRODUCT FEATURES

- Bracket mounts easily using common tools
- Internal wire access chamber
- Automatic dual voltage - no field adjustment required
- Instant release circuit - no residual magnetism
- Efficient, low power usage
- All ferrous metal surfaces plated for durability and rust resistance
- MagnaCare Lifetime Replacement No Fault Warranty

PRODUCT OPTIONS

- Flexible mounting options for
 - › Out-swing doors
 - › In-swing doors
 - › Metal, wood, Herculite or glass-with-aluminum frame
- Dress Covers
- Senstat
- Door position switch
- LED indicator
- Anti-tamper switch

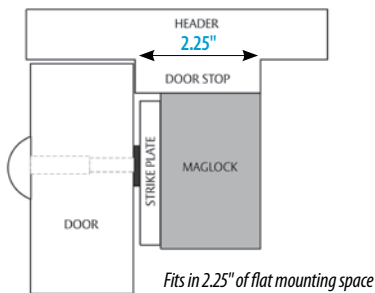

Fits in 2.25" of flat mounting space


MODELS

Part #	Description
M38	Magnalock® Model 38
M38D	M38, Door Position
M38DL	M38, Door Position, LED
M38DLS	M38, Door Position, LED, Senstat
M38DLST	M38, Door Position, LED, Senstat, Tamper
M38DLT	M38, Door Position, LED, Tamper
M38DS	M38, Door Position, Senstat
M38DST	M38, Door Position, Senstat, Tamper
M38DT	M38, Door Position, Tamper
M38L	M38, LED
M38LS	M38, LED, Senstat
M38LT	M38, LED, Tamper
M38S	M38, Senstat
M38ST	M38, Senstat, Tamper
M38T	M38, Tamper
M38/68D-KIT	Retrofit Door Position Switch for M38 or M68
M38T-KIT	Retrofit Anti-Tamper Switch for M38

For dress cover and bracket options model numbers, see page 15 and 27.

M38 SERIES

600lbs Holding Force

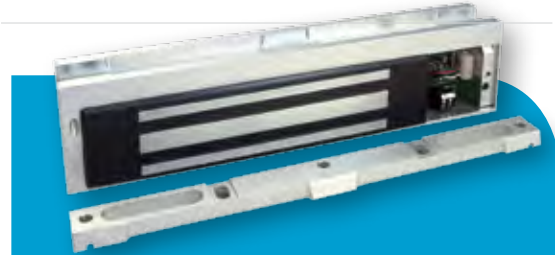

Specifications:

- UL 10C Listed
- CAN4-S104, CAN/ULC-S533 Listed
- ANSI/UL 294 Listed
- CSA-C22.2 No.205 Listed
- ANSI/BHMA 156.23, Grade 1; E18501-1000
- NFPA 101
- CSFM- California State Fire Marshal Approved
- Holding Force: 600lbs [272 kg]
- Dimensions: 10-1/2" L x 1-11/16" D x 2-1/2" H

Electrical:

350mA at 12VDC
170mA at 24VDC

Operating Temperature:

+32 to +110F
[0 to +43C]


Recommended for indoor use

Shipping Weight:

8lbs [3.63 kg]

Finishes:

US28/628 - Brushed Aluminum
US32/629 - Polished Stainless (Dress Cover)
US03/605 - Polished Brass (Dress Cover)
BK - Black (Dress Cover)

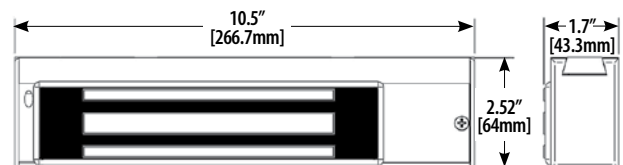

SECURITRON®
ASSA ABLOY

M68 SERIES

1200lbs Holding Force



Specifications:

- UL 10C Listed
- CAN4-S104, CAN/ULC-S533 Listed
- ANSI/UL 294 Listed
- CSA-C22.2 No.205 Listed
- ANSI/BHMA 156.23, Grade 1; E18501-1000
- NFPA 101
- CSFM- California State Fire Marshal Approved
- Holding Force: 1200lbs [544 kg]
- Dimensions: 10-1/2" L x 2" D x 3-5/8" H

Electrical:

250mA at 12VDC
125mA at 24VDC

Operating Temperature:

+32 to +110F
[0 to +43C]

Recommended for indoor use

Shipping Weight:

13lbs [5.44 kg]


Finishes:

US28/628 - Brushed Aluminum

US32/629 - Polished Stainless (Dress Cover)

US03/605 - Polished Brass (Dress Cover)

BK - Black (Dress Cover)

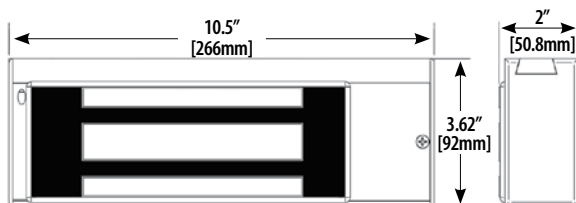

SECURITRON
ASSA ABLOY



Bracket Mounted with Easy Installation for Higher Security Interior Applications


Ideal for traffic control in high-use areas where higher security is needed, the M68 electromagnetic lock provides reliability, durability and strength with low maintenance and efficient power consumption. Bracket mounting and wiring chamber provide ease of installation.

PRODUCT FEATURES

- Strong hold and low maintenance
- Bracket mounts easily using common tools
- Internal wire access chamber
- Automatic dual voltage - no field adjustment required
- Instant release circuit - no residual magnetism
- Efficient, low power usage
- All ferrous metal surfaces plated for durability and rust resistance
- MagnaCare Lifetime Replacement No Fault Warranty

PRODUCT OPTIONS

- Flexible mounting options for
 - › Out-swing doors
 - › In-swing doors
 - › Metal, wood, Herculite or glass-with-aluminum frames
- Dress Covers
- Senstat
- Door position switch
- LED indicator
- Anti-tamper switch



MODELS

Part #
Description

M68

Magnalock
Model 68

M68D

M68, Door Position

M68DL

M68, Door Position,
LED

M68DLS

M68, Door Position,
LED, Senstat

M68DLST

M68, Door Position,
LED, Senstat,
Tamper

M68DLT

M68, Door Position,
LED, Tamper

M68DS

M68, Door Position,
Senstat

M68DST

M68, Door Position,
Senstat, Tamper

M68DT

M68, Door Position,
Tamper

M68L

M68, LED

M68LS

M68, LED, Senstat

M68LT

M68, LED, Tamper

M68S

M68, Senstat

M68ST

M68, Senstat,
Tamper

M68T

M68, Tamper

M38/68D-KIT

Retrofit Door
Position Switch for
M38 or M68

M68T-KIT

Retrofit Anti-
Tamper Switch for
M68

For dress cover and bracket option model numbers, see page 15.
For filler plates and header brackets, see page 27.

M38/M68 SERIES

Options & Upgrades

DC » Dress Covers

- Available for the M38 and M68
- Install using foam adhesive tape

» MODELS

Part #
Description

DC-38BK

DC - M38, Black

DC-38SP

DC - M38, Stainless
Polished

DC-38BP

DC - M38, Brass
Polished

DC-68BK


DC - M68, Black

DC-68SP


DC - M68, Stainless
Polished

DC-68BP

DC - M68, Brass
Polished

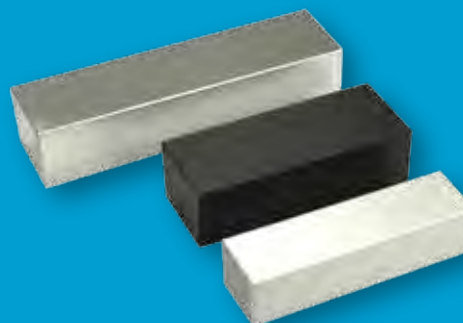

DC - Dress Covers



TJ - M38/M 68 In-swing Door Kit - Top Jamb

TJ » M38/M68 In-swing Door Kit - Top Jamb

- Used to mount the M38 or M68 lock on the secure side of a door that swings into a secured area
- Includes a Z-Bracket and an oversized Dress Cover

» MODELS

Part #
Description

TJ-38BK

In-swing Door Kit -
M38, Black

TJ-38CL

In-swing Door Kit -
M38, Clear

TJ-68BK

In-swing Door Kit -
M68, Black

TJ-68CL

In-swing Door Kit -
M38, Clear

Note: M38/M68 may also be used with SFP and UHB brackets. See page 27.

SECURITRON
ASSA ABLOY

M34R SERIES

500lbs Holding Force



Specifications:

- UL 10C Listed
- CAN4-S104, CAN/ULC-S533 Listed
- CSFM- California State Fire Marshal Approved
- CE:EN 50091-1, EN 61000-6-2 Approved
- NEMA: 4X
- IEC: IP66
- Holding Force: 500lbs [227 kg]
- Dimensions: 10-1/2" L x 1-1/8" D x 1-1/2" H

Electrical:

320mA at 12VDC
170mA at 24VDC

Operating Temperature:


-40 to +140F
[-40 to +60C]
Indoor or Outdoor use

Shipping Weight:

5lbs [2.23 kg]

Finishes:

US32D/630 - Satin
Stainless Steel

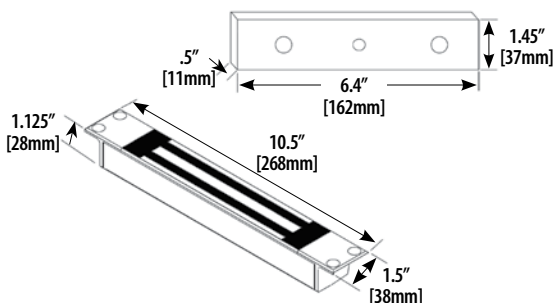

SECURITRON
ASSA ABLOY



Recessed Magalock® for Traffic Control


The M34R secures sliding doors with Magalock strength for traffic control applications within a monitored perimeter. The recessed design conceals the maglock for hidden protection that blends with the aesthetics of the opening. Works great on automatic single sliding doors or on sliding doors for storage closets, patios and more.

PRODUCT FEATURES

- Recessed for aesthetically appealing finish
- Fully sealed and conformal coated for weatherproof operations
- Sealed 10 ft. [3.05m] jacketed, stranded conductor cable
- Automatic dual voltage - no field adjustment required
- Instant release circuit - no residual magnetism
- Noise suppression - no interference with sensitive electronics
- Efficient, low power usage
- All ferrous metal surfaces plated for durability and rust resistance
- MagnaCare Lifetime Replacement No Fault Warranty

PRODUCT OPTIONS

- BondSTAT magnetic bond sensor - Patented
- Integrated door position switch

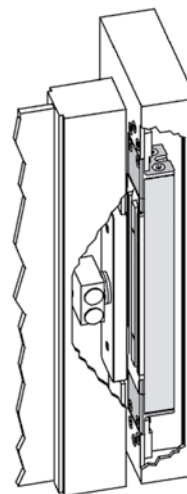

MODELS

Part #
Description

M34R
Magalock
Model 34 - Recessed

M34RB
M34 - Recessed,
Mag Bond Sensor

M34RBD
M34 - Recessed,
Mag Bond Sensor,
Door Position Switch

M34RD
M34 - Recessed,
Door Position Switch

The Ultimate in Maglock® Reliability for Indoor/Outdoor Traffic Control

The M32 electromagnetic lock is ideal for traffic control in high-use areas within secured or monitored perimeters.


With unsurpassed durability, the M32 will last long after most buildings wear out. Applications include storage areas, rooms, and hallways where reliability, high durability and low-maintenance are required.

PRODUCT FEATURES

- Ultra-secure Direct Mount to the door frame for strength and reliability
- Fully sealed and conformal coated for weatherproof operations
- Sealed 10 ft. [3.05m] jacketed, stranded conductor cable
- Automatic dual voltage - no field adjustment required
- Instant release circuit - no residual magnetism
- Noise suppression – no interference with sensitive electronics
- Efficient, low power usage
- All ferrous metal surfaces plated for durability and rust resistance
- MagnaCare Lifetime Replacement No Fault Warranty

PRODUCT OPTIONS

- Flexible mounting options for
 - › Out-swing doors
 - › In-swing doors
 - › Metal, wood, Herculite or glass with aluminum frame
- BondSTAT magnetic bond sensor - Patented
- Integrated door position switch



Fits in 2.25" of flat mounting space

MODELS

Part #	Description
M32	Magnalock Model 32
M32F	M32, Face Mount
M32FB	M32, Face Mount, Magnetic Bond Sensor
M32FBD	M32, Face Mount, Magnetic Bond Sensor, Door Position Switch
M32BD	M32, Magnetic Bond Sensor
M32BD	M32, Magnetic Bond Sensor, Door Position Switch
M32D	M32, Door Position Switch

For dress cover and bracket option model numbers, see pages 27-32.

M32 SERIES

600lbs Holding Force



Specifications:

- UL 10C Listed
- CAN4-S104, CAN/ULC-S533 Listed
- ANSI/UL 294 Listed
- CSA-C22.2 No.205 Listed
- ANSI/BHMA 156.23, Grade 1; E08501-500
- NFPA 101
- CSFM- California State Fire Marshal Approved
- MEA – City of New York Approved
- CE:EN 50091-1, EN 61000-6-2 Approved
- NEMA: 4X
- IEC: IP66
- Holding Force: 600lbs [272 kg]
- Dimensions: 8"L x 1-3/5" D x 1-5/8" H

Electrical:

300mA at 12VDC
150mA at 24VDC

Operating Temperature:

-40 to +140F
[-40 to +60C]

Indoor or Outdoor use

Shipping Weight:

6lbs [2.72 kg]

Finishes:


US32D/630 - Satin Stainless Steel Finish

CL - Clear (Dress Cover)

BK - Black (Dress Cover)

US32/629 - Polished Stainless (Dress Cover)

US03/605 - Polished Brass (Dress Cover)

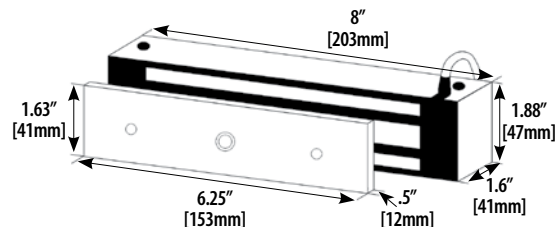

SECURITRON®
ASSA ABLOY

M62 SERIES

1200lbs Holding Force



Specifications:

- UL 10C Listed
- CAN4-S104, CAN/ULC-S533 Listed
- ANSI/UL 294 Listed
- CSA-C22.2 No.205 Listed
- ANSI/BHMA 156.23, Grade 1; E08501-1000
- NFPA 101
- CSFM- California State Fire Marshal Approved
- MEA – City of New York Approved
- CE:EN 50091-1, EN 61000-6-2
- NEMA: 4X
- IEC: IP66
- Holding Force: 1200lbs. [544 kg]
- Dimensions: 8" L x 1-3/4" D x 3" H

Electrical:

250mA at 12VDC
150mA at 24VDC

Operating Temperature:


-40 to +140F
[-40 to +60C]
Indoor or Outdoor use

Shipping Weight:

11lbs [5 kg]

Finishes:

US32D/630 - Satin Stainless Steel
CL - Clear (Dress Cover)
BK - Black (Dress Cover)
US32/629 - Polished Stainless (Dress Cover)
US03/605 - Polished Brass (Dress Cover)

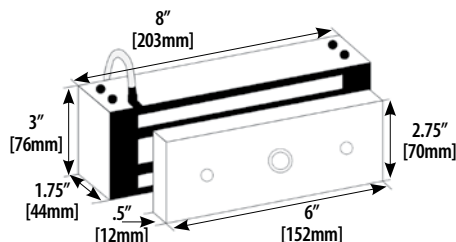

SECURITRON™
ASSA ABLOY



The Ultimate in Magnalock® Versatility for Indoor/Outdoor Higher Security

The M62 is a strong, easy-to-maintain solution for interior, perimeter and exterior access control. With unsurpassed durability, the M62 will last long after most buildings wear out. Flexible mounting options support applications for hollow metal, concrete filled metal, wood, or glass with aluminum frames, and Herculite doors. Options include single and double door configurations, or specialty applications such as gates and fences.

PRODUCT FEATURES

- Ultra-secure Direct Mount to door frame for strength and reliability
- Fully sealed and conformal coated for weatherproof operations
- Sealed ten foot [3.05m] jacketed, stranded conductor cable
- Automatic dual voltage - no field adjustment required
- Instant release circuit - no residual magnetism
- Noise suppression - no interference with sensitive electronics
- Efficient, low power usage
- All ferrous metal surfaces plated for durability and rust resistance
- Fits in 2.5" of flat space
- MagnaCare Lifetime Replacement No Fault Warranty

PRODUCT OPTIONS

- Flexible mounting options for
 - › Out-swing doors
 - › In-swing doors
 - › Metal, wood, Herculite or glass with aluminum frames
 - › Swinging and sliding gates
- BondSTAT magnetic bond sensor - Patented
- Integrated door position switch
- Universal threaded conduit fitting is 1/2" female - 3/4" male
- Split Strike Plates and Offset Strike Plates

MODELS

Part #
Description

M62
Magnalock
Model 62

M62B
M62, Mag Bond
Sensor

M62BD
M62, Mag Bond
Sensor, Door Position
Switch

M62D
M62, Door Position
Switch

M62F
M62, Face Mount

M62FB
M62, Face Mount,
Mag Bond Sensor

M62FBD
M62, Face Mount,
Mag Bond Sensor,
Door Position Switch

M62FD
M62, Face Mount,
Door Position Switch

M62FG
M62, Face Mount,
Conduit

M62FGB
M62, Face Mount,
Conduit, Mag Bond
Sensor

M62FGBD
M62, Face Mount,
Conduit, Mag Bond
Sensor, Door Position
Switch

M62FGD
M62, Face Mount,
Conduit, Door
Position Switch

M62G
M62, Conduit

M62GB
M62, Conduit, Mag
Bond Sensor

M62GBD
M62, Conduit, Mag
Bond Sensor, Door
Position Switch

M62GD
M62, Conduit, Door
Position Switch

For dress cover and bracket option model numbers, see pages 27-32.
For gate bracket options, see pages 41 and 42.

Magnalock® Installation Kit

OFFSET STRIKES »

- An offset strike may be required for proper installation of the M62 in aluminum frame door applications

» MODELS Part # Description

M62-OS

M62, Offset Strike

M62G-OS

M62, Conduit, Offset Strike

M62B-OS

M62, Mag Bond Sensor, Offset Strike

M62BD-OS

M62, Mag Bond Sensor, Door Position Switch, Offset Strike

SPLIT STRIKES »

- A pair of Split Strikes may be used for each leaf of a double door with no mullion to provide traffic control using a single magnet

» MODELS Part # Description

M62-SS

M62, Split Strike

M62B-SS

M62, Mag Bond Sensor, Split Strike

IK » Installation Kit

- This convenient, cost effective kit contains everything an installer needs to achieve professional, high quality Securiton Magnalock® installations. The IK offers substantial savings over purchasing the same items separately.

Securiton's original Installation Kit includes the following components:

Tool Box	Threadlock
Heavy Duty Drill Guide	1/8" Cobalt Drill Bit
Blind Nut Placement Tool	3/8" Cobalt Drill Bit
Sex Bolt – M32/M62/M82	3/8" Carbide Drill Bit
T-Handle Hex Wrench	1/2" High Speed Drill Bit
Hardware Packs – M32, M62/M82	Blind Nuts with Collapsing Tool
Rubber Washers	Finish Caps
Flat Washers	Long Screw Pack
Insulated Crimp Connectors	Product Installation CD



Offset Strikes



Split Strikes



IK - Installation Kit

SECURITRON®
ASSA ABLOY

DM62 SERIES

Double Maglock



Specifications:

- UL 10C Listed
- CAN4-S104, CAN/ULC-S533 Listed
- ANSI/BHMA 156.23, Grade 1; E08511-1000
- NFPA 101
- CSFM- California State Fire Marshal Approved
- NEMA: 4X
- IEC: IP66
- Holding Force: 1200lbs [544 kg] per lock
- Dimensions: 22"L x 1-3/4"D x 3"H

Electrical:

250mA at 12VDC/lock
150mA at 24VDC/lock

Operating

Temperature:


-40 to +140F
[-40 to +60C]
Indoor or Outdoor use

Shipping Weight:

16lbs [7.26 kg]

Finishes:

US32D/630 – Satin
Stainless Steel Finish

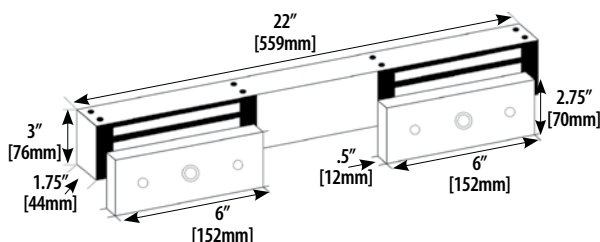

The Ultimate Maglock® Double Magnet for Indoor/Outdoor Higher Security


The versatile DM62 electromagnetic lock offers strength and ease of maintenance for interior, perimeter and exterior access control - in a compact double magnet. This all-in-one unit is designed for double doors with no mullion. With unsurpassed durability, the DM62 will last long after most buildings wear out.

PRODUCT FEATURES

- Ultra-secure Direct Mount to door frame for strength and reliability
- Fully sealed and conformal coated for weatherproof operations
- Sealed 18" [45.7cm] jacketed, stranded conductor cable for each lock
- Automatic dual voltage - no field adjustment required
- Instant release circuit - no residual magnetism
- Noise suppression - no interference with sensitive electronics
- Efficient, low power usage
- All ferrous metal surfaces plated for durability and rust resistance
- MagnaCare Lifetime Replacement No Fault Warranty

PRODUCT OPTIONS

- Flexible mounting options for
 - › *Out-swing doors*
 - › *Metal or wood doors*
- BondSTAT magnetic bond sensor - Patented
- Integrated door position switch
- Offset strike plates



The DM62 with Strike fits in 2.5" of flat mounting space

MODELS

Part #
Description

DM62
Double Maglock
Model DM62

DM62-OS
DM62, Offset Strike

DM62B
DM62, Mag Bond
Sensor

DM62BD
DM62, Mag Bond
Sensor, Door
Position Switch

DM62B-OS
DM62, Mag Bond
Sensor, Offset
Strike

DM62D
DM62, Door
Position Switch

**ASCWB-
DM62CL**
Combo ASB/CWB
Bracket - DM62,
Clear, 22"

For bracket option model numbers, see page 28.

SECURITRON™
ASSA ABLOY



Magnalock® Industrial Strength Hold for Challenging Indoor/Outdoor Environments


The M82 electromagnetic lock offers unsurpassed magnetic-holding strength, durability and ease of maintenance for interior, perimeter and exterior access control applications in high-risk environments. With unsurpassed durability, the M82 will last long after most buildings wear out. Flexible mounting options are available for higher security locations and other environments where extreme forces may be encountered.

PRODUCT FEATURES

- Ultra-secure Direct Mount to door frame for strength and reliability
- Fully sealed for weatherproof and tamper-resistant operations
- Sealed 10 ft. [3.05m] jacketed, stranded conductor cable
- Automatic dual voltage - no field adjustment required
- Instant release circuit - no residual magnetism
- Noise suppression - no interference with sensitive electronics
- Efficient, low power usage
- All ferrous metal surfaces plated for durability and rust resistance
- MagnaCare Lifetime Replacement No Fault Warranty

PRODUCT OPTIONS

- Flexible mounting options for out-swing doors, in-swing doors and metal or wood doors
- BondSTAT magnetic bond sensor - Patented
- Integrated door position switch
- Universal threaded conduit fitting is 1/2" female - 3/4" male
- Split Strike Plates and Offset Strike Plates available

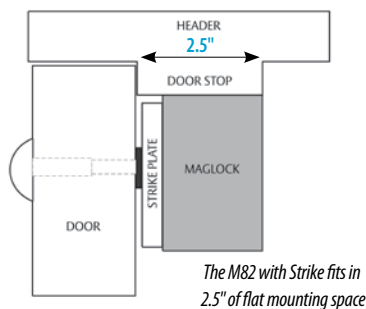

MODELS

M82B
Magnalock Model
82, Mag Bond
Sensor

M82BD
M82, Mag Bond
Sensor, Door
Position Switch

M82B-SS
M82, Mag Bond
Sensor, Split Strike

M82FB
M82, Face Mount,
Mag Bond Sensor

M82FBD
M82, Face Mount,
Mag Bond Sensor,
Door Position
Switch

M82FGB
M82, Face Mount,
Conduit, Mag Bond
Sensor

M82FGBD
M82, Face Mount,
Conduit, Mag
Bond Sensor, Door
Position Switch

M82GB
M82, Conduit, Mag
Bond Sensor

M82GBD
M82, Conduit, Mag
Bond Sensor, Door
Position Switch

For dress cover and bracket option model numbers, see pages 27-32.

M82B SERIES

1800lbs Holding Force



Specifications:

- UL 10C Listed
- CAN4-S104, CAN/ULC-S533 Listed
- ANSI/UL 294 Listed
- ANSI/BHMA 156.23, Grade 1; E08501-1500
- NFPA 101
- CSFM - California State Fire Marshal Approved
- CE:EN 50091-1, EN 61000-6-2
- NEMA: 4X
- IEC: IP66
- Holding Force: 1800lbs [816 kg]
- Dimensions: 12"L x 1-3/4"D x 3"H

Electrical:

350mA at 12VDC
200mA at 24VDC

Operating Temperature:


-40 to +140F
[-40 to +60C]
Indoor or Outdoor use

Shipping Weight:

16lbs [7.26 kg]

Finishes:

US32D/630 - Satin
Stainless Steel Finish
CL - Clear (Dress Cover)
BK - Black (Dress Cover)
US32/629 - Polished
Stainless (Dress Cover)
US03/605 - Polished
Brass (Dress Cover)

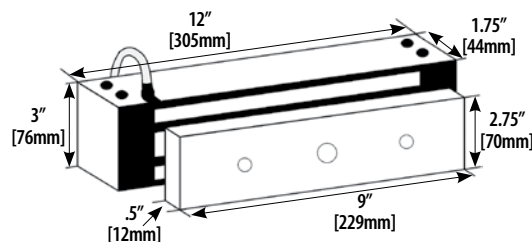

SECURITRON®
ASSA ABLOY

SAM

1200lbs Shear Aligning Magnalock®



Specifications:

- UL 10C Listed
- CAN4-S104, CAN/ULC-S533 Listed
- ANSI/UL 294 Listed
- ANSI/BHMA 156.23, Grade 1; E08561-1000, E08571-1000, E08581-1000, E08591-1000
- CSFM - California State Fire Marshal Approved
- CE-EN 50091-1, EN 61000-6-2
- NEMA: 4X
- IEC: IP66
- Holding Force: 1200lbs [544 kg]

Dimensions:

Magnalock: 10-7/8" L
x 1-3/16" D x 1-1/2" H
Strike: 10-7/8" L x
1-7/16" D x 1-1/2" H

Patent numbers:

6,007,119; 6,135,515;
1,021,633; 741,880;
ZL98809925X

Electrical:

320mA at 12VDC
170mA at 24VDC

Operating Temperature:


-40 to +140F
[-40 to +60C]
Indoor or Outdoor use

Shipping Weight:

6lbs [2.72 kg]

Finishes:

US32D/630 - Satin
Stainless Steel Finish

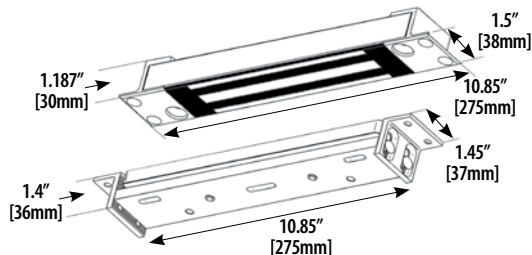

SECURITRON™
ASSA ABLOY



Hidden Strength at Any Angle for Any Application


Magnalock quality with concealed holding force and flexible mounting options for the most challenging door control situations. The SAM Shear Aligning Magnalock mounts fully concealed into wood, steel, aluminum or Herculite doors in any position: top, side or bottom. The SAM also has mounting options for swing through and sliding single or double doors.

PRODUCT FEATURES

- Secure mounted to door frame for strength and reliability
- Fully sealed and conformal coated for weatherproof operations
- Sealed 10 ft. [3.05m] jacketed, stranded conductor cable
- Automatic dual voltage - no field adjustment required
- Instant release circuit - no residual magnetism
- Noise suppression - no interference with sensitive electronics
- Efficient, low power usage
- All ferrous metal surfaces plated for durability and rust resistance
- MagnaCare Lifetime Replacement No Fault Warranty

PRODUCT OPTIONS

- Flexible mounting options for
 - › Out-swing
 - › In-swing
 - › Swing through
 - › Sliding
 - › Metal, wood, Herculite and glass door with aluminum frame
 - › Surface mounting for magnet or strike plate
- BondSTAT magnetic bond sensor - Patented
- Integrated door position switch
- Narrow strike plate

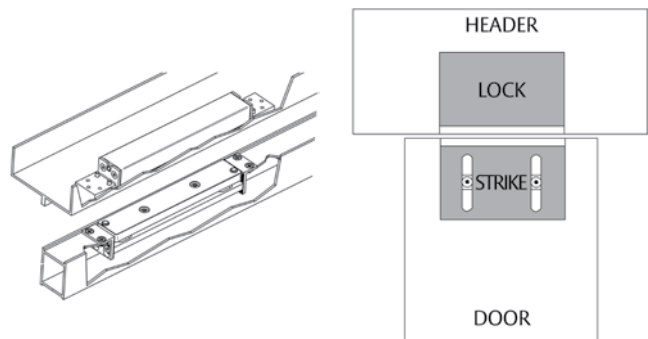

MODELS

Part #
Description

SAM
Shear Aligning
Magnalock®

SAMB
SAM, Mag Bond
Sensor

SAMBD
SAM, Mag Bond
Sensor, Door
Position Switch


SAMD
SAM, Door Position
Switch

SAMN
SAM, Narrow Strike
Plate

SAM Accessories

SWB » SAM Wood Bracket

- SAM Wood Door Bracket provides additional strength and protection for the SAM strike plate in wood door applications

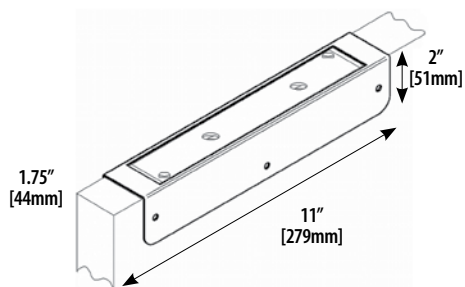

» MODELS

Part #
Description

SWB-26D


SAM Wood Door
Bracket, Clear

SWB-10B

SAM Wood Door
Bracket, Oil Rubbed
Bronze

SWB-03

SAM Wood Door
Bracket, Polished
Brass

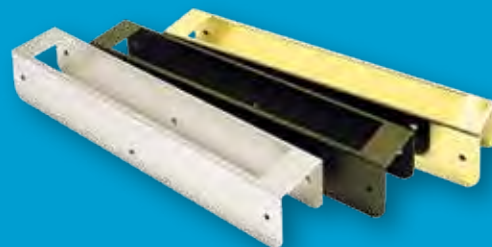


SWB - SAM Wood Bracket



SMLS, SMSS - Surface Mount Kit

SAM » Surface Mount Kit

- For specialty applications
- Permits the SAM magnet, strike or both to be surface mounted when mortising is not possible
- Stainless Steel



SMSS

» MODELS

Part #
Description

SMLS

Surface Mount
Lock Housing

SMSS

Surface Mount
Strike Housing

SECURITRON
ASSA ABLOY

iMXDa

Integrated Movement Exit Delay with Advanced Technology



Specifications:

- CAN/ULC-S533 Listed
- ANSI/UL 294 Listed
- NFPA 101
- Holding Force: 1200lbs [544 kg]
- Dimensions: 12-1/2" L x 2" D x 3-5/8" H
- Patent Numbers: 5,758,913; 6,609,738
- Patents Pending

Electrical:

370mA max at 12VDC
270mA max at 24VDC

Operating Temperature:

+32 to +104F
[0 to +40C]


Recommended for indoor use

Shipping Weight:

15lbs [6.80 kg]

Finishes:

US32D/630 - Satin
Stainless Steel

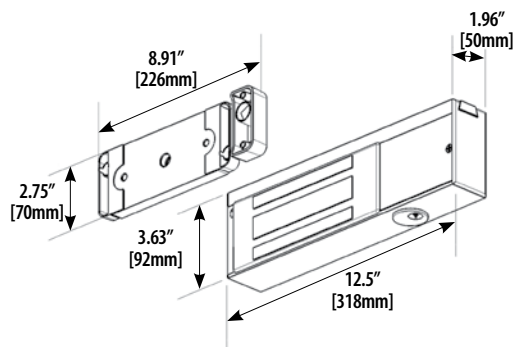

SECURITRON™
ASSA ABLOY



Magnalock® Reliability with All-In-One Exit Delay


Prevent losses at emergency exits with iMXDa. An attempted exit initiates an alarm and a brief delay before the lock releases, giving personnel time to respond before an exit occurs. Protect memory care wards, hospitals, dormitories, airports, child care facilities and retail or warehouse environments. Used on out-swing doors, installation requires no alteration or replacement of existing fire-rated or non-fire-rated latching hardware.

PRODUCT FEATURES

- Fully integrated delay and detection features for fast installation of delayed egress system
- Easily adjustable door movement detection from 1/8" [3.2mm] to 1" [25mm]
- Bracket mounted for ease of installation
- Automatic dual voltage - no field adjustment required
- Permits free egress in emergency situations
- Efficient, low power usage
- Compact 12-1/2" length can be used with most door closers
- BondSTAT and Integrated Door Position Switch (DPS) included
- Internal wire access chamber with tamper switch
- Easily visible LEDs indicate status on secure side of door
- Advanced intelligent microprocessors provide alarm options and trainable door movement detection to minimize false alarms
- Configurable settings include
 - › Nuisance alarm times - 0 to 3 seconds
 - › Irrevocable delay times - 15 or 30 seconds - user selectable
 - › External bypass delay times - 0, 5, 10, or 15 seconds
 - › Post alarm reminder - user selectable
 - › Bypass expiration alarm - user selectable
 - › Manual relock or delayed automatic relock (BOCA) - user selectable
- External alarm relay isolated dry contact (1A at 24VDC)
- External reset
- All ferrous metal surfaces plated for durability
- MagnaCare Lifetime Replacement No Fault Warranty
- Instant release circuit - no residual magnetism

PRODUCT OPTIONS

- iEXD version allows alarm initiation via an external panic device



MODELS Part # Description

iMXDa
Integrated Motion
Exit Delay System -
Advanced

iEXDa
Integrated Electronic
Exit Delay System -
Advanced

Build an Exit Delay System Customized to Your Specific Environment

When the demands of your door environment require customized components, Securitron's UL/ULC Exit Delay System (EXD) delivers a system that meets your specific needs. EXD provides modular delayed egress that complies with NFPA 101 Life Safety Code and conforms to BOCA, UBC, SBC and National Building Code of Canada. This modular approach suits the specific locking requirements of all doors, as well as the desired level of physical security and ease of maintenance.

COMPONENT EXD

Modular Exit Delay System

With modular upgrades, maintenance and replacement, Securitron Component EXD evolves with your changing access control needs.

1. Select a LOCKING DEVICE (one per door)

Choose from Maglock® Series: M32, M38, M62, M68, M82, or SAM



2. Choose an INITIATE DEVICE (one per door)

Determine type of egress - Egress Control Only or Egress Control w/Electronic Access Capability

Determine door type - Fire Rated or Non-Fire Rated

Choose from:

Securitron: SB-MXD, LML, LMS, DSB, TSB, TSH, EMB

Sargent: 80 Series w/55 prefix

Adams Rite: 3700, 3600, 3300 & 3100



3. Choose an EXIT DELAY TIMER (one per opening)

Choose from: XDT, BA-XDT, FA-XDT

Note: If XDT is chosen, a sounder must be installed. If BA-XDT or FA-XDT, a Sonalert and exit sticker are included

More than one door requires purchase of additional EXD-1L Door Label



4. Choose a SYSTEM RESET (one per opening)

Choose from:

Manual Reset: MK Series w/momentary switch

Automatic Reset: DPS-W and DPS-M


Note: Manual Reset (NBC of Canada, NFPA 101 & UBC) or Automatic Reset (UBC & BOCA).

Please consult local jurisdiction for specific requirements.




XDT

Exit Delay Initiate Device

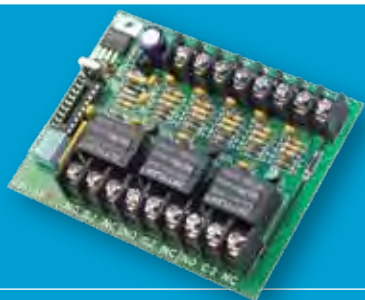


Specifications:

- ANSI/UL 294 Listed
- CSFM – California State Fire Marshal Approved

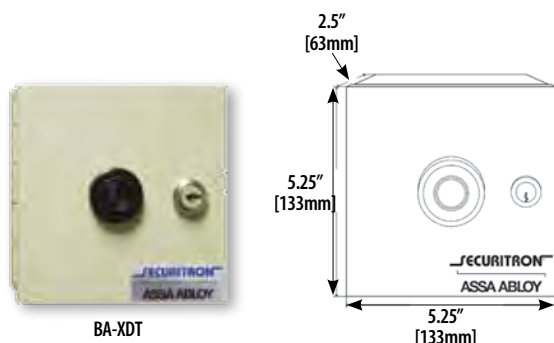

BA-XDT

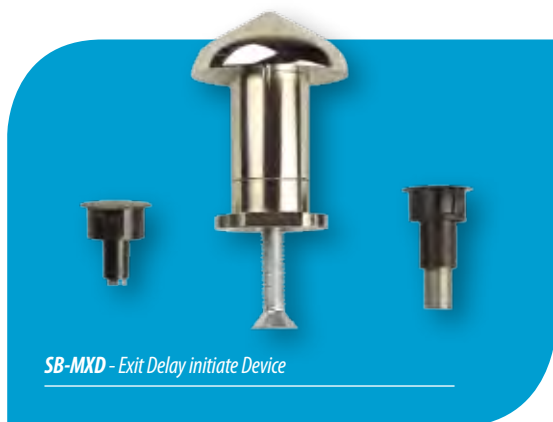

SB-MXD - Exit Delay initiate Device

Sophisticated Control in an Easy To Use, Modular Exit Delay Timer

Configurable exit delay is ideal for fail-safe environments that have varying needs throughout the day. Function is compatible with entry control, door/lock monitoring, and authorized immediate exit. Widely used in health-care environments to alert for patient exit and in retail environments to prevent theft.

PRODUCT FEATURES

- Meets all code requirements including the BOCA 30 second relock function
- Nuisance delay and release times are digitally set using precise DIP switches
- Three 5 Amp SPDT relays for interface capabilities
- External switches such as time clocks can put the XDT into different modes when delayed exit is not desired at all times

PRODUCT OPTIONS

- 12VDC
- 24VDC
- XDT is board only
- BA-XDT in surface mount enclosure with piezo sounder and door label
- FA-XDT is a flush mount plate enclosure with piezo sounder and door label

» MODELS Part # Description

XDT-12
Exit Delay Timer
12VDC

XDT-24
Exit Delay Timer
24VDC

BA-XDT-12
Exit Delay Timer
Surface Mount Box
12VDC

BA-XDT-24
Exit Delay Timer
Surface Mount Box
24VDC


FA-XDT-12
Exit Delay Timer
Flush Mount 12VDC

FA-XDT-24
Exit Delay Timer
Flush Mount 24VDC

EXD-1L
Exit Delay Door
Label "Push Until
Alarm Sounds...30
Seconds"

SB-MXD » Exit Delay Initiate Device

- The SB-MXD detects door movement and initiates a signal for delayed egress when used in conjunction with Securitron's XDT logic timers. Door movement tolerance ranges from 1/2" - 3/4" [12-18mm]. Options are available for standard, thin and thick doors.

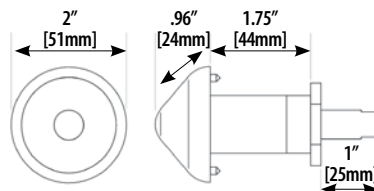

» MODELS Part # Description

SB-MXD
Door Movement
Sex Bolt Kit

*Request part 390-15690 for doors > 2" thick
Request part 390-15650 for doors < 1.75" thick*

SECURITRON
ASSA ABLOY



SFP » Stop Filler Plate

- Used to fill or extend a door stop
- Creates a flat mounting surface for the Magnalock®
- Available in 1/4", 3/8", 1/2" and 5/8" thickness, all 1-1/4" wide
- Use with M32, M62, M82, M38, M68
- Available in clear aluminum or black anodized

**» MODELS**Part #
Description**SFP-1/2BK-8**

SFP 1/2" Black 8"

SFP-1/2BK-12

SFP 1/2" Black 12"

SFP-1/2CL-8

SFP 1/2" Clear 8"

SFP-1/2CL-12

SFP 1/2" Clear 12"

SFP-1/4BK-8

SFP 1/4" Black 8"

SFP-1/4BK-12

SFP 1/4" Black 12"

SFP-1/4CL-8

SFP 1/4" Clear 8"

SFP-1/4CL-12

SFP 1/4" Clear 12"

SFP-3/8CL-8

SFP 3/8" Clear 8"

SFP-3/8BK-12

SFP 3/8" Black 12"

SFP-3/8BK-8

SFP 3/8" Black 8"

SFP-3/8CL-12

SFP 3/8" Clear 12"

SFP-5/8CL-8

SFP 5/8" Clear 8"

SFP-5/8BK-8

SFP 5/8" Black 8"

SFP-5/8CL-12

SFP 5/8" Clear 12"

SFP-5/8BK-12

SFP 5/8" Black 12"

UHB » Universal Header Bracket

- Used to extend the header 1" or 1-1/2"
- Provides a concealed wiring chamber
- Use with M32, M62, M82, M38/M68
- Available in clear aluminum or black anodized

**» MODELS**Part #
Description**UHB-BK-8**

UHB, Black 9-1/2"

UHB-BK-12

UHB, Black 13-1/2"

UHB-CL-8

UHB, Clear 9-1/2"

UHB-CL-12

UHB, Clear 13-1/2"

HEB » Header Extension Bracket

- 90 degree angle brackets
- Extends narrow headers to permit proper mounting of Magnalocks
- Use with M32, M62, M82
- Available in clear aluminum or black anodized

**» MODELS**Part #
Description**HEB-1BK-8**

HEB 1", Black 8"

HEB-1BK-12

HEB 1", Black 12"

HEB-1CL-8

HEB 1", Clear 8"

HEB-1CL-12

HEB 1", Clear 12"

HEB-2BK-8

HEB 2", Black 8"

HEB-2BK-12

HEB 2", Black 12"

HEB-2CL-8

HEB 2", Clear 8"

HEB-2CL-12

HEB 2", Clear 12"

HEB-3BK-8

HEB 3", Black 8"

HEB-3BK-12

HEB 3", Black 12"




HEB-3CL-8

HEB 3", Clear 8"


HEB-3CL-12

HEB 3", Clear 12"

Magnalock® Accessories

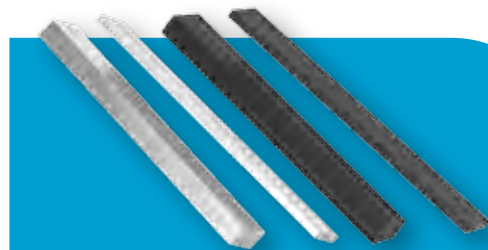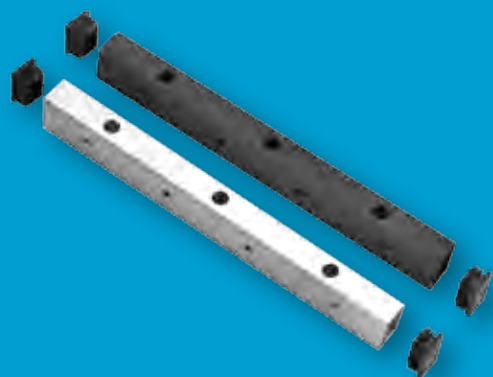
*SFP - Stop Filler Plate**UHB - Universal Header Bracket**HEB - Header Extension Bracket***Out-swing Header Configuration Questions?**

Unsure which brackets you need for your out-swing application?
Call us with the following measurement(s) based on your frame type.

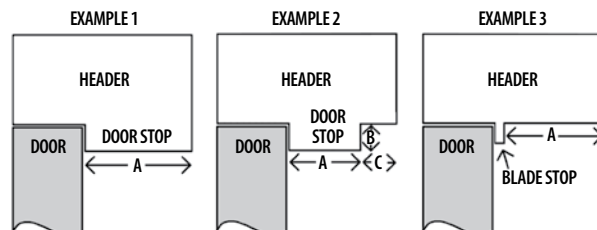

SECURITRON®
ASSA ABLOY

Magnalock® Accessories



HEB-3G/GDB/AKG - Accessories for Glass Door Installations



ASB - Aluminum Shim Bracket




CWB - Concrete Wood Bracket

SECURITRON™
ASSA ABLOY

Accessories for Glass Door Installations

- HEB-3G allows for Magnalock installation on all-glass header when used with AKG
- GDB permits strike plate installation on a solid glass door
- AKG permanently bonds to the glass using a special industrial adhesive
- Strike Plate screws into the bracket, as glass doors cannot be drilled
- Use HEB-3G with M32, M62, 3" x 3" x 8" with specially milled back



MODELS

Part #
Description

HEB-3G

HEB- M32, M62
Glass Door 3" x 3"
x 8" with specially
milled back

GDB


Glass Door Bracket
M32, M38, M62,
M68

AKG

Adhesive Kit (up to
10 applications)

ASB » Aluminum Shim Bracket

- Use when a blade stop requires the Magnalock to be lowered
- Comes pre-drilled for the mounting bolts and wire
- Provides a blind nut for surface installation of strike
- Available in clear aluminum or black anodized



MODELS

Part #
Description

ASB-32BK

ASB - M32, Black 8"

ASB-32CL

ASB - M32, Clear 8"

ASB-62BK

ASB - M62, Black 8"

ASB-62CL

ASB - M62, Clear 8"

ASB-82BK

ASB - M82, Black 12"

ASB-82CL


ASB - M82, Clear 12"

ASCWB-DM62CL

Combo ASB/CWB
Bracket - DM62,
Clear 22"

CWB » Concrete Wood Bracket

- Used on wood or concrete filled metal frames
- Provides a concealed wire chamber
- Available in clear aluminum or black anodized



MODELS

Part #
Description

CWB-32BK

CWB - M32, Black 8"

CWB-32CL

CWB - M32, Clear 8"

CWB-62BK

CWB - M62, Black 8"

CWB-62CL

CWB - M62, Clear 8"

CWB-82BK

CWB - M82, Black 12"

CWB-82CL

CWB - M82, Clear 12"

Offset Strikes/Replacement Strike Plates

- Alters the position of the mounting hole by 1/4" [6mm]. This is often required to clear the glass on aluminum frame store front doors
- Includes Offset Strike Plate only

» MODELS Part # Description

AOS-62

Replacement 1/4"
Offset Strike - M62,
DM62 (X2), M68

AOS-82

Replacement 1/4"
Offset Strike - M82

AOS-62D

Replacement 1/4"
Offset DPS Strike -
M62, DM62 (X2)

AOS-82D

Replacement 1/4"
Offset DPS Strike
- M82

Split Strikes/Replacement Strike Plates

- Allows a single M32, M62 or M82 Maglock to secure a double door at traffic control holding force level
- Includes Split Strike Plates only

» MODELS Part # Description

ASS-32

Replacement Split
Strike Set - M32,
(3" x 1.62" Each Side)

ASS-62


Replacement Split
Strike Set - M62,
(3" x 2.75" Each Side)

ASS-82

Replacement Split
Strike Set - M82,
(4.25" x 2.75" Each Side)

ZA » Z Bracket Kits - Adjustable

- Use on in-swing doors with Maglock "F" options (8.5" overall length)
- Provides 1.25" of lateral movement to accommodate most openings and allows for precision adjustments (2-1/4" to 3-1/2" from door/header)
- Includes an oversized dress cover



» MODELS Part # Description

ZA-32/62BK

Adjustable
Z-Bracket - M32,
M62, Black

ZA-32/62SS

Adjustable
Z-Bracket - M32,
M62, Stainless Steel

ZA-82CL

Adjustable
Z-Bracket - M82,
Clear

ZA-32/62CL

Adjustable
Z-Bracket - M32,
M62, Clear

ZA-82BK

Adjustable
Z-Bracket - M82,
Black

ZA-82SS

Adjustable
Z-Bracket - M82,
Stainless Steel

Magnalock® Accessories



AOS - Offset Strikes/Replacement Strike Plates



ASS - Split Strikes/Replacement Strike Plates



ZA - Z Bracket Kits - Adjustable

SECURITRON®
ASSA ABLOY

Magnalock® Accessories



EASB - Energy Absorbing Sex Bolt



TDK-1 - Accessories for Thick Doors




SB-1 - Sex Bolt Replacement Kit

EASB » Energy Absorbing Sex Bolt

The Energy Absorbing Sex Bolt provides additional protection and shock absorption to augment holding force when a door experiences dynamic forces such as kicks or repeated blows. Used in mental health care and detention ancillary or administrative doors, and perimeter doors.

- For high-security applications on inflexible doors
- Replaces the standard Sex Bolt
- Contains a powerful internal spring that absorbs and dissipates the force of a blow



» MODELS

Part #
Description

EASB-32

Sex Bolt, Energy Absorbing - M32, M38

EASB-62

Sex Bolt, Energy Absorbing - M62, M68

EASB-82

Sex Bolt, Energy Absorbing - M82

EASB-250

.25 Inch Spacer for EASB-62/82

TDK-1 » Accessory for Thick Doors

- The TDK-1 provides replacement screws so armature plates for the M32, M62, M82, M38 and M68 can be used on doors thicker than 1-3/4", and up to 3".

» MODELS

Part #
Description

TDK-1

Thick Door Kit

SB-1 » Sex Bolt Replacement Kit

- Replaces armature plate sex bolt for M32, M38, M62, M68, and M82B Magnalocks
- Available in clear, polished brass or oil rubbed bronze

» MODELS

Part #
Description

SB-1

Sex Bolt - Replacement, Clear

SB-1-03

Sex Bolt - Replacement, Polished Brass

SB-1-10B

Sex Bolt - Replacement, Oil Rubbed Bronze

SECURITRON™
ASSA ABLOY

Magnalock® Accessories

DC » Dress Covers

- Use with M32, M62, and M82
- Install using foam adhesive tape
- Available in clear, black, polished stainless and polished brass finish

» MODELS

Part #
Description

DC-32BK

DC - M32, Black

DC-32BP

DC - M32, Brass
Polished

DC-32CL

DC - M32, Clear

DC-32SP

DC - M32, Stainless
Polished

DC-62BK

DC - M62, Black

DC-62BP

DC - M62, Brass
Polished

DC-62CL

DC - M62, Clear

DC-62SP

DC - M62, Stainless
Polished

DC-82BK

DC - M82, Black

DC-82BP


DC - M82, Brass
Polished

DC-82CL


DC - M82, Clear

DC-82SP

DC - M82, Stainless
Polished

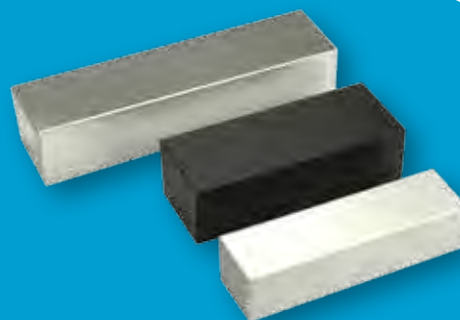

DC - Dress Covers

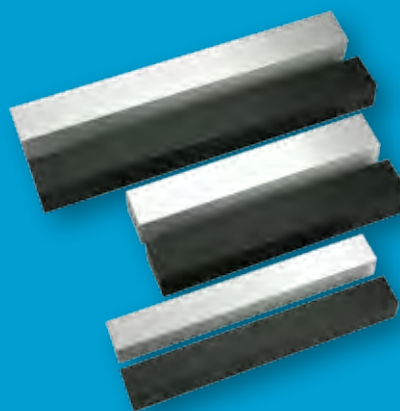

DDC - Double Dress Covers

DDC » Double Dress Covers

- Available in clear and black finish
- For use with a pair of Magnalocks on a double door separated by no more than 2"
- Not for use with the DM62 Magnalock

» MODELS

Part #
Description

DDC-32BK

DDC - M32, Black

DDC-32CL

DDC - M32, Clear

DDC-62BK

DDC - M62, Black

DDC-62CL

DDC - M62, Clear

DDC-82BK

DDC - M82, Black

DDC-82CL

DDC - M82, Clear

SECURITRON®
ASSA ABLOY

Magnalock® Accessories



HVD-62 - Vertical Housing

Full Length Housings

- Vertical or horizontal configurations
- Fit one or two locks (not included)
- SLR = Single Left Hand Reverse
- SRR = Single Right Hand Reverse

MODELS Part # Description

HHD-32
Full Length
Housing - M32,
Dbl. Horizontal

HHD-62
Full Length
Housing - M62,
Dbl. Horizontal

HHD-82
Full Length
Housing - M82,
Dbl. Horizontal

HHSL-32
Full Length
Housing - M32,
SLR Horizontal

HHSL-62
Full Length
Housing - M62,
SLR Horizontal

HHSL-82
Full Length
Housing - M82,
SLR Horizontal

HHSR-32
Full Length
Housing - M32,
SRR Horizontal

HHSR-62
Full Length
Housing - M62,
SRR Horizontal

HHSR-82
Full Length
Housing - M82,
SRR Horizontal

HVD-32
Full Length
Housing - M32,
Dbl. Vertical


HVD-62
Full Length
Housing - M62,
Dbl. Vertical

HVD-82
Full Length
Housing - M82,
Dbl. Vertical

Reference the table below. Indicate size when ordering.

Model	A	B	C	Max Length*
HHD-32	1.75"	2.1"	2.35"	96"
HHD-62	2.1"	2.6"	3.5"	96"
HHD-82	2.1"	2.6"	3.5"	96"
HHSL-32	1.75"	2.1"	2.35"	48"
HHSL-62	2.1"	2.6"	3.5"	48"
HHSL-82	2.1"	2.6"	3.5"	48"
HHSR-32	1.75"	2.1"	2.35"	48"
HHSR-62	2.1"	2.6"	3.5"	48"
HHSR-82	2.1"	2.6"	3.5"	48"
HVD-32	1.75"	2.1"	2.35"	96"
HVD-62	2.1"	2.6"	3.5"	96"
HVD-82	2.1"	2.6"	3.5"	96"

*Full length housings are individually manufactured to custom specifications up to the maximum length shown.

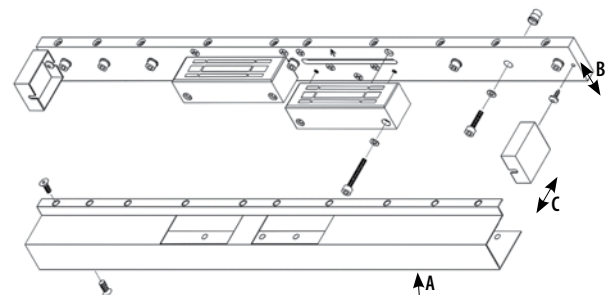

HHD Horizontal Housing

SECURITRON®
ASSA ABLOY

Light Duty Access Control for Cabinets and Retail Display


The VM300 is an affordable Securiton solution for securing cases, closets, cabinets, display windows and more. With mounting options for in-swing, out-swing and solid glass doors, this compact solution is ideal for light-duty applications.

PRODUCT FEATURES

- Adjustable bracket for easy mounting
- Wire Access Chamber with Plug-In Connectors
- Dual Voltage 12/24VDC
- Instant release circuit - no residual magnetism
- All ferrous metal surfaces plated for durability and rust resistance
- VistaCare One Year Hassle-Free, No Fault Warranty

PRODUCT OPTIONS

- Mounting options for in-swing, out-swing and solid glass doors
- Bond Sensor

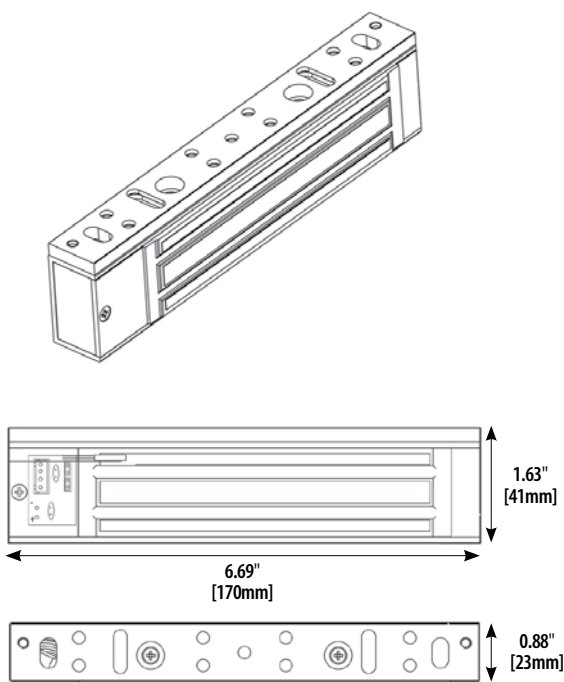

VM300 SERIES

300lbs Holding Force



Specifications:

- ULC Listed
- CAN4-S104, CAN/ULC-S533 Listed
- NFPA 101
- Holding Force: 300lbs [136 kg]
- Dimensions: 6-11/16" L x 7/8" D x 1-5/8" H

Electrical:

300mA at 12VDC
150mA at 24VDC

Operating

Temperature:
+32 to +110F
[0 to +43C]

Recommended for indoor use

Shipping Weight:

2lbs [0.91 kg]

Finishes:

US28/628 -
Brushed Aluminum
Finish

MODELS

VM300
Vista Model VM300
Maglock


VM300B
VM300, Bond
Sensor



SECURITRON
ASSA ABLOY

VM600 SERIES

600lbs Holding Force

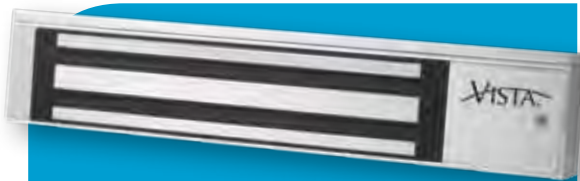

Specifications:

- ULC Listed
- CAN4-S104, CAN/ULC-S533 Listed
- NFPA 101
- Holding Force: 60 lbs [272 kg]
- Dimensions: 9-3/8" L x 1-1/16" D x 1-7/8" H

Electrical:

520mA at 12VDC
260mA at 24VDC

Operating Temperature:

+32 to +110F
[0 to +43C]

Recommended for indoor use

Shipping Weight:

5lbs [2.27 kg]

Finishes:

US28/628 - Brushed Aluminum

An Affordable Securiton Maglock for Interior Applications



The affordable VM600 offers traffic control for a wide selection of interior applications. Its field-selectable dual voltage and easy bracket-mount installation delivers Securiton value in a no-frills value package.

PRODUCT FEATURES

- Adjustable bracket for easy installation
- Wire Access Chamber with Plug-In Connectors
- Dual Voltage 12/24VDC
- Instant release circuit - no residual magnetism
- All ferrous metal surfaces plated for durability and rust resistance
- VistaCare One Year Hassle-Free, No Fault Warranty

PRODUCT OPTIONS

- Bond Sensor
- Door Position Switch
- Mounting brackets for a variety of installations (Page 36)

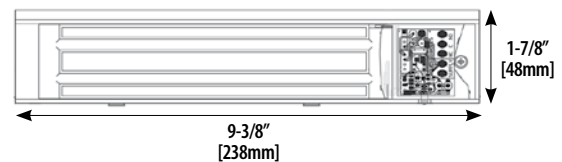

SECURITRON
ASSA ABLOY



MODELS

Part #
Description

VM600
Vista Model VM600
Maglock

VM600DB
VM600, Door
Position Switch,
Bond Sensor

Value and Strength in a No-Frills Package —Retrofits Competitive Footprint


Get Vista Maglock value with 1,200 lbs. of holding force to secure interior and sheltered perimeter doors. The VM1290 is a direct retrofit for the Locknetics 390+ Maglock, complete with a specialized mounting plate to use with existing mounting holes.

PRODUCT FEATURES

- Easy Mount Adjustable Bracket
- Wire Access Chamber with Plug-In Connectors
- Dual Voltage 12/24VDC
- Instant release circuit - no residual magnetism
- All ferrous metal surfaces plated for durability
- VistaCare One Year Hassle-Free, No Fault Warranty
- Retrofits Locknetics 390+ using existing mounting holes (VM1290)

PRODUCT OPTIONS

- Bond Sensor
- Door Position Switch
- Flexible mounting options for out-swing, in-swing, and solid glass doors

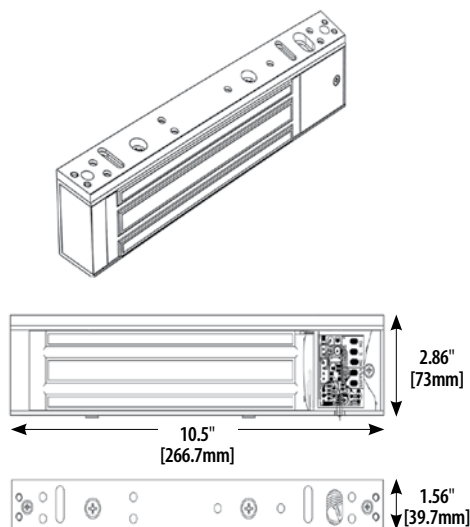

VM1200/VM1290 SERIES

1200lbs Holding Force



Specifications:

- ULC Listed
- CAN4-S104, CAN/ULC-S533 Listed
- NFPA 101
- Holding Force: 1200lbs [544 kg]
- Dimensions: 10-1/2" L x 1-9/16" D x 2-7/8" H

Electrical:
520mA at 12VDC
260mA at 24VDC

Operating Temperature:
+32 to +110F
[0 to +43C]
Recommended for indoor use

Shipping Weight:
8lbs [3.63 kg]

Finishes:
US28/628 - Brushed Aluminum

MODELS

Part #
Description

VM1200
Vista Model
VM1200 Maglock

VM1200DB
VM1200, Door
Position Switch,
Magnetic Bond
Sensor


VM1290
VM1290 Retrofit for
Locknetics 390+

VM1290DB
VM1290 Door
Position Switch,
Magnetic Bond
Sensor Retrofit for
Locknetics 390+




SECURITRON
ASSA ABLOY

Vista Maglock Mounting Brackets




ASB - Aluminum Shim Bracket



GDB - Glass Door Bracket



HEB - Header Extension Bracket



SFP - Stop Filler Plate




Z - Z Bracket Kit

SECURITRON
ASSA ABLOY

ASB » Aluminum Shim Bracket

- Used when a blade stop requires the Vista Maglock to be lowered
- Comes pre-drilled for the mounting bolts and wire



» MODELS


Part #
Description

ASB-VM600
Aluminum Shim
Bracket, 1/2",
VM600

ASB-VM1200
Aluminum Shim
Bracket, 1/2",
VM1200

GDB » Glass Door Bracket

- GDB permits strike plate installation on a solid glass door
- Strike Plate screws into the bracket, as glass doors cannot be drilled



» MODELS

Part #
Description


GDB-VM300
Glass Door Bracket,
VM300

GDB-VM600
Glass Door Bracket,
VM600

GDB-VM1200
Glass Door Bracket,
VM1200

HEB » Header Extension Bracket

- 90 degree angle bracket with lateral adjustability
- Extends narrow headers to permit proper mounting of Vista Maglocks



» MODELS


Part #
Description

HEB-VM600
Header Extension
Bracket, VM600

HEB-VM1200
Header Extension
Bracket, VM1200

SFP » Stop Filler Plate

- Used to fill or extend a door stop
- Creates a flat mounting surface for the Vista Maglock
- Available in 1/4", 3/8", and 1/2" - Clear finish



» MODELS

Part #
Description


SFP-VM-1/2-CL
1/2", Clear

SFP-VM-1/4-CL
1/4", Clear

SFP-VM-3/8-CL
3/8", Clear

Z » Z Bracket Kit

- Use on in-swing doors
- Provides enough lateral movement to accommodate most openings
- Allows for precision adjustments



» MODELS

Part #
Description

Z-VM300
Z Bracket Kit,
VM300

Z-VM600
Z Bracket Kit,
VM600

Z-VM1200
Z Bracket Kit,
VM1200

Unique Hybrid Design, Two Tons of Holding Power


The hybrid design of the MM15 includes two spring-loaded, hardened steel jaws that deliver up to 4000lbs of ultimate holding power. In a forced-entry assault, the jaws clamp down on the armature plate and hold firm, for an unmatched level of access control.

PRODUCT FEATURES

- 4000lbs holding power
- Mounting plate for easy, accurate installation
- Automatic dual voltage (12/24V)
- Accepts AC or DC current
- Fail Safe
- Ideal for mental health care and auxiliary detention facilities and other high-risk locations
- MagnaCare Lifetime Replacement Warranty

PRODUCT OPTIONS

- Door Position Switch
- Anti-tamper switch
- 1/2" conduit fitting
- Mounting options for out-swing or in-swing metal door applications
- Tamper shield
- Dress covers

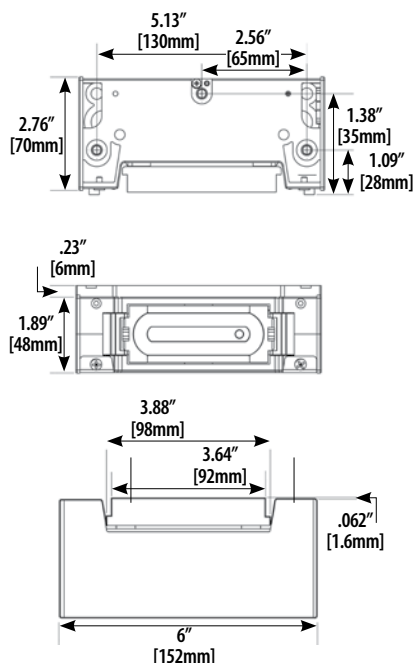

MODELS

Part #
Description

MM15
4000lbs
Electromechanical
Maglock, Satin
Stainless


MM15DT
4000lbs MM15,
Door Position/
Tamper Switch
Option

MM15G
4000lbs MM15,
Conduit Prep

MM15GDT
4000lbs MM15,
Conduit Prep, Door
Position/Tamper
Switch Option

MM15

E-Mag

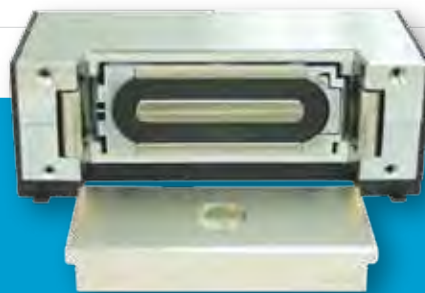

Specifications:

- ULC Listed
- CAN/ULC-S533 Listed
- ANSI/UL 294 Listed
- CSFM – California State Fire Marshal Approved
- Holding Force: 4000lbs [1814 kg]
- Dimensions: 6" L x 1-7/8" D x 2 3/4" H

Electrical:

AC Current: 130mA at 12VAC; 250mA at 24VAC
DC Current: 100mA at 12VDC; 200mA at 24VDC

Operating Temperature:

-40 to +140F
[-40 to +60C]
Indoor Use Only

Shipping Weight:

6lbs [2.72 kg]

Finishes:

US26D/626 - Brushed Stainless
US03/605 - Polished Brass (Dress Cover)
US04/606 - Satin Brass (Dress Cover)
BK - Black (Dress Cover)




SECURITRON
ASSA ABLOY


MM15 E-Mag Accessories



TS - Tamper Shield

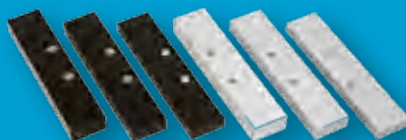

SFP - Stop Filler Plates

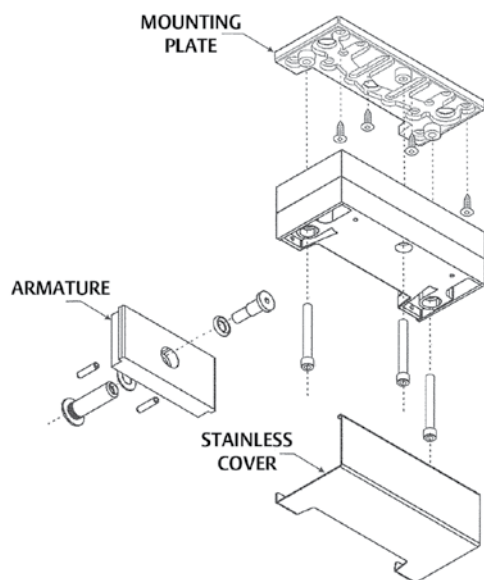

SECURITRON
ASSA ABLOY

TS » Tamper Shield


Protect your locks with Tamper Shield

The TS Tamper Shield completely encases the lock face, providing an added layer of protection against attempts to compromise or vandalize the magnetic locking mechanism.

» MODELS Part # Description

MM15-TS
MM15 Tamper
Shield, Stainless

SFP » Stop Filler Plates

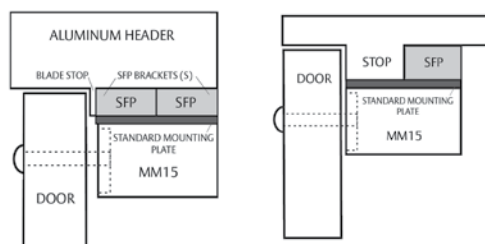

» MODELS Part # Description

SFP-1/2BKMM15
MM15 SFP, 1/2"
Black 6"

SFP-1/2CLMM15
MM15 SFP, 1/2"
Clear 6"

SFP-3/8BKMM15
MM15 SFP, 3/8"
Black 6"


SFP-3/8CLMM15
MM15 SFP, 3/8"
Clear 6"

SFP-5/8CLMM15
MM15 SFP, 5/8"
Clear 6"

SFP-5/8BKMM15
MM15 SFP, 5/8"
Black 6"

MM15 E-Mag Accessories

HEB-MM15 » Header Extension Brackets



» MODELS

Part #
Description

HEB-1BK-MM15

MM15 HEB, 1"
Black 6"

HEB-2BK-MM15

MM15 HEB, 2"
Black 6"

HEB-3BK-MM15

MM15 HEB, 3"
Black 6"

HEB-1CL-MM15

MM15 HEB, 1"
Clear 6"


HEB-2CL-MM15

MM15 HEB, 2"
Clear 6"

HEB-3CL-MM15

MM15 HEB, 3"
Clear 6"

Z-MM15 » Z Bracket Kits



» MODELS

Part #
Description

Z-MM15BK

Z Bracket
MM15, Black 6"

Z-MM15CL

Z Bracket MM15,
Clear 6"

DC-MM15 » Dress Covers

- Available in Black, Polished Brass or Satin Brass finish

» MODELS

Part #
Description

DC-MM15-BK


MM15 Dress Cover,
Black

DC-MM15-BP


MM15 Dress Cover,
Polished Brass

DC-MM15-BS

MM15 Dress Cover,
Satin Brass

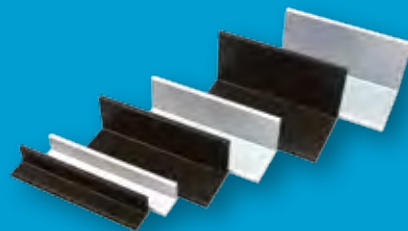

HEB-MM15 - Header Extension Brackets

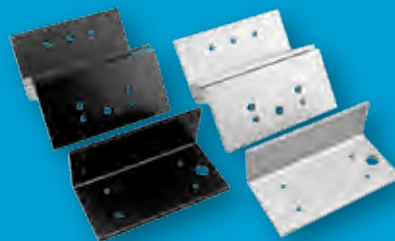

Z-MM15 - Z Bracket Kits



DC-MM15 - Dress Covers

SECURITRON®
ASSA ABLOY

UNL

UnLatch® Strike



Specifications:

- UL 10C Listed, 3 hour single door
- CAN4-S104-80m Listed, 3 hour single door
- UL listed to ANSI/SDI-BHMA A250.13 (60 PSI) Windstorm
- ANSI/BHMA A156.31, Grade 1; E09321, E09322, E09323
- NFPA-252 fire door compliant
- ASTM-E152 fire door compliant
- Patent numbers: 5,474,342; 6,022,056

Current Draw:

12VDC: 40mA continuous, minimum 300mA when operating
24VDC: 40mA continuous, minimum 200mA when operating

Operating Temperature:

-20 to +125F
[-29 to +52C]

Shipping Weight:

6lbs [2.72 kg]

Finishes:

US26D/626 – Stainless Steel
US10B/613 – Oil Rubbed Bronze
US03/605 – Polished Brass

Windstorm-Rated, Preload-Handling Electromechanical Strike


The universal electromechanical UNL strike works with most North American cylindrical locksets, with or without deadlatches. The UNL supports full deadlatch function, releases under pressure and includes latch status monitoring. Strong enough to withstand windstorm conditions, the UNL provides Grade 1 holding power and is UL listed and fire-rated. Like all Securiton locks, the UNL is backed by Securiton MagnaCare—the industry's best lifetime, no fault replacement warranty.

PRODUCT FEATURES

- No cutting or altering of the jamb required
- Releases under preload
- Supports deadlatch function
- Fits standard ANSI 4-7/8" strike cutout
- Motor driven action
- Latch status sensor included (SPDT)
- MagnaCare Lifetime Replacement No Fault Warranty

PRODUCT OPTIONS

- 12VDC
- 24VDC
- FSUNL for field-selectable fail-safe operation

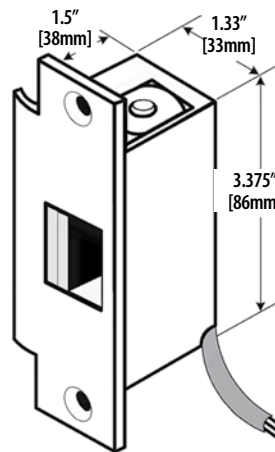

BPS-12-1 or BPS-24-1 with battery backup or a 3 Amp/1.5 Amp 12/24VDC power supply output recommended for startup inrush to achieve best operation when used in preload conditions

MODELS

Part #
Description

FSUNL-12

Fail Safe/Fail Secure UnLatch Module, 12VDC, .90mA

FSUNL-24

Fail Safe/Fail Secure UnLatch Module, 24VDC, 1.4mA

UNL-12

UnLatch for Cylindrical Locks, 12VDC

UNL-12-10B

UnLatch 12VDC, Oil Rubbed Bronze

UNL-12-US3

UnLatch 12VDC, Polished Brass

UNL-24

UnLatch for Cylindrical Locks, 24VDC

UNL-24-10B

UnLatch 24VDC, Oil Rubbed Bronze

UNL-24-US3

UnLatch 24VDC, Polished Brass

SECURITRON®

ASSA ABLOY



GRADE 1



ANSI A250.13-2003
WINDSTORM RESISTANT



CYLINDRICAL LOCKSETS





FIRE RATED

Strong Hold for Better Asset Management

The compact, concealed SAM2-24 Shear Aligning Magnalock provides 600lbs of holding force to swinging doors or sliding doors. The discreet SAM 2-24 mounts fully concealed and is ideally suited to secure smaller applications, like sliding closet doors, atriums, and more.

PRODUCT FEATURES

- Direct mount to door frame for strength and reliability
- Compact design fits tight spaces
- Fully sealed for weatherproof operations
- Sealed six foot [1.8m] jacketed, stranded conductor cable
- Instant release circuit - no residual magnetism
- Efficient, low-voltage, low power usage
- All ferrous metal surfaces plated for durability and rust resistance
- MagnaCare Lifetime Replacement No Fault Warranty

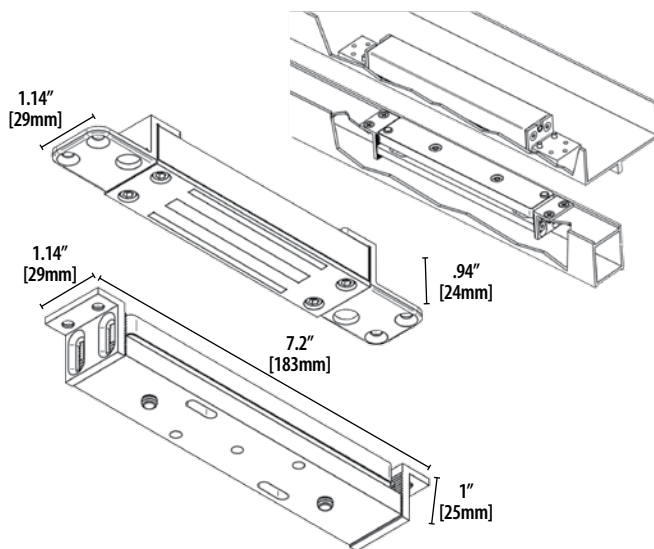

MODELS Part # Description

SAM2-24
SAM2 Magnalock
24VDC

SAM2-24

Shear Aligning Magnalock®



Specifications:

- UL 10C Listed
- CAN4-S104, CAN/ULC-S533 Listed
- ANSI/UL 294 Listed
- ANSI/BHMA 156.23, Grade 1; E08571-1000, E08581-1000
- CSFM - California State Fire Marshal Approved
- CE:EN 50091-1, EN 61000-6-2 Approved
- NEMA: 4X
- IEC: IP66
- Holding Force: 600lbs [272 Kg]
- Dimensions: 7-3/16" L x 1-1/8" D x 1" H
- Patent numbers: 6,007,119; 6,135,515

Electrical:
62mA at 24VDC only

Operating Temperature:

-40 to +140F
[-40 to +60C]

Indoor or outdoor use

Shipping Weight:
2.5lbs [1.13 Kg]

Finishes:
US32D/630 - Satin
Stainless Steel



SECURITRON®
ASSA ABLOY

M62FG-SASM

1200lbs Holding Force Gate Magnalock



Specifications:

- UL 10C Listed
- CAN4-S104, CAN/ULC-S533 Listed
- ANSI/UL 294 Listed
- CSA-C22.2 No.205 Listed
- ANSI/BHMA 156.23, Grade 1; E08501-1000
- NFPA 101
- CSFM- California State Fire Marshal Approved
- MEA – City of New York Approved
- CE:EN 50091-1, EN 61000-6-2 Approved
- NEMA: 4X
- IEC: IP66
- Holding Force: 1200lbs [544 Kg]
- Dimensions: 8"L x 1-3/4"D x 3"H

Electrical:
250mA at 12VDC
150mA at 24VDC

Operating Temperature:
-40 to +140F
[-40 to +60C]
Recommended for indoor or outdoor use

Shipping Weight:
12lbs [5.44 Kg]

Finishes:
US32D/630 - Satin
Stainless Steel Finish

SECURITRON™
ASSA ABLOY



The Low Maintenance Magnalock® Solution for Outdoor Gates

The M62FG-SASM is the only heavy duty Magnalock specifically designed to secure and protect gates. This weatherproof unit delivers 1200lbs of holding force and comes equipped with conduit fittings and a special shock absorbing strike mount (SASM). This unique design dramatically prolongs the life of the lock, the gate and other hardware by controlling excessive impact between the strike plate and the magnet.


The SASM is also available as a separate retrofit kit and is compatible with M32, M62 or M82 Magnalock strike plates for areas prone to excessive force closures or slamming.

PRODUCT FEATURES


- Flexible bracket options for swinging or sliding applications
- Fully sealed and conformal coated for weatherproof operations
- Includes universal threaded conduit fitting 1/2" female - 3/4" male
- Sealed 10 ft. [3.05m] jacketed, stranded conductor cable
- Automatic dual voltage - no field adjustment required
- All ferrous metal surfaces plated for durability
- MagnaCare Lifetime Replacement No Fault Warranty

PRODUCT OPTIONS

- Flexible mounting options for
 - › *Swinging gates*
 - › *Sliding gates*
- SASM for shock absorption and rebound assistance for proper gate alignment



M62FG-SASM on Swinging Gate Using Flex-Mount Bracket Kit FMK-SW



M62FG-SASM on Sliding Gate Using Flex-Mount Bracket Kit FMK-SL

MODELS Part # Description

M62FG
Model 62, Face Mount, Conduit

M62FG-SASM
Model 62, Face Mount, Conduit with SASM Kit

M62FGB
Model 62, Face Mount, Conduit, Mag Bond Sensor

M62FGD
Model 62, Face Mount, Conduit, Door Position Switch

M62FGDB
Model 62, Face Mount, Conduit, Mag Bond Sensor, Door Position Switch

SASM
Shock Absorbing Strike Mount Kit



See page 18 for more M62 options. See page 28 for mounting kits, brackets.

Electromechanical Gate Solution Offers One Ton of Holding Power

The heavy duty GL1 Electromechanical Gate Lock provides weather-resistant access control for a wide range of gate applications. The GL1 provides 2000lbs of holding force for electrical and manually operated indoor or outdoor gates where preload is a concern. Ideal for swinging or sliding vehicle, pedestrian, or stock gate access control. Use with the BPSS Solar Power Supply for remote outdoor locations.*

PRODUCT FEATURES

- 2000lbs holding force
- Operates under preload up to 100lbs
- Automatic dual voltage - no field adjustment required
- Field-selectable fail secure/fail safe
- Manual key override (right or left hand)
- Self-aligning receiver (+/- 1/2" horizontally) helps compensate for gate misalignment and sag
- Tamper resistant cast aluminum housing
- Latch status monitor switch (SPDT)
- Heavy wall 1/2" inside diameter threaded steel coupling
- Hardened steel latch and pin standard
- Surface mount
- MagnaCare Lifetime Replacement No Fault Warranty

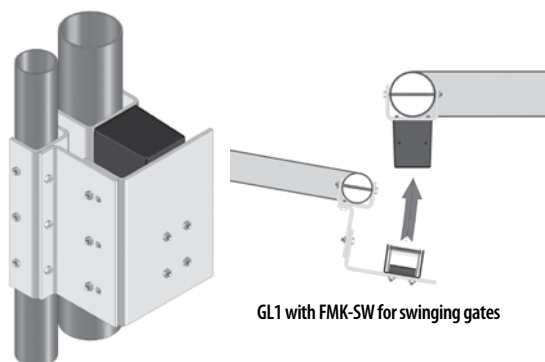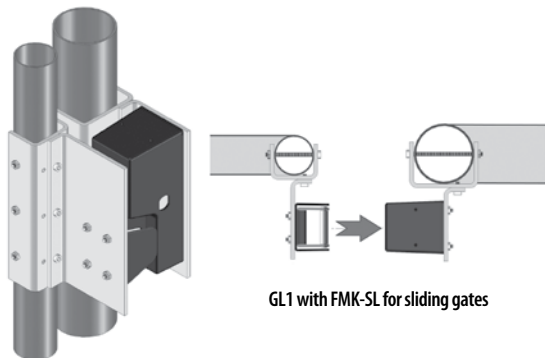

GL1

2000lbs Holding Force Gate Lock



Specifications:

- Holding Force: 2000lbs [907 kg]
- Dimensions: 2-3/4" L x 7-1/4" W x 3-1/4" D
- Patent Pending

Electrical:

12 Volts Initial (Peak):
(~1.0 sec.) @ 870mA -
Reduced: 290mA Power
Consumption: 3.5 Watts

24 Volts Initial (Peak):
(~1.0 sec.) @ 720mA -
Reduced: 170mA Power
Consumption: 4.1 Watts

Operating Temperature:


-58 to +167F
[-50 to +75C]
Indoor or outdoor use

Shipping Weight:

6lbs [2.72 kg]

Finishes:

Black Crinkle Powder
Coated Finish

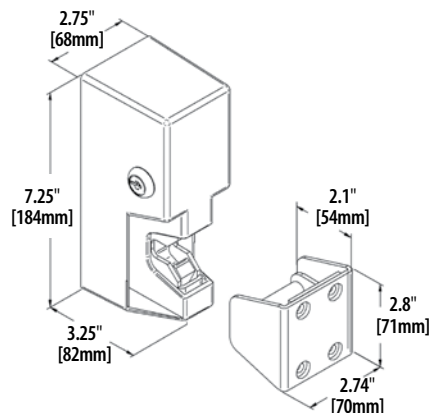

MODELS

GL1
Gate Lock 2000 lbs

Part #
Description


*For BPSS information, see page 81.




SECURITRON®
ASSA ABLOY

FMK

Flex-Mount Gate Lock Bracket Kits

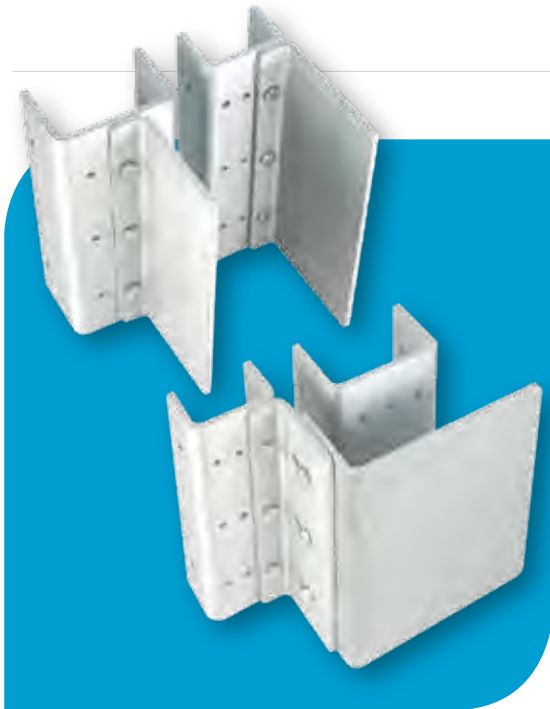


Sliding Gate

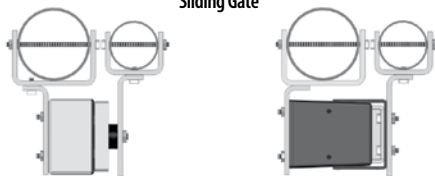

FMK-SL shown with M62FG

FMK-SL shown with GL1

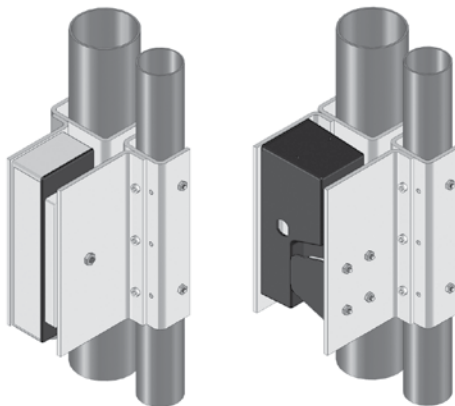

Bracket Kits Extend Access Control to Gates and Fences




The FMK Flex-Mount Bracket System is an intuitive set of mounting brackets designed exclusively for use with the M62FG Magnalock® and the GL1 Gate Lock. Pre-formed post channels and plates of varying lengths make it easy for you to assemble a professional looking, high-security gate lock mounting platform in minutes, without special tools.

PRODUCT FEATURES


- Permits electronics to be mounted on fence posts or gate posts
- Brackets are reversible
- Bracket kits include brackets, mounting hardware and post shims
- Post brackets are pre-drilled
- Zinc-plated steel provides durability and long life
- Bolt on or weld for installation
- Compatible with maximum 3" round post with minimum pole separation of 1"
- Use with Post Shim Brackets for smaller post sizes
- MagnaCare Lifetime Replacement No Fault Warranty

NOTES:

- M62FG can be direct mounted on square posts
- To use FMK-SL with M62FG-SASM, post separation should be 1" to 2-1/4"
- To use FMK-SW with M62FG or the GL1, post separation should be 1" to 2-3/4"
- To use FMK-SL with GL1 or M62FG, post separation should be 1" to 3-3/4"

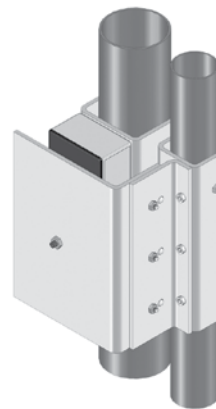

FMK-SW shown with M62FG

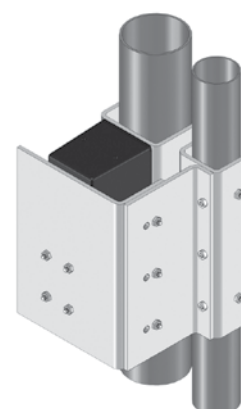

FMK-SW shown with GL1

SECURITRON
ASSA ABLOY

MODELS

Part #
Description

FMB9-4
Flex-Mount
1/8" Post Shim
Brackets (Pkg of 4)

FMK-SL
Flex-Mount Bracket
Kit, Sliding Gate

FMK-SW
Flex-Mount Bracket
Kit, Swinging Gate

Compact Magalock Quality for Versatile Asset Management


The compact MCL Magalock is ideal for extending access control to all types of asset protection. Typical applications include jewelry cases, museum cases, gun cabinets, pharmaceutical storage cabinets, cash drawers and any swinging or sliding door or drawer that needs asset control – indoors or out.

PRODUCT FEATURES


- Direct mount or bracket mount with common tools for easy installation
- Fully sealed and conformal coated for weatherproof operation
- Universal bracket included to support a variety of applications
- Sealed six foot [1.8m] jacketed, stranded conductor cable
- Efficient, low power usage
- All ferrous metal surfaces plated for durability and rust resistance
- MagnaCare Lifetime Replacement No Fault Warranty

MODELS Part # Description

MCL-24
Magnetic Cabinet
Lock 24VDC

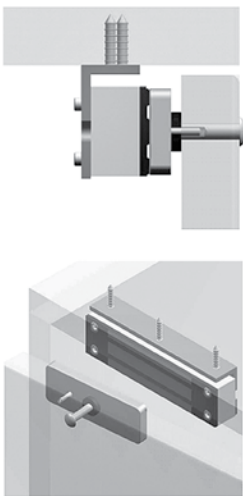

Swinging Door

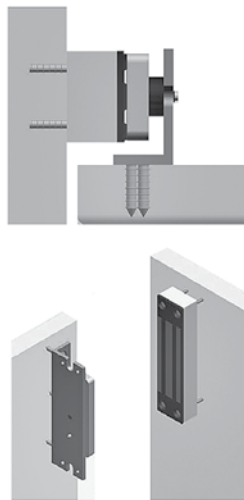

Sliding Door

MCL

200lbs Holding Force Magalock®



Specifications:


- CE: EN 50091-1, EN 61000-6-2 Approved
- Holding Force: 200lbs [91 kg]
- Dimensions: 4-5/8" L x 3/4" D x 1-1/8" H
- For Indoor or Outdoor Use

Electrical:
62mA at 24VDC only

Operating Temperature:
-40 to +140F
[-40 to +60C]

Shipping Weight:
1.5lbs [0.68 kg]

Finishes:
US32D/630 - Satin
Stainless Steel

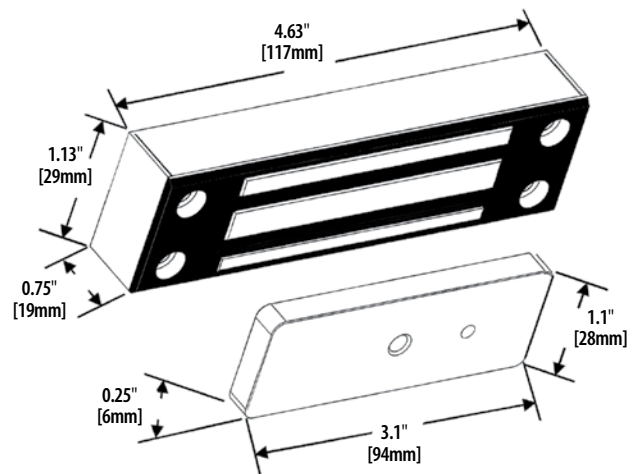

SECURITRON®
ASSA ABLOY

M32-SS

Split Strike Magnalock®



Specifications:

- UL 10C Listed
- CAN4-S104, CAN/ULC-S533 Listed
- ANSI/UL 294 Listed
- CSA-C22.2 No.205 Listed
- NFPA 101
- CSFM - California State Fire Marshal Approved
- MEA - City of New York Approved
- CE:EN 50091-1, EN 61000-6-2 Approved
- NEMA: 4X
- IEC: IP66
- Holding Force: 300lbs. [136 kg] per strike
- Dimensions: 8"L x 1-5/8"D x 1-7/8"H

Electrical:

300mA at 12VDC
150mA at 24VDC

Operating Temperature:


-40 to +140F
[-40 to +60C]
Indoor or outdoor use

Shipping Weight:

6lbs [2.72 kg]

Finishes:

US32D/630 - Satin
Stainless Steel Finish

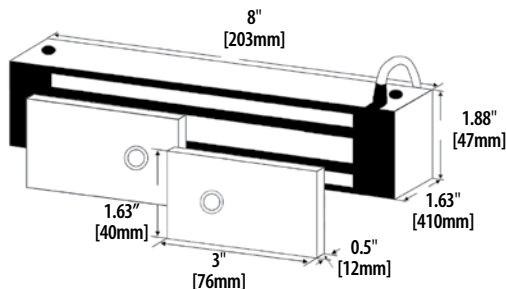

SECURITRON
ASSA ABLOY



Split Strike for Double-Door Cabinet Control


Now you can add asset control to your existing access control system with the durable, power-efficient M32-SS. Each strike plate of the M32-SS delivers 250lbs of holding force (500lbs total). Ideal for securing large two-door cabinets, retail cases or double-door, indoor/outdoor storage applications with out-swinging doors that share a common, center latching point.

PRODUCT FEATURES

- Direct mount with common tools for strength and reliability
- Fully sealed and conformal coated for weatherproof operations
- Sealed 10 ft. [3.05m] jacketed, stranded conductor cable
- Automatic dual voltage - no field adjustment required
- Instant release circuit - no residual magnetism
- Efficient, low power usage
- All ferrous metal surfaces plated for durability
- MagnaCare Lifetime Replacement No Fault Warranty

PRODUCT OPTIONS

- BondSTAT magnetic bond sensor - Patent Pending
- Use with CWB-32 bracket for mounting option on wood or concrete*

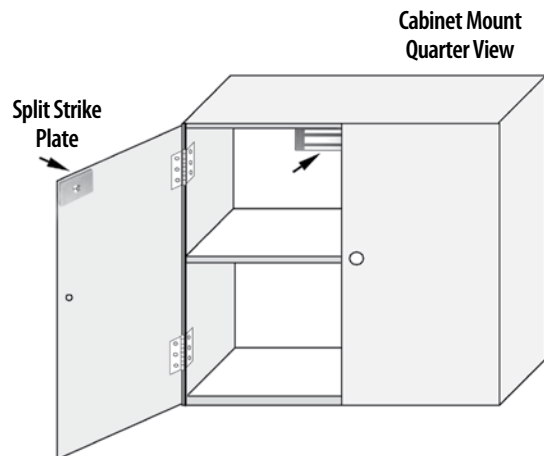

MODELS

Part #
Description

M32-SS

Model 32
Magnalock, Split
Strike

M32B-SS

Model 32,
Magnetic Bond
Sensor, Split Strike

*For CWB-32 Concrete Wood Bracket, see page 28.