


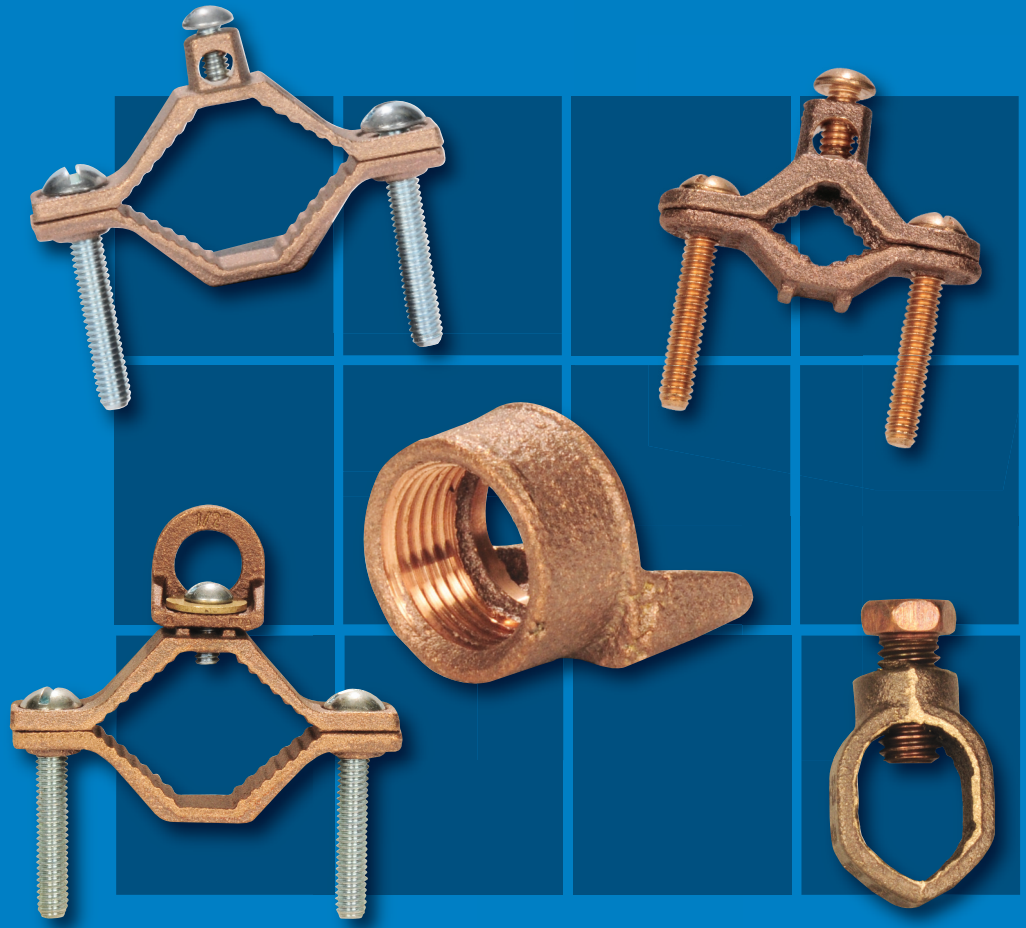

GROUNDING FITTINGS

Ground Clamps . . .	124
Ground Clamps, Rod Clamps and Hubs . . .	126

Ground Clamps

For Bare Wire

Application:

Used to connect bare copper wire to water pipe, rebar, ground rod or copper water tubing for grounding

Standard Materials:

Bronze with Steel Screws



UL Listed:

E93683


CSA file No. LR57925



With Steel Screws



Type 34B



CATALOG NUMBER	TRADE SIZE	WIRE SIZE MIN	WIRE SIZE MAX	DIM A	MIN.	MAX.	UNIT PACK	STANDARD PACK	WEIGHT (LBS.) PER 100	NAED MFG #78-5994 UPC/DCI #
10B	1/2" - 1"	10 SOL.	2 STR.	2.430	0.500	1.380	25	250	19	41054
34B	1-1/4" - 2"	10 SOL.	2 STR.	2.275	0.675	1.850	-	50	40	43414
35A	2-1/2" - 4"	10 SOL.	2 STR.	6.350	2.700	5.900	-	10	135	43514
36A	4" - 6"	10 SOL.	2 STR.	8.000	4.000	7.900	-	5	160	43614

Application:

Used to connect bare copper wire to water pipe, rebar, ground rod or copper water tubing for grounding

Standard Materials:

Bronze with Bronze Screws




UL Listed:

E93683


CSA file No. LR57925



With Bronze Screws for Direct Burial

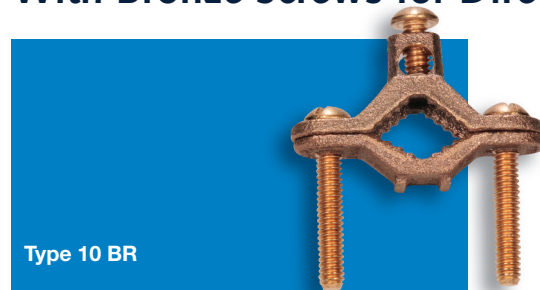

Type 10 BR




CATALOG NUMBER	TRADE SIZE	WIRE SIZE MIN	WIRE SIZE MAX	DIM A	MIN.	MAX.	UNIT PACK	STANDARD PACK	WEIGHT (LBS.) PER 100	NAED MFG #78-5994 UPC/DCI #
10BR	1/2" - 1"	10 SOL.	2 STR.	3.600	1.065	2.680	25	250	21	41084

Zinc Die Cast



Type 10BG



Application:

Used to connect bare copper wire to water pipe, ground rod or copper water tubing for grounding.

Standard Materials:

Zinc Die Cast with Steel Screws



UL Listed:

E93683

CSA file No. LR57925



CATALOG NUMBER	TRADE SIZE	WIRE SIZE MIN	WIRE SIZE MAX	DIM A	MIN.	MAX.	UNIT PACK	STANDARD PACK	WEIGHT (LBS.) PER 100	NAED MFG #78-5994 UPC/DCI #
10BG	1/2" - 1"	8 SOL.	2 STR.	2.220	0.545	1.575	25	250	17	41074
*10BB	1/2" - 1"	8 SOL.	2 STR.	2.400	0.625	2.000	25	250	17	41064

*Brass Colored Zinc Plated

Ground Clamps

For Armored Cable

Application:

Used to connect armored cable to water pipe for grounding.

Features:

- Special pressure bar grips armored cable insulation to decrease chances of grounding conductor being pulled out

Standard Materials:

Solid Brass with Steel Screws



UL Listed:

E93683

CSA file No. LR57925



Application:

Integral cast, lay-in lug style direct burial ground clamps are for making connection with #10AWG solid to #2 AWG stranded copper wire to 1/2" to 1" ground water pipe or 3/8" to 1" rebar. Clamps meet both UL and NEC requirements for burial in earth or embedment in concrete. Typical installations include swimming pool and service grounding.

Features:

- Combines FOUR clamps into ONE
- It eliminates, rebar clamp, clamp with steel screws, clamp with brass screws, and direct burial clamp
- Configure any job in 1/3 the time by presetting clamps with lay-in feature

Standard Materials:

Bronze Alloy with Stainless Steel Screws



UL Listed:

E93683


Listed for Direct Burial in Earth & Concrete

Patent Pending

With Steel Screws



Type 35B



CATALOG NUMBER	TRADE SIZE	WIRE SIZE MIN	WIRE SIZE MAX	DIM A	MIN.	MAX.	UNIT PACK	STANDARD PACK	WEIGHT (LBS.) PER 100	NAED MFG #78-5994 UPC/DCI #
35B	2-1/2" - 4"	8 SOL.	4 STR.	6.350	2.700	5.900	-	10	150	43524
36B	4" - 6"	8 SOL.	4 STR.	8.000	4.000	7.900	-	5	180	43624

Patent Pending Direct Burial-Ground Clamp for Rebar



Type RBC-50

CATALOG NUMBER	PIPE RANGE	REBAR RANGE	GROUND ROD RANGE	WIRE RANGE	MECHANICAL CONNECTION/ SPLICE	UNIT PACK	STD. PACK	WEIGHT (LBS.) PER 100	NAED MFG #78-5994 UPC/DCI #
RBC-50	1/2" - 1"	3/8" - 1"	1/4" - 1"	#10 SOL - #2 STR	TWO #8 SOL	25	250	21	66101

Ground Clamps, Rod Clamps and Hubs

For Rigid Conduit

Application:

Used to connect grounding conductor in rigid conduit to water pipe for grounding.

Standard Materials:

Solid Brass with Steel Screws



UL Listed:
E93683



Application:

Used to connect a grounding conductor to a drive.

Features:

- Approved for direct burial in ground and concrete
- Assembled with bronze hexagon headed bolt

Standard Materials:

Copper Alloy with Bronze Bolt

Third Party Certification:



UL Listed:
E93683
CSA File No.
LR57925



Application:

Used with ground pipe clamp to connect rigid conduit to water pipe for grounding.

Standard Materials:


Copper Alloy



UL Listed:
E93683
CSA File No.
LR57925



Type 307




CATALOG NUMBER	TRADE SIZE	HUB SIZE	DIM A	MIN.	MAX.	UNIT PACK	STANDARD PACK	WEIGHT (LBS.) PER 100	NAED MFG #78-5994 UPC/DCI #
301	1/2" - 1"	1/2"	2.250	0.550	1.795	10	100	25	43014
302	1/2" - 1"	3/4"	2.250	0.550	1.795	10	100	30	43024
310	1/2" - 1"	1"	2.250	0.550	1.795	10	50	35	43104
307	1-1/4" - 2"	1/2"	3.600	1.390	3.000	10	50	75	43074
308	1-1/4" - 2"	3/4"	3.600	1.390	3.000	10	50	80	43084
309	1-1/4" - 2"	1"	3.600	1.390	3.600	-	25	85	43094
35C	2-1/2" - 4"	1/2"	2.430	0.500	1.380	-	10	140	43534
36C	4" - 6"	1/2"	8.000	4.000	7.900	-	2	175	43634
35D	2-1/2" - 4"	3/4"	2.430	0.500	1.380	-	10	185	43544
36D	4" - 6"	3/4"	8.000	4.000	7.900	-	2	215	43644
35E	2-1/2" - 4"	1"	2.430	0.500	1.380	-	10	225	43554
36E	4" - 6"	1"	8.000	4.000	7.900	-	2	280	43654

Ground Rod Clamps - Listed for Direct Burial




Type 201




CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	STANDARD PACK	WEIGHT (LBS.) PER 100	NAED MFG #78-5994 UPC/DCI #
200	1/2"	1.250	0.875	-	100	13	52004
201	5/8"	1.275	0.690	-	100	18	52014
202	3/4"	1.445	1.030	-	50	25	52024

Conduit Hubs

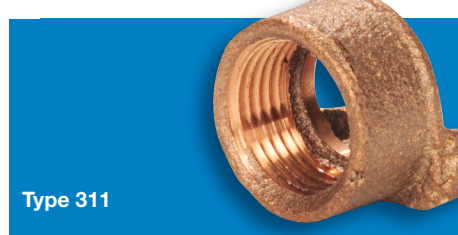

Type 311



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	UNIT PACK	STANDARD PACK	WEIGHT (LBS.) PER 100	NAED MFG #78-5994 UPC/DCI #
311	1/2"	1.000	1.500	25	100	9	43114
312	3/4"	1.250	1.880	25	100	17	43124
313	1"	1.500	2.136	25	100	20	43134