



LIQUIDTIGHT FITTINGS

Malleable Iron Straight Liquidtight Connectors	.. .82
Malleable Iron 90° Liquidtight Connectors	.. .83
Malleable Iron 45° Liquidtight Connectors	.. .84
Malleable Iron Straight Liquidtight Connectors with Aluminum Lugs	.. .85
Malleable Iron 90° Liquidtight Connectors with Aluminum Lugs	.. .86
Malleable Iron 45° Liquidtight Connectors with Aluminum Lugs	.. .87
Malleable Iron Straight Liquidtight Connectors with Copper Lugs	.. .88
Malleable Iron 90° Liquidtight Connectors with Copper Lugs	.. .89
Malleable Iron 45° Liquidtight Connectors With Copper Lugs	.. .90
Zinc Straight Liquidtight Connectors	.. .91
Zinc 90° Liquidtight Connectors	.. .92

Malleable Iron Straight Liquidtight Connectors

For Liquidtight Flexible Metallic Conduit

Application:

To secure, ground and seal Liquidtight Flexible Metal conduit, to boxes and enclosures

Features:

- Tapered threaded male hub NPT
- Compact, slim diameter with small turning radius
- Furnished with an insulated throat with steel locknut and sealing ring
- Liquidtight/Raintight/Oiltight
- Suitable for wet locations
- Long ferrule prevents pullout and tight bend conduit "pop-out"
- UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I


Standard Materials:

Malleable Iron/Steel Furrule


Standard Finish:

Zinc Plated

UL Listed:
cUL US E198258

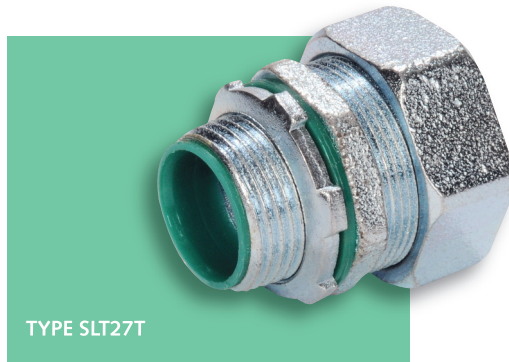

TYPE SLT27T



All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	UNIT PACK	STANDARD PACK	WEIGHT (LBS.) PER 100	NAED MFG #78-5994 UPC/DCI #
SLT47T	3/8"	1/2"	1.140	0.500	1.150	25	250	16	14419
SLT27T	1/2"	1/2"	1.250	0.500	1.280	25	250	18	14630
SLT28T	3/4"	3/4"	1.280	0.520	1.550	10	100	29	14640
SLT29T	1"	1"	1.430	0.650	1.800	5	50	40	14650
SLT30T	1-1/4"	1-1/4"	1.500	0.660	2.250	5	50	56	14309
SLT31T	1-1/2"	1-1/2"	1.610	0.730	2.440	10	50	71	14319
SLT32T	2"	2"	1.760	0.750	2.970	5	25	100	14329
SLT33T	2-1/2"	2-1/2"	2.180	1.010	4.010	1	10	367	14339
SLT34T	3"	3"	2.500	1.150	4.180	1	10	461	14349
SLT60T	3-1/2"	3-1/2"	2.610	1.180	5.250	1	10	675	14609
SLT61T	4"	4"	2.740	1.250	5.780	1	5	797	14619
SLT62T	5"	5"	3.125	1.500	6.063	-	1	1047	78062
SLT63T	6"	6"	3.375	1.563	7.500	-	1	1381	60001



Malleable Iron 90° Liquidtight Connectors

For Liquidtight Flexible Metallic Conduit

Application:

To secure, ground seal Liquidtight Flexible Metal conduit, to boxes and enclosures

Features:


- Tapered threaded male hub NPT
- Compact, slim diameter with small turning radius
- Furnished with an insulated throat with steel locknut and sealing ring
- Liquidtight/Raintight/Oiltight
- Suitable for wet locations
- Long ferrule prevents pullout and tight bend conduit "pop-out"
- UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

Standard Materials:


Malleable Iron/Steel Ferrule

Standard Finish:

Zinc Plated




TYPE SLT35T



All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	STANDARD PACK	WEIGHT (LBS.) PER 100	NAED MFG #78-5994 UPC/DCI #
SLT25T	3/8"	1/2"	1.31	0.50	1.15	1.37	10	100	28	14259
SLT35T	1/2"	1/2"	1.43	0.50	1.28	1.37	10	100	31	14690
SLT36T	3/4"	3/4"	1.62	0.52	1.55	1.50	10	100	46	14700
SLT37T	1"	1"	1.93	0.65	1.80	1.81	5	50	77	14710
SLT38T	1-1/4"	1-1/4"	2.37	0.66	2.25	1.94	-	10	98	14389
SLT39T	1-1/2"	1-1/2"	2.68	0.73	2.44	2.40	-	10	124	14399
SLT40T	2"	2"	3.18	0.75	2.97	2.64	-	5	179	14409
SLT65T	2-1/2"	2-1/2"	8.31	1.01	4.01	7.81	-	1	847	14659
SLT66T	3"	3"	9.80	1.15	4.18	9.15	-	1	1243	14669
SLT67T	3-1/2"	3-1/2"	11.18	1.18	5.25	11.22	-	1	1914	14679
SLT68T	4"	4"	12.98	1.25	5.78	12.54	-	1	2399	14689

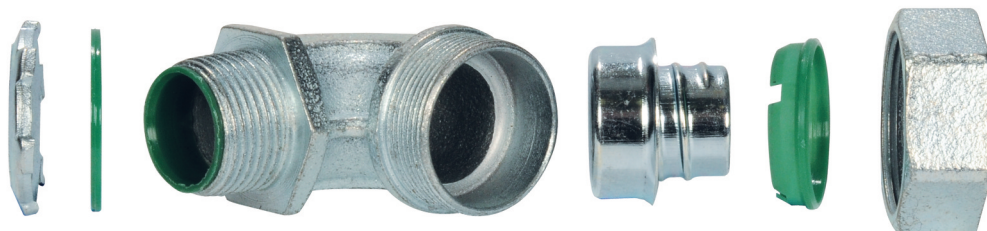

Malleable Iron 45° Liquidtight Connectors

For Liquidtight Flexible Metallic Conduit

Application:

To secure, ground and seal Liquidtight Flexible Metal conduit to boxes and enclosures.

Features:

- Tapered threaded male hub NPT
- Compact, slim diameter with small turning radius
- Furnished with an insulated throat with steel locknut and sealing ring
- Liquidtight/Raintight/Oiltight
- Suitable for wet locations
- Long ferrule prevents pullout and tight bend conduit "pop-out"
- UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I


Standard Materials:

Malleable Iron/Steel Ferrule


Standard Finish:

Zinc Plated

 **UL Listed:**
E198258

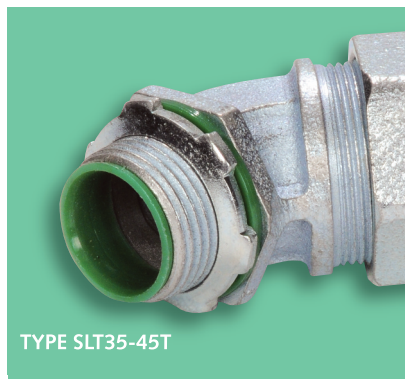

TYPE SLT35-45T



All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	STANDARD PACK	WEIGHT (LBS.) PER 100	NAED MFG #78-5994 UPC/DCI #
SLT25-45T	3/8"	1/2"	1.14	0.50	1.15	1.48	10	100	29	14825
SLT35-45T	1/2"	1/2"	1.25	0.50	1.28	1.51	10	100	29	14835
SLT36-45T	3/4"	3/4"	1.28	0.52	1.55	1.54	10	100	42	14836
SLT37-45T	1"	1"	1.43	0.65	1.80	1.81	5	50	66	14837
SLT38-45T	1-1/4"	1-1/4"	1.50	0.66	2.25	2.16	-	10	90	14838
SLT39-45T	1-1/2"	1-1/2"	1.61	0.73	2.44	2.43	-	10	112	14839
SLT40-45T	2"	2"	1.76	0.75	2.97	2.82	-	5	179	14840
SLT65-45T	2-1/2"	2-1/2"	2.18	1.01	4.01	4.41	-	1	582	14865
SLT66-45T	3"	3"	2.50	1.15	4.18	5.50	-	1	869	14866
SLT67-45T	3-1/2"	3-1/2"	2.61	1.18	5.25	5.93	-	1	1296	14867
SLT68-45T	4"	4"	2.74	1.25	5.78	8.34	-	1	1539	14868



Malleable Iron Straight Liquidtight Connectors

With Aluminum Lugs For Liquidtight Flexible Metallic Conduit

Application:

Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

Features:

- Tapered threaded male hub NPT
- Compact, slim diameter with small turning radius
- Furnished with Insulated throat, steel locknut, and sealing ring
- Liquidtight/Raintight/Oiltight
- Suitable for grounding & wet locations
- Long ferrule prevents pullout and tight bend conduit 'pop-out'
- UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I


Standard Materials:

Malleable Iron/
Steel Ferrule/
Aluminum Grounding Lug

Standard Finish:

Zinc Plated

 **UL Listed:**
E212551



All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	STD. PACK	WEIGHT (LBS.) PER 100	NAED MFG #78-5994 UPC/DCI #
SLT47ALT	3/8"	#4-#14	1.14	0.50	1.15	0.75	25	250	18	50000
SLT27ALT	1/2"	#4-#14	1.25	0.50	1.28	0.75	25	250	20	50001
SLT28ALT	3/4"	#4-#14	1.28	0.52	1.55	0.75	10	100	31	50002
SLT29ALT	1"	#4-#14	1.43	0.65	1.80	0.75	5	50	42	50003
SLT30ALT	1-1/4"	#4-#14	1.50	0.66	2.25	0.75	5	50	57	50004
SLT31ALT	1-1/2"	#4-#14	1.61	0.73	2.44	0.75	10	50	73	50005
SLT32ALT	2"	#4-#14	1.76	0.75	2.97	0.75	5	25	101	50006
SLT33ALT	2-1/2"	#1/0-#8	2.18	1.01	4.01	1.13	1	10	373	50007
SLT34ALT	3"	#1/0-#8	2.50	1.15	4.18	1.13	1	10	465	50008
SLT60ALT	3-1/2"	#3/0-#6	2.61	1.18	5.25	1.50	1	10	686	50009
SLT61ALT	4"	#3/0-#6	2.74	1.25	5.78	1.50	1	5	807	50010
SLT62ALT	5"	#6-#250MCM	3.13	1.50	6.06	1.69	-	1	1058	50011
SLT63ALT	6"	#6-#250MCM	3.13	1.56	7.50	1.69	-	1	1395	50012

Also available with copper lugs. See page 88.



Malleable Iron 90° Liquidtight Connectors

With Aluminum Lugs For Liquidtight Flexible Metallic Conduit

Application:

Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

Features:

- Tapered threaded male hub NPT
- Compact, slim diameter with small turning radius
- Furnished with Insulated throat, steel locknut, and sealing ring
- Liquidtight/Raintight/Oiltight
- Suitable for grounding and wet locations
- Long ferrule prevents pullout and tight bend conduit 'pop-out'
- UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I



Standard Materials:

Malleable Iron/
Steel Ferrule/
Aluminum Grounding Lug

Standard Finish:

Zinc Plated

 **UL Listed:**
E212551

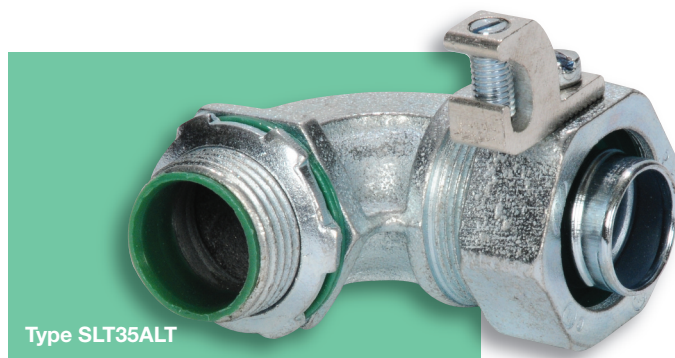

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	UNIT PACK	STD. PACK	WEIGHT (LBS.) PER 100 PCS.	NAED MFG #78-5994 UPC/DCI #
SLT25ALT	3/8"	#4-#14	1.31	0.50	1.15	1.37	0.75	10	100	18	50013
SLT35ALT	1/2"	#4-#14	1.43	0.50	1.28	1.37	0.75	10	100	20	50014
SLT36ALT	3/4"	#4-#14	1.62	0.52	1.55	1.50	0.75	10	100	31	50015
SLT37ALT	1"	#4-#14	1.93	0.65	1.80	1.81	0.75	5	50	42	50016
SLT38ALT	1-1/4"	#4-#14	2.37	0.66	2.25	1.94	0.75	-	10	57	50017
SLT39ALT	1-1/2"	#4-#14	2.68	0.73	2.44	2.40	0.75	-	10	73	50018
SLT40ALT	2"	#4-#14	3.18	0.75	2.97	2.64	0.75	-	5	101	50019
SLT65ALT	2-1/2"	#1/0-#8	8.31	1.01	4.01	7.81	1.13	-	1	373	50020
SLT66ALT	3"	#1/0-#8	9.80	1.15	4.18	9.15	1.13	-	1	465	50021
SLT67ALT	3-1/2"	#3/0-#6	11.18	1.18	5.25	11.22	1.50	-	1	686	50022
SLT68ALT	4"	#3/0-#6	12.93	1.25	5.78	12.54	1.50	-	1	807	50023

Also available with copper lugs. See page 89.



Malleable Iron 45° Liquidtight Connectors

With Aluminum Lugs For Liquidtight Flexible Metallic Conduit

Application:

Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

Features:

- Tapered threaded male hub NPT
- Compact, slim diameter with small turning radius
- Furnished with Insulated throat, steel locknut, and sealing ring
- Liquidtight/Raintight/Oiltight
- Suitable for grounding
- Long ferrule prevents pull-out and tight bend conduit "pop-out"
- UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I.

Standard Materials:


Malleable Iron/
Steel Ferrule/
Aluminum Grounding Lug

Standard Finish:


Zinc Plated



UL Listed:
E212551

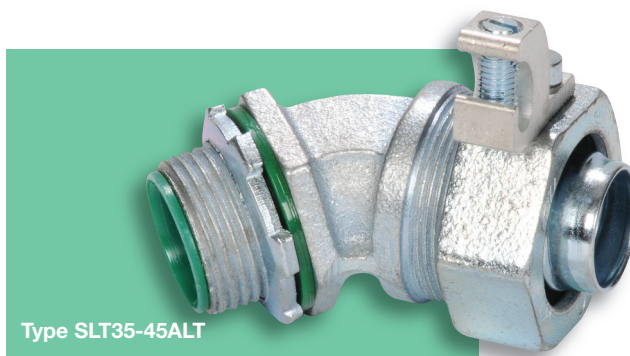


Type SLT35-45ALT

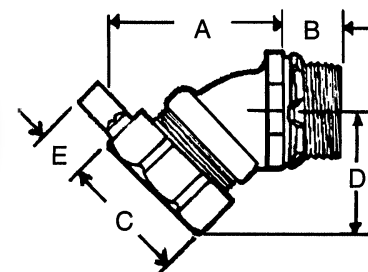

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	UNIT PACK	STD PACK	WEIGHT (LBS.) PER 100 PCS.	NAED MFG #78-5994 UPC/DCI #
SLT25-45ALT	3/8"	#4-#14	1.62	0.50	1.15	1.48	0.75	10	100	18	50024
SLT35-45ALT	1/2"	#4-#14	1.64	0.50	1.28	1.51	0.75	10	100	20	50025
SLT36-45ALT	3/4"	#4-#14	1.68	0.52	1.55	1.54	0.75	10	100	31	50026
SLT37-45ALT	1"	#4-#14	2.16	0.65	1.80	1.81	0.75	5	50	42	50027
SLT38-45ALT	1-1/4"	#4-#14	2.50	0.66	2.25	2.16	0.75	-	10	57	50028
SLT39-45ALT	1-1/2"	#4-#14	3.10	0.73	2.44	2.43	0.75	-	10	73	50029
SLT40-45ALT	2"	#4-#14	3.28	0.75	2.97	2.82	0.75	-	5	101	50030
SLT65-45ALT	2-1/2"	#1/0-#8	6.67	1.01	4.01	4.41	1.13	-	1	373	50031
SLT66-45ALT	3"	#1/0-#8	8.01	1.15	4.18	5.50	1.13	-	1	465	50032
SLT67-45ALT	3-1/2"	#3/0-#6	9.55	1.18	5.25	5.93	1.50	-	1	686	50033
SLT68-45ALT	4"	#3/0-#6	10.64	1.25	5.78	8.34	1.50	-	1	807	50034

Also available with copper lugs. See page 90.

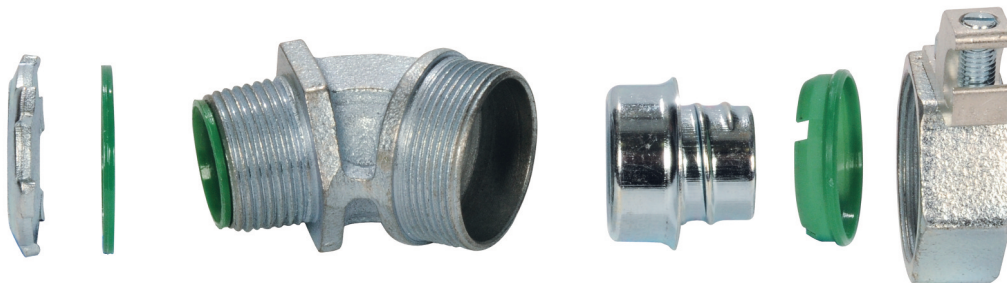

Malleable Iron Straight Liquidtight Connectors

With Copper Lugs For Liquidtight Flexible Metallic Conduit



Application:

Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

Features:

- Tapered threaded male hub NPT
- Compact, slim diameter with small turning radius
- Furnished with Insulated throat, steel locknut, and sealing ring
- Liquidtight/Raintight/Oiltight
- Suitable for grounding & wet locations
- Long ferrule prevents pullout and tight bend conduit 'pop-out'
- UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I


Standard Materials:

Malleable Iron/
Steel Ferrule/
Copper Grounding Lug


Standard Finish:

Zinc Plated/Natural

 **UL Listed:**
E93683

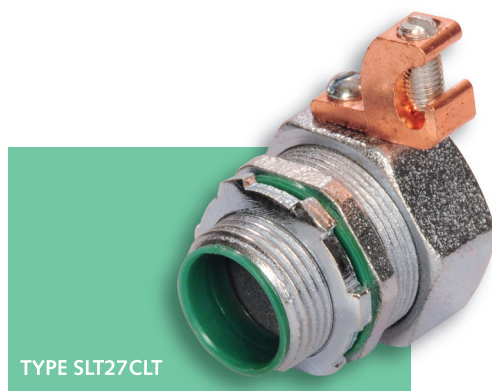

TYPE SLT27CLT



All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	STD. PACK	WEIGHT (LBS.) PER 100	NAED MFG #78-5994 UPC/DCI #
SLT47CLT	3/8"	#4-#14	1.14	0.50	1.15	0.75	25	250	18	50000
SLT27CLT	1/2"	#4-#14	1.25	0.50	1.28	0.75	25	250	20	50001
SLT28CLT	3/4"	#4-#14	1.28	0.52	1.55	0.75	10	100	31	50002
SLT29CLT	1"	#4-#14	1.43	0.65	1.80	0.75	5	50	42	50003
SLT30CLT	1-1/4"	#4-#14	1.50	0.66	2.25	0.75	5	50	57	50004
SLT31CLT	1-1/2"	#4-#14	1.61	0.73	2.44	0.75	10	50	73	50005
SLT32CLT	2"	#4-#14	1.76	0.75	2.97	0.75	5	25	101	50006
SLT33CLT	2-1/2"	#1/0-#8	2.18	1.01	4.01	1.13	1	10	373	50007
SLT34CLT	3"	#1/0-#8	2.50	1.15	4.18	1.13	1	10	465	50008
SLT60CLT	3-1/2"	#3/0-#6	2.61	1.18	5.25	1.50	1	10	686	50009
SLT61CLT	4"	#3/0-#6	2.74	1.25	5.78	1.50	1	5	807	50010
SLT62CLT	5"	#6-#250MCM	3.13	1.50	6.06	1.69	-	1	1058	50011
SLT63CLT	6"	#6-#250MCM	3.13	1.56	7.50	1.69	-	1	1395	50012

Also available with aluminum lugs. See page 85.



Malleable Iron 90° Liquidtight Connectors

With Copper Lugs For Liquidtight Flexible Metallic Conduit



Application:

Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

Features:

- Tapered threaded male hub NPT
- Compact, slim diameter with small turning radius
- Furnished with Insulated throat, steel locknut, and sealing ring
- Liquidtight/Raintight/Oiltight
- Suitable for grounding and wet locations
- Long ferrule prevents pullout and tight bend conduit 'pop-out'
- UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

Standard Materials:



Malleable Iron/
Steel Ferrule/
Copper Grounding Lug

Standard Finish:

Zinc Plated/Natural




UL Listed:
E93683

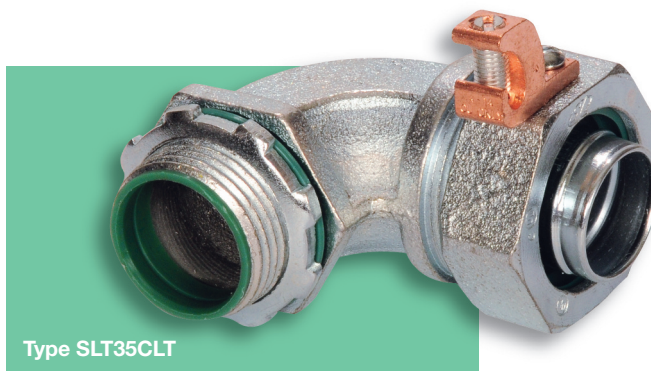

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	UNIT PACK	STD. PACK	WEIGHT (LBS.) PER 100 PCS.	NAED MFG #78-5994 UPC/DCI #
SLT25CLT	3/8"	#4-#14	1.31	0.50	1.15	1.37	0.75	10	100	18	50013
SLT35CLT	1/2"	#4-#14	1.43	0.50	1.28	1.37	0.75	10	100	20	50014
SLT36CLT	3/4"	#4-#14	1.62	0.52	1.55	1.50	0.75	10	100	31	50015
SLT37CLT	1"	#4-#14	1.93	0.65	1.80	1.81	0.75	5	50	42	50016
SLT38CLT	1-1/4"	#4-#14	2.37	0.66	2.25	1.94	0.75	-	10	57	50017
SLT39CLT	1-1/2"	#4-#14	2.68	0.73	2.44	2.40	0.75	-	10	73	50018
SLT40CLT	2"	#4-#14	3.18	0.75	2.97	2.64	0.75	-	5	101	50019
SLT65CLT	2-1/2"	#1/0-#8	8.31	1.01	4.01	7.81	1.13	-	1	373	50020
SLT66CLT	3"	#1/0-#8	9.80	1.15	4.18	9.15	1.13	-	1	465	50021
SLT67CLT	3-1/2"	#3/0-#6	11.18	1.18	5.25	11.22	1.50	-	1	686	50022
SLT68CLT	4"	#3/0-#6	12.93	1.25	5.78	12.54	1.50	-	1	807	50023

Also available with aluminum lugs. See page 86.

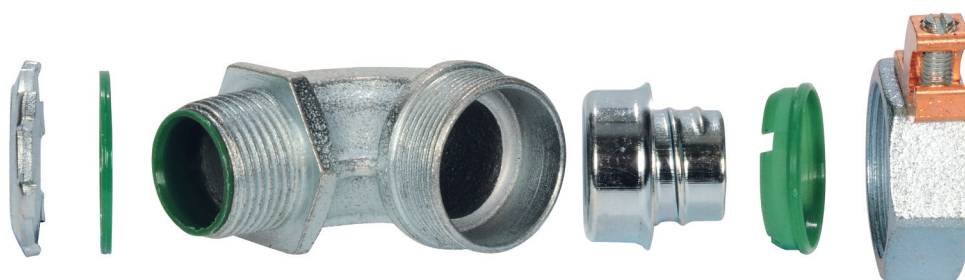

Malleable Iron 45° Liquidtight Connectors

With Copper Lugs For Liquidtight Flexible Metallic Conduit



Application:

Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

Features:

- Tapered threaded male hub NPT
- Compact, slim diameter with small turning radius
- Furnished with Insulated throat, steel locknut, and sealing ring
- Liquidtight/Raintight/Oiltight
- Suitable for grounding
- Long ferrule prevents pull-out and tight bend conduit "pop-out"
- UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I.


Standard Materials:

Malleable Iron/
Steel Ferrule/
Copper Grounding Lug


Standard Finish:

Zinc Plated/Natural

 **UL Listed:**
E93683

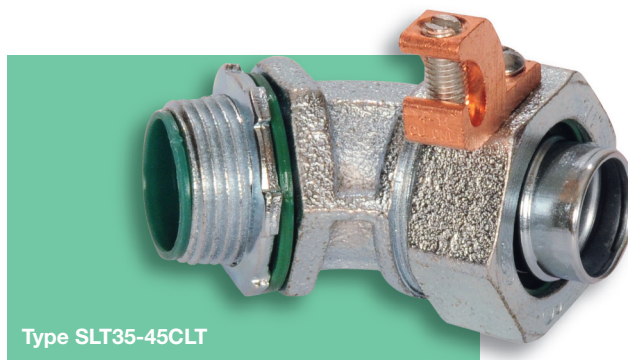


Type SLT35-45CLT

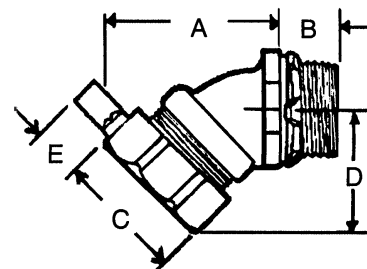

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	UNIT PACK	STD PACK	WEIGHT (LBS.) PER 100 PCS.	NAED MFG #78-5994 UPC/DCI #
SLT25-45CLT	3/8"	#4-#14	1.62	0.50	1.15	1.48	0.75	10	100	18	50024
SLT35-45CLT	1/2"	#4-#14	1.64	0.50	1.28	1.51	0.75	10	100	20	50025
SLT36-45CLT	3/4"	#4-#14	1.68	0.52	1.55	1.54	0.75	10	100	31	50026
SLT37-45CLT	1"	#4-#14	2.16	0.65	1.80	1.81	0.75	5	50	42	50027
SLT38-45CLT	1-1/4"	#4-#14	2.50	0.66	2.25	2.16	0.75	-	10	57	50028
SLT39-45CLT	1-1/2"	#4-#14	3.10	0.73	2.44	2.43	0.75	-	10	73	50029
SLT40-45CLT	2"	#4-#14	3.28	0.75	2.97	2.82	0.75	-	5	101	50030
SLT65-45CLT	2-1/2"	#1/0-#8	6.67	1.01	4.01	4.41	1.13	-	1	373	50031
SLT66-45CLT	3"	#1/0-#8	8.01	1.15	4.18	5.50	1.13	-	1	465	50032
SLT67-45CLT	3-1/2"	#3/0-#6	9.55	1.18	5.25	5.93	1.50	-	1	686	50033
SLT68-45CLT	4"	#3/0-#6	10.64	1.25	5.78	8.34	1.50	-	1	807	50034

Also available with aluminum lugs. See page 87.

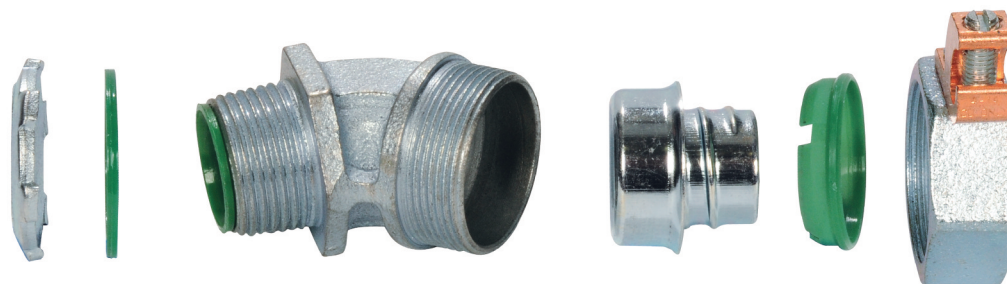

Zinc Straight Liquidtight Connectors

For Liquidtight Flexible Metallic Conduit

Application:

Terminate and seal liquidtight flexible metal conduit to either oiltight, liquidtight or raintight box or enclosure. Connectors can be used with tapered thread female entry or unthreaded knockout using the provided sealing washer and locknut.

Features:

- Furnished with zinc die cast locknut and sealing ring
- Liquidtight/Raintight/Oiltight
- Suitable for grounding (through 1¼")
- Suitable for wet locations

Standard Materials:


Zinc Die Cast



UL Listed:
E198258



Type LT27




CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	STANDARD PACK	WEIGHT (LBS.) PER 100 PCS.	NAED MFG #78-5994 UPC/DCI #
LT47	3/8"	1.440	0.400	1.260	25	250	16	14472
LT27	1/2"	1.500	0.420	1.385	25	250	20	14272
LT28	3/4"	1.600	0.420	1.720	10	100	28	14282
LT29	1"	1.785	0.550	1.900	5	50	44	14292
LT30	1-1/4"	1.900	0.546	2.290	5	50	64	14302
LT31	1-1/2"	2.737	0.520	2.633	-	10	87	14312
LT32	2"	2.080	0.585	3.156	-	5	121	14322
LT33	2-1/2"	3.025	0.775	4.205	-	1	250	14332
LT34	3"	3.530	0.920	4.910	-	1	355	14342
LT60	3-1/2"	3.660	0.920	5.470	-	1	480	14602
LT61	4"	3.875	0.987	5.925	-	1	570	14612

Insulated Throat



Type LT27T



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	STANDARD PACK	WEIGHT (LBS.) PER 100 PCS.	NAED MFG #78-5994 UPC/DCI #
LT47T	3/8"	1.530	0.490	1.260	25	250	16	14478
LT27T	1/2"	1.590	0.510	1.385	25	250	20	14278
LT28T	3/4"	1.690	0.510	1.720	10	100	28	14288
LT29T	1"	1.875	0.530	1.900	5	50	44	14298
LT30T	1-1/4"	1.990	0.636	2.290	5	50	64	14308
LT31T	1-1/2"	2.207	0.610	2.633	-	10	87	14318
LT32T	2"	2.170	0.675	3.156	-	5	121	14328
LT33T	2-1/2"	3.025	0.775	4.205	-	1	250	14338
LT34T	3"	3.530	0.920	4.910	-	1	355	14348
LT60T	3-1/2"	3.660	0.920	5.470	-	1	480	14608
LT61T	4"	3.875	0.987	5.925	-	1	570	14618

Zinc 90° Liquidtight Connectors

For Liquidtight Flexible Metallic Conduit

Application:

Terminate and seal liquidtight flexible metal conduit, at 90° angle, to either oiltight, liquidtight or raintight box or enclosure.


Features:

- Furnished with zinc die cast locknut and sealing ring
- Liquidtight/Raintight/Oiltight
- Suitable for grounding (through 1 1/4")
- Suitable for wet locations


Standard Materials:

Zinc Die Cast

 **UL Listed:**
E198258

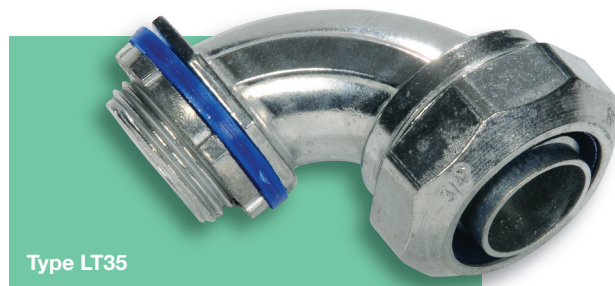

Type LT35




CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	STANDARD PACK	WEIGHT (LBS.) PER 100 PCS.	NAED MFG #78-5994 UPC/DCI #
LT25	3/8"	2.062	0.520	2.340	10	100	23	14252
LT35	1/2"	2.220	0.525	2.340	10	100	27	14352
LT36	3/4"	2.550	0.680	3.550	10	100	48	14362
LT37	1"	2.820	0.675	3.785	5	50	76	14372
LT38	1-1/4"	3.362	0.700	3.960	-	10	112	14382
LT39	1-1/2"	3.450	0.700	4.130	-	10	147	14392
LT40	2"	4.036	0.575	4.700	-	5	196	14402
LT65	2-1/2"	5.215	0.770	5.375	-	1	400	14652
LT66	3"	6.100	1.100	6.500	-	1	550	14662
LT67	3-1/2"	6.715	1.100	7.450	-	1	740	14672
LT68	4"	6.780	1.100	8.000	-	1	970	14682

Insulated Throat



Type LT35T



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	STANDARD PACK	WEIGHT (LBS.) PER 100 PCS.	NAED MFG #78-5994 UPC/DCI #
LT25T	3/8"	2.152	0.610	2.340	10	100	23	14258
LT35T	1/2"	2.310	0.615	2.340	10	100	27	14358
LT36T	3/4"	2.640	0.770	3.550	10	100	48	14368
LT37T	1"	2.910	0.765	3.785	5	50	76	14378
LT38T	1-1/4"	3.452	0.790	3.960	-	10	112	14388
LT39T	1-1/2"	3.540	0.790	4.130	-	10	147	14398
LT40T	2"	4.126	0.665	4.700	-	5	196	14408
LT65T	2-1/2"	5.215	0.860	5.375	-	1	400	14658
LT66T	3"	6.100	1.100	6.500	-	1	550	14668
LT67T	3-1/2"	6.715	1.100	7.450	-	1	740	14678
LT68T	4"	6.780	1.100	8.000	-	1	970	14688