

## PositionLine | Position Indicators

- Mechanical digital position indicators
- Electronic digital position indicators
- Mechanical control knobs
- Mechanical analog position indicators and handwheels

## Success is the result of a commitment to precision, innovation and customer benefit

"Precision is SIKO's top priority and standard!" True to this philosophy, SIKO has been developing and producing innovative solutions in distance and angle measurement technology for more than 45 years now. Based in Buchenbach in the foothills of the Black Forest, the company produces its own measurement technologies, which are a global success in all areas of mechanical engineering. Even today, SIKO's core concept is still manifest in its innovative power, product development and company spirit. Since taking over the business in 1990, industrial engineer Horst Wandres, son of its founder, has continued to develop this philosophy with impressive results.



We speak the same language: At SIKO, a willingness to participate in open dialog enhances engineering performance. Our production site advantages are not interchangeable.



## Intelligent solutions

Attentive ears will always find the right solution. Automation and process optimization are the cornerstones of SIKO's ambitious new technologies and goal-oriented measurement solutions. The company pursues a clear, consistent line of development, ranging from digital position indicators and handwheels through incremental encoders, absolute encoders and measurement displays to future-oriented technologies with electronically programmable or magnetic measurement systems (MagLine).

SIKO again follows the road to success with its compact, ultra-resilient actuators (DriveLine), which enable automated adjustment of machine axles.

### 6 distinctive product lines

<b>PositionLine</b>	Mechanical and electronic position indicators, handwheels with analog indicators, control knobs
<b>RotoLine</b>	Magnetic and optical encoders, geared potentiometers
<b>LinearLine</b>	Wire-actuated encoders
<b>DriveLine</b>	Actuators
<b>MagLine</b>	Magnetic length and angle measurement systems
<b>DisplayLine</b>	Measurement displays



## Consistent teamwork

The secret of SIKO's development prowess lies in the motivation and team spirit of its workers. SIKO has a conscious policy of integrating the experiences of its 170 employees, which has a dynamic effect on all areas of company life. Outstanding individual performances blend together to enhance the efficiency of the whole organization.

Not one for all but all together – this motto typifies SIKO's synergetic development process, delivering solutions which dominate the market in all aspects of "measurement technology in mechanical engineering".

This is SIKO today. Precision in motion, dynamic and open for the future ...



<b>1.0   PositionLine Product overview</b>	<b>4</b>
1.1   Mechanical digital position indicators	6
1.2   Electronic digital position indicators	28
1.3   Mechanical control knobs	42
1.4   Mechanical analog position indicators and handwheels	60
1.5   Accessories	96
1.6   Product index, Contact information	108

**1.0**

1.1

1.2

1.3

1.4

1.5

1.6

### Mechanical or electronic: Absolute tracking of path and angle positions

PositionLine is a track-proven range of products which has grown in line with customers' needs. The latest generation of SIKO programmable electronic indicators is a consistent further development of the versatile mechanical digital position indicators and handwheels and also ensures outstanding performance in bus-controlled applications.

The mechanical control knobs are a special feature, combining miniaturized handwheel technology with the gear unit assisted, mechanical digital indicators in orange.

### Mechanical digital position indicators

Position values on shafts and spindles can be simply and clearly controlled with the original SIKO counters. High mechanical precision and fully developed details combined with easy readability and a long service life have put these orange counters at the forefront of this technology market. Extremely simple installation and retrofitting is one of the decisive advantages of the SIKO position indicators. The displayed value can be adapted to the required spindle pitch with an integrated gear unit.

#### Mechanical displays

Hollow shaft diameters ranging from 6–35 mm
Maximum digit height 7 mm
Mechanical detent/lock
Selectable design (reading position)
Plastic or metal housing



### Electronic digital position indicators

Electronic position indicators have additional advantages over mechanical indicators for automation applications. With this functional principle, the axis motion is tracked either magnetically or capacitively and then evaluated. The spindle pitch, direction of rotation and decimal point can be freely programmed. As they are battery-powered, they can also be used as absolute indicators. Depending on the version, the position values are communicated to a computer or controller through an interface for further processing.

#### Electronic displays

LCD displays
Absolute, battery-buffered
Programmable parameters
Resolutions up to 0.001 mm
RS 485 bus interface





## Mechanical control knobs

This sophisticated new SIKO development combines precise functionality with modern industrial design. An innovative gear unit permits integration of the mechanical digital display directly in the control knob. The mechanical control knobs stand for economy, a wide application range, easy handling and outstanding design.



### Control knobs with display

Hollow shaft diameters of 6–14 mm
Display integrated in adjustment element
Analog and digital displays
Selectable design (reading position)
Rotary knob made of metal or plastic

## Mechanical analog position indicators and handwheels

If machine spindles are not only adjusted manually but the position is to be displayed at the same time, then handwheels with an integrated position indicator are the right choice.

### Handwheels with display


Handwheel diameters of 56–320 mm
Analog display with scale
Digital via integrated display
Corrosion and vibration-resistant, oil-filled
Handwheel made of metal or plastic

This reliable combination can also be simply mounted on horizontal or vertical spindles under demanding conditions. Exact manual positioning is therefore possible without additional adjustment elements. Everything is in full view: Individual scale division or even integrated digital indicators guarantee reliable readability.

1.0



# 11

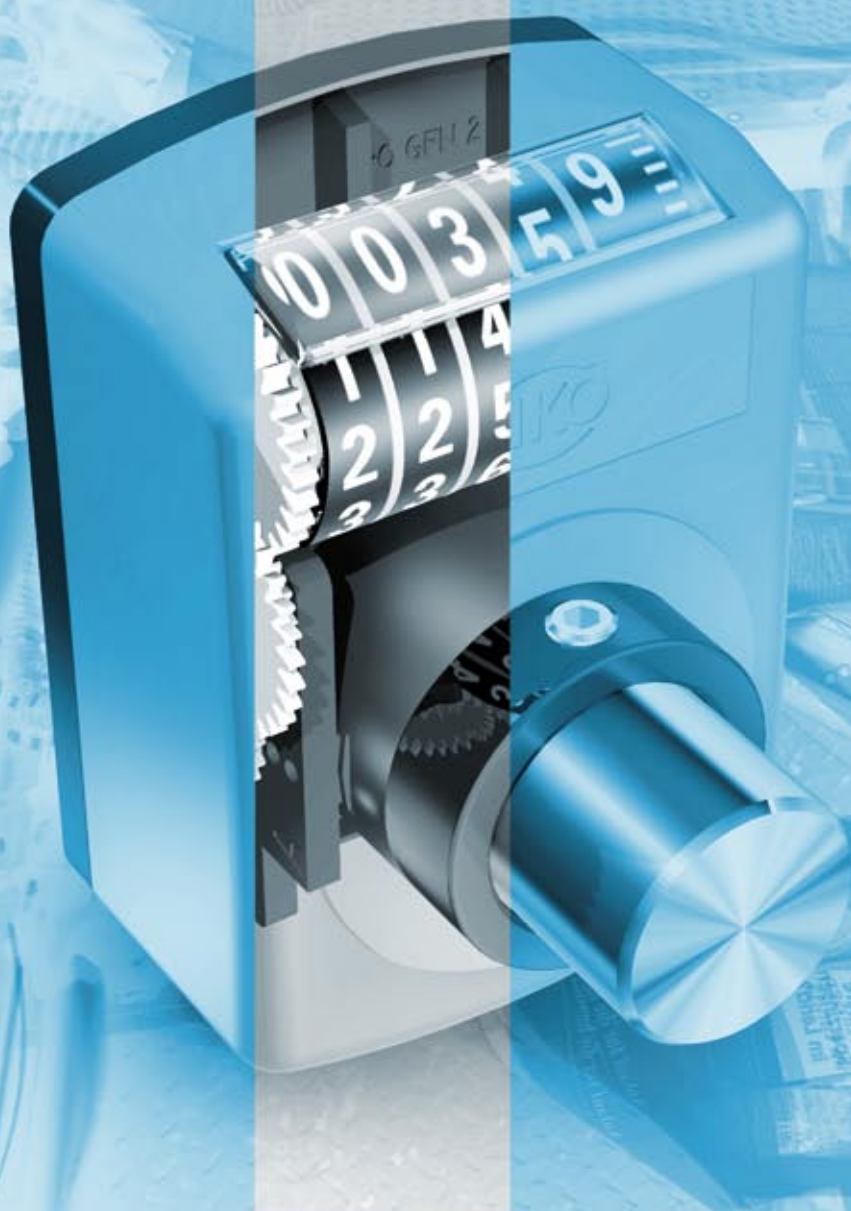

### 1.0 | PositionLine Product overview

3

#### 1.1 | Mechanical digital position indicators

General information and areas of application	8
Technical details	10
Function and application	12
Product matrix	13
Products	
DA02	14
DA04	16
DA05/1	18
DA08	20
DA09S	22
DA10	24
DA10R/1	26

#### 1.2 | Electronic digital position indicators

28

#### 1.3 | Mechanical control knobs

42

#### 1.4 | Mechanical analog position indicators

and handwheels 60

#### 1.5 | Accessories

96

#### 1.6 | Product index, Contact information

108

1.0

1.1

1.2

1.3

1.4

1.5

1.6

1.7



### Measurement and indication directly on the shaft – always clearly readable and versatile.

With its mechanical digital position indicators, SIKO offers customers an original and mature product line. The highly adaptable, functional concept is world-famous and the interaction of variable gear ratios and modular roll indicators is unique.

Digital indicators are a further development of the handwheel with analog displays. However, their “nonius”, a type of vernier on handwheel indicators, can only display the values of one spindle rotation. But what happens if you have to log several rotations?

This requires technology which is functional and robust and has two outstanding features:

- A multi-digit display including a digital point and fine reader for optimum reading precision
- A gear unit that can be customized to suit individual requirements which “converts” a shaft rotation into an easily understandable unit of measurement.

Position values can be monitored reliably and directly on the shaft or spindle with the original SIKO counters. Simply slip onto the shaft, secure in place – ready! With their mature technology, the small “orange indicators” are in untiring use in millions of applications all over the world.



Seeing what's important: Indication precision even after the decimal point – you won't miss anything with the effective SIKO magnifying lens.

### Benefits:

- Long service life due to consistent further development
- Clear and precisely controllable, readable digital values
- Modifiable displays due to individual ratios
- Simple and cost-effective retrofitting
- Easy slip-on hollow shaft mounting

Clever solution: Window with magnifying lens permits an even more compact design.

The digital indicator gear units can be adapted flexibly to specified ratios.



Simple and practical: Variable gear unit versions, functional overall design with a simple slip-on and locking method make the digital indicators a true classic.




## Applications

SIKO position indicators are used in a wide range of sectors and for all production environments, as almost all machines and systems feature guide elements, material stops or tools which require precise and reliable positioning or alignment.

The digital position indicators are ideal for monitoring roller adjustment on sheet metal bending machines. The solid cast design of the counters withstands the extreme mechanical influences under tough conditions such as those on round sheet polishing machines, ensuring exact manufacturing. They are also suitable for a wide range of wood-processing applications. Several work steps are often performed on a single machine, panels cut and milled and edges glued and polished.

SIKO counters are ideal adjustment aids in the metal, plastic and wood processing industries.

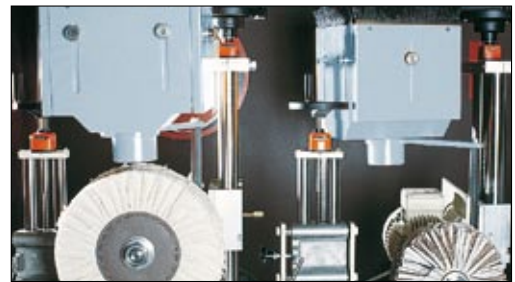

1



2



3



4

[1] Surface processing in the furniture industry: Tools which are perfectly coordinated with digital indicators ensure a perfect finish. [2] Edge jointing and forming – in manual operation number settings must be accessible quickly and reliably. [3] Both as original equipment or retrofitted components, digital position indicators mounted on a shaft can be effectively integrated into all machine configurations. [4] Within the metal forming process chain, digital indicators are responsible for the workpiece alignment.

Photographs provided by the companies according to the sequence of numbers: Ott, Hymen, Hebrock, Dreistern

### Determining decimal points

The following table shows the digital point principle of the digital indicators. For example, to obtain the reading "10.0", the indicator must count "100" with the decimal place 1 after the first rotation. During series production, the decimal point is marked by a colored intermediate ring. SIKO deals with the relationship between the spindle pitch and decimal point as follows: The spindle pitch serves as a reference. If this is 4 mm, the gear unit is designed so that 4.0 appears on the display after the first rotation.

Ordering code	Indication	Display
for decimal place	e.g., 5-digit	
0	00000	00000
1	0000.0	0000 0
2	000.00	000 00
3	00.000	00 000
4	0.0000	0 0000


### Sense of rotation

The sense of rotation of the axis influences the gear unit installed in the digital indicator. Digital position indicators are available in two directions of rotation in relation to the machine axis:

"i" stands for clockwise

"e" stands for counter-clockwise

Ascending values are shown on the display in accordance with the "i" and "e" ordering code.

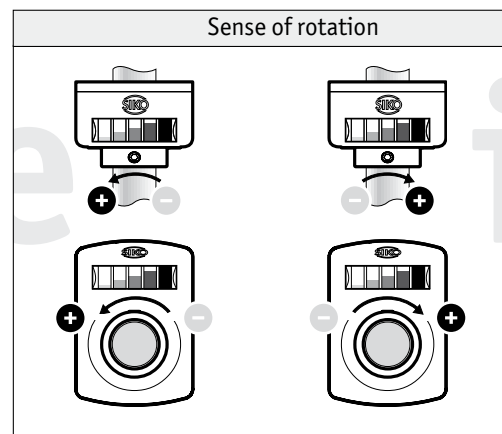


"+" shows the direction of rotation of the respective machine shaft. The ordering codes "e" and "i" specify in which direction of rotation the increasing values appear on the display.

### Mounting position

Two factors determine this ordering code:

- The orientation of the machine shaft
- The line of vision to the window (decades)

The number and orientation of the digital indicator window and the visible decades are determined with a numeric code (e.g., 02, 04, etc.).

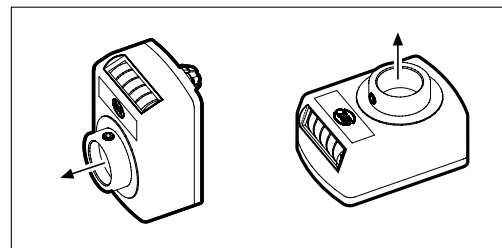

### Orientation aid for the counting direction

The "direction arrow" can be printed on the DA04 and DA09S models as an option. Combined with "+" and "-", this shows clearly in which direction of rotation of the shaft/spindle the decades are increased or decreased [Fig. 1]. Printing is not available on black housings.

### Axial seal

When axial seals are used [Fig 2], the set screw should not protrude over the shaft surface. Please screw in until it is flush; if necessary provide a recess in the shaft.




## Mounting torque support

The radius of the shaft is added to the space measurement between the hollow shaft and torque shaft. This measurement is marked on the mounting surface with a slide gauge and scribe [1], then center-punched [2] and drilled (for the drilling diameter and depth refer to the technical drawings). After correct pre-drilling, stress-free mounting of the position indicator must be possible [3, 4].

## Locking on the shaft

The set screw is screwed in and tightened for reliable locking on the shaft. If axial seals are used, the set screw must be screwed in until it is flush (if necessary provide a recess in the shaft).

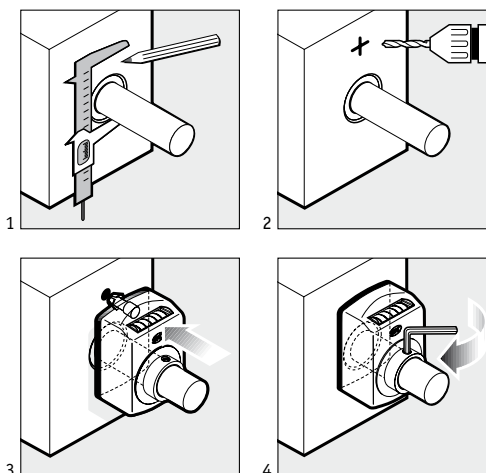

## Torque support (2 versions)


You have the choice between the pin [A] or umbrella [B] versions on almost all position indicators. The umbrella type torque pin is the optimum solution for compensating for installation tolerances.



## Changing the counting direction

The counting direction can be subsequently changed on the position indicators DA05/1 and DA08. To this purpose carefully open the housing. Slacken the clamping screws of the bevel gears on the shaft, so that they can be moved. These must be subsequently firmly re-tightened. When moving the gears, ensure correct meshing and smooth running.

If the left gear wheel is engaged [1], the counting direction is positive in a clockwise direction; if the right gear wheel is engaged [2], the counting direction is positive in an anti-clockwise direction. The diagram shows a view from the rear.

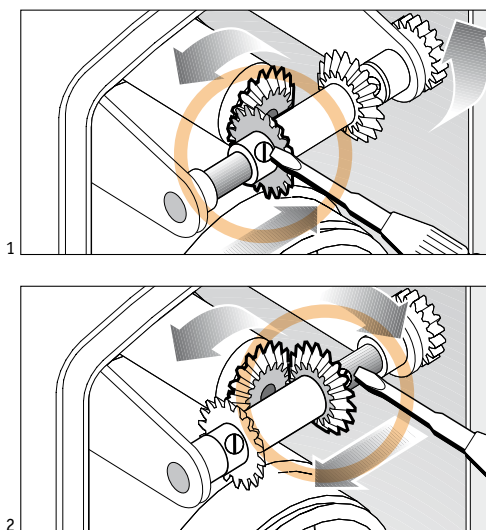

## Inch display: Advantages of the analog principle

While digital principles depend on the resolution, axial rotation has an infinite resolution. Theoretically the smallest of rotation dimensions can be divided into any required number of intermediate steps. This means that loss-free display of metric pitches is also possible in inches. The gear unit makes the conversions.

### Example:

4 mm in inches; display value is  $4/25.4 = 0.15$  (748). Although the last 3 digits "748" are not shown, they are "carried along" in the gear unit due to the analog measuring principle.

mm < > inch

### Ambient conditions

### Examples of use

### Benefits




#### Direct rotation:

Direct action via axle or spindle. The principle of action corresponds to that of a compound table or of linear guides.



E.g., compound tables, planing or dowel drilling machines ...

- Direct display after x,y adjustment
- Easy mounting
- Precise positioning
- Flexible indication of values
- mm or inch



E.g., tooling in the lumber and metal industries



E.g., rewind cutting machines in the paper/foil industries



#### Indirect rotation:

Indirect action (offset) on racks via cogwheel or worm gear.



E.g., angle adjustment units on saws, rotary and milling tables








- Exact angle indication
- Variable diameters
- Variable mounting positions



E.g., end stop systems



### Mechanical digital position indicators

							
	DA02	DA04	DA05/1	DA08	DA09S	DA10	DA10R/1
<b>Page</b>	14	16	18	20	22	24	26
<b>Housing</b>							
Plastic	•	•			•	•	•
Zinc die-cast			•	•	•		
<b>Displays</b>							
3 decades*	•						
4 decades*		•		•			
5 decades*			•	•	•	•	•
<b>Digit height</b>							
in mm, approximately	4	6	7	4,5	7	7	7
<b>Hollow shaft</b>							
Diameter (mm)	10	14	20	20	20	30	30
<b>Dimensions</b>							
WxHxD (mm), approx.	22x33x26	33x47x31	56x82x70	57x107x59	48x67,5x38,5	56x75x52	56x84x70


\* Decade = digit ring with 10-division

# Mechanical digital position indicator DA02

## Very small design

### Profile

- Ultra-small design
- Hollow shaft with max. Ø of 10 mm
- Minimum axle base of 19 mm
- Counter can be designed for “mm” or “inch”
- With stainless-steel driving shaft as an option

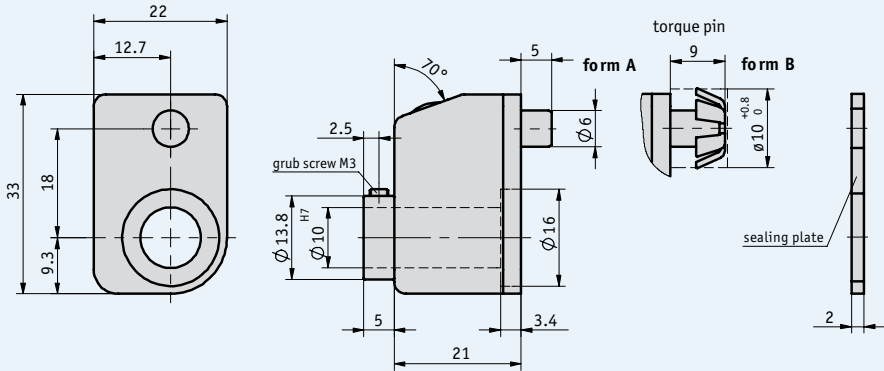

### Mechanical data

Feature	Technical data	Additional information
Counter	3 decades	
Digit height	approx. 4 mm	
Housing	plastic, reinforced	
Weight	0.02 kg	
Ambient temperature	max. +80 °C	

#### ■ Max. speed

Indication after 1 <sup>st</sup> revolution	Max. speed (rpm)
010	500 (1500)
015	500 (1000)
020	500 (750)
025	500 (600)
030	500
040	375
050	300
060	250
080	180
100	150

$$\text{Formula for max. speed} = \frac{15\,000}{\text{Indication after 1}^{\text{st}} \text{ revolution}}$$

**!** Speeds >500 rpm must only be run for short periods.

Order

■ Design

Display	Mounting position				Counting direction
	 02	 04	 06	 07	

Note: Characters highlighted in orange are order features

■ Order table

Feature	Order data	Specification	Additional information
Design/mounting position	... A	02, 04, 06, 07	see the icons illustrating the mounting position
Indication after 1 <sup>st</sup> revolution	... B	7/5, 10, 12/5, 15, 17/5, 20, 25, 30, 40, 50, 60, 80, 100 others on request	/5 = arithmetical value not displayed
Decimal place	0 1 2	0 = 000 1 = 00.0 2 = 0.00	
Counting direction = ascending values	i e	D ascending values clockwise ascending values counter-clockwise	
Hollow shaft/diameter (mm)	10 ... ...	E Ø 10 mm VA10 RH6, RH7, RH8	stainless steel reducing bush
Housing color	0 S	F orange RAL 2004 black	
Torque support/form	A B	G form A form B for tolerance compensation	

■ Order code

DA02 -  -  -  -  -  -  -   
A B C D E F G

Scope of delivery: DA02

Accessories:

Reducing bushes


page 106

Additional information:

General information and areas of application


page 8 cont.

- Hollow shaft, max. Ø 14 mm
- Counter with 4 decades and fine reading
- Detent as an option
- Magnifying function for good readability
- Stainless-steel driving shaft as an option
- Axial seal, dustproof and hose-proof
- Clamping plate (see accessories)

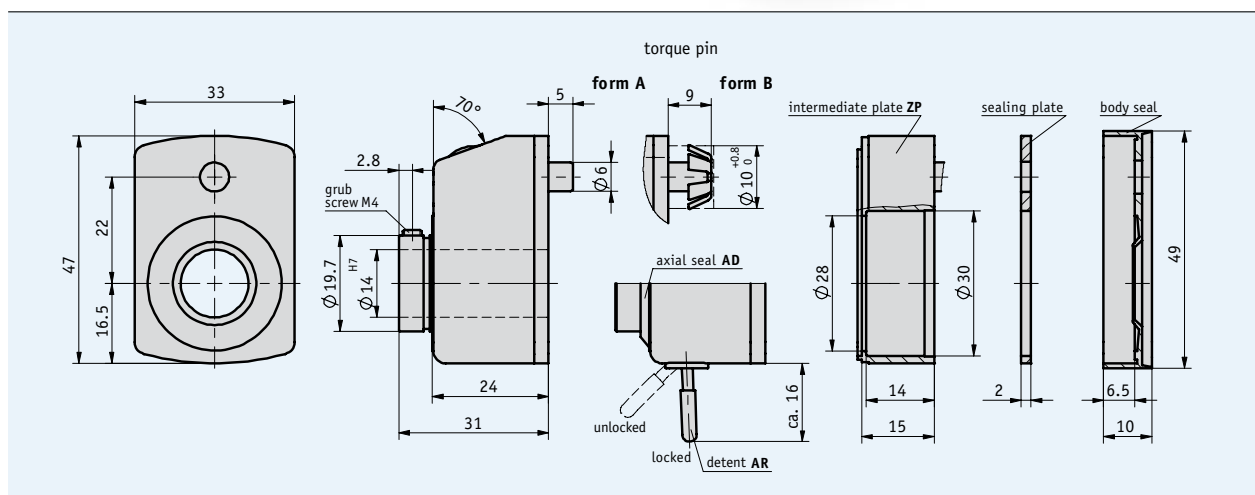

Feature	Technical data	Additional information
Counter	4 decades, fine reading	
Digit height	approx. 6 mm	
Housing	plastic, reinforced	
Weight	0.05 kg	
Ambient temperature	max. +80 °C	

Indication after 1 <sup>st</sup> revolution	Max. speed (rpm)
0010	500 (1500)
0015	500 (1000)
0020	500 (750)
0025	500 (600)
0030	500
0040	375
0050	300
0060	250
0080	180
0100	150

 *Speeds >500 rpm must only be run for short periods.*

► **Accessories:**







page 106  
page 100

page 8 cont.



### Order

#### ■ Design

Display	Mounting position				Counting direction
 Fine reading	 <b>02</b>	 <b>04</b>	 <b>06</b>	 <b>07</b>	

Note: Characters highlighted in orange color are order features

#### ■ Order table

Feature	Order data	Technical data	Additional information
Design/mounting position	... <b>A</b>	<b>02, 04, 06, 07</b>	see the icons illustrating the mounting positions
Indication after 1 <sup>st</sup> revolution	... <b>B</b>	<b>10, 12/5, 15, 17/5, 20, 25, 30, 35, 40, 50, 60, 80, 100</b> others on request	/5 = arithmetical value not displayed
Decimal place	<b>0</b> <b>C</b> <b>1</b> <b>2</b> <b>3</b>	<b>0 = 0000</b> <b>1 = 000.0</b> <b>2 = 00.00</b> <b>3 = 0.000</b>	
Counting direction = ascending values	<b>i</b> <b>D</b> <b>e</b>	ascending values clockwise ascending values counter-clockwise	
Hollow shaft/diameter (mm)	... <b>E</b> ... ...	<b>14, 12.7, 15, 16</b> <b>VA5, VA10, VA14, VA15</b> <b>RH4, RH6, RH8, RH10, RH12</b>	stainless steel reducing bush
Housing color	<b>O</b> <b>F</b> <b>S</b> <b>GR</b> <b>FR</b>	orange RAL 2004 black RAL 9005 gray RAL 7035 blazing red	
Torque support/form	<b>A</b> <b>G</b> <b>B</b>	form A form B for tolerance compensation	
Window	<b>K</b> <b>H</b> <b>M</b> <b>OS</b>	plastic mineral glass without window	
Seal	<b>OAD</b> <b>I</b> <b>AD</b> <b>GD</b>	without additional seal with axial seal with axial and housing seal	
Detent/hollow shaft	<b>OAR</b> <b>K</b> <b>AR</b>	without detent with detent	anti-vibration protection M ~ 20 Ncm
Intermediate plate	<b>OZP</b> <b>L</b> <b>ZP</b>	without intermediate plate with intermediate plate	
Sealing plate	<b>BP</b> <b>M</b> <b>GK</b> <b>OD</b>	provided with the accessories pack glued without sealing plate	only with seal "GD"
Arrow	<b>ORP</b> <b>N</b> <b>P/M</b> <b>M/P</b>	without arrow plus/minus minus/plus	see technical details see technical details

#### ■ Order code

**DA04** -   -   -   -   -   -   -   -   -   -   -   -   -   -  

A B C D E F G H I K L M N

# Mechanical digital position indicator DA05/1


## With fine adjustment

### Profile

- Robust design in a metal housing
- Hollow shaft, max. Ø 20 mm
- Counter with 5 decades and fine reading
- Display can be designed for “mm” or “inch”
- Attenuated counter system
- Fine setting for correction of dimensions
- Reversible counting direction



1.1

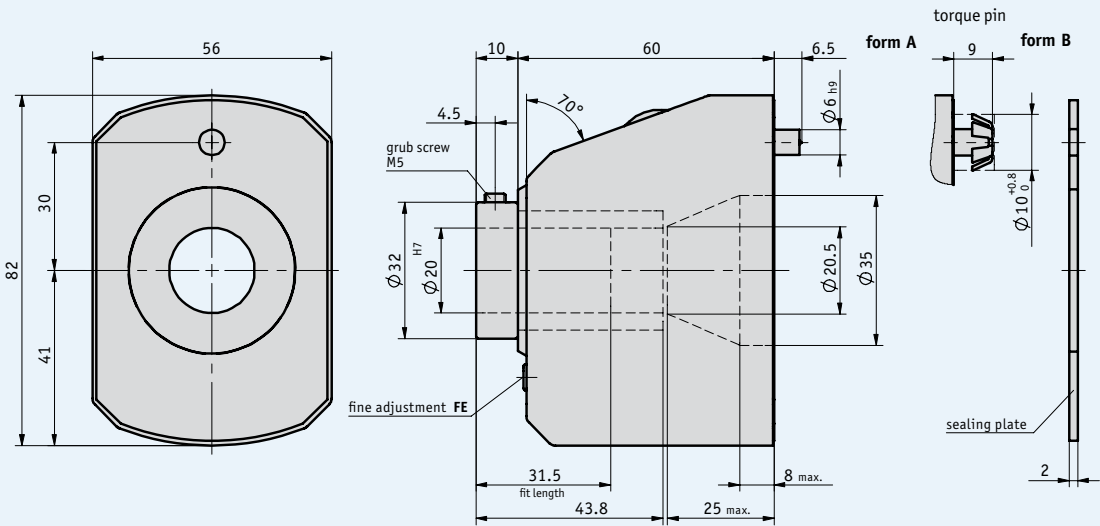

### Mechanical data

Feature	Technical data	Additional information
Counter	5 decades, fine reading	
Digit height	approx. 7 mm	
Housing	zinc die-cast	
Weight	0.5 kg	
Counting direction	adjustable	
Display adjustment	via adjusting screw	
Ambient temperature	max. +80 °C, design/mounting position	

#### ■ Max. speed





Indication after 1 <sup>st</sup> revolution	max. speed (rpm)
00010	500 (1500)
00015	500 (1000)
00020	500 (750)
00025	500 (600)
00030	500
00040	375
00050	300
00060	250
00080	180
00100	150

$$\text{Formula for max. speed} = \frac{15\,000}{\text{Indication after 1<sup>st</sup> revolution}}$$

**!** Speeds >500 rpm must only be run for short periods.

### Order

#### ■ Design

Display	Mounting position		Counting direction*
 Fine reading	 <b>02</b>	 <b>04</b>	

Note: Characters highlighted in orange are order features

#### ■ Order table

Feature	Order data	Specification	Additional information
Design/mounting position	... <b>A</b>	<b>02, 04</b>	see the icons illustrating the mounting positions
Indication after 1 <sup>st</sup> revolution	... <b>B</b>	<b>10, 15, 20, 25, 30, 31/5, 40, 50, 60, 80, 100</b> others on request	/5 = arithmetical value not displayed
Decimal place	<b>0</b> <b>1</b> <b>2</b> <b>3</b> <b>4</b>	<b>C</b> 0 = 00000 1 = 0000.0 2 = 000.00 3 = 00.000 4 = 0.0000	
Counting direction = ascending values	<b>i</b> <b>e</b> <b>e/i</b>	<b>D</b> ascending values clockwise ascending values counter-clockwise customer-adjustable	by opening the housing, see technical details
Hollow shaft/diameter (mm)	... <b>E</b>	<b>20, 19.05, 19</b> <b>RH6, RH8, RH10, RH12, RH14</b> <b>RH16, RH17.5, RH18</b>	reducing bush reducing bush
Housing color	<b>O</b> <b>S</b> <b>R</b> <b>FR</b> <b>U</b>	<b>F</b> orange RAL 2004 black RAL 9005 red RAL 3004 blazing red RAL 3000 unvarnished	
Fine adjustment	<b>FE</b> <b>OFE</b>	<b>G</b> with fine adjustment without fine adjustment	
Slip clutch	<b>RK</b> <b>ORK</b>	<b>H</b> with slip clutch without slip clutch	
Torque support/form	<b>A</b> <b>B</b>	<b>I</b> form A form B for tolerance compensation	
Labyrinth seal	<b>OLD</b> <b>LD</b>	<b>K</b> without labyrinth seal with labyrinth seal	

#### ■ Order code

DA05/1 -  -  -  -  -  -  -  -  -  -

A B C D E F G H I K

Scope of delivery: DA05/1, User information

#### Accessories:

Reducing bushes

Page 106


#### Additional information:

General information and areas of application

Page 8 cont.

Profile

- Extremely sturdy design in a metal housing
- Hollow shaft, max. Ø 35 mm
- Counter with 4 or 5 decades
- Zeroing function
- Clamp lever integrated in the design
- Stainless-steel driving shaft as an option
- Reversible counting direction

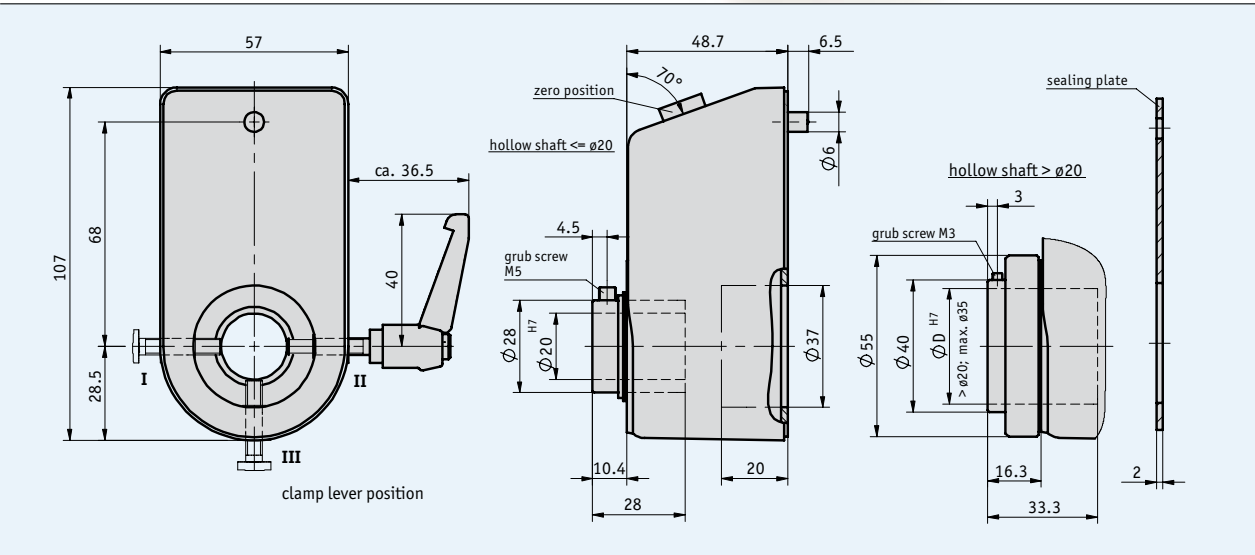

Mechanical data


Feature	Technical data	Additional information
Counter	4 decades, fine reading	
Digit height	approx. 4.5 mm	
Housing	zinc die-cast	
Weight	0.7 kg	
Counting direction	adjustable	
Zero setting	selectable	
Ambient temperature	max. +80 °C	

Max. speed

Indication after 1st revolution	Max. speed (rpm)	
	with zero setting	without zero setting
(0)0010	500	1200
(0)0020	500	600
(0)0025	500	480
(0)0030	500	400
(0)0040	375	300
(0)0050	300	240
(0)0060	250	200
(0)0080	180	150
(0)0100	150	120

Formula for:








max. speed with (without) zero setting =
$$\frac{5000 \text{ (12 000)}}{\text{Indication after 1st revolution}}$$

 *Speeds >500 rpm must only be run for short periods.*



### Order

#### ■ Design

Display	Mounting position with zero position		Mounting position without zero position		Counting direction*
 	 <b>01</b>	 <b>03</b>	 <b>02</b>	 <b>04</b>	

Note: Characters highlighted in orange are order features

#### ■ Order table

Feature	Order data	Specification	Additional information
Design/mounting position	<b>01</b>	<b>A</b> with zero setting	see the icons illustrating the mounting positions
	<b>02</b>		
	<b>03</b>		
	<b>04</b>		
Counter/digits	<b>4</b>	<b>B</b> decades	
	<b>5</b>		
Indication after 1 <sup>st</sup> revolution	<b>...</b>	<b>C</b> 10, 15, 16, 20, 25, 30, 40, 50, 60, 80, 100 others on request	
	<b>...</b>		
Decimal place	<b>0</b>	<b>D</b> 0 = 00000 1 = 0000.0 2 = 000.00 3 = 00.000 4 = 0.0000	only with 5 decades
	<b>1</b>		
	<b>2</b>		only with 5 decades
	<b>3</b>		only with 5 decades
	<b>4</b>		only with 5 decades
Counting direction = ascending values	<b>i</b>	<b>E</b> clockwise counter-clockwise customer-adjustable	by opening the housing, see technical details
	<b>e</b>		
	<b>e/i</b>		
Hollow shaft/diameter (mm)	<b>...</b>	<b>F</b> 19, 20, 25, 35 VA20 Ø 20 mm RH8, RH10, RH12, RH14, RH16, RH18	stainless steel reducing bush
	<b>...</b>		
	<b>...</b>		
Housing color	<b>0</b>	<b>G</b> orange RAL 2004 black RAL 9005 red RAL 3004 unvarnished	
	<b>S</b>		
	<b>R</b>		
	<b>U</b>		
Clamp lever/position	<b>OKL</b>	<b>H</b> without clamp lever position I position II position III	
	<b>I</b>		
	<b>II</b>		
	<b>III</b>		

#### ■ Order code

DA08 -   -   -   -   -   -   -   -   -  

A      B      C      D      E      F      G      H

Scope of delivery: DA08

#### Accessories:

Reducing bushes

Page 106

#### Additional information:

General information and areas of application


Page 8 cont.

# Mechanical digital position indicator DA09S

## Basic device with 5 decades

### Profile

- Most-used size in slim design
- Hollow shaft, max. Ø 20 mm
- Counter with 5 decades and fine reading
- Display can be designed for “mm” or “inch”
- Magnifying function for perfect readability
- With stainless-steel driving shaft as an option
- Axial seal, dustproof and hose-proof
- Clamping plate (see accessories)

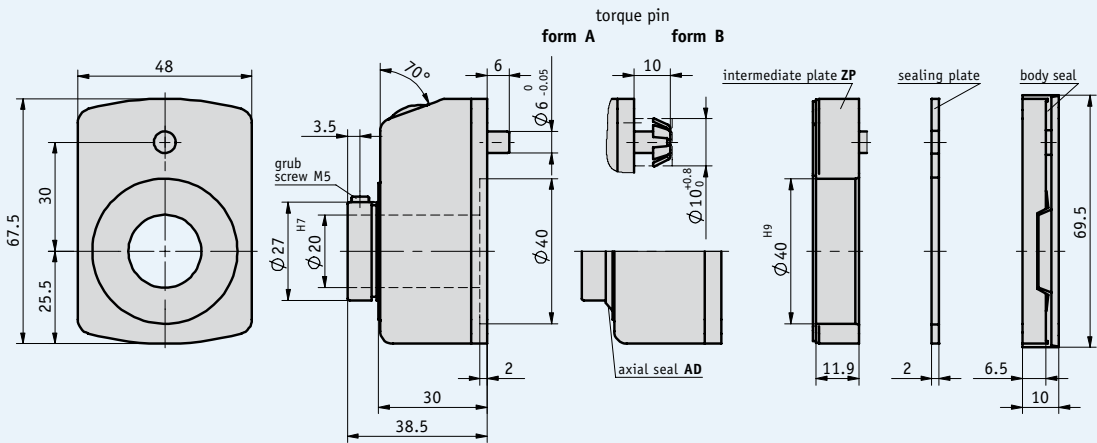

### Mechanical data

Feature	Technical data	Additional information
Counter	5 decades, fine reading	
Digit height	approx. 7 mm	
Housing	plastic, reinforced zinc diecasting with housing MCM	
Weight	0.1 kg	
Ambient temperature	max. +80 °C	

#### ■ Max. speed

Indication after 1 <sup>st</sup> revolution	Max. speed (rpm)
00010	500 (1500)
00015	500 (1000)
00020	500 (750)
00025	500 (600)
00030	500
00040	375
00050	300
00060	250
00080	180
00100	150

$$\text{Formula for max. speed} = \frac{15\,000}{\text{Indication after 1<sup>st</sup> revolution}}$$

**!** Speeds >500 rpm  
must only be run  
for short periods.

Scope of delivery: DA09S

#### Accessories:

Reducing bushes  
Clamping plate KP09

Page 106  
Page 100







#### Additional information:

General information and areas of application

Page 8 cont.

### Order

#### Design

Display	Mounting position				Counting direction
 Fine reading	 <b>02</b>	 <b>04</b>	 <b>06</b>	 <b>07</b>	

Note: Characters highlighted in orange are order features

#### Order table

Feature	Order text	Specification	Additional information
Design/mounting position	... <b>A</b>	<b>02, 04, 06, 07</b>	see the icons illustrating the mounting positions
Indication after 1 <sup>st</sup> revolution	... <b>B</b>	<b>10, 12/5, 15, 15/75, 17/5, 20, 25, 30, 39/375, 40, 50, 60, 78/75, 80, 100</b> others on request	/5 = arithmetical value not displayed
Decimal place	<b>0</b> <b>1</b> <b>2</b> <b>3</b> <b>4</b>	<b>C</b> 0 = 00000 1 = 0000.0 2 = 000.00 3 = 00.000 4 = 0.0000	
Counting direction = ascending values	<b>i</b> <b>e</b>	<b>D</b> clockwise counter-clockwise	
Hollow shaft/diameter (mm)	<b>20</b> ... ...	<b>E</b> Ø 20 mm <b>VA8, VA10, VA14, VA20</b> <b>RH8, RH10, RH12, RH14, RH18</b>	stainless steel reducing bush
Housing	<b>0</b> <b>S</b> <b>GR</b> <b>FR</b> <b>MCM</b>	<b>F</b> orange RAL 2004, plastic black RAL 9005, plastic gray RAL 7035, plastic blazing red, plastic chromatized matt, metal	
Torque support/form	<b>A</b> <b>B</b>	<b>G</b> form A form B for tolerance compensation	
Window	<b>K</b> <b>M</b> <b>OS</b>	<b>H</b> plastic mineral glass without window	
Seal	<b>OAD</b> <b>AD</b> <b>GD</b>	<b>I</b> without additional seal with axial seal with axial and housing seal	
Intermediate plate	<b>OZP</b> <b>ZP</b>	<b>K</b> without intermediate plate with intermediate plate	
Sealing plate	<b>BP</b> <b>GK</b> <b>OD</b>	<b>L</b> provided with the accessories pack glued without sealing plate	only with seal "GD"
Arrow	<b>ORP</b> <b>P/M</b> <b>M/P</b>	<b>M</b> without arrow plus/minus minus/plus	see technical details see technical details

#### Order code


**DA09S** -   -   -   -   -   -   -   -   -   -   -   -   -

# Mechanical digital position indicator DA10

## For large shaft diameters

### Profile

- Designed for large diameters
- Hollow shaft, max. Ø 30 mm
- Counter with 5 decades and fine reading
- Display can be designed for “mm” or “inch”
- Magnifying function for perfect readability
- Stainless-steel driving shaft as an option
- Axial seal, dustproof and hose-proof

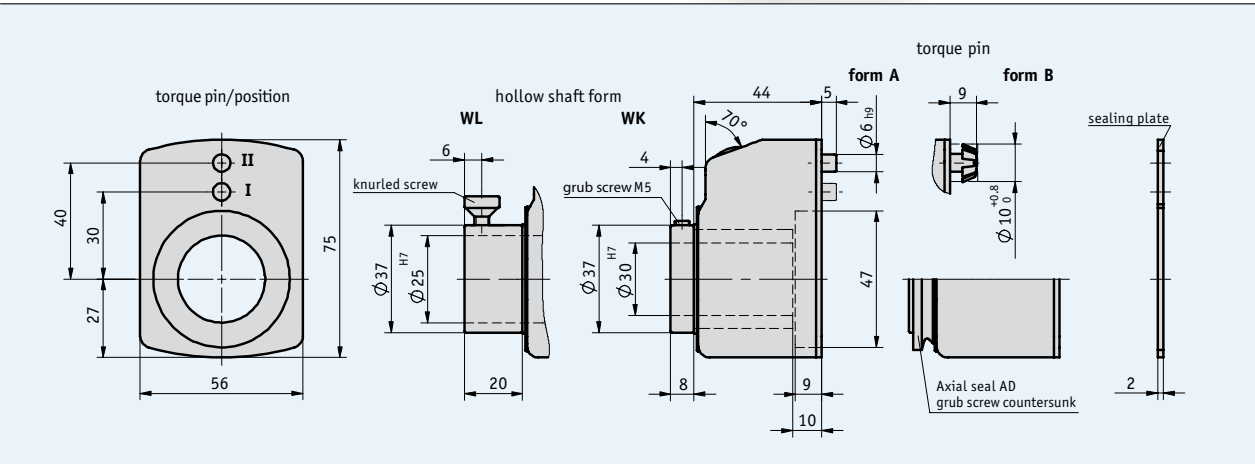

### Mechanical data

Feature	Technical data	Additional information
Counter	5 decades, fine reading	
Digit height	approx. 7 mm	
Housing	plastic, reinforced	
Weight	0.1 kg	
Ambient temperature	max. +80 °C	

#### Max. speed

Indication after 1 <sup>st</sup> revolution	Max. speed (rpm)
00010	500 (1500)
00015	500 (1000)
00020	500 (750)
00025	500 (600)
00030	500
00040	375
00050	300
00060	250
00080	180
00100	150

$$\text{Formula for max. speed} = \frac{15\,000}{\text{Indication after 1<sup>st</sup> revolution}}$$

**!** Speeds >500 rpm must only be run for short periods.

Scope of delivery: DA10

**Accessories:**  
Reducing bushes

Page 106







**Additional information:**  
General information and areas of application

Page 8 cont.



### Order

#### ■ Design

Display	Mounting position				Counting direction
 Fine reading	 <b>12</b>	 <b>14</b>	 <b>16</b>	 <b>17</b>	

Note: Characters highlighted in orange are order features

#### ■ Order table

Feature	Order text	Specification	Additional information
Design/mounting position	... <b>A</b>	<b>12, 14, 16, 17</b>	see icons illustrating the mounting position
Indication after 1 <sup>st</sup> revolution	... <b>B</b>	<b>6/5, 10, 15, 17/5, 20, 25, 30, 39/4, 40, 50, 60, 80, 100</b> others on request	/5 = arithmetical value not displayed
Decimal place	<b>0</b> <b>1</b> <b>2</b> <b>3</b> <b>4</b>	<b>C</b> 0 = 00000 1 = 0000.0 2 = 000.00 3 = 00.000 4 = 0.0000	
Counting direction = ascending values	<b>i</b> <b>e</b>	<b>D</b> clockwise counter-clockwise	
Hollow shaft/diameter (mm)	... <b>VA30</b> ...	<b>E</b> <b>25, 30</b> Ø 30 mm <b>RH10, RH12, RH14, RH16, RH20, RH25</b>	stainless steel reducing bush
Hollow shaft/form	<b>WK</b> <b>WL</b>	<b>F</b> short hollow shaft long hollow shaft	
Torque support/form	<b>A</b> <b>B</b>	<b>G</b> form A form B for tolerance compensation	
Torque support/position	<b>I</b> <b>II</b>	<b>H</b> position I position II	
Housing color	<b>O</b> <b>S</b>	<b>I</b> orange RAL 2004 black RAL 9005	
Window	<b>K</b> <b>M</b> <b>OS</b>	<b>K</b> plastic mineral glass without window	
Axial seal	<b>OAD</b> <b>AD</b>	<b>L</b> without axial seal with axial seal	see technical details
Sealing plate	<b>BP</b> <b>GK</b>	<b>M</b> provided with the accessories pack glued	

#### ■ Order code

**DA10** -   -   -   -   -   -   -   -   -   -   -   -   -  


A    B    C    D    E    F    G    H    I    K    L    M

# Mechanical digital position indicator DA10R/1

## With two counters

### Profile

- Version with two counters (4 or 5 decades) and fine reading
- Predestined for use with wood milling machines
- Hollow shaft, max. Ø 30 mm
- Display can be designed for “mm” or “inch”

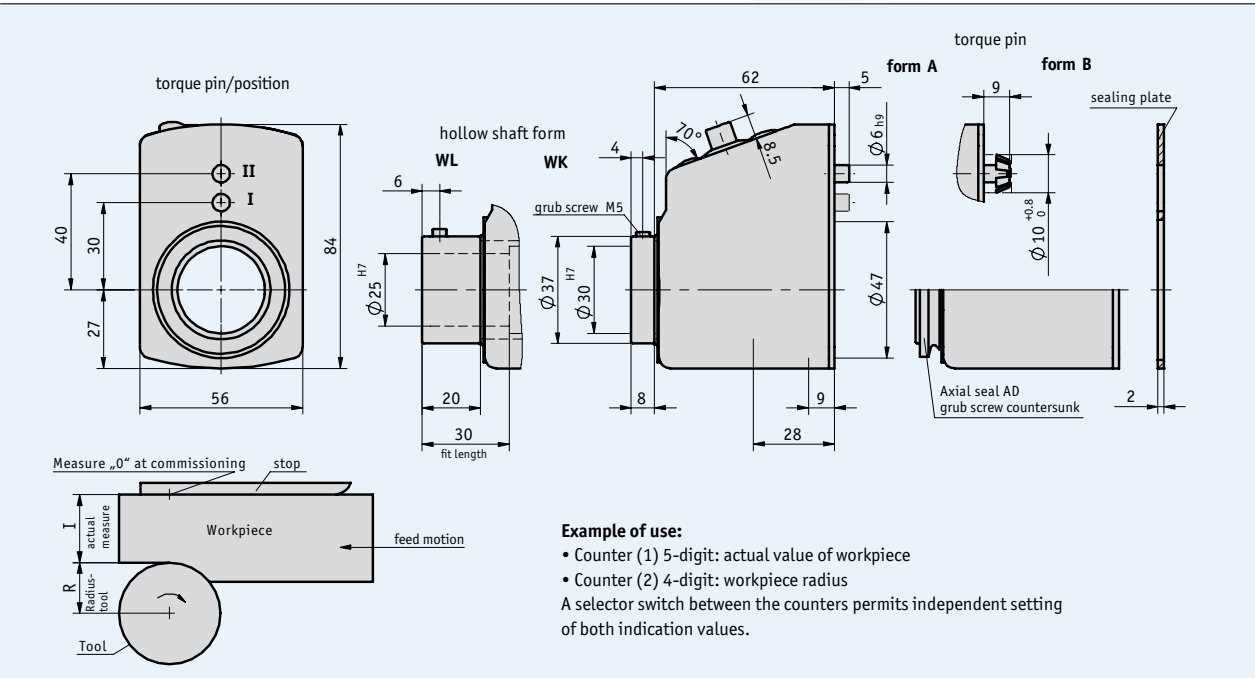

### Mechanical data

Feature	Technical data	Additional information
Counter	4 and 5 decades, fine reading	
Digit height	approx. 7 mm	
Housing	plastic, reinforced	
Weight	0.1 kg	
Ambient temperature	max. +80 °C	

#### Max. speed


Indication after 1 <sup>st</sup> revolution	Max. speed (rpm)
00010	500 (1500)
00015	500 (1000)
00020	500 (750)
00025	500 (600)
00030	500
00040	375
00050	300
00060	250
00080	180
00100	150

$$\text{Formula for max. speed} = \frac{15\,000}{\text{Indication after 1<sup>st</sup> revolution}}$$

**!** Speeds >500 rpm must only be run for short periods.

### Order

#### Design

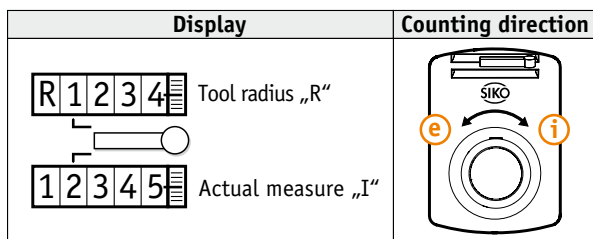

Note: Characters highlighted in orange are order features

#### Order table

Feature	Order text	Specification	Additional information
Indication after 1 <sup>st</sup> revolution	... <b>A</b>	7/874, 10, 15/747, 20, 25, 30, 39/368, 40, 50, 60, 80, 100, others on request	/874 = arithmetical value not displayed
Decimal place	<b>0</b> <b>B</b>	0 = 0000	
	<b>1</b>	1 = 000.0	
	<b>2</b>	2 = 00.00	
	<b>3</b>	3 = 0.000	
Counting direction = ascending values	<b>i</b> <b>C</b>	clockwise	
	<b>e</b>	counter-clockwise	
	<b>i/e</b>	actual value counter clockwise	radius counter counter-clockwise
	<b>e/i</b>	actual value counter counter-clockwise	radius counter clockwise
Hollow shaft/diameter (mm)	... <b>D</b>	25, 30 RH10, RH20, RH25, RH26	reducing bush
Hollow shaft/form	<b>WK</b> <b>E</b>	short hollow shaft	
	<b>WL</b>	long hollow shaft	
Torque support/form	<b>A</b> <b>F</b>	form A	
	<b>B</b>	form B for tolerance compensation	
Torque support/position	<b>I</b> <b>G</b>	position I	
	<b>II</b>	position II	
Axial seal	<b>OAD</b> <b>H</b>	without axial seal	
	<b>AD</b>	with axial seal	se technical details

#### Order code

DA10R/1- A - B - C - D - E - F - G - S - K - H

Scope of delivery: DA10R/1

#### Accessories:

Reducing bushes

Page 106

#### Additional information:

General information and areas of application

Page 8 cont.

# 1.2



1.0   PositionLine Product overview	3
-------------------------------------	---

1.1   Mechanical digital position indicators	6
--	---

## 1.2 | Electronic digital position indicators

General information and areas of application	30
--	----

Technical details	32
-------------------	----

Function and application	34
--------------------------	----

Product matrix	35
----------------	----

Products	DE04	36
	DE10	38
	AP04	40

1.3   Mechanical control knobs	42
--------------------------------	----

1.4   Mechanical analog position indicators and handwheels	60
---	----

1.5   Accessories	96
-------------------	----

1.6   Product index, Contact information	108
--	-----

1.0

1.1

1.2

1.3

1.4

1.5

1.6



### High-resolution measuring technology – flexibly programmed, robust and precise

Mechanical position indicators are already used successfully on shafts and spindles for displaying position values. Electronic digital position indicators are, formally speaking, a logical further development of their mechanical counterparts. Thanks to comparable outer dimensions and the track-proven slip-on principle on the shaft, reconfiguration from mechanical to electronic-programmable indicator technology is a matter of minutes.

The standalone indicators of the DE range are particularly effective as an alternative to mechanical counters if no suitable gearing is available for these. Their free programmability also permits positive and negative display values or operation in angled mode.

The ProTool DE software solution is mainly of interest for mechanical engineering applications, because it can be used to program DEs directly before they are mounted on adjustment spindles.

Therefore only one basic device type has to be kept on stock, which is set up in accordance with the respective application requirements.

### Automated manual work

As an extension to the electronic standalone units of the DE range, the AP models also feature a bus interface. During bus-controlled operation, can be communicated setpoint and actual values between the individual absolute position indicators and a higher-level controller.

### Teamwork in bus operation

This semi-automated spindle adjustment offers a much higher level of process reliability and shortens set-up times during format changes considerably. Due to the display of the set value directly on the shaft and feedback of the manually

correctly set actual value, incorrectly set stops and tool positions are a thing of the past. The overall system is only enabled when all spindle positions have been correctly signaled, so that off-spec material or damaged tools caused by incorrectly set adjusting shafts are no longer possible.

### Benefits

The electronic SIKO position indicators feature a series of software assisted functions:

- The spindle pitch, direction of rotation and decimal point can be freely programmed
- Length or angle indication: Two modes are possible
- Incremental measurement function, offset input: Flexible adaptation to user specifications is possible
- Zero setting of the shaft is performed at the touch of a button

The ultimate achievement: Maximum dimensioned hollow shaft opening in relation to its size.



Truly SIKO – the AP04 has a functional industrial design in a highly-integrated electro-mechanical construction. Its 2-line LCD display provides maximum reading accuracy directly on the shaft.

The magnetic measuring technology coupled with bus-compatible electronics means efficient setpoint-actual value comparison.



## Applications

In an industrial environment, our customers really appreciate the precise and reliable measurement of the electronic position indicators. The shaft motion is no longer tracked by a gear unit but with non-contacting magnetic or capacitive methods. The magnetic measuring method is particularly robust and insensitive to soiling and vibration, and covers applications in particularly rough environmental conditions. The large LCD display also permits reliable reading of the respective position values. A typical application: Stop adjustment on miter saws requires very precise display values.

Additional flexibility is ensured by the implemented chain dimension function and offset input.


With the AP range it is also possible to perform easily controllable, semi-automated adjustment processes in complex machine environments. Communication "in the team" is standardized, and faulty adjustment is immediately visible during bus operation.



1



2

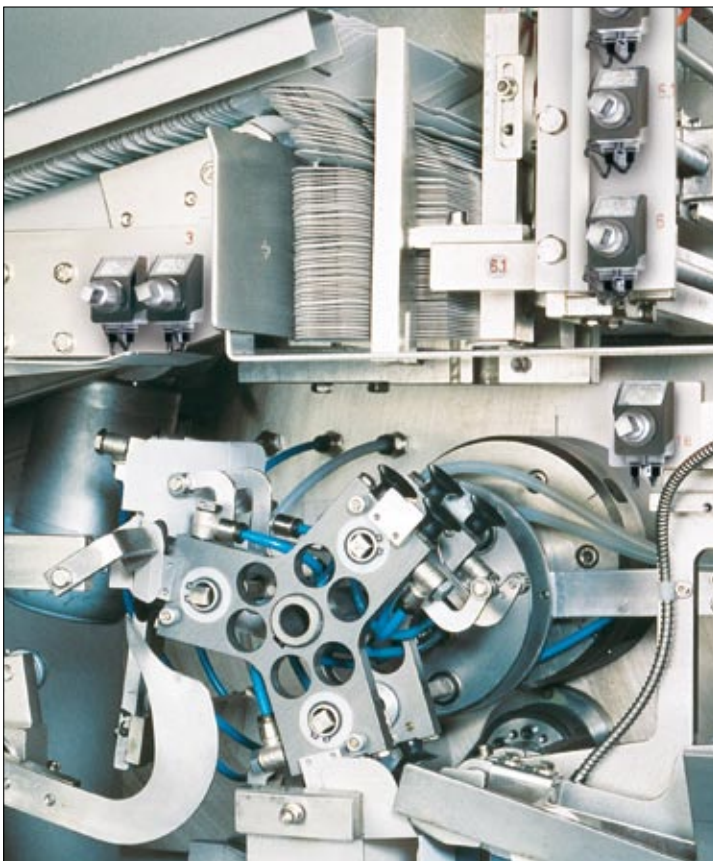

3



4


[1] Format setting on a circular saw: DE in angular and linear mode. [2] Display of angle values: DE-assisted setting of the saw blade rotation on a miter saw. [3] Multiple format settings with AP04: Folding box production requires a number of adjustments. [4] The position of the display can be freely selected: Tool setting on a wood milling machine.

### Mounting position

Two factors determine this feature:

- The orientation of the machine shaft
- Display viewing direction

The number and orientation of the LCD display and the reading direction in the display are determined with a numeric code (e.g., 02, 04, etc.).

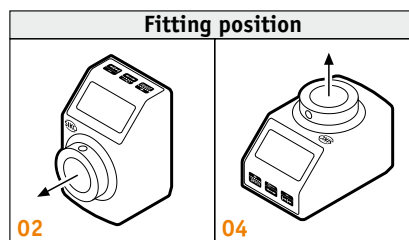


### Sense of rotation

The sense of rotation of the axis influences the parameters programmed in the devices. Digital position indicators are available in two directions of rotation in relation to the machine axis:

"i" stands for clockwise

"e" stands for counter-clockwise

Ascending values are shown on the display in accordance with the "i" and "e" ordering code.

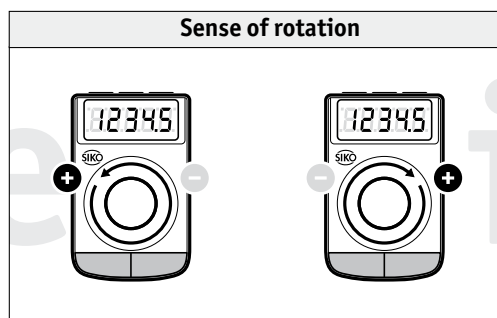


"+" shows the direction of rotation of the respective machine shaft. The ordering codes "e" and "i" specify in which direction of rotation the increasing values appear on the display.

### Mounting the torque support

The radius of the shaft is added to the space measurement between the hollow shaft and torque shaft. This measurement is marked on the mounting surface with a slide gauge and scribe, then center-punched and drilled (for the drilling diameter and depth, refer to the technical drawings). With correct pre-drilling, stress-free mounting of the position indicator must be possible.


### Locking on the shaft

Only the set screw is screwed in and tightened to achieve a positive connection with the shaft.

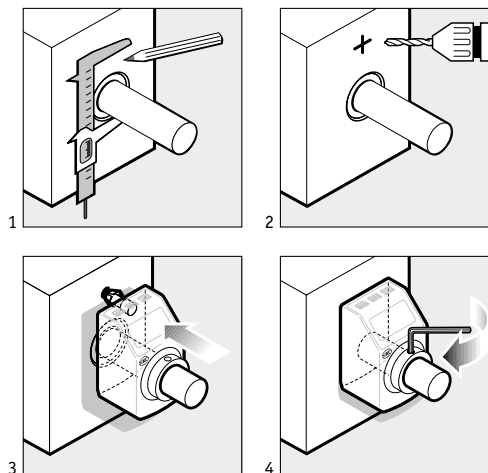

### Torque support (2 versions)

On all electronic position indicators you have the choice between two different designs: [1] Either the pin belonging to the housing or [2] an additional umbrella. The umbrella is an optimum solution for compensating for mounting tolerances.

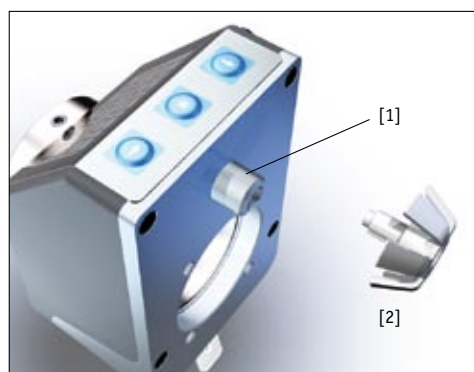


## Programming software

ProToolDE is a convenient software solution for programming the electronic DE04 and DE10 digital indicators. This tool permits programming of a specific display value after one rotation, depending on the respective use of the device. The use of ProToolDE is particularly advantageous when several unprogrammed DE devices are to be kept in stock. Each digital indicator can be freely programmed with this software in accordance with the respective different demands.

ProTool DE offers:

- Free programming of all parameters
- Switchover mode between angle and linear measurement
- USB connection cable included

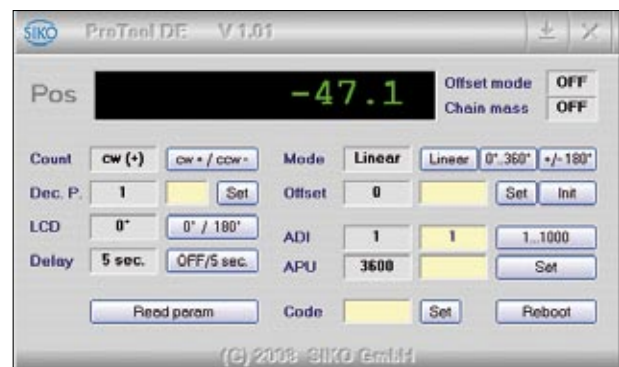

## Gateway modules

The IF09 gateway module serves to connect the electronic indicators type AP with standardized field bus systems. Three bus connections are available. SIKO offers a specific converter for each of the listed connections. Connection of up to 31 stations is possible via the RS485 interface to Profibus or CAN-bus, and up to 8 stations to InterBus-S.



1.2

### Ambient conditions

### Examples of use

### Benefits



#### Direct rotation:

Direct action via axle or spindle. The principle of action corresponds to that of a compound table or of linear guides.



E.g., compound tables, planing or dowel drilling machines ...



E.g., tooling in the lumber and metal industries ...

- Direct display after x,y adjustment
- Easy mounting
- Precise positioning
- Function keys for reset and incremental measurement
- Freely programmable display values

#### Special AP04 features

- Bus operation
- Indication of actual value on the spindle

## 1.2



#### Indirect rotation:

Indirect action (offset) on racks via cogwheel or worm gear.






E.g., angle adjustment units on saws, rotary and milling tables



E.g., end stop systems ...

- Linear or angular modes
- Freely programmable display values
- Easy battery change
- Reset and incremental measurement

### Electronic digital position indicators

			
	DE04	DE10	AP04
<b>Page</b>	36	38	40
<b>Display</b>			
5-digit LCD	•	•	•
Special characters	•	•	•
<b>Interface</b>			
RS485			•
CANopen (option)			•
<b>Key functions</b>			
Incremental measurement	•	•	•
Offset input	•	•	•
Calibration	•	•	•
<b>Digit height</b>			
mm, approximately	8	12	7
<b>Hollow shaft</b>			
Diameter (mm)	14	30	20
<b>Dimensions</b>			
WxHxD (mm), approximately	33x52x34	48x71x39	35x52x35


1.2

# Digital position indicator DE04

## Freely programmable

### Profile

- Freely programmable electronic digital display for linear or angular measurement
- Hollow shaft, max.  $\varnothing$  14 mm
- LCD display with 5 digits and special characters
- Digit height approx. 8 mm
- Reset, incremental measurement, offset via keyboard
- Long battery life
- Easy battery change without dismantling of the device

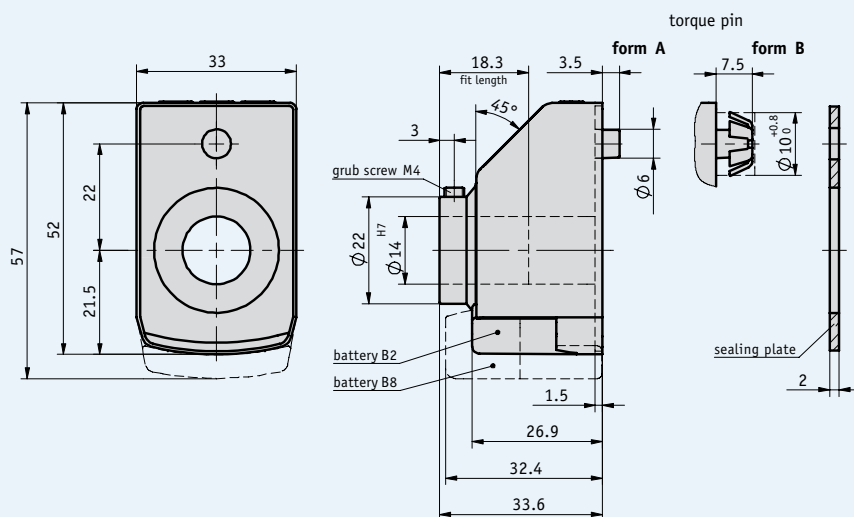

### Mechanical data

Feature	Technical data	Additional information
Display	LCD display, 5-digit, 8 mm digit height	
Display range	-19999 ... 99999	
Battery	lithium coin cell, 3 V, CR2032 type lithium coin cell, 3 V, CR2477 type	~2 years of service life ~8 years of service life
Weight	approx. 0.05 kg	
Hollow shaft	$\varnothing$ 14H7, plain bearing, browned steel	(max. $\varnothing$ 16H7)
Rotational speed	max. 600 rpm (100 % operation time)	
Protection category	IP51	
Operating temperature	-10 ... +60 °C	
Storage temperature	-30 ... +80 °C	
Housing	plastic	
Shock resistance	30 g / 15 ms	according to DIN EN 60068-2-27
Vibration resistance	10 g / (5 ... 150 Hz) 20 g / (100 ... 2.000 Hz)	according to DIN EN 60068-2-6 according to DIN EN 60068-2-6
EMC	DIN EN 61000-4-2 DIN EN 61000-4-4	



### Order

#### Order note

Display	Mounting position
<div> <div>reading</div> <div>not displayed</div> <div>display</div> <div>measured value per revolution</div> </div> <div>00025324</div>	<div>02</div> <div>04</div>

Note: Characters highlighted in orange are order features

#### Display divisor

The display divisor shifts digits of the measured value to the non-visible range of the display without these being lost for mathematical calculation of the display value.

#### Calculation of value displayed (example: order text):

Measured value per revolution 25324  
Display divisor 1000

Feature	Value displayed	Measured value
1 <sup>st</sup> revolution	25	25324
2 <sup>nd</sup> revolution	51	50648

#### Order table

Feature	Order text	Specification	Additional information
Design/mounting position*	02 04	A horizontal spindle vertical spindle	
Measured value per revolution*	... W3600 Z3600	B 2 ... 90 000 angular mode 0 ... 360°, resolution 0.1° angular mode -180 ... +180°, resolution 0.1°	see calculation of value displayed only for decimal point „1“ only for decimal point „1“
Decimal place*	0 1 2 3	C 0 = 00000 1 = 0000.0 2 = 000.00 3 = 00.000	
Display divisor*	...	D 1, 10, 100, 1000	see calculation of value displayed
Counting direction*	i e	E clockwise (ascending on the right) counter-clockwise (ascending on the left)	
Zero setting*	D V	F directly delayed by 5 s	
Hollow shaft/diameter (mm)	... ... ...	G 14, 16 RH6, RH8, RH10, RH12 others on request	reducing bushes
Color	R S	H red RAL 3000 black RAL 9005	
Torque support/form	A B	I cylindric pin for tolerance compensation	
Battery	B2 B8	K ~2 years of service life ~8 years of service life	pay attention to the technical drawing

\* programmable by means of ProTool DE programming software

#### Order code

DE04 - A - B - C - D - E - F - G - H - I - K

Scope of delivery: DE04, User information

#### Accessories:

Programming software ProTool DE  
Reducing bushes

Page 105  
Page 106

#### Additional information:

General information and areas of application


Page 30 cont.

# Digital position indicator DE10

## For large shaft diameters

### Profile

- Freely programmable electronic digital display for linear or angular measurement
- Hollow shaft, max.  $\varnothing$  30 mm
- LCD display with 5 digits and special characters
- Digit height approx. 12 mm
- Reset, incremental measurement, offset via keyboard
- Long battery life
- Easy battery change without dismantling of the device

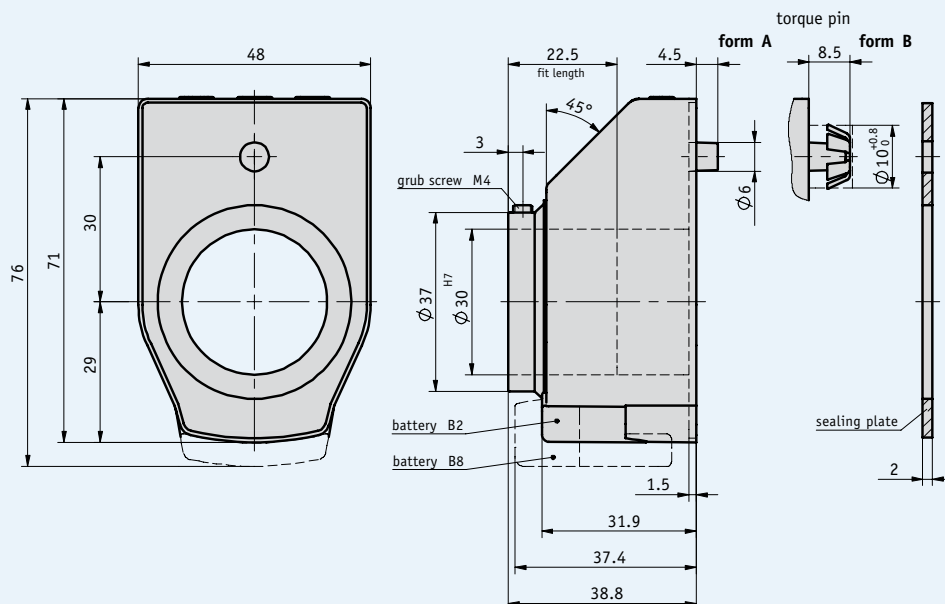

### Mechanical data

Feature	Technical data	Additional information
Display	LCD display, 5-digit, digit height 11.5 mm	
Display range	-19999 ... 99999	
Battery	lithium coin cell, 3 V, CR2032 type lithium coin cell, 3 V, CR2477 type	~2 years of service life ~8 years of service life
Weight	approx. 0.1 kg	
Hollow shaft	$\varnothing$ 30H7, plain bearing, browned steel	
Rotational speed	max. 600 rpm (100 % operation time)	
Protection category	IP51	
Operating temperature	-10 ... +60 °C	
Storage temperature	-30 ... +80 °C	
Housing	plastic	
Shock resistance	30 g / 15 ms	according to DIN EN 60068-2-27
Vibration resistance	10 g / (5 ... 150 Hz) 20 g / (100 ... 2.000 Hz)	according to DIN EN 60068-2-6 according to DIN EN 60068-2-6
EMC	DIN EN 61000-4-2 DIN EN 61000-4-4	

### Order

#### Order note

Display	Mounting position
<div> <div>reading</div> <div>not displayed</div> <div>display divisor</div> <div>measured value per revolution</div> </div> <div>00025324</div>	<div>02</div> <div>04</div>

Note: Characters highlighted in orange are order features

#### Display divisor

The display divisor shifts digits of the measured value to the non-visible range of the display without these being lost for mathematical calculation of the display value.

#### Calculation of value displayed (example: order text):

Measured value per revolution 25324

Display divisor 1000

Feature	Value displayed	Measured value
1 <sup>st</sup> revolution	25	25324
2 <sup>nd</sup> revolution	51	50648

#### Order table

Feature	Order text	Specification	Additional information
Design/mounting position*	02 04	A horizontal spindle vertical spindle	
Measured value per revolution*	... W3600 Z3600	B 2 ... 90 000 angular mode 0 ... 360°, resolution 0.1° angular mode -180 ... +180°, resolution 0.1°	see calculation of value displayed only for decimal point „1“ only for decimal point „1“
Decimal place*	0 1 2 3	C 0 = 00000 1 = 0000.0 2 = 000.00 3 = 00.000	
Display divisor*	...	D 1, 10, 100, 1000	see calculation of value displayed
Counting direction*	i e	E clockwise (ascending on the right) counter-clockwise (ascending on the left)	
Zero setting*	D V	F directly delayed by 5 s	
Hollow shaft/diameter (mm)	30 ...	G Ø 30 mm RH16, RH20, RH24, RH25, RH26 others on request	reducing bushes
Color	R S	H red RAL 3000 black RAL 9005	
Torque support/form	A B	I cylindric pin for tolerance compensation	
Battery	B2 B8	K ~2 years of service life ~8 years of service life	pay attention to the technical drawing

\* programmable by means of ProTool DE programming software

#### Order code

DE10 - A - B - C - D - E - F - G - H - I - K

Scope of delivery: DE10, User information

#### Accessories:

Programming software ProTool DE  
Reducing bushes

Page 105  
Page 106


#### Additional information:

General information and areas of application

Page 30 cont.

### Profile

- Electronic position indicator with bus interface
- Compact design
- Hollow shaft, max.  $\varnothing$  20 mm
- Easily readable, two-line LCD for target and actual values
- Reset, incremental measurement, offset via keyboard
- Integrated RS485 interface, CAN bus as an option
- Robust sensor technology unit thanks to magnetic scanning

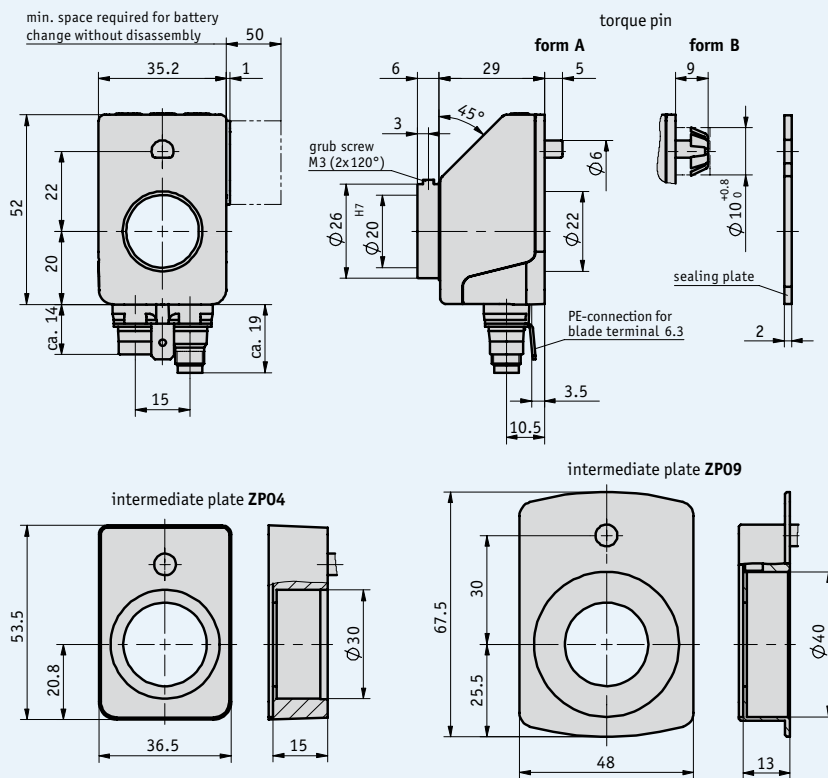

### Mechanical data

Feature	Technical data	Additional information
Max. speed	≤500 rpm	
Operating temperature range	0 ... 60 °C	
Storage temperature range	-20 ... +80 °C	
Humidity	condensation permitted	
Protection category	IP53	in the mounted state, standard version
Housing	plastic reinforced	metal connector thread
Driving shaft	stainless steel	
Housing color	black, RAL 9005	

### Electrical data

Feature	Technical data	Additional information
Operating voltage	24 V DC $\pm 20\%$	
Current consumption	approx. 30 mA	
Battery life	approx. 5 years	
Type of connection	2x M8 connector	4-pin, 1x bush, 1x connector, additionally screen connection via flat-cable plug 6.3 mm
Bus connection	CAN bus or RS485	no galvanic isolation
Display	LCD display	7-segment + decimal points; 2 lines of 5 digits each, special characters
Special characters	left arrow, right arrow, increm. measurem. replace battery	
Display size	approx. 7 mm digit height	
Keys	incremental measurement function, parameterization , reset	
Scanning	magnetic	
Resolution	720 increments/revolution	
Display resolution	freely parameterizable between 1 and 65535 increments/revolution	
Coded number of revolutions	max. 7281	

### Pin assignment

#### Interfaces

RS485	CAN bus	PIN
TxRx-/DÜB	CANL	1
TxRx+/DÜA	CANH	2
+24 V DC	+24 V DC	3
GND	GND	4

1.2

### Order

#### Order table

Feature	Order text	Specification	Additional information
Interface/protocol	<b>S3/00</b> <b>CAN</b>	<b>A</b> RS485/standard CANopen	
Hollow shaft/diameter (mm)	<b>20</b> <b>...</b>	<b>B</b> Ø 20 mm <b>RH10, RH12, RH14, RH16</b> others on request	reducing bushes
Torque support/form	<b>A</b> <b>B</b>	<b>C</b> cylindric pin for tolerance compensation	
Intermediate plate	<b>OZP</b> <b>ZP04</b> <b>ZP09</b>	<b>D</b> without intermediate plate adapter plate	

#### Order code

**AP04** -   -   -   -   -   -  

A      B      C      D      S

**Scope of delivery:** AP04, User information

#### Accessories:

Reducing bushes	Page 106
Mating connectors	Page 102
Cable extension	Page 103
Battery unit	Page 104

#### Additional information:

General information and areas of application	Page 30 cont.
--	---------------



# 1.3



1.0   PositionLine Product overview	3
1.1   Mechanical digital position indicators	6
1.2   Electronic digital position indicators	28

### 1.3 | Mechanical control knobs

<b>General information and areas of application</b>		44
<b>Technical details</b>		46
<b>Function and application</b>		48
<b>Product matrix</b>		49
<b>Products</b>	DK01	50
	DK02	52
	DK03	54
	DK05	56
	DKA02	58

1.4   Mechanical analog position indicators and handwheels	60
1.5   Accessories	96
1.6   Product index, Contact information	108

1.0

1.1

1.2

1.3

1.4

1.5

1.6

### Less is more – elegant double function in a flash

Since their introduction a few years ago, the SIKO mechanical control knobs (referred to as DK) with their integrated measurement system have successfully conquered many new fields of application. This is literally due to their “sensitive touch”, as the control knobs are filigree, industrial standard adjusting knobs comprising a clever combination of miniature handwheel and mechanical digital position indicator.

With the control knobs, applications are possible in which multiple shaft or spindle rotations must be shown under restricted space conditions. The easy-to-handle control knobs already demonstrate their direct effect on the

installed mechanical indicators with the most minimal movement, because all DKs have a full reduction gear in spite of their small dimensions. Only this gear technology enables the extremely fine-resolution tracking and precise absolute depiction of adjustment values directly at the measuring point.

Mounting is also extremely simple: Slip on, lock in place – ready.

Only a small drilled hole on the machine is necessary to accommodate the torque pin. The track-proven SIKO gear technology enables installation in any position.

The innovative concept of the DK range inspires mechanical engineering companies to create very compact, ergonomic and particularly inexpensive solutions. Users profit from the development experience in both areas of competence combined in this product group – handwheel technology and mechanical indicators.


The mechanical control knobs stand for economy, a wide application range and user-oriented product design.

### Benefits

- Long service life due to consistent further development of technology and user-oriented choice of materials
- Excellent cost-benefit ratio
- Clear and precisely readable digital and analog value
- Modifiable displays owing to individual ratios
- Can be mounted in any position
- Cost-efficient retrofitting
- Easy slip-on hollow shaft mounting
- Special scales with analog knobs

## 1.3

Setting values firmly under control – the DK01 is an example of a new ergonomic design for manual adjustment of adjustment shafts under particularly restricted space conditions. Value display meets the highest precision demands.

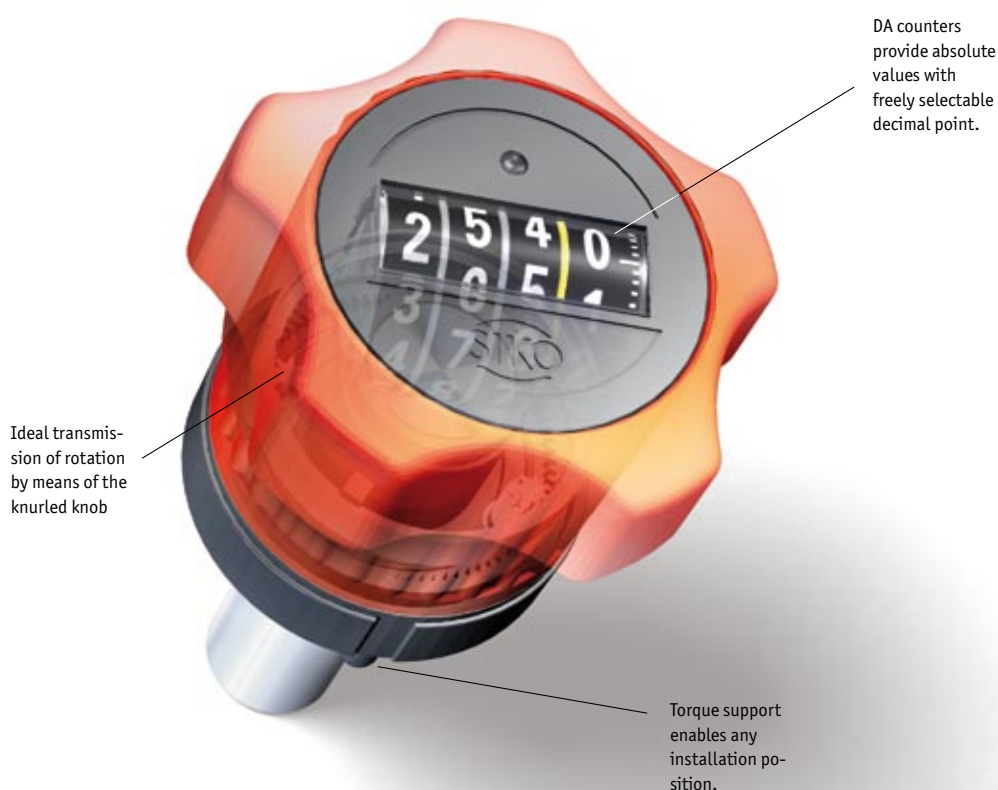



## Applications

SIKO control knobs are versatile series-manufactured products which provide a number of additional displayed values in addition to the standard values.

Their suitability for industrial environments is demonstrated, for example, in process engineering applications, because these require a high level of precision during valve adjustment for numerous dosing applications. Many available actuators prove to be unsuitable as the necessary accuracy and reproducibility requirements cannot be met. The SIKO control knobs meet both criteria with ease and even visualize non-linear adjustment sequences.



1



2

Vögtlin Instruments AG



3



4

[1] The combination of adjustment element and display in one functional unit also enables atypical installation positions: In this user example a larger distance to hot surfaces is achieved in a gluing station for book spines. [2] Fine adjustment: Control knob for adjustment and monitoring opening of needle valves. [3] Use on dosing valves: DK01 with integrated position indicator enables reproducible valve settings without additional measuring devices. [4] The compact design of the SIKO control knobs: Ideal for cramped mounting areas.

### Determining decimal points

The table opposite shows the decimal point principle of the digital indicators. For example, to obtain the reading "10.0", the indicator must count "100" with the decimal place 1 after the first rotation. The decimal point is marked by a colored intermediate ring during series production.

### Background information

SIKO deals with the relationship between the spindle pitch and decimal point as follows: The spindle pitch serves as a reference. If this is 4 mm, the gear unit is designed so that 4.0 appears on the display after the first rotation.

Order figure for decimal place	Indication e.g., 4-digit	Display
0	0000	0000
1	000.0	000 0
2	00.00	00 00
3	0.000	0 000


### Sense of rotation

The sense of rotation of the shaft influences the gear unit installed in the DK. Digital control knobs are available in two directions of rotations in relation to the corresponding machine shaft:

"i" stands for clockwise

"e" stands for counter-clockwise

Ascending values are shown on the display in accordance with the "i" and "e" ordering code.

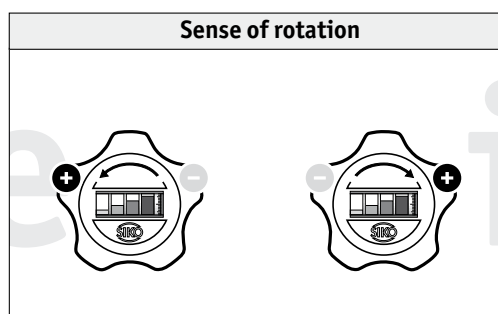


"+" shows the direction of rotation of the respective machine shaft. The ordering codes "e" and "i" specify in which direction of rotation the increasing values appear on the display.

### Mounting position

Two factors determine the ordering codes of DK02\*, DK05:

- The orientation of the machine shaft
- The line of vision to the window (decades)


The position and orientation of the DK window and the visible decades are determined with a numeric code (e.g., 08, 09, etc.).

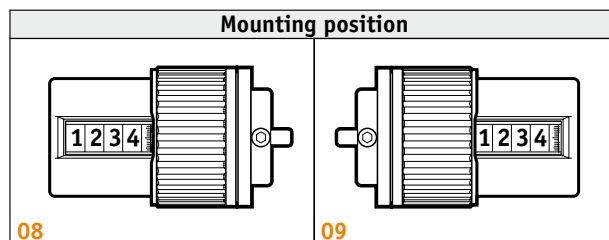

\* Mounting example, DK02

### Torque support

Several control knobs offer a choice of torque support positioning. These control knobs can therefore be mounted in a range of positions to suit the customer's equipment.

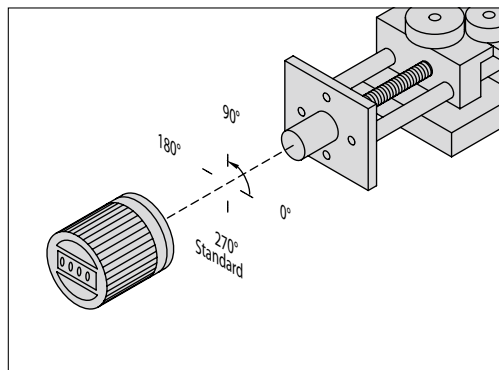

## Scales for control knobs with analog display

Each scale must meet different requirements depending on the wide range of applications of analog control knobs. The basis for the displayed values is always the gear ratio. This defines the path which must be traversed after a specific number of rotations of the pointer (DK03) itself or the scale under the stationary pointer (DKA02).


This why standard scales cannot do justice to all requirements. For these cases, SIKO supplies special scales which can be designed to suit customer requirements, for example for tracking adjustment in both directions, starting at zero and requiring a scale with ascending and descending values.

Non-linear scales are also possible, for example to display the opening degree of a valve.

Precise information in the form of diagrams or technical drawings are necessary for manufacturing such scales. Special requirements such as graduation, digits, company logos and color wishes can also be met.



DK03-normal scale

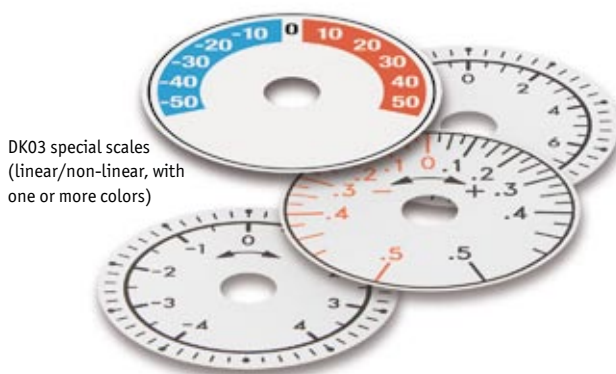


DK03 special scales  
(linear/non-linear, with  
one or more colors)



## Free angle

In some cases it can be necessary to provide a free angle, i.e. a zone on the scale which is not used for display purposes. This depends on your application and the ratios supplied by SIKO.


Free angles for the display of adjustment with a lower ratio are particularly used for the DKA02 control knob, which is only available with a fixed ratio of 26:1. Refer to the section on handwheels (page 65) for more information on this topic.



Normal scale (DKA02)  
and special customized  
scales: A sketch is normally  
sufficient in most cases.  
Refer to drawing  
aids (handwheels, accessories).



In some cases it can be necessary to provide a free angle, i.e., a zone on the scale which is not used for display purposes. This depends on your application and the ratios supplied by SIKO.

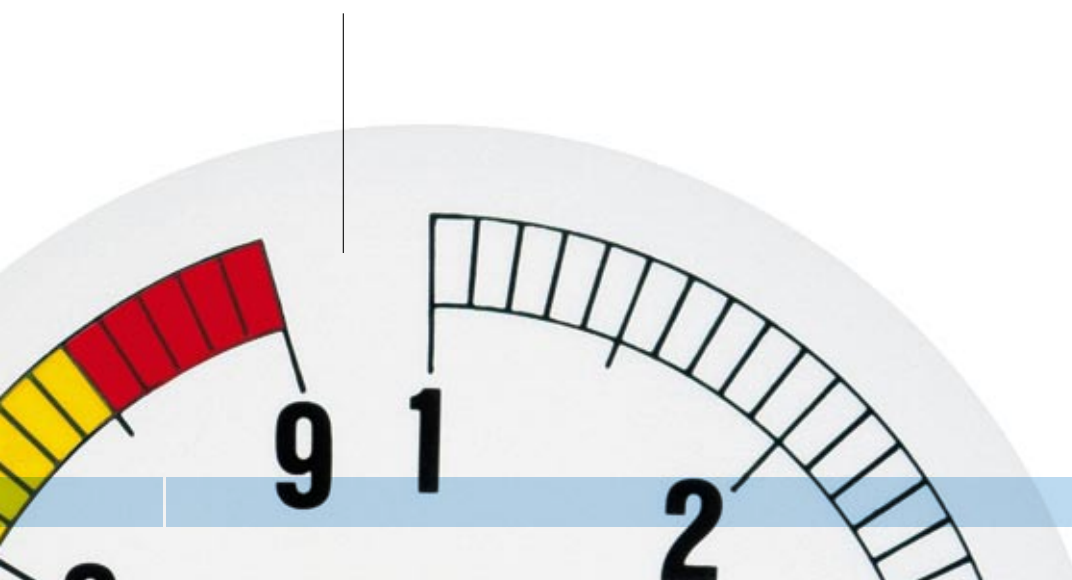



### Ambient conditions



#### Spindle settings

Direct action via axle or spindle. The principle of action corresponds to that of a compound table or of linear guides.

### Examples of use



E.g., compound tables, planing or dowel drilling machines ...

### Benefits

- Direct display after x,y adjustment
- Easy mounting
- Precise positioning
- Flexible indication of values
- mm or inch



E.g., tooling in the lumber and metal industries ...

## 1.3



#### Process engineering

Visualization of valve settings, flow control ...



E.g., flow controllers for gases, liquids and granule, dosing pumps ...

- Variable mounting positions
- Visual representation of valve settings
- Exact reproducibility of set values (e.g. flow quantities)
- Non-linear special scales



E.g., gas mixer taps ...

#### Drive technology






Speed setting ...



E.g., miniature motors

- Ultra-fine speed setting
- Non-linear special scales


### Mechanical digital position indicators

					
	DK01	DK02	DK03	DK05	DKA02
Page	50	52	54	56	58
<b>Display type</b>					
analog			•		•
digital	•	•		•	
<b>Displays</b>					
3 decades*				•	
4 decades*	•	•			
analog			•		•
<b>Hollow shaft</b>					
diameter (mm)	14	14	14	10	10
<b>Control knob dimensions</b>					
external diameter (mm)	36	36	36	22	40

\* Decade = digit ring with 10-division

### Profile

- Control knob with integrated position indicator
- Shaft accommodation max. Ø 14 mm
- Counter with 4 decades and fine reading
- Various display values
- Star wheel as an option

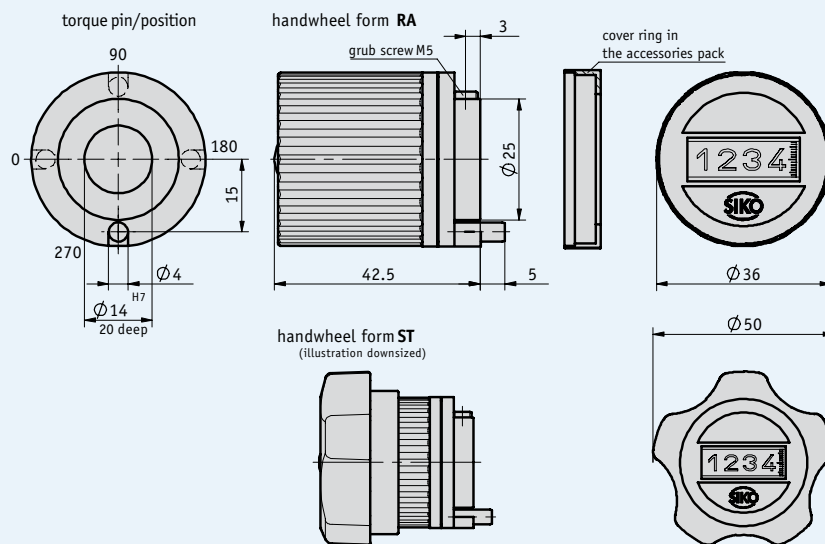

### Mechanical data

Feature	Technical data	Additional information
Counter	4 decades, fine reading	
Digit height	approx. 6 mm	
Ambient temperature	max. 80 °C	
Weight	0.06 kg	
Housing	plastic	

### Order

#### Order table

Feature	Order text		Additional information
Gear ratio	...	A 12/5, 15, 17/5, 20, 25, 30, 40, 50, 100	/5 = arithmetical value not displayed
		others on request	
Decimal place	0	B 0 = 0000	
	1	1 = 000.0	
	2	2 = 00.00	
	3	3 = 0.000	
Counting direction	i	C ascending on the right	clockwise
	e	ascending on the left	counter-clockwise
Hollow shaft/diameter (mm)	14	D Ø 14 mm	
	...	RH8, RH10, RH12	Reducing bushes
		others on request	
Torque support/position	270	E see the drawing	
	0	see the drawing	
	90	see the drawing	
	180	see the drawing	
Handwheel design	RA	F knurled handle	
	ST	star wheel	
Window	K	G plastic	
	M	mineral glass	
Sealing ring	O	H without sealing ring	
	M	sealing ring provided with the accessories pack	

1.3

#### Order code

DK01 - A - B - C - D - E - F - FR - G - H

Scope of delivery: DK01

#### Accessories:

Reducing bushes

Page 106


#### Additional information:

General information and areas of application

Page 44 cont.

### Profile

- Control knob with integrated position indicator
- Shaft accommodation: max. Ø 14 mm
- Counter with 4 decades and fine reading
- Various display values
- Star wheel as an option

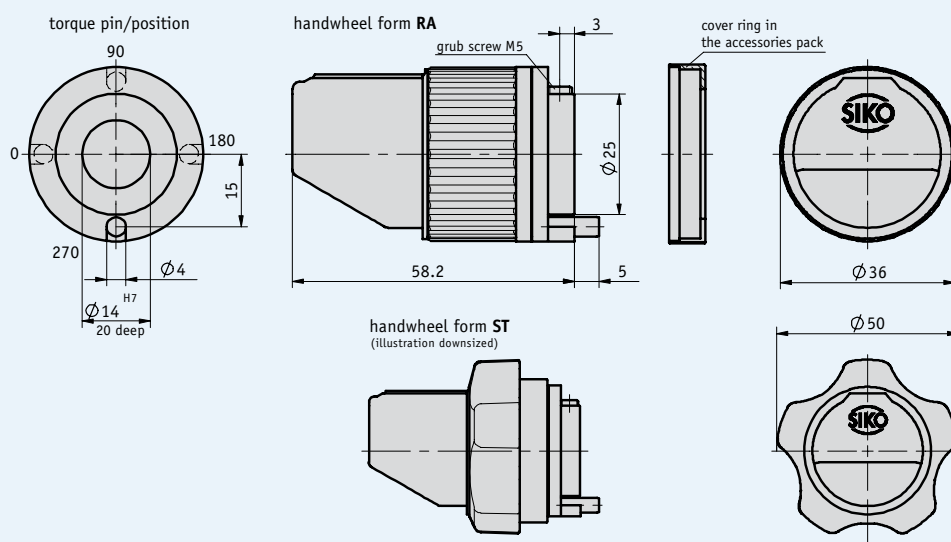


### Mechanical data

Feature	Technical data	Additional information
Counter	4 decades, fine reading	
Digit height	approx. 6 mm	
Ambient temperature	max. 80 °C	
Weight	0.06 kg	
Housing	plastic	

### Order

#### ■ Design

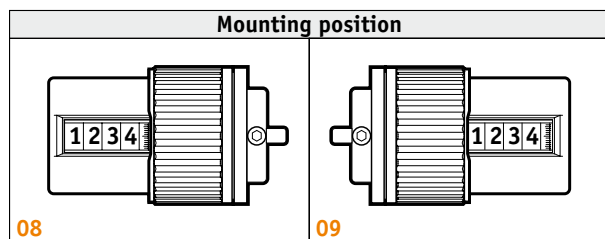

Note: Characters highlighted in orange are order features

#### ■ Order table

Feature	Order text	Additional information
Design	... <b>A</b> <b>08, 09</b>	see the icons illustrating the mounting position
Gear ratio	... <b>B</b> <b>12/5, 15, 17/5, 20, 25, 30, 40, 50, 100</b> others on request	/5 = arithmetical value not displayed
Decimal place	<b>0</b> <b>C</b> 0 = 0000 <b>1</b> 1 = 000.0 <b>2</b> 2 = 00.00 <b>3</b> 3 = 0.000	
Counting direction	<b>i</b> <b>D</b> ascending on the right <b>e</b> ascending on the left	clockwise counter-clockwise
Hollow shaft/diameter (mm)	<b>14</b> <b>E</b> Ø 14 mm ... <b>RH8, RH10, RH12</b> others on request	reducing bush
Torque support/position	<b>270</b> <b>F</b> see the drawing <b>0</b> see the drawing <b>90</b> see the drawing <b>180</b> see the drawing	
Handwheel design	<b>RA</b> <b>G</b> knurled handle <b>ST</b> star wheel	
Window	<b>K</b> <b>H</b> plastic <b>M</b> mineral glass	
Sealing ring	<b>O</b> <b>I</b> without sealing ring <b>M</b> sealing ring provided with the accessories pack	

#### ■ Order code

**DK02** -  -  -  -  -  -  -  -  - **FR** -  -

**A** **B** **C** **D** **E** **F** **G** **H** **I**

Scope of delivery: DK02

#### Accessories:

Reducing bushes

Page 106

#### Additional information:

General information and areas of application

Page 44 cont.




# Mechanical control knob DK03

## With analog scale

### Profile

- Control knob with integrated position indicator
- Shaft accommodation: max. Ø 14 mm
- Front analog display
- Various gear ratios
- Special scales, also for non-linear settings
- Star wheel as an option

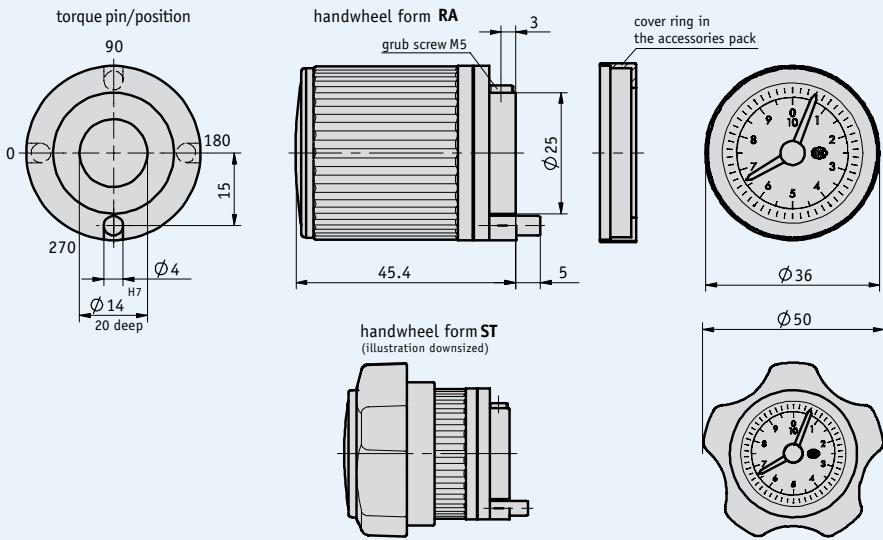

### Mechanical data

Feature	Technical data	Additional information
Ambient temperature	max. 80 °C	
Weight	0.07 kg	
Housing	plastic	

- **Order table**

## 1.3

**DK03** -  A -  B -  C -  D -  E -  F -  G -  H - **FR** -  I



Page 106


Page 44 cont.

Mechanical control knob DK05

Miniaturized design with digital display

Profile

- Miniature control knob
- Shaft accommodation: max. Ø 10 mm
- Front display
- Counter with 3 decades
- Display can be designed for “mm” or “inch”
- Housing color: orange or black





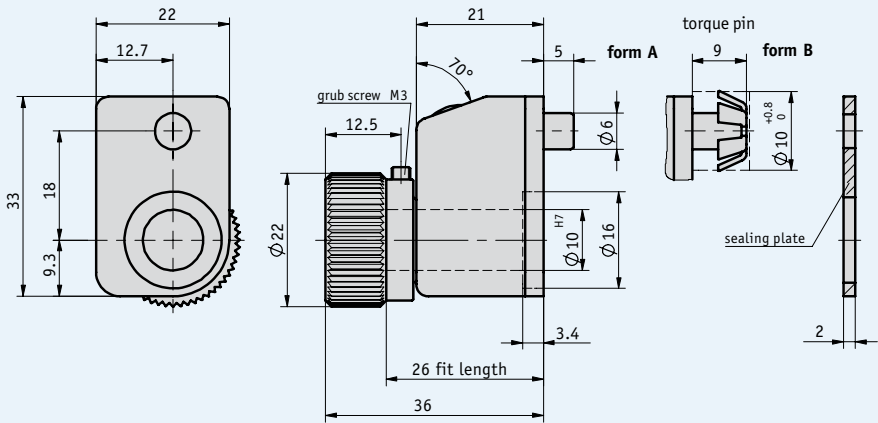


Mechanical data

Feature	Technical data	Additional information
Counter	3 decades	
Digit height	approx. 4 mm	
Ambient temperature	max. 80 °C	
Weight	approx. 0.02 kg	
Control knob shaft	Ø 10H7, plain bearing, anodized aluminum	
Housing	plastic, reinforced	

### Order

#### Design

Display	Mounting position			
	 02	 04	 06	 07

Note: Characters highlighted in orange are order features

#### Order table

Feature	Order text		Additional information
Design	...	<b>A</b> 02, 04, 06, 07	see the icons illustrating the mounting position
Display after 1 <sup>st</sup> revolution	...	<b>B</b> 7/5, 10, 12/5, 15, 17/5, 20, 25, 30, 40, 50, 60, 80, 100 others on request	/5 = arithmetical value not displayed
Decimal place	0	<b>C</b> 0 = 000	
	1	1 = 00.0	
	2	2 = 0.00	
Counting direction	i	<b>D</b> ascending on the right	clockwise
	e	ascending on the left	counter-clockwise
Hollow shaft/diameter (mm)	10	<b>E</b> Ø 10 mm	
	RH8	reducing bush Ø 8 mm	
	RH6	reducing bush Ø 6 mm	
		others on request	
Color	0	<b>F</b> orange	
	S	black	
Torque support/form	A	<b>G</b> cylindrical lug	
	B	for tolerance compensation	

#### Order code

DK05 -  -  -  -  -  -  -

A B C D E F G

Scope of delivery: DK05

#### Accessories:

Reducing bushes

Page 106

#### Additional information:

General information and areas of application


Page 44 cont.

## Mechanical control knob DKA02

### Miniaturized design with analog display

#### Profile

- Miniature control knob with analog display
- Shaft accommodation: max. Ø 10 mm
- Use of normal scales or custom-designed displays
- Fine scaling as an option
- Free choice of mounting situation

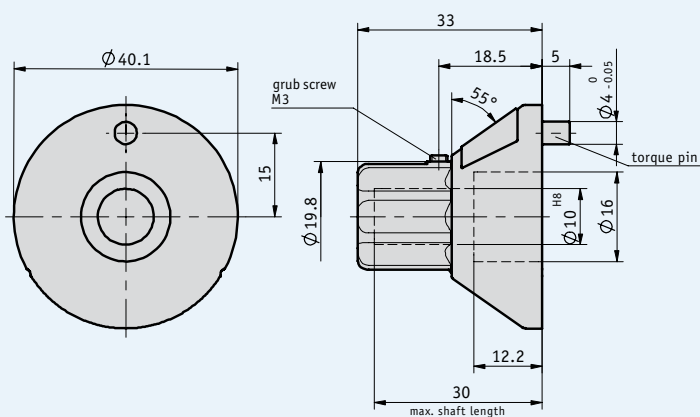

#### Mechanical data

Feature	Technical data	Additional information
Gear ratio	i = 26	
Ambient temperature	max. 80 °C	
Weight	approx. 16 g	
Housing	plastic	

### Order

#### Order table

Feature	Order text	Additional information
Bore/diameter	<b>10</b> <b>A</b> Ø 10 mm others on request	
Sense of rotation	<b>i</b> <b>B</b> ascending on the right <b>e</b> ascending on the left	clockwise counter-clockwise
Scale	<b>N26</b> <b>C</b> normal scale 1...26 <b>VK</b> special scale	
Scale multi-colored	<b>C1</b> <b>D</b> 1-color <b>C2</b> 2-color <b>C3</b> 3-color	
Fine scaling	<b>F100</b> <b>E</b> imprint 0...100 <b>OF</b> not imprinted	

#### Order code

**DKA02** -  -  -  -  -   
A B C D E

**Scope of delivery:** DKA02


**Additional information:**

General information and areas of application

Page 44 cont.



# 1.4

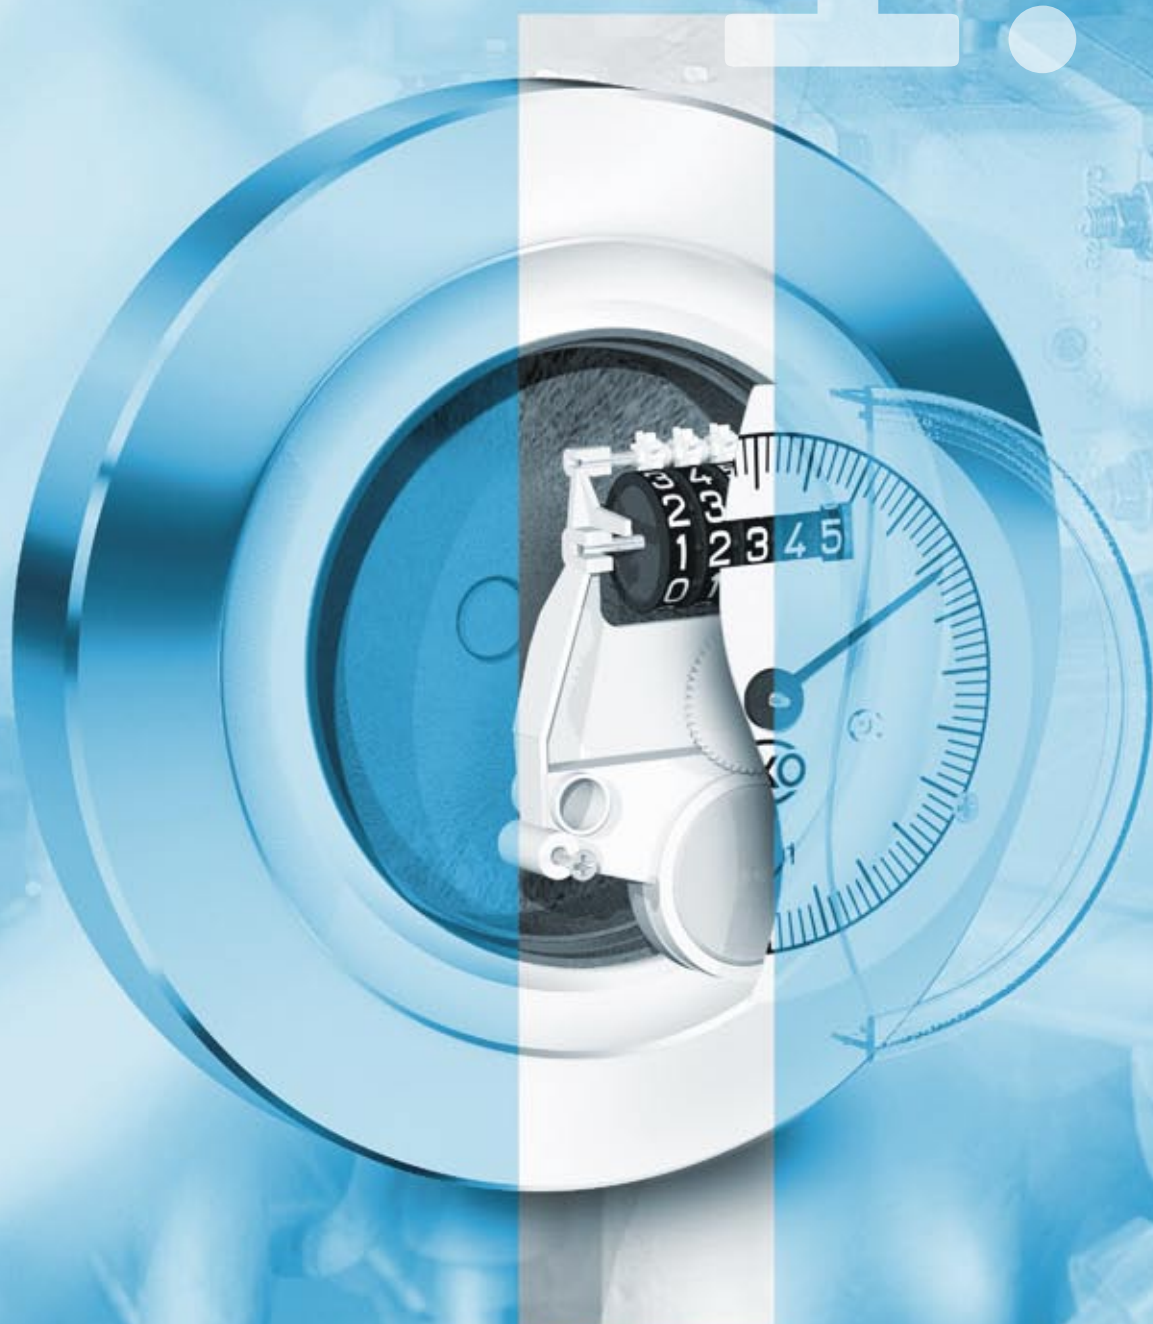

1.0   PositionLine Product overview	3
1.1   Mechanical digital position indicators	6
1.2   Electronic digital position indicators	28
1.3   Mechanical control knobs	42

### 1.4 | Mechanical analog position indicators and handwheels

General information and areas of application	62
Technical details	64
Function and application	66
Product matrix	67
Products	
S50/1	68
S70/1	70
S80/1	72
S120/1	74
SZ80/1	76
KHB...	78
HK.../HKL...	80
HS.../HSL...	83
HST...	86
HG...	88
HR...	90
HR5	92
HKF...	94

1.5   Accessories	96
1.6   Product index, Contact information	108

1.0

1.1

1.2

1.3

1.4

1.5

1.6



Also stay in full control with multiple turns - digital absolute indicators embedded in the analog pointer scale.

### Track-proven precision display and adjustment equipment for robust manual operation

While the handwheel is mainly used for manual adjustment of axial rotation, an integrated display permits reproducibility in addition to indication of rotation positions.

The range of possible applications is very wide – even in our electronic age. This is particularly true as the analog displays also work in the event of a power failure.

The “clocks” (indicators) are high-precision mechanical measuring devices, which are coupled to a motion work for direct, analog display of the adjustment values. The combination of analog pointer indication and digital counter alternatively ensures a high reading reliability for multiple rotations.

### Individual solutions

A wide range of scales is available for actually reading off the value. Customization is possible depending on the respective ratio or to suit individual customer requirements. As for the spindle pitch, almost any standard ratio can be accommodated at the works.

In addition to integrated position indication, handwheels are basically designed for mounting on horizontal spindles. A combination of the standard display with a planetary gear and a torque pin also enables mounting on spindles with any spatial orientation. Only the correct mechanical connection between the handwheel and the shaft must be ensured.

### Rugged outside, fine inside


Versions with non-corrosive, watertight or oil-filled display dials are also available for heavy-duty operation. The particularly robust analog SIKO measuring concept “handwheel plus indicator” is also very efficient in everyday, long-term use.

### Benefits

- Precise display of measured value owing to a pointer shaft with double bearings
- Very good readability owing to large scales
- Robust handwheels made of metal or fiber-glass reinforced plastic
- Rugged measuring system with favorable mounting and operation features
- Ideal adaptation to customer requirements owing to various ratios and provision of customized special scales

## 1.4

Robust handwheels for precise spindle adjustment

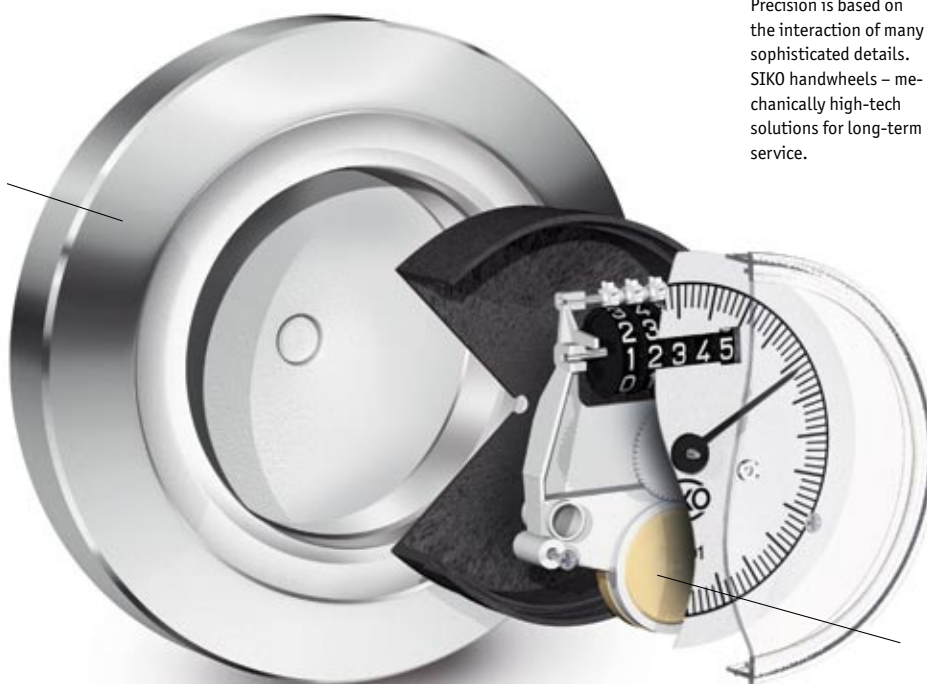

Precision is based on the interaction of many sophisticated details. SIKO handwheels – mechanically high-tech solutions for long-term service.

Counterweight for steady gravimetric alignment of the indicator on horizontal shafts



## Applications

There are many reasons why handwheels are undergoing a renaissance. The most important aspect is probably the human factor, as we have a well-developed, pronounced “analog eye”. For example with his trained vision, an offset printer can see from a distance whether a setting is correct or if it deviates from the standard.

SIKO handwheels with position indicators are already standard in a wide range of different industrial environments. With their precise, highly reliable function they are used on printing machines for regulating the contact pressure of rotary cylinders or in chemical or food cylinders – as here for example in a brewery – for controlling mixing ratios.

With their tangible ergonomics they also prove their robustness in tough production and trade environments. The solid functional design upgrades a number of standard applications, especially the equipment used in the metal, plastic and wood processing industries. In the chemical industry they are used for direct flow control.



1



2



3

[1] Fine height adjustment of the saw blade of a circular saw. [2] Laminate coating system: Space monitoring during the coating process. [3] Tasty beer requires constantly controlled conditions: Control of mixing ratios in a brewery. [4] Control of roller pressure and ink mixing on small printing machines is still manual work. [5] A robust handwheel design is an important advantage in the metal processing industry.



4




5

### Function

The functional principle of the SIKO position indicators is based on the physical force of gravity. The suspension design in the housings allows a double-mounted pointer shaft, which serves as a suspension shaft for a free-hanging weight.

The orientation of the scale, the gear unit with the required gear ratio and the pointer sleeve is based on the weight alignment. If the handwheel is turned, a gear wheel fixed in position on the pointer shaft ensures that the rotation is transmitted to the oscillating gear unit with a ratio of 1 : x. This direct connection between the handwheel and the bearing-mounted gear unit permits a display accuracy of 100 %.

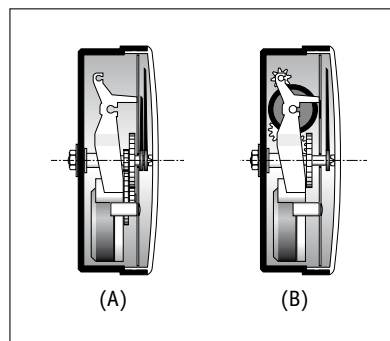

Configuration of analog (A) and digital (B) position indicators. Small weights in this example ensure the vertical orientation of the indicator.

### Zero setting function

When handwheels are used on horizontal spindles, this maintenance-free and reliable configuration permits simple referencing of the measured value.



Referencing (zero setting) is performed simply with a screwdriver from the front of the housing. Various covers are available for the use of SIKO handwheels without an indicator (e.g. as a simple crank). Ordering options are described under accessories.

## 1.4

### Special design for variable installation

Type HKF permits reliable and vibration-free position tracking, especially on vertical spindles. A planetary gear is used on this special SIKO handwheel. An additional bracket secures the scale in place and ensures that it remains in position when the handwheel is turned. The remaining design is comparable with the handwheel types for horizontal applications.



The handwheel type HKF can be reliably used in any position

### Versions

SIKO supplies versions with non-corrosive, watertight or oil-filled dials for industrial applications (refer to table). An oil-filled version, for example, prevents misting of the glass caused by penetrating moisture, so that important data is always visible. Paraffin oil is also advantageous for all applications subject to strong vibration.

The properties of the dials can also be changed by using different glass types. Plastic glasses are light and break-resistant. The dials are equipped with Plexiglas as a standard; polyamide glasses ensure acetone resistance and hard mineral glass is a solution which is resistant to cleaning agents, solvents and corrosion.

N	• Dust-tight version, standard
P	• Filled with paraffin oil, absorbs vibration and impact • Non-misting dial
W	• Watertight, without filling

## Background information

Due to the very different handwheel specifications, each scale or position indicator graduation must meet various requirements. The selected gear ratio is always used as a basis for the display values. This defines the distance which must be covered after a specific number of rotations.


## Normal scales

The type S position indicator can be equipped with two pointers, whereby one pointer is always moved with a gear ratio. With only one pointer and an assumed gear ratio of 20, a pointer moves across a scale range of 360° over 20 handwheel rotations, i.e., the entire adjustment path must be within only one rotation of this pointer. If a second pointer is selected, this runs 1:1 with the actual handwheel motion.

The position indicator type SZ is designed for larger measurement lengths. In this indicator the pointer of the display type S is replaced with a digital counter. Absolute display of more than one rotation of the pointer with a gear ratio is therefore possible. This combination has proven to be particularly advantageous in applications in which a large number of rotations and precise position information is required.



Normal scales for position indicators

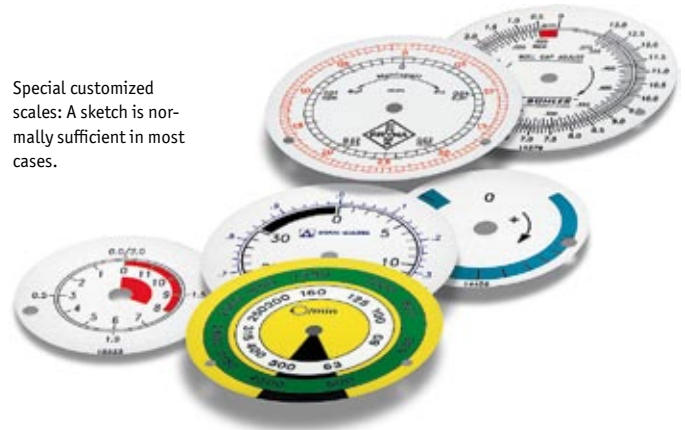

Special customized scales: A sketch is normally sufficient in most cases.

## Special versions

Standard scales can naturally not do justice to all requirements. For this reason SIKO supplies special scales which can be designed to suit customer requirements, for example for tracking adjustment in both directions, starting at zero and requiring a scale with ascending and descending values. Precise information in the form of diagrams or technical drawings are necessary for manufacturing such scales. Special requirements such as graduation, digits, company logos and color wishes can also be met.

In several cases, it can be necessary to include a so-called free angle on the scale. This depends on your application and the ratios supplied by SIKO.

### Calculation example\* for type S:

Machine shaft, pitch  $p = 2$   
Measuring range 150 mm

#### Solution method:

Number of rotations "U" over the entire measuring range

$$\frac{150 \text{ mm}}{2} = 75 \text{ U}$$

If the ratio  $i = 75$  is not available, select the next possible ratio (refer to the product pages "mechanical analog position indicators" from page 68, ordering table "ratios"). Assuming that the available standard ratio is 84 with a free angle, the calculation is this free angle: 84 rotations = 360°


#### Pointer motion:

$$\frac{75 \text{ U} \times 360^\circ}{84 \text{ U}} = 321,43^\circ$$

#### Free angle:

$$360^\circ - 321,43^\circ = 38,57^\circ$$

\* Example not valid for SZ80/1

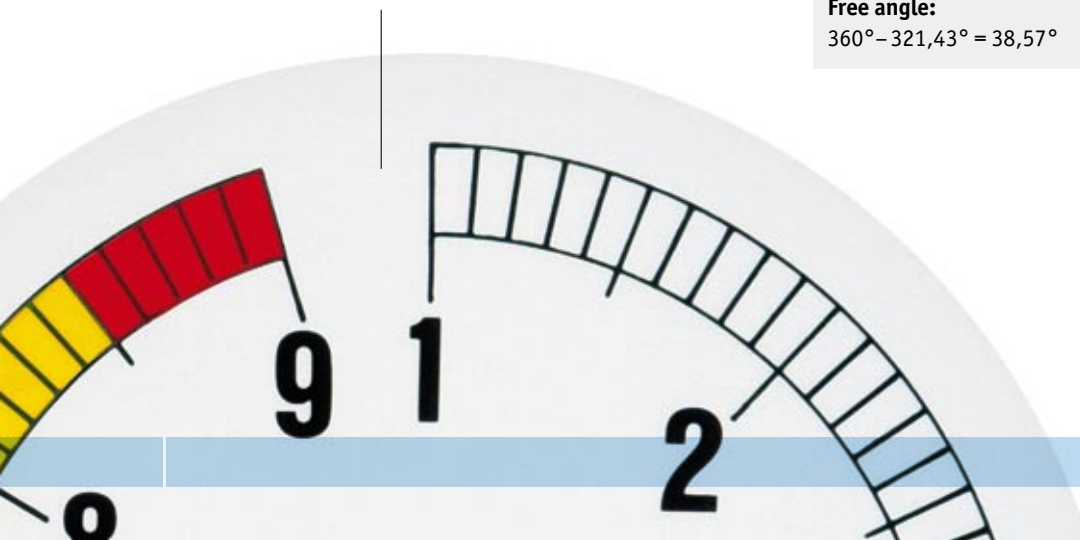



### Ambient conditions

### Examples of use

### Benefits



E.g., motor control

#### Drive equipment

Setting and monitoring of speeds on variable speed gear units and disks. Setting of hydraulic units ...

- Easy mounting
- Precise speed setting
- Indication of speed rpm
- Normal and special scales, perfectly suited to the application



E.g., flow setting

#### Process engineering

Valve settings, pump capacity, stroke length adjustment on dosing pumps, setting of tablet presses ...

- Easy mounting
- Exact reproducibility of process settings
- Mapping of non-linear adjustments
- Normal and special scales, perfectly suited to the application



E.g., rewind cutting machines (paper/foil industries)

#### Printing and paper processing

Adjustment of ink application (inking rollers), setting of register and buckle plates, positioning of punching tools, stop adjustment ...

- Easy mounting
- Precise positioning and exact repositionability
- Normal and special scales, perfectly suited to the application



E.g., coating systems

#### Roller positioning

For direct or angled rotational motion, for example on textile machines, laminating or coating systems ...

- Versions for horizontal mounting
- HKF design for all mounting positions (torque support, epicyclic gear)
- Normal and special scales, perfectly suited to the application
















E.g., wood cutting

#### Stop setting

Setting of stop depth, cutting width, angle or drill head for wood or sheet metal processing, tooling machines ...


- Precise positioning
- Exact angle indication
- Robust metal handwheels for rough environmental conditions
- Oil-filled versions for compensation of vibrations

### Mechanical analog position indicators and handwheels

						
		S50/1	S70/1	S80/1	S120/1	SZ80/1
Page		68	70	72	74	76
Display						
analog		•	•	•	•	
analog-digital						•
Handwheel type, combinable with ...						
	Ø in mm	Form	Page			
Aluminum, integrated position indicator						
HR5	56		92			
HKF	120-160		94			
Aluminum, separate position indicator						
HR	65-108		90	•	•	•
HST	75-110		86	•	•	•
HK/HSL	80-200		80	•	•	•
HS/HSL	80-320		83	•	•	•
Plastic, separate position indicator						
HG	63-98		88	•	•	•
KHB	87-200		78	•	•	•

Profile

- Analog position indicator
- Data logging based on the gravity principle
- High stability thanks to doubly supported pointer shaft
- Very robust, glass-fiber enforced plastic housing
- Wide range of gear ratios
- Special scales, also for small numbers of pieces
- Dustproof, oil-filled or waterproof versions

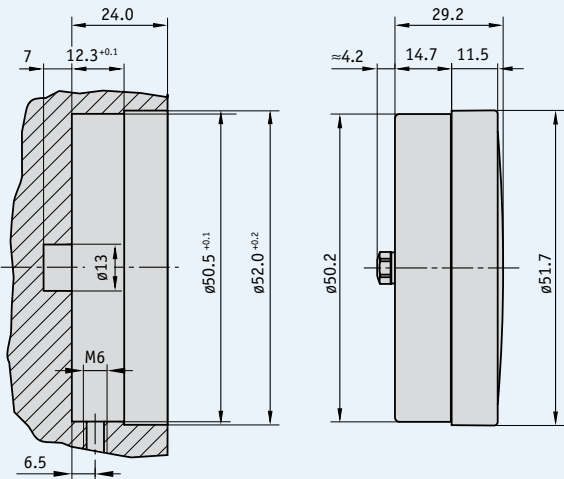

Mechanical data

Feature	Technical data	Additional information
Housing	plastic, reinforced	
Weight versions N and W	0.1 kg	
Weight version P	0.1 kg	

## Order

### Order table

Feature	Order data	Technical data	Additional information
Version	N	dustproof	standard
	P	oil-filled	
	W	waterproof	
Gear ratio	...	1, 2, 3, 6, 10, 12, 15, 18, 20, 24, 30, 36, 48, 50, 60, 72, 84, 96, 100	
	B	others on request	
Sense of rotation = ascending values	i	clockwise	
	e	counter-clockwise	
Pointer	1	pointer with gear ratio	and one pointer running 1:1
	2	one pointer with gear ratio	
Cover glass	S	plastic	
	A	plastic, acetone-resistant	
Scale	N	normal scale	related to gear ratio
	VK	special scale	custom-designed, no VK with first article
Scale imprint	C1	one-color	
	C2	two-color	
	C3	three-color	

### Order code

S50/1 -  -  -  -  -  -  -

A B C D E F G

Scope of delivery: S50/1

#### Accessories:

Drawing aid for scales

Page 107

#### Additional information:

General information and areas of application


Page 62 cont.

# Mechanical analog position indicator S70/1

Individually usable for third-party handwheels

## Profile

- Analog position indicator
- Data logging based on the gravity principle
- High stability thanks to doubly supported pointer shaft
- Very robust, glass-fiber enforced plastic housing
- Wide range of gear ratios
- Special scales, also for small numbers of pieces
- Dustproof, oil-filled or waterproof versions

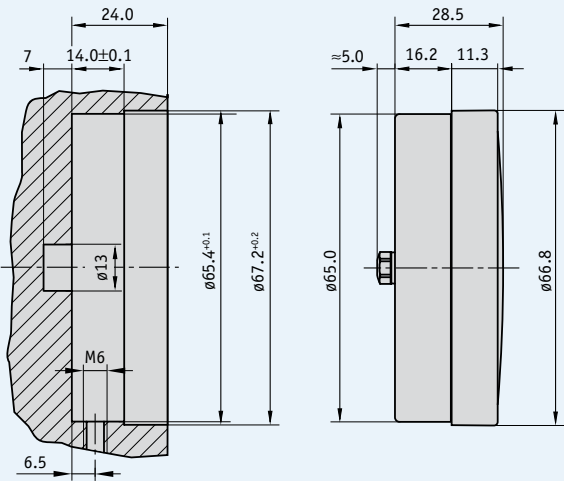

## Mechanical data

Feature	Technical data	Additional information
Housing	plastic, reinforced	
Weight of versions N and W	0.1 kg	
Weight of version P	0.2 kg	

Order

Order table

Feature	Order data	Technical data	Additional information
Version	N	dustproof	standard
	P	oil-filled	
	W	waterproof	
Gear ratio	...	1, 2, 3, 6, 10, 12, 15, 18, 20, 24, 30, 36, 48, 50, 60, 72, 84, 96, 100	
		others on request	
Sense of rotation = ascending values	i	clockwise	
	e	counter-clockwise	
Pointer	1	pointer with gear ratio	and one pointer running 1:1
	2	one pointer with gear ratio	
Scale	N	normal scale	related to gear ratio
	VK	special scale	custom-designed, no VK with first article
Scale imprint	C1	one-color	
	C2	two-color	
	C3	three-color	

Order code

S70/1 - 

A

 - 

B

 - 

C

 - 

D

 - 

E

 - 

F

Scope of delivery: S70/1

Accessories:

Drawing aid for scales

Page 107

Additional information:


General information and areas of application

Page 62 cont.



## Profile

- Analog position indicator
- Data logging based on the gravity principle
- High stability thanks to doubly supported pointer shaft
- Very robust, glass-fiber reinforced plastic housing
- Wide range of gear ratios
- Special scales, also for small numbers of pieces
- Dustproof, oil-filled or waterproof versions

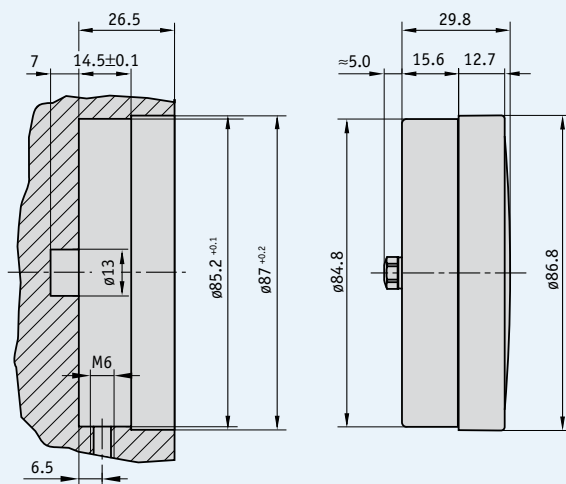

## Mechanical data

Feature	Technical data	Additional information
Housing	plastic, reinforced	
Weight of versions N and W	0.1 kg	
Weight of version P	0.2 kg	

## Order

### Order table

Feature	Order data	Technical data	Additional information
Version	N	dustproof	standard
	P	oil-filled	
	W	waterproof	
Gear ratio	...	1, 2, 3, 6, 10, 12, 15, 18, 20, 24, 30, 36, 48, 50, 60, 72, 84, 96, 100	
	B	others on request	
Sense of rotation = ascending values	i	clockwise	
	e	counter-clockwise	
Pointer	1	pointer with gear ratio	and one pointer running 1:1
	2	one pointer with gear ratio	
Cover glass	S	plastic	
	A	plastic, acetone-resistant	
	M	mineral glass	
Zero setting	ON	without zero setting	
	MN	with zero setting	
Scale	N	normal scale	related to gear ratio
	VK	special scale	custom-designed, no VK with first article
Scale imprint	C1	one-color	
	C2	two-color	
	C3	three-color	

### Order code

S80/1 -  -  -  -  -  -  -  -

A B C D E F G H

1.4

Scope of delivery: S80/1

#### Accessories:

Drawing aid for scales

Page 107


#### Additional information:

General information and areas of application

Page 62 cont.

## Profile

- Analog position indicator
- Data logging based on the gravity principle
- High stability thanks to doubly supported pointer shaft
- Very robust, glass-fiber reinforced plastic housing
- Wide range of gear ratios
- Special scales, also for small numbers of pieces
- Dustproof, oil-filled or waterproof versions

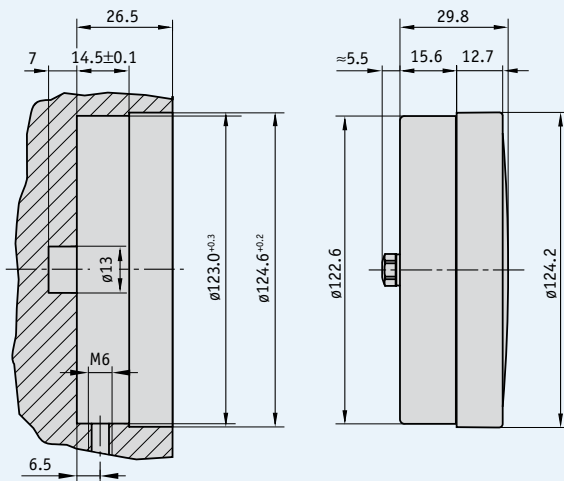

## Mechanical data

Feature	Technical data	Additional information
Housing	plastic, reinforced	
Weight of versions N and W	0.2 kg	
Weight of version P	0.4 kg	

## Order

### Order table

Feature	Order data	Technical data	Additional information
Version	N	dustproof	standard
	P	oil-filled	
	W	waterproof	
Gear ratio	...	1, 2, 3, 6, 10, 12, 15, 18, 20, 24, 30, 36, 48, 50, 60, 72, 84, 96, 100, 120, 150, 200, 250, 300, 360, 500	
		others on request	
Sense of rotation = ascending values	i	clockwise	
	e	counter-clockwise	
Pointer	1	pointer with gear ratio	
	2	one pointer with gear ratio and one pointer running 1:1	
Zero setting	ON	without zero setting	
	MN	with zero setting	
Scale	N	normal scale	related to gear ratio
	VK	special scale	custom-designed, no VK with first article
Scale imprint	C1	one-color	
	C2	two-color	
	C3	three-color	

### Order code

S120/1 -  -  -  -  -  -  -

A B C D E F G

Scope of delivery: S120/1

#### Accessories:

Drawing aid for scales

Page 107


#### Additional information:

General information and areas of application

Page 62 cont.

### Profile

- Combined analog-digital position indicator
- Data logging based on the gravity principle
- High stability thanks to doubly supported pointer shaft
- Very robust, glass-fiber reinforced plastic housing
- Counter with 5 decades
- Special scales, also for small numbers of pieces
- Dustproof or oil-filled versions

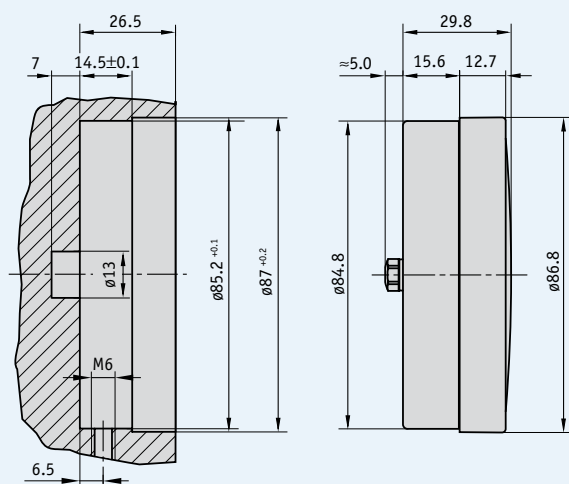

### Mechanical data

Feature	Technical data	Additional information
Housing	plastic, reinforced	
Weight of version N	0.2 kg	
Weight of version P	0.3 kg	

### Order

#### ■ Order table

Feature	Order data	Technical data	Additional information
Version	N	dustproof	standard
	P	oil-filled	
Indication after 1 <sup>st</sup> revolution	...	2, 2/5, 3, 4, 5, 6, 8, 10, 15	e.g. 00010
	B	others on request	
Decimal places	0	0 = 00000	
	1	1 = 0000.0	
	2	2 = 000.00	
	3	3 = 00.000	
	4	4 = 0.0000	
Sense of rotation = ascending values	i	clockwise	
	e	counter-clockwise	
Pointer	1	pointer running 1:1	
	0Z	without pointer	
Cover glass	S	plastic	
	A	plastic, acetone-resistant	
Scale	N	normal scale	related to indication after 1 <sup>st</sup> revolution
	VK	special scale	custom-designed, no VK with first article
Scale imprint	C1	one-color	
	C2	two-color	
	C3	three-color	

#### ■ Order code

SZ80/1 -  -  -  -  -  -  -  -

A B C D E F G H

1.4

**Scope of delivery:** SZ80/1

#### Accessories:

Drawing aid for scales

Page 107

#### Additional information:


General information and areas of application

Page 62 cont.



## Profile

- Robust and economic plastic handwheel
- Various sizes
- Hub made of zinc-coated steel for high stability and easy shaft mounting
- Various hub versions
- With thread for mounting a turning handle (see accessories)

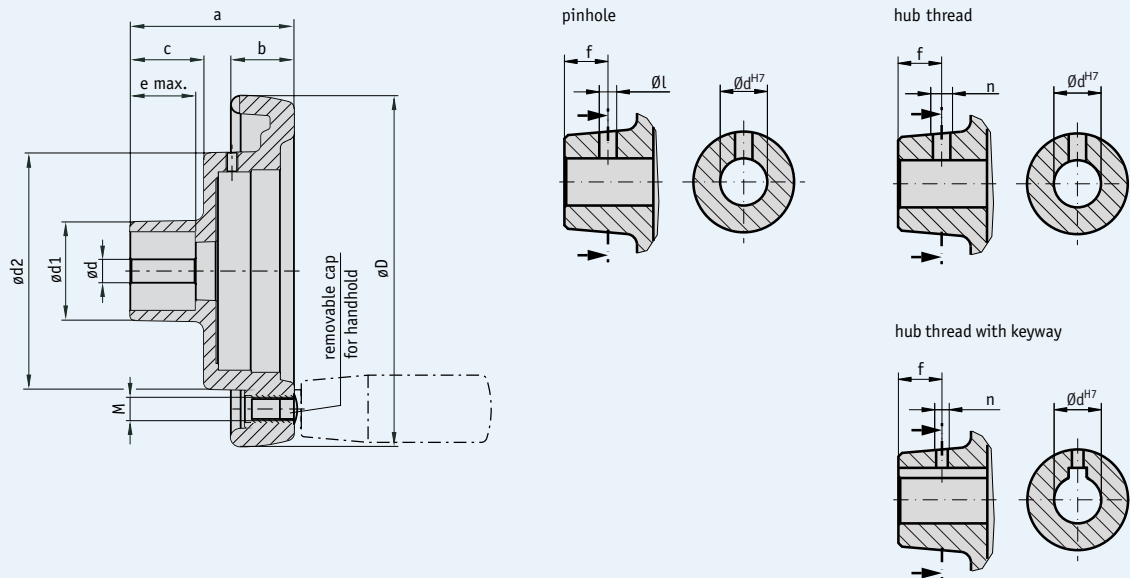

## Mechanical data

### ■ Dimensions

type	ØD	Ødv	Ødx	Ød1	Ød2	a	b	c	e	GfG	suitable for	weight	material
KHB 9	87	5.8	16	32	63	54	17	21	20	M6	S50/1	0.16 kg	plastic, hub: zinc-coated steel
KHB 13	130	6.8	26	42	98.2	66	24	28.5	24	M8	S80/1; SZ80/1	0.35 kg	plastic, hub: zinc-coated steel
KHB 15	150	6.8	26	42	101	70	27	30.5	28	M10	S80/1; SZ80/1	0.43 kg	plastic, hub: zinc-coated steel
KHB 20	200	6.8	30	46	136	72	32	25	23	M10	S120/1	0.81 kg	plastic, hub: zinc-coated steel

dv = d predrilled; dx = d max.; with keyway; GfG = thread for handle

### ■ Special versions

Handwheel type		KHB 9					KHB 13 / KHB 15						
Bore dH7		6 ... 8	9, 10	11, 12	13, 14	15, 16	7, 8	9, 10	11, 12	13 ... 17	18 ... 20	21 ... 24	25, 26
Groove width for keyway JS9			3	4				3	4	5	6		
Pinhole		3.8/8	3.8/8	3.8/8	4.8/8		3.8/12	3.8/12	3.8/12	4.8/12	4.8/12	4.8/12	
Hub thread	no keyway JS9	M4/8	M4/8	M4/8	M6/8		M4/12	M4/12	M4/12	M6/12	M6/12	M6/12	
	with keyway JS9		M3/8	M3/8				M3/12	M3/12	M4/12	M5/12		

Handwheel type	KHB 20							
Bore dH7	7, 8	9, 10	11, 12	13 ... 17	18 ... 22	23 ... 25	26 ... 30	
Groove width for keyway JS9		3	4	5	6	8		
Pinhole	3.8/10	3.8/10	3.8/10	4.8/10	4.8/10	4.8/10		
Hub thread								
without keyway JS9	M4/10	M4/10	M4/10	M6/10	M6/10	M6/10		
with keyway JS9		M3/10	M3/10	M4/10	M5/10			

Note: Characters highlighted in orange are order features

## Order

### Order table

Feature	Order data	Technical data	Additional information
Handwheel	KHB... A	9, 13, 15, 20	see "Dimensions"
Bore Ød	d vorg. ... B	predrilled, see table above, value Ødv 6 ... 30 d max. in mm steps (H7)	see "Dimensions"
Keyway	OP JS9 C	without keyway light seat	according to DIN 6885 T1, not with pinhole for all
Pinhole (only without keyway)	OS ... D	without pinhole diameter „Øl“/measure "f" (e.g. 3.8/12) others on request	see table "Special versions", depending on hand-wheel type, only with hub thread "ONG"
Hub thread	ONG ... E	without hub thread thread "n"/measure "f" (e.g. M4/12) others on request	see table "Special versions", depending on handwheel type, only with pinhole "OS"
Position indicator mounted (*)	PM PS F	position indicator mounted separate position indicator	
Hub turned down	OAN G	without turned-down hub turned-down hub on request	only KHB9

\* separate ordering of position indicator required! (see pages 68-77)

### Order code

KHB...	-		-		-		-		-		-	
A		B		C		D		E		F		G

Scope of delivery: KHB...

#### Accessories:

Handles  
End plate

Page 98  
Page 99

#### Additional information:

General information and areas of application


Page 62 cont.

## Handwheel HK.../HKL...


### Aluminum handwheel in popular design

#### Profile


- Classical handwheel made of aluminum casting
- Various sizes
- Plastic-coated or bright-finished surface
- Various hub versions
- Turning handle as an option (see accessories)

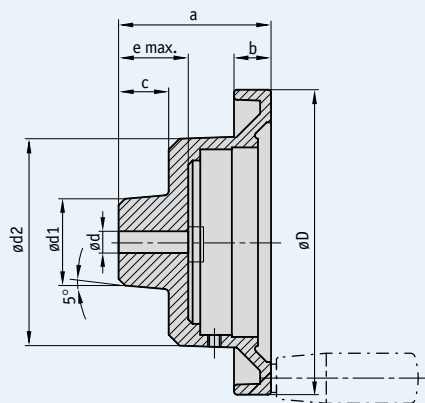


pinhole



hub thread



hub thread with keyway



#### Mechanical data

##### ■ Dimensions

type	ØD	Ødv	Ødx	Ød1	Ød2	a	b	c	e	GfG	suitable for	weight	material
HK 8	80	5.8	16	26	60	52	14	20	21	M6	S50/1	0.2 kg	aluminum
HK 10	100	5.8	16	26	60	55	15	20	23	M6	S50/1	0.4 kg	aluminum
HK 12	120	6.8	25	40	95	64	15	23	30	M6	S80/1; SZ80/1	0.5 kg	aluminum
HK 14	140	6.8	25	40	95	70	17	23	30	M8	S80/1; SZ80/1	0.6 kg	aluminum
HK 16	160	7.8	25	40	95	70	20	23	28	M8	S80/1; SZ80/1	0.7 kg	aluminum
HK 20	200	7.8	30	45	95	75	22	25	32	M10	S80/1; SZ80/1	0.8 kg	aluminum
HKL 20	200	7.8	30	45	132	75	22	25	30	M10	S120/1	0.9 kg	aluminum

dv = d predrilled; dx = d max.; GfG = thread for handle

## Special versions

Handwheel type		HK 8 / HK 10			
Bore dH7		6 ... 8	9, 10	11, 12	13 ... 16
Groove width for keyway JS9			3	4	5
Pinhole		3.8/12	3.8/12	3.8/12	4.8/12
Hub thread	without keyway JS9	M4/12	M4/12	M4/12	M6/12
	with keyway JS9		M3/12	M3/12	

Handwheel type		HK 12 / HK 14 / HK 16						
Bore dH7		7*), 8	9, 10	11, 12	13 ... 17	18 ... 21	22	23 ... 25
Groove width for keyway JS9			3	4	5	6	6	8
Pinhole		3.8/12	3.8/12	3.8/12	4.8/12	4.8/12	4.8/12	4.8/12
Hub thread	without keyway JS9	M4/12	M4/12	M4/12	M6/12	M6/12	M6/12	M6/12
	with keyway JS9		M3/12	M3/12	M4/12	M5/12		

\*) Bore Ø7H7 only for HK 12 / HK 14

Handwheel type		HK 20 / HKL 20							
Bore dH7		8	9, 10	11, 12	13 ... 17	18 ... 22	23 ... 25	26	27 ... 30
Groove width for keyway JS9			3	4	5	6	8	8	8**)
Pinhole		3.8/12	3.8/12	3.8/12	4.8/12	4.8/12	4.8/12	5.8/12	5.8/12
Hub thread	without keyway JS9	M4/12	M4/12	M4/12	M6/12	M6/12	M6/12	M8/12	M8/12
	with keyway JS9		M3/12	M3/12	M4/12	M5/12			

\*\*\*) not for HKL 20, additional special versions available on request. **Note:** Characters highlighted in orange are order features.

- **Order table**

Feature	Order data	Technical data	Additional information
Handwheel type	<b>HK...</b>	<b>A</b> 8, 10, 12, 14, 16, 20	see "Dimensions"
	<b>HKL20</b>		see "Dimensions"
Surface	<b>B</b>	<b>B</b> unvarnished	
	<b>C</b>	plastic-coated, hammer finish paint, light-gray	
		others on request	
Handle bore	<b>0G</b>	<b>C</b> without handle bore	
	<b>...</b>	<b>M6, M8, M10</b> with handle bore or handle thread	see "Dimensions", value GfG
Bore Ød	<b>d vorg.</b>	<b>D</b> predrilled, see table page 80, value Ødv	
	<b>...</b>	<b>6 ... 30</b> d max. in mm steps (H7)	see "Dimensions"
Keyway	<b>0P</b>	<b>E</b> without keyway	
	<b>JS9</b>	light seat	according to DIN 6885 T1
	<b>P9</b>	tight seat	according to DIN 6885 T1
Pinhole (only without keyway)	<b>0S</b>	<b>F</b> without pinhole	
	<b>...</b>	diameter "Øl"/measure "f" (e.g. 3.8/12)	see table "Special versions", depending on handwheel type, only if hub thread "0NG"
		others on request	
Hub thread	<b>0NG</b>	<b>G</b> without hub thread	
	<b>...</b>	thread "n"/measure "f" (e.g. M4/12)	see table "Special versions", depending on handwheel type, only if pinhole "0S"
		others on request	
Hub turned down	<b>0AN</b>	<b>H</b> without turned-down hub	
		others on request	
Position indicator mounted (*)	<b>PM</b>	<b>I</b> position indicator mounted	
	<b>PS</b>	separate position indicator	
* separate order of a position indicator required! (see pages 68-77)			

- **Order code**

HK...	-		-		-		-		-		-		-		-		-	
A		B		C		D		E		F		G		H		I		

**Scope of delivery:** HK.../HKL...



- **Accessories:**

Handles  
End plate

Page 98  
Page 99


**Additional information:**

*General information and areas of application*

Page 62 cont.

## Profile

- Robust handwheel made of aluminum casting
- Rounded design with dirt corners minimized
- Various sizes
- Plastic-coated or bright-finished surface
- Various hub versions
- Turning handle as an option (see accessories)

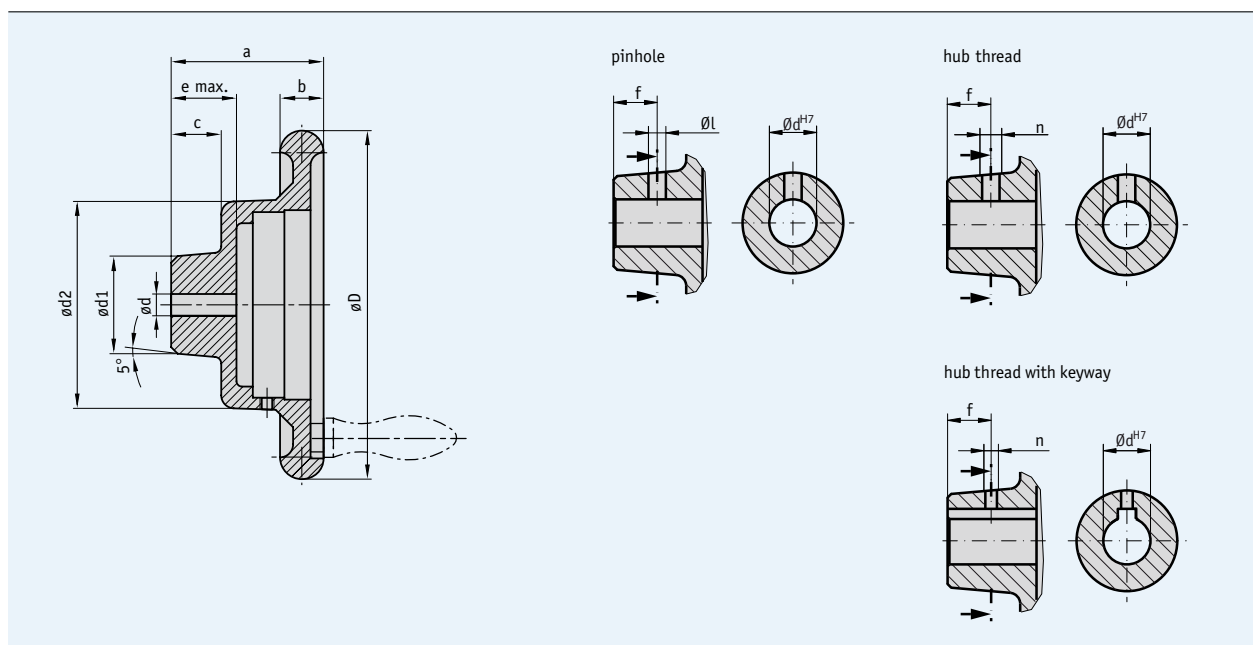

1.4

## Mechanical data

### ■ Dimensions

type	ØD	Ødv	Ødx	Ød1	Ød2	a	b	c	e	GfG	suitable for	weight	material
HS 8	80	5.8	16	26	60	55	15	18	20	M6	S50/1	0.2 kg	aluminum
HS 10	100	5.8	16	30	60	55	16	17	21	M6	S50/1	0.4 kg	aluminum
HS 12	125	6.8	25	40	95	70	16.5	23	30	M6	S80/1; SZ80/1	0.5 kg	aluminum
HS 14	140	6.8	20	32	95	70	18	23	29	M8	S80/1; SZ80/1	0.6 kg	aluminum
HS 16	160	7.8	30	45	95	70	20	23	30	M8	S80/1; SZ80/1	0.7 kg	aluminum
HS 18	180	7.8	30	45	95	75	22	28	34	M10	S80/1; SZ80/1	0.8 kg	aluminum
HSL 16	160	7.8	30	45	130	65	20	23	28	M8	S120/1	0.7 kg	aluminum
HSL 20	200	7.8	35	55	134	75	22	28	34	M10	S120/1	0.9 kg	aluminum
HSL 32	320	9.8	40	80	134	83	28	33	39	M12	S120/1	3 kg	aluminum

dv = d predrilled; dx = d max.; GfG = thread for handle



### Special versions

Handwheel type		HS 8 / HS 10					
Bore dH7		6 ... 8	9, 10	11, 12	13, 14	15	16
Groove width for keyway JS9			3	4	5	5*)	5*)
Pinhole		3.8/12	3.8/12	3.8/12	4.8/12	4.8/12	4.8/12
Hub thread	without keyway JS9	M4/12	M4/12	M4/12	M6/12	M6/12	M6/12
	with keyway JS9		M3/12	M3/12	M4/12*)	M4/12*)	

\*) not for HS 8

Handwheel type		HS 12 / HS 14							
Bore dH7		7, 8	9, 10	11, 12	13 ... 17	18 ... 20	21**)	22**)	23 ... 25**)
Groove width for keyway JS9			3	4	5	6**)	6**)	6**)	
Pinhole		3.8/12	3.8/12	3.8/12	4.8/12	4.8/12	4.8/12**)	4.8/12**)	4.8/12**)
Hub thread	without keyway JS9	M4/12	M4/12	M4/12	M6/12	M6/12	M6/12**)	M6/12**)	M6/12**)
	with keyway JS9		M3/12	M3/12	M4/12	M5/12**)	M5/12**)		

\*\*\*) not for HS14

Handwheel type		HS 16 / HS 18 / HSL 16 / HSL 20								
Bore dH7		8	9, 10	11, 12	13 ... 17	18 ... 22	23 ... 25	26, 27	28 ... 30	31 ... 35****)
Groove width for keyway JS9			3	4	5	6	8	8	8***)	10****)
Pinhole		3.8/12	3.8/12	3.8/12	4.8/12	4.8/12	4.8/12	5.8/12	5.8/12	5.8/12****)
Hub thread	without keyway JS9	M4/12	M4/12	M4/12	M6/12	M6/12	M6/12	M8/12	M8/12	M8/12****)
	with keyway JS9		M3/12	M3/12	M4/12	M5/12	M6/12****)	M6/12****)	M6/12****)	

\*\*\*\*) not for HS 16 or HS 18, \*\*\*\*) not for HS 16, HS 18 or HSL 16

Handwheel type		HSL 32									
Bore dH7		10	11, 12	13 ... 17	18 ... 22	23 ... 25	26 ... 30	31 ... 35	36 ... 38	39 ... 42	43 ... 45
Groove width for keyway JS9		3	4	5	6	8	8	10	10	12	
Pinhole		3.8/12	3.8/12	4.8/12	4.8/12	4.8/12	5.8/12	5.8/12	5.8/12	5.8/12	
Hub thread	without keyway JS9	M4/12	M4/12	M6/12	M6/12	M6/12	M8/12	M8/12	M10/12	M10/12	M10/12
	with keyway JS9	M3/12	M3/12	M4/12	M5/12	M6/12	M6/12	M8/12	M8/12		

Additional special versions available on request. **Note:** Characters highlighted in orange are order features.

## Order

### Order table

Feature	Order data	Technical data	Additional information
Handwheel type	HS... HSL...	A 8, 10, 12, 14, 16, 18 16, 20, 32	see "Dimensions"
Surface	B C	B unvarnished C plastic-coated, hammer finish paint light-gray others on request	
Handle bore	OG ...	C without handle bore M6 ... M12 with handle bore or handle thread	see "Dimensions", value GfG
Bore Ød	d vorg. ...	D predrilled 6 ... 45 d max. in mm steps (H7)	see "Dimensions", value Ødv see "Dimensions"
Keyway	OP JS9 P9	E without keyway light seat tight seat	according to DIN 6885 T1 according to DIN 6885 T1
Pinhole (only without keyway)	OS ...	F without pinhole diameter "Øl"/measure "f" (e.g., 3.8/12) others on request	see table "Special versions", depending on handwheel type, only if hub thread "ONG"
Hub thread	ONG ...	G without hub thread thread "n"/measure "f" (e.g., M4/12) others on request	see table "Special versions", depending on handwheel type, only if pinhole "OS"
Hub turned down	OAN	H without turned-down hub others on request	
Clamp ring	OK MK	I without clamp ring with clamp ring	
Position indicator mounted (*)	PM PS	K position indicator mounted separate position indicator	

\* separate order of a position indicator required (see pages 68-77)

### Order code

HS... - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ]  
A B C D E F G H I K

Scope of delivery: HS.../HSL...

#### Accessories:

Handles  
End plate

Page 98  
Page 99

#### Additional information:


General information and areas of application

Page 62 cont.


# Handwheel HST... Star wheel made of aluminum

## Profile


- Various sizes
- Plastic-coated or bright-finished surface
- Various hub versions

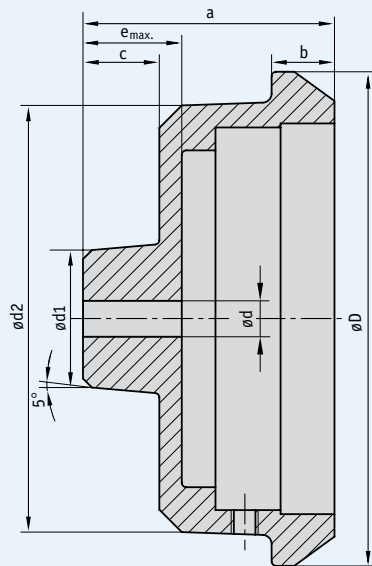


pinhole



hub thread



hub thread with keyway



## Mechanical data

### ■ Dimensions

type	ØD	Ødv	Ødx	Ød1	Ød2	a	b	c	e	suitable for	Weight	material
HST 7	78	5.8	20	32	60	50	20	15	20	S50/1	0.2 kg	aluminum
HST 8	75	5.8	12	20	60	43	10	10	13	S50/1	0.2 kg	aluminum
HST 11	110	6.8	16	30	95	56	14	17	22	S80/1; SZ80/1	0.5 kg	aluminum

dv = d predrilled; dx = d max.

### ■ Special versions

Handwheel type		HST 7					HST 11				
Bore dH7		6 ... 8	9, 10	11, 12	13 ... 16	17 ... 20	7, 8	9, 10	11, 12	13 ... 15	16
Groove width for keyway JS9			3	4	5			3	4	5	5
Pinhole		3.8/10	3.8/10	3.8/10	4.8/10	4.8/10	3.8/12	3.8/12	3.8/12	4.8/12	4.8/12
Hub thread	without keyway JS9	M4/10	M4/10	M4/10	M6/10	M6/10	M4/12	M4/12	M4/12	M6/12	M6/12
	with keyway JS9	M3/10	M3/10	M4/10				M3/12	M3/12	M4/12	

Additional special versions available on request.

Handwheel type	HST 8		
Bore dH7	6 ... 8	9, 10	11, 12
Groove width for keyway JS9		3	
Pinhole	3.8/6	3.8/6	3.8/6
Hub thread	M4/6	M4/6	M4/6

Note: Characters highlighted in orange are order features.

## Order

### Order table

Feature	Order data	Technical data	Additional information
Handwheel type	HST... A	7, 8, 11	see "Dimensions"
Surface	B CS B	unvarnished plastic-coated, black RAL9005 half-matt others on request	not with HST 7
Bore Ød	d vorg. ... C	predrilled 6 ... 20 d max. in mm steps (H7)	see "Dimensions", value Ødv see "Dimensions" (smallest bore corresp. with predr.)
Keyway	OP JS9 P9 D	without keyway light seat tight seat	according to DIN 6885 T1 according to DIN 6885 T1
Pinhole (only without keyway)	OS ... E	without pinhole diameter "Øl"/measure "f" (e.g., 3.8/12) others on request	see table "Special versions", depending on handwheel type, only if hub thread "ONG"
Hub thread	ONG ... F	without hub thread thread "n"/measure "f" (e.g., M4/12) others on request	see table "Special versions", depending on handwheel type, only if pinhole "OS"
Hub turned down	OAN G	without turned-down hub others on request	
Position indicator mounted (*)	PM PS H	position indicator mounted separate position indicator	

\* separate order of a position indicator required (see pages 68-77)

### Order code

HST...	-		-		-		-		-		-			
A		B		C		D		E		F		G		H

Scope of delivery: HST...



Accessories:  
End plate

Page 99

Additional information:  
General information and areas of application


Page 62 cont.

## Handwheel HG...


### Turning handle made of plastic

#### Profile


- Low-cost and compact turning handle made of glass-fiber reinforced plastic
- Various sizes
- Surface with rounded edges avoids accumulation of dirt
- Hub made of plastic or metal
- Various hub versions

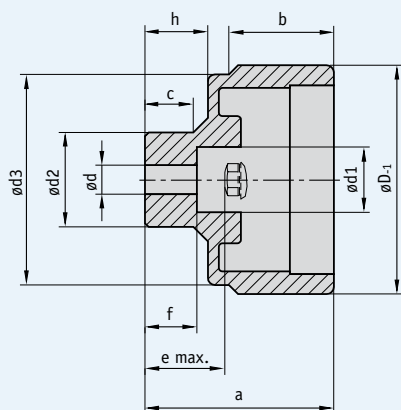


pinhole



hub thread



hub thread with keyway



#### Mechanical data

##### Dimensions

type	Hub	ØD	Ødv	Ødx	Ød1	Ød2	a	b	c	e	f	h	suitable for	weight	material
HG 5	plastic	63		6 ... 12 <sup>H9</sup>	13	21	58	49	28.9	18	17.3	14.3	S50/1	0.1 kg	plastic
	metal	63	5.8	6 ... 16 <sup>H7</sup>	18	26	58	52	28.9	21	14.3	17.3	S50/1	0.1 kg	plastic
HG 10	plastic	98		6 ... 16 <sup>H9</sup>	16	30	93	56	31.5	22.5	20.7	18.7	S80/1; SZ80/1	0.2 kg	plastic
	metal	98	6.8	6 ... 16 <sup>H7</sup>	25.5	35	93	59	31.5	25.5	18	21.7	S80/1; SZ80/1	0.2 kg	plastic

dv = d predrilled

##### Special versions

Handwheel type	HG 5				HG 10			
Plastic hub	•	•	•	•	•	•	•	•
Metal hub	•	•	•	•	•	•	•	•
Bore dH7	6, 8	9, 10	12	14*)	6 ... 8	9, 10	11, 12	13 ... 16
Groove width for keyway JS9		3	4	5		3	4	5
Pinhole	3.8/10	3.8/10	3.8/10	4.8/10*)	3.8/10	3.8/10	3.8/10	4.8/10
Hub thread	without keyway JS9	M4/10	M4/10	M4/10*)	M6/10*)	M4/10	M4/10	M4/10
	with keyway JS9	M3/10	M3/10	M3/10		M3/10	M3/10	M4/10

\*) not possible with plastic hub, special versions available on request. **Note:** Characters highlighted in orange are order features.

## Order

### Order table

Feature	Order data	Technical data	Additional information
Handwheel type	HG... A	5, 10	see "Dimensions"
Hub material	A B K B VA B	aluminum plastic reinforced Nirosta	
Bore Ød	d vorg. C ... C	predrilled 6 ... 16 d max. in mm steps (H7)	see "Dimensions", value Ødv see "Dimensions"
Keyway	OP D JS9 D P9 D	without keyway tight seat tight seat	according to DIN 6885 T1, only with hub material VA + A according to DIN 6885 T1, only with hub material VA + A
Pinhole (only without keyway)	OS E ... E	without pinhole diameter "Øl"/measure "f" (e.g., 3.8/10) others on request	see table "Special versions", depending on handwheel type, only if hub thread "ONG"
Hub thread	ONG F ... F	without hub thread thread "n"/measure "f" (e.g., M4/12) others on request	see table "Special versions", depending on handwheel type, only if pinhole "OS", only with hub material VA + A
Hub turned down	OAN G	without turned-down hub others on request	
Position indicator mounted (*)	PM H PS H	position indicator mounted separate position indicator	

\* separate order of a position indicator required (see pages 68-77)

### Order code

HG... -  -  -  -  -  -  -  -   
 A B C D E F G H

Scope of delivery: HG...

Accessories:  
End plate

Page 99


Additional information:  
General information and areas of application

Page 62 cont.




### Profile


- Premium knurled aluminum handwheel
- Compact design
- Various sizes
- Surface plastic-coated, anodized or bright-finished
- Various hub versions

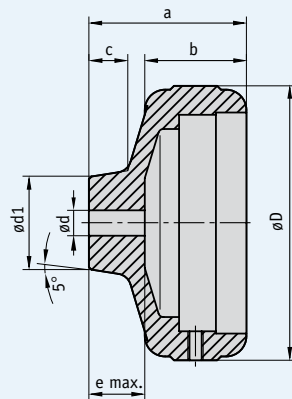


pinhole



hub thread

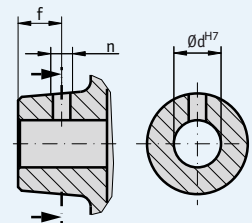

hub thread with keyway



### Mechanical data

#### ■ Dimensions

type	ØD	Ødv	Ødx	Ød1	a	b	c	e	suitable for	weight	material
HR 6	65	5.8	20	30	50	35	15	20	S50/1	0.3 kg	aluminum
HR 11	108	6.8	20	36	62	40	15	22	S80/1; SZ80/1	0.5 kg	aluminum

dv = d predrilled; dx = d max.

#### ■ Special versions

Handwheel type	HR 6					HR 11				
Bore dH7	6 ... 8	9, 10	11, 12	13 ... 16	17 ... 20	7, 8	9, 10	11, 12	13 ... 17	18 ... 20
Groove width for keyway JS9		3	4	5			3	4	5	6
Pinhole	3.8/10	3.8/10	3.8/10	4.8/10		3.8/10	3.8/10	3.8/10	4.8/10	4.8/10
Hub thread	without keyway JS9	M4/10	M4/10	M4/10	M6/10	M4/10	M4/10	M4/10	M6/10	M6/10
	with keyway JS9		M3/10	M3/10	M4/10		M3/10	M3/10	M4/10	

Additional special versions available on request. **Note:** Characters highlighted in orange are order features.

- **Order table**

Feature	Order data	Technical data	Additional information
Handwheel type	HR... A	6, 11	see "Dimensions"
Surface	B ES EF	B unvarnished black anodized natural anodized others on request	
Bore Ød	d vorg. ... C	predrilled 6 ... 16 d max. in mm steps (H7)	see "Dimensions", value Ødv see "Dimensions"
Keyway	OP JS9 P9 D	without keyway light seat tight seat	 according to DIN 6885 T1 according to DIN 6885 T1
Pinhole (only without keyway)	OS ... E	without pinhole diameter "Øl"/measure "f" (e.g., 3.8/10) others on request	 see table "Special versions", depending on handwheel type, only if hub thread "ONG"
Hub thread	ONG ... F	without hub thread thread "n"/measure "f" (e.g., M4/10) others on request	 see table "Special versions", depending on handwheel type, only if pinhole "OS"
Hub turned down	OAN G	without turned-down hub others on request	
Position indicator mounted (*)	PM PS H	position indicator mounted separate position indicator	

\* separate order of a position indicator required (see pages 68-77)

■ **Order code**



**Scope of delivery:** HR...



- **Accessories:**  
*End plate*

Page 99

**Additional information:**

*General information and areas of application*


Page 62 cont.

## Handwheel HR5


Aluminum turning handle with integrated display

### Profile


- Compact turning handle made of aluminum casting
- Integrated position indicator
- Analog display with various gear ratios and special scales
- Surface anodized or bright-finished
- Various hub versions

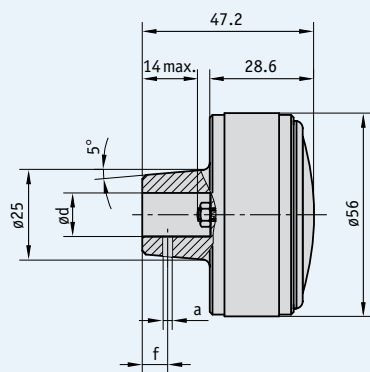


pinhole



hub thread



hub thread with keyway



### Mechanical data

#### ■ Dimensions

type	ØD	Ødx	Weight	material
HR 5	8	12	0.1 kg	aluminum

dx = d max.

## Order

### Order table

Feature	Order data	Technical data	Additional information
Bore Ød	d ...	A value Ød - Ødx 8 ... 12 d max. in mm steps (H7)	see "Dimensions"
Surface	B ES EF	B unvarnished black anodized natural anodized	
Gear ratio	...	C 1, 2, 3, 6, 10, 12, 15, 18, 20, 24, 30, 36, 48, 50, 60, 72, 84, 96, 100	
Sense of rotation	i e	D clockwise counter-clockwise	
Pointer	1 2	E pointer with gear ratio 1 pointer with gear ratio and 1 pointer running 1:1	
Pinhole	0S 2.5/7	F without pinhole diameter "Øl"/measure "f" others on request	only if hub thread "ONG"
Hub thread	ONG M6/8	G without hub thread thread "n"/measure "f" others on request	only if pinhole "0S"
Scale	N VK	H normal scale special scale	related to gear pitch custom-designed, no VK with first article
Scale imprint	C1 C2 C3	I one-color two-color three-color	

### Order code

HR5 -  -  -  -  -  -  -  -  -

A B C D E F G H I

1.4

Scope of delivery: HR5

Additional information:


General information and areas of application

Page 62 cont.

# Handwheel HKF... For any mounting position

## Profile

- Aluminum handwheel with integrated position indicator
- For individual mounting positions
- Analog display with various ratios and special scales
- Various sizes
- Plastic-coated surface
- Various hub versions

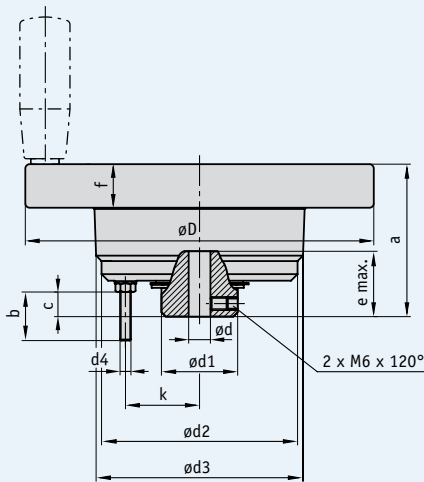

## Mechanical data

### ■ Dimensions

type	ØD	Ødv	Ødx	Ød1	Ød2	Ød3	d4	a	b	c	e	f	k	GfG	weight	material
HKF 12	120	6.8	20	35	90	95	M5	64	22.3	13.3	32	15	34	M6	1 kg	aluminum
HKF 16	160	7.8	20	35	90	95	M5	70	22.3	11.3	30	20	34	M8	1.1 kg	aluminum

dv = d predrilled; dx = d max.; GfG = thread for handle

## Order

### Order table

Feature	Order data	Technical data	Additional information
Handwheel type	HKF... A	12, 16	see table above
Surface	C KS B	plastic-coated, hammer finish paint light-gray plastic-coated, black RAL9005 half-matt	
Handle bore	OG ... C	without handle bore M6 ... M8 with handle bore or handle thread	see "Dimensions", value GfG
Bore Ød	d vorg. ... D	predrilled 7...20 d max. in mm steps (H7)	see "Dimensions", value Ødv see "Dimensions"
Keyway	OP JS9 P9 E	without keyway light seat tight seat	according to DIN 6885 T1 according to DIN 6885 T1
Clamp ring	OK MK F	without clamp ring with clamp ring	only with handle bore OG
Gear ratio	... G	1, 2, 3, 6, 10, 12, 15, 18, 20, 24, 30, 36, 48, 50, 60, 72, 84, 96, 100	
Sense of rotation	i e H	clockwise counter-clockwise	
Pointer	1 2 I	pointer with gear ratio 1 pointer with gear ratio and 1 pointer running 1:1	
Zero setting	ON MN K	without with	
Scale	N VK L	normal scale special scale	related to gear pitch custom-designed, no VK with first article

### Order code

HKF... - A - B - C - D - E - F - G - H - I - K - L

Scope of delivery: HKF

Accessories:  
Handles

Page 98

Additional information:  
General information and areas of application

Page 62 cont.

# 15





1.0   PositionLine Product overview	3
1.1   Mechanical digital position indicators	6
1.2   Electronic digital position indicators	28
1.3   Mechanical control knobs	42
1.4   Mechanical analog position indicators and handwheels	60

### 1.5 | Accessories

#### Products

Handles		98
End plate		99
Clamping plate	KP...	100
Mating connectors		102
Cable extension	KV04S1	103
Battery unit		104
Programming software	ProTool DE	105
Reducing bushes	RH...	106
Drawing aid for scales		107

1.6   Product index, Contact information	108
--	-----

1.0

1.1

1.2

1.3

1.4

1.5

1.6

### Profile


- Customized handling
- Easy to mount

### Fold-away handle


- Space-saving handle




Ball handle

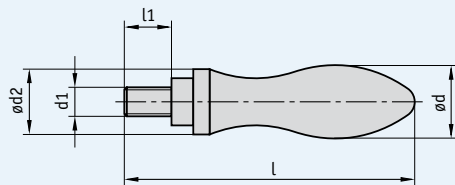

Cylindric handle

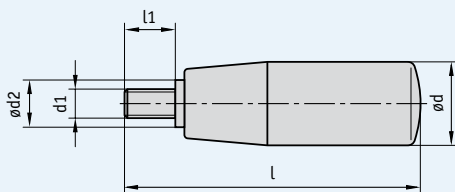

Fold-away handle

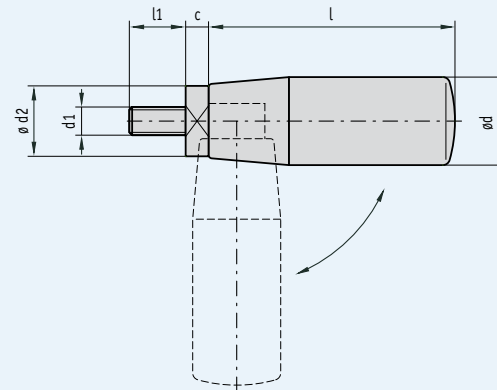

### Order

#### Order table for ball handles

Type	Order text	d	d1	d2	l	l1
fixed	BGF A M6 B	16	M6	10	61	11
fixed	BGF A M8 B	20	M8	13	77	13
fixed	BGF M10	25	M10	16	94	14
fixed	BGF M12	32	M12	20	121	21
rotatable	BGD M6	16	M6	14	66	11
rotatable	BGD M8	20	M8	18	80	13
rotatable	BGD M10	25	M10	21	97	14
rotatable	BGD M12	32	M12	26	127	21

#### Order code for ball handles



#### Order table for cylindric handles

Type	Order text	d	d1	d2	l	l1
rotatable	M6 A	18	M6	10	55	12
rotatable	M8 A	23	M8	13	82	14
rotatable	M10	26	M10	13	99	16

#### Order code for cylindric handles



#### Order table for fold-away handles

Type	Order text	d	d1	d2	l	l1	c
rotatable	M8 A	25	M8	19	69	10	6
rotatable	M10 A	26	M10	26	82	17	7.5


#### Order code for fold-away handles



Scope of delivery: Handle

Profile

- Easy to mount
- Imprint on request

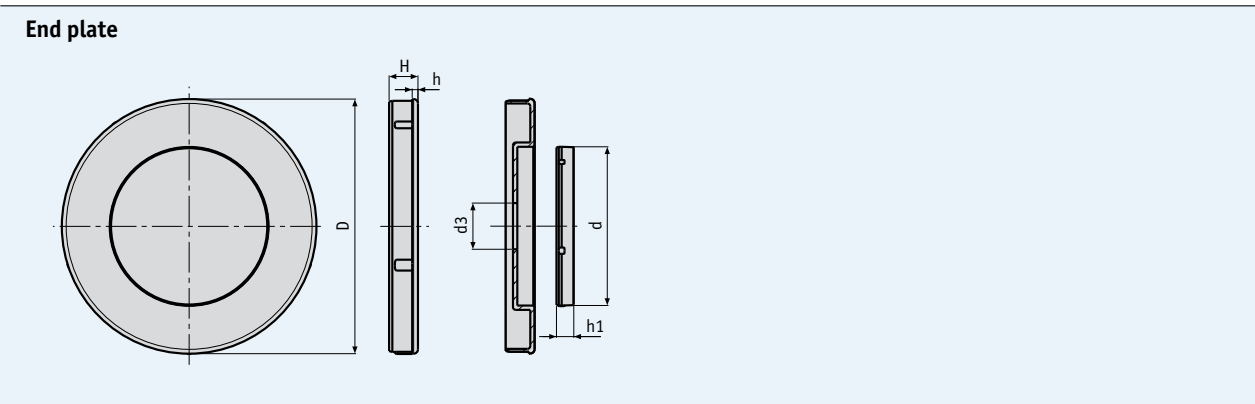

Order

■ Order table




Type	Order text	D	d	d3	H	h	h1
D50*	83641	51.8	34	10	8	2	6
D80*	83642	86.8	55	16	10	2	6

\*imprint on request

■ Order code

Scope of delivery: End plate

- KP04 for shaft diameters 8–15 mm
- KP09 for shaft diameters 8–20 mm
- Selectable clamp lever position
- Easy mounting and retrofitting

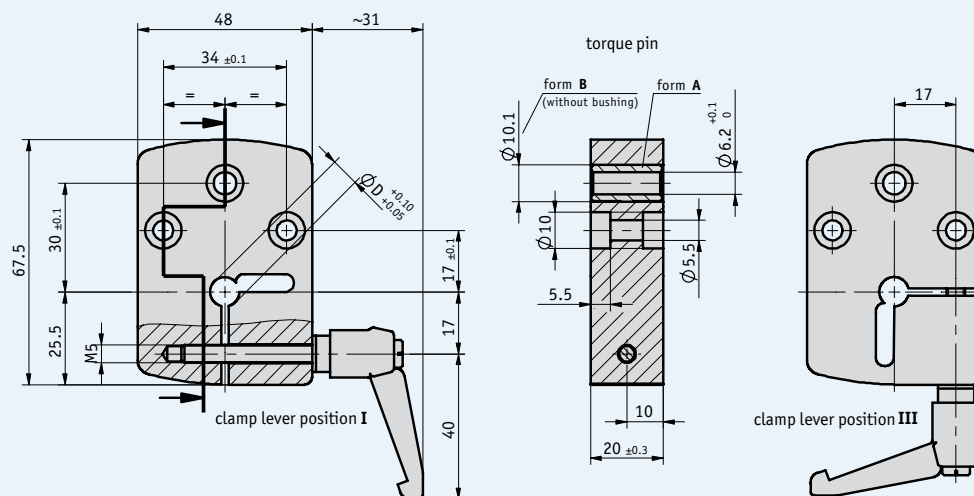

Mechanical data

Feature	Technical data	Additional information
Housing	aluminum, anodized	
Clamp lever	plastic, engaging	

Order

Feature	Order text	Specification	Additional information
Version	04 09	A	
Bore Ø	...	8, 10, 12, 14, 15	only with KP04
	...	8, 10, 12, 14, 15, 16, 18, 20	only with KP09
Clamp lever/position	I III	C	mounting position I mounting position III
Torque support/form	A B	D	
Clamp lever	with without	E	


Order code

KP -  -  -  -  -   
A B C D E


Scope of delivery: KP...

Profile

- Mating connectors, straight
- Bus terminator, straight

 When screwed, the distance to the device will increase by approx. 3 mm.

**Mating connectors, straight**

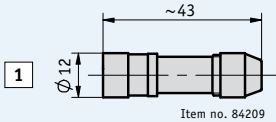


1

Ø 12

~43

Item no. 84209

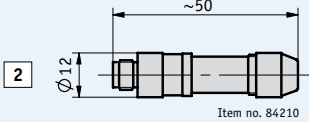


2

Ø 12

~50

Item no. 84210

**Bus terminator, straight**

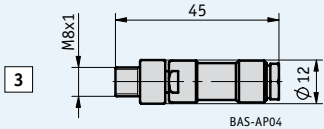

3

M8x1

45

Ø 12

BAS-AP04

Order

	Fig.	PIN	Cable Ø	Order data
<b>Mating connectors, straight</b>				
M8 bush	1	4	3.5 ... 5	84209
M8 connector	2	4	3.5 ... 5	84210
<b>Bus terminator, straight</b>				
M8 connector	3	4		BAS-0005

Order code


Scope of delivery: Connector as per order (see above)

Profile

- Ready-to-use cable connection
- Cable lengths up to 10 m



Type of connection GE/GE

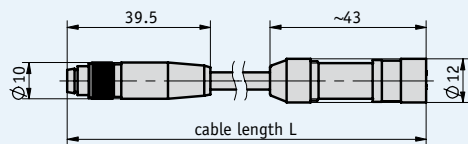

Mechanical data

Feature	Technical data	Additional information
Cable sheath	PUR	
Temperature range	-30 ... +100 °C	

1.5

Pin assignment

■ KV04S1

Cable color	PIN
brown	1
white	2
black	3
blue	4

Order

Feature	Order text	Specification	Additional information
Cable length	...	1 ... 10 m, in steps of 1 m	

■ Order code


KV04S1 - GE/GE - A

Scope of delivery: KV04S1, User information



### Profile

- Unit of battery and holder with contacts
- For easy und reliable replacement of the backup battery

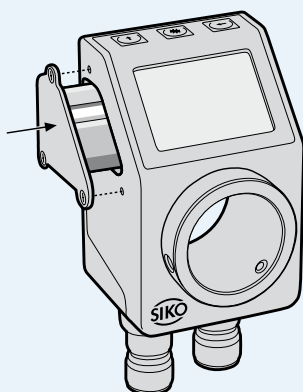

1.5

### Order


- Order code

84208


*Scope of delivery: Battery unit*

### Profile


- Parameters can be freely programmed
- Toggle mode between angle and linear measurement
- With USB connection cable

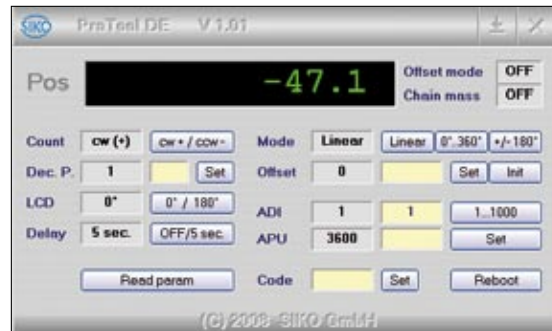

DE04



DE10

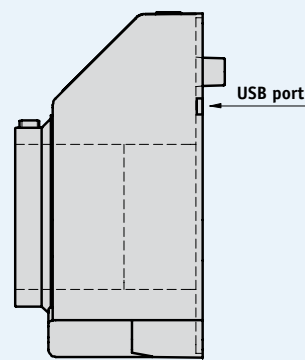

1.5

### Order



- Order code

ProTool DE

**Scope of delivery:** Software on CD, USB programming cable, User information

## Profile

- Easy and fast mounting
- Steel browned or stainless steel



Type	A*	B*	ØDf7*	Ød1H7	Ød2*
RH01	3.5	20	20	max. 18	5.5
RH02	4.0	30	30	max. 28	5.5
RH03	4.5	30	25	max. 22	5.5
RH04	2.8	17	14	max. 12	4.2
RH07	2.5	14	10	max. 8	3.2
RH08	3.0	20	14	max. 12	5.2
RH09	4.5	20	20	max. 18	5.5

\* Details in mm

## Mechanical data

Type	RH01	RH02	RH03	RH04	RH07	RH08	RH09
Suitable for use with display	DA05/1 DA08 DA09S	DA10* DA10R/1* DE10	DA10** DA10R/1**	DA04 DE04	DA02 DK05	DK01 DK02 DK03	AP04
Ød1H7 steel browned	8, 10, 12, 14, 15, 16, 18	10, 12, 14, 16, 18, 20, 22, 24, 25, 26, 28	18, 20, 22	4, 5, 6, 8, 9, 10, 12	6, 8	6, 8, 10, 12	
Ød1H7 stainless steel	VA8, VA9.525, VA10, VA12, VA12.7, VA14, VA15, VA15.875, VA16	VA12.7, VA20, VA24, VA25, VA25.4		VA8, VA9.525, VA10, VA12	VA8		VA8, VA9.525, VA10, VA12, VA12.7, VA14, VA15, VA15.875, VA16

\*) only with hollow shaft WK, \*\*) only with hollow shaft WL

Note: Characters highlighted in orange are order features.

## Order


### Order table

Feature	Order text	Specification	Additional information
Version	... A	RH01, RH02, RH03, RH04, RH07, RH08, RH09	
Internal diameter d1 <sup>H7</sup>	... B	see table above	

### Order code

RH... -  -

Scope of delivery: Reducing bush, headless screw

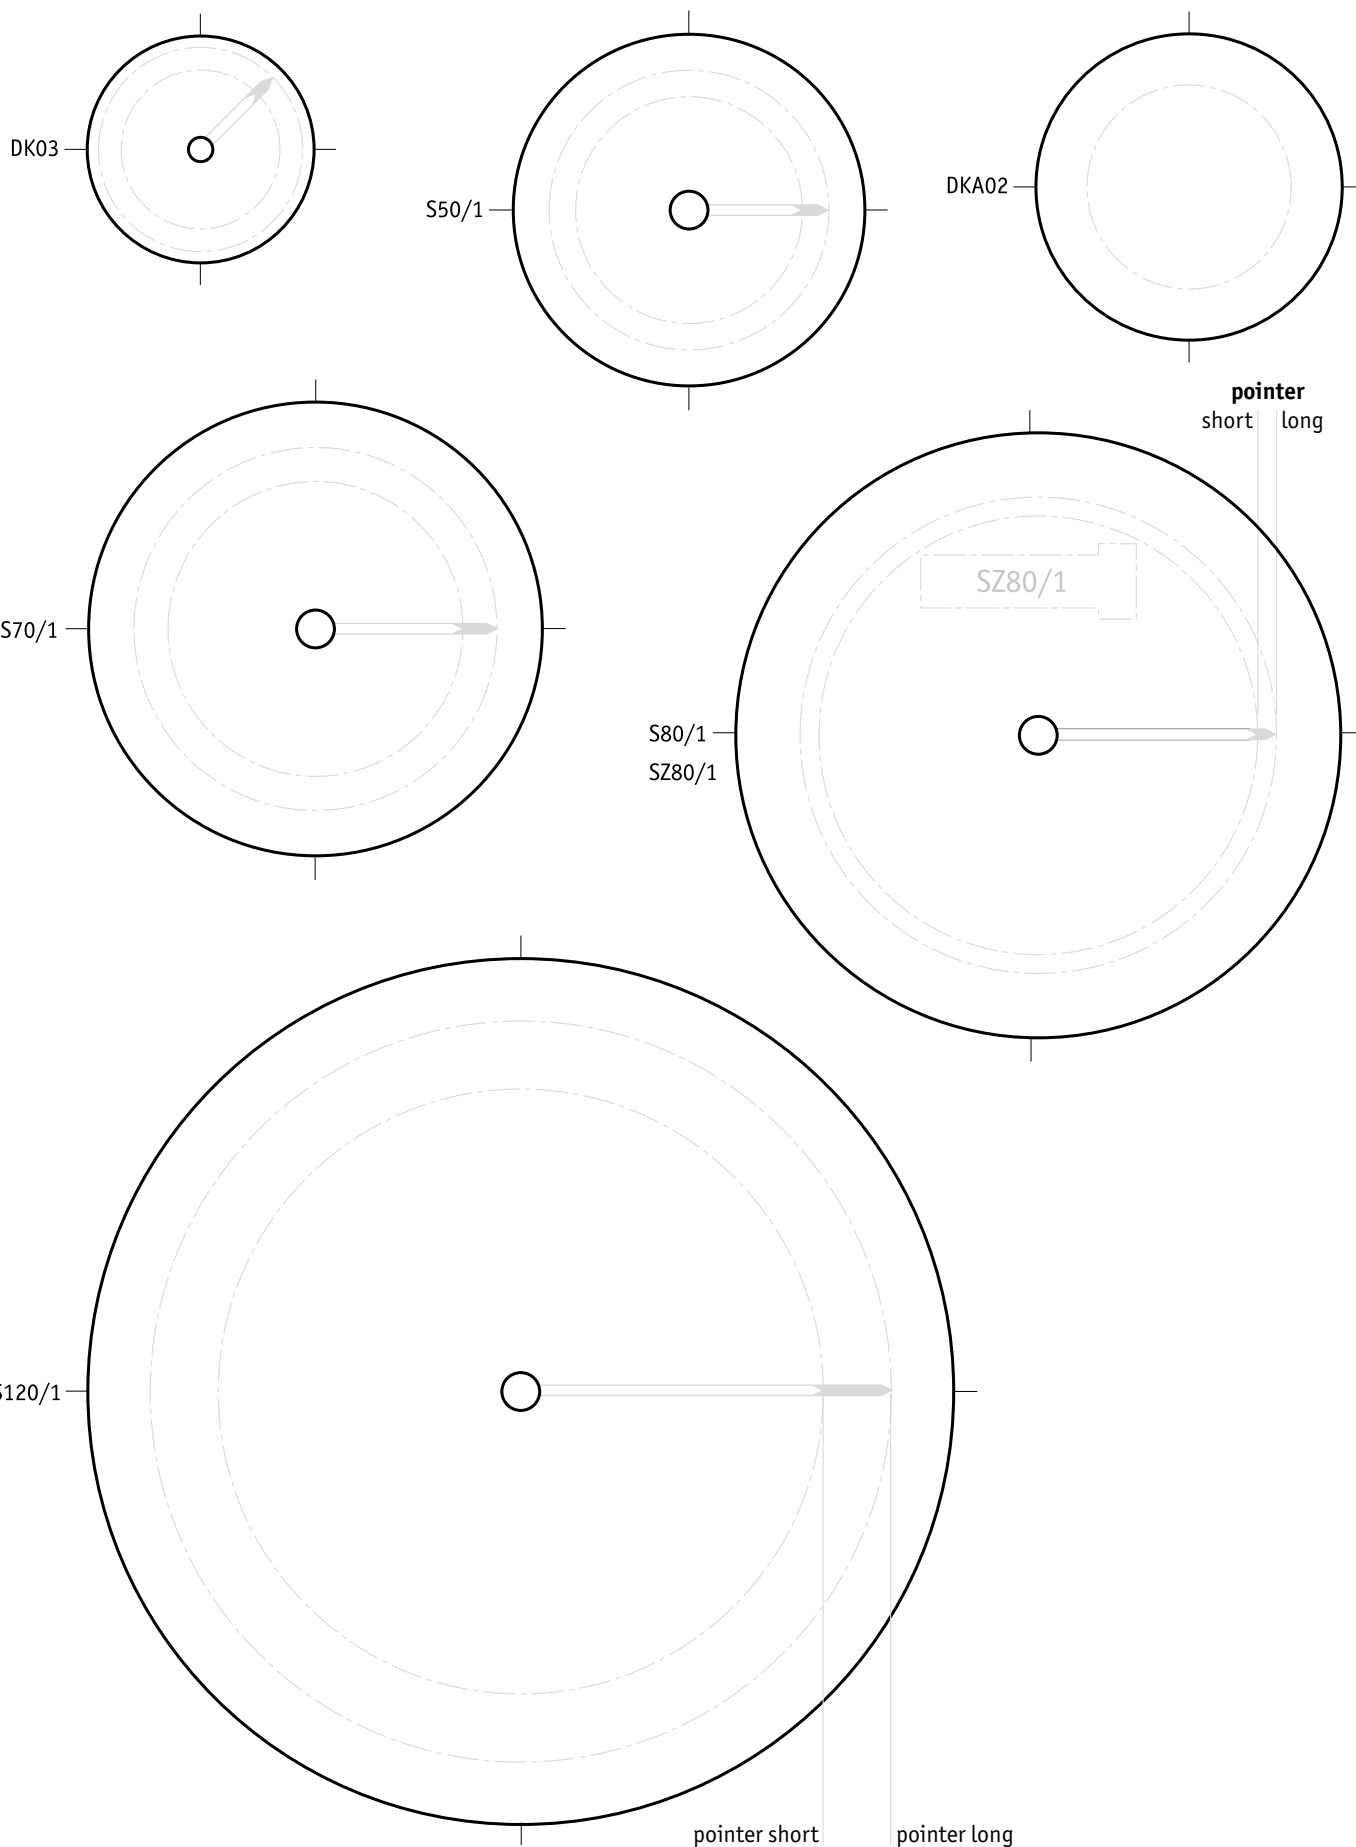

# 1.6



1.0   PositionLine Product overview	2
1.1   Mechanical digital position indicators	6
1.2   Electronic digital position indicators	28
1.3   Mechanical control knobs	42
1.4   Mechanical analog position indicators and handwheels	60
1.5   Accessories	96

---

<b>1.6   Product index, Contact information</b>	<b>110</b>
---	------------

---

1.0

1.1

1.2

1.3

1.4

1.5

**1.6**

Position indicators,  
control knobs, handwheels

AP04

DA05/1  
HG...

Device	Type	Page
<b>A</b>		
AP04	Electronic digital position indicator	40
<b>B</b>		
	Battery unit	104
BAS	Bus terminator	102
BGF	Ball handle	98
BGD	Ball handle	98
<b>D</b>		
DA02	Mechanical digital position indicator	14
DA04	Mechanical digital position indicator	16
DA05/1	Mechanical digital position indicator	18
DA08	Mechanical digital position indicator	20
DA09S	Mechanical digital position indicator	22
DA10	Mechanical digital position indicator	24
DA10R/1	Mechanical digital position indicator	26
DE04	Electronic digital position indicator	36
DE10	Electronic digital position indicator	38
DK01	Mechanical control knob	50
DK02	Mechanical control knob	52
DK03	Mechanical control knob	54
DK05	Mechanical control knob	56
DKA02	Mechanical control knob	58
<b>E</b>		
	End plate	99
<b>H</b>		
HG...	Plastic turning handle	88
HKF...	Aluminium handwheel with position indicator	94
HK.../HKL...	Aluminium handwheel	80
HR...	Aluminium handwheel	90
HR5	Aluminium turning handle with position indicator	92
HS.../HSL...	Aluminium handwheel	83
HST...	Aluminium handwheel	86

Device	Type	Page
<b>K</b>		
KHB...	Plastic handwheel	78
KP...	Clamping plate	100
KV04S1	Cable extension	103
<b>M</b>		
	Mating connectors	102
<b>P</b>		
ProTool DE	Programming software	105
<b>R</b>		
RH...	Reducing bush	106
<b>S</b>		
S50/1	Mechanical analog position indicator	68
S70/1	Mechanical analog position indicator	70
S80/1	Mechanical analog position indicator	72
S120/1	Mechanical analog position indicator	74
SZ80/1	Mechanical analog position indicator	76
<b>U</b>		
UG	Fold-out handle	98
<b>Z</b>		
ZGD	Cylindrical handle	98

S80/1



### Germany

A dealer near you? Our website will help you.

Just enter your postal code at [www.siko.de/en/contact/germany](http://www.siko.de/en/contact/germany) and you will find the current contact data of the representative in your area. Or give us a call and we will be pleased to pass on the contact data.

### International

SIKO is represented by our subsidiaries and trade partners all over the world: [www.siko.de/en/contact/international](http://www.siko.de/en/contact/international)

#### Africa

Republic of South Africa
--------------------------

#### Asia

China
Indonesia
Israel
Japan
Malaysia
Republic of Korea
Singapore
Taiwan
Thailand
Vietnam

#### Australia

Australia
New Zealand

#### Europe

Austria
Belgium
Croatia
Czech Republic
Denmark
Finland
France
Greece
Hungary
Italy
Lithuania
Luxembourg
Netherlands
Norway
Poland
Portugal
Russian Federation
Serbia and Montenegro
Slovakia
Slovenia
Spain
Sweden
Switzerland
Turkey
Ukraine
United Kingdom

#### America

Brazil
Canada
Mexico
United States





**SIKO GmbH**

Weihermattenweg 2  
D-79256 Buchenbach

**Telephone**

+49 7661 394-0

**Telefax**

+49 7661 394-388

**E-Mail**

[info@siko.de](mailto:info@siko.de)

**Internet**

[www.siko.de](http://www.siko.de)