

# Industrial and HVAC Flow Measurement Product Catalog

Flow Meters for Steam, Liquids and Gases



5th Edition



# **Industrial and HVAC Flow Measurement Catalog**

**Product Catalog**  
Fifth Edition

Copyright © 2010 by Spirax Sarco, Inc.  
HVAC and Industrial Flow Measurement  
Product Catalog  
Fifth Edition

All rights reserved.

No part of this publication covered by the copyrights hereon may be reproduced or copied in any form or by any means graphic, electronic, or mechanical without written permission of Spirax Sarco, Inc.



## **Spirax Sarco, your global partner**

Spirax Sarco provides knowledge, service, products and turnkey solutions for the control and efficient use of steam, air and other industrial fluids for industrial and commercial users in the United States. Originally formed as the Sanders Rehders Company in 1888 in London, our worldwide steam business is today part of the Spirax Sarco Engineering plc Group, which has been listed on the London Stock Exchange since 1959.

With over 100 years of expertise across industry, our holistic approach allows us to apply unequaled engineering knowledge in putting together complete solutions for our customers. 1,100 engineers in 33 countries worldwide work alongside steam users and specifiers to improve the performance of their plant and processes, and maximize return on investment.

## **A flow meter solutions provider**


EMCO is the brand of precision flow meters for liquid, gas, and steam applications, accommodating a wide range of pipe sizes. Field proven for over 40 years, the EMCO product line offers solutions for measurement, including industrial inline vortex, industrial insertion vortex and turbine, and variable area flow products. EMCO products provide a wide range of metering solutions to diverse industries, including the military, hospitals, universities, and many Fortune 500 companies.

Our aim is to provide a metering solution that helps our customers achieve operational improvement through their production capability, usually in the form of reduced energy usage, improved product quality, lower emissions and greater production throughout. Reducing emissions, carbon footprint, and your company's impact on the environment is our goal. Not only will this have a strong social and environmental impact but also a positive economic impact today and well into the future.

# Flowmeters

for steam, liquids and gases.


Our range of Flowmeters are suitable for accurate measurement of steam, liquids and gases in pipe sizes 1" to 80" at flowing pressures to 5,000 psig and flowing temperatures to 842°F.

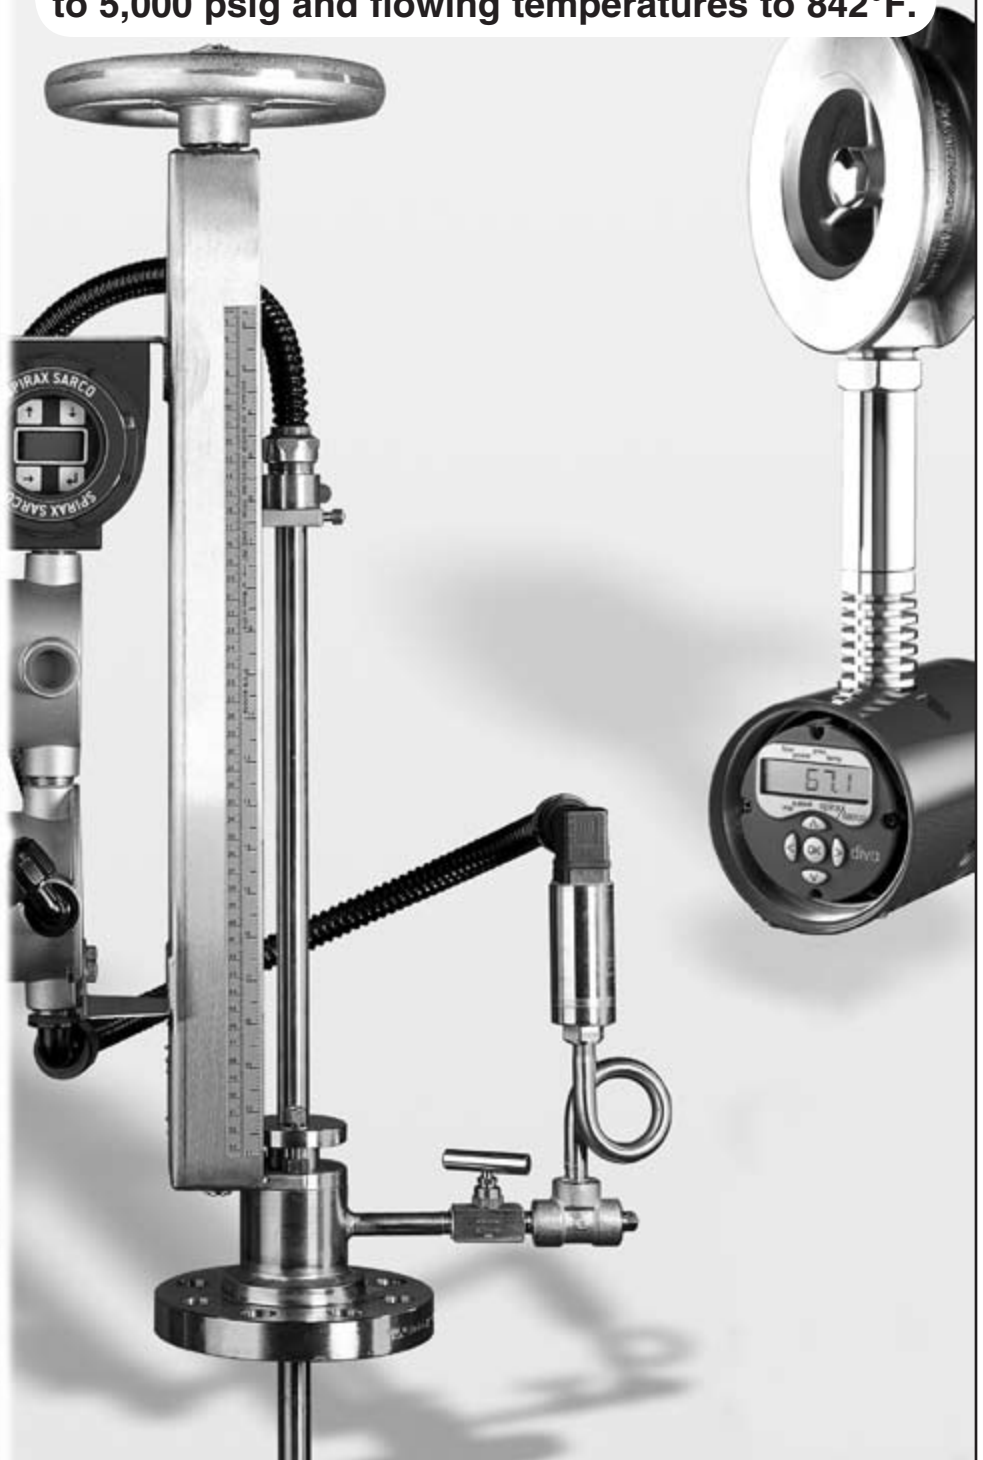

## Flow Measurement Index

Tech. Illus. #	Model	Page No.
TI-8-005-US	Gilflo Flowmeters - Spool Pipeline Unit	6
TI-8-006-US	Gilflo Flowmeters - B Pipeline Unit	8
TI-8-008-US	Gilflo Flowmeters - System Overview	11
TI-8-009-US	Gilflo ILVA Flowmeters	12
TI-8-010-US	Gilflo ILVA Flowmeters System Overview	14
TI-P337-17-US	DIVA Saturated Steam Flowmeter	16
TI-P337-19-US	DIVA Flowmeter - System Overview	19
TI-8-200-US	Orifice Plate Flowmeters M410 Orifice Plate and Carrier Assembly	20
TI-8-202-US	Orifice Plate Flowmeters Orifice Plate Flowmetering System (density compensated)	22
TI-8-201-US	Orifice Plate Flowmeters Orifice Plate Flowmetering System (non compensated)	24
TI-8-203-US	Orifice Plate Flowmeters Customer Data Sheet	25
TI-P331-04-US	M800 Steam Flow Computer	26
TI-P333-24-US	M800 Gas Flow Computer	28
TI-P332-08-US	M750 Display Unit	30
TI-P335-10-US	M610 Series II DP Transmitter Assembly	33
TI-P335-23-US	Scanner 2000 Steam Mass Flow Transmitter	34
TI-8-401-US	Model F50C Isolating Valve	37
TI-P322-06-US	EL2270 & EL2271 Temperature Probes	38
TI-8-403-US	EL2600 Pressure Transmitter and 'U' Syphons	40
TI-8-616-US	MassTracker™ Insertion Turbine	42
TI-8-601-US	PhD Inline Vortex	48
TI-8-602-US	V-Bar Insertion Vortex Models S-V-Bar-600/60S, 700, 910/960	56
TI-8-603-US	Turbo-Bar Insertion Turbine Models S-TMP-600/60S, 700, 910/960	64
TI-8-604-US	FP-93 Flow Processor	72
TI-8-605-US	TEM Temperature Sensor/Transmitter	77
TI-8-606-US	PT Pressure Transmitter	80
TI-8-607-US	Sono-Trak® Transit Time Ultrasonic Flow Meter	82
TI-8-608-US	Sono-Trak® Doppler Ultrasonic Flow Meter	88
TI-8-609-US	UniMag® M Magnetic Flow Tubes	94
TI-8-610-US	UniMag® DT Series Electromagnetic Flow Tube	99
TI-8-611-US	4411e Magnetic Flow Transmitter	111
TI-8-612-US	Model Magflo® 1100, 1100 Food, 3100, 5100W, 6000 and 5000	115
TI-8-613-US	Hydro-Flow 1200	134
TI-8-614-US	Hydro-Flow 2200	138
TI-8-615-US	Hydro-Flow 2300	145
TI-8-624-US	Hydro-Flow 3100	152
	Engineering Data	156
	Index	164

## Gilflo Flowmeters - 'Spool' Pipeline Unit

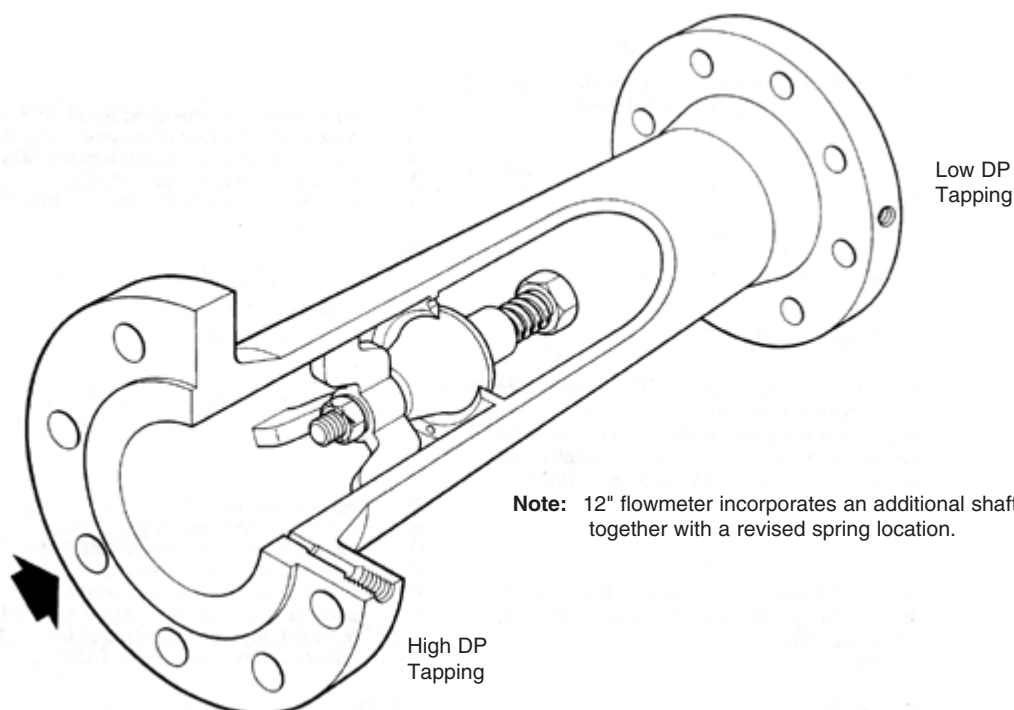

**Note:** 12" flowmeter incorporates an additional shaft support together with a revised spring location.

### Description

The Gilflo 'Spool' flowmeter is installed in the pipeline and produces a differential pressure which is related to the rate of flow. It can be used with most industrial fluids, gases and both saturated and superheated steam.

### Sizes and Pipe Connections

3", 4", 6", 8" and 12"

Flanges available to ANSI B.16.5 class 300

### Limiting Conditions

Minimum operating pressure	9 psig
Maximum operating pressure	740 psig
Minimum operating temperature	-58°F
Maximum operating temperature	842°F
Maximum viscosity	30 centipoise

### Turndown

The Gilflo will provide accurate measurement over a flow range of 100:1.

### Accuracy

To achieve accuracy of a  $\pm 1\%$  of reading, all Gilflo meters must be used in conjunction with a device capable of performing electronic linearism such as:

- M750 Flow Computer
- Customer's EMS, DCS or equivalent
- M800 Steam Flow Computer
- M800 Gas Flow Computer

**Note:** When used with M800 flow computers, Gilflo accuracy is  $\pm 1\%$  of reading from 5% to 100% of maximum rated flow. For flows from 1% to 5% of maximum rated flow, accuracy will be better than  $\pm 1\%$  FSD.

### Repeatability

The Gilflo is repeatable to better than 0.25%.

### Pressure Drop

Less than 140 inches  $H_2O$  (349 mbar) at rated capacity

### Flow Capacity

To determine the maximum flow capacity of a Gilflo 'Spool', it is necessary to calculate the equivalent water flowrate ( $Q_w$ ). See under the section "Sizing the Gilflo 'Spool' flowmeter".

### Materials of Construction

Body	Carbon Steel	ASTM A105/A106/A234
Internals	Mostly Stainless Steel	S304/S316
Spring	Inconel X750	

# Gilflo Flowmeters - 'Spool' Pipeline Unit

## Dimensions / Weights (approximate) in inches and lbs

SIZE	A	B	Weight
3"	13	3.5	37
4"	21	4.5	81
6"	28	6.6	167
8"	31	8.6	191
12"	40	13	240

H.P. and L.P. pressure tappings are threaded 1/4" NPT (female).

## Installation

A separate installation booklet is supplied with each Gilflo 'Spool' flowmeter. The following main points are given for guidance:



1. The Gilflo should be installed with a minimum of 6 straight pipe diameters upstream and 3 downstream. No valves, fittings or cross sectional changes permitted within these pipe lengths. Where an increase in pipe diameter is necessary upstream of a Gilflo flowmeter, the length of straight pipe should be increased to 12 diameters. Similarly, where a Gilflo flowmeter is installed downstream of two 90° bends in two planes, a pressured reducing valve or a partially open valve, 12 pipe diameters should be allowed.
2. The Gilflo flowmeter should normally be mounted horizontally. Vertical installation (with flow vertically downward) is also permissible and must be specified when ordering. Ensure flow is in the correct direction and avoid reverse flow.
3. For steam applications, good basic steam engineering practice should be followed:-
  - Ensure all pipework is adequately insulated.
  - Ensure correct line drainage through adequate trapping.
  - Where practicable, fit a steam separator upstream of the flowmeter. This should be drained using a float trap set.
  - Ensure good alignment and support of all associated pipework.
  - Achieve line size reduction by the use of eccentric reducers.
  - Avoid close installation (less than 25 pipe diameters) upstream or downstream of a pressure reducing valve or modulating valve.

See the "Gilflo flowmeters - system overview" TIS 8.008 which provides information of a Gilflo metering system.

size	Q <sub>e</sub> max (gpm)	15 psig	50 psig	75 psig	100 psig	150 psig	200 psig	400 psig
3"	97	1671	2419	2825	3184	3794	4321	6007
4"	249	4302	6230	7276	8199	9771	11129	15469
6"	440	7598	11002	12849	14479	17255	19653	27318
8"	1045	18033	26113	30498	34366	40954	46646	64838
12"	1958	33777	48912	57125	64371	76711	87373	121448

**Note:** These capacities are based on a differential pressure across the meter of 140 inches H<sub>2</sub>O (349 mbar). Minimum flow is 1% of maximum (100:1 turndown).

## Maintenance

There are no user serviceable parts within the 'Gilflo' Spool flowmeter. Mechanical checks to confirm correct operation are described in the manuals that accompanies the flowmeters.

## Sizing the Gilflo 'Spool' Flowmeter

1. Determine Equivalent Water Flowrate (Q<sub>e</sub>) in U.S. gpm using formulas:

### Liquids:

$$Q_e = \frac{m}{500} \sqrt{\frac{D_e}{D_i}} \quad \text{or} \quad Q_e = Q_i \sqrt{\frac{D_i}{D_e}}$$

Q<sub>e</sub> = equivalent flow rate of water at 70°F (U.S. gpm)  
 m = maximum flow rate of service liquid (lb/hr)  
 D<sub>e</sub> = density of water at calibration (62.305 lb/ft<sup>3</sup>)  
 D<sub>i</sub> = density of service liquid (lb/ft<sup>3</sup>)  
 Q<sub>i</sub> = maximum flow rate of service liquid (US gpm)

### Gases:

$$Q_e = \sqrt{D} \times \frac{P_s}{P_f} \times \frac{T_f}{T_s} \times (0.0158) \times m$$

$$\text{or} \quad Q_e = (0.948) \times Q_g \sqrt{D \times \frac{P_s}{P_f} \times \frac{T_f}{T_s}}$$

Q<sub>e</sub> = water equivalent flow rate at 70°F (U.S. gpm)  
 m = maximum flow rate of gas (lb/hr)  
 D = gas density at 14.7 psia, 520°R (60°F) (lb/ft<sup>3</sup>)  
 P<sub>f</sub> = flowing pressure of gas (psia)  
 P<sub>s</sub> = standard atmospheric pressure (14.7 psia)  
 T<sub>s</sub> = standard absolute temperature (520°R)  
 T<sub>f</sub> = flowing temperature of gas (°R=°F + 460)  
 Q<sub>g</sub> = maximum flow rate of gas (SCFM)

### Steam:

$$Q_e = (0.0158) \times m \sqrt{v}$$

Q<sub>e</sub> = water equivalent flow rate at 70°F (U.S. gpm)  
 m = maximum flow rate of steam (lb/hr)  
 v = specific volume of steam at normal pressure and temperature (ft<sup>3</sup>/lb)

2. Select from the table below the meter with a Q<sub>e</sub> max. that most closely matches (but exceeds) the application Q<sub>e</sub> determined in step 1.


**Note:** These equivalent water flowrates are based on a differential pressure of 140 inches H<sub>2</sub>O (349 mbar). For saturated steam flow measurement, the table below gives flow capacities in lb/h.

## How To Order

1 - 6" our Gilflo 'Spool' flowmeter flanged to ANSI B-16-5 class 300.

TI-8-005-US 10.07

## Gilflo Flowmeters - 'B' Pipeline Unit

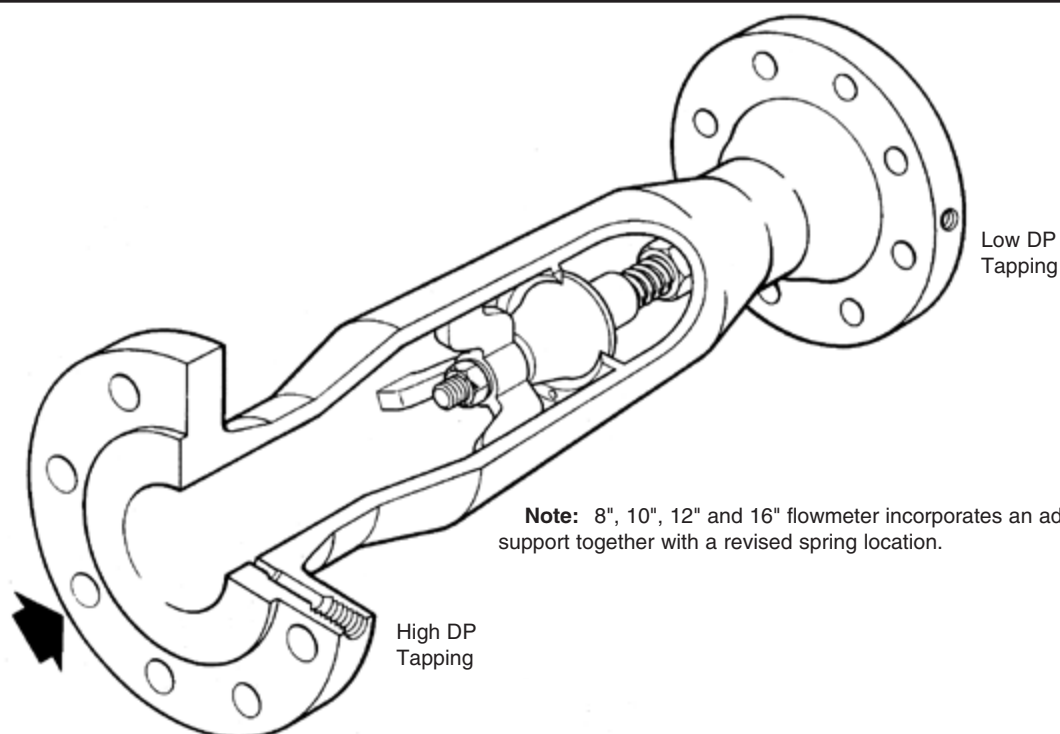

**Note:** 8", 10", 12" and 16" flowmeter incorporates an additional shaft support together with a revised spring location.

### Description

The Gilflo 'B' flowmeter is installed in the pipeline and produces a differential pressure which is related to the rate of flow. It can be used with most industrial fluids, gases and both saturated and superheated steam.

### Sizes and Pipe Connections

2", 3", 4", 6", 8", 10", 12" and 16"

Flanges available to ANSI B.16.5 class 300

### Limiting Conditions

Minimum operating pressure	9 psig
Maximum operating pressure	740 psig
Minimum operating temperature	-58°F
Maximum operating temperature	842°F
Maximum viscosity	30 centipoise

### Turndown

The Gilflo will provide accurate measurement over a flow range of 100:1.

### Accuracy

To achieve accuracy of a  $\pm 1\%$  of reading, all Gilflo meters must be used in conjunction with a device capable of performing electronic linearism such as:

- M750 Flow Computer
- Customer's EMS, DCS or equivalent
- M800 Steam Flow Computer
- M800 Gas Flow Computer

**Note:** When used with M800 flow computers, Gilflo accuracy is  $\pm 1\%$  of reading from 5% to 100% of maximum rated flow. For flows from 1% to 5% of maximum rated flow, accuracy will be better than  $\pm 1\%$  FSD.

### Repeatability

The Gilflo is repeatable to better than 0.25%.

### Pressure Drop

Less than 140 inches  $H_2O$  (349 mbar) at rated capacity

### Flow Capacity

To determine the maximum flow capacity of a Gilflo 'B', it is necessary to calculate the equivalent water flowrate ( $Q_e$ ). See under the section "Sizing the Gilflo 'B' flowmeter".

### Materials of Construction

Body	Carbon Steel	ASTM A105/A106/A234
Internals	Mostly Stainless Steel	S304/S316
Spring	Inconel X750	




# Gilflo Flowmeters - 'B' Pipeline Unit

## Dimensions / Weights (approximate) in inches and lbs

SIZE	A	B	Weight
2"	19	3.5	31
3"	21	4.5	48
4"	28	6.6	105
6"	31	8.6	191
8"	39	12.7	270
10"	57	16	565
12"	63	18	748
16"	79	24	1980

H.P. and L.P. pressure tapings are threaded 1/4" NPT (female).  
On 16" meter, the pressure tapings are on the body.

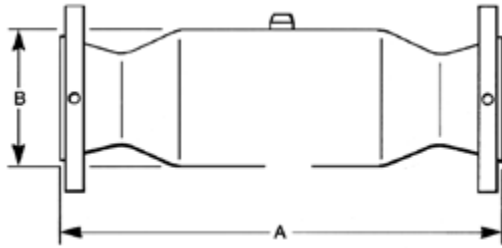

## Installation

A separate installation booklet is supplied with each Gilflo 'B' flowmeter. The following main points are given for guidance:

- The Gilflo should be installed with a minimum of 6 straight pipe diameters upstream and 3 downstream. No valves, fittings or cross sectional changes permitted within these pipe lengths. Where an increase in pipe diameter is necessary upstream of a Gilflo flowmeter, the length of straight pipe should be increased to 12 diameters. Similarly, where a Gilflo flowmeter is installed downstream of two 90° bends in two planes, a pressured reducing valve or a partially open valve, 12 pipe diameters should be allowed.
- The Gilflo flowmeter should normally be mounted horizontally. Vertical installation (with flow vertically downward) is also permissible and must be specified when ordering. Ensure flow is in the correct direction and avoid reverse flow.
- For steam applications, good basic steam engineering practice should be followed:
  - Ensure all pipework is adequately insulated.
  - Ensure correct line drainage through adequate trapping.
  - Where practicable, fit a steam separator upstream of the flowmeter. This should be drained using a float trap set.
  - Ensure good alignment and support of all associated pipework.
  - Achieve line size reduction by the use of eccentric reducers.
  - Avoid close installation (less than 25 pipe diameters) upstream or downstream of a pressure reducing valve or modulating valve.

See the "Gilflo flowmeters - system overview" TI-8-008-US which provides information of a Gilflo metering system.

size	Q <sub>e</sub> max (gpm)	15 psig	50 psig	75 psig	100 psig	150 psig	200 psig	400 psig
2"	94	1625	2353	2748	3096	3690	4203	5842
3"	308	5332	7721	9018	10162	12110	13793	19172
4"	494	8559	12394	14475	16311	19438	22139	30773
6"	1202	20825	30156	35220	39687	47295	53868	74876
8"	2136	37004	53585	62582	70520	84040	95719	133050
10"	2938	50894	73700	86075	96993	115587	131651	182995
12"	5100	88356	127948	149431	168385	200666	228554	317690
16"	8284	143530	207845	242744	273534	325972	371275	516072

**Note:** These capacities are based on a differential pressure across the meter of 140 inches H<sub>2</sub>O (349 mbar).  
Minimum flow is 1% of maximum (100:1 turndown).

EMCO A trademark of Spirax Sarco Inc. • 2150 Miller Drive • Longmont, CO 80501 • Telephone: (303) 682-7060 • Fax: (303) 682-7069

## Maintenance

There are no user serviceable parts within the 'Gilflo' Spool flowmeter. Mechanical checks to confirm correct operation are described in the manuals that accompanies the flowmeters.

## Sizing the Gilflo 'B' Flowmeter

- Determine Equivalent Water Flowrate (Q<sub>e</sub>) in U.S. gpm using formulas:

### Liquids:

$$Q_e = \frac{m}{500} \sqrt{\frac{D_e}{D_i}} \quad \text{or} \quad Q_e = Q_i \sqrt{\frac{D_i}{D_e}}$$

Q<sub>e</sub> = equivalent flow rate of water at 70°F (U.S. gpm)  
m = maximum flow rate of service liquid (lb/hr)  
D<sub>e</sub> = density of water at calibration (62.305 lb/ft<sup>3</sup>)  
D<sub>i</sub> = density of service liquid (lb/ft<sup>3</sup>)  
Q<sub>i</sub> = maximum flow rate of service liquid (US gpm)

### Gases:

$$Q_e = \sqrt{D} \times \frac{P_s}{P_f} \times \frac{T_f}{T_s} \quad (0.0158) \times m$$

$$\text{or} \quad Q_e = (0.948) \times Q_g \sqrt{D \times \frac{P_s}{P_f} \times \frac{T_f}{T_s}}$$

Q<sub>e</sub> = water equivalent flow rate at 70°F (U.S. gpm)  
m = maximum flow rate of gas (lb/hr)  
D = gas density at 14.7 psia, 520°R (60°F) (lb/ft<sup>3</sup>)  
P<sub>f</sub> = flowing pressure of gas (psia)  
P<sub>s</sub> = standard atmospheric pressure (14.7 psia)  
T<sub>s</sub> = standard absolute temperature (520°R)  
T<sub>f</sub> = flowing temperature of gas (°R=°F + 460)  
Q<sub>g</sub> = maximum flow rate of gas (SCFM)

### Steam:

$$Q_e = (0.0158) \times m \sqrt{v}$$

Q<sub>e</sub> = water equivalent flow rate at 70°F (U.S. gpm)  
m = maximum flow rate of steam (lb/hr)  
v = specific volume of steam at normal pressure and temperature (ft<sup>3</sup>/lb)

- Select from the table below the meter with a Q<sub>e</sub> max. that most closely matches (but exceeds) the application Q<sub>e</sub> determined in step 1.

**Note:** These equivalent water flowrates are based on a differential pressure of 140 inches H<sub>2</sub>O (349 mbar). For saturated steam flow measurement, the table below gives flow capacities in lb/h.

## How To Order

1 - 6" our Gilflo 'B' flowmeter flanged to ANSI B-16-5 class 300.

TI-8-006-US 12.09





## Gilflo Flowmeters - System Overview

### Description

The Gilflo flowmetering system consists of 2 major parts:-

1. The Gilflo pipeline unit. This may be a Gilflo 'B' or 'Spool' design. This is installed in the line where the flow is to be measured. Using impulse pipework, this is connected to:-
2. The M610 DP Transmitter Assembly. This measures the differential pressure across the Gilflo pipeline unit and converts it to a 4-20 mA output signal. This output signal can be used in a number of ways:-
  - a- To drive a suitable chart recorder or act as an input to an EMS/DCS. This gives a non-compensated signal proportional to rate of flow.
  - b- To supply an M750 Display Unit. This gives a non-compensated display of totalized flow and rate of flow.
  - c- To supply an M800 series Flow Computer, whose keypad allows the user to select the parameters to be viewed as well as allowing access to the numerous facilities available. The diagram shows these configurations.

**Note:-** The Gilflo pipeline unit can be used to measure the flow of most industrial liquids, gases and vapors within the pressure and temperature limits detailed in the TIS's.


Full density compensation from pressure and temperature transmitters is available when using the M800 series Flow Computer for steam applications or the M800 Series Flow Computer for gas applications. See TIS's for details.

### Installation

Care must be taken to meet all the requirements of the Installation and Maintenance Instructions that are included with the equipment.

#### Installation points to watch:-

1. Ensure all pipework is adequately supported and properly aligned.
2. The Gilflo pipeline unit should be selected on capacity rather than line size. Where pipe size reduction on steam systems is necessary, use eccentric reducers to avoid waterlogging.
3. The minimum recommended lengths of straight pipe are 6D upstream and 3D downstream.
4. Take care to ensure the correct direction of flow as indicated by the arrow on the meter body.
5. Take precautions to avoid reverse flow through the meter.
6. Avoid installing the meter downstream of a pressure reducing valve (especially on steam systems) as this may cause inaccuracies and/or possible damage. Similarly avoid installing the meter downstream of a partially open valve.
7. Remember that actuated valves may cause rapid pressure fluctuations which could cause damage.
8. On steam or liquid systems take care to ensure that all impulse lines remain full to prevent damage to the DP transmitter through contact with steam or high temperature liquid.
9. For steam applications, care should be taken to ensure adequate line drainage, trapping etc., so as to avoid condensate slugs impacting the meter. Where practical, steam separators should be fitted. These should be drained using a float trap set.
10. For gas applications ensure that the DP cell and impulse lines are positioned above the pipework. Also ensure that the impulse lines allow free drainage of moisture away from the DP cell and back into the pipeline.

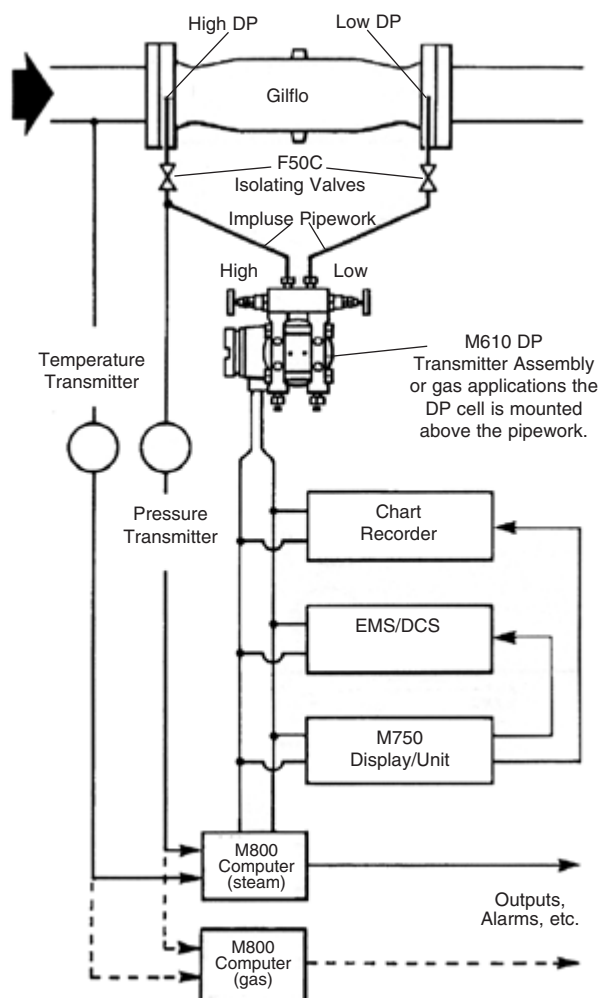

### Electrical wiring

All electrical wiring must be carried out to the appropriate standards. Full wiring interconnection details are included with the equipment.

### How to specify

For details of how to specify each part of your chosen system refer to individual TIS's listed in the Associated Equipment section.

### Associated Equipment

M610	DP Transmitter Assembly	TI-P335-10 US
Gilflo 'B'	Pipeline Unit	TIS 8.006
Gilflo 'Spool'	Pipeline Unit	TIS 8.005
M750	Display Unit	TI-P332-08 US
F50C	Isolating Valve	TIS 8.401
M800	Steam Flow Computer	TI-P331-04-US
M800	Gas Flow Computer	TI-P333-24-US

## Gilflo ILVA Flowmeters

### Description

The Gilflo ILVA flowmeter operates on the spring loaded variable area principle and produces a differential pressure related to the rate of flow. It can be used with both saturated and superheated steam, gases and most industrial fluids.

### Limiting Conditions

The maximum pressure and temperature limitations are the same as the specified flange ratings with an overall maximum temperature of 842°F. Minimum operating temperature -58°F. Minimum operating pressure 9 psig. Maximum viscosity 30 centipoise.

### Turndown

The Gilflo ILVA will provide accurate measurement over a flow range of 100:1.

### Accuracy

To achieve accuracy of a  $\pm 1\%$  of reading, all Gilflo ILVA meters must be used in conjunction with a device capable of performing electronic linearism such as:

- M750 Flow Computer
- Customer's EMS, DCS or equivalent
- M800 Steam Flow Computer
- M800 Gas Flow Computer

Note: When used with M800 flow computers, Gilflo ILVA accuracy is  $\pm 1\%$  of reading from 5% to 100% of maximum rated flow. For flows from 1% to 5% of maximum rated flow, accuracy will be better than  $\pm 1\%$  FSD.

### Repeatability

The Gilflo ILVA is repeatable to better than 0.25%.

### Pressure Drop


The pressure drop across the Gilflo ILVA pipeline unit is 200 inches water gauge at maximum rated flow.

### Flow Capacity

To determine the capacity of the Gilflo ILVA for different fluids, it is necessary to calculate the Equivalent Water Flowrate  $Q_e$  (in U.S. gpm) as described under the section "sizing the Gilflo ILVA" then selecting the appropriate size of meter from the table.

### Construction Materials

Body	Stainless Steel S.316
Internals	431 S29/S303/S304/S316
Spring	Inconel X750 or equivalent

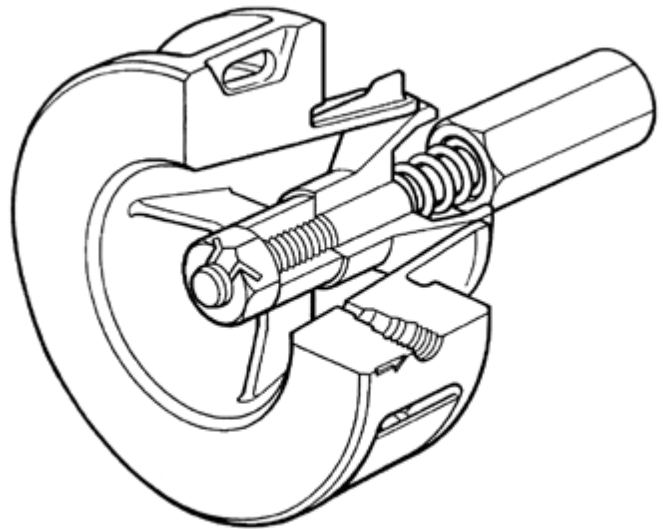

### Sizes and Pipe Connections

2", 3", 4", 6", and 8"

Suitable for fitting between the following flanges  
ANSI B 16.5 class 150, 300, 600.

### How to Specify

6" Gilflo ILVA flowmeter for installation between ANSI 150 flanges. Body material 316 stainless steel. Flow medium saturated steam at 150 psig, maximum flow 20,000 lb/h.


For a general description of the Gilflo ILVA metering system, see TIS 8.010 which also gives details of associated equipment.

# Gilflo ILVA Flowmeters

## Dimensions (approximate) in inches and lbs.

Size	A	B	C	D	E	Weight (lb)
2"	1.38	2.48	5.51	4.06	.69	4.4
3"	1.77	3.07	5.91	5.43	.89	8.6
4"	2.36	4.06	8.07	6.38	1.48	18.3
6"	2.95	5.28	11.81	8.58	1.48	31.3
8"	3.35	6.34	14.17	10.75	1.67	52.0

Note: Pressure tappings are threaded 1/4" NPT

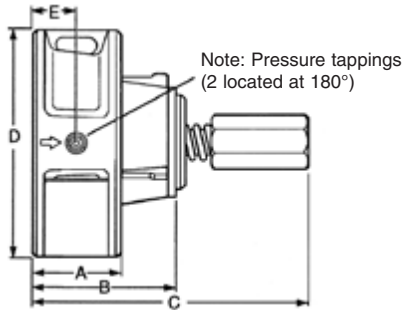

## Installation

A separate installation booklet is supplied with each Gilflo ILVA flowmeter. The following main points are given here for guidance:

1. The Gilflo ILVA should be mounted with a minimum of 6 straight pipe diameters upstream and 3 downstream. No valves, fittings or cross sectional changes are permitted within these pipe lengths. Where an increase in nominal pipe diameter is required upstream of the meter, the length of straight pipe should be increased to 12 diameters. Similarly, where a Gilflo ILVA is installed downstream of two 90 degree bends in two planes, a pressure reducing valve or a partially open valve, 12 upstream pipe diameters should be allowed.
2. Care should be taken to install the Gilflo ILVA concentrically in the line. If this is not done, flow measurement errors may occur.
3. The ILVA meter should be mounted horizontally. For vertical installations, consult your representative.
4. For steam applications, good basic steam engineering practices should be followed:  
Correct line drainage through adequate trapping.  
Good alignment and support of associated pipework.  
Line size changes achieved by the use of eccentric reducers.
5. See TIS 8.010 which provides an overview of the Gilflo ILVA metering system and further installation details.

## Maintenance

There are no user serviceable parts in the Gilflo ILVA. A visual check together with confirmation that the orifice/cone reference dimension is within tolerance is possible. Full details are included in the manual that accompanies the meter.

## Sizing the Gilflo ILVA for Saturated Steam - lb/h

Maximum flow rates in lb/h at different pressures (psig)

**Note:** Maximum steam flow rates are calculated at a differential pressure across the Gilflo ILVA pipeline unit of 200 ins H<sub>2</sub>O.

Size		15 psig	50 psig	75 psig	100 psig	150 psig	200 psig	400 psig	600 psig
2"	Maximum flow	682	988	1153	1299	1549	1764	2451	3009
	Minimum flow	7	10	12	13	15	18	25	30
3"	Maximum flow	2677	3877	4528	5103	6081	6926	9627	11815
	Minimum flow	27	39	45	51	60	69	96	118
4"	Maximum flow	5492	7953	9288	10466	12473	14206	19747	24236
	Minimum flow	55	79	93	105	125	142	197	242
6"	Maximum flow	13273	19220	22448	25295	30144	34333	47723	58571
	Minimum flow	132	192	224	252	301	343	477	585
8"	Maximum flow	26088	37778	44121	49718	59249	67483	93801	115123
	Minimum flow	260	377	441	497	592	674	938	1151

## Sizing the Gilflo ILVA Meter

In order to determine the flow capacity of a Gilflo ILVA pipeline unit, it is necessary to calculate the Equivalent Water Flowrate ( $Q_e$ ) based on the anticipated actual flow.

Figure 2 is then used to select the appropriate unit.

1. Determine Equivalent Water Flowrate ( $Q_e$ ) in U.S. gpm:

### Liquids:

$$Q_e = \frac{m}{500} \sqrt{\frac{D_e}{D_i}} \quad \text{or} \quad Q_e = Q_i \sqrt{\frac{D_i}{D_e}}$$

- $Q_e$  = equivalent flow rate of water at 70°F (U.S. gpm)  
 $m$  = maximum flow rate of service liquid (lb/hr)  
 $D_e$  = density of water at calibration (62.305 lb/ft<sup>3</sup>)  
 $D_i$  = density of service liquid (lb/ft<sup>3</sup>)  
 $Q_i$  = maximum flow rate of service liquid (US gpm)

### Gases:

$$Q_e = \sqrt{D} \times \frac{(0.0158) \times m}{\frac{P_f}{P_s} \times \frac{T_s}{T_f}}$$

$$\text{or } Q_e = (0.948) \times Q_g \sqrt{D} \times \frac{P_s}{P_f} \times \frac{T_f}{T_s}$$

- $Q_e$  = water equivalent flow rate at 70°F (U.S. gpm)  
 $m$  = maximum flow rate of gas (lb/hr)  
 $D$  = gas density at 14.7 psia, 520°R (60°F) (lb/ft<sup>3</sup>)  
 $P_f$  = flowing pressure of gas (psia)  
 $P_s$  = standard atmospheric pressure (14.7 psia)  
 $T_s$  = standard absolute temperature (520°R)  
 $T_f$  = flowing temperature of gas (°R=°F + 460)  
 $Q_g$  = maximum flow rate of gas (SCFM)

### Steam:

$$Q_e = (0.0158) \times m \sqrt{v}$$

- $Q_e$  = water equivalent flow rate at 70°F (U.S. gpm)  
 $m$  = maximum flow rate of steam (lb/hr)  
 $v$  = specific volume of steam at normal pressure and temperature (ft<sup>3</sup>/lb)

2. Select from the table below the Gilflo ILVA meter with a maximum  $Q_e$  that closely matches (but exceeds) the application  $Q_e$  determined in step 1.

Meter size	Max. $Q_e$ U.S. gpm	Max. DP ins Wg
2"	40	200
3"	158	200
4"	317	200
6"	781	200
8"	1,535	200

## Gilflo ILVA Flowmeters System Overview

### Description


The Gilflo ILVA metering system consists of 2 major parts:

1. The Gilflo ILVA pipeline unit. This is installed in the line where the flow is to be measured. Using impulse pipework, this is connected to:
2. The M610 DP transmitter assembly. This measures the differential pressure across the Gilflo ILVA pipeline unit and converts it to a 4-20mA output signal. This output signal can be used in a number of ways:
  - a- To act as a suitable input to an EMS/DCS which can be programmed by the user to carry out the linearizing of the output signal based on the calibration data that is supplied with each Gilflo ILVA meter. Additional inputs from the pressure and temperature transmitters can be used to carry out density compensation for compressible flow applications.
  - b- To supply an M750 Display Unit. This gives a non-compensated display of rate of flow and totalized flow. It is suitable for liquid, gas and steam applications where density compensation is not required.
  - c- To supply an M800 (steam) or (gas) Flow Computer. Use of the pressure and temperature transmitters enables automatic density compensation to be carried out for compressible flow applications. See relevant TIS's for details of pressure/temperature limits for M800 Flow Computers.

The Gilflo ILVA pipeline unit can be used to measure the flow of most industrial liquids, gases and vapors within the pressure and temperature limits detailed in the TIS's.

### Installation

Care must be taken to meet all the requirements of the Installation and Maintenance Instructions that are included with the equipment.

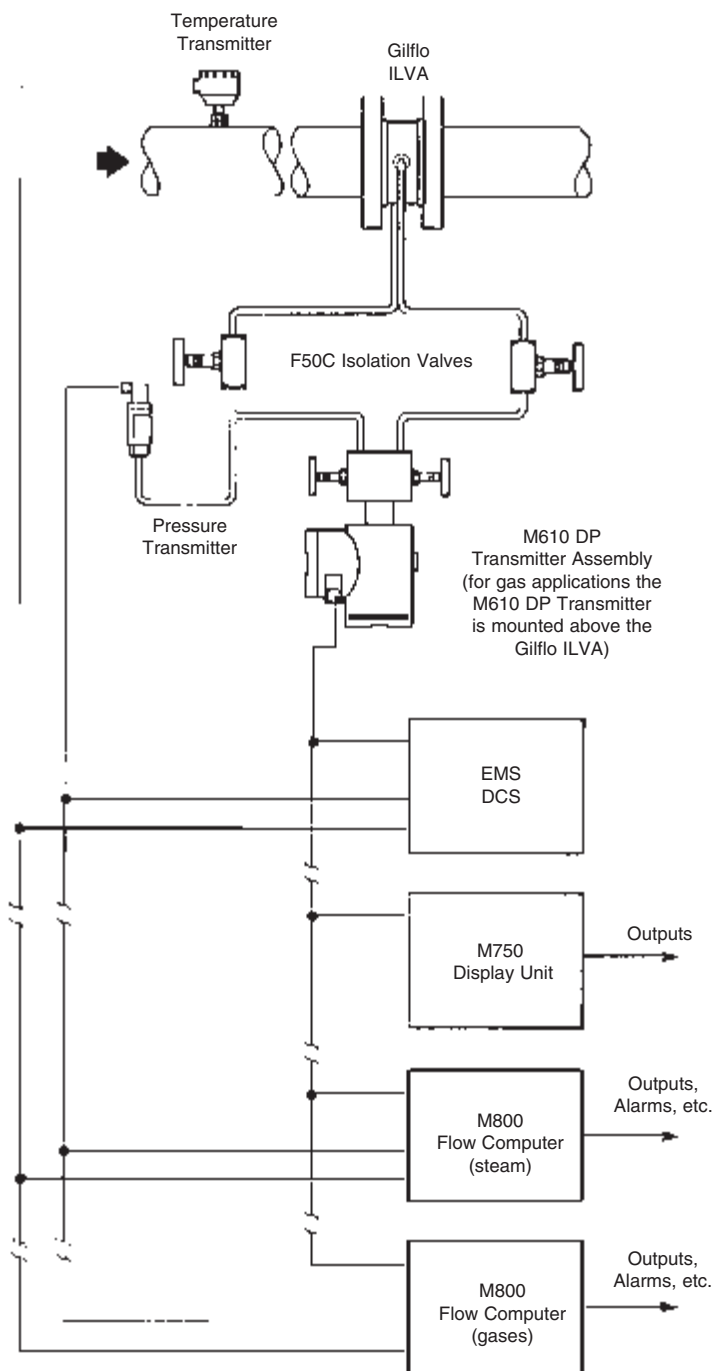

# Gilflo ILVA Flowmeters - System Overview

## Installation points to watch:

1. Ensure that all pipework is adequately supported and properly aligned. Specialcare should be taken to ensure that the Gilflo ILVA pipeline unit is concentrically mounted in the line. (Special installation kits area available to order for sizes 2" to 8").
2. The Gilflo ILVA pipeline unit should be selected on capacity rather than line size. Where line size changes on steam systems are necessary, use eccentric reducers to avoid buildup of condensate.
3. The minimum recommended lengths of straight pipe upstream and downstream are 6D and 3D respectively. See TIS (ref TIS 8.009) for Gilflo ILVA for more details.
4. Take care to ensure the correct direction of flow as indicated by the arrow on the meter body.
5. Take care to avoid reverse flow through the meter.
6. Avoid installing the meter downstream of a pressure reducing valve (especially on steam systems) as this may cause inaccurate readings. Similarly, avoid installing the meter downstream of a partially open valve.
7. Remember that actuated valves may cause rapid pressure fluctuations which could cause damage.
8. On steam or liquid systems, the M610 DP transmitter assembly is mounted below the meter. Take care to ensure that all impulse lines remain full to prevent damage to the DP transmitter through contact with steam or high temperature liquid.
9. For steam applications, care should be taken to ensure adequate line drainage, trapping etc. so as to avoid condensate slugs impacting the meter. Where practical, steam separators should be fitted. These should be drained using a float trap set.
10. For gas applications, the M610 DP transmitter assembly is installed above the pipework. Ensure that the impulse lines allow free drainage of moisture away from the DP transmitter and back into the pipeline.

## Electrical wiring

All electrical wiring must be carried out to the appropriate standards.  
Full wiring interconnection details are included with the equipment.

## Associated equipment

Item	Description	Technical literature
M610	DP transmitter assembly	TI-P335-10 US
Gilflo ILVA	Pipeline unit	TIS 8.009
M750	Display unit	TI-P332-08 US
F50C	Isolation valve	TIS 8.401
M800	Steam flow computer	TI-P331-04-US
M800	Gas flow computer	TI-P333-24-US

## DIVA Saturated Steam Flowmeter

### Description

The DIVA flowmeter is designed for use on saturated steam only and operates by measuring the strain produced on a moving cone by an instantaneous flowrate. This strain is then converted into density compensated mass flowrate and is transmitted via a single loop powered 4 - 20 mA and pulsed output.

### Sizes and pipe connections

2", 3" and 4"

The DIVA is of wafer design, suitable for fitting between ANSI B 16.5 class 150 and 300 flanges


#### Note:



The DIVA flowmeter should be installed in pipework manufactured to BS1600 or ANSI /ASME B 36.10 Schedule 40. For systems with different standards / schedules, spool pieces manufactured from BS 1600 or ANSI/ASME B 36.10 Schedule 40 pipe should be used.

### Limiting Conditions

Minimum operating pressure:	2"	12.5 psig
	3" and 4"	9 psig
Maximum operating pressure:	Horizontal flow	464 psig
	Vertical flow	160 psig
Minimum operating temperature:	217°F	
Maximum operating pressure (saturation):	462°F	
Maximum allowable temperature:	482°F	
Maximum electronic ambient temperature:	131°F	
Maximum electronics humidity level:	90 RH (non condensing)	
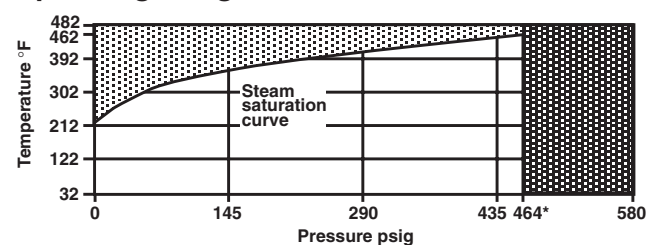
### Operating Range




-  The product must not be used in this region.
-  The product should not be used in this region due to software limitations.

\*PMO Maximum operating pressure for steam service.

### Materials

Body	Stainless steel S.316
Internals	431 S29/S303/S304/S316
Spring	Inconel X750 or equivalent
Stem	Stainless steel 431 S29
Housing	Aluminum HE30

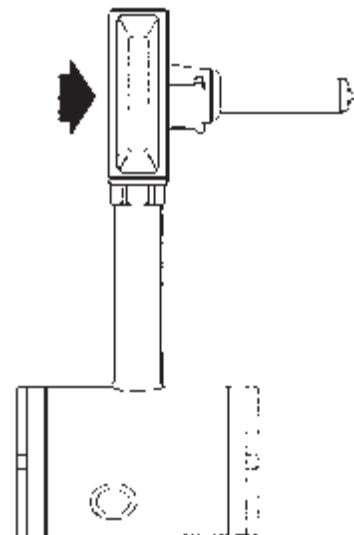

### Technical data

IP rating	IP65 with correct cable glands
Power supply	Loop powered nominal 24 Vdc
Outputs	4 - 20 mA (proportional to mass flow) Pulsed output (Vmax 28 Vdc Rmin 10 k)
Communication port	EIA 232C (RS 232)

### Performance

The DIVA flowmeter has inbuilt electronics which gives a density compensated output. A LCD display is incorporated within the electronics head, which is accessible via the screw cap. The M750 display unit can be used to provide a remote display if required, utilising the linear output.

#### System uncertainty, to 95% confidence (2 STD): (in accordance with ISO 17025)

± 2% of measured value from 10% to 100% of maximum rated flow.  
± 0.2% FSD, from 2% to 10% of maximum rated flow.  
Turndown : up to 50:1

As the DIVA is a self contained unit the uncertainty quoted is for the complete system. Many meters claim a pipeline unit uncertainty and for a true system uncertainty, the individual uncertainty values of any associated equipment, such as DP cells, need to be added to the pipeline value.

### Pressure drop

The pressure drop across the DIVA is nominally 300 inches water gauge (10.8 psig) at maximum rated flow for the 2" unit, and 200 inches water gauge (7.2 psig) for the 3" and 4" units.



# DIVA Saturated Steam Flowmeter

## Sizing the DIVA flowmeter for saturated steam - capacities lb/h

### Horizontal flow applications

Pressure in psig	14.5	29	43.5	58	72.5	87	101.5	116	130.5	145	159.5	174	188.5	203	217.5	232
2" Min. flow lb/h	32	39	45	50	55	59	63	66	70	73	76	79	82	85	88	90
2" Max. flow lb/h	1048	1395	1670	1905	2113	2304	2477	2637	2793	2938	3076	3207	3330	3452	3576	3684
3" Min. flow lb/h	70	85	98	109	119	128	137	145	152	160	167	173	179	185	192	197
3" Max. flow lb/h	2780	3648	4341	4934	5461	5944	6383	6789	7187	7554	7907	8240	8554	8864	9181	9454
4" Min. flow lb/h	108	131	151	168	183	197	210	222	234	245	256	266	275	285	294	303
4" Max. flow lb/h	4968	6199	7206	8082	8867	9592	10254	10868	11472	12032	12569	13079	13559	14033	14520	14939


Pressure in psig	246.5	261	275.5	290	304.5	319	333.5	348	362.5	377	391.5	406	420.5	435	449.5	464
2" Min. flow lb/h	93	96	98	101	103	105	108	110	112	114	116	118	121	123	125	127
2" Max. flow lb/h	3808	3904	4008	4117	4223	4321	4419	4520	4609	4701	4790	4881	4969	5052	5138	522
3" Min. flow lb/h	204	208	214	219	225	230	235	240	245	249	254	258	263	267	272	276
3" Max. flow lb/h	9770	10017	10280	10558	10830	11078	11328	11587	11815	12049	12277	12508	12733	12945	13164	13380
4" Min. flow lb/h	313	320	328	337	345	353	360	368	375	383	390	397	404	410	417	424
4" Max. flow lb/h	15426	15805	16210	16638	17058	17440	17826	18226	18578	18938	19291	19649	19996	20324	20662	20996

### Vertically up flow applications

Pressure in psig	14.5	29	43.5	58	72.5	87	101.5	116	130.5	145	159.5
2" Min. flow lb/h	35	46	56	63	70	77	83	88	93	98	103
2" Max. flow lb/h	1048	1395	1670	1905	2113	2304	2477	2637	2793	2938	3076
3" Min. flow lb/h	93	122	145	164	182	198	213	226	240	252	264
3" Max. flow lb/h	2780	3648	4341	4934	5461	5944	6383	6789	7187	7554	7907
4" Min. flow lb/h	166	207	240	269	296	320	342	362	382	401	419
4" Max. flow lb/h	4968	6199	7206	8082	8867	9592	10254	10868	11472	12032	12569

### Vertically down flow applications

Pressure in psig	14.5	29	43.5	58	72.5	87	101.5	116	130.5	145	159.5
2" Min. flow lb/h	35	39	45	50	55	59	63	66	70	73	76
2" Max. flow lb/h	1048	1395	1670	1905	2113	2304	2477	2637	2793	2938	3076
3" Min. flow lb/h	93	85	98	109	119	128	137	145	153	160	167
3" Max. flow lb/h	2780	3648	4341	4934	5461	5944	6383	6789	7187	7554	7907
4" Min. flow lb/h	108	131	151	168	183	197	210	222	234	245	256
4" Max. flow lb/h	4968	6199	7206	8082	8867	9592	10254	10868	11472	12032	12569

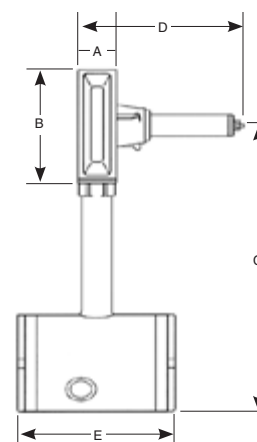

### Dimensions/weights (approximate) in inches and lbs

Size	A	B	C	D	E	Weight
2"	1.4	4.1	10.4	6.1	5.7	7.4
3"	1.8	5.4	11.2	5.9	5.7	11.6
4"	2.4	6.4	12.4	8.1	5.7	18.1

### DIVA flow capacities and pressure drops

Size	Maximum QE US Gal/min	Maximum DP "wg mbar
2"	80	300 750
3"	203	200 498
4"	317	200 498

## Safety Information, installation and maintenance

For full details see the Installation and Maintenance Instructions (IM-P337-18 and IM-P337-21) supplied with the product

The following main points are given for guidance only:

1. The DIVA flowmeter should be mounted with a minimum of 6 straight pipe diameters upstream and 3 downstream. No valves, fittings or cross sectional changes are permitted within these pipe lengths. Where an increase in nominal pipe diameter is required, upstream of the flowmeter, the length of straight pipe should be increased to 12 diameters. Similarly, where a DIVA is installed downstream of two 90° bends in two planes, a pressure reducing valve or a partly open valve, 12 upstream pipe diameters should be allowed.
2. It is important that the internal upstream and downstream diameters of pipe are smooth. Ideally seamless pipes should be used and there should be no intrusive weld beads on the internal diameter. It is also recommended that slip-on flanges are used to avoid this.
3. Care should be taken to install the DIVA flowmeter concentrically in the line. If this is not done, flow measurement errors may occur.
4. As for all steam flowmetering installations, good basic steam engineering practices should be followed.

## How to Order

**Example:** 1 of 4" DIVA saturated steam flowmeter for installation between ANSI 300 flanges.

For use on saturated steam at 145 psig, maximum flow 12,059 lb.hr.

**Note:** For details of the optional remote display see the relevant M750 literature.

TI-P337-17-US 04.04





## DIVA Flowmeter - System Overview

### Description

The DIVA pipeline unit is a complete flowmetering system. It provides a fully density compensated 4-20 mA output proportional to mass flow as well as a digital pulsed output. The system comprises of:

The DIVA pipeline unit is installed in the line where the flow is to be measured. There is no requirement for impulse lines or additional equipment. The DIVA measures the force caused by the deflection of a precision made cone due to the flowrate and converts it to a 4 - 20 mA and digital pulsed output signals proportional to mass flow. These output signals can be used in a number of ways:-

**a-** To act as a suitable input to an EMS/BEMS which can be programmed by the user with the linear 4-20 mA scale. Additional inputs from pressure and temperature transmitters, generally used to carry out density compensation, are not required as the DIVA output is proportional to mass flow.

**b-** To supply an M750 display unit. This gives a display of rate of mass flow and totalised flow. The M750 can also supply the 24 Vdc loop power for the DIVA.

The DIVA pipeline unit can be used to measure the flow of saturated steam within the pressure and temperature limits detailed in the Technical Information sheet TI-P337-17 US.

### Installation


Care must be taken to meet all the requirements of the Installation and Maintenance Instructions that are included with the equipment.

**Some installation points to watch are noted below:**

1. Ensure that all pipework is adequately supported and properly aligned. Special care should be taken to ensure that the DIVA flowmeter is concentrically mounted in the line.
2. The DIVA flowmeter should be selected on capacity rather than line size. Where line size changes on steam systems are necessary, use eccentric reducers to avoid build-up of condensate.
3. The minimum recommended lengths of straight pipe are 6D upstream and 3D downstream.
4. Take care to ensure the correct direction of flow as indicated by the arrow on the flowmeter body.
5. Take care to avoid reverse flow through the flowmeter.
6. Avoid installing the flowmeter downstream of a pressure reducing valve as this may cause inaccurate readings. Similarly, avoid installing the flowmeter downstream of a partially open valve.
7. Remember that actuated valves may cause rapid pressure fluctuations, which could cause damage.
8. Care should be taken to ensure adequate line drainage, trapping etc, so as to avoid condensate slugs impacting the flowmeter. Steam separators should be fitted. These should be drained using a float trap set.

### Note:

**This drawing is schematic only, please see the Installation and Maintenance Instructions for specific installation information.**

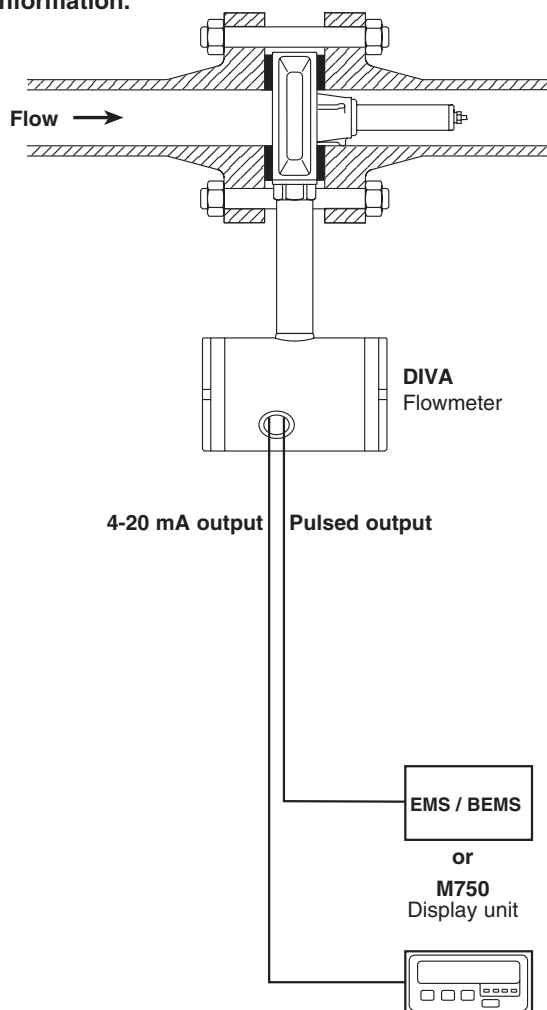

### Electrical wiring

All electrical wiring must be carried out to the appropriate standards. Full wiring interconnection details are included with the equipment.

### How to order

For details of how to specify system components refer to the relevant TI documents.

### Associated equipment

DIVA	Flowmeter	TI-P337-17 US
M750	Display unit	TI-P332-08 US

*Local regulation may restrict the use of this product below the conditions quoted. Limiting conditions refer to standard connections only.*

*In the interests of development and improvement of the product, we reserve the right to change the specification.*

TI-P337-19-US 04.04

## Orifice Plate Flowmeters M410 Orifice Plate and Carrier Assembly

### Description

The M410 Orifice Plate and Carrier assembly is a primary flow element consisting of a tab handled square edged orifice plate and optional carrier. The orifice plate is designed and manufactured to meet the requirements of ASME-MFC-3M in all respects and is suitable for the measurement of the rate of flow of most liquids, gases and steam. The tab handled orifice plate can be used:

- a: on its own fitted between flanges with pressure tapplings in the users pipework or flanges.  
or
- b: fitted into a carrier with integral flange tapplings designed to fit between customer flanges.

### Limiting Conditions

The pressure and temperature limitations of both the tab handled plate and the carrier assembly are the same as the specified flange ratings.

### Performance

The performance of an orifice plate metering system can be greatly influenced by installation variables, so the figures given below are for guidance only:

<b>Accuracy:</b>	typically +/- 3% of actual flow. (equivalent to +/- 1.5% full scale deflection at 50% of rated maximum flow).
<b>Repeatability:</b>	typically +/- 0.3%.
<b>Turndown:</b>	typically 4:1.

### Pipe Sizes Available

Tab handled plates with or without carriers are available to suit the following pipe sizes:

1", 1-1/2", 2", 2-1/2", 3", 4", 5", 6", 8", 10", 12", 14", 16", 18", 20", 24"

### Connections

Tab handled plates and carriers are available to suit the following flange specifications:

ANSI B 16.5 class 150, 300, 600.

### Construction Materials


Tab handled orifice plate	Stainless Steel Grade 316
Carrier	passivated zinc plated carbon steel
Gaskets	exfoliated graphite

### Pressure tapplings


When the tab handled orifice plates are used without the optional carrier, it is the responsibility of the user to provide appropriate pressure tapplings in either the flanges or upstream and downstream pipework in line with ASME-MFC-3M.

The optional carrier assembly incorporates upstream and downstream pressure tapplings threaded 1/2" NPT. These tapplings are 1 inch either side of the orifice plate face in line with the requirements of ASME-MFC-3M

**M410 Orifice Plate**

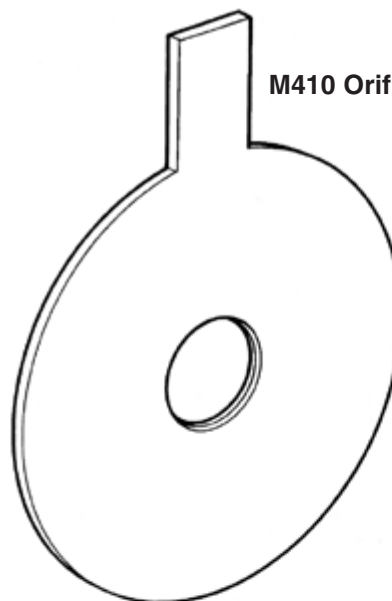

**M410 Orifice Plate and Carrier Assembly**

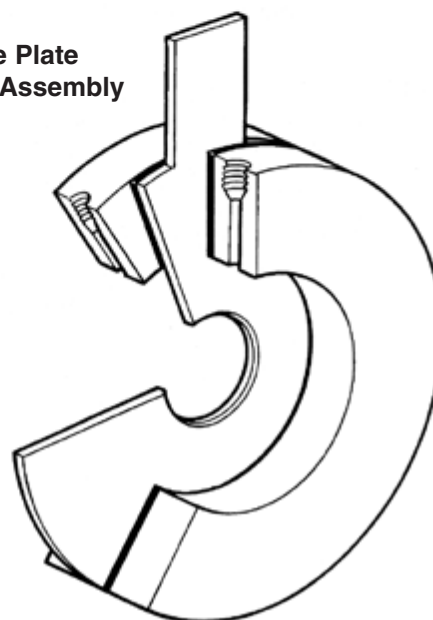

# Orifice Plate Flowmeters

## M410 Orifice Plate and Carrier Assembly

### Associated Equipment

M800 series steam flow computer	TI-P331-04-US
M800 series gas flow computer	TI-P333-24-US
M750 display unit	TI-P332-08 US
M610 DP transmitter assembly	TI-P335-10 US
F50C isolation valve	TIS 8.401
EL2270 temperature sensor	TIS 8.402
EL2271 temperature sensor & transmitter assy.	TIS 8.402
EL2810 temperature transmitter	TIS 8.402
EL2600 pressure transmitter	TIS 8.403

For a general description of orifice plate flowmetering systems, see TIS 8.202 (density compensated system) and TIS 8.201(non density compensated system).

### Installation

It is important that all details of the installation conform to ASME-MFC-3M. Of special note, is the long, straight lengths of pipe that must be present upstream of the orifice plate. As an approximate guide, 20 to 30 pipe diameters upstream and 5 downstream should be adequate but it is recommended that reference is made to the relevant standard. A summary of the basic requirements is included with the M410 equipment.

### Maintenance

A visual inspection of the orifice plate should be made at regular intervals to check for dirt buildup, damage or a loss of sharpness of the upstream edge of the plate. Replacement orifice plates and gaskets are available from Spirax Sarco.

### How to Specify

M410 Orifice plate primary element with/without optional carrier assembly conforming to ASME-MFC-3M.

### How to Order

1- Orifice plate and carrier assembly.


**Important note:** In order that a correctly sized orifice plate can be supplied, it is essential that full details of the installation and estimated flow rates are supplied. This is best done using an orifice plate customer data sheet (TIS 8.203) info available from your local representative.

### Notes:

- 1: Dimension C is 1 inch for all sizes.
- 2: For line sizes 1" to 10", orifice plate thickness T is 3mm, 12" and above, T is 6mm.
- 3: Gaskets are 1.6 mm thick.
- 4: For line sizes up to 14", carrier assembly thickness B is 82mm, 16" and above, B is 85mm.
- 5: Maximum weights shown are based on ANSI 600 flanges.

### Dimension (approximate) in inches

	ANSI 150	ANSI 300	ANSI 600	Maximum Weight Lb
Inches	A	A	A	
1	2.63	2.87	2.87	5.20
1-1/2	3.37	3.75	3.75	8.20
2	4.12	4.37	4.37	10.82
2-1/2	4.87	5.13	5.13	13.69
3	5.37	5.88	5.88	17.44
4	6.87	7.13	7.63	30.31
5	7.75	8.5	9.5	46.25
6	8.75	9.88	10.5	51.83
8	11	12.13	12.62	68.89
10	13.37	14.25	15.75	105.71
12	16.13	16.62	18	129.50
14	17.75	19.12	19.37	132.72
16	22.61	21.25	22.25	189.58
18	21.62	23.5	24.12	208.07
20	23.87	25.75	26.87	259.46
24	28.25	30.5	31.13	322.69

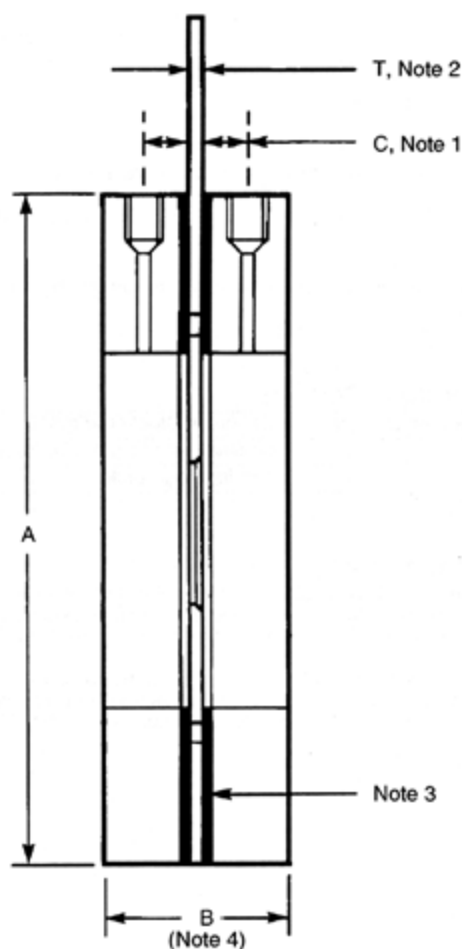

© Spirax Sarco, Inc. 2007

TI-8-200-US 10.07

## Orifice Plate Flowmeters

### Orifice Plate Flowmetering System (density compensated)

#### Description

The Orifice Plate Metering system is suitable for measuring the rate of flow of steam, liquids and most gases. For steam and gas flowmetering applications, it is important to take account of changes in flowing density due to flowing pressure and temperature variations. If ignored these changes in flow density will cause significant measurement errors. Liquids being non-compressible do not suffer from this problem and generally density compensation is not required. Compatible Flow Computers, Pressure and Temperature Transmitters are listed in the Associated equipment section.

#### Options available:

The Orifice Plate Metering package is available in a number of options to suit most requirements. For applications requiring density compensation, select one of the four basic options and add a flow computer and pressure/temperature measuring equipment as required:

- |          |   |
|----------|---|
| Option 1 | M410 orifice plate and gaskets  |
| Option 2 | M410 orifice plate, gaskets and M610 DP transmitter assembly  |
| Option 3 | M410 orifice plate, gaskets, carrier ring assembly and F50C isolation valves                                  |
| Option 4 | M410 orifice plate, gaskets, carrier ring assembly and F50C isolation valves and M610 DP transmitter assembly |

**M410 orifice plate.** This is installed in the line at the point where the flow is to be measured. It produces a differential pressure proportional to the rate of flow.

**F50C isolation valves.** These are used to isolate the impulse lines close to the orifice plate.

**M610 DP transmitter assembly.** This is installed close to the orifice plate and converts the differential pressure to a 4-20mA signal for retransmission to other equipment. The M610 is supplied ready fitted with a 3 way manifold which acts as secondary isolation and pressure equalization valve.

#### Associated Equipment

**EL2600 Pressure transmitter.** This is installed in the impulse piping (high pressure side) and provides a pressure signal for density compensation.

**EL2271 Temperature sensor and transmitter assembly.** This is installed in the line upstream of the orifice plate and provides a temperature signal for density compensation. (Suitable for temperatures up to 482°F).


**EL2270 Temperature sensor.** This is a Pt100 temperature sensor that is installed in the line to provide a temperature signal to the remote M800 temperature transmitter. (Suitable for temperatures up to 932°F).

**M800 Temperature transmitter.** This is a remote temperature transmitter for use in conjunction with the EL2270 temperature sensor for applications with temperatures between 482°F and 932°F.

**M800 Series Steam flow computer.** This flow computer is suitable for use with orifice plates on saturated and superheated steam flow applications. It uses the flow, pressure and temperature signals to carry out necessary density compensation calculations for all steam conditions up to a maximum of 609 psig/932°F. Outputs to drive the DP, pressure and temperature transmitters are standard.

**M800 Series Gas flow computer.** Details as for the M800 gas flow computer except that the M800 gas flow computer is for gas applications.

M410 Orifice plate and Carrier assembly

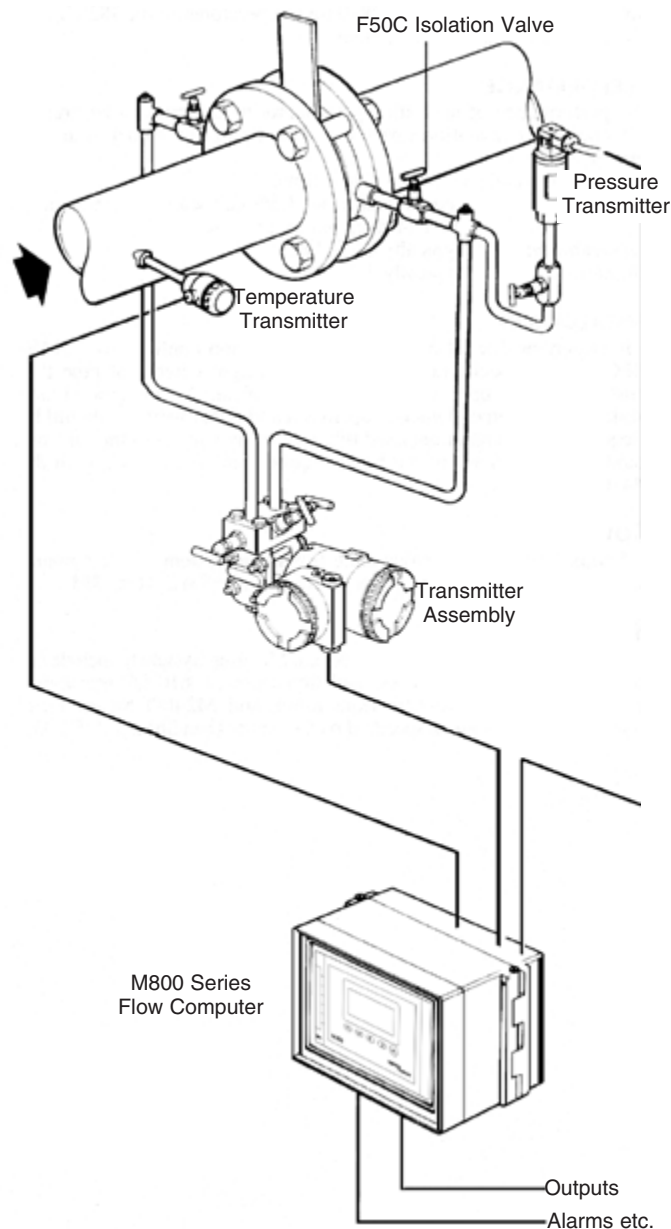

Typical configuration shown here is for a superheated steam application. Gas applications will differ slightly.

# Orifice Plate Flowmeters

## Orifice Plate Flowmetering System (density compensated)

### Density Compensated System Requirements

In addition to a M410 assembly (Option 1 - 4), the following components are required:

#### Saturated Steam

Either a EL2600 pressure transmitter or a EL2271 temperature transmitter (substitute with EL2270 for temperatures above 482°F), and a M800 series steam flow computer.

#### Superheated Steam

Both a EL2600 pressure transmitter and a EL2271 temperature transmitter (substitute with EL2270 for temperatures above 482°F), and a M800 series steam flow computer.

#### Gases

Both a EL2600 pressure transmitter and a EL2271 temperature transmitter (substitute with EL2270 for temperatures above 482°F), and a M800 series gas flow computer.

### Performance

The performance of an orifice plate metering system can be greatly influenced by installation variables, so the figures given below are for guidance only:

Accuracy:	typically +/- 3% of actual flow. (equivalent to +/- 1.5% full scale deflection at 50% of rated maximum flow).
Repeatability:	typically +/- 0.3%.
Turndown:	typically 4:1.

### Installation



It is important that all details of the installation conform to ASME-MFC-3M. Of special note, is the long, straight lengths of pipe that must be present upstream of the orifice plate. As an approximate guide, 20 to 30 pipe diameters upstream and 5 downstream should be adequate but it is recommended that reference is made to the relevant standard. A summary of the basic requirements is included with the M410 equipment.

### How to Specify

1- M410 Orifice plate flowmeter system with automatic density compensation to meet requirements of ASME-MFC-3M.

### How to Order

1- M410 Orifice Plate Steam Metering System to include tab handled plate and carrier, F50C isolation valves, M610 DP transmitter assembly, EL2600 pressure transmitter and M800 Steam Flow Computer.

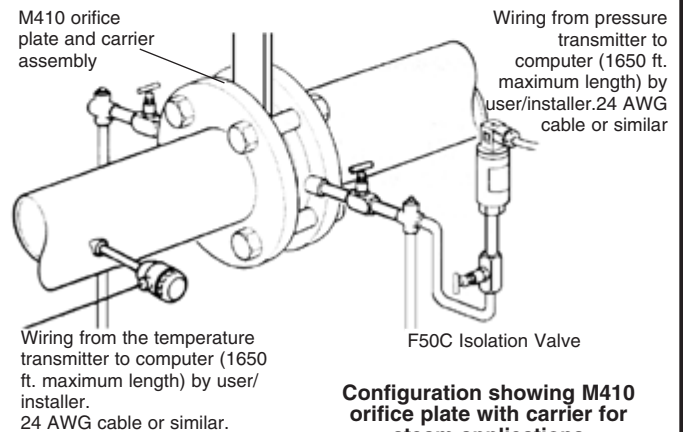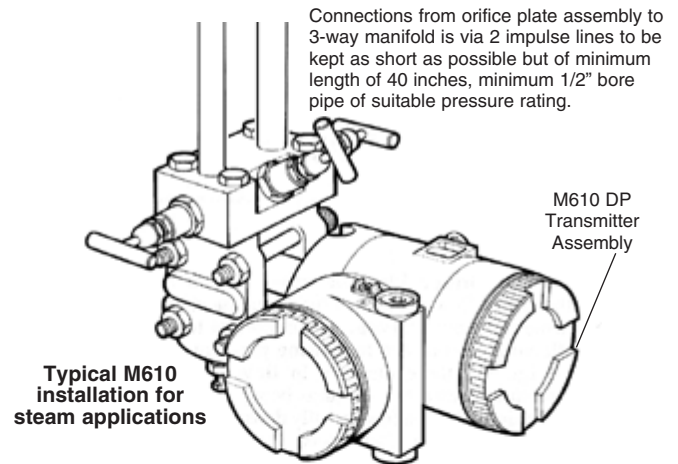



## Orifice Plate Flowmeters

### Orifice Plate Flowmetering System (non-compensated)

#### Description

The Orifice Plate Metering system is suitable for measuring the rate of flow of steam, liquids and most gases. For steam and gas flowmetering applications where the operating pressure and temperature are steady, it is not necessary to incorporate any means of automatic density compensation. Liquids, being non compressible, are not significantly affected by pressure and temperature variations and so density compensation is not normally required.

#### Options Available:

The Orifice Plate Metering package is available in a number of options to suit most requirements. For non density compensated applications, the following options are available :

- Option 1 M410 orifice plate and gaskets
- Option 2 M410 orifice plate, gaskets and M610 DP transmitter assembly
- Option 3 M410 orifice plate, gaskets, carrier ring assembly and F50C isolation valves
- Option 4 M410 orifice plate, gaskets, carrier ring assembly, F50C isolation valves and M610 DP transmitter assembly

#### Description

**M410 orifice plate.** This is installed in the line at the point where the flow is to be measured. It produces a differential pressure proportional to the rate of flow.

**F50C isolation valves:** These are used to isolate the impulse lines close to the orifice plate.

**M610 DP transmitter assembly:** This is installed close to the orifice plate and converts the differential pressure to a 4-20mA signal for retransmission to other equipment. The M610 is supplied ready fitted with a 3 way manifold which acts as secondary isolation and pressure equalization valve.

#### Associated Equipment

**M750 Display Unit.** This is a panel mounting flow indicator that displays flow rate and total flow, with analog and digital outputs available. The M750 supplies 19v DC to power the M610 DP transmitter.

#### Performance


The performance of an orifice plate metering system can be greatly influenced by installation variables, so the figures given below are for guidance only:

Accuracy:	typically +/- 3% of actual flow (equivalent to +/- 1.5% full scale deflection at 50% of rated maximum flow).
Repeatability:	typically +/- 0.3%.
Turndown:	typically 4:1.

#### Installation

It is important that all details of the installation conform to ASME-MFC-3M. Of special note, is the long, straight lengths of pipe that must be present upstream of the orifice plate. As an approximate guide, 20 to 30 pipe diameters upstream and 5 diameters downstream should be adequate but it is recommended that reference is made to the relevant standard. A summary of the basic requirements is included with the M410 equipment.

M410 Orifice Plate and Carrier Assembly

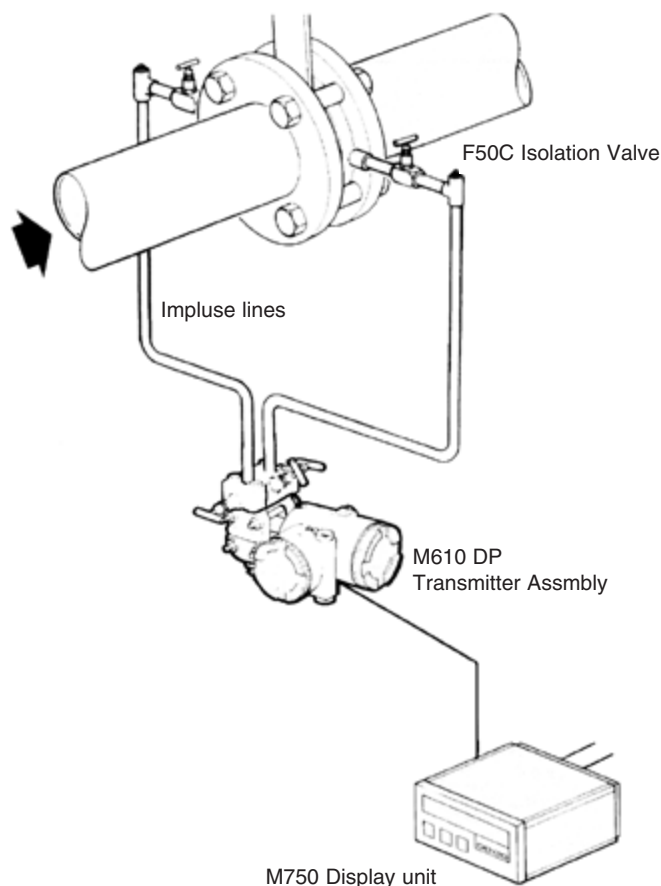

#### How to Specify

1- M410 Orifice plate flowmeter system conforming to ASME-MFC-3M.

#### How to Order

1- M410 Orifice Plate Steam Metering System to include tab handled plate and carrier, F50C isolation valves, M610 DP transmitter assembly and M750 Display Unit. ( Full details as specified on Customer Data Sheet TIS 8.203)

# Orifice Plate Flowmeters

## Customer Data Sheet

This Customer Data Sheet is intended to gather together all relevant information necessary to size and specify an Orifice Plate Flowmetering System. All equipment will be supplied to the customer based on the information received.

Company Name	
Address	
Contact	
Project reference	
Notes	

Please complete all sections and supply drawings, sketches etc. where appropriate.

### Section A: Working Fluid Details

Name of fluid (e.g. steam, water, air )				
State of fluid (e.g. liquid, vapor, gas)				
	Min value	Normal value	Max value	Units
Flowing Pressure				
Flowing Temperature				
Flowing Density				
Estimated rate of flow				

#### Notes:

The pressure drop at specified maximum rate of flow will be 100 inches water gauge unless otherwise stated. Below 25% of specified maximum rate of flow, system accuracy cannot be guaranteed due to turndown limitations of orifice plates.

### Section B: Pipeline Details

	Value
Nominal pipe size (inches)	
Pipe inside diameter (inches)	
Pipe schedule	
Flange rating (ANSI)	
Number of straight pipe diameters upstream	
Number of straight pipe diameters downstream	
Pipe material	
DP Trapping position*	

\*If ordering plate only (no carrier) specify tapping position (corner, flange, D & D/2, or 2.5D & 8D).

Please provide a sketch showing all details of pipework including any valves, bends, fittings etc in the area where the M410 orifice plate is to be fitted. This is important as the performance of all orifice plates can be affected greatly by installation factors. Using the information from sections A and B the correct orifice plate sizing will be accomplished.

### Section C: M410 Kit Options

The Orifice Plate is available in 4 basic kits. To create a complete metering system, additional components should be selected. The composition of the system is dependent on whether or not density compensation is required.

**Note: Check all items required.**

Option		Check
1	M410 orifice plate and gaskets	
2	M410 orifice plate, gaskets, M610 DP transmitter assembly	
3	M410 orifice plate, gaskets, carrier rings and 2 F50C isolation valves	
4	M410 orifice plate, gaskets, carrier rings, 2 F50C isolation valves and M610 DP transmitter assembly	

### Section D: Associated Transmitters Required for Density Compensated Systems


Item	Range length	Insert	Check	See TIS #
EI 2600 pressure transmitter				8.403
EL2270 temperature transmitter				8.402
EL2271 temperature sensor & transmitter				8.402
Temperature Sensor Pocket				8.402
M800 steam flow computer				TI-P331-04-US

### Section E: Associated Flow Computers

Item	Supply (volts)	Check	See TIS #
M750 uncompensated panel mtd. display			TI-P332-08-US
M800 steam flow computer, wall mtd. *			TI-P331-04-US
M800 steam flow computer, panel mtd. *			TI-P331-04-US
M800 gas flow computer, wall mtd. *			TI-P333-24-US
M800 gas flow computer, panel mtd. *			TI-P333-24-US

\*Provide density compensation

## M800 Steam Flow Computer

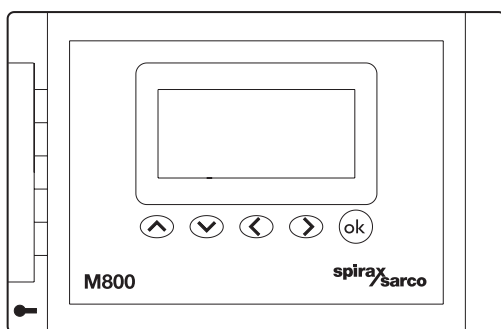

### Description

The M800 steam flow computer is available with either panel or wall mount connections that can operate with:

- Gilflo, ILVA, DIVA flowmeters.
- Vortex, SpiraFlo and orifice plate pipeline units.

The M800 can provide density compensation for saturated and superheated steam with suitable inputs from pressure and / or temperature transmitters and will display:

- Totalized flow
- Flowrate
- Temperature
- Pressure

The M800 can also be used for heat metering applications to measure the mass and temperature of saturated steam flow into a process, and the temperature of condensate flowing out. The net energy consumed by the process can then be calculated and displayed in terms of net power.

Operator settable alarm limits are provided to give a warning when the flowrate, temperature or pressure goes above or below specified limits. These alarms are indicated on a graphic display and can be transmitted via 2 relays (see 'Options' below). A digital pulsed output is provided as standard to signal mass or energy (per pulse).

A 4-20 mA analogue output channel is also provided to enable re-transmission to a chart recorder or BMS system of the flowrate or net power.

The M800 also comes with four independent timers, which are capable of recording the total flow and peak flow with the time of occurrence within a settable period of time.

A customer selectable security code is provided to avoid casual tampering.

### Options

As well as the above functions the M800 is easily expanded by the use of additional option boards, which can be simply retrofitted to the base unit.

#### Additional options available:

- 4-20mA analog output board – providing 2 x 4-20 mA outputs, which can be configured for pressure and temperature.

- Relay option board – providing 2 x volt free relays that can be configured for alarms.
- Modbus RTU communications option board – providing access to total, flowrate, power, temperature and pressure.

### Display parameters

Totalized flow	lb, kg, or customer scaleable
Flowrate	lb/hr, kg/h, kW or Mbtu/h
Temperature	°F or °C
Pressure	psi g or bar g
Time	24 hour clock
Date	MM / DD / YY or DD / MM / YY
Trend graph	flowrate

### Technical data - power

Supply voltage	99 V to 264 V at 50 - 60 Hz
Power consumption	7.5 watts maximum
Overvoltage category	II
Pollution degree	3
Calculation rate	10 / sec (Orifice plates 2 / sec)

### Technical data - input

4-20 mA input(s)	Input voltage (maximum)	2.5 Vdc
	Input impedance	110 Ω
	Input current (maximum)	22 mAdc
	Termination	Screw terminals (supplied)
Current source(s)	Resolution	0.01%
	Current output (per channel)	30 mAdc ±15%
	Open circuit voltage (maximum)	32 Vdc
	Total voltage drop (maximum)	19 Vdc @ 22 mAdc
	Termination	Screw terminals (supplied)

### Environmental information

Maximum operating relative humidity	80% up to 88°F (31°C) decreasing linearly to 50% at 104°F (40°C)
Maximum altitude	6 562 ft (2 000m) above sea level
Ambient temperature limits	0 - 131°F (55°C)
Enclosure rating	IP65 (with correct cable glands)
EMC: Emissions and immunity	EN 61326: A1 and A2 emissions
	Class A equipment Table 4
	EN 61326: A1 and A2 immunity for industrial locations Annex A Table 1
Electrical safety	BS EN 61010-1
Enclosure colours and materials	Grey ABS

TI-P331-04-US 08.07

*Local regulation may restrict the use of this product below the conditions quoted. Limiting conditions refer to standard connections only.  
In the interests of development and improvement of the product, we reserve the right to change the specification.*



## Output technical data

### Pulse output

Contacts	Volt free digital transistor (NPN or PNP)
Maximum supply voltage	28 Vdc
Maximum voltage in closed / on position	1 V
Minimum load resistor	$\geq 10 \text{ k}\Omega$
Termination	Screw terminals (supplied)

### 4 - 20 mA output

Range	4 - 20 mA
Minimum current	0 mA
Maximum current	22 mA
Open circuit voltage (maximum)	19 Vdc
Resolution	0.01%
Maximum output load	500 $\Omega$
Isolation	100 V
Termination	Screw terminals (supplied)

## Option board technical data

### Dual relay alarm option board -

#### Two independent mains rated relay outputs

Contacts	2 x changeover relays with common
Maximum load	3 A resistive @ 250 Vac 1 A inductive @ 250 Vac
Voltage rating	250 Vdc
Electrical life	3 x 10 <sup>5</sup> or greater depending on load
Mechanical life	30 x 10 <sup>6</sup>
Termination	Screw terminals (supplied)

### Isolated dual 4 - 20 mA re-transmission option board -

#### Two independent 4 - 20 mA isolated re-transmission

Range	4 - 20 mA
Minimum current	0 mA
Maximum current	22 mA
Open circuit voltage (maximum)	18 Vdc
Resolution	0.01%
Maximum output load	500 $\Omega$
Isolation	100 V
Termination	Screw terminals (supplied)

### Communications option board

#### RS485 Modbus communications


Physical layer	4 wire full duplex or 2 wire half duplex RS485
Protocol	Modbus RTU format
Isolation	500 Vac / dc
Receiver unit load	1/8 (256 devices maximum)
Termination	Screw terminals (supplied)

For a general description of M800 steam flowmetering systems, see other literature.

## Dimensions / weights (approximate) in inches (mm) and pounds (kg)


### Wall mounting

A	B	C	Weight
9.3 (235)	5.8 (147)	3.3 (85)	2.4 (1.1)

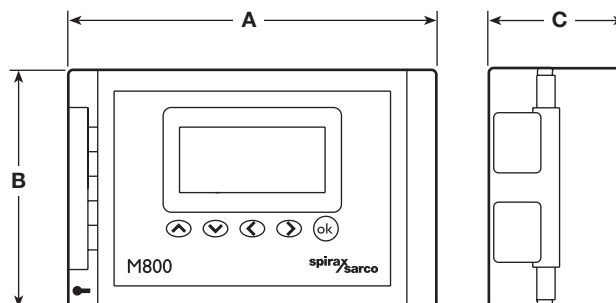

### Panel mounting

A	B	C	D	Weight
10 (255)	6.7 (170)	5.4 (137)	1.9 (48)	3.1 (1.4)

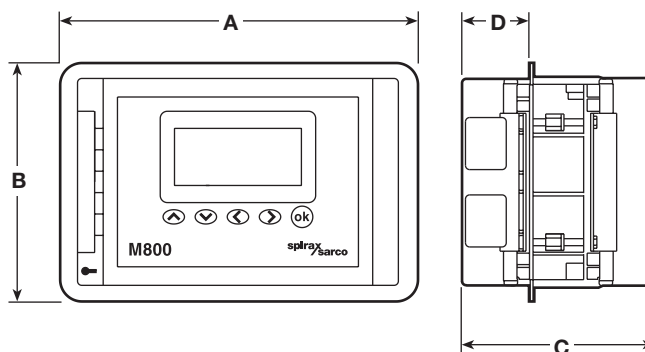

## Safety information, installation and maintenance

For full details, see the Installation and Maintenance Instructions supplied with the product.

### Installation notes:


Wall mounting	4 off screw slots in corners.
Panel mounting	Screw in sub-assembly with back clamps. Pre drilled knock-outs in positions shown in the IMI.
Cable entries	Cable entry fittings and seals to suit appropriate regulations and IP rating to be supplied by the customer. Total length connecting between the M800 and pipeline transmitters must not exceed 1300' (feet) (400m). 24AWG Wire or equivalent (signal wiring).
Wiring (supplied by installer)	

### How to order example:

1 off M800 wall mounted steam flow computer.

**Note:** If requested at the time of order placement option boards can be factory fitted prior to despatch. They can also be ordered separately and fitted to the M800 at anytime.

## M800 Gas Flow Computer

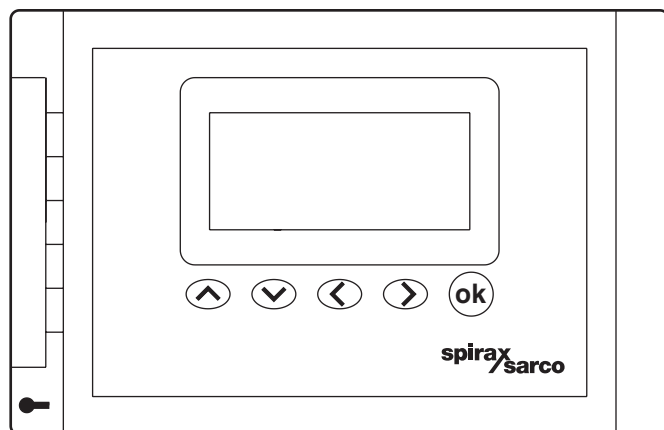

### Description

The M800 gas flow computer receives signals from various pipeline transmitters and converts them to display flowrate, total flow, pressure and temperature. The flow computer operates with Gilflo, ILVA, linear flowmeters, vortex and orifice plates. The M800 can provide density compensation for saturated and superheated steam with suitable inputs from pressure and/or temperature transmitters. Panel and wall mounting versions are available.

Operator settable alarm limits are provided to give a warning when the flowrate, temperature or pressure goes above or below specified limits. These alarms are indicated on a graphic display and can be transmitted via 2 relays (see 'Options' below). A digital pulsed output is provided as standard to signal mass or energy (per pulse).

A 4-20 mA analog output channel is also provided to enable re-transmission to a chart recorder or BMS system of the flowrate.

The M800 also comes with four independent timers, which are capable of recording the total flow and peak flow with the time of occurrence within a settable period of time.

A customer selectable security code is provided to avoid casual tampering.

### Options

As well as the above functions the M800 is easily expanded by the use of additional option boards, which can be simply retrofitted to the base unit.

#### Additional options available:

- 4-20mA analog output board – providing 2 x 4-20 mA outputs, which can be configured for pressure and temperature.
- Relay option board – providing 2 x volt free relays that can be configured for alarms.
- Modbus RTU communications option board – providing access to total, flowrate, power, temperature and pressure.

### Display parameters

<b>Totalized flow</b>	scf or Nm <sup>3</sup>
<b>Flowrate</b>	scfm or Nm <sup>3</sup> /h
<b>Temperature</b>	°F or °C
<b>Pressure</b>	psi g or bar g
<b>Time</b>	24 hour clock
<b>Date</b>	MM/DD/YY or DD/MM/YY
<b>Trend graph</b>	flowrate

### Technical data - power

<b>Supply voltage</b>	99 V to 264 V at 50 - 60 Hz
<b>Power consumption</b>	7.5 watts maximum
<b>Overvoltage category</b>	II
<b>Pollution degree</b>	3
<b>Calculation rate</b>	10/sec (Orifice plates 2/sec)

### Technical data - input

<b>4-20 mA input(s)</b>	Input voltage (maximum)	2.5 Vdc
	Input impedance	110 Ω
	Input current (maximum)	22 mAdc
	Termination	Screw terminals (supplied)
<b>Current source(s)</b>	Resolution	0.01%
	Current output (per channel)	30 mAdc ±15%
	Open circuit voltage (maximum)	32 Vdc
	Total voltage drop (maximum)	19 Vdc @ 22 mAdc
	Termination	Screw terminals (supplied)

### Environmental information

<b>Maximum operating relative humidity</b>	80% up to 88°F (31°C) decreasing linearly to 50% at 104°F (40°C)
<b>Maximum altitude</b>	6562 ft (2000 m) above sea level
<b>Ambient temperature limits</b>	0 - 131°F (55°C)
<b>Enclosure rating</b>	IP65 (with correct cable glands)
<b>EMC: Emissions and immunity</b>	EN 61326: A1 and A2 emissions Class A equipment Table 4
	EN 61326: A1 and A2 immunity for industrial locations Annex A Table 1
<b>Electrical safety</b>	BS EN 61010-1
<b>Enclosure colours and materials</b>	Grey ABS

## Output technical data

### Pulse output

Contacts	Volt free digital transistor (NPN or PNP)
Maximum supply voltage	28 Vdc
Maximum voltage in closed/on position	1 V
Minimum load resistor	$\geq 10 \text{ k}\Omega$
Termination	Screw terminals (supplied)

### 4 - 20 mA output

Range	4 - 20 mA
Minimum current	0 mA
Maximum current	22 mA
Open circuit voltage (maximum)	19 Vdc
Resolution	0.01%
Maximum output load	500 $\Omega$
Isolation	100 V
Termination	Screw terminals (supplied)

## Option board technical data

### Dual relay alarm option board -

#### Two independent mains rated relay outputs

Contacts	2 x changeover relays with common
Maximum load	3 A resistive @ 250 Vdc 1 A inductive @ 250 Vdc
Voltage rating	250 Vdc
Electrical life	$3 \times 10^5$ or greater depending on load
Mechanical life	$30 \times 10^6$
Termination	Screw terminals (supplied)

### Isolated dual 4 - 20 mA re-transmission option board -

#### Two independent 4 - 20 mA isolated re-transmission

Range	4 - 20 mA
Minimum current	0 mA
Maximum current	22 mA
Open circuit voltage (maximum)	18 Vdc
Resolution	0.01%
Maximum output load	500 $\Omega$
Isolation	100 V
Termination	Screw terminals (supplied)

### Communications option board


RS485 Modbus communications	
Physical layer	4 wire full duplex or 2 wire half duplex RS485
Protocol	Modbus RTU format
Isolation	500 Vac/ dc
Receiver unit load	$\frac{1}{8}$ (256 devices maximum)
Termination	Screw terminals (supplied)

For a general description of M800 gas flowmetering systems, see other literature.

## Dimensions/weights (approximate) in inches (mm) and pounds (kg)


### Wall mounting

A	B	C	Weight
9.3 (235)	5.8 (147)	3.3 (85)	2.4 (1.1)

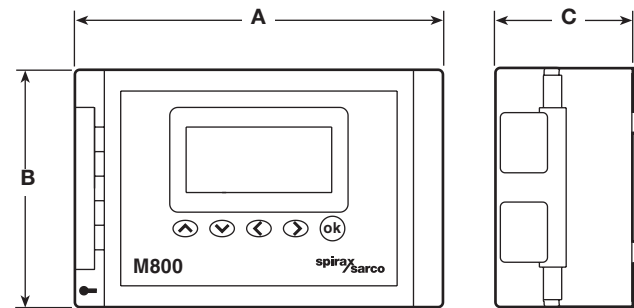

### Panel mounting

A	B	C	D	Weight
10 (255)	6.7 (170)	5.4 (137)	1.9 (48)	3.1 (1.4)

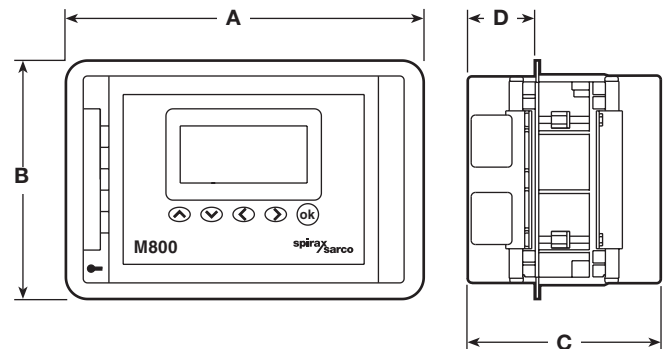

## Safety information, installation and maintenance

For full details, see the Installation and Maintenance Instructions supplied with the product.

### Installation notes:

<b>Wall mounting</b>	4 off screw slots in corners.
<b>Panel mounting</b>	Screw in sub-assembly with back clamps.
<b>Cable entries</b>	Pre drilled knock-outs in positions shown in the IMI. Cable entry fittings and seals to suit appropriate regulations and IP rating to be supplied by the customer.
<b>Wiring (supplied by installer)</b>	Total length connecting between the M800 and pipeline transmitters must not exceed 1300'(feet) (400 m). 24 AWG Wire or equivalent (signal wiring).

### How to order example:

1 off M800 wall mountable gas flow computer.

## M750 Display Unit

### Description

The M750 is an intelligent digital panel display unit that can accept inputs from a wide variety of sensors and digitally process and display the signal. In addition, it has the facility to accept up to two 'Option pods', which can be either isolated 4-20 mA retransmission or two normally open alarm relays. The M750 is fully programmable for any specific application from the front panel.

The M750 totaliser function enables non-volatile storage of the integrated total to be maintained within the unit, even after loss of power. The output option pods can be selected to operate on either Process Variable (rate) or Total.

The M750 is ideally suited as a display unit for use with our flowmeters. It can provide an indication of flowrate and totalized flow for Gilflo, ILVA, DIVA, orifice plates and vortex flowmeters as well as providing a 19 Vdc loop power supply where required.

The unit can be used 'stand-alone' or, utilizing the Modbus serial communications, as part of a larger system.



### Technical data

See overleaf.


### Weight

0.5 lbs (230 grams)


### Dimensions approximate in inches (millimeters)

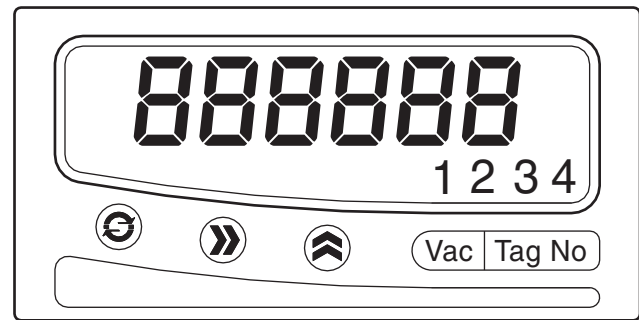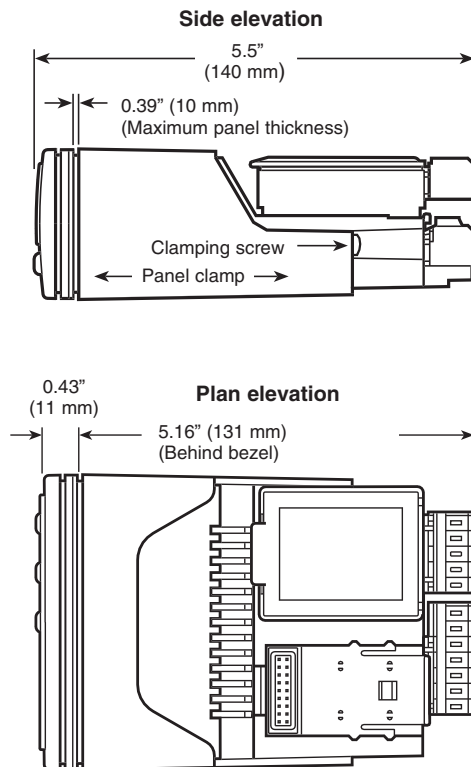

Rear elevation




Front elevation

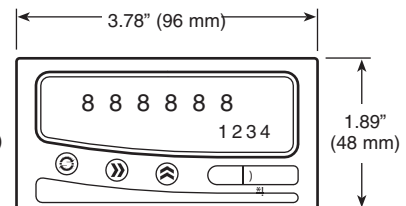

Panel cut out

3.62" (92 mm) x 1.77" (45 mm)

Option pod

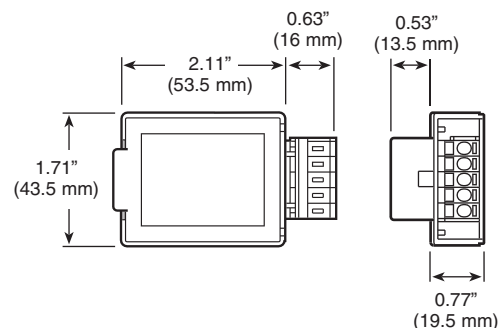

### How to specify:

M750 panel mounted digital display unit that accepts all commonly used process signals, designed to allow current retransmission or dual relay output option pods to be easily installed without the need for dismantling or recalibration.

### How to order

Example: 1 off M750 display unit complete with dual relay and current retransmission option pods.

*Local regulation may restrict the use of this product below the conditions quoted. Limiting conditions refer to standard connections only.*

*In the interests of development and improvement of the product, we reserve the right to change the specification.*

TI-P332-08-US 04.04

# M750 Display Unit

## Technical data at 68°F (20°C)

<b>Power supply</b>	90-264 Vac 50/60 Hz	
	90-253 Vac 50/60 Hz for compliance with LVD and UL	
	BS EN 61010-1 for connection to an installation over-voltage	
	Category II supply	
<b>Power consumption</b>	Pollution degree 2	
	10 VA (worst case)	
<b>Isolation (tested to)</b>	500 V	
	Supply to I/O 3750 V	
	BS EN 61010-1 for connection to an installation over-voltage	
<b>Relay supply</b>	Category II supply	
	Pollution degree 2	
	Sealing to panel NEMA 4 (IP65)	
<b>Environmental</b>	Ambient operating temperature	-22°F to +140°F (-30 to +60°C)
	Ambient storage	-58°F to +185°F (-50 to +85°C)
	Ambient humidity	10 to 90% RH
	EMC: Emissions and immunity	BS EN 61326
	Safety	BS EN 61010-1
<b>Universal input types</b>	<b>Sensor</b>	<b>Sensor range and linearisation</b>
<b>Sensor and Sensor range and linearisation</b>	<b>mA</b>	4-20 mA, 0-20 mA, 0-10 mA
	<b>RTD</b>	Pt 100, NI 120, custom
	<b>T/C</b>	K, J, T, R, S, B, N, L, B, E, Custom*
	<b>mV</b>	± 100 mV
	<b>Volts</b>	0-10v, 0-5v, 1-5v, 0-1v
	<b>Minimum span</b>	Any span within the range can be selected, but the recommended span is > 10% of range.
<b>Current input</b>	<b>Basic accuracy</b>	0.05% FS plus +/- 0.05% of reading
	<b>Thermal drift</b>	200 ppm/°C
	<b>Input impedance</b>	20 Ω
	<b>Linearity</b>	Linear, X <sup>1/2</sup> , X <sup>3/2</sup> , X <sup>5/2</sup> , Custom*

A 19 V @ 25 mA isolated power supply is provided to power the current loop.

\* Custom can be up to 60 co-ordinate pairs or up to 7 segments of 15th order polynomial.

## Option pods

The M750 has interchangeable output pods that are automatically recognised by the unit. The dual relay pod has two independent mains rated relays that can be configured for high or low alarms or pulse output. The isolated re-transmission pod provides 0-10 mA, 0-20 mA or 4-20 mA active or passive outputs.

## Output options

### Dual relay alarm pod

Two independent mains rated relay outputs, which can operate as alarms or pulsed output

<b>Contacts</b>	2 x changeover relays with common	
<b>Ratings</b>	ac	dc
<b>Maximum load</b>	5 A @ 250 V	5 A @ 30 V (inductive load 2 A)
<b>Maximum power</b>	1 250 VA	150 W
<b>Maximum switching</b>	253 volts	125 volts
<b>Termination</b>	Standard 5 way tension clamp connector	

### Isolated 4-20 mA re-transmission pod

Isolated analogue retransmission for use with chart recorders, Building Management Systems, etc.

<b>Ranges</b>	0-10 mA (Active or Passive),	0-20 mA (Active or Passive),	4-20 mA (Active or Passive)
<b>Minimum current output</b>	0 mA		
<b>Maximum current output</b>	23 mA		
<b>Accuracy</b>	0.07% FS		
<b>Maximum output load</b>	Active 1 K Ω		
	Passive [(Vsupply - 2)/20] K Ω		
<b>Maximum external supply voltage</b>	30 V (Passive mode)		
<b>Isolation</b>	500 Vac		
<b>Termination</b>	5-way tension clamp connector		

## Communications

<b>RS485 Modbus communications</b>	The M750 is available with RS485 serial communications using MODBUS RTU protocol as standard.
<b>Physical layer</b>	4 wire or 2 wire half duplex RS485
<b>Protocol</b>	Modbus RTU format
<b>Isolation</b>	500 Vac
<b>Maximum fan out</b>	32 units (this can be increased with repeaters)
<b>Termination standard</b>	RS485



## M610 Series II DP Transmitter Assembly

### Description

The M610 Series II DP transmitter assembly is designed to accept a differential pressure input from a primary flow element such as an orifice plate or Gilflo flowmeter and convert it into an analogue 4-20 mA output signal. The standard version comes with digital communications in the form of HART® 5.2 which is superimposed on the 4-20 mA output. The 3-way manifold which is supplied already assembled to the DP transmitter acts as a means of secondary isolation and as a pressure equalisation valve to check the zero of the DP transmitter.

The M610 Series II DP transmitter assembly consists of two items:

- A high accuracy (0.1%) differential pressure transmitter.
- A 3-way carbon steel isolation manifold.

**Note:** These items are supplied already assembled.

### Pipe connections

The process ports on the 3-way manifold are threaded 1/2" NPT at 2.126" (54mm) centers.

### Electrical connections

M20 x 1.5 screwed terminals.

### M610 Series II technical data

<b>Span</b>	0 - 52.2" H <sub>2</sub> O (0 -13 kPa) minimum 0 - 522" H <sub>2</sub> O (0 -130 kPa) maximum
<b>Output</b>	4 - 20 mA dc and HART® protocol 5.2
<b>Power supply</b>	16 V to 45 Vdc (for non-certified application) 16 V to 28 Vdc (for E Ex ia 11c T4 / T5)
<b>Pressure limits</b>	-14.5 to 2030 psig
<b>Temperature limits</b>	-40°F to +185°F (ambient for non-certified application) -40°F to +212°F (process)
<b>Accuracy</b>	± 0.1% of calibrated span to include effects of linearity, hysteresis and repeatability.
<b>Materials of construction</b>	Body - Stainless steel. Diaphragm - Austenitic stainless steel 316L 3-way manifold - Carbon steel Fluid fill - Silicone oil
<b>Intrinsic safety</b>	ATEX Ex II 1GD - E EX ia 11c T4/T5
<b>Enclosure rating</b>	NEMA 6/6P (IEC IP67)
<b>EMC emissions and immunity</b>	To BS EN 61326:1997

**Note:** If HART® communications are required in intrinsically safe applications, barriers must be used which are designed to pass the HART® signal.

### Calibration



The M610 Series II DP transmitter assembly is supplied with a span factor set to suit a particular application. However, should load conditions and/or details of actual installation change, the range of the M610 can be adjusted within the limits 0 - 52.2" H<sub>2</sub>O (0 - 13 kPa) and 0 - 522" H<sub>2</sub>O (0 - 130 kPa) as described in the Installation and Maintenance Instructions supplied with the product.

### Installation

Full installation details are given in the literature that accompanies the M610 Series II DP transmitter assembly.

*Local regulation may restrict the use of this product below the conditions quoted. Limiting conditions refer to standard connections only.*

*In the interests of development and improvement of the product, we reserve the right to change the specification.*

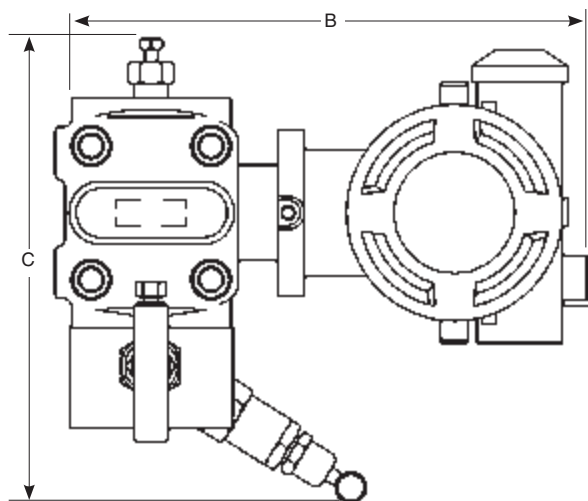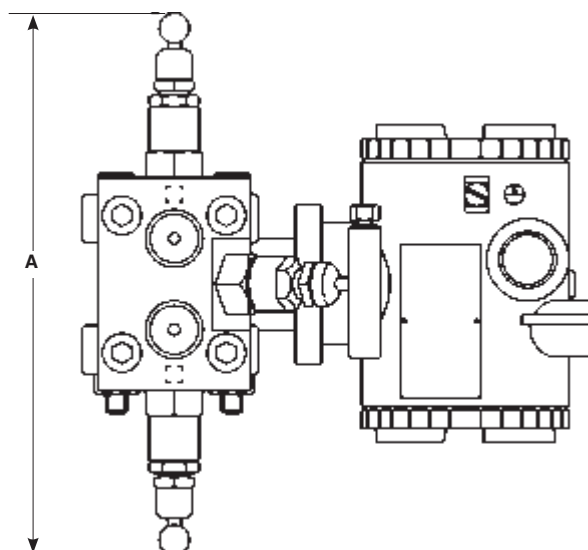

### Dimensions / weights (approximate) in inches and lbs.

A	B	C	DP transmitter	3-Way manifold	M610 assembly
8.7"	7.6"	6.9"	14.3 lb	2.2 lb	16.5 lb

### How to order

Example: 1 off M610 Series II DP transmitter assembly calibrated to give an output of 20 mA at an applied differential pressure of specified value.

### Associated equipment

Orifice plate flowmeter.

Gilflo flowmeter system.



## Scanner 2000 Steam Mass Flow Transmitter

### Description

The Scanner 2000 steam mass flow transmitter takes its inputs from a primary flowmeter, (Gilflo or ILVA) through impulse lines. It converts the differential and static pressure into a corrected mass flowrate of saturated steam, which is accessible via the RS485 Modbus link or optionally via a 4 - 20 mA signal.

### Configuration

Scanner 2000 steam mass flow transmitters are uniquely configured at the factory to work with a single, specific Gilflo or ILVA flowmeter, for a specific flow application.

For correct operation the Scanner 2000 transmitter must be installed with its allocated flowmeter. A label on the packaging gives the serial number of the matched product.

The Scanner 2000 can be configured using an RS485 equipped PC with the supplied configuration software.

#### Note:

A DB9 Serial RS232 to RS485 converter will otherwise be required to connect your PC to the Scanner 2000.

If your PC only has USB ports a USB to DB9 Serial port converter will be required. These are available from most electronic equipment suppliers.

### Available types and approvals

Explosion proof types available:

#### CSA

- Class 1, Div 1, Groups B, C and D
- Type 4 Enclosure
- T6 Temperature Class

#### ATEX

- ATEX II 2 GD
- Ex d IIC T6 (-40°F to 158°F) or
- Ex td A21 IP68 T85C (-40°F to 158°F)
- All Scanner 2000's are compliant

### Features

In head LCD providing local indication of density compensated rate and total saturated steam flow.

RS485 Modbus RTU slave functionality for remote indication, data logging and configuration.

### Associated equipment

- Gilflo flowmeter
- ILVA flowmeter
- M750 flow indicator
- Optional local display

### Materials

Enclosure	Cast aluminium (painted with epoxy and polyurethane)	
Body	Stainless steel	AISI 316
3-way manifold	Stainless steel	AISI 316
Fluid fill	Silicone oil	



### Pipe connections

The process ports on the 3-way manifold are threaded ½" NPT connections at 2½" (54 mm) center.

### Electrical connections

¾" NPT	Non approved and ATEX units
¾" NPT	CSA units

### Technical data

<b>Range</b>	Minimum 2" H <sub>2</sub> O (.498 KPa)
	Maximum 200" H <sub>2</sub> O (49.8 KPa)
<b>Outputs</b>	4 - 20 mA (expansion board required)
	RS485 Modbus RTU slave (baud rate 300 to 38.4 K)
	Solid state relay, configurable as pulse or alarm
<b>Power supply</b>	6 V to 30 Vdc at 31 mA
<b>Pressure limits</b>	155 bar
<b>Temperature limits</b>	-40°F to 158°F (-40°C to 70°C)
	LCD contrast is reduced below -22°F (-30°C)
<b>Accuracy</b>	±0.05% for Spans >10% of the URL
	±0.005 (URL/SPAN) for Spans <10% of the sensor
<b>Enclosure rating</b>	IEC IP68

Local regulation may restrict the use of this product below the conditions quoted. Limiting conditions refer to standard connections only.


In the interests of development and improvement of the product, we reserve the right to change the specification.



# Scanner 2000

## Steam Mass Flow Transmitter

### Dimensions (approximate) inches (mm)

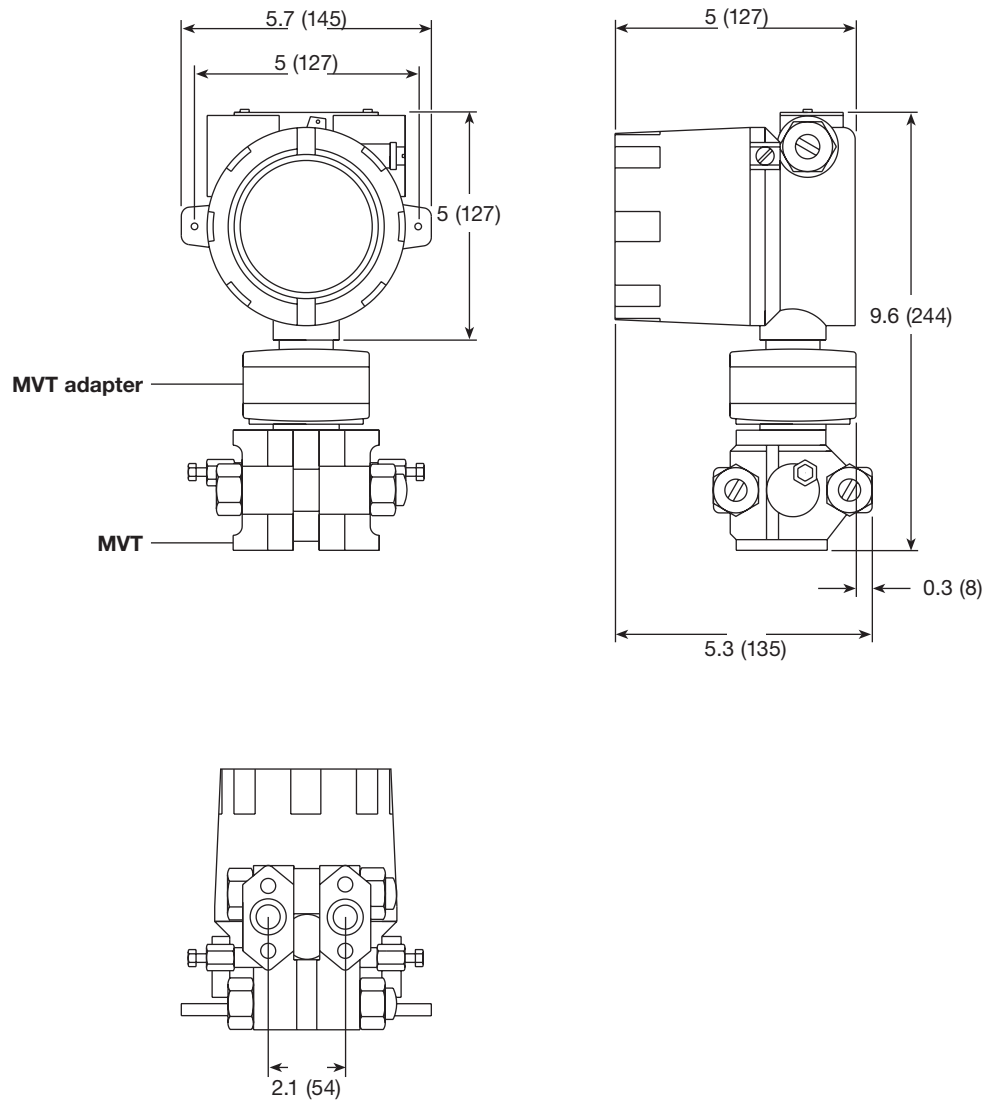

### Weights (approximate) in lbs (kg)

DP transmitter	3-way manifold	Scanner 2000 assembly
11 (5)	2.2 (1)	13.2 (6)


### Safety information, Installation and Maintenance

**Warning:** This document does not give sufficient information for safe installation of the product.

Full details are given in the Installation and Maintenance Instructions supplied with the Scanner 2000.

# Scanner 2000 Steam Mass Flow Transmitter

## Typical installation

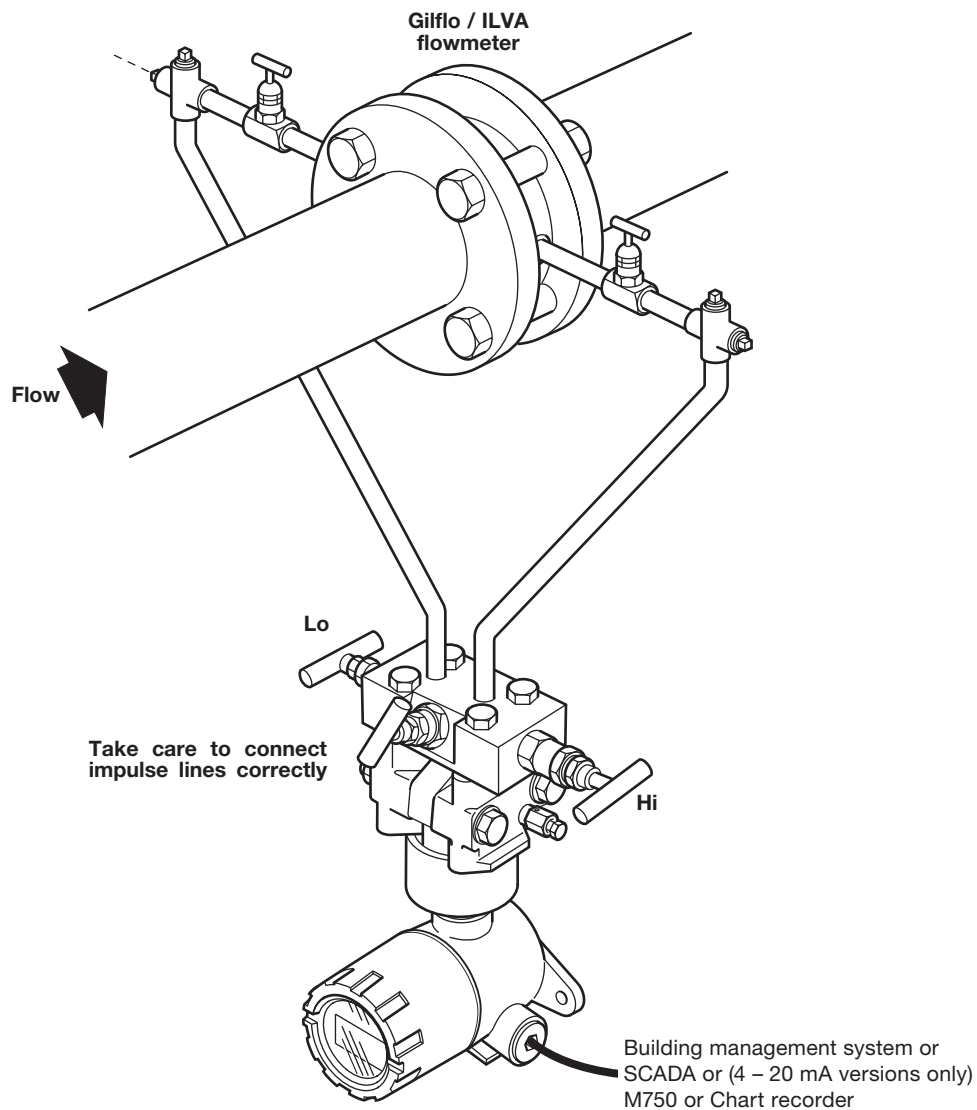

## How to order

The following information will allow us to uniquely configure the Scanner 2000 for each application prior to despatch.

Parameter	Range of values	Customer requirement	Notes
Flowmeter type	Gilflo or ILVA		Specific flowmeter type
Gilflo / ILVA serial number	-		Required for existing flowmeters only
Analog output units	kg/h, lb/h, Btu/h, or kJ/h		Specific required units
Analog output scaling (4 mA)	kg/h, lb/h, Btu/h, or kJ/h		Normally zero
Analog output scaling (20 mA)	kg/h, lb/h, Btu/h, or kJ/h		Normally maximum required flowrate
Maximum range $\Delta p$	2" to 200" H <sub>2</sub> O (0.498 to 49.8 KPa)		From Gilflo and ILVA sizing sheet
Steam quality (Dryness fraction)	60 to 100%		Set at 100% unless otherwise specified

**Example:** 1 off Scanner 2000 steam mass flow transmitter configured for use with a 3" (DN80) ILVA flowmeter passing 4400 lb/h of saturated steam at 101 psig.

## Model F50C Isolating Valve

### Description

The F50C is a needle type isolating valve designed for primary isolation in flow metering applications with steam and other industrial fluids.

### Material

No	Part	Materials
1	Body	Carbon steel zinc plated and passivated
2	Seals	Graphoil (not shown)

Maximum operating pressure: 5990 psig

Maximum operating temperature: 806 degrees F

### Dimensions (approximate) in inches



A	B	C	Weight
2.6	1.1	3	1.1 lb

### Connections

0.5" NPT female (both ends).

### How To Specify

Model F50C Isolating Valve.

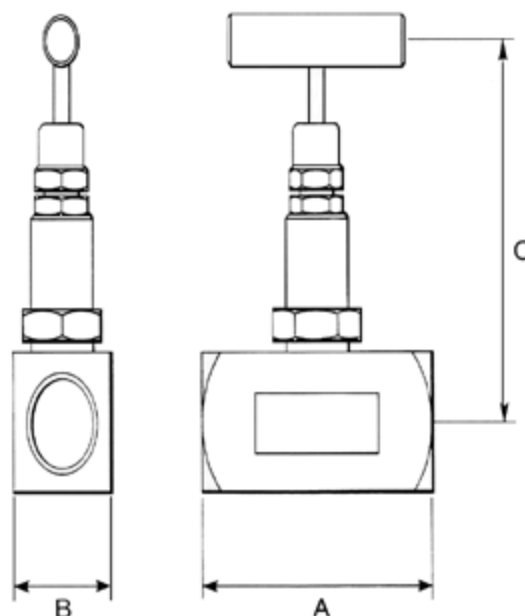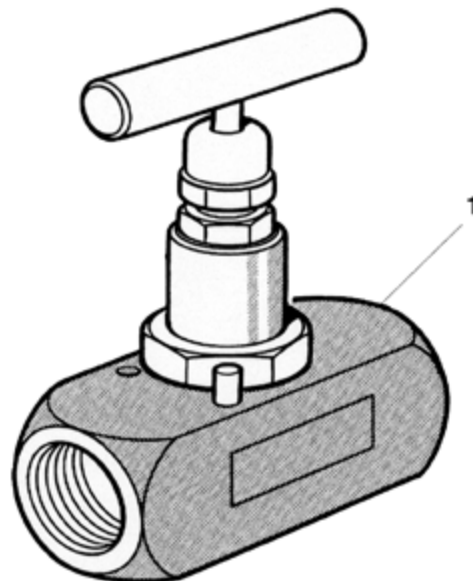

## EL2270 and EL2271 Temperature Probes

### Description

#### EL2270

The EL2270 is a Pt100 platinum resistance temperature sensor for general industrial use. The sensing device is an RTD 3 wire device that meets EN 60751: Class A. This sensor can be connected directly to any temperature indicator or controller that has a 3 wire Pt100 input. A quick response version [1.5" (40 mm) insertion length only] is also available for applications such as plate heat exchanger control. A miniature version of the EL2270 may also be ordered. This has a ¼" BSP taper thread, and a tip length of 1.5" (39 mm).

#### EL2271

The EL2271 is a combined Pt100 sensor and transmitter assembly. The sensing element is a 3 wire device that meets EN 60751: Class A and the transmitter has a 4 - 20 mA output. The transmitter (only) meets ATEX II 1G EExia IIC/IIB T4/T5/T6. A comprehensive standard range is normally available from stock. Non-standard ranges can be obtained to special order, subject to a low limit of -58°F (-50°C), and a maximum of 932°F (+500°C). The 4 - 20 mA output can be connected directly to any temperature indicator, controller or flow computer that has a 4 - 20 mA input. Contact your local representative for further details. Transmitters with 3 point calibration are available to special order.

### Pockets (thermowells)

#### General

Three types of pockets are available:

1. Thin wall with a ½" NPT process connection for non-flow applications only.
2. Drilled taper with a ½" NPT process connection.
3. Hygienic, to 3A sanitary standard, with a 1½" sanitary clamp connection (ASME BPE) electropolished to 0.4 µm (a Declaration of Conformity is available).

**Note:** No pocket is available for the miniature EL2270.

Material	316 stainless steel
Maximum temperature	932°F (500°C)

#### Selection

Pockets are sized to suit the probe tip length 'D', and are specified as 'pocket to suit a \_\_\_ inch (mm) probe'.

**Note 1** - The pocket dimension 'F' is 1" (25 mm) shorter than the probe length 'D', which appears to be incorrect. The reason is that the threaded body of the pocket acts as a stand-off, and therefore allows adequate clearance between the probe tip and the end of the pocket.

**Note 2** - Pockets to suit 8.86" (225 mm) and 28.5" (725 mm) probes are for non-flow applications only [maximum flow velocity 2.13 fps (0.65 m/sec)].


### Dimensions (approximate) in mm

Product range	EL2270*			EL2271
	Standard	Miniature	Quick response and duplex quick response	
A	3.5" (88)	2.25" (58)	3.5" (88)	3.5" (88)
B	5" (130)	2.4" (62)	6" (150)	5" (130)
C	3" (75)	2.5" (63)	3" (75)	3" (75)
D	1.2", 3.5", 8.86", 28.5" (25, 50, 75, 125, 225, 725)	1.54" (39)	1.57" (40)	1", 2", 3", 4" (25, 50, 75, 125)
E	.25" (6)	.25" (6)	.18" (4.5)	.25" (6)

**Notes:** The quick response EL2270 is only available with an insertion length of 40 mm.

#### Pockets

Product range	Standard		Hygienic 1½" sanitary clamp connector Fabricated
	Fabricated	Solid drilled	
F	7.87", 27.6" (200, 700)	1", 2", 4" (25, 50, 100)	1", 2", 4", 7.87" (25, 50, 100, 200)

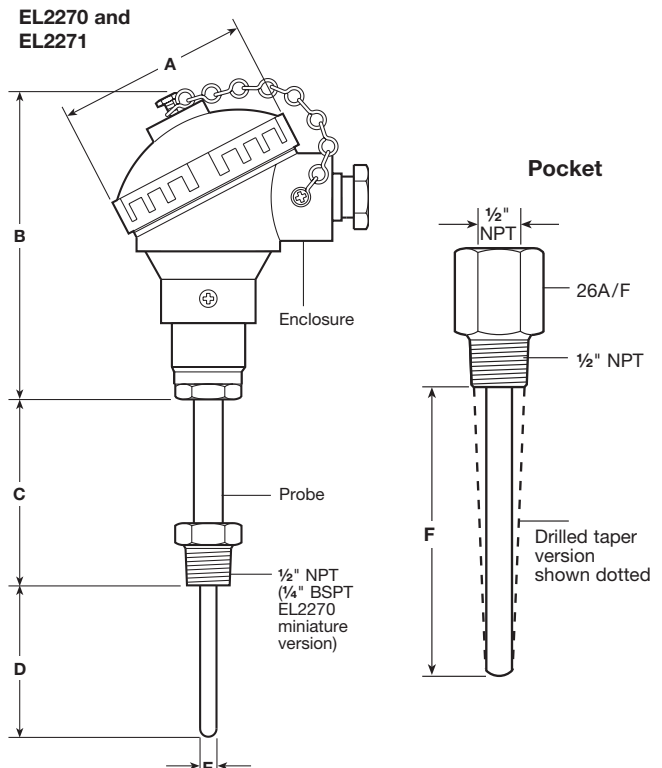

## Mechanical data

	EL2270*	EL2271
Product range	<b>Note:</b> A quick response version of the EL2270 is also available to order	
Enclosure	KNE - aluminium alloy - epoxy coated	KNE - aluminium alloy - epoxy coated
Probe	316 stainless steel	316 stainless steel
Process connection	½" NPT	½" NPT
Electrical connection	M20 with cable gland fitted to BS 4568 Part 1	M20 with cable gland fitted to BS 4568 Part 1
Enclosure rating	IP65	IP65
Maximum ambient temperature	158°F (70°C)	Maximum 185°F (85°C) (dependant on ATEX requirement)

\* The EL2270 quick response sensor has a time constant of 1.7 seconds.

## Electrical data

Available ranges	-58°F (-50°C) to 932°F (+500°C)	-58°F (-50°C) to 932°F (+500°C) 46°F (0°C) to 212°F (+100°C) 212°F (100°C) to + 482°F (250°C)
Output	Pt100 to EN 60751: Class A	Loop powered 4 - 20 mA
Output on sensor failure	-	23 mA typical
Supply	-	10 to 30 Vdc
Maximum loop resistance	-	636 Ω at 24 Vdc 909 Ω at 30 Vdc
Transmitter - Thermal drift measuring deviation	-	± 0.1% / 10 K <sub>TAMB</sub> per EN 60770 ± 0.2%

## Approvals

Ex-protection per Directive 94/9/EC ATEX. Intrinsic Safety per EN 50020	-	ATEX II 1G EExia IIC/IIB T4/T5/T6 (Transmitter only)
Permissible ambient temperature	-	-58°F (-50°C) ... 185°F (+85°C) with T4 -58°F (-50°C) ... 158°F (+75°C) with T5 -58°F (-50°C) ... 140°F (+60°C) with T6
Maximum values for connection of the current loop circuit (connections + and -)	-	U <sub>o</sub> = 30 Vdc I <sub>o</sub> = 120 mA P <sub>i</sub> = 800 mW C <sub>i</sub> = 6.2 μF L <sub>i</sub> = 110 μH
Maximum values for connection of the sensor circuit (connections 1 up to 3)	-	U <sub>o</sub> = 6.4 Vdc I <sub>o</sub> = 42.6 mA P <sub>o</sub> = 37.1 mW <b>Group II B:</b> C <sub>o</sub> = 500 μFL <sub>o</sub> = 50 mH <b>Group IIC:</b> C <sub>o</sub> = 20 μFL <sub>o</sub> = 10 mH
EMC emissions and susceptibility	-	EMC directive 89/336/EEC EN 61326:1997/A1, 1998/A2.2001


## Pressure/temperature limits

The **EL2270** and **EL2271** temperature probes can be used in applications where the process temperature is within the following limits. Where greater temperatures and pressures are present, the temperature probe should be fitted with a pocket.


For air and steam applications, flow velocities must be below 147 fps (45 m/s) 105 fps (32 m/s for fabricated pockets).

For liquids a recommended velocity is 16 fps (5 m/s) [27.5 in. (700 mm) and 7.87 in. (200 mm) non-flow applications only].

### Pressure and temperature limits of temperature probe. (ANSI 300 rated)

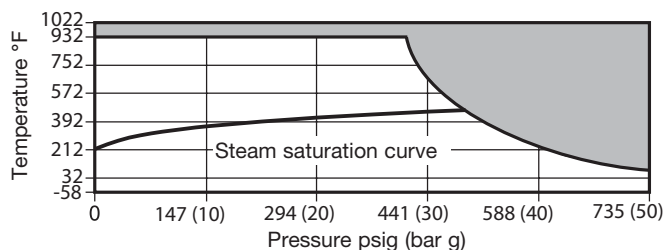

### Pressure and temperature limits of standard pockets. (ANSI 600 rated)

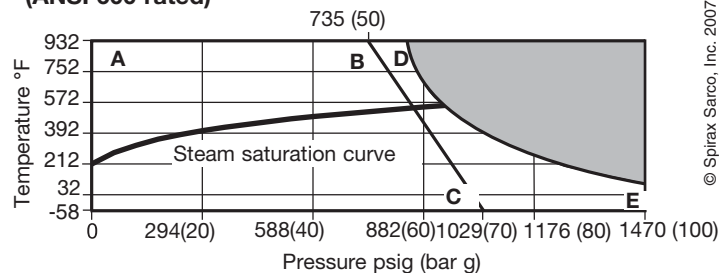

TI-P322-06-US 10.07

## EL2600 Pressure Transmitter and 'U' Syphons

### Safety

Your attention is drawn to Safety Information Leaflet IM-GCM-10.

### Description

The EL2600 is a combined pressure sensor and transmitter which is designed for general industrial use. It has a 2 wire 4-20 mA current loop, and a 1/4" NPT process connection. Two syphon tube and valve assemblies are available, one with a maximum design pressure of 362.5 psig and one with a maximum design pressure of 1160 psig.

### Available Ranges psig

0-14.5	0-145	0-1450 *
0-23.2	0-232	0-2320 *
0-36.25	0-362.5	0-3625 *
0-58	0-870	
0-87	0-580	

\*No 'U' syphon available for these ranges, therefore maximum operating temperature is limited to 158°F.

**Note:** High pressure 'spikes' above maximum overpressure, even of very short (milli-seconds) duration, could damage sensors. If pressure peaks are likely to occur in your application, we recommend the use of a pressure snubber. Alternatively, a higher range pressure transmitter could be used, though this would mean some loss of signal resolution.

### Limiting conditions

#### Pressure/ temperature limits EL2600

Minimum operating temperature	32°F
Maximum operating temperature (without syphon tube)	158°F

#### Low pressure syphon tube/ valve

Maximum design pressure	362.5 psig
Maximum design temperature	500°F
Maximum working conditions	304.5 psig and 422.6°F

#### High pressure syphon tube

Maximum design pressure	1160 psig
Maximum design temperature	842°F
Maximum working conditions	870 psig and 842°F

#### Process connection

For fluids below 158°F the EL2600 may be mounted directly via its 1/4" NPT connection.

Above 158°F, a 'U' syphon and isolating valve must be fitted between the EL2600 and the vessel or pipeline.

### Technical data


Pressure range (psig)	Overpressure	Burst pressure (psig)	Accuracy (+/- %FSD at 68°F)
up to 29	3 x full scale	2900	≥ 0.5
29 - 362.5	3 x full scale	2900	≥ 0.5
362.5 - 3625	3 x full scale	12.325	≥ 0.5

Supply voltage	9 to 33 V dc
Supply voltage influence	< 0.1% full scale
Enclosure rating	NEMA4

### Approvals

EMC emissions	BS EN 50081 - 1
EMC susceptibility	BS EN 50082 - 2
Maximum loop resistance (ohms)	Supply voltage - 9 Volts 0.02 Amps

### EL2600

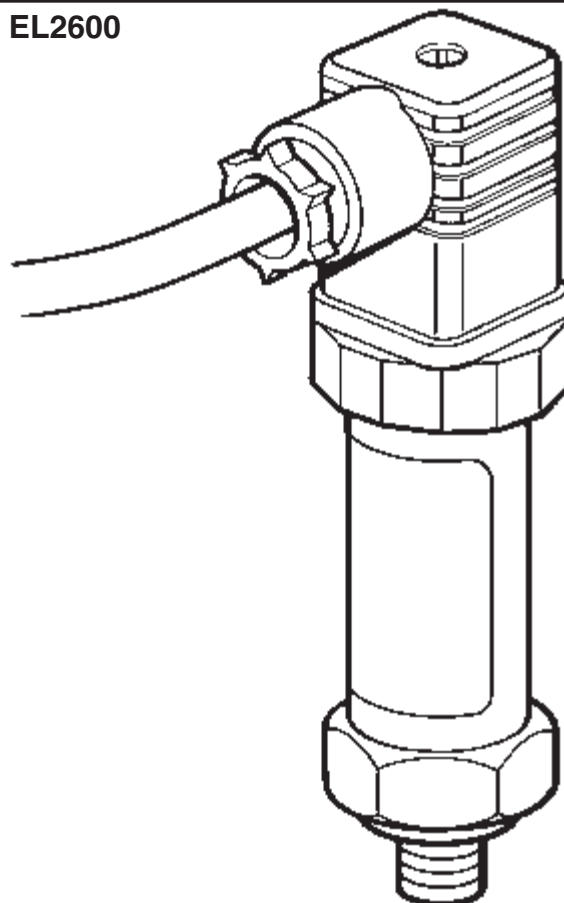

### Materials

#### EL2600

Part	Material	
Body	Stainless steel	316L WS 1.4435
Connector	Moulded plastic	Polyamide PA 66

#### \*Low pressure syphon tube assembly

Part	Material
Tube	Carbon steel ASTM A106 Gr. B. Phosphated
Valve Body	Brass
Valve Handle	Phenolic

#### High pressure syphon tube assembly

Part	Material
Tube	Carbon steel BS 3602: Part.1 1987 CFS 360 (zinc plated/ passivated)
Valve Body	Carbon steel
Valve Seat	PEEK/ Polymain

\* Valve ordered separately

Local regulation may restrict the use of this product below the conditions quoted. Limiting conditions refer to standard connections only.  
In the interests of development and improvement of the product, we reserve the right to change the specification.



# EL2600 Pressure Transmitter and 'U' Syphons



## Dimensions/ weights (approximate) in inches and lbs.

### EL2600


A	B	C	D	E	Weight
2.6"	1.9"	1.1"	0.5"	1.4"	0.2

### 'U' Syphon and isolating valve

F	G	H	J	K	L	Weight
6.3"	2"	5.9"	6.3"	2.3"	5.9"	1.1

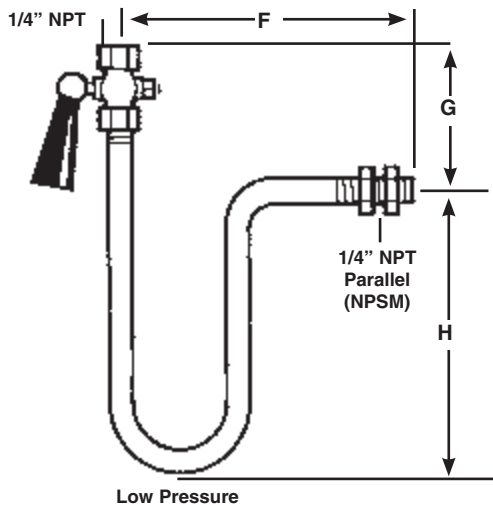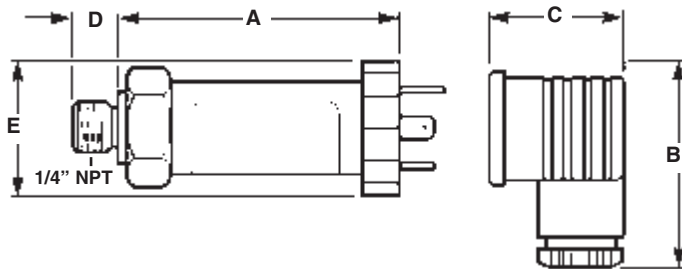


Low Pressure

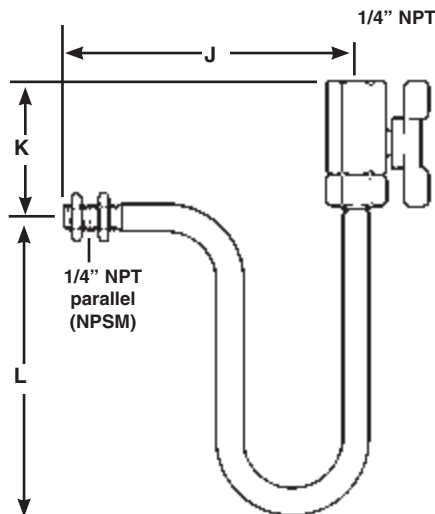


High Pressure

## Wiring details

### Powered current loop input:-

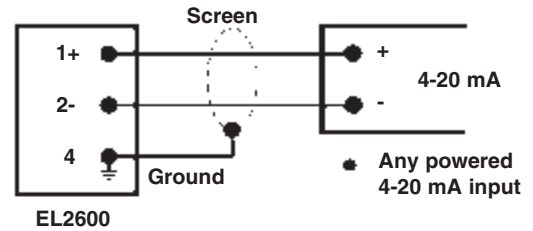

### Unpowered current loop input:-

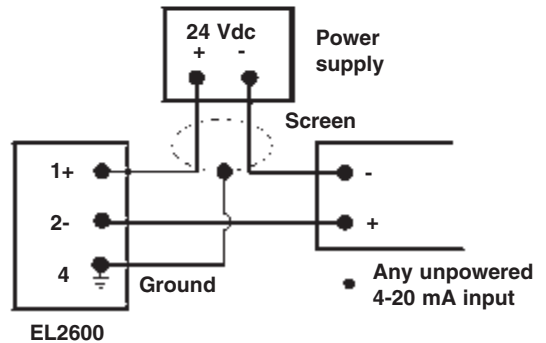

## Installation

The EL2600 pressure sensor must be installed as described in the Installation and Maintenance Instructions supplied with each unit. It is essential to use a 'U' syphon and valve for temperatures above 158°F to avoid damage to the unit. **The syphon tube must be filled with water before fitting the EL2600.**

## Maintenance

No specific maintenance is required, but we recommend inspection of the transmitter and its connector at least once a year. The EL2600 can be re-calibrated - see Installation and Maintenance Instructions.

## Cable requirements

- 2 core cable with screen if noise expected.
- Maximum cable length is dependent upon the driving voltage and cable resistance.

## How to order

1 - EL2600 pressure transmitter, range 0-232 psig with 'U' syphon and valve.

TI-8-403-US 07.02

© Spirax Sarco, Inc. 2002

## MassTracker™ Insertion Turbine Mass Flow Meter

### Description

The masstracker insertion turbine utilizes multivariable electronics to provide a compensated mass flow rate of liquid, gas and steam from a single opening in the pipeline. The masstracker measures all process variables with a single device providing outstanding accuracy and reduces installation costs. Simplified commissioning through easy to use local display or internet accessible Web Server.

Masstracker M-TMP-600 and 900 are “hot-tappable” and can be installed and removed without process shutdown simplifying maintenance.



**masSTRACKER™**  
FLOW METERS

### Features

- Volumetric or mass flow monitoring of liquid, gas, or steam
- Rugged insertion-style mounting in any pipe 3" to 80"
- Can be installed and removed under full flow conditions
- Interchangeable rotors for a wide variety of applications
- Process pressure up to 2000 psig (137.8 barg)
- Process temperatures up to 750°F (400°C)
- Modbus RTU, Modbus TCP/IP standard
- Industry standard pulse output 4 to 20 mA
- Field or remote configurable outputs, display and ranges
- Multi-variable electronics incorporates RTD for compensated mass flow reading
- Optional integral pressure measurement
- Field configurable via magnet wand
- Remote monitoring and programming via built in web server
- FM/ATEX/CE Approval Pending

### Application Guide

Model	Liquid	Gas	Steam	Hot Tap	Temperature Range °F	Maximum Pressure <sup>1</sup> psi	Seal Type	Line Sizes <sup>2</sup> inches
M-TMP-600	yes	yes	yes	yes	-40 to 400	125	E/P <sup>3</sup>	3 to 20
M-TMP-700	yes	yes	yes	no <sup>5</sup>	-40 to 600	2000 <sup>4</sup>	Swagelok®	3 to 80
M-TMP-900	yes	yes	yes	yes	-40 to 750	flange rating	Grafoil®	3 to 80

#### Note:

- 1 Maximum pressure at maximum temperature with appropriate connection.
- 2 In some cases, especially in large pipe sizes, a one or two foot stem extension may be required (See dimensional outlines).
- 3 Ethylene-Propylene elastomer.
- 4 Rating listed is for NPT connection. For flange connections, use ANSI flange rating.
- 5 The M-TMP-700 is a fixed insertion meter; it cannot be removed or installed under pressure.

# MassTracker™ Insertion Turbine Mass Flow Meter

## Operating Specifications

### Measurable Velocity Limits

See Rotor Selection Guide for linear and measurable ranges of available rotors. Continuous operation above the maximum velocity will shorten the life of the rotor and is not recommended.

### Process Viscosity

Maximum 5 centipoise

### Ambient Temperature Limit

*Electronics*

–5 to 140°F

### Ambient Humidity Limit

5 to 95% relative humidity non-condensing

### Power Requirements

12 to 32 VDC, 24 VDC nominal, 2 amps

### Analog

3 each 4 to 20 mA output. Active or passive.

### Scaled Pulse

Output can be scaled so that 1 pulse indicates a specific quantity of fluid passing through the pipe, up to 10 pulses/sec.

### Relay Output

2 each SPDT, 350v/120mA

### Communications

Modbus RTU - Half duplex RS 485

Modbus TCP/IP - Full duplex, 10/100 Base T Ethernet

HTTP Web Interface

### Remote Mount Electronics

Up to 100 feet with shielded twisted pairs

## Performance Specifications

Process Variables	Liquids	Gas & Steam	Repeatability
Volumetric Flow Rate	+/- 1.0% of rate <sup>1</sup>	+/- 1.0% of rate <sup>1</sup>	+/- 0.25% of rate
Mass Flow Rate	+/- 1.5% of rate <sup>2</sup>	+/- 2.0% of rate <sup>3</sup>	+/- 0.35% of rate
Temperature	+/- 2.0°F (+/- 1°C)	+/- 2.0°F (+/- 1°C)	+/- 0.2°F (+/- 0.1°C)
Pressure	+/- 0.25% of full scale	+/- 0.25% of full scale	+/- 0.05% of full scale
Density	+/- 0.3% of reading	+/- 0.3% of reading	+/- 0.1% of reading

**All meters are calibrated to +/-1% on a 3" pipe line.**

<sup>1</sup>G6 Rotor +/- 3.0% of rate

<sup>2</sup>G6 Rotor +/- 3.35% of rate

<sup>3</sup>G6 Rotor +/- 3.6% of rate

## Physical Specifications

Materials	
Rotor	Blades: 17– 4 PH, ten blade, precision machined Housing: 316 stainless steel Pivots: tungsten carbide
Rotor Bearing Type	Liquid: CSJ stellite jewel Gas or Steam: DEV tungsten carbide
Wetted Parts	316L stainless steel stem and housing (bronze and carbon steel housing M-TMP-600)
External Parts	Aluminum, 316 stainless steel, carbon steel (bronze and carbon steel on M-TMP-600), M-TMP- 900
Electrical Connection	
Junction box with terminal block for external wiring. ¾" NPT female connection for conduit.	
Electrical Enclosure	
383 aluminum. Approved for NEMA 4X for watertight and dust tight requirements	
Sensor	
Electromagnetic pick-up, 10 mVp-p minimum, 330 Ω nominal resistance.	
Retractor Type	
M-TMP-600	Screw thread, rising stem
M-TMP-700	Not retractable
M-TMP-900	Acme thread, non-rising stem
Extended Length Stem (Optional)	
<i>Use of the two foot extension is limited to gas or steam applications only.</i>	Longer stems are available for large pipe sizes or when the mounting dimensions exceed the insertion capability. Extended stems are not available for the M-TMP-600.
Process Connection	
M-TMP-600	2" NPT
M-TMP-700	2" NPT
	2" 150#, 300#, 600#, 900#, ANSI raised face flange
M-TMP-900	2" 150#, 300#, 600#, 900#, ANSI raised face flange

# MassTracker™ Insertion Turbine Mass Flow Meter

## Isolation Valve (M-TMP-600)

2" full-port bronze gate valve, 125 psig (8.62 barg) maximum. For M-TMP-900, see Accessories.

## Temperature Sensor

A 100  $\Omega$ , platinum RTD mounted inside the stem of the flowmeter probe, eliminating the need for a separate temperature tap.

## Pressure Tap and Bleed Valve

Standard 1/4" NPT pipe nipple with 1/4" stainless steel bleed valve. Provides connections for mounting optional pressure transmitter (Model PT).

## Accessories

### Gate Valve (Model 2GV) - (for Use with M-TMP-900 Only)

Installation with a 2" double flanged, raised-face, full port gate valve enables the flow sensor to be inserted and removed from the pipe under full flow conditions. Both the valve and pipe tap must have a minimum 1 7/8" internal diameter clearance.

## Straight Run Piping Requirements

	Upstream	Downstream
One 90° elbow before the meter	10 D	5 D
Two 90° elbows before the meter	15 D	5 D
Two 90° elbows out of plane before the meter	30 D	5 D
Reduction before the meter	10 D	5 D
Regulator or valve partially closed before the meter	30 D	5 D

D is equal to the internal diameter of the pipe.

If there is not sufficient straight run of pipe, a flow rectifier may be used to reduce the above diameter measurements.

Consult your local representative or the factory for your specific application.

## Other Installation Considerations

### Tap Size

1 7/8" minimum diameter.

### Mounting Position

The insertion turbine meter may be installed in vertical, horizontal, or angled pipe sections. The meter is attached perpendicular to the axis of the pipe and should not be mounted "upside-down" (with its top section hanging below the pipe mount). For liquid service, the fluid must completely fill the pipe.

### Site Selection

The flow measurement location should be selected to minimize turbulence and swirl. The extent of these flow disturbances depends upon the piping configuration. Valves, elbows, pumps, and other piping components may add disturbances to the flow.

### Hot Tap Compatibility

The M-TMP-600 is hot tap compatible, which means that the sensor can be installed and removed under full flow conditions. The M-TMP-900 is hot tap compatible when installed with a 2" double flanged, full port ball or gate valve that adheres to the dimensions.


### Bidirectional Flow (Option)

Turbine Rotor is calibrated for forward and reverse flow. **Calibration in both directions must be requested at time order is placed.**


# MassTracker™ Insertion Turbine Mass Flow Meter

## Rotor Selection Guide

G6B (1" rotor)



G1B through G5B,  
L1 (1.5" rotor)



Selection of the turbine rotor model depends upon the fluid type and operating velocity range of the fluid.

- For all liquids, the model L1B rotor, with a maximum velocity of 30 ft/sec, must be used.
- For gases and steam, six different rotors are available with maximum velocities ranging from 55 to 175 ft/sec. See Table for maximum velocity limits (Vmax.) for all rotors.

The turbine rotor typically will respond linearly over the velocity range from Vlin to Vmax – within  $\pm 1.0\%$  ( $\pm 3.0\%$  for G6 rotor). This is defined as the “linear” range of the rotor. The minimum “measurable” velocity (Vmin) can be considered the application minimum. Velocities from Vmin to Vlin are measurable and repeatable, but less accurate.

When determining the fluid velocity limits for a given rotor, the following equations can be used to compute fluid velocity.

### Average Fluid Velocities

Fluid	
Liquid	$0.4085 \frac{Q_1}{D^2}$
Gas	$3.056 \frac{Q_2}{D^2}$
Steam	$0.051 \frac{M}{p D^2}$
Where:	
V = average fluid velocity	ft/sec
D = pipe inside diameter	in
Q <sub>1</sub> = liquid volumetric flow	gal/min
Q <sub>2</sub> = gas actual volumetric flow	ft <sup>3</sup> /min
M = mass flow rate	lb/h
ρ = fluid density	lb/ft <sup>3</sup>

Liquid Minimum and Maximum Velocity Rates								
Rotor	Flow Units	All Sizes	3 to 5"		6"		8+"	
		Vmax	Vlin	Vmin	Vlin	Vmin	Vlin	Vmin
L1 *	ft/sec	30	1.4	0.5	1.5	0.6	1.6	0.7

Gas or Steam Minimum and Maximum Velocity Rates (ft/sec)							
Rotor	All Sizes	3–5 in.		6 in.		8+ in.	
	V max	V lin	V min	V lin	V min	V lin	V min
G1B 40° pitch	55	$3.19/\sqrt{\rho}$	$1.94/\sqrt{\rho}$	$2.00/\sqrt{\rho}$	$1.23/\sqrt{\rho}$	$1.50/\sqrt{\rho}$	$1.00/\sqrt{\rho}$
G2B 30° pitch	70	$3.98/\sqrt{\rho}$	$2.26/\sqrt{\rho}$	$2.27/\sqrt{\rho}$	$1.63/\sqrt{\rho}$	$1.90/\sqrt{\rho}$	$1.31/\sqrt{\rho}$
G3B 20° pitch	85	$4.52/\sqrt{\rho}$	$2.42/\sqrt{\rho}$	$2.52/\sqrt{\rho}$	$1.95/\sqrt{\rho}$	$2.18/\sqrt{\rho}$	$1.40/\sqrt{\rho}$
G4B 15° pitch	115	$5.84/\sqrt{\rho}$	$3.85/\sqrt{\rho}$	$3.78/\sqrt{\rho}$	$2.84/\sqrt{\rho}$	$3.00/\sqrt{\rho}$	$2.19/\sqrt{\rho}$
G5B 10° pitch	145	$6.91/\sqrt{\rho}$	$4.57/\sqrt{\rho}$	$4.78/\sqrt{\rho}$	$3.47/\sqrt{\rho}$	$3.54/\sqrt{\rho}$	$2.81/\sqrt{\rho}$
G6 B* 5° pitch	175	$6.10/\sqrt{\rho}$	N/A	$5.53/\sqrt{\rho}$	N/A	$5.00/\sqrt{\rho}$	N/A

\*Bi-Directional calibration not available on G6B rotor.

**Note: Rotors have moving parts that require periodic maintenance.**

**Note:** All values in the above table are approximate and depend on the density of the fluid. Consult EMCO if your application falls outside the above limits.

Vmax = maximum velocity of fluid [ft/sec]

Vlin = minimum velocity of fluid at which rotor response is linear [ft/sec]

Vmin = minimum measurable velocity of fluid [ft/sec]

ρ = density of fluid [lb/ft<sup>3</sup>]

N/A = not applicable


**Note: Measurable flow rates for your specific application are available using EMCOSIZE (downloadable at [www.spiraxsarco.com/us](http://www.spiraxsarco.com/us) or [www.emcoflow.com](http://www.emcoflow.com)).**

# MassTracker™ Insertion Turbine Mass Flow Meter


## Dimensions and Weights

Dimensions are in inches (millimeters).

**M-TMP-600**

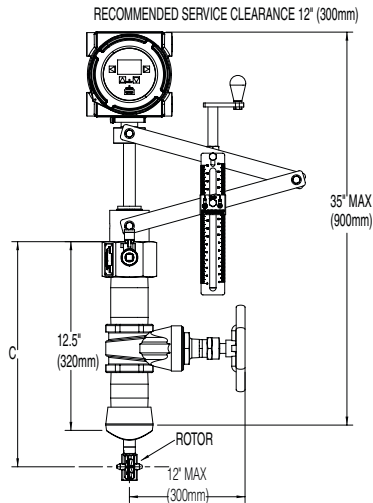


**M-TMP-700**

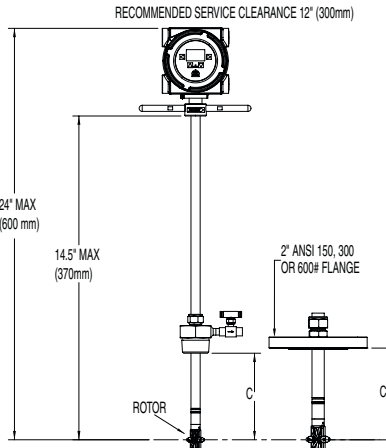

\*Add 12" (300 mm) for each additional foot of stem length.

**M-TMP-900**

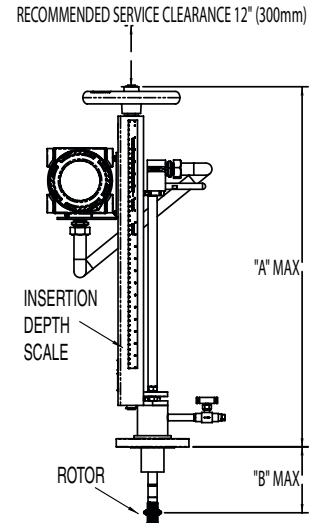

\*Add 12" (300 mm) for each additional foot of stem length.

## Dimensions

Model	Connection	C	
		inches	mm
M-TMP-600	2" NPT	4.5 min 18 max	115 min 450 max
M-TMP-700	2" NPT	3 min 11.25 max	80 min 290 max
	2" 150#	3 min 12.75 max	80 min 325 max
	2" 300#	3 min 12.5 max	80 min 320 max
	2" 600#	3 min 12.25 max	80 min 310 max
	2" 900#	3 min 12 max	80 min 300 max

## Dimensions

Model	Stem Length	B		A	
		inches	mm	inches	mm
M-TMP-900	Standard	1.5 min 20 max	40 min 500 max	30	800

## Weight

Model	Connection	Weight	
		lb	kg
M-TMP-600	2" NPT	28 max	12.7 max
M-TMP-700 <sup>1</sup>	2" NPT	9	4.1
	2" 150#	12	5.4
	2" 300#	14	6.3
	2" 600#	16	7.2
	2" 900#	20	9.1
M-TMP-900 <sup>2</sup>	2" 150#	30	13.6
	2" 300#	35	15.8
	2" 600#	40	18.1
	2" 900#	47	21.3

<sup>1</sup>Add 2.5 lb (1.2 kg) for each additional foot of retractor or stem length.

<sup>2</sup>Add 5 lb (2.3 kg) for each additional foot of retractor or stem length.

# MassTracker™ Insertion Turbine Mass Flow Meter

## How To Order

Category	Description	Suffix Code				
Model	Liquid, steam or gas service, 400°F (204°C)	M-TMP-600				
	Liquid, gas, or steam service, 600°F (316°C)	M-TMP-700	H²			
	Liquid, gas, or steam service, 750°F (400°C)	M-TMP-900	H²			
Connection	2", male NPT (model 700)			2NPT		
	2", 150# flange (model 700, 900)			2F150		
	2", 300# flange (model 700, 900)			2F300		
	2", 600# flange (model 700, 900)			2F600		
	2", 900# flange (model 700, 900)			2F900		
Extended Stem	None (standard length)				XX	
	1' extension (not available for models 600)				E1	
	2' extension (gas/steam applications only) (not available for models 600)				E2	
Pressure Transmitter	No Pressure Transmitter					XX
	PT for pressure range 0 to 50 psig (0 to 3.44 barg)					50
	0 to 100 psig (0 to 6.89 barg)					100
	0 to 150 psig (0 to 10.34 barg)					150
	0 to 200 psig (0 to 13.79 barg)					200
	0 to 250 psig (0 to 17.24 barg)					250
	0 to 500 psig (0 to 34.47 barg)					500
	0 to 1000 psig (0 to 68.95 barg)					1000
Display Options	Local					LOC
	Remote					RMT


Example: M-TMP-900-2F150-XX-XX-RMT

- The G6B is the only available 1" shrouded rotor. Not available for use with bidirectional calibrated meters. Special transmitter scaling is available. Please note scaling range below model code with ordering. If no special scaling is indicated, transmitter will be scaled per model code.
- High temperature option: Must be selected when liquid, gas or steam operating temperature exceeds 400°F (316°C) on the M-TMP-700 or M-TMP-900 only. Extended stems must be used for applications above 500°F
- All meters require rotors. Select the proper rotor based on the information derived from the EMCOSIZE sizing program.

### Please specify the following information with your order:

- Fluid type or composition
- Maximum, minimum, & normal operating flow rate
- Maximum, minimum, & normal operating temperatures
- Maximum, minimum, & normal operating pressures
- Specific weight & viscosity at normal operating conditions

## Gate Valve

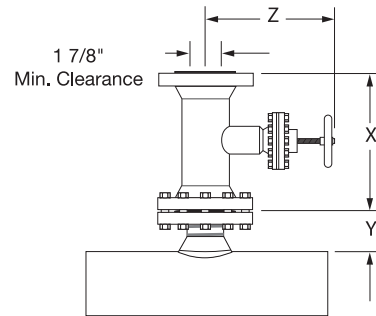

Type	X inches (mm)	Y inches (mm)	Z inches (mm)
150#	7 (180)	3.5 (90)	15.325 (390)
300#	8.5 (215)	3.75 (95)	16.325 (415)
600#	11.5 (290)	3.75 (95)	17.875 (455)

Type	Weight lb (kg)
2" 150#	46 (20.8)
2" 300#	58 (26.3)
2" 600#	84 (38.1)

### Model 600 Connections

Thread-o-let, 3" - 3½" (model 600) includes 2" isolation valve	V3
Thread-o-let, 4" - 6" (model 600) includes 2" isolation valve	V4
Thread-o-let, 8" - 36" includes 2" isolation valve	V8
Thread-o-let, 38" - 80" includes 2" isolation valve	V9

### Rotors³

Liquid, 30 ft/sec maximum (9 m/sec) (40° pitch)	L1B
Gas or steam, 55 ft/sec (17 m/sec) maximum (40° pitch)	G1B
Gas or steam, 70 ft/sec (21 m/sec) maximum (30° pitch)	G2B
Gas or steam, 85 ft/sec (26 m/sec) maximum (20° pitch)	G3B
Gas or steam, 115 ft/sec (35 m/sec) maximum (15° pitch)	G4B
Gas or steam, 145 ft/sec (44 m/sec) maximum (10° pitch)	G5B
Gas or steam, 175 ft/sec (53 m/sec) maximum (5° pitch)¹	G6B



## PhD Inline Vortex

### Description

The Vortex PhD vortex shedding flowmeter measures process fluid flow by detecting the frequency at which vortices are shed from an obstruction in the process fluid line (the bluff body). A piezo-electric sensor mounted outside the flow line acts as the transducer, converting vortex pulses into electrical signals.

The 'Smart' electronics provide excellent noise immunity while the wide range of wetted materials provide outstanding compatibility with most process fluids. The transmitter provides a frequency output, scaled frequency output, totalizer pulse or a 4-20 mA DC signal proportional to the flow rate.

### Features

- Reliable—no moving parts, no fluid to sensor contact
- In-process removable sensor, below 750 psig (52 barg) pressure
- Simple, rugged, all welded construction, no internal gaskets, no leak paths
- High accuracy with wide rangeability
- Line sizes from 1" to 12"
- High temperature operation up to 750°F
- EZ Logic™ menu-driven user interface
- 'Smart' electronics provide excellent noise immunity
- Compatible with HART Protocol

### Performance Specifications

#### Accuracy

Liquid	± 0.7% of flow rate
Gas and Steam	± 1.0% of flow rate
Analog Output Version	Add ± 0.1% of full scale

#### Repeatability

± 0.15% of flow rate

#### Response Time

Adjustable from 1 – 100 seconds (analog output version)

#### K-factor – Temperature Correction

The K-factor of the flowmeter decreases by 0.29% for each 100°F increase in temperature above 70°F. The converse is true below 70°F. By programming the operating fluid temperature in the electronics, the change in the K-Factor is automatically corrected for.

### Operating Specifications

#### Fluid Types

Liquid, gas or steam

#### Line Sizes

1" – 12"

#### Process Temperature Limit

–40 to 750°F


#### Process Pressure

##### Flange

ANSI Class 150, 300 or 600

##### Wafer

All wafer bodies are rated based on appropriate flange rating to a maximum of ANSI Class 600

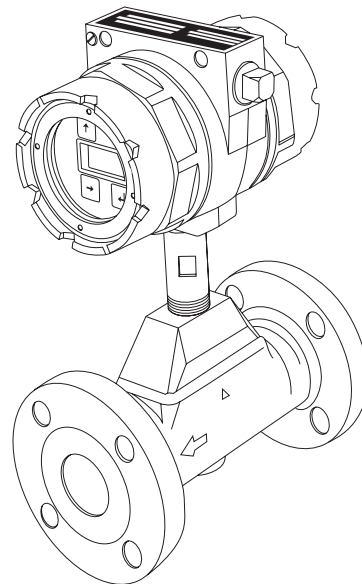

#### Enclosure Specifications

Approved for NEMA 4X watertight and dust tight requirements.


#### Ambient Temperature Limit

##### Normal

– 20 to 140°F

#### Display Option

32 – 140°F

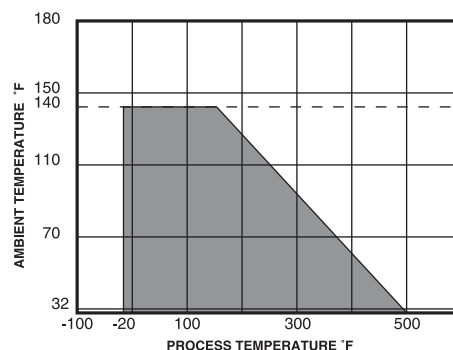

**Figure 1.**  
Ambient Temperature Range for Locally Mounted Electronics.

#### Ambient Humidity Limit

5 – 100% RH non-condensing

#### Power Requirements

18 – 40 VDC; max power consumed: 1 watt

*Local regulation may restrict the use of this product below the conditions quoted. Limiting conditions refer to standard connections only.*

*In the interests of development and improvement of the product, we reserve the right to change the specification.*

TI-8-601-US 12.09

# PhD Inline Vortex

## Operating Specifications continued

### Output

#### Analog

4 – 20 mA, loop powered 2 wire system, digitally adjusted span

#### Frequency

Voltage pulses, 3 wire system, 1 to 10 kHz square wave, open collector FET output with selectable pull-up resistors. The pulse output can be scaled so that 1 pulse represents a specific quantity of fluid passing through the flowmeter. For typical applications, the amplitude of the squarewave can be determined by:

$$V_{\text{pulse}} = V_s - (I \cdot R_{\text{load}})$$

For other options refer to the Vortex PhD manual

### Span Setting

For analog outputs the span setting can be adjusted without the use of electronic test equipment by programming the full scale rate using the EZ Logic™ keypad.

### HART Protocol

In addition to using the keypad for field configuration, the Vortex PhD is also compatible with a laptop PC using a Hart Modem and EZ Comm communications software. This can be used to calibrate the 4-20 mA settings, set the 20 mA point, assign a tag or descriptor, display flowrate, output level, total, velocity and shedding frequency.

### Cable Conduit Connection

ANSI 3/4" female NPT.  
DIN PG 13.5.

### Signal Cable

18, 20 or 22 gauge, shielded instrumentation cable.

### Measurable Flow Velocities

#### Liquid

1.5 to 32 ft/sec

$$\text{Gas/Steam} \sqrt{\frac{50}{\rho}} \text{ to } 260 \text{ ft/sec}$$

Where:  $\rho = \text{density in } \frac{\text{lb}}{\text{ft}^3}$

### Process Viscosity

For minimum linear flow velocities at varying viscosities. (See Figure 2)

### Linear Range

Reynolds Numbers of 20,000 to 7,000,000

### Flowmeter Sizing

Selecting the appropriate size flowmeter can be critical. If the flowmeter is over-sized, the signal strength could be weak – limiting rangeability. If the flowmeter is undersized, excessive pressure drop or cavitation may occur – affecting accuracy. Use the minimum linear flow velocity curves and Tables 1 through 5 (minimum and maximum flow rates for various types of applications) for general sizing. For more detailed information, contact your representative or go to [www.emcoflow.com](http://www.emcoflow.com) for sizing program.

### Pressure Loss

If a differential pressure transducer were connected between pressure taps up and downstream of a vortex flowmeter, the measured differential pressure would be the pressure loss for the device. This value can be calculated using the following equations:

$$\begin{aligned} \Delta P &= 2.67 \times 10^{-4} \cdot \rho \cdot V^2 \\ \text{or } \Delta P &= 2.50 \times 10^{-3} \cdot \rho \cdot (Q)^2 / D^4 \\ \text{or } \Delta P &= 4.47 \times 10^{-5} \cdot \rho \cdot (Q_v)^2 / D^4 \end{aligned}$$

### Where:

$\Delta P$  = Pressure loss psi  
 $\rho$  = Density at operating conditions lb/ft<sup>3</sup>  
 $V$  = Flow velocity in ft/s  
 $Q$  = Volumetric flow rate in ACFM  
 $Q_v$  = Volumetric flow rate in U.S. GPM  
 $D$  = Flowmeter internal diameter in inches

### Minimum Back Pressure (Liquid Service Only)

The line pressure must be sufficiently high so that no cavitation occurs. The minimum required line pressure can be obtained from the equation:

$$PG \geq (1.3 \cdot P_v) + (2.7 \cdot \Delta P) - P_{\text{atm}}$$

### Where:

$P_v$  = Line pressure required psig  
 $\Delta P$  = Maximum pressure loss psig  
 $P_v$  = Saturation liquid vapor pressure at operating temperature psia  
 $P_{\text{atm}}$  = Atmospheric pressure psia (bara)

### Example:

Water flow rate: 0 to 200 US GPM  
Operating temperature: 100°F  
Operating pressure: 10 psig  
Atmospheric pressure: 14.7 psia  
Flowmeter size: 1.939" I.D.  
Specific weight: 61.96 lb/ft<sup>3</sup>

### Solution:

$$\begin{aligned} \Delta P &= 4.47 \times 10^{-5} \cdot 61.96 \cdot (200)^2 / (1.939)^4 = 7.84 \\ P_v &= [(1.3) \cdot (0.951)] + [(2.7) \cdot (7.84)] - 14.7 \\ P_v &= 7.70 \text{ psig} \end{aligned}$$

Since the operating pressure of 10 psig is higher than 7.70 psig, no cavitation occurs.

For meter sizing, download  
"emcosize" program at  
[www.emcoflow.com](http://www.emcoflow.com)

# PhD Inline Vortex

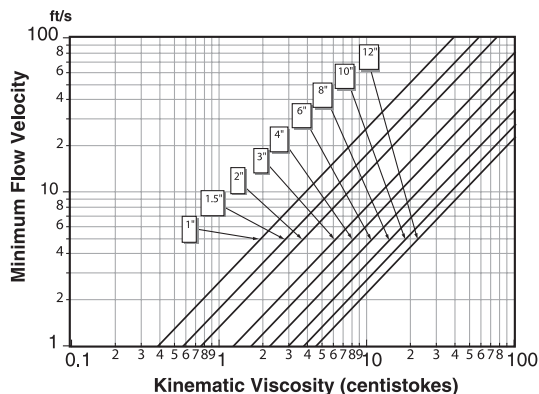


Figure 2. Minimum Linear Flow Velocity vs. Kinematic Viscosity.

## Notes:

- 1 Water values are determined at standard conditions of 60°F.
- 2 The minimum flow rate for the 1", and 1.5" flowmeters are below the linear range (the Reynolds number < 20,000).
- 3 The velocities used to calculate the minimum and maximum flow rates were 1.5 ft/sec and 32 ft/sec respectively.

Nominal Size	Nominal pulse rate	Nominal Meter Factor	
inch	Hz/ft/s	pulses/gal	pulses/ft³
1	12.0	321.2	2,403
1.5	7.5	81.7	611
2	6.0	39.1	293
3	4.0	11.7	87.2
4	3.0	11.7	87.2
6	2.0	1.5	11.0
8	1.3	0.6	4.2
10	1.2	0.3	2.2
12	1.0	0.2	1.3

Table 1. Nominal Pulse Rate and Flowmeter Factor.

Nominal Size	Flow Range in GPM		Flow Range in L/s	
inch	min	max	min	max
1	3.4	72	0.2	4.5
1.5	8.3	176	0.5	11.1
2	13.8	295	0.9	18.6
3	30.9	659	1.9	41.6
4	53.8	1,147	3.4	72.3
6	121.9	2,600	7.7	163.9
8	213.5	4,555	13.5	287.2
10	358.7	7,653	22.6	482.5
12	508.3	10,843	32.0	683.7

Table 2. Water Flow Rates.

## Physical Specifications

### Materials

#### Wetted Parts

##### Wing and Shedder Bar

- Stainless steel and Carbon steel Models 316L or the cast equivalent, CF3M

##### Body

- Stainless steel Model (all sizes) 316L or the cast equivalent, CF3M
- Carbon Steel Model (flanged), 6" and larger ASTM A105, A06 Grade C, and A108 Grade 1018

### Electronics Enclosure

383 Aluminum

### All Other Parts

Stainless Steel

### Flowmeter Classification

#### Standard

Designed to meet NEMA 4X watertight and dust tight specifications

#### Explosion Proof version

FM and CSA approved

### Remote Mount Electronics (RMT)

Signal cable is provided to mount the electronics enclosure up to 30 ft (optional 50 ft) from the flowmeter body, and must be installed within proper electrical conduit.

### Local Indicator and Totalizer (LOC-TOT)

The indicator displays flowrate and total in user-selectable, engineering units. It is a two line, 8 character per line, LCD display. The totalizer enables a pulse output providing a 5 – 999 msec pulse each time the totalizer increments.

Note: This option changes the lower, ambient temperature limit to 32°F. Below 32°F, the display intensity begins to fade but does not affect the transmitter output.

### Material of Construction

All models are available in stainless steel; some models can be ordered in carbon steel.

### FM Approval (Explosion Proof)

Class I, Div. I, Groups B, C, D  
Class II, Div. I, Groups E, F, G  
Class I, Div. II, Groups A, B, C, D  
Class II, III, Div. 2, Groups F, G

### CSA Approval (Explosion Proof)

Class I, Div. I, Groups B, C, D  
Dust-ignition Proof for Class II, Div. 1 Groups E, F, G  
Class III Hazardous locations

# PhD Inline Vortex

## Accessories

### Flow Processor

A microprocessor-based flow processor can be used to significantly increase the accuracy and functionality of any flowmetering application. See the FP-93 TIS for complete details.

## Straight Run Piping Requirements

Typical 10 diameters upstream, 5 diameters downstream. In certain applications where multiple bends or butterfly valves are present, more straight run may be required.

	Upstream	Downstream
One 90° elbow before the meter	10 D	5 D
Two 90° elbows before the meter	15 D	5 D
Two 90° elbows out of plane before the meter	30 D	5 D
Reduction before the meter	10 D	5 D
Regulator or valve partially closed before the meter	30 D	5 D

## Other Installation Considerations

### Installation

Flowmeter can be installed vertically, horizontally, or at any angle. For liquid service, the flow line must be full during flowmeter operation – flow up in vertical lines is recommended.

### Site Selection

The flow measurement location should be selected to minimize turbulence and swirl. The extent of these flow disturbances depends upon the piping configuration. Valves, elbows, pumps and other piping components may add disturbances to the flow.

### Servicability

The sensor element can be removed, and replaced, without removing the flowmeter body from the process line, and without process shut down for process pressures below 750 psig. The flowmeter K-factor is not affected by sensor or electronics servicing.

### Pressure and Temperature Taps

Pressure tap should be mounted 3.5 to 7 pipe diameters downstream from the flowmeter. The temperature tap should be mounted an additional 3.5 to 7 pipe diameters downstream of the pressure tap. See Figure 3.

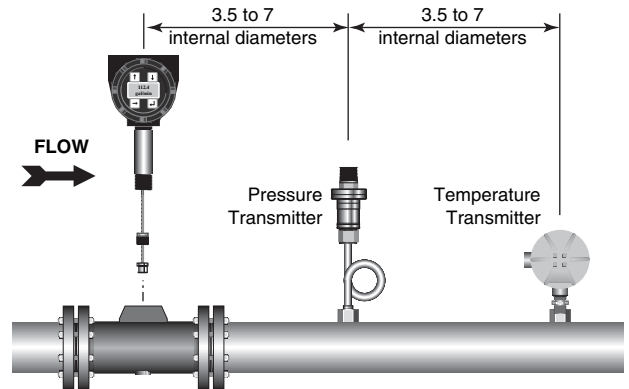


Figure 3. Pressure and Temperature Tap Dimensions.

Pres PSIG	1"		1.5"		2"		3"		4"		6"		8"		10"		12"	
	min	max	min	max	min	max	min	max	min	max	min	max	min	max	min	max	min	max
10	31	283	77	697	129	1164	288	2604	501	4534	1135	10277	1988	18000	3341	30258	4733	42860
15	34	337	84	828	140	1383	313	3094	546	5387	1237	12213	2167	21390	3642	35955	5160	50930
20	37	390	90	958	151	1600	337	3580	587	6233	1331	14129	2331	24746	3918	41597	5550	58923
30	41	494	102	1214	170	2029	380	4539	661	7903	1498	17915	2624	31377	4412	52742	6249	74710
40	45	597	112	1468	187	2453	417	5486	727	9552	1647	21655	2885	37927	4850	63753	6870	90307
50	49	699	121	1719	202	2872	452	6424	786	11186	1783	25357	3122	44412	5249	74654	7435	105748
60	53	801	129	1968	216	3289	483	7356	841	12807	1908	29033	3341	50849	5616	85474	7955	121075
70	56	901	137	2215	229	3702	513	8281	893	14419	2024	32686	3545	57248	5959	96231	8441	136312
80	59	1002	145	2462	242	4114	541	9202	941	16022	2134	36321	3737	63614	6282	106932	8898	151470
90	62	1102	152	2707	253	4524	567	10120	987	17619	2237	39942	3919	69956	6587	117593	9331	166572
100	64	1201	158	2952	265	4933	592	11034	1031	19211	2336	43550	4092	76275	6878	128214	9743	181617
120	70	1399	171	3439	286	5747	639	12855	1112	22382	2522	50740	4417	88868	7424	149382	10517	195065
140	74	1597	183	3925	305	6559	683	14670	1188	25543	2694	57904	4718	101416	7931	166214	11235	197804
160	79	1794	194	4409	323	7369	723	16482	1260	28697	2855	65054	5001	113938	8407	168295	11908	200281
180	83	1991	204	4893	341	8177	762	18291	1327	31846	3008	72193	5268	126441	8856	170158	12545	202498
200	87	2188	214	5377	357	8986	799	20099	1391	34994	3153	79330	5523	132583	9283	171911	13150	204584
220	91	2385	223	5861	373	9795	834	21908	1452	38143	3292	86469	5766	133935	9692	173664	13729	206670
250	96	2680	237	6588	395	11009	884	24624	1540	42873	3490	97191	6113	135625	10275	175855	14555	209278
300	105	3175	257	7803	430	13040	962	29166	1676	50781	3798	104535	6653	138329	11183	179362	15841	213450
350	113	3672	277	9025	463	15082	1035	33734	1802	58735	4085	106259	7155	140610	12027	182320	17036	216971
400	120	4173	295	10256	493	17140	1103	38337	1921	66748	4355	107855	7627	142723	12821	185059	18161	220231
450	127	4679	313	11498	522	19215	1168	42978	2034	72657	4611	109388	8076	144751	13575	187689	19229	223360
500	134	5189	329	12751	550	21310	1230	47665	2142	73548	4856	110729	8505	146525	14296	189990	20251	226098
600	147	6225	361	15299	602	25568	1348	57016	2346	75244	5523	117628	9316	149906	15659	194372	22182	231314

Table 3. Saturated Steam Flow Rates at Selected Process Pressures <sup>1,2</sup> (Minimum and Maximum Operating Flow Rates in lb/hr)

Notes: 1. Maximum flow velocity is 260 ft/sec or Reynolds number limit or 7,000,000 whichever is less.

2. Minimum flow velocity is  $\sqrt{\frac{50}{\rho}}$  ft/sec, where  $\rho$  = density in  $\frac{\text{lb}}{\text{ft}^3}$  or Reynolds number limit of 20,000 whichever is greater.

TI-8-601-US 12.09

# PhD Inline Vortex

Pres PSIG	1"		1.5"		2"		3"		4"		6"		8"		10"		12"	
	min	max	min	max	min	max	min	max	min	max	min	max	min	max	min	max	min	max
0	711	4675	1130	11486	1888	19194	4224	42934	7352	74730	16669	169433	29201	296813	49087	498888	69532	706680
10	711	7858	1465	19306	2448	32260	5476	72160	9531	125601	21611	284772	37857	498864	63722	838268	90263	1187415
20	711	11043	1737	27129	2902	45332	6491	101403	11299	176499	25618	400174	44877	701024	75490	1177647	106933	1668149
30	802	14229	1971	34957	3294	58412	7369	130661	12826	227425	29080	515637	50942	903292	85473	1517027	121073	2148884
40	888	17417	2181	42789	3645	71499	8152	159934	14190	278378	32173	631161	56360	1105667	94572	1856406	133962	2629619
50	966	20606	2372	50624	3964	84593	8868	189223	15435	329357	34995	746746	61304	1308148	102870	2195786	145716	3065336
60	1038	23798	2550	58464	4260	97693	9529	218527	16587	380363	37607	862390	65880	1510734	110546	2535166	156590	3066018
70	1105	26990	2715	66308	4537	110800	10149	247845	17665	431394	40050	978094	70160	1713422	117723	2576801	166756	3066539
80	1169	30185	2871	74156	4798	123914	10732	277179	18681	482452	42354	1093855	74196	1916212	124487	2577147	176337	3066950
90	1229	33381	3020	82008	5046	137034	11286	306527	19645	533534	44540	1209674	78025	1981748	130782	2572706	185254	3061665
100	1287	36578	3161	89863	5282	150160	11814	335889	20564	583642	46625	1325549	81677	1981748	136902	2573347	193923	3062428
120	1395	42978	3426	105586	5725	176433	12806	394656	22291	686931	50539	1497292	88534	1981748	148387	2574344	210192	3063615
140	1495	49384	3673	121323	6137	202729	13728	453478	23894	789315	54175	1497292	94903	1981748	158946	2571893	225149	3060698
160	1589	55795	3904	137075	6523	229050	14592	512354	25398	891794	57584	1497292	100876	1981748	168847	2570006	239173	3058452
180	1678	62213	4122	152840	6888	255394	15408	571282	26819	994362	60805	1497292	106519	1981748	177936	2560955	252048	3047681
200	1762	68635	4330	168619	7235	281760	16184	630260	28169	994383	63867	1497292	111882	1981748	187249	2571876	265241	3060678
220	1843	75063	4528	184411	7566	308148	16925	689287	29459	994383	66791	1497292	117004	1981748	195325	2560024	276680	3046573
250	1958	84715	4810	208123	8038	347770	17980	753714	31295	994383	70955	1497292	124299	1981748	207975	2573422	294599	3062517
300	2136	100825	5248	247701	8769	413905	19615	753714	34141	994383	77408	1497292	135604	1981748	226127	2558874	320311	3045204
350	2301	116963	5652	287347	9445	480154	21127	753714	36772	994383	83373	1497292	146053	1981748	243566	2561760	345014	3048639
400	2454	133125	6030	327054	10076	503949	22539	753714	39231	994383	88947	1497292	155818	1981748	259241	2552194	367217	3037255
450	2599	149310	6386	366814	10671	503949	23870	753714	41547	994383	94199	1497292	165018	1981748	274584	2555165	388951	3040791
500	2737	165512	6724	389852	11235	503949	25132	753714	43743	994383	99179	1497292	173741	1981748	288580	2548126	408777	3032414
600	2993	197961	7353	389852	12287	503949	27485	753714	47840	994383	108466	1497292	190010	1981748	315201	2545390	446486	3029158

**Table 4. Air Flow at Selected Process Pressures at 60°F<sup>1,2,3</sup>**  
(Minimum and Maximum Operating Flow Rates in SCFH)

[Download "emcosize" at www.emcoflow.com](http://www.emcoflow.com)

**Notes:**

- At standard conditions of 60°F and 14.7 psia, SCFH: standard cubic feet per hour.
- Maximum flow velocity is 260 ft/sec (79 m/s) or Reynolds number limit or 7,000,000 whichever is less.
- Minimum flow velocity is  $\sqrt{\frac{50}{\rho}}$  ft/sec, where  $\rho$  = density in  $\frac{\text{lb}}{\text{ft}^3}$  or Reynolds number limit of 20,000 whichever is greater.

Pres PSIG	1"		1.5"		2"		3"		4"		6"		8"		10"		12"	
	min	max	min	max	min	max	min	max	min	max	min	max	min	max	min	max	min	max
0	772	4665	1444	11460	2413	19149	5397	42834	9395	74557	21300	169041	37314	296126	64968	511367	93181	733432
10	772	7851	1873	19289	3130	32231	7002	72096	12188	125490	27634	284520	48410	498422	84286	860683	120888	123441
20	905	11048	2222	27142	3713	45354	8307	101452	14458	176585	32781	400368	57426	701364	99983	1211101	143401	1737031
30	1028	14255	2524	35021	4218	58520	9436	130901	16423	227844	37236	516588	65230	904957	113570	1562626	162889	2241207
40	1138	17472	2795	42925	4670	71728	10446	160445	18182	279268	41225	633180	72217	1109202	125733	1915261	180334	2746978
50	1238	20700	3042	50855	5083	84978	11370	190084	19791	330857	44871	750146	78605	1314104	136853	2269014	196283	2746978
60	1332	23938	3271	58810	5466	98271	12227	219818	21282	382611	48253	867489	84530	1519664	147166	2623888	211075	3254350
70	1419	27187	3486	66791	5825	111606	13030	249648	22680	434533	51423	985209	90083	1725887	156833	2890521	224938	3461702
80	1502	30446	3689	74797	6165	124985	13789	279575	24001	486622	54418	1103309	95329	1932775	165965	2890521	238036	3461702
90	1580	33715	3882	82829	6487	138407	14511	309597	25257	538879	57265	1221791	100317	2140331	174647	2890521	250488	3461702
100	1655	36995	4067	90887	6795	151872	15200	339717	26457	591305	59986	1340656	105084	2152958	182943	2890521	262387	3461702
120	1797	43587	4414	107082	7376	178933	16499	400250	28718	696667	65112	1579542	114062	2152958	198569	2890521	284500	3461702
140	1929	50222	4738	123382	7917	206171	17710	461176	30826	802714	69892	1626648	122436	2152958	213142	2890521	305701	3461702
160	2053	56900	5043	139789	8427	233585	18851	522500	32812	909452	74394	1626648	130323	2152958	226866	2890521	325384	3461702
180	2171	63622	5333	156302	8911	261179	19933	584223	34696	1016887	78665	1626648	137805	2152958	239886	2890521	344058	3461702
200	2283	70388	5609	172924	9373	288953	20967	646350	36494	1080291	82742	1626648	144947	2152958	252312	2890521	361881	3461702
220	2391	77198	5874	189654	9816	316909	21957	708885	38219	1080291	86652	1626648	151797	2152958	264230	2890521	378973	3461702
250	2546	87496	6254	214956	10450	359188	23376	803456	40688	1080291	92252	1626648	161606	2152958	281293	2890521	403446	3461702
300	2787	104888	6847	257682	11442	430583	25594	818830	44549	1080291	101005	1626648	176940	2152958	307963	2890521	441698	3461702
350	3013	122567	7402	301115	12369	503159	27667	818830	48157	1080291	109186	1626648	191271	2152958	332885	2890521	477442	3461702
400	3226	140539	7926	345267	13245	547487	29626	818830	51567	1080291	116917	1626648	204815	2152958	356431	2890521	511214	3461702
450	3430	158808	8426	390150	14079	547487	31493	818830	54816	1080291	124284	1626648	217720	2152958	378865	2890521	543389	3461702
500	3625	177379	8905	423533	14880	547487	33284	818830	57933	1080291	131350	1626648	230098	2152958	400376	2890521	574242	3461702
600	3995	215439	9814	423533	16398	547487	36681	818830	63846	1080291	144757	1626648	253585	2152958	441178	2890521	632763	3461702

**Table 5. Natural Gas Flow Rates at Selected Process Pressures at 60°F<sup>1,2,3,4</sup>**  
(Minimum and Maximum Operating Flow Rates in SCFH)

[Download "emcosize" at www.emcoflow.com](http://www.emcoflow.com)

**Notes:**

- At standard conditions of 60°F and 14.7 psia, SCFH: standard cubic feet per hour
- Maximum flow velocity is 260 ft/sec (79 m/s) or Reynolds number limit or 7,000,000 whichever is less.
- Specific Gravity of natural gas = 0.61 and 0.8% N.
- Minimum flow velocity is  $\sqrt{\frac{50}{\rho}}$  ft/sec, where  $\rho$  = density in  $\frac{\text{lb}}{\text{ft}^3}$  or Reynolds number limit of 20,000 whichever is greater.

# PhD Inline Vortex

## Dimensions and Weights

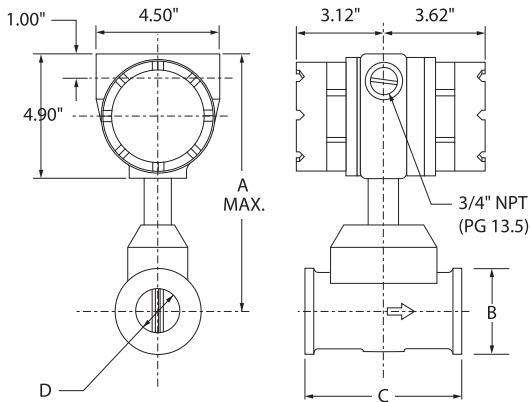


Figure 4. Dimensions: Wafer Connection Type, Integral Mounting.

### Wafer Connection

Wafer connection is available in stainless steel sizes 1 – 4" only. The schedule of the mating pipe's internal diameter  $\geq$  dimension "D".

Size (in)	A (in)	B (in)	C (in)	D (in)	Approx Wt (lb)
1	10.8	2.2	4.1	0.957	13
1.5	10.5	3.1	4.1	1.500	14
2	10.8	3.6	5.0	1.939	17
3	11.5	5.0	7.0	2.900	32

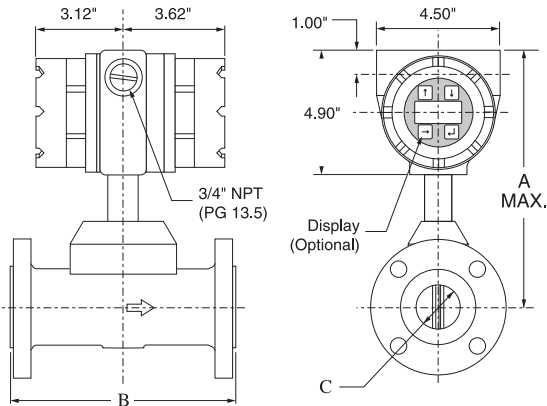


Figure 6. Dimensions: Flange Connection, Integral Mounting.

Table 6. Weights & Dimensions: Wafer


all in inches size	A	B	C				Approx. Wt.(lb)		
			Stainless Steel		Carbon Steel		150#	300#	600#
			150#	300#	150#	300#			
1	10.7	7.6	0.957	0.957	N/A	N/A	18	20	20
1.5	10.7	8.1	1.500	1.500	N/A	N/A	22	28	28
2	13.2	8.5	1.939	1.939	N/A	N/A	31	36	36
3	13.8	9.0	2.900	2.900	N/A	N/A	51	60	60
4	14.3	9.5	3.826	3.826	N/A	N/A	55	72	99
6	15.3	13.6	5.761	5.761	5.761	5.761	92	116	140
8	16.3	18.5	7.625	7.625	7.625	7.625	144	182	220
10	17.4	18.5	10.020	9.750	10.020	9.750	180	260	440
12	18.4	18.5	12.000	11.750	11.938	11.374	265	365	535

Table 7. Weights & Dimensions: Flange.

Notes:  
1. The schedule of the mating pipe's internal diameter  $\geq$  dimension "C".  
2. N/A = Not Available.


## REMOTE MOUNTING

### Pipe Mount Electronics

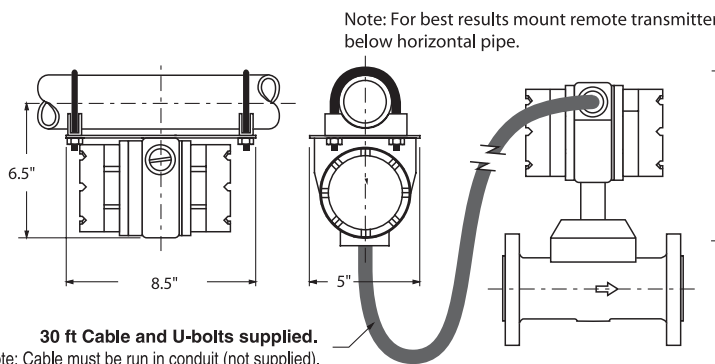

30 ft Cable and U-bolts supplied.  
Note: Cable must be run in conduit (not supplied).  
Conduit connection is 3/4" NPT (PG 13.5).

### Wall Mount Electronics

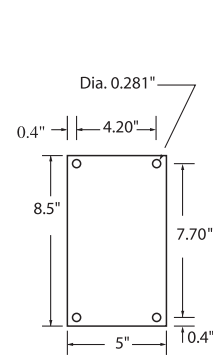

size (in)	Approximate Weight (lb)			Wafer
	150# Flange	300# Flange	600# Flange	
1	24	26	26	19
1.5	28	34	34	20
2	37	42	42	23
3	57	66	66	38
4	72	89	105	57
6	98	122	146	N/A
8	150	188	226	N/A
10	186	266	556	N/A
12	271	371	541	N/A

Figure 5. Dimensions weights: Remote Mounting

TI-8-601-US 12.09



# PhD Inline Vortex

## Wiring

Figures 7- 9 represent typical field wiring applications for the Vortex PhD.

### Analog Output

The Vortex PhD may be operated using a 24 VDC power supply. The 4-20 mA output is scalable (2 wire principle.) The load resistor may be installed on supply or return line. Permissible load resistance values are shown in Figure 7.

### Pulse Output

This is an open collector pulse output using a high impedance electronic counter.  $V_{pulse}$  will vary from:

$$0-1\text{VDC to } V_{pulse} = V_s \left( \frac{R_c}{R_c + R_{pulse}} \right)$$

$$\text{Note : } R_{pulse} \geq \left( \frac{V_s}{0.16} \right)$$

#### Where:

- $V_{pulse}$  = pulse output amplitude
- $R_c$  = counter impedance
- $V_s$  = power supply voltage
- $V_c$  = minimum required voltage to trip counter
- $R_{pulse}$  = pull-up resistance

### Cenelec Approved-Power & Signal Wiring

The Vortex PhD flowmeter may be operated using a 24 VDC power supply. The wiring schematic shown (Figure 9) is for the areas defined by the Cenelec approval (see approval description in options section). I. S. zener barriers must have the following specifications:

- $V_{max}$  = 29 VDC = Maximum voltage which may be connected to barrier terminals
- $J_{max}$  = 110 mA = Maximum current which may be connected to barrier terminals
- $C_{int}$  = 1.5 nF = Maximum equivalent internal capacitance across barrier terminals
- $L_{int}$  = 0 H = Maximum equivalent internal inductance across barrier terminals

The 4-20 mA output is scalable (2 wire principle.) The 4-20 mA loop resistor should be 250  $\Omega$ ; and the pulse output is to be connected to a high impedance, electronic counter.

$$V_{pulse} \text{ varies from: } 0-1 \text{ VDC to } V_{pulse} = V_s \left( \frac{R_c}{R_c + R_{pulse}} \right)$$

$$\text{Note: } R_{pulse} \geq \frac{V_s}{0.16}$$

#### Where:

- $V_{pulse}$  = Pulse output amplitude
- $V_s$  = Power supply voltage (18 to 29 VDC)
- $R_{load}$  = Load resistance
- $R_c$  = Counter impedance
- $R_{pulse}$  = Pull-up resistance

### 110/220 VAC-Power & Signal Wiring

The Vortex PhD flowmeter may be operated using a 110/220 VAC power supply. The power supply board converts the 110/220 VAC to 24 VDC. The 4-20 mA output is scalable (2 wire principle.) The 4-20 mA loop resistor should be 250  $\Omega$ ; and the pulse output is to be connected to a high impedance, electronic counter. (Figure 10)

$$V_{pulse} \text{ varies from } 0-1 \text{ VDC to } V_{pulse} = 24 \text{ VDC} - (I \cdot R_{load})$$

#### Where:

- $V_{pulse}$  = Pulse output amplitude
- $R_{load}$  = Load resistance (250  $\Omega$ )
- $I$  = Current (4-20 mA)

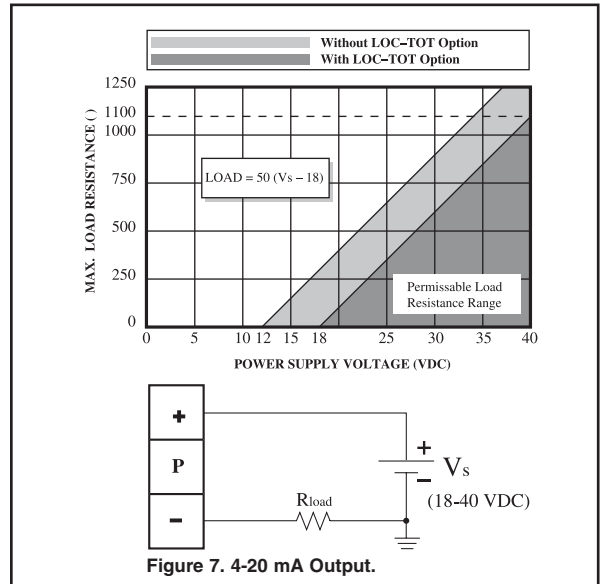


Figure 7. 4-20 mA Output.

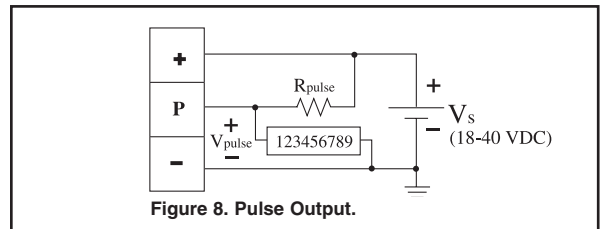


Figure 8. Pulse Output.

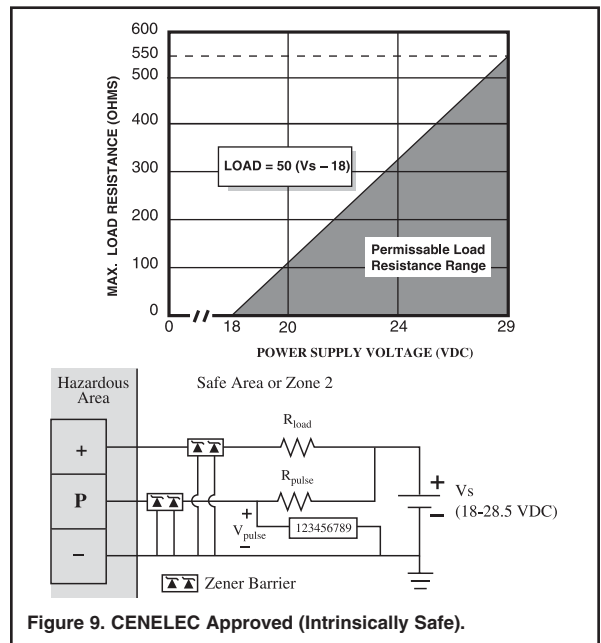


Figure 9. CENELEC Approved (Intrinsically Safe).

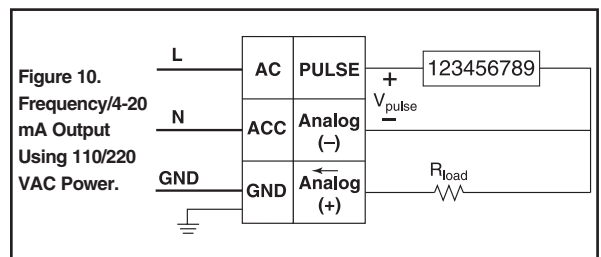


Figure 10. Frequency/4-20 mA Output Using 110/220 VAC Power.



# PhD Inline Vortex

## Model and Suffix Codes

Category	Description	Suffix Codes							
Model	Stainless Steel (sizes 1 – 12")	PhD-90	...	...	...	...	...	...	...
	Carbon Steel (Stainless steel wing) (sizes 6 – 12")	PhD-92	...	...	...	...	...	...	...
Fluid Type	Steam or gas	...	S	...	...	...	...	...	...
	Liquid	...	L	...	...	...	...	...	...
Line Size	1"	...	...	10	...	...	...	...	...
	1.5"	...	...	15	...	...	...	...	...
	2"	...	...	20	...	...	...	...	...
	3"	...	...	30	...	...	...	...	...
	4"	...	...	40	...	...	...	...	...
	6"	...	...	60	...	...	...	...	...
	8"	...	...	80	...	...	...	...	...
	10"	...	...	100	...	...	...	...	...
	12"	...	...	120	...	...	...	...	...
Connection Type	Wafer <sup>6</sup>	...	...	...	W	...	...	...	...
	Flange	...	...	...	F	...	...	...	...
Connection Rating	ANSI Class 150	...	...	...	...	150	...	...	...
	ANSI Class 300	...	...	...	...	300	...	...	...
	ANSI Class 600	...	...	...	...	600	...	...	...
Options	No indicator/totalizer option <sup>1</sup>	...	...	...	...	...	STD	...	...
	FM approved <sup>2</sup>	...	...	...	...	...	FM	...	...
	CSA approved	...	...	...	...	...	CSA	...	...
	Local Indicator and Totalizer <sup>3</sup>	...	...	...	...	...	LOC-TOT	...	...
	Remote Mount Electronics <sup>4</sup>	...	...	...	...	...	RMT	...	...
	Integral 110 VAC input <sup>5</sup>	...	...	...	...	...	110	...	...
Sensor Wires (Internal)	Teflon, -40° to 400°F	...	...	...	...	...	...	T	...
	Fiberglass, 150° to 750°F	...	...	...	...	...	...	F	...

### Example

→ PhD-90-S-60-F-300-LOC-TOT-RMT-T

Table 8. PhD Vortex Shedding Flowmeter.

### Notes:

- Has 4-20 mA and/or 50% duty cycle frequency output. A 50% duty cycle frequency can be scaled.
- FM approved option meters come with a magnet wand. For all other meters the wand can be ordered as an option.
- At least one local indicator is recommended at each site. If one display will be used on many meters, it should be purchased separately.
- Remote mount electronics are required for high process temperatures (refer to the general specification). The standard remote mount option comes with 30' of cable.
- Not available with FM and CSA approvals.
- Wafer style meters available in stainless steel sizes 1 – 3" only.

### Compatibility Chart

Compatible											
Incompatible											
		STD	FM	CSA	LOC-TOT	RMT	110/220	CARBON STEEL	STAINLESS STEEL		
STD		■	■	■	■	■	■	■	■		
FM		■	■	■	■	■	■	■	■		
CSA		■	■	■	■	■	■	■	■		
LOC-TOT		■	■	■	■	■	■	■	■		
RMT		■	■	■	■	■	■	■	■		
110/220		■	■	■	■	■	■	■	■		
CARBON STEEL		■	■	■	■	■	■	■	■		
STAINLESS STEEL		■	■	■	■	■	■	■	■		

© Spirax Sarco, Inc. 2009

TI-8-601-US 12.09

## V-Bar Insertion Vortex Models V-Bar-600/60S • V-Bar-700 • V-Bar-910/960


### Description

V-Bar insertion flow meters have three main components: the retractor, the sensor, and the electronics. The retractor serves to position the sensor within the pipe. The sensor detects the pattern of vortices as a frequency signal. The "Smart," microprocessor-based EZ-Logic electronics conditions the signal and provides a frequency output, a scaled pulse output, or a 4 to 20 mA DC signal proportional to the average pipe flow rate.

Most V-Bar flow meters can be installed on an isolation valve, which permits installation and removal without process shut-down. Integral pressure and/or temperature measurement may be combined with the V-Bar to provide mass flow measurement from a single pipe tap. In addition, a flow processor may be used to increase the accuracy and functionality of the metering system.

### Features

- Fluid types: liquid, gas, or steam
- Pipe sizes: 3 to 80"
- Rugged construction
- Reliability: no moving parts
- Process pressure up to 2000 psig (138 barg)
- Process temperatures up to 500°F
- Industry standard frequency and/or 4 to 20 mA output signals
- Optional integral pressure and/or temperature measurement
- Negligible head loss
- Compatible with HART® protocol
- EZ-Logic™ menu-driven user interface (microprocessor-based)
- Local programming via EZ-Logic keypad or magnet wand through explosion-proof enclosure

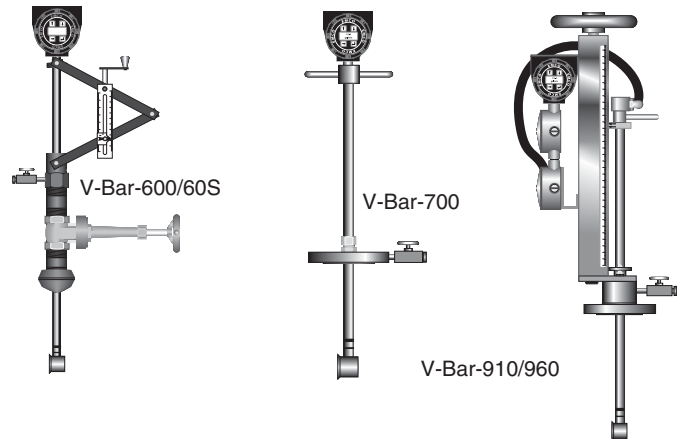

### Performance Specifications

#### Accuracy (Linear Ranges)

Liquid	±1.0% of flow rate
	Test conditions: Water at 60°F, 50 psig (3.4 barg) with a flow rectifier and 10 pipe diameters upstream.
Gas and Steam	±1.5% of flow rate
	Test conditions: Air at 68°F, 26 psia with a flow rectifier and 10 pipe diameters upstream.

**Analog Output** Add ±0.1% of full scale

**Repeatability** ±0.15% of flow rate

**Response Time** Adjustable from 1 to 100 seconds

### Application Guide

Model	Liquid	Gas	Steam	Hot Tap	Temperature Range	Maximum Pressure	Seal Type	Line Sizes inches
600	yes	yes	no	yes	-40 to 400°F	125 psig	Viton®	3 to 80
60S	no	no	yes	yes	-40 to 400°F	125 psig	E/P®	3 to 80
700	yes	yes	yes	no	-40 to 500°F	2000 psig	Swagelok™	3 to 80
910	yes	yes	yes	yes	-40 to 400°F	flange rating	Teflon®	3 to 80
960	yes	yes	yes	yes	-40 to 500°F	flange rating	Grafoil®	3 to 80

- 1 Maximum pressure at maximum temperature with appropriate connection.
- 2 Ethylene-Propylene elastomer.
- 3 Rating listed is for NPT connection. For flange connections, use ANSI flange rating.

### Operating Specifications

#### Linear Range

Reynolds number from 20,000 to 7,000,000

#### Measurable Flow Velocities

##### Liquid Flow

$V_{min}$	1.5 ft/sec
$V_{max}$	32 ft/sec

##### Gas and Steam Flow

$V_{min}$	$\sqrt{\frac{50}{p}} \text{ ft/sec}$
$V_{max}$	300 ft/sec

**Where:**  $p$  = density (lb/ft<sup>3</sup>)

### Operating Range


#### Average Fluid Velocities

Liquid	0.4085	$\frac{Q_v}{D^2}$
Gas	3.056	$\frac{Q_v}{D^2}$
Steam	0.051	$\frac{M}{p \cdot D^2}$

Where:

$V$ = average fluid velocity	ft/sec
$D$ = pipe inside diameter	inches
$Q_v$ = liquid volumetric flow	gal/min
$Q_v$ = gas actual volumetric flow	ft <sup>3</sup> /min
$M$ = mass flow rate	lb/h
$p$ = fluid density	lb/ft <sup>3</sup>

### Gas Flow Operating Range:



Local regulation may restrict the use of this product below the conditions quoted. Limiting conditions refer to standard connections only.

In the interests of development and improvement of the product, we reserve the right to change the specification.

TI-8-602-US 12.08

# V-Bar Insertion Vortex

## Models V-Bar-600/60S • V-Bar-700 • V-Bar-910/960

### Process Viscosity

Reynolds number must be > 20,000.  
Figure 1 translates the minimum Reynolds number, 20,000, to the minimum measurable pipe velocity.

### Kinematic Viscosity

$$\nu = \frac{\mu(\text{cP})}{\text{S.G.}}$$

$$\text{Re} = \frac{124 \text{pVD}}{\mu}$$

where  $\rho$  = Fluid density  
 $V$  = Average velocity (lb/ft<sup>3</sup>)  
 $D$  = Pipe inside diameter (inches)  
 $\mu$  = Fluid viscosity (cP)  
 S.G. = Specific gravity

### Ambient Temperature Limit

32° to 140°F

### Ambient Humidity Limit

5 to 100% relative humidity non-condensing

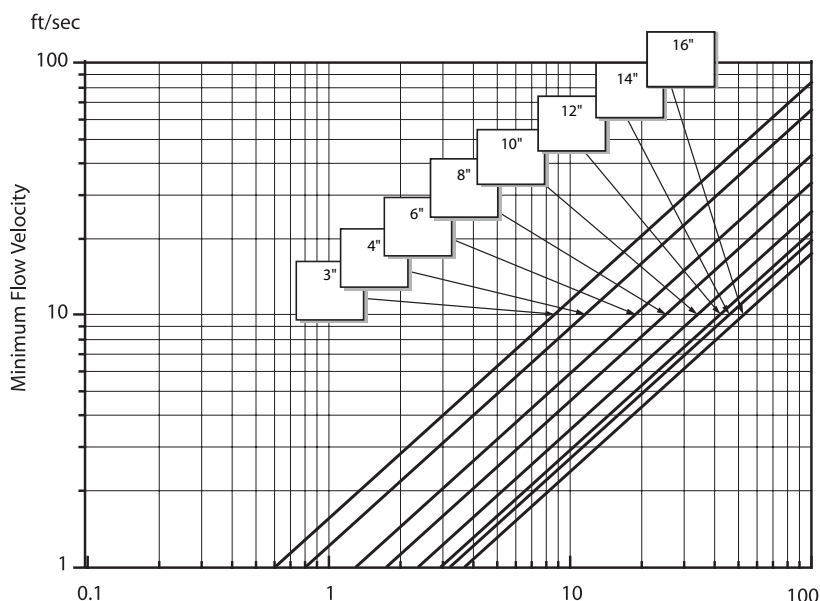


Figure 1. Kinematic Viscosity, centistokes

### Power Requirements

<b>Standard</b>	Isolated 18 to 40 VDC, 35 mA maximum Maximum voltage with pressure transmitter option is 30 V.	
<b>Optional</b>	110/220 VAC All power wiring must be enclosed in rigid conduit, and a watertight and/or explosion-proof seal must be applied at the conduit entry.	
<b>Output Signals</b>		
Analog	4 to 20 mA, 2-wire system, digitally adjusted span	
Frequency	Voltage pulses, 3-wire system, 0 to 3000 Hz square wave, 50% duty cycle.	Low Level: 0 to 1 V High Level: power supply voltage-load
Pulse	3-wire system. Output can be scaled so that 1 pulse indicates a specific quantity of fluid passing through the pipe.	
Hart®	Communications protocol	
<b>Display (LOC-TOT)</b>	2-line by 8-character LCD digital display alternately show flow rate and totalized flow in user-selectable engineering units. Four buttons (up, down, right, enter), operatable either directly on the display panel or with a hand-held magnetic wand through the explosion-proof enclosure, enable programming. Local programming follows the EZ-Logic menu-driven user interface.	
<b>Zero &amp; Span Setting (Analog Output Only)</b>	Zero and span calibration can be performed without a frequency source by programming the flow rate using the EZ-Logic interface.	

### Physical Specifications

<b>Materials</b>	
Wetted Parts	316L stainless steel or the cast equivalent, CF3M (bronze & carbon steel on V-Bar-600/60S)
External Parts	Aluminum, 316 stainless steel, carbon steel (bronze & carbon steel on V-Bar-600/60S)
Electrical Enclosure	383 aluminum. Approved for NEMA 4X watertight and dust-tight requirements.
<b>Retractor Type</b>	
V-Bar-600/60S	Screw thread, rising stem
V-Bar-700	Not retractable
V-Bar-910/960	Acme thread, non-rising
<b>Process Connection</b>	
V-Bar-600/60S	2" NPT
V-Bar-700	2" NPT
	2" 150#, 300#, 600# or 900# ANSI raised face flange
V-Bar-910/960	2" 150#, 300#, 600# or 900# ANSI raised face flange

# V-Bar Insertion Vortex

## Models V-Bar-600/60S • V-Bar-700 • V-Bar-910/960

### Isolation Valve (V-Bar-600/60S only)

2" full-port, bronze gate valve, 125 psig (8.62 bar) maximum.  
For V-Bar-910/960, see Accessories.

### Pressure Tap and Bleed Valve

Standard 0.25" NPT pipe nipple with 0.25" stainless steel bleed valve (bleed valve is bronze for V-Bar-600/60S only). Provides connections for mounting optional pressure transmitter (Model PT).

### Model PT Pressure Transmitter (Optional)

A pressure transmitter can be mounted using the 0.25" NPT connection on the bleed valve supplied with the meter, eliminating the need for a separate pressure tap. A 4 to 20 mA output, scaled to the desired pressure range, is provided. All pressure transmitters include a siphon tube, bleed valve, plug, nipple, and tee. A pressure transmitter is not available with 110/220 VAC power. See the PT TIS General Specifications for complete details.

### Temperature Sensor (RTD Option)

A 1000, 2-wire, platinum RTD can be mounted inside the stem of the flow meter probe, eliminating the need for a separate temperature tap.

### Temperature Transmitter (TXX option)

Includes the RTD option with an additional 4 to 20 mA output, scaled to the desired temperature range. A temperature transmitter is not available with 110/220 VAC power.

### Remote Mount Electronics (RMT Option)

30' (9.144 m) signal cable and U-bolts are provided with remote-mount electronics. Cable must be run in conduit (conduit not supplied). Conduit connection is 0.75" NPT Female (PG 13.5).

### Approvals

#### FM Approval (FM Option)

Certified by FM for Class I, Division 2, Groups A, B, C and D; Class II, III, Division 2, Groups F and G.

FM option is not available when using a 4 to 20 mA temperature transmitter or a 110/220 VAC power supply option. Use the RTD option only for temperature selection, if FM is required.

#### CSA Approval (CSA Option)

Certified by CSA for Hazardous Locations Class I, Division 2, Groups A, B, C and D; Class II, Division 2, Groups F and G; Class III.

CSA option is not available when using a 4 to 20 mA temperature transmitter or a 110/220 VAC power supply option. Use the RTD option only for temperature selection, if CSA is required.

FM or CSA are not available when using a pressure transmitter scaled 0 to 1000 psig or with a special scaling.

### Accessories

#### Gate Valve (Model 2GV) (For use with V-Bar-910/960 only)

Installation with a 2", double-flanged, raised-face, full-port gate valve enables the flow sensor to be inserted and removed from the pipe under full flow conditions. Both the valve and pipe tap must have a minimum 1.875" internal diameter clearance.

#### Flow Rectifier

A flow rectifier is recommended when there is insufficient straight pipe run or flow disturbance. When using a flow rectifier, the straight pipe run can be a combination of 5 pipe diameters upstream and 2 pipe diameters downstream, instead of the standard 10 and 5.

#### Flow Processors (FP-93)

A microprocessor-based flow processor can be used to significantly increase the accuracy and functionality of any flowmetering application. See the FP-93 TIS for complete details.

### Measurable Flow Rates

The following tables are for reference only. Measurable flow rates for your specific application are available using EMCOSIZE (downloadable at [www.emcoflow.com](http://www.emcoflow.com)).

**Water Minimum and Maximum Flow Rates<sup>1</sup>**

	3"	4"	6"	8"	12"	16"	24"
gpm	35 737	60 1,270	135 2,882	234 4,990	523 11,164	826 17,625	1,879 40,096

**Air Minimum and Maximum Flow Rates (SCFM)<sup>1</sup>**

pressure — psig (density lb/ft <sup>3</sup> )	3"	4"	6"	8"	12"	16"	24"
0 (0.0764)	79 924	136 1,591	308 3,611	533 6,253	1,193 13,991	1,883 22,089	4,284 50,250
50 (0.3368)	165 4,073	285 7,015	646 15,916	1,119 27,561	2,504 61,665	3,954 97,355	8,995 221,469
100 (0.5979)	220 7,229	380 12,452	861 28,253	1,491 48,923	3,337 109,461	5,268 172,814	11,984 393,129
150 (0.8600)	264 9,449	455 16,272	1,033 36,927	1,789 63,943	4,002 143,067	6,318 225,869	14,373 513,823
200 (1.1219)	302 10,792	520 18,589	1,180 42,175	2,043 73,030	4,571 163,400	7,216 257,971	16,415 586,851
300 (1.6480)	366 13,080	630 22,530	1,430 51,117	2,476 88,514	5,540 198,044	8,746 312,667	19,896 711,276
400 (2.1760)	420 15,030	724 25,889	1,643 58,736	2,845 101,709	6,365 227,567	10,050 359,276	22,862 817,305
500 (2.7054)	469 16,759	807 28,866	1,832 65,493	3,172 113,408	7,098 253,742	11,206 400,602	25,491 911,316

<sup>1</sup> Standard conditions of 60°F and 14.7 psia in schedule 40 pipe.

# V-Bar Insertion Vortex

## Models V-Bar-600/60S • V-Bar-700 • V-Bar-910/960

**Saturated Steam Minimum and Maximum Flow Rates (lb/h)<sup>1</sup>**

	3"	4"	6"	8"	12"	16"	24"
<b>0</b>	252	435	987	1,709	3,823	6,034	13,729
<b>(0.0373)</b>	2,069	3,563	8,087	14,004	31,333	49,468	112,534
<b>50</b>	506	871	1,976	3,421	7,654	12,085	27,491
<b>(0.1496)</b>	8,297	14,287	32,425	56,148	125,627	198,336	451,189
<b>100</b>	663	1,141	2,589	4,483	10,031	15,837	36,027
<b>(0.2570)</b>	14,250	24,538	55,688	96,431	215,758	340,632	774,893
<b>150</b>	787	1,356	3,078	5,327	11,919	18,817	42,805
<b>(0.3630)</b>	20,116	34,640	78,613	136,129	304,577	480,858	1,093,889
<b>200</b>	894	1,540	3,494	6,051	13,539	21,3774	48,624
<b>(0.4682)</b>	25,957	44,698	101,439	175,654	393,013	620,477	1,411,504
<b>300</b>	1,077	1,855	4,209	7,289	16,309	25,748	58,574
<b>(0.6794)</b>	37,667	64,862	147,200	254,895	507,308	900,386	2,048,260
<b>400</b>	1,235	2,127	4,826	8,357	18,698	29,520	67,154
<b>(0.8930)</b>	44,149	76,024	172,024	298,759	668,452	1,055,332	2,400,742
<b>500</b>	1,377	2,371	5,381	9,318	20,849	32,916	74,879
<b>(1.1102)</b>	49,228	84,770	192,380	333,129	745,351	1,176,739	2,676,927

<sup>1</sup> Standard conditions of 60°F and 14.7 psia in schedule 40 pipe.

**Natural Gas Minimum and Maximum Flow Rates (SCFM)<sup>1</sup>**

	3"	4"	6"	8"	12"	16"	24"
<b>0</b>	102	175	398	690	1,543	2,437	5,543
<b>(0.0457)</b>	924	1,588	3,611	6,253	13,991	22,089	50,250
<b>50</b>	217	368	848	1,468	3,284	5,185	11,795
<b>(0.2067)</b>	4,184	7,044	16,352	28,315	63,352	100,019	227,529
<b>100</b>	290	492	1,133	1,962	4,390	6,931	15,768
<b>(0.3695)</b>	7,478	12,588	29,223	50,603	113,221	178,750	406,634
<b>150</b>	341	588	1,334	2,309	5,166	8,157	18,555
<b>(0.5350)</b>	10,590	18,236	41,384	71,662	160,338	253,137	575,854
<b>200</b>	400	679	1,563	2,707	6,056	9,561	21,749
<b>(0.7030)</b>	14,227	23,945	55,600	96,279	215,417	340,094	773,669
<b>300</b>	488	829	1,908	3,304	7,392	11,671	26,550
<b>(1.475)</b>	17,455	29,623	68,212	118,117	264,278	417,235	949,156
<b>400</b>	565	959	2,209	3,824	8,557	13,510	30,732
<b>(1.4036)</b>	2,204	34,286	78,958	136,725	305,912	482,965	1,098,683
<b>500</b>	635	1,077	2,481	4,297	9,613	15,177	34,526
<b>(1.7715)</b>	22,698	38,513	88,705	153,603	343,676	542,586	1,234,312

<sup>1</sup> Standard conditions of 60°F and 14.7 psia in schedule 40 pipe.

**Note: Approximate specific gravity of natural gas = 0.61 and 0.8% N<sub>2</sub>**

### Straight Run Piping Requirements

	Upstream	Downstream
One 90° elbow before the meter	10 D	5 D
Two 90° elbows before the meter	15 D	5 D
Two 90° elbows out of plane before the meter	30 D	5 D
Reduction before the meter	10 D	5 D
Regulator or valve partially closed before the meter	30 D	5 D

D is equal to the internal diameter of the pipe.

If there is not sufficient straight run of pipe, a flow rectifier can be used to reduce the above lengths. Consult your local representative or the factory for your application.

# V-Bar Insertion Vortex

## Models V-Bar-600/60S • V-Bar-700 • V-Bar-910/960

### Other Installation Considerations

#### Tap Size

1.875" minimum diameter.

#### Mounting Position

V-Bar probes may be installed in vertical, horizontal, or angled pipe sections. The meter is attached perpendicular to the axis of the pipe and should not be mounted "upside-down" (with its top section hanging below the pipe mount). For liquid service, the fluid must completely fill the pipe.

#### Site Selection


The flow measurement location should be selected to minimize turbulence and swirl. The extent of these flow disturbances depends upon the piping configuration. Valves, elbows, pumps, and other piping components may add disturbances to the flow.

#### Hot Tap Compatibility


The V-Bar-600/60S is hot tap compatible, which means that the sensor can be installed and removed under full flow conditions. The V-Bar-910/960 is hot tap compatible when installed with a 2", double-flanged, full-port ball or gate valve that adheres to the dimensions of the gate valve on page 6.

### Dimensions and Weights


**V-Bar-600/60S**

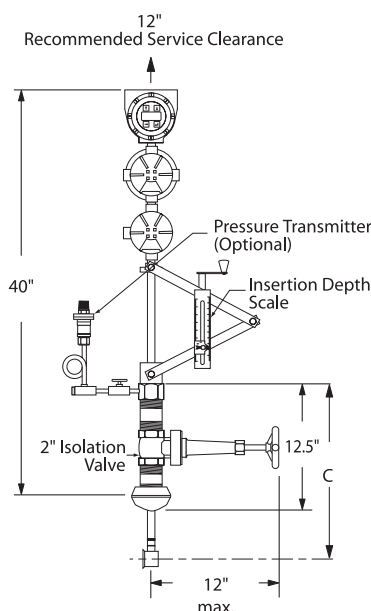

**V-Bar-700**

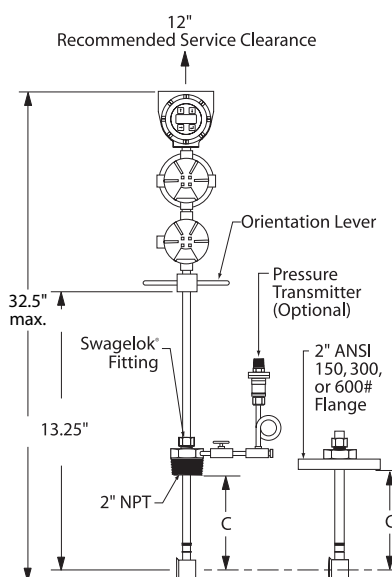

**V-Bar-910/960**

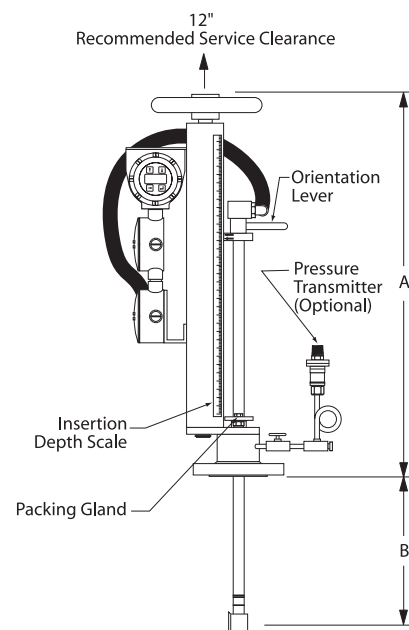

Dimensions	A	B	C
<b>Model 600/60S</b>			
2" NPT Connection	---	---	4.5" min 18" max
<b>Model 700</b>			
2" NPT Connection	---	---	3" min 10" max
2" 150# Connection	---	---	3" min 11.5" max
2" 300# Connection	---	---	3" min 11.25" max
2" 600# Connection	---	---	3" min 11" max
2" 900# Connection	---	---	3" min 10.75" max
<b>Model 910/960</b>			
Standard Stem Length	30"	1.5" min 20" max	---


Weight	
<b>Model 600/60S</b>	
2" NPT Connection	28 lb max
<b>Model 700</b>	
2" NPT Connection	9 lb
2" 150# Connection	12 lb
2" 300# Connection	14 lb
2" 600# Connection	16 lb
2" 900# Connection	20 lb
<b>Model 910/960</b>	
2" 150#	30 lb
2" 300#	35 lb
2" 600#	40 lb
2" 900#	47 lb




# V-Bar Insertion Vortex

## Models V-Bar-600/60S • V-Bar-700 • V-Bar-910/960


### Integral Electronics

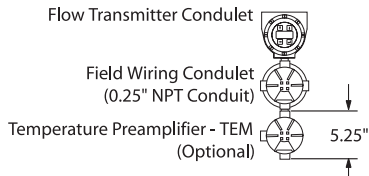


### Pipe Mount Remote Electronics

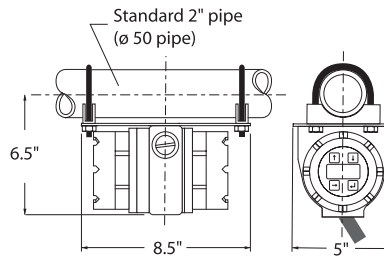


### Pipe Mount Remote Electronics

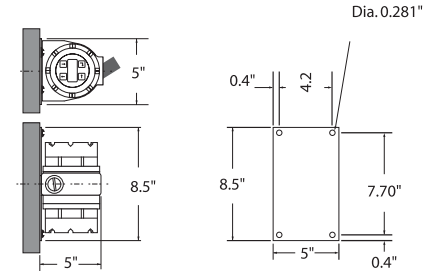

### Remote Electronics Configuration

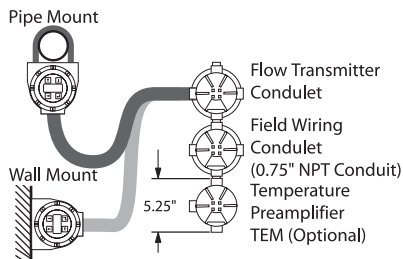

### Gate Valve

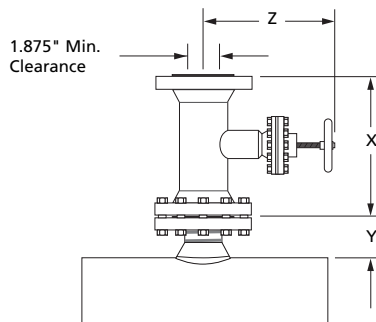

Gate valve is intended for use with the V-Bar-910/960 only.



Gate Valve Dimensions	X	Y	Z
2" 150#	7"	3.5"	15.325"
2" 300#	8.5"	3.75"	16.325"
2" 600#	11.5"	3.75"	17.875"

For flange kit, add 14 lb (6.4 kg) to weight.

## Wiring Diagrams


### VDC Power: Analog Output

Scalable 4 to 20 mA output, 2-wire principle. Load resistor may be installed on supply or return line.  $V_s = 18$  to 40 VDC. See graph below for permissible  $R_{load}$  values.

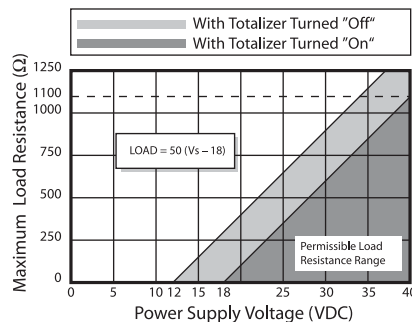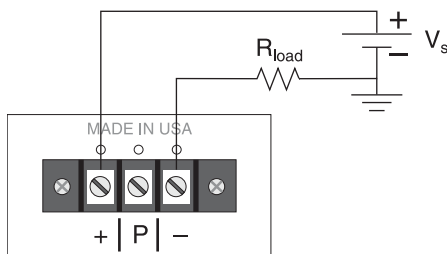

### VAC Power: Analog Output

Scalable 4 to 20 mA output, 2-wire principle. Load resistor may be installed on supply or return line.  $V_s = 110/220$  VAC.  $R_{load}$  must be less than 300  $\Omega$ .

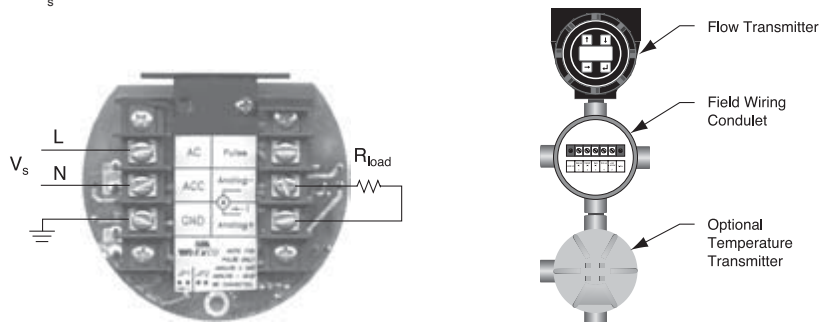


### VDC Power: Pressure and Temperature Transmitter Wiring

Remove the field wiring conduit cap to access the field wiring terminal block for power and signal wiring. Flow, pressure, and temperature output wiring connects to the terminal block. Refer to the previous section on 24 VDC power and signal wiring for appropriate load resistance and power supply values. Pressure and temperature transmitters are scaled to the appropriate ranges at the factory.

Maximum voltage with optional pressure transmitter is 30 VDC, and 110/220 VAC power supply is not available with pressure and/or temperature transmitters.

### Wiring with Analog Output:

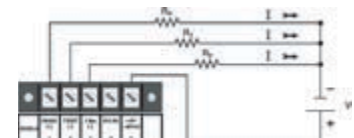

where:

$V_s = 18$  to 30 VDC  
 $R_p$  = Pressure measuring resistance  
 $R_t$  = Temperature measuring resistance  
 $R_f$  = Flow rate measuring resistance




# V-Bar Insertion Vortex

## Models V-Bar-600/60S • V-Bar-700 • V-Bar-910/960

### Remote-Mount Wiring Diagram

Output wiring from remote electronics is identical to output wiring from integral electronics. Wiring from the remote electronics conduit to the electrical junction box must be performed in the field. Connect the remote cable to the terminal block in the junction box as shown. If non-conductive conduit is used, attach a ground strap from the ground screw on the remote electronics conduit. If the remote cable is cut to a shorter length, insulate shield with tape at electrical junction box.

**If remote mounting is required with a pressure and/or temperature transmitter, two power supplies are required for operation: one for the remote flow transmitter and one for the pressure and/or temperature transmitter.**

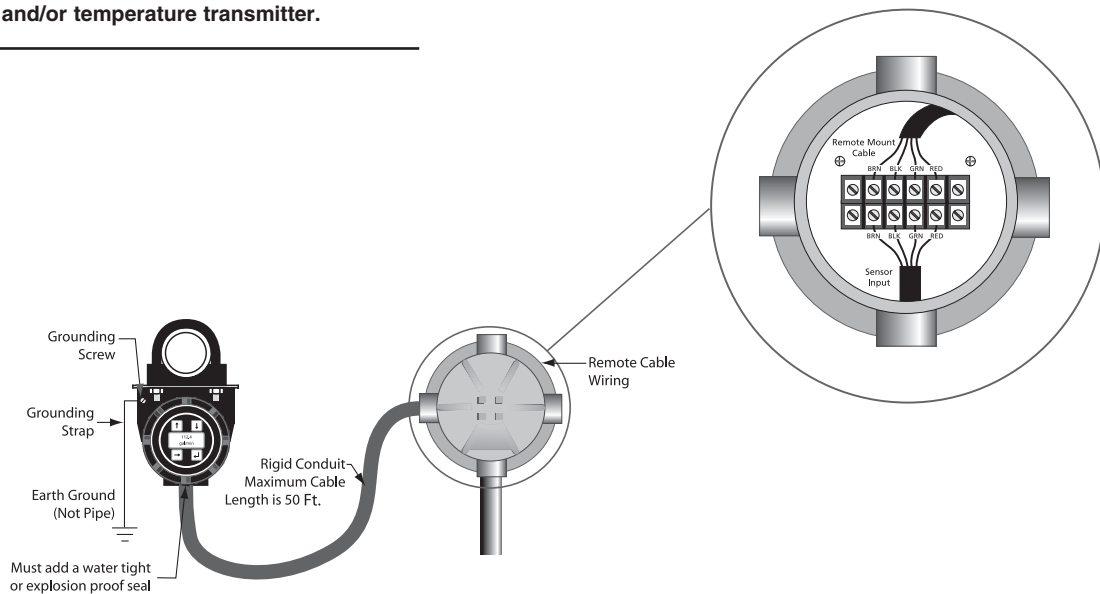

1 Special transmitter scaling is available. Please note scaling range below model code when ordering. If no special scaling is indicated, transmitter will be scaled per model code.

2 Unidirectional only. Unit has 4 to 20 mA and frequency output.

3 The standard remote option comes with 30' of cable.

4 Not available for use with pressure and temperature transmitters.

5 Certified by FM for Class I, Div. 2, Groups A, B, C, & D; Class II, III, Div. 2, Groups F & G; NEMA 4X. Not approved by FM when using a 4 to 20 mA temperature transmitter or a 110/220 VAC power supply option. If FM is required, use RTD option only for temperature selection. Pressure Transmitter 0 to 1000 psig or with special scaling not available with FM or CSA.

6 Certified by CSA for Class I, Div. 2, Groups A, B, C, & D; Class II, Div. 2, Groups F & G; Class III; Type 4X. Not approved by CSA when using a 4 to 20 mA temperature transmitter or a 110/220 VAC power supply option. If CSA is

required, use RTD option only for temperature selection. Pressure Transmitter 0 to 1000 psig or with special scaling not available with FM or CSA.

Please specify the following information with your order:

- Fluid type or composition
- Maximum, minimum, and normal operating flow rate
- Maximum, minimum, and normal operating temperatures
- Maximum, minimum, and normal operating pressures
- Specific weight and viscosity at normal operating conditions

# V-Bar Insertion Vortex

## Models V-Bar-600/60S • V-Bar-700 • V-Bar-910/960

### Models and Suffix Codes

Category	Suffix Codes				
<b>Model</b>					
Liquid or gas service, 400°F (204°C)	V-Bar-600				
Steam service, 400°F (204°C)	V-Bar-60S				
Liquid, gas, or steam service, 500°F (260°C)	V-Bar-700				
Liquid, gas, or steam service, 400°F (204°C)	V-Bar-910				
Liquid, gas, or steam service, 500°F (260°C)	V-Bar-960				
<b>Connection</b>					
2", male NPT (model 700)		2NPT			
2", 150# flange (model 700, 910, 960)		2F150			
2", 300# flange (model 700, 910, 960)		2F300			
2", 600# flange (model 700, 910, 960)		2F600			
2", 900# flange (model 700, 910, 960)		2F900			
Thread-o-let, xx = 03 to 80 inches (models 600, 60S) includes 2" isolation valve		VXX			
<b>Pressure Transmitter</b>					
No pressure transmitter			XX		
PT for pressure range 0 to 50 psig (0 to 3.44 barg)			50		
0 to 100 psig (0 to 6.89 barg) (model 600, 60S, 700, 910, 960)			100		
0 to 150 psig (0 to 10.34 barg) (model 600, 60S, 700, 910, 960)			150		
0 to 200 psig (0 to 13.79 barg) (model 600, 60S, 700, 910, 960)			200		
0 to 250 psig (0 to 17.24 barg) (model 700, 910, 960)			250		
0 to 500 psig (0 to 34.47 barg) (model 700, 910, 960)			500		
0 to 1000 psig (0 to 68.95 barg) (model 700, 910, 960)			1000		
Special scaling requests <sup>1</sup>			PXX		
<b>Temperature Sensor or Transmitter</b>					
No temperature transmitter				XXX	
Temperature sensor without preamplifier (RTD only)					
Teflon RTD internal wires - 40 to 400°F (- 40 to 204°C)				RTD-T	
Temperature sensor without preamplifier (RTD only)					
Fiberglass RTD internal wires 150 to 500°F (65 to 260°C) (models 700 and 960 only)				RTD-F	
Temperature sensor with preamplifier scaled from 32 to 68°F (0 to 20°C) (liquid/gas)				T09	
0 to 250°F (-18 to 121°C) (liquid/gas)				T10	
-40 to 150°F (-40 to 66°C) (liquid/gas)				T11	
212 to 400°F (100 to 204°C) (liquid/gas)				T12	
212 to 500°F (100 to 260°C) (steam) (model 700, 910, 960 only)				T14	
0 to 250°F (-17.7 to 121.1°C) (liquid/gas)				T20	
-40 to 149°C (-40 to 65°C) (liquid/gas)				T21	
212 to 400°F (100 to 204°C) (steam)				T22	
212 to 500°F (100 to 260°C) (liquid/gas) (model 700, 910, 960 only)				T24	
Special scaling requests <sup>1</sup>				TXX	
<b>Electronics</b>					
EZ-Logic with local rate and total <sup>2</sup>					LOC-TOT
Remote mount electronics <sup>3</sup>					RMT
FM Approval <sup>5</sup>					FM
CSA Approval <sup>6</sup>					CSA
Integral 110 VAC input <sup>4</sup>					110
Integral 220 VAC input <sup>4</sup>					220
	<b>V-Bar-600-</b>	<b>2NPT-</b>	<b>XX-</b>	<b>XXX-</b>	<b>LOC-TOT</b>

1 Special transmitter scaling is available. Please note scaling range below model code when ordering. If no special scaling is indicated, transmitter will be scaled per model code.

2 Unidirectional only. Unit has 4 to 20 mA and frequency output.

3 The standard remote option comes with 30' of cable.

4 Not available for use with pressure and temperature transmitters.

5 Certified by FM for Class I, Div. 2, Groups A, B, C, & D; Class II, III, Div. 2, Groups F & G; NEMA 4X. Not approved by FM when using a 4 to 20

mA temperature transmitter or a 110/220 VAC power supply option. If FM is required, use RTD option only for temperature selection. Pressure Transmitter 0 to 1000 psig or with special scaling not available with FM or CSA.

6 Certified by CSA for Class I, Div. 2, Groups A, B, C, & D; Class II, Div. 2, Groups F & G; Class III; Type 4X. Not approved by CSA when using a 4 to 20 mA temperature transmitter or a 110/220 VAC power supply option. If CSA is required, use RTD option only for temperature selection.

Pressure Transmitter 0 to 1000 psig or with special scaling not available with FM or CSA.

Please specify the following information with your order:

- Fluid type or composition
- Maximum, minimum, and normal operating flow rate
- Maximum, minimum, and normal operating temperatures
- Maximum, minimum, and normal operating pressures
- Specific weight and viscosity at normal operating conditions


TI-8-602-US 12.08

## Turbo-Bar Insertion Turbine Models TMP-600/60S • TMP-700 • TMP-910/960

### Description

Turbo-Bar insertion flow meters have three main components: the retractor, the rotor, and the electronics. The retractor positions the rotor within the pipe and houses a pick-up assembly, which detects the rotation of the turbine rotor. The electronics converts the rotational frequency, which is proportional to the velocity of the fluid, to industry standard electrical output signals.

Most Turbo-Bar flow meters can be installed on an isolation valve, which permits installation and removal without process shutdown. Integral pressure and/or temperature measurement may be combined with the Turbo-Bar and flow processor to provide mass or energy flow measurement from a single pipe tap.

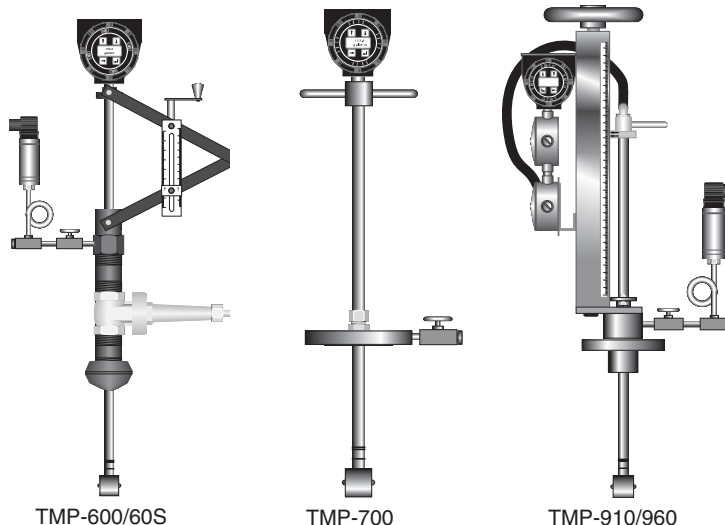

### Features

- Fluid types: liquid, gas, or steam
- Pipe sizes: 3 to 80"
- Rugged construction
- Interchangeable rotors for a wide variety of applications
- Process pressure up to 5000 psig (345 barg)
- Process temperatures up to 750°F
- Industry standard frequency and/or 4 to 20 mA output signals
- Optional integral pressure and/or temperature measurement
- Negligible head loss
- EZ-Logic™ menu-driven user interface (microprocessor-based)
- Linearization with EZ-Logic for enhanced accuracy at low velocities
- Local programming via EZ-Logic keypad or magnet wand through explosion-proof enclosure

### Application Guide

Model	Liquid	Gas	Steam	Hot Tap	Temperature Range °F	Maximum Pressure¹ psi	Seal Type	Line Sizes² inches
600	yes	yes	no	yes	-40 to 400	125	Viton®	3 to 80
60S	no	no	yes	yes	-65 to 400	125	E/P³	3 to 80
700	yes	yes	yes	no⁵	-200 to 600	2000⁴	Swagelok®	3 to 80
910	yes	yes	yes	yes	-200 to 400	flange rating	Teflon®	3 to 80
960	yes	yes	yes	yes	-200 to 750	flange rating	Grafoil®	3 to 80

#### Note:

- 1 Maximum pressure at maximum temperature with appropriate connection.
- 2 In some cases, especially in large pipe sizes, a one or two foot stem extension may be required (See dimensional outlines).
- 3 Ethylene-Propylene elastomer.
- 4 Rating listed is for NPT connection. For flange connections, use ANSI flange rating.
- 5 The TMP-700 is a fixed insertion meter; it cannot be removed or installed under pressure.

# Turbo-Bar Insertion Turbine

## Models TMP-600/60S • TMP-700 • TMP-910/960

### Operating Specifications

#### Measurable Velocity Limits

See Rotor Selection Guide, p. 4, for linear and measurable ranges of available rotors. Continuous operation above the maximum velocity will shorten the life of the rotor and is not recommended.

#### Process Viscosity

Maximum 5 centipoise

#### Ambient Temperature Limit

*EZ-Logic Electronics*

- 32 to 140°F

*All Other Electronics*

- -20 to 140°F

#### Ambient Humidity Limit

0 to 100% relative humidity non-condensing

#### Power Requirements

*EZ-Logic Electronics*

- 18 to 40 VDC (with totalizer on), 24 VDC nominal
- 12 to 40 VDC (with totalizer off), 24 VDC nominal

#### Output Signals

*EZ-Logic Electronics (LOC-TOT Option)*

#### Analog

4 to 20 mA, 2-wire system, digitally adjusted span

#### Frequency

3-wire system, 1 to 10,000 Hz square wave, 50% duty cycle.

- Low Level: 0 to 1 volts
- High Level: power supply voltage-load

#### Pulse

3-wire system. Output can be scaled so that 1 pulse indicates a specific quantity of fluid passing through the pipe.

#### Hart® Communications Protocol

#### Display

2-line by 8-character LCD digital display alternately show flow rate and totalized flow in user-selectable engineering units.

### Performance Specifications

#### Accuracy (Linear Ranges)

L1, G1–G5 Rotors

±1.0% of reading

G6 Rotor

±3.0% of reading

#### Repeatability (Linear Range)

±0.25% of reading

#### Rotor Velocity Calibration

Each rotor is factory calibrated in either water or air. Calibration is traceable to NIST.

#### Accuracy of the Calibration Standard (Linear Range)

Water

±0.25% of reading

Air

±0.8% of reading

### Physical Specifications

#### Materials

Rotor

Blades: 17– 4 PH, ten blade, precision machined

Housing: 316 stainless steel

Pivots: tungsten carbide

Rotor Bearing Type

Liquid: CSJ stellite jewel

Gas or Steam: DEV tungsten carbide

Wetted Parts

316L stainless steel stem and housing (bronze and carbon steel housing TMP-600/60S)

External Parts

Aluminum, 316 stainless steel, carbon steel (bronze and carbon steel on TMP-600/60S, TMP- 910/960)

#### Electrical Connection

Junction box with terminal block for external wiring. 0.75" female NPT connection for conduit.

#### Electrical Enclosure

383 aluminum. Approved for NEMA 4X for watertight and dust tight requirements

#### Sensor

Electromagnetic pick-up, 10 mVp-p minimum, 330  $\Omega$  nominal resistance.

#### Retractor Type

TMP-600/60s

Screw thread, rising stem

TMP-700

Not retractable

TMP-910/960

Acme thread, non-rising stem

#### Extended Length Stem (Optional)

*Use of the two foot extension is limited to gas applications only.*

Longer stems are available for large pipe sizes or when the mounting dimensions exceed the insertion capability. Extended stems are not available for the TMP-600/60S.

#### Process Connection

TMP-600/60S

2" NPT

TMP-700

2" NPT

2" 150#, 300#, 600# or 900# ANSI raised face flange

TMP-910/960

2" 150#, 300#, 600# or 900# ANSI raised face flange

# Turbo-Bar Insertion Turbine

## Models TMP-600/60S • TMP-700 • TMP-910/960

### Isolation Valve (TMP-600/60S only)

2" full-port bronze gate valve, 125 psig (8.62 barg) maximum. For TMP-910/960, see Accessories.

### Pressure Tap and Bleed Valve

Standard 1/4" NPT pipe nipple with 1/4" stainless steel bleed valve. Provides connections for mounting optional pressure transmitter (Model PT).

### Model PT Pressure Transmitter (Optional)

A pressure transmitter can be mounted using the 1/4" NPT connection on the bleed valve supplied with the meter, eliminating the need for a separate pressure tap. A 4 to 20 mA output, scaled to the desired pressure range, is provided. All pressure transmitters include a siphon tube, bleed valve, plug, nipple, and tee. A pressure transmitter is not available with 110/220 VAC power. See the PT TIS for complete details.

### Temperature Sensor (RTD Option)

A 1000  $\Omega$ , platinum RTD can be mounted inside the stem of the flow-meter probe, eliminating the need for a separate temperature tap.

### Temperature Transmitter (TXX Option)

## Accessories

### Gate Valve (Model 2GV) - (for Use with TMP-910/960 Only)

Installation with a 2" double flanged, raised-face, full port gate valve enables the flow sensor to be inserted and removed from the pipe under full flow conditions. Both the valve and pipe tap must have a minimum 1.875" internal diameter clearance.

Includes the RTD option with an additional 4 to 20 mA output, scaled to the desired temperature range. A temperature transmitter is not available with 110/220 VAC power and is not CE approved.

### Remote Mount Electronics (RMT Option)

30 ft signal cable and U-bolts are provided with remote mount electronics. Cable must be run in conduit (conduit not supplied). Conduit connection is 3/4" NPT.

**Note: Remote mount electronics are only available with EZ-Logic electronics (LOC-TOT Option).**

### FM Approval (FM Option)

Certified by FM for Class I, Division 2, Groups A, B, C and D; Classes II, III, Division 2, Groups F and G NEMA 4X locations.

**Note: FM not available when used with 4 to 20 mA temperature transmitter, a pressure transmitter 0 to 1000 psig, or special scaled pressure transmitter.**

### Flow Processor (Model FP-93)

A microprocessor-based flow processor may be used to significantly increase the accuracy and functionality of any flow metering application. See the FP-93 TIS for complete details.

## Straight Run Piping Requirements

	Upstream	Downstream
One 90° elbow before the meter	10 D	5 D
Two 90° elbows before the meter	15 D	5 D
Two 90° elbows out of plane before the meter	30 D	5 D
Reduction before the meter	10 D	5 D
Regulator or valve partially closed before the meter	30 D	5 D

D is equal to the internal diameter of the pipe.

If there is not sufficient straight run of pipe, a flow rectifier may be used to reduce the above diameter measurements.

Consult your local representative or the factory for your specific application.

## Other Installation Considerations

### Tap Size

1.875" minimum diameter.

### Mounting Position

Turbo-Bar probes may be installed in vertical, horizontal, or angled pipe sections. The meter is attached perpendicular to the axis of the pipe and should not be mounted "upside-down" (with its top section hanging below the pipe mount). For liquid service, the fluid must completely fill the pipe.

### Site Selection

The flow measurement location should be selected to minimize turbulence and swirl. The extent of these flow disturbances depends upon the piping configuration. Valves, elbows, pumps, and other piping components may add disturbances to the flow.

### Hot Tap Compatibility

The TMP-600/60S is hot tap compatible, which means that the sensor can be installed and removed under full flow conditions. The TMP-910/960 is hot tap compatible when installed with a 2" double flanged, full port ball or gate valve that adheres to the dimensions shown on page 5.


TI-8-603-US 4.09

# Turbo-Bar Insertion Turbine


## Models TMP-600/60S • TMP-700 • TMP-910/960

### Rotor Selection Guide

G6 (1" rotor)



G1 through G5,  
L1 (1.5" rotor)



Selection of the turbine rotor model depends upon the fluid type and operating velocity range of the fluid.

- For all liquids, the model L1 rotor, with a maximum velocity of 30 ft/sec, must be used.
- For gases and steam, six different rotors are available with maximum velocities ranging from 55 to 175 ft/sec. See Table for maximum velocity limits ( $V_{max}$ ) for all rotors.

The turbine rotor typically will respond linearly over the velocity range from  $V_{min}$  to  $V_{max}$  – within  $\pm 1.0\%$  (3.0% for G6 rotor). This is defined as the “linear” range of the rotor. The minimum “measurable” velocity ( $V_{min}$ ) can be considered the application minimum. Velocities from  $V_{min}$  to  $V_{max}$  are measurable and repeatable, but less accurate.

When determining the fluid velocity limits for a given rotor, the following equations can be used to compute fluid velocity.

#### Average Fluid Velocities

Fluid	
Liquid	$0.4085 \frac{Q_L}{D^2}$
Gas	$3.056 \frac{Q_G}{D^2}$
Steam	$0.051 \frac{M}{p D^2}$
Where:	
V = average fluid velocity	ft/sec
D = pipe inside diameter	in
Q <sub>L</sub> = liquid volumetric flow	gal/min
Q <sub>G</sub> = gas actual volumetric flow	ft <sup>3</sup> /min
M = mass flow rate	lb/h
ρ = fluid density	lb/ft <sup>3</sup>

Liquid Minimum and Maximum Velocity Rates								
Rotor	Flow Units	All Sizes	3 to 5"		6"		8+"	
		$V_{max}$	$V_{min}$	$V_{min}$	$V_{min}$	$V_{min}$	$V_{min}$	$V_{min}$
L1	ft/sec	30	1.4	0.5	1.5	0.6	1.6	0.7

Gas or Steam Minimum and Maximum Velocity Rates (ft/sec)							
Rotor	All Sizes	3–5 in.		6 in.		8+ in.	
		$V_{max}$	$V_{in}$	$V_{min}$	$V_{in}$	$V_{min}$	$V_{in}$
G1 40° pitch	55	$3.19/\sqrt{\rho}$	$1.94/\sqrt{\rho}$	$2.00/\sqrt{\rho}$	$1.23/\sqrt{\rho}$	$1.50/\sqrt{\rho}$	$1.00/\sqrt{\rho}$
G2 30° pitch	70	$3.98/\sqrt{\rho}$	$2.26/\sqrt{\rho}$	$2.27/\sqrt{\rho}$	$1.63/\sqrt{\rho}$	$1.90/\sqrt{\rho}$	$1.31/\sqrt{\rho}$
G3 20° pitch	85	$4.52/\sqrt{\rho}$	$2.42/\sqrt{\rho}$	$2.52/\sqrt{\rho}$	$1.95/\sqrt{\rho}$	$2.18/\sqrt{\rho}$	$1.40/\sqrt{\rho}$
G4 15° pitch	115	$5.84/\sqrt{\rho}$	$3.85/\sqrt{\rho}$	$3.78/\sqrt{\rho}$	$2.84/\sqrt{\rho}$	$3.00/\sqrt{\rho}$	$2.19/\sqrt{\rho}$
G5 10° pitch	145	$6.91/\sqrt{\rho}$	$4.57/\sqrt{\rho}$	$4.78/\sqrt{\rho}$	$3.47/\sqrt{\rho}$	$3.54/\sqrt{\rho}$	$2.81/\sqrt{\rho}$
G6 5° pitch	175	$6.10/\sqrt{\rho}$	N/A	$5.53/\sqrt{\rho}$	N/A	$5.00/\sqrt{\rho}$	N/A

**Note: Rotors have moving parts that require periodic maintenance.**

**Note:** All values in the above table are approximate and depend on the density of the fluid. Accuracy in both the linear and nonlinear ranges may be improved by using the advanced curve fitting techniques present in the FP-93 flow processors or the EZ-Logic electronics. Consult your local representative if your application falls outside the above limits.

- $V_{max}$  = maximum velocity of fluid [ft/sec]
- $V_{min}$  = minimum velocity of fluid at which rotor response is linear [ft/sec]
- $V_{min}$  = minimum measurable velocity of fluid [ft/sec]
- ρ = density of fluid [lb/ft<sup>3</sup>]
- N/A = not applicable

**Note: Measurable flow rates for your specific application are available using EMCOSIZE (downloadable at [www.emcoflow.com](http://www.emcoflow.com)).**


# Turbo-Bar Insertion Turbine

## Models TMP-600/60S • TMP-700 • TMP-910/960


### Dimensions and Weights

*Dimensions are in inches*

#### TMP-600/60S

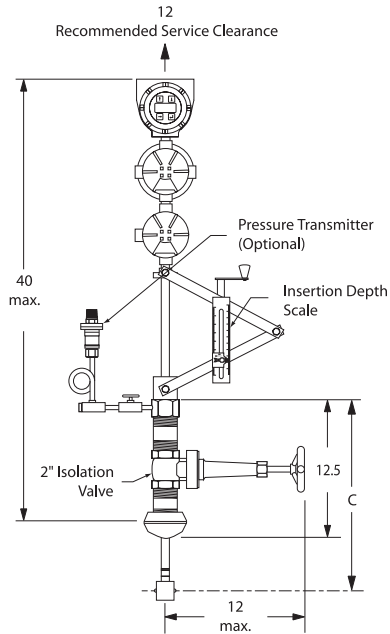


#### TMP-700

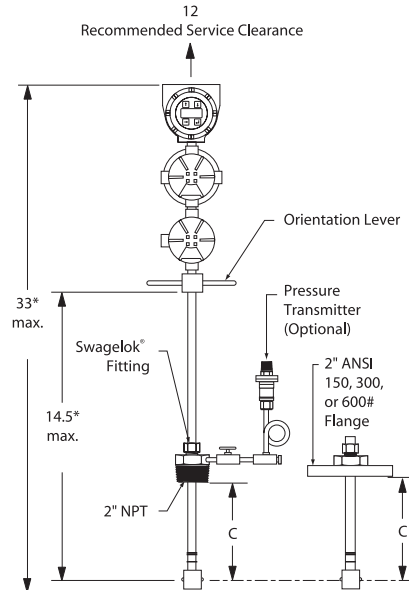

\* Add 12" for each additional foot of retractor length.

#### TMP-910/960

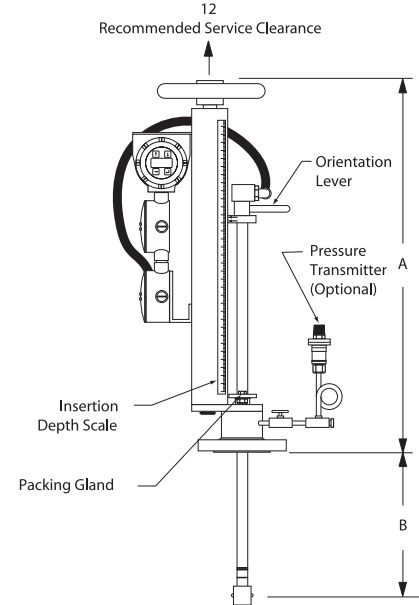

\* Add 12" for each additional foot of retractor length.


Dimensions		
Model	Connection	C inches
600/60S	2" NPT	4.5 min
		18 max
700	2" NPT	3 min
		11.25 max
	2" 150#	3 min
		12.75 max
	2" 300#	3 min
		12.5 max
	2" 600#	3 min
		12.25 max
	2" 900#	3 min
		12 max

Weight		
Model	Connection	Weight lb
600/60S	2" NPT	28 max
		9
700 <sup>1</sup>	2" 150#	12
	2" 300#	14
	2" 600#	16
	2" 900#	20
910/960 <sup>2</sup>	2" 150#	30
	2" 300#	35
	2" 600#	40
	2" 900#	47

1 Add 2.5lb for each additional foot of retractor length.  
2 Add 5 lb for each additional foot of retractor length.

Dimensions			
Model	Stem Length	B inches	A inches
910/960	Standard	1.5 min 20 max	30

### Gate Valve

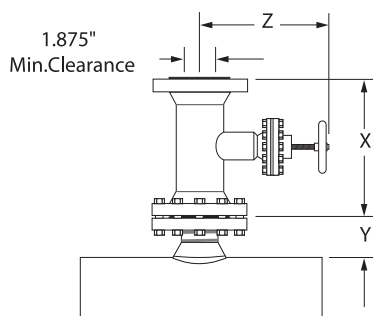

Type	X inches	Y inches	Z inches
150#	7	3.5	15.325
300#	8.5	3.75	16.325
600#	11.5	3.75	17.875

Type	Weight lb
2" 150#	46
2" 300#	58
2" 600#	84


TI-8-603-US 4.09




# Turbo-Bar Insertion Turbine

## Models TMP-600/60S • TMP-700 • TMP-910/960



### Integral Electronics

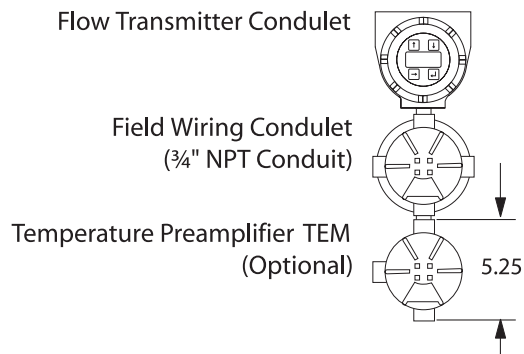

### Pipe Mount Remote Electronics

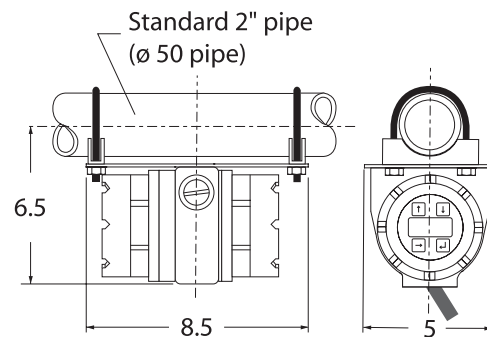



### Remote Electronics Configuration

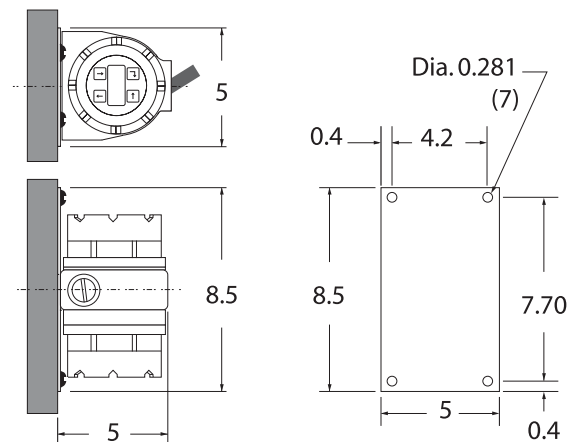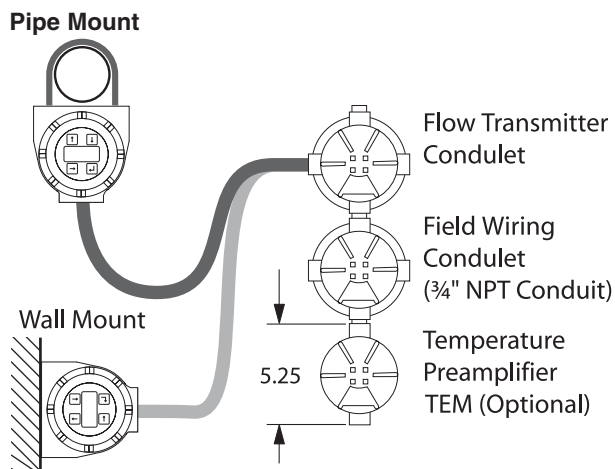

### Wiring Diagrams


#### EZ-Logic Electronics: Analog Output

Scalable 4 to 20 mA output, 2-wire principle. Load resistor may be installed on supply or return line.  $V_s = 18$  to 40 VDC. See graph below for permissible  $R_{load}$  values.

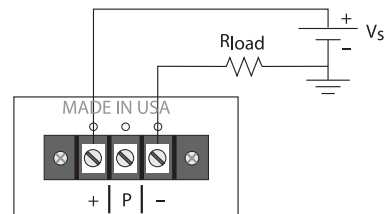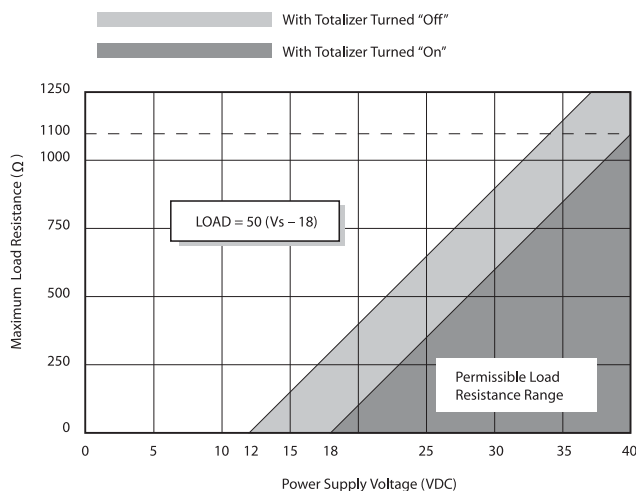

#### EZ-Logic Electronics: Pulse Output

3 wire system. Output can be scaled so that 1 pulse indicates a specific quantity of fluid passing through the pipe.  $V_s = 18$  to 40 VDC.

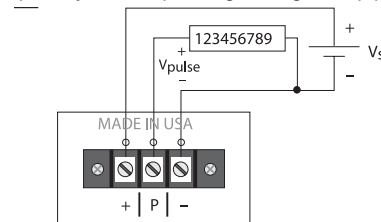


# Turbo-Bar Insertion Turbine

## Models TMP-600/60S • TMP-700 • TMP-910/960

### Pressure and Temperature Transmitter Wiring

Remove the field wiring conduit cap to access the field wiring terminal block for power and signal wiring. Flow, pressure, and temperature output wiring connects to the terminal block. Refer

to the previous section on 24 VDC power and signal wiring for appropriate load resistance and power supply values. Pressure and temperature transmitters are scaled to the appropriate ranges at the factory.

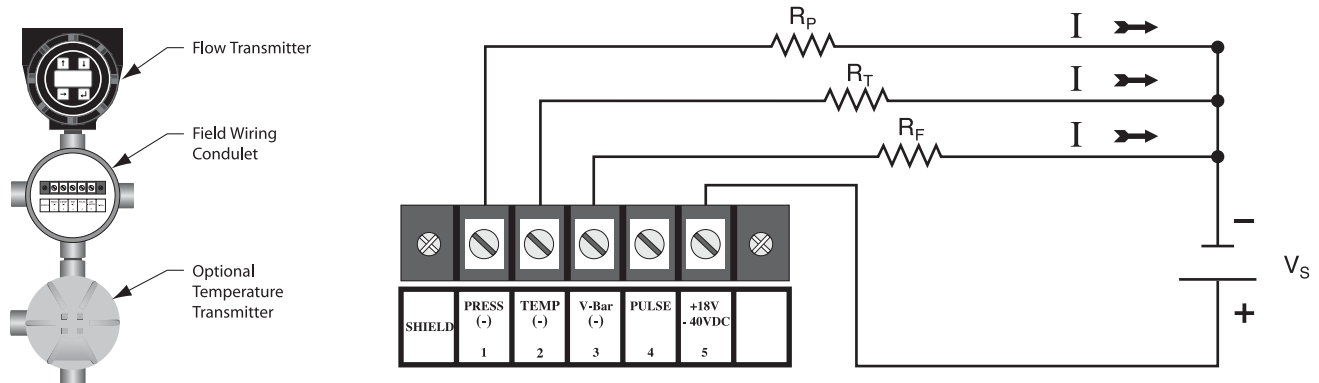



**Note:** Maximum voltage with optional pressure transmitter is 30 VDC and 110/220 VAC power supply is not available with pressure and/or temperature transmitters.

### Wiring with Analog Output

where:  $V_s = 18$  to 30 VDC  
 $R_P$  = Pressure measuring resistance  
 $R_T$  = Temperature measuring resistance  
 $R_F$  = Flow rate measuring resistance

### Remote Mount Wiring Diagram (Only Available with EZ-Logic Electronics)

Output wiring from remote electronics is identical to output wiring from integral electronics. Wiring from the remote electronics conduit to the electrical junction box must be performed in the field. Connect the remote cable to the terminal block in the junction box as shown. If nonconductive conduit is used, attach a ground strap from the ground screw on the remote electronics conduit. If the remote cable is cut to a shorter length, insulate shield with tape at electrical junction box.

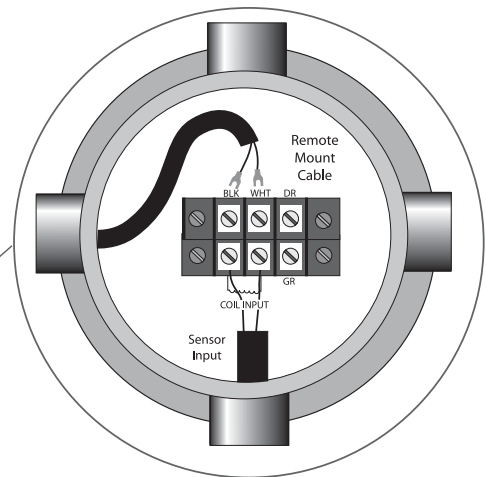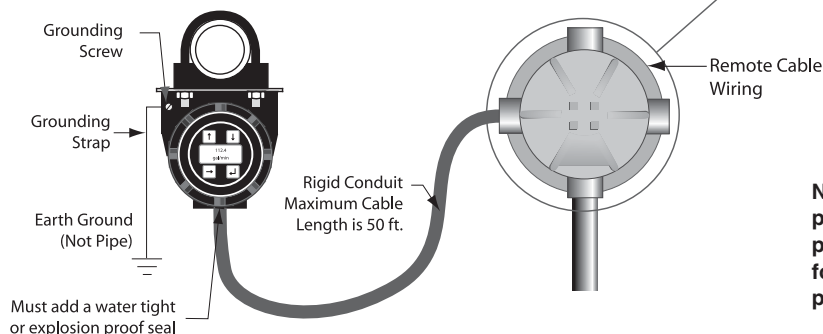

**Note:** If remote mounting is required with a pressure and/or temperature transmitter, two power supplies are required for operation: one for the remote flow transmitter and one for the pressure and/or temperature transmitter.

# Turbo-Bar Insertion Turbine

## Models TMP-600/60S • TMP-700 • TMP-910/960

Category	Suffix Codes							
<b>Model</b>								
Liquid or gas service, 400°F	TMP-600							
Steam service, 400°F	TMP-60S							
Liquid, gas, or steam service, 600°F	TMP-700							
Liquid, gas, or steam service, 400°F	TMP-910							
Liquid, gas, or steam service, 750°F <sup>7</sup>	TMP-960							
<b>Connection</b>								
2", male NPT (model 700)		2NPT						
2", 150# flange (model 700, 910, 960)		2F150						
2", 300# flange (model 700, 910, 960)		2F300						
2", 600# flange (model 700, 910, 960)		2F600						
2", 900# flange (model 700, 910, 960)		2F900						
Thread-o-let, xx = 3 to 80 inches (models 600, 60S) includes 2" isolation valve		VXX						
<b>Rotor</b>								
Liquid, 30 ft/sec maximum (9 m/sec) (40° pitch)		L1						
Gas or steam, 55 ft/sec maximum (40° pitch)		G1						
Gas or steam, 70 ft/sec maximum (30° pitch)		G2						
Gas or steam, 85 ft/sec maximum (20° pitch)		G3						
Gas or steam, 115 ft/sec maximum (15° pitch)		G4						
Gas or steam, 145 ft/sec maximum (10° pitch)		G5						
Gas or steam, 175 ft/sec maximum (5° pitch) <sup>1</sup>		G6						
<b>Electronics</b>								
EZ-Logic with local rate and total <sup>3</sup>				LOC-TOT				
Remote, only available with LOC-TOT option <sup>4</sup>				RMT				
FM Approval <sup>5</sup>				FM				
<b>Pressure Transmitter</b>								
No pressure transmitter					XX			
PT for pressure range 0 to 50 psig (0 to 3.44 barg)					50			
0 to 100 psig (0 to 6.89 barg) (models 600/60S, 700, 910/960)					100			
0 to 150 psig (0 to 10.34 barg) (models 600/60S, 700, 910/960)					150			
0 to 200 psig (0 to 13.79 barg) (models 600/60S, 700, 910/960)					200			
0 to 250 psig (0 to 17.24 barg) (models 700, 910/960)					250			
0 to 500 psig (0 to 34.47 barg) (models 700, 910/960)					500			
0 to 1000 psig (0 to 68.95 barg) (models 700, 910/960)					1000			
Special scaling requests <sup>6, 2</sup>					PXX			
<b>Temperature Sensor or Transmitter</b>								
No temperature transmitter					XXX			
RTD only					RTD			
Temperature sensor with preamplifier scaled from 32 to 68°F <sup>2</sup>					T09			
0 to 250°F <sup>2</sup>					T10			
-40 to 150°F <sup>2</sup>					T11			
212 to 400°F <sup>2</sup>					T12			
212 to 800°F (models 700, 960) <sup>2</sup>					T13			
-17.7 to 121.1°C <sup>2</sup>					T20			
-40 to 65°C <sup>2</sup>					T21			
100 to 204°C <sup>2</sup>					T22			
100 to 260°C (models 700, 910/960) <sup>2</sup>					T23			
Special scaling requests <sup>6, 2</sup>					TXX			
<b>Extended Stem</b>								
None (standard length)						XX		
1' extension (not available for models 600/60S)						E1		
2' extension (gas/steam applications only) (not available for models 600/60S)						E2		
<b>Pick-up Coil Wires</b>								
TMP-700 Only: Teflon®, - 200 to 400°F								T
TMP-700 Only: Fiberglass, 150 to 600°F <sup>7</sup>								F
	<b>TMP-700-</b>	<b>2F900-</b>	<b>G3-</b>	<b>LOC-TOT-</b>	<b>200-</b>	<b>T12-</b>	<b>E1-</b>	<b>T</b>

This example represents a liquid, gas, or steam Turbo-Bar TMP-700 at 600°F, 2" 900# flange connection, 85 ft/sec gas or steam rotor, EZ-Logic electronics, 0 to 200 psig pressure transmitter, 212 to 400°F temperature sensor, 1' extended stem, and Teflon® coil wires.

- The G6 is the only available 1" shrouded rotor. Not available for use with bidirectional meters.
- Not available with European CE Mark.
- Unidirectional only. Unit has 4 to 20 mA and frequency output.
- Remote mount electronics are required for high process temperatures. The standard remote mount option comes with 30 feet (9.1 meters) of cable.

- Certified by FM for Class I, Div. 2, Groups A, B, C, & D; Class II, III, Div. 2, Groups F & G; NEMA 4X. FM approval with only LOC-TOT and RMT electronics options. If FM is required, use RTD option only for temperature selection. 0 to 1000 psia and special sealing pressure transmitter not available with FM.
- Special transmitter scaling is available. Please note scaling range below model code with ordering. If no special scaling is indicated, transmitter will be scaled per model code.
- Not available with FM approval.

**Please specify the following information with your order:**

- Fluid type or composition
- Maximum, minimum, & normal operating flow rate
- Maximum, minimum, & normal operating temperatures
- Maximum, minimum, & normal operating pressures
- Specific weight & viscosity at normal operating conditions

TI-8-603-US 4.09

## FP-93 Flow Processor

### Description

The FP-93 is a microprocessor-based instrument that is designed to monitor a variety of flows within industrial environments. The single-board design enables high reliability in a low cost form factor. Pressure and/or temperature compensation and an 8-point flow calibration curve may be used to further enhance performance. Diagnostic routines constantly monitor the FP-93's performance, automatically displaying any detection of a fault. The FP-93 features a backlit display that is readable in all lighting conditions. An industrial rated NEMA 4 enclosure is available for protection against harsh environments.

### Features

- Displayed values with description and user-selectable, engineering units
- Non-volatile memory for programmed data
- Battery-backed memory for statistical values and totalizers
- Self-diagnostics and operational alarm monitoring
- 16-bit resolution A/D converter for superb analog accuracy
- Isolated outputs for digital and analog control
- Backlit display option for viewing in all lighting conditions
- Light weight and low power consumption
- EIA R232C compatible communications interface
- Panel mount unit or optional NEMA 4 enclosure

### Benefits


- Calculates volume, mass, and heat flow for steam, liquid, and gas
- Single-board design for low cost and high reliability



### Dimensions and Weights


Dimensions are in inches

#### Panel Mount Enclosure

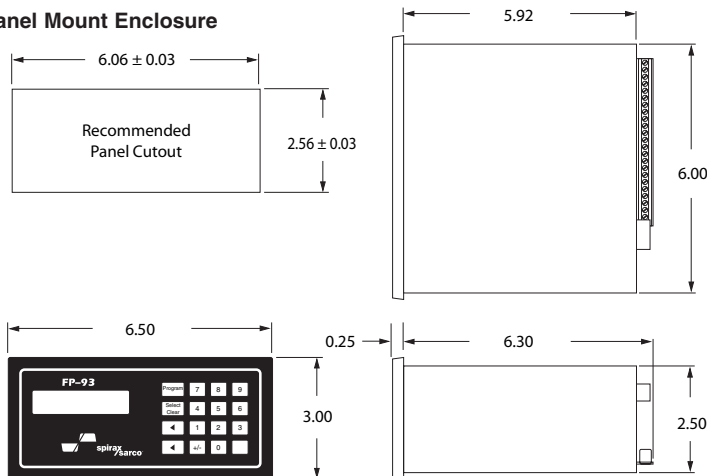

Weight 1.25 lb

#### NEMA 4 Enclosure

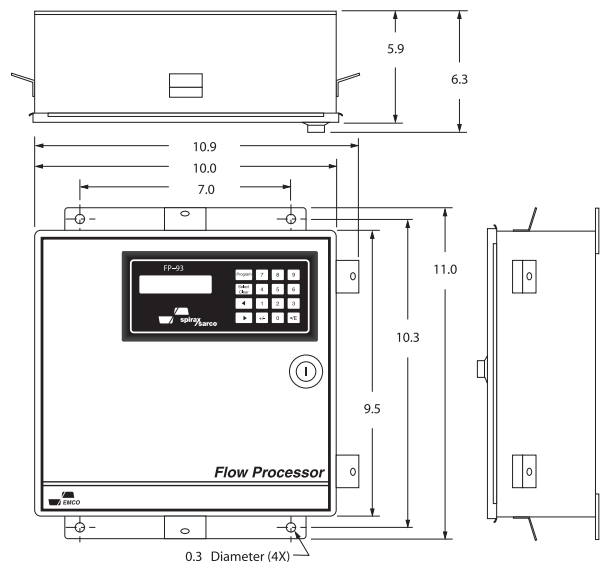

Weight 15.0 lb

Local regulation may restrict the use of this product below the conditions quoted. Limiting conditions refer to standard connections only.  
In the interests of development and improvement of the product, we reserve the right to change the specification.

# FP-93 Flow Processor

## Operating Specifications

<b>Fluid Types</b>	Steam condensate, water, water energy, liquid, air, natural gas, ideal gas, steam	
<b>Storage Temperature</b>	-40 to 140°F	
<b>Operating Temperature</b>	32 to 122°F	
<b>Relative Humidity</b>	0 to 95% (non-condensing)	
<b>Power Requirement</b>	The FP-93 power supply, 24 VDC $\pm 5\%$ at 150 mA, is used for powering external transmitters.	
Standard	10.5 to 36 VDC, 100 mA maximum	
Option 1	115 VAC $\pm 15\%$ @ 50/60 Hz	
Option 2	230 VAC $\pm 15\%$ @ 50/60 Hz	
	2 x 3 x 1.75" with 6' cords	
	VAC Power Weight—1.25 lb	
<b>Input Signals</b>		
One Frequency	Range 0 to 10 kHz	
	Accuracy $\pm(0.01\%$ of reading + 1 count)	
	Impedance 50 k $\Omega$ minimum	
	Transition Level +3 volts nominal	
	Hysteresis 0.25 volts	
	Signal Amplitude 4 to 36 VDC	
One Direction	Impedance 50 k $\Omega$ minimum	
	Transition Level +3 volts nominal	
	Hysteresis 0.25 volts	
	Signal Amplitude $\pm 36$ volts maximum	
	One 4-Wire RTD Resistance	Range 10 to 4000 $\Omega$
		Resolution—the greater of 0.05% of reading or 0.1 $\Omega$
	Accuracy	10 to 100 $\Omega$ $\pm 0.15$ $\Omega$
		100 to 2000 $\Omega$ $\pm 0.15\%$ of reading
		100 to 4000 $\Omega$ $\pm 0.2\%$ of reading (extended range)
Two Analog (4 to 20 mA) Current	Resolution 0.4 $\mu$ A	
	Accuracy $\pm 0.15\%$ of full scale ( $\pm 30$ $\mu$ A)	
	Impedance 100 $\Omega$	
	Alarm Limits	Overrange 21.6 mA
		Underrange 2.4 mA
<b>Output Signals</b>		
One Isolated 4 to 20 mA Current	Voltage Range 15 to 40 VDC	
	Resolution 6 $\mu$ A	
	Accuracy $\pm 0.25\%$ of full scale ( $\pm 50$ $\mu$ A)	
One Isolated Solid-State Relay	A maximum up to 60 VDC	
<b>Communications</b>		
Compatibility	EIA R232C	
Multi-Drop Capability	Up to 10 units on a single R232C port (RS423 compatible)	
Programmable Baud Rate	300, 600, 1200, 2400, 4800, 9600, 19200, or 38400 baud	
Data Bits	7 or 8	
Parity	Even, odd, or none	
Stop Bits	1 or 2	
Connector	Chassis mounted 9-pin D-subminiature	

The analog input can be configured for flow input in all applications except BTU measurements with two RTD temperature inputs. For BTU measurements, select frequency input for flow.

# FP-93 Flow Processor

## FP-93 Programmed Constants

Column #1	Column #2	Column #3	Column #4 Fluid Parameters	Column #5 Totalizer	Column #6 Analog Output	Column #7 Relay Output	Column #8 Displayed Values	Column #9 Display Units	Column #10 System
Fluid	Flow	Temp input	Density from	Total #1	Analog out-	Relay output	Bar graph	Velocity units	Unit number
Steam/cond	Frequency	None	Temp. input #1	None	put	None	Off/On	ft/sec	Baud rate
Water	4 to 20 mA	RTD	Temp. input #2	Volume flow	None	Temp alarm	Density	cm/sec	38400
Water energy	Substitute	4 to 20 mA	Ref. density	Comp flow	Temperature	Temp #2 alarm	Off/On	m/sec	19200
Liquid	Flowmeter	Substitute	Specific gravity	Mass flow	Temp #2	Diff Temp alarm	Temperature	Volume units	9600
Air	Linear	Sub temp #1	Mole frac CO <sub>2</sub>	Energy flow	Diff Temp	Pressure alarm	Off/On	cubic feet	4800
Natural gas	Non-linear	RTD #1 cal A	Mole frac N <sub>2</sub>	Scale factor	Pressure	Density alarm	Temp Stats	cubic inches	2400
Ideal gas	Insertion	RTD #1 cal B	Supercomp	Total #1	Density	Velocity alarm	Off/On	gallons	1200
Steam	Small turbine	RTD #1 cal R	Viscosity	None	Velocity	Vol flow alarm	Pressure	barrels	600
	Large turbine	Zero scale	Temperature #1	Volume flow	Volume flow	Comp flow alarm	Off/On	cubic cm	300
	Interpolation	Full scale	Density #1	Comp flow	Comp flow	Mass flow alarm	Pressure stats	liters	Data format
	Linear	Temp Input #2	thru	Mass flow	Mass flow	Energy alarm	Off/On	cubic meters	7 Even
	Cubic Spline	None	Temperature #8	Energy flow	Energy flow	Total #1	Line velocity	quarts	7 Odd
	Bidirectional	RTD	Density #8	Scale factor #2	Zero scale	Total #2	Off/On	Mass units	8 None
	On/Off	4 to 20 mA			Full scale	Alarm limit	Volume flow	pounds	Stop bits
	Substitute freq	Substitute				Low	Off/On	tons	1/2
	Pipe diameter	Sub temp #2				High	Vol flow stats	grams	Comm hand-
	Obscuration	RTD #2 cal A				Setpoint	Off/On	kilograms	shake
	Profile factor	RTD #2 cal B				Hysteresis	Comp vol flow	metric tons	None
	K-factor	RTD #2 cal R					Off/On	Energy units	Hardware
	Full scale vel	Zero scale					Comp vol stats	Btu	(CTS)
	Full scale freq	Full scale					Off/On	kJ	XON/XOFF
	Diff press cal	Pressure input					Mass flow	cal	Both
	Frequency #1	None					Off/On	kcal	Modem
	Velocity #1	4 to 20 mA					Mass flow stats	Mcal	Comm
	thru	Substitute					Off/On	ton	Off/On
	Frequency #8	Sub pressure					Energy flow	kW	Password
	Velocity #8	Zero scale					Off/On	MW	Display scan
		Full scale					Energy stats	GW	Sync calc
		Atm pressure					Off/On	Flow time	Off/On
							Analog output	base	Temperature
							Off/On	/second	TC
							Relay output	/minute	Pressure TC
							Off/On	/hour	Flow TC
							Total #1	/day	A/D reference
							Off/On	Temp units	A/D int count
							Total #2	'F'/'R'/'C'/'K	D/A zero
							Off/On	Pressure units	count
							Clock/Calendar	psi	D/A span
							Off/On	atm	count
							Verification	bar	
							Off/On	kg/cm <sup>2</sup>	
								mm Hg	
								Pressure dis-	
								play	
								absolute	
								gauge	
								Density units	
								lb/ft <sup>3</sup>	
								g/cc	
								kg/m <sup>3</sup>	

# FP-93 Flow Processor

## Model and Suffix Codes

Category		Suffix Codes				
<b>Model</b>	Microprocessor-Based Flow Processor	FP-93				
<b>Enclosure</b>	Panel Mount Unit NEMA 4 Rated Enclosure	P N				
<b>Power Supply</b>	10.5 to 36 VDC 115 VAC, 50/60 Hz <sup>1</sup> 2305 VAC, 50/60 Hz <sup>1</sup>		0 1 2			
<b>Relay Output</b>	DC Option			D		
<b>Display</b>	Standard Display Display with Backlighting				S B	
<b>Flow Input</b>	Frequency Analog 4 to 20 mA					F A
<b>Example</b>	<b>FP-93- P- 0- D- F</b> FP-93-P-0-D-F represents a panel mount unit, 10.5 to 36 VDC power supply, DC option relay output, standard display, with frequency flow input.					





## Temperature Sensor/Transmitter Model TEM

### Description


TEM platinum resistance temperature sensors measure process fluid temperature for most applications. The TEM uses a resistance temperature device (RTD) to measure process temperature. RTDs operate on the principle that the resistance of the sensing device is proportional to the temperature, producing a highly repeatable and exceptionally stable resistance versus temperature relationship.

The TEM may be selected with either a direct RTD output or with an industry standard 4-20 mA current output. The current output includes a preamplifier that is factory scaled and calibrated to one of several standard temperature ranges in either degrees Fahrenheit or Celsius.

The TEM is thermowell mounted to allow installation and removal without process shutdown. Several immersion lengths are available to accommodate a wide range of pipe sizes.

### Features

- RTD or 4–20 mA current output (linear)
- Factory calibrated over selected range
- Rugged design
- Thermowell included

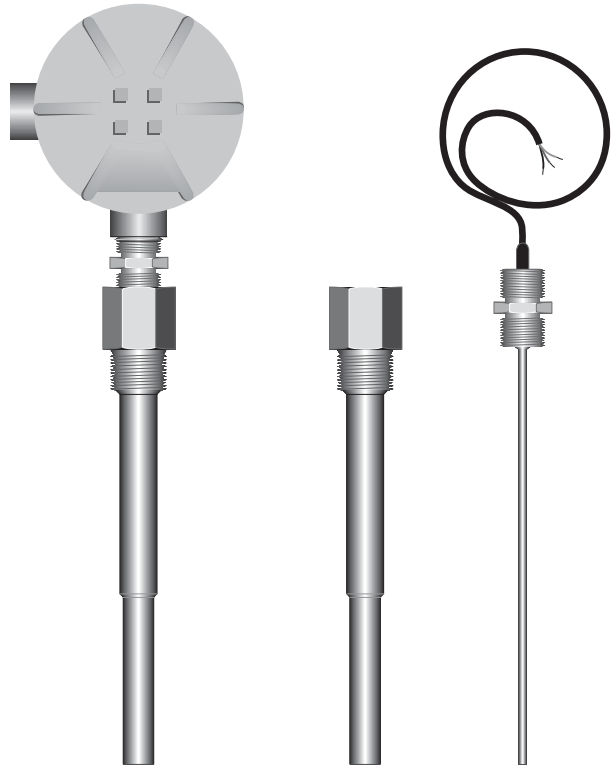

### Performance Specifications

#### RTD Sensor

##### Accuracy (Ice Point)

$\pm 0.12\%$  ( $1000 \pm 1.2 \Omega$ )

##### Interchangeability

Accuracy . . . . .  $\pm 0.9^\circ\text{F}$  or  $0.8\%$

##### Stability

Better than  $\pm 0.45^\circ\text{F}$  per year

##### Sensing Element Coefficient

$0.00385 \Omega/\Omega/^\circ\text{C}$

#### Preamplifier

##### Accuracy

$\pm 0.1\%$  of span

##### Ambient Temperature Effect

Zero . . . . .  $0.03 + 0.005\%$  of span per  $^\circ\text{C}$

Span . . . . .  $0.02 + 0.003\%$  of span per  $^\circ\text{C}$

### Operating Specifications

#### Temperature Ranges

Output	Preamplifier Model Suffix Code	Temperature Range
RTD Sensor	RTD	$-40$ to $800^\circ\text{F}$ ( $-40$ to $426^\circ\text{C}$ )
Transmitter (4 to 20 mA)	T09	32 to $68^\circ\text{F}$
	T10	0 to $250^\circ\text{F}$
	T11	$-40$ to $150^\circ\text{F}$
	T12	212 to $400^\circ\text{F}$
	T14	212 to $500^\circ\text{F}$
	T13	212 to $800^\circ\text{F}$
	T20	$-17.7$ to $121.1^\circ\text{C}$
	T21	$-40$ to $65^\circ\text{C}$
	T22	100 to $204^\circ\text{C}$
	T24	100 to $260^\circ\text{C}$
	T23	100 to $426^\circ\text{C}$

# Temperature Sensor/Transmitter

## Model TEM

### Operating Specifications continued

#### Temperature Ranges

**Ambient Temperature Limit**  
-30 to 160 °F

**Storage Temperature Limit**  
-60 to 185 °F

**Ambient Humidity Limit**  
0 to 100% relative humidity

**Thermowell Pressure Limit**  
3500 psig at 1140 °F

#### RTD Sensor

**Output**  
3-wire RTD

**Current**  
1 mA recommended, 2 mA maximum


**Insulation Resistance**  
100 mΩ minimum at 300 VDC at 75 °F

#### Optional Preamplifier

**Output**  
4 to 20 mA, 2-wire

**Power Supply**  
24 VDC nominal, operable from 12 to 40 VDC

**Load Resistance**  
600 at 24 VDC; depends upon power supply voltage

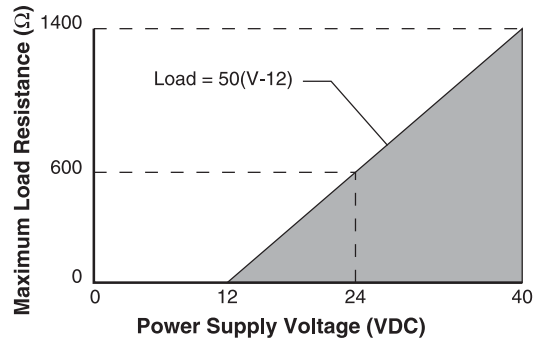

### Physical Specifications

#### Materials

**Sensing Element**  
1000 Ω thin film platinum

**RTD Sheath**  
316 stainless steel

**Junction Box**  
Aluminum

**Thermowell**  
316 stainless steel

**Process Connection (Thermowell)**


1/2" NP

**Electrical Connection**  
Junction box with terminal block for external wiring.  
3/4" NPT female connection for conduit.


**Weight (with 6" Thermowell)**  
3 lb

### Dimensions (in inches)


TEM Probe without Preamp

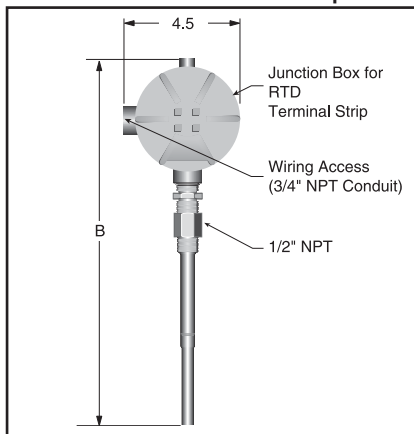

TEM Probe with Preamp

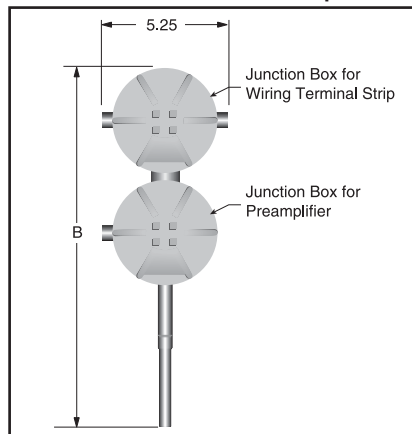

Thermowell

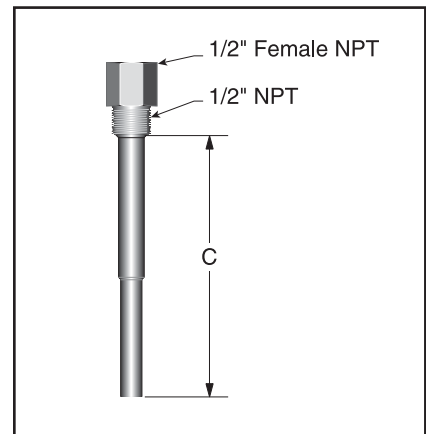

Dimensions Table

Thermowell Length Model Suffix Code	B w/o Preamp in.	B w/ preamp in.	C in.
2"	10.5	15	2
3"	11.5	16	3
4"	12.5	17	4
6"	14.5	19	6

Thermowell Length Model Suffix Code	B w/o Preamp in.	B w/ preamp in.	C in.
8"	16.5	21	8
10"	18.5	23	10
12"	20.5	25	12

TI-8-605-US 12.08

# Temperature Sensor/Transmitter

## Model TEM

### Model and Suffix Codes

Category	Description	Suffix Codes			
Model	Precision RTD with thermowell	TEM-30	...	...	...
Preamplifier (Temperature Range)	None (RTD output only)	...	RTD	...	...
	Preamplifier scaled from: 32 to 68°F (liquid or gas)	...	T09	...	...
	Preamplifier scaled from: 0 to 250°F (liquid or gas)	...	T10	...	...
	Preamplifier scaled from: -40 to 150°F (liquid or gas)	...	T11	...	...
	Preamplifier scaled from: 212 to 400°F (liquid or gas)	...	T12	...	...
	Preamplifier scaled from: 212 to 500°F (steam)	...	T14	...	...
	Preamplifier scaled from: 212 to 800°F (steam)	...	T13	...	...
	Preamplifier scaled from: -17.7 to 121.1°C (liquid or gas)	...	T20	...	...
	Preamplifier scaled from: -40 to 65°C (liquid or gas)	...	T21	...	...
	Preamplifier scaled from: 100 to 204°C (steam)	...	T22	...	...
	Preamplifier scaled from: 100 to 260°C (liquid or gas)	...	T24	...	...
	Preamplifier scaled from: 100 to 426°C	...	T23	...	...
	Transmitters can be scaled to accommodate special requests and bar scaling	...	TXX	...	...
Thermowell Length	2" thermowell length	...	...	2	...
	3" thermowell length	...	...	3	...
	4" thermowell length	...	...	4	...
	6" thermowell length	...	...	6	...
	8" thermowell length	...	...	8	...
	10" thermowell length	...	...	10	...
	12" thermowell length	...	...	12	...
RTD wires (internal)	Teflon, -4 to 400°F	...	...	...	T
	Fiberglass, 150-800°F	...	...	...	F

### Example

→ **TEM-30-T13-6-F**

## Pressure Transmitter Model PT

### Description

The Model PT combines micro-machined silicon diaphragms with fully welded stainless steel and hastelloy pressure ports to provide a highly accurate, stable pressure transmitter. It is constructed with the materials and environmental protection required for industrial applications.

The silicon sensors incorporate developments derived from aerospace applications. These developments are used to decrease output noise, non-linearity, and hysteresis and to improve long term stability.

A detachable, industrial, electrical connector provides access to the independent zero and span trim controls.

Each transmitter incorporates RFI/EMC and electrical spike protection.

### Features

- Process pressure range: 1.5 to 1,000 psig
- Accuracy of  $\pm 0.25\%$  of full scale
- Process temperature range:  $-40$  to  $250$  °F
- 2-wire, 4 to 20 mA output
- CE Approved
- FM Approved for Class I, Division 2, Groups A, B, C, D; Class II & III, Division 2, Groups F, G

### Performance Specifications

#### Accuracy

$\pm 0.25\%$  of full scale (the best straight line-determined from the combined effects of non-linearity, hysteresis, and repeatability).

#### Ambient Temperature Effects


For ranges of 5 psi and above, the output will not deviate from room temperature calibration by more than:

- 2.0% full scale over 15 to 122 °F
- 3.0% full scale over  $-5$  to 175 °F

Typically:

- 1.0% full scale over 15 to 122 °F
- 2.0% full scale over  $-5$  to 175 °F

For ranges below 5 psi these values will increase pro-rata with calibrated span.

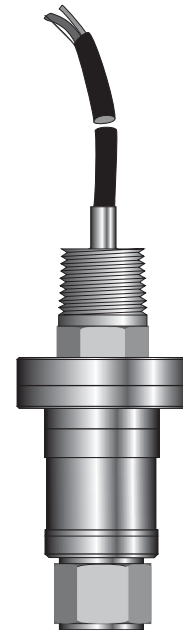

### Operating Specifications

#### Service

Liquid, gas, and steam

#### Operating Pressure Range

#### Proof Pressure

The rated pressure can be exceeded by 2X without degrading performance.

Part Number	Pressure Range
	psig
S0111151	0 to 50
S0111152	0 to 100
S0111153	0 to 150
S0111154	0 to 200
S0111155	0 to 250
S0111156	0 to 500
S0111172	0 to 1000
S0111171	Customer specified.

#### Operating Temperature Range


**Ambient**  
 $-40$  to  $175$  °F

**Process Media**  
 $-40$  to  $250$  °F

**Storage**  
 $-40$  to  $250$  °F

#### Power Supply Requirements

9 to 30 VDC, across red wire (positive) and blue wire (negative). This voltage must appear across the transmitter terminals.

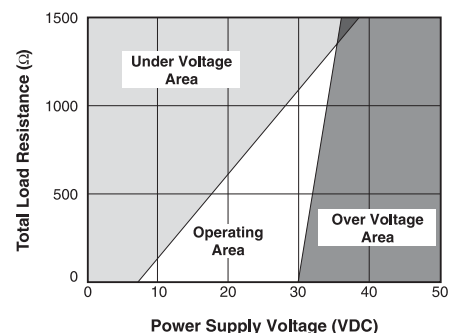

#### Output

4 to 20 mA (2-wire configuration) proportional for zero to full scale pressure.

*Local regulation may restrict the use of this product below the conditions quoted. Limiting conditions refer to standard connections only.  
In the interests of development and improvement of the product, we reserve the right to change the specification.*

# Pressure Transmitter Model PT

## Physical Specifications

### Materials of Construction

Isolating Diaphragm . . . . . Hastelloy C®-276  
Transducer Body . . . . . 316 stainless steel

### Pressure Connection

1/4" NPT female

### Calibration Standards


Transmitters are calibrated against precision pressure calibration equipment traceable to NIST.

### Weight


14 oz nominal

### Electrical Connection


Two 22 AWG wires

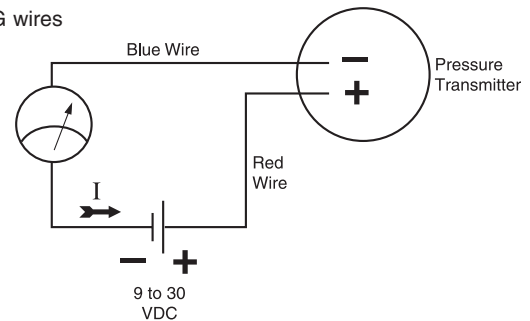

## Dimensions

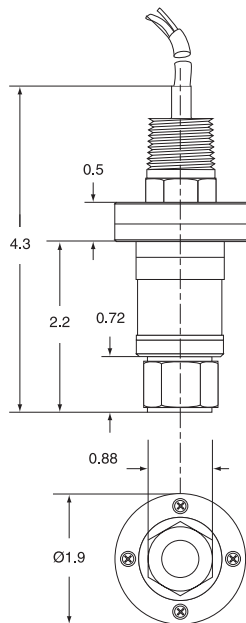

## Zero and Span Adjustments

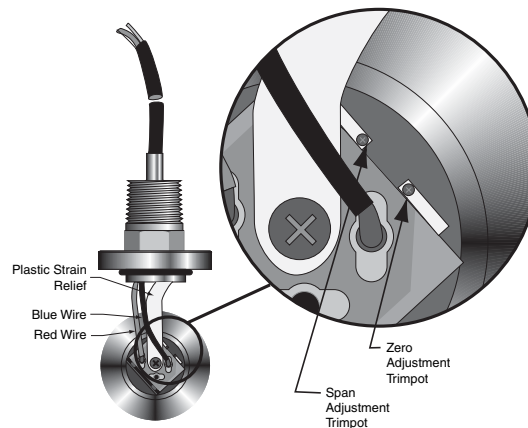

Zero and span adjustments are made using the trimpots. To gain access to trimpots, disassemble the PT as follows:


- Remove the four screws
- Gently separate two halves
- Adjust zero and span as needed
- Replace the connection plate back on the housing

## Model and Suffix Codes

Description	Part Number
S-PT for pressure range 0–50 psig	S0111151
S-PT for pressure range 0–100 psig	S0111152
S-PT for pressure range 0–150 psig	S0111153
S-PT for pressure range 0–200 psig	S0111154
S-PT for pressure range 0–250 psig	S0111155
S-PT for pressure range 0–500 psig	S0111156
S-PT for pressure range 0–1000 psig <sup>3</sup>	S0111172
S-PT to accommodate special requests and bar scaling. <sup>1</sup>	S0111171
Mounting Kit: includes bleed valve, siphon tube, plug, nipple, and tee. Must be used with S-PT if process temperature is above 250 °F.	S0105894

- Determine the pressure range that is the most appropriate for your application. Contact your local representative for details.
- Specify the typical service conditions. A siphon tube on the PT is required for all applications above 250 °F.
- Not FM Approved.

## Mounting Kit

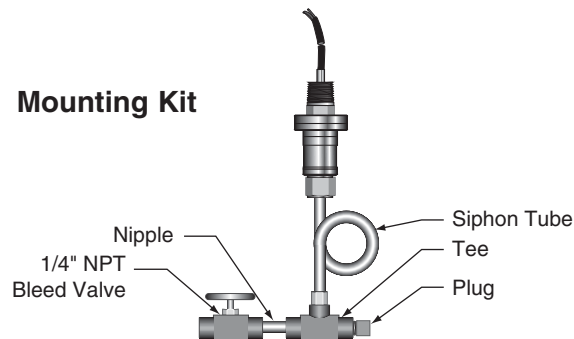

## Sono-Trak® Transit Time Clamp-on Ultrasonic Flow Meter

### Description

Engineered for performance excellence, the Sono-Trak® Transit Time ultrasonic flow meter combines non-invasive, bi-directional flow measurement with advanced ultrasonic technology. This easy-to-install and easy-to-program system provides the ideal solution for low-cost, reliable, and maintenance-free flow measurement.

### Benefits

- Fast and easy installation
- Rugged and maintenance-free with no moving parts
- Fits pipe sizes from 2 to 100" (50 to 2540 mm)
- Non-invasive, bi-directional flow measurement
- Reliable and accurate flow readings – provides  $\pm 2.0\%$  of rate accuracy and  $\pm 0.1\%$  repeatability

### Features

- Simple, clamp-on design
- Time domain expansion technology used to increase resolution
- Flexible, field-programmable EZ-Logic™ user interface
- NEMA 6-rated transducer housings
- Flexible module I/O design
- Built-in infrared capability for optional PC interface

### Applications

Ideally suited for:

- Deionized water
- Ultrapure water
- General water
- Acids
- Solvents

### Overview

The Sono-Trak® Transit Time flow meter delivers performance excellence in a non-invasive, bi-directional, ultrasonic flow metering system. Consisting of simple, clamp-on transducers and a menu-driven programmable display, the system eliminates mechanical wear, drift, and pressure drop problems associated with traditional technologies—making it the ideal choice for new installations and system retrofits. This exceptionally compatible, reliable, and accurate flow metering solution is suitable for clean, swirl-free liquids in most industrial applications.



### Compatible and Reliable

The Sono-Trak® Transit Time flow meter fits pipe sizes from 2 to 100" (50 to 2540 mm) and accommodates a wide variety of pipe materials. In addition, it can sustain high-temperature and high-pressure conditions. With no orifice plates or other moving parts to wear, recalibrate, or maintain, the Sono-Trak® Transit Time flow meter offers  $\pm 0.1\%$  of flow rate repeatability. Non-contact fluid measurement not only allows installation during flow, but also eliminates chemical corrosion, caking, and risk of fluid contamination.

### Highly Accurate

The Sono-Trak Transit Time flow meter uses advanced ultrasonic technology for accurate measurement. Transducers operate as both transmitter and receiver of signals, with one transducer upstream and one downstream. By taking bi-directional measurement—transmitting high-frequency sound waves through the pipe into the flow stream in both directions—the electronics determine the difference in time (transit time) of the upstream and downstream signals.

Advanced digital signal processing translates the transit time and calculates the average fluid velocity—delivering  $\pm 2.0\%$  of rate accuracy in a typical field installation. Response time is user selectable from 0.3 to 30 seconds.



# Sono-Trak® Transit Time

## Display Module

An easy-to-program, wall-mounted display employs field-programmable EZ-Logic™ software. The default data output alternates between continuous, real-time flow rate readings and total flow readings shown in English and Metric user-selectable engineering units.

With buffet-style input/output (I/O) module options, the electronics configuration is easily customized. Two I/O sockets will accept multiple modules, including pulse, analog, relay, RS-232, or RS-485. To streamline configuration, a built-in infrared communication port is available with optional Windows™-compatible software, allowing multiple meters to be programmed with a personal computer.


## Optional Input/Output Modules

Custom electronics configuration is made possible through multiple I/O module options:



- **4 to 20 mA Output** – Field configurable as a 2-wire active or passive transmitter, 800 Ω maximum resistance
- **Frequency Output** – Open collector, field configurable for 0 to 1000 Hz or 0 to 10,000 Hz output
- **Dual Relay Output** – Used for batching, high/low flow alarms, empty pipe detection, and error indication
- **RS-232 Communication** – Used to monitor flow information
- **RS-485 Communication** – Used to network up to 100 units together in a master/slave configuration

## Dimensions

### Electronic Dimensions

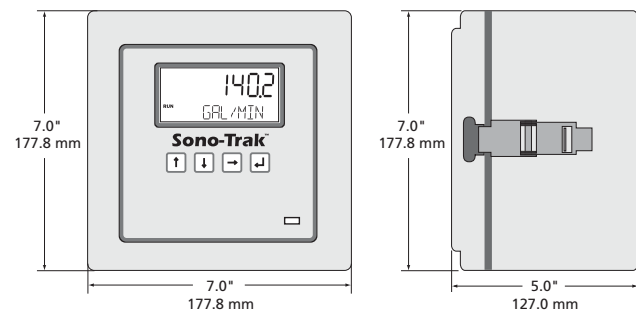

### Transducer Dimensions

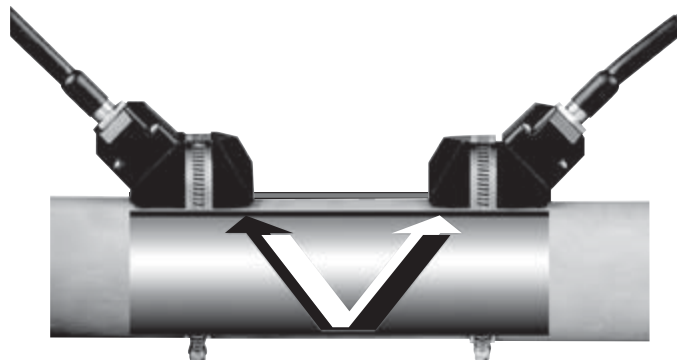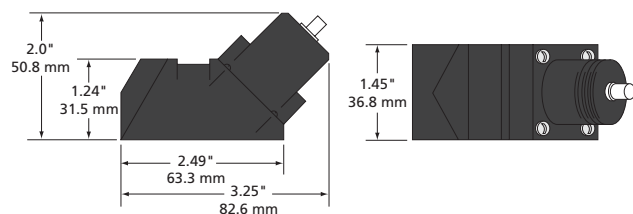

- Signal moving upstream  
 $Upstream\ velocity = speed\ of\ sound - fluid\ velocity$
- Signal moving downstream  
 $Downstream\ velocity = speed\ of\ sound + fluid\ velocity$

## Installation Considerations


### Transducer Mounting

The Sono-Trak Transit Time flow meter's non-invasive design uses stainless steel quick clamps and heavy-duty cables that are pre-terminated to facilitate fast and easy installation. The transducers mount on the outside of a process pipe with one transducer upstream and one downstream. Installation is non-intrusive as no sensor is inserted into the pipe. Transducer spacing is dependent upon pipe size and is calculated automatically during set-up.

Straight run requirements are typically 10 diameters upstream and 5 diameters downstream. Accurate results may be achieved with straight run of 5 diameters upstream and 3 diameters downstream. Upstream valves and other piping configurations may require more straight run.


### Vertical Pipe Mounting

The recommended flow direction in a vertical pipe is upwards.

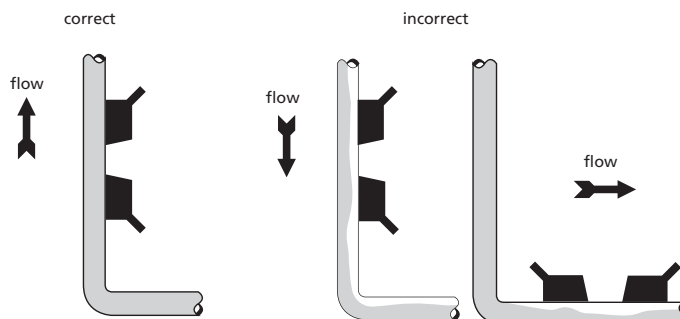

### Horizontal Pipe Mounting

Transducer should be mounted on a horizontal pipe as shown.

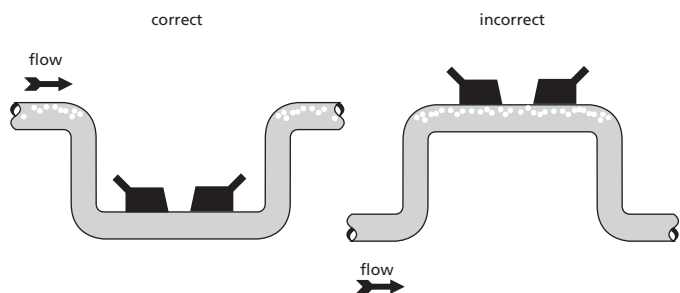

# Sono-Trak® Transit Time

## Zero Point Adjustment

For best accuracy, a zero point setting must be made with a full pipe at no flow during initial start-up.

## Air/Gas Entrapment

Excess gas entrapment can scatter or reflect the sound wave, causing inaccurate measurement. Allowable air/gas entrapment is 2%.

## Pipe Material

The property of the pipe material can affect the performance of the meter.


Good Results	Caution Needed	Do Not Use On
Most metallic	Cast iron	Cement
Plastic	Lined pipes	Pipes with internal deposits or severe corrosion

## Sonic Wave Forms


To obtain the best possible signal strength, the following mounting options are recommended:

- 2 to 2.5" (DN50 to DN65) = W
- 3 to 12" (DN80 to DN300) = V
- 14 to 100" (DN350 to DN2500) = Z


"W"

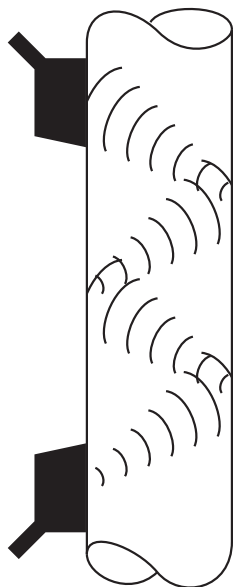

"V"

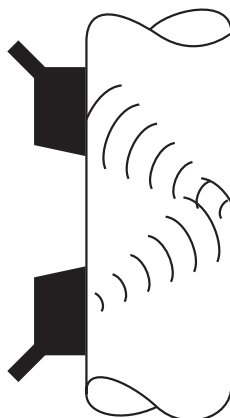

"Z"



## Cabling

The Sono-Trak® Transit Time includes a standard cable length of 25' (7.6 m) and optional lengths of 50' (15.2 m) and 75' (22.8 m). Custom cable lengths of 76 to 1000' (23.1 to 304.8 m) are also available.

# Sono-Trak® Transit Time

## Specifications

Performance	
<b>Accuracy</b>	Factory tested at $\pm 0.5\%$ of flow rate. <sup>1</sup> Typical field installation is $\pm 2.0\%$ of flow rate. Field performance is dependant on the accuracy of the pipe's internal diameter and wall thickness measurements as well as straight run conditions.
<b>Repeatability</b>	$\pm 0.1\%$ of flow rate
<b>Response Time</b>	Adjustable from .3 to 30 seconds

1 Factory test conditions: water at 70°F (21°C), flow velocity > 1 ft/sec on a 6" stainless steel pipe

Physical		
<b>Materials</b>	Wetted parts	None
	Electronics housing	Reinforced polycarbonate with stainless steel hardware NEMA 4X (IP65)
	Transducer housing	400°F (204°C): Torlon®/Vespe®/Stainless Steel; NEMA 6 (IP68)
		250°F (121°C): Delrin®/Ultem®/Stainless Steel; NEMA 6 (IP68)
	Sensor cables	Polyurethane armored coaxial
	Clamps	Stainless Steel
<b>Cable Lengths</b>	Standard	25' (7.6 m)
	Options	50' (15.2 m)
		75' (22.8 m)
	Custom	76 to 1000' (23.1 to 304.8 m)
<b>Weight</b>	Electronics	4.5 lb (2 kg)
	Transducers	4.5 lb (2.05 kg) for two transducers with 25' (7.6 m) of cable
<b>Size</b>	Electronics	7" (H) x 7" (W) x 5" (D) 177.8 mm (H) x 177.8 mm (W) x 127 mm (D)
	Transducer	2" (H) x 3.25" (W) x 1.45" (D) 50.8 mm (H) x 82.6 mm (W) x 36.8 mm (D)
<b>Maximum Transducer Cable Length</b>	1000' (304.8 m)	
<b>Cable Connection</b>	Standard submersible	
<b>Mounting</b>	Electronics	Remote wall
	Transducer	External, adjustable clamp
<b>CSA Approval</b>	Class I Div II Groups A, B, C, D Class II and Class III Groups E, F	

TI-8-607-US 7.09

# Sono-Trak® Transit Time

## Specifications (continued)

<b>Operating Specifications</b>		
<b>Applied Pipeline Sizes</b>	2 to 100" (50 to 2540 mm)	
<b>Measurable Fluids</b>	Most common liquids from waste water to petrochemical products	
<b>Measurable Flow Velocities</b>	Liquid -40 to 40 ft/sec (-12 to 12 m/sec)	
<b>Ambient Temperature Limit</b>	-40 to 140°F (-40 to 60°C)	
<b>Process Temperature Limit</b>	Standard	-40 to 250°F (-40 to 120°C)
	High temp option	-40 to 400°F (-40 to 205°C)
<b>Ambient Humidity Limit</b>	Up to 95% RH, non-condensing	
<b>Process Pressure Limit</b>	Not applicable	
<b>Power Requirements</b>	Field configurable for AC or DC operation	12 to 24 VDC 115 VAC, 50/60 Hz (± 10%) 230 VAC, 50/60 Hz (± 10%)
	Power Consumption	> 5 W
<b>Input/Output Modules</b>	A maximum of two outputs can be selected. All input/output modules are optically isolated up to 2,500 V against ground loops and electrical surges.	
	4 to 20 mA Output	Field configurable as a 2-wire active or passive transmitter, 800 Ω maximum resistance
	Frequency Output	Open collector, field configurable for 0 to 1000 Hz or 0 to 10,000 Hz output, 20 mA maximum (50% of duty cycle)
	Dual Relay Output	Two SPDT form C contacts independently controlled; 175 V, ¼ A switch, 1 A carry current, 0.2 Ω resistance. Used for batching, high/low flow alarms, empty pipe detection, and error indication
	RS485 Interface	Used to network up to 100 units together in a master/slave configuration using built-in software and communications protocol. Supports 57.6 kb communications, up to 1000' (304.8 m)
	RS232 Interface	Used to monitor flow information. Supports up to 57.6 kb communications, (19.2 kb @ 50')
<b>Standard Interface</b>	LCD backlit display with 8-character large numeric and 8-character small alphanumeric. Four button menu-driven EZ-Logic™ interface for programming	
<b>Flow Units</b>	English units	User-selectable from gallons, cubic feet, millions of gallons, oil barrels, liquid barrels, feet, and pounds. Note: Gallons refers to U.S. Gallons.
	Metric units	Liters, meters, cubic meters, and kilograms
<b>Time Units</b>	User-selectable from seconds, minutes, hours and days	

# Sono-Trak® Transit Time

## Model Selection

Category	Suffix Codes						
<b>Electronics</b>							
2-line backlit display with 4-button keypad	ST-30						
<b>I/O Port 1</b>							
None		N					
4-20 mA output		A					
Frequency output		F					
Dual relay output (dry contact)		R					
RS-232 interface		RS2					
RS-485 interface		RS4					
<b>I/O Port 2</b>							
None			N				
4-20 mA output			A				
Frequency output			F				
Dual relay output (dry contact)			R				
RS-232 interface			RS2				
RS-485 interface			RS4				
<b>Process Temperature</b>							
-40 to 250°F (-40 to 120°C)				250			
-40 to 400°F (-40 to 205°C)				400			
<b>Transducers</b>							
Submersible					1		
<b>Cable Length (specify length)</b>							
25' (7.6 m)						25	
50' (15.2 m)						50	
75' (22.8 m)						75	
76 to 1000' (23.1 to 304.8 m)						xx	
<b>Pipe Clamp (specify pipe size)</b>							
2 to 12" (50 to 300 mm)							12
14 to 24" (350 to 600 mm)							24
26 to 36" (650 to 900 mm)							36
38 to 100" (950 to 2540 mm)							xx
<b>Example</b>	<b>ST-30-</b>	<b>A-</b>	<b>N-</b>	<b>250-</b>	<b>1-</b>	<b>25-</b>	<b>12</b>

## Accessories

Description	Part Number
Windows® communication software for IR Port/RS232/RS485 modules	6001100
Infrared serial communicator for wireless PC interface	1-800-138
Transducer cable conduit adapter ¾" NPT (requires 2 pieces)	340790
Low temp transducer and 25' of cable -40 to 250°F (-40 to 120°C)*	011143-125
High temp transducer and 25' of cable -40 to 400°F (-40 to 205°C)*	011143-225

\* If a pair of transducers is required, two units of the same part number must be ordered.

## Sono-Trak® Doppler Clamp-on Ultrasonic Flow Meter

### Description

The Sono-Trak® Doppler ultrasonic flow meter is a non-invasive, ultrasonic flow metering system. Based on the principles of the Doppler effect, it calculates flow velocity by sensing and measuring the frequency shift in motion from reflective materials within a liquid.

### Benefits

- Non-invasive design
- Low-cost, simple installation
- Fits pipe sizes from 1 to 100" (25 to 2540 mm) outside diameter
- Rugged and maintenance-free—no moving parts
- No pressure drop and no costly process shutdowns
- Reliable and accurate flow readings—typically provides  $\pm 2.0\%$  full scale accuracy and  $\pm 0.1\%$  repeatability

### Features

- Automatic gain control—as flow profile changes so does the electronics signal
- Noise immunity to variable frequency drive (VFD)
- User-friendly, easy-to-program display with on-screen prompting and keyboard entry
- Digital signal—allows for cable lengths up to 5000' (1524 m)
- AC or DC operation
- Fixed and portable units available

### Overview

The Sono-Trak® Doppler flow meter uses advanced signal processing technology that dramatically increases the accuracy of flow rate measurement. Its accuracy ratings are typically  $\pm 2.0\%$  of full-scale accuracy, and repeatability is  $\pm 0.1\%$  of reading.

This flow metering system uses two transducers mounted side by side, operating as ultrasonic signal transmitters and receivers. The measurement is obstructionless and produces no associated pressure drops. With no moving parts to wear over time, the Sono-Trak® Doppler flow meter is virtually maintenance-free and is available in both fixed and portable units.

### Suitable Fluids

The Sono-Trak® Doppler flow meter is suitable for fluids containing suspended particles or bubbles with at least 35 parts per million (ppm) at 40  $\mu$  or larger, and a minimum of at least 0.2% density difference from liquid medium.



### Applications

- The Sono-Trak® Doppler flow meter easily measures most all liquids containing particles or air bubbles. Some materials well suited for measurement include:
  - Agricultural water
  - Abrasives
  - Asphalts
  - Concrete
  - Drudge flows
  - Drilling mud
  - Large contaminates
  - Extremely viscous substances
  - Grout
  - Hazardous wastes
  - Municipal sludge and wastes
  - Paper pulp
  - Rendering products
  - Reservoirs and runoffs
  - Rivers and streams
  - Sludge
  - Slurries
  - Suspended solids

# Sono-Trak® Doppler

## Installation Considerations

The Sono-Trak® Doppler flow meter is available in fixed and portable units. The fixed unit consists of:

- Electronics enclosure
- Digitizer
- Two transducers and 25' cable (7.6 m)
- Tiedown kit
- Sonic coupling gel
- User manual


In addition, portable units include:

- 12 V, 2.2 AH battery
- 110 VAC battery charger
- Tote handle and side latch
- Field transport case

*Custom cable lengths of up to 5000' (1524 m) are available.*

## Doppler Placement

The ideal placement of the Sono-Trak® Doppler flow meter is within 20 diameters of straight run upstream and 10 diameters of straight run downstream between the meter and any disturbance of the flow; however, the meter has worked with straight runs of as little as 5 diameters upstream and 2 diameters downstream.

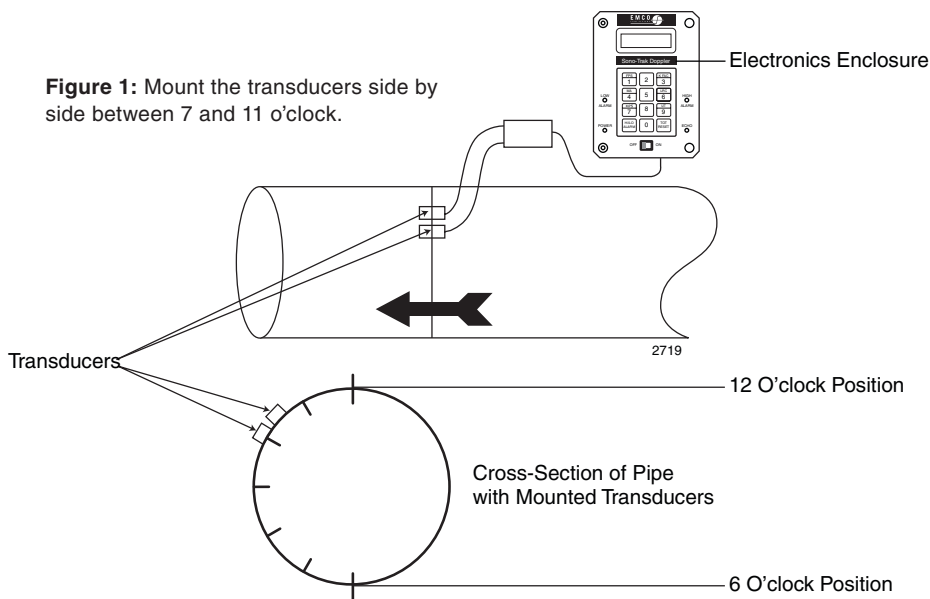

## Piping Conditions

- The Sono-Trak® Doppler flow meter fits pipe diameters from 1 to 100" (25 to 2540 mm).
- Pipes should be cleaned with all paint and scale removed.
- Horizontal pipe mounting is recommended.


## Clamp-on mounting

The Sono-Trak® Doppler flow meter is configured with clamp-on transducers. When installed, the transducers sense fluid flow through a pipe and send this information to the system electronics. The electronics then convert, transmit, and display the received data.

External clamp-on sensors are ideal for smooth, clean pipe surfaces and are installed without shutting down flow. When clamp-mounting the flow meter, attach the sensors side by side in a position approximately 7 to 11 o'clock on the outside of the pipe. Use stainless straps, nylon belts, or bungee straps and a steel chain to secure the clamps in place.

Use only a sonic coupling medium to transmit the energy from the transducer crystals through the pipe wall and into the flow to be measured. Any type of non-fibrous grease or gel will suffice.

**Figure 2:** Secure the transducers in place

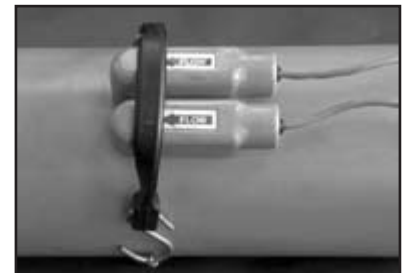

## Cabling

The standard cable length between the electronics enclosure and the transducers is 25' (7.6 m). Custom cable lengths up to 5000' (1524 m) are available.

## Display Module

A user-friendly, easy-to-read display provides continuous, real-time flow rate, velocity, and totalization measurements in user-selectable engineering units.

On-screen prompting and a full-function, 32-character, dual-line, alphanumeric keypad entry make programming effortless.

The display reads pulse, voltage, and analog rates, and it includes built-in high/low limit alarms, 4 to 20 mA signals, and an echo light to indicate whether the signal is producing accurate readings.



# Sono-Trak® Doppler

## Specifications

Fluid Conditions		
Measured Fluid	Homogenous liquids with Newtonian flow profiles (sludges, slurries, sewage, wastewater, and other fluids containing suspended particles)	
State of Flow	Axis-symmetric flow in pipe filled with fluid	
Fluid Type	Liquids containing suspended particles of at least 35 ppm at 40 μ at 0.2% density of undissolved solids or air bubbles	
Measurable Fluid Temperature Range	-40 to 300°F (-40 to 149°C)	
Velocity Range	0.1 to 40 fps (0.04 to 12.19 mps)	
Flow Sensitivity	0.05 fps (0.02 mps)	
Piping Conditions		
Pipe Diameter Range	Volumetric indication	1 to 100" (25 to 2540 mm) diameter
Pipe	Including, but not limited to, carbon steel, stainless steel, ductile iron, cast iron, FRP, PVC, fiberglass, Teflon®, and most concrete-lined or coated pipes	
Pipe Lining	Including, but not limited to, tar, epoxy, mortar, rubber, Teflon®, PVC, and glass	
Measurement Accuracy		
Accuracy Note: Accuracy is a function of flow profile.	Typically ±1% to ±3% of full scale, based on straight run of piping of 20 diameters upstream and 10 diameters downstream	
	±3% to ±5% of full scale based on straight run of 10 diameters upstream and 5 diameters downstream	
	±5% to ±10% of full scale based on straight run of 5 diameters upstream and 3 diameters downstream	
Linearity	±0.5% of full scale	
Repeatability	±0.1% of full scale	
Response Time	≤ 1 sec	
Electronics Enclosure		
Dimensions	9.21" (H) x 7.21" (W) x 5.09" (D) (285 mm x 183 mm x 129 mm)	
Weight	12 lb (5.45 kg)	
Materials	Flame-retardant, fiberglass-reinforced polyester with lockable latch, gray in color	
Environmental Rating	NEMA 4X (IP65)	
Ambient Temperature Range	-13 to 132°F (-25 to 55°C)	
Ambient Humidity	< 100% RH	

TI-8-608-US 12.08

# Sono-Trak® Doppler

## Specifications (continued)

Transducers		
Dimensions	Transducer heads	4.85" (L) x 1.33" (W) x 1.35" (D) (123 mm x 33.8 mm x 34.3 mm)
	Digitizer	4.45" (L) x 2.50" (W) x 1.10" (D) (113 mm x 63.5 mm x 28 mm)
Weight	2.3 lb (1 kg)	
Housing Material	Cast aluminum	
Mounting	Mount to the outside of pipe by means of stainless straps, nylon belts, or bungee and steel chain	
Crystal Wedge Material	Epoxy resin (all transducer models)	
Environmental Rating	NEMA 6 (IP67)	
Ambient Temperature Range	-4 to 130°F (-20 to 54°C)	
Ambient Humidity	< 100% RH	
Transducer Cable		
Standard Cable	25' (7.6 m), 2 twisted pairs, 24 AWG, belfoil shield Note: Custom cable lengths are available.	
Maximum cable length	5000' (1524 m)	
Power		
Fixed Units	110 VAC or 220 VAC at 50/60 Hz (AC line voltage selectable via internal selector switch)	
	12 VDC (DC operation enabled by internal selector switch)	
Portable Units	Internal gel-cell, 8-hour continuous operation; built-in battery Recharge time is 12 hours using the external power adapter/charger or DC auto cigarette lighter.	
Power Adapter/Charger	Standard adapter	115 VAC, 50/60 Hz (± 10%) input delivering 12 VDC, 500 mA output
	Optional adapter	230 VAC, 50/60 Hz (± 10%) input delivering 12 VDC, 500 mA output
Power Consumption	10 W typical	
Analog Output Signal	4 to 20 mA DC, 700 maximum load resistance, internally fused, active output	
Alarm Output	When on AC power	15 VDC = Active alarm
		High alarm switched +15 VDC, 500 mA
		Low alarm switched +15 VDC, 500 mA
	When on battery power	12 VDC = Active alarm
		High alarm switched +12.0 VDC, 500 mA
		Low alarm switched +12.0 VDC, 500 mA
Power Failure Backup	An internal super-capacitor allows the electronics assembly to retain all parameter information and current totalizer value for up to ten days.	


# Sono-Trak® Doppler

## Specifications (continued)

<b>Standard Interface</b>		
<b>LCD Display</b>	2-line, 16 characters per line, high resolution	
<b>LED Indicators</b>	Yellow	Echo signal received
	Red	High alarm or low alarm activated
	Green	Power available
<b>Keypad</b>	12 keys, tactile feedback <i>Note: Keypad lockout is available through internal switch.</i>	
<b>Display Panel</b>	Rate selection	
	Totalizer selection	
	K factor selection	
	Analog output set	
	Low-flow cutoff set	
	Update time (damping) set	
	High/low alarm set	
	Fps or mps selection	
	Totalizer reset	
<b>Output Setting Function</b>	4 to 20 mA output scaling (set in velocity from keypad)	
<b>Alarm Setting Function</b>	High and low alarm set points (entered in velocity from keypad)	
<b>Rate Indication</b>	4-digit LCD, velocity or volume (user selectable)	
	English units	Feet per second (fps), gallons per minute (gpm), cubic feet per second, and million gallons per day <i>Note: Gallons refers to U.S. gallons.</i>
	Metric units	Meters per second (mps), liters per second (lps), and cubic meters per second
<b>Totalizer Indication</b>	11-digit LCD	
	English units	Gallons, cubic feet, acre feet, and millions of gallons <i>Note: Gallons refers to U.S. gallons.</i>
	Metric units	Liters and cubic meters
<b>Update Time (Damping)</b>	0 to 99 sec, entered from keypad	
<b>Low-Flow Cutoff</b>	0 to 2.5 fps (0 to 0.76 mps), entered from keypad	
<b>K Factor</b>	A value of 1 to 256, entered from the keypad depending upon sensor type; default is 90 Hz (correction factor)	
<b>Totalizer Reset</b>	Totalizer can be manually reset to zero from the keypad.	

# Sono-Trak® Doppler

**Figure 4-1: Dimensions**

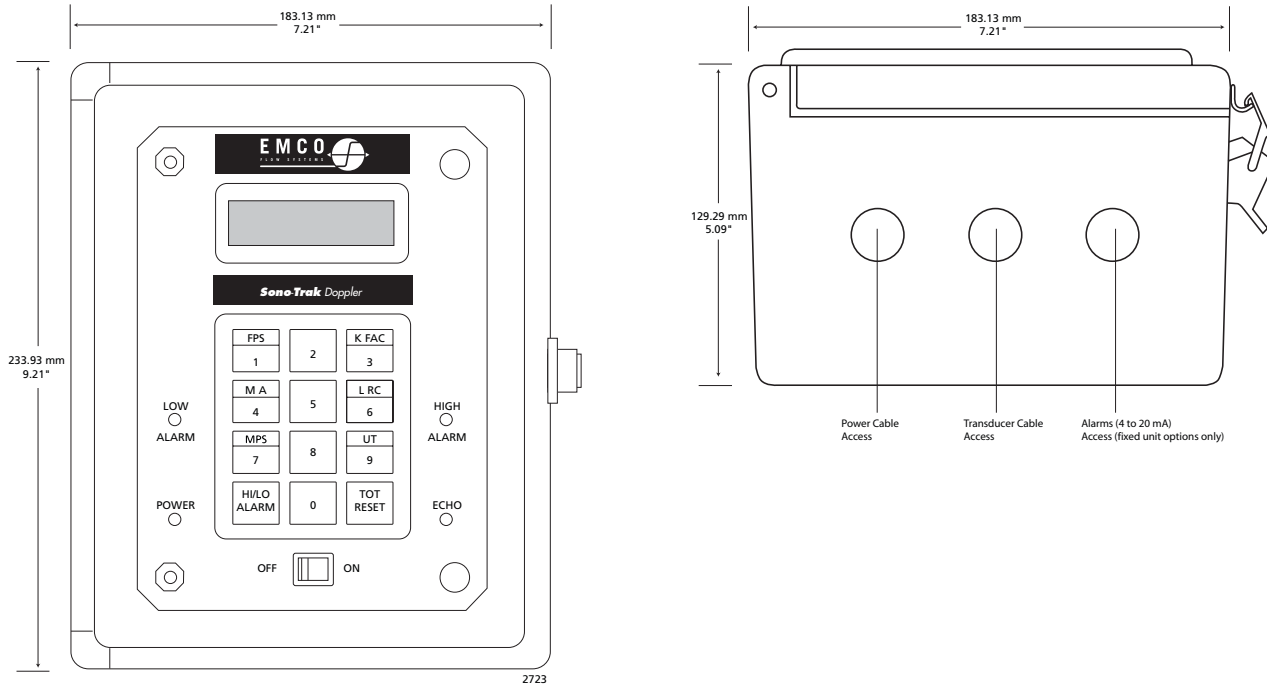

## Fixed and Portable Models

The Sono-Trak® Doppler flow meter is available in fixed, wall-mounted models or portable models.

Fixed Sono-Trak® Doppler Inclusions	
<b>C5F Model</b> <b>Part Number 3153140-001</b>	1 set of electronics in a NEMA 4X case with an LCD display
	2 transducers with 25' (7.6 m) of cable
	Transducer tiedown kit
	Sonic coupling gel
	Operating manual
Portable Sono-Trak® Doppler Inclusions	
<b>C5P Model</b> <b>Part Number 3153141-001</b>	1 set of electronics in a NEMA 4X case with an LCD display
	2 transducers with 25' (7.6 m) cable
	Transducer tiedown kit
	Sonic coupling gel
	Operating manual
	12 V, 2.2 AH battery
	120 VAC battery charger
	NEMA enclosure with tote handle and side latch
	Field transport case

## UniMag® M Magnetic Flow Tubes Electromagnetic Flow Meter for Standard Media and Conditions

### Description

EMCO UniMag® M flow meters are comprised of the flow tube (spool piece), sensors and junction box. UniMag M flowtubes have no liner, and therefore have no risk of failure due to a defective liner.

Each sensor includes an exciter coil and reference coil. Voltage is generated in the flow tube by the media in accordance with Faraday's Law, from which volumetric flow is calculated.

### Features

EMCO's UniMag® M Magnetic Flow Meter System specifically meets the requirements of the Water and Wastewater industry. The complete M system consists of a patented UniMag® flow meter assembly and a remote 4411e transmitter.

- Totally encapsulated sensor components
- No liner; M flow tubes are fusion bonded epoxy coated and approved by NSF61 and AWWA C213 for drinking water
- No liner means no meter failure due to a defective liner
- Low conductivity media > 0.08 µS/cm
- Patented AC coil excitation (high coil current and high pulsation frequency)
- Field replaceable sensors
- Sensor reference coils
- Internal grounding electrodes
- Carbon steel flow tubes for powerful magnetic field retention
- Accuracy unaffected by media coatings such as calcium carbonate, raw sewage, grease, algae and similar
- High signal-to-noise ratio for immunity to media noise



### Application Guide

		Temperature Range		Maximum Pressure <sup>1</sup>		Notes
		°F	°C	psi	bar	
Coating	Fusion Bonded Epoxy	-40 to 240	-40 to 116	based on sensor		Conforms to USA National Sanitation Foundation Standard NSF61 and AWWA Standard C213 for drinking water.
Sensors	PVDF (2" - 14" / 50 - 350mm)	240 max.	116 max.	150	10	Full vacuum capability. Temperature rating is for water and may be lower for other media. PVDF is approved by the US FDA #21 CFR 177.2510
Sensor Notes	Sensor assembly includes a non-wetted carbon steel cover flange, fusion bonded polyethylene protected. Sensor assemblies are supplied with outer cover flanges, 50 feet (15m) cables, re-enterable potting gel, junction box, conduit and stainless steel bolts. Special length cable on request. Standard 2-year warranty against material defects and bad workmanship, not including media compatibility, erosion and abrasion, or for media > 180°F / 80°C.					

<sup>1</sup> Maximum pressure at maximum temperature with appropriate connection.

# UniMag® M Magnetic Flow Tubes

## Electromagnetic Flow Meter for Standard Media and Conditions

### Media Conductivity

Typical required conductivity:  $\geq 5 \mu\text{S/cm}$  (5 micromhos/cm)

Low conductivity option: for conductivities  $> 0.80$  or  $< 5 \mu\text{S/cm}$  use the

UniMag® pre-amplifier option

For deionized, distilled or demineralized water, consult EMCO.

### Performance Specifications

Accuracy and Traceability	
<b>DTM Accuracy</b> Flow Tubes 2" to 6" (50mm to 150mm)	$\pm 0.5\%$ of rate for flows $\geq 2 \text{ fps}$ (0.6 m/s) $\pm 0.0075 \text{ fps}$ ( $\pm 0.00225 \text{ m/s}$ ) for flows $< 2 \text{ fps}$ (0.6 m/s)
<b>DTM Accuracy</b> Flow Tubes 8" to 14" (200mm to 350mm)	$\pm 0.5\%$ of rate for flows $\geq 1.5 \text{ fps}$ (0.45 m/s) $\pm 0.0075 \text{ fps}$ ( $\pm 0.00225 \text{ m/s}$ ) for flows $< 1.5 \text{ fps}$ (0.45 m/s)
<b>Traceability</b>	Accuracy is traceable to the National Institute of Science and Technology. A NIST traceable Calibration Certificate is provided with each flow tube.
<b>Accuracy Notes</b>	Accuracy is unaffected by electrode coatings such as sewage, grease, calcium carbonate, algae or similar.

1 For media such as ferric chloride, ferric sulfate (Odophos) or similar highly conductive media, flow meter performance can be adversely affected. Please consult EMCO for these types of applications, otherwise performance guarantee is null and void.

### Operating Specifications: 2-6" (50 to 150 mm)

Flow Range	Minimum	Maximum	Notes
<b>ft/s and m/s</b>	2 ft/s (.6 m/s)	32 ft/s (9.75 m/s)	
<b>gpm</b>	$4.896D^2 \text{ gpm}$	$78.34D^2 \text{ gpm}$	Where D is the I.D. of the pipe in inches.
<b>m³/h</b>	$.00172D^2 \text{ m}^3/\text{hr}$	$.02757D^2 \text{ m}^3/\text{hr}$	Where D is the I.D. of the pipe in millimeters.

### Operating Specifications: 8-14" (200 to 350mm)

Flow Range	Minimum	Maximum	Notes
<b>fps and m/s</b>	1.5 ft/s (.4572 m/s)	32 ft/s (9.75 m/s)	
<b>gpm</b>	$3.672D^2 \text{ gpm}$	$78.34D^2 \text{ gpm}$	Where D is the I.D. of the pipe in inches.
<b>m³/h</b>	$.00129D^2 \text{ m}^3/\text{hr}$	$.02757D^2 \text{ m}^3/\text{hr}$	Where D is the I.D. of the pipe in millimeters.

### Power Requirements for 4411e Flow Transmitter

<b>Power Supply Options</b>	120V, 60Hz	230V, 50Hz	120V, 50Hz
<b>Analog Output</b>	2 x 4-20 mA 2-wire system		
<b>Pulse Output</b>	2-wire potential-free output		

### Physical Specifications

<b>Materials of Construction</b>	Flanges and flow tubes: Carbon steel. Flanges have stainless steel retention bolts.
<b>Flange Notes</b>	Maximum pressure and temperature rating of the flow tube may be limited by the flange type selected. Flow tubes can be specially ordered with plain ends or with butt weld ends.
<b>Installation</b>	NEMA 6/IP68 indefinitely submersible to 30 foot water column up to 175°F (80°C)
<b>Process Connections</b>	ANSI 150 RF

# UniMag® M Magnetic Flow Tubes

## Electromagnetic Flow Meter for Standard Media and Conditions

### Measurable Flow Rates at 0.5% Accuracy

Line Size		Minimum Flow Rate Velocity		Maximum Flow Rate Velocity		Maximum Pressure
inches	mm	fps	gpm	fps	gpm	psi
2	50	2	21	32	335	150
3	80	2	46	32	737	150
4	100	2	79	32	1,270	150
6	150	2	180	32	2,882	150
8	200	1.5	234	32	4,990	150
10	250	1.5	369	32	7,865	150
12	300	1.5	529	32	11,280	150
14	350	1.5	645	32	13,753	150

### Straight Run Piping Requirements

Piping	Upstream	Downstream	Upstream	Downstream
Minimum requirement	5 D	3 D	5 D	3 D
Single elbow or tee upstream	10 D	5 D	5 D	3 D
Two elbows, coupled in the same plane	10 D	5 D	5 D	3 D
Two elbows, close coupled and out of plane	20 D	5 D	10 D	3 D
Pump, blending point, control valve upstream	30 D	5 D	20 D	3 D
Pump, control valve downstream	10 D	5 D	10 D	5 D

D is equal to the internal diameter of the pipe

### Other Installation Considerations

#### Mounting Recommendations

The UniMag may be mounted into a pipeline in any attitude, taking note of the flow direction arrow on the flow tube. To obtain accurate measurement, the pipe must be completely full and air must not be entrained in the flow.

#### Straight Run Requirements

For particularly poor velocity profiles caused, for example, by upstream bends in two or more planes or partially open valves, the UniMag M DTM requires a minimum of 10 pipe diameters of straight pipe upstream from the flow tube, and a minimum of 5 diameters downstream.

#### Non-Homogenous Media

For particularly non-homogenous slurries, pulps or pastes, the flow tube should be mounted in a vertical pipe to obtain the most even distribution of solids and fibers. There must be a minimum of 20 pipe diameters between any media mixing point and the UniMag M flow tube.

#### Partially Closed Valves

If the piping is horizontal and includes a partially closed valve, the valve should always be installed downstream of the UniMag. This will allow the head pressure in the system to be adjusted, reducing the chance of air entrainment in the flow, and will prevent excessive irregular profiles forming upstream of the flow tube.

#### Vacuum Conditions


The fusion bonded epoxy coating on UniMag M flow tubes is suitable for vacuum conditions caused, for example, by a pump downstream from the flow tube.



# UniMag® M Magnetic Flow Tubes

## Electromagnetic Flow Meter for Standard Media and Conditions

### Dimensions and Weights

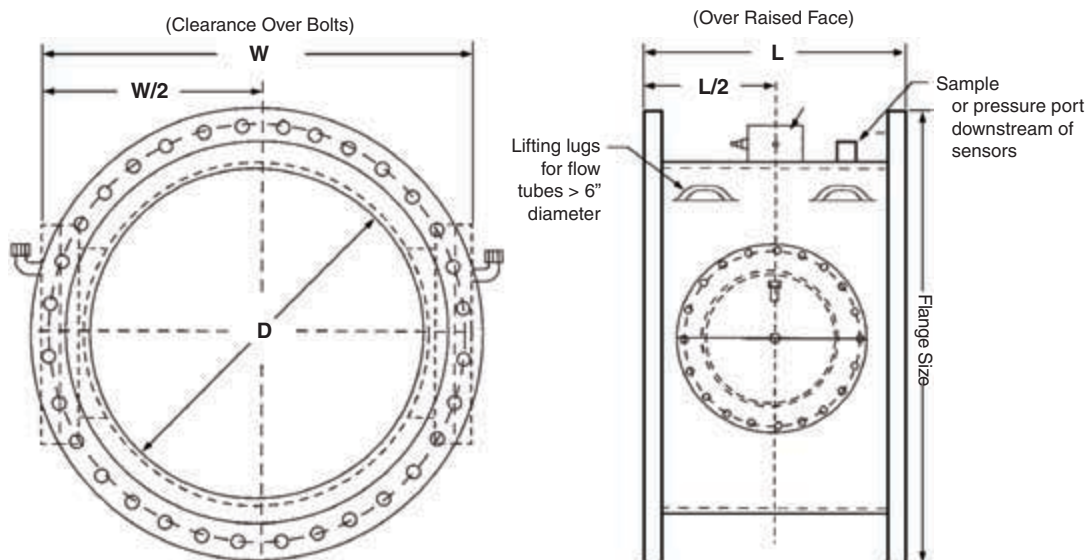

Nominal Size D		Dimension L*		Dimension W		Approximate Weight	
Inches	mm	Inches	mm	Inches	mm	LB	KG
2	50	10	250	9	250	35	16
3	80	10	250	11	250	45	20
4	100	12	300	12	300	65	30
6	150	12	300	15	350	84	38
8	200	18	450	21	550	185	84
10	250	18	450	24	600	225	102
12	300	18	450	26	650	301	137
14	350	18	450	27	700	335	152

# UniMag® M Magnetic Flow Tubes

## Electromagnetic Flow Meter for Standard Media and Conditions

**Model and Suffix Codes** Items in Grey Highlight are normally stocked and have standard lead times.

Category	Description										
UniMag® M	UniMag® M		DTM	...		...	...	...	...	...	...
Line Size	2	50	...	02	...	...	...	...	...	...	...
2-14" (50-350mm)	3	80	...	03	...	...	...	...	...	...	...
	4	100	...	04	...	...	...	...	...	...	...
	6	150	...	06	...	...	...	...	...	...	...
	8	200	...	08	...	...	...	...	...	...	...
	10	250	...	10	...	...	...	...	...	...	...
	12	300	...	12	...	...	...	...	...	...	...
	14	350	...	14	...	...	...	...	...	...	...
Flowtube/Flange	Carbon Steel Flowtube and Flanges				C	...		...	...	...	...
Sensors, seals, gaskets	PVDF Sensor, Elastomer Gaskets, Viton Electrode Seals ≤ 16" (400mm)					E	...	...	...	...	...
Electrodes/Grounding	AISI 316 Stainless Steel Electrodes and Grounding					...	T	...	...	...	...
Flowtube liner/coating	Fusion Bonded Epoxy inside and outside (note 1)					...	...	X	...	...	...
Installation	Indefinitely submersible to 30 ft. (10m) water column to NEMA 6/IP68 with 50 ft cables (15m)					...	...	...	R	...	...
	Extra cable length (up to 150ft max.)					...	...	...	E	...	...
Process connections	ANSI 150rf Process Flanges						...	...	...	1	...
Coil Supply	120V Coils					...	...	...	...	...	A
	EXAMPLE		DTM	03-	C-	E-	T-	X-	R-	1-	A

### NOTES:

1. Approved by NSF61 and AWWA C213 for drinking water.
2. 4411e transmitter must be ordered, as a separate line item, and is included in the price.
3. All flowtubes will be supplied with a 3/4" sample port.
4. Currently, EMCO products are NOT PED approved for sales into European Union countries.

## UniMag® DT Series Electromagnetic Flow Tubes

### Description

EMCO's UniMag® DT Magnetic Flow Meter System consists of the patented UniMag Flow Tube and 4411e Transmitter. UniMag sensors are unique because they do not require a liner and can be replaced in the field.

EMCO UniMag® DT flow meters are comprised of the flow tube (spool piece), sensors and junction box. Liner options are available but are not necessary for operation.

Each sensor includes an exciter coil and reference coil. Voltage is generated in the flow tube by the media in accordance with Faraday's Law, from which volumetric flow is calculated.

### Features

- Totally encapsulated sensor components
- No liner required for flow tube operation; liners available for abrasive media
- Low conductivity media  $> 0.08 \mu\text{S/cm}$
- Patented AC coil excitation (high coil current and high pulsation frequency)
- Large conical electrodes to project through non-fluidic coatings
- Field replaceable sensors
- Inherent redundancy from multiple sensors
- Sensor reference coils
- Internal grounding electrodes
- Flow tubes can be manufactured to any length
- Various flow tube materials, including carbon steel for powerful magnetic field retention




The UniMag DT, shown with 2 sensors (left) and 4 sensors (right).

- Accuracy unaffected by media coatings such as calcium carbonate, raw sewage, grease, algae and similar
- High signal-to-noise ratio for immunity to media noise

### UniMag Sensor

UniMag Sensors are completely encapsulated, solid-state, and do not depend on a liner for insulation.

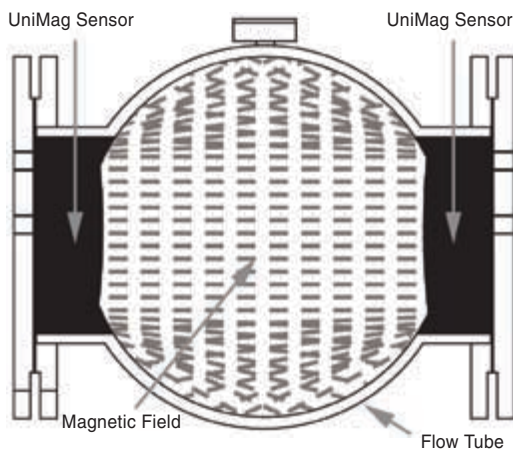

**UniMag Magnetic Field**  
Large UniMag sensors create a magnetic field over the entire flow tube cross section. The flow signal represents the true weighted velocity of the media and is highly insensitive to velocity profile distortion and swirl effects.

TI-8-610-US 4.09

*Local regulation may restrict the use of this product below the conditions quoted. Limiting conditions refer to standard connections only.  
In the interests of development and improvement of the product, we reserve the right to change the specification.*

# UniMag® DT Series Electromagnetic Flow Tubes

## Application Guide

	Temperature Range		Maximum Pressure¹		Notes
	°F	°C	psi	bar	
Liners and Coatings					
Fusion Bonded Epoxy	-40 to 240	-40 to 116	based on sensor		Conforms to USA National Sanitation Foundation Standard NSF61 and AWWA Standard C213 for drinking water.
Polyurethane²	175 max.	80 max.	based on sensor		Conforms to NSF61 and AWWA C213 for drinking water. Heavy duty polyurethane is suitable for mining slurries and similar media.
Tefzel™	240 max.	115 max.	based on sensor		Temperatures based on water. Not recommended for high vacuum applications. Other media may reduce this temperature.
Ryton™	250 max.	121 max.	based on sensor		Used for paper mill liquors, lime muds and similar high conductivity media.
Sensors					
Polyurethane	175 max.	80 max.	150	10	Conforms to NSF61 and AWWA C213 for drinking water.
PVDF	240 max.	115 max.	150	10	Full vacuum capability. Temperature rating is for water and may be lower for other media. PVDF is approved by the US FDA #21 CFR 177.2510
UHMWPE	175 max.	80 max.	150	10	
PEEK	250 max.	121 max.	356	25	Full vacuum capability.
Sensor Notes	Sensor assembly includes a non-wetted carbon steel cover flange, fusion bonded polyethylene protected. Sensor assemblies are supplied with outer cover flanges, 30 feet (10m) cables, re-enterable potting gel, junction box, conduit and stainless steel bolts. Special length cable on request. Standard 2-year warranty against material defects and bad workmanship, not including media compatibility, erosion and abrasion, or for media > 180°F / 80°C.				

1 Maximum pressure at maximum temperature with appropriate connection.

2 Temperature differential between process and ambient limited to 140°F / 60°C for polyurethane sensor, and 212°F / 100°C for PVDF sensor.

## Media Conductivity

Typical required conductivity: > 1 µS/cm (1 micromho/cm)

Low conductivity option: for conductivities > 0.08 or < 5 µS/cm use the UniMag pre-amplifier option

For deionized, distilled or demineralized water, consult EMCO.

## Performance Specifications

Accuracy and Traceability	
<b>Accuracy</b>	±0.5% of rate for flows ≥ 1.5 fps (0.45 m/s) ±0.0075 fps (± 0.00225 m/s) for flows < 1.5 fps (0.45 m/s)
<b>Traceability</b>	Accuracy is traceable to the National Institute of Science and Technology. A NIST traceable Calibration Certificate is provided with each flow tube.
<b>Accuracy Notes</b>	Accuracy is unaffected by electrode coatings such as sewage, grease, calcium carbonate, algae or similar.

1 For media such as ferric chloride, ferric sulfate (Odophos) or similar highly conductive media, flow meter performance can be adversely affected. Please consult EMCO for these types of applications, otherwise performance guarantee is null and void.

TI-8-610-US 4.09

# UniMag® DT Series Electromagnetic Flow Tubes

## Operating Specifications - 2-80" (50 to 2000 mm)

Flow Range	Minimum	Maximum	Notes
ft/s and m/s	1.5 ft/s (.4572 m/s)	32 ft/s (9.75 m/s)	
gpm	3.672D <sup>2</sup> gpm	78.34D <sup>2</sup> gpm	Where D is the I.D. of the pipe in inches
m <sup>3</sup> /hr	.00129D <sup>2</sup> m <sup>3</sup> /hr	.02757D <sup>2</sup> m <sup>3</sup> /hr	Where D is the I.D. of the pipe in millimeters

## Power Requirements for 4411e Flow Transmitter

Power Supply Options	120V, 60Hz 230V, 50Hz 120V, 50Hz
Analog Output	2 x 4-20 mA 2-wire system
Pulse Output	2-wire potential-free output

## Physical Specifications

Materials of Construction	Flanges and flow tubes: Carbon steel, 316 stainless steel or HDPE (high density polyethylene)
Flange Notes	Maximum pressure and temperature rating of the flow tube may be limited by the flange type selected. Flow tubes can be specially ordered with plain ends or with butt weld ends. For pressure and temperature ratings of HDPE flow tubes, consult EMCO.
Installation Options	NEMA 6/IP68 indefinitely submersible to 30 foot water column up to 175°F (80°C) NEMA 4X/IP65 for temperatures greater than 175°F (80°C) Entela approved to NEC/CSA Class 1, Division 2, Groups C, D, Temp. T4 Entela approved to ATEX Zone 2 explosive atmospheres
Process Connections	ANSI 150 RF (<28 in.); ANSI/AWWA C207 Class D FF (≥28 in.) ANSI 300 RF AWWA FF (specify class) DIN/BS4504 PN6 DIN/BS4504 PN10 DIN/BS4504 PN16 JIS10krf BS/AS2129 Table D BS/AS2129 Table E

# UniMag® DT Series Electromagnetic Flow Tubes

## Measurable Flow Rates at 0.5% Accuracy

Line Size		Minimum Flow Rate Velocity		Maximum Flow Rate Velocity		Maximum Pressure
inches	mm	fps	gpm	fps	gpm	psi
2	50	1.5	16	32	335	150
3	80	1.5	35	32	737	150
4	100	1.5	60	32	1,270	150
6	150	1.5	135	32	2,882	150
8	200	1.5	234	32	4,990	150
10	250	1.5	369	32	7,865	150
12	300	1.5	529	32	11,280	150
14	350	1.5	645	32	13,753	150
16	400	1.5	854	32	18,218	150
18	450	1.5	1,093	32	23,310	150
20	500	1.5	1,361	32	29,028	150
24	600	1.5	1,985	32	42,345	150
28	700	1.5	2,727	32	58,169	140
30	760	1.5	3,142	32	67,021	
32	800	1.5	3,586	32	76,500	
36	900	1.5	4,563	32	97,337	90
42	1000	1.5	6,248	32	133,293	60
48	1200	1.5	8,198	32	174,889	
54	1400					35
56	1450	1.5	11,209	32	239,125	
60	1600	1.5	12,891	32	275,003	
66	1675	1.5	15,634	32	333,519	
72	1800	1.5	18,641	32	397,676	30
80	2000	1.5	23,062	32	491,993	

## Straight Run Piping Requirements

Piping	Upstream	Downstream
Minimum requirement	5 D	3 D
Single elbow or tee upstream	5 D	3 D
Two elbows, coupled in the same plane	5 D	3 D
Two elbows, close coupled and out of plane	10 D	3 D
Pump, blending point, control valve upstream	20 D	3 D
Pump, control valve downstream	--	5 D

D is equal to the internal diameter of the pipe

# UniMag® DT Series Electromagnetic Flow Tubes

## Other Installation Considerations

### Mounting Recommendations

The UniMag may be mounted into a pipeline in any attitude, taking note of the flow direction arrow on the flow tube. To obtain accurate measurement, the pipe must be completely full and air must not be entrained in the flow.

### Straight Run Requirements

For particularly poor velocity profiles caused, for example, by upstream bends in two or more planes or partially open valves, the UniMag DT requires a minimum of 10 pipe diameters of straight pipe upstream from the flow tube, and a minimum of 5 diameters downstream.

### Non-Homogenous Media

For particularly non-homogenous slurries, pulps or pastes, the flow tube should be mounted in a vertical pipe to obtain the most even distribution of solids and fibers. There must be a minimum of 20 pipe diameters between any media mixing point and the UniMag DT flow tube.

### Partially Closed Valves

If the piping is horizontal and includes a partially closed valve, the valve should always be installed downstream of the UniMag. This will allow the head pressure in the system to be adjusted, reducing the chance of air entrainment in the flow, and will prevent excessive irregular profiles forming upstream of the flow tube.


### Vacuum Conditions

For vacuum conditions caused, for example, by a pump downstream from the UniMag flow tube, use internally coated fusion bonded epoxy, or no liner at all. For full vacuum, use PEEK sensors only.



# UniMag® DT Series Electromagnetic Flow Tubes


## Dimensions and Weights

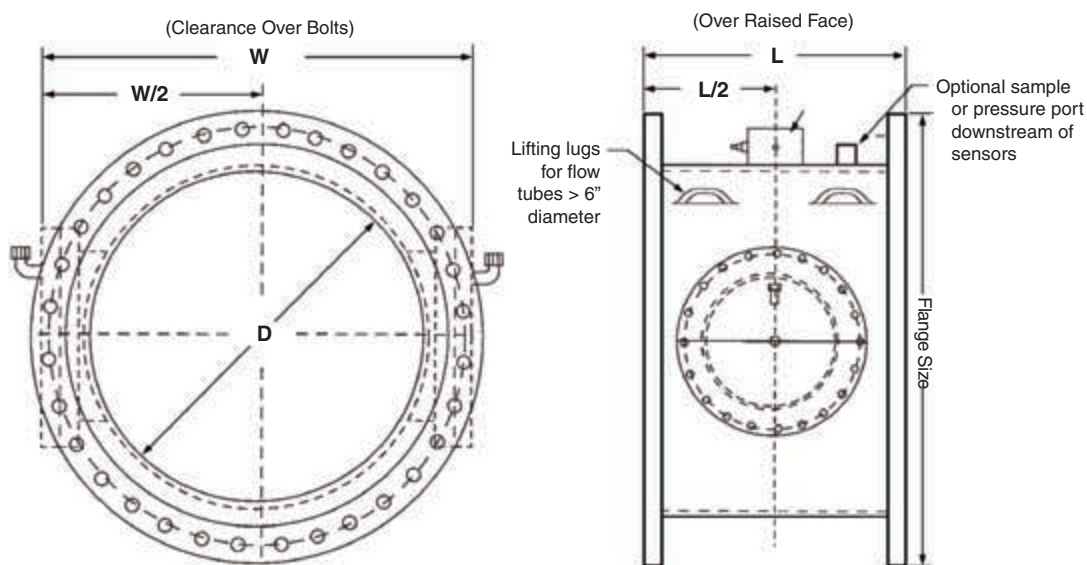

Nominal Size D		Dimension L*		Dimension W		Approximate Weight	
Inches	mm	Inches	mm	Inches	mm	LB	KG
2	50	10	250	13	250	35	16
3	80	10	250	14	250	45	20
4	100	12	300	16	300	65	30
6	150	12	300	19	350	84	38
8	200	18	450	21	550	185	84
10	250	18	450	24	600	225	102
12	300	18	450	26	650	301	137
14	350	18	450	27	700	335	152
16	400	20	500	30	750	490	223
18	450	20	500	32	800	515	234
20	500	20	500	35	900	615	280
24	600	24	600	39	1000	840	382
28	700	30	800	42	1000	980	445
30	750	30	800	44	1100	1280	582
32	800	30	800	46	1150	1310	595
36	900	30	800	50	1300	1625	739
42	1050	40	1000	56	1450	1980	900
48	1200	40	1000	63	1600	2210	1005
54	1350	48	1200	66	1700	2500	1136
56	1400	48	1200	71	1800	2860	1300
60	1500	48	1200	79	2000	2930	1332
66	1700	48	1200	85	2150	3270	1486
72	1850	48	1200	90	2300	3609	1640
80	2050	48	1200	98	2501	3898	1772

# UniMag® DT Series Electromagnetic Flow Tubes


## Wiring Diagrams - Junction Box Wiring (1 or 2 Sensors)

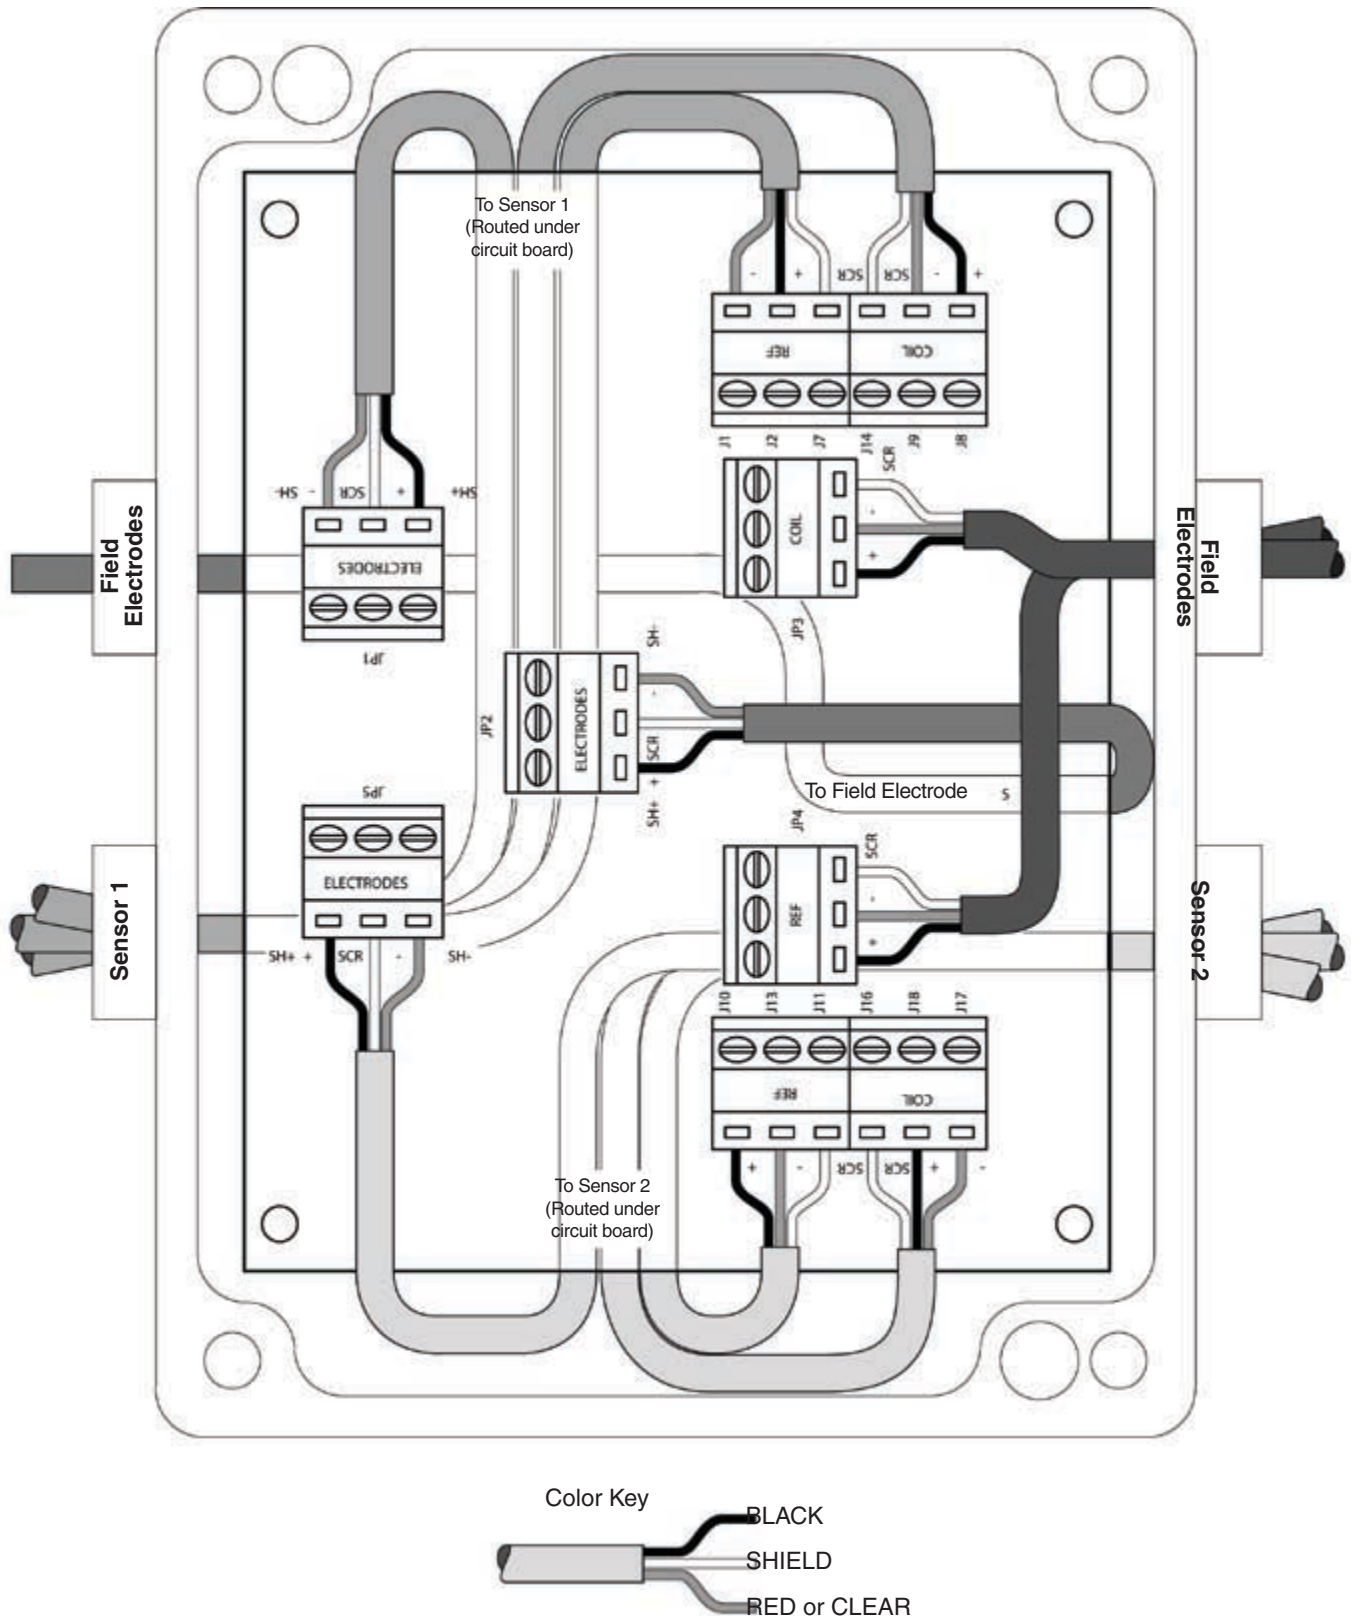

TI-8-610-US 4.09

# UniMag® DT Series Electromagnetic Flow Tubes

## Wiring Diagrams - Junction Box Wiring (4 Sensors)

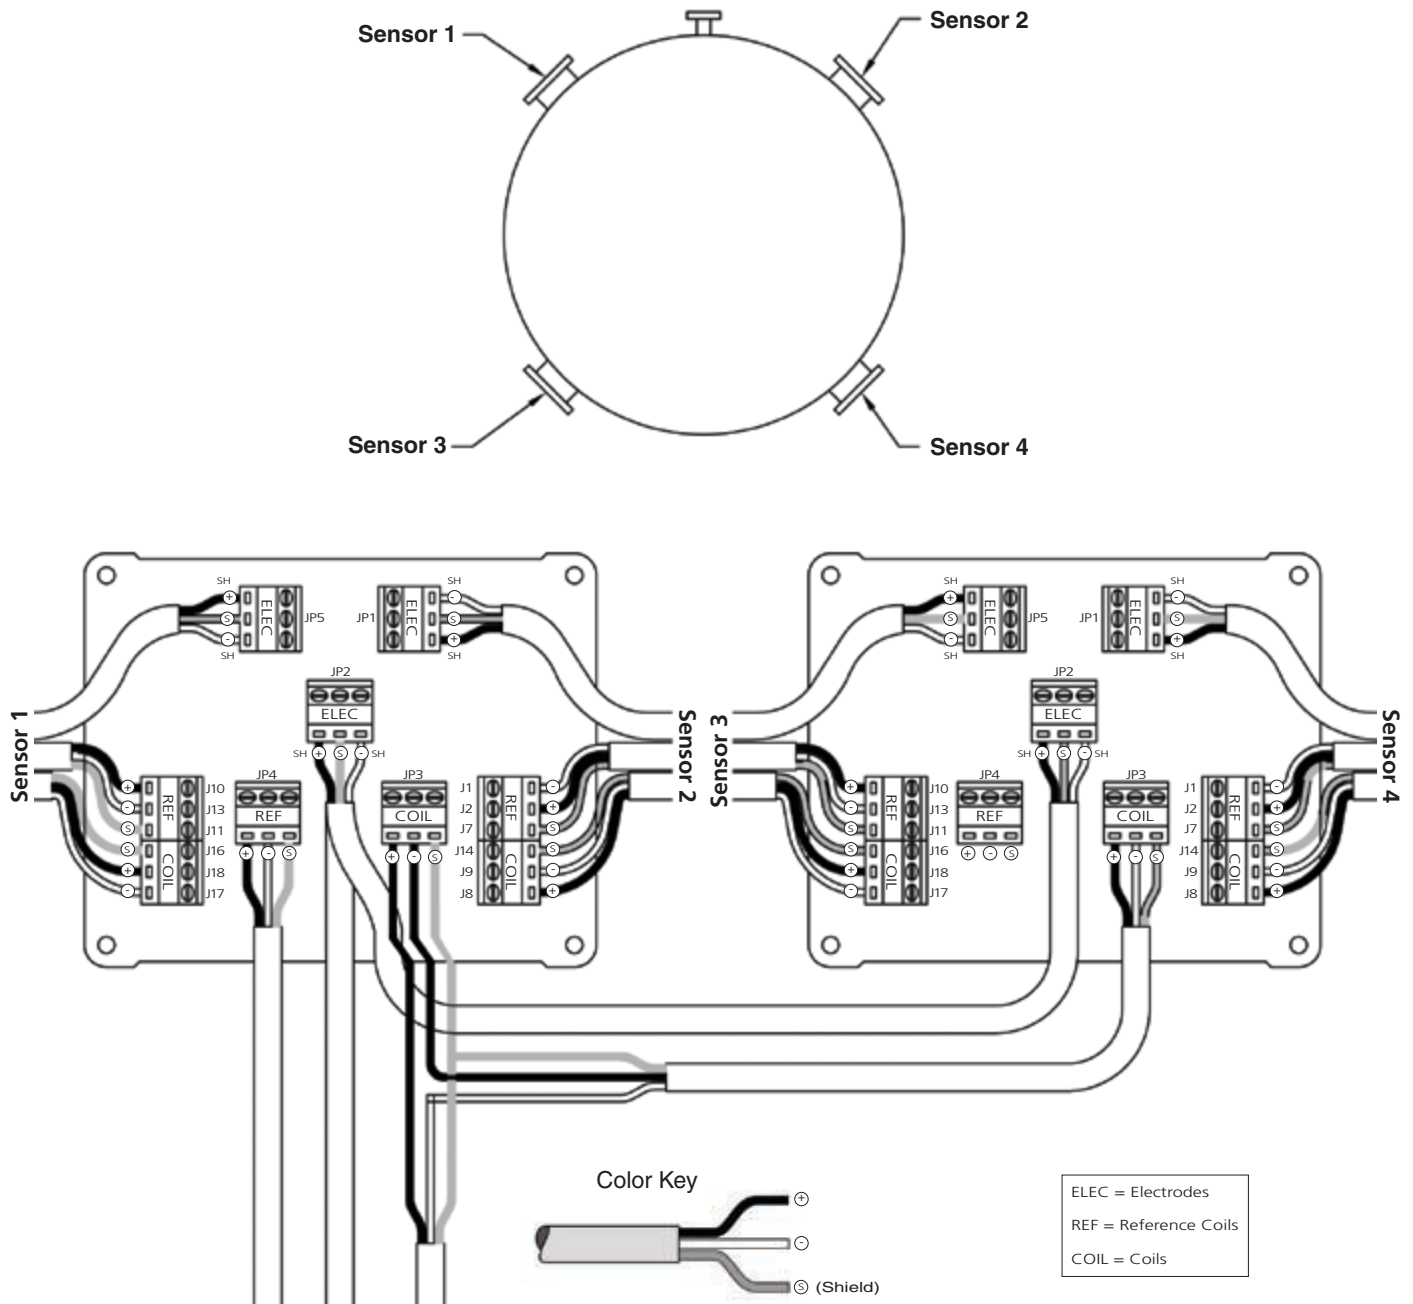

### Notes

1. Electrodes are connected in parallel.
2. Coils are connected with opposite pairs in parallel, each pair in series.
3. Two reference coils make one set.

# UniMag® DT Series Electromagnetic Flow Tubes

**Model and Suffix Codes** (Items in Grey Highlight are normally stocked and have standard lead times.)

Category	Description														
Type	DT Type Flowtube: Multiple Sensors				DT	...	...	...	...	...	...	...	...	...	...
Line Size	2	50				02	...	...	...	...	...	...	...	...	...
	3	80				03	...	...	...	...	...	...	...	...	...
	4	100				04	...	...	...	...	...	...	...	...	...
	6	150				06	...	...	...	...	...	...	...	...	...
	8	200				08	...	...	...	...	...	...	...	...	...
	10	250				10	...	...	...	...	...	...	...	...	...
	12	300				12	...	...	...	...	...	...	...	...	...
	14	350				14	...	...	...	...	...	...	...	...	...
	16	400				16	...	...	...	...	...	...	...	...	...
	18	450				18	...	...	...	...	...	...	...	...	...
	20	500				20	...	...	...	...	...	...	...	...	...
	24	600				24	...	...	...	...	...	...	...	...	...
	28	700				28	...	...	...	...	...	...	...	...	...
	30	760				30	...	...	...	...	...	...	...	...	...
	32	800				32	...	...	...	...	...	...	...	...	...
	36	900				36	...	...	...	...	...	...	...	...	...
	42	1000				42	...	...	...	...	...	...	...	...	...
	48	1200				48	...	...	...	...	...	...	...	...	...
	54	1400				54	...	...	...	...	...	...	...	...	...
	56	1450				56	...	...	...	...	...	...	...	...	...
	60	1600				60	...	...	...	...	...	...	...	...	...
	66	1675				66	...	...	...	...	...	...	...	...	...
	72	1800				72	...	...	...	...	...	...	...	...	...
	80	2000				80	...	...	...	...	...	...	...	...	...
Flowtube/Flange	Carbon Steel (Water & Waste)					...	C	...	...	...	...	...	...	...	...
Materials	316 Stainless Steel Flowtube, Carbon Steel Flanges					...	A	...	...	...	...	...	...	...	...

TI-8-610-US 4.09

# UniMag® DT Series Electromagnetic Flow Tubes

**Model and Suffix Codes** (Items in Grey Highlight are normally stocked and have standard lead times.)

Category	Description														
Materials (cont.)	All AISI 316 Stainless Steel					...	T	...	...	...	...	...	...	...	...
	Non-Standard Pipewall Thickness					...	W	...	...	...	...	...	...	...	...
	Sensor	Gasket	Seal	Line Size											
Sensor,	PVDF	Elastomer	Viton	2-14" (50-350mm)				E	...	...	...	...	...	...	...
Gasket, and	PVDF	Teflon	Viton	2-14" (50-350mm)				D	...	...	...	...	...	...	...
Seal Materials	Polyurethane	Elastomer	Viton	> 16" (400mm)				P	...	...	...	...	...	...	...
by line size	PVDF	Teflon	Kalrez	2-14" (50-350mm)				F	...	...	...	...	...	...	...
(note 1,5)	Peek	Klinger	Chemraz	2-14" (50-350mm)				K	...	...	...	...	...	...	...
	UHMWPE	Elastomer	Viton	2-14"(50-350mm) (note 5)CONCAVE				U	...	...	...	...	...	...	...
	Peek	Klinger	Fused	2-14" (50-350mm) (note 2)				H	...	...	...	...	...	...	...
	Polyurethane	Elastomer	Viton	> 16" (400mm) CONCAVE				C	...	...	...	...	...	...	...
	Special							S	...	...	...	...	...	...	...
Electrodes	AISI 316 Stainless Steel (Water & Waste)					...	...	...	T	...	...	...	...	...	...
(note 3)	Hastelloy B (Small)					...	...	...	B	...	...	...	...	...	...
	Hastelloy C (Small)					...	...	...	C	...	...	...	...	...	...
	Titanium					...	...	...	I	...	...	...	...	...	...
	Hastelloy C (Large - note 4)					...	...	...	W	...	...	...	...	...	...
	Hastelloy B (Large- note 4)					...	...	...	X	...	...	...	...	...	...
	Tantalum					...	...	...	A	...	...	...	...	...	...
	Hastelloy C fused in (note 2)					...	...	...	H	...	...	...	...	...	...
Flowtube liners	Fusion Bonded Epoxy Coating Inside and outside					...	...	...	...	X	...	...	...	...	...
and Coatings	Polyurethane inside and outside (note 6)					...	...	...	...	P	...	...	...	...	...
	Heavy Duty Polyurethane inside, Epoxy Enamel outside (note 7)					...	...	...	...	M	...	...	...	...	...
	Heavy Duty Tefzel (ETFE) (note 8)					...	...	...	...	Z	...	...	...	...	...
	No Coating inside, Fusion Bonded Epoxy outside (note 9)					...	...	...	...	N	...	...	...	...	...
	Ryton Coated inside, Epoxy Enamel outside (note 18)					...	...	...	...	R	...	...	...	...	...
Installation	50 feet (15m) cables NEMA 6/IP68 (note 14)					...	...	...	...	...	R	...	...	...	...
	Extra length cables					...	...	...	...	...	E	...	...	...	...


# UniMag® DT Series Electromagnetic Flow Tubes

## Model and Suffix Codes (Items in Grey Highlight are normally stocked and have standard lead times.)

Category	Description																			
Process	ANSI 150 RF (<28", 700mm) ANSI/AWWA C207 Class D FF (> 28", 700mm)																			
Connections	ANSI 300 RF																			
and Flanges	DIN/BS4054 PN 6																			
	DIN/BS4504 PN 10 (note 12)																			
	DIN/BS4504 PN 16 (note 12)																			
	Special																			
Options	Pre-Amplifier (note 10)																			
	Extra-Long 316 Stainless Steel Electrodes (note 11)																			
(note 22)	Special Lay Length (note 20)																			
	No Options																			
	Special (note 21)																			
Coil Supply	120V supply																			
	230V supply																			
<b>Example</b>		DT-	03-	C-	E-	T-	X-	R-	1-	A-	A									

### NOTES:

- For PVDF, PEEK, UHMWPE and Teflon sensors greater than 14 inch (350 mm) diameter, consult EMCO.
- Use H electrodes on fluids with temperature greater than 200°F (93°C). Use with H sensors and R (Ryton) coating only.
- Extra-Long electrodes are provided for thick, non-fluidic coating applications. Advise Thickness. For other materials, consult EMCO.
- Use W or X electrodes with K (PEEK) sensors only.
- For highly abrasive materials used with NON COATED internal flowtubes as a lower cost alternative to M (Heavy Duty Polyurethane) liners.
- Option P (Polyurethane) is intended as an alternative in the Water & Waste industry only to meet inferior engineering specifications. It is not as effective as an X (Fusion Bonded Epoxy) coating and is not intended for abrasive material.
- Recommended for mining slurries and similar fluids. Please include internal piping diameter of mating pipe so the UniMag® can be manufactured to match.
- Tefzel is a fusion bonded ETFE, similar to Teflon. It is intended for use with acids or similar non-abrasive, but corrosive media.
- Non-internally coated flowtubes are intended for use with concave sensors, normally up to 8 inches flowtube diameter, for highly abrasive media. The wear rate of the sensor equals the wear rate of the flowtube. This is a lower cost alternative to M liner flowtubes, but service life is typically 25% less than with an M liner. Their internal diameter must match the i.d. of the mating pipework.
- A Pre-amplifier is required in the junction box for media conductivity <5 µS/cm or for cables 150 feet (50m) or greater.
- Extra-long electrodes are provided for thick, non-fluidic coating applications. Advise thickness. For other materials, consult EMCO.
- Options 5 and 6 have the same dimensions up to 6 inches (150mm).
- Round all % increases up to the nearest dollar.
- Indefinitely submersible to 30 foot water column.
- Water & Waste notifies the recommended standard option for water, raw sewage and similar applications.
- For media such as ferric chloride, ferric sulphate and similar, consult EMCO.
- Stainless steel tags (tag number only) available upon request, additional charge.
- Ryton coating is used for media normally found in the paper industry. We recommend Ryton coating as follows:  
\_ Maximum 220° F (104°C): Use K sensors with W or X electrodes and grounding  
\_ Maximum 250° F (176°C): Use H sensors with H electrodes and grounding
- For acids, always specify % in solution with water and operational temperature range with inquiries.
- Consult EMCO for non-standard flowtube lengths up to double length.
- All special orders must include a complete description along with the ordering code. Use 'special' option for combinations.
- All flowtubes will be supplied with a sample port. For line sizes < 24" (600mm) the sample port will be 3/4", for line sizes >28" (700mm) the sample port will be 1".
- Currently, EMCO products are NOT PED approved for sales into European Union countries.
- 4411e is NOT included in the price & must be a separate line item on your order





## 4411e Magnetic Flow Transmitter

### Description

EMCO's 4411e flow transmitter produces a clean and powerful bi-directional flow signal with unsurpassed fast response and a uniquely high signal strength.


The 4411e flow transmitter uses an innovative and patented Pulsed Hybrid method of coil excitation to create an ultra stable flow signal to media noise ratio up to 50 times higher than other magmeter technologies.

The 4411e is a versatile and advanced magmeter transmitter with a user-friendly keypad for programming, a 10-year memory, batch control, RS232 interface, two 4 x 20mA outputs and a scaleable pulse frequency output.

### Features

- High excitation current (to 5.5 base to peak) and high exciter frequency (40 Hz or 33 Hz) for all size UniMag Sensors
- Suitable for problem media (mining, slurries, pulps, liquors and low conductivity media)
- 4 lines of 20 character alphanumeric, backlit LCD display with sealed, tactile feedback and vandal-resistant keyboard
- Noise countervailence and auto-zero circuits with RF and VFD filtration
- Virtually immune to common noise effects, including eddy current drift, radio frequency, variable frequency drives and similar
- Bi-directional flow measurement; accurately eliminates back flow from net totals
- Reference coils to compensate for media temperature
- Fast time constant of 0.30 seconds
- Comprehensive alarm relays and setpoints

### Dimensions and Weight

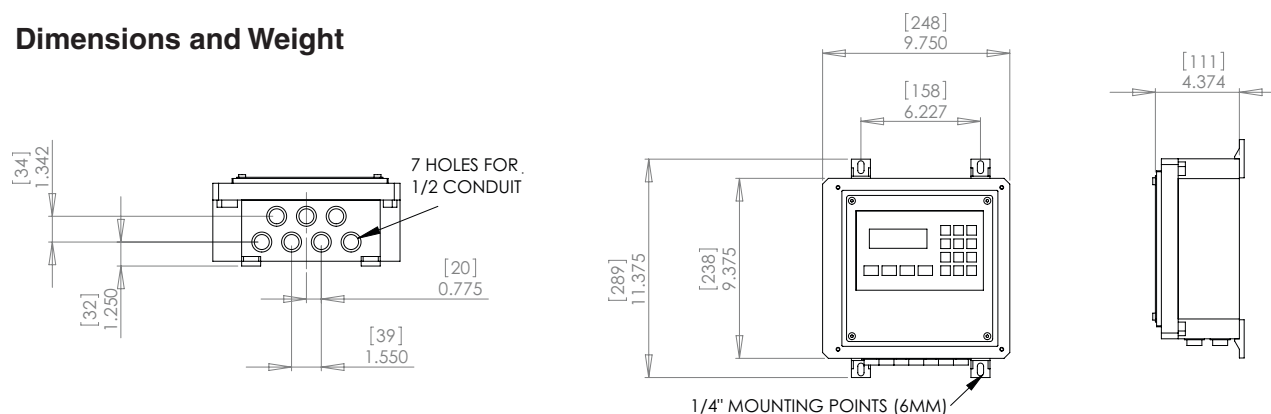

# 4411e Magnetic Flow Transmitter

## 4411e Specifications

<b>Enclosure</b>	Wall mounted, UV resistant fiberglass.
<b>Display</b>	Four lines of 20 characters; waterproof, back-lit LCD display.
<b>Front Panel Keypad</b>	Tactile feedback, waterproof sealed.
<b>Environmental Protection</b>	NEMA 4X and IP65
<b>Ambient Temperature<sup>1</sup></b>	-4°F to 140°F (-20°C to 60°C)
<b>Supply Voltage</b>	120V, 60Hz; 120V, 50Hz; 230V, 50Hz
<b>Power Consumption</b>	20 watts typical, including sensors.
<b>Diagnostics</b>	All necessary diagnostics, readings and system status are available via the front panel keypad without opening the door. A user security password is programmable, allowing revalidation of the magmeter's NIST traceable Calibration Certificates. A separate calibration box is not necessary.
<b>Windows Interface Program</b>	Computer interface via serial connection, enabling programming of setup, the ability to upload new firmware and download diagnostics and status.
<b>Magnetizing Current</b>	Up to 5.5A, depending on sensor size.
<b>Exciter Frequency</b>	40Hz (with 60Hz) or 33Hz (with 50 Hz)
<b>Time Constant (T)</b>	Minimum 30 milliseconds
<b>Signal Averaging (5T)</b>	Infinitely adjustable 150ms to 300 seconds.
<b>Optional Batch Control</b>	For batch control, the total set amount is entered via the keypad and displayed. Keypad actuation of batch flow via a 4411e relay initiates flow, counting from zero to the total set amount.
<b>Frequency Mode</b>	0 to 1000Hz, up to 10,000Hz square wave. The external isolated outputs are rated 30V DC maximum, current of 250mA.
<b>Analog Outputs<sup>2</sup></b>	Two 4-20mA outputs from separate terminals are available for bi-directional flow. Either may be configured as an internally powered 2-wire output or an externally powered 2-wire output.
<b>Pulsed Outputs</b>	An externally powered, 2-wire scaled output (for totalizing flow) or frequency output (for rate of flow) is available as follows: <ul style="list-style-type: none"> <li>• Slow speed: 100 ms pulse width, 5Hz maximum frequency</li> <li>• Medium speed: 50 ms pulse width, 10Hz maximum frequency</li> <li>• Fast speed: 5 ms pulse width, 100Hz maximum frequency</li> </ul>
<b>Communication Outputs</b>	RS-232 and RS-485 are available as standard.
<b>Relay Outputs</b>	Two user configurable form C (changeover) relays with contact rating 125V AC, 1A, 30VA.
<b>Contact Inputs</b>	Two user configurable inputs, rated 12V DC, 10mA. These inputs require a contact closure or transistor switch between the terminals.
<b>Input Impedance</b>	10 <sup>12</sup> Ohms
<b>Pre-Amp Supply</b>	A pre-amp is internally supplied on all DM Series DemiMags as standard. On other magmeters, an internal booster pre-amp is recommended for media conductivity < 5 uS/cm.
<b>Analog Inputs (Including Level)<sup>3</sup></b>	Two 4 - 20mA inputs with 2 wire, 18V DC supply.
<b>Maximum Cable Length</b>	50 feet (15m) for conductivities < 3 µS/cm (micromhos/cm) or 300 feet or 10 x C (90m or 3 x C) for conductivities > 3 µS/cm, whichever is less, where C is the conductivity in µS/cm (preamplifier required over 150 feet).

See footnotes on next page.

# 4411e Magnetic Flow Transmitter

**Model and Suffix Codes-** Items Grey Highlight are normally stocked and have standard lead times

Category	Description				
<b>Type</b>	4411e transmitter with RS232 communication	DSM	...	...	...
<b>Approvals<sup>1</sup></b>	Pending UL and CSA	...	1	...	...
<b>Power Supply<sup>2</sup></b>	120V AC, 60Hz	...	...	1	...
	120V AC, 50 Hz	...	...	2	...
	230V AC, 50Hz	...	...	3	...
<b>Options</b>	No Further Options	...	...	...	O
	2-Wire Level,12-30V DC Supply / 4-20mA Input (note 3)		...	...	C
	CE transmitter for use with ChannelMag and NFP ONLY (note 3)			...	E
	Special for use with combinations (note 4)				S
Example		DSM-	1-	1-	O

## Notes:

- 1 The 4411e Transmitter must be in the safe area.
- 2 For dredging applications with 120V / 230V AC, always recommend using EGS Sola HeviDuty Power Conditioner 63 series on quotations.
- 3 For use with UniMag® NFP, ChannelMag PM2, and ChannelMag CM2
- 4 All special orders must include a complete description along with the ordering code. Use 'special' option for combinations.
- 5 Currently, EMCO products are NOT PED approved for sales into European Union countries.



## Model MAGFLO® Sensor Model Mag 1100, MAG 1100 Food and MAG 3100 Signal Converter Model MAG 6000 and MAG 5000 MAG 5100 W

### Description

MAGFLO® electromagnetic flowmeters employ Faraday's law to measure the volumetric flow rate of conductive liquids. EMCO offers a wide variety of electromagnetic flowmeters. In addition to standard meters for typical applications, we have specialized meters, like our sanitary MAG 1100 FOOD—for application-specific flow measurement.

### Features

#### 6000 signal converter (electronics)

- 0.25% accuracy
- Compact and practical design
- User-friendly design
- SENSORPROM™ Technology
- Bidirectional measurement
- Self-diagnostic
- Backlit display
- HART protocol available
- Empty Pipe Cut-Off
- Batch Control Function
- Electrode Cleaning available

#### 5000 same features as 6000 except

- 0.5% accuracy
- Less Batch Control Function

#### 1100 sensor

- Universal sensor
- High liquid temperature
- Withstands rigorous cleaning
- Food version
  - 3A and FDA approved
  - Steam CIP cleanable
  - Withstands rigorous cleaning
  - Sanitary Design
  - Tri-clamp connections
- Line sizes
  - Standard: 1/4" to 4"
  - High temperature: 1/2" to 4"
  - Food: 3/8" to 4"
  - Wafer connection

#### 3100 sensor

- Line Sizes: 1/2" to 80"
- Several Liner and Electrode Materials Available
- NEMA 6 (Accidental Submersible)
- Flange Connection

#### 5100 W

- DN 25 to DN 1200 (1" to 48")
- Connection flanges EN 1092-1 (DIN 2501), ANSI, AWWA and AS.
- NBR Hard Rubber liner for all water applications
- Drinking water EPDM liner with approvals
- Hastelloy integrated grounding and measuring electrodes
- Increased low flow accuracy for water leak detection, due to coned liner design.
- Drinking water approvals
- Suitable for direct burial and constant flooding
- Build-in length according to ISO 13359
- Easy commissioning, SENSORPROM unit automatically uploads calibration values and settings.
- Designed that patented in-situ verification can be conducted. Using SENSORPROM fingerprint.



### Applications

MAGFLO® electromagnetic flowmeters offer important advantages such as no pressure drop, no moving parts, high accuracy, and a wide variety of materials of construction. They have been successfully used in many industries including food, beverage, pharmaceutical, chemical, power, heat, pulp & paper, steel and water treatment. No maintenance, low cost of ownership, and high reliability make MAGFLO® the flowmeter of choice for many flow measurement applications.

# Model MAGFLO®

## Sensor Model Mag 1100, MAG 1100 Food and MAG 3100

## Signal Converter Model MAG 6000 and MAG 5000 MAG 5100 W

### Performance Specifications

#### Mag 6000 signal converter

##### Accuracy

- Better than  $\pm 0.25\%$  of rate

##### Compact and practical design

The NEMA 6 signal converter can be installed either integrally on the sensor or remote on a wall or pipe. Front and back panel NEMA 4x converters are also available as an option.

##### User-friendly design

Alphanumeric display

Electronic unit and display can be rotated for easy viewing.

##### Sensorprom™ technology

Easy to start up—sensor data is downloaded from the SENSORPROM™ located in the terminal box to the signal converter. After power failure or converter replacement, all settings are automatically downloaded from the SENSORPROM™ to the MAG 5000—no need for reprogramming.

##### Self-diagnostic

Operating malfunctions are indicated in the display and error relays are activated. The last 10 errors are stored in Error Pending and Error Log.

##### Backlit display

##### Hart protocol available

##### Electrode cleaning

Converter can control an optional external electrode cleaning unit—output and display values are maintained during cleaning.

##### Bidirectional

Flow can be measured in both forward and reverse directions using a relay output to indicate direction changes.

##### Empty-pipe cut-off

If the sensor is drained, the converter automatically suppresses the input and indicates zero flow.

##### Batch function

#### Mag 5000 signal converter

##### Accuracy

$\pm 0.5\%$  of rate

##### Compact and practical design

The NEMA 6 signal converter can be installed either integrally on the sensor or remote on a wall or pipe. Front and back panel NEMA 4x converters are also available as an option.

##### User-friendly design

Alphanumeric display

Electronic unit and display can be rotated for easy viewing.

##### Sensorprom™ technology

Easy to start up—sensor data is downloaded from the SENSORPROM™ located in the terminal box to the signal converter. After power failure or converter replacement, all settings are automatically downloaded from the SENSORPROM™ to the MAG 5000—no need for reprogramming.

##### Bidirectional

Flow can be measured in both directions with two internal totalizers.

##### Self-diagnostic

Operating malfunctions are indicated in the display and error relays are activated. The last 10 errors are stored in Error Pending and Error Log.

##### Backlit display

##### Hart protocol available

# Model MAGFLO®

## Sensor Model Mag 1100, MAG 1100 Food and MAG 3100 Signal Converter Model MAG 6000 and MAG 5000 MAG 5100 W

### Mag 1100 sensor

**(standard, high temp and food)**

*Universal sensor*

Ceramic Liner with platinum electrodes

*High liquid temperature*

Standard 302° F, optional 390° F

*Withstands rigorous cleaning*

External construction in stainless steel, and enclosure meets NEMA 6 (accidental submersible), and can be steam cleaned.

*Food version*

- 3A and FDA approved
- Steam CIP cleanable
- Withstands Rigorous Cleaning:
  - External construction in stainless steel.
  - Enclosure meets NEMA 6 (accidental submersible).
- Sanitary Design:
  - The electrodes are fused into the ceramic liner
  - no crevices where bacteria can grow
- Tri-clamp connections

*Line sizes*

- Standard: 1/4" to 4"
  - High temperature: 1/2" to 4"
  - Food: 3/8" to 4"

### Mag 3100 sensor

*Line sizes:*

1/2" to 80"

*Several liner and electrode materials available*

See following pages for selection

*Nema 6 (accidental submersible)*

Can easily be upgraded to NEMA 6P (continuously submersible to 30 ft of water)

*Fully welded sensor construction*

*Flange version*

ANSI Class 150, 300 or AWWA class D

### Mag 5100W



- DN 25 to DN 1200 (1" to 48")
- Connection flanges EN 1092-1 (DIN 2501), ANSI, AWWA and AS.
- NBR Hard Rubber liner for all water applications
- Drinking water EPDM liner with approvals
- Hastelloy integrated grounding and measuring electrodes
- Increased low flow accuracy for water leak detection, due to coned liner design.
- Drinking water approvals
- Suitable for direct burial and constant flooding
- Build-in length according to ISO 13359
- Easy commissioning, SENSORPROM unit automatically uploads calibration values and settings.
- Designed that patented in-situ verification can be conducted. Using SENSORPROM fingerprint.



## Model MAGFLO®

# Sensor Model Mag 1100, MAG 1100 Food and MAG 3100 Signal Converter Model MAG 6000 and MAG 5000 MAG 5100 W



### Specifications - Sensor Mag 1100

	MAG 1100 Ceramic 	MAG 1100 PFA 
<b>Type</b>	Flangeless sensor (Wafer)	
<b>Nominal size</b>	1/4", 3/8", 1/2", 1", 1 1/2", 2", 3", 4"	3/8", 1/2", 1", 1 1/2", 2", 3", 4"
<b>Operating pressure</b>	1/4"-2 1/2": 600 psi, 3": 560 psi, 4": 450 psi	300 psi
<b>Vacuum</b>	1.5 × 10 <sup>-5</sup> psi	0.3 psi
<b>Temperature of medium</b> <i>PFA</i>		-20°F to +265°F
<i>Ceramic</i>	0°F to +300°F	
<i>High temperature version</i>	0°F to +400°F	Suitable for steam sterilization at 300°F
<b>Temperature shock</b> (Ceramic liner)	(Duration > 1 min.): 1/4", 3/8", 1/2", 1": Max. ΔT ≤ 60°F/min. 1 1/2", 2", 2 1/2": Max. ΔT ≤ 50°F/min. 3", 4" : Max. ΔT ≤ 40°F/min. (Duration ≤ 1 min., followed by 10 min. rest): 1/4", 3/8", 1/2", 1": Max. ΔT ≤ 175°F 1 1/2", 2", 2 1/2": Max. ΔT ≤ 160°F 3", 4": Max. ΔT ≤ 140°F	Max. ±210°F momentarily
<b>Ambient temperature</b>	Remote mount signal converter: -40°F to +210°F Integral mount signal converter: -5°F to +120°F	
<b>Liner</b>	Aluminum oxide Al <sub>2</sub> O <sub>3</sub> (ceramics)	Reinforced PFA (Teflon)
<b>Electrodes</b>	Platinum with gold/titanium brazing alloy	Hastelloy C-276
<b>Enclosure</b>	Stainless steel AISI 316L (1.4404)	Stainless steel AISI 316 (1.4436)
<b>Terminal box</b> <i>Standard</i>	Fiberglass-reinforced polyamide	Fiberglass-reinforced polyamide
(Remote installation only) <i>High temp.</i>	Stainless steel AISI 316 (1.4436)	Stainless steel AISI 316L (1.4404)
<b>Studs &amp; nuts</b>	Stainless steel AISI 304 (1.4301) Number and size to DIN 2501	
<b>Mating flanges</b>	DIN 2501 (150-600 psi), ANSI B16.5, class 150 and 300 or equivalent	
<b>Option</b>	1/4" & 3/8": 1/2" NPT threaded adaptor	
<b>Gaskets</b> <i>Standard</i>	EPDM (max. 300°F, 600 psi)	
<i>Option</i>	Graphite (max. 390°F, 600 psi)	
<i>Option</i>	PTFE (max. 210°F, 300 psi)	
<b>Cable entries</b>	4 pcs. PG 13.5	
<b>Enclosure rating</b> <i>Standard</i>	NEMA 4X / 6 (3 ft. submersion for 30 min)	
<i>Option</i>	NEMA 6P (30 ft. continuous submersion)	
<b>Mechanical load (vibration)</b>	18-1000 Hz random, 3.17 G rms in all directions to EN 60068-2-36	
<b>Test pressure</b>	1200 psi (2 × nominal)	600 psi (2 × nominal)
<b>Ex approvals</b>		
<b>Excitation frequency programmable</b>	1/4" - 2 1/2": 15 Hz 3", 4": 7.5 Hz	3/8" - 2 1/2": 15 Hz 3", 4": 7.5 Hz

# Model MAGFLO®

## Sensor Model Mag 1100, MAG 1100 Food and MAG 3100 Signal Converter Model MAG 6000 and MAG 5000 MAG 5100 W

### Specifications - Sensor Mag 1100 FOOD

	MAG 1100 FOOD	MAG 1100 FOOD PFA
		
<b>Type</b>	Hygienic sensor	
<b>Nominal size</b>	3/8", 1/2", 1", 1 1/2", 2", 3", 4"	
<b>Process connection</b>	Hygienic adapters available for: ♦ Direct welding in ♦ Clamp fitting ♦ Threaded fitting	
<b>Operating pressure</b>	3/8"-2 1/2": 600 psi, 3": 560 psi, 4": 450 psi	300 psi
<i>Vacuum</i>	1.5 × 10 <sup>-5</sup> psi	0.3 psi
<b>Temperature of medium</b>	0°F to +300°F	-20°F to +270°F
	Suitable for steam sterilization	Suitable for steam sterilization at 300°F
<b>Temperature shock</b>	(Duration > 1 min.): 3/8", 1/2", 1" Max. ΔT ≤ 60°F/min. 1 1/2", 2", 2 1/2" Max. ΔT ≤ 50°F/min. 3", 4" Max. ΔT ≤ 40°F/min. (Duration ≤ 1 min., followed by 10 min. rest): 3/8", 1/2", 1" Max. ΔT ≤ 175°F 1 1/2", 2", 2 1/2" Max. ΔT ≤ 160°F 3", 4" Max. ΔT ≤ 140°F	Max. ±212°F momentarily
<b>Ambient temperature</b>	Remote mount signal converter: -40°F to +210°F Integral mount signal converter: -5°F to +120°F	Remote mount signal converter: -40°F to +210°F Integral mount signal converter: -5°F to +120°F
<b>Liner</b>	Aluminum oxide Al <sub>2</sub> O <sub>3</sub> (ceramic)	Reinforced PFA (Teflon)
<b>Electrodes</b>	Platinum with gold/titanium brazing alloy	Hastelloy C-276
<b>Enclosure</b>	Stainless steel AISI 316L (1.4404)	Stainless steel AISI 316L (1.4404)
<b>Terminal box</b> <i>Standard</i>	Fiberglass-reinforced polyamide	Fiberglass-reinforced polyamide
(Remote installation only) <i>Option</i>	Stainless steel AISI 316 (1.4436)	Stainless steel AISI 316 (1.4436)
<b>Cable entries</b>	4 pcs. PG 13.5	4 pcs. PG 13.5
<b>Enclosure rating</b> <i>Standard</i>	NEMA 4X / 6 (3 ft. submersion for 30 min)	NEMA 4X / 6 (3 ft. submersion for 30 min)
<i>Option</i>	NEMA 6P (30 ft. continuous submersion)	NEMA 6P (30 ft. continuous submersion)
<b>Mechanical load (vibration)</b>	18-1000 Hz random, 3.17 G rms in all directions, to EN 60068-2-36	18-1000 Hz random, 3.17 G rms in all directions, to EN 60068-2-36
<b>Test pressure</b>	1200 psi (2 × nominal)	600 psi (2 × nominal)
<b>Approvals</b>	3A, EHEDG	3A
<b>Excitation frequency</b>	3/8" - 2 1/2": 15 Hz	3/8" - 2 1/2": 15 Hz
<b>programmable</b>	3", 4": 7.5 Hz	3", 4": 7.5 Hz

### Accessories MAG 1100 FOOD

Adapters	Stainless steel AISI 316	Pressure
<b>Pipe connection/ Operating pressure</b>	<b>Adapter for direct welding into pipe:</b> <b>Tri-Clover</b> ISO 2037, DIN 11850, SMS 3008, BS 4825-1 3/8", 1/2", 1", 1 1/2", 2", 3" 4"	600 psi 350 psi
	<b>Clamp adapter:</b> <b>Tri-Clamp</b> ISO 2852, DIN 32676, SMS 3016, BS 4825-3 3/8", 1/2", 1", 1 1/2", 2" 2 1/2", 3", 4"	200 psi 150 psi
	<b>Thread adapter:</b> DIN 11851: 3/8", 1/2", 1", 1 1/2" 2", 2 1/2", 3", 4"	600 psi 350 psi
	ISO 2853, SS 3351, BS 4825-4: 3/8", 1/2", 1", 1 1/2", 2", 3", 4" SMS 1145: 1", 1 1/2", 2", 2 1/2", 3"	200 psi 80 psi
	<b>Gasket</b> <i>Standard</i>	EPDM (ethylene, propylene rubber) (-5 °F to 300 °F)
	<i>Option</i>	NBR (nitrile butadiene rubber) (-5 °F to 210 °F)
<b>Material</b>	Stainless steel AISI 304, ISO 2852	

### Note

It is always a system so please state system max. pressure and **not** MAG 1100 or adapter.

# Model MAGFLO®

## Sensor Model Mag 1100, MAG 1100 Food and MAG 3100 Signal Converter Model MAG 6000 and MAG 5000 MAG 5100 W



	<b>MAG 3100</b>
<b>Type</b>	Sensor with flanges
<b>Nominal Size</b>	1/2" to 80"
<b>Measuring Range</b>	Adjustable from 0-0.8 ft/s to 0-33 ft/s
<b>Coil Current</b>	Pulsating DC with one of the following frequencies: 6 1/4 Hz or 12 1/2 Hz depending on sensor size
<b>Process Temperature (Pressure ≤ 580 psi)</b>	Neoprene: 32° to 158° F      Linatex Rubber: -40° to 160° F
	PTFE®: -5° to 210° F      Ebonite: 32° to 200° F
	High Temp PTFE 0 to 355° F      EPDM: -15 to 158° F
<b>Ambient Temperature</b>	Remote Signal Converter      -40° F to 210° F
	Integral Signal Converter      -40° F to 120° F
<b>Pipe Connection</b>	
Standard	1/2" to 24" ANSI B 16.5 Class 150 28" to 80" AWWA C-207 Class D (150 psi)
Option	1/2" to 24" ANSI B 16.5 Class 300 Others on request
<b>Process Vacuum</b>	Maximum process vacuum depends on liner material:
	Neoprene, Ebonite, EPDM, Natural rubber: 7.25 psia
<b>Liner</b>	
Standard	Neoprene
Option	Teflon®, Natural rubber, EPDM, Ebonite
<b>Electrodes</b>	
Standard	Stainless steel 316 Ti
Option	Hastelloy C276, Platinum, Titanium, Monel, Tantalum, AISI 316Ti coated
<b>Enclosure</b>	
Standard	Carbon steel, corrosion-resistant two-component coating
Option	Stainless steel AISI 316
<b>Measuring Pipe</b>	Stainless steel AISI 304
<b>Enclosure Rating</b>	
Standard	NEMA 6 accidental submersible (tested to 10 ft of water 72h)
Option	NEMA 6 submersible, tested to 30 ft of water (no time limit if NEMA 6P submersible kit is being used)
<b>Cable Entries</b>	2 Pg 13.5—2 others available
<b>Mechanical Load Design Pressure</b>	3 G, 1-800 Hz sinusoidal in all directions
	1.5 x flange rating
<b>Conductivity</b>	
Compact installation	Liquids with an electric conductivity ≥ 5 µS/cm For a conductivity between 1 and 5 µS/cm, the accuracy may degrade to ±0.5% of actual flow.
Remote installation	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p><b>Standard Cable</b></p> <p>Cable length</p> </div> <div style="text-align: center;"> <p><b>Special Cable</b></p> <p>Cable length</p> </div> </div> <p><b>Note:</b> For detection of empty sensor the min. conductivity must always be ≥ 20 µS/cm and the max. length of electrode cable when remote mounted is 150 ft. Special cable must be used.</p>

\* -5 to 120° F with signal converter mounted on sensor

\*\* Each temperature class assumes a maximum ambient temperature of 105° F.

# Model MAGFLO®

## Sensor Model Mag 1100, MAG 1100 Food and MAG 3100 Signal Converter Model MAG 6000 and MAG 5000 MAG 5100 W

### MAG 3100 Liner Selection Guide

Liner	Applications
Neoprene	General purpose, sewage, drinking water and district heating
EPDM	Drinking water, sea water
PTFE	Aggressive chemicals, paper and pulp, high temperature applications
Linatex®	Abrasive media and mining slurries
Ebonite	Drinking water, high pressure applications and district heating

### Electrode Selection Guide

Electrodes	Applications
AISI 316 Ti	General purpose, water, sewage and district heating
AISI 316 Ti Ceramic coated	High content of fibres, paper pulp
Hastelloy C-276	Good chemical properties, sea water
Monel	Salt, brine and alkaline solutions
Titanium	Chlorine, chlorite, nitric and chromic acids.
	Textile bleaching industry
Tantalum	Almost any acid solution
Platinum and platinum/irridium	The ultimate electrode material.
	Unaffected by most liquids

## Model MAGFLO®

# Sensor Model Mag 1100, MAG 1100 Food and MAG 3100 Signal Converter Model MAG 6000 and MAG 5000 MAG 5100 W





### Specifications - MAG 5100 W

Technical specifications			
Design	Full bore sensor	Coned bore sensor	Full bore sensor
Nominal size	DN 25 ... 40 (1" ... 1½")	DN 50 ... 300 (2" ... 12")	DN 350 ... 1200 (14" ... 48")
Measuring principle	Electromagnetic induction		
Excitation frequency	12.5 Hz	• 50 ... 65 mm (2" ... 2½"): 12.5 Hz • 80 ... 150 mm (3" ... 6"): 6.25 Hz • 200 ... 300 mm (8" ... 12"): 3.125 Hz	DN 350 ... 450 (14" ... 18"): 3.125 Hz DN 500 ... 1200 (20" ... 48"): 1.5625 Hz
Process connection			
Flanges		Flat face flanges	
• EN 1092-1	PN 40 (580 psi)	• 50 ... 300 mm: PN 16 (2" ... 12": 230 psi) • 200 ... 300 mm: PN 10 (8" ... 12": 145 psi)	• PN 10 (145 psi) • PN 16 (230 psi)
• ANSI B16.5	Class 150 lb	Class 150 lb ~20 bar (290 psi)	--
• AWWA C-207	--	--	28" ... 48": Class D
• AS4087	PN 16 (230 psi) DN 50 ... 1200 (2" ... 48"), 14 bar (232 psi)		
Rated Operation conditions			
Ambient temperature			
• Sensor	-40 ... +70 °C (-40 ... +158 °F)		
• With compact transmitter MAG 5000/6000	-20 ... +50 °C (-4 ... +122 °F)		
• With compact transmitter MAG 6000 I	-20 ... +60 °C (-4 ... +140 °F)		
Operating pressure	0.01 ... 40 bar (0.15 ... 580 psi)	0.03 ... 20 bar (0.44 ... 290 psi)	0.01 ... 16 bar (0.15 ... 232 psi)
Enclosure rating			
• Standard	IP67 to EN 60529 / NEMA 4X/6 (1 mH2O for 30 minutes)		
• Option	IP68 to EN 60529 / NEMA 6P (10 mH2O continuously)		
Pressure drop at 3 m/s (10 ft/s)	As straight pipe	Max. 25 mbar (0.36 psi)	As straight pipe
Medium conditions			
Temperature of medium			
• NBR	-10 ... +70 °C (14 ... +158 °F)		
• EPDM	-10 ... +70 °C (14 ... +158 °F)		
EMC	89/336 EEC		
Design			
Weight	See dimensional drawings		
Material			
• Housing and flanges	Carbon steel, St 37.2		
• Terminal box	Standard Fibre glass reinforced polyamide		
• Measuring pipe	AISI 304 (1.4301)		
• Liner	NBR Hard Rubber (hydro carbon resistant)		
	EPDM		
• Electrodes	Hastelloy C276		
• Grounding electrodes standard	Hastelloy C276		
Certificates and approvals			
Custody Transfer (only together with MAG 5000/6000 CT), order as special Approvals	OIML R 49 pattern approval cold water (Denmark and Germany): DN 50 ... 300 (2" ... 12") MI 001 cold water (EU): DN 50 ... 300 (2" ... 12") FM Class 1, Div 2		
Drinking water approvals			
• EPDM	NSF61 (Cold water, US) WRAS (WRc, BS6920 cold water, GB) ACS listed (F), DVGW W270 (D) Belaqua (B)		
• NBR	NSF61 (Cold water, US)		
Approvals	PED – 97/23 EC1), CRN		

1) For sizes larger than 600 mm (24") in PN 16 PED conformity is available as a cost added option. The basic unit will carry the LVD (Low Voltage Directive) and EMC approval.

# Model MAGFLO®







## Sensor Model Mag 1100, MAG 1100 Food and MAG 3100 Signal Converter Model MAG 6000 and MAG 5000 MAG 5100 W

	 			 		
	<b>MAG 6000 Signal Converter: 0.25%</b>			<b>MAG 5000 Signal Converter: 0.5% accuracy</b>		
<b>Functions</b>	Display flowrate, 2 totalizers, low flow cut-off, empty pipe cut-off, flow direction, error system, operating time uni/bidirectional flow, limit switches, pulse output, control for cleaning unit and batch			Display flowrate, 2 totalizers, low flow cut-off, empty pipe cut-off, flow direction, error system, operating time, uni/bidirectional flow, limit switches, pulse output, control for cleaning unit		
<b>Current Output</b>						
Current	0-20 mA or 4-20 mA			0-20 mA or 4-20 mA		
Load	< 800 ohm			< 800 ohm		
Time Constant	0.1-30 s adjustable			0.1-30 s adjustable		
<b>Frequency/Pulse Output</b>	Short-circuit-protected			Short-circuit-protected		
Frequency	0-10 kHz, 50% duty cycle			0-10 kHz, 50% duty cycle		
Pulse Width	50 ms, 500 ms, 5 ms, 50 ms, 100 ms, 500 ms, 1 s, 5 s			50 ms, 500 ms, 5 ms, 50 ms, 100 ms, 500 ms, 1 s, 5 s		
Time Constant	0.1-30 s adjustable			0.1-30 s adjustable		
<b>Active</b>	24 V DC			24 V DC supplied by the signal converter		
		≤ 1 Hz	≤ 10 kHz	0-2 Hz: load: 125 ohm to 100 kohm		
	Min. R <sub>load</sub>	150 Ω	1 KΩ	0-10 kHz: load: 125 ohm to 100 kohm		
<b>Passive</b>	Max. R <sub>load</sub>	≤ 10 KΩ	≤ 10 KΩ			
	3-30 V DC			External supply of 5-50 V DC (max. current: 200 mA)		
		U = 3 V	U = 30 V	0-10 kHz: load: 125 ohm to 10 kohm		
	Min. R <sub>load</sub>	10 Ω	225 Ω			
	Max. R <sub>load</sub>	≤ 10 KΩ	≤ 10 KΩ			
<b>Relay</b>	Switch relay to indicate flow direction or fault			Switch relay to indicate fault		
Load	Max.: 42 V/ 2 A, 24 Vd.c./1 A			Max.: 42 V/2A, 24 Vd.c./1A		
Time Constant	Flow direction: 5 s; Fault : 1 s			1 s		
<b>Digital input</b>	11-30 V d.c., R <sub>i</sub> = 4.4 KΩ (reset Totalizer, Force Output and Batch Control)			11-30 V d.c., R <sub>i</sub> = 4.4 KΩ (reset Totalizer, Force Output)		
Activation time	50 msec.			50 msec		
Current	I <sub>11 V d.c.</sub> = 2.5 mA, I <sub>30 V d.c.</sub> = 7 mA			I <sub>11 V d.c.</sub> = 2.5 mA, I <sub>30 V d.c.</sub> = 7 mA		
<b>Galvanic Isolation</b>	All inputs and outputs are galvanically isolated			All inputs and outputs are galvanically isolated		
<b>Cut-off</b>						
Low-flow	0-9.9% of maximum flow			0-9.9% of maximum flow		
Empty Pipe	Detection of empty pipe. (special cable required)			detection of empty pipe. (special cable required)		
<b>Counter</b>	Two internal eight-digit counters for forward, net or reverse flow source					

# Model MAGFLO®

## Sensor Model Mag 1100, MAG 1100 Food and MAG 3100

## Signal Converter Model MAG 6000 and MAG 5000 MAG 5100 W

					
		<b>MAG 6000 Signal Converter: 0.25%</b>		<b>MAG 5000 Signal Converter: 0.5% accuracy</b>	
<b>Electrode Cleaning</b>		For process liquids which can leave insulating deposits on the sensor's electrodes, or leave conductive deposits on the inside of the sensor.		N/A	
		Electrode cleaning requires a special 19" rack cleaning unit.			
<b>Display</b>		Backlit alphanumeric text, 3 x 20 characters to indicate flow, volume, settings and faults. Reverse flow indicated by negative sign.		Backlit alphanumeric text, 3 x 20 characters to indicate flow, volume, settings and faults. Reverse flow indicated by negative sign.	
<b>Zero Point Adjustment</b>		Automatic		Automatic	
<b>Input Impedance</b>		> 1 x 10 <sup>14</sup> Ω		> 1 x 10 <sup>14</sup> Ω	
<b>Excitation Frequency</b>		Pulsating DC current with one of the following frequencies: 1 9/16 Hz, 3 1/8 Hz, 6 1/4 Hz or 12 1/2 Hz, 25 Hz		Pulsating DC current at a frequency of 3 1/8 Hz	
<b>Ambient Temperature</b>		During operation -5° to 120° F		During operation -5° to 120° F	
		During storage -40° to 160° F (RH max. 95%)		During storage -40° to 160° F (RH max. 95%)	
<b>Supply Voltage</b>					
AC		115/230 V AC. +10% to -15%, 50-60 Hz, 9 VA		115/230 V AC +10% to -15%, 50-60 Hz, 9 VA	
DC		11-30 V DC/11-24 V AC, 9 W		11-30 V DC/11-24 V AC 9 W	
<b>Integral/Remote</b>		Can be mounted integrally on sensor, or remote on pipe or wall		Can be mounted integrally on sensor, or remote on pipe or wall	
	<b>Material</b>	Fiberglass-reinforced polyamide or optional stainless steel		Fiberglass-reinforced polyamide or optional stainless steel	
	<b>Rating</b>	NEMA 6, accidental submersible (3ft of water for 30 min.)		NEMA 6, accidental submersible (3 ft of water for 30 min.)	
	<b>Mechanical Load</b>	3.17 G, 18-1000 Hz random in all directions		3.17 G, 18–1000 Hz random in all directions	
<b>19" insert</b>		Insert fits in a 19" rack or wall, front, back panel unit		Insert can be fitted in a 19" rack or wall, front, back panel unit	
	<b>Material</b>	Standard 19" insert of Aluminum/steel		Standard 19" insert of Aluminum/steel	
	<b>Rating</b>	19" Insert and back panel mount: NEMA 1		19" Insert and back panel mount: NEMA 1	
		Front panel and wall mount unit: NEMA 4X		Front panel and wall mount unit: NEMA 4X	
	<b>Mechanical Load</b>	115/230 V AC version: 1 G, 1-800 Hz sinusoidal in all directions		115/230 V AC version: 1 G, 1-800 Hz sinusoidal in all directions	
		24 V DC version: 1 G, 1-800 Hz sinusoidal in all directions			
<b>Communication</b>					
<b>Standard</b>		Prepared for client mounted add-on modules		Without serial communication	
<b>Optional</b>		HART® as add on module		HART®	



# Model MAGFLO®

## Sensor Model Mag 1100, MAG 1100 Food and MAG 3100 Signal Converter Model MAG 6000 and MAG 5000 MAG 5100 W



**MAGFLO® Cleaning Unit**

**Application** For use with MAG 6000 and MAG 5000 19" insert to clean the electrodes on MAG 1100 and MAG 3100.

### Cleaning Voltage

AC cleaning: 60 V a.c.

DC cleaning: 30 V d.c.

**Cleaning Period** 60 sec + 60 sec. pause period

**Relay** Switch relay indicating cleaning in progress

Load: 42 V/2A

**Indicator Lamps** LEDs: "ON" and "CLEANING"

### Supply Voltage

AC 115/230 V AC +10% to -15%, 50-60 Hz, 7 VA cleaning, 5 VA stand by

DC 18-30 V DC, 17 W cleaning, 3 W stand by

**Ambient Temperature** During operation: -5 to 120° F

During storage: -5 to 160° F


**19" insert** 19" insert for MAG 6000 and MAG 5000 in either a front, back or wall mount unit

Enclosure material: Standard 19" insert in Aluminum/steel

Enclosure rating: NEMA 1; if front or wall mount kit is used: NEMA 4X


Mechanical load: 1 G, 1-800 Hz sinusoidal in all directions

MAG 6000 can be MAG 5000 can be mounted with the Cleaning Unit. The electronic package can be mounted in either a wall, front, or back panel unit.

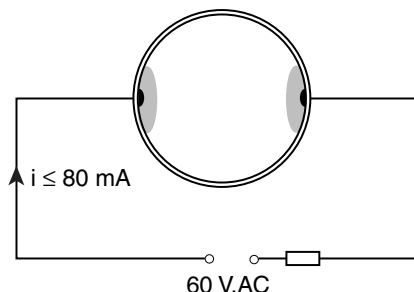

### AC Cleaning

AC Cleaning is used to remove greasy deposits on the electrodes caused from measurement of waste water flows from abattoirs or water containing oil residues. During cleaning, heat is generated on the electrode surface, softening the greasy particles. This causes gas bubbles which remove the deposits from the electrode surface.

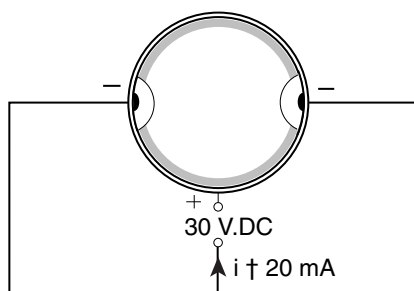

### DC Cleaning

DC cleaning is used to remove conductive deposits from the meter pipe. When measuring district heating water flows, conductive magnetite deposits can accumulate. If the water's conductivity is below approx. 250µS/cm, these deposits can short the electrode signal and cause measuring error. This cleaning method involves electrolysis in which the electron flow leads the deposited particles away from the area around the electrodes.

# Model MAGFLO®

## Sensor Model Mag 1100, MAG 1100 Food and MAG 3100

## Signal Converter Model MAG 6000 and MAG 5000 MAG 5100 W

### Sensor size selection guide


The table shows the relationship between flow velocity V, flow quantity Q, and sensor size.

### Guidelines for selection of sensor

Min. measuring range: 0-0.8 ft/s

Max. measuring range: 0-33 ft/s

Normally the sensor is selected with a nominal flow in the measuring range of 3-5 ft/s.

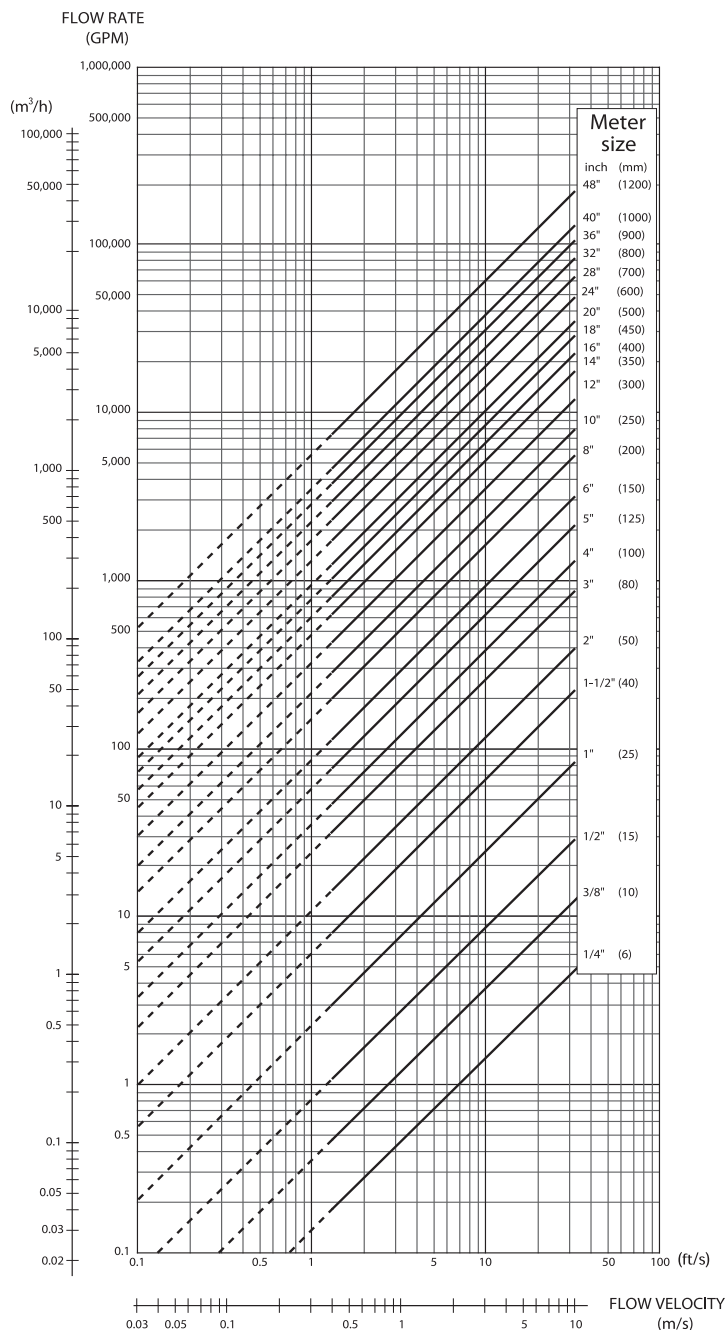


# Model MAGFLO®

## Sensor Model Mag 1100, MAG 1100 Food and MAG 3100

## Signal Converter Model MAG 6000 and MAG 5000 MAG 5100 W


### Accuracy

Meter uncertainty under reference conditions (display/frequency/pulse output)

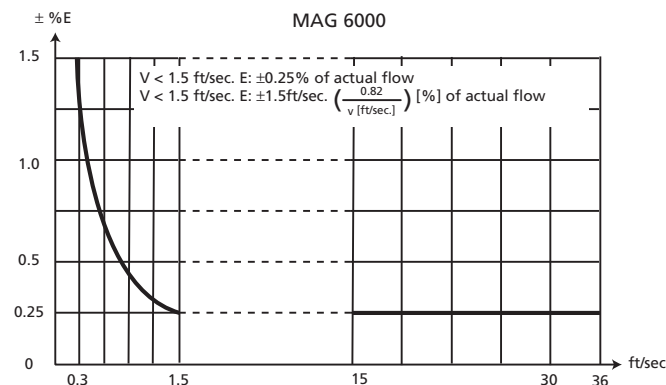

V: Actual flow velocity [ft/sec]

E: Meter uncertainty as a percentage of actual flow

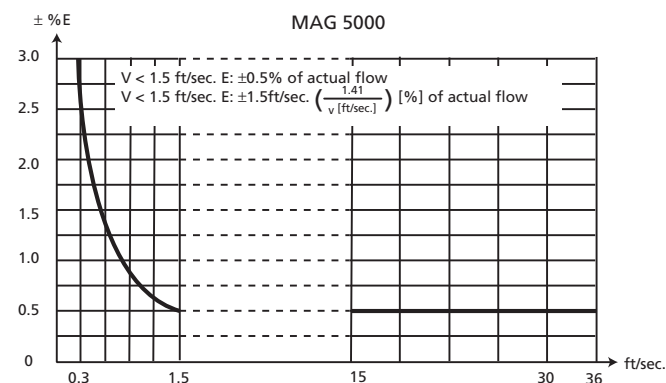

V: Actual flow velocity [ft/sec]

E: Meter uncertainty as a percentage of actual flow


### Other Accuracy Statements

<b>Current output</b>	Pulse output: $\pm(0.1\%$ of actual flow +0.05% FSO)
<b>Effect of ambient temperature</b>	Display/frequency/pulse output: $< \pm 0.003\%$ / Kelvin
	Current output: $< \pm 0.005\%$ / Kelvin
<b>Effect of supply voltage</b>	$< 0.005\%$ of measuring value on 1% change
<b>Repeatability</b>	$\pm 0.1\%$ of actual flow for $V \geq 1.5$ ft/s

### Inlet and outlet conditions

For accurate flow measurement, it is essential to have sufficient straight run of inlet and outlet pipes, and a certain distance between pumps and valves.

It is also important to center the flowmeter in relation to the pipe flanges and gaskets.

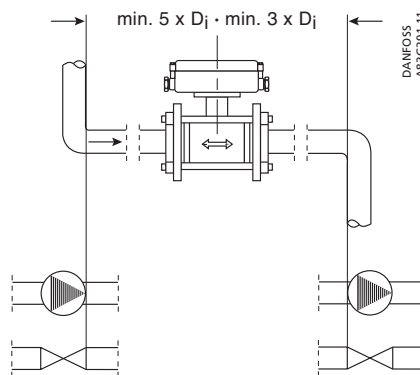

### Reference Conditions (ISO/DP9104)


<b>Temperature of medium</b>	68° F $\pm 4$ °F
<b>Ambient temperature</b>	68° F $\pm 4$ °F
<b>Supply voltage</b>	Un $\pm 1\%$
<b>Warm-up time</b>	30 min
<b>Incorporation in pipe section in accordance with reference conditions (ISO)</b>	Inlet section 10 x DN
	Outlet section 5 x DN
	Sensor optimally grounded and centered
	For further information contact EMCO
<b>Flow conditions</b>	Fully developed flow profile

# Model MAGFLO®


## Sensor Model Mag 1100, MAG 1100 Food and MAG 3100 Signal Converter Model MAG 6000 and MAG 5000 MAG 5100 W

### Electrical connection mag 6000 and mag 5000

Signal converter MAG 6000 and MAG 5000 integrally mounted on sensor


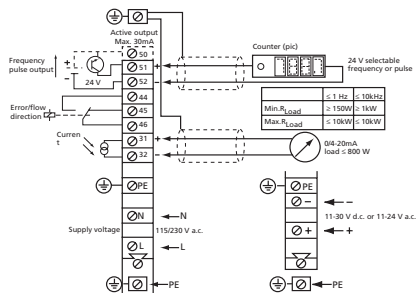


Connection of electromechanical counter (active output), current output, power supply.


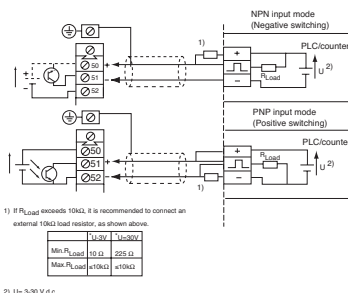


Other pulse-frequency output connection options using passive mode.



### Signal converter mag 6000 and mag 5000 remote mounted on sensor (other connections as shown above)

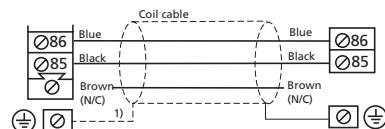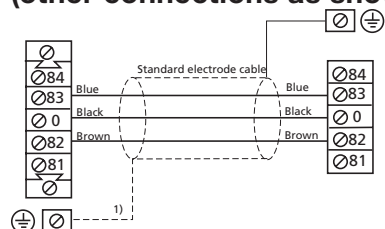



Signal converter remote mounted using a standard electrode cable.

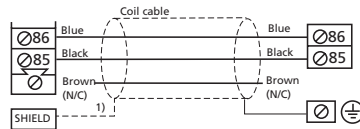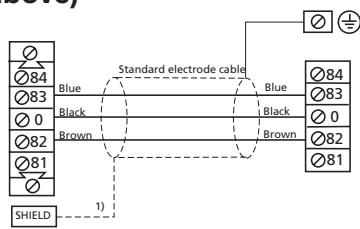

MAG 6000 NEMA 6 version with special electrode cable for empty pipe detection.

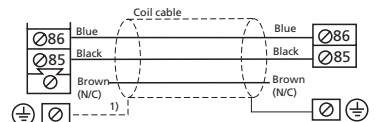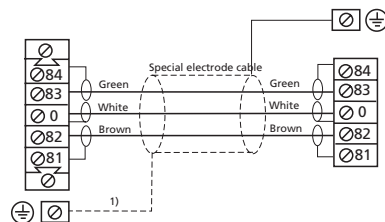

MAG 6000 NEMA 6 version with special electrode cable for empty pipe detection.

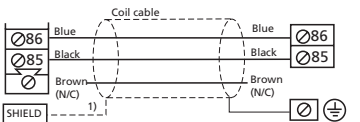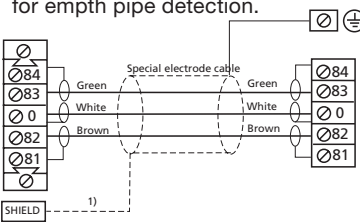

19 insert remote mounted using special electrode cable. empty pipe detection.

1) EMC immunity: In areas with severe electrical interference, the shield on the electrode and coil cables must be grounded at both ends.


# Model MAGFLO®

## Sensor Model Mag 1100, MAG 1100 Food and MAG 3100 Signal Converter Model MAG 6000 and MAG 5000 MAG 5100 W

### Dimensions

Sensor MAG 1100 Standard and high temperature


MAG 1100, integral/remote

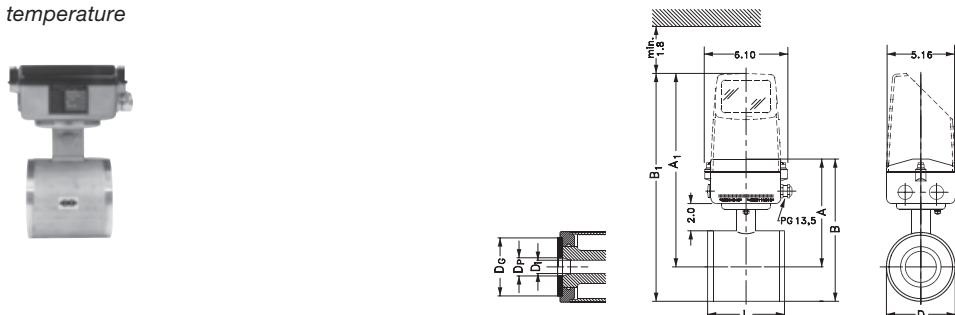

Size	A <sup>1</sup>	B <sup>1</sup>	A <sub>1</sub>	B <sub>1</sub>	D	D <sub>i</sub> (Al <sub>2</sub> O <sub>3</sub> )	D <sub>p</sub>	D <sub>g</sub>	Weight <sup>2</sup>	The total built-in length "L", depends on the gasket selected.				
										EPDM	Graphite	PTFE (Teflon)	Without gasket	Earthing Ring
.25"	6.14"	7.13"	12.16"	13.15"	1.90"	0.24"	0.68"	1.34"	4.8"	2.52	2.60	2.75	2.52	3.03
.375"	6.14"	7.13"	12.16"	13.15"	1.90"	0.39"	0.68"	1.34"	4.8"	2.52	2.60	2.75	2.52	3.03
.5"	6.14"	7.13"	12.16"	13.15"	1.90"	0.59"	0.68"	1.57"	4.8"	2.56	2.60	2.75	2.52	3.03
1"	6.46"	7.72"	12.48"	13.74"	2.50"	0.98"	1.12"	2.20"	4.9"	3.15	3.19	3.35	3.10	3.62
1.5"	6.93"	8.58"	12.95"	14.61"	3.31"	1.57"	1.71"	2.95"	7.5"	3.74	3.78	3.94	3.70	4.21
2"	7.24"	9.25"	13.27"	15.27"	4.00"	1.97"	2.15"	3.54"	9.2"	4.13	4.17	4.33	4.05	4.61
2.5"	7.64"	10.00"	13.66"	16.02"	4.72"	2.56"	2.68"	4.41"	12.0"	5.12	5.15	5.31	5.05	5.59
3"	7.87"	10.47"	13.90"	16.50"	5.24"	3.15"	3.25"	4.88"	15.0"	6.10	6.14	6.30	6.00	6.57
4"	8.39"	11.50"	14.41"	17.52"	6.26"	3.94"	4.22"	5.91"	22.0"	7.28	7.31	7.48	7.20	7.76

1 0.5" shorter when the AISI terminal box is used. (High temperature version 390°F).

2 With signal converter MAG 5000 or MAG 6000 installed, weight is increased by approx. 1.8 lbs.

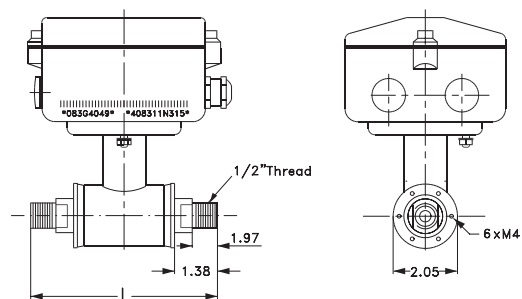

The MAG 1100 1/4" and 3/8" can be assembled with a 1/2" NPT SS fitting instead of wafer mount.


	Without gasket	EPDM	Graphite	Teflon
L	5.9"	5.9"	6.0"	6.1"

# Model MAGFLO®

## Sensor Model Mag 1100, MAG 1100 Food and MAG 3100 Signal Converter Model MAG 6000 and MAG 5000 MAG 5100 W

### Dimensions


Sensor mag 1100 food

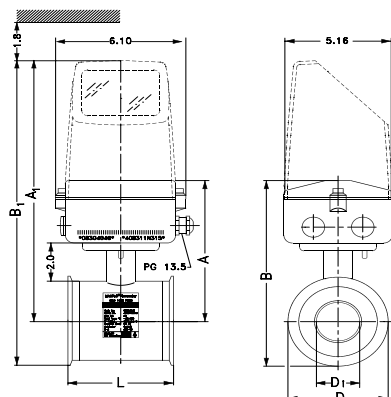

	L	A	B	A <sub>1</sub>	B <sub>1</sub>	D	Weight *
.375"	2.60"	5.63"	6.89"	11.8"	13.1"	2.52"	4.8"
.5"	2.60"	5.63"	6.89"	11.8"	13.1"	2.52"	4.8"
1	3.19"	5.94"	7.48"	12.1"	13.6"	3.05"	4.9"
1.5"	3.78"	6.34"	8.15"	12.5"	14.3"	3.58"	7.5"
2	4.17"	6.69"	9.06"	12.8"	15.2"	4.69"	9.2"
2.5"	5.24"	7.01"	9.57"	13.2"	15.7"	5.12"	12"
3	6.22"	7.32"	10.40"	13.5"	16.6"	6.10"	15"
4	7.40"	8.43"	12.04"	14.6"	18.2"	7.20"	22"

\* With signal converter MAG 5000 or MAG 6000 installed weight is increased by approx. 4.4 lbs.

Built-in length



Sensor Size	A	L **
.375	3.90"	5.75"
.5	3.90"	5.75"
1	4.45"	6.34"
1.5	4.96"	6.93"
2	6.06"	7.32"
2.5	6.50"	8.78"
3	7.87"	10.5"
4	8.86"	11.34"

\*\* The total built-in length "L" is independent of the adapter type selected.

### Accessories

Mag 1100 food


Sensor Size	Di	Do	Di	Do
.5	0.53	0.63		
1			0.89	2
1.5	1.40	1.52	1.4	2
2	1.91	2.03	1.91	2.52
2.5	2.37	2.52	2.37	3.05
3	2.87	3.02	2.87	3.58
4	3.85	4.04	3.85	4.69

# Model MAGFLO®

## Sensor Model Mag 1100, MAG 1100 Food and MAG 3100 Signal Converter Model MAG 6000 and MAG 5000 MAG 5100 W


### Dimensions

Sensor mag 3100

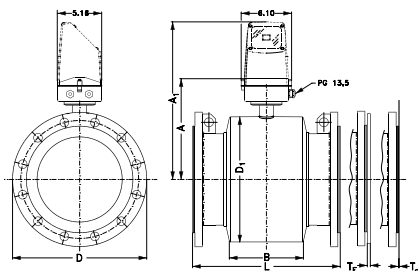

Earthing/protection flange

Type C




Size	A'	A <sub>1</sub>	B	D <sub>1</sub>	L <sup>2</sup>		T <sub>C</sub> <sup>3</sup>	T <sub>E</sub> <sup>3</sup>	Weight <sup>4</sup>	
					ANSI 16.5 Class 150	AWWA C-207 Class D				
.5"	7.36"	13.31"	2.32"	4.09"	7.87"	7.87"		-	0.24"	11"
1"	7.36"	13.31"	2.32"	4.09"	7.87"	7.87"		0.05"	0.24"	13"
1.5"	7.76"	13.70"	3.23"	4.88"	7.87"	7.87"		0.05"	0.24"	17"
2"	8.07"	14.01"	2.83"	5.47"	7.87"	7.87"		0.05"	0.24"	28"
2.5"	8.35"	14.29"	2.83"	6.06"	7.87"	10.71"		0.05"	0.24"	30"
3"	8.74"	14.69"	2.83"	6.85"	10.71"	10.71"		0.05"	0.24"	33"
4"	9.53"	15.47"	3.35"	8.43"	9.84"	12.20"		0.05"	0.24"	44"
5"	10.04"	15.98"	3.35"	9.41"	9.84"	13.10"		0.05"	0.24"	55"
6"	10.87"	16.81"	5.39"	11.10"	11.81"	11.81"		0.05"	0.24"	66"
8"	11.97"	17.91"	5.39"	13.31"	13.78"	13.78"		0.05"	0.31"	110"
10"	13.07"	19.02"	5.39"	15.47"	17.72"	17.72"		0.05"	0.31"	155"
12"	14.05"	20.00"	5.39"	17.48"	19.69"	19.69"		0.06"	0.31"	176"
14"	14.25"	20.20"	10.63"	17.76"	21.65"	21.65"	-	0.06"	0.31"	242"
16"	15.24"	21.18"	10.63"	19.76"	23.62"	23.62"	-	0.06"	0.39"	275"
18"	16.45"	22.40"	12.20"	22.16"	23.62"	25.20"	-	0.06"	0.39"	385"
20"	17.44"	23.39"	13.78"	24.17"	26.77"	28.70"	-	0.06"	0.39"	440"
24"	19.45"	25.39"	16.93"	28.15"	32.28	33.80"	-	0.06"	0.39"	660"
28"	21.42"	27.36"	19.69"	32.13"	-	-	34.5"	0.08"	-	770"
30"	22.48"	28.43"	21.89"	34.21"	-	-	36.9"	0.08"	-	880"
32"	23.86"	29.80"	22.05"	36.50"	-	-	39.4"	0.08"	-	1045"
36"	25.71"	31.65"	24.80"	40.63"	-	-	44.3"	0.08"	-	1233"
40"	27.72"	35.67"	26.38"	44.72"	-	-	49.2"	0.08"	-	1541"
44"	29.72"	35.67"	30.31"	48.74"	-	-	-	0.08"	-	
48"	31.89"	37.83"	31.18"	53.07"	-	-	59.1"	0.08"	-	2751"
56"	36.42"	42.36"	39.37"	65.94"	-	-	68.9"	0.12"	-	3211"
60"	38.27"	44.21"	40.15"	65.83"	-	-	73.8"	0.12"	-	3731"
64"	40.35"	46.30"	44.49"	75.39"	-	-	78.7"	0.12"	-	4257"
72"	44.21"	50.16"	49.21"	77.72"	-	-	88.5"	0.12"	-	5291"
80"	48.15"	54.09"	54.13"	85.59"	-	-	98.4"	0.12"	-	7492"

- 1 0.5" shorter with AISI terminal box (Ex and high temperature)
- 2 When earthing flanges are used the thickness of the earthing flange must be added to the built-in length
- 3 T<sub>C</sub> = Type C grounding ring, T<sub>E</sub> = Type E grounding ring
- 4 Weights are approx and for ANSI 150 without signal converter.

D = Outside diameter of flange, see flange tables

Size	t <sub>1</sub>	t <sub>2</sub>	Weight (lbs)
1" to 10"	0.05"	0.6"	0.07-0.9
12" to 24"	0.06"	0.8"	1.3-5.7
28" to 48"	0.08"	1.0"	6.6-11.0
56" to 80"	0.12"	1.6"	20.0-35.0

Type E



Size	t <sub>1</sub>	Weight
.5"	0.2	0.15
1" to 6"	0.2	0.7-3.0
8" to 14"	0.3	3.7-9.0
16" to 24"	0.4	14.0-28.0

Type C flanges for liners of neoprene, EPDM, linatex® and ebonite.

Type E flanges for liners of PTFE.  
MAG 3100 high temperature (PTFE) is always equipped with 2 pcs. type E earthing flanges.



# Model MAGFLO®


## Sensor Model Mag 1100, MAG 1100 Food and MAG 3100

## Signal Converter Model MAG 6000 and MAG 5000 MAG 5100 W

### Dimensions

MAG 5100 W

MAG 5100 W / 6000 I Compact

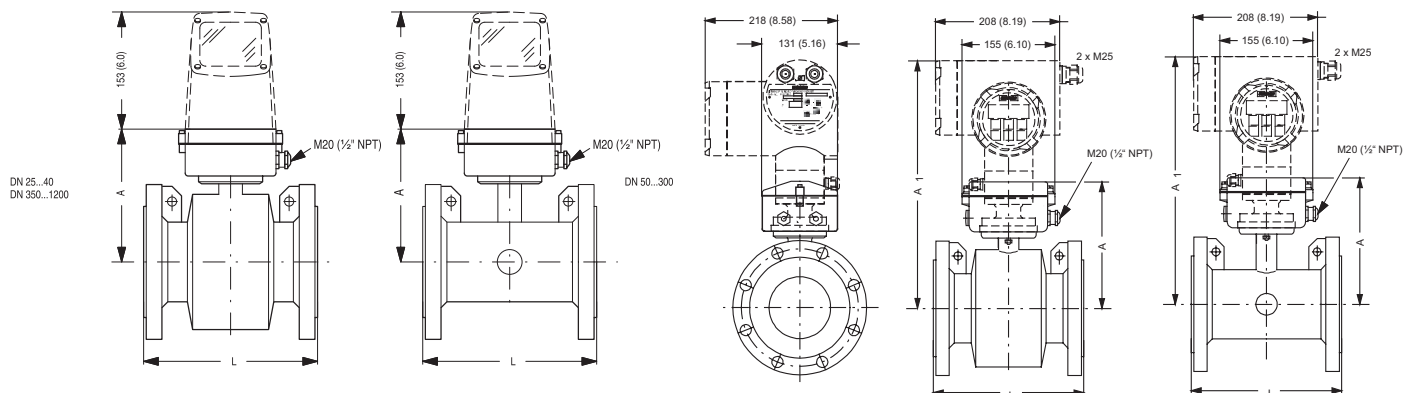

Nominal size		A		A <sub>1</sub>		L									
						PN 10		PN 16		PN 40		Class 150/AWWA		AS	
[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]
25	1	187	7.4	340	13.4	-	-	-	-	200	7.9	200	7.9	200	7.87
40	1½	197	7.8	350	13.8	-	-	-	-	200	7.9	200	7.9	200	7.87
50	2	188	7.4	341	13.4	-	-	200	7.9	-	-	200	7.9	200	7.87
65	2½	194	7.6	347	13.7	-	-	200	7.9	-	-	200	7.9	200	7.87
80	3	200	7.9	353	13.9	-	-	200	7.9	-	-	200	7.9	200	7.87
100	4	207	8.1	360	14.2	-	-	250	9.8	-	-	250	9.8	250	9.84
125	5	217	8.5	370	14.6	-	-	250	9.8	-	-	250	9.8	250	9.84
150	6	232	9.1	385	15.2	-	-	300	11.8	-	-	300	11.8	300	11.81
200	8	257	10.1	410	16.1	350	13.8	350	13.8	-	-	350	13.8	350	13.78
250	10	284	11.2	437	17.2	450	17.7	450	17.7	-	-	450	17.7	450	17.72
300	12	310	12.2	463	18.2	500	19.7	500	19.7	-	-	500	19.7	500	19.69
350	14	382	15.0	535	21.1	550	21.7	550	21.7	-	-	550	21.7	550	21.65
400	16	407	16.0	560	22.1	600	23.6	600	23.6	-	-	600	23.6	600	23.62
450	18	438	17.2	591	23.3	600	23.6	600	23.6	-	-	600	23.6	600	23.62
500	20	463	18.2	616	24.3	600	23.6	600	23.6	-	-	600	23.6	600	23.6
600	24	514	20.2	667	26.3	600	23.6	600	23.6	-	-	600	23.6	600	23.6
700	28	564	22.2	717	28.2	700	27.6	700	27.6	-	-	700	27.6	700	27.6
750	30	591	23.3	744	29.3	-	-	-	-	-	-	750	29.5	750	-
800	32	616	24.3	779	30.7	800	31.5	800	31.5	-	-	800	31.5	800	31.5
900	36	663	26.1	826	32.5	900	35.4	900	35.4	-	-	900	35.4	900	35.4
1000	40	714	28.1	877	34.5	1000	39.4	1000	39.4	-	-	1000	39.4	1000	39.4
	42	714	28.1	877	34.5	-	-	-	-	-	-	1000	39.4	-	-
	44	765	30.1	928	36.5	-	-	-	-	-	-	1100	43.3	-	-
1200	48	820	32.3	983	38.7	1200	47.2	1200	47.2	-	-	1200	47.2	1200	47.2


- not available

# Model MAGFLO®

## Sensor Model Mag 1100, MAG 1100 Food and MAG 3100 Signal Converter Model MAG 6000 and MAG 5000 MAG 5100 W


### Signal converter compact polyamid—standard

*Signal converter installed in compact mode*

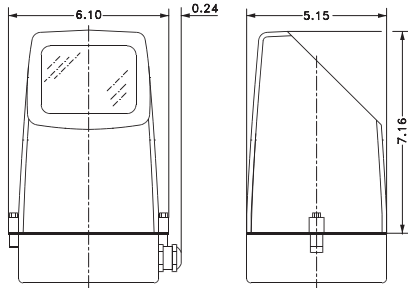


weight: mag 6000  
and mag 5000: 1.65 lbs

### Wall mounting box 21 TE (for optional 19" insert signal converter)

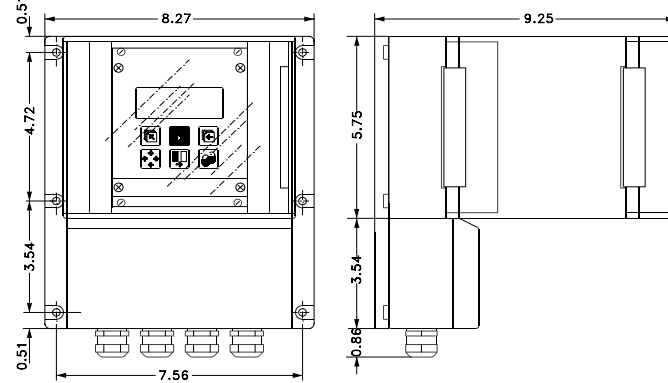


Weight excl. signal converter: 7.56 lbs

*Signal converter installed remote*

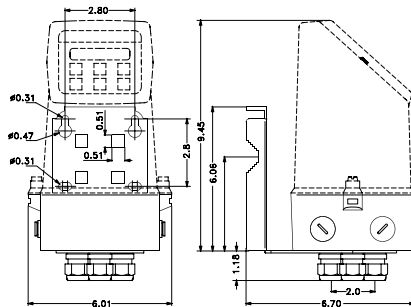

weight: wall bracket: 2.0 lbs

### Wall mounting box 42 TE (for optional 19" insert signal converter and electrode cleaning unit)

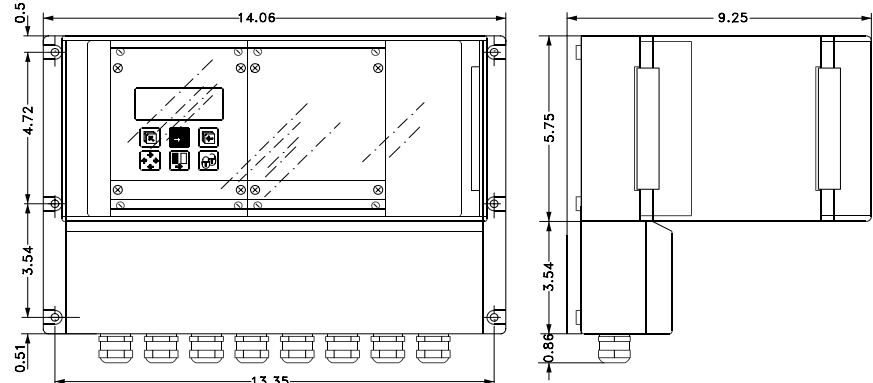

Weight excl. signal converter: 6.4 lbs

## Hydro-Flow 1200 Inline Vortex Flow Meter

### Description

The Hydro-Flow Model 1200 inline vortex flow meter was designed specifically for water flow measurement, containing no moving parts like traditional paddlewheel and impeller-type flow meters. Specifically designed for line sizes of 1 to 3 inches (25 to 76 mm), the Hydro-Flow Model 1200 is a full bore, inline flow meter that measures water, water/glycol mixtures, and condensate.

### Benefits

- Fast and easy installation
- Rugged and maintenance-free with no moving parts
- Fits line sizes from 1 to 3" (25 to 76 mm)
- Reliable and accurate flow readings—provides  $\pm 0.5\%$  of full-scale accuracy and 15:1 turndown ratio

### Features

- 2-year extended warranty is the best in the industry
- Ultra low-flow measurement capability
- Reliably processes vortex signals smaller than permitted by other technologies

### Applications

- The Hydro-Flow Model 1200 flow meter is ideally suited for:
  - Water
  - Water/Glycol Mixtures
  - Condensate

### Ultra Low-Flow Measurement Capability

Hydro-Flow's unique and proprietary microprocessor based piezo-resistive sensor can accurately and reliably process vortex signals that are 25 times smaller than permitted by other technologies, producing a flow meter of unequal performance and reliability.

### Condensate and Hot Water

The Hydro-Flow 1200 is ideal for measuring condensate, withstanding process temperatures up to 160°F (71°C). The Hydro-Flow 1200 contains no moving parts, so excessive mechanical loads on the flow meter (caused by continuous start-stop flow) do not affect the accuracy or mechanical reliability of the flow meter. Additionally, the flow meter is not affected by possible iron, salt, or other deposits found in the water flow.



# Hydro-Flow 1200

## Specifications

<b>Performance</b>	
<b>Accuracy</b>	Combined linearity and repeatability is $\pm 0.5\%$ of full scale.

<b>Electrical</b>	
<b>Enclosure</b>	Reinforced polycarbonate, NEMA 6
<b>Output Signal Options</b>	
<b>Pulse Output</b>	Frequency proportional to flow rate.
	Power supply: 10 to 32 VDC with current limited by series resistance to between 5 and 20 mA.
	Maximum pulse width is 5 ms. Other settings can be configured by the factory or reconfigured in the field using Hydro-Flow Field-Pro software.
<b>Analog Output</b>	4 to 20 mA analog current loop. Current proportional to flow rate.
	Power supply: 10 to 32 VDC compliance
	4 mA = zero flow; 20 mA = maximum flow. Other 20 mA settings can be reconfigured in the field using Hydro-Flow Field-Pro software.
<b>No Output</b>	Display only
	Power supply: 8 to 32 VDC
	4 mA maximum
<b>Display Option</b>	LCD display alternately shows 4-digit rate and 8-digit total flow.

Mechanical					
Type	Full bore, inline				
Measurable Fluids	Water, water/glycol mixtures, condensate				
Pipe Sizes	1" (25 mm)	1.5" (38 mm)	2" (51 mm)	2.5" (64 mm)	3" (76 mm)
Fluid Temperature	32 to 160°F (0 to 71°C)				
Fluid Pressure	150 psi (10.3 bar) maximum				
Ambient Temperature	-20 to 140°F (-20 to 60°C)				
Flow Range	1' (0.3 m) per second, minimum				
	15' (4.5 m) per second, maximum				
Measuring Units	English = gallons				
	Metric = cubic meters				
	Other measuring units available upon request or measuring units can be reconfigured using Hydro-Flow's Field-Pro, PC compatible configuration software.				
Wetted Parts					
Vortex Sensor	Ultem® (plastic)				
Shedder Bar	316 stainless steel				
Flow Meter Body	Brass				
Stem	Brass				
O-rings	EPDM				
Pipe Connection	Brass—NPTF				
Straight Run Piping	Typical 10 diameters upstream, 5 diameters downstream				


# Hydro-Flow 1200

## Measurable Flow Rates

Line Size	1" (25 mm)	1.5" (38 mm)	2" (51 mm)	2.5" (64 mm)	3" (76 mm)
<b>Gallons Per Minute</b>					
Minimum Flow	2.6	5.4	10.6	14.0	23.4
Maximum Flow	40	80	160	210	350
<b>Cubic Meters Per Hour</b>					
Minimum Flow	0.60	1.22	2.42	3.18	5.30
Maximum Flow	9.1	18.2	36.3	47.7	79.5
Pulses/Gallon <sup>1</sup>	250	100	50	50	25
Pulses/Cubic Meters <sup>1</sup>	75000	25000	15000	15000	6000

<sup>1</sup> When flow meter is configured for pulse output.

## Dimensions

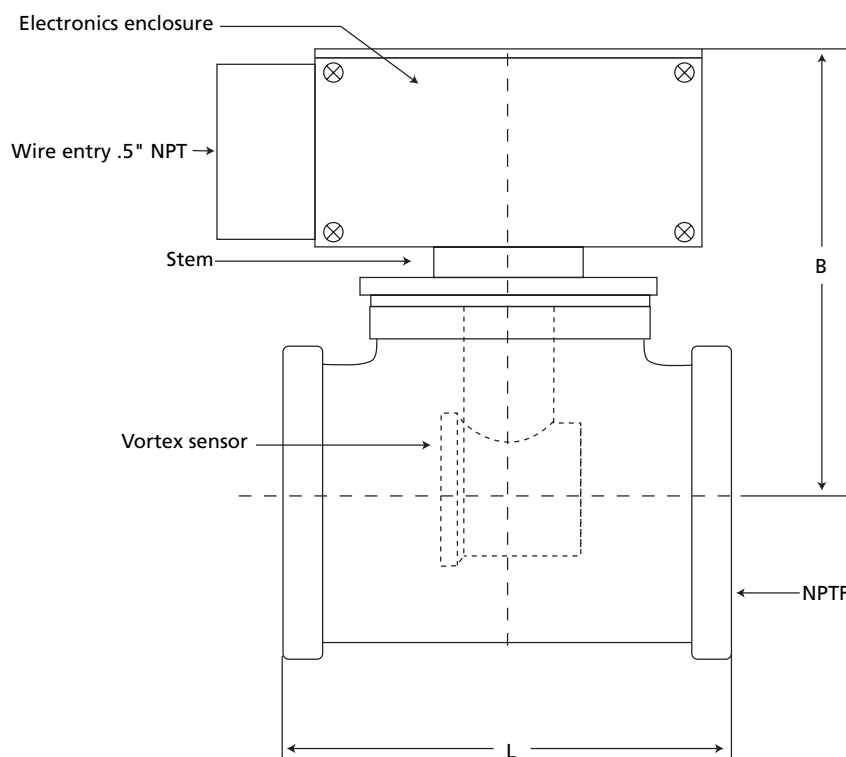

Meter Size	L	B
1.0" (25 mm)	3.44" (87.4 mm)	3.85" (97.8 mm)
1.5" (38 mm)	3.63" (92.2 mm)	4.25" (108.0 mm)
2.0" (51 mm)	3.82" (97.0 mm)	4.40" (111.8 mm)
2.5" (64 mm)	4.31" (109.5 mm)	4.90" (124.5 mm)
3.0" (76 mm)	4.55" (115.6 mm)	5.20" (132.1 mm)

# Hydro-Flow 1200

## Model and Suffix Codes

Category	Suffix Codes					
Type						
Inline	1200					
Line Size						
1.0" (25 mm)		10				
1.5" (38 mm)		15				
2.0" (51 mm)		20				
2.5" (64 mm)		25				
3.0" (76 mm)		30				
Connection						
Brass-NPTF			1			
Output						
Pulse				1		
Current: 4 to 20 mA				2		
No Output				3		
Display						
No Display					1	
Rate/Total Display					2	
Measuring Units						
English						1
Metric						2
Example	1200-	20-	1-	2-	2-	2
	Hydro-Flow 1200-20-1-2-2-2 represents a 2" inline flow meter with a brass tee fitting, 4 to 20 mA analog output and a rate/total display with Metric measuring units					

- 1 Standard English measuring units for flow rate and totalized flow are gallons per minute (gpm) and gallons, respectively. Standard Metric measuring units for flow rate and totalized flow are cubic meters per hour (m<sup>3</sup>/h) and cubic meters (m<sup>3</sup>), respectively. Please specify other desired measuring units for which the flow meter should be configured. Other units, such as acre-feet, cubic feet, barrels, and liters are available and can be set by the factory.
- 2 Watertight cable connector and direct burial lead wires are available. See Accessories section for more information.

## Accessories/Options

Description	Part Number
BTU-121 BTU/Energy Measurement System for Chilled and Hot Water	Contact rep or factory
Field-Pro Configuration Program: Software	011110
Communicator Hardware	011113
Hydro-Flow Relay Output Module	011121
AC to DC Converter/Power Supplies	011138
Water-Tight Cable Connector and 18" Direct Burial Cable	011142
Aluminum enclosure	Add <b>AL</b> to end of product string

## Hydro-Flow 2200 Fixed Insertion Vortex Flow Meter

### Description

The Hydro-Flow Model 2200 fixed insertion vortex flow meter was designed specifically for water flow measurement, containing no moving parts like traditional paddlewheel and impeller-type flow meters. Specifically designed for line sizes of 2 to 20 inches (51 to 508 mm), the Hydro-Flow Model 2200 is a fixed insertion flow meter that measures water, water/glycol mixtures, and agriculture/Reuse water.

### Benefits

- Fast and easy installation
- Rugged and maintenance-free with no moving parts
- Fits line sizes from 2 to 20" (51 to 508 mm)
- Reliable and accurate flow readings—provides  $\pm 1.0\%$  of full-scale accuracy and 15:1 turndown ratio

### Features

- 2-year extended warranty is the best in the industry
- Reliably processes vortex signals smaller than permitted by other technologies

### Applications

- The Hydro-Flow Model 2200 flow meter is ideally suited for:
  - Water
  - Water/glycol mixtures
  - Agriculture/Reuse water

### Ultra Low-Flow Measurement Capability

Hydro-Flow's unique and proprietary microprocessor based piezo-resistive sensor can accurately and reliably process vortex signals that are 25 times smaller than permitted by other technologies, producing a flow meter of unequal performance and reliability.

### Diverse Water Applications

The Hydro-Flow 2200 is ideal for measuring water applications, withstanding process temperatures 32-160°F (0-71°C). The Hydro-Flow 2200 contains no moving parts, so excessive mechanical loads on the flow meter (caused by continuous start-stop flow) do not affect the accuracy or mechanical reliability of the flow meter. An optional aluminum electronics enclosure can ensure performance in wet environments. Additionally, the flow meter is not affected by possible iron, salt, or other deposits found in the water flow.





# Hydro-Flow 2200 Fixed Insertion Vortex Flow Meter

## Specifications

<b>Performance</b>	
<b>Accuracy</b>	Combined linearity and repeatability is $\pm 1.0\%$ of full scale.

<b>Electrical</b>	
Enclosure	Reinforced polycarbonate, NEMA 4X
Output Signal Options	
Pulse Output	Frequency proportional to flow rate.
	Power supply: 10 to 32 VDC with current limited by series resistance to between 5 and 20 mA.
	Maximum pulse width is 5 ms. Other pulse output settings can be configured by the factory or reconfigured in the field using Hydro-Flow Field-Pro software.
Analog Output	4 to 20 mA analog current loop. Current proportional to flow rate.
	Power Supply: 10 to 32 VDC compliance
	4 mA = zero flow; 20 mA = maximum flow.
No Output	Display only
	Power supply: 8 to 32 VDC
	4 mA maximum
Display Option	LCD display alternately shows 4-digit rate and 8-digit total flow.

<b>Mechanical</b>	
Type	Fixed Insertion
Measurable Fluids	Water, water/glycol mixtures, condensate
Pipe Sizes	2 to 20" (51 to 508 mm)
Fluid Temperature	32 to 160°F (0 to 71°C) all connections
Fluid Pressure	400 psi (27.5 bar) maximum for thread-o-let
	300 psi (20.7 bar) maximum for saddle connection
	150 psi (10.3 bar) maximum for tee connection
Process Temperature	32 to 160°F (0 to 71°C)
Flow Range	1' (0.3 m) per second, minimum
	15' (4.5 m) per second, maximum
Measuring Units	English = gallons
	Metric = cubic meters
	Other measuring units available upon request or measuring units can be reconfigured using Hydro-Flow's Filed-Pro, PC compatible configuration software.

<b>Wetted Parts</b>	
Vortex Sensor	Ultem® (plastic)
Shedder Bar	316 stainless steel
Compression Fitting	Brass
Stem	316 Stainless Steel
O-rings	EPDM
Straight Run Piping	Typical 10 diameters upstream, 5 diameters downstream
Mounting Options	Carbon steel saddle for steel or PVC pipes
	Carbon steel thread-o-let
	Brass tee fitting
	Pipe connection – 1.5" NPTF

# Hydro-Flow 2200 Fixed Insertion Vortex Flow Meter

## Measurable Flow Ranges

Line Size	2" (51 mm)	3" (76 mm)	4" (102 mm)	6" (152 mm)	8" (203 mm)	10" (254 mm)
<b>Gallons per Minute</b>						
Minimum Flow	10.6	23.4	40.0	100.0	166.6	266.6
Maximum Flow	160	350	600	1500	2500	4000
<b>Cubic Meters per Hour</b>						
Minimum Flow	2.4	5.4	9.2	22.8	38.0	60.6
Maximum Flow	36.3	79.5	136.3	340.7	556.8	908.5
Pulses/Gallon <sup>1</sup>	50	25	15	6	4	2
Pulses/Cubic Meters <sup>1</sup>	15000	6000	5000	2000	1000	500

Line Size	12" (305 mm)	14" (356 mm)	16" (406 mm)	18" (457 mm)	20" (508 mm)
<b>Gallons Per Minute</b>					
Minimum Flow	368	418	568	734	934
Maximum Flow	5500	6250	8500	11000	14000
<b>Cubic Meters per Hour</b>					
Minimum Flow	83.4	94.8	128.8	166.6	212
Maximum Flow	1249.2	1419.5	1930.6	2498.4	3179.7
Pulses/Gallon <sup>1</sup>	2	1	1	1	0.5
Pulses/Cubic Meters <sup>1</sup>	500	500	200	200	200

<sup>1</sup> When flow meter is configured for pulse output.


# Hydro-Flow 2200 Fixed Insertion Vortex Flow Meter

## Hardware Installation

The Hydro-Flow model 2200 is a fixed insertion flow meter with a 1-½" NPT mounting thread. The pipe must be depressurized prior to flow meter installation and/or removal. Three standard accessory mounting fittings are recommended for flow meter installation.

- **Thread-o-let:** The thread-o-let is recommended for permanent installation requiring minimal service and is good for high-pressure (up to 400 psi) applications.
- **Tee Fitting:** The tee fitting is installed only for 2" and 3" pipe sizes. Installation requires no special machining, hole cutting or welding. Pressure is limited to 150 psi
- **Saddle Clamp:** The saddle clamp is recommended when welding is not feasible. Saddles can be used for steel and PVC pipe. Pressure is limited to 300 psi.

## Model 2200 Hydro-Flow mechanical drawing with conduit detail

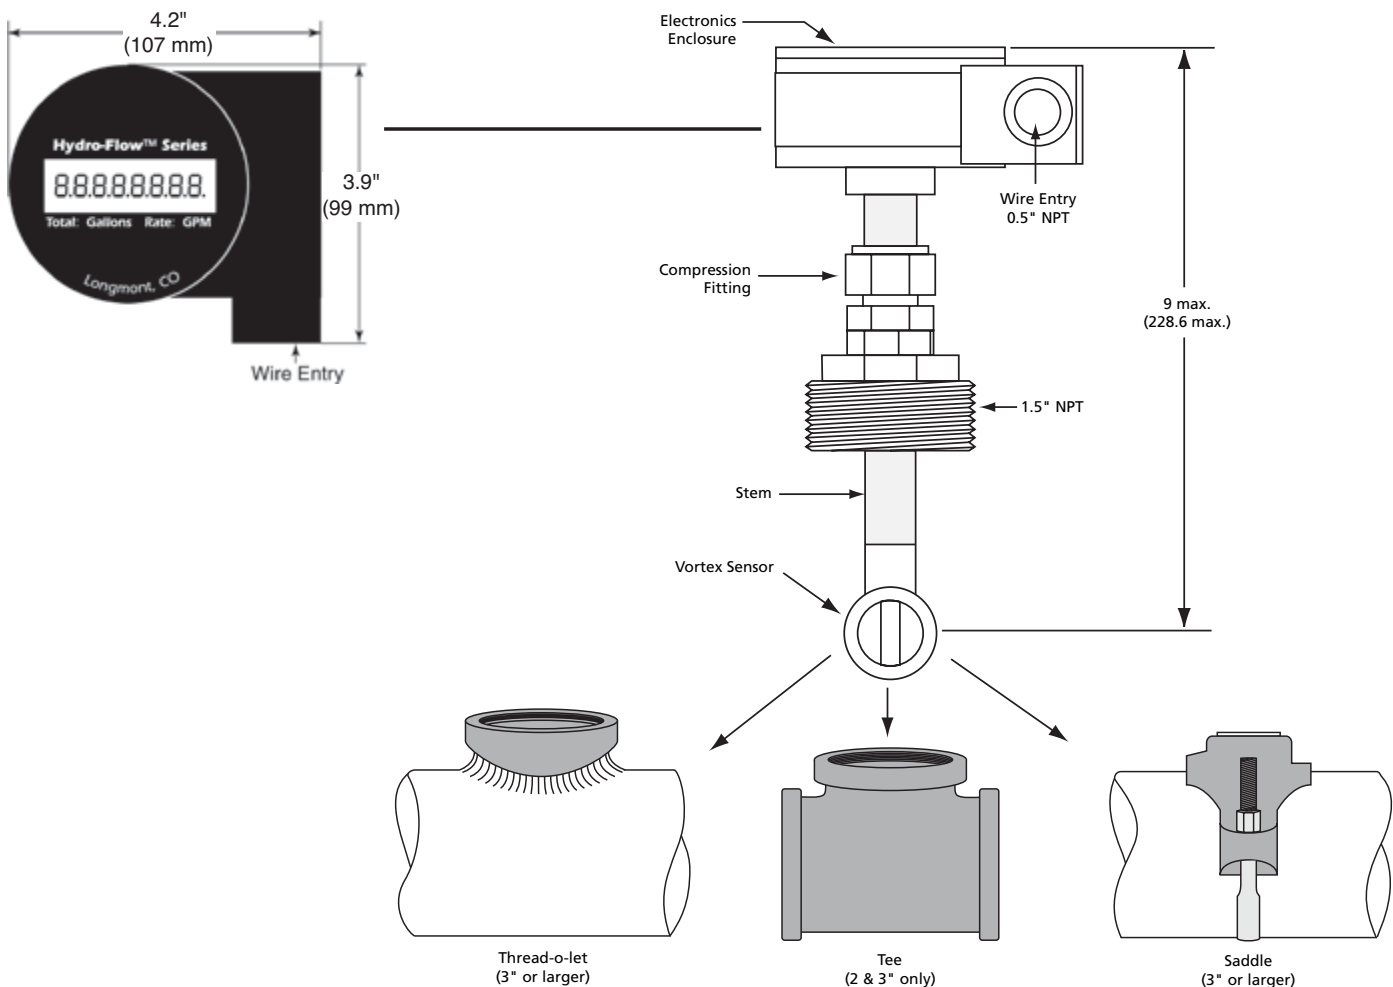

# Hydro-Flow 2200 Fixed Insertion Vortex Flow Meter

## Making Electrical Connections

### Cabling (Pulse Output)

The cable may be up to 2000 feet of #20 AWG or larger shielded two-conductor cable. The shield lead from the meter may be connected to an earth ground, such as a copper cold water pipe. The shield improves noise immunity and provides a return path for electrical surges. Its use is optional in installations in which electrical transients and noise are not a problem.

### Current Limiting Resistor (Pulse Output)

The current limiting resistor is required to limit the normal operating current in the flow meter to a value between 5 mA and 20 mA (with a meter voltage of 8 volts and less than 25 mA). The value of the resistor is determined by the power supply voltage, the operating meter current, and the cable resistance.

Table 1 lists standard ½ watt 5% resistor values which will work in most installations. For power supply voltages between those in the table, use the lower value of resistor.


**Caution: If the flow meter is wired backwards to the current-limited power source, the flow meter will not be damaged but it will not function properly.**

### Cabling (4 mA to 20 mA Output or No Output)

The flow meter may be connected with up to 2000 feet of #22 AWG or larger cable. Shielded cable may be necessary in some environments to reduce electrical noise; if used, the shield should be connected at one end only to an earth ground point, such as a copper cold water pipe.

Supply Voltage (DC)	Current Limiting Resistor Values ( $\Omega$ )	
	Minimum	Maximum
10	400	400
12	480	800
14	560	1200
16	640	1600
18	720	2000
20	800	2400
22	880	2800
24	960	3200
26	1040	3600
28	1120	4000
30	1200	4400
32	1280	4800

Table 1. Current limiting resistor for pulse output

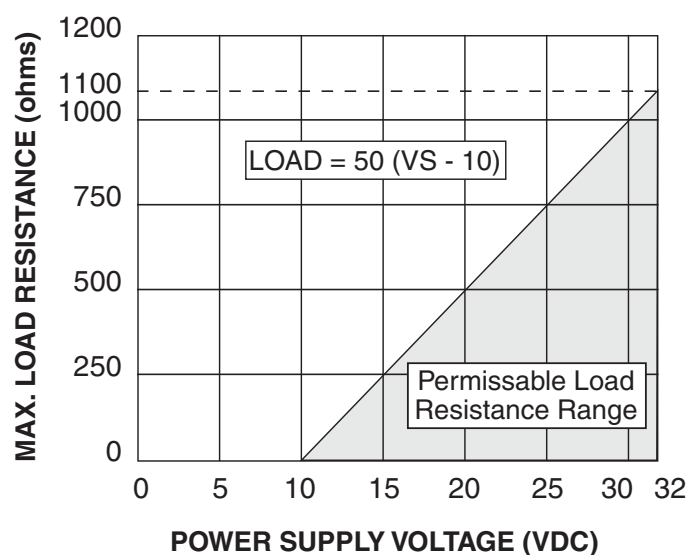

# Hydro-Flow 2200 Fixed Insertion Vortex Flow Meter

Category	Suffix Codes					
Type						
Fixed Insertion	2200					
Line Size						
2" (51 mm) through 20" (508 mm)		02 to 20				
Mounting						
Thread-o-let (3" and larger)			1			
Saddle for Steel Pipe (3" and larger)			2			
Saddle for PVC Pipe (3" and larger)			3			
Tee (2" and 3" only)			4			
None (retrofit)			5			
Output						
Pulse				1		
Current: 4 to 20 mA				2		
No Output				3		
Display						
No Display					1	
Rate/Total Display					2	
Measuring Units						
English						1
Metric						2
Example	2200-	08-	3-	1-	2-	1
Hydro-Flow 2200-08-3-1-2-1 represents an 8" fixed insertion flow meter with saddle mounting for PVC pipe, pulse output and a rate/total display with English measuring units.						

1 Standard English measuring units for flow rate and totalized flow are gallons per minute (gpm) and gallons, respectively. Standard metric measuring units for flow rate and totalized flow are cubic meters per hour (m<sup>3</sup>/h) and cubic meters (m<sup>3</sup>), respectively. Please specify other desired measuring units for which the flow meter should be configured. Other units, such as acre-feet, cubic feet, barrels, and liters are available and can be set by the factory.

2 Watertight cable connector and direct burial lead wires are available. See Accessories section for more information.

3 Please specify pipe size, material, and schedule (or outside and inside diameter of pipe).


4 To order the Aluminum electronics enclosure put AL on the end of the product string.

## Aluminum Electronics Enclosure Advantages and Uses:

- Solid Enclosure—NEMA 6P environmental protection (prolonged submersion)
- Field Serviceable
- Designed to withstand wet environments, direct burial, and heavy industrial installations
- Fluid Temperature 32 to 160°F (0 to 71°C)
- Accuracy ±1% of full scale
- Line size 2 to 20" (50 to 500mm)

## Accessories

Description	Part Number
BTU-121 BTU/Energy Measurement System for Chilled and Hot Water	Contact rep or factory
Field-Pro Configuration Program: Software	011110
Communicator Hardware	011113
Hydro-Flow Relay Output Module	011121
AC to DC Converter/Power Supplies	011138
Water-Tight Cable Connector and 18" Direct Burial Cable	011142



## Hydro-Flow 2300 Fixed Insertion Vortex Flow Meter

### Description

The Hydro-Flow Model 2300 insertion vortex flow meter was designed specifically for water flow measurement, containing no moving parts like traditional paddlewheel and impeller-type flow meters. Specifically designed for line sizes of 0.5 to 8 inches (13 to 203 mm), the Hydro-Flow Model 2300 is an insertion flow meter that measures ultrapure water, dionized water, acids, and solvents.

### Benefits

- Fast and easy installation
- Fits line sizes from 0.5 to 8" (13 to 203 mm)
- Rugged and maintenance-free with no moving parts
- Reliable and accurate flow readings—provides  $\pm 1.0\%$  of full-scale accuracy and 15:1 turndown ratio

### Features

- 2-year extended warranty is the best in the industry
- Ultra low-flow measurement capability
- Reliably processes vortex signals smaller than permitted by other technologies

### Applications

- The Hydro-Flow Model 2300 flow meter is ideally suited for:
  - Ultrapure Water
  - Dionized water
  - Acids
  - Solvents
  - Water

### Ultra Low-Flow Measurement Capability

Hydro-Flow's unique and proprietary microprocessor based piezo-resistive sensor can accurately and reliably process vortex signals that are 25 times smaller than permitted by other technologies, producing a flow meter of unequal performance and reliability.

### Ultrapure Water, Deionized Water, Acids, and Solvents

The Model 2300 is manufactured from PVDF for flow measurement of ultrapure water, deionized water, acids, solvents, and other corrosive fluids, making it an idea solution for use in semi-conductor and chemical wet processes. The Model 2300 design has no internal crevices, or "dead space", eliminating the risk of bacterial growth and contamination. Unlike traditional paddlewheel and impeller type flow meters, which can wear over time or shed particles into the system, Hydro-Flow's no moving parts technology eliminates the possibility of fluid and process contamination. The Model 2300 is designed to retrofit into most +GF+ Signet fittings without modifications to the existing piping system.





# Hydro-Flow 2300 Fixed Insertion Vortex Flow Meter

## Specifications

<b>Performance</b>	
<b>Accuracy</b>	Combined linearity and repeatability is $\pm 1.0\%$ of full scale.

<b>Electrical</b>	
<b>Enclosure</b>	Reinforced polycarbonate, NEMA 6
<b>Output Signal Options</b>	
<b>Pulse Output</b>	Frequency proportional to flow rate.
	Power supply: 10 to 32 VDC with current limited by series resistance to between 5 and 20 mA.
	Maximum pulse width is 5 ms. Other pulse output settings can be configured by the factory or reconfigured in the field using Hydro-Flow Field-Pro software.
<b>Analog Output</b>	4 to 20 mA analog current loop. Current proportional to flow rate.
	Power Supply: 10 to 32 VDC compliance
	4 mA = zero flow; 20 mA = maximum flow.
<b>Display Option</b>	LCD display alternately shows 4-digit rate and 8-digit total flow.

<b>Mechanical</b>	
<b>Type</b>	Insertion
<b>Measurable Fluids</b>	Ultrapure water, dionized water, acids, solvents, water
<b>Pipe Sizes</b>	0.5 to 8" (13 to 203 mm)
<b>Fluid Temperature</b>	32 to 160°F (0 to 71°C) (See Graph 1)
<b>Ambient Temperature</b>	-20 to 140°F (-29 to 60°C)
<b>Flow Range</b>	1' (0.3 m) per second, minimum
	15' (4.5 m) per second, maximum
<b>Measuring Units</b>	English = gallons
	Metric = cubic meters
	Other measuring units available upon request or measuring units can be reconfigured using Hydro-Flow's Field-Pro, PC compatible configuration software.
<b>Wetted Parts</b>	
<b>Sensor/Bar/Stem</b>	PVDF
<b>O-rings</b>	Viton®
<b>Straight Run Piping</b>	Typical 10 diameters upstream, 5 diameters downstream
<b>Mounting Options</b>	Retrofit: Fits existing +GF+ Signet tee fitting
	Union tee fitting: PVDF or PP for 0.5 to 2"
	Tee fitting: CPVC or PVC for 0.5 to 1.5"

# Hydro-Flow 2300 Fixed Insertion Vortex Flow Meter


## Measurable Flow Ranges

Line Size	0.5" (13 mm)	0.75" (19 mm)	1" (25 mm)	1.25" (32 mm)	1.5" (38 mm)	2" (51 mm)
<b>Gallons per minute</b>						
Minimum Flow	1.0	1.6	2.6	4.0	7.0	11.4
Maximum Flow	13.7	23	40	60	103	168
<b>Cubic Meters per Hour</b>						
Minimum Flow	0.24	0.36	0.6	0.9	1.6	2.6
Maximum Flow	3.1	5.2	9.1	13.8	23.5	38.1
Pulses/Gallon <sup>1</sup>	550	330	200	125	75	45
Pulses/Cubic Meters <sup>1</sup>	150000	85000	55000	35000	20000	12000

Line Size	2.5" (64 mm)	3" (76 mm)	4" (102 mm)	5" (127 mm)	6" (152 mm)	8" (203 mm)
<b>Gallons Per Minute</b>						
Minimum Flow	15.4	23.4	36.6	56.6	81.6	146.6
Maximum Flow	228	348	558	855	1226	2204
<b>Cubic Meters per Hour</b>						
Minimum Flow	3.6	5.4	8.4	13.0	18.6	33.4
Maximum Flow	51.9	78.1	126.7	194.4	278.5	500.6
Pulses/Gallon <sup>1</sup>	35	20	15	10	5	3
Pulses/Cubic Meters <sup>1</sup>	9000	6000	3500	2500	1500	1000

<sup>1</sup> When flow meter is configured for pulse output.

Graph 1. Process Pressure/Temperature

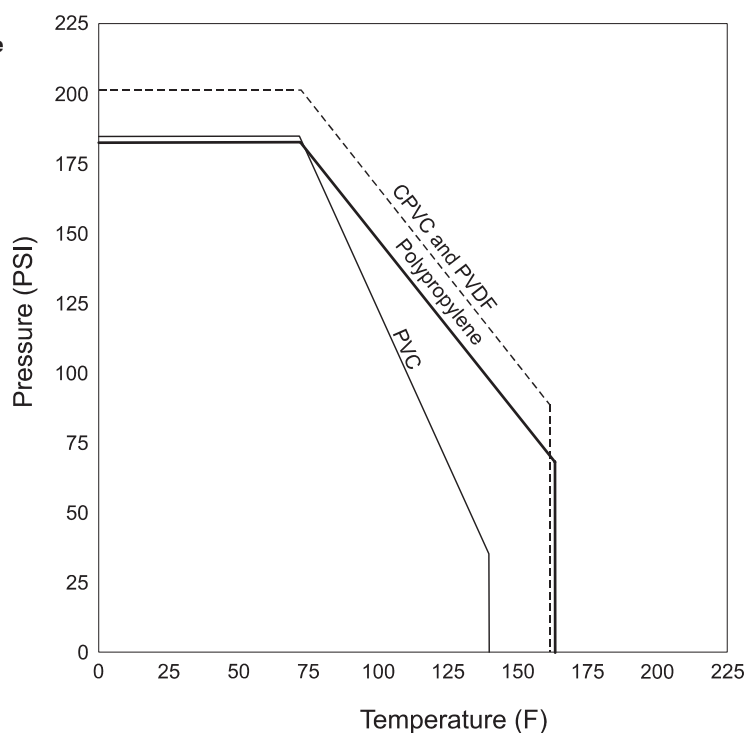

# Hydro-Flow 2300 Fixed Insertion Vortex Flow Meter

## Cabling (Pulse Output)

The cable may be up to 2000 feet of #20 AWG or larger shielded two-conductor cable. The shield lead from the meter may be connected to an earth ground, such as a copper cold water pipe. The shield improves noise immunity and provides a return path for electrical surges. Its use is optional in installations in which electrical transients and noise are not a problem.

## Current Limiting Resistor (Pulse Output)

The current limiting resistor is required to limit the normal operating current in the flow meter to a value between 5 mA and 20 mA (with a meter voltage of 8 volts and less than 25 mA). The value of the resistor is determined by the power supply voltage, the operating meter current, and the cable resistance.

Table 1 lists standard 1/2 watt 5% resistor values which will work in most installations. For power supply voltages between those in the table, use the lower value of resistor.

Load Resistances (4 mA to 20 mA Output)


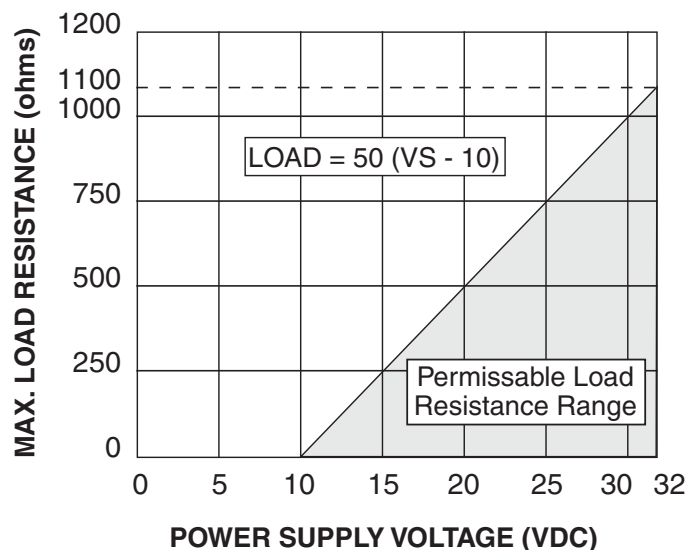


Table 1. Current limiting resistor (pulse output)

Supply Voltage (DC)	Current Limiting Resistor Values ( $\Omega$ )	
	Minimum	Maximum
10	400	400
12	480	800
14	560	1200
16	640	1600
18	720	2000
20	800	2400
22	880	2800
24	960	3200
26	1040	3600
28	1120	4000
30	1200	4400
32	1280	4800

Figure 1. Wiring Diagram (Pulse Output)

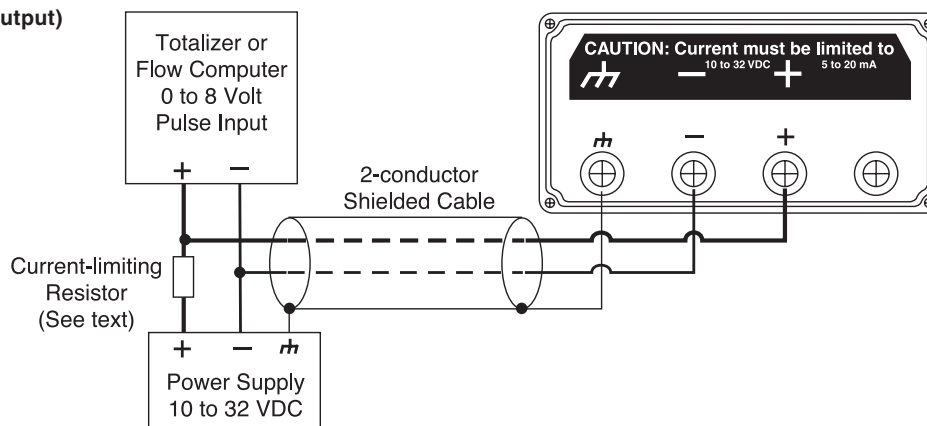

# Hydro-Flow 2300 Fixed Insertion Vortex Flow Meter

## Mechanical Illustrations


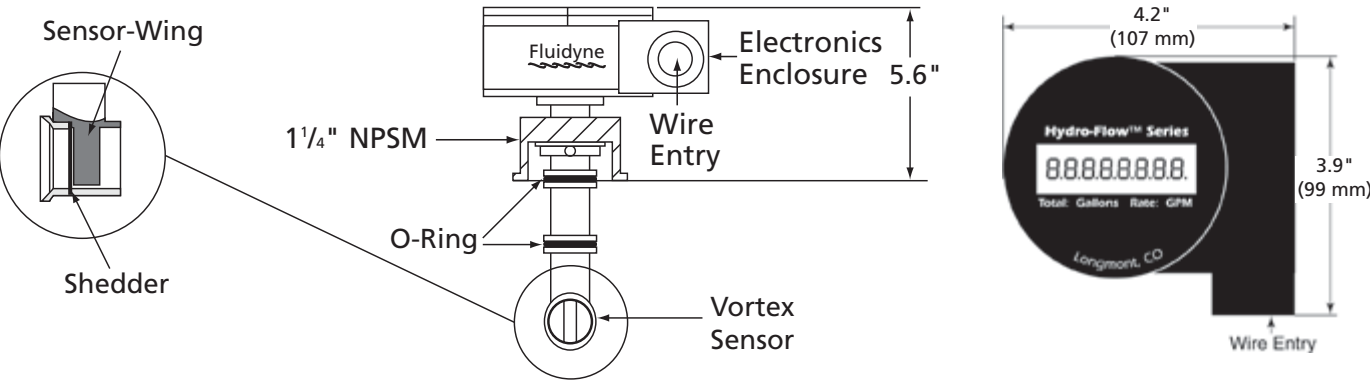



Figure 3. Model 2300 mechanical drawing and conduit (with display) dimensions

## Union Tee Fitting



Meter Size Inches (mm)	0.5" (15)	0.75" (20)	1" (25)	1.25" (30)	1.5" (40)	2" (50)
L	5.05 (128)	5.59 (142)	6.14 (156)	6.33 (161)	6.93 (156)	7.64 (194)
H	3.43 (87)	3.57 (91)	4.17 (106)	4.35 (111)	6.26 (159)	5.75 (146)

## Tee Fitting



Meter Size Inches (mm)	0.5" (15)	0.75" (20)	1" (25)	1.25" (30)	1.5" (40)
H	3.73 (95)	3.93 (100)	4.30 (109)	4.35 (111)	4.90 (124)
W	3.81 (97)	4.06 (103)	4.17 (106)	4.38 (111)	4.60 (117)

# Hydro-Flow 2300 Fixed Insertion Vortex Flow Meter

## Retrofit Compatibility to Signet Fittings

Size	Material*			
	CPVC	PVC	PVDF	Polypropylene
0.5" (13 mm)	Not compatible	Not compatible	SFMT005 Union Tee	PPMT005 Union Tee
0.75" (19 mm)	Not compatible	Not compatible	SFMT007 Union Tee	PPMT007 Union Tee
1" (25 mm)	Not compatible	Not compatible	SFMT010 Union Tee	PPMT010 Union Tee
1.25" (32 mm)	CPV8T012F Tee CPV8T012 Saddle	CPV8T012F Tee CPV8T012 Saddle	SFMT012 Union Tee	PPMT012 Union Tee
1.5" (38 mm)	CPV8T015F Tee CPV8T015 Saddle	CPV8T015F Tee CPV8T015 Saddle	SFMT015 Union Tee	PPMT015 Union Tee
2" (51 mm)	N/A	N/A	SFMT020 Union Tee	PPMT020 Union Tee
2.5" (64 mm)	N/A	N/A	SFMT025 Wafer	PPMT025 Wafer
3" (76 mm)	N/A	N/A	SFMT035 Wafer	PPMT030 Wafer
4" (102 mm)	N/A	N/A	SFMT040 Wafer	PPMT040 Wafer
5" (127 mm)	N/A	N/A	SFMT050 Wafer	PPMT050 Wafer
6" (152 mm)	N/A	N/A	SFMT060 Wafer	PPMT060 Wafer
8" (203 mm)	N/A	N/A	SFMT080 Wafer	PPMT080 Wafer

## Accessories

Description	Part Number
BTU-121 BTU/Energy Measurement System for Chilled and Hot Water	Contact rep or factory
Field-Pro Configuration Program: Software	011110
Communicator Hardware	011113
Hydro-Flow Relay Output Module	011121
AC to DC Converter/Power Supplies	011138
Water-Tight Cable Connector and 18" Direct Burial Cable	011142

\* Consult factory for stainless steel tee fitting retrofits.

# Hydro-Flow 2300 Fixed Insertion Vortex Flow Meter

## Model and Suffix Codes

Category		Suffix Codes			
Type					
Fixed Insertion - PVDF	2300				
Line Size					
0.5" (13 mm)		05			
0.75" (19 mm)		07			
1" (25 mm)		10			
1.25" (32 mm)		12			
1.5" (38 mm)		15			
2" (51 mm)		20			
2.5" (64 mm)		25			
3" (76 mm)		30			
4" (102 mm)		40			
5" (127 mm)		50			
6" (152 mm)		60			
8" (203 mm)		80			
Mounting					
Supplied by EMCO					
EMCO CPVC (0.5" to 1.5" line sizes only)			02		
EMCO PVC (0.5" to 1.5" line sizes only)			03		
EMCO PVDF (0.5" to 2.0" line sizes only)			04		
EMCO Polypropylene (0.5" to 2.0" line sizes only)			05		
Retrofit to +GF+Signet fitting and no EMCO mountings required					
Retrofit to +GF+Signet CPVC fitting			2R		
Retrofit to +GF+Signet PVC fitting			3R		
Retrofit to +GF+Signet PVDF fitting			4R		
Retrofit to +GF+Signet polypropylene fitting			5R		
Output/Display					
Pulse/No Display				1	
4 to 20 mA/Rate and Total Display				2	
Pulse Rate and Total Display				3	
4 to 20 mA/No Display				4	
Measuring Units					
English					1
Metric					2
Example	2300-	12-	04-	2-	

Hydro-Flow 2300-12-04-2-1 represents a 1.25" PVDF fixed insertion flow meter with a PVDF union tee fitting and 4 to 20 mA analog output with a rate/total display with English measuring units.

Retrofit Example: Hydro-Flow 2300-40-4R-2-1 represents a 4" PVDF fixed insertion vortex flow meter to be retrofit to existing PVDF fitting (Signet p/n SFMT040 wafer) with current, 4 to 20 mA output, with a rate/total display with English measuring units.

## Ordering Considerations

- 1 Consult factory for stainless steel tee fitting retrofits.
- 2 Standard English measuring units for flow rate and totalized flow are gallons per minute (gpm) and gallons, respectively. Standard metric measuring units for flow rate and totalized flow are cubic meters per hour (m<sup>3</sup>/h) and cubic meters (m<sup>3</sup>), respectively. Please specify other desired measuring units for which the flow meter should be configured. Other units, such as acre-feet, cubic feet, barrels, and liters are available and can be set by the factory.
- 3 Watertight cable connector and direct burial lead wires are available. See Accessories section for more information.
- 4 Please specify pipe size/material and pipe schedule and OUTSIDE AND INSIDE DIAMETER OF PIPE.

## Hydro-Flow 3100 Retractable Insertion Vortex Flow Meter

### Description

The Hydro-Flow Model 3100 Retractable Insertion Vortex Flow Meter was designed specifically for water flow measurement, containing no moving parts like traditional paddlewheel and impeller-type flow meters. Specifically designed for line sizes of 3 to 20 inches (50 to 500 mm), the Hydro-Flow Model 3100 is a fixed insertion flow meter that measures water, water/glycol mixtures, and condensate.



### Benefits

- Fast and easy installation
- Rugged and maintenance-free with no moving parts
- Fits line sizes from 3 to 20" (80 to 500 mm)
- Reliable and accurate flow readings—provides  $\pm 1.0\%$  of full-scale accuracy and 15:1 turndown ratio

### Features

- 2-year extended warranty is the best in the industry
- Ultra low-flow measurement capability
- Reliably processes vortex signals smaller than permitted by other technologies

### Applications

- The Hydro-Flow Model 3100 flow meter is ideally suited for:
  - Water
  - Water/glycol mixtures
  - Condensate

### Ultra Low-Flow Measurement Capability

Hydro-Flow's unique and proprietary microprocessor based piezo-resistive sensor can accurately and reliably process vortex signals that are 25 times smaller than permitted by other technologies, producing a flow meter of unequal performance and reliability.

### Condensate and Hot Water

The Hydro-Flow 3100 is ideal for measuring condensate, withstanding process temperatures up to 160°F (71°C). The Hydro-Flow 3100 contains no moving parts, so excessive mechanical loads on the flow meter (caused by continuous start-stop flow) do not affect the accuracy or mechanical reliability of the flow meter. Additionally, the flow meter is not affected by possible iron, salt, or other deposits found in the water flow.

# Hydro-Flow 3100 Retractable Insertion Vortex Flow Meter

## Specifications

<b>Performance</b>	
<b>Accuracy</b>	Combined linearity and repeatability is $\pm 1.0\%$ of full scale.

<b>Electrical</b>	
Enclosure	Reinforced polycarbonate, NEMA 6
Output Signal Options	
Pulse Output	Frequency proportional to flow rate.
	Power supply: 10 to 32 VDC with current limited by series resistance to between 5 and 20 mA.
	Maximum pulse width is 5 ms. Other pulse output settings can be configured by the factory or reconfigured in the field using Hydro-Flow Field-Pro software.
Analog Output	4 to 20 mA analog current loop. Current proportional to flow rate.
	Power Supply: 10 to 32 VDC compliance
	4 mA = zero flow; 20 mA = maximum flow.
No Output	Display only
	Power supply: 8 to 32 VDC
	4 mA maximum
Display Option	LCD display alternately shows 4-digit rate and 8-digit total flow.

<b>Mechanical</b>	
Type	Retractable Insertion
Measurable Fluids	Water, water/glycol mixtures, condensate
Pipe Sizes	3 to 20" (80 to 500 mm)
Fluid Temperature	32 to 160°F (0 to 71°C) all connections
Fluid Pressure	400 psi (27.5 bar) maximum for thread-o-let
	300 psi (20.7 bar) maximum for saddle connection
Ambient Temperature	-20 to 140°F (-29 to 60°C)
Flow Range	1' (0.3 m) per second, minimum
	15' (4.5 m) per second, maximum
Measuring Units	English = gallons
	Metric = cubic meters
	Other measuring units available upon request or measuring units can be reconfigured using Hydro-Flow's Filed-Pro, PC compatible configuration software.

<b>Wetted Parts</b>	
Vortex Sensor	Ultem® (plastic)
Shedder Bar	316 stainless steel
Valve	Brass
Stem	316 Stainless Steel
O-rings	EPDM
Straight Run Piping	Typical 10 diameters upstream, 5 diameters downstream
Mounting Options	Carbon steel saddle for steel pipes
	Carbon steel thread-o-let
	Pipe connection – 2" NPTF



# Hydro-Flow 3100 Retractable Insertion Vortex Flow Meter

## Measurable Flow Ranges

Line Size	3" (80 mm)	4" (100 mm)	6" (150 mm)	8" (200 mm)	10" (250 mm)
<b>Gallons per Minute</b>					
Minimum Flow	23.4	40.0	100.0	166.6	266.6
Maximum Flow	350	600	1500	2500	4000
<b>Cubic Meters per Hour</b>					
Minimum Flow	5.4	9.2	22.8	38.0	60.6
Maximum Flow	79.5	136.3	340.7	556.8	908.5
Pulses/Gallon <sup>1</sup>	25	15	6	4	2
Pulses/Cubic Meters <sup>1</sup>	6000	5000	2000	1000	500

Line Size	12" (300 mm)	14" (350 mm)	16" (400 mm)	18" (450 mm)	20" (500 mm)
<b>Gallons Per Minute</b>					
Minimum Flow	368	418	568	734	934
Maximum Flow	5500	6250	8500	11000	14000
<b>Cubic Meters per Hour</b>					
Minimum Flow	83.4	94.8	128.8	166.6	212
Maximum Flow	1249.2	1419.5	1930.6	2498.4	3179.7
Pulses/Gallon <sup>1</sup>	2	1	1	1	0.5
Pulses/Cubic Meters <sup>1</sup>	500	500	200	200	200

<sup>1</sup> When flow meter is configured for pulse output.

# Hydro-Flow 3100 Retractable Insertion Vortex Flow Meter

Category		Suffix Codes				
Type						
Retractable Insertion	3100					
Line Size						
3" (80 mm) through 20" (500 mm)		03 to 20				
Mounting						
Thread-o-let (3" and larger)			1			
Saddle for Steel Pipe (3" and larger)			2			
Output						
Pulse				1		
Current: 4 to 20 mA				2		
No Output				3		
Display						
No Display					1	
Rate/Total Display					2	
Measuring Units						
English						1
Metric						2
Example	2200-	08-	3-	1-	2-	1
	Hydro-Flow 3100-08-2-1-2-1 represents an 8" retractable insertion flow meter with saddle mounting for steel pipe, pulse output and a rate/total display with English measuring units.					

1 Standard English measuring units for flow rate and totalized flow are gallons per minute (gpm) and gallons, respectively. Standard metric measuring units for flow rate and totalized flow are cubic meters per hour (m<sup>3</sup>/h) and cubic meters (m<sup>3</sup>), respectively. Please specify other desired measuring units for which the flow meter should be configured. Other units, such as acre-feet, cubic feet, barrels, and liters are available and can be set by the factory.

2 Watertight cable connector and direct burial lead wires are available. See Accessories section for more information.


3 Please specify pipe size, material, and schedule (or outside and inside diameter of pipe).

## Accessories

Description	Part Number
BTU-121 BTU/Energy Measurement System for Chilled and Hot Water	
Field-Pro Configuration Program: Software	
Hydro-Flow Relay Output Module	
AC to DC Converter/Power Supplies	
Water-Tight Cable Connector and 18" Direct Burial Cable	011142

## Engineering Data

Engineering Data

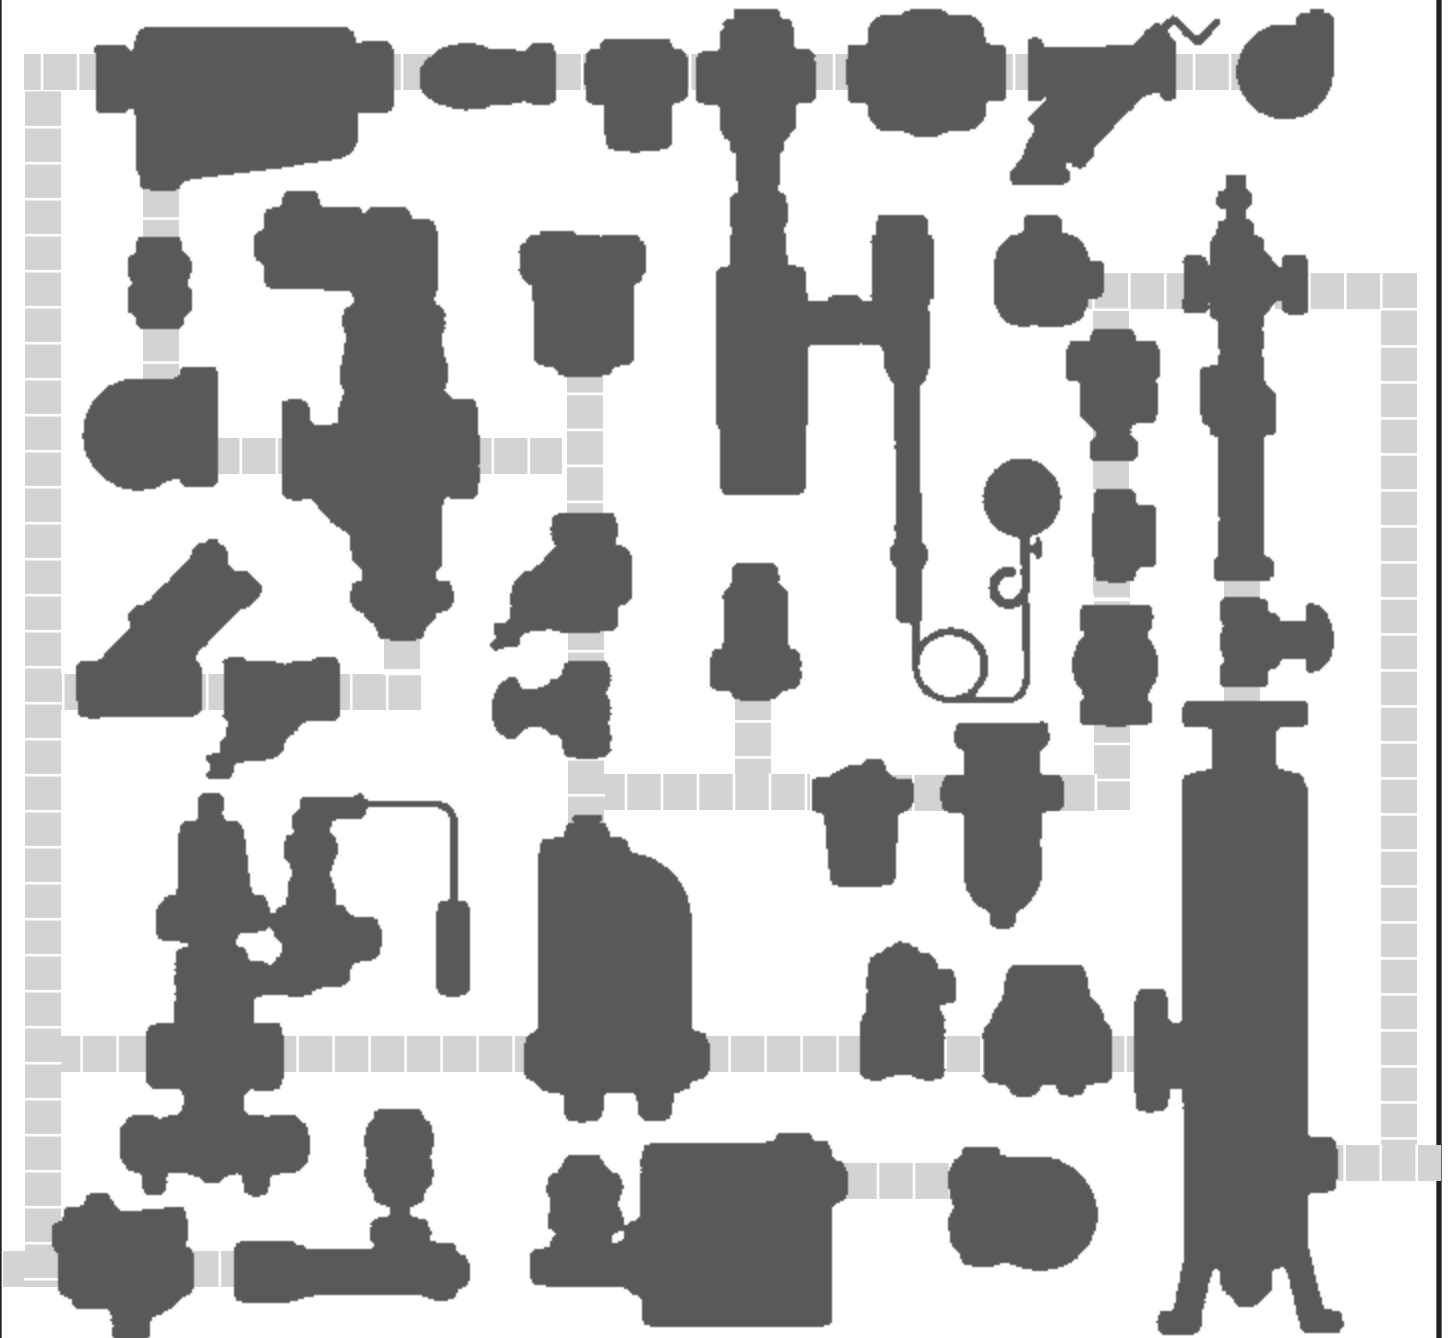

# Properties of Saturated Steam

	Gauge Pressure psig	Temperature °F	Heat in Btu/lb			Specific Volume ft <sup>3</sup> /lb
			Sensible	Latent	Total	
INS. VAC.	25	134	102	1017	1119	142
	20	162	129	1001	1130	73.9
	15	179	147	990	1137	51.3
	10	192	160	982	1142	39.4
	5	203	171	976	1147	31.8
	0	212	180	970	1150	26.8
	1	215	183	968	1151	25.2
	2	219	187	966	1153	23.5
	3	222	190	964	1154	22.3
	4	224	192	962	1154	21.4
	5	227	195	960	1155	20.1
	6	230	198	959	1157	19.4
	7	232	200	957	1157	18.7
	8	233	201	956	1157	18.4
	9	237	205	954	1159	17.1
	10	239	207	953	1160	16.5
	12	244	212	949	1161	15.3
	14	248	216	947	1163	14.3
	16	252	220	944	1164	13.4
	18	256	224	941	1165	12.6
	20	259	227	939	1166	11.9
	22	262	230	937	1167	11.3
	24	265	233	934	1167	10.8
	25	267	234	933	1169	10.3
	26	268	236	933	1169	10.3
	28	271	239	930	1169	9.85
	30	274	243	929	1172	9.46
	32	277	246	927	1173	9.10
	34	279	248	925	1173	8.75
	35	281	250	924	1174	8.6
	36	282	251	923	1174	8.42
	38	284	253	922	1175	8.08
	40	286	256	920	1176	7.82
	42	289	258	918	1176	7.57
	44	291	260	917	1177	7.31
	45	292	261	916	1177	7.21
	46	293	262	915	1177	7.14
	48	295	264	914	1178	6.94
	50	298	267	912	1179	6.68
	55	300	271	909	1180	6.27
	60	307	277	906	1183	5.84
	65	312	282	901	1183	5.49
	70	316	286	898	1184	5.18
	75	320	290	895	1185	4.91
	80	324	294	891	1185	4.67
	85	328	298	889	1187	4.44
	90	331	302	886	1188	4.24
	95	335	305	883	1188	4.05
	100	338	309	880	1189	3.89
	105	341	312	878	1190	3.74
	110	344	316	875	1191	3.59
	115	347	319	873	1192	3.46
	120	350	322	871	1193	3.34
	125	353	325	868	1193	3.23
	130	356	328	866	1194	3.12
	140	361	333	861	1194	2.92
	145	363	336	859	1195	2.84
	150	366	339	857	1196	2.74
	155	368	341	855	1196	2.68

	Gauge Pressure psig	Temperature °F	Heat in Btu/lb			Specific Volume ft <sup>3</sup> /lb
			Sensible	Latent	Total	
	160	371	344	853	1197	2.60
	165	373	346	851	1197	2.54
	170	375	348	849	1197	2.47
	175	377	351	847	1198	2.41
	180	380	353	845	1198	2.34
	185	382	355	843	1198	2.29
	190	384	358	841	1199	2.24
	195	386	360	839	1199	2.19
	200	388	362	837	1199	2.14
	205	390	364	836	1200	2.09
	210	392	366	834	1200	2.05
	215	394	368	832	1200	2.00
	220	396	370	830	1200	1.96
	225	397	372	828	1200	1.92
	230	399	374	827	1201	1.89
	235	401	376	825	1201	1.85
	240	403	378	823	1201	1.81
	245	404	380	822	1202	1.78
	250	406	382	820	1202	1.75
	255	408	383	819	1202	1.72
	260	409	385	817	1202	1.69
	265	411	387	815	1202	1.66
	270	413	389	814	1203	1.63
	275	414	391	812	1203	1.60
	280	416	392	811	1203	1.57
	285	417	394	809	1203	1.55
	290	418	395	808	1203	1.53
	295	420	397	806	1203	1.49
	300	421	398	805	1203	1.47
	305	423	400	803	1203	1.45
	310	425	402	802	1204	1.43
	320	427	405	799	1204	1.38
	330	430	408	796	1204	1.34
	340	433	411	793	1204	1.31
	350	435	414	790	1204	1.28
	360	438	417	788	1205	1.24
	370	441	420	785	1205	1.20
	380	443	422	783	1205	1.18
	390	446	425	780	1205	1.14
	400	448	428	777	1205	1.12
	450	460	439	766	1205	1.00
	500	470	453	751	1204	.89
	550	479	464	740	1204	.82
	600	489	473	730	1203	.75
	650	497	483	719	1202	.69
	700	505	491	710	1201	.64
	750	513	504	696	1200	.60
	800	520	512	686	1198	.56
	900	534	529	666	1195	.49
	1000	546	544	647	1191	.44
	1250	574	580	600	1180	.34
	1500	597	610	557	1167	.23
	1750	618	642	509	1151	.22
	2000	636	672	462	1134	.19
	2250	654	701	413	1114	.16
	2500	669	733	358	1091	.13
	2750	683	764	295	1059	.11
	3000	696	804	213	1017	.08

# Calculating Condensate Loads

When the normal condensate load is not known, the load can be approximately determined by calculations using the following formulae.

## General Usage Formulae

Heating water with steam (Exchangers)\*

$$\text{lb/h Condensate} = \frac{\text{GPM}}{2} \times (1.1) \times \text{Temperature Rise } ^\circ\text{F}$$

Heating fuel oil with steam

$$\text{lb/h Condensate} = \frac{\text{GPM}}{4} \times (1.1) \times \text{Temperature Rise } ^\circ\text{F}$$

Heating air with steam coils

$$\text{lb/h Condensate} = \frac{\text{CFM}}{800} \times \text{Temperature Rise } ^\circ\text{F}$$

Steam Radiation

$$\text{lb/h Condensate} = \frac{\text{Sq. Ft. E. D. R.}}{4}$$

$$\text{lb/h Condensate} = \frac{\text{BTU/HR}}{\text{Latent Heat at Operating Pressure}}$$

$$\text{lb/h Condensate} = \frac{\text{MBH} \times 1,000}{\text{Latent Heat at Operating Pressure}}$$

\*Delete the (1.1) factor when steam is injected directly into water.

## Specialized Applications

### Sterilizers, Autoclaves, Retorts Heating Solid Material

$$\text{lb/h Condensate} = \frac{W \times C_p \times \Delta T}{L \times t}$$

W = Weight of material — lbs.  
C<sub>p</sub> = Specific heat of the material  
ΔT = Temperature rise of the material °F  
L = Latent heat of steam Btu/lb  
t = Time in hours

### Steam Jacketed Dryers

$$\text{lb/h Condensate} = \frac{1000 (W_i - W_f) + (W_i \times \Delta T)}{L}$$

W<sub>i</sub> = Initial weight of the material — pounds per hour  
W<sub>f</sub> = Final weight of the material — pounds per hour  
ΔT = Temperature rise of the material °F  
L = Latent heat of steam Btu/lb

### Heating Liquids in Steam Jacketed Kettles and Steam Heated Tanks

$$\text{lb/h Condensate} = \frac{G \times \text{s.g.} \times C_p \times \Delta T \times 8.3}{L \times t}$$

G = Gallons of liquid to be heated  
s.g. = Specific gravity of the liquid  
C<sub>p</sub> = Specific heat of the liquid  
ΔT = Temperature rise of the liquid °F  
L = Latent heat of the steam Btu/lb  
t = Time in hours

### Heating Air with Steam; Pipe Coils and Radiation

$$\text{lb/h Condensate} = \frac{A \times U \times \Delta T}{L}$$

A = Area of the heating surface in square feet  
U = Heat transfer coefficient (2 for free convection)  
ΔT = Steam temperature minus the air temperature °F  
L = Latent heat of the steam Btu/lb

Note: The condensate load to heat the equipment must be added to the condensate load for heating the material. Use same formula

## Steam Tracing Lines:

Approximate load is 10 to 50 lb/h for each 100 ft. of tracer

## Recommended Safety Factors for Steam Traps

The actual safety factor to use for any particular application will depend upon accuracy of:  
1. Estimated load  
2. Estimated pressure at trap  
3. Estimated backpressure  
Any unusual or abnormal conditions must be taken into consideration.

Safety Factor by Type of Trap	Safety Factor
Balanced-Pressure Thermo-static Traps	2 to 4
Thermo-Matic Thermostatic Traps	1.5 to 2.5
Liquid Expansion Traps	2 to 4
Bimetallic Traps	2 to 3
Float and Thermostatic Traps	1.5 to 2.5
Inverted Bucket Traps	2 to 3
Thermo-Dynamic® Traps	1.2 to 2

Safety Factor by Application	General	With Temp. Control
Mains Drainage	x 2	—
Storage Heaters	x 2	—
Unit Heaters	x 2	x 3
Air Heating Coils	x 2	x 4
Submerged Coils (low level drain)	x 2	—
Submerged Coils (siphon drain)	x 3	—
Rotating Cylinders	x 3	—
Tracing Lines	x 2	—
Platen Presses	x 2	—

Rule of Thumb: Use factor of 2 on everything except Temperature Controlled Air Heater Coils and Converters, and Siphon applications

## Effect of Backpressure on Steam Trap Capacity

### % Reduction in Capacity

Backpressure % of Inlet	Inlet Pressure PSIG			
	5	25	100	200
25%	6%	3%	0%	0%
50	20	12	10	5
75	38	30	28	23

## Warm-up and Condensate Load Tables

### Warm-up Load in Pounds of Steam per 100 ft of Steam Main (based on a start-up timer of 1 hour)

Ambient Temperature 70°F. Based on Sch. 40 Pipe to 250 psi, Sch. 80 Above 250 Except Sch. 120 5" and Larger Above 800 psi.

Steam Pressure Pressure (psig)	2"	2-1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	0°F Correction Factor*
0	6.2	9.7	12.8	18.2	24.6	31.9	48	68	90	107	140	176	207	208	1.50
5	6.9	11.0	14.4	20.4	27.7	35.9	48	77	101	120	157	198	233	324	1.44
10	7.5	11.8	15.5	22.0	29.9	38.8	58	83	109	130	169	213	251	350	1.41
20	8.4	13.4	17.5	24.9	38.8	44	66	93	124	146	191	241	284	396	1.37
40	9.9	15.8	20.6	29.3	39.7	52	78	110	145	172	225	284	334	465	1.32
60	11.0	17.5	22.9	32.6	44	57	86	122	162	192	250	316	372	518	1.29
80	12.0	19.0	24.9	35.3	48	62	93	132	175	208	271	342	403	561	1.27
100	12.8	20.3	26.6	37.8	51	67	100	142	188	222	290	366	431	600	1.26
125	13.7	21.7	28.4	40	55	71	107	152	200	238	310	391	461	642	1.25
150	14.5	23.0	30.0	43	58	75	113	160	212	251	328	414	487	679	1.24
175	15.3	24.2	31.7	45	61	79	119	169	224	265	347	437	514	716	1.23
200	16.0	25.3	33.1	47	64	83	125	177	234	277	362	456	537	748	1.22
250	17.2	27.3	35.8	51	69	89	134	191	252	299	390	492	579	807	1.21
300	25.0	38.3	51	75	104	143	217	322	443	531	682	854	1045	1182	1.20
400	27.8	43	57	83	116	159	241	358	493	590	759	971	1163	1650	1.18
500	30.2	46	62	91	126	173	262	389	535	642	825	1033	1263	1793	1.17
600	32.7	50	67	98	136	187	284	421	579	694	893	1118	1367	1939	1.16
800	38	58	77	113	203	274	455	670	943	1133	1445	1835	2227	3227	1.156
1000	42	72	86	126	227	305	508	748	1052	1264	1613	2048	2485	3601	1.147
1200	47	72	96	140	253	340	566	833	1172	1407	1796	2280	2768	4010	1.140
1400	52	79	106	155	280	376	627	922	1298	1558	1988	2525	3064	4440	1.135
1600	57	87	117	171	309	415	692	1018	1432	1720	2195	2787	3383	4901	1.130
1750	62	94	126	184	333	448	746	1098	1545	1855	2367	3006	3648	5286	1.128
1800	63	97	129	189	341	459	765	1126	1584	1902	2427	3082	3741	5420	1.127

\*For outdoor temperature of 0°F, multiply load value in table for each main size by correction factor shown.

### Condensate Load in Pounds per Hour per 100 ft. of Insulated Steam Main

Ambient Temperature 70°F — Insulation 80% Efficient. Load Due to Radiation and Convection for Saturated Steam

Steam Pressure Pressure (psig)	2"	2-1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	0°F Correction Factor*
10	6	7	9	11	13	16	20	24	29	32	36	39	44	53	1.58
40	8	9	11	14	17	20	26	32	38	42	48	51	57	68	1.50
60	10	12	14	18	24	27	33	41	49	54	62	67	74	89	1.45
100	12	15	18	22	28	33	41	51	61	67	77	83	93	111	1.41
125	13	16	20	24	30	36	45	56	66	73	84	90	101	121	1.36
175	16	19	23	26	33	38	53	66	78	86	98	107	119	142	1.38
250	18	22	27	34	42	50	62	77	92	101	116	126	140	168	1.36
300	20	25	30	37	46	54	68	85	101	111	126	138	154	184	1.33
400	23	28	34	43	53	63	80	99	118	130	148	162	180	216	1.32
500	27	33	39	49	61	73	91	114	135	148	170	185	206	246	1.32
600	30	37	44	55	68	82	103	128	152	167	191	208	232	277	1.31
800	36	44	53	69	85	101	131	164	194	214	244	274	305	365	1.30
1000	43	52	63	82	101	120	156	195	231	254	290	326	363	435	1.27
1200	51	62	75	97	119	142	185	230	274	301	343	386	430	515	1.26
1400	60	73	89	114	141	168	219	273	324	356	407	457	509	610	1.25
1600	70	85	103	132	163	195	253	315	375	412	470	528	588	704	1.22
1750	77	93	113	145	179	213	278	346	411	452	516	580	645	773	1.22
1800	79	96	117	150	185	221	288	358	425	467	534	600	667	800	1.21

\*For outdoor temperature of 0°F, multiply load value in table for each main size by correction factor shown.

## Heat Transfer Calculations

### Heat Emission Rates from Pipes Submerged in Water

Published Overall Heat Transfer Rates		Btu/ft <sup>2</sup> h °F
Tank Coils, Steam/Water (Temperature difference 50°F)		100 to 225
Tank Coils, Steam/Water (Temperature difference 100°F)		175 to 300
Tank Coils, Steam/Water (Temperature difference 200°F)		225 to 475
Reasonable Practical Heat Transfer Rates		
Tank Coils, low pressure with natural circulation		100
Tank Coils, high pressure with natural circulation		200
Tank Coils, low pressure with assisted circulation		200
Tank Coils, high pressure with assisted circulation		300

### Heat Emission Coefficients from Pipes Submerged in Miscellaneous Fluids

The viscosity of fluids has a considerable bearing on heat transfer characteristics and this varies in any case with temperature. The following figures will therefore serve only as a rough guide.

Immersed steam coil, medium pressure, natural convection

	Btu/ft <sup>2</sup> h °F difference
Light Oils	30
Heavy Oils	15 to 20
*Fats	5 to 10

Immersed steam coil, medium pressure, natural convection

	Btu/ft <sup>2</sup> h °F difference
Light Oils (220 SSU at 100°F)	100
Medium Oils (1100 SSU at 100°F)	60
Heavy Oils (3833 SSU at 100°F)	30

### Average Heat Loss from Oil in Storage Tanks and Pipe Lines

		* Heat Transfer Rate in Btu/ft <sup>2</sup> h °F temperature difference between oil and surrounding air		
Position	Oil Temperature	Exposed	Insulated	
Tank Sheltered	Up to 50°F	1.2	.3	
	Up to 80°F	1.3	.325	
	Up to 100°F	1.4	.35	
Tank Exposed	Up to 50°F	1.4	.35	
	Up to 80°F	1.5	.375	
	Up to 100°F	1.6	.4	
Tank In Pit	All Temperatures	1.2	—	
Pipe Sheltered Line	Up to 80°F	1.5	.375	
	80 to 260°F	2.3	.575	
Pipe Exposed Line	Up to 80°F	1.8	.45	
	80 to 260°F	2.75	.7	

\* For maximum heat loss the "surrounding air temperature" may be 25°F higher or lower according to country and locality.

For rough calculations it may be taken that 1 ton of fuel oil occupies 36 .4 ft<sup>3</sup>. The specific heat capacity of heavy fuel is 0.45 to 0.48 Btu/lb °F.

### Heat Transfer from Steam Coils

Approximately 20 Btu/h per square foot of heating surface per °F difference between oil and steam temperature.

### Heat Transfer from Hot Water Coils

Approximately 10 Btu/h per square foot of heating surface per °F difference between oil and steam temperature.

### Heat Loss from Open Tanks

Liquid Temp. °F	Heat Loss from Liquid Surface Btu/ft <sup>2</sup> h			Heat Lost through Tank Wall Btu/ft <sup>2</sup> h			
	Evap. Loss	Rad. Loss	Total	Bare Steel	1" Insulation	2" Insulation	3" Insulation
90	80	50	130	50	12	6	4
100	160	70	230	70	15	8	6
110	240	90	330	90	19	10	7
120	360	110	470	110	23	12	9
130	480	135	615	135	27	14	10
140	660	160	820	160	31	16	12
150	860	180	1040	180	34	18	13
160	1100	210	1310	210	38	21	15
170	1380	235	1615	235	42	23	16
180	1740	260	2000	260	46	25	17
190	2160	290	2450	290	50	27	19
200	2680	320	3000	320	53	29	20
210	3240	360	3590	360	57	31	22

The above values are for open tanks in 60°F still ambient air.

## Steam Tracing

### Designing of Steam Tracing

Recommended number of 1/2" tracers to meet average requirements

	<b>Type A</b> General frost protection or where solidification may occur at temps. below 75°F	<b>Type B</b> Where solidification may occur at temps. between 75 - 150°F	<b>Type C</b> When solidification may occur at temps. between 150 - 300°F
Product Line Size	Number of 1/2" Tracers	Number of 1/2" Tracers	Number of 1/2" Tracers
1"	1	1	1
1-1/2"	1	1	2
2"	1	1	2
3"	1	1	3
4"	1	2	3
6"	2	2	3
8"	2	2	3
10"-12"	2	3	6
14"-16"	2	3	8
18"-20"	2	3	10

As a general rule, length of tracers to 3/8" size should not exceed 60 ft. Larger size tracers should not exceed 150 ft. in length.

### Steam Size Connections for Jacketed Lines

Product Line	Jacket Diameter	Steam Connection
2-1/2"	4"	1/2"
3"	6"	3/4"
4"	6"	3/4"
6"	8"	3/4"
8"	10"	1"
10"	12"	1"

Length of jacket should not exceed 20 ft. In most cases 1/2" condensate outlet would be adequate but it is usual to make this same size as the steam connection as it simplifies installation.

### Recommended Header Size for Supplying Steam Tracer Lines

Header Size	Number of 1/2" Tracers
3/4"	2
1"	3 to 5
1-1/2"	6 to 15
2"	16 to 30

### Recommended Header Size for Condensate Lines

Header Size	Number of 1/2" Tracers
1"	Up to 5
1-1/2"	6 to 10
2"	11 to 25


## Steam Pipe Sizing

### Sizing for Pressure Drop per 100 ft. in Schedule 40 Pipe

Divide "Allowable Drop" by pressure factor and use chart to select pipe size.

#### Based on 100 psig saturated steam

For other pressures, multiply chart  $\Delta P$  by factor below

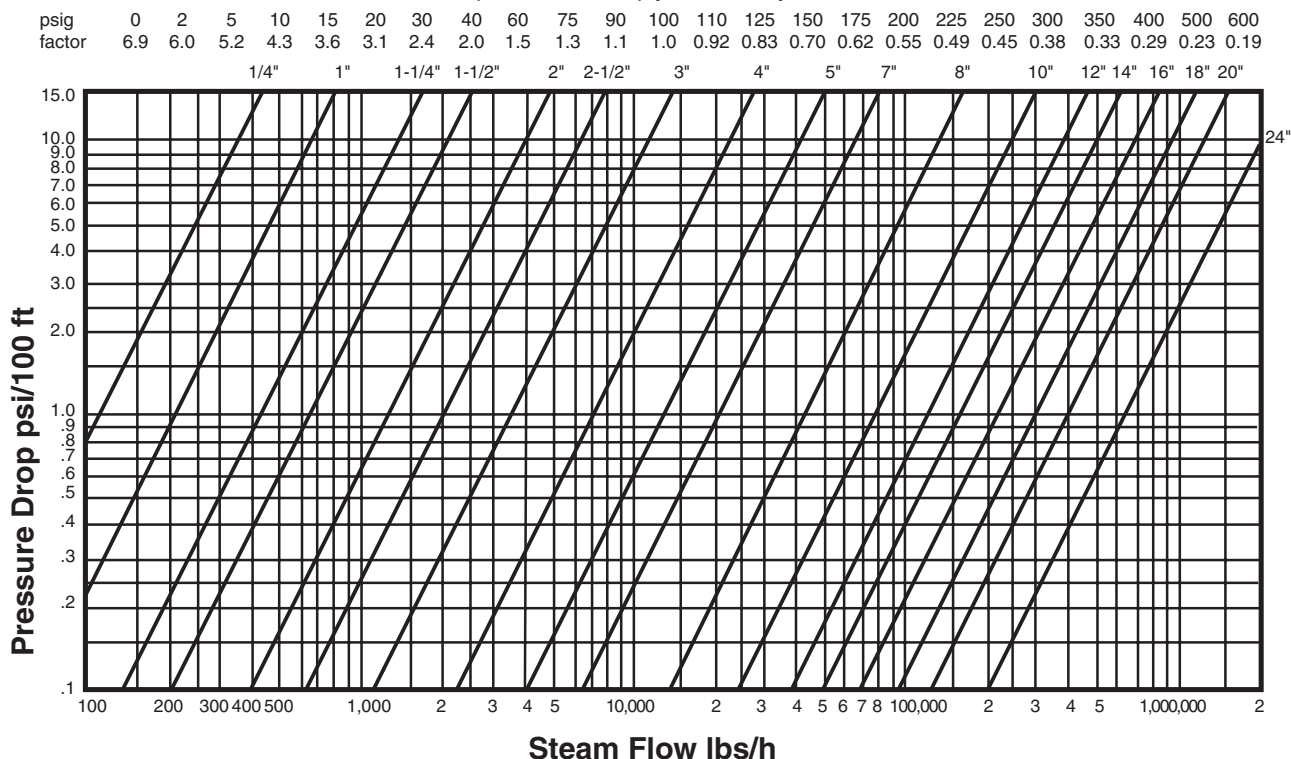



## Steam Pipe Sizing

### How to Size Steam Pipes for Various Pressure and Velocity Conditions

To select pipe size in long mains and wherever supply pressure is critical, use the pressure drop chart to assure it is within allowable limits. Most saturated steam lines may be sized for a velocity of 4800 to 7200 ft/min; higher velocities should be avoided unless appreciable superheat is present.

Piping at pressure reducing stations should be sized for the same velocity on both sides of the PRV. This generally results in a valve smaller than the supply piping with still larger downstream pressure piping due to the increase in steam volume (see example below.)

Trap discharge piping contains a bi-phase flash steam/condensate mixture, and a lower velocity of 4000 to 6000 ft/min to the receiver encourages gravity separation. The receiver vent line is sized for the amount of flash vented at atmospheric pressure at a velocity of 3000 to 4000 ft/min.

#### Velocity Chart Example

Given a steam heating piping system with a 100 psig inlet pressure ahead of a control valve with a capacity of 1,000 lb/h of steam reduced to 25 psig, find the smallest sizes of upstream and downstream piping for reasonable quiet steam velocities.

#### Upstream Pressure Piping Sizing

Enter the velocity chart above at A for steam flow of 1,000 lb/h. Go over to point B where the 100 psig diagonal line intersects. Follow up vertically to C where an intersection with a diagonal line falls inside the 4,000-to-6,000 ft/min velocity band. Actual velocity at D is about 4,800 ft/min for 1-1/2" upstream piping. Selecting a smaller pipe size results in greater steam velocity and noise level.

#### Downstream Piping Sizing

Enter the velocity chart at A for 1,000 lb/h. Go over to point E where the 25 psig diagonal line intersects. Follow up vertically to F where an intersection with a diagonal line falls inside the 4,000-to-6,000 ft/min velocity band. Actual velocity at G is 5,500 ft/min for 2-1/2" downstream piping.

#### Formula for Velocity of Steam in Pipes:

$$V = \frac{2.4Q V_s}{A}$$


Where:

V = Velocity in ft/min

Q = Flow lb/h steam

Vs = Sp. Vol. in cu. ft/lb at the flowing pressure

A = Internal area of the pipe — in<sup>2</sup>

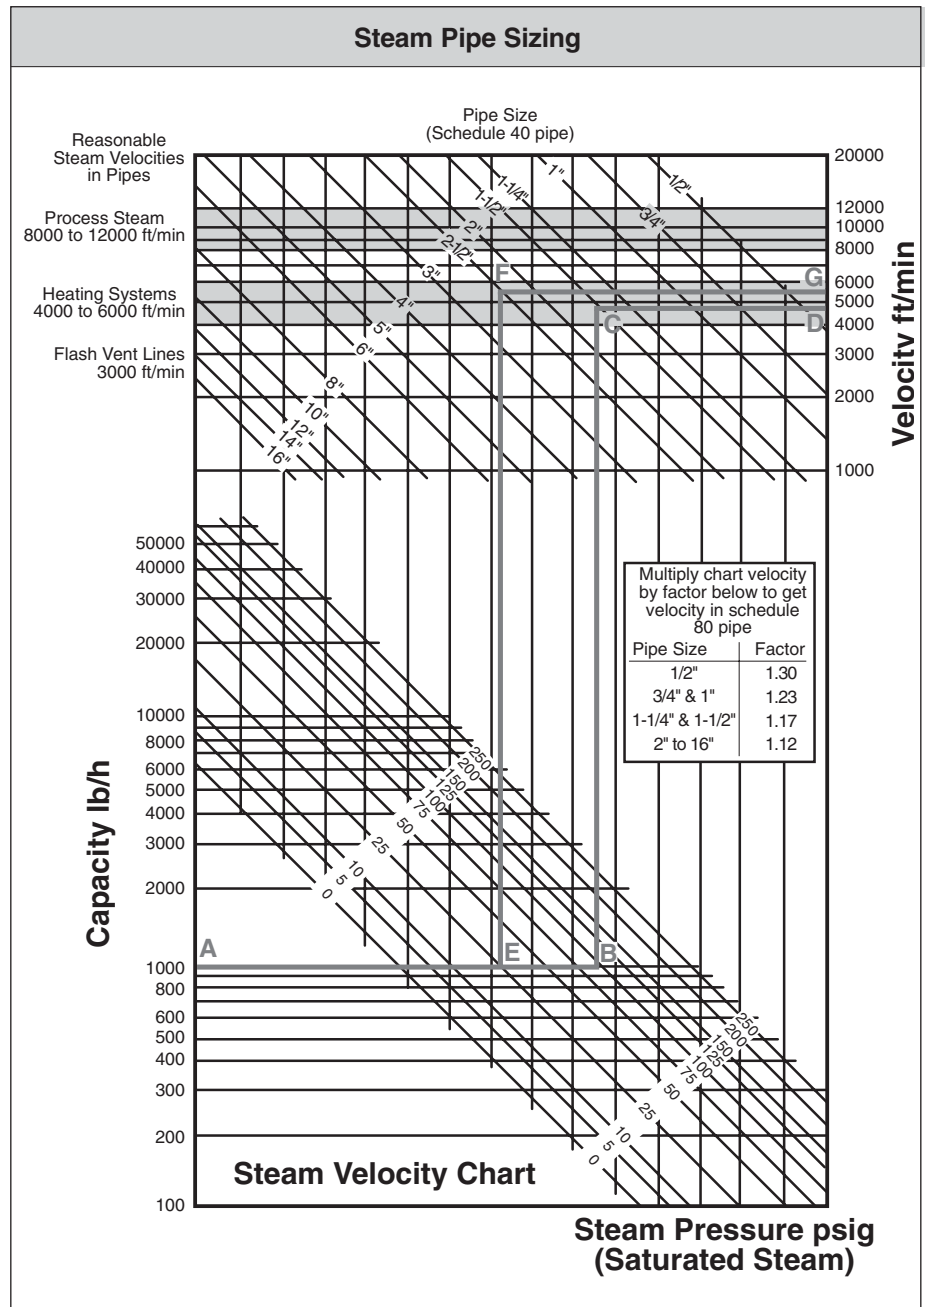

## Condensate Line Sizing

Condensate return lines on the discharge side of steam traps must be able to accommodate the flow of both water and flash steam. While the percentage, by weight, of flash steam may be rather low, its overall volume in comparison to the liquid is very large. By determining the quantity of flash steam and sizing the return line for velocities between 4,000 and 6,000 ft/min, the two-phase flow within the pipe can be accommodated. The information required for sizing is the condensate load in lb/h, inlet pressure to steam trap(s) in psig and return line system pressure.

### Example:

Size a condensate return line from a 160 psig steam trap discharging to 20 psig. flash tank. Load is 3,000 lb/h.

1. Determine percent flash steam produced using table. With a steam pressure of 160 psig and a flash tank pressure of 20 psig read a value of 12.4%.
2. Next, multiply the condensate load by the percent flash from step #1 to determine the flowrate, of flash steam produced.  
 $3,000 \text{ lb/h} \times .124 = 372 \text{ lb/h}$ .


3. Enter Condensate Recovery Sizing chart at the flash steam flowrate of 372 lb/h at "A" and move horizontally to the right to the flash tank pressure of 20 psig "B". Rise vertically to choose a condensate return line size which will give a velocity between 4,000 and 6,000 ft/min, "C". In this example, an 1-1/2" schedule 40 pipe with a velocity of approximately 5,000 ft/min. If schedule 80 pipe is to be used, refer to table within body of chart. Multiply the velocity by the factor to determine whether the velocity is within acceptable limits.

### Percent Flash Steam

Produced when Condensate is discharged to atmosphere or into a flash tank controlled at various pressures.

Pressure psig	Atmo- sphere 0	2	5	Flash Tank Pressure — psig							
				10	15	20	30	40	60	80	100
5	1.7	1.0	0								
10	2.9	2.2	1.4	0							
15	4.0	3.2	2.4	1.1	0						
20	4.9	4.2	3.4	2.1	1.1	0					
30	6.5	5.8	5.0	3.8	2.6	1.7	0				
40	7.8	7.1	6.4	5.1	4.0	3.1	1.3	0			
60	10.0	9.3	8.6	7.3	6.3	5.4	3.6	2.2	0		
80	11.7	11.1	10.3	9.0	8.1	7.1	5.5	4.0	1.9	0	
100	13.3	12.6	11.8	10.6	9.7	8.8	7.0	5.7	3.5	1.7	0
125	14.8	14.2	13.4	12.2	11.3	10.3	8.6	7.4	5.2	3.4	1.8
160	16.8	16.2	15.4	14.1	13.2	12.4	10.6	9.5	7.4	5.6	4.0
200	18.6	18.0	17.3	16.1	15.2	14.3	12.8	11.5	9.3	7.5	5.9
250	20.6	20.0	19.3	18.1	17.2	16.3	14.7	13.6	11.2	9.8	8.2
300	22.7	21.8	21.1	19.9	19.0	18.2	16.7	15.4	13.4	11.8	10.1
350	24.0	23.3	22.6	21.6	20.5	19.8	18.3	17.2	15.1	13.5	11.9
400	25.3	24.7	24.0	22.9	22.0	21.1	19.7	18.5	16.5	15.0	13.4

### Condensate Recovery Sizing

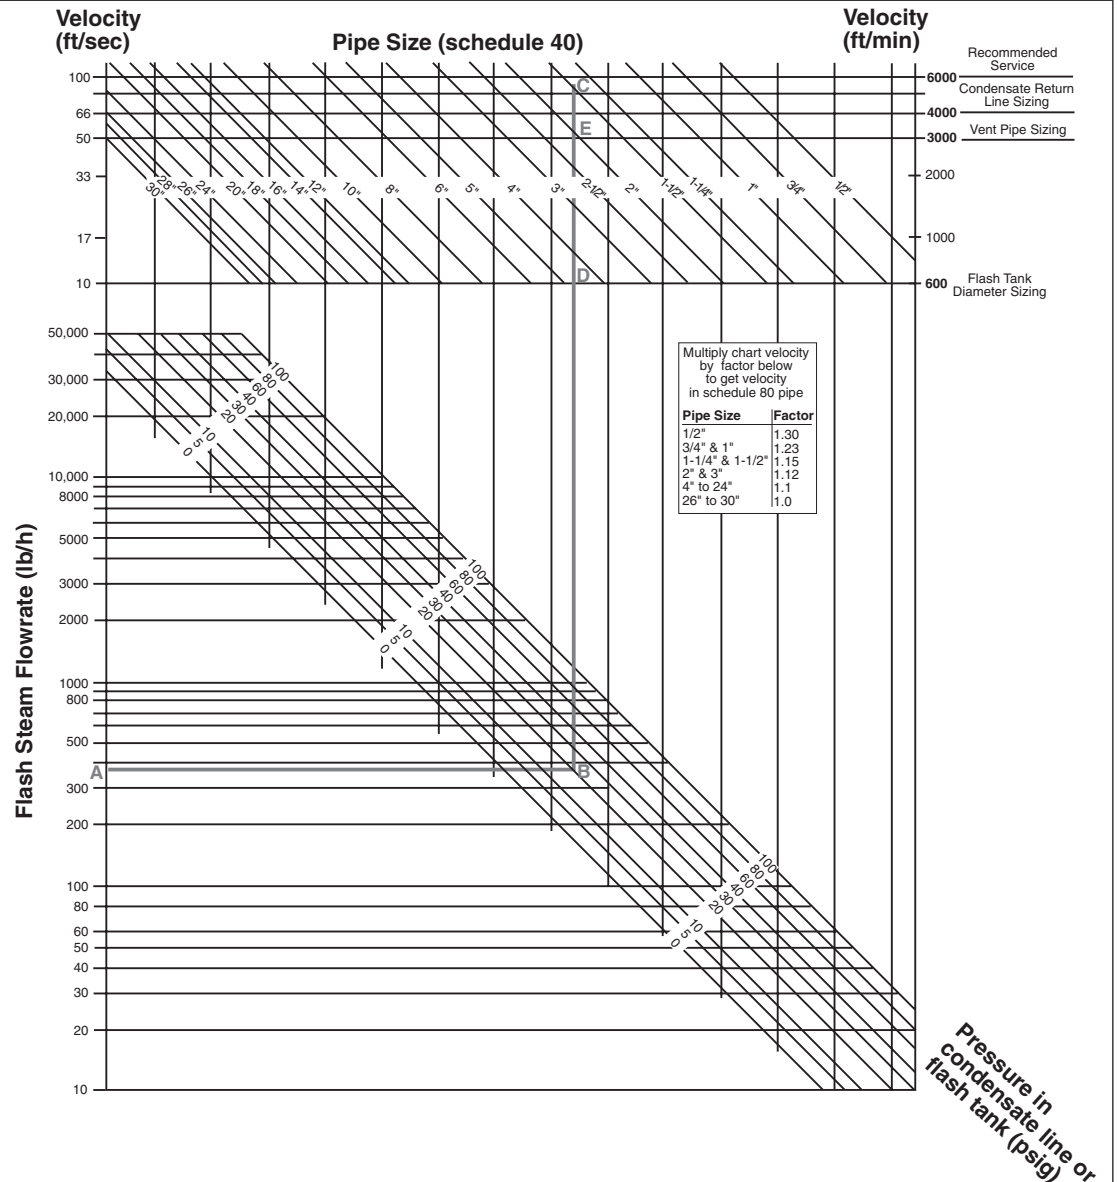

## Model Designation Index

4411e Magnetic Flow Transmitter . . . . .	111	M410 Customer Data Sheet . . . . .	25
DIVA . . . . .	16	M410 Non-Compensated. . . . .	24
DIVA System . . . . .	19	M610 . . . . .	33
EL2270 . . . . .	38	M800 Steam. . . . .	26
EL2271 . . . . .	38	M800 Gas. . . . .	28
EL2600 . . . . .	40	M750 . . . . .	30
F50C. . . . .	37	MagFlo® 1100, 1100 Food, 3100, 5100W, 6000, 5000 .	115
FP-93 . . . . .	72	MassTracker™ . . . . .	42
Gilflo - B Type . . . . .	8	PhD. . . . .	48
Gilflo - ILVA . . . . .	12	PT. . . . .	80
Gilflo - ILVA System. . . . .	14	Scanner 2000. . . . .	34
Gilflo - Spool Type . . . . .	6	Sono-Trak® Transit Ultrasonic . . . . .	82
Gilflo - System . . . . .	11	Sono-Trak® Doppler Ultrasonic . . . . .	88
Hydro-Flow 1200 . . . . .	134	TEM . . . . .	77
Hydro-Flow 2200 . . . . .	138	Turbo-Bar. . . . .	64
Hydro-Flow 2300 . . . . .	145	UniMag® M Flow Tube . . . . .	94
Hydro-Flow 3100 . . . . .	152	UniMag® DT Flow Tube . . . . .	99
M410 . . . . .	20	V-Bar . . . . .	56
M410 Compensated. . . . .	22		



# Flow Meters for Steam, Liquids and Gases

EMCO is a trademark of Spirax Sarco, Inc.

For information on EMCO industrial flow products, contact:

EMCO • 2150 Miller Drive Suite H • Longmont, CO 80501

T: 800.356.9362 or 303.682.7060 • F: 303.682.7069 • sales@emcoflow.com • www.emcoflow.com



In our century-long commitment to sustainable energy use in buildings and industry, we dedicate our innovative expertise, products, services and business efforts to conserve our valued natural resources, and will actively guide our customers in attaining these same goals:

- Energy - Minimize energy demand, carbon footprint, emissions and maintenance;
- Balance - Apply energy precisely, recovering and reapplying low-grade energy, conserving wherever possible for future use;
- Flow - Precisely regulate fluid flow to optimize energy consumption, for consistent interior comfort and process control accuracy.

SPIRAX SARCO, INC.  
1150 NORTHPOINT BLVD.  
BLYTHEWOOD, SC 29016  
t: 800.883.4411  
or: 803.714.2000  
f: 803.714.2222  
www.spiraxsarco.com/us

**spirax/sarco**

