



Products Manual

Waterproof Box
防水盒选型手册

Vol.13





To create products
that deliver happiness to everyone

—— 铸造充满幸福的产品 ——

CONTENTS

Copyright © Saip ELEC. All Right Reserved
Deliver happiness to everyone

目录

02

关于赛普
About Saip

03

赛普意义
Saip Meaning

05

赛普理念
Saip Enterprise Concept

07

赛普的价值观
Value Theory

09

产品介绍
About Products

关于赛普 SAIP ELEC.

Copyright © Saip ELEC. All Right Reserved
Deliver happiness to everyone



Us.

赛普电气集团（简称赛普）是一家专业从事电气产品及新能源的研发、制造及营销的专业化电气有限公司。赛普集团已引进国外资深管理与经验丰富的专业人事，以严谨的管理，有创意的研发团队，先进的营销理念，在传统产品的基础上创造和发展了新的更适用的且具有良好性价比的产品。Saip 产品已获得 CE、ROHS、IP66 等国内国际认证。产品已得到机关行业的认证认可，并远销东南亚、中东、东欧及美洲等地域。赛普现在有全球 28 家代理、三个直销公司。赛普已与多家国际化公司建立了良好的长期合作伙伴关系。赛普一如既往地坚持“合作发展，共同提高”的服务宗旨，以真诚的合作态度来最大程度地满足客户的需求。赛普电气—您成功的合作伙伴！

Saip Electric Group Co., Ltd ("Saip" for short) is an enterprise specialized in the design, production and sales of all kinds of electric equipments. Our head office is in Liushi town, the largest manufacturing base of electric equipments of Wenzhou, China. It's very near to Shanghai and Ningbo ports.

Saip has five specialized branches and more than 300 specialized cooperative partners all over the world. As an ISO9001 certificated enterprise, Saip owns modern production lines, advanced quality controlling equipment with scientific administration, professional engineers, highly trained teams technicians and skilled workers.

Now Saip has five design and production bases in Hong Kong, Taiwan, Singapore, Turkey and Shanghai (China Mainland), 28 sales organizations in the world and more than 50 holding member enterprises. Saip products range covers wind energy, solar energy, low voltage apparatus, welding machines, instruments and meters, photoelectron, electrical products for construction, automobile apparatus and industrial automation. The products are sold to over 100 countries and regions. All exported products have passed through CE, ROHS, EMC, LVD, IP66, KEMA certificates.

Saip always insists on "high quality and sincere service". Saip—your successful cooperative partner.

Meaning.

赛普的意义 +

SAIP ELEC.

Copyright © Saip ELEC. All Right Reserved
Deliver happiness to everyone

成为一家持续发展超出 103 年的企业

成为一家超出 20000 名销售员工和 2000 名设计工程师的企业

成为全球电气品牌管理专家

一家环球的高质量的电气组织

为了达到最高的质量水准

所有产品均按照 IEC 国际电工委员会的标准生产。

to be an enterprise lasting 103 years and beyond

To be an enterprise with a network of 20000 sales personnel and 2000 design engineers

To be the choice brand manager of major worldwide electrical brands

A global quality electric organization

In order to obtain the highest quality all of

Products according to international iec normatives.



铸造充满幸福的产品

To create products that deliver happiness to everyone





Concept.

赛普的理念 

SAIP ELEC.

Copyright © Saip ELEC. All Right Reserved
Deliver happiness to everyone



商业原则
BUSINESS
PRINCIPLE

做简单的生意 简单地做生意
To conduct business in a simple
straightforward manner.

企业精神
CORPORATE
SPIRIT

耐心 细心
Patience Dedication

人生观
HUMAN
PRINCIPLE

客户至上 员工第一 股东第二
Customers are our topmost priority,
followed by our employees and stakeholders

工作观
WORKING
PRINCIPLE

快乐工作 幸福生活
To work and live happily

产品观
PRODUCT
PRINCIPLE

文化电气 / 幸福电气 / 品质电气 / 信息电气 / 便捷电气
To manufacture quality, innovative products that bring
convenience to its users

Value

赛普的价值观

SAIP ELEC.

Copyright © Saip ELEC. All Right Reserved
Deliver happiness to everyone

人人平等—充分尊重，处理问题，对事不对人
相互信任—敢于担当深知彼此信任的力量
奉献—乐于付出，以司为家
坚持—专业执着，完善自我，不断进步。
创新—承接变化，勇于创新

Equality— Fully respect, and focus on the issue rather than the person.

Trust— Believe in the power of trust and be brave in trusting others.

Dedication— Be willing to sacrifice and take the company as home.

Persistence— Never say never.

Innovation— Accept changes, and be bold to innovate.



铸造充满幸福的产品

To create products
that deliver happiness to everyone

SAIP ELECT.

Copyright © Saip ELEC. All Right Reserved
Deliver happiness to everyone



Index.

Copyright © Saip ELEC. All Right Reserved
Deliver happiness to everyone

产品索引

开关防水盒 Switch Box(Screw Open-close Type)	11-12
大型防水箱 Large Waterproof Box	13-15
防水接线盒 Waterproof Junction Box	16-20
端子盒 Terminal Box	21-22
搭扣防水箱 Buckle Waterproof Box	23-26
带锁防水箱 Enclosure With Lockable Door	27-29
铝防水盒 Aluminium Waterproof Box	31-36
玻璃纤维箱 Polyester Enclosure Fiberglass Box	37-40
金属防水箱 Metal Screws Waterproof Box	41-44
防水配电箱 Waterproof Distribution Box	45-56
防水开关插座 Waterproof Switch And Socket	57-58
配电箱 Distribution Box	59-63
转换插座 Conversion Socket	64-65
防水接头 Cable Gland	66-82
汇流排、导轨 Busbar、Din Rail	83-89

DS-AG

SWITCH BOX(SCREW OPEN-CLOSE TYPE)

开关防水盒



IP66
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 重量只有铁制箱子的1/4左右，便于搬运和操作，耐腐蚀，绝缘性佳。
- 产品经过严格的品质检测，其防水、防尘等级达到IP66（检测报告备案）。
- 适用于机场、地铁站、按钮盒、小型终端机、信号机箱、继电器、传感器、通信接线盒等设备。
- The product weight is about 1/4 of steel box, it is easy to be installed and moved, and it's anti-corrosion, insulated.
- The product has passed strict waterproof and dustproof test, it reach IP66.
- It can be used in airport, subway station, and it can be pushbutton box, terminal box, signal box, relays box, sensor box and communication junction box and so on.

技术参数 TECHNICAL DATA

尺寸Size	室内用Indoor Use		室外用Outdoor Use			
宽x高x深度(mm) WxHxD(mm)	ABS		AC(PC/ABS)		Polyester(PBT/PC)	
	灰色盖子Solid cover	透明盖子Clear cover	灰色盖子Solid cover	透明盖子Clear cover	灰色盖子Solid cover	透明盖子Clear cover
50 x 65 x 55	DS-AG-0506	DS-AT-0506	DS-PG-0506	DS-PT-0506	DS-PCG-0506	DS-PCT-0506
65 x 95 x 55	DS-AG-0609	DS-AT-0609	DS-PG-0609	DS-PT-0609	DS-PCG-0609	DS-PCT-0609
80 x 110 x 45	DS-AG-0811-S	DS-AT-0811-S	DS-PG-0811-S	DS-PT-0811-S	DS-PCG-0811-S	DS-PCT-0811-S
80 x 110 x 70	DS-AG-0811	DS-AT-0811	DS-PG-0811	DS-PT-0811	DS-PCG-0811	DS-PCT-0811
80 x 110 x 85	DS-AG-0811-1	DS-AT-0811-1	DS-PG-0811-1	DS-PT-0811-1	DS-PCG-0811-1	DS-PCT-0811-1
80 x 130 x 70	DS-AG-0813	DS-AT-0813	DS-PG-0813	DS-PT-0813	DS-PCG-0813	DS-PCT-0813
80 x 130 x 85	DS-AG-0813-1	DS-AT-0813-1	DS-PG-0813-1	DS-PT-0813-1	DS-PCG-0813-1	DS-PCT-0813-1
80 x 160 x 55	DS-AG-0816-S	DS-AT-0816-S	DS-PG-0816-S	DS-PT-0816-S	DS-PCG-0816-S	DS-PCT-0816-S
80 x 180 x 70	DS-AG-0818	DS-AT-0818	DS-PG-0818	DS-PT-0818	DS-PCG-0818	DS-PCT-0818
80 x 250 x 70	DS-AG-0825	DS-AT-0825	DS-PG-0825	DS-PT-0825	DS-PCG-0825	DS-PCT-0825
80 x 250 x 85	DS-AG-0825-1	DS-AT-0825-1	DS-PG-0825-1	DS-PT-0825-1	DS-PCG-0825-1	DS-PCT-0825-1
100 x 100 x 75	DS-AG-1010	DS-AT-1010	DS-PG-1010	DS-PT-1010	DS-PCG-1010	DS-PCT-1010
125 x 125 x 75	DS-AG-1212-S	DS-AT-1212-S	DS-PG-1212-S	DS-PT-1212-S	DS-PCG-1212-S	DS-PCT-1212-S
125 x 125 x 100	DS-AG-1212	DS-AT-1212	DS-PG-1212	DS-PT-1212	DS-PCG-1212	DS-PCT-1212
125 x 175 x 75	DS-AG-1217	DS-AT-1217	DS-PG-1217	DS-PT-1217	DS-PCG-1217	DS-PCT-1217
125 x 175 x 100	DS-AG-1217-1	DS-AT-1217-1	DS-PG-1217-1	DS-PT-1217-1	DS-PCG-1217-1	DS-PCT-1217-1
140 x 170 x 95	DS-AG-1417	DS-AT-1417	DS-PG-1417	DS-PT-1417	DS-PCG-1417	DS-PCT-1417
175 x 175 x 110	DS-AG-1717-1	DS-AT-1717-1	DS-PG-1717-1	DS-PT-1717-1	DS-PCG-1717-1	DS-PCT-1717-1
150 x 200 x 100	DS-AG-1520	DS-AT-1520	DS-PG-1520	DS-PT-1520	DS-PCG-1520	DS-PCT-1520
150 x 200 x 130	DS-AG-1520-1	DS-AT-1520-1	DS-PG-1520-1	DS-PT-1520-1	DS-PCG-1520-1	DS-PCT-1520-1
150 x 250 x 100	DS-AG-1525	DS-AT-1525	DS-PG-1525	DS-PT-1525	DS-PCG-1525	DS-PCT-1525
150 x 250 x 130	DS-AG-1525-1	DS-AT-1525-1	DS-PG-1525-1	DS-PT-1525-1	DS-PCG-1525-1	DS-PCT-1525-1
200 x 200 x 95	DS-AG-2020-S	DS-AT-2020-S	DS-PG-2020-S	DS-PT-2020-S	DS-PCG-2020-S	DS-PCT-2020-S
200 x 200 x 130	DS-AG-2020	DS-AT-2020	DS-PG-2020	DS-PT-2020	DS-PCG-2020	DS-PCT-2020
280 x 190 x 130	DS-AG-2819	DS-AT-2819	DS-PG-2819	DS-PT-2819	DS-PCG-2819	DS-PCT-2819



IP66
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 重量只有铁制箱子的1/4左右，便于搬运和操作，耐腐蚀，绝缘性佳。
- 产品经过严格的品质检测，其防水、防尘等级达到IP66（检测报告备案）。
- 适用于机场、地铁站、按钮盒、小型终端机、信号机箱、继电器、传感器、通信接线盒等设备。
- The product weight is about 1/4 of steel box, it is easy to be installed and moved, and it's anti-corrosion, insulated.
- The product has passed strict waterproof and dustproof test, it reach IP66.
- It can be used in airport, subway station, and it can be pushbutton box, terminal box, signal box, relays box, sensor box and communication junction box and so on.

技术参数 TECHNICAL DATA

尺寸Size	室内用Indoor Use		室外用 Outdoor Use			
宽x高x深度(mm) WxHxD(mm)	ABS		AC(PC/ABS)		Polyester(PBT/PC)	
	灰色盖子Solid cover	透明盖子Clear cover	灰色盖子Solid cover	透明盖子Clear cover	灰色盖子Solid cover	透明盖子Clear cover
50 x 65 x 55	DS-AGH-0506	DS-ATH-0506	DS-PGH-0506	DS-PTH-0506	DS-PCGH-0506	DS-PCTH-0506
65 x 95 x 55	DS-AGH-0609	DS-ATH-0609	DS-PGH-0609	DS-PTH-0609	DS-PCGH-0609	DS-PCTH-0609
80 x 110 x 45	DS-AGH-0811-S	DS-ATH-0811-S	DS-PGH-0811-S	DS-PTH-0811-S	DS-PCGH-0811-S	DS-PCTH-0811-S
80 x 110 x 70	DS-AGH-0811	DS-ATH-0811	DS-PGH-0811	DS-PTH-0811	DS-PCGH-0811	DS-PCTH-0811
80 x 110 x 85	DS-AGH-0811-1	DS-ATH-0811-1	DS-PGH-0811-1	DS-PTH-0811-1	DS-PCGH-0811-1	DS-PCTH-0811-1
80 x 130 x 70	DS-AGH-0813	DS-ATH-0813	DS-PGH-0813	DS-PTH-0813	DS-PCGH-0813	DS-PCTH-0813
80 x 130 x 85	DS-AGH-0813-1	DS-ATH-0813-1	DS-PGH-0813-1	DS-PTH-0813-1	DS-PCGH-0813-1	DS-PCTH-0813-1
80 x 160 x 55	DS-AGH-0816-S	DS-ATH-0816-S	DS-PGH-0816-S	DS-PTH-0816-S	DS-PCGH-0816-S	DS-PCTH-0816-S
80 x 180 x 70	DS-AGH-0818	DS-ATH-0818	DS-PGH-0818	DS-PTH-0818	DS-PCGH-0818	DS-PCTH-0818
80 x 250 x 70	DS-AGH-0825	DS-ATH-0825	DS-PGH-0825	DS-PTH-0825	DS-PCGH-0825	DS-PCTH-0825
80 x 250 x 85	DS-AGH-0825-1	DS-ATH-0825-1	DS-PGH-0825-1	DS-PTH-0825-1	DS-PCGH-0825-1	DS-PCTH-0825-1
100 x 100 x 75	DS-AGH-1010	DS-ATH-1010	DS-PGH-1010	DS-PTH-1010	DS-PCGH-1010	DS-PCTH-1010
125 x 125 x 75	DS-AGH-1212-S	DS-ATH-1212-S	DS-PGH-1212-S	DS-PTH-1212-S	DS-PCGH-1212-S	DS-PCTH-1212-S
125 x 125 x 100	DS-AGH-1212	DS-ATH-1212	DS-PGH-1212	DS-PTH-1212	DS-PCGH-1212	DS-PCTH-1212
125 x 175 x 75	DS-AGH-1217	DS-ATH-1217	DS-PGH-1217	DS-PTH-1217	DS-PCGH-1217	DS-PCTH-1217
125 x 175 x 100	DS-AGH-1217-1	DS-ATH-1217-1	DS-PGH-1217-1	DS-PTH-1217-1	DS-PCGH-1217-1	DS-PCTH-1217-1
140 x 170 x 95	DS-AGH-1417	DS-ATH-1417	DS-PGH-1417	DS-PTH-1417	DS-PCGH-1417	DS-PCTH-1417
175 x 175 x 110	DS-AGH-1717-1	DS-ATH-1717-1	DS-PGH-1717-1	DS-PTH-1717-1	DS-PCGH-1717-1	DS-PCTH-1717-1
150 x 200 x 100	DS-AGH-1520	DS-ATH-1520	DS-PGH-1520	DS-PTH-1520	DS-PCGH-1520	DS-PCTH-1520
150 x 200 x 130	DS-AGH-1520-1	DS-ATH-1520-1	DS-PGH-1520-1	DS-PTH-1520-1	DS-PCGH-1520-1	DS-PCTH-1520-1
150 x 250 x 100	DS-AGH-1525	DS-ATH-1525	DS-PGH-1525	DS-PTH-1525	DS-PCGH-1525	DS-PCTH-1525
150 x 250 x 130	DS-AGH-1525-1	DS-ATH-1525-1	DS-PGH-1525-1	DS-PTH-1525-1	DS-PCGH-1525-1	DS-PCTH-1525-1
200 x 200 x 95	DS-AGH-2020-S	DS-ATH-2020-S	DS-PGH-2020-S	DS-PTH-2020-S	DS-PCGH-2020-S	DS-PCTH-2020-S
200 x 200 x 130	DS-AGH-2020	DS-ATH-2020	DS-PGH-2020	DS-PTH-2020	DS-PCGH-2020	DS-PCTH-2020
280 x 190 x 130	DS-AGH-2819	DS-ATH-2819	DS-PGH-2819	DS-PTH-2819	DS-PCGH-2819	DS-PCTH-2819

DS-AG

LARGE WATERPROOF BOX

大型防水箱



IP66
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 重量只有铁制箱子的1/4左右，便于搬运和操作，耐腐蚀，绝缘性佳。
- 产品经过严格的品质检测，其防水、防尘等级达到IP66（检测报告备案）。
- 适用于机场、地铁站、按钮盒、小型终端机、信号机箱、继电器、传感器、通信接线盒等设备。
- The product weight is about 1/4 of steel box, it is easy to be installed and moved, and it's anti-corrosion, insulated.
- The product has passed strict waterproof and dustproof test, it reach IP66.
- It can be used in airport, subway station, and it can be pushbutton box, terminal box, signal box, relays box, sensor box and communication junction box and so on.

技术参数 TECHNICAL DATA

尺寸Size	室内用Indoor Use		室外用Outdoor Use			
宽x高x深度(mm) WxHxD(mm)	ABS		AC(PC/ABS)		Polyester(PBT/PC)	
	灰色盖子Solid cover	透明盖子Clear cover	灰色盖子Solid cover	透明盖子Clear cover	灰色盖子Solid cover	透明盖子Clear cover
DS-AG-1919	190×190×130	DS-AT-1919	DS-PG-1919	DS-PT-1919	DS-PCG-1919	DS-PCT-1919
DS-AG-2819	280×190×130	DS-AT-2819	DS-PG-2819	DS-PT-2819	DS-PCG-2819	DS-PCT-2819
DS-AG-2819-1	280×190×180	DS-AT-2819-1	DS-PG-2819-1	DS-PT-2819-1	DS-PCG-2819-1	DS-PCT-2819-1
DS-AG-3819	380×190×130	DS-AT-3819	DS-PG-3819	DS-PT-3819	DS-PCG-3819	DS-PCT-3819
DS-AG-3819-1	380×190×180	DS-AT-3819-1	DS-PG-3819-1	DS-PT-3819-1	DS-PCG-3819-1	DS-PCT-3819-1
DS-AG-2828	280×280×130	DS-AT-2828	DS-PG-2828	DS-PT-2828	DS-PCG-2828	DS-PCT-2828
DS-AG-3828	380×280×130	DS-AT-3828	DS-PG-3828	DS-PT-3828	DS-PCG-3828	DS-PCT-3828
DS-AG-3828-1	380×280×180	DS-AT-3828-1	DS-PG-3828-1	DS-PT-3828-1	DS-PCG-3828-1	DS-PCT-3828-1
DS-AG-5638	560×380×180	DS-AT-5638	DS-PG-5638	DS-PT-5638	DS-PCG-5638	DS-PCT-5638
DS-AG-5628	560×380×265	DS-AT-5628	DS-PG-5628	DS-PT-5628	DS-PCG-5628	DS-PCT-5628

温度 Temperature	AG(ABS)	PG(PC/ABS)	PCG(PBT/PC)	Clear cover (Polycarbonate)
短时间 Short time	-40℃~+100℃	-40℃~+90℃	-40℃~+100℃	-40℃~+132℃
连续 Continuous	-40℃~+80℃	-40℃~+85℃	-40℃~+75℃	-40℃~+130℃



IP66
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 重量只有铁制箱子的1/4左右，便于搬运和操作，耐腐蚀，绝缘性佳。
- 产品经过严格的品质检测，其防水、防尘等级达到IP66（检测报告备案）。
- 适用于机场、地铁站、按钮盒、小型终端机、信号机箱、继电器、传感器、通信接线盒等设备。
- The product weight is about 1/4 of steel box, it is easy to be installed and moved, and it's anti-corrosion, insulated.
- The product has passed strict waterproof and dustproof test, it reach IP66.
- It can be used in airport, subway station, and it can be pushbutton box, terminal box, signal box, relays box, sensor box and communication junction box and so on.

技术参数 TECHNICAL DATA

尺寸Size	室内用Indoor Use		室外用Outdoor Use			
宽x高x深度(mm) WxHxD(mm)	ABS		AC(PC/ABS)		Polyester(PBT/PC)	
	灰色盖子Solid cover	透明盖子Clear cover	灰色盖子Solid cover	透明盖子Clear cover	灰色盖子Solid cover	透明盖子Clear cover
DS-AGH-1919	190×190×130	DS-ATH-1919	DS-PGH-1919	DS-PTH-1919	DS-PCGH-1919	DS-PCTH-1919
DS-AGH-2819	280×190×130	DS-ATH-2819	DS-PGH-2819	DS-PTH-2819	DS-PCGH-2819	DS-PCTH-2819
DS-AGH-2819-1	280×190×180	DS-ATH-2819-1	DS-PGH-2819-1	DS-PTH-2819-1	DS-PCGH-2819-1	DS-PCTH-2819-1
DS-AGH-3819	380×190×130	DS-ATH-3819	DS-PGH-3819	DS-PTH-3819	DS-PCGH-3819	DS-PCTH-3819
DS-AGH-3819-1	380×190×180	DS-ATH-3819-1	DS-PGH-3819-1	DS-PTH-3819-1	DS-PCGH-3819-1	DS-PCTH-3819-1
DS-AGH-2828	280×280×130	DS-ATH-2828	DS-PGH-2828	DS-PTH-2828	DS-PCGH-2828	DS-PCTH-2828
DS-AGH-3828	380×280×130	DS-ATH-3828	DS-PGH-3828	DS-PTH-3828	DS-PCGH-3828	DS-PCTH-3828
DS-AGH-3828-1	380×280×180	DS-ATH-3828-1	DS-PGH-3828-1	DS-PTH-3828-1	DS-PCGH-3828-1	DS-PCTH-3828-1
DS-AGH-5638	560×380×180	DS-ATH-5638	DS-PGH-5638	DS-PTH-5638	DS-PCGH-5638	DS-PCTH-5638
DS-AGH-5628	560×380×265	DS-ATH-5628	DS-PGH-5628	DS-PTH-5628	DS-PCGH-5628	DS-PCTH-5628

温度	AG(ABS)	PG(PC/ABS)	PCG(PBT/PC)	Clear cover (Polycarbonate)
短时间 Short time	-40℃~+100℃	-40℃~+90℃	-40℃~+100℃	-40℃~+132℃
连续 Continuous	-40℃~+80℃	-40℃~+85℃	-40℃~+75℃	-40℃~+130℃

SP-PC

EUROPEAN WATERPROOF ELECTRICAL BOX

欧式防水电气箱



IP66
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 采用高强度ABS材料制成，外观美观大方，具有很高的可塑性和坚固性。
- 获得CE认证和ROHS认证。
- 适用于端子箱、配电板、仪器仪表盒、信号箱等设备。
- 工作环境：ABS：-20℃~+70℃；PC：-50℃~+120℃。
- 防护等级：IP66
- 抗冲击力：IK08
- It is made of ABS materials that have a good exterior, excellent processing performance and strength.
- As a conventional plastic box, it is a popular product that is approved by various stand organization such as CE ,ROHS and Customer Association.
- It is convenient for the general & mechanical usages such as terminal box, measuring equipment box, gauge box, power distribution, control box, etc.
- Temperature range: ABS:from-20to +70deg; PC:from-50 to +120deg
- Protection degree: IP66
- Degree of Protection against Machanical Impact IK08

技术参数 TECHNICAL DATA

型号 Model	尺寸(mm) Dimension(mm)	螺钉紧固数量(pcs) Fastening Screws(pcs)
SP-PC-283813	280x380x130	4
SP-PC-223415	220x340x150	4
SP-PC-304016	300x400x160	4
SP-PC-274616	270x460x160	6
SP-PC-305216	300x520x160	6
SP-PC-365418	360x540x180	6

SP-02

PLASTIC SCREWS WATERPROOF BOX

塑料螺丝防水盒



IP66
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 重量只有铁制箱子的1/4左右，便于搬运和操作，耐腐蚀，绝缘性佳。
- 产品经过严格的品质检测，其防水、防尘等级达到IP66（检测报告备案）。
- 适用于机场、地铁站、按钮盒、小型终端机、信号机箱、继电器、传感器、通信接线盒等设备。
- The product weight is about 1/4 of steel box, it is easy to be installed and moved, and it's anti-corrosion, insulated.
- The product has passed strict waterproof and dustproof test, it reach IP66.
- It can be used in airport, subway station, and it can be pushbutton box, terminal box, signal box, relays box, sensor box and communication junction box and so on.

技术参数 TECHNICAL DATA

型号 Model	宽x高x深(mm) WxHxD(mm)
SP-02-848256	84x82x56
SP-02-956575	95x65x75
SP-02-969660	96x96x60
SP-02-121260	120x120x60
SP-02-139357	130x93x57
SP-02-141460	145x145x60
SP-02-141490	145x145x90
SP-02-161660	160x160x60

型号 Model	宽x高x深(mm) WxHxD(mm)
SP-02-161690	160x160x90
SP-02-171411	170x140x110
SP-02-188085	180x80x85
SP-02-181360	180x130x60
SP-02-181390	180x130x90
SP-02-201511	200x150x115
SP-02-202014	200x200x145
SP-02-241411	248x148x115

SP-F

METAL SCREWS WATERPROOF BOX

金属螺丝防水盒



IP66
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 重量只有铁制箱子的1/4左右，便于搬运和操作，耐腐蚀，绝缘性佳。
- 产品经过严格的品质检测，其防水、防尘等级达到IP66（检测报告备案）。
- 适用于机场、地铁站、按钮盒、小型终端机、信号机箱、继电器、传感器、通信接线盒等设备。
- The product weight is about 1/4 of steel box, it is easy to be installed and moved, and it's anti-corrosion, insulated.
- The product has passed strict waterproof and dustproof test, it reach IP66.
- It can be used in airport, subway station, and it can be pushbutton box, terminal box, signal box, relays box, sensor box and communication junction box and so on.

技术参数 TECHNICAL DATA

型号 Model	宽x高x深度(mm) WxHxD(mm)	备注 Remarks	型号 Model	宽x高x深度(mm) WxHxD(mm)	备注 Remarks	型号 Model	宽x高x深度(mm) WxHxD(mm)	备注 Remarks
SP-F1	200x120x75		SP-F7	158x90x46	带耳	SP-F16	160x45x55	有耳
SP-F1-1	200x120x113	高盖	SP-F7-1	158x90x60	带耳高盖	SP-F17	150x70x47	
SP-F1-2	200x120x75	带耳	SP-F8	115x85x35	带耳	SP-F19	83x58x33	
SP-F1-3	200x120x56	低盖	SP-F9	280x195x135		SP-F19-1	83x58x33	带耳
SP-F1-6	200x120x67	带耳	SP-F9-3	280x195x86	低盖	SP-F20	63x58x35	
SP-F2	158x90x60		SP-F10 低	320x240x60	底低	SP-F20-2	63x58x35	
SP-F2-2	158x90x64	带耳	SP-F10	320x240x110		SP-F21	240x160x90	
SP-F2-3	158x90x40	低盖	SP-F10 高盖	320x240x140		SP-F21 高盖	240x160x120	
SP-F3	115x90x55		SP-F10 特高	320x240x155		SP-F22	160x110x90	带耳
SP-F3-2	115x90x55	带耳	SP-F11-3	380x260x70	底低	SP-F24	192x188x100	
SP-F3-3	115x90x70	带耳	SP-F11-4	380x260x85	底低	SP-F24-2	192x188x70	
SP-F4	100x68x50		SP-F11	380x260x105		SP-F25	83x81x56	
SP-F4-1	100x68x40	小耳	SP-F11 中盖	380x260x120		SP-F34	290x210x60	
SP-F4-2	100x68x50	带耳	SP-F11 高盖	380x260x140		SP-F36	290x210x100	合页搭扣
SP-F5	160x160x90		SP-F13	120x81x65	带耳	SP-F50	300x280x140	
SP-F5-2	160x160x90	带耳	SP-F14	120x120x90		SP-F51B	390x290x165	盖子高
SP-F6	263x182x95		SP-F15	230x150x85		SP-K2	120x170x250	盖子高
SP-F6 低盖	263x182x60		SP-F15 平盖	230x150x87		SP-K16	52x100x125	
SP-F6 高盖	263x182x125		SP-F15-2	230x150x87	带耳	SP-K11	112x270x300	


IP66
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 防水、防尘、耐腐蚀、高强度绝缘。
- 适用于机场、地铁站、按钮盒、小型终端机、信号机箱、继电器、传感器、通信接线盒等设备。
- Waterproof, dustproof, anticorrosion, high-strength insulation
- It can be used in airport, subway station, and it can be pushbutton box, terminal box, signal box, really box, sensor box and communication junction box and so on.

技术参数 TECHNICAL DATA

型号	长	宽	厚	备注
Model	L(mm)	W (mm)	H(mm)	Remarks
PBX01	68	68	50	可选颜色 黄色 Yellow 白色 White
PBX02	105	68	50	
PBX03	135	68	50	
PBX04	165	68	50	
PBX11	110	80	70	
PBX12	130	80	70	
PBX13	180	80	70	
PBX14	250	80	70	

型号	长	宽	厚	备注
Model	L(mm)	W (mm)	H(mm)	Remarks
SBX01	68	68	54	可选颜色 灰色 Gray 黄色 Yellow
SBX02	106	68	54	
SBX03	137	68	54	
SBX04	168	68	54	
SBX05	198	68	54	

CS-AG

WATERPROOF JUNCTION BOX

防水接线盒

**IP66**
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 重量只有铁制箱子的1/4左右，便于搬运和操作，耐腐蚀，绝缘性佳。
- 产品经过严格的品质检测，其防水、防尘等级达到IP66（检测报告备案）。
- 适用于机场、地铁站、按钮盒、小型终端机、信号机箱、继电器、传感器、通信接线盒等设备。
- The product weight is about 1/4 of steel box, it is easy to be installed and moved, and it's anti-corrosion, insulated.
- The product has passed strict waterproof and dustproof test, it reach IP66.
- It can be used in airport, subway station, and it can be pushbutton box, terminal box, signal box, relays box, sensor box and communication junction box and so on.

技术参数 TECHNICAL DATA

型号 Model	宽x高x深度 WxHxD(mm)	螺钉紧固 FASTENING SCREWS
CS-AG-101050	100x100x50	4
CS-AG-101080	100x100x80	4
CS-AG-120850	120x80x50	4
CS-AG-151170	150x110x70	4
CS-AG-151570	150x150x70	4
CS-AG-191470	190x140x70	4
CS-AG-241990	240x190x90	4
CS-AG-241912	240x190x125	4
CS-AG-302212	300x220x120	4
CS-AG-302217	300x220x170	4
CS-AG-383012	380x300x120	4
CS-AG-383017	380x300x170	4
CS-AG-463813	460x380x130	4

**IP65**
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 重量只有铁制箱子的1/4左右，便于搬运和操作，耐腐蚀，绝缘性佳。
- 产品经过严格的品质检测，其防水、防尘等级达到IP66（检测报告备案）。
- 适用于机场、地铁站、按钮盒、小型终端机、信号机箱、继电器、传感器、通信接线盒等设备。
- The product weight is about 1/4 of steel box, it is easy to be installed and moved, and it's anti-corrosion, insulated.
- The product has passed strict waterproof and dustproof test, it reach IP65.
- It can be used in airport, subway station, and it can be pushbutton box, terminal box, signal box, relays box, sensor box and communication junction box and so on.

技术参数 TECHNICAL DATA

型号 Model	尺寸(mm) Dimension(mm)	孔数 Number of holes	孔直径(mm) Hole diameter(mm)
RS-AG-6535	Φ65x35	4	23
RS-AG-8040	Φ80x40	4	23
RS-AG-808040	80x80x40	6	23
RS-AG-101050	100x100x50	6	23
RS-AG-128050	120x80x50	8	29
RS-AG-151170	150x110x70	10	29
RS-AG-151570	150x150x70	12	29
RS-AG-191470	190x140x70	10	37
RS-AG-241990	240x190x90	12	37
RS-AG-302212	300x220x120	12	48
RS-AG-383012	380x300x120	12	48

SP-D SK TERMINAL JUNCTION BOX

分线盒



IP66
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 壳体采用ABS阻燃材质，接线端子采用黄铜材质。
- 产品经过严格的品质检测，其防水、防尘等级达到IP66。
- 适用于室内、室外电气、通信、消防设备、钢铁冶炼，石油化工，电子、电力，铁路，建筑工地等设备。
- The product weighs approximately 1/4 the weight of an iron box and can be easily installed or moved, The product is free from corrosion, carries superior insulation.
- The Product has passed waterproof and dustproof carried out under rigid quality standards.(IP 66)
- The use is also convenient for the installation of Terminal Substitution Rail, Button Box, Small Terminal, Signal , Relay and Sensor , Communication and joint Box etc.

技术参数 TECHNICAL DATA

分线盒（不带预留孔）TERMINAL JUNCTION BOX(WITHOUT KNOCK-OFF HOLE)

型号 Model	宽x高x深度(mm) WxHxD(mm)	备注 Remarks
SP-D9020	88x88x53	
SP-D9025	88x88x53	"带五位端子（可调节）"
SP-D9040	98x98x61	
SP-D9045	98x98x61	"带五位端子（可调节）"
SP-D9060	139x119x70	
SP-D9065	139x119x70	"带五位端子（可调节）"

分线盒（带有预留孔）TERMINAL JUNCTION BOX(WITH KNOCK-OFF HOLE)

型号 Model	宽x高x深度(mm) WxHxD(mm)	备注 Remarks
SK9100Z	167x125x82	
SK9105Z	167x125x82	内配端子
SK9250Z	200x160x98	
SK9255Z	200x160x98	内配端子



IP66
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 壳体采用ABS阻燃材质，接线端子采用黄铜材质。
- 产品经过严格的品质检测，其防水、防尘等级达到IP66。
- 适用于室内、室外电气、通信、消防设备、钢铁冶炼，石油化工，电子、电力，铁路，建筑工地等设备。
- The product weighs approximately 1/4 the weight of an iron box and can be easily installed or moved, The product is free from corrosion, carries superior insulation.
- The Product has passed waterproof and dustproof carried out under rigid quality standards.(IP 66)
- The use is also convenient for the installation of Terminal Substitution Rail, Button Box, Small Terminal, Signal , Relay and Sensor , Communication and joint Box etc.

技术参数 TECHNICAL DATA

型号 Model	宽x高x深度(mm) WxHxD(mm)	备注 Remarks
DS-PG-4P	70x50x40	
DS-PG-6P	83x54x40	
DS-PG-10P	110x75x40	
DS-PG-15P	200x100x70	带预留孔
DS-PG-20P	170x160x70	带预留孔

NYLON JUNCTION BOX

尼龙接线盒

技术参数 TECHNICAL DATA

型号 Model	宽x高x深度(mm) WxHxD(mm)
SP-802-22.5	60x80x25
SP-803-22.5	95x80x25
SP-803-22.5双	95x80x25



WATERPROOF BOX 防水箱



SAIP ELECT.

Copyright © Saip ELEC. All Right Reserved
Deliver happiness to everyone



IP66
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 采用高强度PC耐火材料制成，外观美观大方，具有很高的可塑性和坚固性。
- 获得CE认证和ROHS认证。
- 适用于端子箱、配电板、仪器仪表盒、信号箱等设备。
- 防护等级：IP66
- 抗冲击力：IK08
- It is made of PC and non-flammable materials that have a good exterior, excellent processing performance and strength.
- As a conventional plastic box, it is a popular product that is approved by various stand organization such as CE ,ROHS and Customer Association.
- It is convenient for the general & mechanical usages such as terminal box, measuring equipment box, gauge box, power distribution, control box, etc.
- Protection degree: IP66
- Degree of Protection against Mechanical Impact IK08

PC料灰盖 PC GRAY COVER

型号 Model	宽x高x深度(mm) WxHxD(mm)	备注 Remarks
SP-PCG-302017	300x200x170	二个搭扣Two clasp
SP-PCG-403017	400x300x170	
SP-PCG-504020	500x400x200	三个搭扣Three clasp
SP-PCG-604022	600x400x220	

PC料透明盖 PC TRANSPARENT COVER

型号 Model	宽x高x深度(mm) WxHxD(mm)	备注 Remarks
SP-PCT-302017	300x200x170	二个搭扣Two clasp
SP-PCT-403017	400x300x170	
SP-PCT-504020	500x400x200	三个搭扣Three clasp
SP-PCT-604022	600x400x220	

镀锌底板 GALVANIZED BASEPLATE

型号 Model	宽x高x深度(mm) WxHxD(mm)	备注 Remarks
SP-302017	169x273X2	金属板Plate metals
SP-403017	269x372X2	
SP-504020	368x472X2	
SP-604022	368x572X2	

镀锌中间门板 GALVANIZED MIDDLE DOOR


型号 Model	宽x高x深度(mm) WxHxD(mm)	备注 Remarks
SP-N-302017	171x271X2	金属板Plate metals
SP-N-403017	271x371X2	
SP-N-504020	371x471X2	
SP-N-604022	371x571X2	

**IP66**
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 本产品由优质的热塑性塑料—聚碳酸酯和ABS制成，颜色为标准颜色——灰色RAL 7035，而盖子是灰色或透明的，外形美观，性能坚固，重量是铁盒子的1/3，运输及加工方便。
- 本产品具有：防水、防火、防爆、耐酸碱、绝缘、抗撞击等等。
- 本产品使用于：按钮盒、小型终端机、终端交换机、信号机、继电器、通信用接线箱、公共场所用的控制箱、消防设备、沿海工厂、码头、水处理设施、环保设备、防水防潮等场所。
- The product is made from a high-quality thermoplastic Plastic Polycarbonate and ABS. Its body color take the standard gray RAL 7035, its cover is gray and transparent, and its weight is 1/3 of the iron box which is easy to transport and process. With A beautiful appearance, with a firm performance.
- The performance of the product: waterproof, fireproof, explosion-proof, acid-proof and alkali-proof, insulated, anti-collision etc.
- The product is applied to button boxes, mini-terminals, terminal exchangers, signal devices, relays, communication connection boxes, public control boxes, fire control devices, coastal areas, factories, docks, water processing equipments, environment protection equipments, waterproof and damp proof places etc.

尺寸规格 PRODUCT FEATURES

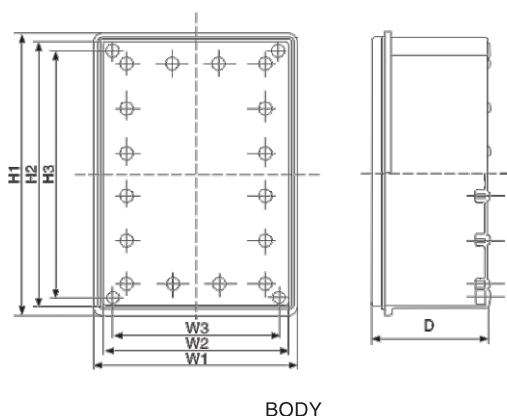

技术参数 TECHNICAL DATA

型号	宽x高x深度(mm)	宽x高x深度(mm)	宽x高x深度(mm)
Model	WxHxD(mm)	WxHxD(mm)	WxHxD(mm)
SP-WG-161090	100 × 160 × 90	80 × 140 × 90	65 × 125 × 90
SP-WG-151590	150 × 150 × 90	125 × 125 × 90	120 × 120 × 90
SP-WG-171290	125 × 175 × 90	105 × 155 × 90	90 × 140 × 90
SP-WG-121790	175 × 125 × 90	155 × 105 × 90	140 × 90 × 90
SP-WG-201190	110 × 200 × 90	90 × 180 × 90	75 × 165 × 90
SP-WG-201510	150 × 200 × 100	127 × 177 × 100	115 × 165 × 100
SP-WG-211690	160 × 210 × 90	140 × 185 × 90	125 × 175 × 90
SP-WG-201513	150 × 200 × 130	127 × 177 × 130	115 × 165 × 130
SP-WG-251710	170 × 250 × 100	148 × 228 × 100	135 × 215 × 100
SP-WG-251713	190 × 280 × 130	168 × 258 × 130	152 × 242 × 130
SP-WG-322718	275 × 325 × 180	250 × 300 × 180	235 × 285 × 180
SP-WG-433325	330 × 430 × 255	300 × 400 × 255	275 × 375 × 255
SP-WG-534325	430 × 530 × 255	400 × 500 × 255	375 × 475 × 255
SP-WG-634325	430 × 630 × 255	400 × 600 × 255	375 × 575 × 255
SP-WG-635325	530 × 630 × 255	500 × 600 × 255	475 × 575 × 255
SP-WG-735325	530 × 730 × 255	500 × 700 × 255	475 × 675 × 255
SP-WG-837328	731 × 831 × 286	700 × 800 × 286	672 × 770 × 286
SP-WG-108333	831 × 1031 × 336	900 × 1000 × 336	770 × 970 × 336



IP66
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 采用高强度ABS制成，外观美观大方，具有很高的可塑性和坚固性。
- 获得CE认证和ROHS认证。
- 适用于端子箱、配电板、仪器仪表盒、信号箱等设备。
- 防护等级：IP66
- 抗冲击力：IK08
- It is made of ABS, materials that have a good exterior, excellent processing performance and strength.
- As a conventional plastic box, it is a popular product that is approved by various stand organization such as CE ,ROHS and Customer Association.
- It is convenient for the general & mechanical usages such as terminal box, measuring equipment box, gauge box, power distribution, control box, etc.
- Protection degree: IP66
- Degree of Protection against Mechanical Impact: IK08

技术参数 TECHNICAL DATA

型号 Model	宽x高x深度(mm) WxHxD(mm)
SP-MG-1016085	100x160x85
SP-MG-112009	110x200x90
SP-MG-1217085	125x175x85
SP-MG-151509	150x150x90
SP-MG-152010	150x200x100
SP-MG-152013	150x200x130
SP-MG-172510	170x250x100
SP-MG-192813	190x280x130
SP-MG-203015	200x300x150
SP-MG-211609	210x160x90
SP-MG-253615	250x360x150
SP-MG-304017	300x400x170
SP-MG-323214	320x320x140
SP-MG-374818	370x480x180
SP-MG-405020	400x500x200
SP-MG-426222	420x620x220

型号 Model	宽x高x深度(mm) WxHxD(mm)
SP-MT-1016085	100x160x85
SP-MT-112009	110x200x90
SP-MT-1217085	125x175x85
SP-MT-151509	150x150x90
SP-MT-152010	150x200x100
SP-MT-152013	150x200x130
SP-MT-172510	170x250x100
SP-MT-192813	190x280x130
SP-MT-203015	200x300x150
SP-MT-211609	210x160x90
SP-MT-253615	250x360x150
SP-MT-304017	300x400x170
SP-MT-323214	320x320x140
SP-MT-374818	370x480x180
SP-MT-405020	400x500x200
SP-MT-426222	420x620x220

SP-AG

ABS LOCKABLE WATERPROOF BOX

ABS带锁防水箱

**IP65**
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 采用高强度ABS、PC材料制成，外观美观大方，具有很高的可塑性和坚固性。
- 获得CE认证。
- 适用于端子箱、配电板、仪器仪表盒、信号箱等设备。
- 防护等级：IP65
- 抗冲击力：IK08
- It is made of ABS, PC materials that have a good exterior, excellent processing performance and strength.
- As a conventional plastic box, it is a popular product that is approved by various stand organization such as CE certification.
- It is convenient for the general & mechanical usages such as terminal box, measuring equipment box, gauge box, power distribution, control box, etc.
- Protection degree: IP65
- Degree of Protection against Mechanical Impact IK08

技术参数 TECHNICAL DATA

型号 Model	宽x高x深度(mm) WxHxD(mm)	描述 Description
SP-AG-302016	300 × 200 × 160	材料ABS
SP-AG-403016	400 × 300 × 160	
SP-AG-504019	500 × 400 × 195	
SP-AG-604019	600 × 400 × 195	
SP-AG-605019	600 × 500 × 195	
SP-AT-302016	300 × 200 × 160	箱体: 灰白色ABS 上盖: 透明PC Body: ABS(gray) Door: Clear PC
SP-AT-403016	400 × 300 × 160	
SP-AT-504019	500 × 400 × 195	
SP-AT-604019	600 × 400 × 195	
SP-AT-605019	600 × 500 × 195	
SP-ATM-302016	300 × 200 × 160	透明上盖带内门 Body: ABS(gray) Door: Clear PC Mid-Door: ABS(gray)
SP-ATM-403016	400 × 300 × 160	
SP-ATM-501019	500 × 400 × 195	
SP-ATM-604019	600 × 400 × 195	
SP-ATM-605019	600 × 500 × 195	



IP65
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 采用高强度PVC材料制成，外观美观大方，具有很高的可塑性和坚固性。
- 适用于端子箱、配电板、仪器仪表盒、信号箱等设备。
- 防护等级：IP65
- 抗冲击力：IK08
- It is made of PVC materials that have a good exterior, excellent processing performance and strength.
- It is convenient for the general & mechanical usages such as terminal box, measuring equipment box, gauge box, power distribution, control box, etc.
- Protection degree: IP65
- Degree of Protection against Mechanical Impact IK08


技术参数 TECHNICAL DATA

型号 Model	宽x高x深度(mm) WxHxD(mm)	型号 Model	宽x高x深度(mm) WxHxD(mm)	型号 Model	宽x高x深度(mm) WxHxD(mm)
SP-PHV-302013	300x200x130	SP-PHV-453523	450x350x300	SP-PHV-905035	900x500x350
SP-PHV-302018	300x200x180	SP-PHV-504015	500x400x150	SP-PHV-905040	900x500x400
SP-PHV-302022	300x200x220	SP-PHV-504018	500x400x180	SP-PHV-1004020	1000x400x200
SP-PHV-302026	300x200x260	SP-PHV-504028	500x400x220	SP-PHV-1004025	1000x400x250
SP-PHV-302030	300x200x300	SP-PHV-504026	500x400x260	SP-PHV-1004030	1000x400x300
SP-PHV-352513	350x250x130	SP-PHV-504030	500x400x300	SP-PHV-1004035	1000x400x350
SP-PHV-352518	350x250x180	SP-PHV-605015	600x500x150	SP-PHV-1004040	1000x400x400
SP-PHV-352522	350x250x220	SP-PHV-605018	600x500x180	SP-PHV-1006020	1000x600x200
SP-PHV-352526	350x250x260	SP-PHV-605022	600x500x220	SP-PHV-1006025	1000x600x250
SP-PHV-352530	350x250x300	SP-PHV-605026	600x500x260	SP-PHV-1006030	1000x600x300
SP-PHV-403013	400x300x130	SP-PHV-605030	600x500x300	SP-PHV-1006035	1000x600x350
SP-PHV-403018	400x300x180	SP-PHV-805020	800x500x200	SP-PHV-1006040	1000x600x400
SP-PHV-403022	400x300x220	SP-PHV-805025	800x500x250	SP-PHV-1205020	1200x500x200
SP-PHV-403026	400x300x260	SP-PHV-805030	800x500x300	SP-PHV-1205025	1200x500x250
SP-PHV-403030	400x300x300	SP-PHV-805035	800x500x350	SP-PHV-1205030	1200x500x300
SP-PHV-453513	450x350x130	SP-PHV-805040	800x500x400	SP-PHV-1205035	1200x500x350
SP-PHV-453518	450x350x180	SP-PHV-905020	900x500x200	SP-PHV-1205040	1200x500x400
SP-PHV-453519	450x350x220	SP-PHV-905025	900x500x250		
SP-PHV-453521	450x350x260	SP-PHV-905030	900x500x300		

LO-AG

ENCLOSURE WITH LOCKABLE DOOR


带锁防水箱

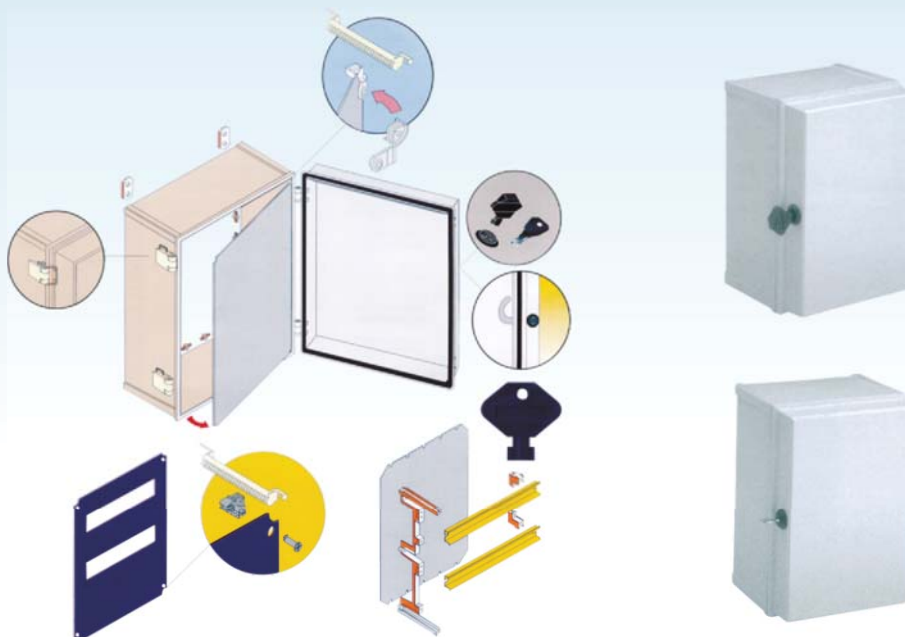**IP67**
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 采用高强度ABS、PC材料制成，外观美观大方，具有很高的可塑性和坚固性。
- 获得CE认证和ROHS认证。
- 适用于端子箱、配电板、仪器仪表盒、信号箱等设备。
- 工作环境：ABS：-20℃~+70℃；PC：-50℃~+120℃。
- 防护等级：IP67
- 抗冲击力：IK08
- It is made of ABS,PC and non-flammable materials that have a good exterior, excellent processing performance and strength.
- As a conventional plastic box, it is a popular product that is approved by various stand organization such as CE ,ROHS and Customer Association.
- It is convenient for the general & mechanical usages such as terminal box, measuring equipment box, gauge box, power distribution, control box, etc.
- Temperature range: ABS:from-20to +70deg; PC:from-50 to +120deg
- Protection degree: IP67
- Degree of Protection against Mechanical Impact IK08

尺寸规格 PRODUCT FEATURES

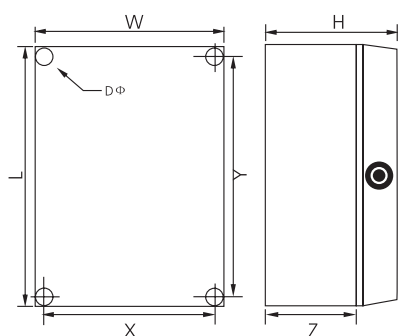

Dimensions in mm

技术参数 TECHNICAL DATA

型号	宽x高x深度(mm)	安装尺寸Mounting Dim.		
MODEL	WxHxD(mm)	x	y	Dφ
LO-AG-302018	200x300x180	172	272	6Φ
LO-AG-303018	300x300x180	272	272	6Φ
LO-AG-403018	300x400x180	372	272	6Φ
LO-AG-504020	400x500x200	372	472	6Φ
LO-AG-604021	400x600x210	372	572	6Φ


IP66
 PROTECTION
 DEGREE

产品特性 PRODUCT FEATURES

- 采用高强度ABS、PC材料制成，外观美观大方，具有很高的可塑性和坚固性。
- 获得CE认证和ROHS认证。
- 适用于端子箱、配电板、仪器仪表盒、信号箱等设备。
- 工作环境：ABS：-20℃~+70℃；PC：-50℃~+120℃。
- 防护等级：IP66
- 抗冲击力：IK08
- It is made of ABS,PC and non-flammable materials that have a good exterior, excellent processing performance and strength.
- As a conventional plastic box, it is a popular product that is approved by various stand organization such as CE ,ROHS and Customer Association.
- It is convenient for the general & mechanical usages such as terminal box, measuring equipment box, gauge box, power distribution, control box, etc.
- Temperature range: ABS:from-20to +70deg; PC:from-50 to +120deg
- Protection degree: IP66
- Degree of Protection against Mechanical Impact IK08

技术参数 TECHNICAL DATA

灰色盖子 Solid Cover		透明盖子 Clear Cover	
型号 Model	宽x高x深度 WxHxD(mm)	型号 Model	宽x高x深度 WxHxD(mm)
Mi-AG-1530	150 × 300 × 170	Mi-AT-1530	150 × 300 × 170
Mi-AG-3030	300 × 300 × 170	Mi-AT-3030	300 × 300 × 170
Mi-AG-3030-1	300 × 300 × 214	Mi-AT-3030-1	300 × 300 × 214
Mi-AG-3030-2	300 × 300 × 182	Mi-AT-3030-2	300 × 300 × 182
Mi-AG-3030-2	228 × 239 × 182	Mi-AT-3030-2	228 × 239 × 182
Mi-AG-4530	450 × 300 × 170	Mi-AT-4530	450 × 300 × 170
Mi-AG-4530-1	450 × 300 × 214	Mi-AT-4530-1	450 × 300 × 214
Mi-AG-6030	600 × 300 × 170	Mi-AT-6030	600 × 300 × 170
Mi-AG-6030-1	600 × 300 × 214	Mi-AT-6030-1	600 × 300 × 214
Mi-AG-6060	600 × 600 × 170	Mi-AT-6060	600 × 600 × 170

ALUMINIUM WATERPROOF BOX

铸铝防水盒



SAIP ELECT.

Copyright © Saip ELEC. All Right Reserved
Deliver happiness to everyone


IP66
 PROTECTION
 DEGREE

产品特性 PRODUCT FEATURES

- 采用铝合金压铸成形，耐高温、防腐蚀，可在恶劣环境下使用。
- 表面处理：磨砂面（浅灰色）、光面（青灰色）
- 适用于端子箱、配电板、仪器仪表盒、信号箱、采矿场、沿海工厂、污水处理设施等环境。
- 防护等级：IP66
- Aluminum alloy die-casting forming, high temperature resistant, Corrosion-Proof, can be used in harsh environments.
- Surface Treatment: Frosting(light gray), smooth (steel grey).
- Applicable: Terminal box, Distribution Box, Instrument Box, Signal Junction Box, Stope, Coastal factories, Sewage Treatment Works and other environments.
- Protection: IP66.

技术参数 TECHNICAL DATA

型号 Model	尺寸 Model	备注 Remarks
SP-AG-FA1	64x58x35	四个螺丝
SP-AG-FA2	120x80x55	六个螺丝
SP-AG-FA2-1	120x80x55	四个螺丝
SP-AG-FA2-2	135x85x56	四个螺丝
SP-AG-FA2-3	125x80x58	四个螺丝
SP-AG-FA3	188x120x78	六个螺丝
SP-AG-FA3-1	188x120x78	四个螺丝
SP-AG-FA4	100x68x50	翻盖带四个螺丝
SP-AG-FA5	222x145x55	六个螺丝
SP-AG-FA5-1	222x145x55	四个螺丝
SP-AG-FA6	222x145x75	六个螺丝
SP-AG-FA6-1	222x145x80	四个螺丝
SP-AG-FA7	111x64x37	四个螺丝
SP-AG-FA8	180x140x55	翻盖带四个螺丝（有窗、无窗）
SP-AG-FA9	90x36x31	四个螺丝
SP-AG-FA10	228x150x75	四个螺丝（有窗、无窗）
SP-AG-FA10-2	228x150x90	四个螺丝
SP-AG-FA12	200x130x80	可带窗口（有窗、无窗）
SP-AG-FA12-1	200x130x88	四个螺丝
SP-AG-FA13	185x135x85	四个螺丝

DIE CAST ALUMINUM WATERPROOF BOX

MATTE SURFACE

压铸铝防水盒(磨砂表面)



技术参数 TECHNICAL DATA

型号	尺寸	备注
Model	Model	Remarks
SP-AG-FA14	220x155x95	合页翻盖四角螺丝
SP-AG-FA15	250x185x88	合页翻盖四角螺丝
SP-AG-FA15-1	250x185x88	翻盖四角螺丝（有窗、无窗）
SP-AG-FA16	280x185x80	合页翻盖四角螺丝
SP-AG-FA18	80x76x57	四个螺丝
SP-AG-FA18-1	80x76x57	四个螺丝固定
SP-AG-FA20	175x80x56	四个螺丝
SP-AG-FA20-1	175x80x80	四个螺丝
SP-AG-FA21	250x80x64	四个螺丝
SP-AG-FA22	250x80x80	四个螺丝
SP-AG-FA24	115x65x55	四个螺丝
SP-AG-FA25	160x100x60	四个螺丝
SP-AG-FA25-1	165x95x39	四个螺丝
SP-AG-FA26	160x100x65	四个螺丝
SP-AG-FA29	150x100x80	四个螺丝
SP-AG-FA34	115x90x58	四个螺丝
SP-AG-FA34-1	115x90x60	合页翻盖四角螺丝
SP-AG-FA36	250x120x82	四个螺丝
SP-AG-FA38	320x120x90	四个螺丝
SP-AG-FA40	360x160x95	四个螺丝
SP-AG-FA41	360x160x135	四个螺丝
SP-AG-FA43	100x100x60	四个螺丝
SP-AG-FA44	140x140x75	四个螺丝
SP-AG-FA58	145x100x45	四个螺丝
SP-AG-FA60	120x120x82	四角螺丝
SP-AG-FA61	160x160x70	四角螺丝
SP-AG-FA62	160x160x90	四角螺丝
SP-AG-FA62-1	160x160x86	合页翻盖四角螺丝
SP-AG-FA63	240x160x75	四个螺丝
SP-AG-FA64	240x160x100	四角螺丝
SP-AG-FA65	265x185x75	四角螺丝
SP-AG-FA66	260x185x96	四角螺丝
SP-AG-FA67	260x185x128	四角螺丝
SP-AG-FA68	300x210x100	四角螺丝
SP-AG-FA69	300x210x130	四角螺丝
SP-AG-FA70	340x235x95	四个螺丝
SP-AG-FA70-1	340x235x95	合页翻盖四角螺丝
SP-AG-FA71	340x235x120	四角螺丝
SP-AG-FA71-1	340x235x120	合页翻盖四角螺丝
SP-AG-FA71-2	340x235x115	合页翻盖四角螺丝
SP-AG-FA72	340x235x135	四角螺丝
SP-AG-FA72-1	340x235x135	合页翻盖四角螺丝
SP-AG-FA73	340x235x160	四角螺丝
SP-AG-FA73-1	340x235x160	合页翻盖四角螺丝
SP-AG-FA73-2	340x235x155	合页翻盖四角螺丝
SP-AL-4023	400x230x110	四角螺丝
SP-AL-4031	400x310x110	四角螺丝
SP-AL-6023	600x230x130	六个螺丝
SP-AL-6031	600x310x110	六个螺丝



IP66
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 采用铝合金压铸成形，耐高温、抗冲击、防腐蚀。
- 表面处理：喷涂处理
- 适用于端子箱、配电板、仪器仪表盒、信号箱等设备。
- 防护等级：IP66
- Aluminum alloy die-casting forming, high temperature resistant, shock resistance, Corrosion-Proof.
- Surface treatment: Spraying.
- Applicable: Terminal box, Distribution box, Instrument box, signal junction box, etc.
- Protection: IP66

技术参数 TECHNICAL DATA

型号 MODEL	宽x高x深度(mm) WxHxD(mm)	型号 MODEL	宽x高x深度(mm) WxHxD(mm)
SP-05-282870	285x285x70	SP-05-251492	257x147x92
SP-05-251470	256x146x70	SP-05-361616	360x167x165
SP-05-251485	254x145x85	SP-05-473214	475x325x145
SP-05-211385	210x130x85	SP-05-331611	330x160x116
SP-05-251490	255x146x90	SP-05-201610	200x168x100
SP-05-169980	160x99x80	SP-05-252090	256x200x90
SP-05-161160	160x110x60	SP-05-301878	304x184x78
SP-05-168580	168x85x80	SP-05-201968	205x195x68
SP-05-139560	130x95x60	SP-05-201867	200x185x67
SP-05-261660	260x166x60	SP-05-201985	205x195x85
SP-05-211380	210x130x60		


IP66
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 采用6063铝材挤压成型，耐高温、抗冲击、防腐蚀。
- 表面处理：阳极氧化处理或喷涂处理。
- 适用于通信、医学、光电、安防、电子、仪器仪表等行业。
- 颜色：常规为银色、黑色、金色，也可根据客户需求定制。
- 6063 aluminum extrusion production, high temperature resistant, shock resistance, Corrosion-Proof.
- Surface Treatment: Anodic oxidation or Spraying.
- Applicable: communications, medical, photoelectric, security, electronics, instrumentation and other industries.
- Color: Silver, black, gold, can also be customized.

技术参数 TECHNICAL DATA

型号 MODEL	宽x高x深度(mm) WxHxD(mm)	型号 MODEL	宽x高x深度(mm) WxHxD(mm)
SP-AD-1	36x147x155	SP-AD-11	40x97x100
SP-AD-2	61x147x155	SP-AD-12	27x76x100
SP-AD-3	46x190x155	SP-AD-13	46x76x100
SP-AD-4	71x190x155	SP-AD-14	29x89x100
SP-AD-5	75x150x160	SP-AD-15	36x86x100
SP-AD-6	48x148x130	SP-AD-16	26x54x100
SP-AD-7	40x89x100	SP-AD-17	21x104x100
SP-AD-8	32x70x100	SP-AD-18	35x73x100
SP-AD-9	35x65x100	SP-AD-19	60x82x110
SP-AD-23	35x76x100	SP-AD-21	34x58x100
SP-AD-24	46x76x100	SP-AD-22	44x65x100
SP-AD-36	20x61x100	SP-AD-27	36x121x155
SP-AD-39	24x69x100	SP-AD-29	38x147x155
SP-AD-398	31x50x65	SP-AD-100	100x160x200
SP-AD-60	60x200x200	SP-AD-101	100x200x200
SP-AD-60-1	60x250x200	SP-AD-102	100x250x200
SP-AD-60-2	60x300x200	SP-AD-103	100x300x250
SP-AD-60黑	60x200x200	SP-AD-104	100x300x160
SP-AD-10	57x75x100		

POLYESTER ENCLOSURE FIBERGLASS BOX

玻璃纤维箱



SAIP ELECT.

Copyright © Saip ELEC. All Right Reserved
Deliver happiness to everyone

SMC

SMC POLYESTER ENCLOSURE FIBERGLASS BOX

SMC玻璃纤维箱


**IP66**
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

SMC 系列是新型的开关箱，它由玻璃纤维强化多元酯所制造，防水等级达到IP66、抗冲击力达到IK8等级。多元酯的特性是它本身混合30%玻璃纤维来强化，使它达到一个高电阻和机械刚度(IK8)。

同金属箱相比，SMC系列重量只有金属箱的1/3、更适应腐蚀、潮湿的环境等优点。

◆ Material: Fiberglass(SMC) ◆ Color: RAL7035 ◆ Protection degree: IP66 ◆ Working temperature: -40℃ to +120℃ ◆ Mechanical impact: IK08

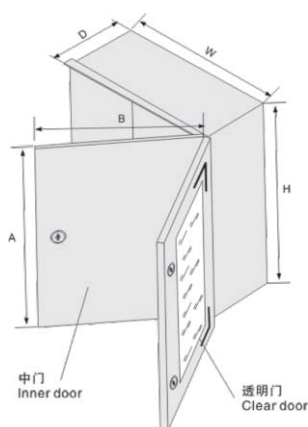


标准锁Standard lock
型号Model:MS-01
包装Package:1pc



钥匙锁Key lock
型号Model:MS705
包装Package:1pc



安装支架:Wall mount brackets
型号Model:SPX-01 包装Package:4pcs/set



环氧树脂安装底板
Polyester mounting plate



铁安装底板
Steel mounting plate

技术参数 TECHNICAL DATA

玻璃纤维箱Polyester box(fiber glass box)					内门Inner door			环氧树脂安装底板Polyester mounting plate			铁安装底板Steel mounting plate				
型号 Model		Dimension(mm)			型号 Model	Dimension(mm)		型号 Model		Dimension(mm)		型号 Model		Dimension(mm)	
灰门Grey door	透明门Clear door	W	H	D	中门 Inner door	M	N			M	N			C	E
SMC-302514G	SMC-302514T	250	300	140				PM-325	221	238	SM-325	263	201		
SMC-403020G	SMC-403020T	300	400	200	ID-43	364	245	PM-43	311	286	SM-43	353	245		
SMC-404020G	SMC-404020T	400	400	200	ID-44	364	345	PM-44	308	386	SM-44	349	345		
SMC-504020G	SMC-504020T	400	500	200	ID-54	464	345	PM-54	408	386	SM-54	453	345		
SMC-604023G	SMC-604023T	400	600	230	ID-64	564	345	PM-64	511	386	SM-64	553	345		
SMC-605023G	SMC-605023T	500	600	230	ID-65	564	445	PM-65	508	486	SM-65	553	447		
SMC-806030G	SMC-806030T	600	800	300	ID-86	764	545	PM-86	706	581	SM-86	749	540		




IP66
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

产品用于仪器仪表或自动化领域，机箱表面预留贴膜区，机箱盖和机箱底预留螺纹孔，便于安装印刷线路板或者DIN导轨，易加工，可选配多种附件。

Enclosures made of Aluminums, Plastic and Glass-fiber reinforced polyester, as well as machine control panels and suspension systems protect sensitive electronics in a wide range of industrial applications.

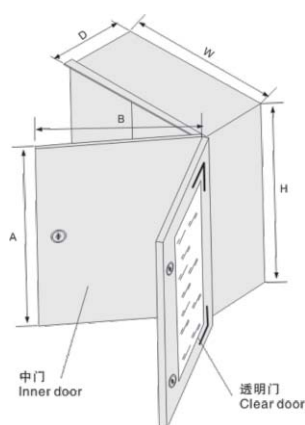


锁Lock



钥匙Key



调节支架Adjustable support



环氧树脂安装底板
Polyester mounting plate



铁安装底板
Steel mounting plate

技术参数 TECHNICAL DATA

型号 Model	宽x高x深度(mm) WxHxD(mm)	说明 Description
SP-DMC-302415	300 × 240 × 150	箱体材料: DMC 安装板: 铁板 Box Material: DMC Fix plate: steel
SP-DMC-413116	418 × 318 × 162	
SP-DMC-404020	400 × 400 × 200	
SP-DMC-504320	500 × 430 × 200	
SP-DMC-655025	650 × 500 × 250	



IP54
PROTECTION
DEGREE

箱体特点 BOX FEATURES

- 箱体构件由全绝缘的高分子复合材料(SMC)经高温模压成型
- 箱体构件为模压成型，积木式拼装结构，所以尺寸精度高、安装方便。
- 优良的绝缘性能。箱体为全绝缘结构，无需增设接地系统。
- 材料本身优良的绝缘性能，加上特殊的通风结构设计，可以有效防止箱体内部凝露、凝霜发生的可能。
- 优良的耐化学腐蚀性能，能有效抵抗弱酸、弱碱、盐雾、雨水的腐蚀。
- 优良的抗老化性能。在材料内添加防紫外线元素处理，使得箱体更加耐用，使用寿命长。
- 全封闭的结构，独特的防尘设计，防护等级达到IP44甚至IP54。
- Box parts are high temperature pressure formed with completely insulating polymer composite materials(SMC).
- Box parts is pressure formed, modular construction, with high dimensional precision and convenient installation.
- Excellent insulation property. The box is completely insulating structure, no need adding earthing system.
- Excellent heat-shielding performance and special ventilation structure design prevent box inside from condensation and glazed frost.
- Excellent corrosion proof properties withstand dilute acid, base, salt and rain corrosion
- Excellent aging resistance property adding substance withstanding ultraviolet ray in the material makes the box more durable and longer life.
- Completely sealed structure and special protection design make protection class up to IP44,IP54.

技术参数 TECHNICAL DATA

型号 MODEL	宽x高x深度(mm) WxHxD(mm)
PDB-SMC-608632	600x865x320
PDB-SMC-806532	800x650x320
PDB-SMC-108632	1000x865x320
PDB-SMC-128632	1200x865x320
PDB-SMC-601032	600x1015x320
PDB-SMC-801032	800x1015x320
PDB-SMC-101032	1000x1015x320
PDB-SMC-121032	1200x1015x320
PDB-SMC-801048	800x1015x485
PDB-SMC-101048	1000x1015x485
PDB-SMC-601132	600x1100x320
PDB-SMC-801132	800x1100x320
PDB-SMC-101132	1000x1100x320
PDB-SMC-121132	1200x1100x320

型号 MODEL	宽x高x深度(mm) WxHxD(mm)
PDB-SMC-601232	600x1250x320
PDB-SMC-801232	800x1250x320
PDB-SMC-101232	1000x1250x320
PDB-SMC-121232	1200x1250x320
PDB-SMC-801248	800x1250x485
PDB-SMC-101248	1000x1250x485
PDB-SMC-601064	600x1065x640
PDB-SMC-801064	800x1065x640
PDB-SMC-101064	1000x1065x640
PDB-SMC-121064	1200x1065x640
PDB-SMC-141064	1400x1065x640
PDB-SMC-607060	600x700x600
PDB-SMC-801350	800x1370x500
PDB-SMC-121350	1200x1370x500


箱体尺寸 DIMENSION

型号 MODEL	宽x高x深度(mm) WxHxD(mm)	型号 MODEL	宽x高x深度(mm) WxHxD(mm)
PDB-SMC-816497	810x640x970	PDB-SMC-126497	1200x640x970
PDB-SMC-966032	960x600x320	PDB-SMC-156497	1500x640x970
PDB-SMC-978164	970x810x640	PDB-SMC-176497	1700x640x970
PDB-SMC-116032	1140x600x320	PDB-SMC-196497	1900x640x970
PDB-SMC-126032	1200x600x320		

构件列表 COMPONENTS LIST

编号 NO.	名称 Name	编号 NO.	名称 Name
1	后板 Rack plate	13	门锁扣 Door Lock Catch
2	左侧板 Left Plate	14	铰链拴 Hinge Hitch
3	右侧板 Right Plate	15	闪电标志 Lightning Symbol
4	顶板 Top Plate	16	上滑动部件 Upper Sliding Part
5	活动板 Movable Plate	17	下滑动部件 Under Sliding Part
6	左门板 Left Door Plate	18	门锁 Door Lock
7	门锁扣 Door Lock Catch	19	门锁防滑片 Door Lock Antislip Piece
8	螺钉 Screw	20	锁舌 Lock Bolt
9	方形螺母 Square Nut	21	左门板 Left Door Plate
10	分段卡扣锁 Section Lock Catch	22	后板连接件 Back Plate Connecting Piece
11	顶板螺钉 Top Plate Screw	23	底座右侧板 Base Right Plate
12	垫片 Pad	24	底座前后板 Base Front Back Plate

箱体分解图 BOX EXPLODED DIAGRAM

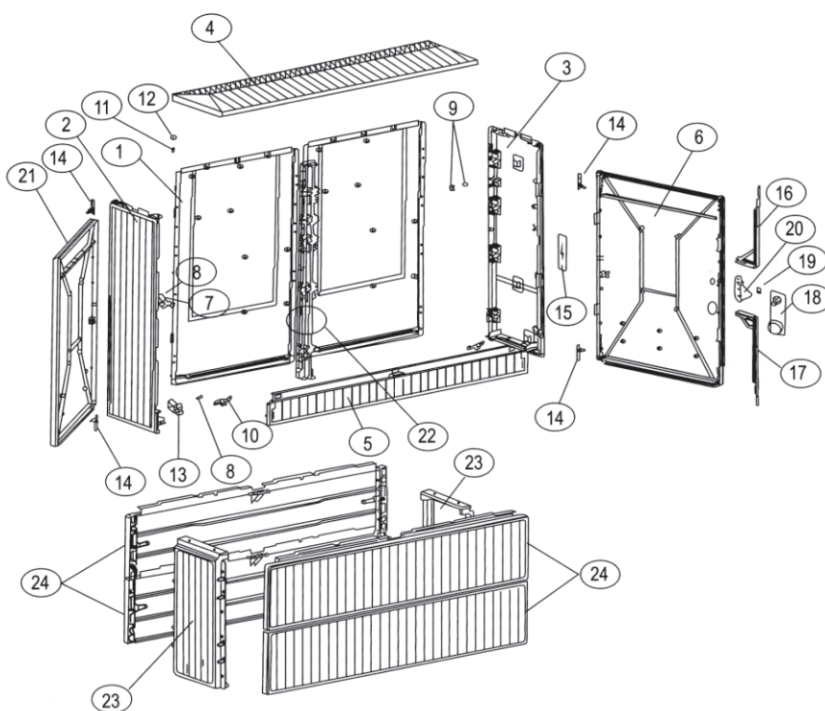

SPT

WALL MOUNTING STEEL ENCLOSURE

壁挂式铁箱









IP65
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 表面处理：热固粉末涂层、波纹饰面
- 安装板：镀锌板
- 防护等级：IP65
- 材质：箱体及前门采用冷轧钢板，安装板采用镀锌钢板
- 颜色：RAL7032
- 抗冲击等级：IK10
- Finish: Thermosetting powder coating, corrugated finish
- Mounting plate: galvanized sheet
- Protection: IP65
- Material: cold-rolled steel housing and front door, mounting plate made of galvanized steel
- Color: RAL7032
- Against mechanical impacts: IK10

接线孔 GLAND OPEN



技术参数 TECHNICAL DATA

型号 Model	宽x高x深度(mm) WxHxD(mm)	箱体和门(mm) Enclosure&Door/mm	接线孔安装板 Mounting Plate(mm)
SPT252015	250 × 200 × 150	1.2	2
SPT302515	300 × 250 × 150	1.2	2
SPT302520	300 × 250 × 200	1.2	2
SPT303015	300 × 300 × 150	1.2	2
SPT303020	300 × 300 × 200	1.2	2
SPT304020	300 × 400 × 200	1.2	2
SPT403015	400 × 300 × 150	1.2	2
SPT403020	400 × 300 × 200	1.2	2
SPT404020	400 × 400 × 200	1.2	2
SPT406025	400 × 600 × 250	1.2	2
SPT406030	400 × 600 × 300	1.2	2
SPT504015	500 × 400 × 150	1.2	2
SPT504020	500 × 400 × 200	1.2	2
SPT504025	500 × 400 × 250	1.2	2
SPT505025	500 × 500 × 250	1.2	2
SPT604015	600 × 400 × 150	1.2	2
SPT604020	600 × 400 × 200	1.2	2
SPT604025	600 × 400 × 250	1.2	2
SPT605015	600 × 500 × 150	1.2	2
SPT605020	600 × 500 × 200	1.2	2
SPT605025	600 × 500 × 250	1.2	2
SPT606025	600 × 600 × 250	1.2	2

型号 Model	宽x高x深度(mm) WxHxD(mm)	箱体和门(mm) Enclosure&Door/mm	接线孔安装板 Mounting Plate(mm)
SPT606030	600 × 600 × 300	1.2	2
SPT608030	600 × 800 × 300	1.2	2
SPT705020	700 × 500 × 200	1.2	2
SPT705025	700 × 500 × 250	1.2	2
SPT806020	800 × 600 × 200	1.2	2
SPT806025	800 × 600 × 250	1.2	2
SPT806030	800 × 600 × 300	1.2	2
SPT806040	800 × 600 × 400	1.2	2
SPT808020	800 × 800 × 200	1.2	2
SPT808030	800 × 800 × 300	1.2	2
SPT8010030	800 × 1000 × 300	1.2	2
SPT1006025	1000 × 600 × 250	1.2	2
SPT1006030	1000 × 600 × 300	1.2	2
SPT1008025	1000 × 800 × 250	1.2	2
SPT1008030	1000 × 800 × 300	1.2	2
SPT1008040	1000 × 800 × 400	1.2	2
SPT10010030	1000 × 1000 × 300	1.2	2
SPT10012030	1000 × 1200 × 300	1.2	2
SPT1208030	1200 × 800 × 300	1.2	2
SPT1208040	1200 × 800 × 400	1.2	2
SPT12010030	1200 × 1000 × 300	1.2	2

WALL MOUNTING STEEL ENCLOSURE WITH INNER DOOR

EI/EC 壁挂式带中门机箱



IP65
PROTECTION
DEGREE

壁挂式带中门机箱 Wall Mounting Steel Enclosure With Inner Door

- ◇配置：箱体、中门、安装底板锁、密封圈及安装附件
- ◇材料：冷轧钢
- ◇表面处理：热固粉末涂层、波纹饰面
- ◇颜色：RAL-7032
- ◇防水等级：IP65
- ◇Configuration: Body, Middle door, Mounting plate locks, Sealing ring and Accessories.
- ◇Material: Cold Rolled Steel.
- ◇Surface Treatment: Thermosetting powder coating, Corrugated finish
- ◇Color: RAL-7032(Grey)
- ◇Protection: IP65

内门 Inner door

中门固定在箱体的前面，内门可以通过钢圈支架调节深度，中门是由冷轧钢板制成、表面喷塑（色卡RAL-7032）。

Inner door set for fixing to the front of the enclosure The internal door can also be adjusted in depth through SDCR supports. Made of sheet steel protected with polyester epoxy grey paint to RAL-7032

平门 Solid Door	透明门 Transparent Door	宽 W(mm)	高 H(mm)	深 D(mm)
EI-43	EI-43T	400	300	200
EI-54	EI-54T	500	400	200
EI-64	EI-64T	600	400	200
EI-75	EI-75T	700	500	250
EI-86	EI-86T	800	600	300
EI-106	EI-106T	1000	600	300
EI-108	EI-108T	1000	800	300
EI-128	EI-128T	1200	800	300



IP65
PROTECTION
DEGREE

壁挂式断路器箱 Wall Mounting Enclosure With Chassis



模块化断路器配电箱架，参考BJI-系列可以在35mm之间调节间距，左右墙板和上下盖板可以从40mm到85mm进行调节。

- ◇配电箱架为镀锌钢材；
- ◇配电箱和断路器架喷漆为RAL-7032；
- ◇接线端子接地线和接零线；
- ◇电气设备为标准的设备。

Distribution chassis assembly for modular equipment, ref. BJI-... with adjustable distance between the 35mm, symmetrical profile and cover plate from 40 up to 85mm.

- ◇chassis made of galvanized steel
- ◇blank cover plate and metal frame painted to RAL-7032
- ◇terminal blocks for earth and neutral wiring
- ◇circuit identification system supplied as standard

型号 Model		排数 No.rows	Breakers QTY PCS	门尺寸 Door(mm)	
平门 Solid door	透明门 Transparent door			宽 W (mm)	高 H (mm)
EC-43	EC-43T	2	24	300	400
EC-54	EC-54T	3	48	400	500
EC-64	EC-64T	3	48	400	600
EC-66	EC-66T	3	84	600	600
EC-75	EC-75T	4	66	500	700
EC-75R	EC-75RT	4	88	500	700
EC-86	EC-86T	4	84	600	800
EC-86R	EC-86RT	4	112	600	800
EC-106	EC-106T	6	168	600	1000
EC-108	EC-108T	6	240	800	1000



KD

KNOCK DOWN CABINET WITH MOUNTING PLATE

落地式机柜



IP55
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

• 概述 GENERAL

金属柜由焊接好的顶盖、箱体和垂直的可移动螺栓组成，使得装配更稳定更灵活。内外部喷漆（色卡RAL7032）

Metal cubicle consisting of a structure of triangular closed profiles with welded top and base and vertical removable bolted profiles, giving the assembly and optimum stability and versatility. Painted internally and externally with poly-ester-epoxy resin to texturized RAL 7032.

• 基本组成部分 BASIC CUBICLE

- 1、焊接好的顶盖
- 2、焊接好的箱体
- 3、垂直立柱
- 4、可移动的雨棚

- 1、welded top
- 2、welded base
- 3、vertical uprights
- 4、removable roof

- 1、易操作
- 2、安装方式灵活多样
- 3、120℃门开
- 4、垫圈区域外4点锁定系统，几种改造和锁定可供选择

- 1、great accessibility
- 2、maximum versatility for all kind of installtions
- 3、120℃ door opening
- 4、4 point locking system outside the gasketed area. Several transformation and locking possibilities

• 标准配置 GENERAL COMPONENTS

- 1、门内侧安装加强型材
- 2、前门带加强筋
- 3、IP55防护等级
- 4、RAL7032颜色
- 5、表面处理采用聚酯环氧粉末喷涂成型成织纹状

- 1、Inside door with reinforcement profiles
- 2、Front door with reinforcement profiles
- 3、IP55 protection degree
- 4、RAL7032 color type
- 5、Painted with polyester-epoxy resin to texturized RAL-7032

技术参数 TECHNICAL DATA

型号 Model	宽 W (mm)	高 H (mm)	深 D (mm)	门数 No. of doors
KD126/40	1200	600	400	1
KD126/60	1200	600	600	1
KD126/80	1200	600	800	1
KD128/40	1200	800	400	1
KD128/60	1200	800	600	1
KD128/80	1200	800	800	1
KD146/40	1400	600	400	1
KD146/60	1400	600	600	1
KD146/80	1400	600	800	1
KD148/40	1400	800	400	1
KD148/60	1400	800	600	1
KD148/80	1400	800	800	1
KD166/60	1600	600	600	1
KD166/80	1600	600	800	1
KD168/60	1600	800	600	1
KD168/80	1600	800	800	1
KD186/40	1800	600	400	1
KD186/50	1800	600	500	1
KD186/60	1800	600	600	1
KD186/80	1800	600	800	1
KD188/40	1800	800	400	1
KD188/50	1800	800	500	1
KD188/60	1800	800	600	1
KD1810/40	1800	1000	400	1
KD1810/40/2P	1800	1000	400	2
KD1810/50	1800	1000	500	1
KD1810/50/2P	1800	1000	500	2
KD1810/60	1800	1000	600	1
KD1810/60/2P	1800	1000	600	2
KD1812/40/2P	1800	1200	400	2
KD1812/50/2P	1800	1200	500	2

型号 Model	宽 W (mm)	高 H (mm)	深 D (mm)	门数 No. of doors
KD1812/60/2P	1800	1200	600	2
KD206/40	2000	600	400	1
KD206/50	2000	600	500	1
KD206/60	2000	600	600	1
KD206/80	2000	600	800	1
KD208/40	2000	800	400	1
KD208/50	2000	800	500	1
KD208/60	2000	800	600	1
KD208/80	2000	800	800	1
KD2010/40	2000	1000	400	1
KD2010/40/2P	2000	1000	400	2
KD2010/50	2000	1000	500	1
KD2010/50/2P	2000	1000	500	2
KD2010/60	2000	1000	600	1
KD2010/60/2P	2000	1000	600	2
KD2010/80	2000	1000	800	1
KD2010/80/2P	2000	1000	800	2
KD2012/40/2P	2000	1200	400	2
KD2012/50/2P	2000	1200	500	2
KD2012/60/2P	2000	1200	600	2
KD2012/80/2P	2000	1200	800	2
KD226/60	2200	600	600	1
KD226/80	2200	600	800	1
KD228/60	2200	800	800	1
KD228/80	2200	800	800	1
KD2210/60	2200	1000	600	1
KD2210/80	2200	1000	800	1
KD2210/80/2P	2200	1000	800	2
KD2212/60/2P	2200	1200	600	2
KD2212/80/2P	2200	1200	800	2



节省75%的运输成本
Save sea freight space 75%



包装仅用5个纸箱即可
Packaged in 5 Cartons only

IP55
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

• 标准配置 FEATURE

- 1、机箱可任意拆卸、组合
- 2、运输时节省75%的空间
- 3、RAL7032颜色
- 4、IP55防护等级
- 5、IK10抗冲击能力
- 6、箱体材料：冷轧钢板

- 1、Versatile disassembly and installation possibilities
- 2、Save 75% room during the shipment
- 3、RAL7032 Color
- 4、IP55 protection degree
- 5、IK10 impact resistance
- 6、Base material: sheet steel

• 概述 GENERAL

- 1、外观（型号：F）铰链立柱、面板、锁紧元件
- 2、顶盖和箱体（型号：TCB）焊接好的顶部框架、箱体、安装板、固定支架
- 3、后门和前门（型号：FBD）前门带锁
- 4、安装板（型号：MP）
- 5、侧面板（型号：ARSP）：2片侧面板，带配件
- 1、profiles (model: F)
hinged uprights, panel mounts and locking elements assembled.
- 2、top cover and base (model: TCB)
welded top frame welded base mounting plate fixing support.
- 3、back door and front door (model: FBD)
plan door with lock plan back panel
- 4、mounting plate (model: MP)
- 5、side panels (model: ARSP): 2Pcs side panels with accessories

• 包装 PACKAGE

部分组装好的、分体包装，大大节省安装时间，也能缩小体积，减少贮藏运输成本。

The flat pack kit is supplied partly assembled, which reduces greatly the mounting time. It also saves volume substantially, making storage and transport cheaper.

• 供应 SUPPLY

- 1、焊接好的顶部、带雨棚
- 2、焊接好的箱体
- 3、带滑槽的安装面板
- 4、安装面板固定支架
- 5、垂直立柱包括铰链、锁紧元件、已经安装好的侧面固定块
- 6、面板带锁
- 7、后门

- 1、welded top. with roof
- 2、welded base
- 3、mounting plate sliding guide
- 4、mounting plate fixing supports
- 5、vertical uprights including hinges, locking elements and side fixing blocks already fitted
- 6、plain door with lock
- 7、plain back panel

• 中门 INTERNAL DOORS

直接安装在柜体里，由冷轧钢板制成、表面喷塑（色卡RAL-7032）

- 1、每25mm一档，深度可调节的
- 2、可反向安装
- 3、背部加强筋

To fit directly into knock-down cabinet. Made of sheet steel and painted with polyester-epoxy resin to texturized RAL-7032

- 1、depth adjustable every 25mm
- 2、reversible door
- 3、reinforcement profiles on the back, punched every 25mm for mounting of equipment

技术参数 TECHNICAL DATA

型号	箱体尺寸 Cabinet dimensions		
Model	高 H(mm)	宽 W(mm)	深 D(mm)
KDIG-166	1600	600	350
KDIG-168	1600	800	550
KDIG-186	1800	600	350
KDIG-188	1800	800	550
KDIG-1810	1800	1000	700
KDIG-206	2000	600	350
KDIG-208	2000	800	550
KDIG-2010	2000	1000	700
KDIG-226	2200	600	350
KDIG-228	2200	800	550
KDIG-2210	2200	1000	700

WATERPROOF DISTRIBUTION BOX 防水配电箱



SAIP ELECT.

Copyright © Saip ELEC. All Right Reserved
Deliver happiness to everyone

产品特性 PRODUCT FEATURES

- 适用于防水、防尘、防腐蚀等特殊场合。
- 符合标准: IEC60529, EN 60309, IP65
- It is applicable for special waterproof, dustproof and corrosion-proof locations.
- Executive standard: IEC60529, EN 60309, IP65

GDB系列 WATERPROOF DISTRIBUTION BOX-GDB SERIES (IP65)



GDB-06



GDB-09



GDB-12

型号	长x宽x高(mm)	断路器可安装数	材质
Model	LxWxH(mm)	No.of breakers(pcs)	Material
GDB-06	220x165x100	6 ways	聚碳PC
GDB-09	220x219x100	9ways	
GDB-12	230x273x110	12 ways	



GDB-18




GDB-24



GDB-36

型号	长x宽x高(mm)	断路器可安装数	材质
Model	LxWxH(mm)	No.of breakers(pcs)	Material
GDB-18	230x381x110	18ways	聚碳PC
GDB-24	380x273x110	24ways	
GDB-36	380x381x110	36ways	

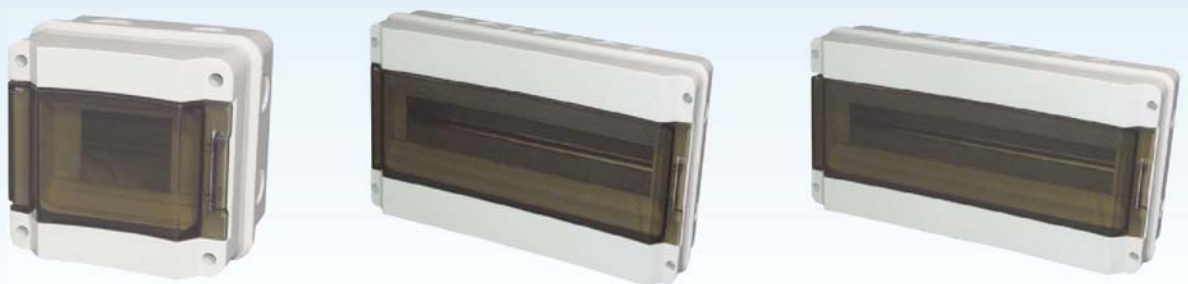SHK系列 WATERPROOF DISTRIBUTION BOX-SHK SERIES (IP65)

型号	长x宽x高(mm)	断路器可安装数
Model	LxWxH(mm)	No.of breakers(pcs)
SHK2-5	140×140×105	2-5
SHK-8	185×185×105	8
SHK-12	270×195×105	12
SHK-18	370×195×105	18

SHT系列 WATERPROOF DISTRIBUTION BOX-SHT SERIES(IP65)


型号	长x宽x高(mm)	断路器可安装数
Model	LxWxH(mm)	No.of breakers(pcs)
SHT-5	250×195×70	2-5
SHT-8	195×150×55	8
SHT-12	250×195×70	12
SHT-15	195×305×70	15
SHT-18	195×365×70	18
SHT-24	270×350×70	24

SHA系列 WATERPROOF DISTRIBUTION BOX HA SERIES(IP65)





型号 Model	长x宽x高(mm) LxWxH(mm)	断路器可安装数 No.of breakers(pcs)
SHA2-5	140×210×100	2-5
SHA-8	215×210×100	8
SHA-12	300×260×140	12
SHA-18	410×285×140	18
SHA-24	415×300×140	24

透明保护窗罩 TRANSPARENT PROTECTION WINDOW HOOD

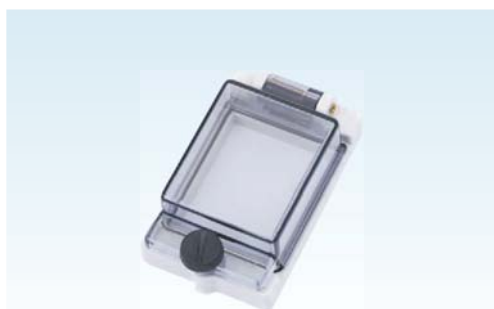 产品图片
Product photo


窗口产品外形尺寸、安装孔及孔位图

Outline dimension, mounting hole and hole position diagram of window product

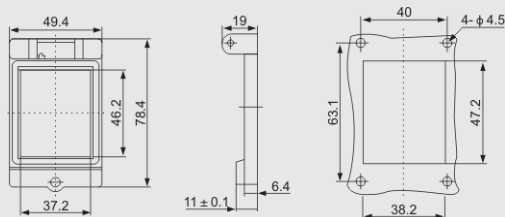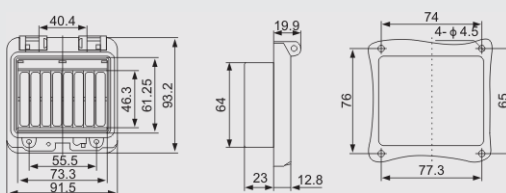
 型号Model
PWH-0402

 型号Model
PWH-0404

PWH

TRANSPARENT PROTECTION WINDOW HOOD

透明保护窗罩




产品图片
Product photo




窗口产品外形尺寸、安装孔及孔位图


Outline dimension, mounting hole and hole position diagram of window product

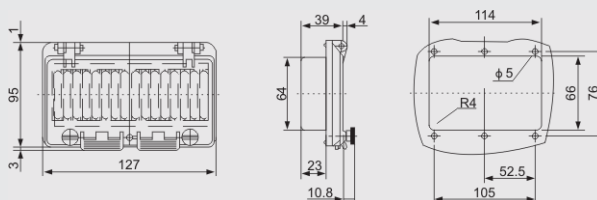


型号Model
PWH-0406

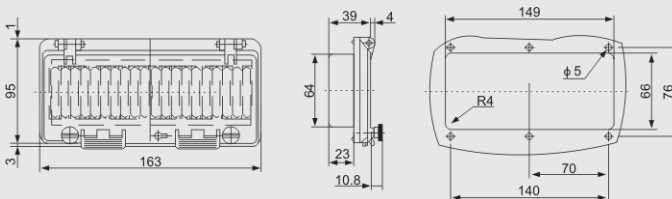


型号Model
PWH-0408

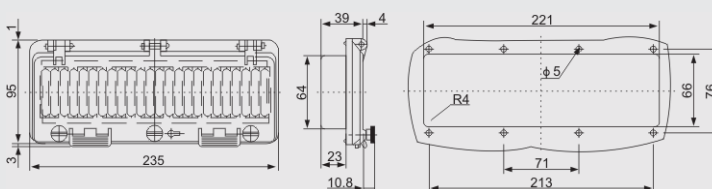


型号Model
PWH-0412

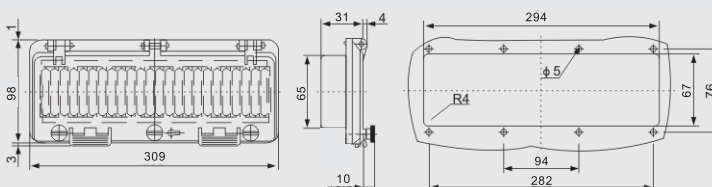


型号Model
PWH-0416




型号Model
WDB-0012

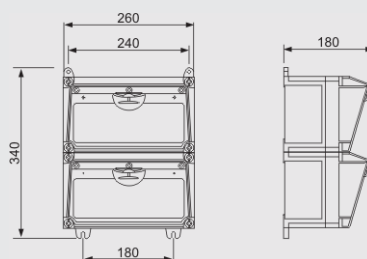

型号Model
WDB-0024




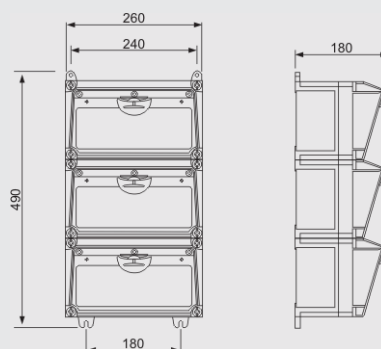


型号Model
CSD-0036

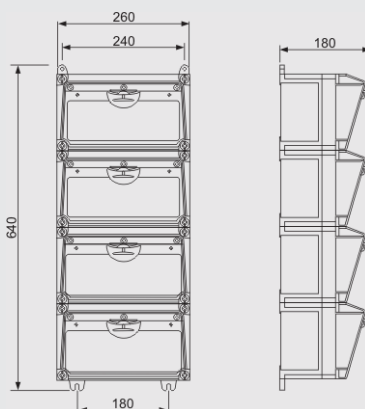

型号Model
CSD-0048

- 防水、防尘、耐腐蚀、高强度绝缘。可根据用户需求随意开孔，规格齐全，安装方便。
- 执行标准：IEC60529,EN60309,IP65
- Waterproof,dustproof,anticorrosion,highstrength insulation Any opening is available according to the customers' demands,it is very complete in specification and convenient in installation.
- Executive standard: IEC60529,EN60309,IP65

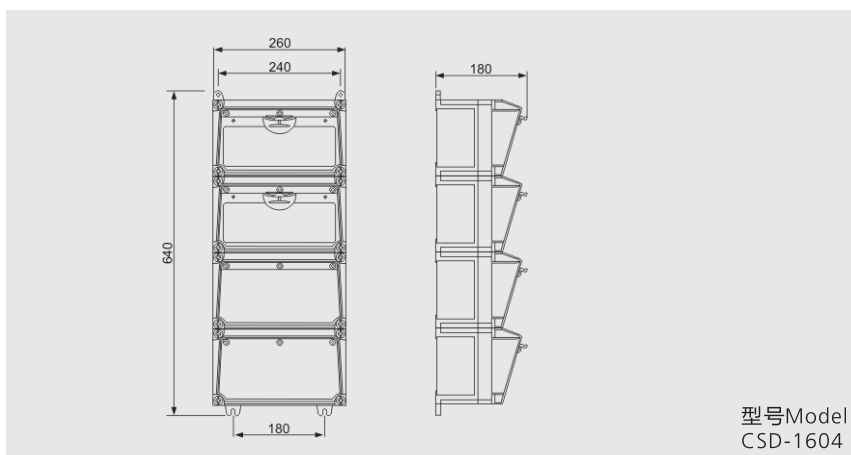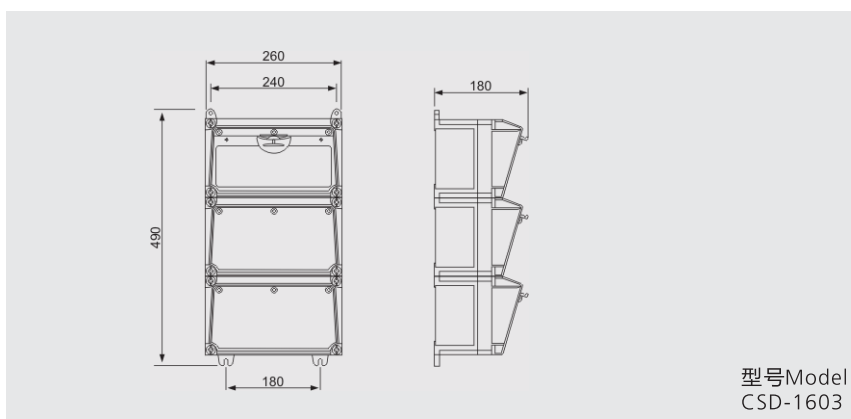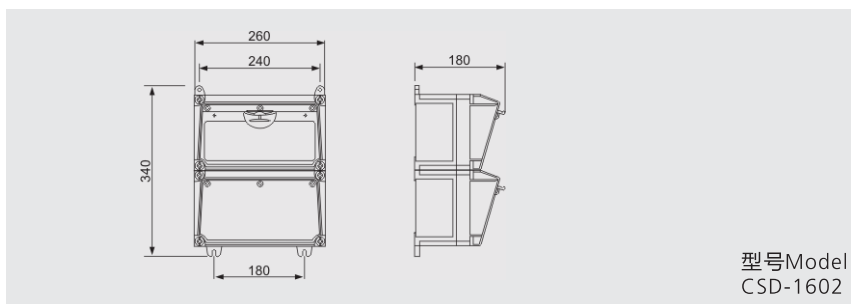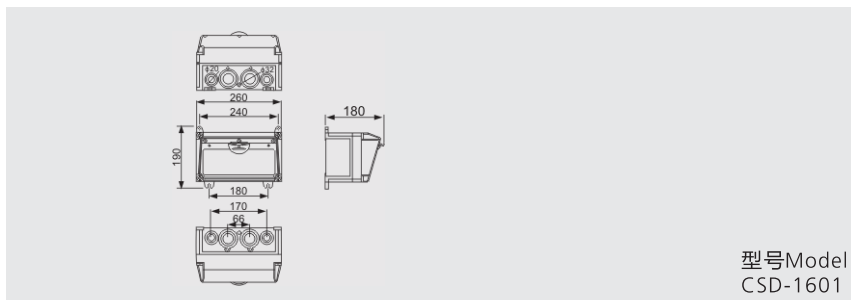

手提式插座配电箱

PORTABLE SOCKET DISTRIBUTION BOX



- 方便携带式提供灵活的电源输出。Portable, and provide flexible power supply output.
- 执行标准 Executive standard DIN VDE0623 IEC60309-2
- 防护等级 Protection degree IEC60529,IP65

型号 Model	尺寸 Dimension		
	长(mm) L	宽(mm) W	厚(mm) H
CSD-1801	260	170	140
CSD-1802	260	170	140


SPS配电箱

WATERPROOF DISTRIBUTION BOX-SPS SERIES



尺寸规格

PRODUCT FEATURES





技术参数

TECHNICAL DATA



规格	产品尺寸(axbxc)mm
Specification	Size(axbxc)mm
SPS-2ways	120x55x90
SPS-3 ways	175x85x100
SPS-4 ways	200x100x100
SPS-8 ways	200x200x100

CSD



COMBINED SOCKET DISTRIBUTION BOX 组合式插座配电箱




型号Model
CSD-1807A



型号Model
CSD-1807B



型号Model
CSD-1806

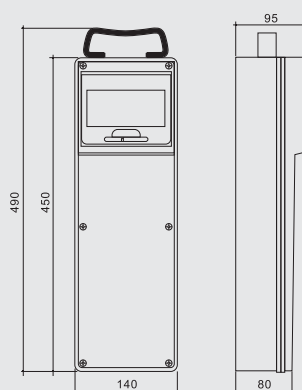

型号Model
CSD-1805



56CB3N



56E Series

产品特性 PRODUCT FEATURES

- 所有安装后箱为耐紫外线硬质RVC构造，以便配件胶合和导管引入。
- 足够的管道和电缆引入装置，足够的接线空间以方便安装。
- 所在螺纹管引入装置提供有插头。多联外壳的模块之间有铸模桥架，确保开关和插座嵌在一连续层面上。多联箱也可设置铸模间隔物，以隔离服务，并与4, 6, 8, 9以及16联外壳同标准。
- 每个外壳有许多安装点和220/10密封插头，双重绝缘安装螺钉头，确保达到IP额定保护等级。
- 铸模垫片随开关和插座模块一起供应。
- Mounting Back Boxes are moulded in UV stabilized rigid RVC to facilitate glueing of fittings for conduit entry.
- Ample conduit and cable entries are provided and there is plenty of wiring room for easy installation.
- All screwed conduit entries are provided with plugs. The multigang enclosures feature moulded bridges between modules to ensure switches and sockets sit flush on a continuous surface. Moulded dividers are also available for multigang boxes to Segregate services and are standard with 4,6,8,9, and 16 gang enclosures.
- Each enclosure has a number of mounting points and 220/10 Sealing Plugs are provided to double insulate mounting screw heads and ensure the IP rating.
- Moulded gaskets are supplied with switch and socket modules.
- 可选项Options Available
耐久性橙色在型号后加RO，例如56E2RO。
Resistant Orang - add RO to Catalog Number e.g. 56E2 becomes 56E2RO.
- 安装附件Mounting Accessories
不锈钢杆安装架装备适用于56E2,56E3以及56E4VH模块，型号56PMK。
不锈钢安装脚适用于所有外壳，目录号为56MF。
- Stainless steel pole mounting bracket kit to suit 56E2, 56E3 and 56E4VH Modules.
Catalogue No 56PMK.
Stainless steel mounting feet suit all enclosures. Catalogue Number 56MF.

技术参数 TECHNICAL DATA


型号 Model	联数 No. of Gangs	外形尺寸(H)x(W)x(D) O/A Dims (H)x(W)x(D)	安装点 Mounting Points	导管引入装置数(mm) No. of Conduit Entries(mm)	截取规定(mm) Cut out Provision(mm)
56E1	1	101x101x63	8	2x25, 1x32	1x25/32
56ES1	1	101x101x38	4	1x25, 1x20	1x20x/25
56E2	2	198x101x63	8	2x25, 1x32	1x25, 1x32
56ED2	2	198x101x100	8	2x40	1x25, 1x32
56ES2	2	198x101x38	4	1x25, 2x32	2x20/25
56E2/4EL	2	198x101x105	8	2x25, 1x32	1x25, 1x31
56E3	3	294x101x63	16	2x25, 1x32	2x25, 1x32
56E4	4	198x198x63	16	2x25, 2x32	2x25, 1x32, 1x40
56E4VH	4	391x101x63	16	2x25, 1x32	2x25, 1x32, 1x40
56E6	6	294x198x63	24	2x25, 2x32	2x25, 2x32, 2x40
56E8	8	391x198x63	28	2x25, 2x32	4x25, 2x32, 2x40
56E9	9	294x294x63	28	2x25, 2x32	4x25, 1x32, 1x40
56E16	16	391x391x63	48	2x25, 2x32	6x25, 6x32, 4x40

• 外壳盖(盖) Enclosure Lide(Covers)

外壳盖为耐紫外线聚碳酸酯构造。全部28mm高，并配有密封垫片。
Mounting enclosure lids are moulded in UV stabilised polycarbonate. All are 28mm high and supplied complete with sealing gasket.

• 可选项 Option available

- ◎ 耐久性橙色在型号后加RO，例如56L1加RO后就是56L1RO。
- ◎ 化学性质56L1可选耐久性灰色在型号后加CG，例如56L1加CG后就是56L1CG。
- ◎ Resistant Orange-add RO to Cat.NO.e.g.56L1 becomes 56L1RO.
- ◎ 56L1 available in Chemical Resistant Grey-add CG to Catalogute Number e.g.56L1 becomes 56L1CG.



56L3,56L1



型号	联数	尺寸Dimensions(mm)				
Model	No.of Gangs	A	B	C	D	E
56L1	1	95	95	28	84	84
56L2	2	192	95	28	84	181
56L3	3	288	95	28	84	277
56L4	4	192	192	28	181	181

• 接线盒 JUNCTION BOXES

56系列接线盒是专为工业环境设计。中性连接器适用于3x6mm²电缆以及密封垫片。提供25mm和32mm螺纹导管引入装置和密封插头，电缆引入装置在后面截取。

56 Series Junction Boxes are designed for industrial environments. Neutral conn-ectors for up to 3x6mm² cable and sealing gasket. 25mm and 32mm screwed conduit entries and sealing plugs are provided, as are cable entry cut outs in the back.

• 可选项 Options available

- ◎ 耐久性橙色只用于56JB1和56JB2，在型号后加RO，例如56JB1加RO后就是56JB1RO。
- ◎ Resistant Orange for 56JB1 and 56JB2 only-Add RO to Catalogute Number e.g. 56 JB1 becomes 56JB1RO.

型号	联数	外形尺寸(H)x(W)x(D)	截取(mm)
Model	No.of Gangs	O/A Dims (H)x(W)x(D)	Cut outs(mm)
56JB1	1	107x101x90	1x25x32
56JB2	2	204x101x90	1x25,1x32
56JB3	3	300x101x90	2x25,1x32
56JB4	4	201x198x90	2x25,1x32,1x40



• 可选项 Options available

- ◎ 耐久性橙色在型号后加RO，例如56CB1N加RO后就是56CB1NRO。
- ◎ Resistant Orange -Add RO to Catalogute Number e.g. 56 CB1N becomes 56CB1NRO.
- ◎ 化学性质灰色在型号后加CG，例如56CBIN加CG后就是56CBINCG。
- ◎ Chemical Grey-add CG to Catalogue Number e.g.56CBIN becomes 56CBINCG.



• 开关设备盖总成 Switchgear Cover Assemblies

- ◎ 56系列二联盖总成为耐冲击性聚碳酸酯构造，特殊设计的安装架，安装架适用于全部范围的断路器、RCDs以及MCB/RCDs组合。
- ◎ 盖适用于所有56系列外壳(最小标准深度为63mm)并提供氖灯指示器，氖灯指示器可从开关的线路或负载侧接线。

- ◎ The 56 Series Two Gang Cover Assemblies are moulded in hi-impact polycarbonate and feature a specially designed mounting bracket which will accommodate the full range of circuit breakers, RCDs and combination MCB/RCDs.
- ◎ Covers suit all 56 Series Enclosures (minimum standard depth 63mm) and are supplied with neon indicators which can be wired from either the line or load side of the switch

型号	模块类型	相数	模块宽度
Model	Modulc Type	No.of Phases	Mondule Width
56CB1N	MCB	1	1
56CB2N	MCB	2	2
56CB3N	MCB	3	3
56CB4N	MCB	4	4
56EL2N	4EL RCD	2	21/2
*56EL2	4EL RCD	2	21/2
56EL4N	4EL RCD	4	4

WATERPROOF SWITCH AND SOCKET 防水开关插座



SAIP ELECT.

Copyright © Saip ELEC. All Right Reserved
Deliver happiness to everyone

SPL

WATERPROOF SWITCH AND SOCKET 防水开关插座




IP55
PROTECTION
DEGREE

产品特性 PRODUCT FEATURES

- 塑料材质: ABS/阻燃PC
- 导电介质: 磷铜/紫铜
- 工作电流: 防水开关20A, 防水插座10A。
- 防护等级: IP55
- 插座规格: 国标、法式、德式、英式、南非、澳式等, 其它插座均可订制。
- 适用于浴室、户外、庭院、家居、洗车场、室外充电站、别墅等场所
- Plastic Material: ABS / flame retardant PC
- Conductive medium: phosphor bronze / copper
- Current: waterproof switch 20A, waterproof socket 10A.
- Protection: IP55
- Socket Specifications: GB, French, German, British, South African, Australian, etc., can be customized to other outlets.
- Suitable for bathrooms, outdoor, patio, home, car wash, outdoor charging stations, villas and other places

产品示意图 PRODUCT FEATURES

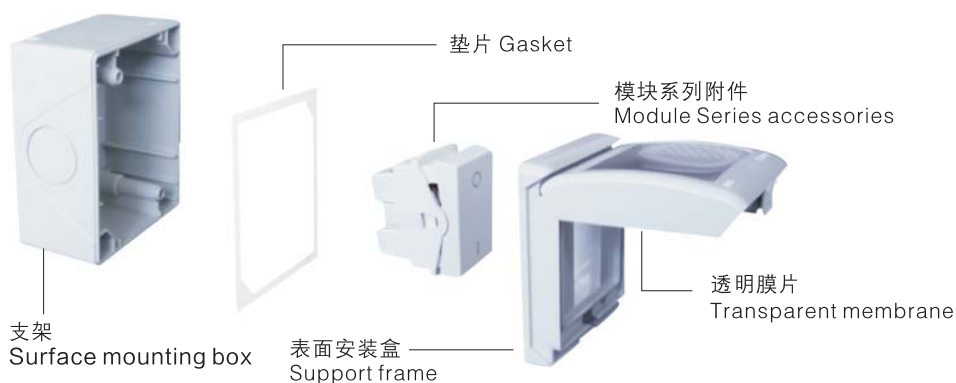



WATERPROOF SWITCH AND SOCKET

防水开关插座



技术参数 TECHNICAL DATA

型号 Model	名称 Name
SPL-1GS	一位单控开关
SPL2-1GS	一位双控开关
SPL-2GS	二位单控开关
SPL2-2GS	二位双控开关
SPL-3GS	三位单控开关
SPL2-3GS	三位双控开关
SPL-4GS	四位单控开关
SPL2-4GS	四位双控开关
SPL-6GS	六位单控开关
SPL2-6GS	六位双控开关
SPL-1GB	一位门铃
SPL-U	一位多功能插座
SPL-2U	二位多功能插座
SPL-AS	一位澳式插座
SPL-2AS	二位澳式插座
SPL-S	一位英式插座
SPL-2S	二位英式插座
SPL-SA	一位南非插座
SPL-2SA	二位南非插座
SPL-FR	一位法式插座
SPL-2FR	二位法式插座
SPL-SR	一位德式插座
SPL-2SR	二位德式插座
SPL-US	一位单控开关加多功能插座
SPL-U2S	二位单控开关加多功能插座
SPL-2US	二位单控开关加二位多功能插座
SPL-U4S	四位单控开关加多功能插座
SPL-ASS	一位单控开关加澳式插座
SPL-AS2S	二位单控开关加澳式插座
SPL-2ASS	二位单控开关加二位澳式插座
SPL-AS4S	四位单控开关加澳式插座
SPL-SS	一位单控开关加英式插座


型号 Model	名称 Name
SPL2-SS	一位双控开关加英式插座
SPL-SAS	一位单控开关加南非插座
SPL2-SAS	一位双控开关加南非插座
SPL-FRS	一位单控开关加法式插座
SPL2-FRS	一位双控开关加法式插座
SPL-SRS	一位单控开关加德式插座
SPL2-SRS	一位双控开关加德式插座
SPL-S2S	二位单控开关加英式插座
SPL2-S2S	二位双控开关加英式插座
SPL-SA2S	二位单控开关加南非插座
SPL2-SA2S	二位双控开关加南非插座
SPL-FR2S	二位单控开关加法式插座
SPL2-FR2S	二位双控开关加法式插座
SPL-SR2S	二位单控开关加德式插座
SPL2-SR2S	二位双控开关加德式插座
SPL-2SS	二位单控开关加二位英式插座
SPL2-2SS	二位双控开关加二位英式插座
SPL-2SAS	二位单控开关加二位南非插座
SPL2-2SAS	二位双控开关加二位南非插座
SPL-2FRS	二位单控开关加二位法式插座
SPL2-2FRS	二位双控开关加二位法式插座
SPL-2SRS	二位单控开关加二位德式插座
SPL2-2SRS	二位双控开关加二位德式插座
SPL-S4S	四位单控开关加英式插座
SPL2-S4S	四位双控开关加英式插座
SPL-SA4S	四位单控开关加南非插座
SPL2-SA4S	四位双控开关加南非插座
SPL-FR4S	四位单控开关加法式插座
SPL2-FR4S	四位双控开关加法式插座
SPL-SR4S	四位单控开关加德式插座
SPL2-SR4S	四位双控开关加德式插座

AN-TSM暗装系列 DISTRIBUTION BOX AN-TSM SERIES(FLUSH)



铁底座 Iron Base Dimension		塑料底座 Plastics Base Dimension	
型号 Model	长x宽x高LxWxH(mm)	型号 Model	长x宽x高LxWxH(mm)
AN-TSM-2	99×140×60	AN-TSM-2ways	90×140×60
AN-TSM-4	107×190×85	AN-TSM-4ways	112×200×66
AN-TSM-6	143×190×85	AN-TSM-6ways	150×200×66
AN-TSM-8	179×190×85	AN-TSM-8ways	184×200×66
AN-TSM-10	222×200×85	AN-TSM-10ways	222×200×66
AN-TSM-12	250×190×85	AN-TSM-12ways	256×200×66
AN-TSM-15	306×190×85	AN-TSM-15ways	310×200×66
AN-TSM-18	361×217×85	AN-TSM-18ways	365×220×76
AN-TSM-24	252×310×85	AN-TSM-24ways	257×310×76
AN-TSM-36	290×475×85	AN-TSM-36ways	293×455×76
AN-TSM-45	473×326×76	AN-TSM-45ways	473×326×76

MIN-TSM明装系列 DISTRIBUTION BOX MIN-TSM SERIES(SURFACE)

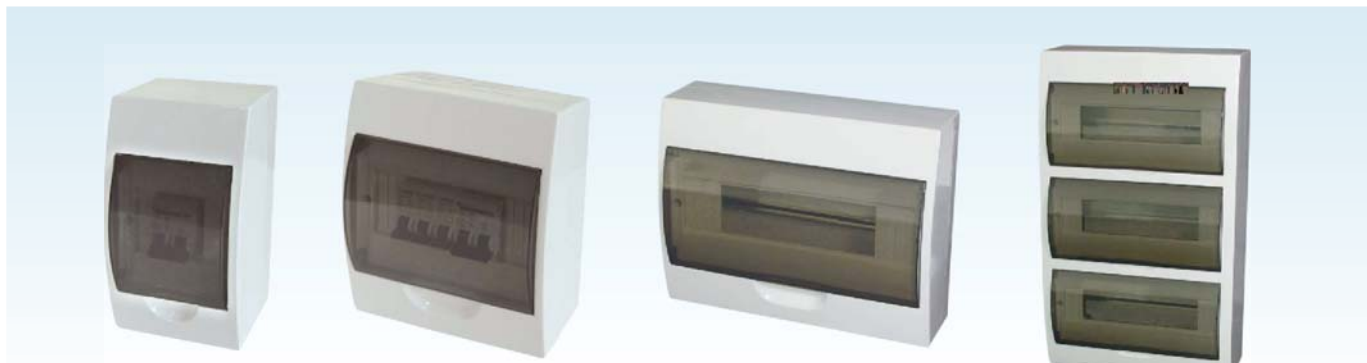

型号 Model	长(mm) L(mm)	宽(mm) W(mm)	高(mm) H(mm)
MIN-TSM-2	90	140	60
MIN-TSM-4	112	210	100
MIN-TSM-6	148	210	100
MIN-TSM-8	184	210	100
MIN-TSM-10	222	210	100
MIN-TSM-12	256	210	100
MIN-TSM-15	312	210	100
MIN-TSM-18	364	222	100
MIN-TSM-24	270	325	100
MIN-TSM-36	305	473	100
MIN-TSM-45	473	326	100

SAG系列 WATERPROOF DISTRIBUTION BOX-SAG SERIES




型号	长(mm)	宽(mm)	高(mm)
Model	L(mm)	W(mm)	H(mm)
SAG-A-1	34×130×60	SAG-B-1ways	34×130×60
SAG-A-2	52×130×60	SAG-B-2ways	52×130×60
SAG-A-4	87×130×60	SAG-B-4ways	87×130×60
SAG-A-6	125×160×60	SAG-B-6ways	125×160×60
SAG-A-8	160×160×60	SAG-B-8ways	160×160×60
SAG-A-12	260×160×60		
SAG-A-18	365×160×60		
SAG-A-24	360×250×105		

SAG-C系列 WATERPROOF DISTRIBUTION BOX-SAG-C SERIES



型号	长(mm)	宽(mm)	高(mm)
Model	L(mm)	W(mm)	H(mm)
SAG-C-2ways	45	130	80
SAG-C-4ways	90	130	80
SAG-C-6ways	135	130	80
SAG-C-8ways	180	130	80
SAG-C-12ways	135	130	80
SAG-C-18ways	180	130	80
SAG-C-24ways	340	250	95
SAG-C-36ways	465	250	95

DP1系列模数化配电箱 DP1 SERIES MODULIZATION DISTRIBUTION BOX

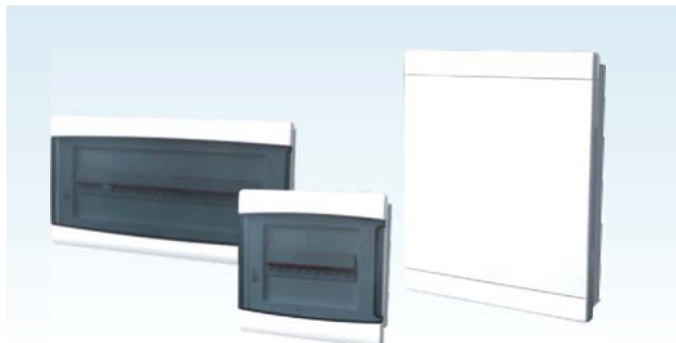


DP1系列模数化配电箱是赛普电气最新开发的一款引领潮流的概念产品，它具有豪华气质、线条流畅柔美、空间宽敞、横向开启方式，工艺精湛规格齐全，材料绿色环保阻燃耐用，为公寓、别墅等中高端民用住宅用户所青睐，是酒店、写字楼等公共建筑的安全保障，是房地产开发商、工厂、终端用户的最佳选择！

DP1 Series modular terminal box is one of many products in the unique luxury qualities, smooth lines and soft, spacious, functional super Green material, durable, modular terminal box may well be the most cutting-edge field of high-end products.

暗装 / 型号 Flush / Model			明装 / 型号 Surface / Model			宽x高x深度(mm) W × H × D(mm)
白色门 White Door	透明门 Clear Door	宽x高x深度(mm) W × H × D(mm)	白色门 White Door	透明门 Clear Door	宽x高x深度(mm) W × H × D(mm)	
DP1-9AW	DP1-9AT	224×220×80	DP1-9MW	DP1-9MT	264×255×80	264×255×100
DP1-12AW	DP1-12AT	288×220×80	DP1-12MW	DP1-12MT	315×250×80	315×250×100
DP1-16AW	DP1-16AT	360×220×80	DP1-16MW	DP1-16MT	390×250×80	390×255×100
DP1-20AW	DP1-20AT	435×220×80	DP1-20MW	DP1-20MT	460×250×80	460×250×100
DP1-24AW	DP1-24AT	290×354×85	DP1-24MW	DP1-24MT	318×384×85	318×384×105
DP1-32AW	DP1-32AT	360×470×85	DP1-32MW	DP1-32MT	390×500×85	390×500×105
DP1-40AW	DP1-40AT	430×470×85	DP1-40MW	DP1-40MT	460×500×85	460×500×105
DP1-48AW	DP1-48AT	360×720×85	DP1-48MW	DP1-48MT	390×750×85	390×750×105
DP1-60AW	DP1-60AT	435×720×85	DP1-60MW	DP1-60MT	460×750×85	460×750×105

DP2系列模数化配电箱 DP2 SERIES MODULIZATION DISTRIBUTION BOX

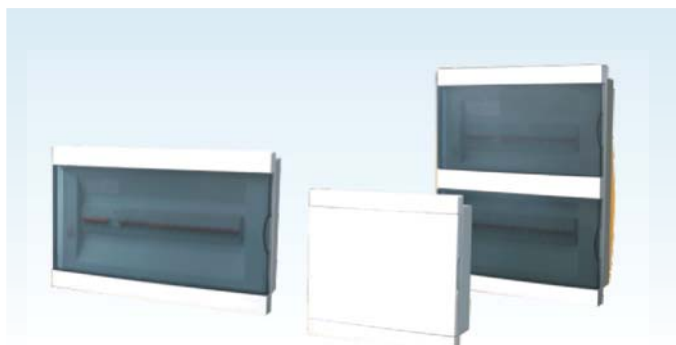

DP2系列模数化配电箱是赛普电气针对客户的不同审美观，在原有的基础上增加了一款全新开关门磨砂面产品。它外观简洁精致，细节完美，规格齐全，是一款经典之作。是公寓、别墅、酒店、写字楼、房地产开发商、工厂工程等终端用户的最佳选择。

And installation of ultra-thin flat panel wall tightly integrated, the more the overall appearance, mounting bracket for use in the use of different environments and installation, extensive applications, economical and practical.

暗装 / 型号 Flush / Model			明装 / 型号 Surface / Model			宽x高x深度(mm) W × H × D(mm)
白色门 White Door	透明门 Clear Door	宽x高x深度(mm) W × H × D(mm)	白色门 White Door	透明门 Clear Door	宽x高x深度(mm) W × H × D(mm)	
DP2-8AW	DP2-8AT	239×200×80	DP2-8MW	DP2-8MT	250×230×80	250×230×90
DP2-12AW	DP2-12AT	305×220×80	DP2-12MW	DP2-12MT	318×250×80	318×250×90
DP2-16AW	DP2-16AT	375×220×80	DP2-16MW	DP2-16MT	390×250×80	390×250×90
DP2-20AW	DP2-20AT	450×220×80	DP2-20MW	DP2-20MT	460×250×80	460×250×90
DP2-24AW	DP2-24AT	305×370×85	DP2-24MW	DP2-24MT	318×400×85	318×400×95
DP2-32AW	DP2-32AT	375×470×85	DP2-32MW	DP2-32MT	390×500×85	390×500×95
DP2-40AW	DP2-40AT	445×470×85	DP2-40MW	DP2-40MT	460×500×85	460×500×95
DP2-48AW	DP2-48AT	375×720×85	DP2-48MW	DP2-48MT	390×750×85	390×750×95
DP2-60AW	DP2-60AT	450×720×85	DP2-60MW	DP2-60MT	460×750×85	460×750×95

DP4系列模数化配电箱 DP4 SERIES MODULIZATION DISTRIBUTION BOX




DP4系列模数化配电箱安全防护等级特强，面板、底箱均采用优质冷轧钢板；产品向上开启方式，设计典雅大方，制作工艺精湛，内部接线空间宽敞，使用简易。是当今家居终端配电箱的理想选择。

Pok Xing Series modular terminal box, an exceptionally strong level of security protection, panel, bottom boxes are made of high quality cold rolling steel sheet; product design, elegant, production of superb, spacious interior wiring space, ease of use. Terminal distribution box today's home ideal.

暗装 / 型号 Flush / Model		明装 / 型号 Surface / Model		宽x高x深度(mm) W × H × D(mm)
白色门 White Door	宽x高x深度(mm) W × H × D(mm)	白色门 White Door	宽x高x深度(mm) W × H × D(mm)	
DP4-8AW	239×200×80	DP4-8MW	250×230×80	250×230×90
DP4-12AW	290×220×80	DP4-12MW	318×250×80	318×250×90
DP4-16AW	360×220×80	DP4-16MW	390×250×80	390×250×90
DP4-20AW	450×220×80	DP4-20MW	450×225×80	460×250×90
DP4-24AW	305×370×85	DP4-24MW	318×400×85	318×400×95
DP4-32AW	375×470×85	DP4-32MW	390×500×85	390×500×95
DP4-40AW	445×470×85	DP4-40MW	460×500×85	460×500×95
DP4-48AW	375×720×85	DP4-48MW	390×750×85	390×750×95
DP4-60AW	450×720×85	DP4-60MW	460×750×85	460×750×95

DP5系列模数化配电箱 DP5 SERIES MODULIZATION DISTRIBUTION BOX

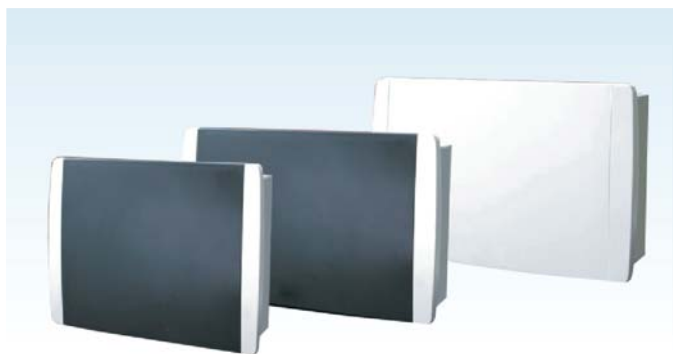

DP5系列模数化配电箱是赛普电气针对中高端商业及民用建筑市场开发的一款全新的产品。它独具超薄、豪华、时尚，轮廓清晰，线条优雅明朗，超大内部空间，工艺精细，规格齐全。是公寓、别墅、酒店、写字楼、房地产开发商、工厂等终端用户的最佳选择。

Smooth lines, you can flip open the panel up, the design embodies the concept of human nature, according to different internal and external structure of the environment arbitrary regulation, after all, a model of product distribution, box.

暗装 / 型号 Flush / Model			明装 / 型号 Surface / Model			宽x高x深度(mm) W × H × D(mm)
白色门 White Door	透明门 Clear Door	宽x高x深度(mm) W × H × D(mm)	白色门 White Door	透明门 Clear Door	宽x高x深度(mm) W × H × D(mm)	
DP5-8AW	DP5-8AT	239×220×80	DP5-8MW	DP5-8MT	260×250×80	256×230×100
DP5-12AW	DP5-12AT	305×220×80	DP5-12MW	DP5-12MT	320×255×80	325×250×100
DP5-16AW	DP5-16AT	375×220×80	DP5-16MW	DP5-16MT	392×255×80	400×250×100
DP5-20AW	DP5-20AT	450×220×80	DP5-20MW	DP5-20MT	465×255×80	470×250×100
DP5-24AW	DP5-24AT	290×354×85	DP5-24MW	DP5-24MT	318×384×85	318×384×105
DP5-48AW	DP5-48AT	360×720×85	DP5-48MW	DP5-48MT	390×750×85	390×750×105

DP7系列模数化配电箱 DP7 SERIES MODULIZATION DISTRIBUTION BOX



DP7系列模数化配电箱是赛普电气在原有的基础上优化细节，在材料及模具工艺上的革新使产品更加耐用，安装更加简易，美观，工艺精细，规格齐全，是当今家居终端箱的理想选择。

Smooth lines, you can flip open the panel up, the design embodies the concept of human nature, according to different internal and external structure of the environment arbitrary regulation, after all, a model of product distribution box.

暗装 / 型号 Flush / Model		明装 / 型号 Surface / Model	
白色门 White Door	宽x高x深度(mm) W×H×D(mm)	白色门 White Door	宽x高x深度(mm) W×H×D(mm)
DP7-4AT	140×140×80	DP7-4MT	170×170×80
DP7-6AT	170×180×90	DP7-6MT	200×210×90
DP7-8AT	200×200×90	DP7-8MT	230×230×90
DP7-10AT	250×250×90	DP7-10MT	280×280×90
DP7-12AT	290×250×90	DP7-12MT	320×280×90
DP7-15AT	340×250×90	DP7-15MT	370×280×90
DP7-18AT	400×250×90	DP7-18MT	430×280×90
DP7-20AT	430×250×90	DP7-20MT	460×280×90
DP7-24AT	290×430×90	DP7-24MT	320×460×90
DP7-30AT	340×430×90	DP7-30MT	370×460×90
DP7-36AT	400×430×90	DP7-36MT	430×600×90
DP7-45AT	340×600×90	DP7-45MT	370×630×90
DP7-60AT	430×600×90	DP7-60MT	460×630×90

AN-LGD/MIN-ABC系列 DISTRIBUTION BOX-AN-LGD/MIN-LGD SERIES



AN-LGD暗装系列

ABC系列

型号 Model	长(mm) L(mm)	宽(mm) W(mm)	高(mm) H(mm)
AN-LGD-3ways	115×138×75	ABC500	218×145×95
AN-LGD-6ways	180×155×90	ABC700	252×174×95
AN-LGD-8ways	190×220×90	ABC900	315×175×95
AN-LGD-12ways	298×198×100	ABC1019	370×180×85
AN-LGD-18ways	415×212×90	ABC1024	370×250×85
AN-LGD-24ways	300×323×90		

**SG10
SG15**

PORTABLE POWER OUTLET 便携式插座



产品特性 PRODUCT FEATURES

型号: SG10 MODEL:SG10

- 双插电源插座: 10A
- 小型断路器/漏电断路器复合型两插16A
- 1.5米导线+插头
- SG10带安全罩的电源插座
- 10A, 4组便携式电源插座, 带漏电保护功能和导线, 防水等级IP33

- Double Power Outlet 10A
- MCB/RCD Combination 2poles 16A
- 1.5 metre Lead and Plug
- SG10Safety Guard Power Outlet
- 10amp, 4 gang portable power outlet with RCD and power lead. IP33 rated



产品特性 PRODUCT FEATURES

型号: SG15 MODEL:SG15

- 单插电源插座: 15A
- 小型断路器/漏电断路器复合型两插20A
- 1.5米导线+插头
- SG15带安全罩的电源插座
- 15A, 2组便携式电源插座, 带漏电保护功能和导线, 防水等级IP33

- Single Power Outlet 15A
- MCB/RCD Combination 2poles 20A
- 1.5 metre Lead and Plug
- Sg15 Safety Guard 4 gang power outlet
- 15 amp Safety Guard 2 gang power outlet, portable with RCD and power lead. IP33 rated

A06

MULTIFUNCTION SOCKET ADAPTER

多功能插座转换器



内部结构Interior structure



多功能插头Multi-function plug




双USB设计 Double USB design

产品特性 PRODUCT FEATURES

- 集合各国插头规格尺寸，解决了插头与插孔的国标间转换问题，外观时尚、体积小巧，居家旅行，出行必备。
 - 材质：外壳阻燃ABS新料。
 - 兼容性：适用于全球180多个国家。
 - 产品已通过欧洲"CE"等多项国际认证。
 - 产品适用于手机、笔记本电脑、数码相机、平板、ipad等
- States set the plug size, solve the national standard plug and socket between the conversion, stylish, compact, home travel, travel essential.
 - Material: ABS flame retardant housing new material.
 - Compatibility: Suitable for over 180 countries around the world.
 - The product has passed the European "CE" and many other international certification.
 - Products for mobile phones, laptop computers, digital cameras, flat, ipad etc.

欧标 European Type	德国、丹麦、芬兰、法国、挪威、荷兰、波兰、葡萄牙、韩国、奥地利、比利时、意大利、巴西、保加利亚、喀麦隆、克罗地亚、埃及、希腊、匈牙利、瑞士等 Germany, Denmark, Finland, France, Norway, Holland, Poland, Portugal, South Korea, Austria, Italy, Brazil, Bulgaria, Cameroon, Croatia, Egypt, Greece, Hungary, Switzerland, etc.
美标 AMERICAN Type	美国、加拿大、日本、台湾、哥伦比亚、墨西哥、巴拿马、菲律宾、委内瑞拉、越南、哥斯达黎加、关岛、洪都拉斯、牙买加等 USA, Canada, Japan, Taiwan, Columbia, Mexico, Barbados, Philippines, Venezuela, Vietnam, Costa Rica, Guam, Honduras, Jamaica, etc.
英标 British Type	英国、香港、印度、巴基斯坦、新加坡、马来西亚、印度尼西亚、马尔代夫、卡塔尔、加纳、尼日利亚、坦桑尼亚、多米尼克、不丹等 Britain, Hongkong, India, Pakistan, Singapore, Malaysia, Indonesia, Maldives, Qatar, Ghana, Nigeria, Tanzania, Dominica, Bhutan, etc.
澳标 Australian Type	中国大陆、澳大利亚、新西兰、阿根廷、斐济、基里巴斯、密克罗尼西亚、马绍尔群岛、瓦努阿图、图瓦卢等 Mainland China, Australia, New Zealand, Argentina, Fiji, Kiribati, Peru, etc.

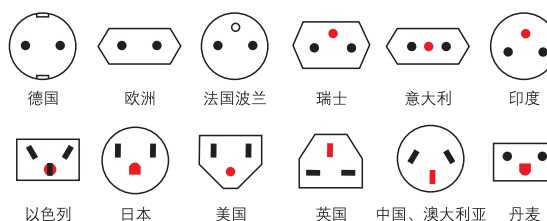

技术参数 TECHNICAL DATA

型号 Model	尺寸(mm) Size:LxWxH(mm)	USB输出 USB Output(mm)	额定电压 Rated voltage	额定电流 Rated current	颜色 Colour
SP-A06W	75X50X40	1A	100-240V	6A	白色 White
SP-A06B	75X50X40	1A	100-240V	6A	黑色 Black
SP-A06P	75X50X40	1A	100-240V	6A	粉色 Pink
SP-2A06W	75X50X40	2.1A	100-240V	6A	白色 White
SP-2A06B	75X50X40	2.1A	100-240V	6A	黑色 Black
SP-2A06P	75X50X40	2.1A	100-240V	6A	粉色 Pink

CABLE GLAND

防水接头



SAIP ELECT.


Copyright © Saip ELEC. All Right Reserved
Deliver happiness to everyone




产品特性 PRODUCT FEATURES

- 用于户外电缆连接需要防水的地方，如路灯、桥梁隧道灯、园林照明、大型电子显示屏等。
- 符合标准：IEC60529 IP68
EN 60309
- 颜色可选：灰/黑色
- For outdoor cable connections where require the waterproof function, such as street lamps, bridge and tunnel lights, garden illumination, large electronic displays, etc.
- Executive standard: IEC60529 IP68
EN 60309
- Colors Available: Grey/Black


技术参数 TECHNICAL DATA

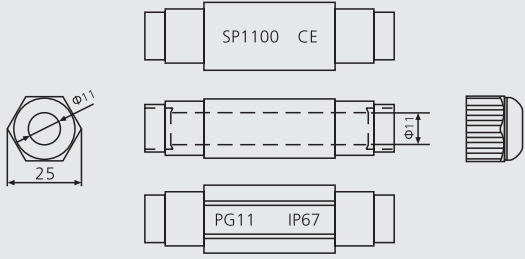产品图片 Product Image	线路图 Wiring diagram	2芯护套线规格 2 core sheathed cable specifications	
 PG11 电缆直径 $\Phi 5-10\text{mm}$ PG11 Cable Diameter $\Phi 5-10\text{mm}$		规格 Specification (mm ²)	电缆外径 Cable diameter (mm)
		2x0.2	4.2
		2x0.3	5.0
		2x0.5	5.8
		2x0.75	6.0
		2x1	6.8
		2x1.5	7.8
		2x2.5	9.6
		2x4	11.5
		2x6	13

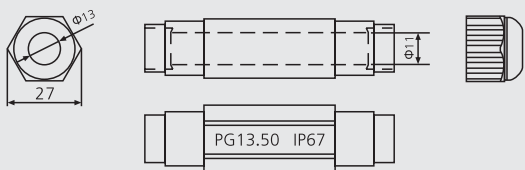产品图片 Product Image	线路图 Wiring diagram	3芯护套线规格 3 core sheathed cable specifications	
 PG13.5 电缆直径 $\Phi 6-12\text{mm}$ PG13.5 Cable Diameter $\Phi 6-12\text{mm}$		规格 Specification (mm ²)	电缆外径 Cable diameter (mm)
		3x0.2	4.4
		3x0.3	5.3
		3x0.5	6.2
		3x0.75	6.4
		3x1	7.15
		3x1.5	8.45
		3x2.5	10.4
		3x4	12.3
		3x6	13.5



外形尺寸 DIMENSIONS



RoHs
CE

IP68防尘、防水测试合格

产品特性 PRODUCT FEATURES

- 材料: 尼龙PA(UL File NO:E 240925)
 - 密封件: 丁腈橡胶 (NBR)
 - 防护等级: IP68
 - 环境温度: 静态-40℃至100℃, 短时至120℃, 动态-20℃至80℃, 短时至100℃
 - 供货颜色: 灰色 RAL7035
黑色 RAL9005
其它颜色请询问
- Material:Nylon
 - Rubber gasket:Nitrile rubber(NBR)
 - Protection Grade: IP68
 - Ambient temperature:static~40℃ to 100℃,for short time 120℃,Dynamic -20℃ to 80℃,For short time 100℃
 - Color: Gray RAL7035
Black RAL9005
others color available

技术参数 TECHNICAL DATA

型号	Φk	GL	H	Φ	AG	订货号 Art.No.	
Model	mm	mm	mm	mm	mm	灰色 GRAY RAL7035	黑色 Black RAL9005
PG7	3-6.5	8	22	16	12	MP0708060	MP0708061
PG7	2-5	8	22	16	12	MP0708050	MP0708051
PG9	4-8	8	26	19	16	MP0908080	MP0908081
PG9	2-6	8	26	19	16	MP0908060	MP0908061
PG11	5-10	8	27	22	18	MP1108100	MP1108101
PG11	3-7	8	27	22	18	MP1108070	MP1108071
PG13.5	6-12	9	28	24	20	MP1309120	MP1309121
PG13.5	5-9	9	28	24	20	MP1309090	MP1309091
PG16	10-14	10	30	27	22	MP1610140	MP1610141
PG16	7-12	10	30	27	22	MP1610120	MP1610121
PG19	12-15	10	30	27/28	24	MP1910150	MP1910151
PG19	10-12	10	30	27/28	25	MP1910120	MP1910121
PG21	13-18	10	35	33	28	MP2110180	MP2110181
PG21	9-16	10	35	33	28	MP2110160	MP2110161
PG25	16-21	11	34	35/36	30	MP2511210	MP2511211
PG25	13-18	11	34	35/36	30	MP2511180	MP2511181
PG29	18-25	12	40	41/42	37	MP2912250	MP2912251
PG29	13-20	12	40	41/42	37	MP2912200	MP2912201
PG36	22-32	14	48	52/53	47	MP3614320	MP3614321
PG36	20-26	14	48	52/53	47	MP3614260	MP3614261
PG42	32-38	14	49	60/61	54	MP4214380	MP4214381
PG42	25-31	14	49	60/61	54	MP4214310	MP4214311
PG48	37-44	14	50	64/65	59	MP4814440	MP4814441
PG48	29-35	14	50	64/65	59	MP4814350	MP4814351
PG63	42-50	27	60	72	70	MP6327500	MP6327501


M 型

M TYPE CABLE GLAND

M型防水接头



外形尺寸 DIMENSIONS



RoHs



IP68防尘、防水测试合格

产品特性 PRODUCT FEATURES

- 材料：尼龙PA(UL File NO:E 240925)
- 密封件：丁腈橡胶 (NBR)
- 防护等级：IP68
- 环境温度：静态-40℃至100℃，短时至120℃，动态-20℃至80℃，短时至100℃
- 供货颜色：灰色 RAL7035
黑色 RAL9005
其它颜色请询问


- Material:Nylon
- Rubber gasket:Nitrile rubber(NBR)
- Protection Grade: IP68
- Ambient temperature:static~40℃ to 100℃,for short time 120℃,Dynamic -20℃ to 80℃,For short time 100℃
- Color: Gray RAL7035
Black RAL9005
others color available

技术参数 TECHNICAL DATA

型号	φk	GL	H	ψ	AG	订货号 Art.No.	
Model	mm	mm	mm	mm	mm	灰色 GRAY RAL7035	黑色 Black RAL9005
M12 × 1.5	3-6.5	8	22	16	12	M1208060	M1208061
M12 × 1.5	2-5	8	22	16	12	M1208050	M1208051
M14 × 1.5	4-8	8	26	19	14	M1408080	M1408081
M14 × 1.5	2-6	8	26	19	14	M1408060	M1408061
M16 × 1.5	4-8	8	26	19	16	M1608080	M1608081
M16 × 1.5	2-6	8	26	19	16	M1608060	M1608061
M16 × 1.5	5-10	8	27	22	16	M1608100	M1608101
M16 × 1.5	3-7	8	27	22	16	M1608070	M1608071
M18 × 1.5	5-10	8	27	22	18	M1808100	M1808101
M18 × 1.5	3-7	8	27	22	18	M1808070	M1808071
M20 × 1.5	6-12	9	28	24	20	M2009120	M2009121
M20 × 1.5	5-9	9	28	24	20	M2009090	M2009091
M20 × 1.5	10-14	10	30	27	20	M2010140	M2010141
M20 × 1.5	7-12	10	30	27	20	M2010120	M2010121
M22 × 1.5	10-14	10	30	27	22	M2210140	M2210141
M22 × 1.5	7-12	10	30	27	22	M2210120	M2210121
M24 × 1.5	12-15	10	30	27	24	M2410150	M2410151
M24 × 1.5	10-12	10	30	27	24	M2410120	M2410121
M25 × 1.5	13-18	10	35	33	25	M2510180	M2510181
M25 × 1.5	9-16	10	35	33	25	M2510160	M2510161
M27 × 1.5	13-18	10	35	33	27	M2710180	M2710181
M27 × 1.5	9-16	10	35	33	27	M2710160	M2710161
M30 × 1.5	12-21	11	34	35/36	30	M3011210	M3011211
M30 × 1.5	7-15	11	34	35/36	30	M3011150	M3011151
M32 × 1.5	12-21	11	34	36/37	32	M3211210	M3211211
M32 × 1.5	7-15	11	34	36/37	32	M3211150	M3211151
M32 × 1.5	18-25	12	40	41/42	32	M3212250	M3212251
M32 × 1.5	13-20	12	40	41/42	32	M3212200	M3212201
M36 × 1.5	18-25	12	40	41/42	36	M3612250	M3612251
M36 × 1.5	13-20	12	40	41/42	36	M3612200	M3612201
M40 × 1.5	22-32	14	48	52/53	40	M4014320	M4014321
M40 × 1.5	20-26	14	48	52/53	40	M4014260	M4014261
M50 × 1.5	32-38	14	49	60/61	50	M5014380	M5014381
M50 × 1.5	25-31	14	49	60/61	50	M5014310	M5014311
M63 × 1.5	37-44	14	50	67	63	M6314440	M6314441
M63 × 1.5	29-35	14	50	67	63	M6314350	M6314351



外形尺寸 DIMENSIONS



RoHs
CE

IP68防尘、防水测试合格

产品特性 PRODUCT FEATURES


- 材料: 尼龙PA(UL File NO:E 240925)
 - 密封件: 丁腈橡胶 (NBR)
 - 防护等级: IP68
 - 环境温度: 静态-40℃至100℃, 短时至120℃, 动态-20℃至80℃, 短时至100℃
 - 供货颜色: 灰色 RAL7035
黑色 RAL9005
其它颜色请问
- Material:Nylon
 - Rubber gasket:Nitrile rubber(NBR)
 - Protection Grade: IP68
 - Ambient temperature:static~40℃ to 100℃,for short time 120℃,Dynamic -20℃ to 80℃,For short time 100℃
 - Color: Gray RAL7035
Black RAL9005
others color available

技术参数 TECHNICAL DATA

型号	规格	GL	H	Φ	AG	订货号 Art.No.	
Model	mm	mm	mm	mm	mm	灰色 GRAY RAL7035	黑色 Black RAL9005
PGL7	3-6.5	15	22	15/16	12.5	P0715060	P0715061
PGL7	2-5	15	22	15/16	12.5	P0715050	P0715051
PGL9	4-8	15	26	19	15.2	P0915080	P0915081
PGL9	2-6	15	26	19	15.2	P0915060	P0915061
PGL11	5-10	15	27	22	18.6	P1115100	P1115101
PGL11	3-7	15	27	22	18.6	P1115070	P1115071
PGL13.5	6-12	15	28	24	20.4	P1315120	P1315121
PGL13.5	5-9	15	28	24	20.4	P1315090	P1315091
PGL16	10-14	15	30	27	22.5	P1615140	P1615141
PGL16	7-12	15	30	27	22.5	P1615120	P1615121
PGL21	13-18	15	35	33	28.3	P2115180	P2115181
PGL21	9-16	15	35	33	28.3	P2115160	P2115161
PGL29	18-25	18	40	41/42	37	P2918250	P2918251
PGL29	13-20	18	40	41/42	37	P2918200	P2918201
PGL36	22-32	18	48	52/53	47	P3618320	P3618321
PGL36	20-26	18	48	52/53	47	P3618260	P3618261
PGL42	32-38	18	49	60/61	54	P4218380	P4218381
PGL42	25-31	18	49	60/61	54	P4218310	P4218311
PGL48	37-44	18	50	64	59.3	P4818440	P4818441
PGL48	29-35	18	50	64	59.3	P4818350	P4818351



外形尺寸 DIMENSIONS



RoHS



IP68防尘、防水测试合格

产品特性 PRODUCT FEATURES

- 材料：尼龙PA(UL File NO:E 240925)
 - 密封件：丁腈橡胶（NBR）
 - 防护等级：IP68
 - 环境温度：静态-40℃至100℃，短时至120℃，动态-20℃至80℃，短时至100℃
 - 供货颜色：灰色 RAL7035
黑色 RAL9005
其它颜色请咨询
- Material:Nylon
 - Rubber gasket:Nitrile rubber(NBR)
 - Protection Grade: IP68
 - Ambient temperature:static~40℃ to 100℃,for short time 120℃,Dynamic -20℃ to 80℃,For short time 100℃
 - Color: Gray RAL7035
Black RAL9005
others color available

技术参数 TECHNICAL DATA

型号	规格	GL	H	Φ	AG	订货号 Art.No.	
Model	mm	mm	mm	mm	mm	灰色 GRAY RAL7035	黑色 Black RAL9005
ML12 × 1.5	3-6.5	15	22	15/16	12	M1215060	M1215061
ML12 × 1.5	2-5	15	22	15/16	12	M1215050	M1215051
ML16 × 1.5	4-8	15	26	19	16	M1615080	M1615081
ML16 × 1.5	2-6	15	26	19	16	M1615060	M1615061
ML16 × 1.5	5-10	15	27	22	16	M1615100	M1615101
ML16 × 1.5	3-7	15	27	22	16	M1615070	M1615071
ML18 × 1.5	5-10	15	27	22	18	M1815100	M1815101
ML18 × 1.5	3-7	15	27	22	18	M1815070	M1815071
ML20 × 1.5	6-12	15	28	24	20	M2015120	M2015121
ML20 × 1.5	5-9	15	28	24	20	M2015090	M2015091
ML20 × 1.5	10-14	15	30	27	20	M2015140	M2015141
ML20 × 1.5	7-12	15	30	27	20	M2015120	M2015121
ML22 × 1.5	10-14	15	30	27	22	M2215140	M2215141
ML22 × 1.5	7-12	15	30	27	22	M2215120	M2215121
ML25 × 1.5	13-18	15	35	33	25	M2515180	M2515181
ML25 × 1.5	9-16	15	35	33	25	M2515160	M2515161
ML32 × 1.5	18-25	15	40	41/42	32	M3215250	M3215251
ML32 × 1.5	13-20	15	40	41/42	32	M3215200	M3215201
ML40 × 1.5	19-28	18	43	45/46	40	M4018280	M4018281
ML40 × 1.5	15-23	18	43	45/46	40	M4018230	M4018231
ML40 × 1.5	22-32	18	48	52/53	40	M4018320	M4018321
ML40 × 1.5	20-26	18	48	52/53	40	M4018260	M4018261
ML50 × 1.5	27-35	18	48	55/56	50	M5018350	M5018351
ML50 × 1.5	22-29	18	48	55/56	50	M5018290	M5018291
ML50 × 1.5	32-38	18	49	60/61	50	M5018380	M5018381
ML50 × 1.5	25-31	18	49	60/61	50	M5018310	M5018311
ML63 × 1.5	37-44	18	50	64	63	M6318440	M6318441
ML63 × 1.5	29-35	18	50	64	63	M6318350	M6318351
ML63 × 1.5	34-45	19	57	67/68	63	M6319450	M6319451
ML63 × 1.5	28-38	19	57	67/68	63	M6319390	M6319391


PG

PG TYPE METAL CABLE GLAND

PG型金属防水接头



外形尺寸 DIMENSIONS



RoHs



IP68防尘、防水测试合格

产品特性 PRODUCT FEATURES

- 材料: 黄铜镀镍
- 夹紧件: 尼龙PA (UL File NO:E 240925)
- 密封件: 丁腈橡胶 (NBR)
耐候橡胶 (EPDM)
- 防护等级: IP68 (旋紧部位)
- 环境温度: -40℃至100℃, 短时至120℃
- Material: brass plating nickel
- Clamping: PA (UL File NO:E 240925)
- Rubber gasket: Nitrile rubber(NBR)
- Protection Grade: IP68
- Ambient temperature: stick~40℃
to 100℃,for short time 120℃,Dynamic
-20℃ to 80℃,For short time 100℃

技术参数 TECHNICAL DATA

型号	Φk	GL	H	Ψ	AG	订货号
Model	mm	mm	mm	mm	mm	Art.No.
PG7	3-6.5	5	19	14	12.5	P070806
PG7	2-5	5	19	14	12.5	P070505
PG9	4-8	6	20	17	15.2	P090608
PG9	2-6	6	20	17	15.2	P090606
PG11	5-10	6	21	20	18.6	P110610
PG11	3-7	6	21	20	18.6	P110607
PG13.5	6-12	6.5	22	22	20.4	P130712
PG13.5	5-9	6.5	22	22	20.4	P130709
PG16	10-14	6.5	23	24	22.5	P160714
PG16	7-12	6.5	23	24	22.5	P160712
PG21	13-18	7	25	30	28.3	P210718
PG21	9-16	7	25	30	28.3	P210716
PG29	18-25	8	29	40	37	P290825
PG29	13-20	8	29	40	37	P290820
PG36	22-32	8	35	50	47	P360832
PG36	20-26	8	35	50	47	P360826
PG42	32-38	9	37	57	54	P420938
PG42	25-31	9	37	57	54	P420931
PG48	37-44	10	38	64	59.3	P481044
PG48	29-35	10	38	64	59.3	P481035


M 型

M TYPE METAL CABLE GLAND

M型金属防水接头



外形尺寸 DIMENSIONS



RoHS



IP68防尘、防水测试合格

产品特性 PRODUCT FEATURES


- 材料：黄铜镀镍
 - 夹紧件：尼龙PA (UL File NO:E 240925)
 - 密封件：丁腈橡胶 (NBR)
耐候橡胶 (EPDM)
 - 防护等级：IP68 (旋紧部位)
 - 环境温度：-40℃至100℃，短时至120℃
- Material: brass plating nickel
 - Clamping: PA (UL File NO:E 240925)
 - Rubber gasket: Nitrile rubber(NBR)
 - Protection Grade: IP68
 - Ambient temperature: stick~40℃
to 100℃,for short time 120℃,Dynamic
-20℃ to 80℃,For short time 100℃

技术参数 TECHNICAL DATA

型号	Φ×	GL	H	Φ	AG	订货号
Model	mm	mm	mm	mm	mm	Art.No.
M12 × 1.5	3-6.5	5	19	14	12	T.M120506
M12 × 1.5	2-5	5	19	14	12	T.M120505
M16 × 1.5	4-8	6	20	17	16	T.M160608
M16 × 1.5	2-6	6	20	17	16	T.M160606
M16 × 1.5	5-10	6	21	20	16	T.M160610
M16 × 1.5	3-7	6	21	20	16	T.M160607
M18 × 1.5	5-10	6	21	20	18	T.M180610
M18 × 1.5	3-7	6	21	20	18	T.M180607
M20 × 1.5	6-12	6.5	22	22	20	T.M200712
M20 × 1.5	5-9	6.5	22	22	20	T.M200709
M20 × 1.5	10-14	6.5	23	24	20	T.M200714
M20 × 1.5	7-12	6.5	23	24	20	T.M200712
M22 × 1.5	10-14	6.5	23	24	22	T.M220714
M22 × 1.5	7-12	6.5	23	24	22	T.M220712
M25 × 1.5	13-18	7	25	30	25	T.M250718
M25 × 1.5	9-16	7	25	30	25	T.M250716
M32 × 1.5	18-25	8	29	40	32	T.M320825
M32 × 1.5	13-20	8	29	40	32	T.M320820
M40 × 1.5	22-32	8	35	50	40	T.M400832
M40 × 1.5	20-26	8	35	50	40	T.M400826
M50 × 1.5	32-38	9	37	57	50	T.M500938
M50 × 1.5	25-31	9	37	57	50	T.M500931
M63 × 1.5	37-44	10	38	68	63	T.M631044
M63 × 1.5	29-35	10	38	68	63	T.M631035



外形尺寸 DIMENSIONS



RoHs
CE

IP68防尘、防水测试合格

产品特性 PRODUCT FEATURES


- 材料：黄铜镀镍
- 夹紧件：尼龙PA (UL File NO:E 240925)
- 密封件：丁腈橡胶 (NBR)
耐候橡胶 (EPDM)
- 防护等级：IP68 (旋紧部位)
- 环境温度：-40℃至100℃，短时至120℃
- Material: brass plating nickel
- Clamping: PA (UL File NO:E 240925)
- Rubber gasket: Nitrile rubber(NBR)
- Protection Grade: IP68
- Ambient temperature: stick~40℃
to 100℃,for short time 120℃,Dynamic
-20℃ to 80℃,For short time 100℃

技术参数 TECHNICAL DATA

型号	Φk	GL	H	Φ	AG	订货号
Model	mm	mm	mm	mm	mm	Art.No.
PGL7	3-6.5	10	19	14	12.5	T.P071006
PGL7	2-5	10	19	14	12.5	T.P071005
PGL9	4-8	10	20	17	15.2	T.P091008
PGL9	2-6	10	20	17	15.2	T.P091006
PGL11	5-10	10	21	20	18.6	T.P111010
PGL11	3-7	10	21	20	18.6	T.P111007
PGL13.5	6-12	10	22	22	20.4	T.P131012
PGL13.5	5-9	10	22	22	20.4	T.P131009
PGL16	10-14	10	23	24	22.5	T.P161014
PGL16	7-12	10	23	24	22.5	T.P161012
PGL21	13-18	12	25	30	28.3	T.P211218
PGL21	9-16	12	25	30	28.3	T.P211216
PGL29	18-25	12	29	40	37	T.P291225
PGL29	13-20	12	29	40	37	T.P291220
PGL36	22-32	15	35	50	47	T.P361532
PGL36	20-26	15	35	50	47	T.P361526
PGL42	32-38	15	37	57	54	T.P421538
PGL42	25-31	15	37	57	54	T.P421531
PGL48	37-44	15	38	64	59.3	T.P481544
PGL48	29-35	15	38	64	59.3	T.P481535



外形尺寸 DIMENSIONS



RoHs



IP68防尘、防水测试合格

产品特性 PRODUCT FEATURES


- 材料：黄铜镀镍
 - 夹紧件：尼龙PA (UL File NO:E 240925)
 - 密封件：丁腈橡胶 (NBR)
耐候橡胶 (EPDM)
 - 防护等级：IP68 (旋紧部位)
 - 环境温度：-40℃至100℃，短时至120℃
- Material: brass plating nickel
 - Clamping: PA (UL File NO:E 240925)
 - Rubber gasket: Nitrile rubber(NBR)
 - Protection Grade: IP68
 - Ambient temperature: stick~40℃
to 100℃,for short time 120℃,Dynamic
-20℃ to 80℃,For short time 100℃

技术参数 TECHNICAL DATA

型号	ΦK	GL	H	Φ	AG	订货号
Model	mm	mm	mm	mm	mm	Art.No.
ML12 × 1.5	3-6.5	10	19	14	12	T.M121006
ML12 × 1.5	2-5	10	19	14	12	T.M121005
ML16 × 1.5	4-8	10	20	17	16	T.M161008
ML16 × 1.5	2-6	10	20	17	16	T.M161006
ML16 × 1.5	5-10	10	21	20	16	T.M161010
ML16 × 1.5	3-7	10	21	20	16	T.M161007
ML18 × 1.5	5-10	10	21	20	18	T.M181010
ML18 × 1.5	3-7	10	21	20	18	T.M181007
ML20 × 1.5	6-12	10	22	22	20	T.M201012
ML20 × 1.5	5-9	10	22	22	20	T.M201009
ML20 × 1.5	10-14	10	23	24	20	T.M201014
ML20 × 1.5	7-12	10	23	24	20	T.M201012
ML22 × 1.5	10-14	10	23	24	22	T.M221014
ML22 × 1.5	7-12	10	23	24	22	T.M221012
ML25 × 1.5	13-18	12	25	30	25	T.M251218
ML25 × 1.5	9-16	12	25	30	25	T.M251216
ML32 × 1.5	18-25	12	29	40	32	T.M321225
ML32 × 1.5	13-20	12	29	40	32	T.M321220
ML40 × 1.5	22-32	15	35	50	40	T.M401532
ML40 × 1.5	20-26	15	35	50	40	T.M401526
ML50 × 1.5	32-38	15	37	57	50	T.M501538
ML50 × 1.5	25-31	15	37	57	50	T.M501531
ML63 × 1.5	37-44	15	38	68	63	T.M631544
ML63 × 1.5	29-35	15	38	68	63	T.M631535



外形尺寸 DIMENSIONS



产品特性 PRODUCT FEATURES

CO-PG/CO-M型


- 材料: 尼龙PA
 - 防护等级: IP54
 - 环境温度: -20℃至80℃
 - 供货颜色: 灰色RAL7035
黑色RAL9005
其它颜色请咨询
- Material: Nylon
 - Protection Grade: IP54
 - Ambient temperature: -20℃ to 80℃
 - Color: Gray RAL7035
Black RAL9005
others color available

技术参数 TECHNICAL DATA

型号	GL	H	D	AG	订货号 Art.No.	
Model	mm	mm	mm	mm	灰色 GRAY RAL7035	黑色 Black RAL9005
CO-PG7	8.5	12.5	15	12.5	P0710PA	P0711PA
CO-PG9	8.5	13	19	15.2	P0910PA	P0911PA
CO-PG11	9	13	22	18.6	P1110PA	P1111PA
CO-PG13.5	9	13	25	20.4	P1310PA	P1311PA
CO-PG16	10.5	15	27	22.5	P1610PA	P1611PA
CO-PG21	10.5	15.5	33	28.3	P2110PA	P2111PA
CO-PG29	11.5	16	14	37	P2910PA	P2911PA
CO-PG36	13.5	18	55	47	P3610PA	P3611PA
CO-PG42	13.5	18.5	62	54	P4210PA	P4211PA
CO-PG48	14.5	19.5	68	59.3	P4810PA	P4811PA
CO-M12	8.5	12.5	15	12	M1210PA	M1211PA
CO-M16	8.5	13	19	16	M1610PA	M1611PA
CO-M18	9	13	22	18	M1810PA	M1811PA
CO-M20	9	13	25	20	M2010PA	M2011PA
CO-M22	10.5	15	27	22	M2210PA	M2211PA
CO-M25	10.5	15.5	30	25	M2510PA	M2511PA
CO-M27	10.5	15.5	33	27	M2710PA	M2711PA
CO-M32	10.5	16	38	32	M3210PA	M3211PA
CO-M40	11.5	16	46	40	M4010PA	M4011PA
CO-M50	13.5	18	56	50	M5010PA	M5011PA
CO-M63	14	19	68	63	M6310PA	M6311PA



外形尺寸 DIMENSIONS



产品特性 PRODUCT FEATURES

CO-PG/CO-M型

- 材料: 尼龙PA
- 防护等级: IP54
- 环境温度: -20℃至80℃
- 供货颜色: 灰色RAL7035
黑色RAL9005
其它颜色请询问


- Material: Nylon
- Protection Grade: IP54
- Ambient temperature: -20℃ to 80℃
- Color: Gray RAL7035
Black RAL9005
others color available

技术参数 TECHNICAL DATA

型号	IG	GL	H	D	AG	G	订货号 Art.No.	
Model	mm	mm	mm	mm	mm	mm	灰色 GRAY RAL7035	黑色 Black RAL9005
SC-PG13.5	PG9	8	12	27	20.4	15.2	P13P090	P13P091
SC-PG16	PG9	10	13	29	22.5	15.2	P16P090	P16P091
SC-PG16	PG11	10	13	29	22.5	18.6	P16P110	P16P111
SC-PG21	PG13.5	11	13.5	36	28.3	20.4	P21P130	P21P131
SC-PG21	PG16	11	13.5	36	28.3	22.5	P21P160	P21P161
SC-PG29	PG21	11	13.5	46	37	28.3	P29P210	P29P211
SC-PG36	PG29	11	15	58	47	37	P36P290	P36P291
SC-M20×1.5	M12×1.5	8	12	27	20	12	M20M120	M20M121
SC-M20×1.5	M16×1.5	8	12	27	20	16	M20M160	M20M161
SC-M25×1.5	M16×1.5	10	13	29	25	16	M25M160	M25M161
SC-M25×1.5	M20×1.5	10	13	29	25	20	M25M200	M25M201
SC-M32×1.5	M20×1.5	11	13.5	36	32	20	M32M200	M32M201
SC-M32×1.5	M25×1.5	11	13.5	36	32	25	M32M250	M32M251
SC-M40×1.5	M25×1.5	11	13.5	46	40	25	M40M450	M40M251
SC-M40×1.5	M32×1.5	11	13.5	46	40	32	M40M320	M40M321
SC-M50×1.5	M32×1.5	11	15	58	50	32	M50M320	M50M321
SC-M50×1.5	M40×1.5	11	15	58	50	40	M50M400	M50M401



外形尺寸 DIMENSIONS



产品特性 PRODUCT FEATURES


RC-PG/RC-M型

- 材料：尼龙PA
- 环境温度：-20℃至80℃
- 供货颜色：灰色RAL7035
黑色RAL9005
其它颜色请询问


- Material:Nylon
- Ambient temperature:-20℃ to 80℃
- Color: Gray RAL7035
Black RAL9005
others color available

技术参数 TECHNICAL DATA

型号	IG	GL	H	AG	G	订货号 Art.No.	
Model	mm	mm	mm	mm	mm	灰色 GRAY RAL7035	黑色 Black RAL9005
RC-PG7	PG9	15	19	12.5	15.2	P07P090	P07P091
RC-PG9	PG13.5	15	19	15.2	20.4	P09P130	P09P131
RC-PG13.5	PG21	15	19	20.4	28.3	P13P210	P13P211
RC-PG21	PG29	15	19	28.3	37	P21P290	P21P291
RC-PG29	PG36	15	19.5	37	47	P29P360	P29P361
RC-PG36	PG42	15	19.5	47	54	P36P420	P36P421
RC-PG42	PG48	15	19.5	54	59.3	P42P480	P42P481
RC-M12×1.5	M16×1.5	15	19	12	16	M07M160	M70M161
RC-M16×1.5	M20×1.5	15	19	16	20	M16M200	M16M201
RC-M20×1.5	M25×1.5	15	19	20	25	M20M250	M20M251
RC-M25×1.5	M32×1.5	15	19	25	32	M25M320	M25M321
RC-M32×1.5	M40×1.5	15	19.5	32	40	M32M400	M32M401
RC-M40×1.5	M50×1.5	15	19.5	40	50	M40M500	M40M501
RC-M50×1.5	M63×1.5	15	19.5	50	63	M50M630	M50M631

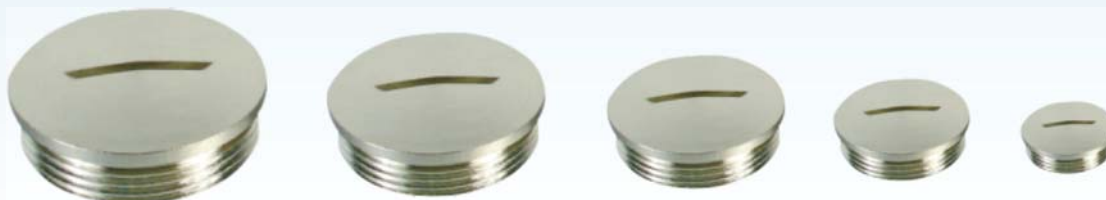

外形尺寸 DIMENSIONS



产品特性 PRODUCT FEATURES

MCO-P/MCO-M型


- 材料: 黄铜镀镍
- O-密封件: 丁腈橡胶(NBR)耐侯橡胶(EPDM)
- 防护等级: IP65
- 环境温度: -40℃至100℃
- Material: Brass
- Rubber: NBR & EPDM
- Protection Degree: IP65
- Working Temp: -40°C to 100°C

技术参数 TECHNICAL DATA

型号 Model	GL mm	H mm	D mm	AG mm	订货号 Art.No. 黑色 Blak RAL9005
MCO-PG7	5	8	14	12.5	T.P071
MCO-PG9	6	9	17	15.2	T.P091
MCO-PG11	6	9	20	18.6	T.P111
MCO-PG13.5	6.5	9.5	22	20.4	T.P131
MCO-PG16	6.5	9.5	24	22.5	T.P161
MCO-PG21	7	11	30	28.3	T.P211
MCO-PG29	8	12	39	37	T.P291
MCO-PG36	9	15	50	47	T.P361
MCO-PG42	10	16	57	54	T.P421
MCO-PG48	10	16	64	59.3	T.P481
MCO-M12×1.5	5	8	14	12	T.M121
MCO-M16×1.5	6	9	18	16	T.M161
MCO-M18×1.5	6	9	20	18	T.M181
MCO-M20×1.5	6.5	9.5	22	20	T.M201
MCO-M22×1.5	6.5	9.5	24	22	T.M221
MCO-M25×1.5	7	11	28	25	T.M251
MCO-M32×1.5	8	12	35	32	T.M321
MCO-M40×1.5	9	15	44	40	T.M401
MCO-M50×1.5	10	16	54	50	T.M501
MCO-M63×1.5	10	16	70	63	T.M631



外形尺寸 DIMENSIONS



产品特性 PRODUCT FEATURES

软管快速接头

应用特点：通用的工业尼龙制品，仅需插入软管便可快速地完成连接固定。

软管快速接头-弯角形

应用特点：通用的工业尼龙制品，用于线缆出线弯角的软管保护连接，仅需插入软管旋紧接头，便可快捷完成连接固定。

软管

应用特点：塑料制软管，耐腐蚀、重量轻、强度高，并且能耐受一定高温的软管，能够有效的全面保护线缆。

PG型

材料：尼龙PA(UL File NO:E 240925)

防护等级：IP54(用O-密封圈且固定安装：IP65)

环境温度：-20℃至80℃

供货颜色：黑色RAL9005 其它颜色请询问

技术参数 TECHNICAL DATA

型号	GL	H	AG	适配软管	订货号
Model	mm	mm	mm	Suit for tube	黑色 Blak RAL9005
PG7	10	22.5	12.5	AD10	P07D101
PG9	10	22.5	15.2	AD13	P09D131
PG11	10	25	18.6	AD15.8	P11D161
PG13.5	11	29	20.4	AD18	P13D181
PG16	12	31.5	22.5	AD21.2	P16D211
PG21	12	34	28.3	AD28.5	P21D281
PG29	12	36	37	AD34.5	P29D341
PG36	13	38.5	47	AD42.5	P36D421
PG48	15	39	59.3	AD54.5	P48D541




M型



NPT型

外形尺寸 DIMENSIONS

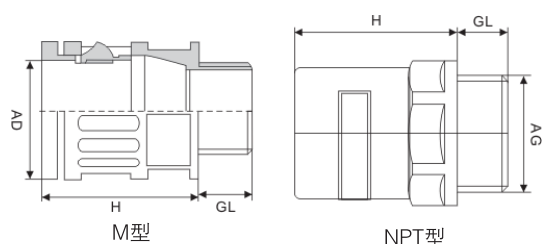

产品特性 PRODUCT FEATURES

FT-M/FT-NPT型

- 材料：尼龙PA
- 防护等级：IP54
(用O-密封圈且固定安装：IP65)
- 环境温度：-20℃至80℃
- 供货颜色：黑色RAL9005
其它颜色请询问


- Material:Nylon
- Protection Grade:IP54
- Ambient temperature:-20℃ to 80℃
- Color: Black RAL9005
others color available

技术参数 TECHNICAL DATA

型号 Model	GL mm	H mm	AG mm	适配软管 Suit for tube	订货号 黑色 Black RAL9005
FT-M12×1.5	10	22.5	12	AD10	M12D101
FT-M16×1.5	10	22.5	16	AD13	M16D131
FT-M18×1.5	10	25	18	AD15.8	M18D161
FT-M20×1.5	11	29	20	AD18	M20D181
FT-M22×1.5	12	31.5	22	AD21.2	M22D211
FT-M25×1.5	12	34	25	AD28.5	M25D281
FT-M32×1.5	12	36	32	AD34.5	M32D341
FT-M40×1.5	13	38.5	40	AD42.5	M40D421
FT-M63×1.5	15	39	63	AD54.5	M63D541
FT-NPT3/8	15	30	17	AD13	N38D131
FT-NPT1/2	13	32	21.2	AD21.2	N12D211
FT-NPT3/4	13	36	26.2	AD28.5	N34D281
FT-NPT1"	15	38	33.3	AD34.5	N10D341



外形尺寸 DIMENSIONS



产品特性 PRODUCT FEATURES

尼龙PA软管/聚乙烯PE软管

- 材料：尼龙PA/聚乙烯 PE
- 环境温度：-40℃至100℃ / -40℃至80℃
- 弯曲性能：很好
- 抗压性能/100mm：>450牛顿/ >200牛顿
- 有害成份：不含卤素和镉元素
- 抗腐蚀性：抗酒精、脂肪、燃料、无机油、弱酸弱碱类物质/抗碱
- 供货颜色：黑色 RAL9005 其它颜色请询问

- Material: Nylon PA/Polyethylene PE
- Working temp: -40℃ to 100℃
-40℃ to 80℃
- Color: Black RAL9005

技术参数 TECHNICAL DATA

型号 Model	d mm	D mm	订货号 黑色 Black RAL9005
FT-AD10	7	10	D101PA
FT-AD13	10	13	D131PA
FT-AD15.8	13	15.8	D161PA
FT-AD18	14	18	D181PA
FT-AD20	16	20	D201PA
FT-AD21.2	17	21.2	D211PA
FT-AD25	20	25	D251PA
FT-AD28.5	22.5	28.5	D281PA
FT-AD34.5	28.5	34.5	D341PA
FT-AD42.5	35	42.5	D421PA
FT-AD54.5	43	54.5	D541PA
FT-AD10	7	10	D101PE
FT-AD13	10	13	D131PE
FT-AD15.8	13	15.8	D161PE
FT-AD18	14	18	D181PE
FT-AD20	16	20	D201PE
FT-AD21.2	17	21.2	D211PE
FT-AD25	20	25	D251PE
FT-AD28.5	22.5	28.5	D281PE
FT-AD34.5	28.5	34.5	D341PE
FT-AD42.5	35	42.5	D421PE
FT-AD54.5	43	54.5	D541PE

C45

ELECTRIC COMB BUSBAR

电气汇流排








产品特性 PRODUCT FEATURES






汇流排系列是我公司根据市场需求最近推出的新产品，它突破了延续多年的小型断路器进线的接线方式，增加了接触面积，减少了功耗，降低了温升。由于汇流排卧于绝缘槽中，人体接触不到带电体，因此该产品具有使用安全、可靠、省时、简便及价格低廉等特点。

该产品采用纯铜制造，导电性能好、接触电阻低，规格齐全、深受欢迎。

技术参数 TECHNICAL DATA

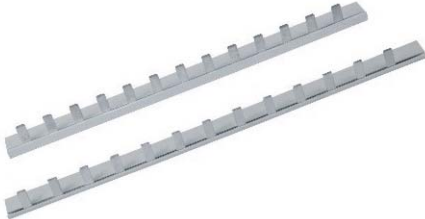产品外观 Photo	外形尺寸 Dimension	电气汇流排 Comb busbar	订购数据 info	定长 Length
		型号 Model	厚度×宽度×电流(A) Thickness×width	长度 Length
	 中心距: 18mm	C45/1P 紫铜质 Copper	1.0×5 32A 1.2×5 40A 1.2×7 50A 1.4×5 50A 1.4×7 63A 1.4×9 63A 1.7×5 50A 1.7×7 63A 1.7×9 80A 1.9×9 100A	1000(mm) 特殊长度可定制
	 中心距: 36mm	C45/2P 紫铜质 Copper	1.0×5 32A 1.2×5 40A 1.2×7 50A 1.4×5 50A 1.4×7 63A 1.4×9 63A 1.7×5 50A 1.7×7 63A 1.7×9 80A 1.9×9 100A	1000(mm) 特殊长度可定制
	 中心距: 54mm	C45/3P 紫铜质 Copper	1.0×5 32A 1.2×5 40A 1.2×7 50A 1.4×5 50A 1.4×7 63A 1.4×9 63A 1.7×5 50A 1.7×7 63A 1.7×9 80A 1.9×9 100A 3.0×9 150A	1000(mm) 特殊长度可定制
	 中心距: 72mm	C45/4P 紫铜质 Copper	1.2×5 40A 1.4×7 63A 1.7×9 80A 1.9×9 100A	1000(mm) 特殊长度可定制

技术参数 TECHNICAL DATA

产品外观 Photo	外形尺寸 Dimension	电气汇流排 Comb busbar	订购数据 info	定长 Length
		材质、型号规格 Material & Model	厚度×宽度×电流(A) Thickness × with	长度 Length
	 中心距: 45mm	C45/1P+L 紫铜质 Copper	1.0×5 32A 1.2×5 40A 1.2×7 50A 1.4×5 50A 1.4×7 63A 1.4×9 63A 1.7×9 80A	1000(mm) 特殊长度可定制
	 中心距: 63mm	C45/2P+L 紫铜质 Copper	1.0×5 32A 1.2×5 40A 1.2×7 50A 1.4×5 50A 1.4×7 63A 1.4×9 63A 1.7×9 80A	1000(mm) 特殊长度可定制
	 中心距: 99mm	C45/3P+L 紫铜质 Copper	1.4×7 63A	1000(mm) 特殊长度可定制
	 中心距: 117mm	C45/4P+L 紫铜质 Copper	1.2×5 40A 1.4×7 63A 1.7×9 80A	1000(mm) 特殊长度可定制
	 中心距: 36mm	C65/1P+L 紫铜质 Copper	1.4×7 63A	1000(mm) 特殊长度可定制





C65

ELECTRIC COMB BUSBAR










电气汇流排



技术参数 TECHNICAL DATA







产品外观 Photo	外形尺寸 Dimension	电气汇流排 Comb busbar	订购数据 info	定长 Length
		材质、型号规格 Material & Model	厚度×宽度×电流(A) Thickness × with	长度 Length
	 中心距: 72mm	C65/2P+L 紫铜质 Copper	1.4 × 7 63A	1000(mm) 特殊长度可定制
	 中心距: 116mm	C65/3P+L 紫铜质 Copper	1.4 × 7 63A	1000(mm) 特殊长度可定制
	 中心距: 134mm	C65/4P+L 紫铜质 Copper	1.4 × 7 63A	1000(mm) 特殊长度可定制
	 中心距: 18mm	DPN 紫铜质 Copper	1.0×5 32A 1.2×5 40A 1.2×7 50A 1.4×5 50A 1.4×7 63A 1.4×9 63A 1.7×9 80A	1000(mm) 特殊长度可定制
	 中心距: 36mm	DPN+L 紫铜质 Copper	1.0×5 32A 1.2×5 40A 1.2×7 50A 1.4×5 50A 1.4×7 63A 1.4×9 63A 1.7×9 80A	1000(mm) 特殊长度可定制

技术参数 TECHNICAL DATA

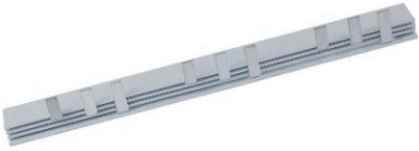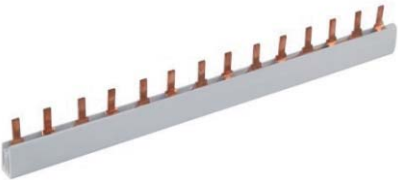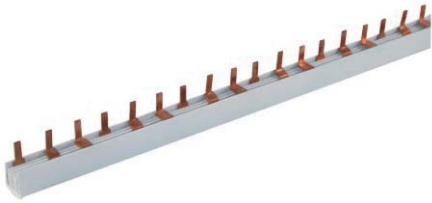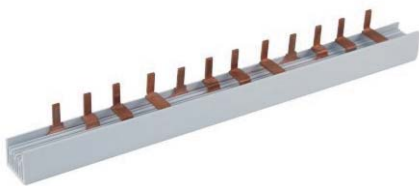产品外观 Photo	外形尺寸 Dimension	电气汇流排 Comb busbar	订购数据 info	定长 Length
		材质、型号规格 Material & Model	厚度×宽度×电流(A) Thickness × with	长度 Length
	 中心距: 81mm	C100/3P 紫铜质 Copper	1.4×7 63A 1.7×9 80A	1000(mm) 特殊长度可定制
	 中心距: 18mm	PT-Z1P 紫铜质 Copper	1.2×5 40A 1.2×5 50A 1.2×7 50A 1.4×5 63A 1.4×7 63A 1.5×9 80A 1.5×9 100A	1000(mm) 特殊长度可定制
	 中心距: 36mm	PT-Z2P 紫铜质 Copper	1.2×5 40A 1.2×7 50A 1.4×5 50A 1.4×7 63A 1.4×9 63A 1.5×7 80A 1.5×9 100A	1000(mm) 特殊长度可定制
	 中心距: 54mm	PT-Z3P 紫铜质 Copper	1.2×5 40A 1.2×7 50A 1.4×8 50A 1.4×7 63A 1.4×9 63A 1.5×7 80A 1.5×9 100A	1000(mm) 特殊长度可定制
	 中心距: 72mm	PT-Z4P 紫铜质 Copper	1.2×5 40A 1.2×7 50A 1.4×8 50A 1.4×7 63A 1.4×9 63A 1.5×7 80A 1.5×9 100A	1000(mm) 特殊长度可定制

技术参数

TECHNICAL DATA

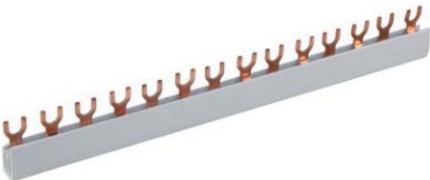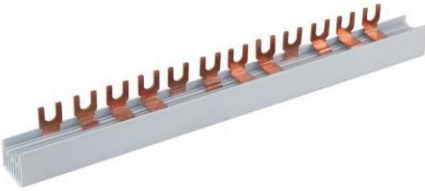
产品外观 Photo	外形尺寸 Dimension	电气汇流排 Comb busbar	订购数据 info	定长 Length
		材质、型号规格 Material & Model	厚度×宽度×电流(A) Thickness × with	长度 Length
		PT-U1P 紫铜质 Copper	1.2×5 40A 1.2×5 50A 1.2×7 50A 1.4×5 63A 1.4×7 63A 1.5×9 80A 1.5×9 100A	1000(mm) 特殊长度可定制
		PT-U2P 紫铜质 Copper	1.2×5 40A 1.2×7 50A 1.4×5 50A 1.4×7 63A 1.4×9 63A 1.5×7 80A 1.5×9 100A	1000(mm) 特殊长度可定制
		PT-U3P 紫铜质 Copper	1.2×5 40A 1.2×7 50A 1.4×8 50A 1.4×7 63A 1.4×9 63A 1.5×7 80A 1.5×9 100A	1000(mm) 特殊长度可定制
		PT-U4P 紫铜质 Copper	1.2×5 40A 1.2×7 50A 1.4×8 50A 1.4×7 63A 1.4×9 63A 1.5×7 80A 1.5×9 100A	1000(mm) 特殊长度可定制

TH35


TH SERIES DIN RAIL(STEEL) TH系列钢质导轨




TH35-7.5(1.0)

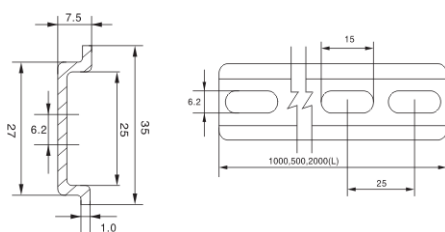


TH35-7.5(0.8)

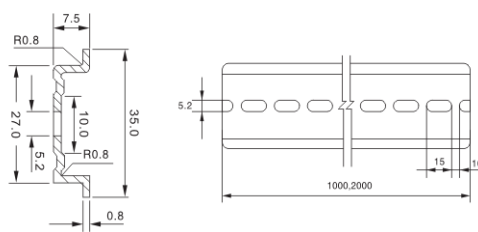


电气安装轨	型号规格 Model	型号规格 Model
DIN Rail	TH35-7.5(1.0)	TH35-7.5(0.8)
尺寸 Size	宽×高×厚 35×7.5×1.0mm Width×High×Deep	宽×高×厚 35×7.5×0.8mm Width×High×Deep
开孔尺寸 Hold size	φ6.2×15mm	φ6.2×15mm
长度 Length	1米或2米 1m or 2m	1米或2米 1m or 2m
订货号 Code	06060	06062



TH35-15(1.5)

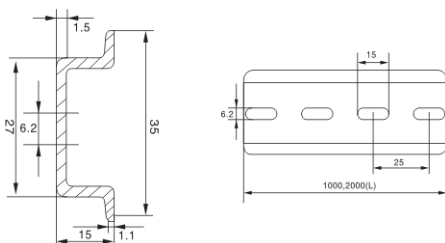


TH35-15(1.0)

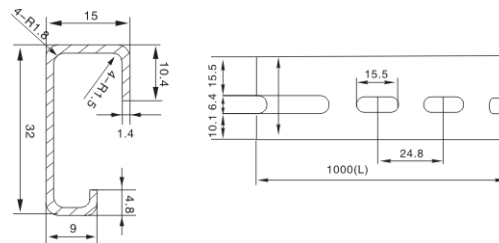

电气安装轨	型号规格 Model	型号规格 Model
DIN Rail	TH35-15(1.5)	THW35-15(1.0)
尺寸 size	宽×高×厚 35×15×1.5mm width×high×deep	宽×高×厚 35×15×1.0mm width×high×deep
开孔尺寸 Hold size	φ6.2×15mm	φ6.2×15mm
长度 Length	1米或2米 1m or 2m	1米或2米 1m or 2m
订货号 Code	06063	06064

TH35

TH SERIES DIN RAIL(ALUMINUM) TH系列铝质导轨

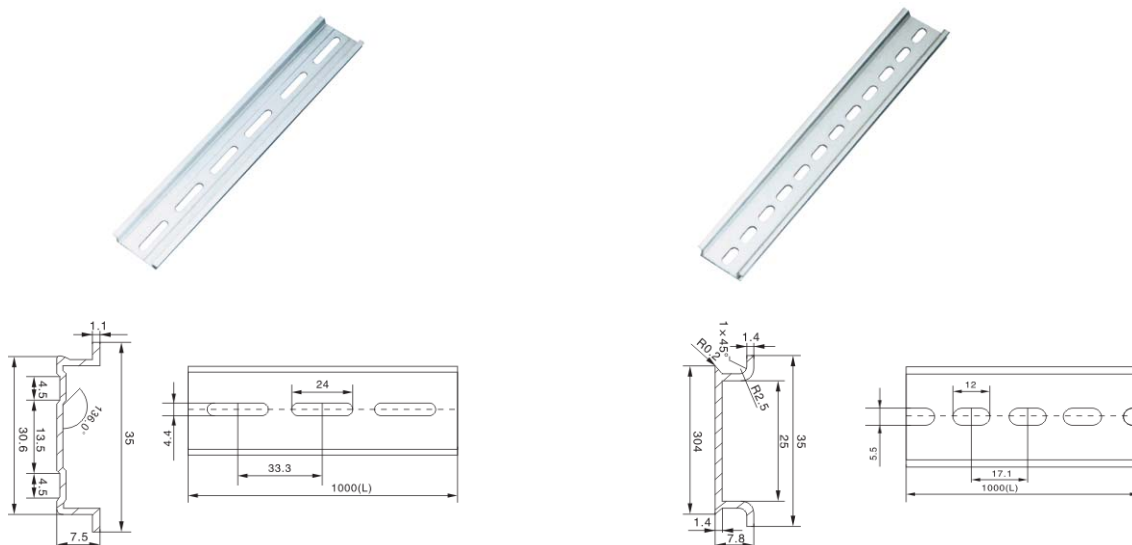

电气安装轨	型号规格 Model	型号规格 Model
DIN Rail	TH35-7.5(1.1)	TH35-7.5(0.8)
尺寸 size	宽×高×厚 35×7.5×1.1mm width×high×deep	宽×高×厚 35×7.5×0.8mm width×high×deep
长度 Length	1米或2米 1m or 2m	1米或2米 1m or 2m
订货号 Code	06066	06068

导轨配件 RAIL PARTS



C45 塑料固定件 SDW-203
C45 Plastic end stopper SDW-203



SDK-22 固定件
SDK-22 End Stopper




E-UK 固定件
E-UK End Stopper



导轨切断器: 适用于TH35-7.5 TH35-15
Rail Cutter: Suit for TH35-7.5 TH35-15

IP AND IK CLASSIFICATIONS

IP、IK 防护等级标准

First Number	防固形物	Second Number	防水	IK	防物理冲击
1P	Protection	1P	Protection	IK	Test
0	 无防护 No protection	0	 无防护 No protection	00	 无防护 No protection
1	 防护50mm直径和更大的固体外来体 protected against solid objects up to 50 mm e.g. hands	1	 防护垂直落下的水滴 protected against vertically falling drops of water	01-05	 冲击<1 焦耳 impact<1 joule
2	 防护12.5mm直径和更大的固体外来体 protected against solid objects up to 12.5 mm e.g. fingers	2	 箱体倾斜15°时，防护垂直落下的水滴 protected against direct sprays of water up to 15° from the vertical	06	 1焦耳冲击 impact 1 joule
3	 防护2.5mm直径和更大的固体外来体 protected against solid objects over 2.5 mm (tools+small wires)	3	 防护以60°角从垂直线两侧溅出的水 protected against water sprayed from all directions-limited ingress permitted	07	 2焦耳冲击 impact 2 joule
4	 防护1.0mm直径和更大的固体外来体 protected against solid objects over 1 mm (tools+small wires)	4	 防护从每个方向对准箱体的溅水 protected against water sprayed from all directions-limited ingress permitted	08	 5焦耳冲击 impact 5 joule
5	 防护灰尘 protected against dust-limited ingress permitted (no harmful deposit)	5	 防护从每个方向对准箱体的低压喷水 protected against low pressure jets of water from all directions-limited ingress permitted	09	 10焦耳冲击 impact 10 joule
6	 灰尘封闭 totally protected against dust	6	 防护从每个方向对准箱体的高压喷水 protected against strong jets of water e.g. for use on shipdecks-limited ingress permitted	10	 20焦耳冲击 impact 20 joule
		7	 防护在15cm~1m深水浸入30分钟 protected against the effects of immersion between 15 cm and 1 m		
		8	 防护长时间浸入水中 protected against long periods of immersion under pressure		



SAIPWELL
WWW.SAIPWELL.COM

To create products
 that deliver happiness to everyone

—— 铸造充满幸福的产品 ——



赛普电气集团有限公司
SAIP ELECTRIC GROUP CO., LTD.

电话.TEL: +86-577-62760721

传真.FAX: +86-577-62760731

邮箱.E-mail: saip@saip.cn

网址.Website: www.saipwell.com.cn

浙江省乐清市柳市工业区

Liushi Industrial Zone, Yueqing, Zhejiang, 325604 China

上海斯普威尔电气有限公司
SHANGHAI SAIPWELL ELECTRIC CO., LTD.

电话.TEL: +86-21-33050667

传真.FAX: +86-21-33050669

邮箱.E-mail: saip@saip.cn

网址.Website: www.saipwell.com

上海市宝山区蕙川路512号

No.512, Wenchuan Road, Shanghai, 201906 China