



# AIR TOOL SOLUTIONS

[www.sunextools.com](http://www.sunextools.com)





## SUNEX TOOLS® WARRANTY PROGRAM

### Limited Warranty...

**SUNEX INTERNATIONAL, INC. WARRANTS TO ITS CUSTOMERS THAT THE COMPANY'S SUNEX TOOLS® BRANDED PRODUCTS ARE FREE FROM DEFECTS IN WORKMANSHIP AND MATERIALS.**

Sunex International, Inc. will repair or replace its Sunex Tools® branded products which fail to give satisfactory service due to defective workmanship or materials, based upon the terms and conditions of the following described warranty plans attributed to that specific product.

**Sunex Air Tools:** These products carry a One Year warranty. During this warranty period, Sunex International, Inc. will repair or replace at our option, any part or unit which proves to be defective in material or workmanship.

**SXC Series Air Tools:** The SXC series air tools are exempt from the normal Sunex Tools® air tool warranty. SXC series tools carry a One Year Replacement warranty for tools which fail due to defects in material or workmanship.

**Sunex Spray Guns and Spray Gun Accessories:** These products carry a 90-Day warranty. During this warranty period, Sunex International, Inc. will repair or replace at our option, any part or unit which proves to be defective in material or workmanship.

### Other important warranty information...













This warranty does not cover damage to equipment or tools arising from alteration, abuse, misuse, or damage, and does not cover any repairs or replacement made by anyone other than Sunex Tools® or its authorized warranty service centers. The foregoing obligation is Sunex Tools® sole liability under this or any implied warranty and under no circumstances shall we be liable for any incidental or consequential damages.

**Note:** Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. Return equipment or parts to Sunex Tools®, or an authorized warranty service center, transportation prepaid. Be certain to include your name and address, evidence of the purchase date, and description of the suspected defect. If you have any questions about warranty service, please write to Sunex Tools®. This warranty gives you specific legal rights and you may also have other rights which vary from state to state. Repair kits and replacement parts are available for many Sunex Tools® products regardless of whether or not the product is still covered by a warranty plan.

**Shipping Address:** Sunex Tools • 315 Hawkins Rd. • Travelers Rest, SC 29690

**Mailing Address:** Sunex Tools • P.O. Box 1233 • Travelers Rest, SC 29690

## TABLE OF CONTENTS

|   |                        |    |
|---|------------------------|----|
|    | IMPACT WRENCHES        | 2  |
|    | RATCHETS               | 4  |
|    | SANDERS/POLISHERS      | 5  |
|    | GRINDERS               | 7  |
|    | SAWS/CUT OFF TOOLS     | 12 |
|    | DRILLS                 | 14 |
|   | HAMMERS/NEEDLE SCALERS | 17 |
|  | RIVETERS               | 19 |
|  | SPRAY GUNS             | 21 |
|  | SPECIALTY TOOLS        | 24 |
|  | ACCESSORIES            | 25 |
|  | PRODUCT INDEX          | 28 |

All specifications contained in this catalog are obtained by running the tool at 90 psi unless otherwise noted.

All specifications are for reference only. Please refer to product manuals included with each tool for official specifications.

## IMPACT WRENCHES



### 3/8" DRIVE PALM GRIP IMPACT WRENCH

- > Advanced design clutch for smooth operation and extreme durability
- > Butterfly paddle design throttle for easy directional control
- > Built-in regulator and 360 degree swivel for great control and easy handling

#### SX111

|                                |        |
|--------------------------------|--------|
| Square Drive (in.)             | 3/8    |
| Max. Torque (ft.lbs.) @ 90 PSI | 75     |
| Working Torque (ft.lbs.)       | 30-60  |
| Free Speed (RPM)               | 10,000 |
| Weight (Lbs)                   | 1.8    |
| Length (in.)                   | 6      |
| Average Air Consumption (CFM)  | 4      |
| Air Inlet Thread Size (NPTF)   | 1/4    |
| Sound Level (dBA)              | 110    |



### 3/8" DRIVE PISTOL GRIP IMPACT WRENCH

- > Reliable rocking dog clutch for long life
- > One hand push button forward/reverse
- > Built-in regulator for great power and speed control

#### SX821A

|                                |        |
|--------------------------------|--------|
| Square Drive (in.)             | 3/8    |
| Max. Torque (ft.lbs.) @ 90 PSI | 75     |
| Working Torque (ft.lbs.)       | 30-60  |
| Free Speed (RPM)               | 10,000 |
| Weight (lbs.)                  | 2.6    |
| Length (in.)                   | 5.5    |
| Average Air Consumption (CFM)  | 4      |
| Air Inlet Thread Size (NPTF)   | 1/4    |
| Sound Level (dBA)              | 84     |



### 1/2" DRIVE IMPACT WRENCH

- > Rocking dog clutch for economical power
- > Comes with Protective PVC rubber cover
- > Our most economical 1/2" impact wrench

#### SX634CZ

|                                |        |
|--------------------------------|--------|
| Square Drive (in.)             | 1/2    |
| Max. Torque (ft.lbs.) @ 90 PSI | 220    |
| Working Torque (ft.lbs.)       | 50-190 |
| Free Speed (RPM)               | 7,000  |
| Weight (lbs.)                  | 5.5    |
| Length (in.)                   | 7      |
| Average Air Consumption (CFM)  | 4      |
| Air Inlet Thread Size (NPTF)   | 1/4    |
| Sound Level (dBA)              | 103    |



### 1/2" DRIVE HEAVY DUTY IMPACT WRENCH

- > High-powered pin clutch delivers over 450 ft.lbs. of maximum torque
- > Working torque range 25-350 ft.lbs.
- > Rear knob regulator and variable speed trigger allow precise speed control
- > Cushion grip design for comfort and control

#### SX959A

|                                |        |
|--------------------------------|--------|
| Square Drive (in.)             | 1/2    |
| Max. Torque (ft.lbs.) @ 90 PSI | 450    |
| Working Torque (ft.lbs.)       | 25-350 |
| Free Speed (RPM)               | 7,000  |
| Weight (lbs.)                  | 5.6    |
| Length (in.)                   | 7.5    |
| Average Air Consumption (CFM)  | 4      |
| Air Inlet Thread Size (NPTF)   | 1/4    |
| Sound Level (dBA)              | 103    |

## IMPACT WRENCHES



### 1/2" DRIVE HEAVY DUTY IMPACT WRENCH WITH 2" EXTENDED ANVIL

- > High-powered pin clutch delivers over 430 ft.lbs. of maximum torque
- > Working torque range 25-330 ft.lbs.
- > Rear knob regulator and variable speed trigger allow precise speed control
- > Cushion grip design for comfort and control

#### SX959A-2

|                                |        |
|--------------------------------|--------|
| Square Drive (in.)             | 1/2    |
| Max. Torque (ft.lbs.) @ 90 PSI | 430    |
| Working Torque (ft.lbs.)       | 25-330 |
| Free Speed (RPM)               | 7,000  |
| Weight (lbs.)                  | 5.6    |
| Length (in.)                   | 9.5    |
| Average Air Consumption (CFM)  | 4      |
| Air Inlet Thread Size (NPTF)   | 1/4    |
| Sound Level (dBA)              | 103    |



### 3/4" DRIVE IMPACT WRENCH

- > Pin clutch mechanism delivers 740 ft.lbs. of torque
- > Push button forward/reverse for true one hand operation
- > Built-in regulator for great power and speed control

#### SX670A

|                                |         |
|--------------------------------|---------|
| Square Drive (in.)             | 3/4     |
| Max. Torque (ft.lbs.) @ 90 PSI | 740     |
| Working Torque (ft.lbs.)       | 400-600 |
| Free Speed (RPM)               | 4,500   |
| Weight (lbs.)                  | 11      |
| Length (in.)                   | 9.75    |
| Average Air Consumption (CFM)  | 6.4     |
| Air Inlet Thread Size (NPTF)   | 1/4     |
| Sound Level (dBA)              | 90      |



### 1" DRIVE HEAVY DUTY IMPACT WRENCH WITH 8" EXTENDED ANVIL

- > 1,460 ft.lbs of torque to handle the toughest tire work
- > Heavy duty clutch for long reliable service
- > 6 position power regulator for control throughout the power and speed range

#### SX505A-8

|                                |          |
|--------------------------------|----------|
| Square Drive (in.)             | 1        |
| Max. Torque (ft.lbs.) @ 90 PSI | 1,460    |
| Working Torque (ft.lbs.)       | 600-1200 |
| Free Speed (RPM)               | 4,000    |
| Weight (lbs.)                  | 30.9     |
| Length (in.)                   | 21.7     |
| Average Air Consumption (CFM)  | 13.4     |
| Air Inlet Thread Size (NPTF)   | 1/4      |



## RATCHETS



### 1/4" DRIVE MINI AIR RATCHET WRENCH

- > Maximum speed control throughout the range
- > Small design to get into tight areas
- > Rear exhaust to keep air away from work surface

Replacement head kit - RSRHK106B

#### SX106B

|                               |     |
|-------------------------------|-----|
| Square Drive (in.)            | 1/4 |
| Torque (ft.lbs.)              | 25  |
| Free Speed (RPM)              | 230 |
| Weight (lbs.)                 | 1   |
| Length (in.)                  | 7   |
| Average Air Consumption (CFM) | 3   |
| Air Inlet Thread Size (NPTF)  | 1/4 |
| Min. Hose Size (I.D.)         | 3/8 |
| Sound Level (dBA)             | 87  |



### 3/8" DRIVE AIR RATCHET WRENCH

- > 45 ft.lbs. of ultimate torque
- > Ribbed handle for controlled grip in all conditions
- > Exceptional durability and quality at an outstanding price

Replacement head kit - RSRHK100

#### SX108A

|                               |      |
|-------------------------------|------|
| Square Drive (in.)            | 3/8  |
| Torque (ft.lbs.)              | 45   |
| Free Speed (RPM)              | 150  |
| Weight (lbs.)                 | 2.6  |
| Length (in.)                  | 10.5 |
| Average Air Consumption (CFM) | 4    |
| Air Inlet Thread Size (NPTF)  | 1/4  |
| Min. Hose Size (I.D.)         | 3/8  |
| Sound Level (dBA)             | 88   |



### 3/8" DRIVE AIR RATCHET WRENCH

- > With 45 ft.lbs. of torque and 150 rpm, it can handle any job quickly and efficiently
- > High quality design for longer ratchet head life
- > Exceptional quality at an affordable price

Replacement head kit - RSRHK100C

#### SX113

|                               |      |
|-------------------------------|------|
| Square Drive (in.)            | 3/8  |
| Torque (ft.lbs.)              | 45   |
| Free Speed (RPM)              | 150  |
| Weight (lbs.)                 | 2.6  |
| Length (in.)                  | 10.5 |
| Average Air Consumption (CFM) | 4    |
| Air Inlet Thread Size (NPTF)  | 1/4  |
| Min. Hose Size (I.D.)         | 3/8  |
| Sound Level (dBA)             | 110  |



### 1/2" DRIVE HEAVY DUTY AIR RATCHET WRENCH

- > 90 ft.lbs. of torque is ideal for high torque fasteners in tight work areas
- > High speed rundown with 150 rpm of speed
- > High quality head design for longer life

Replacement head kit - RSRHK109

#### SX109

|                               |     |
|-------------------------------|-----|
| Square Drive (in.)            | 1/2 |
| Torque (ft.lbs.)              | 90  |
| Free Speed (RPM)              | 150 |
| Weight (lbs.)                 | 4.4 |
| Length (in.)                  | 14  |
| Average Air Consumption (CFM) | 5   |
| Air Inlet Thread Size (NPTF)  | 1/4 |
| Min. Hose Size (I.D.)         | 3/8 |
| Sound Level (dBA)             | 92  |



## 2" COMPOSITE GRIP ANGLE SANDER

- > Light weight composite grip
- > Designed for small area repairs
- > 360° adjustable rear exhaust directs air away from work surface
- > Built-in speed regulator

(Includes 2" velcro pad)

### SXC605A

|                               |        |
|-------------------------------|--------|
| Pad Size (in.)                | 2      |
| Maximum Speed (RPM)           | 15,000 |
| Weight (lbs.)                 | 1.6    |
| Length (in.)                  | 7.8    |
| Average Air Consumption (CFM) | 3      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (in.)          | 3/8    |



## 5" HIGH SPEED SANDER

- > Compact and lightweight for handling for long periods of time
- > Contoured trigger housing for extra comfort and control
- > Built-in regulator for precise speed control throughout the range

(Includes 3 backing pads: 3", 4-1/2" & 5-1/2")

**Replacement pad set - RS265B31**

### SX265B

|                               |        |
|-------------------------------|--------|
| Pad Size (in.)                | 5.5    |
| Free Speed (RPM)              | 16,000 |
| Weight (lbs.)                 | 2.6    |
| Length (in.)                  | 8.25   |
| Average Air Consumption (CFM) | 5      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (I.D.)         | 3/8    |
| Sound Level (dBA)             | 102    |



## 6" DUAL ACTION SANDER

- > Rotary and orbital motion for rapid removal as well as fine finishing
- > Built-in regulator for precise speed control
- > Insulated grip for additional comfort

(Includes 6" bonded sanding pad)

**5" Replacement pad - RS87511**

**6" Replacement pad - RS87513**

### SX203N

|                               |        |
|-------------------------------|--------|
| Pad Size (in.)                | 6      |
| Free Speed (RPM)              | 10,000 |
| Weight (lbs.)                 | 3.8    |
| Length (in.)                  | 9.25   |
| Average Air Consumption (CFM) | 4      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (I.D.)         | 3/8    |
| Sound Level (dBA)             | 91     |



## 6" HEAVY DUTY DUAL ACTION SANDER

- > Balanced counterweight design provides smooth operation in orbital or rotary action
- > Built-in regulator for precise speed control
- > Insulated grip for additional comfort

(Includes 6" bonded sanding pad)

**5" Replacement pad - RS87511**

**6" Replacement pad - RS87513**

### SX294-6

|                               |        |
|-------------------------------|--------|
| Pad Size (in.)                | 6      |
| Free Speed (RPM)              | 10,000 |
| Weight (lbs.)                 | 4      |
| Length (in.)                  | 10     |
| Average Air Consumption (CFM) | 4      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (I.D.)         | 3/8    |
| Sound Level (dBA)             | 86     |



## 7" HORIZONTAL AIR SANDER

- > Advanced construction provides for low vibration and long life
- > Side handle can be mounted for right or left handed operation
- > Built-in regulator for outstanding speed control

(Includes 7" backing pad)

**7" Replacement backing pad - RS21440**  
**Replacement pad nut - RS21441**

### SX214A

|                               |        |
|-------------------------------|--------|
| Pad Size (in.)                | 7      |
| Spindle Size (in.)            | 5/8-11 |
| Free Speed (RPM)              | 4,500  |
| Weight (lbs.)                 | 3.8    |
| Length (in.)                  | 12.875 |
| Average Air Consumption (CFM) | 5      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (I.D.)         | 3/8    |
| Sound Level (dBA)             | 97     |



## DUAL PISTON STRAIGHT LINE SANDER

- > Dual piston design provides stall free performance
- > 100% Needle Bearing construction is designed for longer life
- > Automatic release trigger for positive stop action

**Replacement pad assembly - RS28635A**

### SX288C

|                               |          |
|-------------------------------|----------|
| Pad Size (in.)                | 16 x 2.5 |
| Free Speed (RPM)              | 2,500    |
| Weight (lbs.)                 | 6.6      |
| Length (in.)                  | 16.125   |
| Average Air Consumption (CFM) | 8        |
| Air Inlet Thread Size (NPTF)  | 1/4      |
| Min. Hose Size (I.D.)         | 3/8      |
| Sound Level (dBA)             | 93       |



## ORBITAL JITTERBUG SANDER

- > Heavy duty ball bearing construction for long life
- > Positive locking clamps for outstanding paper retention
- > Built-in regulator for outstanding speed control

**Replacement sanding pad - RS296C44**

### SX296C

|                               |            |
|-------------------------------|------------|
| Pad Size (in.)                | 3.5 x 7.75 |
| Free Speed (RPM)              | 8,000      |
| Weight (lbs.)                 | 4          |
| Length (in.)                  | 6.75       |
| Average Air Consumption (CFM) | 5          |
| Air Inlet Thread Size (NPTF)  | 1/4        |
| Min. Hose Size (I.D.)         | 3/8        |
| Sound Level (dBA)             | 84         |



## 7" HORIZONTAL AIR POLISHER

- > Flex edge polishing pad to help eliminate scorching
- > Side handle can be mounted for right or left handed operation
- > Built-in regulator for outstanding speed control

(Includes 7" backing pad)

**7" Replacement backing pad - RS21440**  
**Replacement pad nut - RS21441**

### SX215A

|                               |        |
|-------------------------------|--------|
| Pad Size (in.)                | 7      |
| Spindle Size (in.)            | 5/8-11 |
| Free Speed (RPM)              | 2,500  |
| Weight (lbs.)                 | 3.8    |
| Length (in.)                  | 13     |
| Average Air Consumption (CFM) | 9      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (I.D.)         | 3/8    |
| Sound Level (dBA)             | 95     |





## 2" COMPOSITE GRIP ANGLE GRINDER

- > Light weight composite grip
- > Built-in speed regulator
- > Ideal for smoothing welds and material removal in tight spaces
- > 360° adjustable rear exhaust directs air away from work surface

(Includes 2" disc wheel)

### SXC606

|                               |        |
|-------------------------------|--------|
| Wheel Size (in.)              | 2      |
| Maximum Speed (RPM)           | 15,000 |
| Weight (lbs.)                 | 1.6    |
| Length (in.)                  | 7.4    |
| Average Air Consumption (CFM) | 3      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (in.)          | 3/8    |



## 4" ANGLE GRINDER

- > Mini size is great when working in tight areas
- > Ample power for a small, compact tool
- > Auxiliary side handle for enhanced operator control and can be mounted for right or left handed operation

(Includes 4" disc wheel)

Replacement disc wheel - RS21134

### SX210

|                               |        |
|-------------------------------|--------|
| Pad Size (in.)                | 4      |
| Spindle Size (in.)            | 3/8-24 |
| Free Speed (RPM)              | 11,000 |
| Weight (lbs.)                 | 3.6    |
| Length (in.)                  | 8.25   |
| Average Air Consumption (CFM) | 5      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (I.D.)         | 3/8    |
| Sound Level (dBA)             | 85     |



## 4" HEAVY DUTY ANGLE GRINDER

- > High torque motor for outstanding performance in all conditions
- > Hardened and ground spiral bevel gears for low vibration and outstanding life
- > Lock off throttle for extra safety

(Includes 4" disc wheel)

Replacement disc wheel - RS21134

### SX211A

|                               |        |
|-------------------------------|--------|
| Pad Size (in.)                | 4      |
| Spindle Size (in.)            | 3/8-24 |
| Free Speed (RPM)              | 11,000 |
| Weight (lbs.)                 | 3.6    |
| Length (in.)                  | 9      |
| Average Air Consumption (CFM) | 6      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (I.D.)         | 3/8    |
| Sound Level (dBA)             | 86     |



## 4.5" COMPOSITE GRIP ANGLE GRINDER

- > Light weight composite grip
- > High torque motor designed for maximum material removal
- > Built-in speed regulator
- > Rear exhaust directs air away from work surface
- > Side handle can be mounted for right or left handed operation

### SXC610

|                               |        |
|-------------------------------|--------|
| Wheel Size (in.)              | 4.5    |
| Spindle Size                  | 3/8-24 |
| Maximum Speed (RPM)           | 10,000 |
| Weight (lbs.)                 | 3.3    |
| Length (in.)                  | 9.6    |
| Average Air Consumption (CFM) | 5      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (in.)          | 3/8    |



## 1/4" MINI DIE GRINDER

- > Compact, lightweight design for easy maneuverability in tight areas
- > Built-in speed regulator
- > Lock off throttle for extra safety

### SX231B

|                               |        |
|-------------------------------|--------|
| Collet Size (in.)             | 1/4    |
| Free Speed (RPM)              | 25,000 |
| Weight (lbs.)                 | 0.8    |
| Length (in.)                  | 5.13   |
| Average Air Consumption (CFM) | 4      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (I.D.)         | 3/8    |
| Sound Level (dBA)             | 94.5   |



## 1/4" COMPOSITE GRIP MINI DIE GRINDER

- > Light weight composite grip
- > Twin bearing spindle for durability and smooth operation
- > Rear exhaust directs air away from work surface
- > Built-in speed regulator

### SXC201

|                               |        |
|-------------------------------|--------|
| Collet Size (in.)             | 1/4    |
| Maximum Speed (RPM)           | 25,000 |
| Weight (lbs.)                 | 0.9    |
| Length (in.)                  | 6.1    |
| Average Air Consumption (CFM) | 2.1    |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (in.)          | 3/8    |



## 1/4" MEDIUM DIE GRINDER

- > Rear exhaust directs air away from work surface
- > Built-in speed regulator
- > Lock off throttle for extra safety

### SX230B

|                               |        |
|-------------------------------|--------|
| Collet Size (in.)             | 1/4    |
| Free Speed (RPM)              | 22,000 |
| Weight (lbs.)                 | 1.2    |
| Length (in.)                  | 6.75   |
| Average Air Consumption (CFM) | 4      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (I.D.)         | 3/8    |
| Sound Level (dBA)             | 93     |



## 1/4" COMPOSITE GRIP MEDIUM DIE GRINDER

- > Light weight composite grip
- > Twin bearing spindle for durability and smooth operation
- > Rear exhaust directs air away from work surface
- > Built-in speed regulator

### SXC205

|                               |        |
|-------------------------------|--------|
| Collet Size (in.)             | 1/4    |
| Maximum Speed (RPM)           | 22,000 |
| Weight (lbs.)                 | 1.3    |
| Length (in.)                  | 7      |
| Average Air Consumption (CFM) | 3      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (in.)          | 3/8    |



## 1/4" EXTENDED DIE GRINDER

- > Ideal for work in deep crevices
- > Throttle lever for positive speed control
- > Rear exhaust minimizes chip fly back

### SX240B

|                               |        |
|-------------------------------|--------|
| Collet Size (in.)             | 1/4    |
| Free Speed (RPM)              | 20,000 |
| Weight (lbs.)                 | 1.4    |
| Length (in.)                  | 9.75   |
| Average Air Consumption (CFM) | 4      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (I.D.)         | 3/8    |
| Sound Level (dBA)             | 87.2   |



## 1/4" MINI ANGLE DIE GRINDER

- > Compact, lightweight design for easy maneuverability in tight areas
- > 90 degree head allows flexibility in many applications
- > Lock off throttle for extra safety

### SX264

|                               |        |
|-------------------------------|--------|
| Collet Size (in.)             | 1/4    |
| Free Speed (RPM)              | 20,000 |
| Weight (lbs.)                 | 1      |
| Length (in.)                  | 5.12   |
| Average Air Consumption (CFM) | 44     |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (I.D.)         | 3/8    |
| Sound Level (dBA)             | 93.2   |



## 1/4" MINI ANGLE DIE GRINDER KIT

- > Built-in speed regulator
- > Safety throttle lever for positive speed control
- > Ball bearing construction for long tool life
- > Convenient blow mold storage case
- > Includes:
  - (1) - SX264 Mini Right Angle Die Grinder
  - (2) - Spanner wrenches
  - (1) - 1/8" (3mm) Collet
  - (5 pc.) - 1/8" (3mm) Shank grinding stones
  - (5 pc.) - 1/4" (6mm) Shank grinding stones
  - (1 each) - 2" & 3" Backing pads
  - (4 each) - 2" & 3" Abrasive discs
  - (2) - Screw posts
  - (1) Arbor

### SX264K

|                               |        |
|-------------------------------|--------|
| Collet Size (in.)             | 1/4    |
| Free Speed (RPM)              | 20,000 |
| Weight (lbs.)                 | 1      |
| Length (in.)                  | 5.12   |
| Average Air Consumption (CFM) | 44     |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (I.D.)         | 3/8    |
| Sound Level (dBA)             | 93.2   |



## 1/4" COMPOSITE GRIP MINI ANGLE DIE GRINDER

- > Light weight composite grip
- > Twin bearing spindle for durability and smooth operation
- > Rear exhaust directs air away from work surface
- > Built-in speed regulator

### SXC202

|                               |        |
|-------------------------------|--------|
| Collet Size (in.)             | 1/4    |
| Maximum Speed (RPM)           | 20,000 |
| Weight (lbs.)                 | 1.1    |
| Length (in.)                  | 6.1    |
| Average Air Consumption (CFM) | 2.1    |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (in.)          | 3/8    |



## 1/4" MEDIUM ANGLE DIE GRINDER

- > 90° angle head for restricted areas
- > Built-in speed regulator
- > Rear exhaust directs air away from work surface

### SX232B

|                               |        |
|-------------------------------|--------|
| Collet Size (in.)             | 1/4    |
| Free Speed (RPM)              | 20,000 |
| Weight (lbs.)                 | 1      |
| Length (in.)                  | 6.38   |
| Average Air Consumption (CFM) | 4      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (I.D.)         | 3/8    |
| Sound Level (dBA)             | 93.6   |



## 1/4" COMPOSITE GRIP MEDIUM ANGLE DIE GRINDER

- > Light weight composite grip
- > Twin bearing spindle for durability and smooth operation
- > Rear exhaust directs air away from work surface
- > Built-in speed regulator

### SXC206

|                               |        |
|-------------------------------|--------|
| Collet Size (in.)             | 1/4    |
| Maximum Speed (RPM)           | 18,000 |
| Weight (lbs.)                 | 1.7    |
| Length (in.)                  | 7      |
| Average Air Consumption (CFM) | 3      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (in.)          | 3/8    |



## COMPOSITE GRIP TIRE BUFFER

- > Light weight composite grip
- > 7/16" chuck accepts most standard buffing wheels
- > Quick change collet makes changing wheels quick and easy
- > Rear exhaust keeps air away from work surface

### SXC602

|                               |        |
|-------------------------------|--------|
| Chuck Size (in.)              | 7/16   |
| Spindle Thread (in.)          | 3/8-24 |
| Maximum Speed (RPM)           | 2,600  |
| Weight (lbs.)                 | 1.9    |
| Length (in.)                  | 8.9    |
| Average Air Consumption (CFM) | 3      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (in.)          | 3/8    |



## PENCIL DIE GRINDER KIT

- > Built-in regulator
- > Convenient blow mold storage case
- > Includes:
  - (1) - SX245 - 54,000 RPM Pencil Die Grinder
  - (10) - 1/8" Shank stones
  - (2) - 9mm Wrenches
  - (1) - 1/4" Coupler
  - (1) Air tool oil bottle
  - (1) Oiler

### SX245K

|                               |        |
|-------------------------------|--------|
| Collet Size (in.)             | 1/8    |
| Free Speed (RPM)              | 54,000 |
| Weight (lbs.)                 | 6      |
| Length (in.)                  | 5.5    |
| Average Air Consumption (CFM) | 5.3    |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (I.D.)         | 3/16   |
| Sound Level (dBA)             | 72     |





## ENGRAVING PEN

- > Good for engraving on hard materials such as non-ferrous metals, hardened tool steel, glass, ceramic, and plastics
- > No lubrication needed
- > Easy adjustable shut-off collar for adjusting the power

(Includes 5' hose and engraving needle)

**Replacement engraving needle - RS25011**

### SX250

|                               |       |
|-------------------------------|-------|
| Blows Per Minute (BPM)        | 3,000 |
| Weight (lbs.)                 | .25   |
| Length (in.)                  | 5.5   |
| Average Air Consumption (CFM) | 2     |
| Air Inlet Thread Size (NPTF)  | 1/4   |
| Min. Hose Size (I.D.)         | 3/8   |



## KNIFE / SEALANT CUTTER

- > Safety lever throttle
- > Built-in regulator for positive speed control
- > Rear exhaust directs air away from work surface
- > Quickly and easily cuts around bonded glass

(Includes offset blade)

**Replacement offset blade - RS87446**

### SX248

|                               |        |
|-------------------------------|--------|
| Strokes Per Minute (BPM)      | 20,000 |
| Weight (lbs.)                 | 2.2    |
| Length (in.)                  | 28.5   |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (I.D.)         | 3/8    |
| Average Air Consumption (CFM) | 5      |
| Sound Level (dBA)             | 78     |



## RECIPROCATING AIR SAW

- > Safety lever throttle
- > Compact design allows work in tight areas
- > Able to cut up to 16-gauge capacity
- > Positive blade retention

(Includes 2 blades: (1) 32TPI and (1) 24TPI)

**Replacement blades (set of 5) - RS87620**  
**Contains (3) 32TPI and (2) 24TPI blades**

### SX244

|                               |       |
|-------------------------------|-------|
| Strokes Per Minute            | 9,000 |
| Weight (lbs.)                 | 1.2   |
| Length (in.)                  | 9     |
| Air Inlet Thread Size (NPTF)  | 1/4   |
| Min. Hose Size (I.D.)         | 3/8   |
| Average Air Consumption (CFM) | 7     |
| Sound Level (dBA)             | 95    |



## MINI AIR SAW

- > Black industrial matte finish
- > Adjustable blade guard
- > Locking throttle lever for safety and control
- > Red TPR grip for maximum comfort and less vibration
- > Perfect for working in confined areas

(Includes 2 blades: (1) 32TPI and (1) 24TPI)

**Replacement blades (set of 5) - RS87620**  
**Contains (3) 32TPI and (2) 24TPI blades**

### SX261

|                                |       |
|--------------------------------|-------|
| Strokes Per Minute             | 7,500 |
| Weight (lbs.)                  | 1.0   |
| Recommended Air Pressure (PSI) | 90    |
| Air Inlet Thread Size (NPTF)   | 1/4   |
| Stroke Length (mm)             | 5     |
| Capacity Cutting Size (mm)     | 1.2   |



## 3" UTILITY CUT-OFF TOOL

- > Light weight at 1.6 lbs. but with the power to cut all types of materials
- > Rear exhaust directs air away from the work surface
- > Built-in regulator

(Includes 3" disc)

**Replacement discs (set of 5) - 87602**

**Replacement guard - RS233A24**

### SX233A

|                               |        |
|-------------------------------|--------|
| Maximum Speed (RPM)           | 20,000 |
| Wheel Size (in.)              | 3      |
| Weight (lbs.)                 | 1.6    |
| Length (in.)                  | 7.38   |
| Average Air Consumption (CFM) | 5      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (I.D.)         | 3/8    |
| Sound Level (dBA)             | 93     |



## 3" REVERSIBLE CUT-OFF TOOL

- > Reversible option to direct sparks and debris away from the user and sensitive work surfaces
- > 1/2" Horsepower motor
- > Hardened rubber grip housing to reduce vibration

(Includes 3" disc)

**Replacement discs (set of 5) - 87602**

**Replacement guard - RS234R32**

### SX234R

|                               |        |
|-------------------------------|--------|
| Maximum Speed (RPM)           | 18,000 |
| Wheel Size (in.)              | 3      |
| Weight (lbs.)                 | 2      |
| Length (in.)                  | 8.3    |
| Average Air Consumption (CFM) | 3.5    |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (in.)          | 3/8    |
| Sound Level (dBA)             | 82     |



## 3" COMPOSITE GRIP UTILITY CUT-OFF TOOL

- > Light weight composite grip
- > High torque motor reduces binding
- > Twin bearing spindle for durability and smooth operation
- > Rear exhaust keeps air away from work surface

(Includes 3" disc)

**Replacement discs (set of 5) - 87602**

**Replacement guard - RS20829**

### SXC208

|                               |        |
|-------------------------------|--------|
| Maximum Speed (RPM)           | 21,000 |
| Wheel Size (in.)              | 3      |
| Weight (lbs.)                 | 1.8    |
| Length (in.)                  | 7.6    |
| Average Air Consumption (CFM) | 3      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (in.)          | 3/8    |



## METAL SHEAR

- > Hardened shear head can cut up to 18 gauge steel
- > Planetary gearing for long life and heavy duty use
- > Bottom handle diffused exhaust for quiet operation and keeping air away from work surface

### SX227B

|                               |       |
|-------------------------------|-------|
| Strokes Per Minute            | 2,500 |
| Weight (lbs.)                 | 3     |
| Length (in.)                  | 8.5   |
| Average Air Consumption (CFM) | 4     |
| Air Inlet Thread Size (in.)   | 1/4   |
| Min. Hose Size (I.D.)         | 3/8   |
| Sound Level (dBA)             | 82    |



## NIBBLER

- > Ability to cut up to 18 gauge rolled steel without distortion
- > Compact design allows work in confined areas
- > Cuts tight 1/4" radius with accuracy

(Includes cutter punch and die)

Replacement cutter punch - RS229B36

Replacement cutter die - RS229B39

## SX229B

|                               |       |
|-------------------------------|-------|
| Strokes Per Minute            | 2,600 |
| Weight (lbs.)                 | 2     |
| Length (in.)                  | 7.375 |
| Average Air Consumption (CFM) | 5     |
| Air Inlet Thread Size (in.)   | 1/4   |
| Min. Hose Size (I.D.)         | 3/8   |
| Sound Level (dBA)             | 93    |



## 8MM PUNCH/FLANGE TOOL

- > 8 mm diameter hole punch/crimp/flange in up to 14 gauge steel capacity
- > Head swivels 360° for great maneuverability
- > 7/8" Gap

## SX278C

|                               |      |
|-------------------------------|------|
| Punch Hole Size (in.)         | 5/16 |
| Punch Hole Size (mm)          | 8    |
| Gap Size (in.)                | 7/8  |
| Weight (lbs.)                 | 3.5  |
| Length (in.)                  | 10   |
| Average Air Consumption (CFM) | 4    |
| Air Inlet Thread Size (NPTF)  | 1/4  |
| Min. Hose Size (I.D.)         | 3/8  |



## PUNCH/FLANGE TOOL SET WITH INTERCHANGEABLE HEADS

- > Meets ICAR standard
- > Both 3/16" (5mm) and 5/16" (8mm) punch/ flange heads included in one set
- > Punches steel or aluminum sheeting up to 2.0mm thickness
- > Patented punch/ flange heads change quickly and easily
- > Comfort grip sleeve for better control
- > Convenient blow mold case for tool protection and storage

Replacement 3/16" head assembly - RSPF316HD

Replacement 5/16" head assembly - RSPF516HD

## SX281

|                                |              |
|--------------------------------|--------------|
| Punch Hole Size (in.)          | 3/16 or 5/16 |
| Punch Hole Size (mm)           | 5 or 8       |
| Recommended Air Pressure (PSI) | 90           |
| Weight of Tool / Kit (lbs.)    | 3.6 / 6      |
| Length (in.)                   | 10           |
| Average Air Consumption (CFM)  | 4            |
| Air Inlet Thread Size (NPTF)   | 1/4          |
| Min. Hose Size (I.D.) (in.)    | 3/8          |



## 3/8" DRIVE REVERSIBLE AIR DRILL WITH CHUCK

- > Great durability at a value price
- > One finger forward/reverse for true one hand operation
- > Muffled handle exhaust for quiet operation

(Includes 3/8" Jacobs® chuck and key)

Replacement 3/8" Jacobs® chuck with key - RS87106

## SX223

|                               |        |
|-------------------------------|--------|
| Chuck Size (in.)              | 3/8    |
| Spindle Size (in.)            | 3/8-24 |
| Free Speed (RPM)              | 1,800  |
| Weight (lbs.)                 | 2.42   |
| Length (in.)                  | 7.6    |
| Average Air Consumption (CFM) | 4      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (in.)          | 3/8    |
| Sound Level (dBA)             | 83.3   |



### 3/8" DRIVE REVERSIBLE AIR DRILL WITH CHUCK

- > High quality planetary gearing for extreme duty
- > One finger forward/reverse for true one hand operation
- > Muffled handle exhaust for quiet operation

(Includes 3/8" Jacobs® chuck and key)

**Replacement 3/8" Jacobs® chuck with key - RS87106**

#### **SX225B**

|                               |        |
|-------------------------------|--------|
| Chuck Size (in.)              | 3/8    |
| Spindle Size (in.)            | 3/8-24 |
| Free Speed (RPM)              | 1,800  |
| Weight (lbs.)                 | 2.4    |
| Length (in.)                  | 6.5    |
| Average Air Consumption (CFM) | 4      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (in.)          | 3/8    |
| Sound Level dBA               | 85     |



### 3/8" DRIVE AIR DRILL WITH CHUCK

- > High quality planetary gearing for extreme duty
- > Teasing throttle trigger for great speed control
- > Muffled handle exhaust for quiet operation

(Includes 3/8" Jacobs® chuck and key)

**Replacement 3/8" Jacobs® chuck with key - RS87106**

#### **SX228A**

|                               |        |
|-------------------------------|--------|
| Chuck Size (in.)              | 3/8    |
| Spindle Size (in.)            | 3/8-24 |
| Free Speed (RPM)              | 2,600  |
| Weight (lbs.)                 | 2.2    |
| Length (in.)                  | 6.5    |
| Average Air Consumption (CFM) | 4      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (in.)          | 3/8    |
| Sound Level (dBA)             | 83     |



### 3/8" DRIVE HEAVY DUTY REVERSIBLE AIR DRILL WITH KEYLESS CHUCK

- > Heavy duty gearing for high performance jobs
- > Reversible for added versatility
- > Muffled handle exhaust for extra quiet operation

(Includes 3/8" Jacobs® keyless chuck)

**Replacement 3/8" Jacobs® keyless chuck - RS79535**

#### **SX495**

|                               |        |
|-------------------------------|--------|
| Chuck Size (in.)              | 3/8    |
| Spindle Size (in.)            | 3/8-24 |
| Free Speed (RPM)              | 1,800  |
| Weight (lbs.)                 | 2.6    |
| Length (in.)                  | 7      |
| Average Air Consumption (CFM) | 4      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (in.)          | 3/8    |
| Sound Level (dBA)             | 94     |



## 3/8" DRIVE REVERSIBLE RIGHT ANGLE AIR DRILL WITH CHUCK

- > Compact, low profile head for hard to reach confined areas
- > Variable speed throttle lever for speed control throughout run down
- > Reverse valve for directional changes and added versatility

(Includes 3/8" Jacobs® chuck and key)

**Replacement 3/8" Jacobs® chuck with key - RS87106**

### SX545B

|                               |        |
|-------------------------------|--------|
| Chuck Size (in.)              | 3/8    |
| Spindle Size (in.)            | 3/8-24 |
| Free Speed (RPM)              | 1,600  |
| Weight (lbs.)                 | 2.6    |
| Length (in.)                  | 8      |
| Average Air Consumption (CFM) | 4      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (in.)          | 3/8    |
| Sound Level (dBA)             | 94     |



## 1/2" DRIVE REVERSIBLE AIR DRILL WITH CHUCK

- > Planetary gearing for smooth operation and extended life
- > Teasing throttle for precise speed control
- > Side handle for added control and comfort

(Includes 1/2" Jacobs® chuck and key)

**Replacement 1/2" Jacobs® chuck with key - RS87109**

### SX221B

|                               |        |
|-------------------------------|--------|
| Chuck Size (in.)              | 1/2    |
| Spindle Size (in.)            | 3/8-24 |
| Free Speed (RPM)              | 500    |
| Weight (lbs.)                 | 3.6    |
| Length (in.)                  | 8      |
| Average Air Consumption (CFM) | 4      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (in.)          | 3/8    |
| Sound Level (dBA)             | 89     |



## 1/2" DRIVE HEAVY DUTY REVERSIBLE AIR DRILL WITH KEYLESS CHUCK

- > Planetary gearing for smooth operation and extended life
- > Teasing throttle for precise speed control
- > Side handle for added control and comfort

(Includes 1/2" Jacobs® keyless chuck)

**Replacement 1/2" Jacobs® keyless chuck - RS79437N**

### SX494

|                               |        |
|-------------------------------|--------|
| Chuck Size (in.)              | 1/2    |
| Spindle Size (in.)            | 3/8-24 |
| Free Speed (RPM)              | 700    |
| Weight (lbs.)                 | 3.2    |
| Length (in.)                  | 8      |
| Average Air Consumption (CFM) | 4      |
| Air Inlet Thread Size (NPTF)  | 1/4    |
| Min. Hose Size (in.)          | 3/8    |
| Sound Level (dBA)             | 92     |



## HAMMERS / NEEDLE SCALERS



### SHORT HAMMER

- > Ideal for standard duty applications
- > Built-in regulator
- > Quick change retainer spring

(Includes 3 pc. chisel set)

Replacement quick change retainer spring - RS87301

#### SX235KTB

|                               |       |
|-------------------------------|-------|
| Shank Opening (in.)           | .401  |
| Blows Per Minute              | 4,500 |
| Bore Diameter (in.)           | 11/16 |
| Piston Stroke (in.)           | 1-5/8 |
| Weight (lbs.)                 | 2.6   |
| Length (in.)                  | 5.25  |
| Average Air Consumption (CFM) | 4     |
| Air Inlet Thread Size (NPTF)  | 1/4   |
| Min. Hose Size (I.D.)         | 3/8   |
| Sound Level (dBA)             | 105   |



### MEDIUM DUTY HAMMER

- > An excellent general purpose hammer
- > Built-in regulator
- > Accepts .401" Parker taper shank chisels
- > Quick change retainer spring

Replacement quick change retainer spring - RS87301

#### SX275B

|                               |       |
|-------------------------------|-------|
| Shank Opening (in.)           | .401  |
| Blows Per Minute              | 3,000 |
| Bore Diameter (in.)           | 11/16 |
| Piston Stroke (in.)           | 2-5/8 |
| Weight (lbs.)                 | 3.4   |
| Length (in.)                  | 6.75  |
| Average Air Consumption (CFM) | 4     |
| Air Inlet Thread Size (NPTF)  | 1/4   |
| Min. Hose Size (I.D.)         | 3/8   |
| Sound Level (dBA)             | 105   |



### HEAVY DUTY LONG BARREL HAMMER

- > Hard hitting long barrel design for great power
- > Comfort rubber grip
- > Quick change chisel retainer for fast changes

Replacement quick change retainer - RS248025

#### SX243

|                               |       |
|-------------------------------|-------|
| Shank Opening (in.)           | .401  |
| Blows Per Minute              | 2,200 |
| Bore Diameter (in.)           | 3/4   |
| Piston Stroke (in.)           | 3-3/4 |
| Weight (lbs.)                 | 4.6   |
| Length (in.)                  | 8.875 |
| Average Air Consumption (CFM) | 4     |
| Air Inlet Thread Size (NPTF)  | 1/4   |
| Min. Hose Size (I.D.)         | 3/8   |
| Sound Level (dBA)             | 110   |



## PISTOL GRIP NEEDLE SCALER

- > Perfect for surface prep work involving the removal of rust, paint, weld slag, etc.
- > Lightweight aluminum housing
- > Hardened steel casing and 1/8" hardened steel needles
- > Pistol design for comfort and control

**Replacement needle - RS24623**  
**Sold individually - tool requires 19**

### SX246

|                               |       |
|-------------------------------|-------|
| Blows Per Minute (BPM)        | 3,000 |
| Needle Diameter (in.)         | 1/8   |
| Needle Quantity               | 19    |
| Weight (lbs.)                 | 4.6   |
| Length (in.)                  | 10.25 |
| Average Air Consumption (CFM) | 10    |
| Air Inlet Thread Size (NPTF)  | 1/4   |
| Min. Hose Size (I.D.)         | 3/8   |
| Sound Level (dBA)             | 97    |




## HEAVY DUTY STRAIGHT NEEDLE SCALER

- > Perfect for surface prep work involving the removal of rust, paint, weld slag, etc.
- > Hardened steel casing and 1/8" hardened steel needles
- > Straight design for limited access areas

**Replacement needle - RS730280**  
**Sold individually - tool requires 19**

### SX247

|                              |       |
|------------------------------|-------|
| Blows Per Minute (BPM)       | 4,500 |
| Needle Diameter (in.)        | 1/8   |
| Needle Quantity              | 19    |
| Weight (lbs.)                | 4     |
| Length (in.)                 | 11.25 |
| Average Air Consumption      | 5     |
| Air Inlet Thread Size (NPTF) | 1/4   |
| Min. Hose Size (I.D.)        | 3/8   |

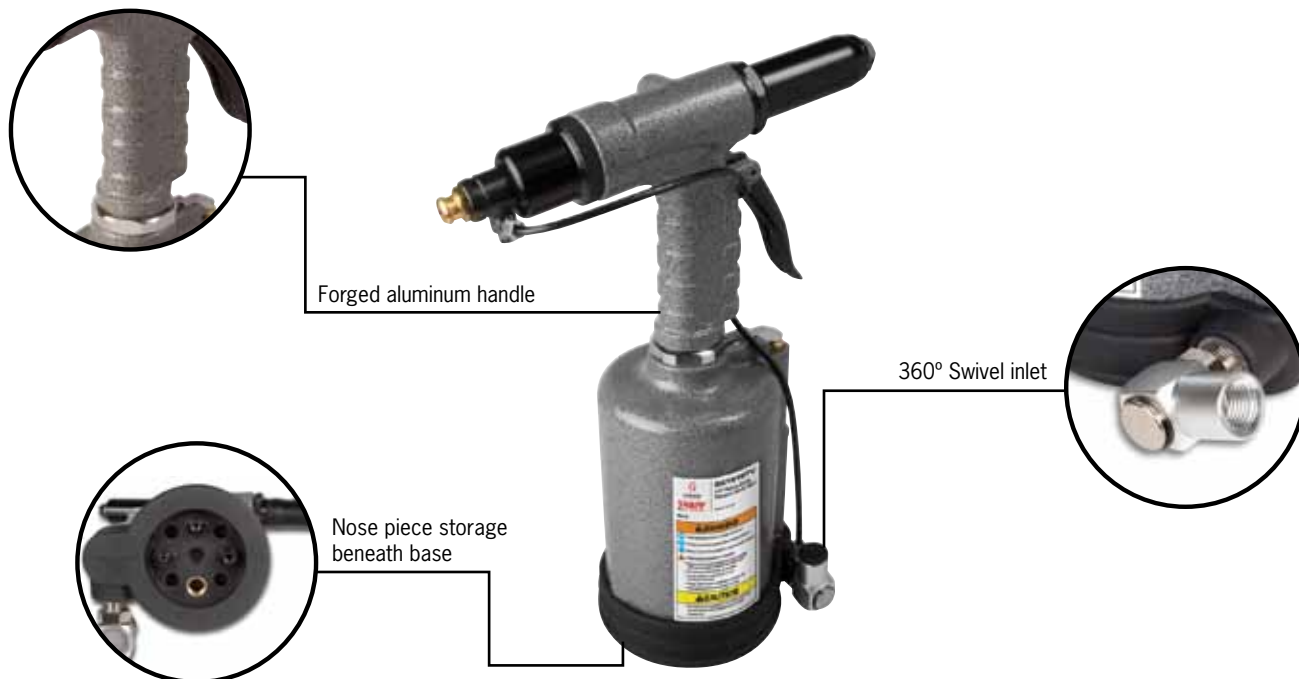

## 5/32" - 3/16" HEAVY DUTY VACUUM RIVET GUN

- > Features a pulling (traction) power of 1,360 ft.lbs.
- > Sets all conventional, blind rivets from 3/32", 1/8", 5/32" in all materials, and will shoot standard 3/16" conventional style rivets up through steel material
- > Shoots 3/16" aluminum only standard blind rivets
- > Features a patented vacuum system to allow ease of use in all positions
- > Comes with nose pieces in 3/32", 1/8", 5/32", and 3/16" sizes
- > Forged aluminum handle
- > Nose pieces stored conveniently underneath base of gun

(Includes blow molded storage case, nose pieces and mandrel collection hose)

### SX0618TV

|                              |        |
|------------------------------|--------|
| Rivet Capacity (in.)         | 5/32   |
| Traction Power (ft.lbs.)     | 1,360  |
| Air Pressure (PSI)           | 70-100 |
| Stroke Length (in.)          | 11/16  |
| Height (in.)                 | 11     |
| Weight (lbs.)                | 3.5    |
| Min. Hose Size (I.D.)        | 3/8    |
| Air Inlet Thread Size (NPTF) | 1/4    |



## 3/16" HEAVY DUTY RIVET GUN

- > Features a pulling (traction) power of 1,983 ft.lbs.
- > Sets all conventional, standard and structural blind rivets, monobolts, and trivets up to and including 3/16" diameter in all materials
- > Comes with nose pieces in 3/32", 1/8", 5/32", and 3/16" sizes
- > Forged aluminum handle
- > Nose pieces stored conveniently underneath base of gun

(Includes blow molded storage case and nose pieces)

### SX0918T

|                              |        |
|------------------------------|--------|
| Rivet Capacity (in.)         | 3/16   |
| Traction Power (ft.lbs.)     | 1,983  |
| Air Pressure (PSI)           | 75-90  |
| Stroke Length (in.)          | 11/16  |
| Height (in.)                 | 12-3/8 |
| Weight (lbs.)                | 3.5    |
| Min. Hose Size (I.D.)        | 3/8    |
| Air Inlet Thread Size (NPTF) | 1/4    |



## 3/16" HEAVY DUTY VACUUM RIVET GUN

- > Features a pulling (traction) power of 1,983 ft.lbs.
- > Sets all conventional, standard and structural blind rivets, monobolts, and t-rivets up to and including 3/16" diameter in all materials
- > Features a patented vacuum system to allow ease of use in all positions
- > Comes with nose pieces in 3/32", 1/8", 5/32", and 3/16" sizes
- > Forged aluminum handle
- > Nose pieces stored conveniently underneath base of gun

(Includes blow molded storage case, nose pieces and mandrel collection hose)

### SX0918TV

|                              |        |
|------------------------------|--------|
| Rivet Capacity (in.)         | 3/16   |
| Traction Power (ft.lbs.)     | 1,983  |
| Air Pressure (PSI)           | 70-100 |
| Stroke Length (in.)          | 11/16  |
| Height (in.)                 | 12-3/8 |
| Weight (lbs.)                | 3.7    |
| Min. Hose Size (I.D.)        | 3/8    |
| Air Inlet Thread Size (NPTF) | 1/4    |



## 1/4" HEAVY DUTY RIVET GUN

- > Features a pulling (traction) power of 3,960 ft.lbs.
- > Sets all conventional, standard and structural blind rivets, monobolts, and t-rivets up to and including 1/4" diameter in all materials
- > Comes with nose pieces in 3/16" and 1/4" sizes
- > Forged aluminum handle
- > Nose pieces stored conveniently underneath base of gun

(Includes blow molded storage case and nose pieces)

### SX1819T

|                              |         |
|------------------------------|---------|
| Rivet Capacity (in.)         | 1/4     |
| Traction Power (ft.lbs.)     | 3,960   |
| Air Pressure (PSI)           | 70-100  |
| Stroke Length (in.)          | 3/4     |
| Height (in.)                 | 12-9/16 |
| Weight (lbs.)                | 5.5     |
| Min. Hose Size (I.D.)        | 3/8     |
| Air Inlet Thread Size (NPTF) | 1/4     |



## 1/4" HEAVY DUTY VACUUM RIVET GUN

- > Features a pulling (traction) power of 3,960 ft.lbs.
- > Sets all conventional, standard and structural blind rivets, monobolts, and t-rivets up to and including 1/4" diameter in all materials
- > Features a patented vacuum system to allow ease of use in all positions
- > Comes with nose pieces in 3/16" and 1/4" sizes
- > Forged aluminum handle
- > Nose pieces stored conveniently underneath base of gun

(Includes blow molded storage case, nose pieces and mandrel collection hose)

### SX1819TV

|                              |         |
|------------------------------|---------|
| Rivet Capacity (in.)         | 1/4     |
| Traction Power (ft.lbs.)     | 3,960   |
| Air Pressure (PSI)           | 70-100  |
| Stroke Length (in.)          | 3/4     |
| Height (in.)                 | 12-9/16 |
| Weight (lbs.)                | 5.3     |
| Min. Hose Size (I.D.)        | 3/8     |
| Air Inlet Thread Size (NPTF) | 1/4     |



## TOUCH UP GRAVITY FEED SPRAY GUN

- > Gravity feed action uses less air and offers increased control over atomization and fluid output
- > 0.8 mm fluid orifice

**0.8mm**

Optional 1.0 mm needle, nozzle and cap set - RS9001A1.0  
Replacement cup assembly - RS125CC

### 9001A

|                                |     |
|--------------------------------|-----|
| Air Inlet Thread Size (NPTF)   | 1/4 |
| Recommended Air Pressure (PSI) | 43  |
| Inlet Pressure (PSI)           | 35  |
| Nozzle Pressure                | 30  |



## HVLP GRAVITY FEED SPRAY GUN

- > Adjustable spray pattern varies from round jet to full flat jet
- > Meets all high volume, low pressure (HVLP) mandates
- > Fine atomization at low air consumption
- > Excellent balance with soft trigger action
- > Sunex 9091 Mini Regulator with Pressure Gauge included
- > 1.4 mm fluid orifice - 9002B

**1.4mm**

Optional 2.0 mm needle, nozzle and cap set - RS9002B2.0  
Replacement cup assembly - RS600CCA

### 9002B

|                                |     |
|--------------------------------|-----|
| Air Inlet Thread Size (NPTF)   | 1/4 |
| Recommended Air Pressure (PSI) | 43  |
| Inlet Pressure (PSI)           | 43  |
| Nozzle Pressure                | 10  |



## GRAVITY FEED SPRAY GUN

- > Gravity feed action uses less air and offers increased control over atomization and fluid output
- > Adjustable spray pattern varies from round jet to full flat jet
- > Excellent balance with soft trigger action
- > Die cast aluminum gun body
- > 1.4 mm fluid orifice - 9004A
- > 1.7 mm fluid orifice - 90045A

**1.4mm**

**9004A**

**1.7mm**

**90045A**

Optional 2.0 mm needle, nozzle and cap set - RS9004A2.0  
Replacement cup assembly - RS600CCA

### 9004A & 90045A

|                                |     |
|--------------------------------|-----|
| Air Inlet Thread Size (NPTF)   | 1/4 |
| Fluid Orifice 9004A (mm)       | 1.4 |
| Fluid Orifice 90045A (mm)      | 1.7 |
| Inlet Pressure (PSI)           | 50  |
| Recommended Air Pressure (PSI) | 43  |
| Nozzle Pressure                | 25  |




**HVLP TOUCH UP  
SPRAY GUN**

- > Adjustable spray pattern varies from round jet to full flat jet
- > Meets all high volume, low pressure (HVLP) mandates
- > Lightweight, compact design, perfect for touch-up work in tight places
- > Excellent balance with soft trigger action
- > Sunex 9091 Mini Regulator with Pressure Gauge included
- > 0.8 mm fluid orifice

**0.8mm**

Optional 1.0 mm needle, nozzle and cap set - RS9013B1.0  
 Replacement cup assembly - RS125CC

**9013B**

|                                |     |
|--------------------------------|-----|
| Air Inlet Thread Size (NPTF)   | 1/4 |
| Recommended Air Pressure (PSI) | 43  |
| Inlet Pressure (PSI)           | 43  |
| Nozzle Pressure                | 10  |


**TOUCH UP SPRAY GUN  
WITH CUP**

- > Lightweight, compact design
- > Overhead trigger for fine control
- > Adjustable siphon cup
- > Adjustable fluid control
- > 0.8 mm fluid orifice

**0.8mm**

Replacement cup (no lid) - RS10A23  
 Replacement lid assembly - RS10A21

**SX10A**

|                                |     |
|--------------------------------|-----|
| Air Inlet Thread Size (NPTF)   | 1/4 |
| Recommended Air Pressure (PSI) | 40  |
| Inlet Pressure (PSI)           | 50  |
| Nozzle Pressure                | 26  |


**SPRAY GUN  
WITH CUP**

- > Chrome plated head and air nozzle
- > External breather tube cup
- > Adjustable air and paint controls
- > Dual action trigger
- > Durable black finish
- > 1.3 mm fluid orifice

**1.3mm**

Replacement cup (no lid) - RS70C30  
 Replacement lid assembly - RS70C28

**SX70C**

|                                |       |
|--------------------------------|-------|
| Air Inlet Thread Size (NPTF)   | 1/4   |
| Recommended Air Pressure (PSI) | 50-70 |
| Inlet Pressure (PSI)           | 60    |
| Nozzle Pressure                | 47    |



## DELUXE SPRAY GUN WITH CUP

- > Ideal for heavy duty spraying
- > Precision air cap and fluid nozzle
- > Features vented lid
- > Two fingered control for ease of operation
- > 1.3 mm fluid orifice

**1.3mm**

Replacement cup (no lid) - RS80B32

Replacement lid assembly - RS80B30

### SX80B

|                                |       |
|--------------------------------|-------|
| Air Inlet Thread Size (NPTF)   | 1/4   |
| Recommended Air Pressure (PSI) | 50-70 |
| Inlet Pressure (PSI)           | 50    |
| Nozzle Pressure                | 47    |



## SPRAY GUN HOLDER WITH PAINT STRAINER

- > Black powder coated finish
- > Holds all types of gravity feed spray guns while not in use
- > Accommodates both full size and touch-up guns
- > Can be mounted on a wall or a counter

(Includes paint strainer attachment)

### 9014A



## MINI DIAPHRAGM REGULATOR WITH PRESSURE GAUGE

- > Precision valve allows proper air pressure in spray gun
- > 0-140 PSI pressure gauge
- > Fits most makes and models of spray guns and air tools
- > Shipping weight (lbs.) - 0.6

### 9091



## SPARK PLUG CLEANER

- > Cleans all spark plug
- > Compact for easy storage
- > Two way valve allows for abrasive blast or clean air

Replacement silica - 3914

Replacement bag - 3915

**3912**




## PNEUMATIC BRAKE CALIPER SET

- > Finger controlled press speed with easy grip left or right rotating wind-back handle
- > 16 pads cover the widest worldwide vehicle applications
- > One button pressure release
- > Single piston press shaft
- > Magnetic press pad attachment
- > Anodized, light weight, cast aluminum body

**3935**

|                                  |          |
|----------------------------------|----------|
| Square Drive Size (in.)          | 3/8      |
| Weight (lbs.)                    | 2.2 lbs. |
| Length (in.)                     | 10       |
| Height (in.)                     | 5.5      |
| Air Inlet Thread Size NPTF (in.) | 1/4      |

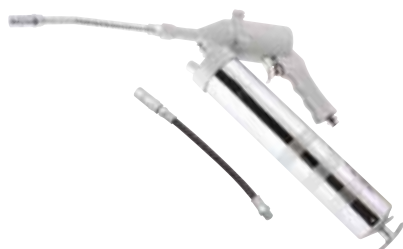

## AIR OPERATED GREASE GUN

- > Ideal for lubrication and maintenance of automotive and industrial equipment
- > Lightweight design for ease of operation
- > Provides wide angle operation in narrow spaces

**9011**

|              |     |
|--------------|-----|
| Length (in.) | 16  |
| Width (in.)  | 2.5 |
| Height (in.) | 7   |

(Includes metal extension nozzle and flexible nylon extension)

Replacement flexible nylon extension - RS901122

Replacement hexagonal spout (metal extension nozzle) - RS901109




## DUAL FUNCTION POWER VACUUM

- > Dual function vacuum and blower
- > Light weight composite housing
- > Great for detail work and media installation
- > Non-woven dust bag has zipper for easy debris removal

(Includes flexible extension tube, rotatable brush, crevice attachment, orifice attachment and non-woven dust bag)

**SX1000**

|                               |      |
|-------------------------------|------|
| Vacuum Level (mmHg)           | 7.5  |
| Weight (lbs.)                 | 1.47 |
| Length (in.)                  | 5.7  |
| Average Air Consumption (CFM) | 3.36 |
| Air Inlet Thread Size (NPTF)  | 1/4  |
| Min. Hose Size (in.)          | 5/16 |
| Sound Level (dBa)             | 92   |

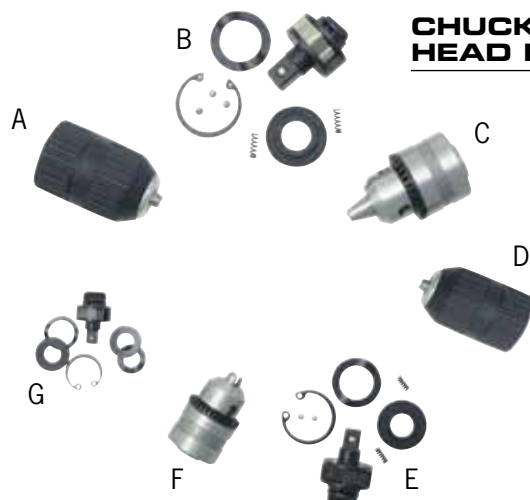
**CHUCKS AND HEAD KITS**

|   | DESCRIPTION                                    | MODEL     |
|---|--|-----------|
| A | 1/2" Jacobs® keyless chuck (3/8-24 spindle)    | RS79437N  |
| B | 3/8" Ratchet head kit for SX108A               | RSRHK100  |
| C | 1/2" Jacobs® heavy duty chuck (3/8-24 spindle) | RS87109   |
| D | 3/8" Jacobs® keyless chuck (3/8-24 spindle)    | RS79535   |
| E | 1/2" Head kit for SX109                        | RSRHK109  |
| F | 3/8" Jacobs® geared chuck for (3/8-24 spindle) | RS87106   |
| G | 1/4" Head kit for SX106B                       | RSRHK106B |
|   | 3/8" Head kit for SX113 (not shown)            | RSRHK100C |

RS #'s are only available through Sunex Tools Service Dept.


**MODEL 8727  
1/2" 4-WAY CHUCK KEY**

> Opens 127 different chucks

**MODEL 8737  
3/8" 4-WAY CHUCK KEY**

> Opens 86 different chucks

**Chuck keys will open most chucks used by the following manufacturers:**

|                    |                     |
|--------------------|---------------------|
| Aro®               | Jacobs®             |
| Atlas Copco®       | Makita®             |
| Black & Decker®    | Master Power®       |
| Bosch®             | Michigan Pneumatic® |
| Buffalo®           | Milwaukee®          |
| Chicago Pneumatic® | Porter Cable®       |
| Cooper®            | Reg®                |
| Craftsman®         | Ridgid®             |
| Cushman®           | Rockwell®           |
| Delta®             | Rohm®               |
| Desoutter®         | Sioux®              |
| Dotco®             | Skil®               |
| Florida Pneumatic® | Thor®               |
| Ingersoll Rand®    | U.S. Air Tool®      |


**5 PIECE  
3/8" CUTTING WHEELS**

- > 3" x 1-16" double reinforced
- > Use with 3/8" arbor
- > Complies with ANSI B7.1/OSHA regulations

***\*Do not exceed 20,000 RPMs***


| <b>87602</b>           |        |
|------------------------|--------|
| Diameter (in.)         | 3      |
| Qty. Included          | 5      |
| Max. RPM               | 20,000 |
| Shipping Weight (lbs.) | 0.2    |

## SANDER, POLISHER AND GRINDER ACCESSORIES



| DESCRIPTION  | MODEL    |
|--|----------|
| A 5" Dual action bonded sanding pad for SX203N and SX294-6 | RS87511  |
| B 6" Dual action bonded sanding pad for SX203N and SX294-6 | RS87513  |
| C Set of 3 backing plates - 3", 4-1/2", 5-1/2" for SX265B  | RS265B31 |
| D Pad nut for SX214A and SX215A                            | RS21441  |
| E Pad assembly for SX288C                                  | RS28635A |
| F 4" Grinding wheel for SX211A, SX210                      | RS21134  |
| G Pad for SX214A and SX215A                                | RS21440  |
| H Sanding pad for SX296C                                   | RS296C44 |

## BLADES, CHISELS AND CUTTING ACCESSORIES

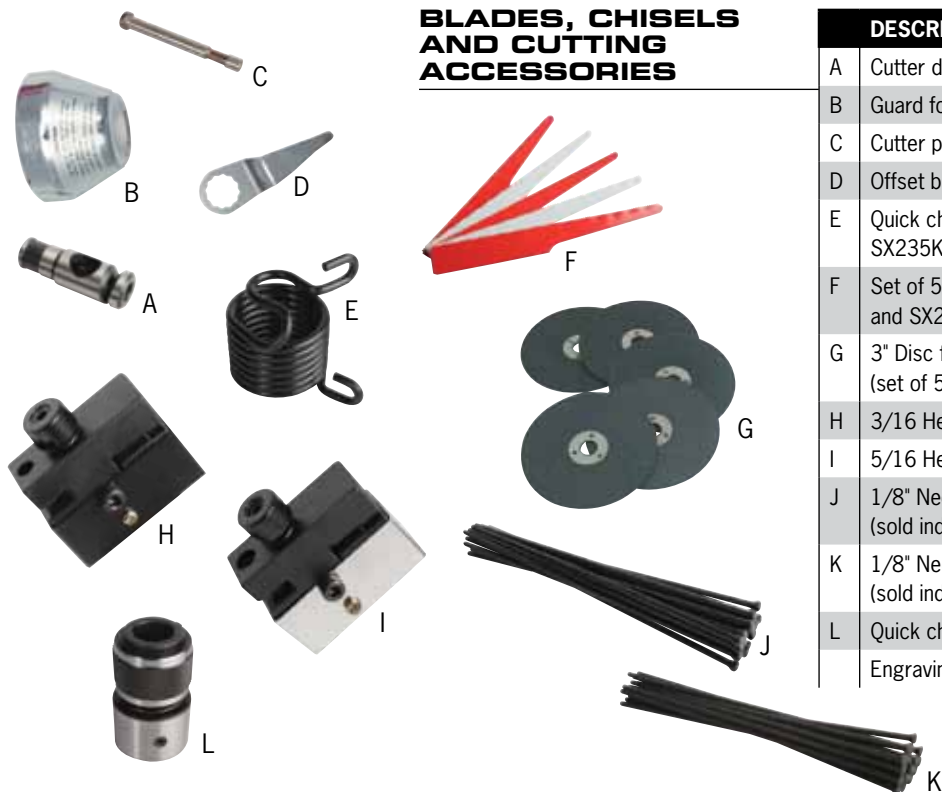

| DESCRIPTION  | MODEL     |
|--|-----------|
| A Cutter die for SX229B  | RS229B39  |
| B Guard for SX233A   | RS233A24  |
| C Cutter punch for SX229B                                      | RS229B36  |
| D Offset blade for SX248                                       | RS87446   |
| E Quick change retainer spring for SX235KTA, SX275B and SX241B | RS87301   |
| F Set of 5 mini saw blades for SX244 and SX261                 | RS87620   |
| G 3" Disc for SX233A and SXC208 (set of 5)                     | 87602     |
| H 3/16 Head assembly for SX281                                 | RSPF316HD |
| I 5/16 Head assembly for SX281                                 | RSPF516HD |
| J 1/8" Needle for SX246 (sold individually)                    | RS24623   |
| K 1/8" Needle for SX247 (sold individually)                    | RS730280  |
| L Quick change retainer for SX243                              | RS248025  |
| Engraving needle for SX250                                     | RS25011   |



## ACS06

### INCLUDES:

|      |   |
|------|---|
| AC03 | 13/16" Flat Chisel - 7" Length          |
| AC17 | Tailpipe Cutter - 8" Length             |
| AC18 | Muffler Cutter - 8" Length              |
| AC19 | Muffler & Pipe Cutter - 8" Length       |
| AC20 | Outside Muffler Pipe Cutter - 8" Length |
| AC21 | Inside Muffler Pipe Cutter - 8" Length  |

## 6 PIECE AIR CHISEL SET

- > Canvas pouch for convenience and easy storage
- > Made of SCM440 high alloy steel
- > Zinc phosphate finish

**.401 shank**



## ACS10


### INCLUDES:

|      |  |
|------|--|
| AC03 | 13/16" Flat Chisel - 7" Length         |
| AC07 | Claw Ripper & Panel Cutter - 7" Length |
| AC08 | Tapered Punch - 7" Length              |
| AC10 | Straight Punch - 7" Length             |
| AC12 | Dual Blade Panel Cutter - 7" Length    |
| AC13 | Rivet Cutter - 6-1/2" Length           |
| AC14 | 1" Standard Hammer - 3-1/2" Length     |
| AC16 | Bushing Splitter - 6-1/2" Length       |
| AC18 | Muffler Cutter - 8" Length             |
| AC23 | 5/16" Nut Splitter - 6" Length         |

## 10 PIECE AIR CHISEL SET

- > Canvas pouch for convenience and easy storage
- > Made of SCM440 high alloy steel
- > Zinc phosphate finish


**.401 shank**

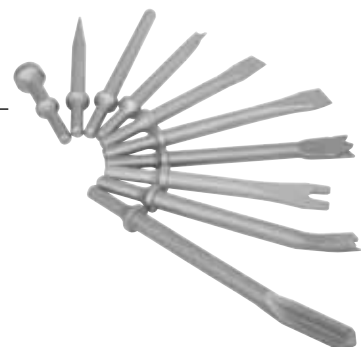

## INDIVIDUAL AIR CHISELS

- > Made of SCM440 high alloy steel
- > Zinc phosphate finish

**.401 shank**

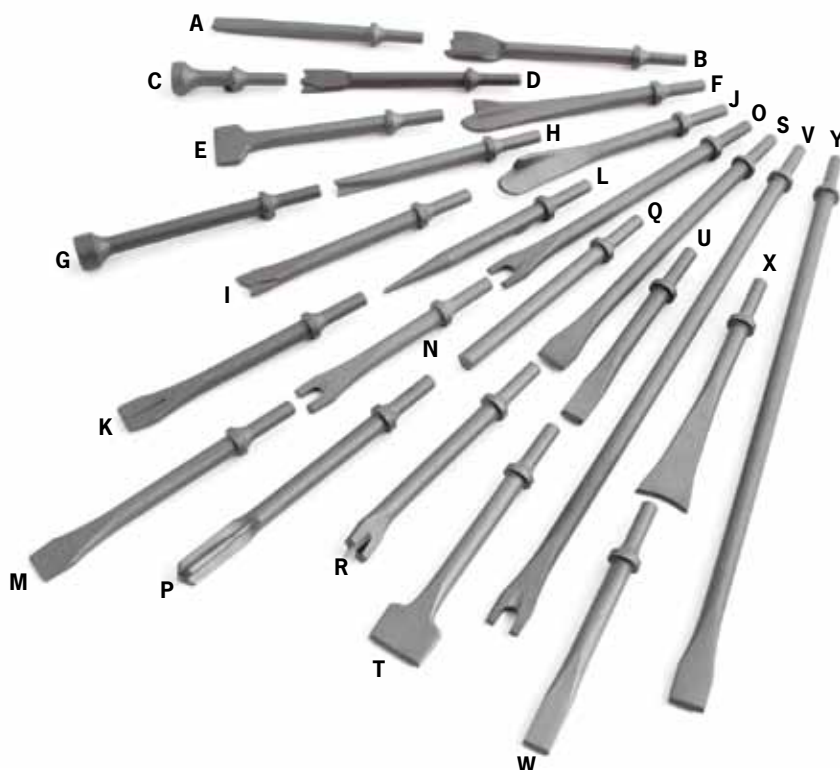

|   |      |   |
|---|------|---|
| A | AC01 | 1/2" Flat Chisel - 7" Length            |
| B | AC19 | Muffler & Pipe Cutter - 8" Length       |
| C | AC14 | 1" Standard Hammer - 3-1/2" Length      |
| D | AC12 | Dual Blade Panel Cutter - 7" length     |
| E | AC04 | 1-9/16" Flat Chisel - 7" Length         |
| F | AC20 | Outside Muffler Pipe Cutter - 8" Length |
| G | AC15 | 1" Hammer - 7" Length                   |
| H | AC16 | Bushing Splitter - 6-1/2" Length        |
| I | AC11 | Single Blade Panel Cutter - 7" Length   |
| J | AC21 | Inside Muffler Pipe Cutter - 8" Length  |
| K | AC22 | Spot Weld Cutter - 7" Length            |
| L | AC08 | Tapered Punch - 7" Length               |
| M | AC03 | 3/4" Flat Chisel - 7" Length            |
| N | AC23 | 5/16" Nut Splitter - 6" Length          |
| O | AC24 | 3/8" Nut Splitter - 10" Length          |
| P | AC18 | Muffler Cutter - 8" Length              |
| Q | AC10 | Straight Punch - 7" Length              |
| R | AC07 | Claw Ripper & Panel Cutter - 7" Length  |
| S | AC05 | 13/16" Flat Chisel - 11" Length         |
| T | AC09 | 1-3/8" Chisel Scraper - 7" Length       |
| U | AC13 | Rivet Cutter - 6-1/2" Length            |
| V | AC25 | 3/8" Nut Splitter - 18" Length          |
| W | AC02 | 5/8" Flat Chisel - 6-1/2" Length        |
| X | AC17 | Tailpipe Cutter - 8" Length             |
| Y | AC06 | 13/16" Flat Chisel - 18" Length         |

## PRODUCT INDEX

### A

Air Polisher ..... 6  
Air Ratchet..... 4

### B

Brake Caliper Set ..... 24

### C

Cut-Off Tool..... 13

### D

Die Grinder ..... 8-11  
Die Grinder Kit ..... 10  
Drill ..... 14-16

### E

Engraving Pen..... 12

### G

Grease Gun..... 24  
Grinder..... 7

### H

Hammer ..... 17

### I

Impact Wrench ..... 2-3

### N

Needle Scaler ..... 18  
Nibbler ..... 14

### P

Pencil Die Grinder..... 11  
Power Vacuum ..... 24  
Punch/Flange Tool..... 14

### R

Ratchet ..... 4  
Reciprocating Saw..... 12  
Regulator ..... 23  
Riveter ..... 19-20

### S

Sander ..... 5-6  
Sealant Knife..... 12  
Shear ..... 13  
Spark Plug Cleaner..... 24  
Spray Gun ..... 21-23

### T

Tire Buffer ..... 11

### Model # Page

3912..... 24  
3935..... 24  
9011..... 24  
9091..... 23  
9001A..... 21  
9002B ..... 21  
9004A..... 21  
90045A..... 21  
9013B ..... 22  
SX0618TV..... 19  
SX0918T..... 19  
SX0918TV..... 20  
SX1000..... 24  
SX106B..... 4  
SX108A..... 4  
SX109..... 4  
SX10A..... 22  
SX111..... 2  
SX113..... 4  
SX1819T..... 20  
SX1819TV..... 20  
SX203N ..... 5  
SX210..... 7  
SX211A..... 7  
SX214A..... 6  
SX215A..... 6  
SX221B..... 16  
SX223..... 14  
SX225B..... 15  
SX227B..... 13  
SX228A..... 15  
SX229B..... 14  
SX230B..... 9

### Model # Page

SX231B..... 8  
SX232B..... 11  
SX233A..... 13  
SX234R..... 13  
SX235KTB..... 17  
SX240B..... 9  
SX243..... 17  
SX244..... 12  
SX245K..... 11  
SX246..... 18  
SX247..... 18  
SX248..... 12  
SX250..... 12  
SX261..... 12  
SX264..... 10  
SX264K..... 10  
SX265B..... 5  
SX275B..... 17  
SX278C ..... 14  
SX281..... 14  
SX288C ..... 6  
SX294-6..... 5  
SX296C ..... 6  
SX494..... 16  
SX495..... 15  
SX505A-8..... 3  
SX545B..... 16  
SX634CZ..... 2  
SX670A..... 3  
SX70C ..... 22  
SX80B..... 23  
SX821A..... 2  
SX959A..... 2

### Model # Page

SX959A-2 ..... 3  
SXC201 ..... 8  
SXC202 ..... 10  
SXC205 ..... 9  
SXC206 ..... 11  
SXC208 ..... 13  
SXC602 ..... 11  
SXC605A ..... 5  
SXC606 ..... 7  
SXC610 ..... 8

A series of horizontal lines for taking notes, spanning the width of the page below the header.

Distributed by:



[www.sunextools.com](http://www.sunextools.com)

Shipping Address: Sunex Tools • 315 Hawkins Rd. • Travelers Rest, SC 29690

Mailing Address: Sunex Tools • PO Box 1233 • Travelers Rest, SC 29690

Sunex Tools® Service: 877.786.3939 • Toll Free: 1.800.833.7869

Fax: 864.834.7954



REF: SXCS189

Rev. 04/29/10