

AC-DC power supplies & DC-DC converters *Medical*



Products for the
Global Medical Environment



ACuQor®

CFQor



Medical Grade, Highly Efficient AC-DC Power Supplies with PFC

Product Features

GENERAL SPECIFICATIONS

- High efficiency up to 92% at full rated load current
- Delivers up to 1400W of output power (1800W transient)
- Semi-regulated output
- Universal 85-264V AC Input Voltage (47-63Hz)
- Single output voltages:
12V, 15V, 24V, 28V, 36V, 48V
- 5 V "Always On" standby power output
- Active PFC; EN61000-3-2 compliant
- Low leakage; EN60601-1 compliant
- Low noise;
EN55011 / EN55022 Class B compliant
- Operating ambient temperature 0-70°C

PROTECTION/CONTROL

- Over-current, over-voltage, and over-temp protection
- DC Power Good and AC Power Good signals
- Remote enable input

SAFETY

- Type B, BF, CF & Defibrillator proof variants available
- UL60601-1 and 60950-1
- Can/CSA-C22.2 No. 601.1-M90 and 60950-1
- EN 60601-1 and 60950-1
- CE Marked
- EN55011, 55022 and 61000



Output Voltage	Power Rating		
E-Series (Single Output) (3" x 5" Package) 12V, 24V, 36V or 48V (includes 5V@50mA standby)	300W (400W Transient)	400W (500W Transient)	500W (700W Transient)
E-Series (Triple Output) (3" x 5" Package) 12V, 24V, 36V or 48V (includes 5V@2A and 12V@4.2A)	300W (400W Transient)	400W (500W Transient)	500W (700W Transient)
G-Series (Single Output) (4.75" x 7" Package) 12V, 15V, 24V, 28V, 48V (includes 5V@50mA standby)	800W (1000W Transient)	1100W (1300W Transient)	1400W (1800W Transient)



Medical Grade DC-DC Converters Rated for CF Patient Contact and Defibrillation Proof

Product Features

GENERAL SPECIFICATIONS

- High Efficiency, up to 93% at full rated load current
- Industrial standard quarter-brick pin-out configuration
- Low leakage; EN60601-1 compliant

SAFETY

- Reinforced Insulation
- 4250V, 100MΩ input-to-output
- UL 60601-1:2003
- CAN/CSA C22.2 No. 601.1-M90
- IEC 60601-1/A2:1995
- EN 60601-1/A2:1995
- CF Patient Contact
- Defibrillation Proof



		Output Voltage			
CFQor	Series	5V	12V	15V	24V
12Vdc Nominal Input (9-22V Continuous Input Range; 9-25V transient)					
Quarter Brick	CF12	20A 100W	8A 96W	7A 105W	4A 96W
24Vdc Nominal Input (18-36V Continuous Input Range; 18-50V transient)					
Quarter Brick	CF24	24A 120W	10A 120W	8A 120W	5A 120W
48Vdc Nominal Input (34-75V Continuous Input Range; 34-100V transient)					
Quarter Brick	CF48	25A 125W	12A 144W	10A 150W	6A 144W



P A C K A G E S


The CFQor series of Quarter-Brick DC-DC converters is designed for medical applications that require isolation and leakage current levels that comply with IEC60601-1 for CF patient contact & are also defibrillation proof.

They are high efficiency, fixed switching frequency converters based on SynQor's well proven and reliable industrial grade products. CFQor products are fully encased for additional environmental protection.




Defibrillator proof
Type CF equipment

Quarter Brick

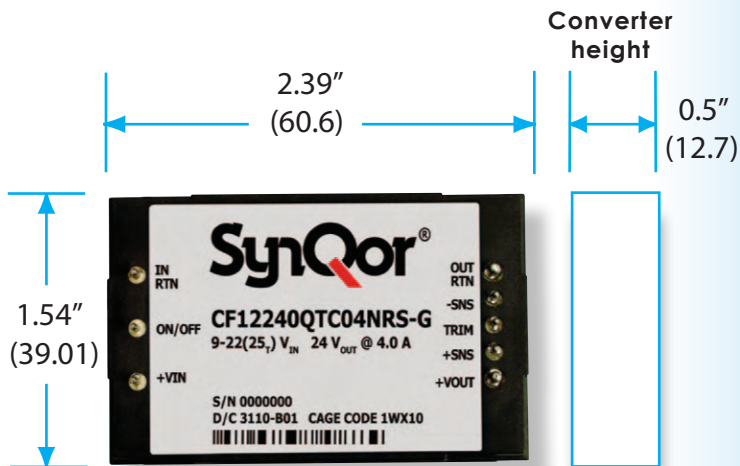

Flanged Quarter Brick

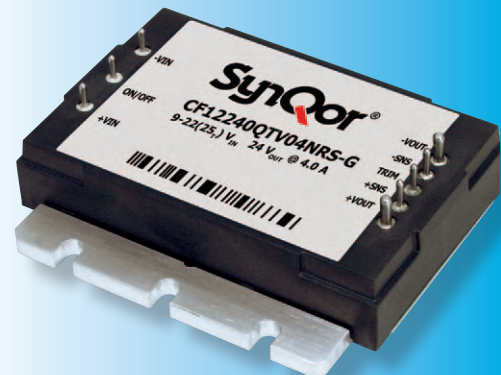

E-Series



CONFIGURATIONS


E-Series ACuQor products are available open framed or encased. They can also be double or triple stacked for additional power output or multiple output voltages.*





Mix and match a combination of 2 or 3 of any of the E-Series (3" x 5") packages in either flat or stacked packages to achieve a higher power and multiple outputs.

Double/Triple Stacked


- Double Package: S, Thermal Design: C
- Small size: 3.5" x 5.25" x 3.25"
- 600W/800W @ 12V, 24V, 36V or 48V
- Triple Package: U, Thermal Design: C
- Small size: 3.5" x 5.25" x 4.875"
- 900W/1200W @ 12V, 24V, 36V or 48V

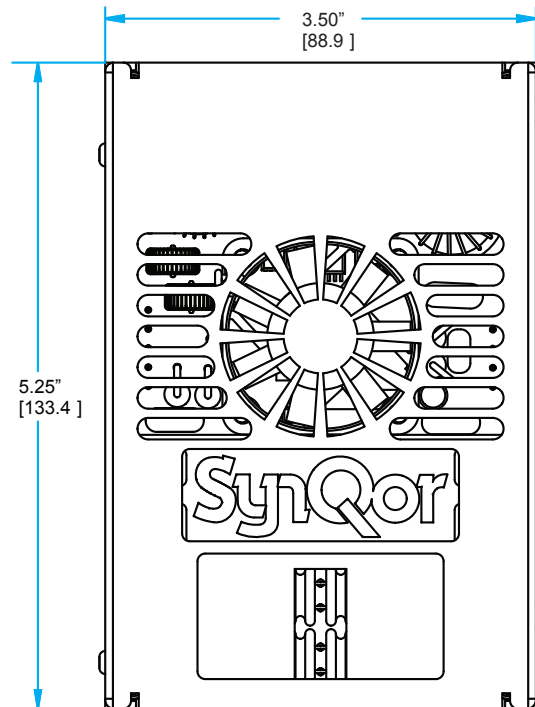

E-Series Encased converter

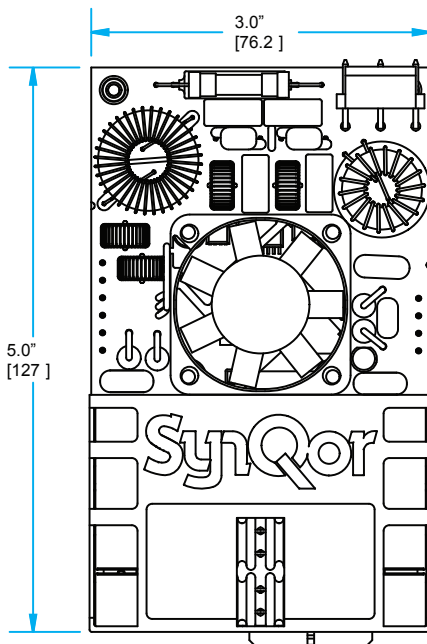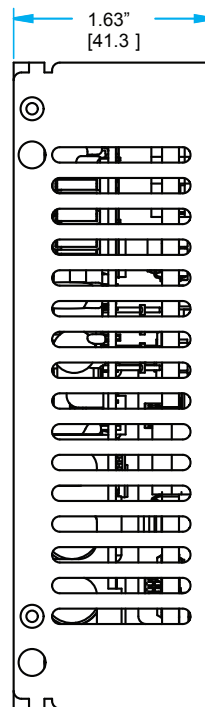

E-Series Open frame converter

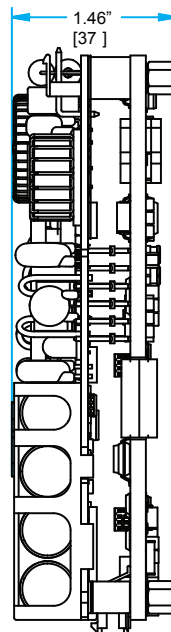

Double/Triple Flat

Double Package: R, Thermal Design: C

- Small size: 6.75" x 5.25" x 1.625"
- 600W/800W/1000W @ 12V, 24V, 36V or 48V

Triple Package: T, Thermal Design: C




- Small size: 10" x 5.25" x 1.625"
- 900W/1200W/1500W @ 12V, 24V, 36V or 48V




G-Series

P A C K A G E

*G-Series ACuQor products are available as encased product only. **

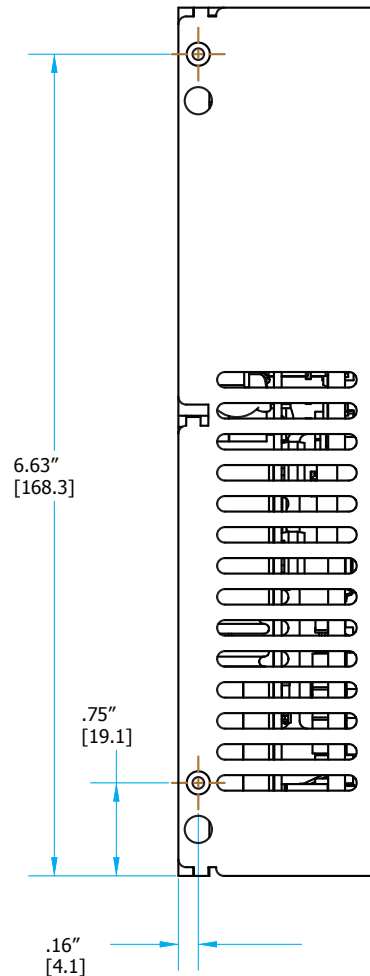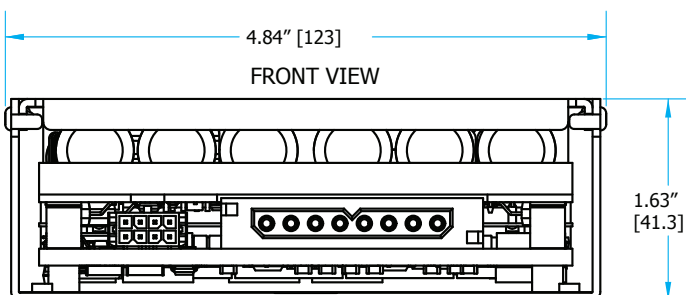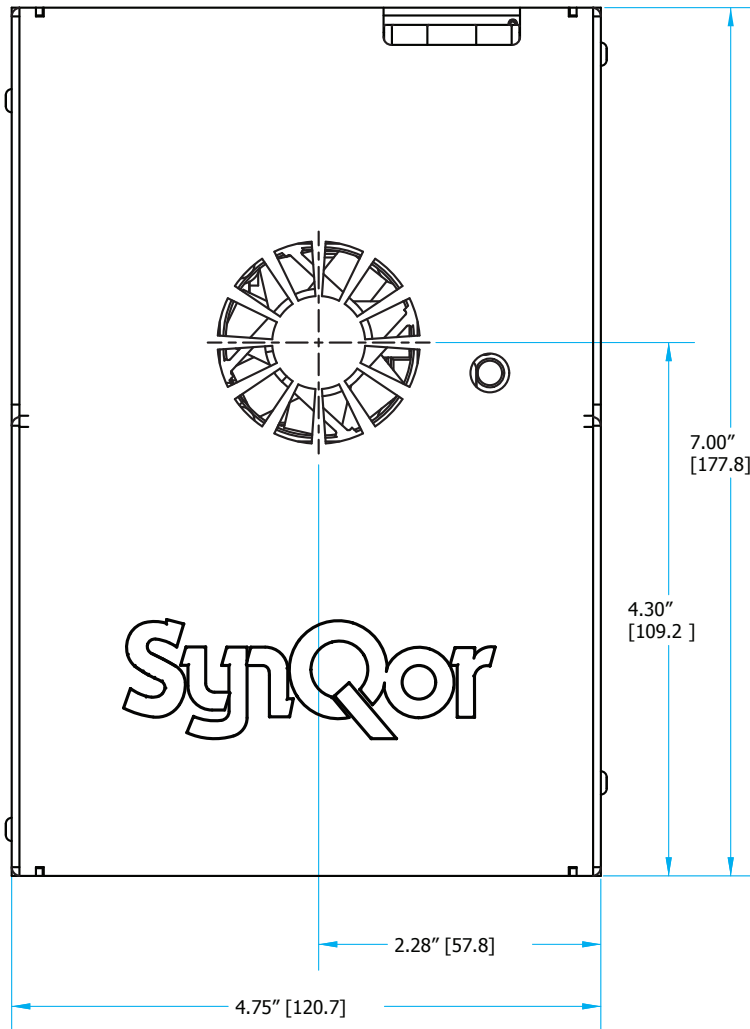

G-Series converter

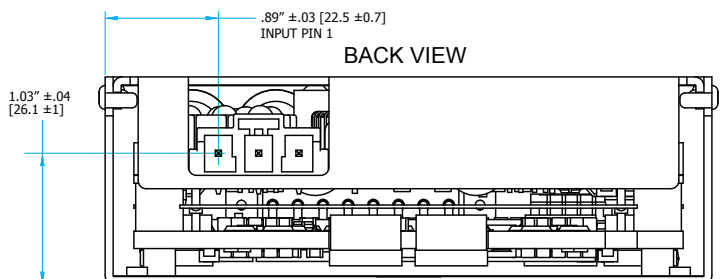

**For both series, accessories including input and output cables are also available.*

Advancing The Power Curve®

Founded in 1997, SynQor® has become the technology, quality and service leader for high efficiency dc-dc converters for the telecom/datacom marketplace. The PowerQor®, BusQor®, DualQor®, iQor™, and NiQor® product lines, combined with SynQor's unmatched lead-times, flexibility, design support and lowest total cost of ownership have become the benchmark sought by SynQor's worldwide customer base.

In 2004, SynQor began its successful entry into the industrial, medical and military market segments with the InQor®, ACuQor® and MilQor® product lines. These new technology leading dc-dc and ac-dc product lines have enabled customers to realize vast savings in space, weight and overall system costs while dramatically increasing power densities and end-system performance. Equally important is the service and support advantage SynQor has brought to customers in these market segments.

SynQor is a privately owned U.S. company headquartered in Boxborough, Massachusetts, which is also the location of all of its manufacturing operations. SynQor has a design center in Dallas, Texas, and sales/marketing offices in Europe, Malaysia, Korea and China. More information is available on the company's website at www.synqor.com.



SynQor Headquarters

155 Swanson Road Boxborough, MA 01719-1316

Phone: 978-849-0600 Fax: 978-849-0602

Toll Free (USA): 888-567-9596

E-mail: mqnbofae@synqor.com

www.SynQor.com



SynQor holds the following U.S. patents, one or more of which apply to each product listed in this document. Additional patent applications may be pending or filed in the future.

5,999,417	6,222,742	6,545,890	6,577,109	6,594,159	6,731,520	6,894,468
6,896,526	6,927,987	7,050,309	7,072,190	7,085,146	7,119,524	7,269,034
7,272,021	7,272,023	7,558,083	7,564,702	7,765,687	7,787,261	8,023,290

005-0005958 - 07/11