

LED LIGHTING FIXTURES CATALOG



TEDDICO
ELECTRICAL PRODUCTS



1104 Parkway View Dr.
Pittsburgh, PA 15205

TEL: 412-747-4970 FAX: 412-747-4973

E-Mail:
Sales@teddico.com

Website:
www.teddico.com

TEDDICO is pleased to announce we are now offering a wide variety of our outdoor weatherproof fixtures with the Xicato LED module. These spec quality modules feature perfect color, rugged reliability and compact high flux.

Xicato uses a 1x2 MacAdam Ellipse to specify color which allows color consistency from module to module throughout its lifespan.

Color temps range from 2700K, 3000K and 4000K.

Intensity and color temperature are consistent, so there are no yellow rings or shadows produced.

Long life of up to 50,000 hours.

Exceeds DoE requirements for lumen maintenance.

Choice of drivers; 350mA for maximum efficacy (fixtures listed with 7.5 watt modules) or 700mA for maximum light output. (fixtures listed with 15 watt modules).


Dimming capability for light harvesting and further energy savings.




Xicato Spot Module

XSM

XSM technology

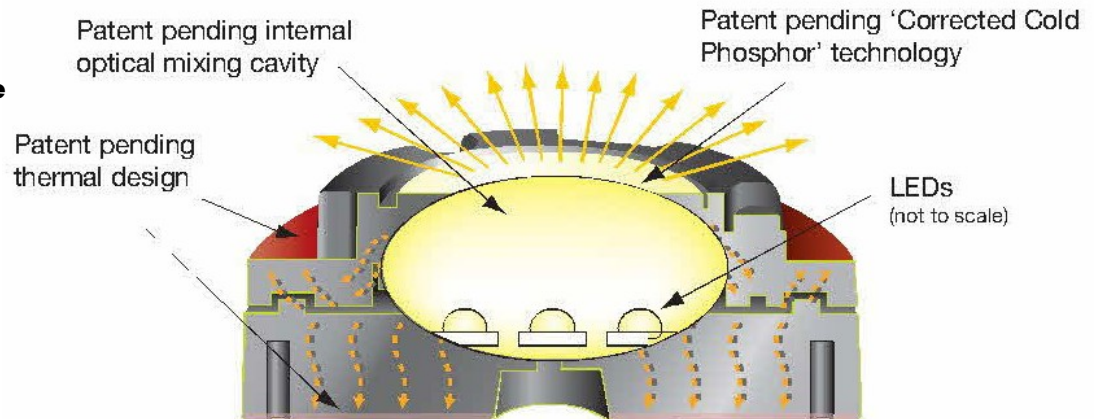

Modules can be customized with 20, 40, and 60 degree reflectors on select models or used without for a wider beam spread.

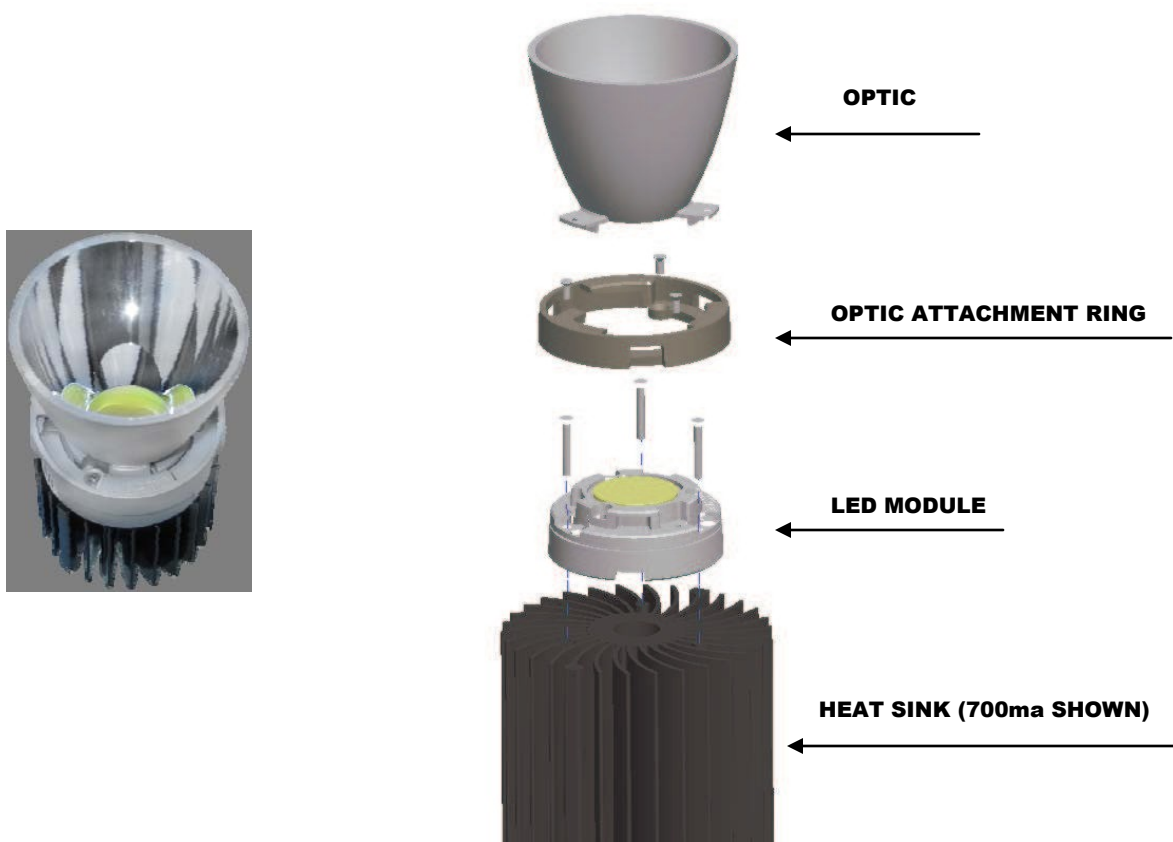



LED SPEC

MINI WALLPACK

APPLICATION:

Ideal low wattage energy saving luminaire that provides economic cost and vandal resistance for exterior and interior architectural and security lighting applications for commercial buildings, shopping

ELECTRICAL

CSA listed for wet locations

LENS

High impact heat resistant borosilicate glass lens for optimum light distribution.

HOUSING

Diecast aluminum housing with powder coat finish over a chromate conversion coating for durability— BRONZE. Weatherproof silicone gasket provides moisture and dust proof protection.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
MWP7.5LED	1x7.5w	120/277	13
MWP15LED	1x15 w	120/277	13



DIMENSIONS

WIDTH HEIGHT DEPTH

7-3/4" 13" 5-1/2"

OPTIC OPTIONS



NONE
20 DEGREE BEAM
40 DEGREE BEAM
60 DEGREE BEAM

ADDITIONAL FEATURES

Conduit access on bottom and back side
One piece aluminum reflector

ACCESSORIES

Wire Guard add suffix— WG
120 volt Photo Cell add suffix— PC
277 volt Photo Cell add suffix— PC2

WALL PACKS



LED SPEC

MEDIUM WALLPACK

APPLICATION:

Ideal low wattage energy saving luminaire that provides economic cost for mounting heights below 15 feet for exterior wall and area lighting for parking areas, perimeter lighting, entrance and walkways,

ELECTRICAL

CSA listed for wet locations

LENS

High impact heat resistant prismatic borosilicate glass lens for optimal light distribution.

HOUSING

Diecast aluminum housing and hinged front frame with powder coat finish over a chromate conversion coating for durability— BRONZE. Weatherproof silicone gasket provides moisture and dust proof protection.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
WPM7.5LED	1x7.5w	120/277	15
WPM15LED	1x15 w	120/277	15
WPM2/7.5LED	2x7.5w	120/277	15
WPM2/15LED	2x15 w	120/277	15



DIMENSIONS

WIDTH HEIGHT DEPTH

14" 9" 7"

OPTIC OPTIONS



NONE
20 DEGREE BEAM
40 DEGREE BEAM
60 DEGREE BEAM

ADDITIONAL FEATURES

Conduit access on bottom and sides
One piece aluminum reflector

ACCESSORIES

Wire Guard add suffix— WG
120 volt Photo Cell add suffix— PC
277 volt Photo Cell add suffix— PC2

WALL PACKS



LED SPEC

LARGE WALLPACK

APPLICATION:

Ideal higher wattage energy saving luminaire that provides economic cost for mounting heights above 15 feet for exterior wall and area lighting for parking areas, perimeter lighting, entrance and walkways,

ELECTRICAL

CSA listed for wet locations

LENS

High impact heat resistant prismatic borosilicate glass lens for optimal light distribution.

HOUSING

Diecast aluminum housing and hinged front frame with powder coat finish over a chromate conversion coating for durability— BRONZE. Weatherproof silicone gasket provides moisture and dust proof protection.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
WPL2/7.5LED	2x7.5w	120/277	20
WPL2/15LED	2x15 w	120/277	20
WPL3/7.5LED	3x7.5w	120/277	20
WPL3/15LED	3x15 w	120/277	20



DIMENSIONS

WIDTH	HEIGHT	DEPTH
18-1/8"	9"	9-3/8"

OPTIC OPTIONS



NONE
20 DEGREE BEAM
40 DEGREE BEAM
60 DEGREE BEAM

ADDITIONAL FEATURES

Conduit access on bottom and sides
One piece aluminum reflector

ACCESSORIES

Wire Guard add suffix— WG
120 volt Photo Cell add suffix— PC
277 volt Photo Cell add suffix— PC2

WALL PACKS

TEDDICO

ELECTRICAL PRODUCTS



LED SPEC

MEDIUM ACCORD WALLPACK

APPLICATION:

Ideal lower wattage energy saving luminaire that provides economic cost for mounting heights below 15 feet for exterior wall and area lighting for parking areas, perimeter lighting, entrance and walkways,

ELECTRICAL

CSA listed for wet locations

LENS

High impact heat resistant prismatic borosilicate glass lens for optimal light distribution.

HOUSING

Diecast aluminum housing and hinged front frame with powder coat finish over a chromate conversion coating for durability— BRONZE. Weatherproof silicone gasket provides moisture and dust proof protection. Stainless steel hinge pins & safety cable to prevent front frame impact when relamping.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
WPA7.5LED	1x7.5w	120/277	17
WPA15LED	1x15 w	120/277	17
WPA2/7.5LED	2x7.5w	120/277	17
WPA2/15LED	2x15 w	120/277	17



DIMENSIONS

WIDTH	HEIGHT	DEPTH
11-1/8"	12"	7-7/8"

OPTIC OPTIONS



NONE
20 DEGREE BEAM
40 DEGREE BEAM
60 DEGREE BEAM

ADDITIONAL FEATURES

Conduit access on bottom and sides
One piece aluminum reflector

ACCESSORIES

Wire Guard add suffix— WG
120 volt Photo Cell add suffix— PC
277 volt Photo Cell add suffix— PC2

WALL PACKS



LED SPEC

MEDIUM FULL CUTOFF WALLPACK

APPLICATION:

Ideal lower wattage energy saving luminaire that provides economic cost for mounting heights below 15 feet for exterior wall and area lighting for parking areas, perimeter lighting, entrance and walkways,

ELECTRICAL

CSA listed for wet locations

LENS

High impact heat resistant tempered flat glass lens for optimal light distribution.

HOUSING

Diecast aluminum housing and hinged front frame with powder coat finish over a chromate conversion coating for durability— BRONZE. Weatherproof silicone gasket provides moisture and dust proof protection. Meets **Dark Sky** requirements.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
WPC7.5LED	1x7.5w	120/277	17
WPC15LED	1x15 w	120/277	17
WPC2/7.5LED	2x7.5w	120/277	17
WPC2/15LED	2x15 w	120/277	17



DIMENSIONS

WIDTH	HEIGHT	DEPTH
14-1/4"	9-1/8"	11-3/8"

OPTIC OPTIONS



NONE
20 DEGREE BEAM
40 DEGREE BEAM
60 DEGREE BEAM

ADDITIONAL FEATURES

Conduit access on sides
One piece aluminum reflector

ACCESSORIES

Wire Guard add suffix— WG
120 volt Photo Cell add suffix— PC
277 volt Photo Cell add suffix— PC2

WALL PACKS



LED SPEC

LARGE FULL CUTOFF WALLPACK

APPLICATION:

Ideal higher wattage energy saving luminaire that provides economic cost for mounting heights above 15 feet for exterior wall and area lighting for parking areas, perimeter lighting, entrance and walkways,

ELECTRICAL

CSA listed for wet locations. Can be mounted as an up-light or down-light

LENS

High impact heat resistant tempered flat glass lens for optimal light distribution.

HOUSING

Diecast aluminum housing and hinged front frame with powder coat finish over a chromate conversion coating for durability— BRONZE. Weatherproof silicone gasket provides moisture and dust proof protection. Meets **Dark Sky** requirements.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
WPLC2/7.5LED	2x7.5w	120/277	22
WPLC2/15LED	2x15 w	120/277	22
WPLC3/7.5LED	3x7.5w	120/277	22
WPLC3/15LED	3x15 w	120/277	22



DIMENSIONS

WIDTH	HEIGHT	DEPTH
18-1/4"	9-1/8"	13-3/4"

OPTIC OPTIONS



NONE
20 DEGREE BEAM
40 DEGREE BEAM
60 DEGREE BEAM

ADDITIONAL FEATURES

Conduit access on sides
One piece aluminum reflector

ACCESSORIES

Wire Guard add suffix— WG
120 volt Photo Cell add suffix— PC
277 volt Photo Cell add suffix— PC2

WALL PACKS



LED SPEC

CRESCENT DOWN LIGHT WALLPACK

APPLICATION:

Ideal lower wattage energy saving luminaire that provides economic cost for mounting heights below 15 feet for exterior wall and area lighting for parking areas, perimeter lighting, entrance and walkways,

ELECTRICAL

CSA listed for wet locations

LENS

High impact heat resistant tempered flat glass lens for optimal light distribution.

HOUSING

Diecast aluminum housing with powder coat finish over a chromate conversion coating for durability— BRONZE. Weatherproof silicone gasket provides moisture and dust proof protection. Easy-Hang "two hands free" wall mounting bracket included. Custom colors available upon request.



DIMENSIONS

WIDTH HEIGHT DEPTH

18" 7-1/8" 9-1/8"

OPTIC OPTIONS

NONE AVAILABLE

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
CRD2/7.5LED	2x7.5w	120/277	18
CRD2/15LED	2x15 w	120/277	18
CRD3/7.5LED	3x7.5w	120/277	18
CRD3/15LED	3x15 w	120/277	18

ADDITIONAL FEATURES

One piece aluminum reflector
120 volt Photo Cell suffix adder— PC
277 volt Photo Cell suffix adder— PC2

WALL PACKS



LED SPEC

CRESCENT UP/DOWN LIGHT WALLPACK

APPLICATION:

Ideal lower wattage energy saving luminaire that provides economic cost for mounting heights below 15 feet for exterior wall and area lighting for parking areas, perimeter lighting, entrance and walkways,

ELECTRICAL

CSA listed for wet locations

LENS

High impact heat resistant tempered flat glass lens bottom and molded oval shape upper lens optimal light distribution.

HOUSING

Diecast aluminum housing with powder coat finish over a chromate conversion coating for durability— WHITE, BRONZE or BLACK. Weather-proof silicone gasket provides moisture and dust proof protection. Easy -Hang "two hands free" wall mounting bracket included.



DIMENSIONS

WIDTH HEIGHT DEPTH

18" 7-1/8" 9-1/8"

OPTIC OPTIONS

NONE AVAILABLE

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
CRU2/7.5LED	2x7.5w	120/277	18
CRU3/7.5LED	3x7.5 w	120/277	18
CRU4/7.5LED	4x7.5w	120/277	18
CRU5/7.5LED	5x7.5 w	120/277	18
CRU3/15LED	3x15 w	120/277	18

ADDITIONAL FEATURES

One piece aluminum reflector
 120 volt Photo Cell suffix adder— PC
 277 volt Photo Cell suffix adder— PC2
 WHITE color suffix— WH
 BRONZE color suffix— BZ
 BLACK color suffix— BK

WALL PACKS



LED SPEC

BRAVO WALLPACK

APPLICATION:

Ideal lower wattage energy saving luminaire that provides economic cost for mounting heights below 15 feet for exterior wall and areas in need of energy efficient lighting and as accent perimeter lighting for

ELECTRICAL

CSA listed for wet locations

LENS

Polycarbonate clear ribbed lens area.

HOUSING

Diecast aluminum back housing with powder coat finish over a chrome conversion coating for durability— BRONZE. Polycarbonate front housing. Weatherproof silicone gasket provides moisture and dust proof protection.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
WBR2/7.5LED	2x7.5w	120/277	12
WBR15LED	1x15 w	120/277	12
WBR2/15LED	2x15w	120/277	12



DIMENSIONS

WIDTH HEIGHT DEPTH

10-3/8" 12-1/4" 7-3/8"

OPTIC OPTIONS



NONE
20 DEGREE BEAM
40 DEGREE BEAM
60 DEGREE BEAM

ADDITIONAL FEATURES

One piece aluminum reflector
1/2" coin plugs on sides and top for conduit or photo cell
120 volt Photo Cell suffix adder— PC
277 volt Photo Cell suffix adder— PC2

WALL PACKS



LED SPEC

ROUND OPEN WALLPACK

APPLICATION:

Ideal lower wattage energy saving luminaire that provides economic cost for mounting heights below 15 feet for exterior wall and areas in need of energy efficient lighting and as accent perimeter lighting for

ELECTRICAL

CSA listed for wet locations

LENS

Prismatic borosilicate glass lens in your choice of clear or frosted.

HOUSING

Diecast aluminum housing and top frame with powder coat finish over a chromate conversion coating for durability— BRONZE.



DIMENSIONS

WIDTH HEIGHT DEPTH

15" 15" 8-3/4"

OPTIC OPTIONS



NONE
20 DEGREE BEAM
40 DEGREE BEAM
60 DEGREE BEAM

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
WACO2/7.5LED	2x7.5w	120/277	15
WACO15LED	1x15 w	120/277	15
WACO2/15LED	2x15w	120/277	15

ADDITIONAL FEATURES

One piece aluminum reflector
1/2" coin plugs on sides for conduit or photo cell access
120 volt Photo Cell suffix adder— PC
277 volt Photo Cell suffix adder— PC2



LED SPEC

ROUND HALF-CUTOFF WALLPACK

APPLICATION:

Ideal lower wattage energy saving luminaire that provides economic cost for mounting heights below 15 feet for exterior wall and areas in need of energy efficient lighting and as accent perimeter lighting for

ELECTRICAL

CSA listed for wet locations

LENS

Prismatic borosilicate glass lens in your choice of clear or frosted.

HOUSING

Diecast aluminum housing and top frame with powder coat finish over a chromate conversion coating for durability— BRONZE.



DIMENSIONS

WIDTH	HEIGHT	DEPTH
15"	15"	8-3/4"

OPTIC OPTIONS



NONE
20 DEGREE BEAM
40 DEGREE BEAM
60 DEGREE BEAM

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
WACH2/7.5LED	2x7.5w	120/277	15
WACH15LED	1x15 w	120/277	15
WACH2/15LED	2x15w	120/277	15

ADDITIONAL FEATURES

One piece aluminum reflector
1/2" coin plugs on sides for conduit or photo cell access
120 volt Photo Cell suffix adder— PC
277 volt Photo Cell suffix adder— PC2

WALL PACKS



LED SPEC

ROUND GRIDDED WALLPACK

APPLICATION:

Ideal lower wattage energy saving luminaire that provides economic cost for mounting heights below 15 feet for exterior wall and areas in need of energy efficient lighting and as accent perimeter lighting for

ELECTRICAL

CSA listed for wet locations

LENS

Prismatic borosilicate glass lens in your choice of clear or frosted.

HOUSING

Diecast aluminum housing and top frame with powder coat finish over a chromate conversion coating for durability— BRONZE.



DIMENSIONS

WIDTH HEIGHT DEPTH

15" 15" 8-3/4"

OPTIC OPTIONS



NONE
20 DEGREE BEAM
40 DEGREE BEAM
60 DEGREE BEAM

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
WACG2/7.5LED	2x7.5w	120/277	15
WACG15LED	1x15 w	120/277	15
WACG2/15LED	2x15w	120/277	15

ADDITIONAL FEATURES

One piece aluminum reflector
1/2" coin plugs on sides for conduit or photo cell access
120 volt Photo Cell suffix adder— PC
277 volt Photo Cell suffix adder— PC2

TEDDICO

ELECTRICAL PRODUCTS



LED SPEC

LARGE SLIMLINE WALLPACK

APPLICATION:

Ideal energy saving luminaire that provides economic cost for mounting on exterior walls and areas in need of energy efficient lighting and as perimeter lighting, entrance, walkways for apartment

ELECTRICAL

CSA listed for wet locations

LENS

High impact heat resistant molded prismatic borosilicate glass lens for optimum light distribution.

HOUSING

Diecast aluminum housing and hinged front frame with powder coat finish over a chromate conversion coating for durability— BRONZE. Weatherproof silicone gasket provides moisture and dust proof protection. Mounting plate with integral electrical box and built-in level for "two hands free" mounting.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
SLW3/7.5LED	3x7.5w	120/277	30
SLW4/7.5LED	4x7.5w	120/277	30
SLW2/15LED	2x15w	120/277	30
SLW3/15LED	3x15w	120/277	30
SLW4/15LED	4x15w	120/277	32



DIMENSIONS

WIDTH	HEIGHT	DEPTH
16-3/4"	18-3/4"	8"

OPTIC OPTIONS



NONE
20 DEGREE BEAM
40 DEGREE BEAM
60 DEGREE BEAM

ADDITIONAL FEATURES

One piece aluminum reflector
Conduit access on sides and top
120 volt Photo Cell suffix adder— PC
277 volt Photo Cell suffix adder— PC2

WALL PACKS



LED SPEC

SMALL FLOODLIGHT

APPLICATION:

Ideal low wattage energy saving luminaire that provides economic cost for lighting facades, displays & signs and areas in need of energy efficient lighting and as perimeter lighting and general security

ELECTRICAL

CSA listed for wet locations

LENS

Tempered flat glass lens for optimum light distribution.

HOUSING

Diecast aluminum housing and hinged lens frame with powder coat finish over a chromate conversion coating for durability— BRONZE. Equipped with adjustable knuckle for directional stability.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
MFL7.5LED	1x7.5w	120/277	10
MFL2/7.5LED	2x7.5w	120/277	10



DIMENSIONS

WIDTH HEIGHT DEPTH

9" 7-1/2" 7"

OPTIC OPTIONS



NONE
20 DEGREE BEAM
40 DEGREE BEAM
60 DEGREE BEAM

ADDITIONAL FEATURES

One piece aluminum reflector
Photocell adaptable
120 volt Photo Cell suffix adder— PC
277 volt Photo Cell suffix adder— PC2
Wire Guard suffix adder— WG
Glare Shield suffix adder— GS

FLOOD LIGHTING



LED SPEC

MEDIUM FLOODLIGHT

APPLICATION:

Ideal low wattage energy saving luminaire that provides economic cost for lighting large broad area on facades, displays & signs and areas in need of energy efficient lighting as perimeter lighting and

ELECTRICAL

CSA listed for wet locations

LENS

Tempered flat glass lens for optimum light distribution.

HOUSING

Diecast aluminum housing and hinged lens frame with powder coat finish over a chromate conversion coating for durability— BRONZE. Equipped with adjustable knuckle for directional stability or equipped with an adjustable slipfitter for pole top mounting (see picture at right).

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
FL7.5LED	1x7.5w	120/277	12
FL2/7.5LED	2x7.5w	120/277	12
FL15LED	1x15w	120/277	12
FL2/15LED	2x15w	120/277	12



Pictured with Glare Shield attached

DIMENSIONS

WIDTH HEIGHT DEPTH

9-3/4" 9-3/4" 6-3/4"



Pictured with slip fitter attached for pole mounting

ADDITIONAL FEATURES

One piece aluminum reflector
 Photocell adaptable
 120 volt Photo Cell suffix adder— PC
 277 volt Photo Cell suffix adder— PC2
 Wire Guard suffix adder— WG
 Glare Shield suffix adder— GS
 Slipfitter suffix adder— SW

FLOOD LIGHTING



LED SPEC

DELUX 12" FLOODLIGHT

APPLICATION:

Ideal low wattage energy saving luminaire that provides economic cost for lighting residential areas, convenience stores, apartment buildings, as perimeter lighting and general security lighting.

ELECTRICAL

CSA listed for wet locations

LENS

Tempered flat glass lens for optimum light distribution.

HOUSING

Diecast aluminum housing and hinged lens frame with powder coat finish over a chromate conversion coating for durability— BRONZE. Equipped with two-piece swivel bracket for wall mounting or adjustable slipfitter for pole top mounting or extruded arms for pole mounting.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
DFL2/15LED	2x15w	120/277	22
DFL3/15LED	3x15w	120/277	22



DIMENSIONS

WIDTH HEIGHT DEPTH

12-1/2" 12-1/2" 5-3/8"

ADDITIONAL FEATURES

One piece aluminum reflector
Wire Guard suffix adder— WG
Glare Shield suffix adder— GS
Slipfitter suffix adder— SW
6" Aluminum arm— FLEM6
10" Aluminum arm— FLEM10
12" Aluminum arm— FLEM12
18" Aluminum arm— FLEM18

FLOOD LIGHTING



LED SPEC

ROUND BACK FLOODLIGHT

APPLICATION:

Ideal low wattage energy saving luminaire that provides economic cost for lighting residential areas, landscape lighting, architectural applications, building facades and general security lighting.

ELECTRICAL

CSA listed for wet locations

LENS

Tempered flat glass lens for optimum light distribution.

HOUSING

Diecast aluminum housing and hinged lens frame with powder coat finish over a chromate conversion coating for durability— BRONZE. Equipped with 1/2" NPT threaded adjustable knuckle or adjustable slip-fitter for pole top mounting. (See picture at right)

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
RFL7.5LED	1x7.5w	120/277	19
RFL2/7.5LED	2x7.5w	120/277	19
RFL3/7.5LED	3x7.5w	120/277	19
RFL15LED	1x15w	120/277	19
RFL2/15LED	2x15w	120/277	19



DIMENSIONS

WIDTH HEIGHT DEPTH

11-1/2" 8-1/2" 8"



Pictured with the pole top slipfitter attached

ADDITIONAL FEATURES

One piece aluminum reflector
Wire Guard suffix adder— WG
Glare Shield suffix adder— GS
Slipfitter suffix adder— SW

FLOOD LIGHTING



LED SPEC

INTERMEDIATE FLOODLIGHT

APPLICATION:

Ideal low wattage energy saving luminaire that provides economic cost for lighting building facades, flags, signs & displays, and general security lighting.

ELECTRICAL

CSA listed for wet locations

LENS

Tempered flat glass lens for optimum light distribution.

HOUSING

Diecast aluminum housing and hinged lens frame with powder coat finish over a chromate conversion coating for durability— BRONZE. Equipped with a two-piece swivel bracket for wall mounting or adjustable slipfitter for pole top mounting.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
IFL7.5LED	1x7.5w	120/277	28
IFL2/7.5LED	2x7.5w	120/277	28
IFL3/7.5LED	3x7.5w	120/277	28
IFL15LED	1x15w	120/277	28
IFL2/15LED	2x15w	120/277	28
IFL3/15LED	3x15w	120/277	28



DIMENSIONS

WIDTH	HEIGHT	DEPTH
16-1/8"	10-1/8"	10-1/2"

OPTIC OPTIONS



NONE
20 DEGREE BEAM
40 DEGREE BEAM
60 DEGREE BEAM

ADDITIONAL FEATURES

One piece aluminum reflector
Wire Guard suffix adder— WG
Glare Shield suffix adder— GS
Slipfitter suffix adder— SW

FLOOD LIGHTING

TEDDICO

ELECTRICAL PRODUCTS



LED SPEC

LARGE FLOODLIGHT

APPLICATION:

Ideal energy saving luminaire that provides economic cost for lighting building facades, industrial applications, commercial and retail use, warehouses, factories, supermarkets, parking lots and general

ELECTRICAL

CSA listed for wet locations

LENS

Tempered flat glass lens for optimum light distribution.

HOUSING

Diecast aluminum housing and hinged lens frame with powder coat finish over a chromate conversion coating for durability— BRONZE. Equipped with a two-piece swivel bracket for wall mounting or adjustable slipfitter for pole top mounting.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs.
----------------	---------	---------	------

LFL4/15LED	4x15w	120/277	35
-------------------	--------------	----------------	-----------

LFL5/15LED	5x15w	120/277	35
-------------------	--------------	----------------	-----------



DIMENSIONS

WIDTH	HEIGHT	DEPTH
-------	--------	-------

16-1/8"	16-5/8"	7"
---------	---------	----

OPTIC OPTIONS



NONE
20 DEGREE BEAM
40 DEGREE BEAM
60 DEGREE BEAM

ADDITIONAL FEATURES

One piece aluminum reflector
1/2" coin plugs for photo cell
120 volt photo cell suffix adder— PC
277 volt photo cell suffix adder— PC2
Wire Guard suffix adder— WG
Glare Shield suffix adder— GS
Slipfitter suffix adder— SW

FLOOD LIGHTING



LED SPEC

MEGA FLOODLIGHT

APPLICATION:

Ideal energy saving luminaire that provides economic cost for lighting building facades, industrial applications, commercial and retail use, warehouses, factories, supermarkets, parking lots and general

ELECTRICAL

CSA listed for wet locations

LENS

Tempered flat glass lens for optimum light distribution.

HOUSING

Diecast aluminum housing and hinged lens frame with powder coat finish over a chromate conversion coating for durability— BRONZE. Equipped with a two-piece swivel bracket for wall mounting, adjustable slipfitter for pole top mounting or extruded arms for pole side mounting.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
GFL8/15LED	8x15w	120/277	65
GFL10/15LED	10x15w	120/277	65



DIMENSIONS

WIDTH HEIGHT DEPTH

24" 24-1/2" 10-1/4"

OPTIC OPTIONS



NONE
20 DEGREE BEAM
40 DEGREE BEAM
60 DEGREE BEAM

ADDITIONAL FEATURES

One piece aluminum reflector
1/2" coin plugs for photo cell
120 volt photo cell suffix adder— PC
277 volt photo cell suffix adder— PC2
Wire Guard suffix adder— WG
Glare Shield suffix adder— GS
Slipfitter suffix adder— SW

FLOOD LIGHTING



LED SPEC

GLASS REFRACTOR BOLLARD

APPLICATION:

Ideal energy saving luminaire that provides economic cost for lighting residential areas,

ELECTRICAL

CSA listed for wet locations

LENS

Clear Polycarbonate lens over an IES Type III (BOGIII) or IES Type V (BOGV) refractor.

HOUSING

One-piece extruded aluminum body and diecast aluminum domed top with powder coat finish over a chromate conversion coating for durability. Available in BLACK, WHITE or BRONZE.



DIMENSIONS

WIDTH	HEIGHT	DEPTH
7"	43-3/8"	7"

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
BOGIII7.5LED	1x7.5w	120/277	30
BOGIII2/7.5LED	2x7.5w	120/277	30
BOGIII15LED	1x15w	120/277	30
BOGIII2/15LED	2x15w	120/277	30
BOGV7.5LED	1x7.5w	120/277	30
BOGV2/7.5LED	2x7.5w	120/277	30
BOGV15LED	1x15w	120/277	30
BOGV2/15LED	2x15w	120/277	30

ADDITIONAL FEATURES

Includes cast aluminum mounting plate and 4 inch anchor bolts
Also available 8 inch, 12 inch and 15 inch anchor bolts and replacement polycarbonate lens, sold separately
Bollards can be cut to custom lengths upon request
WHITE color suffix— WH
BRONZE color suffix— BZ
BLACK color suffix— BK

BOLLARDS



LED SPEC

ALUMINUM CONE REFLECTOR

APPLICATION:

Ideal energy saving luminaire that provides economic cost for lighting residential areas,

ELECTRICAL

CSA listed for wet locations

LENS

Clear Polycarbonate lens over an aluminum cone reflector.

HOUSING

One-piece extruded aluminum body and diecast aluminum domed top with powder coat finish over a chromate conversion coating for durability. Available in BLACK, WHITE or BRONZE.



DIMENSIONS

WIDTH	HEIGHT	DEPTH
7"	43-3/8"	7"

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
BOR7.5LED	1x7.5w	120/277	30
BOR2/7.5LED	2x7.5w	120/277	30
BOR15LED	1x15w	120/277	30
BOR2/15LED	2x15w	120/277	30

ADDITIONAL FEATURES

Includes cast aluminum mounting plate and 4 inch anchor bolts
Also available 8 inch, 12 inch and 15 inch anchor bolts and replacement polycarbonate lens, sold separately
Bollards can be cut to custom lengths upon request
WHITE color suffix— WH
BRONZE color suffix— BZ
BLACK color suffix— BK

BOLLARDS



LED SPEC

ALUMINUM LOUVER BOLLARD

APPLICATION:

Ideal energy saving luminaire that provides economic cost for lighting residential areas,

ELECTRICAL

CSA listed for wet locations

LENS

Clear Polycarbonate lens over cast aluminum louvers.

HOUSING

One-piece extruded aluminum body and diecast aluminum domed top with powder coat finish over a chromate conversion coating for durability. Available in BLACK, WHITE or BRONZE.



DIMENSIONS

WIDTH	HEIGHT	DEPTH
7"	43-3/8"	

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
BOL7.5LED	1x7.5w	120/277	30
BOL2/7.5LED	2x7.5w	120/277	30
BOL15LED	1x15w	120/277	30
BOL2/15LED	2x15w	120/277	30

ADDITIONAL FEATURES

Includes cast aluminum mounting plate and 4 inch anchor bolts
Also available 8 inch, 12 inch and 15 inch anchor bolts and replacement polycarbonate lens, sold separately
Bollards can be cut to custom lengths upon request
WHITE color suffix— WH
BRONZE color suffix— BZ
BLACK color suffix— BK

BOLLARDS



LED SPEC

FLAT GLASS REFRACTOR BOLLARD

APPLICATION:

Ideal energy saving luminaire that provides economic cost for lighting residential areas,

ELECTRICAL

CSA listed for wet locations

LENS

Clear Polycarbonate lens over an IES Type III (BOFGIII) or IES Type V (BOFGV) refractor.

HOUSING

One-piece extruded aluminum body and diecast aluminum flat top with powder coat finish over a chromate conversion coating for durability. Available in BLACK, WHITE or BRONZE.



DIMENSIONS

WIDTH	HEIGHT	DEPTH
7"	41	7"

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
BOFGIII7.5LED	1x7.5w	120/277	30
BOFGIII2/7.5LED	2x7.5w	120/277	30
BOFGIII15LED	1x15w	120/277	30
BOFGIII2/15LED	2x15w	120/277	30
BOFGV7.5LED	1x7.5w	120/277	30
BOFGV2/7.5LED	2x7.5w	120/277	30
BOFGV15LED	1x15w	120/277	30
BOFGV2/15LED	2x15w	120/277	30

ADDITIONAL FEATURES

Includes cast aluminum mounting plate and 4 inch anchor bolts
Also available 8 inch, 12 inch and 15 inch anchor bolts and replacement polycarbonate lens, sold separately
Bollards can be cut to custom lengths upon request
WHITE color suffix— WH
BRONZE color suffix— BZ
BLACK color suffix— BK

BOLLARDS



LED SPEC

FLAT ALUMINUM CONE REFLECTOR

APPLICATION:

Ideal energy saving luminaire that provides economic cost for lighting residential areas,

ELECTRICAL

CSA listed for wet locations

LENS

Clear Polycarbonate lens over an aluminum cone reflector.

HOUSING

One-piece extruded aluminum body and diecast aluminum flat top with powder coat finish over a chromate conversion coating for durability. Available in BLACK, WHITE or BRONZE.



DIMENSIONS

WIDTH	HEIGHT	DEPTH
7"	41"	7"

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
BOFR7.5LED	1x7.5w	120/277	30
BOFR2/7.5LED	2x7.5w	120/277	30
BOFR15LED	1x15w	120/277	30
BOFR2/15LED	2x15w	120/277	30

ADDITIONAL FEATURES

Includes cast aluminum mounting plate and 4 inch anchor bolts
Also available 8 inch, 12 inch and 15 inch anchor bolts and replacement polycarbonate lens, sold separately
Bollards can be cut to custom lengths upon request
WHITE color suffix— WH
BRONZE color suffix— BZ
BLACK color suffix— BK

BOLLARDS



LED SPEC

FLAT ALUMINUM LOUVER BOLLARD

APPLICATION:

Ideal energy saving luminaire that provides economic cost for lighting residential areas,

ELECTRICAL

CSA listed for wet locations

LENS

Clear Polycarbonate lens over cast aluminum louvers.

HOUSING

One-piece extruded aluminum body and diecast aluminum flat top with powder coat finish over a chromate conversion coating for durability. Available in BLACK, WHITE or BRONZE.



DIMENSIONS

WIDTH	HEIGHT	DEPTH
7"	41"	7"

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
BOFL7.5LED	1x7.5w	120/277	30
BOFL2/7.5LED	2x7.5w	120/277	30
BOFL15LED	1x15w	120/277	30
BOFL2/15LED	2x15w	120/277	30

ADDITIONAL FEATURES

Includes cast aluminum mounting plate and 4 inch anchor bolts
Also available 8 inch, 12 inch and 15 inch anchor bolts and replacement polycarbonate lens, sold separately
Bollards can be cut to custom lengths upon request
WHITE color suffix— WH
BRONZE color suffix— BZ
BLACK color suffix— BK

BOLLARDS



LED SPEC

MEDIUM VANDAL RESISTANT

APPLICATION:

Ideal low wattage energy saving luminaire that provides economic cost for use in residential exteriors, entryways, walkways, stairways & perimeters, parking garages, and wet industrial and

ELECTRICAL

CSA listed for wet locations

LENS

High impact clear prismatic polycarbonate lens for optimal light distribution.

HOUSING

Diecast aluminum housing with powder coat finish over a chromate conversion coating for durability— BRONZE. Weatherproof silicone gasket eliminates moisture, dust and insect penetration.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
MVR7.5LED	1x7.5w	120/277	12



DIMENSIONS

WIDTH	HEIGHT	DEPTH
9"	9"	7-1/4"

OPTIC OPTIONS



NONE
20 DEGREE BEAM
40 DEGREE BEAM
60 DEGREE BEAM

ADDITIONAL FEATURES

Conduit access on sides
One piece white reflector

ACCESSORIES

120 volt Photo Cell add suffix— PC
277 volt Photo Cell add suffix— PC2

VANDAL RESISTANT



LED SPEC

LARGE VANDAL RESISTANT

APPLICATION:

Ideal low wattage energy saving luminaire that provides economic cost for use in residential exteriors, entryways, walkways, stairways & perimeters, parking garages, and wet industrial and

ELECTRICAL

CSA listed for wet locations

LENS

High impact clear prismatic polycarbonate lens for optimal light distribution.

HOUSING

Diecast aluminum housing with powder coat finish over a chromate conversion coating for durability— BRONZE. Weatherproof silicone gasket eliminates moisture, dust and insect penetration.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
LVR2/7.5LED	2x7.5w	120/277	15
LVR3/7.5LED	3x7.5w	120/277	15
LVR4/7.5LED	4x7.5w	120/277	15
LVR2/15LED	2x15w	120/277	15



DIMENSIONS

WIDTH	HEIGHT	DEPTH
12-3/8"	12-3/8"	8-5/8"

OPTIC OPTIONS



NONE
20 DEGREE BEAM
40 DEGREE BEAM
60 DEGREE BEAM

ADDITIONAL FEATURES

Conduit access on sides
One piece white reflector

ACCESSORIES

120 volt Photo Cell add suffix— PC
277 volt Photo Cell add suffix— PC2

VANDAL RESISTANT



LED SPEC

DELUXE GARAGE LIGHTER

APPLICATION:

Ideal low wattage energy saving luminaire that provides economic cost for use in canopy areas, garages, shopping malls, shopping centers, terminals, public buildings and convenience stores.

ELECTRICAL

CSA listed for damp locations

LENS

High impact clear prismatic polycarbonate optical refractor with gasket & hinged drop lens. Upper section of the reflector can be removed to create an up light.

HOUSING

Heavy duty round diecast aluminum housing with powder coat finish over a chromate conversion coating for durability— SILVER. Sealed optics prevents dust accumulation inside the fixture.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
DGLVR2/15LED	2x15w	120/277	18
DGLVR4/15LED	4x15w	120/277	18



DIMENSIONS

WIDTH	HEIGHT	DEPTH
16"		12-1/4"

OPTIC OPTIONS



NONE
20 DEGREE BEAM
40 DEGREE BEAM
60 DEGREE BEAM

ADDITIONAL FEATURES

Two piece aluminum reflector

GARAGE LIGHTER



LED SPEC

VANDAL RESISTANT GARAGE LIGHTER

APPLICATION:

Ideal low wattage energy saving luminaire that provides economic cost for use in canopy areas, garages, shopping malls, shopping centers, terminals, public

ELECTRICAL

CSA listed for wet locations

LENS

Extended clear prismatic polycarbonate lens.

HOUSING

Round diecast aluminum with powder coat finish over a chromate conversion coating for durability— BRONZE. Sealed optics prevents dust accumulation inside the fixture.



DIMENSIONS

WIDTH HEIGHT DEPTH

15"

10-1/2"

OPTIC OPTIONS



NONE
20 DEGREE BEAM
40 DEGREE BEAM
60 DEGREE BEAM

ORDERING INFORMATION

Catalog Number	Wattage	Voltage	Lbs,
RVR7.5LED	1x7.5w	120/277	22
RVR2/7.5LED	2x7.5w	120/277	22
RVR3/7.5LED	3x7.5w	120/277	22
RVR4/7.5LED	4x7.5w	120/277	22
RVR15LED	1x15w	120/277	22
RVR2/15LED	2x15w	120/277	22
RVR3/15LED	3x15w	120/277	22
RVR4/15LED	4x15w	120/277	22

ADDITIONAL FEATURES

Conduit access on sides and back
One piece white reflector

ACCESSORIES

120 volt Photo Cell add suffix— PC
277 volt Photo Cell add suffix— PC2

GARAGE LIGHTER



TEDDICO
ELECTRICAL PRODUCTS



A Leading Manufacturer of Outdoor Lighting Products

1104 Parkway View Drive, Bldg 11 • Pittsburgh, PA 15205 • Phone 412-747-4970 • Fax 412-747-4973 • www.teddico.com