

TEDDICO

LIGHTING PRODUCTS



*A Leading
Manufacturer of
Lighting Products*

www.teddico.com

TEDDICO

LIGHTING PRODUCTS

<i>Wall Packs</i>	1
<i>Flood Lighting</i>	2
<i>Vandal Resistant Fixtures</i>	3
<i>Garage Lighting</i>	4
<i>Area/Parking Lighting</i>	5
<i>Sports Lighting</i>	6
<i>High/Low Bay</i>	7
<i>Vapor Tight</i>	8
<i>Compact Fluorescent</i>	9
<i>Lamps</i>	10
<i>Ballasts</i>	11
<i>Future Products</i>	12

TEDDICO

LIGHTING SPECIFICATION SHEET

SMALL WALLPACK

APPLICATION:

Ideal low wattage energy saving luminaire that provides economic cost and vandal resistance for exterior wall and area lighting for parking areas, perimeter lighting, entrance and walkways, loading platforms, and warehouses.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

DIFFUSER

One piece, injection molded, heat resistant clear polycarbonate lens with UV inhibitors. Front hinged and secured with four screws. A borosilicate molded prismatic glass lens with die cast frame is also available.

HOUSING

One piece, heavy duty, die cast aluminum. Polyester powder coat paint finish, BRONZE.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast	Lbs.
HIGH PRESSURE SODIUM			
WP35	35	120/Reactor NPF	8
WP50	50	120/Reactor NPF	8
WP70	70	120/Reactor NPF	9
WP100	100	120/Reactor NPF	9
WPG100	100	120/Reactor NPF	12
WPG150	150	120/Reactor NPF	12
METAL HALIDE			
WPG70MH	70	Multi-tap HX-HPF	15
WPG100MH	100	Multi-tap HX-HPF	15



DIMENSIONS

Width	Height	Depth
8 1/2"	8 1/2"	9"

REFLECTOR

One piece, semi specular asymmetric anodized aluminum for optimum efficiency.

BALLAST

Class H insulated, NPF 120v 60 Hz reactor
High pressure sodium. Metal Halide Multi-tap.

ADDITIONAL FEATURES

- Two 1/2" tapped side holes for securing conduit.
- One 1/2" tapped hole for mounting photo cell
- Porcelain medium base socket
- Optional mounting cover and threaded stem
- Lamp included

ACCESSORIES

Wire Guard suffix - WG
Photo Cell - 120 volt suffix - PC
Glass Lens (WPG)

TEDDICO

LIGHTING SPECIFICATION SHEET

MINI WALLPACK

APPLICATION:

Ideal low wattage energy saving luminaire that provides economic cost and vandal resistance for exterior and interior architectural and security lighting applications for commercial buildings, shopping centers, schools and apartment complexes. Also available with aborosilicate glass refractor to eliminate discoloring.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

LENS

One piece, injection molded, heat resistant polycarbonate with UV inhibitors to reduce yellowing. Also available with a heat resistant molded borosilicate glass lens to eliminate discoloring.

HOUSING

Polycarbonate unit comes with a one piece heavyduty, die cast aluminum back plate. Glass unit has a heavy duty, die cast aluminum housing and lensframe. Polyester powder coat finish - BRONZE.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast	Lbs.
POLYCARBONATE HIGH PRESSURE SODIUM			
MWP35	35	120/Reactor NPF	4
MWP50	50	120/Reactor NPF	4
MWP70	70	120/Reactor NPF	4
GLASS HIGH PRESSURE SODIUM			
MWP100	100	120/Reactor NPF	10
MWP150	150	120/Reactor NPF	11
GLASS PULSE START METAL HALIDE			
MWP70MH	70	Multi-tap HX-HPF	13
MWP100MH	100	Multi-tap HX-HPF	13



DIMENSIONS

	Width	Height	Depth
Polycarbonate	7"	11"	5 1/4"
Glass	7 3/4"	13"	5 1/2"

REFLECTOR

One piece, semi specula asymmetric anodized aluminum for optimum efficiency.

BALLAST

Class H insulated, NPF 120v 60 Hz reactor High pressure sodium HX-HPF multi-tap 60Hz Pulse Start Metal Halide.

ADDITIONAL FEATURES

- Conduit access on bottom and back side
- Photo cell adaptable
- Porcelain medium base socket
- Lamp included

ACCESSORIES

Wire Guard suffix - WG
Photo Cell - 120 volt suffix - PC
Photo Cell 208-277 volt suffix -PC2

TEDDICO

LIGHTING SPECIFICATION SHEET

MEDIUM WALLPACK

APPLICATION:

Ideal high wattage luminaire for mounting heights below 15 feet for exterior wall and area lighting for parking areas, perimeter lighting, entrance and walkways, loading platforms, and warehouses. Special energy efficient Uni-form Pulse Start Metal Halide ballast and lamps are also available.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

LENS

One piece, high impact, heat resistant, borosilicate glass for wide spread distribution of light.

HOUSING

Die cast housing with a Borosilicate molded glass lens, gasket, chromate conversion coating, and a textured bronze finish.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
HIGH PRESSURE SODIUM		
WP150	150	120 Volt
WP150MT	150	Multi-Tap
METAL HALIDE		
WP50MH	50	Multi-Tap
WP70MH	70	Multi-Tap
WP100MH	100	Multi-Tap
WP175MH	175	Multi-Tap
WP175PSMH	175	Multi-Tap



DIMENSIONS

	Width	Height	Depth
WP15	14"	9"	7"

REFLECTOR

The medium wall pack has a combination barrier-reflector.

BALLAST

Class H insulated, NPF 120v 60Hz reactor High pressure sodium. Metal halide Multi-tap.

ADDITIONAL FEATURES

- Medium Base socket and bracket
- Reusable Styrofoam and inner carton

ACCESSORIES

Wire Guard
Full Cut Off*
Side Cut Off*
Polycarbonate Guard
* Specify "A" for Aluminum and "S" for Steel

TEDDICO

LIGHTING SPECIFICATION SHEET

LARGE WALLPACK

APPLICATION:

Ideal high wattage luminaire for mounting heights above 15 feet for exterior wall and area lighting for parking areas, perimeter lighting, entrance and walkways, loading platforms, and warehouses. Special energy efficient Uni-form Pulse Start Metal Halide ballast and lamps are also available.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

LENS

One piece, high impact, heat resistant, borosilicate glass for wide spread distribution of light.

HOUSING

Two piece heavy duty die cast aluminum. Face frame is hinged and secured to back box with two stainless steel screws. This design allows for easy access for relamping. Polyester powder coat paint finish, BRONZE.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast	Lbs.
HIGH PRESSURE SODIUM			
WP250	250	Multi-Tap	31
WP400	400	Multi-Tap	31
METAL HALIDE			
WP250MH	250	Multi-Tap	29
WP400MH	400	Multi-Tap	31
PULSE START METAL HALIDE			
WP200MH	200	Multi-Tap	31
WP250PSMH	250	Multi-Tap	31
WP300MH	300	Multi-Tap	31
WP320MH	320	Multi-Tap	31
WP350MH	350	Multi-Tap	32
WP400PSMH	400	Multi-Tap	32



DIMENSIONS

Width	Height	Depth
18"	9"	12 3/4"

REFLECTOR

One piece stippled asymmetric anodized aluminum designed in conjunction with the diffuser for efficient light distribution.

BALLAST

Class H insulated, CWA Multi-tap 60Hz.

ADDITIONAL FEATURES

- Two 1/2" tapped side holes for securing conduit.
- One 1/2" tapped hole for mounting photo cell
- Porcelain Mogul socket

ACCESSORIES

Wire Guard suffix - WG
Photo Cell - 120 volt suffix - PC
Photo Cell 208-277 volt suffix - PC2
Polycarbonate Guard - PG

TEDDICO

LIGHTING SPECIFICATION SHEET

CONSTELLATION "FULL CUTOFF" WALL PACKS

APPLICATION:

Parking areas, perimeter lighting, entrance and walkways, waterfronts, loading platforms, recreational areas.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

Die Cast front and rear housing with tempered glass lens and built-in template for mounting to an electrical box. There is a chromate conversion coating with a textured bronze finish.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
WPFC175	14 1/4"	9 1/8"	11 3/8"
WPFC250	18 1/4"	9 1/8"	13 3/4"
WPFC150	18 1/4"	9 1/8"	7 1/8"

REFLECTOR

2-piece pinged aluminum reflector with porcelain socket and bracket.

BALLAST

Class H insulated, NPF 120v 60Hz reactor High pressure sodium. Metal halide Multi-tap.

ADDITIONAL FEATURES

- Reusable Styrofoam and inner carton
- Meets local "Dark Sky" requirements
- Also available in white

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
METAL HALIDE		
WPFC100MH	100	Multi-Tap
WPFC150MH	150	Multi-Tap
WPFC175MH	175	Multi-Tap
WPFC175MH	175	Multi-Tap
WPFC250MH	250	Multi-Tap
WPFC400MH	400	Multi-Tap
WPFC320MH	320	Multi-Tap
HIGH PRESSURE SODIUM		
WPFC150	150	120 Volt
WPFC250	250	Multi-Tap
WPFC400	400	Multi-Tap

ACCESSORIES

Flat Glass Lens
Clear Glass
Etched Glass
Prismatic Glass
ColorLIFE Lens
ColorLIFE-YELLOW
ColorLIFE-LIGHT BLUE

TEDDICO

LIGHTING SPECIFICATION SHEET

SCONCE WALL PACKS

APPLICATION:

Parking areas, perimeter lighting, entrance and walkways, waterfronts, loading platforms, recreational areas.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

Die cast housing with flat tempered prismatic glass lens, chromate conversion coating and textured bronze finish.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
WPSC150	14 1/4"	9"	7 1/4"
WPSC250	18 1/8"	9"	12 7/8"

REFLECTOR

Two-piece pinged aluminum reflector with porcelain socket and bracket.

BALLAST

Class H insulated, NPF 120v 60Hz reactor High pressure sodium. Metal halide Multi-tap.

ADDITIONAL FEATURES

- Porcelain medium base socket and bracket for medium
- Porcelain mogul base socket and bracket for large
- Semi-cutoff design

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
METAL HALIDE		
WPSC100MH	100	Multi-Tap
WPSC150MH	150	Multi-Tap
WPSC175MH	175	Multi-Tap
WPSC175MH	175	Multi-Tap
WPSC250MH	250	Multi-Tap
WPSC400MH	400	Multi-Tap
HIGH PRESSURE SODIUM		
WPSC150	150	120 Volt
WPSC250	250	Multi-Tap
WPSC400	400	Multi-Tap

TEDDICO

LIGHTING SPECIFICATION SHEET

SLIM LINE WALLPACK

APPLICATION:

Parking areas, perimeter lighting, entrance and walkways, waterfronts, loading platforms, recreational areas.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

Die Cast housing and hinged front frame with a chromate conversion coating and a textured bronze finish. The Slimline Wall Pack comes with molded Borosilicate prismatic glass lens.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
WPSL400	16 1/2"	17 3/8"	7"

REFLECTOR

The reflector has porcelain mogul base socket and bracket with side access to the conduit.

BALLAST

Class H insulated, NPF 120v 60Hz reactor High pressure sodium. Metal halide Multi-tap.

ADDITIONAL FEATURES

- Includes mounting plate with integral electrical box

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast	
METAL HALIDE			
WPSL175MH	175	Multi-Tap	
WPSL250MH	250	Multi-Tap	
WPSL400MH	400	Multi-Tap	
HIGH PRESSURE SODIUM			
WPSL250	250	Multi-Tap	
WPSL400	400	Multi-Tap	
PULSE START METAL HALIDE			
WP200MH	200	Multi-Tap	31
WP250PSMH	250	Multi-Tap	31
WP300MH	300	Multi-Tap	31
WP320MH	320	Multi-Tap	31
WP350MH	350	Multi-Tap	32
WP400PSMH	400	Multi-Tap	32

TEDDICO

LIGHTING SPECIFICATION SHEET

FLUORESCENT WALLPACK

APPLICATION:

Parking areas, perimeter lighting, entrance and walkways, waterfronts, loading platforms, recreational areas.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

Die Cast housing with a chromate conversion coating and a textured bronze finish.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
WP42EL	8 1/2"	9 1/2"	7"
MWP42EL	7 3/4"	13"	5 1/2"
MWP84EL	7 3/4"	13"	5 1/2"
MWP26	6 3/4"	11"	5 1/4"
WP84EL	14 1/4"	9"	7 1/4"

REFLECTOR

The reflector is aluminum and has a fluorescent socket and bracket.

BALLAST

Class H insulated, NPF 120v 60Hz reactor High pressure sodium. Metal halide Multi-tap.

ADDITIONAL FEATURES

- Reusable Styrofoam and inner carton
- Compact Fluorescent lamps
- Heat Resistant clear polycarbonate available

ACCESSORIES

Mounting Plate - MP
 Wire Guard - WG
 Full Cut Off - FC
 Side Cut Off - SC
 Polycarbonate Guard - PC

ORDERING INFORMATION

Catalog Number	Lens	Wattage	Voltage/Ballast
WP42EL	polycarbonate	1x 42W	120/Reactor NPF
MWP42EL	borosilicate	1x 42W	120/Reactor NPF
MWP84EL	borosilicate	2 x 42W	120/Reactor NPF
MWP26	polycarbonate	2 x 13W	120/Reactor NPF
MWP26	borosilicate	2 x 42	120/Reactor NPF

TEDDICO

LIGHTING SPECIFICATION SHEET

SMALL FLOODLIGHT

APPLICATION:

Industrial applications for commercial and retail use, warehouses, factories, supermarkets.

ELECTRICAL

UL and CSA_{US} listed for wet and damp locations.

HOUSING

Die Cast housing with a chromate conversion coating and a textured bronze finish with tempered glass lens.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
MFL100	9"	7 1/2"	6"
MFL100MH	9"	7 1/2"	7"

REFLECTOR

The small floods come with an anodized aluminum reflector.

BALLAST

Class H insulated, NPF 120v 60Hz reactor
High pressure sodium. Metal halide Multi-tap.

ADDITIONAL FEATURES

- Porcelain medium base socket and bracket
- Adjustable Knuckle
- Photocell adaptable

ACCESSORIES

Wire Guard - WG
Glareshield - GS
Post Top Fitter - PTF
HID Groud Stake - GSK
Polycarbonate Guard - PC

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
HIGH PRESSURE SODIUM		
MFL50	50	120/Reactor NPF
MFL70	70	120/Reactor NPF
MFL100	100	120/Reactor NPF
MFL150	150	120/Reactor NPF
METAL HALIDE		
MFL100MH	100	Multi-Tap

TEDDICO

LIGHTING SPECIFICATION SHEET

MEDIUM FLOODLIGHT

APPLICATION:

Lower wattage luminaire that provides economic cost for exterior security lighting applications for commercial building facades, parking areas, perimeter lighting, recreational areas, display, sign lighting and landscape lighting.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

DIFFUSER

One piece high impact tempered glass lens.

HOUSING

The one piece heavy duty cast aluminum face frame is hinged and secured to the back box with captive screws. Powder coat Bronze finish. 1/2" NPT threaded mounting swivel.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast	Lbs.
HIGH PRESSURE SODIUM			
FL100	100	120 Volt/Reactor	13
FL150	150	120 Volt/Reactor	13
METAL HALIDE			
FL175MH	175	Multi-Tap	15
PULSE START METAL HALIDE			
FL70MH	70	Multi-Tap	15
FL100MH	100	Multi-Tap	15
FL125MH	125	Multi-Tap	15
FL150MH	150	Multi-Tap	15
FL175PSMH	175	Multi-Tap	15



DIMENSIONS

Width	Height	Depth
9-3/4"	9-3/4"	6-3/4"

REFLECTOR

A one piece anodized aluminum reflector provides wide beam distribution.

BALLAST

Class H insulated, CWA Multi tap

MOUNTING

Wall or pole mount.

ADDITIONAL FEATURES

- Photo cell adaptable
- Porcelain mogul base socket
- Lamp included

ACCESSORIES

- Glare Shield suffix - GS
- Photo Cell - 120 suffix- PC
- Photo Cell 208-277 volt suffix- PC2

TEDDICO

LIGHTING SPECIFICATION SHEET

LARGE FLOODLIGHT

APPLICATION:

Industrial applications for commercial and retail use, warehouses, factories, supermarkets.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

Die Cast housing with a chromate conversion coating and a textured bronze finish with tempered glass lens.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
LFL250MH	16 1/2"	17"	7 1/8"

REFLECTOR

The large floods come with an anodized aluminum reflector.

BALLAST

Class H insulated, NPF 120v 60Hz reactor
High pressure sodium. Metal halide Multi-tap.

ADDITIONAL FEATURES

- Uses Standard lamp vs. reduced envelope
- External accessibility wiring compartment
- Ballast mounting bracket

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
METAL HALIDE		
LFL250MH	250	Multi-Tap
LFL400MH	400	Multi-Tap
LFL320PSMH	320	Multi-Tap
HIGH PRESSURE SODIUM		
LFL250	250	Multi-Tap
LFL400	400	Multi-Tap

ACCESSORIES

Wire Guard - WG
Glareshield - GS
Small Mounting Yoke - SMY
Large Mounting Yoke - LMY
Large "Handle" Yoke - LHY
Pole Tenon Mount - PTM
Polycarbonate Guard - PG

TEDDICO

LIGHTING SPECIFICATION SHEET

LARGE FLOOD ACCESSORIES

Accessory	New Model #	Fits Fixture Model #'s
Wireguard	FL73WG	All Large Floods
Glareshield/Cutoff	FL70GS	FL70
Glareshield	AL73GS	AL72, AL73
Back Cutoff	AL73GSB	AL72, AL73
Baffle	FL70BF	FL70
PC Guard	FL73LG	All Large Floods
Standard Reflector	FL70ARS	FL70
I.E.S. Type 5 Reflector	FL70AR5	FL70
Forward Throw	FL70ARF	FL70
Parking (Wide Angle)	FL70ARW	FL70
Cutoff	AL70ARC	AL72, AL73
Vertical Mount	AL72AR	AL72
Horizontal Mount	AL73AR	AL73
Cobra Style Reflector	AL74CHR	AL74
Half-Open Frame	FL70TF	FL70
Full-Open Frame	AL73TF	AL72, AL73, AL74



TEDDICO

LIGHTING SPECIFICATION SHEET

LARGE FLOOD MOUNTING HARDWARE

LARGE "HANDLE" YOKE

Heavy duty stamped steel with a bronze finish. A "No Tools Needed" aiming adjustment.

SWIVEL BRACKET


Stamped two-piece bracket complete with hardware and a bronze finish. It is also available with liquid tight connector.

SLIP FITTER

Die cast bracket with mounting hardware and angle indicators, a coin plug for photocell, and a bronze finish. Also available with 2' of U.L. listed 16/3 STW cord with one end blunt cut, opposite end jacket stripped 6", leads stripped fi", and the ring terminal on green wire.

EXTERNAL MOUNT SLIP FITTER

The new design allows external mounting, so there is no need to open the fixture! Die cast with a bronze finish, and hardware and angle indicators with a coin plug for photocell.

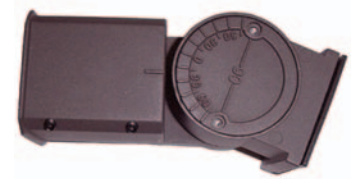

SLIP FITTER COVER

Cover with 1" coin plug allows use of a socket for angle adjustment assembly. There is no need to remove the cover plate!

EXTRUDED MOUNTING

Extruded aluminum with a textured bronze finish. Includes gasket and hardware. Available in 6", 10", 12", and 18".

HEAVY DUTY DIRECT MOUNT POLE

Die cast adjustable arm with two access panels, textured bronze finish. All hardware is included.

Accessory	New Model #	Fits Fixture Model #'s
Swivel Bracket	FL73BR	All Large Floods
Bracket w/Cord & Conn.	FL73BRC	
Bracket w/ Conn.	FL73BRL	
Slip Fitter	FL73SF	All 16" Floods
Slip Fitter with Cord	FL73SFC	
External Mount SF	FL73SFX	
1" Coin Plug Slipfitter Cover	FLSFCP1	All Slip Fitters
Aluminum	FLEM6*	All Large Floods
Extruded	FLEM10*	
Mounting Arms	FLEM12*	
	FLEM18*	
*Specify Mounting: Straight Arms: "S" - Square Pole, "R" - Round Pole		
Angled Arms: "AS" Square Pole "R" - Round Table		
Handle Yoke	FL73HY	All Large Floods
Direct Pole Mount Arm	FLAM	All Large Floods

TEDDICO

LIGHTING SPECIFICATION SHEET

ROUND BACK FLOOD

APPLICATION:

Lower wattage luminaire that provides exterior security lighting applications for commercial building facades, parking areas, perimeter lighting, recreational areas, display, sign lighting and landscape lighting.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

DIFFUSER

One piece high impact tempered glass lens.

HOUSING

The one piece heavy duty cast aluminum face frame is hinged and secured to the back box with captive screws. Powder coat Bronze finish. 1/2" NPT threaded mounting swivel.



DIMENSIONS

Width	Height	Depth
11"	8-1/2"	7-3/4"

REFLECTOR

A one piece anodized aluminum reflector provides wide beam distribution.

BALLAST

Class H insulated, CWA Multi tap

MOUNTING

UL listed for mounting within 4" of the ground.

ADDITIONAL FEATURES

- Porcelain mogul base socket
- Lamp included

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast	Lbs.
HIGH PRESSURE SODIUM			
RFL100	100	Multi-Tap CWA	13
RFL150	150	Multi-Tap CWA	13
METAL HALIDE			
RFL175MH	175	Multi-Tap CWA	15
PULSE START METAL HALIDE			
RFL100MH	100	Multi-Tap CWA	15
RFL125MH	125	Multi-Tap CWA	15
RFL150MH	150	Multi-Tap CWA	15
RFL175PSMH	175	Multi-Tap CWA	15

TEDDICO

LIGHTING SPECIFICATION SHEET

DELUXE 12" FLOODLIGHT

APPLICATION:

Industrial applications for commercial and retail use, warehouses, factories, supermarkets.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

Die Cast housing with a chromate conversion coating and a textured bronze finish, and a hinged die cast top frame with high impact tempered glass lens.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
DFL175MH	12 1/2 "	12 1/2"	5 3/8"

REFLECTOR

Five different reflectors are available for five different applications - standard reflectors, cutoff reflectors, forward throw reflectors, parking area reflectors, and I.E.S. Type 5 reflectors.

BALLAST

Class H insulated, NPF 120v 60Hz reactor High pressure sodium. Metal halide Multi-tap.

ADDITIONAL FEATURES

- Tempered flat clear glass lens

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
METAL HALIDE		
DFL100MH	100	Multi-Tap
DFL150MH	150	Multi-Tap
DFL175MH	175	Multi-Tap
PULSE START		
DFL175PSMH	175	Multi-Tap
HIGH PRESSURE SODIUM		
DFL150	150	120 Volt

ACCESSORIES

- Wire Guard - WG
- Glaeshield - GS
- Polycarbonate Guard - PG
- Swivel Bracket - SB
- Slip Fitter - SF
- External Mount Slip Fitter - ESF
- Slipfitter Cover - SC
- Extruded Mounting Arms - EMA

TEDDICO

LIGHTING SPECIFICATION SHEET

DELUXE 12" FLOODLIGHT ACCESSORIES




Accessory	New Model #	Fits Fixture Model #'s
Std. Reflector-Smooth	FL50ARS	FL50
Std. Reflector-Pinged	FL50ARD	FL50
Cutoff Reflector	AL50ARC2	FL50
Forward Throw Reflector	FL50ARF2	FL50
Parking Area Reflector	FL50ARF2	FL50
I.E.S. Typed 5 Reflector	FL50AR5	FL50
Wireguard	FL50WG	FL50
Glareshield	FL50GS	FL50
PC Guard	FL50LG	FL50
Swivel Bracket	FL73BR	FL50
Bracket w/ Cord & Conn.	FL73BRC	
Bracket w/ Conn.	FL73BRL	
Slip Fitter	FL73SF	FL50
Slip Fitter with Cord	FL73SFC	
External Mount Slip Fitter	FL73SFX	
1" Coin Plug Slip Fitter	FLSFC1	All Slip Fitters
Aluminum	FLEM6*	FL50
Extruded	FLEM10*	
Mounting Arms	FLEM12*	
	FLEM18*	

* Specify Mounting:

Straight Arms: "S" - Square Pole, "R" - Round Pole

Angled Arms: "AS" - Square Pole, "AR" - Round Pole



TEDDICO

LIGHTING SPECIFICATION SHEET

MEGA FLOODLIGHT

APPLICATION:

Higher wattage luminaire that provides economic cost for exterior security lighting applications for commercial building facades, parking areas, perimeter lighting, recreational areas, display, sign lighting and landscape lighting.

ELECTRICAL

UL listed for wet and damp locations.

DIFFUSER

One piece high impact tempered glass lens.

HOUSING

The one piece heavy duty cast aluminum face frame is hinged and secured to the back box with captive screws. The face frame has four pads to allow for easy installation of the polycarbonate guard. Trunion mounting bracket included.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast	Lbs.
HIGH PRESSURE SODIUM			
LFL1000	1000	Multi-Tap CWA	68
METAL HALIDE			
LFL1000MH	1000	Multi-Tap CWA	68
PULSE START METAL HALIDE			
LFL875PSMH	875	Multi-Tap CWA	68



DIMENSIONS

Width	Height	Depth
23"	23"	10 1/4"

REFLECTOR

A one piece anodized aluminum reflector provides wide beam distribution.

BALLAST

Class H insulated, CWA Multi-tap 60Hz.

MOUNTING

Wall or pole mount.

ADDITIONAL FEATURES

- Photo cell adaptable
- Porcelain mogul base socket
- Lamp included

ACCESSORIES



Glare Shield suffix - GS
Baffles suffix - BF
Photo Cell - 120 volt suffix - PC
Photo Cell 208-277 volt suffix- PC2
Polycarbonate Guard - PG
Wire Guard - WG
Mounting Swivel - S

TEDDICO

LIGHTING SPECIFICATION SHEET

MEGA FLOODLIGHT ACCESSORIES

Accessory	New Model #
Wire Guard	FL90WG
Glare Shield	FL90GS
Baffle	FL90BF
Baffle	AL90BF
Standard Reflector	FL90ARS
I.E.S. Type 5	FL90ARF
Forward Throw	FL90ARF
Cut Off	AL90ARC
Parking (Wide Angle)	FL90ARW
Safety Cabinet	CPSC
Swivel Bracket	FL90BR
Bracket w/cord & Connector	FL90BRC
Slip Fitter	FL90SF
Slip Fitter w/cord	FL90SFC
External Mount S.F.	FL90SFX
1" Coin Plug Slip Fitter Cover	FLSFCP1
Yoke Mount	FL90Y
Aluminum	FLEM6
Extruded	FLEM10
Mounting Arms	FLEM12
	FLEM18
Direct Mount Arm	FLAM

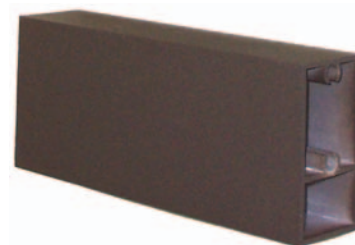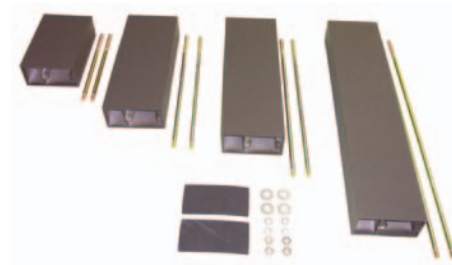

TEDDICO

LIGHTING SPECIFICATION SHEET

PLASTIC FLUORESCENT FLOODLIGHT

APPLICATION:

Industrial applications for commercial and retail use, warehouses, factories, supermarkets.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

Plastic housing and lens with a weatherproof housing gasket.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
PFL26	2 x 13W	120/Reactor NPF
PFL13	1 x 13W	120 Volt



DIMENSIONS

	Width	Height	Depth
PFL26	9 1/4 "	4 3/4"	4 5/8"

REFLECTOR

One piece anodized aluminum reflector provides controlled high intensity.

BALLAST

Class H insulated, NPF 120v 60Hz reactor
High pressure sodium. Metal halide Multi-tap.

ADDITIONAL FEATURES

- Includes twin 13 Watt compact fluorescent sockets, lamps, and brackets.

ACCESSORIES

HID Ground Stake - STK

TEDDICO

LIGHTING SPECIFICATION SHEET

POLYFLOOD FLUORESCENT FLOODLIGHT

APPLICATION:

Industrial applications for commercial and retail use, warehouses, factories, supermarkets.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

The Polyflood fluorescent flood has a European-styled fixture with a polycarbonate housing and clear polycarbonate lens.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
PFL84	10"	15"	7 3/8"

REFLECTOR

One piece anodized aluminum reflector provides controlled high intensity.

BALLAST

Class H insulated, NPF 120v 60Hz reactor
High pressure sodium. Metal halide Multi-tap.

ADDITIONAL FEATURES

- Optional clear tempered glass lens
- Steel mounting yoke
- Twin 42 watt compact fluorescent lamps

ACCESSORIES

Wire Guard - WG
Glareshield - GS
Pole Tenon Mount - PTM

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
PFL84	2 x 42W	Included

TEDDICO

LIGHTING SPECIFICATION SHEET

QUARTZ FLOODLIGHTS

APPLICATION:

Industrial applications for commercial and retail use, warehouses, factories, supermarkets.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

All Quartz floods have a die cast housing with a white or bronze powdercoat.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
Q150GRBZ	150	120/Reactor NPF
Q150GRWH	150	120/Reactor NPF
Q500BZ	500	120/Reactor NPF
Q500WH	500	120/Reactor NPF
Q1500BZ	1500	120/Reactor NPF
Q1500WH	1500	120/Reactor NPF



DIMENSIONS

	Width	Height	Depth
Q150GRBZ	5 3/8"	3 7/8"	5 7/8"
Q500BZ	9 1/4"	6 5/8"	4 1/8"
Q1500BZ	13 1/2"	9"	7 1/2"

REFLECTOR

One piece anodized aluminum reflector provides controlled high intensity.

ADDITIONAL FEATURES

- Double-ended quartz lamp included
- Tempered glass lens

ACCESSORIES

Die Cast Backplate - BP

TEDDICO

LIGHTING SPECIFICATION SHEET

FLOODLIGHT MOUNTING HARDWARE

POST TOP FITTER - PTF

Die cast Aluminum, textured bronze finish, three 1/2" tapped holes with coin plugs, fits 2 3/8" to 3 1/2" poles.

SMALL MOUNTING YOKE - SMY

Stamped steel, bronze finish.

LARGE MOUNTING YOKES - LMY

Stamped steel, bronze finish.

LARGE "HANDLE" YOKES - LHY

Heavy duty stamped steel, bronze finish, "No tools needed" aiming adjustment.

POLE TENON MOUNT - PTM

Fits 2" pole or tenon, bronze finish.

SWIVEL BRACKET - SB

Stamped two-piece bracket complete with hardware, bronze finish.

SWIVEL BRACKET WITH CORD - SBC

Stamped, two-piece bracket complete with hardware, bronze finish. Available with liquid tight connector, or connector and 3' of U.L. listed 16/3 STW cord, one end blunt cut, opposite end jacket stripped 6", leads stripped 1/2", ring terminal on green wire.

HID GROUND STAKE - STK

With wiring compartment

SLIP FITTER - SF

Die cast bracket with mounting hardware and angle indicators, coin plug for photocell, bronze finish. Also available with 2' of U.L. listed 16/3 STW cord with one end blunt cut, jacket stripped 6" opposite end, leads stripped 1/2", ring terminal on green wire.

HEAVY DUTY SLIP FITTER - HDSF

Die cast bracket with mounting hardware and angle indicators, coin plug for photocell, bronze finish. Also available with 2' of U.L. listed 16/3 STW cord with one end blunt cut, jacket stripped 6" opposite end, leads stripped 1/2", ring terminal on green wire.



EXTERNAL MOUNT SLIP FITTER - EMSF

New design allows external mounting, no need to open fixture! Die cast, bronze finish, hardware and angle indicators, coin plug for photocell.

SLIP FITTER COVER - SC

Cover with 1" coin plug allows use of a socket for angle adjustment after assembly, no need to remove cover plate.

EXTRUDED MOUNTING ARMS - EMA

Extruded aluminum, textured bronze finish, includes gasket and hardware, 4" high, 2" wide, available in 6", 10", 12" and 18" lengths, straight or 15 degree angled.

PIPE FOR PAD MOUNTING -

2" pipe, textured bronze finish.

SAFETY CABLE -

3' steel cable with clear vinyl coating, steel eye and loop ends.

HEAVY DUSTY DIRECT POLE MOUNT -

Die cast adjustable arm with two access panels, textured bronze finish, hardware included.

TEDDICO

LIGHTING SPECIFICATION SHEET

VANDAL RESISTANT FLUORESCENT ENTRY LIGHT

APPLICATION:

Ideal low wattage energy saving luminaire that provides economic cost for exterior/interior ceiling or wall mounting for parking garages, perimeter lighting, entrance and walkways, building eaves and canopies, correctional institutions, schools, shopping centers and terminals.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

Die cast housing with a Chromate Conversion Coating, polycarbonate lens with gasket (deep or shallow). Master carton available painted in black and white and all white or as an unfinished casting net.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
VR26WH	2x13	120 Volt
VR26BZ	2x13	120 Volt
VR26BL	2x13	120 Volt



DIMENSIONS

	Width	Height	Depth
VR26WH	5 1/8"	13 1/4"	3"

BALLAST

Magnetic Fluorescent Ballast.

ADDITIONAL FEATURES

- Galvanized back pan
- Inner carton
- Master carton

ACCESSORIES

Clear Polycarbonate Shallow Lens

Clear Polycarbonate Deep Lens

TEDDICO

LIGHTING SPECIFICATION SHEET

MEDIUM VANDAL RESISTANT

APPLICATION:

Parking areas, perimeter lighting, entrance and walkways, waterfronts, loading platforms, recreational areas.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

Die cast housing with a Cromate Conversion Coating and textured bronze finish.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
VR35	9"	9"	7 1/4"
VR42	8 1/2"	8 1/2"	7 1/4"

BALLAST

Class H insulated, NPF 120v 60Hz reactor High pressure sodium. Metal halide Multi-tap.

ADDITIONAL FEATURES

- PC lens
- Gasket
- Medium Socket and bracket
- White Reflector
- Reusable Styrofoam and inner carton
- Master Carton

ACCESSORIES

Clear Lens
White Lens

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
HIGH PRESSURE SODIUM		
VR35	35	120 Volt
VR50	50	120 Volt
VR70	70	120 Volt
INCANDESCENT		
VR75	75	120 Volt
ELECTRONIC FLUORESCENT		
VR42	42	120 Volt
MAGNETIC FLUORESCENT		
VR18	2x9	120 Volt
VR26	2x13	120 Volt

TEDDICO

LIGHTING SPECIFICATION SHEET

LARGE VANDAL RESISTANT

APPLICATION:

Parking areas, perimeter lighting, entrance and walkways, waterfronts, loading platforms, recreational areas.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

DIFFUSER

One piece, injection molded, heat resistant polycarbonate with UV inhibitors to reduce yellowing.

HOUSING

Die cast housing with a Chromate Conversion Coating and textured bronze finish with a polycarbonate lens.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
VR150	12 3/8"	12 3/8"	8 5/8"
VR120	12"	12"	5 1/2"

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
HIGH PRESSURE SODIUM		
VR100	100	120 Volt
VR150	150	120 Volt
METAL HALIDE		
VR175MH	175	Multi-Tap
PULSE START		
VR100MH	100	Multi-Tap
VR125MH	125	Multi-Tap
VR150MH	150	Multi-Tap
INCANDESCENT		
VR120	2x60	120 Volt
FLOURESCENT		
VRL84EL	2x42	120 Volt
VRL26MG	2x13	120 Volt
VRL52EL	2x26	120 Volt

BALLAST

Class H insulated, NPF 120v 60Hz reactor High pressure sodium. Metal halide Multi-tap.

ADDITIONAL FEATURES

- Gasket
- Porcelain medium base socket and bracket white reflector

ACCESSORIES

- Clear Polycarbonate Lens
- White Polycarbonate Lens
- Internal Reflector
- External Hood

TEDDICO

LIGHTING SPECIFICATION SHEET

VANDAL RESISTANT GARAGE LIGHTER

APPLICATION:

Ideal low wattage energy saving luminaire that provides economic cost for exterior ceiling mounting for parking garages, perimeter lighting, entrance and walkways, building eaves and canopies, correctional institutions, schools, shopping centers and terminals. Special energy efficient Uni-Form Pulse Start Metal Halide ballast and lamps are also available.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

DIFFUSER

One piece, injection molded, heat resistant polycarbonate with UV inhibitors to reduce yellowing.

HOUSING

Die cast back housing with built-in template for mounting to an electrical box and chromate conversion coating.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
HIGH PRESSURE SODIUM		
GLVR150	150	120 Volt
METAL HALIDE		
GLVR175MH	175	Multi-Tap
PULSE START		
GLVR70MH	70	Multi-Tap
GLVR100MH	100	Multi-Tap
GLVR150MH	150	Multi-Tap
GLVR175MHPS	175	Multi-Tap



DIMENSIONS

Width	Height	Depth
15"	15"	11 1/4"

BALLAST

Class H insulated, NPF 120v 60Hz reactor High pressure sodium. Metal halide Multi-tap.

ADDITIONAL FEATURES

- Coin plugs on sides and back
- Extended vandal resistant polycarbonate lens with stainless steel screws
- Gasket
- Reflector
- Pulse start medium base socket and bracket
- Vertical Lamp mount
- Master carton

ACCESSORIES

Swivel Pendant Mount
Reducer Bushing
Round Electrical Box
Die Cast Back Plate
Liquid Tight Connector
Cordsets
Downrods
Highly Polished Reflector

TEDDICO

LIGHTING SPECIFICATION SHEET

VANDAL RESISTANT FLUORESCENT BULKHEADS

APPLICATION:

Industrial applications for commercial and retail use, warehouses, factories, supermarkets.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

Die cast housing with frame, lamps included, white powder coat finish.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
BH18C	9"	6"	4"
BH18G	9 3/4"	6 1/2"	4"

BALLAST

Magnetic Fluorescent Ballast.

ADDITIONAL FEATURES

- Ballast
- Sockets
- Vandal Resistant Polycarbonate Lens

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
BH18C	2 X 9	120 Volt
BH18G	2 X 9	120 Volt

ACCESSORIES

None

TEDDICO

LIGHTING SPECIFICATION SHEET

GARAGE LIGHTER

APPLICATION:

Ideal low wattage energy saving luminaire that provides economic cost for exterior ceiling mounting for parking garages, perimeter lighting, entrance and walkways, building eaves and canopies, correctional institutions, schools, shopping centers and terminals. Special energy efficient Uni-Form Pulse Start Metal Halide ballast and lamps are also available.

ELECTRICAL

UL listed for damp locations for ceiling mount.

DIFFUSER

One piece, high impact, clear prismatic polycarbonate with ultraviolet inhibitors to minimize discoloration. Gasketed to eliminate moisture, dust and insects.

HOUSING

One piece heavy die duty cast back housing. Features three convenient 1/2" side hubs for surface mounting and one rear 1/2" hub for ceiling mount. Polyester powder coat paint finish, BRONZE.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast	Lbs.
HIGH PRESSURE SODIUM			
GLVR150	150	120/Reactor NPF	14
GLVR150MT	150	Multi-tap HPF	19
METAL HALIDE			
GLVR175	175	Multi-tap CWA	18
PULSE START METAL HALIDE			
GLVR100MH	100	Multi-tap CWA	18
GLVR125MH	125	Multi-tap CWA	18
GLVR150MH	150	Multi-tap CWA	18
GLVR175MH	175	Multi-tap CWA	18



DIMENSIONS

Width	Height	Depth
15" RND	11-1/4"	-

REFLECTOR

Highly polished aluminum

BALLAST

Class H insulated, NPF 120v 60 Hz reactor
High pressure sodium and HPF Quad volt
60Hz Metal Halide and HPS.

ADDITIONAL FEATURES

- Three 1/2" tapped side holes for securing conduit
- Porcelain medium base socket

ACCESSORIES

Quartz Restrike suffix - QZ
Pendant Mount Swivel - CPSPS
Downrods

TEDDICO

LIGHTING SPECIFICATION SHEET

“MAXI LIGHTER” AREA or GARAGE LIGHTER

APPLICATION:

Ideal low wattage energy saving luminaire that provides economic cost for exterior ceiling mounting for parking garages, perimeter lighting, entrance and walkways, building eaves and canopies, correctional institutions, schools, shopping centers and terminals. Special energy efficient Uni-Form Pulse Start Metal Halide ballast and lamps are also available.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

Square die cast back housing and front frame, chromate conversion coating with a textured bronze finish.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
HIGH PRESSURE SODIUM		
MAXGL250	250	Multi-Tap
MAXGL400	400	Multi-Tap
METAL HALIDE		
MAXGL250MH	250	Multi-Tap
MAXGL400MH	400	Multi-Tap



DIMENSIONS

Width	Height	Depth
16 fi"	17"	14 fi"

BALLAST

Class H insulated, NPF 120v 60Hz reactor High pressure sodium. Metal halide Multi-tap.

ADDITIONAL FEATURES

- Coin plugs on sides and back
- Extended vandal resistant polycarbonate lens with stainless steel screws
- Gasket
- Aluminum Reflector
- Porcelain Mogul Base Socket and Bracket
- Vertical Lamp Mount
- Master Carton

ACCESSORIES

Swivel Bracket
Slip Fitter
External Mount Slip Fitter
Slip Fitter Cover with 1" Plug
Extruded Mounting Arms

TEDDICO

LIGHTING SPECIFICATION SHEET

LARGE VANDAL RESISTANT

APPLICATION:

Industrial applications for commercial and retail use, warehouses, factories, supermarkets.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

Die cast housing with a Chromate Conversion Coating and textured bronze finish with a polycarbonate lens.



DIMENSIONS

Width	Height	Depth
12 3/8"	12 3/8"	8 5/8"
12 3/8"	12 3/8"	8 5/8"
12 3/8"	12 3/8"	8 5/8"
12"	12"	5 1/2"
12"	12"	5 1/2"
12"	12"	5 1/2"

BALLAST

Class H insulated, NPF 120v 60Hz reactor High pressure sodium. Metal halide Multi-tap.

ADDITIONAL FEATURES

- Gasket
- Porcelain medium base socket and bracket white reflector

ACCESSORIES

Clear Polycarbonate Lens
 White Polycarbonate Lens
 Internal Reflector
 External Hood

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
HIGH PRESSURE SODIUM		
VR100	100	120 Volt
VR150	150	120 Volt
METAL HALIDE		
VR100MH	100	Multi-Tap
VR125MH	125	Multi-Tap
VR150MH	150	Multi-Tap
VR175MH	175	Multi-Tap

TEDDICO

LIGHTING SPECIFICATION SHEET

GARAGE LIGHTER ACCESSORIES

Accessory	New Model	Old Model #	Fits Fixture Model #'s
Pendant Mount	CSPSP	-	CPDR118
	CSPSR	-	CPDR136
Reducer Bushing	CPRB	-	Swivel Pendant Mount
6" Round Box	CPRB	WROB51/2	All
8" Round Box	CPRB3	WROB53/4	All
Back Plate	CPRC1	WROBR31/2	CPRB1, CPRB3
Cordset with Blunt Cut	CPCS1633	-	VNGL40
Cordset with 3 prong polarized	CPCS16310P110	-	VNGL40
Cordset with 120V NEMA Twist Lock	CPCS1633P120	-	VNGL40
Cordset with 277V NEMA Twist Lock	CPCS1633P240	-	VNGL40
Cordset with 277V NEMA Twist Lock	CPCS1633P277	-	VNGL40
Liquid Tight	CPLT1	-	VNGL40
Highly Polished Reflector			
Smooth	VNGL 45ARPS	-	VNGL40
Dimpled	VNGL45ARPD	-	VNGL40



TEDDICO

LIGHTING SPECIFICATION SHEET

LARGE FLOOD

APPLICATION:

Industrial applications for commercial and retail use, warehouses, factories, supermarkets.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

DIFFUSER

One piece, high impact, clear prismatic polycarbonate with ultraviolet inhibitors to minimize discoloration. Gasketed to eliminate moisture, dust and insects.

HOUSING

Die Cast housing with a chromate conversion coating and a textured bronze finish.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
HIGH PRESSURE SODIUM		
LFL250	250	Multi-Tap
LFL400	400	Multi-Tap
METAL HALIDE		
LFL250MH	250	Multi-Tap
LFL400MH	400	Multi-Tap



DIMENSIONS

	Width	Height	Depth
LFL250MH	16 1/2"	17"	7 1/8"

REFLECTOR

The large floods come with an anodized aluminum reflector.

BALLAST

Class H insulated, NPF 120v 60Hz reactor
High pressure sodium. Metal halide Multi-tap.

ADDITIONAL FEATURES

- Uses Standard lamp vs. reduced envelope
- External accessibility wiring compartment
- Ballast mounting bracket

ACCESSORIES

Wire Guard - WG
Glareshield - GS
Small Mounting Yoke - SMY
Large Mounting Yoke - LMY
Large "Handle" Yoke - LHY
Pole Tenon Mount - PTM
Polycarbonate Guard - PG

TEDDICO


LIGHTING SPECIFICATION SHEET

LARGE FLOOD ACCESSORIES

Accessory	New Model #	Fits Fixture Model #'s
Wireguard	FL73WG	All Large Floods
Glareshield/Cutoff	FL70GS	FL70
Glareshield	AL73GS	AL72, AL73
Back Cutoff	AL73GSB	AL72, AL73
Baffle	FL70BF	FL70
PC Guard	FL73LG	All Large Floods
Standard Reflector	FL70ARS	FL70
I.E.S. Type 5 Reflector	FL70AR5	FL70
Forward Throw	FL70ARF	FL70
Parking (Wide Angle)	FL70ARW	FL70
Cutoff	AL70ARC	AL72, AL73
Vertical Mount	AL72AR	AL72
Horizontal Mount	AL73AR	AL73
Cobra Style Reflector	AL74CHR	AL74
Half-Open Frame	FL70TF	FL70
Full-Open Frame	AL73TF	AL72, AL73, AL74



FL70GS

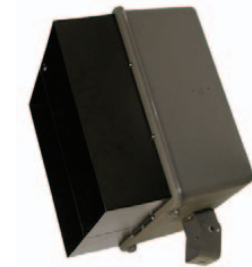

FL70BF



FL73GSB



FL73WG



FL73BR

TEDDICO

LIGHTING SPECIFICATION SHEET

STANDARD SPORTSLITER

APPLICATION:

Designed as a fixture for sports field applications, such as baseball, football and soccer fields. Can also be used for lighting up buildings, parks and other general applications where floodlighting may be used.

LAMP

Ideal for Metal Halide 1500 watt max.

ELECTRICAL

UL and CUL listed for wet locations.

GLASS LENS

One piece high impact resistant tempered glass lens with silicone rubber gasket.

REFLECTOR

One piece, anodized aluminum.

ADDITIONAL FEATURES

- Porcelain mogul base UL listed 4KV socket

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast	Lbs.
METAL HALIDE			
SPORT1500MH	1500	Multi-Tap	18



TEDDICO

LIGHTING SPECIFICATION SHEET

SPORTSLITER ACCESSORIES

Accessory	New Model #	Fits Fixture Model #'s
Standard Reflector	SP50AR19	SP50
Flat Glass & Clamp Band for STD. REF.	SPGLCB19	SP50AR19
E-Z Fit Clamp Band for STD. Reflector	SPCBEZ19	SP50AR19
I.E.S. Type 3 Reflector	SP50AR3	SP50
Flat Glass for Type 3	SPGL23	SP50AR3
I.E.S. Type 4/5 Reflector	SP50AR4-5	SP50
I.E.S. Type 6 Reflector	SP250AR6	SP50
Glass for Types 4/5 and 6 Reflectors	SPGL21	SP50AR4-5 SP50AR6
Pole Top Mount	SP50PT	SP50
Handle Yoke	SP50HY	SP50
Glareshield	SP50AR19GS	SP50AR19
Internal Lamp Brace	SP50AR19LB	SP50AR19



SP50AR19LB



SP50PT



SP50AR19

TEDDICO

LIGHTING SPECIFICATION SHEET

HIGH BAY

APPLICATION:

Industrial applications for commercial and retail use, warehouses, factories, supermarkets.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

REFRACTOR

Aluminum reflector or acrylic refractor.

HOUSING

Die Cast housing with chromate conversion coating.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
HIGH PRESSURE SODIUM		
HB250	250	Multi-Tap
HB400	400	Multi-Tap
METAL HALIDE		
HB200MH	200	Multi-Tap
HB250MH	250	Multi-Tap
HB320MH	320	Multi-Tap
HB350MH	350	Multi-Tap
HB400MH	400	Multi-Tap
LB250MH	250	Multi-Tap
LB320MH	320	Multi-Tap
LB350MH	350	Multi-Tap
LB400MH	400	Multi-Tap
WORK LIGHT		
WK400MH	200	Multi-Tap



DIMENSIONS

	Width	Height	Depth
HB11	9"	13 1/2"	9 1/2"

REFLECTOR

The High Bay Light has a spun anodized aluminum reflector.

BALLAST

Class H insulated, NPF 120v 60Hz reactor
High pressure sodium. Metal halide Multi-tap.

ADDITIONAL FEATURES

- Electrical Box with Malleable Hook

ACCESSORIES

White Reflector

Flat Glass

Clamp Bands

Reflector and Hinged Clamp Band

Collar

Wire Guard

Reflector Wire Guard

Glass Dome

Accessory Bracket

Swivel Pendant Mount

Down Rods

Cord Sets

Low Bay Socket Plate


Acrylic Refractor

TEDDICO

LIGHTING SPECIFICATION SHEET

HIGH BAY ACCESSORIES

Accessory	New Model #	Fits Fixture Model #'s
14" Reflector	HB11AR14	HB11, LB20
16" Reflector	HB10AR16	HB10
16" Reflector	HB11AR16	HB11, LB20
18" Reflector	HB10AR18	HB10
18" Reflector	HB11AR18	HB11, LB20
22" Reflector	HB10AR22	HB10
22" Reflector	HB11AR22	HB11, LB20
White Reflectors add "W" to end of above part numbers.		
16" Hinged Reflector	HB11AR16HG	HB11, LB20
22" Hinged Reflector	HB11AR22HG	HB11, LB20
16" Flat Glass	HBGL16	16" Reflector
18" Flat Glass	HBGL18	18" Reflector
22" Flat Glass	HBGL22	22" Reflector
16" Clamp Band	HBCB16	16" Flat Glass
18" Clamp Band	HBCB18	18" Flat Glass
22" Clamp Band	HBCB22	22" Flat Glass
16" E-Z Fit Clamp Band	HBCBEZ16	16" Flat Glass
22" E-Z Fit Clamp Band	HBCBEZ22	22" Flat Glass
16" Collar	HB11C016	Acrylic
22" Collar	HB11C022	Refractor
Wire Guard "Open Close"	HB11WG	HB11 Series
Wire Guard Reflector	HBAR14WG	14" Reflector
	HBAR16WG	16" Reflector
	HBAR18WG	18" Reflector
	HBAR22WG	22" Reflector
Malleable Hook	CPMH1	All
Snap-Shut Hook	CPMH2	All
16" Acrylic Refractor	804302	All
22" Acrylic Refractor	804310	All





TEDDICO

LIGHTING SPECIFICATION SHEET

HIGH BAY ACCESSORIES, CONTINUED

Accessory	New Model #	Fits Fixture Model #'s
Accessory Bracket	HBAB1	HB11WG Wire Guard HB11 Reflectors
Accessory Bracket	HBAB0	HB10 Reflectors
Low Bay Socket Bracket	LBSB	All
Swivel Pendant Mount	CPSPS (Square Plate) CPSPR (Round Plate)	Downrods
1/2" Downrod, 18"	CPDR118	All
1/2" Downrod, 36"	CPDR136	
3/4" Downrod, 18"	CPDR318	
3/4" Downrod, 36"	CPDR336	
*Add color designation to end of part #: W= white, G= Gray.		
Cordsets:		
Blunt Cut	CPCS1633	All
3 Prong Polarized	CPCS16310P110C	
120V Twist Lock	PCS1633910	
240V Twist Lock	CPCS1633P240	
277V Twist Lock	CPCS1633P277	

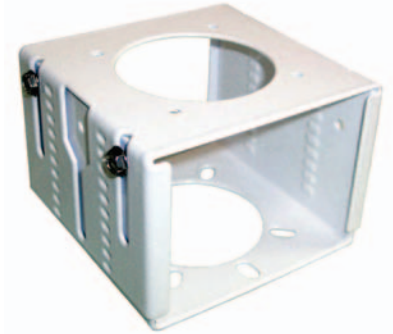

TEDDICO

LIGHTING SPECIFICATION SHEET

DELUXE 1000 WATT HIGH BAY

APPLICATION:

Industrial applications for commercial and retail use, warehouses, factories, supermarkets.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

REFRACTOR

One piece, injection molded, heat resistant polycarbonate with UV inhibitors to reduce yellowing.

HOUSING

Die cast housing with access for wiring, accommodates 1000 Watt metal halide or high pressure sodium ballasts.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
HB51	8 1/2"	13 1/2"	8 1/2"

BALLAST

Class H insulated, NPF 120v 60Hz reactor
High pressure sodium. Metal halide Multi-tap.

ADDITIONAL FEATURES

- Porcelain Mogul Base Socket
- 1" threaded hold on top for hook or pipe
- Malleable hook with screw and deluxe accessory bracket for mounting reflectors/refractors.
- White powder coat finish

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
METAL HALIDE		
HB875MH	875	Multi-Tap
HB1000MH	1000	Multi-Tap
LB875MH	875	Multi-Tap
LB1000MH	1000	Multi-Tap

ACCESSORIES


Reflector
Flat Glass
Clamp Bands
Reflector and Hinged Clamp Band
Collar
Safety Cable
Wire Guard
Reflector Wire Guard
Hook
Accessory Bracket
Swivel Pendant Mount
Downrods
Cordsets

TEDDICO

LIGHTING SPECIFICATION SHEET

DELUXE 1000 WATT HIGH BAY ACCESSORIES

Accessory	New Model #	Fits Fixture Model #'s
22" Reflector	HB11AR22	HB51
22" Hinged Reflector	HB11AR22HG	HB51
22" Flat Glass	HBGL22	22" Reflector
22" Collar	HB11C022	Acrylic Refractor
Wire Guard "Open Close"	HB11WG	HB51
Wire Guard Reflector	HBAR22WG	22" Reflector
Malleable Hook	CPMH3	HB51
Accessory Bracket	HBAB1	HB11WG Wire Guard HB11AR22 Reflector
Safety Cable	CPSC	HB51
Swivel Pendant Mount	CPSPS (Square Plate) Downrods CPSPS (Round Plate)	
3/4" Downrod, 18"	CPDR318	CPSPS
3/4" Downrod, 36"	CPDR336	CPSPR
*Add color designation to end of part # W=White, G=Gray		
Cordsets:		
Blunt Cut	CPCS1633	All
3 Prong Polarized	CPCS16310P110C	
120V Twist Lock	PCS1633910	
240V Twist Lock	CPCS1633P240	
277V Twist Lock	CPCS1633P277	



TEDDICO

LIGHTING SPECIFICATION SHEET

HID WORKLIGHT

APPLICATION:

Designed as a temporary fixture for construction sites. Can be used anywhere temporary lighting is required. Also available with energy saving pulse start metal halide ballasts and lamps. Also available with special open rated PSMH lamps.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

Heavy duty die cast aluminum with splice box and hook. Gasketed to reduce dirt contamination and extend ballast life and performance. Polyester powder coat finish - WHITE.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
WK150	9"	27-3/4"	9-1/2"

BALLAST

Class H insulated, NPF 120v 60 Hz reactor High Pressure Sodium, Multi-tap ballasts are CWA autotransformers.

WIRE GUARD

Zinc plated steel, "open-close" type

ADDITIONAL FEATURES

- Adjustable bracket
- Porcelain mogul base socket
- Lamp included

ACCESSORIES

Quartz restrike 150 watt suffix - Z

Cordset 120 volt suffix - 120C

Cordset 240 volt suffix - 240C

Cordset 277 volt suffix - 277C

* Requires shrouded open fixture rated lamp.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast	LBS.
METAL HALIDE			
WK400MH*	400	Multi-tap CWA	23
PULSE START METAL HALIDE			
WK200MH*	200	Multi-tap CWA	24
WK250PSMH*	250	Multi-tap CWA	24
WK300MH*	300	Multi-tap CWA	24
WK320MH*	320	Multi-tap CWA	24
WK350MH*	350	Multi-tap CWA	24
WK400PSMH*	400	Multi-tap CWA	24

TEDDICO

LIGHTING SPECIFICATION SHEET

VAPORTIGHT FIXTURES – INCANDESCENT

Pendant Fixtures

1/2" & 3/4" NPT base, 110/120V, fully enclosed & gasketed

BWF#	Unit UPC 0-87115	Hub Size	Description Wattage	Color	Case Qty.	Case Weight
Boxed						
VPKG-11L	14020-3	1/2"	75	Lexan® Clear	6	10
VPKG-21L	14025-8	3/4"	75	Lexan® Clear	6	10
VPKG-11	14030-2	1/2"	100	Glass Clear	6	13
VPKG-21	14035-7 3	3/4"	100	Glass Clear	6	13
VPKG-12L	14220-7	1/2"	100	Lexan® Clear	1	2.1
VPKG-22L	14225-2	3/4"	100	Lexan® Clear	1	2.1
VPKG-12	14230-6	1/2"	200	Glass Clear	1	3.6
VPKG-22	14235-1	3/4"	200	Glass Clear	1	3.6

Pendant Fixtures with Guard

1/2" & 3/4" NPT base, 110/120V, fully enclosed & gasketed

BWF#	Unit UPC 0-87115	Hub Size	Description Wattage	Color	Case Qty.	Case Weight
Boxed						
VPKG-11-G	14040-1	1/2"	100	Glass Clear	6	16
VPKG-11-CG	14039-5	1/2"	100	Glass Clear	6	20
VPKG-21-G	14045-6	3/4"	100	Glass Clear	6	16
VPKG-21-CG	14044-9	3/4"	100	Glass Clear	6	20
VPKG-12-G	14240-5	1/2"	200	Glass Clear	1	4.1
VPKG-22-G	14245-0	3/4"	200	Glass Clear	1	4.1



VPKG-11



VPKG-11-G



VPKG-11-CG

TEDDICO

LIGHTING SPECIFICATION SHEET

VAPORTIGHT FIXTURES – INCANDESCENT

Surface Mount Fixtures for Round or Octagonal Boxes

Fits all 3-1/2" and 4" round boxes, 1/2" & 3/4" NPT base, 110/120V, fully enclosed & gasketed

BWF#	Unit UPC 0-87115	Hub Size	Description Wattage	Color	Case Qty.	Case Weight
Boxed						
VPAG-01L	14050-0	3-1/2 & 4"	75	Lexan® Clear	6	7
VPAG-01	14055-5	3-1/2 & 4"	100	Glass Clear	6	10
VPAG-02L	14250-4	3-1/2 & 4"	100	Lexan® Clear	1	1.5
VPAG-02	14255-9	3-1/2 & 4"	200	Glass Clear	1	3.0

Surface Mount Fixtures with Guard for Round or Octagonal Boxes

Fits all 3-1/2" and 4" round boxes, 1/2" & 3/4" NPT base, 110/120V, fully enclosed & gasketed

BWF#	Unit UPC 0-87115	Hub Size	Description Wattage	Color	Case Qty.	Case Weight
Boxed						
VPAG-01-G	14060-9	3-1/2 & 4"	100	Glass Clear	6	18
VPAG-01-CG	14059-3	3-1/2 & 4"	100	Glass Clear	6	20
VPAG-02-G	14260-3	3-1/2 & 4"	200	Glass Clear	1	3.5



VPAG-01



VPAG-01-CG

G = Wire Guard CG = Cast Guard



VPXG-11



VPXG-11-G

INCANDESCENT: 75W, 100W, 200W, see individual products, bulb not included.

IMPORTANT:

- Vaportight fixtures are not for use in hazardous locations.
- Fixtures supplied with glass globes are furnished with "Clear" glass. See page 31 for glass globes.
- Standard Lexan® fixtures have "Clear" Lexan globes. To order any of those fixtures with Red, White, Amber or Green globes, add the suffix "R", "W", "A" or "G" to the catalog number. See page 31 for Lexan® globes.

LEXAN® is a registered trademark of General Electric Co.

Box Mounted Fixture for Wall or Ceiling

Four sided holes taped, 1/2" & 3/4" NPT base, 110/120V, fully enclosed & gasketed, 3 plugs

BWF#	Unit UPC 0-87115	Box Size	Description Wattage	Color	Case Qty.	Case Weight
Boxed						
VPXG-11L	14065-4	1/2"	75	Lexan® Clear	6	10
VPXG-21L	14070-8	3/4"	75	Lexan® Clear	6	10
VPXG-11	14075-3	1/2"	100	Glass Clear	6	13
VPXG-21	14080-7	3/4"	100	Glass Clear	6	13
VPXG-12L	14265-8	1/2"	100	Lexan® Clear	1	1.9
VPXG-22L	14270-2	3/4"	100	Lexan® Clear	1	2.1
VPXG-12	14275-7	1/2"	200	Glass Clear	1	3.6
VPXG-22	14280-1	3/4"	200	Glass Clear	1	3.6

TEDDICO

LIGHTING SPECIFICATION SHEET

VAPORTIGHT FIXTURES – INCANDESCENT

Box Mounted Fixture for Wall or Ceiling with Guard

Four sided holes tapped, 1/2" & 3/4" NPT base, 110/120V, fully enclosed & gasketed, 3 plugs

BWF#	Unit UPC 0-87115	Box Size	Description Wattage	Description Color	Case Qty.	Case Weight
Boxed						
VPXG-11-G	14085-2	1/2"	100	Glass Clear	6	16
VPXG-11-CG	14086-9	1/2"	100	Glass Clear	6	20
VPXG-21-G	14090-6	3/4"	100	Glass Clear	6	16
VPXG-21-CG	14092-0	3/4"	100	Glass Clear	6	20
VPXG-12-G	14285-6	1/2"	200	Glass Clear	1	4.2
VPXG-22-G	14286-3	3/4"	200	Glass Clear	1	4.2



VPXG-11-CG

Wall Mount Fixture with Right Angle Bracket

For use with 4" box, 110/120V, fully enclosed & gasketed

BWF#	Unit UPC 0-87115	Box Size	Description Wattage	Description Color	Case Qty.	Case Weight
Boxed						
VWG-01L	14011-1	4"	75	Lexan® Clear	1	2.0
VWG-01	14021-0	4"	100	Glass Clear	1	2.8
VWG-02L	14287-0	4"	100	Lexan® Clear	1	2.4
VWG-02	14288-7	4"	200	Glass Clear	1	3.7



VWG-01

Wall Mount Fixture with Right Angle Bracket with Guard

For use with 4" box, 110/120V, fully enclosed & gasketed

BWF#	Unit UPC 0-87115	Box Size	Description Wattage	Description Color	Case Qty.	Case Weight
Boxed						
VWG-01-G	14031-9	4"	100	Glass Clear	1	3.2
VWG-01-CG	14032-6	4"	100	Glass Clear	1	4.1
VWG-02-G	14289-4	4"	200	Glass Clear	1	4.2



VWG-01-CG

G = Wire Guard CG = Cast Guard

INCANDESCENT: 75W, 100W, 200W, see individual products, bulb not included.

IMPORTANT:

- Vaportight fixtures are not for use in hazardous locations.
- Fixtures supplied with glass globes are furnished with "Clear" glass. See page 31 for glass globes.
- Standard Lexan® fixtures have "Clear" Lexan globes. To order any of those fixtures with Red, White, Amber or Green globes, add the suffix "R", "W", "A" or "G" to the catalog number. See page 31 for Lexan® globes.

LEXAN® is a registered trademark of General Electric Co.

TEDDICO

LIGHTING SPECIFICATION SHEET

VAPORTIGHT FIXTURES – INCANDESCENT

Wall Mount Fixture with Right Angle Bracket & Box

Factory assembled to 4" weatherproof box, 110/120V, fully enclosed & gasketed, 3 plugs

BWF#	Unit UPC 0-87115	Box Size	Description Wattage	Color	Case Qty.	Case Weight
Boxed						
VXWG-11L	14041-8	1/2"	75	Lexan® Clear	1	2.7
VXWG-21L	14051-7	3/4"	75	Lexan® Clear	1	3.0
VXWG-11	14061-6	1/2"	100	Glass Clear	1	3.4
VXWG-21	14071-5	3/4"	100	Glass Clear	1	3.4
VXWG-12L	14290-0	1/2"	100	Lexan® Clear	1	3.1
VXWG-22L	14291-7	3/4"	100	Lexan® Clear	1	3.1
VXWG-12	14292-4	1/2"	200	Glass Clear	1	4.5
VXWG-22	14293-1	3/4"	200	Glass Clear	1	4.5



VXWG-11



VXWG-11-CG

G = Wire Guard CH = Cast Guard

Wall Mount Fixture with Right Angle Bracket & Box with Guard

Factory assembled to 4" weatherproof box, 110/120V, fully enclosed & gasketed, 3 plugs

BWF#	Unit UPC 0-87115	Box Size	Description Wattage	Color	Case Qty.	Case Weight
Boxed						
VXWG-11-G	14081-4	1/2"	100	Glass Clear	1	3.8
VXWG-11-CG	14082-1	1/2"	100	Glass Clear	1	4.7
VXWG-21-G	14091-3	3/4"	100	Glass Clear	1	3.8
VXWG-21-CG	14089-0	3/4"	100	Glass Clear	1	4.7
VXWG-12-G	14294-8	1/2"	200	Glass Clear	1	5.1
VXWG-22-G	14295-5	3/4"	200	Glass Clear	1	5.1

VAPORTIGHT FIXTURES – INCANDESCENT

BWF Product Benefits & Features

- Rugged, seamless, die-cast construction that prevents moisture entry
- State of the art powder coat finish for maximum durability
- All fixtures are industrial grade, factory assembled and fully gasketed
- Engineered to protect the interior from deteriorating effects of ice, corrosive fumes, non-explosive vapors, etc.
- Choose between heat resistant glass globes or Lexan® plastic globes in a choice of colors, see page 31
- 75, 100 and 200 Watt Incandescent fixtures – 7 and 13 Watt PL Fluorescent fixtures

Applications

- For use in severe service areas where extreme conditions prevail
- Applications: subways, construction sites, bridges, tunnels, freezers, waste water & sewage treatment plants



Wire Guard - VPGW



Cast Guard - VPCG



Pendant - VPKG



Ceiling Mount -
VPAG



Box Mounted -
VPXG



Right Angle Wall
Mount - VWG



Right Angle Wall Mount
Assembled to Box - VXWG

TEDDICO

LIGHTING SPECIFICATION SHEET

VAPORTIGHT FIXTURES – INCANDESCENT

Replacement Parts & Accessories

BWF#	Unit UPC 0-87115	Hub Size	Max Wattage	Description	Color	Case Qty.	Case Weight
Boxed							
VPK-11	15020-2	1/2"	100	Pendant cap,	Grey	10	18
VPK-21	15025-7	3/4"	100	porcelain socket	Grey	10	18
VPK-12	15220-6	1/2"	200	gasket and screws	Grey	10	10
VPK-22	15225-1	3/4"	200		Grey	10	10
VPA-01-N	15030-1	N/A	100	Ceiling box cap, socket	Grey	10	12
VPA-02	15230-5	N/A	200	gasket and screws	Grey	10	12
VPX-11	15035-6	1/2"	100	Ceiling mount box	Grey	10	19
VPX-21	15040-0	3/4"	100	with gaskets,	Grey	10	19
VPX-12	15235-0	1/2"	200	porcelain socket	Grey	10	19
VPX-22	15240-4	3/4"	200	and screws	Grey	10	19
VPXL-1	14271-9	5 - 1/2"	N/A	Cross feed box 5 hole	Grey	10	9
VPXL-13	14272-6	5 - 3/4"	N/A	with gaskets	Grey	10	9
VW-01	14096-8	N/A	100	Right angle bracket	Grey	10	21
VW-02	14196-5	N/A	200	gasket, socket, screws	Grey	6	12
VXW-11	14097-5	1/2"	100		Grey	1	3
VXW-21	14297-9	3/4"	100	Right angle bracket	Grey	1	3
VXW-12	14098-2	1/2"	200	attached box, gaslet	Grey	1	1.5
VXW-22	14298-6	3/4"	200	socket and screws	Grey	1	1.5
VPCG	15044-8	N/A	100	Heavy duty cast	Cast Zinc	5	7
VPGW	15045-5	#8 AWS	100		Wire	5	4
VPGW-02	15046-2	#8 AWS	200	Heavy duty	Wire	1	1
VPGL-01	15050-9	N/A	100	wire guard	Glass Clear	1	1.5
VPGL-02	15051-6	N/A	200		Glass Clear	1	2
VPGLL-01	15055-4	N/A	75		Lexan® Clear	12	3
VPGLL-01R	15060-8	N/A	75	Lexan® globe	Lexan® Red	12	3
VPGLL-01W	15065-3	N/A	75	for 100 Watt	Lexan® White	12	3
VPGLL-01A 1	5070-7	N/A	75	and 200 Watt	Lexan® Amber	12	3
VPGLL-01G	15056-1	N/A	75	fixtures	Lexan® Green	12	3
VPGLL-02	15071-4	N/A	150		Lexan® Clear	6	5
AP-1	15075-2	3 1/2 & 4"	N/A	Adapter plate w/gasket	Metal	20	4
PL-5	21005-0	1/2"	N/A	Closure Plug	Metal	1000	20
PL-75	21010-4	3/4"	N/A	Closure Plug	Metal	1000	21



VPX-11



VPXL-1



VW-01



VXW-11



VPCG



VPGW



VPGL-01



VPGL-02



VPGLL-01 Series



VPGLL-02



AP-1



PL-5

PL-75

TEDDICO

LIGHTING SPECIFICATION SHEET

VAPORTIGHT FIXTURES – INCANDESCENT

VPKG Without Guard

Cat No	A	B
VPKG-11L	3-11/16"	8-3/16"
VPKG-21L	3-11/16"	8-3/16"
VPKG-11	3-11/16"	8-3/16"
VPKG-21	3-11/16"	8-3/16"
VPKG-12L	4-3/8"	10-1/2"
VPKG-22L	4-3/8"	10-1/2"
VPKG-12	4-3/8"	10-1/2"
VPKG-22	4-3/8"	10-1/2"

VPAG Without Guard

Cat No	A	B
VPAG-01L	3-11/16"	6-13/16"
VPAG-01	3-11/16"	6-13/16"
VPAG-02L	4-3/8"	8-1/2"
VPAG-02	4-3/8"	8-1/2"

VPXG Without Guard

Cat No	A	B
VPXG-11L	3-11/16"	8-5/8"
VPXG-21L	3-11/16"	8-5/8"
VPXG-11	3-11/16"	8-5/8"
VPXG-21	3-11/16"	8-5/8"
VPXG-12L	4-3/8"	10-1/2"
VPXG-22L	4-3/8"	10-1/2"
VPXG-12	4-3/8"	10-1/2"
VPXG-22	4-3/8"	10-1/2"

VWG Without Guard

Cat No	A	B	E	F
VWG-01L	3-11/16"	7-1/4"	3"	4-1/4"
VWG-01	3-11/16"	7-1/4"	3"	4-1/4"
VWG-02L	4-3/8"	8-3/4"	3"	4-1/2"
VWG-02	4-3/8"	8-3/4"	3"	4-1/2"

VXWG Without Guard

Cat No	A	B	E	F
VXWG-11L	3-11/16"	7-1/4"	4-1/2"	4-1/4"
VXWG-21L	3-11/16"	7-1/4"	4-1/2"	4-1/4"
VXWG-11	3-11/16"	7-1/4"	4-1/2"	4-1/4"
VXWG-21	3-11/16"	7-1/4"	4-1/2"	4-1/4"
VXWG-12L	4-3/8"	8-3/4"	4-1/2"	4-1/2"
VXWG-22L	4-3/8"	8-3/4"	4-1/2"	4-1/2"
VXWG-12	4-3/8"	8-3/4"	4-1/2"	4-1/2"
VXWG-22	4-3/8"	8-3/4"	4-1/2"	4-1/2"

VPKG With Guard

Cat No	C	D
VPKG-11-G	4-1/4"	9-5/8"
VPKG-11-CG	4-1/4"	9-5/8"
VPKG-21-G	4-1/4"	9-5/8"
VPKG-21-CG	4-1/4"	9-5/8"
VPKG-12-G	5-1/2"	11"
VPKG-22-G	5-1/2"	11"

VPAG With Guard

Cat No	C	D
VPAG-01-G	4-1/4"	7-9/16"
VPAG-01-CG	4-1/4"	7-9/16"
VPAG-02-G	5-1/2"	9"

VPXG With Guard


Cat No	A	B
VPXG-11-G	4-1/4"	9-1/8"
VPXG-11-CG	4-1/4"	9-1/8"
VPXG-21-G	4-1/4"	9-1/8"
VPXG-21-CG	4-1/4"	9-1/8"
VPXG-12-G	5-1/2"	10-3/4"
VPXG-22-G	5-1/2"	10-3/4"

VWG With Guard


Cat No	C	D	E	F
VWG-01-G	4-1/4"	7-3/4"	3"	4-1/4"
VWG-01-CG	4-1/4"	7-3/4"	3"	4-1/4"
VWG-02-G	5-1/2"	9-1/4"	3"	4-1/2"

VXWG With Guard


Cat No	C	D	E	F
VXWG-11-G	4-1/4"	7-3/4"	4-1/2"	4-1/4"
VXWG-11-CG	4-1/4"	7-3/4"	4-1/2"	4-1/4"
VXWG-21-G	4-1/4"	7-3/4"	4-1/2"	4-1/4"
VXWG-21-CG	4-1/4"	7-3/4"	4-1/2"	4-1/4"
VXWG-12-G	5-1/2"	9-1/4"	4-1/2"	4-1/2"
VXWG-22-CG	5-1/2"	9-1/4"	4-1/2"	4-1/2"




VPKG




VPAG



VPXG



VWG



VXWG

TEDDICO

LIGHTING SPECIFICATION SHEET

FLUORESCENT WALL PACKS

APPLICATION:

Parking areas, perimeter lighting, entrance and walkways, waterfronts, loading platforms, recreational areas.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

Housing is made of heavy duty die cast aluminum. All fluorescent wall packs have a chromate conversion coating with a textured bronze finish.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
WP10F42EL	8 fi"	9 fi"	7"
WP13F42EL	7 fi"	13"	5 fi"
WP13F84EL	7 fi"	13"	5 fi"
WP14F26	6 fi"	11"	5/8"
WP15F84EL	14/8"	9"	7/8"

REFLECTOR

One piece anodized aluminum reflector provides controlled high intensity.

ADDITIONAL FEATURES

- Compact fluorescent lamps
- Reusable Styrofoam and inner carton

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
WP42EL	1 x 42W	Full Electronic
WP13F42EL	1 x 42W	Full Electronic
MWP84EL	2 x 42W	Full Electronic
MWP26	2 x 13W	Magnetic
WP84EL	2 x 42W	Full Electronic

ACCESSORIES

Mounting Plate - MP
Wire Guard - WG
Full Cutoff ("Dark Sky") - FC
Side Cutoff - SC
Polycarbonate Guard - LG

TEDDICO

LIGHTING SPECIFICATION SHEET

PLASTIC FLUORESCENT FLOOD

APPLICATION:

Parking areas, perimeter lighting, entrance and walkways, waterfronts, loading platforms, recreational areas.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

Plastic housing and lens with weatherproof housing gasket. All fluorescent wall packs have a chromate conversion coating with a textured bronze finish.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
PFL26	9 1/4"	4 3/4"	4 5/8"
PFL13	9 1/4"	4 3/4"	4 5/8"

REFLECTOR

One piece anodized aluminum reflector provides controlled high intensity.

ADDITIONAL FEATURES

- Includes twin 13 watt compact fluorescent sockets and brackets

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
PFL26	2 x 13W	Lamps not included
PFL13	1 x 13W	Lamps not included

ACCESSORIES

HID Ground Stake - STK

TEDDICO

LIGHTING SPECIFICATION SHEET

FLUORESCENT FLOODS

APPLICATION:

Parking areas, perimeter lighting, entrance and walkways, waterfronts, loading platforms, recreational areas.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

All fluorescent floods have a die cast housing with a chromate conversion coating and a textured bronze finish.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
MFL42EL	9"	7 1/2"	6"
FL84EL	9"	10 1/4"	7 1/4"

REFLECTOR

One piece anodized aluminum reflector provides controlled high intensity.

ADDITIONAL FEATURES

- Photocell adaptable
- Compact fluorescent lamps and a full electronic ballast are included.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
MFL42EL	1 x 42W	Full Electronic
FL84EL	2 x 42W	Full Electronic

ACCESSORIES

- Wire Guard - WG
- Glaeshield - GS
- Polycarbonate Guard - PG
- Post Top Fitter - PTF
- HID Ground Stake - STK

TEDDICO

LIGHTING SPECIFICATION SHEET

FLUORESCENT BULKHEADS

APPLICATION:


Parking areas, perimeter lighting, entrance and walkways, waterfronts, loading platforms, recreational areas.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

All bulkheads have a die cast housing and frame.

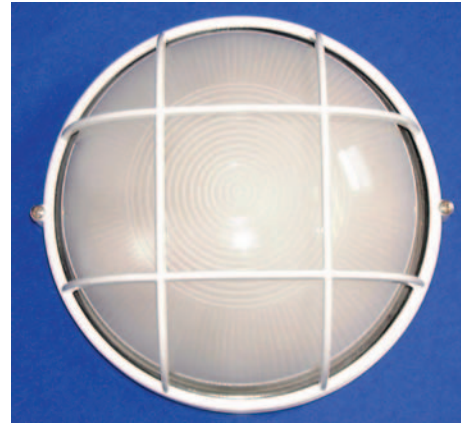

DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
BH51F26	9 1/2"	9 1/2"	5 1/4"
BH61F26	10 1/2"	6 1/2"	5 1/2"
BH81F7	8 1/2"	5"	6"

REFLECTOR

piece anodized aluminum reflector provides controlled high intensity.

ADDITIONAL FEATURES

- White Powdercoat finish
- Other colors available by special color.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
BH51F26	2 x 13W	Magnetic
BH61F26	2 x 13W	Magnetic
BH81F7	1 x 7W	Magnetic

TEDDICO

LIGHTING SPECIFICATION SHEET

VANDAL RESISTANT FLUORESCENT BULKHEADS

APPLICATION:

Parking areas, perimeter lighting, entrance and walkways, waterfronts, loading platforms, recreational areas.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

All bulkheads have a die cast housing and frame.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
BH18C	9"	6"	4"
BH18G	9 3/4"	6 1/2"	4"

REFLECTOR

One piece anodized aluminum reflector provides controlled high intensity.

ADDITIONAL FEATURES

- White Powdercoat finish
- Other colors available by special color.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
BH18C	2 x 9W	Magnetic
BH18G	2 x 9W	Magnetic

TEDDICO

LIGHTING SPECIFICATION SHEET

VANDAL RESISTANT ENTRY LIGHT

APPLICATION:

Ideal low wattage energy saving luminaire that provides economic cost for exterior/interior ceiling or wall mounting for parking garages, perimeter lighting, entrance and walkways, building eaves and canopies, correctional institutions, schools, shopping centers and terminals.

ELECTRICAL

UL listed for wet and damp locations.

DIFFUSER

One piece, high impact, clear or white prismatic polycarbonate with ultraviolet inhibitors to minimize discoloration. Gasketed to eliminate moisture, dust and insects.

HOUSING

One piece heavy duty diecast aluminum for surface or wall mounting. Polyester powder coat paint finish, BRONZE, BLACK or WHITE.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast	Lbs.
VR26	26	Electronic	8
COLOR BL-BLACK BR-BRONZE WH-WHITE			



DIMENSIONS

	Width	Height	Depth
VR26	5 1/8"	13 1/4"	3"

REFLECTOR

One piece stamped steel powdercoat painted white

ADDITIONAL FEATURES

- Porcelain medium base socket

TEDDICO

LIGHTING SPECIFICATION SHEET

SMALL VANDAL RESISTANT

APPLICATION:

Parking areas, perimeter lighting, entrance and walkways, waterfronts, loading platforms, recreational areas.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

HOUSING

Clear polycarbonate lens, gasket, and hardware.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
VR7	7 3/4"	5 1/2"	4 1/4"
VR13	7 3/4"	5 1/2"	4 1/4"

REFLECTOR

One piece anodized aluminum reflector provides controlled high intensity.

ADDITIONAL FEATURES

- Available in fluorescent or wired.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
VR7	1 x 7W	Magnetic
VR13	1 x 13W	Magnetic

ACCESSORIES

- Clear Lens - PC
- White Lens - PW

TEDDICO

LIGHTING SPECIFICATION SHEET

MEDIUM VANDAL RESISTANT

APPLICATION:

Parking areas, perimeter lighting, entrance and walkways, waterfronts, loading platforms, recreational areas.

ELECTRICAL

UL and CSA_{us} listed for wet and damp locations.

LENS

One piece, injection molded, heat resistant polycarbonate with UV inhibitors to reduce yellowing.

HOUSING

Die cast housing with chromate conversion coating and a textured bronze finish.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
VR42	9"	9"	7 1/4"
VR18	8 1/2"	8 1/2"	4 1/4"
VR26	8 1/2"	8 1/2"	4 1/4"

REFLECTOR

One piece anodized aluminum reflector provides controlled high intensity.

ADDITIONAL FEATURES

- Available in fluorescent or wired.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
VR42	1 x 42W	Magnetic
VR18	2 x 9W	Magnetic
VR26	2 x 13W	Magnetic

ACCESSORIES

- Clear Lens - PC
- White Lens - PW

TEDDICO

LIGHTING SPECIFICATION SHEET

LARGE VANDAL RESISTANT

APPLICATION:

Parking areas, perimeter lighting, entrance and walkways, waterfronts, loading platforms, recreational areas.

ELECTRICAL

UL and CSA_{US} listed for wet and damp locations.

LENS

One piece, injection molded, heat resistant polycarbonate with UV inhibitors to reduce yellowing.

HOUSING

Die cast housing with chromate conversion coating and a textured bronze finish.



DIMENSIONS

	<i>Width</i>	<i>Height</i>	<i>Depth</i>
VRL84EL	12 3/8"	12 3/8"	8 5/8"
VRL26MG	12"	12"	5 1/2"
VRL52EL	12"	12"	5 1/2"

REFLECTOR

One piece anodized aluminum reflector provides controlled high intensity.

ADDITIONAL FEATURES

- Available in fluorescent or wired.

ORDERING INFORMATION

Catalog Number	Wattage	Voltage/Ballast
VRL84EL	2 x 42W	Full Electronic
VRL26MG	2 x 13W	Magnetic
VRL52EL	2 x 26W	Full Electronic

ACCESSORIES

Clear Lens - PC
White Lens - PW
Internal Reflector - IR
External Hood - EH

TEDDICO

LIGHTING SPECIFICATION SHEET

ORDERING INFORMATION

Catalog Number	Wattage	Lamp Base
HIGH PRESSURE SODIUM		
CLU35	LU 35	Medium
CLU50	LU 50	Medium
CLU70	LU 70	Medium
CLU100	LU 100	Medium
CLU150	LU 150	Medium
CLU70MOG	LU 70	MOG
CLU100MOG	LU 100	MOG
CLU150MOG	LU 150	MOG
CLU250	LU 250	MOG
CLU400	LU 400	MOG
CLU1000	LU 1000	MOG
METAL HALIDE		
TMH50PS	50 U	Medium
TMH70PS	70 U	Medium
TMH100PS	100 U	Medium
TMH175PS	175 U	Medium
TMH150PS	150 U	Medium
TMH175	175 U ED28	MOG
TMH250	250 U ED28	MOG
TMH400	400 U ED37	MOG
TMH1000	1000 U BT56	MOG
TMH1500	1500 BUH BT56	MOG
TMH400ED28	400 U ED28	MOG
TMH1000BT37	1000 U BT37	MOG
TMH320PSED28	320 BU ED28	MOG
TMH320PSBT37	320 U ED37	MOG



TEDDICO

BALLAST ONLY KITS

KIT Number	Description	Voltage	Ballast
BALLAST			
T50PSMHQUADX	50 watt metal halide pulse start	Multi-tap	HX-HPF
T70PSMHQUADX	70 watt metal halide pulse start	Multi-tap	HX-HPF
T100PSMHQUADX	100 watt metal halide pulse start	Multi-tap	HX-HPF
T150PSMHQUADX	150 watt metal halide pulse start	Multi-tap	CWA
T175MHQUADA	175 watt metal halide	Multi-tap	CWA
T175MH480A	175 watt metal halide	480	CWA
T250MHUADA	250 watt metal halide	Multi-tap	CWA
T250MH480TA	250 watt metal halide	480 w/120 tap	CWA
T320PSMHQUADA	320 watt metal halide pulse start	Multi-tap	CWA
T400MHQUADA	400 watt metal halide	Multi-tap	CWA
T400MH480TA	400 watt metal halide	480 w/120 tap	CWA
T1000MHQUADA	1000 watt metal halide	Multi-tap	CWA
T1000MH480TA	1000 watt metal halide	480 w/120 tap	CWA
T1500MHQUADA	1500 watt metal halide	Multi-tap	CWA
T1500MH480TA	1500 watt metal halide	480 w/120 tap	CWA
<hr/>			
T50HPS120R	50 watt high pressure sodium	120	Reactor
T70HPS120R	70 watt high pressure sodium	120	Reactor
T70HPSQUADX	70 watt high pressure sodium	Multi-tap	HX-HPF
T100HPS120R	100 watt high pressure sodium	120	Reactor
T100HPSQUADX	100 watt high pressure sodium	Multi-tap	HX-HPF
T150HPS120R	150 watt high pressure sodium	120	Reactor
T150HPSQUADX	150 watt high pressure sodium	Multi-tap	HX-HPF
T250HPSQUADA	250 watt high pressure sodium	Multi-tap	CWA
T250HPS480TA	250 watt high pressure sodium	480 w/120 tap	CWA
T400HPSQUADA	400 watt high pressure sodium	Multi-tap	CWA
T400HPS480TA	400 watt high pressure sodium	480 w/120 tap	CWA
T1000HPSQUADA	1000 watt high pressure sodium	Multi-tap	CWA
T1000HPS480TA	1000 watt high pressure sodium	480 w/120 tap	CWA

TEDDICO

BALLAST WITH LAMP KITS

KIT Number	Description	Voltage	Lamp
BALLAST			
TK50MHP/MED/M	50 watt metal halide pulse start	Multi-tap	ED17
TK70MHP/MED/M	70 watt metal halide pulse start	Multi-tap	ED17
TK100MHP/MED/M	100 watt metal halide pulse start	Multi-tap	ED17
TK150MHP/MED/M	150 watt metal halide pulse start	Multi-tap	ED17
TK175MH/MED/M	175 watt metal halide	Multi-tap	ED17
TK175MG/ED28/M	175 watt metal halide	Multi-tap	ED28
TK175MH/ED28/480	175 watt metal halide	480	ED28
TK250MH/ED28/M	250 watt metal halide	Multi-tap	ED28
TK250MH/ED28/480	250 watt metal halide	480 w/120 tap	ED28
TK320MHP/ED28/M	320 watt metal halide pulse start	Multi-tap	ED28
TK320MHP/ED28/M	320 watt metal halide pulse start	Multi-tap	ED37
TK400MH/ED37M	400 watt metal halide	Multi-tap	ED37
TK400MH/ED28/M	400 watt metal halide	Multi-tap	ED28
TK400MH/ED28/480	400 watt metal halide	480 w/120 tap	ED28
TK400/ED37/480	400 watt metal halide	480 w/120 tap	ED37
TK1000MH/BT37/M	1000 watt metal halide	Multi-tap	BT37
TK1000MH/BT5/M	1000 watt metal halide	Multi-tap	BT56
TK1000MH/BT56/480	1000 watt metal halide	480 w/120 tap	BT56
TK1500MH/BT56/M	1500 watt metal halide	Multi-tap	BT56
TK1500MH.BT56/480	1500 watt metal halide	480 w/120 tap	BT56
NOTE: ED17= Medium Base, ED28, ED37, BT37 & BT56 = Mogul Base			
TK70HPS/MED/120	70 watt high pressure sodium	120	Medium
TK70HPS/MOG/120	70 watt high pressure sodium	120	Mogul
TK70HPS/MED/M	70 watt high pressure sodium	120	Medium
TK70HPS/MOG/M	70 watt high pressure sodium	Multi-tap	Mogul
TK100HPS/MED/120	100 watt high pressure sodium	120	Medium
TK100HPS/MED/M	100 watt high pressure sodium	Multi-tap	Medium
TK100HSP/MOG/M	100 watt high pressure sodium	Multi-tap	Mogul
TK150HPS/MED/120	150 watt high pressure sodium	120	Medium
TK150HPS/MED/M	150 watt high pressure sodium	Multi-tap	Medium
TK150HPS/MOG/M	150 watt high pressure sodium	Multi-tap	Mogul
TK250HPS/MOG/M	250 watt high pressure sodium	Multi-tap	Mogul
TK250HPS/MOG/480	250 watt high pressure sodium	480 w/120 tap	Mogul
TK400HPS/MOG/M	400 watt high pressure sodium	Multi-tap	Mogul
TK400HPS/MOG/480	400 watt high pressure sodium	480 w/120 tap	Mogul
TK1000HPS/MOG/M	1000 watt high pressure sodium	Multi-tap	Mogul
TK1000HPS/MOG/480	1000 watt high pressure sodium	480 w/120 tap	Mogul

TEDDICO

NEW PRODUCTS FOR THE FUTURE

WCS	WALLITE UP/DOWN SINGLE
WCD	WALLITE UP/DOWN DOUBLE
WPC15A	WPC15 WITH REMOTE BALLAST BOX
POLARIS	EQUINOX FLOURESCENT BULKHEADS
WINK	EQUINOX FLOURESCENT BULKHEADS
BOWTIE	EQUINOX FLOURESCENT BULKHEADS
THE WAVE	EQUINOX FLOURESCENT BULKHEADS
LADYBUG	EQUINOX FLOURESCENT BULKHEADS
SPOKE	EQUINOX FLOURESCENT BULKHEADS
WP35(QSSI)	CRESCENT WALL SCONCE
WPC10	MINI CONSTELLATION FULL CUTOFF WALLPACK
BOG3	BOLLARDS
BOG5	BOLLARDS
BOL	BOLLARDS
BOR	BOLLARDS
HBRF842	FLOURESCENT HIGH BAY
EB30	I-BAY HIGH/LOW BAY

TEDDICO

NEW PRODUCTS FOR THE FUTURE



EB30



FL61



BOG,

BOR

BOL




WPC10



WP35




WCD

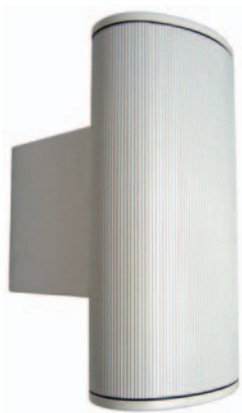

WPC15A

FUTURE PRODUCTS

NOTES

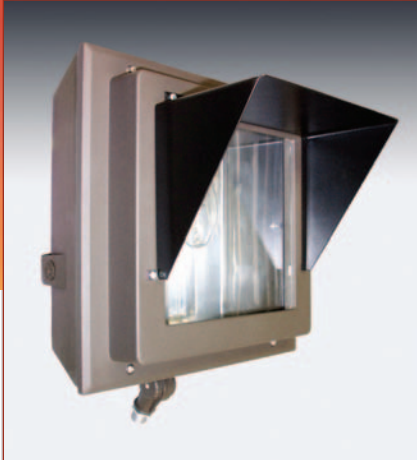

TEDDICO

LIGHTING PRODUCTS

*A Leading Manufacturer of
Lighting Products*

*1104 Parkway View Drive
Pittsburgh, PA 15205
412-747-4970
Fax: 412-747-4973*

www.teddico.com