



Table Of Contents

Pictorial Index	A-10	For Underwater Pellatizer Die	2-25
Hi-Density Cartridge Heaters (US sizes).....	2-2	Hi-Density Cartridge Heaters (Metric Sizes)	2-26
Terminator Program.....	2-10	Low Density Cartridge Heaters.....	2-32
Type F Terminated Stock Heaters.....	2-21	Cartridge Heater Terminations.....	2-37
Hi-Density Pennybottom Heaters	2-22	Hi-Density Immersion Heaters	2-54
OEM Replacement Heaters:		Hi-Density Bolt Heaters	2-58
For Runnerless Molding Systems	2-24	Square Cartridge Heaters	2-60

2


section

Cartridge Heaters



Hi-Density

CARTRIDGE HEATER FEATURES

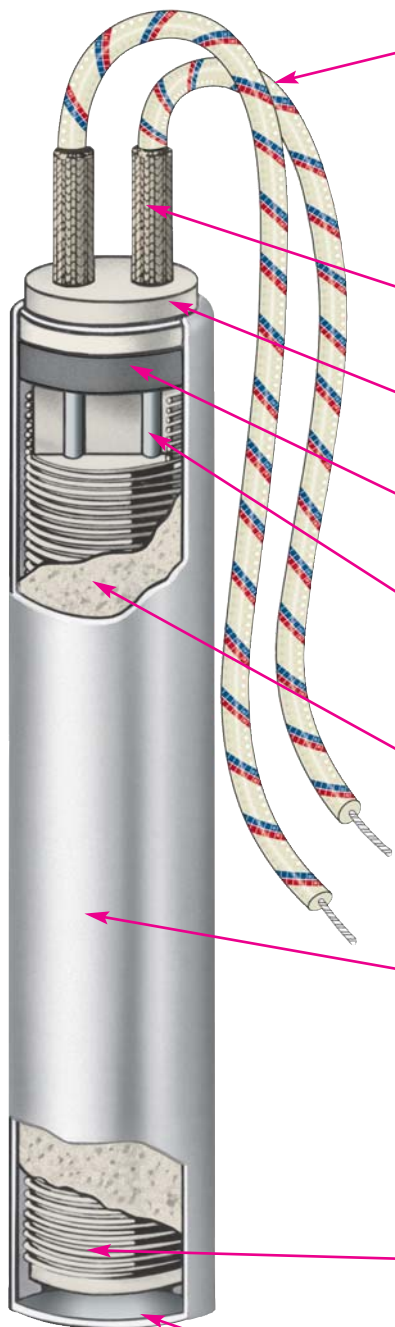

A The standard termination for Hi-Density Cartridge Heaters is Type N, consisting of 10" (254 mm) externally connected leads to 1-1/4" (32 mm) solid nickel conductors. The lead wires with nickel conductors have fiberglass composite insulation and are UL approved for temperatures up to 482°F (250°C). Mica insulated UL approved wires for temperatures up to 842°F (450°C) are optional.



Note: To meet the requirements of your application we offer over 40 standard termination styles to select from that will solve many of the most common application problems. See pages 2-37 through 2-49.

B Double-wall thickness high temperature fiberglass sleeve provides maximum electrical insulation to the connector used to splice the nickel conductors to the flexible leads.

C Ceramic end cap prevents nickel conductors from shorting out against sheath when sharp bending of the leads is required.

D Ceramic end cap and swaged-in lava plug protect the internal cartridge from outer contamination. Other types of seals can also be provided.

E The largest possible diameter solid nickel conductors are used to insure a good electrical connection between the nickel conductors and the resistance wire, thereby providing maximum current carrying capacity.

F Specially selected grain size high purity Magnesium Oxide (MgO) is used to fill all remaining space inside the sheath. Heater is then swaged, which compacts the magnesium oxide grains into a solid mass, thereby increasing thermal conductivity and dielectric strength.

G Standard Alloy 321 Stainless Steel is used to provide high temperature strength, up to 1200°F (650°C), good thermal conductivity, resistance to corrosion and scaling. Alloy 321 is a Nickel-Chromium Stainless Steel modified with the addition of Titanium. For higher operating temperatures or corrosive immersion heating applications optional Incoloy® 800, up to 1400°F (760°C), is available. Other alloy sheaths are also available. Consult Tempco with your requirements.

H Grade "A" Nickel-Chrome resistance wire is precisely wound on a high purity magnesium oxide core, placing the resistance wire as close to the inside of the sheath as possible while maintaining dielectric strength. This provides excellent heat transfer, and results in the highest possible watt densities and longer heater life.

I Heli-arc welded end disc made from same material as the sheath provides a positive seal against moisture and other contaminants. Pennybottom™ heaters have a flat copper end disc.

Agency Approvals



Hi-Density Cartridge Heaters are UL recognized and CSA certified in many design variations under UL File Number E65652 and CSA File Number 043099.

If you require UL and/or CSA Agency Approval, please specify when ordering.






TEMPCO Offers the Most Comprehensive and Diverse Selection in Hi-Density Cartridge Heaters

Since Their Introduction in 1972, Hi-Density Cartridge Heaters Have Evolved and Today Offer a Multitude of Diverse Product Options:

1. (HDC) A Hi-Density cartridge heater in US sizes (see page 2-4).
2. (HDM) A Hi-Density cartridge heater in Metric sizes (see page 2-26).
3. (HDP) Pennybottom™, A Hi-Density cartridge heater with a Built-in Thermocouple and Flat Copper end disc designed for Plastic Runnerless Molding Bushings (see page 2-22).
4. (HDL) A Hi-Density cartridge heater designed with NPT Fittings for Immersion heating (see page 2-54).
5. (HDB) Bolt Heaters A Hi-Density cartridge heater designed for assisting in the assembly of large machinery (see page 2-58).

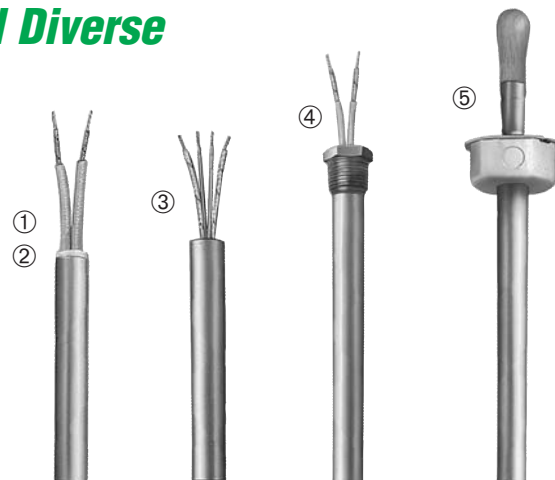

Hi-Density Cartridge Heaters provide maximum processing temperature capability

- ✦ Higher watt densities permit smaller heaters to be used without sacrificing life expectancy. This results in up-front as well as long-term cost savings.
- ✦ Swaged construction provides maximum support for the resistance wire and excellent heat transfer characteristics, improving the overall life expectancy of the cartridge heater.
- ✦ Termination styles and special features allow customization to any application.
- ✦ Applications up to 1400°F (760°C)

Typical Applications

- * Plastic Extruders
- * Hot Runner Molds
- * Hot Stamping
- * Medical Equipment
- * Packaging Equipment
- * Molds
- * Aerospace
- * Sealing Bags
- * Semi-Conductor
- * Plastic Molding
- * Shoe Machinery
- * Food Processing
- * Heating Gases and Liquids
- * Glue Guns
- * Laminating Presses
- * Platens
- * Scientific Equipment
- * Food Service Equipment

Hi-Density Cartridge Heaters are Classified in Two Distinct Categories

Multi-Purpose Use

The Multi-Purpose Use Cartridge Heaters represent Tempco's commitment to value-added customer service as we maintain in Stock over 65,000 Semi-Finished Hi-Density Cartridge Heater Substrates offering a combination of over 1000 sizes in industry standard diameters and lengths ranging from 1" (25.4 mm) to 36" (914.4 mm) in a complete spectrum of wattages and operating voltages. Multi-Purpose Use Cartridge Heaters are the solution for a multitude of original equipment manufacturers (OEMs) or maintenance (MRO) applications.

Available through the Terminator Program for same-day or next-day shipment. Complete details are found on pages 2-10 through 2-20.

Highly Engineered Specific Purpose Use

Tempco has been at the forefront of addressing the challenges of Original Equipment Manufacturers (OEMs) in a broad segment of diversified industries. As a company we are uniquely qualified and committed to providing value-added expertise in engineering and manufacturing capabilities that span over three decades of acquired knowledge, assisting customers in developing highly engineered specific use cartridge heaters for dependable and reliable performance. Let us provide the optimal solution to your thermal loop system and cartridge heater design challenges. Engineering assistance can be found on pages 2-2 through 2-7.

*Consult Us With Your Requirements.
We Welcome Your Inquiries.*

Ordering Information

**Custom
Manufactured**



Custom Engineered/Manufactured Heaters

Understanding that an electric heater can be very application specific, for sizes and ratings not listed, **TEMPCO** will design and manufacture a Hi-Density Cartridge Heater to meet your requirements. **Standard lead time is 3 weeks.**

Please Specify the following:

- | | |
|-----------------------------------|--|
| <input type="checkbox"/> Diameter | <input type="checkbox"/> Termination types (see pages 2-37 through 2-49) |
| <input type="checkbox"/> Length | <input type="checkbox"/> Lead Length |
| <input type="checkbox"/> Wattage | <input type="checkbox"/> Cable/Braid length |
| <input type="checkbox"/> Voltage | <input type="checkbox"/> Special Features |

Cartridge Heaters

Standard Specifications



Hi-Density Cartridge Heater Specifications

DIMENSIONAL SPECIFICATIONS

Nominal Diameter	1/8 in (mm)	1/4 in (mm)	5/16 in (mm)	3/8 in (mm)	1/2 in (mm)	5/8 in (mm)	3/4 in (mm)	1 in (mm)
Actual Diameter	.122 (3.10)	.246 (6.25)	.308 (7.82)	.371 (9.42)	.496 (12.60)	.621 (15.77)	.746 (18.95)	.996 (25.30)
Diameter Tolerance	±.002 (.051)	±.002 (.051)	±.002 (.051)	±.002 (.051)	±.002 (.051)	±.002 (.051)	±.003 (.076)	±.003 (.076)
Minimum Length	1.25 (31.8)	1 (25.40)	1 (25.40)	1 (25.40)	1 (25.40)	1 (25.40)	1-1/4 (31.75)	1-3/4 (44.45)
Maximum Length	12 (305)	36 (914)	36 (914)	48 (1219)	60 (1524)	72 (1829)	72 (1829)	72 (1829)
Length Tolerance Heaters up to 5" (127 mm) long	±3/32 (2.4)	±3/32 (2.4)	±3/32 (2.4)	±3/32 (2.4)	±3/32 (2.4)	±3/32 (2.4)	±1/8 (3.2)	±1/8 (3.2)
Length Tolerance Heaters over 5" (127 mm) long	±2% of Sheath Length							
Camber Tolerance Heaters to 12" (305 mm) long	010" (.254 mm) per foot of length							
Camber Tolerance Heaters over 12" (305 mm) long	020" (.508 mm) per foot of length							

A certain amount of Camber is unavoidable. With a slight force, Hi-Density Cartridge Heaters will flex enough to fit into a straight reamed hole.

ELECTRICAL SPECIFICATIONS

Nominal Diameter	1/8	1/4	5/16	3/8	1/2	5/8	3/4	1
Maximum Voltage	240	240	240	240	240	480*	480*	480*
Maximum Amperage (see next line for exceptions)	3.0	4.4	4.5	6.7	10.5	23	23	23
†Maximum Amperage for Types F, F1, W, W3, M3, S1 and S2 Terminations	—	3.0	3.0	5.5	7.6	9.7	9.7	9.7
Minimum Wattage at 120V on a 1" long Heater	—	50	45	45	50	50	—	—
Minimum Wattage at 120V on a 2" long Heater	5	20	20	20	20	20	20	20
Maximum Wattage at 120V	360	525	540	800	1260	2760	2760	2760
Maximum Wattage at 240V	720	1050	1080	1600	2520	5520	5520	5520
Maximum Wattage at 480V	—	—	—	—	—	11,000	11,000	11,000
Wattage Tolerance	+10,-15%	Plus 5%, Minus 10%						
Resistance Tolerance	+15,-10%	Plus 10%, Minus 5%						

*480V when applicable. Consult Tempco.

†Current carrying capacities are for ambient temperatures up to 482°F (250°C) with mica insulated lead wires.

LENGTH TOLERANCE FOR LEAD WIRES WIRE BRAID LEADS ARMOR CABLE LEADS

Up to 36": -1/2", +1" (-12.7mm, +25.4 mm)
36" to 72": -1", +2" (25.4mm, +50.8 mm)
Above 72": ±4" (101.6 mm)



Note: Specifications detailed on this page are standard. Consult Tempco if your application requires tighter tolerances or has other special requirements.

TEMPERATURE COEFFICIENT OF RESISTANCE

The electrical resistance (ohms) of the heater resistance wire increases with temperature rise.

Tempco standard Hi-Density Cartridge Heaters are manufactured with ohms (cold ohms) 3.3% lower than the actual calculated ohms (hot ohms) to compensate for this increase.

AVAILABLE ELECTRICAL FEATURES

Diameter	Dual Volts	3-Phase	Dual Circuits	Multiple Heat Zones (maximum 3 zones)
1/8"	No	No	No	No
1/4"	No	No	No	No
5/16"	No	No	No	No
3/8"	Yes*	No	No	Yes*
1/2"	Yes*	No	Yes	Yes*
5/8"	Yes	Yes	Yes	Yes
3/4"	Yes	Yes	Yes	Yes
1"	Yes	Yes	Yes	Yes

Consult factory for maximum wattages and voltages

* Heaters may require a larger diameter transition area at lead end.



Recommendations for Improving the Life of Hi-Density Cartridge Heaters

Tempco Hi-Density Cartridge Heaters have been widely used in many demanding and diverse applications for over 30 years. The commonly used basic applications are platen, plastic mold and die heating, liquid immersion and air heating.



Note: Selection of the wrong termination for a particular application is the primary reason for all heater failures. However, failure to consider other important criteria can also have a negative effect on the life of the heater. To get the best performance and assure long life, it is important to carefully evaluate the following factors.

Operating Temperature

Operating temperature of a heater is a major factor in determining the life expectancy of a heating element. The heater life depends on the actual temperature of the resistance wire within the heater and not on the process operating temperature. The graph in Fig. 1 demonstrates the proper relationship between operating temperature and watt density; the higher the operating temperature, the lower the maximum recommended watt density.

Heater Watt Density

Cartridge heater watt density is defined as the wattage dissipated per square inch of the heated sheath surface. For a particular application a heater's watt density governs internal resistance wire temperature, which determines the outer sheath temperature. These factors are critical to the proper heating of the application and to the life expectancy of the heater. Special construction features that promote excellent heat transfer permit Hi-Density Cartridge Heaters to operate at higher watt densities while maintaining the lowest possible resistance wire temperatures of any style cartridge heater.

Heater watt density (w/in^2) is calculated using the following formula:

$$\text{Watt Density} = \frac{\text{Heater wattage}}{\text{Heated length} \times \text{Heater diameter} \times 3.1416}$$

Heated length is the overall length of the heater minus any unheated (cold) sections. Standard Type N, Hi-Density cartridge heaters have 3/8" at the lead end and 1/4" at the disc end unheated. This would mean a 6" long heater would have 5-3/8" effective heated length. Unheated sections vary with type of heater termination. For descriptions of terminations and options, see pages 2-37 through 2-53.


The graph in Fig. 1 shows the maximum recommended watt density for Hi-Density Cartridge Heaters when used in a steel platen. Watt density limitations for various materials are given in the engineering section of this catalog. For liquid immersion heaters the maximum watt density depends on the type of liquid being heated. The more viscous, or thicker the liquid, the lower the maximum watt density. Higher watt density can cause the liquid to carbonize and accumulate on the heater sheath, which will cause premature heater failure. It is advisable to use heaters that have watt densities below the maximum recommended watt density to get the longest heater life. If the actual heater watt density is close to the maximum recommended watt density, you can correct the problem by:

1. Increasing the number, diameter and length of heaters.
2. Lowering the total wattage; however, this may increase the heat-up time.
3. Obtaining tighter fit (see Fig. 2 — Determining Fit).

A Hi-Density cartridge heater designed at the maximum recommended watt density allows the smallest heater to be used to obtain the required wattage with good service life. All things being equal, using a lower watt density heater will typically provide optimized service life.

FIG.


1 Recommended Watt Density for Heating Metal Parts

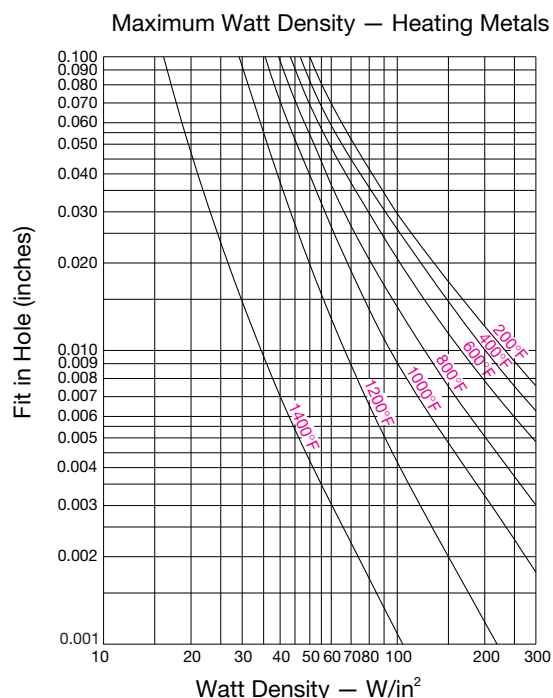

The graph shows the recommended maximum watt density for Tempco Hi-Density cartridge heaters at different operating temperatures and fit, when the heater is installed in an oxidized mild steel block. The thermocouple is located 1/2" from the heater. When heating other materials, the data needs to be extrapolated based on the thermal conductivity of the material. Consult Tempco with your requirements.

FIG.

2 Determining Fit



CONTINUED



Hi-Density

Recommendations for Improving the Life of Hi-Density Cartridge Heaters

Continued from previous page...

Determining Fit

When heating a platen, mold, die or hot runner probe with Hi-Density Cartridge Heaters inserted into drilled holes, fit is an important factor in determining the life expectancy of the heater. Fit is the difference between the minimum diameter of the cartridge heater and the maximum diameter of the hole. Unheated sections on a Hi-Density cartridge may be smaller in diameter due to swaging. To determine fit, use the smallest diameter on the heated length only.

Example: A 3/8" nominal OD Hi-Density cartridge heater has an actual diameter of .371" \pm .002, which translates to a minimum diameter of .369". If used in a .375" \pm .003 hole, the fit would be .009" (.378" - .369" = .009").

When medium watt density heaters (less than 60 watts per square inch) are used in low temperature applications (less than 600°F [315°C]) general purpose drills are commonly used to drill holes. The typical hole size may be .003" to .008" over the drill size. For higher watt density and/or higher temperature applications, we recommend that the holes are drilled and reamed for the tightest possible fit. In applications where precise temperature control and heat transfer properties are required, Hi-Density cartridge heaters can be centerless ground to \pm .0005".

Although a tighter fit is desirable to efficiently transfer heat and to get long heater life, a looser fit will aid in installing and removing heaters, especially long heaters. We recommend that you apply Tempco's BNS anti-seize cartridge heater coating as it will improve heat transfer and will make the removal of heaters easier.

The graph in Fig 1. (page 2-5) shows the effect of fit in determining the maximum recommended watt density on a steel platen. As it is indicated in the graph, the tighter the fit, the higher the maximum recommended watt density.

Temperature Control and Location of Temperature Sensing Device

In order to better control the heater temperature and hence the resistance wire temperature, use of an appropriate temperature control and the proximity of the heater to the sensor is very important. The graph in Fig. 1 (page 2-5) shows the effect of operating temperature in determining the maximum recommended watt density on a steel platen where the sensor is located 1/2" from the heater. Higher watt density heaters can generate heat faster than the surrounding area's ability to dissipate heat. This creates a thermal lag between the heater and the sensor. The closer the sensor to the heater, the better you can control the heater temperature. By keeping the sensor further from the heater, temperature gradients of several hundred degrees can be observed in many applications, especially during initial start-up and heavy thermal cycling. Although the set operating temperature may be low, the heater may be running at a very high temperature. This is a common cause of heater failure. This can be minimized using time proportional and PID functions of the temperature controllers. See Section 13 for temperature controllers and Section 14 for thermocouples and sensors.

Power Control

Power control methods affect the life expectancy of heating elements. In general, although economical, on-off controls increase thermal fatigue and oxidation rate on heating elements by causing wide temperature swings of the internal heating element. Silicon Controlled Rectifiers (SCRs), Mercury Relays and Solid State Power Controls can increase the life expectancy of heating elements by reducing the temperature swings of the internal heating element. See Section 13 for power controls.

Common Causes of Cartridge Heater Failures

Contamination

Contamination is a major cause of heater failure. Moisture, hydraulic oils, and melted plastic are the most common contaminants that are seen on failed heaters. Since the magnesium oxide insulation in a Hi-Density heater is hygroscopic in nature, moisture is easily absorbed into the heater and typically results in premature heater failure. Moisture absorption during machine washdown or cleanup also is a frequent problem. These contaminants, which are electrically conductive, will short out the heater. Most probably, the failures will be at the lead end of the heater and in some cases can split or blow a hole on the heater sheath. The disc end of a Hi-Density cartridge heater is welded shut with a stainless steel disc.

Generally contaminants enter the heater through the lead end of the heater. The high temperature lead wires used on Hi-Density heaters have fiberglass or mica insulation. Oil and moisture can wick through the insulation on the lead wire into the heater. Tempco offers a wide variety of terminations to avoid this problem, including epoxy seals, Teflon® seals, convoluted cables, welded end discs and Teflon® insulated lead wires. However, there are temperature limitations on many of these terminations.



Note: If you should encounter premature cartridge heater failure, consult Tempco. Our team of professionals will have the solution to your problem.

Excessive Flexing of Leads

Tempco Hi-Density heaters use flexible grade A nickel stranded lead wires with fiberglass or mica insulation. On certain terminations the lead wires are connected externally to solid nickel conductor pins. In applications where there is excessive movement or vibration, the solid pins could break due to fatigue. A simple solution is to give enough slack on the leads to minimize the stress on the solid pins or provide an internal lead wire connection within the heater. Tempco also offers strain relief brackets and springs to prevent this problem.

Where heater leads can wear out by abrasion due to excessive flexing of the leads, Tempco offers several abrasion resistant terminations. See pages 2-37 through 2-49.

Lack of Heat Sink

Hi-Density heaters are designed with minimum unheated (cold) sections. If the heated sections project from the platen or mold, these sections will get extremely hot due to lack of heat transfer. This will lead to premature heater failure. Tempco can manufacture heaters with cold sections anywhere along the length of the heater to prevent overheating of the heater sheath.

When a Hi-Density heater is used as a liquid immersion heater, make sure the heater's sheath length is completely immersed in the liquid. The heater lead end should not be immersed in liquid, since most of the lead end seals are only moisture resistant, not moisture proof.



Recommendations for Improving the Life of Hi-Density Cartridge Heaters

High Operating Temperature

Tempco Hi-Density heaters are designed to operate at sheath temperatures up to 1400°F (760°C). When process temperatures approach the maximum heater sheath temperature, make sure the sheath temperature doesn't exceed its limitations. Location of the thermocouple and the type of temperature and power controls are factors that affect sheath temperature and potential over-shoot conditions.

Although the heater is designed to run at temperatures up to 1400°F (760°C), heater lead wires and terminations are rated for much lower temperatures. Care should be taken to make sure that the heater lead end temperatures do not exceed their limitations. Heaters can be made longer with unheated sections at the lead end to bring the lead end out of the high temperature area. Tempco can also provide you with a high temperature wiring harness, which can withstand temperatures up to 1400°F (760°C). See page 15-3 in the accessories section for details.



Note: As explained in the above paragraphs, the single major cause for cartridge heater failure is the selection of the wrong type of heater lead end termination for the specific application. To assist you in selecting the right termination type, pages 2-37 through 2-49 give detailed descriptions of over 40 terminations designed to solve many of the common application problems. If you need further assistance, consult Tempco.

High Wattage Rating

Heaters with very high wattage ratings can create temperature overshoots, uneven temperature distribution and high heater sheath temperatures, causing premature heater failure.

For liquid immersion heaters, maximum watt density depends on the type of liquid being heated. The heavier or thicker the liquid, the lower the maximum watt density. Higher watt density can cause the liquid to carbonize and accumulate on the heater sheath, which will cause premature heater failure.

Scale and Sludge Buildup

In liquid immersion applications, periodic cleaning of the heater sheath is necessary to remove any scale buildup on the sheath. Scale can accumulate on the sheath and cause the heater to over-heat and fail. When used to heat liquid in a tank, be sure to clean any sludge from the bottom of the tank. A heater sheath covered with sludge will overheat and fail.

Important Installation Considerations

- For closest fit and best heat transfer, use reamed holes.
- When possible, drill holes through the object being heated. This will make heater removal easier.
- When using an anti-seize coating like Tempco's BNS spray or paste, **do not apply** over lead wires or any other current carrying conductors.
- When using insulated tape or sleeving, check to make sure they are rated for the temperature of the application. Lower temperature rated materials can contain an adhesive or binder that can carbonize and become electrically conductive.
- When using heaters near their maximum recommended watt density, it is recommended that the temperature sensing probes be at least 1/2" from the heater sheath.
- Lead wires should not be located in the hole containing the cartridge heater during operation. This may cause the lead wires to be exposed to temperatures above their rated temperature.
- When used in a vacuum application, make sure the lead end of the heater is outside the vacuum. If the lead has to be in the vacuum, consult Tempco for specific recommendations.
- Many applications will subject a heater's electrical terminations to one or more of the following potentially damaging conditions:
 - Moisture
 - Oil and other contaminants
 - Flexing
 - Abrasion
 - High temperature



Note: To protect the heater from damage in these harsh environments, Tempco has a wide selection of terminations and options available. See pages 2-37 through 2-53 for details.

BNS Anti-Seize Cartridge Heater Coating

This high temperature, electrically insulating and thermally conductive coating will minimize oxidation and improve heat transfer from heater to the object being heated.

Brush a thin layer of paste or spray lightly over the cartridge heater prior to inserting the heater into a hole.



Do not apply over lead wires or other bare current carrying conductors, since the water in the paste and spray can cause an electrical short circuit.



13 oz.
Aerosol spray can
Part Number:
CML00010

- * Temperature Range 1562°F (850°C)
- * High Heat Transfer



4 oz.
Paste w/brush applicator top
Part Number: CML00020

- * Temperature Range 1562°F (850°C)
- * High Heat Transfer



Note: Formulated to assist in the removal of cartridge heaters.

All Items Available from Stock



Highly Engineered Custom Manufactured Specific Use Cartridge Heaters

Meeting the Challenges of Original Equipment Manufacturers with Custom Engineering

Tempco has been at the forefront of addressing the challenges of original equipment manufacturers (OEMs) in diversified industries, when dependable and reliable performance of custom engineered cartridge heaters is crucial to the overall operating efficiency and quality of their equipment and machinery.

Tempco is a company uniquely qualified and committed to providing value added expertise in engineering and manufacturing that spans over three decades of acquired knowledge, assisting customers in developing highly engineered specific use cartridge heaters for equipment and/or machinery systems.

Cartridge heater with NPT fitting and a 5-pin industrial connector molded to the cord.



Cartridge heater for continuous air heating application with Incoloy sheath, custom machined fitting and silicone rubber moisture barrier



Cartridge heater with built-in thermal fuse and ground wire for X-Ray processing equipment.



Cartridge heater with built-in thermostat, pipe fitting and ground leads for oil heating in waste handling equipment.



Finned Cartridge Oil Immersion Heater with a liquid tight electrical termination.



Complete a New Project on Time Improved Efficiencies and Reduce Cost

Consult Tempco, your strategic partner, in the early stages of a new project requiring cartridge heaters, or to improve a troublesome existing application. By doing so you allow Tempco to place at your disposal our team of professionals, offering you our vast knowledge in product design and manufacturing expertise. We can provide you with the optimal solution to your thermal loop system and cartridge heater design challenges.

Tempco offers you the perfect balance in quality and service with value-added technology. These pictures depict a small sampling of the cartridge heaters we have developed for special applications. Put our knowledge and experience to work for you.

*Our capabilities are limited only by your imagination.
Consult us with your requirements.
We welcome your inquiries.*




Internal thermocouple is wired to a serial connector for easy assembly to a microprocessor used in incubators.



Incoloy® fitting and seamless Incoloy® 800 sheath material is used in aviation application.



Straight armor cable and adjustable bayonet cap for easy assembly

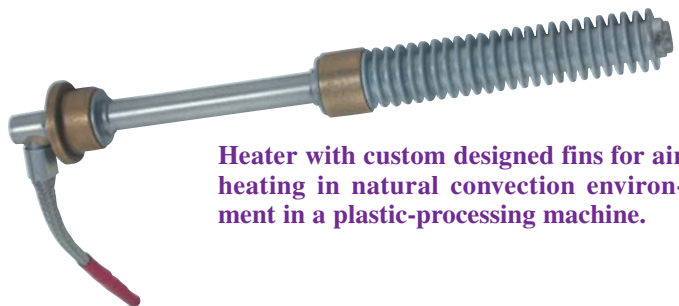

Heater with custom designed fins for air heating in natural convection environment in a plastic-processing machine.




Cartridge Heaters

Special Applications

Highly Engineered Custom Manufactured Specific Purpose Use Cartridge Heaters



The heater has a header cap as an integral part of the NPT fitting. Leads exit through small holes that are sealed with RTV for moisture protection.

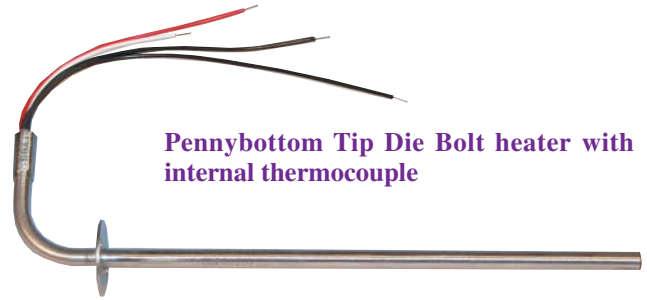


Pennybottom Tip Die Bolt heater with internal thermocouple




Heater designed to run continuously at 1202°F (650°C); built-in isolated thermocouple and ground wire

Heater for medical diagnostic instruments has an integrated heat sink and thermal fuse.

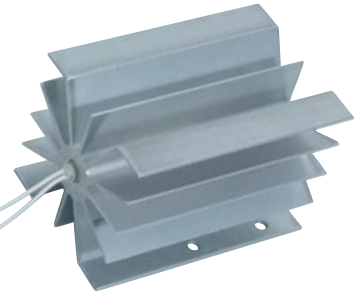

SJO cord and molded plug for automotive air conditioning recharging units

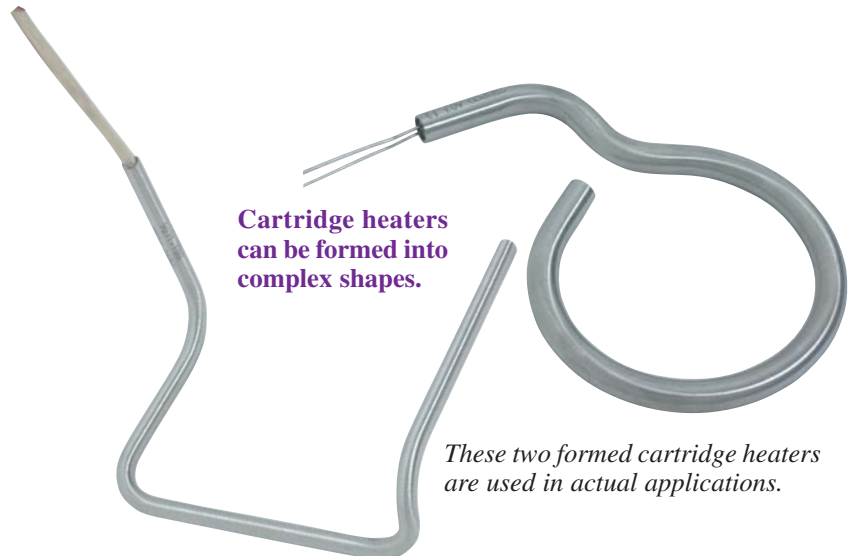

Cartridge heaters can be formed into complex shapes.

These two formed cartridge heaters are used in actual applications.

Optional Inspection Services and Test Reports

Die Penetrant Test

This non-destructive testing can detect imperfections in weld joints. For critical applications, each individual heater's weld joints by end cap and fittings can be tested. Certified test reports will be sent with each shipment. Consult Tempco for details.

Hydrostatic Pressure Test

Cartridge heaters with attached pipe fittings can be pressure tested to your specifications at Tempco. Our in-house testing capabilities can ensure that your products meet your exact specifications. Contact Tempco with your requirements.


Electrical Tests

Our state of the art test meter can perform AC/DC dielectric withstand test (Hypot) up to 5000 volts while measuring leakage current in micro amps. It can also measure Insulation resistance (IR) and heater element resistance. Heaters can be serialized and test reports can be sent with each shipment if required.

*Consult Tempco with Your Requirements.
We Welcome Your Inquiries.*

Call Toll Free: (800) 323-6859 • Fax: (630) 350-0232 • E-Mail: sales@tempco.com

Custom Terminated Multi-Purpose Use Cartridge Heaters **ON DEMAND!**

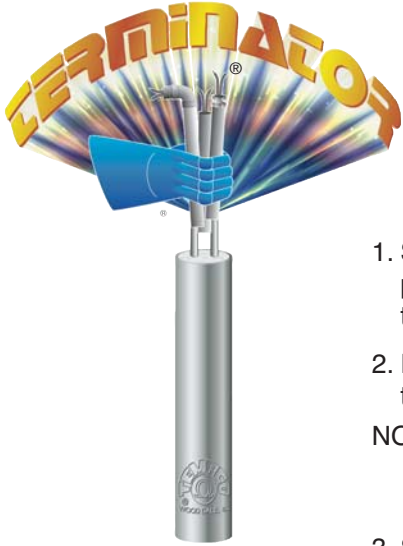

Tempco stocks over 1000 different Semi-Finished Hi-Density Cartridge Heaters in diameters 1/4", 5/16", 3/8", 1/2", 5/8" and 3/4".

These cartridge heaters are semi-finished (substrates), offering you the option to finish them by choosing from 23 program-qualified lead end terminations. Cartridge heaters will be ready for shipment within 1 to 3 days, depending on the termination.

Ordering Information — Follow These Simple Steps

1. Select an available 1/4" through 3/4" Hi-Density cartridge heater from the stock lists on pages 2-13 through 2-20. The Part Number in the tables are for heaters with termination type N (10" long externally connected lead wires).

2. Refer to the Program-Qualified Lead Terminations Reference Chart on page 2-11 to select the cartridge heater termination type best suited for your application.

NOTE: Type "N" (10" long externally connected plain lead wires) is the most common termination applied in the Terminator program. If a termination other than Type N is selected a new permanent part number will be assigned when your order is placed.


3. Specify your lead requirements in the event that the standard supplied lengths for Plain leads (10"), Braid or Armor Cable (10" over 12" leads) are not suited for your application.

4. Specify the Quantity.

These Program-Qualified Lead Terminations for Stock Cartridge Heater Substrates will ship *Same or Next day.*


Type N

Standard Leads
(page 2-37)




Type B

Ceramic Bead Insulation
(page 2-49)




Type S3

Lead Wire Strain Relief
(page 2-40)




Type LR

Locating Ring
(page 2-47)

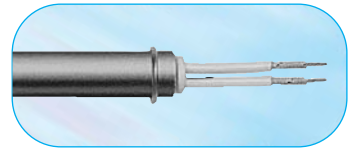


Type C1

Straight Armor Cable
(page 2-41)




Type MFR

Mounting Flange Round
(page 2-47)




Type MFH

Mounting Flange Hex
(page 2-47)




Type P

Quick Disconnect Plug
(page 2-49)




Type C2

Right Angle Armor
Cable with Copper Elbow
(page 2-42)




Type R1

Right-Angle Leads with
Copper Elbow
(page 2-42)



Type S4


Right-Angle
Lead Wire Strain Relief
(page 2-40)






These Program-Qualified Lead Terminations for Stock Cartridge Heater Substrates will ship 2nd or 3rd day.


Type BF
Bulkhead Fitting
(page 2-46)




Type CN
Double Threaded Fitting
(page 2-46)




Type CM
Single Threaded Fitting
(page 2-46)




Type E1
General Purpose Box
(page 2-48)




Type W
Straight Wire Braided Leads
(page 2-40)



Type M2A
Potted Lead End Seal
(Cement Only)
(page 2-38)




Type SA
Sealed Armor Cable
(page 2-38)




Type T2
Screw Terminals
(page 2-44)




Type R2
Right-Angle Leads
(page 2-43)




Type W1
Right-Angle Wire
Braided Leads
(page 2-43)



Type C3
Right-Angle Armor Cable
(page 2-43)



Type R3
Angled Sheath Extension
(page 2-44)



Complete specifications and details on these terminations can be found on the specified catalog page numbers.

**Custom
Manufactured**



Custom Engineered/Manufactured Hi-Density Cartridge Heaters

(Refer to pages 2-2 through 2-9)

Understanding that cartridge heaters can be very application specific, consult Tempco with your special requirements. For sizes, electrical ratings and any other design features required but not listed in the catalog, Tempco will custom engineer and manufacture to your specifications.

Consult Us with Your Requirements. We Welcome Your Inquiries.

Cartridge Heaters

Hi-Density Miniature




Hi-Density 1/8" Diameter Miniature Cartridge Heaters feature swaged construction for temperature up to 1200°F (650°C).

1/8" Actual .122" (3.10 mm) Diameter Hi-Density Cartridge Heaters with Type N Termination (10" leads)

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
1/4	31.8	25	90	14	HDC19100	—
1/4	31.8	35	126	20	HDC19101	—
1/4	31.8	50	180	28	HDC19102	—
1/2	38.1	30	80	12	HDC19103	—
1/2	38.1	60	160	25	HDC19104	—
2	50.8	40	70	11	HDC19105	—

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
2	50.8	50	87	13	HDC19106	HDC19112
2	50.8	100	175	27	HDC19107	HDC19113
2 1/2	63.5	50	68	11	HDC19108	—
3	76.2	60	64	10	HDC19109	—
3 1/2	88.9	70	62	10	HDC19110	—
4	101.6	80	60	9	HDC19111	HDC19114

1/8" Diameter Cartridge Heaters are available in Seven Termination Types

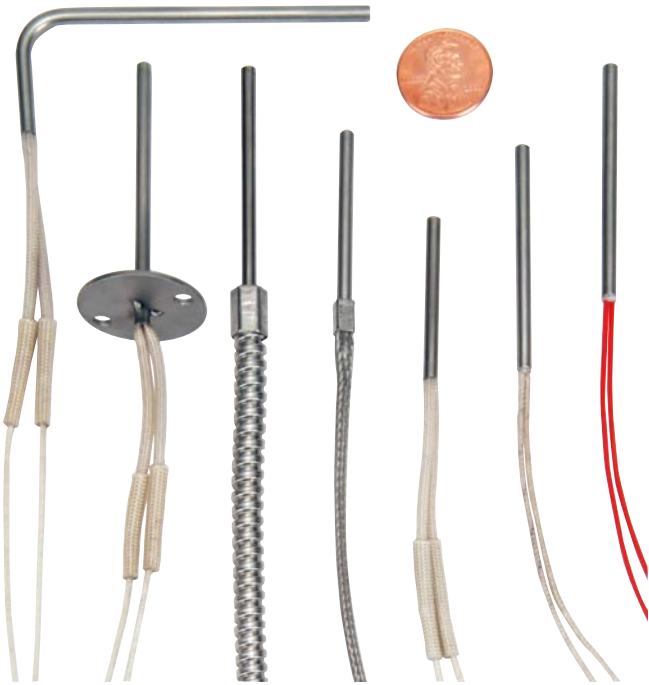

Type R4
Bent Cartridge

Type MFR
Mounting Flange

Type C1B
SS Cable, Mechanically Fastened

Type W
SS Braid, Mechanically Fastened

Type N
External Pins with Leads

Type F
Internally Connected Flexible Leads

Type M3
Teflon® End Plug Seal



Note: 1/8" Dia. Hi-Density Cartridge Heaters are made-to-order only.
Standard lead time is 3 weeks.

**Custom
Manufactured**



Custom Engineered/Manufactured 1/8" Hi-Density Cartridge Heaters

Understanding that cartridge heaters can be very application specific, consult Tempco with your special requirements. For sizes, electrical ratings and any other design features required but not listed in the catalog, Tempco will custom engineer and manufacture to your specifications.

Consult Us with Your Requirements. We Welcome Your Inquiries.

Product Inventory Available for Viewing and Selection @ www.tempco.com



STOCK — Immediate Delivery through the Terminator® Lead Conversion Program

1/4" Actual .246" (6.25 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heater substrates terminated with 10" long leads (Type N termination). Other lead terminations qualified under the Terminator Program for stock substrates are shown on pages 2-10 and 2-11.

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
1	25.4	50	127	20	HDC00001	—
1	25.4	80	204	32	HDC00002	—
1	25.4	100	255	40	HDC00003	HDC00004
1	25.4	150	382	59	HDC00005	—
1 1/8	28.6	100	204	32	HDC00006	—
1 1/4	31.8	50	85	13	HDC00007	—
1 1/4	31.8	75	127	20	HDC00008	—
1 1/4	31.8	100	170	26	HDC00009	—
1 1/4	31.8	125	212	33	HDC00010	—
1 1/4	31.8	150	255	40	HDC00011	HDC00012
1 1/4	31.8	200	340	53	—	HDC00013
1 1/4	31.8	225	382	59	—	HDC00014
1 1/2	38.1	50	64	10	HDC00015	—
1 1/2	38.1	75	92	14	HDC08691	—
1 1/2	38.1	100	127	20	HDC00016	HDC00017
1 1/2	38.1	150	191	30	HDC00018	HDC00019
1 1/2	38.1	175	223	35	HDC00020	HDC00021
1 1/2	38.1	200	255	40	HDC00022	HDC00023
1 1/2	38.1	250	318	49	—	HDC00024
1 3/4	44.5	75	76	12	HDC00025	—
1 3/4	44.5	150	153	24	HDC00026	—
1 3/4	44.5	300	306	47	—	HDC00027
2	50.8	50	42	7	HDC00028	—
2	50.8	80	68	11	HDC00029	—
2	50.8	100	85	13	HDC00030	HDC00031
2	50.8	125	106	17	HDC00032	HDC00033
2	50.8	150	127	20	HDC00034	HDC00035
2	50.8	200	170	26	HDC00036	HDC00037
2	50.8	250	212	33	HDC00038	HDC00039
2	50.8	300	255	40	—	HDC00040
2 1/4	57.2	200	146	23	HDC10139	HDC00041
2 1/2	63.5	150	95	15	—	HDC00042
2 1/2	63.5	200	127	20	HDC00043	HDC00044
2 1/2	63.5	250	159	25	HDC00045	HDC00046
2 3/4	69.9	200	113	18	—	HDC00048
3	76.2	75	38	6	HDC00049	—
3	76.2	100	51	8	HDC00050	HDC00051
3	76.2	125	64	10	—	HDC00052
3	76.2	150	76	12	HDC00053	HDC00054

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
3	76.2	200	102	16	HDC00055	HDC00056
3	76.2	250	127	20	HDC00057	HDC00058
3	76.2	300	153	24	HDC00059	HDC00060
3	76.2	350	178	28	—	HDC00061
3 1/2	88.9	200	85	13	—	HDC00062
3 1/2	88.9	300	127	20	HDC00063	HDC00064
3 3/4	95.3	300	118	18	—	HDC00065
4	101.6	100	36	6	HDC00066	—
4	101.6	150	55	9	HDC00067	—
4	101.6	175	64	10	HDC00068	HDC00069
4	101.6	200	73	11	HDC00070	HDC00071
4	101.6	250	91	14	HDC00072	HDC00073
4	101.6	300	109	17	HDC00074	HDC00075
4	101.6	400	146	23	—	HDC00076
4 1/2	114.3	125	40	6	HDC00077	—
4 1/2	114.3	200	64	10	HDC00078	—
4 1/2	114.3	500	159	25	—	HDC00079
5	127.0	200	57	9	—	HDC00080
5	127.0	250	71	11	—	HDC00081
5	127.0	300	87	14	HDC22940	—
5	127.0	350	99	15	HDC00082	HDC00083
5	127.0	400	113	18	HDC00084	HDC00085
5 1/4	146.1	350	85	13	HDC00086	HDC00087
6	152.4	150	35	5	HDC00088	—
6	152.4	200	46	7	—	HDC00089
6	152.4	300	69	11	HDC00090	HDC00091
6	152.4	400	93	14	HDC00092	HDC00093
6	152.4	450	104	16	HDC00094	HDC00095
6	152.4	600	139	22	—	HDC00096
6 1/2	165.1	500	106	17	HDC00097	HDC00098
7	177.8	500	98	15	HDC20502	—
7	177.8	600	118	18	—	HDC00099
7 1/2	190.5	525	95	15	HDC00100	—
8	203.2	300	51	8	HDC00101	—
8	203.2	600	102	16	—	HDC00102
9	228.6	675	101	16	—	HDC00103
9 1/2	241.3	525	74	12	HDC00104	—
10	254.0	750	101	16	—	HDC00105
11	279.4	600	73	11	—	HDC00106
13	330.2	725	74	12	—	HDC00107

Ordering Information

Part Numbers listed are for stock Cartridge Heater substrates terminated with 10" long leads (Type N termination). Part Numbers for stock substrates with other Terminator Program qualified lead terminations (shown on pages 2-10 and 2-11) will be issued when an order is placed.

Custom Engineered/Manufactured

Cartridge Heaters can be application specific, therefore for sizes, electrical ratings, terminations and any other design features not listed in this catalog **TEMPCO** will custom manufacture to your specifications. Consult us with your requirements.

Cartridge Heaters

Hi-Density



STOCK — Immediate Delivery through the Terminator® Lead Conversion Program

5/16" Actual .308" (7.82 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heater substrates terminated with 10" long leads (Type N termination). Other lead terminations qualified under the Terminator Program for stock substrates are shown on pages 2-10 and 2-11.

Sheath Length in mm	Watts	Watt Density W/in ² W/cm ²	Part Number 120V 240V
2 50.8	150	102 16	HDC00108 —
2½ 63.5	150	76 12	HDC00109 —
2½ 63.5	200	102 16	HDC00110 HDC00111
3 76.2	225	92 14	HDC00112 HDC00113
3¾ 85.7	160	57 9	HDC00114 —
3½ 88.9	250	85 13	HDC00115 —

Sheath Length in mm	Watts	Watt Density W/in ² W/cm ²	Part Number 120V 240V
4 101.6	275	80 12	HDC00117 HDC00118
5 127.0	350	79 12	HDC00119 HDC00120
5½ 139.7	250	51 8	HDC00121 —
6 152.4	450	83 13	HDC00122 HDC00123
7½ 190.5	600	87 14	— HDC00124

3/8" Actual .371" (9.42 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heater substrates terminated with 10" long leads (Type N termination). Other lead terminations qualified under the Terminator Program for stock substrates are shown on pages 2-10 and 2-11.

Sheath Length in mm	Watts	Watt Density W/in ² W/cm ²	Part Number 120V 240V
1 25.4	50	85 13	HDC00125 —
1 25.4	100	170 26	HDC00127 —
1 25.4	150	255 40	HDC00128 HDC00129
1 25.4	200	340 53	— HDC00130
1¼ 31.8	100	113 18	HDC00133 —
1¼ 31.8	150	170 26	HDC00135 HDC00136
1¼ 31.8	200	226 35	HDC00137 HDC00138
1½ 33.3	100	104 16	HDC00139 HDC00140
1½ 33.3	150	157 24	HDC00141 —
1½ 34.9	150	146 23	HDC00142 HDC00143
1¾ 36.5	100	91 14	HDC00144 —
1½ 38.1	30	25 4	HDC00146 —
1½ 38.1	50	42 7	HDC00147 HDC00148
1½ 38.1	75	64 10	HDC00149 —
1½ 38.1	100	85 13	HDC00150 HDC00151
1½ 38.1	125	106 17	— HDC00152
1½ 38.1	150	127 20	HDC00153 HDC00154
1½ 38.1	200	170 26	HDC00155 HDC00156
1½ 38.1	250	212 33	HDC00157 HDC00158
1¾ 44.5	150	102 16	HDC00160 HDC00161
1¾ 44.5	200	136 21	— HDC00163
1¾ 44.5	250	170 26	HDC00164 HDC00165
1¾ 46.0	150	97 15	— HDC00166
1¾ 46.0	200	129 20	HDC00167 —
2 47.6	250	154 24	HDC00169 —
2 50.8	50	28 4	HDC00170 —
2 50.8	75	42 7	HDC00171 —
2 50.8	100	57 9	HDC00172 HDC00173
2 50.8	125	71 11	HDC00174 —
2 50.8	150	85 13	HDC00175 HDC00176
2 50.8	200	113 18	HDC00177 HDC00178
2 50.8	250	141 22	HDC00179 HDC00180
2 50.8	300	170 26	HDC00181 HDC00182
2 50.8	350	198 31	— HDC00183
2 50.8	400	226 35	HDC00184 HDC00185
2 50.8	500	283 44	HDC00186 HDC00187
2¼ 57.2	75	36 6	HDC00189 —
2¼ 57.2	100	49 8	HDC00190 —
2¼ 57.2	125	61 9	HDC00191 HDC00192
2¼ 57.2	150	73 11	— HDC00193
2¼ 57.2	175	85 13	HDC00194 —
2¼ 57.2	200	97 15	— HDC00196
2¼ 57.2	250	125 19	HDC00197 —
2¼ 57.2	300	146 23	HDC00199 HDC00200

Sheath Length in mm	Watts	Watt Density W/in ² W/cm ²	Part Number 120V 240V
2¼ 57.2	350	170 26	HDC00201 HDC00202
2¼ 57.2	400	194 30	— HDC00204
2¼ 57.2	500	243 38	— HDC00205
2¾ 60.3	75	34 5	HDC00206 —
2¾ 60.3	165	75 12	— HDC00207
2¾ 60.3	300	136 21	— HDC00210
2¾ 63.5	100	42 7	HDC00213 HDC00214
2¾ 63.5	125	53 8	HDC00215 —
2¾ 63.5	150	64 10	— HDC00216
2¾ 63.5	200	85 13	HDC00217 HDC00218
2¾ 63.5	250	106 17	HDC00219 HDC00220
2¾ 63.5	300	127 20	HDC00221 HDC00222
2¾ 63.5	350	149 23	— HDC00223
2¾ 63.5	400	174 27	HDC00224 —
2¾ 63.5	500	212 33	HDC00227 HDC00228
2¾ 69.9	400	151 23	— HDC00231
2¾ 71.4	300	110 17	— HDC00235
3 76.2	100	34 5	HDC00236 HDC00237
3 76.2	125	42 7	HDC00238 —
3 76.2	150	51 8	HDC00239 —
3 76.2	200	68 11	HDC00240 HDC00241
3 76.2	250	85 13	HDC00242 HDC00243
3 76.2	300	102 16	HDC00244 HDC00245
3 76.2	375	127 20	HDC00247 —
3 76.2	400	136 21	HDC00249 HDC00250
3 76.2	500	170 26	HDC00251 HDC00252
3 76.2	600	204 32	— HDC00253
3 76.2	750	255 40	— HDC00254
3¾ 84.1	500	151 23	HDC00255 —
3¾ 88.9	125	35 6	HDC00256 —
3¾ 88.9	200	57 9	— HDC00257
3¾ 88.9	225	64 10	— HDC00258
3¾ 88.9	250	71 11	HDC00259 HDC00260
3¾ 88.9	300	85 13	HDC00261 HDC00262
3¾ 88.9	350	99 15	HDC00263 HDC00264
3¾ 88.9	400	113 18	— HDC00265
3¾ 88.9	500	141 22	HDC00266 HDC00267
3¾ 96.8	150	38 6	HDC00269 —
3¾ 96.8	500	128 20	— HDC00270
4 101.6	100	24 4	HDC00272 —
4 101.6	125	30 5	HDC00273 HDC00274
4 101.6	150	36 6	HDC00275 —
4 101.6	175	42 7	HDC00276 —
4 101.6	200	49 8	HDC00277 HDC00278



STOCK — Immediate Delivery through the Terminator® Lead Conversion Program

3/8" Actual .371" (9.42 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heater substrates terminated with 10" long leads (Type N termination). Other lead terminations qualified under the Terminator Program for stock substrates are shown on pages 2-10 and 2-11.

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
4	101.6	250	61	9	HDC00279	HDC00280
4	101.6	300	73	11	HDC00281	HDC00282
4	101.6	350	85	13	HDC00283	HDC00284
4	101.6	400	97	15	HDC00285	HDC00286
4	101.6	450	109	17	—	HDC00288
4	101.6	500	121	19	HDC00289	HDC00290
4	101.6	600	146	23	—	HDC00292
4	101.6	700	170	26	—	HDC00293
4	101.6	750	182	28	—	HDC00294
4 1/4	108.0	300	68	11	—	HDC00295
4 1/4	108.0	750	170	26	—	HDC00296
4 1/2	114.3	250	53	8	—	HDC00297
4 1/2	114.3	300	64	10	HDC00298	HDC00299
4 1/2	114.3	450	95	15	HDC00302	HDC00303
4 1/2	114.3	500	106	17	HDC00304	HDC00305
4 3/4	120.7	300	60	9	—	HDC00307
4 3/8	122.2	300	59	9	—	HDC00308
4 3/8	122.2	500	98	15	—	HDC00309
5	127.0	150	28	4	HDC00312	HDC00313
5	127.0	200	38	6	HDC00314	HDC00315
5	127.0	250	47	7	HDC00316	—
5	127.0	300	57	9	HDC00317	HDC00318
5	127.0	350	66	10	—	HDC00319
5	127.0	400	75	12	HDC00320	HDC00321
5	127.0	500	94	15	HDC00323	HDC00324
5	127.0	600	113	18	—	HDC00327
5	127.0	700	132	21	—	HDC00328
5	127.0	750	141	22	—	HDC00329
5	127.0	800	151	23	—	HDC00330
5	127.0	1000	189	29	—	HDC00331
5 1/4	133.3	200	36	6	—	HDC00332
5 1/2	139.7	250	42	7	HDC00334	HDC00335
5 1/2	139.7	550	93	15	—	HDC00338
5 1/2	139.7	600	102	16	—	HDC00339
5 1/2	139.7	1000	170	26	—	HDC00340
5 3/4	146.1	400	65	10	—	HDC00341
5 3/4	146.1	600	97	15	HDC00342	HDC00343
6	152.4	200	31	5	HDC00344	—
6	152.4	250	39	6	HDC00345	HDC00346
6	152.4	300	46	7	HDC00347	HDC00348
6	152.4	400	62	10	HDC00349	HDC00350
6	152.4	500	77	12	HDC00351	HDC00352
6	152.4	600	93	14	HDC00353	HDC00354
6	152.4	675	104	16	—	HDC00355
6	152.4	750	116	18	HDC00356	HDC00357
6	152.4	800	123	19	—	HDC00358
6	152.4	900	139	22	—	HDC00359
6	152.4	1000	154	24	—	HDC00360
6 1/2	165.1	600	85	13	—	HDC00361
6 1/2	165.1	1000	141	22	—	HDC00362
7	177.8	250	33	5	HDC00365	HDC00366
7	177.8	350	46	7	—	HDC00367

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
7	177.8	400	52	8	HDC00368	—
7	177.8	500	65	10	—	HDC00369
7	177.8	600	78	12	HDC00370	HDC00371
7	177.8	750	98	15	—	HDC00373
7	177.8	775	101	16	—	HDC00374
7	177.8	1000	131	20	—	HDC00375
7 1/2	190.5	600	73	11	—	HDC00377
7 1/2	190.5	725	88	14	—	HDC00378
7 1/2	190.5	850	103	16	—	HDC00379
7 1/2	190.5	1000	121	19	—	HDC00380
7 3/8	198.4	750	87	14	—	HDC00381
8	203.2	250	30	5	HDC07944	—
8	203.2	300	34	5	HDC00382	HDC00383
8	203.2	400	45	7	HDC00384	—
8	203.2	450	51	8	HDC00385	—
8	203.2	500	57	9	HDC00386	HDC00387
8	203.2	600	68	11	HDC00388	HDC00389
8	203.2	700	79	12	—	HDC00390
8	203.2	750	85	13	—	HDC00391
8	203.2	900	102	16	—	HDC00392
8	203.2	1000	113	18	—	HDC00393
8 3/8	219.1	500	52	8	—	HDC00395
9	228.6	200	20	3	HDC00396	HDC00397
9	228.6	500	50	8	—	HDC00398
9	228.6	885	88	14	—	HDC00399
9	228.6	1000	100	16	—	HDC00400
9 1/2	241.3	200	19	3	HDC00401	—
9 1/2	241.3	600	57	9	—	HDC00402
9 1/2	241.3	1000	94	15	—	HDC00403
10	254.0	400	36	5	HDC00405	—
10	254.0	500	45	7	—	HDC00407
10	254.0	600	54	8	HDC00408	HDC00409
10	254.0	700	63	10	—	HDC00410
10	254.0	750	67	10	—	HDC00411
10	254.0	1000	89	14	—	HDC00413
10	254.0	1500	134	21	—	HDC00415
10 1/8	274.6	375	31	5	—	HDC00416
12	304.8	400	30	5	HDC00417	—
12	304.8	500	37	6	—	HDC00418
12	304.8	600	44	7	HDC00419	HDC00420
12	304.8	750	57	9	—	HDC14222
12	304.8	1000	74	11	—	HDC00421
12	304.8	1500	113	18	—	HDC06225
12 1/8	325.4	1000	69	11	—	HDC00422
13	330.2	1000	70	11	—	HDC07200
14	355.6	600	39	6	—	HDC22941
14	355.6	750	47	7	—	HDC00423
16	406.4	600	34	5	—	HDC22942
16	406.4	1200	66	10	—	HDC00424
18	457.2	1000	58	9	—	HDC22943
20	508.0	1000	53	8	—	HDC09305
24	609.6	1000	38	6	—	HDC10234

Ordering Information

Part Numbers listed are for stock Cartridge Heater substrates terminated with 10" long leads (Type N termination). Part Numbers for stock substrates with other Terminator Program qualified lead terminations (shown on pages 2-10 and 2-11) will be issued when an order is placed.

Custom Engineered/Manufactured

Cartridge Heaters can be application specific, therefore for sizes, electrical ratings, terminations and any other design features not listed in this catalog **TEMPCO** will custom manufacture to your specifications. Consult us with your requirements.

Call Toll Free: (800) 323-6859 • Fax: (630) 350-0232 • E-Mail: sales@tempco.com

Cartridge Heaters

Hi-Density



STOCK — Immediate Delivery through the Terminator® Lead Conversion Program

1/2" Actual .496" (12.60 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heater substrates terminated with 10" long leads (Type N termination). Other lead terminations qualified under the Terminator Program for stock substrates are shown on pages 2-10 and 2-11.

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
1	25.4	50	64	10	HDC00426	—
1	25.4	150	191	30	HDC00427	—
1	25.4	200	255	40	—	HDC00428
1 1/4	31.8	50	42	7	HDC00429	—
1 1/4	31.8	125	106	17	HDC00430	HDC00431
1 1/4	31.8	180	153	24	—	HDC00432
1 1/4	31.8	200	170	26	—	HDC00433
1 1/4	31.8	250	212	33	—	HDC00434
1 1/2	38.1	50	32	5	HDC00435	—
1 1/2	38.1	150	95	15	HDC00436	HDC00437
1 1/2	38.1	200	127	20	HDC00438	HDC00439
1 1/4	44.5	100	51	8	HDC00440	—
1 1/4	44.5	200	102	16	—	HDC00441
1 1/4	44.5	250	127	20	HDC00442	—
1 1/4	44.5	400	204	32	—	HDC00443
2	50.8	75	32	5	HDC00444	—
2	50.8	100	52	8	—	HDC22944
2	50.8	150	64	10	HDC00445	—
2	50.8	175	74	12	HDC00446	—
2	50.8	200	85	13	HDC00447	HDC00448
2	50.8	250	106	17	HDC00449	HDC00450
2	50.8	300	127	20	HDC00451	HDC00452
2	50.8	400	170	26	HDC00453	HDC00454
2	50.8	500	212	33	HDC00455	—
2	50.8	600	255	40	—	HDC00456
2	50.8	700	297	46	—	HDC00457
2 1/4	57.2	75	27	4	HDC00458	—
2 1/4	57.2	100	36	6	HDC00459	—
2 1/4	57.2	125	45	7	HDC00460	—
2 1/4	57.2	150	55	9	HDC00461	—
2 1/4	57.2	250	91	14	HDC00462	HDC00463
2 1/4	57.2	300	109	17	—	HDC00464
2 1/4	57.2	400	146	23	HDC00465	HDC00466
2 1/4	57.2	500	182	28	HDC00467	HDC00468
2 3/8	60.3	100	34	5	HDC00470	HDC00471
2 3/8	60.3	125	42	7	HDC00472	—
2 3/8	60.3	250	85	13	HDC00473	HDC00474
2 3/8	60.3	400	136	21	—	HDC00475
2 3/8	60.3	500	170	26	HDC00476	HDC00477
2 1/2	63.5	100	32	5	HDC00478	HDC00479
2 1/2	63.5	125	40	6	HDC00480	—
2 1/2	63.5	150	48	7	—	HDC00481
2 1/2	63.5	200	64	10	HDC00482	HDC00483
2 1/2	63.5	250	80	12	HDC00484	HDC00485
2 1/2	63.5	300	95	15	HDC00486	HDC00487
2 1/2	63.5	400	127	20	HDC00489	HDC00490
2 1/2	63.5	500	159	25	HDC00491	HDC00492
2 1/16	65.1	300	93	14	—	HDC00493
2 1/16	65.1	350	108	17	HDC00494	—
2 3/4	69.9	250	71	11	HDC00495	—
2 3/4	69.9	400	113	18	HDC00496	HDC00497
3	76.2	125	32	5	HDC00498	HDC00499
3	76.2	150	38	6	HDC00500	HDC00501
3	76.2	200	51	8	—	HDC00502
3	76.2	250	64	10	HDC00503	HDC00504
3	76.2	300	76	12	HDC00505	HDC00506
3	76.2	350	89	14	HDC00507	—
3	76.2	400	102	16	HDC00508	HDC00509

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
3	76.2	500	127	20	HDC00510	HDC00511
3	76.2	600	153	24	HDC00512	HDC00513
3	76.2	750	191	30	HDC00514	HDC00515
3	76.2	1000	255	40	HDC00516	—
3 1/2	88.9	250	53	8	HDC00517	HDC00518
3 1/2	88.9	300	64	10	—	HDC00519
3 1/2	88.9	350	74	12	—	HDC00520
3 1/2	88.9	400	95	15	—	HDC08472
3 1/2	88.9	500	106	17	HDC00522	HDC00523
3 1/2	88.9	750	159	25	—	HDC00524
3 1/2	88.9	1000	212	33	—	HDC00525
3 3/4	95.3	500	98	15	—	HDC00526
3 3/4	96.8	250	48	8	—	HDC00527
3 3/4	96.8	500	96	15	HDC00528	—
4	101.6	150	27	4	HDC00529	HDC00530
4	101.6	200	40	6	—	HDC07555
4	101.6	250	45	7	HDC00531	HDC00532
4	101.6	300	55	9	HDC00533	HDC00534
4	101.6	350	64	10	HDC00536	HDC00537
4	101.6	400	73	11	HDC00538	HDC00539
4	101.6	500	91	14	HDC00540	HDC00541
4	101.6	550	100	16	HDC00542	HDC00543
4	101.6	600	109	17	—	HDC00544
4	101.6	750	136	21	HDC00545	HDC00546
4	101.6	1000	182	28	—	HDC00547
4	101.6	1200	218	34	—	HDC00548
4 1/16	109.5	550	92	14	HDC00550	—
4 1/2	114.3	250	40	6	HDC00551	—
4 1/2	114.3	350	56	9	—	HDC00552
4 1/2	114.3	500	80	12	HDC00553	HDC00554
4 1/2	114.3	650	103	16	HDC00555	HDC00556
4 1/2	114.3	750	119	19	HDC00557	HDC00558
4 1/2	114.3	1000	159	25	—	HDC00559
4 3/4	120.7	200	30	5	—	HDC00560
4 3/8	122.2	250	37	6	HDC00561	—
4 3/8	122.2	300	44	7	—	HDC00562
4 3/8	122.2	1000	148	23	—	HDC00563
5	127.0	200	28	4	HDC00565	HDC00566
5	127.0	250	35	6	HDC00567	—
5	127.0	300	42	7	—	HDC00568
5	127.0	350	50	8	HDC00569	HDC00570
5	127.0	400	57	9	HDC00571	HDC00572
5	127.0	500	71	11	HDC00573	HDC00574
5	127.0	550	78	12	—	HDC00575
5	127.0	600	85	13	—	HDC00576
5	127.0	625	88	14	—	HDC00577
5	127.0	750	106	17	HDC00578	HDC00579
5	127.0	800	113	18	—	HDC00580
5	127.0	1000	141	22	—	HDC00581
5 1/4	133.4	250	34	5	HDC00582	HDC00583
5 1/4	133.4	1000	134	21	—	HDC00584
5 1/2	139.7	200	25	4	—	HDC00585
5 1/2	139.7	500	64	10	HDC00586	HDC00587
5 1/2	139.7	650	83	13	—	HDC00588
5 1/2	139.7	750	95	15	HDC00589	HDC00590
5 3/4	146.1	350	42	7	—	HDC00591
5 3/4	146.1	700	85	13	HDC00592	HDC00593
5 3/8	147.6	300	36	6	—	HDC00594



STOCK — Immediate Delivery through the Terminator® Lead Conversion Program

1/2" Actual .496" (12.60 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heater substrates terminated with 10" long leads (Type N termination). Other lead terminations qualified under the Terminator Program for stock substrates are shown on pages 2-10 and 2-11.

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
6	152.4	200	23	4	—	HDC00595
6	152.4	250	29	5	HDC00596	HDC00597
6	152.4	300	35	5	HDC00598	HDC00599
6	152.4	350	41	6	HDC00600	HDC00601
6	152.4	450	52	8	—	HDC00602
6	152.4	500	58	9	HDC00603	HDC00604
6	152.4	600	69	11	—	HDC00605
6	152.4	750	87	14	HDC00606	HDC00607
6	152.4	850	98	15	HDC00609	HDC00610
6	152.4	875	101	16	—	HDC00611
6	152.4	1000	116	18	HDC00612	HDC00613
6	152.4	1200	139	22	—	HDC00614
6	152.4	1500	183	28	—	HDC16228
6 3/8	161.9	1000	108	17	—	HDC00615
6 1/2	165.1	500	53	8	HDC00616	HDC00617
6 1/2	165.1	1000	106	17	—	HDC00618
6 3/4	171.5	500	51	8	HDC00619	HDC00620
7	177.8	250	24	4	HDC00621	—
7	177.8	340	33	5	—	HDC00622
7	177.8	400	39	6	—	HDC00623
7	177.8	500	49	8	HDC00624	HDC00625
7	177.8	600	59	9	HDC00626	HDC00627
7	177.8	700	69	11	—	HDC00628
7	177.8	750	73	11	HDC00629	HDC00630
7	177.8	1000	98	15	HDC00631	HDC00632
7	177.8	1500	147	23	—	HDC00633
7 1/2	190.5	500	45	7	HDC00634	HDC00635
7 1/2	190.5	1000	91	14	—	HDC00636
7 3/4	196.9	1000	88	14	—	HDC00637
8	203.2	200	17	3	—	HDC00639
8	203.2	300	25	4	HDC00640	HDC00641
8	203.2	500	42	7	HDC00642	HDC00643
8	203.2	600	51	8	—	HDC00644
8	203.2	750	64	10	HDC00645	HDC00646
8	203.2	800	68	11	HDC00647	HDC00648
8	203.2	1000	85	13	HDC00650	HDC00651
8	203.2	1200	102	16	—	HDC00653
8	203.2	1500	127	20	—	HDC00654
8	203.2	2000	170	26	—	HDC00655
8 1/2	215.9	300	24	4	—	HDC00656
8 1/2	215.9	500	40	6	—	HDC00657
8 1/2	215.9	1000	80	12	HDC00658	HDC00659
8 3/4	222.3	1000	77	12	—	HDC00660
9	228.6	500	37	6	—	HDC00661
9	228.6	750	56	9	—	HDC00662
9	228.6	1000	75	12	HDC00663	HDC00664

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
9	228.6	1325	99	15	—	HDC00665
9	228.6	1500	112	17	—	HDC00666
9 1/2	241.3	500	35	6	—	HDC00667
9 1/2	241.3	800	57	9	—	HDC00668
9 1/2	241.3	1000	71	11	—	HDC00669
10	254.0	500	34	5	HDC00670	HDC00671
10	254.0	750	50	8	—	HDC00672
10	254.0	800	54	8	—	HDC00673
10	254.0	1000	67	10	HDC00674	HDC00675
10	254.0	1250	84	13	—	HDC00677
10	254.0	1500	101	16	—	HDC00678
10	254.0	2000	134	21	—	HDC00679
10 1/2	266.7	1500	95	15	—	HDC00680
11	279.4	500	30	5	HDC00681	—
11	279.4	1000	61	9	—	HDC00682
11	279.4	1500	91	14	—	HDC00683
11	279.4	2000	121	19	—	HDC00684
11 1/2	292.1	1525	88	14	—	HDC00685
12	304.8	500	28	4	HDC00686	HDC00687
12	304.8	600	33	5	HDC00688	HDC00689
12	304.8	1000	55	9	HDC00690	HDC00691
12	304.8	1100	61	9	—	HDC00692
12	304.8	1500	83	13	—	HDC00693
12	304.8	2000	111	17	—	HDC00694
12 1/2	317.5	1675	89	14	—	HDC00695
13 1/2	342.9	500	24	4	—	HDC00696
14	355.6	1000	47	7	—	HDC00697
14	355.6	1700	80	12	—	HDC00698
14	355.6	2300	108	17	—	HDC00699
15	381.0	800	35	5	—	HDC00700
15	381.0	1000	44	7	—	HDC00701
15	381.0	1500	66	10	—	HDC00702
15	381.0	2000	88	14	—	HDC00703
16	406.4	800	33	5	—	HDC00704
16	406.4	1000	41	6	—	HDC00705
16	406.4	2000	84	13	—	HDC17207
16 1/2	419.1	2200	88	14	—	HDC00706
17	431.8	1000	39	6	—	HDC00707
18	457.2	750	27	4	—	HDC00708
18	457.2	1000	36	6	—	HDC00709
18	457.2	1500	55	9	—	HDC00710
18	457.2	1700	62	10	—	HDC00711
18	457.2	2000	73	11	—	HDC00712
20	508.0	1000	34	5	—	HDC11652
24	609.6	1000	28	4	—	HDC14867

Ordering Information

Part Numbers listed are for stock Cartridge Heater substrates terminated with 10" long leads (Type N termination). Part Numbers for stock substrates with other Terminator Program qualified lead terminations (shown on pages 2-10 and 2-11) will be issued when an order is placed.

Custom Engineered/Manufactured

Cartridge Heaters can be application specific, therefore for sizes, electrical ratings, terminations and any other design features not listed in this catalog **TEMPCO** will custom manufacture to your specifications. Consult us with your requirements.

Cartridge Heaters

Hi-Density



STOCK — Immediate Delivery through the Terminator Lead Conversion Program

5/8" Actual .621" (15.77 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heater substrates terminated with 10" long leads (Type N termination). Other lead terminations qualified under the Terminator Program for stock substrates are shown on pages 2-10 and 2-11.

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
1¼	31.8	50	34	5	HDC00713	—
1¼	31.8	200	136	21	HDC00714	HDC00715
1¼	31.8	250	170	26	HDC00716	HDC00717
1½	38.1	250	127	20	HDC00719	HDC00720
2	50.8	100	34	5	HDC00721	—
2	50.8	125	42	7	HDC00722	—
2	50.8	200	68	11	HDC00723	HDC00724
2	50.8	250	85	13	HDC00725	HDC00726
2	50.8	300	102	16	—	HDC00727
2	50.8	400	136	21	—	HDC00728
2	50.8	500	170	26	—	HDC00729
2	50.8	750	255	40	—	HDC00730
2¼	57.2	100	29	5	HDC00731	—
2¼	57.2	125	36	6	HDC00732	—
2¼	57.2	250	73	11	HDC00733	HDC00734
2¼	57.2	350	102	16	HDC00735	HDC00736
2½	60.3	280	76	12	HDC00739	HDC00740
2½	63.5	180	46	7	HDC00742	—
2½	63.5	275	70	11	HDC00743	HDC00744
2½	63.5	400	102	16	HDC00745	HDC00746
2½	63.5	720	183	28	—	HDC00747
3	76.2	150	31	5	HDC00748	—
3	76.2	180	37	6	HDC00749	—
3	76.2	250	51	8	HDC00750	HDC00751
3	76.2	350	71	11	HDC00752	HDC00753
3	76.2	400	81	13	HDC00754	—
3	76.2	500	102	16	HDC00755	HDC00756
3	76.2	600	122	19	—	HDC00757
3	76.2	720	147	23	—	HDC00758
3	76.2	750	153	24	—	HDC00759
3¼	82.6	200	37	6	HDC00760	—
3¼	82.6	800	148	23	—	HDC00761
3½	88.9	525	89	14	—	HDC00762
3½	95.3	525	82	13	HDC00763	HDC00764
4	101.6	250	36	6	HDC00766	HDC00767
4	101.6	300	44	7	—	HDC00768
4	101.6	350	51	8	HDC00769	—
4	101.6	400	58	9	—	HDC00770
4	101.6	500	73	11	HDC00771	HDC00772
4	101.6	550	80	12	—	HDC00773
4	101.6	600	87	14	—	HDC00774
4	101.6	750	109	17	HDC00775	HDC00776
4	101.6	1000	146	23	—	HDC00777
4½	114.3	500	64	10	—	HDC00780
4½	114.3	750	95	15	HDC00783	HDC00784
4½	114.3	1000	127	20	—	HDC00785
4½	120.7	750	90	14	—	HDC00787
5	127.0	250	28	4	HDC00788	HDC00789
5	127.0	500	57	9	—	HDC00790
5	127.0	750	85	13	HDC00791	HDC00792
5	127.0	875	99	15	—	HDC00793
5	127.0	1000	113	18	HDC00794	HDC00795
5½	136.5	800	84	13	HDC00796	HDC00797
5½	139.7	800	81	13	—	HDC00800
5½	146.1	500	49	8	—	HDC00801
5½	146.1	1500	146	23	—	HDC00802

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
6	152.4	300	28	4	HDC00804	HDC00805
6	152.4	500	46	7	HDC00806	HDC00807
6	152.4	750	69	11	—	HDC00808
6	152.4	1000	93	14	HDC00809	HDC00810
6	152.4	1200	111	17	—	HDC00811
6	152.4	1500	139	22	HDC00812	HDC00813
6½	165.1	350	30	5	HDC00814	HDC00815
6½	165.1	500	42	7	HDC00816	HDC00817
6½	165.1	900	76	12	—	HDC00818
6½	165.1	1400	119	18	—	HDC00819
6¾	171.5	500	41	6	—	HDC00820
6¾	171.5	1000	81	13	—	HDC00821
7	177.8	500	39	6	HDC00822	HDC00823
7	177.8	750	59	9	—	HDC00824
7	177.8	1000	78	12	HDC00825	HDC00826
7	177.8	1500	118	18	—	HDC00827
7½	190.5	325	24	4	HDC00828	—
7½	190.5	1300	95	15	—	HDC00829
7¾	196.9	400	28	4	—	HDC00830
7¾	196.9	1000	70	11	—	HDC00831
8	203.2	400	27	4	—	HDC00832
8	203.2	500	34	5	HDC00833	HDC00834
8	203.2	750	51	8	—	HDC00835
8	203.2	850	58	9	—	HDC00836
8	203.2	1000	68	11	HDC00837	HDC00838
8	203.2	1200	81	13	HDC00839	HDC00840
8	203.2	1500	102	16	HDC00841	HDC00842
8	203.2	2000	136	21	—	HDC00843
8¾	222.3	450	28	4	HDC00845	—
8¾	222.3	1800	111	17	—	HDC00846
9	228.6	500	30	5	—	HDC00847
9	228.6	750	45	7	—	HDC00848
9	228.6	1000	60	9	—	HDC00849
9	228.6	1500	90	14	—	HDC00850
9½	241.3	975	55	9	—	HDC00851
10	254.0	500	27	4	HDC00852	HDC00853
10	254.0	650	35	5	HDC00855	—
10	254.0	750	40	6	—	HDC00856
10	254.0	800	43	7	—	HDC00857
10	254.0	1000	54	8	HDC00858	HDC00859
10	254.0	1500	80	13	HDC00860	HDC00861
10	254.0	2000	107	17	—	HDC00862
11	279.4	1000	49	8	—	HDC00863
11	279.4	1400	68	11	—	HDC00864
11	279.4	2000	97	15	—	HDC00865
12	304.8	500	22	3	HDC00866	HDC00867
12	304.8	600	27	4	HDC00868	—
12	304.8	775	34	5	—	HDC00869
12	304.8	900	40	6	—	HDC00870
12	304.8	1000	44	7	HDC00871	HDC00872
12	304.8	1500	66	10	HDC00873	HDC00874
12	304.8	2000	89	14	—	HDC00875
13	330.2	1000	41	6	—	HDC00876
13	330.2	1500	61	10	—	HDC00877
14	355.6	925	35	5	HDC00878	—
14	355.6	1000	38	6	—	HDC00879



STOCK — Immediate Delivery through the Terminator® Lead Conversion Program

5/8" Actual .621" (15.77 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heater substrates terminated with 10" long leads (Type N termination). Other lead terminations qualified under the Terminator Program for stock substrates are shown on pages 2-10 and 2-11.

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
14	355.6	1500	57	9	—	HDC00880
14	355.6	3700	140	22	—	HDC00881
15	381.0	750	26	4	—	HDC00882
15	381.0	1000	35	5	—	HDC00883
15	381.0	2400	84	13	—	HDC00884
15	381.0	4000	140	22	—	HDC00885
16	406.4	1000	33	5	—	HDC00886
16	406.4	2500	82	13	—	HDC00887
16	406.4	4500	148	23	—	HDC00888
17	431.8	1000	31	5	—	HDC00889
18	457.2	900	26	4	—	HDC00890
18	457.2	1000	29	5	—	HDC00891
18	457.2	1500	44	7	—	HDC00892

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
18	457.2	3000	87	14	—	HDC00893
18	457.2	4700	137	21	—	HDC00894
19	482.6	1000	28	4	—	HDC00895
20	508.0	1000	26	4	—	HDC00896
20	508.0	1500	39	6	—	HDC00897
20	508.0	3500	91	14	—	HDC00898
20	508.0	4700	123	19	—	HDC00899
24	609.6	1000	22	3	—	HDC00900
24	609.6	2000	43	7	—	HDC00901
24	609.6	4700	102	16	—	HDC00902
25¼	641.4	1500	31	5	—	HDC00903
30	762.0	2800	48	8	—	HDC00904
36	914.4	3000	43	7	—	HDC00905

3/4" Actual .746" (18.95 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heater substrates terminated with 10" long leads (Type N termination). Other lead terminations qualified under the Terminator Program for stock substrates are shown on pages 2-10 and 2-11.

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
2	50.8	200	57	9	HDC00906	—
2	50.8	800	226	35	—	HDC00907
2¼	57.2	200	49	8	HDC00908	—
2¼	57.2	800	194	30	—	HDC00909
3	76.2	250	42	7	HDC00910	—
3	76.2	500	85	13	HDC00911	HDC00912
3	76.2	600	102	16	HDC00913	HDC00914
3	76.2	1000	170	26	—	HDC00915
3½	88.9	250	35	6	HDC00916	HDC00917
3½	88.9	350	50	8	—	HDC00918
3½	88.9	500	71	11	HDC00919	—
3½	88.9	1000	141	22	—	HDC00920
3¾	95.3	250	33	5	HDC00921	—
3¾	95.3	500	65	10	—	HDC00922
3¾	95.3	1000	131	20	—	HDC00923
4	101.6	250	30	5	HDC00924	—
4	101.6	500	61	9	HDC00926	HDC00927
4	101.6	750	91	14	—	HDC00928
4	101.6	1000	121	19	HDC00929	HDC00930
4½	114.3	350	37	6	HDC00931	—
4½	114.3	875	93	14	HDC00932	HDC00933
4½	114.3	1400	149	23	—	HDC00934
4¾	120.7	750	75	12	—	HDC00935
5	127.0	300	28	4	HDC00936	HDC00937

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
5	127.0	500	47	7	—	HDC00938
5	127.0	750	71	11	—	HDC00939
5	127.0	1000	94	15	HDC00940	HDC00941
5	127.0	1200	113	18	—	HDC00942
5¼	146.1	1000	81	13	—	HDC00943
6	152.4	500	39	6	HDC00944	HDC00945
6	152.4	750	58	9	—	HDC00946
6	152.4	1000	77	12	HDC00947	HDC00948
6	152.4	1200	93	14	—	HDC00949
6	152.4	1500	116	18	—	HDC00950
6	152.4	2000	154	24	—	HDC00951
7	177.8	500	33	5	HDC00952	HDC00953
7	177.8	1000	65	10	HDC00954	HDC00955
7	177.8	1500	98	15	HDC00956	HDC00957
7	177.8	2000	131	20	—	HDC00958
7¾	193.7	450	27	4	—	HDC00959
8	203.2	350	20	3	—	HDC00961
8	203.2	500	28	4	HDC00962	HDC00963
8	203.2	700	40	6	—	HDC00964
8	203.2	1000	57	9	—	HDC00965
8	203.2	1350	76	12	—	HDC00966
8	203.2	2000	113	18	HDC00967	HDC00968
9	228.6	350	17	3	—	HDC00969
9	228.6	500	25	4	—	HDC00970

Ordering Information

Part Numbers listed are for stock Cartridge Heater substrates terminated with 10" long leads (Type N termination). Part Numbers for stock substrates with other Terminator Program qualified lead terminations (shown on pages 2-10 and 2-11) will be issued when an order is placed.

Custom Engineered/Manufactured

Cartridge Heaters can be application specific, therefore for sizes, electrical ratings, terminations and any other design features not listed in this catalog **TEMPCO** will custom manufacture to your specifications. Consult us with your requirements.

3/4" DIA. CONTINUED

Cartridge Heaters

Hi-Density



STOCK — Immediate Delivery through the **TERMINATOR** Lead Conversion Program
Continued from previous page...

3/4" Actual .746" (18.95 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heater substrates terminated with 10" long leads (Type N termination).
Other lead terminations qualified under the Terminator Program for stock substrates are shown on pages 2-10 and 2-11.

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
9	228.6	1000	53	8	—	HDC22945
9	228.6	1200	60	9	—	HDC00971
9	228.6	1800	90	14	—	HDC00973
9 3/4	247.7	2000	92	14	—	HDC00974
10	254.0	600	27	4	—	HDC00975
10	254.0	1000	45	7	—	HDC00976
10	254.0	1200	54	8	—	HDC00977
10	254.0	1500	70	11	—	HDC22946
10	254.0	2000	89	14	HDC00978	HDC00979
10 1/2	266.7	550	23	4	—	HDC00980
11	279.4	1000	40	6	—	HDC00981
11 3/4	298.5	2000	75	12	—	HDC00983
12	304.8	800	30	5	—	HDC00984
12	304.8	1000	37	6	—	HDC00985
12	304.8	1200	44	7	—	HDC00986
12	304.8	1500	55	9	—	HDC00987
12	304.8	2000	74	11	HDC00988	HDC00989
12	304.8	2500	92	14	—	HDC00990
12	304.8	4000	148	23	—	HDC00991
13	330.2	1000	34	5	—	HDC00992
14	355.6	800	25	4	—	HDC00993
14	355.6	1000	31	5	—	HDC00994
14	355.6	1125	35	6	HDC00995	—
14	355.6	1250	39	6	—	HDC00996
14	355.6	1400	44	7	—	HDC00997
14	355.6	2500	79	12	—	HDC00998
14	355.6	4500	141	22	—	HDC00999
14 3/4	374.7	1500	45	7	—	HDC01000

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
15	381.0	1000	29	5	—	HDC01001
15	381.0	1500	44	7	—	HDC01002
16	406.4	1000	27	4	—	HDC01003
16	406.4	1175	32	5	HDC01004	—
16	406.4	1500	41	6	—	HDC01005
16	406.4	1800	49	8	—	HDC01006
16	406.4	3000	82	13	—	HDC01007
16	406.4	4700	129	20	—	HDC01008
17	431.8	1000	26	4	—	HDC01009
17 3/4	450.9	850	21	3	—	HDC01010
18	457.2	1000	24	4	—	HDC01011
18	457.2	1250	30	5	HDC01012	—
18	457.2	1450	35	6	—	HDC01013
18	457.2	2000	49	8	—	HDC01014
18	457.2	3250	79	12	—	HDC01015
18	457.2	5000	121	19	—	HDC01016
19	482.6	1000	23	4	—	HDC01017
20	508.0	1000	22	4	—	HDC01018
20	508.0	1150	25	4	—	HDC01019
20	508.0	2050	45	7	—	HDC01020
20	508.0	2250	49	8	—	HDC01021
20	508.0	5250	114	18	—	HDC01022
24	609.6	1000	18	3	—	HDC01023
24	609.6	1375	25	4	—	HDC01024
24	609.6	2000	36	6	—	HDC01025
24	609.6	2750	50	8	—	HDC01026
24	609.6	5500	99	15	—	HDC01027
36	914.4	2500	30	5	—	HDC01028

Ordering Information

Part Numbers listed are for stock Cartridge Heater substrates terminated with 10" long leads (Type N termination). Part Numbers for stock substrates with other Terminator Program qualified lead terminations (shown on pages 2-10 and 2-11) will be issued when an order is placed.

Custom Engineered/Manufactured

Cartridge Heaters can be application specific, therefore for sizes, electrical ratings, terminations and any other design features not listed in this catalog **TEMPCO** will custom manufacture to your specifications. Consult us with your requirements.

1" Dia. Actual .996" (25.30 mm) Hi-Density Cartridge Heaters with Type N termination 10" leads

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
3	76.2	750	101	16	—	HDC02662
3 1/2	88.9	565	63	10	—	HDC02663
5	127.0	1000	73	11	—	HDC02664
7 1/2	200.0	500	22	3	HDC02665	HDC02666
8	203.2	1500	65	10	—	HDC02667
8 3/4	222.3	875	34	5	—	HDC02668
11 1/2	292.1	1000	29	5	HDC02669	—
13	330.2	1000	26	4	HDC02670	—
14	355.6	2700	64	10	—	HDC02671
15	381.0	1000	22	3	HDC02672	—


Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
16	406.4	1800	37	6	—	HDC02673
17 3/8	441.3	2400	46	7	—	HDC02674
20	508.0	1000	16	3	—	HDC02675
20	508.0	2800	46	7	—	HDC02676
25	635.0	1725	23	3	HDC02677	HDC02678
40	1016.0	4400	36	6	—	HDC02679
49	1244.6	3725	25	4	—	HDC02680
50 1/2	1282.7	945	6	1	—	HDC02681
57	1447.8	2800	16	3	—	HDC02682
60	1524.0	1500	8	1	—	HDC02683



Note: 1" Dia. Hi-Density Cartridge Heaters are made-to-order only.
Refer to ordering information on page 2-3.
Standard lead time is 3 weeks.



STOCK Cartridge Heaters with Type F Flexible Lead Termination

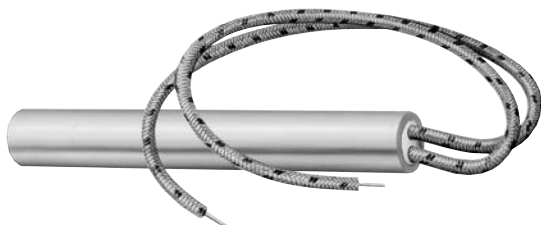

Type F Internally Connected Flexible Leads 10" Long

This lead termination provides flexibility; the lead wires are internally connected to the terminal pins. The lead wires can be sharply bent as they exit the ceramic insulating cap without exposing the bare wire or breaking the solid terminal pins.

1/4" Diameter Actual .246" (6.25 mm)

Sheath Length		Watts	Volts	Watt Density		Part Number
in	mm			W/in ²	W/cm ²	
1	25.4	80	120	204	32	HDC05603
1½	38.1	50	120	64	10	HDC06151
1½	38.1	200	120	255	40	HDC10869
2	50.8	200	240	170	26	HDC01989
2	50.8	250	240	212	33	HDC05179
2	50.8	300	240	255	40	HDC04556
2½	63.5	300	240	191	30	HDC07119
3	76.2	75	120	38	6	HDC10412
3	76.2	300	240	153	24	HDC04490
4	101.6	400	240	146	23	HDC04200
5¾	146.1	350	120	94	15	HDC04732

3/8" Diameter Actual .371" (9.42 mm)

Sheath Length		Watts	Volts	Watt Density		Part Number
in	mm			W/in ²	W/cm ²	
1¼	31.8	150	240	170	26	HDC06254
1¼	31.8	200	240	226	35	HDC04349
1½	31.8	250	120	212	33	HDC04402
2	50.8	250	240	141	22	HDC04291
2	50.8	350	240	198	31	HDC11345
2½	63.5	250	240	106	16	HDC07496
2½	63.5	350	240	149	23	HDC04759
2½	63.5	500	240	212	33	HDC05359
3	76.2	300	240	102	16	HDC02094
3	76.2	375	240	127	20	HDC06779
3½	88.9	350	240	99	15	HDC04861
4	101.6	400	120	97	15	HDC04560
4	101.6	500	240	121	19	HDC04552
5½	139.7	1000	240	170	26	HDC05431
7	177.8	350	240	46	7	HDC05303
12	304.8	1000	240	74	11	HDC05833

1/2" Diameter Actual .496" (12.60 mm)

Sheath Length		Watts	Volts	Watt Density		Part Number
in	mm			W/in ²	W/cm ²	
2	50.8	300	240	127	20	HDC03872
3¼	79.4	500	240	121	19	HDC11162
3½	96.8	250	240	48	7	HDC10330
4	101.6	500	240	91	14	HDC04676
4	101.6	600	240	109	17	HDC03878
5	127	500	240	71	11	HDC04701
6	152.4	500	240	58	9	HDC04677
6	152.4	750	240	87	14	HDC04352
6	152.4	1000	240	116	18	HDC03887
7	177.8	750	240	73	11	HDC03893
8	203.2	500	240	42	7	HDC02265
8	203.2	1000	240	85	13	HDC02263
10	254	1000	240	67	10	HDC04220

5/8" Diameter Actual .621" (15.77 mm)

Sheath Length		Watts	Volts	Watt Density		Part Number
in	mm			W/in ²	W/cm ²	
3	76.2	750	240	153	24	HDC04483
6	152.4	600	240	56	9	HDC11240
6	152.4	1000	240	93	14	HDC07353

Available from Stock

For same day shipping when
ORDERED BY 2^{PM} CST



Note: Custom Engineered/Manufactured Hi-Density Cartridge Heaters with Type F Flexible Lead Termination
Refer to ordering information on page 2-3.


Cartridge Heaters



Hi-Density Pennybottom

Hi-Density Pennybottom™ Cartridge Heaters with Built-In Thermocouple

Designed for Trouble-Free Performance and Improved Efficiency

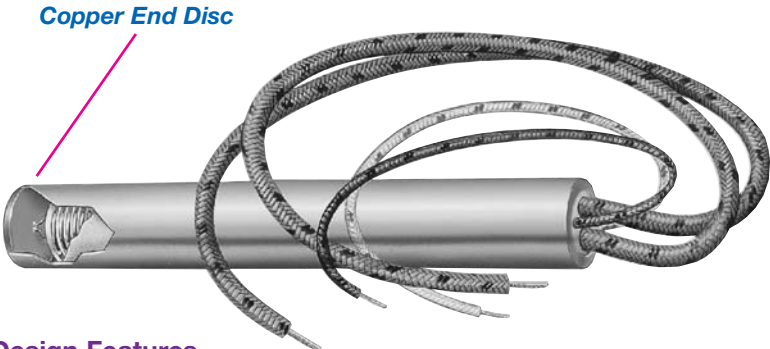


Design Features

- * Pennybottom™ Copper Flat End Disc
- * Hi-Density Swaged Construction
- * Grounded Type J Thermocouple at the Copper End Disc
- * 36" High Temperature Leads for both Heater and Thermocouple
- * Minimum Cold Sections
- * Computer Designed Distributed Wattage
- * Maximum Temperature at Lead End — 482°F (250°C)
- * OEM Replacements Available From Stock for Runnerless Molding Systems

Injection Molding Applications Include:

- * Hot Tip Bushings
- * Gating Torpedoes
- * Manifold Bushings

This drawing shows a typical installation of a Hi-Density Pennybottom™ Cartridge Heater:

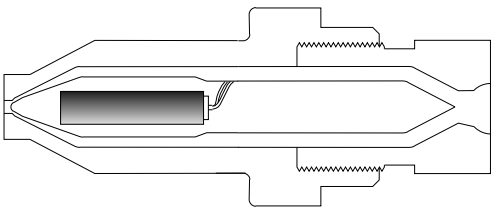

Hot Tip Bushings






Note: The cartridge heaters listed in this section include Pennybottom™ and Hi-Density cartridge heaters configured for specific tasks in the plastic injection molding environment with extra long leads, Teflon® or fiberglass insulation, with and without thermocouples, grounded at the end disc or in the middle of the heater.

PENNYBOTTOM HEATER SPECIFICATIONS

Nominal Diameter	1/4"		3/8"		1/2"	
	in	(mm)	in	(mm)	in	(mm)
Actual Diameter	.248	(6.30)	.371	(9.42)	.496	(12.60)
Diameter Tolerance	±.002	(.051)	±.002	(.051)	±.002	(.051)
Minimum Length	1	(25.40)	1	(25.40)	1	(25.40)
Maximum Length	36	(914)	48	(1219)	60	(1524)
Length Tolerance	±3/32	(2.4)	±3/32	(2.4)	±3/32	(2.4)
Heaters up to 5" (127 mm) long						
Length Tolerance						
Heaters over 5" (127 mm) long	±2% of Sheath Length					
Camber Tolerance						
Heaters to 12" (305 mm) long	.010" (.254 mm) per Foot of Length					
Camber Tolerance						
Heaters over 12" (305 mm) long	.020" (.508 mm) per Foot of Length					

Tubular Hot Runner Mold Heaters

SEE PAGE 10-14 IN THE TUBULAR HEATER SECTION.

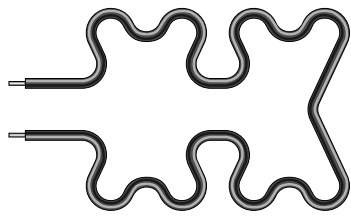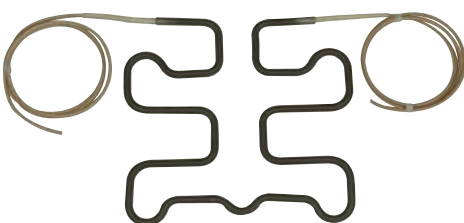



STOCK Hi-Density Pennybottom Cartridge Heaters with Built-In Type J Thermocouple

Cartridge Heater Diameter	Sheath Length		Watts	Watt Density		120V Tempco	Part Number		
	in	mm		W/in ²	W/cm ²		DME	240V Incoe	Tempco
1/4" Actual .248	1½	38.1	200	255	39	—	—	—	HDP00001
	1¾	44.5	200	204	32	HDP00002	—	—	—
	2	50.8	200	170	26	HDP00003	—	—	HDP00004
	2½	63.5	200	127	20	HDP00005	—	—	HDP00006
	3	76.2	200	102	16	HDP00007	—	—	HDP00008
	3½	88.9	250	106	16	—	—	—	HDP00009
	4	101.6	250	91	14	—	—	—	HDP00010
3/8" Actual .371	5	127.0	250	71	11	—	—	—	HDP00011
	1¾	44.5	200	136	21	—	TCH0001	TJ38017	HDP00012
	2	50.8	250	141	22	—	TCH0002	TJ38020	HDP00013
	2½	63.5	250	106	16	—	TCH0003	TJ38025	HDP00014
	3	76.2	260	88	14	—	TCH0004	TJ38030	HDP00015
	3½	88.9	320	91	14	—	TCH0005	TJ38035	HDP00016
	4	101.6	370	90	14	—	TCH0006	TJ38040	HDP00017
	4½	114.3	420	89	14	—	TCH0007	TJ38045	HDP00018
	5	127.0	470	89	14	—	TCH0008	TJ38050	HDP00019
	5½	139.7	525	89	14	—	TCH0009	TJ38055	HDP00020
	6	152.4	575	89	14	—	TCH0010	TJ38060	HDP00021
	6½	165.1	625	88	14	—	TCH0011	TJ38065	HDP00022
	7	177.8	675	88	14	—	TCH0012	TJ38070	HDP00023
	7½	190.5	725	88	14	—	TCH0013	TJ38075	HDP00024
	8	203.2	775	88	14	—	TCH0014	TJ38080	HDP00025
	9	228.6	885	88	14	—	—	TJ38090	HDP00026
	9½	241.3	940	89	14	—	—	TJ38095	HDP00027
1/2" Actual .496	10	254.0	990	88	14	—	—	TJ38100	HDP00028
	10½	266.7	1045	89	14	—	—	TJ38105	HDP00029
	11½	292.1	1500	116	18	—	—	TJ38115	HDP00030
	2½	63.5	280	89	14	—	—	TJ12025	HDP00031
	3½	88.9	420	89	14	—	TCH0015	TJ12035	HDP00032
	4	101.6	490	89	14	—	TCH0016	TJ12040	HDP00033
	4½	114.3	550	88	14	—	TCH0017	TJ12045	HDP00034
	5	127.0	625	88	14	—	TCH0018	TJ12050	HDP00035
	5½	139.7	700	89	14	—	TCH0019	TJ12055	HDP00036
	6	152.4	775	90	14	—	TCH0020	TJ12060	HDP00037
	6½	165.1	850	90	14	—	TCH0021	TJ12065	HDP00038
	7	177.8	900	88	14	—	—	TJ12070	HDP00039
	7½	190.5	975	89	14	—	TCH0022	TJ12075	HDP00040
	8	203.2	1050	89	14	—	—	TJ12080	HDP00041
	8½	215.9	1100	88	14	—	—	TJ12085	HDP00042
	9	228.6	1200	90	14	—	—	TJ12090	HDP00043
	9½	241.3	1250	88	14	—	—	TJ12095	HDP00044
	10	254.0	1325	89	14	—	—	TJ12100	HDP00045
	10½	266.7	1400	89	14	—	—	TJ12105	HDP00046
	11	279.4	1470	89	14	—	—	TJ12110	HDP00047
	12½	317.5	1675	89	14	—	—	TJ12125	HDP00048
	13½	342.9	1800	88	14	—	—	TJ12135	HDP00049

All Items Available from Stock

Ordering Information

Stock Heaters

Order by Catalog Part Number from the Stock Sizes and Ratings List above. Note that Part Numbers shown are for heaters with 36" Heater and T/C Leads. Thermocouple Type J grounded at disc end.

Custom Engineered/Manufactured Heaters

Understanding that an electric heater can be very application specific, for sizes and ratings not listed, **TEMPCO** will design and manufacture a Pennybottom™ Cartridge Heater to meet your requirements. **Standard lead time is 3 weeks.**

Please Specify the following:


- ☐ Diameter
- ☐ Length
- ☐ Wattage
- ☐ Voltage
- ☐ Lead and Thermocouple Lengths
- ☐ Special Features

Cartridge Heaters

OEM Replacement



STOCK OEM Replacement Cartridge Heaters for Runnerless Molding Hot Tip Bushings

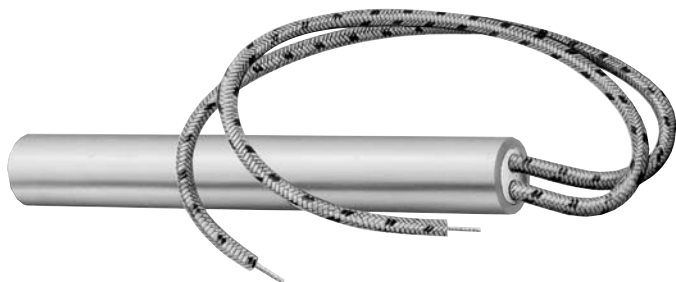


Non-Thermocouple Type F Heaters — 240V

Design Features

- * Pennybottom™ Copper Flat End Disc
- * Hi-Density Swaged Construction
- * 36" High Temperature Heater Flexible Leads
- * Computer Designed Distributed Wattage
- * Designed for 240VAC

Non-Thermocouple Type F Heaters — 240V

Cartridge Heater Diameter	Sheath Length in	Watts	Part Number	
			Incoe	TEMPCO
3/8" Actual .371	1 1/4	200	H-38017	HDP00050
	2 1/2	250	H-38025	HDP00051
	3	260	H-38030	HDP00052
	4	370	H-38040	HDP00053
	4 1/2	420	H-38045	HDP00054
	5	470	H-38050	HDP00055
	5 1/2	525	H-38055	HDP00056
	6	575	H-38060	HDP00057
	6 1/2	625	H-38065	HDP00058
	7	675	H-38070	HDP00059
	7 1/2	725	H-38075	HDP00060
	8	775	H-38080	HDP00061
	8 1/2	835	H-38085	HDP00062
	9	885	H-38090	HDP00063
	9 1/2	940	H-38095	HDP00064
	10	990	H-38100	HDP00065
1/2" Actual .496	10 1/2	1045	H-38105	HDP00066
	11 1/2	1150	H-38115	HDP00067
	13	1300	H-38130	HDP00068
	13 1/2	1350	H-38135	HDP00069
	3 1/2	420	H-12035	HDP00070
	4	490	H-12040	HDP00071
	4 1/2	550	H-12045	HDP00072
	5	625	H-12050	HDP00073
	5 1/2	700	H-12055	HDP00074
	6	775	H-12060	HDP00075
	6 1/2	850	H-12065	HDP00076
	7	900	H-12070	HDP00077
	7 1/2	975	H-12075	HDP00078
	8	1050	H-12080	HDP00079
	8 1/2	1100	H-12085	HDP00080
	9	1200	H-12090	HDP00081
	9 1/2	1250	H-12095	HDP00082
	10	1325	H-12100	HDP00083
	10 1/2	1400	H-12105	HDP00084
	11	1470	H-12110	HDP00085
	11 1/2	1525	H-12115	HDP00086
	12 1/2	1675	H-12125	HDP00087
	13 1/2	1800	H-12135	HDP00088
	14 1/2	1950	H-12145	HDP00089
	15 1/2	2100	H-12155	HDP00090
	16 1/2	2200	H-12165	HDP00091
	17 1/2	2300	H-12175	HDP00092
	18 1/2	2500	H-12185	HDP00093
	19 1/2	2875	H-12195	HDP00094

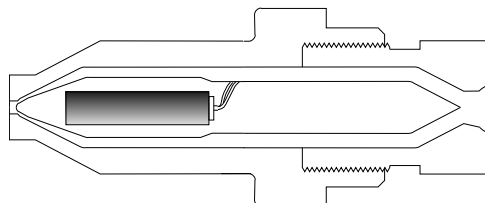

Available from Stock

For same day shipping when **2 PM** CST

ORDERED BY



Note: Custom Engineered/Manufactured Hi-Density Cartridge Heaters with Type F Flexible Lead Termination
Refer to ordering information on page 2-3.




STOCK OEM Replacement Hi-Density Cartridge Heaters — Underwater Pellatizer Die Heater

Design Features


- * Hi-Density Swaged Construction
- * 44" mica insulated 842°F (450°C) Lead Wires
- * 1" and 1/2" Diameter Heater Sheath
- * 16 Gauge Stainless Steel Mounting Flange
- * Designed for 240VAC




All Items Available from Stock

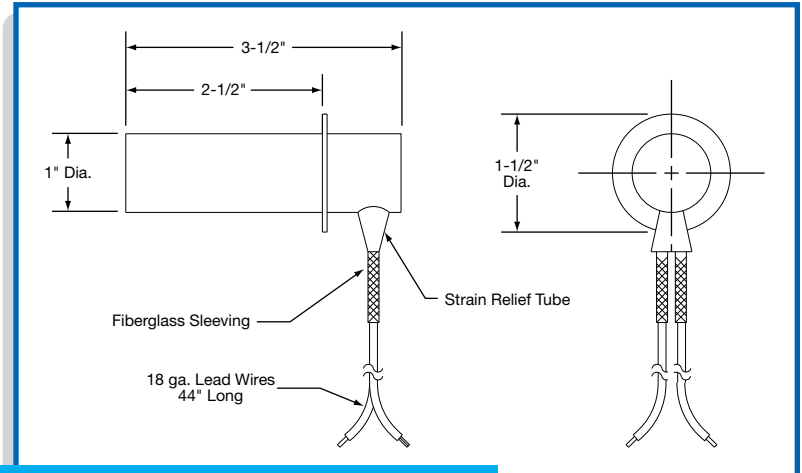

600W, 240V — Part Number HDC02661

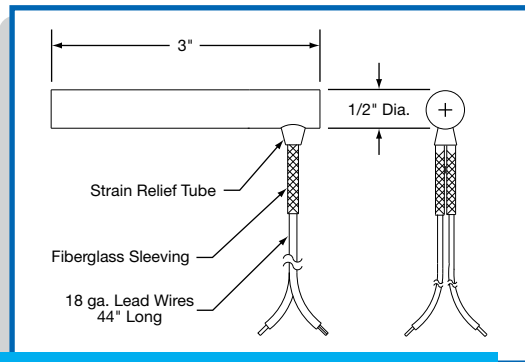

300W, 240V — Part Number HDC02684

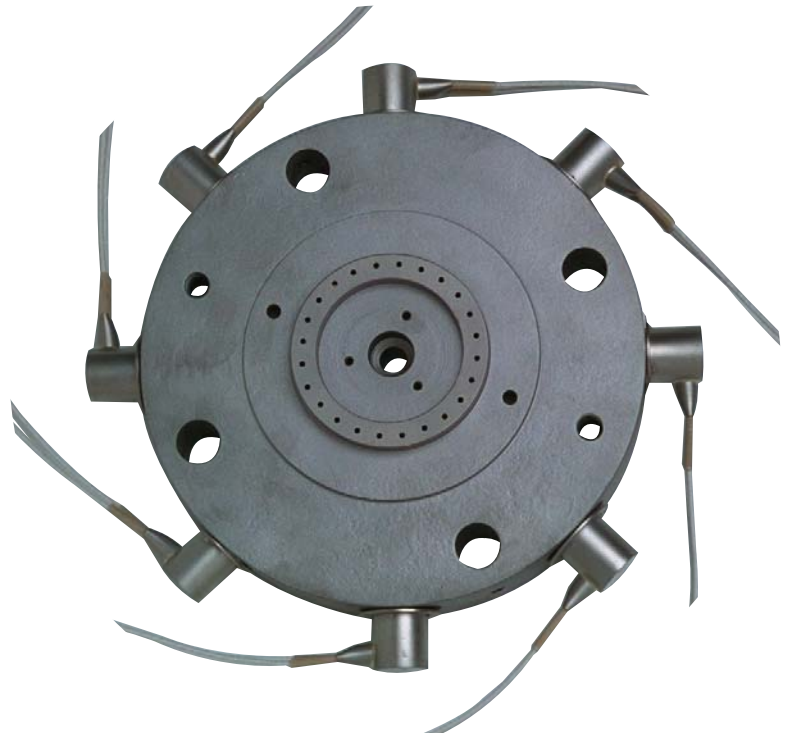



METRIC SIZES

Hi-Density

CARTRIDGE HEATERS

Standard Specifications and Tolerances of Hi-Density Cartridge Heaters in **Metric** sizes. If tighter tolerances are required consult Tempco.

LEAD LENGTH TOLERANCE

Up to 1000 mm: -15/+40 mm
1000 mm to 2000 mm: -25/+50 mm
Above 2000 mm: ± 100 mm

DIMENSIONAL SPECIFICATIONS

Nominal Diameter	6.5	8	10	12.5	16	20
Nominal Diameter Tolerance	-.02 mm, -.08 mm (-.0008", -.0031")					
	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)
Actual Diameter	6.45 (.254)	7.95 (.313)	9.95 (.392)	12.45 (.490)	15.95 (.628)	19.95 (.785)
Actual Diameter Tolerance	$\pm .03$ mm ($\pm .0012$ ")					
Minimum Length	25.4 (1)	25.4 (1)	25.4 (1)	25.4 (1)	25.4 (1)	31.75 (1-1/4)
Maximum Length	914 (36)	914 (36)	1219 (48)	1524 (60)	1829 (72)	1829 (72)
Length Tolerance						
Heaters up to 127 mm (5") long	± 2.4 (3/32)	± 2.4 (3/32)	± 2.4 (3/32)	± 2.4 (3/32)	± 2.4 (3/32)	± 3.2 (1/8)
Length Tolerance	$\pm 2\%$ of Sheath Length					
Heaters over 127 mm (5") long						
Camber Tolerance						
Heaters to 305 mm (12") long	.25 mm (.010") per 305 mm (12") of length					
Camber Tolerance						
Heaters over 305 mm (12") long	.50 mm (.020") per 305 mm (12") of length					

With some force, Tempco Hi-Density Cartridge Heaters will normally flex enough to fit into a straight reamed hole.

ELECTRICAL SPECIFICATIONS

Nominal Diameter	6.5	8	10	12.5	16	20
Maximum Voltage	260	260	260	380	460*	460*
Maximum Amperage						
(see next line for exceptions)	4.4	4.4	6.7	10.5	23	23
†Maximum Amperage for Types F, F1, W, W3, M3, S1 and S2 Terminations	3.0	3.0	5.5	7.6	9.7	9.7
Maximum Wattage at 260V	1140	1150	1740	2730	5980	5980
Maximum Wattage at 380V	—	—	—	3990	8740	8740
Maximum Wattage at 460V	—	—	—	—	10,580	10,580
Wattage Tolerance	Plus 5%, Minus 10%					
Resistance Tolerance	Plus 10%, Minus 5%					

*460V when applicable. Consult Tempco.

†Current carrying capacities are for ambient temperatures up to 482°F (250°C) with mica insulated lead wires.



Recommendations for Improving the Life of Tempco Hi-Density Metric Cartridge Heaters

Tempco Hi-Density Metric Cartridge Heaters have been widely used in many demanding and diverse applications for over 30 years. The commonly used basic applications are platen, plastic mold and die heating, liquid immersion and air heating.



Note: Selection of the wrong termination for the particular application is the major reason for all heater failures. However, failure to consider other important criteria can also have a negative effect on the life of the heater. To get the best performance and assure long life, it is important to carefully evaluate the following factors.

Operating Temperature

Operating temperature of a heater is a major factor in determining the life expectancy of a heating element. The heater life depends on the actual temperature of the resistance wire within the heater and not on the process operating temperature. The graph in Fig. 1 demonstrates the proper relationship between operating temperature and watt density; the higher the operating temperature, the lower the maximum recommended watt density.

Heater Watt Density

Cartridge heater watt density is defined as the wattage dissipated per square centimeter of the heated sheath surface. For a particular application a heater's watt density governs internal resistance wire temperature, which determines the outer sheath temperature. These factors are critical to the proper heating of the application and to the life expectancy of the heater. Special construction features that promote excellent heat transfer permit Hi-Density cartridge heaters to operate at higher watt densities while maintaining the lowest possible resistance wire temperatures of any style cartridge heater.

Heater watt density (w/cm^2) is calculated using the following formula:

$$\text{Watt Density} = \frac{\text{Heater wattage}}{\text{Heated length} \times \text{Heater diameter} \times 3.1416}$$

Heated length is the overall length of the heater minus any unheated (cold) sections. Standard Type N, Hi-Density Metric Cartridge Heaters have 9.5 mm at the lead end and 6.4 mm at the disc end unheated. This would mean a 100 mm long heater would have 84.1 mm effective heated length. Unheated sections vary with type of heater termination. For descriptions of terminations and options, see pages 2-37 through 2-53.


The graph in Fig. 1 shows the maximum recommended watt density for Hi-Density Metric Cartridge Heaters when used in a steel platen. Watt density limitations for various materials are given in the engineering section of this catalog. For liquid immersion heaters the maximum watt density depends on the type of liquid being heated. The more viscous, or thicker the liquid, the lower the maximum watt density. Higher watt density can cause the liquid to carbonize and accumulate on the heater sheath, which will cause premature heater failure. It is advisable to use heaters that have watt densities below the maximum recommended watt density to get the longest heater life. If the actual heater watt density is close to the maximum recommended watt density, you can correct the problem by

1. Increasing the number, diameter and length of heaters.
2. Lowering the total wattage; however, this may increase the heat-up time.
3. Obtaining tighter fit (see Fig. 2 — Determining Fit).

A Hi-Density cartridge heater designed at the maximum recommended watt density allows the smallest heater to be used to obtain the required wattage with good service life. All things being equal, using a lower watt density heater will typically provide optimized service life.

FIG.


1 Recommended Watt Density for Heating Metal Parts

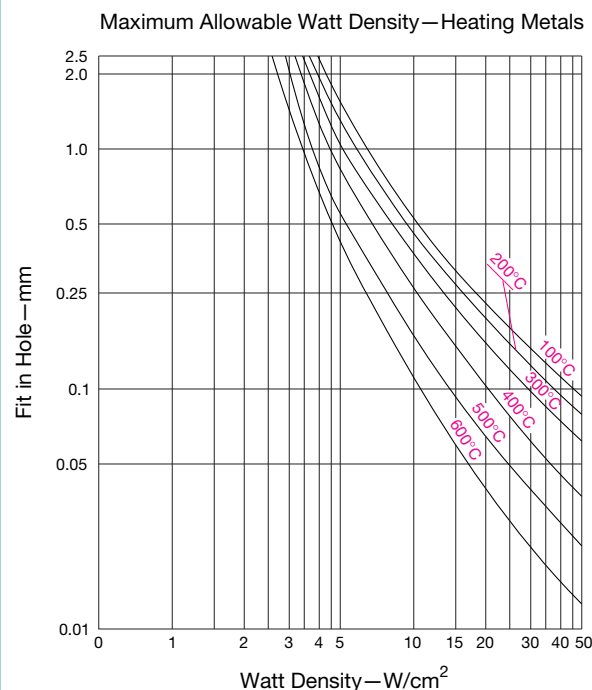

The graph shows the recommended maximum watt density for Tempco Hi-Density Metric Cartridge Heaters at different operating temperatures and fit, when the heater is installed in an oxidized mild steel block. The thermocouple is located 12.5 mm from the heater. When heating other materials, the data needs to be extrapolated based on the thermal conductivity of the material. Consult Tempco with your requirements.

FIG.

2 Determining Fit



CONTINUED



Metric Hi-Density

Recommendations for Improving the Life of Tempco Hi-Density Metric Cartridge Heaters

Continued from previous page...

Determining Fit

When heating a platen, mold, die or hot runner probe with Hi-Density Metric Cartridge Heaters inserted into drilled holes, fit is an important factor in determining the life expectancy of the heater. Fit is the difference between the minimum diameter of the cartridge heater and the maximum diameter of the hole. Unheated sections on a Hi-Density cartridge may be smaller in diameter due to swaging. To determine fit, use the smallest diameter on the heated length only.

Example: A 10 mm nominal OD Hi-Density cartridge heater has an actual diameter of $9.93 \pm .5$ mm, which translates to a minimum diameter of 9.88 mm. If used in a $10.0 \text{ mm} \pm .10$ mm hole, the fit would be .22 mm ($10.10 \text{ mm} - 9.88 \text{ mm} = 0.22 \text{ mm}$).

When medium watt density heaters (less than 9.30 watts per square centimeter) are used in low temperature applications (less than 600°F [315°C]) general purpose drills are commonly used to drill holes. The typical hole size may be 0.07 mm to 0.20 mm over the drill size. For higher watt density and/or higher temperature applications, we recommend that the holes are drilled and reamed for the tightest possible fit. In applications where precise temperature control and heat transfer properties are required, Hi-Density cartridge heaters can be centerless ground to ± 0.01 mm.

Although a tighter fit is desirable to efficiently transfer heat and to get long heater life, a looser fit will aid in installing and removing heaters, especially long heaters. We recommend that you apply Tempco's BNS anti-seize cartridge heater coating as it will improve heat transfer and will make the removal of heaters easier.

The graph in Fig 1. (page 2-27) shows the effect of fit in determining the maximum recommended watt density on a steel platen. As it is indicated in the graph, the tighter the fit, the higher the maximum recommended watt density.

Temperature Control and Location of Temperature Sensing Device

In order to better control the heater temperature and hence the resistance wire temperature, use of an appropriate temperature control and the proximity of the heater to the sensor is very important. The graph in Fig 1. (page 2-27) shows the effect of operating temperature in determining the maximum recommended watt density on a steel platen where the sensor is located 12.5 mm from the heater. Higher watt density heaters can generate heat faster than the surrounding area's ability to dissipate heat. This creates a thermal lag between the heater and the sensor. The closer the sensor to the heater, the better you can control the heater temperature. By keeping the sensor further from the heater, temperature gradients of several hundred degrees can be observed in many applications, especially during initial start-up and heavy thermal cycling. Although the set operating temperature may be low, the heater may be running at a very high temperature. This is a common cause of heater failure. This can be minimized using time proportional and PID functions of the temperature controllers. See Section 13 for temperature controllers and Section 14 for thermocouples and sensors.

Power Control

Power control methods affect the life expectancy of heating elements. In general, although economical, on-off controls increase thermal fatigue and oxidation rate on heating elements by causing wide temperature swings of the internal heating element. Silicon Controlled Rectifiers (SCRs), Mercury Relays and Solid State Power Controls can increase the life expectancy of heating elements by reducing the temperature swings of the internal heating element. See Section 13 for power controls.

Important Installation Considerations

1. For closest fit and best heat transfer, use reamed holes.
2. When possible, drill holes through the object being heated. This will make heater removal easier.
3. When using an anti-seize coating like Tempco's BNS spray or paste, **do not apply** over lead wires or any other current carrying conductors.
4. When using insulated tape or sleeving, check to make sure it is rated for the temperature of the application. Lower temperature rated materials can contain an adhesive or binder that can carbonize and become electrically conductive.
5. When using heaters near their maximum recommended watt density, it is recommended that the temperature sensing probes be located approximately 12.5 mm from the heater sheath.
6. Lead wires should not be located in the hole containing the cartridge heater during operation. This may cause the lead wires to be exposed to temperatures above their rated temperature.
7. When used in a vacuum application, make sure the lead end of the heater is outside the vacuum. If the lead has to be in the vacuum, consult Tempco for specific recommendations.
8. Many applications will subject a heater's electrical terminations to one or more of the following potentially damaging conditions:

- Moisture
- Flexing
- Oil and other contaminants
- Abrasion
- High temperature

Note: To protect the heater from damage in these harsh environments, Tempco has a wide selection of terminations and options available. See pages 2-37 through 2-53 for details.



CALCULATING WATTAGE REQUIREMENTS

Formulas and related data to calculate wattage requirements are detailed in the Engineering Section located at the back of this catalog. For new applications it is recommended that testing under actual operating conditions be performed to confirm wattage and watt density calculations.

An excellent evaluation method is to power up a heater with the calculated wattage and watt density through a variable voltage transformer. By changing the voltage and therefore the heater output, thermocouples sensing heater and process temperature can verify the design.



Standard (Non-Stock) Hi-Density Metric Cartridge Heaters

6.5 mm Diameter Actual 6.45 mm (.254")

Sheath Length (mm)	Watts	Watt Density (W/cm ²)	Part Number 220V
40	50	9	HDM00001
40	75	13	HDM00002
40	100	18	HDM00003
40	125	22	HDM00004
40	150	27	HDM00005
60	50	5	HDM00006
60	100	10	HDM00007
60	150	15	HDM00008
60	200	21	HDM00009
60	250	26	HDM00010

Sheath Length (mm)	Watts	Watt Density (W/cm ²)	Part Number 220V
80	100	7	HDM00011
80	150	11	HDM00012
80	200	15	HDM00013
80	300	22	HDM00014
80	400	29	HDM00015
100	100	6	HDM00016
100	200	11	HDM00017
100	300	17	HDM00018
100	400	22	HDM00019
100	500	28	HDM00020
130	100	4	HDM00021
130	250	10	HDM00022
130	400	17	HDM00023
130	500	21	HDM00024
130	600	25	HDM00025

8 mm Diameter Actual 7.95 mm (.313")

Sheath Length (mm)	Watts	Watt Density (W/cm ²)	Part Number 220V
40	50	7	HDM00026
40	75	11	HDM00027
40	100	14	HDM00028
40	150	22	HDM00029
40	200	29	HDM00030
60	75	6	HDM00031
60	150	13	HDM00032
60	200	17	HDM00033
60	250	21	HDM00034
60	300	25	HDM00035
80	100	6	HDM00036
80	200	12	HDM00037
80	300	18	HDM00038
80	400	24	HDM00039
80	500	29	HDM00040
100	100	5	HDM00041
100	250	11	HDM00042
100	400	18	HDM00043
100	500	23	HDM00044
100	600	27	HDM00045

Sheath Length (mm)	Watts	Watt Density (W/cm ²)	Part Number 220V
130	200	7	HDM00046
130	350	12	HDM00047
130	500	17	HDM00048
130	600	20	HDM00049
130	700	24	HDM00050
160	200	5	HDM00051
160	400	11	HDM00052
160	600	16	HDM00053
160	700	19	HDM00054
160	900	24	HDM00055
200	300	6	HDM00056
200	500	11	HDM00057
200	700	15	HDM00058
200	900	19	HDM00059



Note: Part Numbers above are for Hi-Density Cartridge Heaters terminated with Type N leads, 250 mm (10") long. See pages 2-37 through 2-49 for other terminations.

Metric Size Cartridge Heaters are made-to-order only. **Standard lead time is 3 weeks.**

Custom Engineered/Manufactured Hi-Density Metric Cartridge Heaters

Refer to ordering information on page 2-31.

Cartridge Heaters

Metric Hi-Density



Standard (Non-Stock) Hi-Density Metric Cartridge Heaters

10 mm Diameter Actual 9.95 mm (.392")

Sheath Length (mm)	Watts	Watt Density (W/cm ²)	Part Number 220V
40	50	6	HDM00060
40	100	12	HDM00061
40	150	17	HDM00062
40	200	23	HDM00063
40	250	29	HDM00064
60	100	7	HDM00065
60	150	10	HDM00066
60	200	13	HDM00067
60	300	20	HDM00068
60	400	27	HDM00069
80	100	5	HDM00070
80	200	9	HDM00071
80	300	14	HDM00072
80	400	19	HDM00073
80	600	28	HDM00074
100	200	7	HDM00075
100	300	11	HDM00076
100	400	15	HDM00077
100	500	18	HDM00078
100	700	25	HDM00079
130	200	5	HDM00080
130	400	11	HDM00081
130	600	16	HDM00082

Sheath Length (mm)	Watts	Watt Density (W/cm ²)	Part Number 220V
130	800	22	HDM00083
130	1000	27	HDM00084
160	200	4	HDM00085
160	500	11	HDM00086
160	800	17	HDM00087
160	1000	22	HDM00088
160	1200	26	HDM00089
200	300	5	HDM00090
200	600	10	HDM00091
200	1000	17	HDM00092
200	1200	20	HDM00093
200	1400	24	HDM00094
250	400	5	HDM00095
250	700	9	HDM00096
250	1000	13	HDM00097
250	1400	20	HDM00098
300	500	6	HDM00099
300	1000	11	HDM00100
300	1500	17	HDM00101

12.5 mm Diameter Actual 12.45 mm (.490")

Sheath Length (mm)	Watts	Watt Density (W/cm ²)	Part Number 220V
60	100	6	HDM00102
60	200	12	HDM00103
60	300	17	HDM00104
60	400	23	HDM00105
60	500	29	HDM00106
80	150	6	HDM00107
80	300	12	HDM00108
80	400	16	HDM00109
80	500	20	HDM00110
80	700	28	HDM00111
100	200	6	HDM00112
100	400	12	HDM00113
100	600	18	HDM00114
100	800	24	HDM00115
100	1000	30	HDM00116
130	250	6	HDM00117

Sheath Length (mm)	Watts	Watt Density (W/cm ²)	Part Number 220V
130	500	11	HDM00118
130	800	18	HDM00119
130	1000	22	HDM00120
130	1400	31	HDM00121
160	300	5	HDM00122
160	600	11	HDM00123
160	1000	18	HDM00124
160	1400	25	HDM00125
160	1700	30	HDM00126
200	400	6	HDM00127
200	700	10	HDM00128
200	1000	14	HDM00129
200	1500	21	HDM00130
200	2000	28	HDM00131
250	500	5	HDM00132
250	1000	11	HDM00133
250	1500	16	HDM00134
250	2000	22	HDM00135
300	600	5	HDM00136
300	1500	13	HDM00137
300	2000	18	HDM00138



Note: Part Numbers above are for Hi-Density Cartridge Heaters terminated with Type N leads, 250 mm (10") long. See pages 2-37 through 2-49 for other terminations.

Metric Size Cartridge Heaters are made-to-order only. Standard lead time is 3 weeks.

Custom Engineered/Manufactured Hi-Density Metric Cartridge Heaters

Refer to ordering information on page 2-31



Standard (Non-Stock) Hi-Density Metric Cartridge Heaters

16 mm Diameter Actual 15.95 mm (.628")

Sheath Length (mm)	Watts	Watt Density (W/cm ²)	Part Number 220V
60	100	5	HDM00139
60	300	14	HDM00140
60	400	18	HDM00141
60	500	23	HDM00142
60	700	32	HDM00143
80	200	6	HDM00144
80	400	12	HDM00145
80	600	19	HDM00146
80	800	25	HDM00147
80	1000	31	HDM00148
100	300	7	HDM00149
100	500	12	HDM00150
100	700	17	HDM00151
100	1000	24	HDM00152
100	1300	31	HDM00153
130	400	7	HDM00154

Sheath Length (mm)	Watts	Watt Density (W/cm ²)	Part Number 220V
130	600	10	HDM00155
130	800	14	HDM00156
130	1200	21	HDM00157
130	1600	28	HDM00158
160	500	7	HDM00159
160	700	10	HDM00160
160	1000	14	HDM00161
160	1500	21	HDM00162
160	2000	28	HDM00163
200	600	6	HDM00164
200	1000	11	HDM00165
200	1500	16	HDM00166
200	2000	22	HDM00167
250	700	6	HDM00168
250	1500	13	HDM00169
250	2000	17	HDM00170
300	1000	7	HDM00171
300	1500	11	HDM00172
300	2000	14	HDM00173

20 mm Diameter Actual 19.95 mm (.785")

Sheath Length (mm)	Watts	Watt Density (W/cm ²)	Part Number 220V
60	250	8	HDM00174
60	400	13	HDM00175
60	300	10	HDM00176
60	500	17	HDM00177
80	500	12	HDM00178
80	800	19	HDM00179
100	650	12	HDM00180
100	1000	18	HDM00181
130	300	4	HDM00182
130	800	11	HDM00183
130	1250	17	HDM00184
160	800	9	HDM00185

Sheath Length (mm)	Watts	Watt Density (W/cm ²)	Part Number 220V
160	1000	11	HDM00186
160	1250	13	HDM00187
200	1000	8	HDM00188
200	1200	10	HDM00189
200	1600	14	HDM00190
250	1250	8	HDM00191
250	1750	12	HDM00192
250	2000	13	HDM00193
300	1600	9	HDM00194
300	2200	12	HDM00195



Note: Part Numbers above are for Hi-Density Cartridge Heaters terminated with Type N leads, 250 mm (10") long. See pages 2-37 through 2-49 for other terminations.

Ordering Information

Catalog Heaters

Order by Catalog Part Number from the Standard Sizes and Ratings List on the preceding pages. Note that Part Numbers shown are for heaters with Type N Termination (250 mm leads). Available Terminations and Optional Features can be found on pages 2-37 through 2-53.

Custom Engineered/Manufactured Heaters

Understanding that an electric heater can be very application specific, for sizes and ratings not listed, **TEMPCO** will design and manufacture a Hi-Density Metric Cartridge Heater to meet your requirements. **Standard lead time is 3 weeks.**


Please Specify the following:

- ☐ Diameter
- ☐ Length
- ☐ Wattage
- ☐ Voltage
- ☐ Termination types (see pages 2-37 through 2-49)
- ☐ Lead Length
- ☐ Cable/Braid length
- ☐ Special Features



Low-Density CARTRIDGE HEATER FEATURES

*An Economical and Reliable Cartridge Heater,
Used in Applications Requiring
Lower Operating Temperatures and Watt Densities*

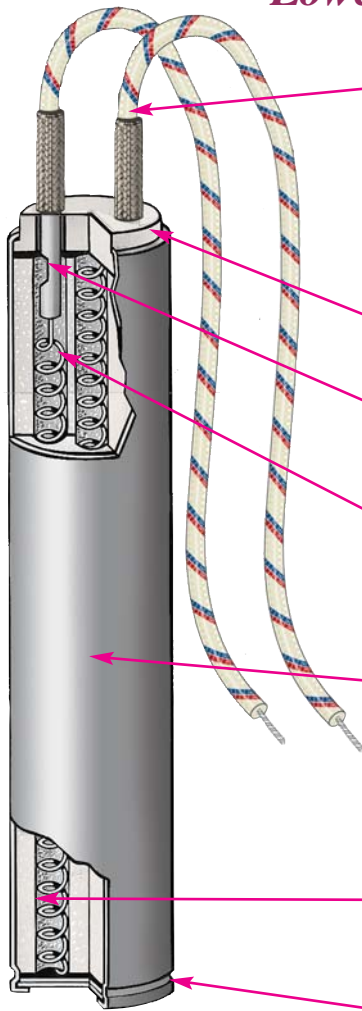

A The standard termination for Low-Density Cartridge Heaters is Type F, consisting of 10" (254 mm) internally connected flexible stranded nickel wire leads with high temperature insulation, UL approved for 300 Volt or 600 Volt service, rated at a continuous operating temperature of 482°F (250°C).



Note: To meet the requirements of your application we offer over 40 standard termination styles to select from that will solve many of the most common application problems. See pages 2-37 through 2-49.

B Ceramic end cap protects the cartridge internally from outside contamination.

C Resistance wire and lead wires are mechanically spliced with heavy wall nickel connectors for a positive electrical connection.

D Helically wound Nickel-Chrome resistance wire is evenly stretched and strung through ceramic insulators.

E Alloy 304 Stainless Steel is used to provide high temperature strength, good thermal conductivity and resistance to oxidation up to 1200°F (650°C). Alloy 304 is a Nickel-Chromium Stainless Steel. For immersion heating of corrosive solutions other sheath materials are available; consult Tempco.

F Specially selected grain size high purity Magnesium Oxide (MgO) is used to fill all remaining space inside the ceramic insulator, thus increasing thermal conductivity, dielectric strength and heater life.

G Sheath is roll crimped over a 304 Stainless Steel end disc. A mica spacer electrically insulates the heater core from the end disc. This style end seal is not moisture proof.

Agency Approvals



Low Density Cartridge Heaters are UL recognized and CSA certified in many design variations under UL File Number E65652 and CSA File Number 043099.

If you require UL and/or CSA Agency Approval, please specify when ordering.



Typical Applications

- * Heat Sealing Equipment
- * Laminating Equipment
- * Packaging Equipment
- * Labeling Machines
- * Molds and Dies
- * Food Processing
- * Refrigeration
- * Shoe Machinery
- * Glue Guns
- * Wax Pots
- * Heating Liquids
- * Heating Gases

Tempco Low-Density Cartridge Heaters are an excellent, cost effective choice without compromising quality for Original Equipment Manufacturers (OEMs) consuming large quantities of cartridge heaters for their equipment.

Product Inventory Available for Viewing and Selection @ www.tempco.com



Low-Density Cartridge Heater Specifications

Standard Specifications and Tolerances of Low Density Cartridge Heaters.
If tighter tolerances are required consult Tempco.

PERFORMANCE RATINGS

Maximum Temperature: 1200°F (650°C)

Maximum Watt Density: 30-45 W/in² (4.6-7.0 W/cm²) depending on heater size and operating temperature.

DIMENSIONAL SPECIFICATIONS

Nominal Diameter	3/16	1/4	3/8	1/2	5/8	3/4	7/8	15/16	1	1-1/4
Actual Diameter- in.	.185	.247	.372	.496	.621	.745	.870	.933	.995	1.245
Actual Diameter-(mm)	(4.70)	(6.27)	(9.45)	(12.60)	(15.77)	(18.92)	(22.10)	(23.70)	(25.27)	(31.62)
Diameter Tolerance	±.002 (.051 mm)									
Length Tolerance	±1/16 (1.59 mm) up to 6" (152.4 mm) long; ±1/8" (3.18 mm) over 6" long									
Camber Tolerance	.010" (.254 mm) per foot of length									

ELECTRICAL SPECIFICATIONS

Nominal Diameter	3/16	1/4	3/8	1/2	5/8	3/4	7/8	15/16	1	1-1/4
Maximum Voltage	240	240	240	240	480*	480*	480*	480*	480*	480*
Maximum Amperage	1.5	3.5	6	8	10	15	15	15	25	30
Maximum Wattage	Consult Tempco									
Wattage Tolerance	Plus 5%, Minus 10%									
Resistance Tolerance	Plus 10%, Minus 5%									

*480V when applicable. Consult Tempco.

Standard (Non-Stock) Low-Density Cartridge Heaters

3/16" Diameter Actual .185" (4.70 mm)

Sheath Length		Watts	Watt Density		Part Number	
			W/in ²	W/cm ²	120V	240V
1	25.4	15	34	5.3	LDC00001	—
1½	38.1	20	30	4.7	LDC00002	—
2	50.8	30	31	4.9	LDC00003	—
2½	63.5	40	32	5.0	LDC00004	—
3	76.2	45	29	4.5	LDC00005	—
4	101.6	65	31	4.7	LDC00006	—
5	127.0	80	29	4.6	LDC00007	—
6	152.4	100	30	4.7	LDC00008	—
7	177.8	125	32	5.0	LDC00009	—
8	203.2	150	33	5.2	LDC00010	—
10	254.0	170	30	4.7	LDC00011	—

1/4" Diameter Actual .247" (6.27 mm)

Sheath Length		Watts	Watt Density		Part Number	
			W/in ²	W/cm ²	120V	240V
1	25.4	20	34	5.3	LDC00012	—
1	25.4	42	71	11.1	LDC00013	—
1½	38.1	20	23	3.5	LDC00014	—
2	50.8	32	27	4.2	LDC00015	—
2	50.8	40	34	5.3	LDC00016	—
2	50.8	50	42	6.6	LDC00017	—
2½	63.5	30	19	3.0	LDC00018	—
3	76.2	32	16	2.5	LDC00019	—
3	76.2	50	25	3.9	LDC00020	—
3½	88.9	80	34	5.3	LDC00021	—
4	101.6	100	36	5.6	LDC00022	LDC00023
5	127.0	125	35	5.5	LDC00024	—
6	152.4	150	35	5.4	LDC00025	LDC00026
7	177.8	100	20	3.0	LDC00027	LDC00028
8	203.2	200	34	5.3	LDC00029	LDC00030
10	254.0	250	34	5.2	LDC00031	LDC00032



Note: Part Numbers above are for Low Density Cartridge Heaters terminated with Type F flexible leads, 10" long. See pages 2-37 through 2-49 for other terminations.

Low-Density Cartridge Heaters are made-to-order only. Standard lead time is 3 weeks.

Custom Engineered/Manufactured Low-Density Cartridge Heaters

Refer to ordering information on page 2-36.

CONTINUED

Cartridge Heaters



Low-Density

Standard (Non-Stock) Low-Density Cartridge Heaters

Continued from previous page...

3/8" Diameter Actual .372" (9.45 mm)

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
1½	38.1	15	13	2.0	LDC00033	—
1½	38.1	40	34	5.3	LDC00034	—
2	50.8	50	28	4.4	LDC00035	—
2½	63.5	75	32	4.9	LDC00036	—
2½	63.5	100	42	6.6	LDC00037	—
3	76.2	100	34	5.3	LDC00038	—
3½	88.9	120	34	5.3	LDC00039	LDC00040
4	101.6	75	18	2.8	LDC00041	LDC00042
4	101.6	130	32	4.9	LDC00043	LDC00044
4	101.6	150	36	5.6	LDC00045	LDC00046
4	101.6	180	44	6.8	LDC00047	LDC00048
4½	114.3	75	16	2.5	LDC00049	LDC00050
4½	114.3	150	32	4.9	LDC00051	LDC00052
5	127.0	150	28	4.4	LDC00053	LDC00054
5	127.0	200	38	5.8	LDC00055	LDC00056
5½	139.7	200	34	5.3	LDC00057	LDC00058
6	152.4	225	35	5.4	LDC00059	LDC00060
6	152.4	250	39	6.0	LDC00061	LDC00062
7	177.8	200	26	4.0	LDC00063	LDC00064
7	177.8	265	35	5.4	LDC00065	LDC00066
8	203.2	300	34	5.3	LDC00067	LDC00068
9	228.6	350	35	5.4	LDC00069	LDC00070
9½	241.3	300	28	4.4	LDC00071	LDC00072
10	254.0	375	34	5.2	LDC00073	LDC00074
12	304.8	425	31	4.9	LDC00075	LDC00076
12	304.8	450	33	5.1	LDC00077	LDC00078
12	304.8	475	35	5.4	LDC00079	LDC00080
12	304.8	500	37	5.7	LDC00081	LDC00082
14	355.6	500	31	4.9	LDC00083	LDC00084
16	406.4	550	30	4.7	LDC00085	LDC00086
20	508.0	200	9	1.3	LDC00087	LDC00088
20	508.0	650	28	4.4	LDC00089	LDC00090
22	558.8	800	32	4.9	—	LDC00091
24	609.6	750	27	4.2	—	LDC00092

1/2" Diameter Actual .496" (12.60 mm)

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
1½	38.1	60	38	5.9	LDC00093	—
2	50.8	75	32	4.9	LDC00094	—
2½	63.5	40	13	2.0	LDC00095	—
2½	63.5	125	40	6.2	LDC00096	—
3	76.2	150	38	5.9	LDC00097	LDC00098
3½	88.9	150	32	4.9	LDC00099	LDC00100
3½	88.9	90	17	2.6	LDC00101	LDC00102
4	101.6	180	33	5.1	LDC00103	LDC00104
4½	114.3	200	32	4.9	LDC00105	—
5	127.0	200	28	4.4	LDC00106	LDC00107
5½	139.7	300	38	5.9	LDC00108	LDC00109
6	152.4	150	17	2.7	LDC00110	LDC00111
6	152.4	250	29	4.5	LDC00112	LDC00113
6	152.4	300	35	5.4	LDC00114	LDC00115
6½	165.1	300	32	4.9	LDC00116	LDC00117
7	177.8	275	27	4.2	LDC00118	LDC00119
7	177.8	350	34	5.3	LDC00120	LDC00121
7½	190.5	350	32	4.9	LDC00122	LDC00123
8	203.2	400	34	5.3	LDC00124	LDC00125
8	203.2	425	36	5.6	LDC00126	LDC00127
8½	215.9	400	32	4.9	LDC00128	LDC00129
9	228.6	450	34	5.2	LDC00130	LDC00131
10	254.0	500	34	5.2	LDC00132	LDC00133
10½	266.7	500	32	4.9	LDC00134	LDC00135
11	279.4	550	33	5.2	LDC00136	LDC00137
12	304.8	500	28	4.3	LDC00138	LDC00139
12	304.8	600	33	5.1	LDC00140	LDC00141
14	355.6	600	28	4.4	LDC00142	LDC00143
15	381.0	650	29	4.4	LDC00144	LDC00145
15	381.0	750	33	5.1	LDC00146	LDC00147
16	406.4	500	21	3.2	LDC00148	LDC00149
16	406.4	675	28	4.3	LDC00150	LDC00151
18	457.2	725	26	4.1	LDC00152	LDC00153
18	457.2	800	29	4.5	—	LDC00154
20	508.0	750	24	3.8	LDC00155	LDC00156
21	533.4	750	23	3.6	LDC00157	LDC00158
24	609.6	500	14	2.1	LDC00159	LDC00160
24	609.6	1000	27	4.2	—	LDC00161
25	635.0	1100	29	4.4	—	LDC00162



Note: Part Numbers above are for Low Density Cartridge Heaters terminated with Type F flexible leads, 10" long. See pages 2-37 through 2-49 for other terminations.

Low-Density Cartridge Heaters are made-to-order only. Standard lead time is 3 weeks.

Custom Engineered/Manufactured Low-Density Cartridge Heaters

Refer to ordering information on page 2-36.



Standard (Non-Stock) Low-Density Cartridge Heaters

5/8" Diameter Actual .621" (15.77 mm)

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
1½	38.1	100	51	7.9	LDC00163	LDC00164
2	50.8	100	34	5.3	LDC00165	LDC00166
2½	63.5	80	20	3.2	LDC00167	LDC00168
2½	63.5	150	38	5.9	LDC00169	LDC00170
3	76.2	175	36	5.5	LDC00171	LDC00172
3½	88.9	190	32	5.0	LDC00173	LDC00174
4	101.6	200	29	4.5	LDC00175	LDC00176
4½	114.3	240	31	4.7	LDC00177	LDC00178
4½	114.3	275	35	5.4	LDC00179	LDC00180
5	127.0	200	23	3.5	LDC00181	LDC00182
5	127.0	250	28	4.4	LDC00183	LDC00184
5	127.0	375	42	6.6	LDC00185	LDC00186
5½	139.7	200	20	3.2	LDC00187	LDC00188
5½	139.7	285	29	4.5	LDC00189	LDC00190
5½	139.7	510	52	8.1	LDC00191	—
5½	149.2	350	33	5.1	LDC00192	LDC00193
6	152.4	200	19	2.9	LDC00194	LDC00195
6	152.4	300	28	4.3	LDC00196	LDC00197
6	152.4	350	32	5.0	LDC00198	LDC00199
6½	165.1	350	30	4.6	LDC00200	LDC00201
7	177.8	375	29	4.6	LDC00202	LDC00203
8	203.2	400	27	4.2	LDC00204	LDC00205
8½	215.9	425	27	4.2	LDC00206	LDC00207
9	228.6	450	27	4.2	LDC00208	LDC00209
9½	241.3	475	27	4.2	LDC00210	LDC00211
10	254.0	500	27	4.2	LDC00212	LDC00213
11	279.4	550	27	4.1	LDC00214	LDC00215
12	304.8	250	11	1.7	LDC00216	LDC00217
12	304.8	500	22	3.4	LDC00218	LDC00219
12	304.8	600	27	4.1	LDC00220	LDC00221
12	304.8	700	31	4.8	LDC00222	LDC00223
12¾	314.3	450	19	3.0	LDC00224	LDC00225
14	355.6	700	26	4.1	LDC00226	LDC00227
15	381.0	750	26	4.1	LDC00228	LDC00229
16	406.4	800	26	4.1	LDC00230	LDC00231
17	431.8	1000	31	4.8	LDC00232	LDC00233
18	457.2	725	21	3.3	LDC00234	LDC00235
18	457.2	800	23	3.6	LDC00236	LDC00237
20	508.0	900	24	3.6	LDC00238	LDC00239
21	533.4	1000	25	3.9	—	LDC00240
22	558.8	2000	47	7.3	—	LDC00241
24	609.6	2000	43	6.7	—	LDC00242
25	635.0	768	16	2.5	LDC00243	—
25	635.0	1100	23	3.5	—	LDC00244
25	635.0	1500	31	4.8	LDC00245	LDC00246
27	685.8	1200	23	3.6	LDC00247	—
28	711.2	2000	37	5.7	—	LDC00248
30	762.0	2000	35	5.4	—	LDC00249
31	787.4	2000	33	5.2	—	LDC00250
34	863.6	2000	30	4.7	—	LDC00251
36	914.4	2000	29	4.4	—	LDC00252
38	965.2	2000	27	4.2	—	LDC00253
38¾	979.5	1200	16	2.5	LDC00254	—

3/4" Diameter Actual .745" (18.92 mm)

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
3	76.2	225	38	5.9	LDC00255	LDC00256
3½	88.9	225	32	4.9	LDC00257	LDC00258
3½	88.9	250	35	5.5	LDC00259	LDC00260
4	101.6	300	36	5.6	LDC00261	LDC00262
5	127.0	350	33	5.1	LDC00263	LDC00264
6	152.4	170	13	2.0	LDC00265	LDC00266
6	152.4	350	27	4.2	LDC00267	LDC00268
6	152.4	400	31	4.8	LDC00269	LDC00270
7	177.8	350	23	3.5	LDC00271	LDC00272
7	177.8	450	29	4.6	LDC00273	LDC00274
7	177.8	535	35	5.4	LDC00275	LDC00276
8	203.2	350	20	3.1	LDC00277	LDC00278
8	203.2	500	28	4.4	LDC00279	LDC00280
8	203.2	600	34	5.3	LDC00281	LDC00282
8½	215.9	675	36	5.6	LDC00283	LDC00284
9	228.6	350	17	2.7	LDC00285	LDC00286
9	228.6	550	27	4.3	LDC00287	LDC00288
9½	241.3	575	27	4.2	LDC00289	LDC00290
10	254.0	600	27	4.2	LDC00291	LDC00292
10	254.0	800	36	5.5	LDC00293	LDC00294
11	279.4	675	27	4.2	LDC00295	LDC00296
12	304.8	750	28	4.3	LDC00297	LDC00298
12	304.8	1000	37	5.7	LDC00299	LDC00300
13½	342.9	600	20	3.0	LDC00301	LDC00302
14	355.6	1000	31	4.9	LDC00303	LDC00304
16	406.4	950	26	4.0	LDC00305	LDC00306
18	457.2	950	23	3.6	LDC00307	LDC00308
18	457.2	1100	27	4.1	—	LDC00309
20	508.0	1000	22	3.4	LDC00310	LDC00311
21	533.4	1150	24	3.7	LDC00312	LDC00313
30	762.0	1800	26	4.0	—	LDC00314
31	787.4	1800	25	3.9	—	LDC00315

CONTINUED



Note: Part Numbers above are for Low Density Cartridge Heaters terminated with Type F flexible leads, 10" long. See pages 2-37 through 2-49 for other terminations.

Low-Density Cartridge Heaters are made-to-order only. Standard lead time is 3 weeks.

Custom Engineered/Manufactured Low-Density Cartridge Heaters

Refer to ordering information on page 2-36.

Cartridge Heaters



Low-Density

Standard (Non-Stock) Low-Density Cartridge Heaters

7/8" Diameter Actual .870" (22.10 mm)

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
3½	88.9	250	30	4.7	LDC00316	LDC00317
4	101.6	300	31	4.8	LDC00318	LDC00319
5	127.0	400	32	5.0	LDC00320	LDC00321
6	152.4	475	31	4.9	LDC00322	LDC00323
7	177.8	525	29	4.6	LDC00324	LDC00325
8	203.2	550	27	4.1	LDC00326	LDC00327
10	254.0	600	23	3.6	LDC00328	LDC00329
11	279.4	600	21	3.2	LDC00330	LDC00331
11	279.4	700	24	3.8	LDC00332	LDC00333
12	304.8	850	27	4.2	LDC00334	LDC00335
13	330.2	900	26	4.1	LDC00336	LDC00337
15	381.0	950	24	3.7	LDC00338	LDC00339
18	457.2	1000	21	3.2	LDC00340	LDC00341
21½	546.1	1000	17	2.7	—	LDC00342

1" Diameter Actual .995" (25.27 mm)

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
3	76.2	250	32	4.9	LDC00373	LDC00374
4	101.6	300	27	4.2	LDC00375	LDC00376
5	127.0	375	27	4.1	LDC00377	LDC00378
6	152.4	500	29	4.5	LDC00379	LDC00380
8	203.2	600	25	3.9	LDC00381	LDC00382
9	228.6	700	26	4.1	LDC00383	LDC00384
10	254.0	800	27	4.2	LDC00385	LDC00386
10¾	273.1	600	19	2.9	LDC00387	LDC00388
10¾	273.1	850	26	4.1	LDC00389	LDC00390
12	304.8	1000	28	4.3	LDC00391	LDC00392
14	355.6	1100	26	4.0	LDC00393	LDC00394
18	457.2	1250	23	3.5	LDC00395	LDC00396
22¼	565.2	1000	15	2.3	LDC00397	LDC00398
23	584.2	1000	14	2.2	LDC00399	LDC00400
23½	596.9	1500	21	3.2	—	LDC00401
24	609.6	1500	20	3.1	—	LDC00402

15/16" Diameter Actual .933" (23.70 mm)

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
3	76.2	275	37	5.8	LDC00343	LDC00344
4	101.6	325	32	4.9	LDC00345	LDC00346
5	127.0	140	11	1.6	LDC00347	LDC00348
5	127.0	400	30	4.7	LDC00349	LDC00350
6	152.4	450	28	4.3	LDC00351	LDC00352
7	177.8	450	24	3.6	LDC00353	LDC00354
7¾	187.3	270	13	2.1	LDC00355	LDC00356
8	203.2	500	23	3.5	LDC00357	LDC00358
8½	215.9	500	21	3.3	LDC00359	LDC00360
10	254.0	600	21	3.3	LDC00361	LDC00362
11	279.4	625	20	3.1	LDC00363	LDC00364
12	304.8	700	21	3.2	LDC00365	LDC00366
15	381.0	850	20	3.1	LDC00367	LDC00368
18	457.2	1000	19	3.0	LDC00369	LDC00370
24	609.6	1400	20	3.1	LDC00371	LDC00372

1-1/4" Diameter Actual 1.245" (31.62 mm)

Sheath Length		Watts	Watt Density		Part Number	
in	mm		W/in ²	W/cm ²	120V	240V
3¼	82.6	400	37	5.7	LDC00403	LDC00404
5	127.0	450	25	3.9	LDC00405	LDC00406
6	152.4	500	23	3.6	LDC00407	LDC00408
6	152.4	800	37	5.7	LDC00409	LDC00410
7	177.8	550	22	3.3	LDC00411	LDC00412
7	177.8	1000	39	6.1	LDC00413	LDC00414
9	228.6	675	20	3.1	LDC00415	LDC00416
10	254.0	1000	27	4.2	LDC00417	LDC00418
12	304.8	1000	22	3.4	LDC00419	LDC00420
14	355.6	2000	38	5.8	—	LDC00421
15	381.0	1250	22	3.4	—	LDC00422
16½	419.1	1000	16	2.5	LDC00423	LDC00424
22½	571.5	2200	25	3.9	—	LDC00425
24	609.6	2400	26	4.0	—	LDC00426



Note: Part Numbers above are for Low-Density Cartridge Heaters terminated with Type F flexible leads, 10" long.

Low-Density Cartridge Heaters are made-to-order only. **Standard lead time is 3 weeks.**
See pages 2-37 through 2-49 for other terminations.

Ordering Information

Catalog Heaters

Order by Catalog Part Number from the Standard Sizes and Ratings List on the preceding pages. Note that Part Numbers shown are for heaters with Type F Termination (10" leads).

Available Terminations and Optional Features can be found on pages 2-37 through 2-49.

Custom Engineered/Manufactured Heaters

Understanding that an electric heater can be very application specific, for sizes and ratings not listed, **TEMPCO** will design and manufacture a Low-Density Cartridge Heater to meet your requirements. **Standard lead time is 3 weeks.**

Please Specify the following:

- ☐ Diameter
- ☐ Length
- ☐ Wattage
- ☐ Voltage
- ☐ Termination types (see pages 2-37 through 2-49)
- ☐ Lead Length
- ☐ Cable/Braid length
- ☐ Special Features



Tempco Offers Innovative Cartridge Heater Terminations Focused on Providing Maximum Performance Under a Diverse Segment of Demanding Applications

Cartridge Heater Terminations Can be Elusive to Define and Often Overlooked

Failure to evaluate the operating conditions and the environment of a cartridge heater application and/or improper termination selection will compromise the operating reliability and functional life of the cartridge heater resulting in costly machine downtime and loss of revenue due to lack of productivity.

To ensure maximum efficiency and reliable cartridge heater service, evaluate your existing operating conditions and proceed to select the best suited termination(s) for your application.

The synergy between the cartridge heater termination and the application will result in reduced operating cost, increased productivity, optimized performance and improved customer satisfaction.

Take Advantage of Tempco's Innovative Cartridge Heater Terminations.

We offer a selection of over 40 standard terminations specifically designed to address the operating requirements of a multitude of diverse applications requiring protection against the following conditions:

- **Abrasion** ➤ **Contamination** ➤ **Flexing**
- **Moisture Resistance** ➤ **High Temperatures**

In addition, there are many cartridge heater adaptations to facilitate their use:

- **Double-End Powerleads** ➤ **Mounting Flanges**
- **Locating Ring or Bushings** ➤ **Pull Straps**
- **NPT or Bulkhead Fittings**
- **Built-In Thermocouples and Thermostats**
- **Electrical Boxes**

Refer to pages 2-37 through 2-53 for complete specifications and details on all available terminations.

A Wise Man Once Said . . .

"A Cartridge Heater is Only As Good as the Termination that Powers It."

Standard Termination for HDC and HDM Hi-Density Cartridge Heaters



Available through the **Terminator Program** for Same or Next Day Shipping


Type N External Pins with Leads

Available on HDC and HDM cartridge heaters

Flexible stranded nickel lead wires have fiberglass insulation and are UL approved for 600 volt or 300 volt service. The leads are connected to 1-1/4" (32 mm) long solid nickel conductors. Silicone rubber coated fiberglass sleeving insulates the pin/lead wire connection.

- Standard termination style for HDC and HDM cartridge heaters.
- A nominal 3/8" cold section at the lead end is required.
- **Standard 10" (254 mm) leads. Specify longer leads.**

Standard Termination for LDC Low-Density and SCH Square Cartridge Heaters

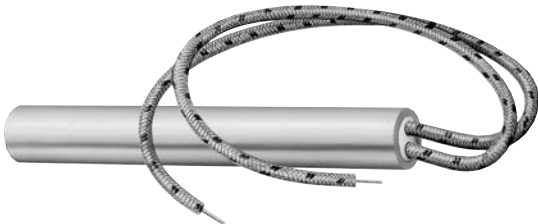

Note: Stock Hi-Density Cartridge Heaters with type F flexible lead termination can be found on pages 2-21 through 2-24.

Type F Internally Connected Flexible Leads

Available on HDC, HDM, LDC and SCH Cartridge Heaters

This lead termination provides flexibility; the lead wires are internally connected to the terminal pins. The lead wires can be sharply bent as they exit the ceramic insulating cap without exposing the bare wire or breaking the solid terminal pins.

- Standard termination type for LDC cartridge heaters.
- Minimum 3/8" up to 1" cold section at the lead end is required. Temperature at the lead end is not to exceed 482°F (250°C). For higher temperature applications special lead wires can be used. Consult Tempco with your requirements.
- **Standard 10" (254 mm) leads. Specify longer leads.**



Available through the **Terminator Program**.

Note: Applies only to Hi-Density Cartridge Heaters.



Cartridge Heater Moisture Resistant Terminations



Type M1 ☐ Polyolefin Liquid Barrier

Available on HDC, HDM, and LDC cartridge heaters

A liquid barrier used for low temperature applications in primarily refrigeration or food service applications. The seal bonds to both the heater and the leads.

M1A Teflon® insulated lead wires.

M1B Three conductor SJO type cord.

➤ A minimum of 1-1/2" of cold section at the lead end is required. Temperature at the lead end is not to exceed 220°F (105°C).

➤ **Standard** 10" (254 mm) leads. Specify longer leads.



 **M2A** only is available through the Terminator Program for 2nd or 3rd Day Shipping

Type M2 ☐ Potted End Seal

Available on HDC, HDM and LDC cartridge heaters

Potted end seals help to protect the heater from moisture or contamination from plastic material, cleaning solvents, or oils. The bottom end disc seal is welded in.

M2A Cement potting with silicone varnish. 1000°F (538°C). Fiberglass lead wires externally connected.

M2B Silicone rubber potting. 450°F (232°C). Silicone rubber lead wires internally connected.

M2C High temperature epoxy potting. 450°F (232°C). Teflon® lead wires internally connected.

M2D Low temperature epoxy potting. 266°F (130°C). Teflon® lead wires internally connected.

➤ A minimum of 1" cold section at the lead end is required.

➤ **Standard** 10" (254 mm) leads. Specify longer leads.



Type M3 ☐ Teflon® End Plug Seal

Available on HDC and HDM cartridge heaters

A moisture resistant Teflon® seal that is swaged in during the manufacturing process with Teflon® insulated lead wire.

Minimum 3/8" up to 1" cold section at the lead end is required.

➤ Temperature at the lead end not to exceed 350°F (176°C)

➤ **Standard** 10" (254 mm) leads. Specify longer leads.



 Available through the Terminator Program for 2nd or 3rd Day Shipping

Type SA ☐ Sealed Armor Cable

Available on HDC, HDM and LDC cartridge heaters

A liquid-proof stainless steel corrugated metal hose is silver brazed to the end of the cartridge heater. The end disc of the heater is also welded or brazed. This termination provides a positive seal against moisture and contamination entering the heater.

➤ **Standard** 10" (254 mm) cable over 12" (305 mm) leads. Specify longer leads or cable.



Available through the Terminator Program.

Note: Applies only to Hi-Density Cartridge Heaters.



Cartridge Heater Flexing Resistant Terminations

Type S1 ☐ Straight Spring

Available on HDC, HDM, and LDC cartridge heaters.

The leads are reinforced with a steel spring for applications with extreme flexing. The spring is mechanically fastened or silver brazed.

S1A Mechanically fastened spring.


S1B Silver brazed spring.

➤ **Standard 10" (254 mm) leads. Specify longer leads.**


➤ Temperature at the lead end not to exceed 350°F (176°C).

	Diameter		Fig.	"A" Dim.		"B" Dim.	
	in	mm		in	mm	in	mm
Hi-Density Cartridge Heaters	1/4	6.35	1	11/16	17.46	5/16	7.94
	5/16	7.94	1	11/16	17.46	7/16	11.11
	3/8	9.53	1	11/16	17.46	7/16	11.11
	1/2	12.70	1	13/16	20.64	9/16	14.29
	5/8	15.88	1	1	25.40	3/4	19.05
	3/4	19.05	1	1-1/4	31.75	7/8	22.23
	1	25.40	2	5/8	15.88	5/8	15.88
Low-Density Cartridge Heaters	3/16	4.76	—	—	—	—	—
	1/4	6.35	1	11/16	17.46	5/16	7.94
	3/8	9.53	1	11/16	17.46	7/16	11.11
	1/2	12.70	1	13/16	20.64	9/16	14.29
	5/8	15.88	2	7/16	11.11	9/16	14.29
	3/4	19.05	2	1/2	12.70	9/16	14.29
	7/8	22.23	2	5/8	15.88	9/16	14.29
	15/16	23.81	2	5/8	15.88	5/8	15.88
	1	25.40	2	5/8	15.88	5/8	15.88
	1-1/4	31.75	2	5/8	15.88	5/8	15.88

TYPE S1 Fig. 1

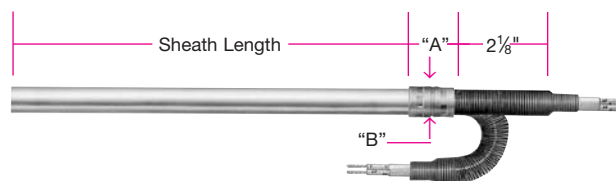

TYPE S1 Fig. 2

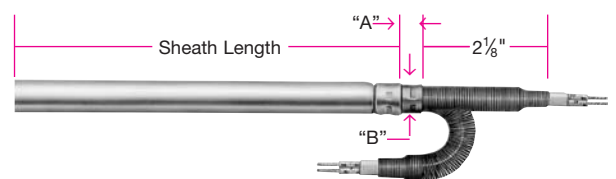

Type S2 ☐ Right-Angle Spring

Available on HDC, HDM, and LDC cartridge heaters

The leads are reinforced with a steel spring for applications with extreme flexing. The spring is mechanically fastened or silver brazed.

S2A Mechanically fastened spring


S2B Silver brazed spring

➤ **Standard 10" (254 mm) leads. Specify longer leads.**


➤ Temperature at the lead end not to exceed 482°F (250°C).

	Diameter		Fig.	"A" Dim.		"B" Dim.	
	in	mm		in	mm	in	mm
Hi-Density Cartridge Heaters	1/4	6.35	1	3/4	19.05	3/4	19.05
	5/16	7.94	1	15/16	23.81	15/16	23.81
	3/8	9.53	1	15/16	23.81	15/16	23.81
	1/2	12.70	1	1-1/4	31.75	1-1/4	31.75
	5/8	15.88	1	1-1/4	31.75	1-1/4	31.75
	3/4	19.05	1	1-3/4	44.45	1-1/4	31.75
	1	25.40	2	1-1/8	28.58	1-3/8	34.93
Low-Density Cartridge Heaters	3/16	4.76	—	—	—	—	—
	1/4	6.35	1	3/4	19.05	3/4	19.05
	3/8	9.53	1	15/16	23.81	15/16	23.81
	1/2	12.70	1	1-1/4	31.75	1-1/4	31.75
	5/8	15.88	2	11/16	17.46	1-1/4	31.75
	3/4	19.05	2	3/4	19.05	1-1/4	31.75
	7/8	22.23	2	3/4	19.05	1-3/8	34.93
	15/16	23.81	2	1-1/8	28.58	1-3/8	34.93
	1	25.40	2	1-1/8	28.58	1-3/8	34.93
	1-1/4	31.75	2	1-1/8	28.58	1-3/8	34.93

TYPE S2 Fig. 1

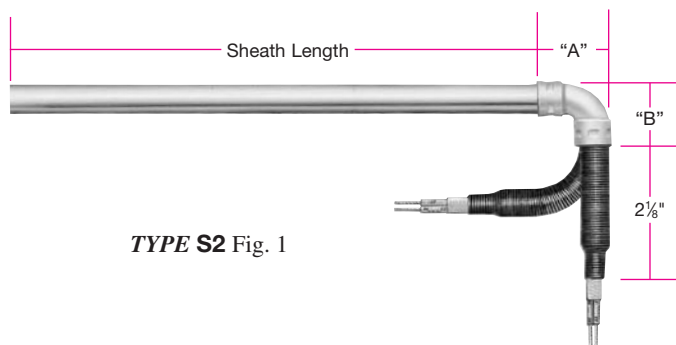

TYPE S2 Fig. 2

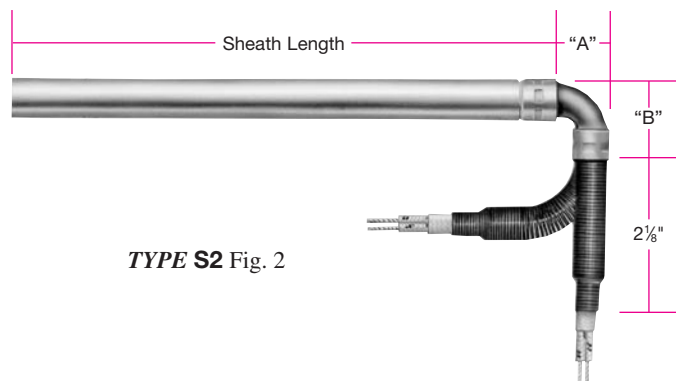

Cartridge Heater Lead Wire with Strain Relief Terminations



 Available through the Terminator Program for Same or Next Day Shipping



 Available through the Terminator Program for Same or Next Day Shipping

Type S3 Lead Wire Strain Relief

Available on HDC, HDM, and LDC cartridge heaters

Strain relief clip for leads subject to tension and stress. A "T" type strain relief is silver brazed to the sheath.

- Standard 10" (254 mm) leads. Specify longer leads.
- Temperature at the lead end not to exceed 482°F (250°C).

Type S4 Right-Angle Lead Wire Strain Relief

Available on HDC, HDM, and LDC cartridge heaters

Strain relief clip for leads subject to tension and stress. A "T" type strain relief is silver brazed to the sheath and bent at a 90° angle.

- Standard 10" (254 mm) leads. Specify longer leads.
- Temperature at the lead end not to exceed 482°F (250°C).


Cartridge Heater Abrasion Resistant Terminations

TYPE W Fig. 1



 Available through the Terminator Program for 2nd or 3rd Day Shipping

TYPE W Fig. 2

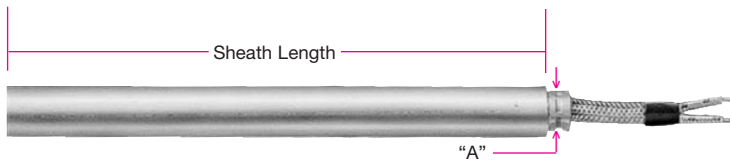

Type W Wire Braided Leads

Available on HDC, HDM, and LDC cartridge heaters

Stainless steel braid over fiberglass leads offers sharp bending not possible with armor cable, as well as abrasion protection.

- Minimum 3/8" up to 1" cold section at the lead end is required. Temperature at the lead end is not to exceed 482°F (250°C). For higher temperature applications, special gauge lead wires can be used—consult Tempco with your requirements.
- Standard 10" (254 mm) braid over 12" (305 mm) leads. Specify longer braid/leads.

Diameter in mm	Fig.	"A" Dim./HD		"A" Dim./LD	
		in	mm	in	mm
3/16 4.76	1	—	—	1/4 6.35	—
1/4 6.35	1	5/16 7.94	7.94	5/16 7.94	—
5/16 7.94	1	3/8 9.53	9.53	—	—
3/8 9.53	2	3/8 9.53	9.53	3/8 9.53	—
1/2 12.70	2	7/16 11.11	11.11	7/16 11.11	—
5/8 15.88	2	9/16 14.29	14.29	9/16 14.29	—
3/4 19.05	2	9/16 14.29	14.29	9/16 14.29	—
7/8 22.23	2	—	—	9/16 14.29	—
15/16 23.81	2	—	—	9/16 14.29	—
1 25.40	2	9/16 14.29	14.29	9/16 14.29	—
1-1/4 31.75	2	—	—	9/16 14.29	—

Type W3 Swaged-In Wire Braided Leads

Available on HDC and HDM cartridge heaters

Stainless steel braid over fiberglass leads offers sharp bending not possible with armor cable, as well as abrasion protection. In addition, Type W3 offers moisture resistance due to the Teflon® seal required for holding the wire braid.

- Minimum 3/8" up to 1" cold section at the lead end is required.
- Temperature at the lead end not to exceed 350°F (176°C).
- Standard 10" (254 mm) braid over 12" (305 mm) leads. Specify longer braid/leads.



Cartridge Heater Abrasion Resistant Terminations

Type CS ☐ Silver Brazed Cable to Sheath

Available on HDC, HDM, and LDC cartridge heaters

The armor cable is silver brazed directly to the cartridge heater, eliminating the coupling, to maintain an overall diameter equal to or smaller than the cartridge diameter.

CSA Galvanized armor cable

CSB Stainless steel armor cable

► **Standard** 10" (254 mm) cable over 12" (305 mm) leads.
Specify longer leads or cable.

► Temperature at lead end not to exceed 482°F (250°C).



Type C1 ☐ Straight Armor Cable

Available on HDC, HDM, or LDC cartridge heaters

Armor cable provides the maximum in protection for abrasive, jagged environments. The coupling between the cartridge and the armor cable is mechanically fastened or silver brazed.


C1A Galvanized armor cable, mechanically fastened

C1B Stainless steel armor cable, mechanically fastened


C1C Galvanized armor cable, silver brazed

C1D Stainless steel armor cable, silver brazed

► **Standard** 10" (254 mm) cable over 12" (305 mm) leads.
Specify longer leads or cable.

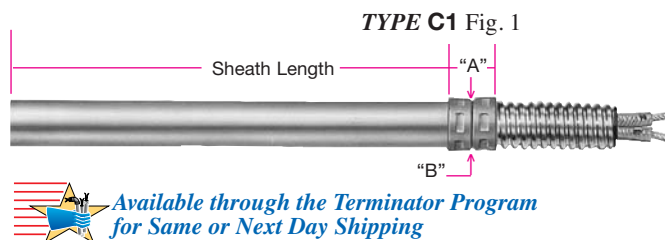

	Diameter		Fig.	"A" Dim.		"B" Dim.		Cable Dia.
	in	mm		in	mm	in	mm	
Hi-Density Cartridge Heaters	1/4	6.35	1	11/16	17.46	5/16	7.94	1/4
	5/16	7.94	1	11/16	17.46	7/16	11.11	1/4
	3/8	9.53	1	11/16	17.46	7/16	11.11	3/8
	1/2	12.70	1	13/16	20.64	9/16	14.29	1/2
	5/8	15.88	1	1	25.40	3/4	19.05	1/2
	3/4	19.05	1	1-1/4	31.75	7/8	22.23	1/2
	1	25.40	2	5/8	15.88	5/8	15.88	1/2
Low-Density Cartridge Heaters	3/16	4.76	—	—	—	—	—	—
	1/4	6.35	1	11/16	17.46	5/16	7.94	1/4
	3/8	9.53	1	11/16	17.46	7/16	11.11	3/8
	1/2	12.70	1	13/16	20.64	9/16	14.29	1/2
	5/8	15.88	2	7/16	11.11	9/16	14.29	1/2
	3/4	19.05	2	1/2	12.70	9/16	14.29	1/2
	7/8	22.23	2	5/8	15.88	9/16	14.29	1/2
	15/16	23.81	2	5/8	15.88	5/8	15.88	1/2
	1	25.40	2	5/8	15.88	5/8	15.88	1/2
	1-1/4	31.75	2	5/8	15.88	5/8	15.88	1/2

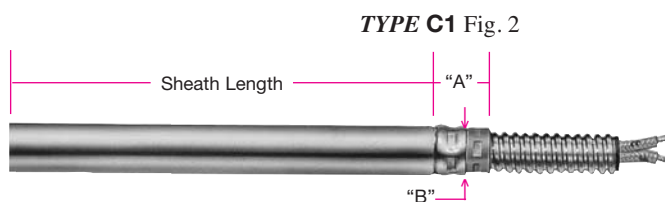

Available through the **Terminator** Program.

Note: Applies only to Hi-Density Cartridge Heaters.


Terminations

Cartridge Heater Right-Angle Terminations

TYPE C2 Fig. 1




TYPE C2 Fig. 2

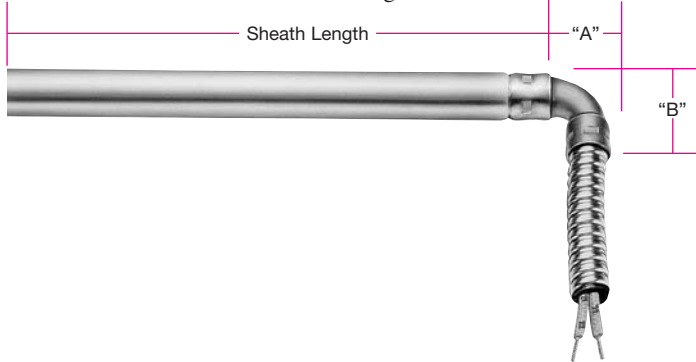

TYPE R1 Fig. 1



TYPE R1 Fig. 2

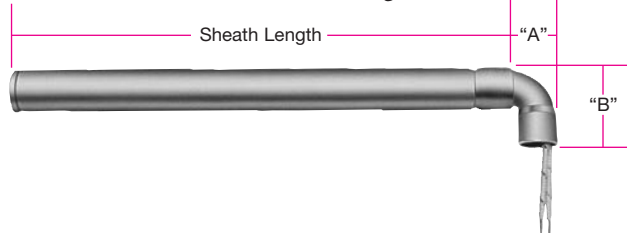

Type C2 ☐ Right-Angle Armor Cable with Copper Elbow

Available on HDC, HDM, and LDC cartridge heaters

A armor cable provides the maximum in protection for abrasive, jagged environments. The copper elbow between the cartridge and the armor cable is mechanically fastened or silver brazed.

C2A Galvanized armor cable, mechanically fastened

C2B Stainless steel armor cable, mechanically fastened

C2C Galvanized armor cable, silver brazed

C2D Stainless steel armor cable, silver brazed

➤ **Standard 10" (254 mm) cable over 12" (305 mm) leads.** Specify longer cable or leads.

Dimensions for Types C2 and R1

	Diameter			"A" Dim.		"B" Dim.		Cable Dia.
	in	mm	Fig.	in	mm	in	mm	
Hi-Density Cartridge Heater	1/4	6.35	1	3/4	19.05	3/4	19.05	1/4
	5/16	7.94	1	15/16	23.81	15/16	23.81	1/4
	3/8	9.53	1	15/16	23.81	15/16	23.81	3/8
	1/2	12.70	1	1-1/4	31.75	1-1/4	31.75	1/2
	5/8	15.88	1	1-1/4	31.75	1-1/4	31.75	1/2
	3/4	19.05	1	1-3/4	44.45	1-1/4	31.75	1/2
	1	25.40	2	1-1/8	28.58	1-3/8	34.93	1/2
Low Density Cartridge Heater	3/16	4.76	—	—	—	—	—	—
	1/4	6.35	1	3/4	19.05	3/4	19.05	1/4
	3/8	9.53	1	15/16	23.81	15/16	23.81	3/8
	1/2	12.70	1	1-1/4	31.75	1-1/4	31.75	1/2
	5/8	15.88	2	11/16	17.46	1-1/4	31.75	1/2
	3/4	19.05	2	3/4	19.05	1-1/4	31.75	1/2
	7/8	22.23	2	3/4	19.05	1-3/8	34.93	1/2
	15/16	23.81	2	1-1/8	28.58	1-3/8	34.93	1/2
	1	25.40	2	1-1/8	29.58	1-3/8	34.93	1/2
	1-1/4	31.75	2	1-1/8	29.58	1-3/8	34.93	1/2

Type R1 ☐ Right-Angle Leads with Copper Elbow

Available on HDC, HDM, and LDC cartridge heaters

This termination is used when space is limited. The copper elbow is mechanically fastened or silver brazed.

R1A Mechanically fastened

R1B Silver brazed

➤ **Standard 10" (254 mm) leads. Specify longer leads.**



Cartridge Heater Right-Angle Terminations

Type C3 ☐ Right-Angle Armor Cable

Available on HDC, HDM, and LDC cartridge heaters

Use this termination when space is limited and maximum protection is required. The armor cable is silver brazed to the cartridge sheath at 90°. The sheath extension is potted with cement. Various lead end finishes are available as listed below.

C3A Cement potting and silicone varnish, with galvanized cable

C3B Cement potting and silicone varnish, with stainless steel cable

C3C Welded lead end disc, with galvanized cable

C3D Welded lead end disc, with stainless steel cable

► **Standard** 10" (254 mm) armor cable over 12" (305 mm) leads. Specify longer cable or leads.



Type W1 ☐ Right-Angle Wire Braided Leads


Available on HDC, HDM, and LDC cartridge heaters

Stainless steel braid over fiberglass leads for abrasion protection, mechanically crimped to the cartridge sheath at 90°. Wire braid offers extreme flexibility not possible with armor cable. Various lead end finishes are available as listed below.

W1A Cement potting and silicone varnish

W1B Welded lead end disc

► **Standard** 10" (254 mm) braid over 12" (305 mm) leads. Specify longer braid or leads.

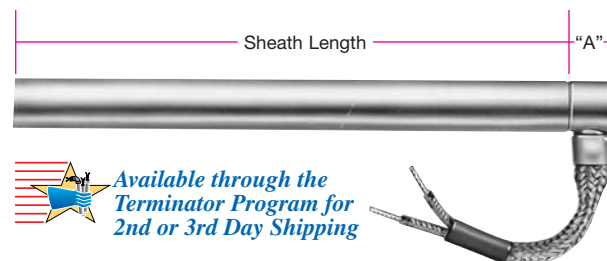

Type R2 ☐ Right-Angle Leads

Available on HDC, HDM, and LDC cartridge heaters

This termination is used when space is limited. Not suitable for abrasive environments. Same as C3 and W1 except plain fiberglass leads. The sheath extension is potted with cement. Various lead end finishes are available as listed below.

R2A Cement potting and silicone varnish

R2B Welded lead end disc

► **Standard** 10" (254 mm) leads. Specify longer leads.



Dimensions for types C3, W1 and R2

Diameter		Availability		"A" Dim.		Armor Cable	
in	mm	HD	LD	in	mm	in	mm
3/16	4.76	No	No	—	—	—	—
1/4	6.35	Yes	Yes	5/16	7.94	1/4	6.35
5/16	7.94	Yes	No	5/16	7.94	1/4	6.35
3/8	9.53	Yes	Yes	7/16	11.11	3/8	9.53
1/2	12.70	Yes	Yes	9/16	14.29	1/2	12.70
5/8	15.88	Yes	Yes	9/16	14.29	1/2	12.70
3/4	19.05	Yes	Yes	9/16	14.29	1/2	12.70
7/8	22.23	No	Yes	5/8	15.88	1/2	12.70
15/16	23.81	No	Yes	5/8	15.88	1/2	12.70
1	25.40	Yes	Yes	5/8	15.88	1/2	12.70
1-1/4	31.75	No	Yes	5/8	15.88	1/2	12.70

Available through the **Terminator** Program.
Note: Applies only to Hi-Density Cartridge Heaters.



Terminations

Cartridge Heater Other Angle Terminations



Type R3 ☐ Angled Sheath Extension

Available on HDC, HDM, and LDC cartridge heaters

The sheath extension is silver brazed to the cartridge at a 90° angle and cement potted. The leads are internally connected. The standard sheath extension is 3/8" long. Specify when ordering if a longer sheath is required. If abrasion resistance is required, armor cable or stainless steel wire braid can be attached to the sheath extension.


R3A Plain leads 10" (254 mm) long

R3B 10" galvanized armor cable over 12" leads

R3C 10" stainless steel armor cable over 12" leads

R3D 10" stainless steel braid over 12" leads

➤ Specify if longer cable/leads are required.

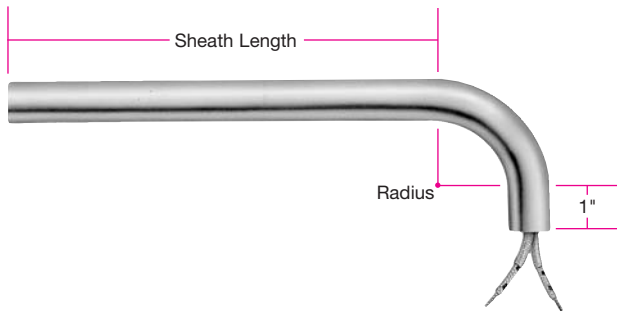

Type R4 ☐ Bent Cartridge

Available on HDC and HDM cartridge heaters

The heater sheath itself is bent to 90°. The bend is through a required cold section. The leads are internally connected. The standard sheath extension past the bend is 1". Specify when ordering if a longer sheath is required.

R4A Plain leads 10" (254 mm) long

R4B 10" galvanized armor cable over 12" leads

R4C 10" stainless steel armor cable over 12" leads

R4D 10" stainless steel braid over 12" leads

➤ Specify if longer cable/leads are required.

Cartridge Dia.	in	1/4	3/8	1/2	5/8	3/4	1
	mm	6.35	9.53	12.70	15.88	19.05	25.40
Bend Radius	in	1/2	1/2	3/4	1	1-1/4	1-1/2
	mm	12.70	12.70	19.05	25.40	31.75	38.10

Cartridge Heater Standard Screw Terminations



Type T1 ☐ Screw Terminals

Available on LD type cartridge heaters only

For use with leads, crimp terminals, or bus bars. Includes high temperature washers and nuts. Diameters available: 3/4", 7/8", 15/16", 1", and 1-1/4".

➤ **Standard:** screw #6-32 × 3/4" long

Diameter	in	3/4	7/8	15/16	1	1-1/4
	mm	19.05	22.23	23.81	25.40	31.75
"A" Dimension	in	3/8	7/16	7/16	1/2	1/2
	mm	9.53	11.11	11.11	12.70	12.70



Type T2 ☐ Screw Terminals

Available on HDC and HDM type cartridge heaters only

For use with leads, crimp terminals, or bus bars. Includes high temperature washers and nuts.

Diameters available: HD — 5/8", 3/4", 1"

HDM — 16 and 20 mm

➤ **Standard:** screw #8-32

Product Inventory Available for Viewing and Selection @ www.tempco.com



Cartridge Heater Double End Terminations

Type T4 Double End Terminal Pin

Available on HDC, HDM, and LDC cartridge heaters

For those applications in which wiring from both ends is an advantage. Standard terminal pin length is 2". A minimum of 1" cold section at each end is required. Various seals are available:

T4A Cement potting seal with silicone varnish — 1000°F (537°C)

T4B High temp. moisture resistant epoxy seal — 450°F (232°C)

T4C Low temp. moisture resistant epoxy seal — 266°F (130°C)



Type F1 Double End Flexible Leads

Available on HDC, HDM, and LDC cartridge heaters

For applications in which it is an advantage to wire from both ends. The leads are internally connected and can be bent sharply as they exit the potted ends. Various seals are available:

F1A Cement potting seal with silicone varnish — 1000°F (532°C)

F1B High temp. moisture resistant epoxy seal — 450°F (232°C)

F1C Low temp. moisture resistant epoxy seal — 266°F (130°C)



Note: A minimum of 1" cold section at each end is required.



➤ Standard 10" leads are standard. Specify longer leads.

Type T3 Double End Screw Terminal Leads

Available on HDC, HDM, and LDC cartridge heaters from 1/2" to 1-1/4" diameter

A double ended heater with quick change wiring screw terminals. Includes high temperature washers and nuts.

Standard screw sizes:

➤ 1/2" diameter — #8-32 × 3/4" screws

➤ 5/8" to 1-1/4" diameter — #10-32 × 3/4" screws



Available through the **Terminator** Program.


Note: Applies only to Hi-Density Cartridge Heaters.

Cartridge Heaters



Terminations

Cartridge Heater with National Pipe Thread (NPT) and Bulkhead Fittings

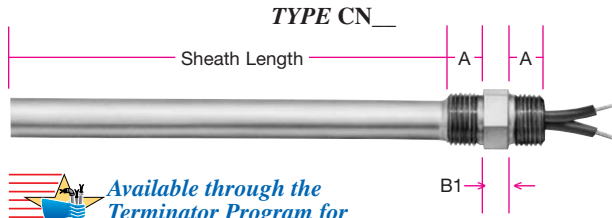

Available through the Terminator Program for 2nd or 3rd Day Shipping

Type Codes for Double Threaded Fittings

Potting Seal Type	Bushing Material	
	Brass	Stn.Stl.
Low Temp Epoxy	CNA	CNN
Hi Temp Cement	CNB	CNP
Silicone Rubber	CNC	CNQ
Hi Temp Epoxy	CND	CNR
Teflon® End Plug Seal	CNE	CNS
Empty Cavity	CNF	CNT



Available through the Terminator Program for 2nd or 3rd Day Shipping

Type Codes for Single Threaded Fittings

Potting Seal Type	Bushing Material	
	Brass	Stn.Stl.
Low Temp Epoxy	CMA	CMN
Hi Temp Cement	CMB	CMF
Silicone Rubber	CMC	CMQ
Hi Temp Epoxy	CMD	CMR
Teflon® End Plug Seal	CME	CMS
Empty Cavity	CMF	CMT



Available through the Terminator Program for 2nd or 3rd Day Shipping



Warning: Epoxy potting on Cartridge Heaters with fittings type CN, CM, and BF; the operating temperature of the application cannot exceed 266°F (130°C) for Low Temperature Epoxy and 450°F (232°C) for High Temperature Epoxy.

Failure to comply will result in premature heater burn-out.

Type CN ☐ Double Threaded Fitting

Type CM ☐ Single Threaded Fitting

Note: Teflon® end plug seals are not available through the Terminator program. Stainless steel fittings are available through the Terminator program only on heaters 1/2" diameter and bigger.

Available on HDC, HDM and LDC cartridge heaters

A double threaded or single threaded pipe fitting is attached to the end of a cartridge heater to allow for installation into a threaded hole. The brass or steel fitting is silver brazed. The stainless steel fitting is heli-arc welded.

The bushing cavity can be sealed with various materials such as:

- * Low temperature epoxy potting — 266°F (130°C)
Teflon® leads, internally connected.
- * High temperature epoxy potting — 450°F (232°C)
Teflon® leads, internally connected.
- * Silicone rubber potting — 450°F (232°C)
Silicone rubber leads, internally connected.
- * Cement potting with silicone varnish — 1000°F (538°C)
Stainless steel fitting, with fiberglass leads externally connected.
- * Swaged-in Teflon® end plug seal — 350°F (176°C)
Teflon® leads, internally connected (available on HDC and HDM cartridge heaters only). Bushing to be offset up to 1".
- A minimum of 1/4" cold section behind the bushing is required.
- **Standard 10" (254 mm) leads. Specify longer leads.**

Standard NPT Bushing Dimensions

Heater Diameter (in)	NPT Size	"A"	"B"	"B1"	"C"
1/4	1/8-27	3/8	3/16	1/4	7/16
3/8	1/4-18	1/2	3/16	1/4	9/16
1/2	3/8-18	9/16	1/4	1/4	11/16
5/8	1/2-14	5/8	1/4	5/16	7/8
3/4	3/4-14	3/4	1/4	3/8	1-1/8
7/8	1-11 1/2	3/4	1/4	3/8	1-3/8
1	1-11 1/2	3/4	1/4	3/8	1-3/8
1-1/4	1 1/4-11 1/2	7/8	5/16	1/2	1-3/4

Type BF ☐ Bulkhead Fitting

Available on HDC and LDC 1/2" and 5/8" cartridge heaters

A 5/8-18 UNF brass fitting is silver brazed to the cartridge for mounting the heater to the wall of a tank or enclosure. Includes a copper washer and jam nut. The lead wires are internally connected. To prevent moisture or contamination, the bushing cavity can be filled with various materials. Optional stainless steel fittings are available—specify.

BFA Low temperature epoxy potting—266°F (130°C)

BFB Silicone rubber potting—450°F (232°C)

BFC High temperature epoxy potting—450°F (232°C)

- A minimum 1/4" cold section below the bulkhead fitting is required.
- **Standard 10" (254 mm) leads. Specify longer leads.**

(For a Complete Selection of Standard Cartridge Immersion Heaters See Pages 2-54 and 2-55)


Product Inventory Available for Viewing and Selection @ www.tempco.com



Cartridge Heater Mounting Flanges



Available through the Terminator Program for Same or Next Day Shipping



Type MFR Mounting Flange — Round

Available on HDC, HDM, and LDC cartridge heaters

Recommended for applications where excessive vibration exists and may cause the heater to back out of its mounting hole. The flange is used as a means of securing the cartridge heater in place.

► Standard 10" externally connected leads. Specify longer leads.

Standard Round Mounting Flanges


Heater Diameter in (mm)	"F"		"C"		"H"	
	in	mm	in	mm	in	mm
1/4 (6.35), 5/16 (7.94), 3/8 (9.53), 1/2 (12.70), 5/8 (15.88), 3/4 (19.05)	1-1/2	38.10	1-1/8	28.57	.156	3.97
7/8 (22.23), 1 (25.40), 1-1/4 (31.80)	2	50.80	1-5/8	41.28	.203	5.16



Note: 5/16" dia. cartridge heater can only be HDC; 7/8" and 1-1/4" can only be LDC.



Available through the Terminator Program for Same or Next Day Shipping



Type MFH Mounting Flange — Hex

Available on HDC, HDM, and LDC cartridge heaters

A hex shape to allow the possibility of using a wrench when removal is tight. The flange is used as a means of securing the cartridge heater in place.

► Standard 10" externally connected leads. Specify longer leads.

Standard Hex Mounting Flanges

Heater Diameter		"F"		"C"		"H"	
in	mm	in	mm	in	mm	in	mm
1/4	6.35	1	25.40	3/4	19.05	.144	3.66
5/16	7.94	1	25.40	3/4	19.05	.144	3.66
3/8	9.53	1	25.40	3/4	19.05	.144	3.66
1/2	12.70	1-3/8	34.93	1-5/32	29.37	.187	4.76
5/8	15.88	1-3/8	34.93	1-5/32	29.37	.187	4.76
3/4	19.05	1-3/8	34.93	1-5/32	29.37	.187	4.76
7/8	22.26	1-7/8	47.63	1-9/16	39.69	.203	5.16
1	25.40	1-7/8	47.63	1-9/16	39.69	.203	5.16
1-1/4	31.80	1-7/8	47.63	1-11/16	42.86	.203	5.16

Cartridge Heater Locating Ring



Available through the Terminator Program for Same or Next Day Shipping

Type LR Locating Ring

Available on HDC, HDM, and LDC cartridge heaters

A locating ring can be attached to the heater to aid in positioning the heater for the application. The default position of the ring is 1/4" from the lead end. Specify the position of the ring when ordering.

► Standard 10" externally connected leads. Specify longer leads.

Cartridge Heater Pull Strap



Type PS Pull Strap

Available on HDC, HDM, and LDC cartridge heaters

A stainless steel wire rope is silver brazed to the lead end of the cartridge heater sheath to assist in removing the heater.

► Standard 10" externally connected leads. Specify longer leads.



Available through the Terminator Program.

Note: Applies only to Hi-Density Cartridge Heaters.



Terminations

Cartridge Heater Terminal Boxes




Type E1 ☐ General Purpose Terminal Box

Available on HDC, HDM, and LDC cartridge heaters

General purpose NEMA 1 electrical enclosure designed to provide protection from electrical shock. The boxes have 5/8" conduit knock-outs and are silver brazed to the cartridge sheath.

E1A Terminal box with 10" (254 mm) fiberglass leads

E1E Terminal box w/screw terminals

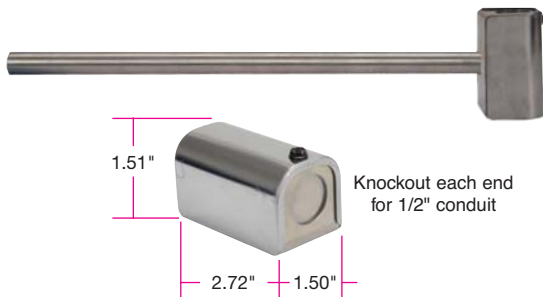

Type E4 ☐ General Purpose Terminal Box (mailbox style)

Available on HDC, HDM, and LDC cartridge heaters

General purpose NEMA 1 electrical enclosure designed to provide protection from electrical shock. The box is silver brazed to the cartridge sheath.

E4A Terminal box with 10" (254 mm) fiberglass leads



Type E2 ☐ Moisture Proof Terminal Box


Available on HDC, HDM, and LDC cartridge heaters

NEMA 4 PVC electrical enclosures provide protection from splashing or hose directed water, external condensation and water seepage. The box is mechanically attached to the cartridge sheath and the heater is sealed with moisture resistant epoxy.

E2A Terminal box with 10" (254 mm) Teflon® leads

E2E Terminal box w/screw terminals

➤ A minimum of 1" cold section at the lead end is required.

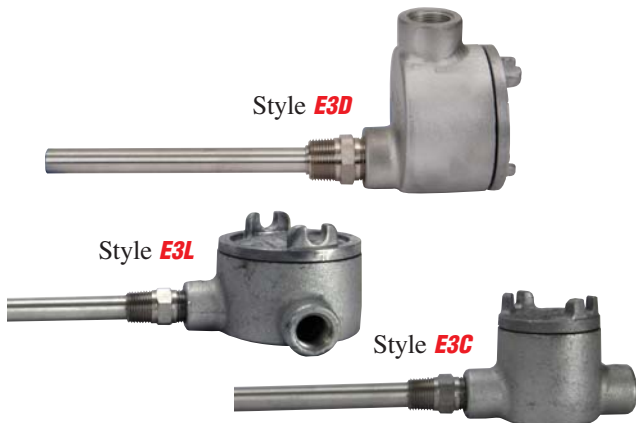

Type E3 ☐ Explosion Resistant Terminal Box

Available on HDC 5/8", 3/4" and 1" cartridge heaters

NEMA 4/7 electrical enclosures provide protection from contaminants, moisture, and hazardous conditions. These housings are screwed onto a heater with a single or double ended SS fitting.

➤ Screw terminals with high temperature epoxy moisture seal rated to 450°F (232°C).



Explosion resistant terminal housings are intended to provide containment of an explosion in the enclosure only. No portion of the heater assembly outside the enclosure is covered under this NEMA rating. Abnormal use of a heater which results in excessive temperature can create hazardous conditions such as a fire. Never perform any type of service nor remove the housing cover prior to disconnecting all electrical power to the heater.



Cartridge Heater High Temperature Termination


Type B Heat Resistant Ceramic Bead Insulation

Available on HDC, HDM, and LDC cartridge heaters.

The ultimate in high temperature lead protection. Allows for the attachment of flexible leads to the heater away from the high heat area.

- Temperature range: up to 1200°F (650°C)
- **Standard** 10" (254 mm) solid nickel pins insulated with ball and socket construction type ceramic beads



 Available through the Terminator Program for Same or Next Day Shipping

Cartridge Heater Options — Lead End Connections

Type RT Ring Terminal

Type ST Spade Terminal

Type QTA 1/4" Female Straight Quick Disconnect

Type QTB 1/4" Female Right-Angle Quick Disconnect

Available on HDC, HDM and LDC cartridge heaters

Various types of crimp terminals can be attached to the heater leads to make wiring into applications quick and easy. Non-insulated and insulated with nylon (221°F/105°C) or PVC (194°F/90°C).



Note: Specify insulation type and ring size (#6, #8, or #10) when ordering. Standard is a non-insulated #10 terminal. Consult Tempco with your requirements.



Type RT




Type ST



Type QTA



Type QTB

 Available through the Terminator Program for same or Next Day Delivery

Type P Quick Disconnect Plugs

Available on HDC, HDM, and LDC cartridge heaters

Allows for the quick and easy replacement of the heater. The plug can be attached to galvanized armor cable, stainless steel armor cable, or wire braid.


Plug Type	Description
1	2-pole/2-wire twist locking plug 15 amp 125 volt, NEMA L1-15P
2	2-pole/3-wire twist locking plug 15 amp 125 volt or 10 amp 250 volt, NEMA N/A. (This plug is not listed by UL, and is recommended for replacement use only.)
3	2-pole/3-wire straight blade plug 15 amp 125 volt, NEMA 5-15P
4	2-pole/3-wire twist locking plug 15 amp 125 volt, NEMA L5-15P
5	2-pole/3-wire twist locking plug 15 amp 250 volt, NEMA L6-15P



Note: For other types of plugs, consult Tempco or specify the manufacturer's part number when ordering.



Caution! Voltage and Amperage ratings of heater and plug must match.

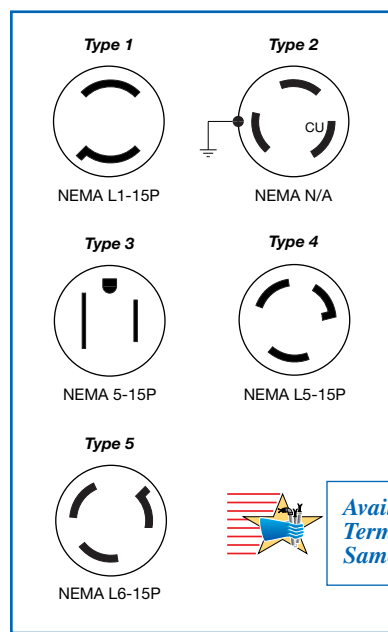

Available through the Terminator Program for Same or Next Day Shipping



Available through the Terminator Program.
Note: Applies only to Hi-Density Cartridge Heaters.

Cartridge Heaters



Options

Cartridge Heater With Built-In Internal Thermocouples

Built-in Internal Thermocouples are available on all HDC, HDM, and LDC cartridge heater diameters except for 3/16", 5/16" and 8 mm.



Note: Type TJ4 and TK4 are not available on 1/4" and 6.5 mm diameter cartridges.

Minimum sheath length: 3" for 1/4", 3/8" and 1/2" diameter.
4" for 5/8" and 3/4" diameter.

10" leads are standard for both heater and thermocouple.
Leads are internally connected. Specify longer leads.

Type TJ1 and TK1



Type TJ2 and TK2



Type TJ3 and TK3




Type TJ4 and TK4



Type TJ5 and TK5



 Available through the
Terminator Program for
2nd Day Delivery

 Available through the "Terminator" Program.
Note: Applies only to Hi-Density Cartridge Heaters.

ANSI Code	Conductor Characteristics		Temperature Range	
	Positive	Negative	°F	°C
J	Iron (Magnetic)	Constantan (Non-Magnetic)	0 to 1400	-17 to 760
K	Chromel (Non-Magnetic)	Alumel (Magnetic)	0 to 2300	-17 to 1260

For other thermocouple types consult Tempco.

Type TJ1 and TK1 Grounded at Disc End

The thermocouple junction is grounded to the sheath at the disc end and packed with MgO. The concave end disc is filled with silver solder and ground flat. When inserted into a flat end blind hole, it will provide fast responsive temperature readings. Widely used in Hot Runner mold probes.

TJ1 Type J thermocouple; TK1 Type K thermocouple

Type TJ2 and TK2 Ungrounded at Disc End

The thermocouple junction is ungrounded, located at the end of the heater section, 1/8" behind the end disc and packed with MgO. Only provides reference temperature reading of the part being heated – slower response.

TJ2 Type J thermocouple; TK2 Type K thermocouple

Type TJ3 and TK3 Ungrounded at Center

The thermocouple junction is ungrounded and is located in the center of the length and diameter of the cartridge heater. It provides internal temperature readings of the heater core. Generally used for research applications and is not recommended for controlling process temperatures.

TJ3 Type J thermocouple; TK3 Type K thermocouple

Type TJ4 and TK4 Grounded at Center

The thermocouple junction is grounded to the sheath in a 1/2" unheated section located in the center of the cartridge length unless otherwise specified. It provides good temperature readings with quick response.

TJ4 Type J thermocouple; TK4 Type K thermocouple

Type TJ5 and TK5 Grounded at Lead End

The thermocouple junction is grounded to the sheath at the lead end. A minimum of 3/8" of cold section is required. It provides good temperature readings with quick response.

TJ5 Type J thermocouple; TK5 Type K thermocouple



Note: For a complete selection of standard Hi-Density Pennybottom™ Cartridge Heaters, with built-in Type J thermocouple for Hot Runner plastic molds, see pages 2-22 through 2-24.
Available from stock.



Cartridge Heater Internal Sensor and Control Options

Type TF Thermal Fuses

Available on HDC, HDM, and LDC cartridge heaters 1/2" diameter and larger

Thermal fuses can be built into cartridge heaters to act as a high limit for the heater in applications where the temperature must be limited to avoid dangerous situations. When the trigger point is reached, the thermal fuse will open, cutting the electrical current to the cartridge heater. Once the thermal fuse opens, it cannot be reset. Many different trigger temperatures are available.

Type TS Thermostat

Available on HDC, HDM, and LDC cartridge heaters 1/2" diameter or larger

Cartridge heaters with built-in thermostats are very efficient and economical for heating and controlling temperatures. Available with NPT or special type mounting fittings, they provide a self-contained heater mainly recommended for immersion applications. They can also be used as over-temperature safety devices. The thermostats are factory preset for the trip temperature; therefore, prototyping and testing is required to determine the exact fixed setpoint. Maximum temperature—302°F(150°C). Maximum Amps—8@120 Volts.

A minimum 2-1/2" cold section is required to house the thermostat. Consult Tempco with your requirements.

Type TM Thermistor

Type RD RTD Temperature Sensors

Available on HDC, HDM, and LDC cartridge heaters

Tempco has the ability to custom design cartridge heaters with built-in temperature sensors such as thermistors and RTDs. For specific applications that have a limited or single set point range, thermistors or RTDs in conjunction with simple electronic controllers can be an economical choice.

Type TS



Cartridge Heater Lead Wire Options

Type MIL High Temperature Lead Wire

Available on HDC, HDM and LDC cartridge heaters

When required, high temperature lead wire can be used on most cartridge heaters. The stranded nickel conductor wire is insulated with mica tapes and then a treated fiberglass overbraid.

Maximum temperature rating: 450°C (842°F)

Consult Tempco with your requirements.

Type HA Heat Shrink Covered Armor Cables

Available on HDC, HDM and LDC cartridge heaters

Either the galvanized or stainless steel armor cable can be covered with moisture proof heat shrink PVC tubing.

Type SR ☐ Silicone Rubber Coated Fiberglass Sleeve

Available on HDC, HDM and LDC cartridge heaters

For added protection, strength, and resistance to various chemicals, the lead wires can be covered with silicone rubber sleeving.

SRA Silicone rubber coated fiberglass sleeving on each lead separately

SRB Silicone rubber coated fiberglass sleeving on both leads together

Specify length when ordering.

Type TL Teflon® Leads

Available on HDC and HDM cartridge heaters

Cartridge Heaters



Options


Cartridge Heater With Internal Power Variations

Available on HDC and HDM cartridge heaters


Cartridge heaters can be designed to vary the wattage along the length of the heater. Specify number of zones and the required watts and length per zone starting from the disk end. Leads can be connected externally or internally. Picture shows a heater with Type N externally connected leads. Heaters with other terminations may require a longer cold section at the lead end.




Type DW Distributed Wattage




Type 3PH Three Phase




Type DV Dual Voltage




Type DWV Dual Circuits




Type MHZ Multiple Heat Zones



Type GJ Grounded Element Winding



Type GL Ground Lead/Sheath



Type LLC Low Leakage Current

Available on HDC, HDM, and LDC cartridge heaters

In order to minimize the gauge of the wiring on high wattage cartridge heaters, 3-phase elements can be designed.

Available on HDC, HDM, and LDC cartridge heaters

Cartridge heaters can be designed using 3-wire series/parallel circuits for dual voltage applications. Whether the heater is run on the high or low voltage, the wattage will be the same.

DV1 120/240 volts

DV2 240/480 volts

Available on HDC, HDM, and LDC cartridge heaters

Independent resistance elements can be designed in a single cartridge heater for added versatility.

Available on HDC and HDM cartridge heaters

Multiple independently operated sections of the heater with a common wiring connection can be designed for increased flexibility.

Available on HDC, HDM, and LDC cartridge heaters

For DC applications where the electrical circuit is negative grounded, the cartridge heater can be designed with one side of the element winding grounded to the sheath and a single lead wire exiting the cartridge heater.

Available on HDC, HDM, and LDC cartridge heaters

For those applications requiring a separate ground lead attached to the cartridge heater sheath.

Standard ground lead wire is 10" long non-insulated stranded conductor. Optional insulated and color coded leads are available.



Available through the **Terminator Program**
for 2nd Day Delivery

Available on HDC, HDM, and LDC cartridge heaters

Low leakage current construction is available for those applications such as medical products that require strict conformity to the requirements of regulatory agencies.



Available through the **Terminator Program**.
Note: Applies only to Hi-Density Cartridge Heaters.

Product Inventory Available for Viewing and Selection @ www.tempco.com



Cartridge Heater Sheath Surface Options and Materials

Type PAS Passivation

Available on HDC, HDM, and LDC cartridge heaters.

Passivating is a chemical process accomplished by dipping the heater in a solution of nitric acid. The process removes surface contamination, usually iron, so that the optimum corrosion resistance of the stainless steel is maintained.

Type ELP Electro-Polish

Available on HDC, HDM, and LDC cartridge heaters.

Electro-Polishing is an electro-chemical process that removes surface imperfections and contaminants, enhancing the corrosion resisting ability of the heater sheath.

Type CG Centerless Grinding

Available on HDC and HDM cartridge heaters.

For applications requiring high precision fit and tolerance, the sheath can be centerless ground.

Tolerance: ± 0.0005 inches (0.013 mm)

Specify diameter when ordering.

Type DSM Optional Sheath Material

Standard sheath material is 321 stainless steel for Hi-Density Cartridge Heaters except 1" diameter, and 304 stainless steel for 1" diameter Hi-Density and all Low-Density Cartridge Heaters.

If your application requires a specific alloy sheath material, consult Tempco with your requirements.

To assist you in selecting the proper sheath material, corrosion resistant ratings and chemical properties of various heater sheath materials are given in Section 16, Engineering Data, in the back of this catalog.

Type SDA End Disc Seals Silver Brazed

Type SDB End Disc Seals Heli-Arc Welded

Available on LDC cartridge heaters.

End discs on HDC and HDM cartridge heaters are heli-arc welded as standard.

The normally mechanically attached end discs on LD cartridge heaters can be silver brazed or heli-arc welded if desired.

Optional Inspection Services and Test Reports

Die Penetrant Test

This non-destructive testing can detect imperfections in weld joints. For critical applications, each individual heater's weld joints by end cap and fittings can be tested. Certified test reports will be sent with each shipment. Consult Tempco for details.

Hydrostatic Pressure Test

Cartridge heaters with attached pipe fittings can be pressure tested to your specifications at Tempco. Our in-house testing capabilities can ensure that your products meet your exact specifications. Contact Tempco with your requirements.

Electrical Tests

Our state of the art test meter can perform AC/DC dielectric withstand test (Hypot) up to 5000 volts while measuring leakage current in micro amps. It can also measure Insulation resistance (IR) and heater element resistance. Heaters can be serialized and test reports can be sent with each shipment if required. Contact Tempco with your requirements.

Consult Tempco with your requirements.


We Welcome Your Inquiries.

LDA and HAC Forced Air In-Line Process Cartridge Heaters

TEMPCO manufactures a variety of Air Process Cartridge Heaters. They can be standard units or designed to the customer's specifications. The following diameter sizes are available: 3/8", 1/2", 5/8" and 3/4".

These diameters can be adapted with various types of fittings and made into any practical length.

See Section 11, Pages 11-48 through 11-51
for complete details

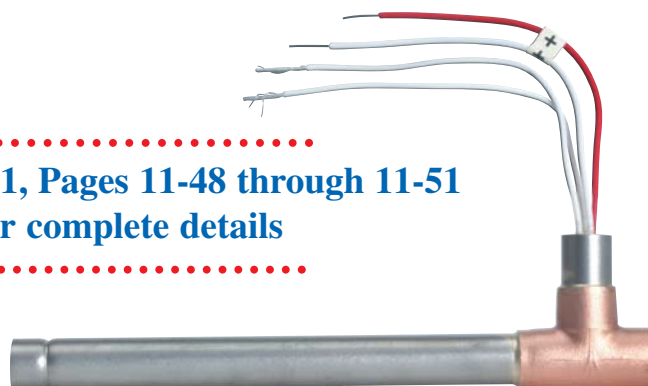

Tempco can Design/Manufacture a heater to fit any application!
Consult us with your requirements.



HI-Density CARTRIDGE IMMERSION FEATURES

Hi-Density Cartridge Immersion Heaters are designed for heating water and other liquids. The high watt density capability of this heater permits greater heat dissipation in a given area than would a tubular immersion heater. However, it is important to note that allowable watt density depends on the material being heated. For water heating, watt densities, of several hundred watts per square inch are possible; while oil heating may be limited to 5 to 20 watts per square inch.

Additional information on Watt Density can be found in Section 16, Engineering Data, at the back of this catalog.

Design Features

- * *Hi-Density Design*
- * *Maximum Voltage to 480V*
- * *Incoloy® Sheath Material*
- * *Teflon® Insulated Lead Wires*
- * *Optional 321 and 316 Stainless Steel Sheath*
- * *Passivated Sheath*
- * *Stainless Steel or Brass Screw Plug*
- * *Epoxy Seal at Lead End 266°F (130°C) Standard*
- * *Available From Stock in 48 Hours*
- * *Six Termination Types to Select From*



Standard NPT and Heater Sizes

NPT Size	1/2"-14	3/4"-14
Cartridge Diameter	5/8"	3/4"

Available for Immediate Delivery through the **TERMINATOR®** Lead Conversion Program



1/2" NPT Screw Plug Hi-Density Cartridge Immersion Heaters

Diameter	Heater Immersion Length		Watts	Watt Density		Part Number		
	in	mm		W/in ²	W/cm ²	120V	240V	480V
5/8" Incoloy	1½	38.1	100	41	6	HDL00001	—	—
	1½	38.1	400	163	25	—	HDL00002	—
	3½	88.9	250	39	6	HDL00003	HDL00004	—
	3½	88.9	1000	157	24	—	HDL00005	HDL00006
	7½	200.0	500	33	5	HDL00007	HDL00008	—
	7½	200.0	2000	134	21	—	HDL00009	HDL00010
	12	304.8	750	33	5	HDL00011	HDL00012	—
	12	304.8	3000	130	20	—	HDL00013	HDL00014



Note: Part Numbers listed are for 1/2" NPT brass screw plug Cartridge Immersion Heaters with Type CM termination and standard 10" long leads. The following terminations are available for Stock Cartridge Immersion Heaters: CM, CN, BF, MR, ER, E and P. *For details see pages 2-56 and 2-57.*



Available through the Terminator Program
for 2nd Day Delivery



Available for Immediate Delivery through the **TERMINATOR** Lead Conversion Program



3/4" NPT Screw Plug Hi-Density Cartridge Immersion Heaters

Diameter	Heater Immersion Length		Watts	Watt Density		Part Number		
	in	mm		W/in ²	W/cm ²	120V	240V	480V
3/4" Incoloy®	4 1/4	108.0	500	53	8	HDL00015	HDL00016	—
	4 1/4	108.0	750	80	12	HDL00017	HDL00018	—
	4 1/4	108.0	1000	106	16	HDL00019	HDL00020	—
	4 3/8	117.5	300	29	5	HDL00021	HDL00022	—
	4 3/8	117.5	1200	116	18	—	HDL00023	HDL00024
	4 3/8	120.7	375	35	5	HDL00025	HDL00026	—
	4 3/8	120.7	1500	141	22	—	HDL00027	HDL00028
	5 3/4	146.1	500	39	6	HDL00029	HDL00030	—
	5 3/4	146.1	2000	154	24	—	HDL00031	HDL00032
	6 1/4	158.8	500	35	5	HDL00033	HDL00034	—
	6 1/4	158.8	2000	141	22	—	HDL00035	HDL00036
	6 1/2	165.1	625	42	7	HDL00037	HDL00038	—
	6 1/2	165.1	2500	170	26	—	HDL00039	HDL00040
	7 1/4	184.2	750	45	7	HDL00041	HDL00042	—
	7 1/4	184.2	3000	182	28	—	HDL00043	HDL00044
	9	228.6	1000	49	8	HDL00045	HDL00046	—
	9	228.6	4000	194	30	—	HDL00047	HDL00048
	10 1/2	266.7	750	31	5	HDL00049	HDL00050	—
	10 1/2	266.7	3000	124	19	—	HDL00051	HDL00052
	10 3/4	273.1	1250	51	8	HDL00053	HDL00054	—
	10 3/4	273.1	5000	202	31	—	HDL00055	HDL00056
	12 1/2	317.5	1500	52	8	—	HDL00057	—
	12 1/2	317.5	6000	208	32	—	—	HDL00058
	13 3/8	346.1	1000	32	5	HDL00059	HDL00060	—
	13 3/8	346.1	4000	127	20	—	HDL00061	HDL00062
	16	406.4	2000	54	8	—	HDL00063	—
	16	406.4	8000	216	33	—	—	HDL00064
	19 1/4	489.0	2500	56	9	—	HDL00065	—
	19 1/4	489.0	10000	223	35	—	—	HDL00066



Note: Part Numbers listed are for 3/4" NPT brass screw plug Cartridge Immersion Heaters with Type CM termination and standard 10" long leads. The following terminations are available for Stock Cartridge Immersion Heaters: CM, CN, BF, MR, ER, E and P. *For details see pages 2-56 and 2-57.*



Available through the Terminator Program
for 2nd Day Delivery

Ordering Information

Stock Heaters

Part Numbers listed above are for 1/2" and 3/4" NPT Brass Screw Plug Cartridge Immersion Heaters with Type CM termination and 10" long leads.

Termination types CN, BF, MR, ER, E and P can be applied to stock heaters. For these terminations the heater part number will be assigned at time of order.

Custom Engineered/Manufactured Heaters

Understanding that an electric heater can be very application specific, for sizes and ratings not listed, **TEMPCO** will design and manufacture a Cartridge Immersion Heater to meet your requirements. **Standard lead time is 3 weeks.**

Please Specify the following:

- | | |
|--|--|
| <input type="checkbox"/> Screw Plug NPT Size | <input type="checkbox"/> Heated Length |
| <input type="checkbox"/> Screw Plug material (Brass or SS) | <input type="checkbox"/> Wattage |
| <input type="checkbox"/> Sheath material (Incoloy®, 321 or 316 SS) | <input type="checkbox"/> Voltage |
| <input type="checkbox"/> Element Watt Density | <input type="checkbox"/> Termination types |
| <input type="checkbox"/> Immersion Length | <input type="checkbox"/> Lead Length |

Cartridge Heaters



Immersion Heater Terminations

Hi-Density Cartridge Immersion Heater Terminations



Available through the Terminator Program
for 2nd Day Delivery

Type **CM** ☐ **Single Threaded Screw Plug**

Easy installation into threaded NPT holes.

CMA Brass Plug

CMN Stainless Steel Plug

➤ **Standard 10" (254 mm) leads. Specify longer leads.**



Available through the Terminator Program
for 2nd Day Delivery

Type **CN** ☐ **Double Threaded Screw Plug**

Allows direct installation of conduit or conduit boxes to the heater.

CNA Brass Plug

CNN Stainless Steel Plug

➤ **Standard 10" (254 mm) leads. Specify longer leads.**



Available through the Terminator Program
for 2nd Day Delivery

Type **E8** ☐ **Octagonal General Purpose Terminal Box**

Boxes have 5/8" conduit knockouts.

E8A Box with 10" (254 mm) Teflon® leads

E8B Box with 10" galvanized armor cable over 12" leads

E8C Box with 10" SS armor cable over 12" leads



Available through the Terminator Program
for 2nd Day Delivery

Type **MR/ER** ☐ **Moisture/Explosion Resistant Terminal Box**

A cast aluminum moisture resistant (Nema 4) and explosion resistant (Nema 7) housing can be screwed onto a heater with double threaded fitting Type CN_ (see page 2-46). See page 2-48 for additional hub locations.

MR/ERA Box with 10" (254 mm) leads

MR/ERB Box with 10" galvanized armor cable over 12" Teflon® leads

MR/ERC Box with 10" SS armor cable over 12" Teflon® leads



Type **TH** **Top Hat - NPT Screw Plug**

This heater has a header cap as an integral part of the NPT fitting. Leads exit through small holes which are sealed with RTV for moisture protection. Available for all standard cartridge dimensions.



Hi-Density Cartridge Immersion Heater Terminations

Type BF ☐ Bulkhead Fitting

A 5/8-18 UNF brass bulkhead fitting is silver brazed to the cartridge heater for mounting the heater to the wall of a tank or enclosure. No need for expensive female fittings on the mating part. Heater comes complete with copper washer and jam nut. Available only on 5/8" diameter heaters.

BFA Low temperature epoxy potting — 266°F (130°C)

BFB Silicone rubber potting — 450°F (232°C)

BFC High temperature epoxy potting — 450°F (232°C)

➤ A minimum 1/4" cold section below the bulkhead fitting is required.

➤ **Standard 10" (254 mm) leads.** Specify longer leads.

Shown with optional hex head fitting. Round head is standard.



Available through the **Terminator Program**
for 2nd Day Delivery

Type P ☐ Quick Disconnect Plug

P1 — 2-pole/2-wire twist locking plug
15 amp 125 volt, NEMA L1-15P
Part no. EHD-102-102

P1A Plug with 10" galvanized armor cable

P1B Plug with 10" SS armor cable

P1C Plug with 10" SS wire braid

P2 — 2-pole/3-wire twist locking plug.
15 amp 125 volt or 10 amp 250 volt, NEMA N/A
This plug is not UL listed, and is recommended for replacement use only.

P2A — Plug with 10" galvanized armor cable

P2B — Plug with 10" SS armor cable

P2C — Plug with 10" SS wire braid

P3 — 2-pole/3-wire straight blade plug
15 amp 125 volt, NEMA 5-15P
Part no. EHD-102-103

P3A — Plug with 10" galvanized armor cable

P3B — Plug with 10" SS armor cable

P3C — Plug with 10" SS wire braid

P4 — 2-pole/3-wire twist locking plug
15 amp 125 volt, NEMA L5-15P
Part no. EHD-102-113

P4A — Plug with 10" galvanized armor cable

P4B — Plug with 10" SS armor cable

P4C — Plug with 10" wire braid

P5 — 2-pole/3-wire twist locking plug
15 amp 250 volt, NEMA L6-15P
Part no. EHD-102-121


P5A — Plug with 10" galvanized armor cable

P5B — Plug with 10" SS armor cable

P5C — Plug with 10" SS wire braid




Available through the **Terminator Program**
for 2nd Day Delivery

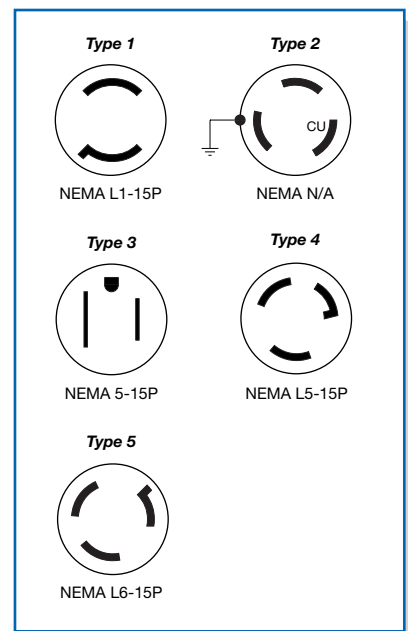

Available through the **Terminator Program**.
Note: Applies only to Hi-Density Cartridge Heaters.



BOLT HEATERS

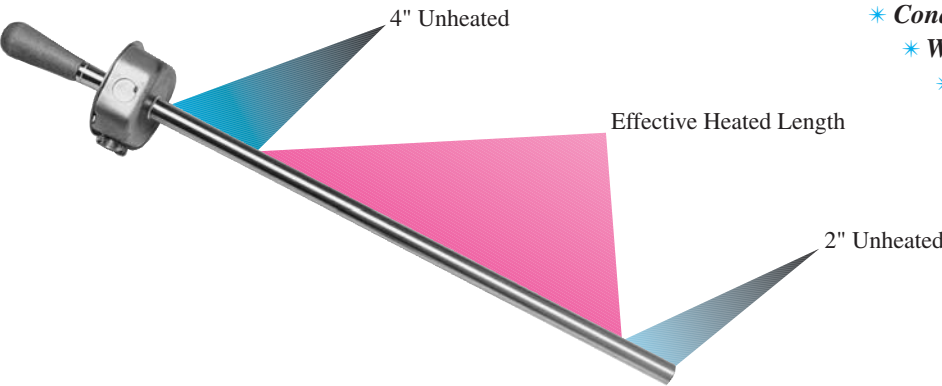

Design Features

- * *Hi-Density Construction*
- * *Conduit Box with Knockouts*
- * *Wooden Handle*
- * *High Temperature Lead Wires—250°C (482°F)*
- * *Optional SJO Cord or Post Terminals*
- * *Optional Quick Disconnect Plugs*

Typical Industries

- * *Power Plants*
- * *Shipyards*
- * *Large Machine and Die Manufacturers*
- * *Construction*
- * *Boiler Manufacturers*

Typical Applications

- * *Large Compressors*
- * *Turbines*
- * *Die Blocks*
- * *Large Cylinders*
- * *Engine Heads*
- * *Pressure Vessels*

Tempco Bolt Heaters are used as an aid to tighten large bolts in heavy machinery and equipment. Heaters are sized for easy insertion into a hollow bolt. The rapid heating of the bolt expands it, allowing further tightening of the nut. The heater is then de-energized and removed. As the bolt cools, its contraction back to original size provides a tight fit.

Tempco Bolt Heaters are constructed with one of the industry’s most efficient and highest quality heating elements—Tempco Hi-Density (swaged) Cartridge Heaters; with close tolerance fits, watt densities of 100 watts per square inch are obtainable—65% higher than standard cartridge or tubular heating elements can deliver. The higher wattage on Hi-Density Bolt Heaters means quicker heat-up time and minimum heat loss to the area surrounding the bolt.

Bolt Heaters Standard Specifications and Tolerances

DIMENSIONAL SPECIFICATIONS

Actual Diameter (in)	.438	.496	.553	.580	.621	.660	.710	.745	.813	.993
Actual Diameter (mm)	11.1	12.6	14.0	14.7	15.8	16.8	18.0	18.9	20.7	25.2
Diameter Tolerance	±.005 (.127 mm)									
Length Tolerance	±2% of sheath length									
Camber Tolerance	.015" (0.38 mm) per foot of length									

ELECTRICAL SPECIFICATIONS

Diameter (in)	.438	.496	.553	.580	.621	.660	.710	.745	.813	.993
Maximum Voltage	240	240	240	240	240	480	480	480	480	480
Maximum Amperage	6.7	10.5	10.5	23	25	25	25	25	25	25

If tighter tolerances are required, consult Tempco.



Standard (Non-Stock) Bolt Heaters

Heater Diameter in (mm)	Inserted Length		Heated Length		Watts	Watt Density		Part Number 240V
	in	mm	in	mm		W/in ²	W/cm ²	
.438 (11.1)	18	457	12	305	1000	60.6	9.4	HDB00001
	24	610	18	457	1500	60.6	9.4	HDB00002
.496 (12.6)	18	457	12	305	1900	101.6	15.8	HDB00003
	24	610	18	457	2300	82.0	12.7	HDB00004
	30	762	24	610	2300	61.5	9.5	HDB00005
	36	914	30	762	2300	49.2	7.6	HDB00006
.553 (14.0)	18	457	12	305	1200	57.6	8.9	HDB00007
	24	610	18	457	1700	54.4	8.4	HDB00008
	30	762	24	610	2500	60.0	9.3	HDB00009
	36	914	30	762	3200	61.4	9.5	HDB00010
.580 (14.7)	18	457	12	305	2200	100.6	15.6	HDB00011
	24	610	18	457	3300	100.6	15.6	HDB00012
	30	762	24	610	4350	99.5	15.4	HDB00013
	36	914	30	762	5450	99.7	15.5	HDB00014
.621 (15.8)	18	457	12	305	2350	100.4	15.6	HDB00015
	24	610	18	457	3500	99.7	15.4	HDB00016
	30	762	24	610	4700	100.4	15.6	HDB00017
	36	914	30	762	5500	94.0	14.6	HDB00018
.660 (16.8)	18	457	12	305	1200	48.2	7.5	HDB00019
	24	610	18	457	1700	45.5	7.1	HDB00020
	30	762	24	610	2300	46.2	7.2	HDB00021
	36	914	30	762	2800	45.0	7.0	HDB00022
.710 (18.0)	18	457	12	305	2700	100.9	15.6	HDB00023
	24	610	18	457	4000	99.7	15.4	HDB00024
	30	762	24	610	5350	100.0	15.5	HDB00025
	36	914	30	762	5500	82.2	12.7	HDB00026
.745 (18.9)	18	457	12	305	2800	99.7	15.5	HDB00027
	24	610	18	457	4200	99.7	15.5	HDB00028
	30	762	24	610	5500	97.9	15.2	HDB00029
	36	914	30	762	5500	78.3	12.1	HDB00030
.813 (20.7)	18	457	12	305	1800	58.7	9.1	HDB00031
	24	610	18	457	2500	54.4	8.4	HDB00032
	30	762	24	610	3500	57.1	8.6	HDB00033
	36	914	30	762	4200	54.8	8.5	HDB00034
.993 (25.2)	18	457	12	305	3750	100.2	15.5	HDB00035
	24	610	18	457	5500	97.9	15.2	HDB00036
	30	762	24	610	5500	73.5	11.4	HDB00037
	36	914	30	762	5500	58.8	9.1	HDB00038



Note: Part Numbers shown are for heaters with standard 10" long leads and a conduit box with wooden handle.

Hi-Density Bolt Heaters are made-to-order only.

Ordering Information

Catalog Heaters

Order by Catalog Part Number from the Standard Sizes and Ratings List.

Note that Part Numbers shown are for heaters with 10" long, 428°F (250°C) stranded flexible lead wires inside the conduit box.

Standard lead time is 3 weeks.

Custom Engineered/Manufactured Heaters

Understanding that an electric heater can be very application specific, for sizes and ratings not listed, **TEMPCO** will design and manufacture a Bolt Heater to meet your requirements. **Standard lead time is 3 weeks.**

Please Specify the following:

- | | |
|--|--|
| <input type="checkbox"/> Diameter | <input type="checkbox"/> Voltage |
| <input type="checkbox"/> Insertion Length | <input type="checkbox"/> Lead Length or Post Terminals |
| <input type="checkbox"/> Cold Section (top and bottom) | <input type="checkbox"/> Optional Cord or Plug |
| <input type="checkbox"/> Wattage | <input type="checkbox"/> Special Features |


Low Density Square

TEMPCO Low Density Square Cartridge Heaters allow more contact per linear inch than cylindrical cartridge heaters, for greater heat transfer to the surrounding medium. Inserted in a milled slot they permit greater heater lengths than would be possible with a drilled hole.

Typical Applications

- * Bag Sealing
- * Plastic Forming Bars
- * Heating of Long Platens
- * Cutting Jaws

LOW DENSITY SQUARE CARTRIDGE HEATERS

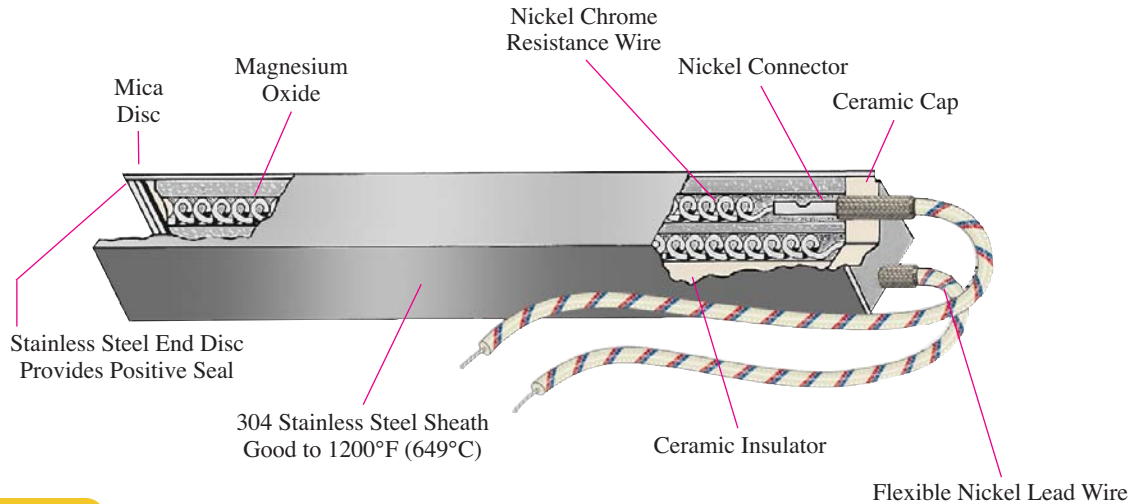

DIMENSIONAL SPECIFICATIONS



Nominal Size (in)	3/16	1/4	3/8	1/2	5/8
Actual Size (in)	.185	.246	.370	.496	.621
Actual Size (mm)	(4.70)	(6.25)	(9.40)	(12.60)	(15.77)
Size Tolerance	±.002 (.051 mm)				
Length Tolerance	±1/16" (1.59 mm) up to 6" long; ±1/8" (3.18 mm) over 6" long				
Camber Tolerance	.010" (0.254 mm) per foot of length				

ELECTRICAL SPECIFICATIONS

Nominal Size (in)	3/16	1/4	3/8	1/2	5/8
Maximum Voltage	120	240	240	240	480*
Maximum Amperage	2	3.5	6	10	10
Maximum Wattage	240	840	1440	2400	4800
Wattage Tolerance	Plus 5%, Minus 10%				
Resistance Tolerance	Plus 10%, Minus 5%				





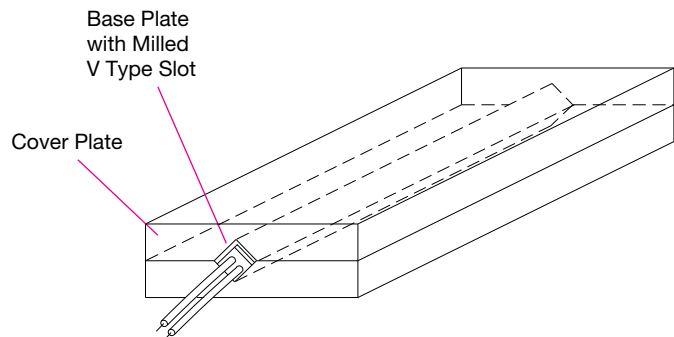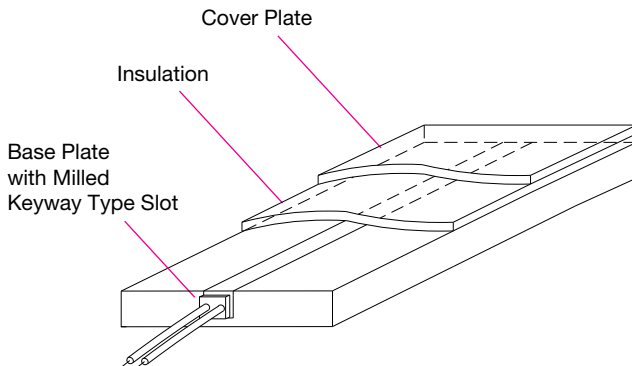




*480V when applicable — Consult Tempco

Suggested Installation





Low Density Square Cartridge Heater Terminations

 <p>Type F — Standard Flexible Leads</p> <p>Standard termination for Square Cartridge Heaters. Leads are internally connected. Sharp bending of the lead wire is possible where it exits the heater. 3/16" and 1/4" heaters use Teflon® insulated wires. 3/8", 1/2" and 5/8" heaters use 482°F (250°C) rated fiberglass insulated lead wires. 10" leads are standard. If longer leads are required, specify.</p>	 <p>Type W Straight Braided Leads</p> <p>Abrasion resistant while still allowing sharp bending that is not possible with armor cable. 10" of stainless steel wire braid over 12" leads is standard. If longer leads and braid are required, specify.</p>	 <p>Type W1 Right-Angle Braided Leads</p> <p>Abrasion resistant while still allowing sharp bending that is not possible with armor cable. 10" of stainless steel wire braid over 12" leads is standard. If longer leads and braid are required, specify.</p>
 <p>Type C1 Straight Armor Cable</p> <p>Abrasion resistant. 10" of galvanized cable over 12" leads is standard. If longer leads and cable are required, specify.</p>	 <p>Type C3 Right-Angle Armor Cable</p> <p>Abrasion resistant. 10" of galvanized cable over 12" leads is standard. If longer leads and cable are required, specify.</p>	 <p>Type R3 Angled Sheath Extension</p> <p>Sheath extension is potted with cement. 10" leads standard. If longer leads are required, specify. Wire braid or armor cable can be applied for lead wire protection. If lead protection is required, specify.</p>
 <p>Type S1 Straight Spring</p> <p>Flex resistant 2-1/2" long spring with 10" leads standard. If longer leads are required, specify.</p>	 <p>Type S3 Lead Wire Strain Relief</p> <p>Flex resistant "T" type strain relief with 10" leads standard. If longer leads are required, specify.</p>	 <p>Type T3 Double End Screw Terminal</p> <p>Available on 1/2" and 5/8" heaters. Thread is 8-32 by 3/4" long.</p>

Low Density Square Cartridge Heater Additional Optional Features

Distributed Wattage

Special wattage concentration for even heat distribution.

Cold Section

Specify location and length.

Full Length Silicone Rubber Coated Fiberglass Sleeveing

Internal Thermocouple (N/A on 3/16" heaters)

Specify thermocouple type, grounded or ungrounded junction and location.

Consult TEMPCO...

For any additional options your application may require.



Standard (Non-Stock) Low Density Square Cartridge Heaters

Size in (mm)	Sheath Length in mm	Watts	Watt Density W/in ² W/cm ²	Voltage	Termination Type	Part Number
3/16" (4.76)	2 50.8	40	36 6	120	F	SCH00001
	2 ⁹ / ₁₆ 65.1	100	65 10	120	R3	SCH00002
	2 ³ / ₄ 69.9	100	59 9	120	W1	SCH00003
	2 ¹⁵ / ₁₆ 74.6	150	82 13	120	R3	SCH00004
	18 457.2	165	13 2	120	F	SCH00005
1/4" (6.35)	2 50.8	60	40 6	120	W1	SCH00006
	4 ³ / ₄ 120.7	200	47 7	120	F	SCH00007
	6 152.4	200	36 6	120	F	SCH00008
	6 152.4	200	36 6	240	F	SCH00009
	8 203.2	100	14 2	120	F	SCH00010
	14 355.6	75	6 1	24	F	SCH00011
	15 381.0	200	14 2	120	F	SCH00012
	18 457.2	500	29 5	120	W1	SCH00013
	18 457.2	500	29 5	240	W1	SCH00014
	23 584.2	300	14 2	120	F	SCH00015
	26 ³ / ₈ 676.3	475	19 3	240	C3	SCH00016
	35 889.0	450	13 2	120	F	SCH00017
	57 ³ / ₈ 1457.3	1000	18 3	240	C3	SCH00018
	59 ³ / ₁₆ 1503.4	1050	18 3	240	C3	SCH00019
	62 ¹ / ₂ 1587.5	940	15 2	240	C1	SCH00020
	67 1701.8	1000	15 2	240	C1	SCH00021
	80 ³ / ₈ 2035.2	1000	13 2	240	W1	SCH00022
3/8" (9.53)	8 203.2	400	38 6	240	C3	SCH00023
	8 203.2	400	38 6	240	W	SCH00024
	9 ¹ / ₄ 235.0	500	40 6	120	F	SCH00025
	10 254.0	500	37 6	120	F	SCH00026
	10 ¹ / ₂ 266.7	300	21 3	240	F	SCH00027
	12 304.8	200	12 2	240	C3	SCH00028
	12 304.8	275	17 3	120	F	SCH00029
	12 304.8	600	36 6	120	F	SCH00030
	18 ¹ / ₂ 469.9	450	17 3	240	F	SCH00031
	24 609.6	1000	29 4	120	W1	SCH00032
1/2" (12.7)	24 ³ / ₄ 628.7	65	2 0.3	120	F	SCH00033
	8 203.2	500	36 6	240	F	SCH00034
	10 254.0	650	36 6	240	W	SCH00035
	14 355.6	1200	46 7	240	F	SCH00036
	21 533.4	1200	30 5	120	C3	SCH00037
	24 609.6	1250	27 4	240	S3	SCH00038
	24 609.6	1250	27 4	240	W	SCH00039
	24 609.6	2400	52 8	240	W	SCH00040
	29 736.6	2000	36 6	240	W	SCH00041
	33 838.2	2200	34 5	240	F	SCH00042
	35 889.0	2000	29 5	240	W	SCH00043
	39 990.6	2500	33 5	240	C3	SCH00044
	46 1168.4	2500	28 4	240	W	SCH00045
5/8" (15.88)	72 1828.8	2200	15 2	240	W	SCH00046
	6 152.4	500	36 6	240	C1	SCH00047
	20 508.0	1000	21 3	240	F	SCH00048
	33 838.2	2000	25 4	240	F	SCH00049

Ordering Information

Catalog Heaters

Order by Catalog Part Number from the Standard Sizes and Ratings List. Note that Part Numbers shown are for heaters with 10" Standard leads or 12" leads with 10" Cable or Braid.

Standard lead time is 3 weeks.

Custom Engineered/Manufactured Heaters

Understanding that an electric heater can be very application specific, for sizes and ratings not listed, **TEMPCO** will design and manufacture a Square Cartridge Heater to meet your requirements. **Standard lead time is 3 weeks.**

Please Specify the following:

- ☐ Square Size
- ☐ Length
- ☐ Wattage
- ☐ Voltage
- ☐ Termination Type (see page 2-61)
- ☐ Lead Length
- ☐ Cable/Braid Length
- ☐ Optional Features