




Global Catalog

Compressors, Vacuum Pumps & Liquid Pumps

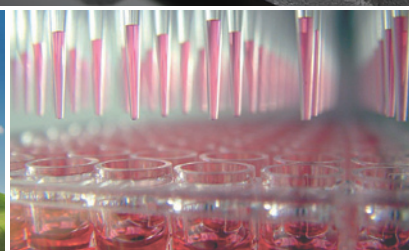

Improving Lives through Innovation™

THOMAS
A Gardner Denver Product



Pumps and Compressor Solutions for OEMs Worldwide

As a leader in providing fluidic solutions to Original Equipment Manufacturers, Thomas continues to develop new products to meet the requirements of evolving markets and applications. Breadth of product, proprietary technologies and global manufacturing benefit our customers.

These distinctions coupled with innovative research and development programs, qualifies Thomas as the premier resource utilized by OEMs throughout the world.

OEM Products

The extensive product line presented in this catalog offers custom solutions configured to meet specific requirements.

Flow – The flow range extends to 12.7 cfm (360 l/min).

Pressure – The pressure range extends to 175 psi (12.1 bar).

Vacuum – The vacuum range extends to 99% of local barometer (10 mbar abs).

Liquid – Thomas pumps cover a flow range to 3 l/min and pressures to 80 m H₂O. These pumps are self-priming and can also be used for dosing applications.



Improving Lives
through Innovation™

Table of Contents

Technology Selection Guide	4
Model Series Selection Guide	5
Model Performance & Specifications	8
WOB-L® Piston Pumps & Compressors	8
Articulated Piston Pumps & Compressors	12
Diaphragm Pumps & Compressors	14
Rotary Vane Pumps & Compressors	18
Linear Diaphragm Pumps & Compressors	22
Liquid Diaphragm Pumps	26
Liquid Peristaltic Pumps	26

Operating Principles for Compressors & Vacuum Pumps



WOB-L® PISTON Oil-less WOB-L® piston pumps and compressors. Best choice for pressure and/or vacuum applications that require compact, lightweight designs and high performance piston seals.

Free flow: to 7.1 cfm (201 l/min)
Pressure: to 160 psi (11 bar)
Vacuum: to 99% local barometer




ROTARY VANE Oil-less and self-lubricating rotary vane pumps and compressors. Low vibration, nearly pulsation free, compact and in some cases reversible.

Free flow: to 10 cfm (283 lpm)
Pressure: to 15 psi (1 bar)
Vacuum: to 89% local barometer



ARTICULATING PISTON Oil-less articulating piston pumps and compressors. Well suited for applications that require high pressures with proportionately higher flow capability.

Free flow: to 5.4 cfm (153 l/min)
Pressure: to 175 psi (12.1 bar)
Vacuum: to 94% local barometer



LINEAR Oil-less linear diaphragm pumps and compressors. Quiet operation, lower pulsation, higher efficiency and fewer wearing parts.

Free flow: to 12.7 cfm (360 l/min)
Pressure: to 10.2 psi (703 mbar)
Vacuum: to 47% local barometer



DIAPHRAGM Oil-less diaphragm pumps and compressors. Durable diaphragm design provides high efficiencies, low sound levels and good air tightness. Adapts well to different gases.

Free flow: to 3.2 cfm (91 l/min)
Pressure: to 44 psi (3 bar)
Vacuum: to 99% local barometer

Operating Principles for Liquid Pumps



DIAPHRAGM Liquid diaphragm pumps. Self priming, dry running and suitable for continuous operation. Drive available for all required AC and DC voltages.

Free flow max: 900 ml/min
Suction height: 6 m H₂O
Pressure height: 80 m H₂O



PERISTALTIC Liquid peristaltic pumps. Low vibration, nearly pulsation free and of compact design. Reversible operation. Adjustable through supply voltage.

Free flow max: 3000 ml/min
Suction height: 8.0 m H₂O
Pressure height: 10 m H₂O



LINEAR Liquid linear diaphragm pumps. Very long life and low sound level. For applications with low pressure requirements.

Free flow max: 310 ml/min
Suction height: 2.0 m H₂O
Pressure height: 6.0 m H₂O

Common Unit of Measure Conversions

Flow
1 cfm = 28.32 l/min
1 l/min = 0.0353 cfm

Vacuum
1 in. Hg = 33.8 mbar
1 mbar = 0.0296 in. Hg




Weight
1 lb = 0.4536 kg
1 kg = 2.21 lb

Pressure
1 psi = 0.069 bar
1 bar = 14.5 psi

Dimensions
1 in = 25.4 mm
1 mm = 0.0394 in

Temperature
°C = 0.55 x (°F - 32.0)
°F = (1.8 x °C) + 32.0

Model Series Selection Guide

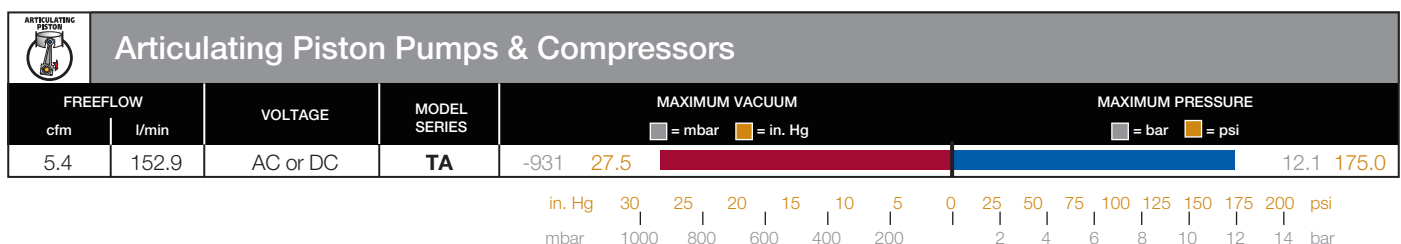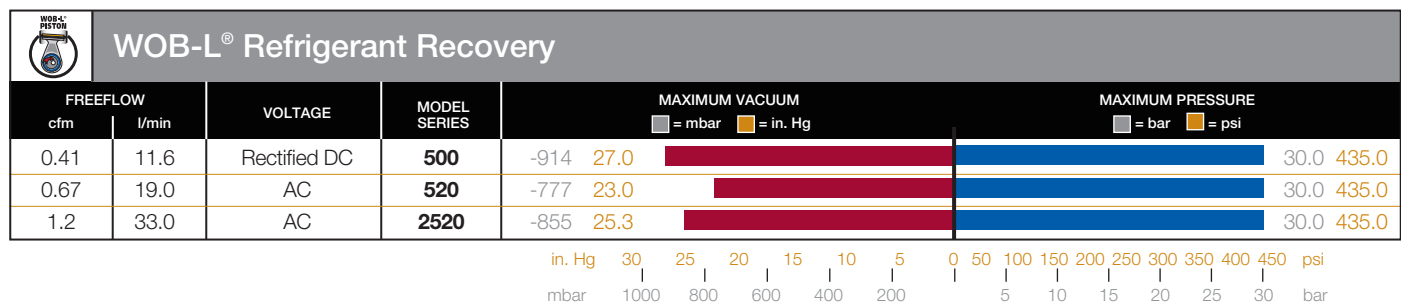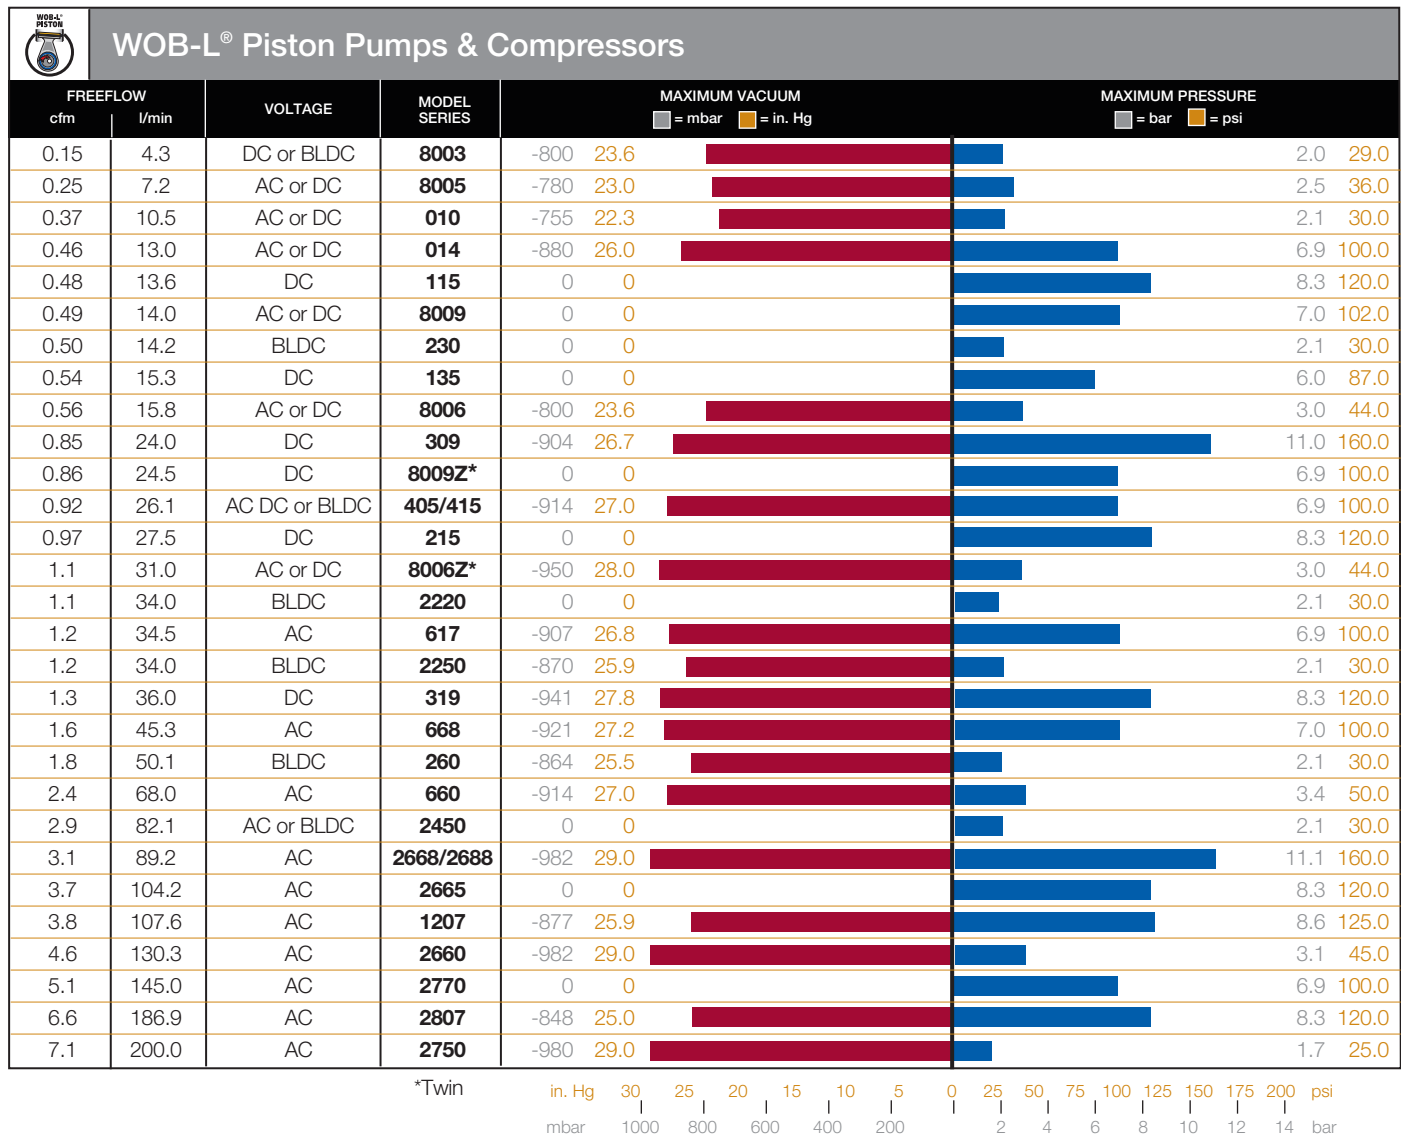



Diaphragm Pumps & Compressors

FREEFLOW		VOLTAGE	MODEL SERIES	MAXIMUM VACUUM		MAXIMUM PRESSURE	
cfm	l/min			■ = mbar	■ = in. Hg	■ = bar	■ = psi
-	0.8	DC or BLDC	2002	-520	15.3	0.6	9.0
-	1.0	DC or BLDC	3003	-480	14.2	1.0	14.5
-	1.3	DC	3013	-450	13.3	0.6	8.7
0.1	2.0	DC	4002	-600	17.7	0.7	10.1
0.2	5.5	DC or BLDC	1410	-750	22.0	1.9	27.6
0.2	6.5	AC or DC	7010	-730	21.5	2.3	33.3
0.3	9.0	AC, DC or BLDC	7006	-850	25.1	2.5	36.3
0.4	11.0	DC or BLDC	1420*	-900	26.6	1.9	27.6
0.4	11.0	AC or DC	7011*	-900	26.6	2.3	33.3
0.4	12.5	AC or DC	7010Z*	-900	26.6	2.3	33.3
0.5	14.0	DC	7015	-800	23.6	2.5	31.3
0.6	18.0	AC, DC or BLDC	7006Z*	-850	25.1	2.5	36.3
0.8	23.0	AC	8010	-780	23.0	2.8	40.6
0.8	24.0	DC	7011Z*	-980	28.9	2.3	33.3
0.9	25.0	AC or DC	7015Z*	-950	28.0	3.0	43.5
1.0	28.0	AC	8015	-830	24.5	3.0	43.5
1.1	32.5	DC	007	-780	23.0	1.0	15.0
1.2	34.0	AC, DC or BLDC	107	-775	22.9	2.1	30.0
1.2	34.0	AC	8011	-950	28.0	0	0
1.2	35.1	AC	927	-807	23.8	2.1	30.0
1.3	38.0	AC	8010Z*	-920	27.1	2.8	40.6
1.5	42.5	DC	907	-841	24.8	2.1	30.0
1.6	46.7	AC	2107	-956	28.3	1.4	20.0
1.8	50.0	AC	8015Z*	-960	28.3	0	0
2.0	55.8	DC	910	-824	24.3	1.7	25.0
2.3	65.0	AC	8011Z*	-990	29.2	0	0
3.2	90.6	DC	2907	-814	24.0	1.0	15.0

*Twin

in. Hg 30 25 20 15 10 5 0 10 20 30 40 50 psi
mbar 1000 800 600 400 200 0.5 1.0 1.5 2.0 2.5 3.0 3.5 bar






Rotary Vane Pumps & Compressors

FREEFLOW		VOLTAGE	MODEL SERIES	MAXIMUM VACUUM		MAXIMUM PRESSURE	
cfm	l/min			■ = mbar	■ = in. Hg	■ = bar	■ = psi
0.1	1.6	DC or BLDC	G/01	-290	8.6	0.3	4.1
0.1	2.2	DC	G/01-K	-70	2.1	0.1	1.2
0.1	3.7	DC or BLDC	G/02	-450	13.3	0.6	8.7
0.2	6.8	DC	G/04	-260	7.7	0.3	3.8
0.3	7.5	DC	G045	-700	20.7	0.9	13.0
0.3	8.5	BLDC	BL-G 085 M	-500	14.2	0.5	6.5
0.4	11.0	DC	G/09	-350	10.3	0.4	5.4
0.6	15.5	DC	G08	-830	24.5	1.4	20.3
0.8	23.0	DC	G/07	-800	23.6	1.4	20.3
1.3	36.0	DC	G/08-T*	-930	25.0	1.4	20.3
1.5	42.0	DC	TF2	-800	23.6	1.0	14.5
2.3	66.0	DC	TF4	-800	23.6	1.0	14.5
2.5	70.0	AC or DC	VTE/DTE3	-850	25.1	1.0	14.5
2.8	79.3	AC or BLDC	SR	-847	25.0	0.7	10.1
4.2	120.0	AC or DC	VTE/DTE6	-850	25.1	1.0	14.5
4.8	136.0	DC	TF8	-800	23.6	1.0	14.5
5.6	160.0	AC or DC	VTE/DTE8	-850	25.1	0.6	8.7
7.1	200.0	AC or DC	VTE/DTE10	-850	25.1	1.0	14.5
10.0	283.1	AC	QR	-881	26.0	1.0	15.1

*Twin

in. Hg 30 25 20 15 10 5 0 5 10 15 20 25 psi
mbar 1000 800 600 400 200 0.25 0.50 0.75 1.00 1.25 1.50 1.75 bar

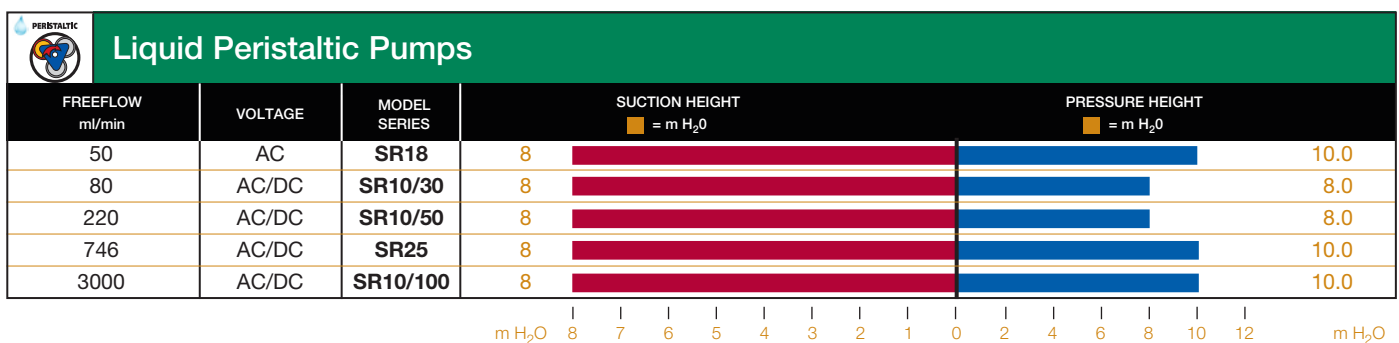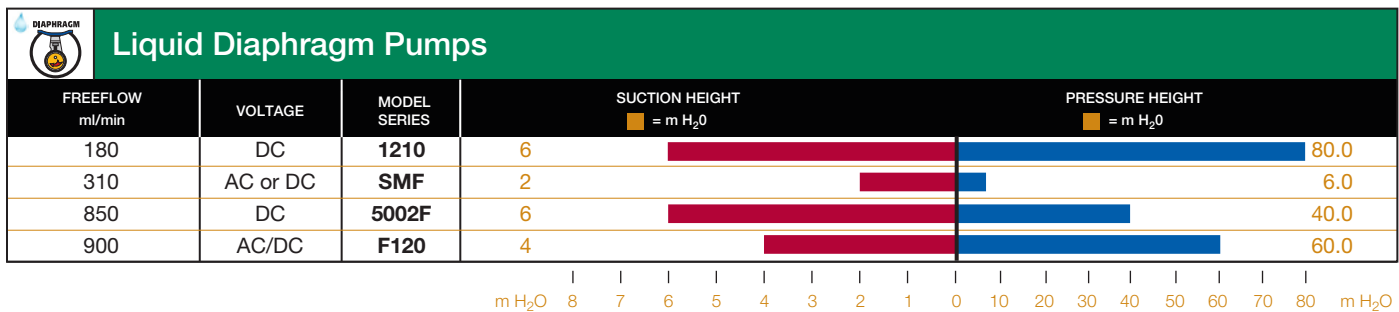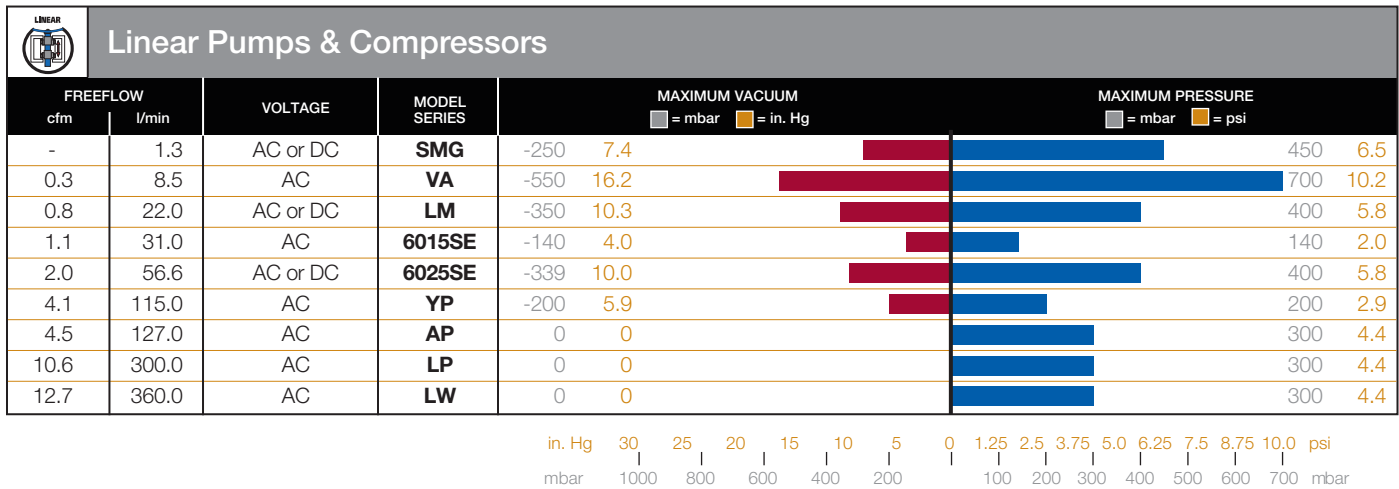

As a leading manufacturer of OEM pumps and compressors, our innovation in design and technology has helped our customers create new innovative products and become leaders in their marketplace.

For more information on how Thomas innovation can help you lead your industry, go to gd-thomas.com.

Model Performance & Specifications

8003 BLDC




WOB-L® Piston Pumps & Compressors

Pressure Performance												
MODEL	MOTOR CAPACITY		FLOW l/min @ bar								MAXIMUM PRESSURE bar	
	VOLTAGE	TYPE*	0.0	0.5	1.0	1.5	2.0	3.0	5.0	7.0	CONTINUOUS	INTERMITTENT
8003D	12,24	PM	4.3	3.1	2.1	1.3	-	-	-	-	1.0	2.0
8003ZDP	12	PM	5.4	2.8	1.6	0.8	-	-	-	-	0.3	2.0
8003V	12,24	PM	-	-	-	-	-	-	-	-	-	-
8003ZVR	12	PM	-	-	-	-	-	-	-	-	-	-
8005D	12,24	PM	7.2	5.7	4.3	3.2	2.4	-	-	-	1.5	2.5
8005D	230/50/1	SP	6.0	4.8	3.7	2.8	2.0	-	-	-	1.5	2.5
8005V	12,24	PM	-	-	-	-	-	-	-	-	-	-
8005V	230/50/1	SP	-	-	-	-	-	-	-	-	-	-
8006D	12,24	PM	15.8	12.2	9.3	6.9	4.8	1.3	-	-	1.0	3.0
8006D	230/50/1	PSC	15.8	12.6	10.1	7.6	5.5	2.0	-	-	1.0	3.0
8006V	12,24	PM	-	-	-	-	-	-	-	-	-	-
8006V	230/50/1	SP	-	-	-	-	-	-	-	-	-	-
8006ZVP	12,24	PM	-	-	-	-	-	-	-	-	-	-
8006ZVP	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
8006ZVR	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
8009D	12,24	PM	14.0	11.5	9.0	8.0	7.1	5.6	3.2	1.8	1.0	7.0
8009D	230/50/1	PSC	11.8	10.4	9.4	8.5	7.6	6.2	4.2	2.9	1.0	7.0
8009ZD	24	PM	24.5	21.6	19.1	17.2	15.3	13.4	10.2	7.0	1.0	7.0
8009ZD	230/50/1	PSC	22.4	19.9	17.8	16.1	14.4	11.9	8.2	5.4	1.0	7.0

*PM = Permanent Magnet, SP = Shaded Pole, PSC = Permanent Split Capacitor

Note: Minimum release quantities or regional availability may apply. Consult factory.

8006 AC



115ADC



WOB-L® Piston Pumps & Compressors

Pressure Performance												
MODEL	MOTOR CAPACITY		FLOW cfm @ psi								MAXIMUM PRESSURE psi	
	VOLTAGE	TYPE*	0	5	10	20	40	60	80	100	CONTINUOUS	INTERMITTENT
010CA26	115/60/1	SP	0.37	0.33	0.29	0.20	-	-	-	-	10.0	30.0
010CD26	220/50/1	SP	0.31	0.28	0.24	0.17	-	-	-	-	10.0	30.0
010CDC26/12	12	PM	0.37	0.33	0.29	0.20	-	-	-	-	10.0	30.0
010CR26	100/50/60/1	SP	0.37	0.33	0.29	0.20	-	-	-	-	30.0	30.0
014CA28	115/60/1	SP	0.46	0.40	0.37	0.32	0.26	0.22	0.17	0.12	100.0	100.0
014CD28	220/50/1	SP	0.37	0.33	0.30	0.28	0.22	0.17	0.15	0.09	100.0	100.0
014CDC20/12	12	PM	0.39	0.31	0.22	0.16	-	-	-	-	20.0	50.0
115ADC56/	12 or 24	PM	0.48	0.44	0.39	0.36	0.29	0.25	0.21	0.16	-	120.0
135ADC56/	12 or 24	PM	0.54	0.51	0.48	0.42	0.33	0.27	0.22	-	-	87.0
215ADC38/	12 or 24	PM	0.97	0.92	0.87	0.76	0.61	0.46	0.38	0.30	-	120.0
230ZA30/12	12	BLDC	0.40	0.36	0.32	0.30	-	-	-	-	30.0	30.0
260ZC35/24	24	BLDC	1.77	1.62	1.49	1.23	-	-	-	-	30.0	30.0
309CDC56/12	12	PM	0.85	0.82	0.73	0.70	0.60	0.53	0.45	0.42	-	160.0
309DDC56/12	12	PM	0.85	0.82	0.73	0.70	0.60	0.53	0.45	0.42	-	134.0
3191250IRLSCE	12	PM	1.25	1.20	1.15	1.05	0.90	0.79	0.71	0.65	-	120.0
3D191250IRLSCE	12	PM	1.27	1.22	1.18	1.09	0.93	0.83	0.73	0.68	-	120.0

*PM = Permanent Magnet, SP = Shaded Pole, BLDC=Brushless DC

215DC



230



3D19






WOB-L® Piston Pumps & Compressors


Vacuum Performance									Specifications		
MODEL	MOTOR CAPACITY		FLOW l/min @ mbar						MAX. VACUUM mbar	DIMENSIONS (H x W x L) mm	WEIGHT kg
	VOLTAGE	TYPE*	0	-100	-200	-400	-600	-800			
8003D	12, 24	-	-	-	-	-	-	-	-	54 x 30 x 82	0.19
8003ZDP	12	PM	-	-	-	-	-	-	-	53 x 30 x 123	0.28
8003V	12,24	PM	1.3	3.5	2.8	1.5	0.2	-	-650	54 x 30 x 82	0.19
8003ZVR	12	PM	2.9	2.5	2.0	1.2	0.6	-	-800	53 x 30 x 123	0.28
8005D	12,24	PM	-	-	-	-	-	-	-	75 x 96 x 118	1.1
8005D	230/50/1	SP	-	-	-	-	-	-	-	75 x 106 x 110	1.1
8005V	12,24	PM	7.2	6.0	4.8	3.0	1.4	-	-780	75 x 96 x 118	1.1
8005V	230/50/1	SP	6.0	4.9	3.8	2.4	1.2	-	-780	75 x 106 x 110	1.1
8006D	12,24	PM	-	-	-	-	-	-	-	100 x 71 x 146	1.2
8006D	230/50/1	PSC	-	-	-	-	-	-	-	114 x 78 x 147	1.5
8006V	12,24	PM	15.8	13.4	11.1	6.2	3.6	-	-800	100 x 71 x 146	1.2
8006V	230/50/1	SP	14.2	12.0	9.7	6.0	3.0	-	-800	110 x 71 x 131	1.5
8006ZVP	12,24	PM	31.0	25.0	20.0	11.7	5.1	-	-800	99 x 63 x 191	0.9
8006ZVP	230/50/1	PSC	29.0	24.9	20.7	12.9	6.2	-	-800	114 x 78 x 193	2.0
8006ZVR	230/50/1	PSC	14.2	12.0	10.5	7.0	4.0	1.5	-950	114 x 78 x 193	2.0
8009D	12,24	PM	-	-	-	-	-	-	-	104 x 63 x 145	1.1
8009D	230/50/1	PSC	-	-	-	-	-	-	-	108 x 91 x 153	1.7
8009ZD	24	PM	-	-	-	-	-	-	-	105 x 70 x 177	2.1
8009ZD	230/50/1	PSC	-	-	-	-	-	-	-	108 x 110 x 195	2.5

*PM = Permanent Magnet, SP = Shaded Pole, PSC = Permanent Split Capacitor


Note: Minimum release quantities or regional availability may apply. Consult factory.



8003 Z



8005 DC



8009 ZDC



010CA



WOB-L® Piston Pumps & Compressors

Vacuum Performance									Specifications		
MODEL	MOTOR CAPACITY		FLOW cfm @ in. Hg						MAX. VACUUM in. Hg	DIMENSIONS (H x W x L) in	WEIGHT lb
	VOLTAGE	TYPE*	0	5	10	15	20	25			
010CA26	115/60/1	SP	0.37	0.27	0.18	0.10	0.02	-	18.0	4.29 x 3.00 x 5.20	3.2
010CD26	230/50/1	SP	0.31	0.23	0.16	0.09	0.02	-	18.0	4.29 x 3.00 x 5.20	3.2
010CDC26/12	12	PM	0.37	0.27	0.18	0.10	0.02	-	18.0	4.01 x 2.36 x 4.82	1.6
010CR26	100/50/60/1	SP	0.37	0.27	0.18	0.10	0.02	-	18.0	4.29 x 3.00 x 5.70	3.5
014CA28	115/60/1	SP	0.46	0.37	0.28	0.19	0.09	-	26.0	5.02 x 4.50 x 5.89	4.7
014CD28	220/50/1	SP	0.37	0.30	0.24	0.17	0.07	-	25.7	5.06 x 4.50 x 5.89	4.7
014CDC20/12	12	PM	0.39	0.24	0.18	0.12	0.06	-	25.3	4.09 x 1.89 x 5.58	2.3
115ADC56/	12 or 24	PM	-	-	-	-	-	-	-	5.13 x 1.01 x 5.27	1.6
135ADC56/	12 or 24	PM	-	-	-	-	-	-	-	3.60 x 1.66 x 4.34	1.2
215ADC38/	12 or 24	PM	-	-	-	-	-	-	-	4.46 x 2.10 x 6.18	3.0
230ZA30/12	12	BLDC	-	-	-	-	-	-	-	3.80 x 2.64 x 3.63	1.2
260ZC35/24	24	BLDC	-	-	-	-	-	-	-	4.63 x 3.02 x 4.12	2.8
309CDC56/12	12	PM	0.75	0.61	0.48	0.34	0.21	0.09	26.7	6.14 x 4.00 x 7.65	5.1
309DDC56/12	12	PM	-	-	-	-	-	-	-	6.79 x 5.26 x 9.08	6.4
3191250IRBLSCE	12	PM	1.25	0.84	0.62	0.43	0.27	0.07	27.0	6.14 x 4.00 x 7.46	5.1
3D191250IRLSCE	12	PM	-	-	-	-	-	-	-	6.82 x 5.26 x 9.12	6.4

*PM = Permanent Magnet, SP = Shaded Pole, BLDC=Brushless DC

Note: Minimum release quantities or regional availability may apply. Consult factory.



014CA



260



319



WOB-L® Piston Pumps & Compressors

Pressure Performance												
MODEL	MOTOR CAPACITY		FLOW cfm @ psi								MAXIMUM PRESSURE psi	
	VOLTAGE	TYPE*	0	5	10	20	40	60	80	100	CONTINUOUS	INTERMITTENT
405AA38	115/60/1	SP	0.32	0.29	0.27	0.24	0.17	-	-	-	20.0	40.0
405AD38	220/50/1	SP	0.26	0.24	0.19	0.17	0.14	-	-	-	20.0	40.0
405ADC38/	12 or 24	PM	0.79	0.77	0.75	0.71	0.56	0.38	0.33	0.24	100.0	100.0
415CDC30/	12 or 24	PM	0.92	0.87	0.81	0.71	0.56	0.44	0.34	0.25	100.0	100.0
415ZC36/24	24	BLDC	.64	0.59	0.55	0.51	0.42	0.38	0.34	0.31	100.0	100.0
617CA22	115/60/1	SP	0.78	0.74	0.69	0.59	0.42	0.31	0.18	0.07	100.0	100.0
617CA32	115/60/1	SP	1.22	1.19	1.10	0.97	0.74	0.56	-	-	50.0	60.0
617CD22	220/50/1	SP	0.69	0.65	0.59	0.50	0.35	0.25	0.17	0.10	100.0	100.0
617CD32	220/50/1	SP	1.01	0.97	0.91	0.80	0.59	-	-	-	40.0	40.0
660E48XNTLSXX	115/60/1	PSC	2.40	2.31	2.20	2.01	1.65	-	-	-	45.0	45.0
660N48XNTLSXX	220-240/50/60/1	PSC	2.40	2.31	2.20	2.01	1.65	-	-	-	45.0 (50Hz), 50.0 (60Hz)	45.0 (50Hz), 50.0 (60Hz)
660S48XNTLSXX	100/50/60/1	PSC	2.40	2.31	2.20	2.01	1.65	-	-	-	30.0 (50Hz), 50.0 (60Hz)	30.0 (50Hz), 50.0 (60Hz)
668E44XNTLSXX	115/60/1	PSC	1.61	1.56	1.52	1.39	1.19	1.01	0.84	0.71	100.0	100.0
668N44XNTLSXX	220-240/50/60/1	PSC	1.61	1.56	1.52	1.39	1.19	1.01	0.84	0.71	100.0	100.0
668S44XNTLSXX	100/50/60/1	PSC	1.61	1.56	1.52	1.39	1.19	1.01	0.84	0.71	100.0	100.0
1207PHI80	220-240/50/1	PSC	3.60	3.52	3.47	3.24	2.92	2.52	2.16	1.85	125.0	125.0
1207PK80	115/60/1	CS	3.78	3.72	3.66	3.43	3.04	2.69	2.33	1.99	125.0	125.0
22201230INTLSCX	12	BLDC	1.14	1.09	1.06	1.00	-	-	-	-	30.0	30.0
2250ZC35/24	24	BLDC	1.15	0.97	0.89	0.82	-	-	-	-	30.0	30.0
2450AE44	115/60/1	PSC	3.00	2.87	2.70	2.57	2.45	-	-	-	30.0	30.0
2450AUU44	230/50/1	PSC	2.60	2.50	2.37	2.11	-	-	-	-	30.0	30.0
2660E48XNTLSXX	115/60/1	PSC	4.60	4.43	4.25	3.92	3.63	-	-	-	40.0	40.0
2660N48XNTLSXX	220-240/50/60/1	PSC	4.60	4.43	4.25	3.92	3.63	-	-	-	45.0	45.0
2660S48XNTLSXX	100/50/60/1	PSC	4.60	4.43	4.25	3.92	-	-	-	-	25.0 (50Hz), 20.0 (60Hz)	25.0 (50Hz), 20.0 (60Hz)
2665PE40	115/60/1	PSC	3.68	3.50	3.30	3.20	2.64	2.18	1.75	1.42	100.0	120.0
2665PHI44	220-240/50/1	PSC	3.23	3.10	3.00	2.76	2.21	1.77	1.35	1.00	100.0	120.0
2668E44XNTLSXX	115/60/1	PSC	3.06	2.95	2.89	2.65	2.24	1.88	1.57	1.32	100.0	100.0
2668N44XNTLSXX	220-240/50/60/1	PSC	3.06	2.95	2.89	2.65	2.24	1.88	1.57	1.32	100.0	100.0
2668S44XNTLSXX	100/50/60/1	PSC	3.06	2.95	2.89	2.65	2.24	1.88	1.57	1.32	100.0	100.0
2688TE44/38	115/60/1	PSC	1.52	1.48	1.45	1.41	1.35	1.32	1.30	1.28	160.0	160.0
2688TGH44/38	220-240/50/1, 230/60/1	PSC	1.52	1.48	1.45	1.41	1.35	1.32	1.30	1.28	160.0	160.0
2688VE44	115/60/1	PSC	-	-	-	-	-	-	-	-	-	-
2688VGH44	220-240/50/1, 230/60/1	PSC	-	-	-	-	-	-	-	-	-	-
2688VS44	100/50/60/1	PSC	-	-	-	-	-	-	-	-	-	-
2750BE75	115/60/1	PSC	-	-	-	-	-	-	-	-	-	-
2750BGHI75	220-240/50/1, 230/60/1	PSC	-	-	-	-	-	-	-	-	-	-
2750BS75	100/50/60/1	PSC	-	-	-	-	-	-	-	-	-	-
2750CE60	115/60/1	PSC	6.20	6.05	5.80	-	-	-	-	-	15.0	15.0
2750CGHI60	220-240/50/1, 230/60/1	PSC	6.20	6.05	5.80	5.3	-	-	-	-	20.0	20.0
2750CS60	100/50/60/1	PSC	6.20	6.05	5.80	5.3	-	-	-	-	20.0	25.0
2750VEF75	115/60/1, 110/50/1	PSC	-	-	-	-	-	-	-	-	-	-
2750VHI75	220-240/50/1	PSC	-	-	-	-	-	-	-	-	-	-
2750VS75	100/50/60/1	PSC	-	-	-	-	-	-	-	-	-	-
2770CE50	115/60/1	PSC	5.12	4.68	4.75	4.35	3.64	2.98	2.38	1.87	100.0	100.0
2770CGHI50	220-240/50/1, 230/60/1	PSC	5.12	4.68	4.75	4.35	3.64	2.98	2.38	1.87	100.0	100.0
2807CE72	115/60/1	PSC	6.60	6.40	6.20	5.90	5.13	4.35	3.75	3.05	50.0	120.0
2807CGHI72	220-240/50/1, 230/60/1	PSC	5.48	5.31	5.15	4.90	4.26	3.61	3.11	2.53	50.0	120.0

*PM = Permanent Magnet, SP = Shaded Pole, PSC = Permanent Split Capacitor, BLDC=Brushless DC, CS = Capacitor Start

Note: Minimum release quantities or regional availability may apply. Consult factory.



WOB-L® Piston Pumps & Compressors

Vacuum Performance									Specifications		
MODEL	MOTOR CAPACITY		FLOW cfm @ in. Hg						MAX. VACUUM % local barometer in. Hg	DIMENSIONS (H x W x L) in	WEIGHT lb.
	VOLTAGE	TYPE*	0	5	10	15	20	25			
405AA38	115/60/1	SP	-	-	-	-	-	-	-	5.30 x 4.25 x 6.74	5.5
405AD38	230/50/1	SP	-	-	-	-	-	-	-	5.30 x 4.25 x 6.74	5.5
405ADC38/	12 or 24	PM	-	-	-	-	-	-	-	5.30 x 4.26 x 7.29	4.3
415CDC30/	12 or 24	PM	0.92	0.75	0.54	0.34	0.20	-	24.6	5.35 x 4.25 x 7.29	5.0
415ZC36/24	24	BLDC	0.64	0.49	0.39	0.28	0.18	0.08	27.0	5.88 x 4.25 x 6.04	3.6
617CA22	115/60/1	SP	0.78	0.63	0.47	0.31	0.16	0.02	25.6	6.77 x 5.00 x 7.89	11.0
617CA32	115/60/1	SP	1.22	0.87	0.65	0.45	0.23	-	26.8	6.77 x 5.00 x 7.89	11.0
617CD22	230/50/1	SP	0.69	0.53	0.40	0.26	0.14	-	25.6	6.77 x 5.00 x 7.89	11.0
617CD32	230/50/1	SP	1.01	0.75	0.55	0.35	0.19	-	26.2	6.77 x 5.00 x 7.89	11.0
660E48XNTLSXX	115/60/1	PSC	2.40	1.81	1.40	1.01	0.58	0.19	92%	7.19 x 5.18 x 7.09	14.4
660N48XNTLSXX	220-240/50/60/1	PSC	2.40	1.81	1.40	1.01	0.58	0.19	92%	7.19 x 5.18 x 7.09	13.5
660S48XNTLSXX	100/50/60/1	PSC	2.40	1.81	1.40	1.01	0.58	0.19	92%	7.19 x 5.18 x 7.09	14.4
668E44XNTLSXX	115/60/1	PSC	1.61	1.30	0.99	0.71	0.41	0.13	93%	7.19 x 5.18 x 7.09	13.3
668N44XNTLSXX	220-240/50/60/1	PSC	1.61	1.30	0.99	0.71	0.41	0.13	93%	7.19 x 5.18 x 7.09	13.3
668S44XNTLSXX	100/50/60/1	PSC	1.61	1.30	0.99	0.71	0.41	0.13	93%	7.19 x 5.18 x 7.09	13.3
1207PHI80	220-240/50/1	PSC	3.60	2.45	1.80	1.25	0.66	-	24.3	10.05 x 6.55 x 10.66	26.0
1207PK80	115/60/1	CS	3.78	2.60	1.98	1.30	0.70	0.10	25.9	10.02 x 6.53 x 10.70	26.0
22201230INTLSCX	12	BLDC	-	-	-	-	-	-	-	3.77 x 2.64 x 4.70	1.5
2250ZC35/24	24	BLDC	1.92	1.43	1.06	0.74	0.39	0.94	25.9	4.27 x 3.10 x 6.05	2.8
2450AE44	115/60/1	PSC	-	-	-	-	-	-	-	6.41 x 3.90 x 8.32	9.5
2450AUU44	230/50/1	PSC	-	-	-	-	-	-	-	6.41 x 3.90 x 8.32	9.5
2660E48XNTLSXX	115/60/1	PSC	4.60	3.61	2.75	1.93	1.11	0.34	92%	7.09 x 5.18 x 9.31	17.6
2660N48XNTLSXX	220-240/50/60/1	PSC	4.60	3.61	2.75	1.93	1.11	0.34	92%	7.09 x 5.18 x 9.31	17.1
2660S48XNTLSXX	100/50/60/1	PSC	4.60	3.61	2.75	1.93	1.11	0.34	92%	7.09 x 5.18 x 9.31	17.6
2665PE40	115/60/1	PSC	-	-	-	-	-	-	-	7.09 x 5.18 x 9.31	16.0
2665PHI44	220-240/50/1	PSC	-	-	-	-	-	-	-	7.09 x 5.18 x 9.31	16.0
2668E44XNTLSXX	115/60/1	PSC	3.06	2.42	1.81	1.22	0.65	0.11	93%	7.09 x 5.18 x 9.31	16.0
2668N44XNTLSXX	220-240/50/60/1	PSC	3.06	2.42	1.81	1.22	0.65	0.11	93%	7.09 x 5.18 x 9.31	16.0
2668S44XNTLSXX	100/50/60/1	PSC	3.06	2.42	1.81	1.22	0.65	0.11	93%	7.09 x 5.18 x 9.31	16.0
2688TE44/38	115/60/1	PSC	-	-	-	-	-	-	-	7.39 x 6.68 x 9.73	16.0
2688TGH144/38	220-240/50/1, 230/60/1	PSC	-	-	-	-	-	-	-	7.39 x 6.68 x 9.73	15.0
2688VE44	115/60/1	PSC	1.60	1.20	0.98	0.69	0.48	0.16	29.0	7.40 x 6.61 x 9.73	16.4
2688VGH144	220-240/50/1, 230/60/1	PSC	1.60	1.20	0.98	0.69	0.48	0.16	29.0	7.40 x 6.61 x 9.73	14.6
2688VS44	100/50/60/1	PSC	1.60	1.20	0.98	0.69	0.48	0.16	29.0	7.40 x 6.61 x 9.73	16.4
2750BE75	115/60/1	PSC	7.1	6.3	4.7	3.2	1.8	0.5	27.0	9.29 x 5.37 x 10.09	20.0
2750BGHI75	220-240/50/1, 230/60/1	PSC	7.1	6.3	4.7	3.2	1.8	0.5	27.0	9.29 x 5.37 x 10.09	21.0
2750BS75	100/50/60/1	PSC	7.1	6.3	4.7	3.2	1.8	0.5	27.0	9.29 x 5.37 x 10.09	21.0
2750CE60	115/60/1	PSC	6.2	5.0	3.7	2.6	1.4	0.4	27.0	9.29 x 5.37 x 10.09	21.0
2750CGHI60	220-240/50/1, 230/60/1	PSC	6.2	5.0	3.7	2.6	1.4	0.4	27.0	9.29 x 5.37 x 10.09	21.0
2750CS60	100/50/60/1	PSC	6.2	5.0	3.7	2.6	1.4	0.4	27.0	9.29 x 5.37 x 10.09	21.0
2750VEF75	115/60/1, 110/50/1	PSC	3.14	2.65	2.05	1.48	0.90	0.40	29.0	9.29 x 5.37 x 10.09	20.0
2750VHI75	220-240/50/1	PSC	3.14	2.65	2.05	1.48	0.90	0.40	29.0	9.29 x 5.37 x 10.09	21.0
2750VS75	100/50/60/1	PSC	3.14	2.65	2.05	1.48	0.90	0.40	29.0	9.29 x 5.37 x 10.09	21.0
2770CE50	115/60/1	PSC	-	-	-	-	-	-	-	9.58 x 6.11 x 12.80	25.0
2770CGHI50	220-240/50/1, 230/60/1	PSC	-	-	-	-	-	-	-	9.58 x 6.11 x 12.80	25.0
2807CE72	115/60/1	PSC	6.60	3.60	2.66	1.80	0.88	-	25.0	10.05 x 7.31 x 15.60	39.0
2807CGHI72	220-240/50/1, 230/60/1	PSC	5.48	3.66	2.21	1.41	0.56	-	25.0	10.05 x 7.31 x 15.60	39.0

415DC



617



668



1207



*PM = Permanent Magnet, SP = Shaded Pole, PSC = Permanent Split Capacitor, BLDC=Brushless DC, CS = Capacitor Start

Note: Minimum release quantities or regional availability may apply. Consult factory.



WOB-L® Refrigerant Recovery

520



Pressure Performance

MODEL	MOTOR CAPACITY		FLOW cfm @ psi								MAXIMUM PRESSURE psi	
	VOLTAGE	TYPE*	0	50	100	150	250	350	400	435	INLET	EXHAUST
500CAR75	100-115/50/60	RDC	0.41	0.31	0.29	0.26	0.23	0.16	0.13	0.13	35.0	435.0
500CDR75	230/50/60	RDC	0.41	0.31	0.29	0.26	0.23	0.16	0.13	0.13	35.0	435.0
520CJ75	100/50/60/1	CS	0.50	0.39	0.33	0.32	0.32	0.30	0.29	0.27	35.0	435.0
520CK75	115/60/1	CS	0.50	0.39	0.33	0.32	0.32	0.30	0.29	0.27	35.0	435.0
520CL75	220-240/50/1	CS	0.36	0.31	0.28	0.27	0.26	0.24	0.24	0.23	35.0	435.0
2520CK60	115/60/1	CS	1.00	0.85	0.73	0.61	0.50	0.46	0.44	0.42	35.0	435.0
2520CL60	220-240/50/60/1	CS	0.74	0.63	0.52	0.45	0.40	0.38	0.36	0.35	35.0	435.0

RDC=Rectified DC Permanent Magnet, CS=Capacitor Start

Note: Minimum release quantities or regional availability may apply. Consult factory.

TA-3101 DC
TA-4101 DC



Articulated Piston Pumps & Compressors

Pressure Performance

MODEL	MOTOR CAPACITY		FLOW cfm @ psi								MAXIMUM PRESSURE psi	
	VOLTAGE	TYPE*	0	5	10	20	40	60	80	100	CONTINUOUS	INTERMITTENT
TA-3101-DC (270024)	12	PM	1.70	1.62	1.55	1.40	1.18	1.00	0.85	0.70	100.0	100.0
TA-4101-DC (270025)	12	PM	2.20	2.07	1.95	1.75	1.45	1.25	1.10	0.95	100.0	100.0
TA-4101-DC (270047)	24	PM	2.20	2.07	1.95	1.75	1.45	1.25	1.10	0.95	100.0	100.0
TA-5102-DC (270058)	12	PM	4.06	3.81	3.54	3.42	3.02	2.72	2.12	1.61	100.0	100.0
TA-3051 (270002)	115/230/60/1	CS	2.00	1.92	1.85	1.70	1.50	-	-	-	50.0	50.0
TA-3052 (270006)	115/230/60/1	CS	2.50	2.40	2.30	2.10	1.80	-	-	-	50.0	50.0
TA-3101 (270005)	115/230/60/1	CS	1.60	1.50	1.40	1.25	1.03	0.85	0.66	0.60	100.0	100.0
TA-3V2 (270018)	115/230/60/1	CS	-	-	-	-	-	-	-	-	-	-
TA-4051 (270014)	115/230/60/1	CS/CR	2.80	2.72	2.65	2.45	2.10	-	-	-	50.0	50.0
TA-4052 (270007)	115/230/60/1	CS	3.30	3.17	3.05	2.80	2.40	-	-	-	50.0	50.0
TA-4101 (270015)	115/230/60/1	CS/CR	2.20	2.12	2.05	1.90	1.65	1.45	1.25	1.10	100.0	100.0
TA-4102 (270010)	115/230/60/1	CS	2.60	2.54	2.44	2.20	1.80	1.60	1.35	1.20	50.0	50.0
TA-4172 (270072)	115/230/60/1	CS	1.40	1.38	1.35	1.35	1.30	1.25	1.20	1.15	175.0	175.0
TA-4V2 (270019)	115/230/60/1	CS	-	-	-	-	-	-	-	-	-	-
TA-5052 (270008)	115/230/60/1	CS	4.30	4.17	4.00	3.90	3.41	-	-	-	50.0	50.0
TA-5052 (270039)	110/220-240/50/1	CS	3.40	3.30	3.20	3.00	2.65	-	-	-	50.0	50.0
TA-5102 (270011)	115/230/60/1	CS	3.20	3.05	2.90	2.68	2.40	2.10	1.90	1.65	100.0	100.0
TA-5102 (270040)	110/220-240/50/1	CS	2.55	2.42	2.30	2.15	1.90	1.70	1.50	1.30	100.0	100.0
TA-5102 (270043)	190/380 208-230/460	POLY	3.20	3.05	2.90	2.68	2.40	2.10	1.90	1.65	100.0	100.0
TA-5172 (270073)	115/230/60/1	CS	1.80	1.79	1.79	1.78	1.75	1.72	1.69	1.65	175.0	175.0
TA-5172 (270078)	110/220-240/50/1	CS	1.43	1.42	1.42	1.41	1.39	1.37	1.35	1.32	175.0	175.0
TA-5172 (270076)	190/380 208-230/460	POLY	1.80	1.79	1.79	1.78	1.75	1.72	1.69	1.65	175.0	175.0
TA-6052 (270009)	115/230/60/1	CS	5.20	5.05	4.90	4.65	4.25	-	-	-	50.0	50.0
TA-6102 (270012)	115/230/60/1	CS	4.30	4.15	4.00	3.75	3.30	2.95	2.60	2.40	100.0	100.0
TA-6102 (270042)	110/220-240/50/1	CS/CR	3.45	3.32	3.20	3.00	2.65	2.35	2.05	1.90	100.0	100.0
TA-6102 (270044)	190/380 208-230/460	POLY	4.30	4.15	4.00	3.75	3.30	2.95	2.60	2.40	100.0	100.0
TA-6172 (270080)	115/230/60/1	CS/CR	2.40	2.39	2.39	2.37	2.34	2.31	2.28	2.25	175.0	175.0
TA-6172 (270082)	190/380 208-230/460	POLY	1.92	1.91	1.90	1.89	1.86	1.84	1.81	1.79	175.0	175.0
TA-7102 (270045)	115/230/60/1	CS/CR	5.40	5.30	5.20	5.00	4.60	4.20	3.75	3.30	100.0	100.0

*PM = Permanent Magnet, CS = Capacitor Start, CS/CR = Capacitor start/run, POLY = 3 Phase

Note: Minimum release quantities or regional availability may apply. Consult factory.

TA-2101
TA-3101
TA-4101



TA-5102





WOB-L® Refrigerant Recovery

Vacuum Performance									Specifications		
MODEL	MOTOR CAPACITY		FLOW cfm @ in. Hg						MAX. VACUUM in. Hg	DIMENSIONS (H x W x L) in	WEIGHT lb.
	VOLTAGE	TYPE*	0	5	10	15	20	25			
500CAR75	100-115/50/60	RDC	0.41	0.30	0.23	0.18	0.11	0.03	27.0	8.07 x 5.05 x 10.11	11.0
500CDR75	230/50/60	RDC	0.41	0.30	0.23	0.18	0.11	0.03	27.0	8.07 x 5.05 x 10.11	11.4
520CJ75	100/50/60/1	CS	0.42	0.27	0.20	0.13	0.05	-	23.0	9.06 x 5.82 x 7.58	17.0
520CK75	115/60/1	CS	0.42	0.27	0.20	0.13	0.05	-	23.0	9.06 x 5.82 x 7.83	17.0
520CL75	220-240/50/1	CS	0.36	0.26	0.19	0.13	0.05	-	23.0	9.06 x 5.82 x 7.83	18.5
2520CK60	115/60/1	CS	1.00	0.73	0.52	0.33	0.14	0.06	25.3	9.15 x 5.82 x 11.07	28.0
2520CL60	220-240/50/60/1	CS	0.74	0.60	0.45	0.28	0.14	0.04	25.3	9.15 x 5.82 x 11.32	29.5

RDC=Rectified DC Permanent Magnet, CS=Capacitor Start

Note: Minimum release quantities or regional availability may apply. Consult factory.



Articulated Piston Pumps & Compressors

Vacuum Performance									Specifications		
MODEL	MOTOR CAPACITY		FLOW cfm @ in. Hg						MAX. VACUUM in. Hg	DIMENSIONS (H x W x L) in	WEIGHT lb.
	VOLTAGE	TYPE*	0	5	10	15	20	25			
TA-3101-DC (270024)	12	PM	-	-	-	-	-	-	-	8.61 x 5.83 x 11.54	22.0
TA-4101-DC (270025)	12	PM	-	-	-	-	-	-	-	8.61 x 5.83 x 11.54	22.0
TA-4101-DC (270047)	24	PM	-	-	-	-	-	-	-	8.61 x 5.83 x 11.54	25.0
TA-5102-DC (270058)	12	PM	-	-	-	-	-	-	-	6.81 x 9.96 x 15.32	40.0
TA-3051 (270002)	115/230/60/1	CS	-	-	-	-	-	-	-	8.10 x 5.75 x 12.11	21.0
TA-3052 (270006)	115/230/60/1	CS	-	-	-	-	-	-	-	6.95 x 10.59 x 14.30	33.0
TA-3101 (270005)	115/230/60/1	CS	-	-	-	-	-	-	-	8.10 x 5.75 x 12.11	21.0
TA-3V2 (270018)	115/230/60/1	CS	3.10	2.50	2.00	1.25	0.70	0.20	27.5	6.95 x 10.59 x 14.30	37.0
TA-4051 (270014)	115/230/60/1	CS/CR	-	-	-	-	-	-	-	8.53 x 5.75 x 12.05	25.0
TA-4052 (270007)	115/230/60/1	CS	-	-	-	-	-	-	-	6.95 x 10.20 x 14.30	36.0
TA-4101 (270015)	115/230/60/1	CS/CR	-	-	-	-	-	-	-	8.10 x 5.75 x 12.05	24.0
TA-4102 (270010)	115/230/60/1	CS	-	-	-	-	-	-	-	6.95 x 10.20 x 11.49	36.0
TA-4172 (270072)	115/230/60/1	CS	-	-	-	-	-	-	-	6.95 x 11.20 x 14.30	45.0
TA-4V2 (270019)	115/230/60/1	CS	3.60	2.90	2.17	1.45	0.82	0.25	27.5	6.95 x 10.59 x 14.30	37.0
TA-5052 (270008)	115/230/60/1	CS	-	-	-	-	-	-	-	6.91 x 10.59 x 14.30	37.0
TA-5052 (270039)	110/220-240/50/1	CS	-	-	-	-	-	-	-	6.91 x 10.59 x 14.30	37.0
TA-5102 (270011)	115/230/60/1	CS	-	-	-	-	-	-	-	6.91 x 10.59 x 14.30	37.0
TA-5102 (270040)	110/220-240/50/1	CS	-	-	-	-	-	-	-	9.04 x 10.83 x 16.30	37.0
TA-5102 (270043)	190/380 208-230/460	POLY	-	-	-	-	-	-	-	6.95 x 10.71 x 14.13	37.0
TA-5172 (270073)	115/230/60/1	CS	-	-	-	-	-	-	-	6.95 x 11.59 x 14.30	51.0
TA-5172 (270078)	110/220-240/50/1	CS	-	-	-	-	-	-	-	9.04 x 11.20 x 16.30	51.0
TA-5172 (270076)	190/380 208-230/460	POLY	-	-	-	-	-	-	-	6.95 x 11.20 x 14.13	51.0
TA-6052 (270009)	115/230/60/1	CS	-	-	-	-	-	-	-	9.05 x 11.26 x 17.18	45.0
TA-6102 (270012)	115/230/60/1	CS	-	-	-	-	-	-	-	6.91 x 10.20 x 15.30	45.0
TA-6102 (270042)	110/220-240/50/1	CS/CR	-	-	-	-	-	-	-	6.91 x 10.20 x 15.30	45.0
TA-6102 (270044)	190/380 208-230/460	POLY	-	-	-	-	-	-	-	6.91 x 10.20 x 15.30	45.0
TA-6172 (270080)	115/230/60/1	CS/CR	-	-	-	-	-	-	-	6.95 x 11.20 x 14.30	56.0
TA-6172 (270082)	190/380 208-230/460	POLY	-	-	-	-	-	-	-	6.95 x 11.20 x 14.30	56.0
TA-7102 (270045)	115/230/60/1	CS/CR	-	-	-	-	-	-	-	7.44 x 11.77 x 16.11	61.0

*PM = Permanent Magnet, CS = Capacitor Start, CS/CR = Capacitor start/run, POLY = 3 Phase

Note: Minimum release quantities or regional availability may apply. Consult factory.


500



2520



TA-3V2
TA-4V2



TA-3052





Diaphragm Pumps & Compressors

Pressure Performance

MODEL	MOTOR CAPACITY		FLOW l/min @ bar								MAXIMUM PRESSURE bar	
	VOLTAGE	TYPE*	0.0	0.5	1.0	1.5	2.0	3.0	5.0	7.0	CONTINUOUS	INTERMITTENT
1410 DC	2.0 - 12	PM	0.8	0.1	-	-	-	-	-	-	0.2	0.6
	4.5 - 12	PM	1.0	0.1	-	-	-	-	-	-	0.2	0.6
	4.5 - 12	PM	1.3	0.1	-	-	-	-	-	-	0.2	0.6
	6	PM	-	-	-	-	-	-	-	-	0.2	0.7
	12, 24	PM	5.5	2.5	-	-	-	-	-	-	1.0	1.0
7006 DC	12, 24	PM	4.3	2.5	1.4	0.6	-	-	-	-	0.7	1.9
	12, 24	PM	11.0	5.1	-	-	-	-	-	-	1.0	1.0
	12, 24	PM	8.2	6.0	3.9	1.7	-	-	-	-	0.7	1.9
	12, 24	PM	7.2	5.3	3.9	2.8	1.9	-	-	-	0.8	2.5
	230/50/1	PSC	6.9	5.0	3.7	2.3	1.3	-	-	-	0.8	2.5
	12, 24	PM	13.8	9.4	7.1	5.5	4.1	-	-	-	0.8	2.5
	230/50/1	PSC	13.8	9.4	7.1	5.5	4.1	-	-	-	0.8	2.5
	12, 24	PM	-	-	-	-	-	-	-	-	-	-
	230/50/1	SP	-	-	-	-	-	-	-	-	-	-
	12, 24	PM	6.5	4.5	2.9	1.9	-	-	-	-	1.0	2.2
7010 DC	115/60/1, 230/50/1	SP	5.8	4.3	3.0	2.0	-	-	-	-	1.2	2.3
	12, 24	PM	12.0	8.1	5.1	2.5	-	-	-	-	0.8	2.0
	115/60/1, 230/50/1	SP	10.4	7.3	4.8	2.5	-	-	-	-	0.8	2.3
	12, 24	PM	-	-	-	-	-	-	-	-	-	-
	230/50/1	SP	-	-	-	-	-	-	-	-	-	-
	12, 24	PM	12.4	8.1	5.3	3.5	1.5	-	-	-	0.8	2.3
	115/60/1, 230/50/1	SP	11.0	7.6	5.5	3.2	0.9	-	-	-	0.8	2.2
	12, 24	PM	24.0	17.0	11.0	8.0	-	-	-	-	0.5	2.3
	12, 24	PM	-	-	-	-	-	-	-	-	-	-
	12, 24	PM	-	-	-	-	-	-	-	-	-	-
8010	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
	12, 24	PM	14.0	9.7	7.1	4.9	3.1	-	-	-	1.0	2.5
	12, 24	PM	27.0	20.0	15.0	12.0	9.0	-	-	-	1.0	3.0
	230/50/1	PSC	22.0	16.2	11.5	9.3	5.3	-	-	-	1.0	2.5
	230/50/1	PSC	23.0	16.0	11.0	8.0	4.5	1.8	-	-	1.0	2.8
	230/50/1	PSC	38.0	31.0	24.0	17.0	11.0	3.5	-	-	0.8	2.8
	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
8015	230/50/1	PSC	28.0	22.0	17.5	13.0	10.0	3.5	-	-	0.8	3.0
	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-

*PM = Permanent Magnet, SP = Shaded Pole,

*PSC=Permanent Split Capacitor, Consult factory for 60 hertz models – minimum quantities apply.


Note: Minimum release quantities or regional availability may apply. Consult factory.



Diaphragm Pumps & Compressors

Vacuum Performance									Specifications		
MODEL	MOTOR CAPACITY		FLOW l/min @ mbar						MAX. VACUUM mbar	DIMENSIONS (H x W x L) mm	WEIGHT kg
	VOLTAGE	TYPE*	0	-100	-200	-400	-600	-800			
2002	2.0 - 10	PM	0.8	0.6	0.4	-	-	-	-500	26 x 17 x 41	0.03
3003	4.5 - 12	PM	1.0	0.6	0.3	-	-	-	-380	37 x 23 x 43	0.04
3013	4.5 - 12	PM	1.3	0.7	0.4	0.1	-	-	-450	34 x 23 x 44	0.03
4002V	6	PM	2.0	1.5	1.2	0.5	-	-	-600	30 x 17 x 53	0.05
1410V	12,24	PM	5.5	4.6	3.9	2.4	1.0	-	-750	54 x 30 x 83	0.17
1410VD	12,24	PM	4.3	3.5	2.8	1.7	0.6	-	-730	54 x 30 x 83	0.17
1420VP	12,24	PM	11.0	9.5	8.0	5.0	2.1	-	-780	75 x 30 x 87	0.22
1420VDP	12,24	PM	8.2	7.0	5.8	3.2	1.0	-	-730	75 x 30 x 87	0.22
7006	12,24	PM	7.2	5.3	4.4	2.7	1.2	0.3	-850	78 x 47 x 123	0.60
7006	230/50/1	PSC	6.9	5.3	4.3	2.6	1.2	0.3	-850	110 x 79 x 141	1.6
7006ZP	12,24	PM	13.8	10.6	8.6	5.3	2.8	0.9	-850	78 x 47 x 123	0.9
7006ZP	230/50/1	PSC	13.8	10.6	8.6	5.3	2.8	0.9	-850	110 x 79 x 185	1.8
7006ZVR	12,24	PM	6.6	5.7	4.8	3.2	1.9	0.7	-950	78 x 47 x 123	0.90
7006ZVR	230/50/1	SP	7.1	6.0	5.0	3.3	1.9	0.6	-950	78 x 61 x 123	1.8
7010	12,24	PM	6.5	4.6	3.7	2.2	1.0	-	-730	86 x 48 x 120	0.60
7010	115/230/1	SP	5.8	4.5	3.5	2.1	0.9	-	-780	83 x 61 x 109	0.95
7010ZDP	12,24	PM	12.0	10.0	8.0	4.5	1.7	-	-750	82 x 48 x 161	0.75
7010ZDP	230/50/1	SP	10.4	8.6	7.0	4.2	1.8	-	-750	82 x 61 x 158	1.45
7010ZVR	12,24	PM	6.0	5.1	4.4	2.9	1.6	0.4	-900	82 x 48 x 161	0.75
7010ZVR	230/50/1	SP	5.3	4.5	3.7	2.4	1.3	0.3	-900	82 x 61 x 158	1.45
7011	12,24	PM	12.4	9.5	7.5	4.5	1.5	-	-730	62 x 87 x 150	0.85
7011	230/50/1	SP	11.0	9.7	7.3	3.8	1.5	-	-730	90 x 87 x 160	1.5
7011ZP	12,24	PM	24.0	20.0	15.5	3.0	2.5	-	-700	48 x 97 x 194	1.4
7011ZR	12,24	PM	7.0	6.2	5.6	3.5	2.0	0.8	-990	48 x 97 x 192	1.4
7015ZR	12,24	PM	12.0	10.5	9.5	7.0	4.5	2.0	-920	125 x 76 x 164	2.3
7015ZR	230/50/1	PSC	12.0	10.5	9.5	6.5	4.0	1.5	-900	137 x 79 x 182	2.4
7015	12,24	PM	14.0	11.0	8.5	4.9	1.8	-	-800	125 x 80 x 130	1.1
7015ZP	12,24	PM	27.0	21.0	17.0	11.0	5.0	-	-800	125 x 76 x 164	2.3
7015ZP	230/50/1	PSC	22.0	16.8	13.2	7.8	2.9	-	-800	137 x 79 x 182	2.4
8010	230/50/1	PSC	23.0	14.0	11.5	7.0	3.0	-	-780	122 x 129 x 200	2.5
8010ZP	230/50/1	PSC	38.0	29.0	23.0	14.0	6.0	-	-780	122 x 124 x 255	3.4
8010ZR	230/50/1	PSC	26.0	22.0	19.0	13.0	7.7	2.7	-920	122 x 124 x 255	3.4
8011	230/50/1	PSC	34.0	29.0	22.0	14.0	8.0	3.0	-950	143 x 129 x 193	3.5
8011ZP	230/50/1	PSC	65.0	58.0	48.0	32.0	17.0	5.8	-930	143 x 129 x 261	5.0
8011ZR	230/50/1	PSC	34.0	26.0	22.8	16.0	10.0	4.5	-990	143 x 129 x 261	5.0
8015	230/50/1	PSC	28.0	20.5	16.0	10.0	5.3	1.0	-830	122 x 129 x 200	2.5
8015ZP	230/50/1	PSC	50.0	42.0	34.0	22.0	11.5	1.8	-830	122 x 124 x 255	3.9
8015ZR	230/50/1	PSC	29.0	24.5	21.0	14.5	8.6	3.2	-960	122 x 124 x 255	3.9

2002



3013




1420 BLDC



7011 DC



8011 Z



*PM = Permanent Magnet, SP = Shaded Pole,

*PSC=Permanent Split Capacitor, Consult factory for 60 hertz models – minimum quantities apply.

Note: Minimum release quantities or regional availability may apply. Consult factory.



Diaphragm Pumps & Compressors

107 AC




107 DC



2107



2907




Pressure Performance

MODEL	MOTOR CAPACITY		FLOW cfm @ psi								MAXIMUM PRESSURE psi	
	VOLTAGE	TYPE*	0	5	10	20	40	60	80	100	CONTINUOUS	INTERMITTENT
007BDC19	12	PM	-	-	-	-	-	-	-	-	-	-
007CDC19	12	PM	0.65	0.61	0.50	0.41	-	-	-	-	15.0	25.0
107AB18XFTLBXX	100/50/1, 115/60/1	SP	0.70	0.60	0.50	0.30	-	-	-	-	20.0	25.0
107CDU18XFTLBXX	220-230/50/1, 230/60/1	SP	0.70	0.60	0.50	0.30	-	-	-	-	20.0	25.0
107ZC18/24	24	BLDC	0.96	0.77	0.63	0.40	-	-	-	-	35.0	35.0
1071220IFTLBXX	12	PM	1.45	1.30	1.15	0.85	-	-	-	-	35.0	35.0
118ZC20/24	24	BLDC	0.85	0.78	0.69	0.51	-	-	-	-	20.0	30.0
907BDC22	12	PM	-	-	-	-	-	-	-	-	-	-
907CDC18	12	PM	2.05	1.67	1.30	0.72	-	-	-	-	30.0	30.0
910CDC22/12	12	PM	1.97	1.72	1.47	1.10	0.48	-	-	-	25.0	40.0
927CA18	115/60/1	SP	1.24	1.11	0.96	0.65	0.24	-	-	-	30.0	40.0
927CD18	220/50/1	SP	1.15	1.00	0.87	0.61	0.21	-	-	-	30.0	40.0
2107A18XSTLNXX	115/60/1	SP	1.60	1.25	-	-	-	-	-	-	5.0	5.0
2107DU18XSTLNXX	220-230/50/1	SP	1.25	1.00	-	-	-	-	-	-	5.0	5.0
2107VA20	115/60/1	SP	-	-	-	-	-	-	-	-	-	-
2107VD20	220/50/1	SP	-	-	-	-	-	-	-	-	-	-
2119VCDU18	220/50/1, 230/50/60/1	SP	-	-	-	-	-	-	-	-	-	-
2119VE20	115/60/1	PSC	-	-	-	-	-	-	-	-	-	-
2907CDC22/12	12	PM	3.20	2.89	2.53	-	-	-	-	-	15.0	15.0

*PM = Permanent Magnet, SP = Shaded Pole, BLDC=Brushless DC, PSC = Permanent Split Capacitor

Note: Minimum release quantities or regional availability may apply. Consult factory.

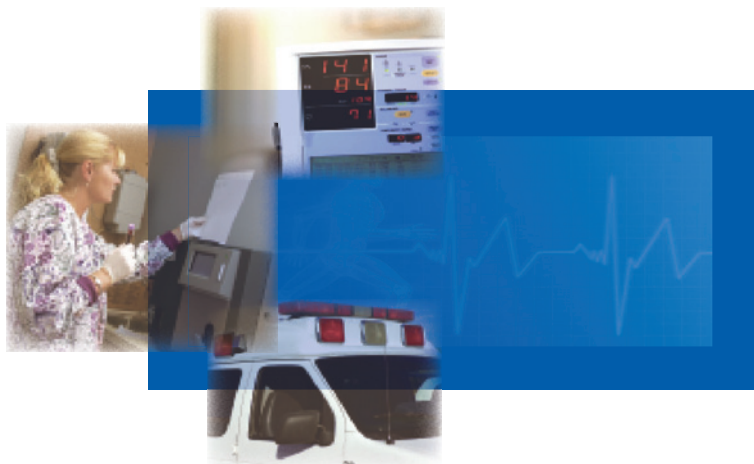

Thomas diaphragm pumps and compressors are used in OEM applications around the world and help to improve lives every day.



Diaphragm Pumps & Compressors

Vacuum Performance									Specifications		
MODEL	MOTOR CAPACITY		FLOW cfm @ in. Hg						MAX. VACUUM % local barometer in. Hg	DIMENSIONS (H x W x L) in	WEIGHT lb.
	VOLTAGE	TYPE*	0	5	10	15	20	25			
007BDC19	12	PM	1.15	0.75	0.55	0.34	0.15	-	23.0	5.03 x 2.36 x 6.10	2.9
007CDC19	12	PM	0.65	0.48	0.34	0.21	-	-	23.0	5.12 x 3.35 x 6.17	2.9
107AB18XFTLBXX	100/50/1, 115/60/1	SP	0.70	0.57	0.45	0.33	0.20	-	75%	4.68 x 4.25 x 6.35	5.1
107CDU18XFTLBXX	220-230/50/1, 230/60/1	SP	0.70	0.57	0.45	0.33	0.20	-	75%	4.68 x 4.25 x 6.35	5.1
107ZC18/24	24	BLDC	0.96	0.69	0.46	0.29	0.12	-	23.0	4.68 x 4.25 x 6.08	
1071220IFTLBXX	12	PM	1.45	1.10	0.80	0.50	0.20	-	75%	4.68 x 4.25 x 7.17	4.5
118ZC20/24	24	BLDC	0.85	0.67	0.48	0.28	0.12	-	22.0	4.87 x 4.26 x 6.09	4.4
907BDC22	12	PM	2.13	1.34	0.88	0.56	-	-	24.1	5.89 x 4.75 x 7.88	6.5
907CDC18	12	PM	2.05	1.25	0.82	0.48	-	-	22.2	5.89 x 4.75 x 7.88	6.5
910CDC22/12	12	PM	1.97	1.53	1.05	0.65	0.28	-	24.3	5.89 x 4.75 x 7.88	8.3
927CA18	115/60/1	SP	1.24	0.89	0.64	0.36	0.16	-	23.8	6.77 x 4.75 x 7.81	11.0
927CD18	220/50/1	SP	1.15	0.73	0.53	0.33	0.11	-	23.8	6.77 x 4.75 x 7.81	11.0
2107A18XSTLNXX	115/60/1	SP	1.60	1.10	0.74	0.43	0.14	-	75%	4.71 x 4.25 x 7.47	6.0
2107DU18XSTLNXX	220-230/50/1	SP	1.25	0.88	.058	0.31	-		70%	4.71 x 4.25 x 7.47	6.0
2107VA20	115/60/1	SP	0.85	0.65	0.49	0.33	0.20	-	28.2	4.71 x 4.25 x 8.11	6.3
2107VD20	220/50/1	SP	0.72	0.56	0.42	0.29	0.17	-	28.3	4.71 x 4.25 x 8.11	6.3
2119VCDU18	220/50/1, 230/50/60/1	SP	0.73	0.62	0.48	0.35	0.22	0.08	27.0	4.85 x 4.20 x 8.67	6.3
2119VE20	115/60/1	PSC	0.82	0.64	0.48	0.33	0.20	0.06	27.1	5.98 x 5.31 x 8.41	7.3
2907CDC22/12	12	PM	3.20	2.00	1.43	0.90	0.41	-	24.0	6.16 x 4.75 x 11.50	11.0

*PM = Permanent Magnet, SP = Shaded Pole, BLDC=Brushless DC, PSC = Permanent Split Capacitor

Note: Minimum release quantities or regional availability may apply. Consult factory.

007BDC




907



910



As a leading manufacturer of OEM pumps and compressors, we provide innovative solutions for various environmental, laboratory and medical applications.

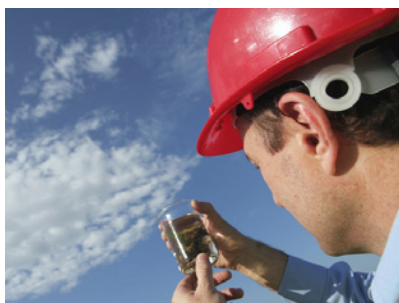



Rotary Vane Pumps & Compressors

G 04 EB



G 045



G 09 LC



Pressure Performance												
MODEL	MODEL CAPACITY		FLOW l/min @ mbar								MAXIMUM PRESSURE mbar	
	VOLTAGE	TYPE*	0.0	50	100	200	400	600	800	1000	CONTINUOUS	INTERMITTENT
G 01-K-LC(L)	6	PM	2.2	1.3	-	-	-	-	-	-	25.0	80.0
G 01-K-EB	6,12	PM	1.4	-	-	-	-	-	-	-	10.0	40.0
G 01 EB	3,6,12,24	PM	1.6	1.2	0.7	-	-	-	-	-	100.0	180.0
G 01-4 EB	6,12,24	PM	1.4	1.2	0.9	0.4	-	-	-	-	100.0	280.0
G 02 EB	3,6,12,24	PM	3.6	2.6	1.6	-	-	-	-	-	100.0	190.0
G 02-4 EB	6,12,24	PM	3.7	3.2	2.5	1.3	-	-	-	-	100.0	310.0
G 02-8	6,12	PM	2.7	2.5	2.2	1.6	0.5	-	-	-	200.0	500.0
G 04 EB	3,6,12,24	PM	6.8	4.5	2.4	-	-	-	-	-	40.0	150.0
G 04-4 EB	6,12	PM	5.1	4.0	3.0	0.9	-	-	-	-	50.0	240.0
G 04-8	12	PM	4.4	3.6	2.6	1.0	-	-	-	-	100.0	260.0
G 045-LC	12	PM	7.5	7.2	6.8	6.4	4.2	2.6	1.0	-	100.0	900.0
G 045	12,24	PM	6.1	5.8	5.5	4.5	2.9	1.3	-	-	150.0	750.0
G 07	12,24	PM	21.0	21.0	20.0	19.0	15.0	13.0	9.0	6.0	200.0	1,400.0
G 07-N	12	PM	23.0	21.0	21.0	19.0	15.0	11.0	7.0	3.0	-	1,100.0
G 08	12,24	PM	15.5	15.0	15.0	14.0	11.0	9.0	6.0	5.0	300.0	1,400.0
G 08-T Series	12,24	PM	19.0	19.0	18.0	17.0	13.0	11.0	7.0	6.0	-	1,400.0
G 08-T Parallel	12,24	PM	36.0	36.0	34.0	33.0	25.0	21.0	12.0	10.0	-	1,400.0
BL-G 085 M	12	BLDC	8.5	7.5	6.5	4.7	1.0	-	-	-	150.0	450.0
G 09-6 LC	12	PM	9.0	7.8	6.4	3.9	-	-	-	-	150.0	350.0

*PM = Permanent Magnet, BLDC = Brushless DC

Note: Minimum release quantities or regional availability may apply. Consult factory.



Rotary Vane Pumps & Compressors

QR-0030
QR-0050



SR-0015-VP



Pressure Performance												
MODEL	MOTOR CAPACITY		FLOW cfm @ psi								MAXIMUM PRESSURE psi	
	VOLTAGE	TYPE*	0	5	10	20	40	60	80	100	CONTINUOUS	INTERMITTENT
QR-0030 (291305)	100-115/200	SPh	3.20	2.70	2.20	1.70	-	-	-	-	10.0	15.0
	240/60/50/1		2.70	2.30	1.80	1.40	-	-	-	-		
QR-0050 (291306)	100-115/200	SPh	4.60	4.10	3.60	3.00	-	-	-	-	10.0	15.0
	240/60/50/1		4.00	3.50	3.00	2.40	-	-	-	-		
QR-0080 (291303)	100-115/200	CS	8.00	7.35	6.80	6.20	-	-	-	-	10.0	15.0
	240/60/50/1		6.70	6.20	5.65	5.20	-	-	-	-		
QR-0080 (291309)	200-240/460/60/3 200-220/380-415/50/3	POLY	8.00	7.35	6.80	6.20	-	-	-	-	10.0	15.0
QR-0100 (291310)	200-240/460/60/3 200-220/380-415/50/3	POLY	10.00	9.40	8.80	-	-	-	-	-	10.0	15.0
QR-0100 (291304)	100-115/200	CS	10.00	9.40	8.00	-	-	-	-	-	10.0	15.0
	240/60/50/1		8.30	7.80	7.30	-	-	-	-	-		
SR-0015-VP (291275)	115/60/50/1	PSC	1.50	1.20	1.00	-	-	-	-	-	10.0	10.0
SR-0015-VP (291293)	220/240/50/60/1	PSC	1.20	1.00	0.80	-	-	-	-	-	10.0	10.0
SR-0015-VP (291277)	115/60/50/1	SPh	1.50	1.20	1.00	-	-	-	-	-	10.0	10.0

*CS = Capacitor Start, SPh = Split Phase, PSC = Permanent Split Capacitor, POLY = 3 Phase

Note: Minimum release quantities or regional availability may apply. Consult factory.



Rotary Vane Pumps & Compressors

Vacuum Performance									Specifications		
MODEL	MOTOR CAPACITY		FLOW l/min @ mbar						MAX. VACUUM	DIMENSIONS (H x W x L) mm	WEIGHT kg
	VOLTAGE	TYPE*	0	-100	-200	-400	-600	-800			
G 01-K-LC(L)	3,6	PM	2.2	-	-	-	-	-	-25 / -70	20.5 x 20 x 46	0.03
G 01-K-EB	6,12	PM	1.4	-	-	-	-	-	-10 / -40	20.5 x 20 x 53	0.04
G 01 EB	3,6,12,24	PM	1.6	0.8	-	-	-	-	-100 / -200	29 x 26 x 55	0.10
G 01-4 EB	6,12,24	PM	1.4	0.9	0.4	-	-	-	-100 / -290	29 x 26 x 55	0.10
G 02 EB	3,6,12,24	PM	3.6	1.6	-	-	-	-	-100 / -190	29 x 26 x 55	0.10
G 02-4 EB	6,12,24	PM	3.7	2.5	1.3	-	-	-	-100 / -310	29 x 26 x 55	0.10
G 02-8	6,12	PM	2.7	2.1	1.5	0.3	-	-	-200 / -450	29 x 26 x 72	0.13
G 04 EB	3,6,12,24	PM	6.8	2.5		-	-	-	-40 / -160	29 x 26 x 62	0.10
G 04-4 EB	6,12	PM	5.1	3.0	1.0	-	-	-	-50 / -260	29 x 26 x 62	0.10
G 04-8	12	PM	4.4	2.5	0.9	-	-	-	100 / -250	29 x 26 x 78	0.14
G 045	12	PM	7.5	6.5	5.2	2.8	0.5	-	-100 / -630	42 x 42 x 90	0.25
G 045	12,24	PM	6.1	5.3	4.4	2.6	0.8	-	-150 / -700	42 x 42 x 86	0.25
G 07	12,24	PM	21.0	18.0	16.0	10.0	5.0	-	-200 / -770	48 x 48 x 150	0.70
G 07-N	12	PM	23.0	20.0	17.5	11.5	6.0	-	- / -800	51 x 51 x 104	0.40
G 08	12,24	PM	15.5	13.0	12.0	8.0	5.0	1.0	-300 / -830	59 x 59 x 135	0.75
G 08-T Series	12,24	PM	19.0	17.0	15.0	11.0	7.0	3.0	- / -930	59 x 59 x 210	1.30
G 08-T Parallel	12,24	PM	36.0	32.0	27.0	19.0	10.0	2.0	- / -840	59 x 59 x 210	1.30
BL-G 085 M	12	BLDC	8.5	6.7	5.0	1.7	-	-	-150 / -500	50 x 50 x 44	0.15
G 09-6 LC	12	PM	9.0	6.5	3.8	-	-	-	-150 / -350	40 x 40 x 60	0.30

*PM = Permanent Magnet, BLDC = Brushless DC

Note: Minimum release quantities or regional availability may apply. Consult factory.

G-01-K-LC(L)



G 02 EB



G 07



Rotary Vane Pumps & Compressors

Vacuum Performance									Specifications		
MODEL	MOTOR CAPACITY		FLOW cfm @ in. Hg						MAX. VACUUM	DIMENSIONS (H x W x L) in	WEIGHT lb
	VOLTAGE	TYPE*	0	5	10	15	20	25			
QR-0030 (291305)	100-115/200 240/60/50/1	SPh	3.20 2.70	2.50 2.20	1.90 1.60	1.30 1.10	.60 .50	- -	25.0	5.80 x 5.60 x 13.56	33.0
QR-0050 (291306)	100-115/200 240/60/50/1	SPh	4.60 4.00	3.80 3.30	2.90 2.50	2.00 1.70	1.20 0.90	.30 .10	26.0	5.80 x 5.60 x 13.56	33.0
QR-0080 (291303)	100-115/200 240/60/50/1	CS	8.00 6.70	6.40 5.30	4.80 4.00	3.40 2.80	2.00 1.40	.40 .10	26.0	6.75 x 6.50 x 16.41	54.0
QR-0080 (291309)	200-240/460/60/3 200-220/380-415/50/3	POLY	8.00	6.40	4.80	3.40	2.00	0.4	25.0	6.75 x 6.50 x 16.41	56.0
QR-0100 (291310)	200-240/460/60/3 200-220/380-415/50/3	POLY	10.00	8.10	6.20	4.40	2.50	.8	25.0	6.75 x 6.50 x 16.41	56.0
QR-0100 (291304)	100-115/200 240/60/50/1	CS	10.00 8.30	8.10 6.60	6.20 5.00	4.40 3.40	2.50 1.90	.8 .35	26.0	6.75 x 6.50 x 16.41	54.0
SR-0015-VP (291275)	115/60/50/1	PSC	1.50	1.10	0.80	0.50	0.20	-	24.0	4.12 x 4.17 x 8.17	8.0
SR-0015-VP (291293)	220/240/50/60/1	PSC	1.20	0.90	0.60	0.40	0.20	-	24.0	4.12 x 4.17 x 8.17	8.0
SR-0015-VP (291277)	115/60/50/1	SPh	1.50	1.10	0.80	0.50	0.20	-	24.0	4.12 x 4.17 x 8.17	8.5

*CS = Capacitor Start, SPh = Split Phase, PSC = Permanent Split Capacitor, POLY = 3 Phase

Note: Minimum release quantities or regional availability may apply. Consult factory.

QR-0080
QR-0100



ROTARY VANE



Rotary Vane Pumps & Compressors

Pressure Performance

MODEL	MOTOR CAPACITY		FLOW l/min @ bar								MAXIMUM PRESSURE bar	
	VOLTAGE	TYPE*	0.0	0.5	1.0	1.5	2.0	3.0	5.0	7.0	CONTINUOUS	INTERMITTENT
TF 2	24	PM	42	39	37	33	29	25	21	-	-	1.0
TF 4	12,24	PM	66	62	59	52	46	39	33	-	-	1.0
TF 8	24	PSC	131	131	126	117	108	99	90	-	-	1.0
VTE 3	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
VTE 3	115/60/1	PSC	-	-	-	-	-	-	-	-	-	-
VTE 3	multi	POLY	-	-	-	-	-	-	-	-	-	-
VTE 3	24	PM	-	-	-	-	-	-	-	-	-	-
DTE 3	230/50/1	PSC	58	57	55	52	47	43	38	-	1.0	1.0
DTE 3	115/60/1	PSC	70	69	68	63	60	55	-	-	0.8	0.8
DTE 3	multi	POLY	58	57	55	52	47	43	38	-	1.0	1.0
DTE 3	24	PM	58	57	55	52	47	43	38	-	1.0	1.0
VTE 6	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
VTE 6	115/60/1	PSC	-	-	-	-	-	-	-	-	-	-
VTE 6	multi	POLY	-	-	-	-	-	-	-	-	-	-
VTE 6	24	PM	-	-	-	-	-	-	-	-	-	-
DTE 6	230/50/1	PSC	100	98	97	90	85	75	67	-	1.0	1.0
DTE 6	115/60/1	PSC	120	117	115	108	102	95	83	-	1.0	1.0
DTE 6	multi	POLY	100	98	97	90	85	75	67	-	1.0	1.0
DTE 6	24	PM	100	98	97	90	85	75	67	-	1.0	1.0
VTE 8	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
VTE 8	115/60/1	PSC	-	-	-	-	-	-	-	-	-	-
VTE 8	multi	POLY	-	-	-	-	-	-	-	-	-	-
VTE 8	24	PM	-	-	-	-	-	-	-	-	-	-
DTE 8	230/50/1	PSC	133	132	128	118	113	-	-	-	0.6	0.6
DTE 8	115/60/1	PSC	160	128	153	145	133	102	98	-	0.6	0.6
DTE 8	multi	POLY	133	132	128	118	113	102	98	-	1.0	1.0
DTE 8	24	PM	133	132	128	118	113	102	98	-	1.0	10.0
VTE 10	230/50/1	PSC	-	-	-	-	-	-	-	-	-	-
VTE 10	115/60/1	PSC	-	-	-	-	-	-	-	-	-	-
VTE 10	multi	POLY	-	-	-	-	-	-	-	-	-	-
VTE 10	24	PM	-	-	-	-	-	-	-	-	-	-
DTE 10	230/50/1	PSC	167	164	158	146	134	122	-	-	0.8	0.8
DTE 10	115/60/1	PSC	200	194	187	174	161	148	-	-	0.8	0.8
DTE 10	multi	POLY	167	164	158	146	134	122	110	-	1.0	1.0
DTE 10	24	PM	167	164	158	146	134	122	110	-	1.0	1.0

*PM = Permanent Magnet, PSC = Permanent Split Capacitor, POLY = 3 Phase

Note: Minimum release quantities or regional availability may apply. Consult factory.

DTE 3



DTE 6



VTE 10



ROTARY VANE



Rotary Vane Pumps & Compressors

Vacuum Performance									Specifications		
MODEL	MOTOR CAPACITY		FLOW l/min @ mbar						MAX. VACUUM mbar	DIMENSIONS (H x W x L) mm	WEIGHT kg
	VOLTAGE	TYPE*	0	-100	-200	-400	-600	-800			
TF 2	24	PM	42	37	32	21	11	-	-	93 x 88 x 215	3.5
TF 4	12,24	PM	66	53	40	33	17	-	-	93 x 88 x 215	3.5
TF 8	24	PSC	136	119	102	68	34	-	-	143 x 138 x 260	7.5
VTE 3	230/50/1	PSC	58	51	44	31	17	3	-850 / -850	150 x 152 x 205	6.5
VTE 3	115/60/1	PSC	70	62	53	37	20	4	-850 / -850	150 x 152 x 205	6.5
VTE 3	multi	POLY	58	51	44	31	17	3	-850 / -850	150 x 152 x 205	6.5
VTE 3	24	PM	58	51	44	31	17	3	-850 / -850	150 x 152 x 210	7.9
DTE 3	230/50/1	PSC	-	-	-	-	-	-	-	150 x 152 x 205	6.5
DTE 3	115/60/1	PSC	-	-	-	-	-	-	-	150 x 152 x 205	6.5
DTE 3	multi	POLY	-	-	-	-	-	-	-	150 x 152 x 205	6.5
DTE 3	24	PM	-	-	-	-	-	-	-	150 x 152 x 210	7.9
VTE 6	230/50/1	PSC	100	89	77	52	30	7	-850 / -850	156 x 152 x 220	7.5
VTE 6	115/60/1	PSC	120	106	92	64	36	9	-850 / -850	156 x 152 x 220	7.5
VTE 6	multi	POLY	100	89	77	52	30	7	-850 / -850	156 x 152 x 220	7.5
VTE 6	24	PM	100	89	77	52	30	7	-850 / -851	156 x 152 x 225	8.5
DTE 6	230/50/1	PSC	-	-	-	-	-	-	-	156 x 152 x 220	7.5
DTE 6	115/60/1	PSC	-	-	-	-	-	-	-	156 x 152 x 220	7.5
DTE 6	multi	POLY	-	-	-	-	-	-	-	156 x 152 x 220	7.5
DTE 6	24	PM	-	-	-	-	-	-	-	156 x 156 x 225	8.5
VTE 8	230/50/1	PSC	133	117	99	68	77	10	-850 / -850	156 x 156 x 249	8.0
VTE 8	115/60/1	PSC	160	140	120	81	45	13	-850 / -850	156 x 156 x 249	8.0
VTE 8	multi	POLY	133	117	99	68	37	10	-850 / -850	156 x 156 x 249	8.0
VTE 8	24	PM	133	117	99	68	37	10	-850 / -850	156 x 156 x 245	9.2
DTE 8	230/50/1	PSC	-	-	-	-	-	-	-	156 x 156 x 249	8.0
DTE 8	115/60/1	PSC	-	-	-	-	-	-	-	156 x 156 x 249	8.0
DTE 8	multi	POLY	-	-	-	-	-	-	-	156 x 156 x 249	8.0
DTE 8	24	PM	-	-	-	-	-	-	-	156 x 156 x 245	9.2
VTE 10	230/50/1	PSC	167	150	130	90	50	10	-850 / -850	156 x 156 x 265	10.3
VTE 10	115/60/1	PSC	200	175	155	105	60	15	-850 / -850	156 x 156 x 265	10.3
VTE 10	multi	POLY	167	150	130	90	50	10	-850 / -850	156 x 156 x 265	10.1
VTE 10	24	PM	167	150	130	90	50	10	-850 / -850	156 x 156 x 270	11.8
DTE 10	230/50/1	PSC	-	-	-	-	-	-	-	156 x 156 x 265	10.3
DTE 10	115/60/1	PSC	-	-	-	-	-	-	-	156 x 156 x 265	10.3
DTE 10	multi	POLY	-	-	-	-	-	-	-	156 x 156 x 265	10.1
DTE 10	24	PM	-	-	-	-	-	-	-	156 x 156 x 270	11.8

*PM = Permanent Magnet, PSC = Permanent Split Capacitor, POLY = 3 Phase

Note: Minimum release quantities or regional availability may apply. Consult factory.

TF 2



TF 4




VTE 3





Linear Diaphragm Pumps & Compressors

SMG 4



YP-20DU



Pressure Performance

MODEL	MOTOR CAPACITY		FLOW l/min @ mbar				MAXIMUM PRESSURE mbar	
	VOLTAGE	TYPE*	0	100	200	400	CONTINUOUS	INTERMITTENT
SMG 4	230/50/1	LM	1.1	0.9	0.6	0.1	450.0	450.0
SMG 4	12,24	LM	1.3	1.0	0.7	0.1	450.0	450.0
LM 15	230/50/1	LM	16.0	12.5	8.4	-	300.0	400.0
LM 15	115/60/1	LM	16.0	12.5	8.7	0.8	300.0	420.0
LM 15	12,24	LM	15.0	12.0	6.6	-	200.0	320.0
LM 22	230/50/1	LM	22.0	16.0	8.0	-	250.0	300.0
LM 22	115/60/1	LM	19.0	16.0	9.8	-	250.0	350.0
LM 22	12,24	LM	20.0	15.0	5.6	-	200.0	260.0
YP-6DU	230/50/1	LM	13.0	6.0	-	-	150.0	150.0
YP-15DU	230/50/1	LM	25.0	15.0	5.0	-	200.0	200.0
YP-20DU	230/50/1	LM	31.0	20.0	9.0	-	200.0	200.0
YP-30DU	230/50/1	LM	59.0	37.0	15.0	-	200.0	200.0
YP-40DU	230/50/1	LM	78.0	49.0	20.0	-	200.0	200.0
YP-50DU	230/50/1	LM	84.0	56.0	29.0	-	220.0	220.0

*LM = Linear Magnetic

Note: Minimum release quantities or regional availability may apply. Consult factory.



Linear Diaphragm Pumps & Compressors

Pressure Performance

MODEL	MOTOR CAPACITY		FLOW cfm @ psi								MAXIMUM PRESSURE psi	
	VOLTAGE	TYPE*	0	1	2	3	4	5	6	7	CONTINUOUS	INTERMITTENT
6015SE (150098)	115/60/1	LM	1.10	0.62	0.09	-	-	-	-	-	2.0	2.3
6025SE (150057)	115/60/1	LM	2.00	1.62	1.20	0.70	0.38	-	-	-	4.0	4.7
6025SE (150058)	230/50/60/1	LM	2.00	1.62	1.20	0.70	0.38	-	-	-	4.0	4.7
6025SE (150108)	12	LM	1.50	1.08	0.73	0.41	0.16	-	-	-	4.0	4.5
6025SE (150109)	24	LM	1.50	1.08	0.73	0.41	0.16	-	-	-	4.0	4.5

*LM = Linear Magnetic

Note: Minimum release quantities or regional availability may apply. Consult factory.



Linear Diaphragm Pumps & Compressors (Vibrating Armature Type)


Pressure Performance

MODEL	MOTOR CAPACITY		FLOW l/min @ mbar				MAXIMUM PRESSURE mbar	
	VOLTAGE	TYPE*	0	100	200	400	CONTINUOUS	INTERMITTENT
106	230/50	VA	0.9	0.6	0.2	-	200.0	270.0
112.0	230/50	VA	2.8	2.0	1.2	-	280.0	280.0
112.1	230/50	VA	5.0	2.6	2.0	-	340.0	340.0
202.0	230/50	VA	4.6	3.3	1.7	-	340.0	340.0
202.1	230/50	VA	4.8	3.8	2.1	0.3	450.0	450.0
302.0	230/50	VA	5.5	4.3	3.0	1.0	500.0	500.0
302.1	230/50	VA	8.5	6.5	5.2	3.0	700.0	700.0
312	230/50	VA	6.2	3.8	1.7	-	270.0	270.0
362	230/50	VA	8.5	4.6	-	-	200.0	200.0

*VA = Vibrating armature

Note: Minimum release quantities or regional availability may apply. Consult factory.

106






Linear Diaphragm Pumps & Compressors

Vacuum Performance						Specifications		
MODEL	MOTOR CAPACITY		FLOW l/min @ mbar			MAX. VACUUM mbar	DIMENSIONS (H x W x L)	WEIGHT
	VOLTAGE	TYPE*	0	-100	-200	CONT./INTERM.	mm	kg
SMG 4	230/50/1	LM	1.1	0.7	0.2	-250 / -250	46 x 53 x 72	0.2
SMG 4	12,24	LM	1.3	0.8	0.3	-250 / -250	46 x 53 x 72	0.2
LM 15	230/50/1	LM	16.0	12.5	7.5	-300 / -350	65 x 111 x 107	1.0
LM 15	115/60/1	LM	16.0	12.5	8.4	-300 / -400	65 x 111 x 107	1.0
LM 15	12,24	LM	15.0	16.0	5.3	-200 / -280	76 x 111 x 107	1.0
LM 22	230/50/1	LM	22.0	16.0	6.0	-250 / -260	65 x 111 x 107	1.0
LM 22	115/60/1	LM	19.0	16.0	8.8	-250 / -320	65 x 111 x 107	0.95
LM 22	12,24	LM	20.0	15.0	5.6	-200 / -260	76 x 111 x 107	1.0
YP-6DU	230/50/1	LM	-	-	-	-	77 x 116 x 110	1.1
YP-15DU	230/50/1	LM	-	-	-	-	77 x 116 x 110	1.2
YP-20DU	230/50/1	LM	-	-	-	-	77 x 116 x 110	1.2
YP-30DU	230/50/1	LM	-	-	-	-	85 x 127 x 117	2.3
YP-40DU	230/50/1	LM	-	-	-	-	85 x 127 x 117	2.5
YP-50DU	230/50/1	LM	-	-	-	-	85 x 127 x 117	2.8

*LM = Linear Magnetic

Note: Minimum release quantities or regional availability may apply. Consult factory.

LM 15



YP-30DU



Linear Diaphragm Pumps & Compressors

Vacuum Performance								Specifications		
MODEL	MOTOR CAPACITY		FLOW cfm @ in. Hg					MAX. VACUUM in. Hg	DIMENSIONS (H x W x L) in	WEIGHT lb
	VOLTAGE	TYPE*	0	2	4	6	8			
6015SE (150098)	115/60/1	LM	1.10	0.63	0.10	-	-	4.0	3.33 x 4.60 x 5.00	2.7
6025SE (150057)	115/60/1	LM	2.00	1.62	1.25	0.80	0.35	8.0	3.33 x 4.60 x 5.00	3.3
6025SE (150058)	230/50/60/1	LM	2.00	1.62	1.25	0.80	0.35	8.0	3.33 x 4.60 x 5.00	3.3
6025SE (150108)	12	LM	1.50	1.09	0.74	0.43	0.17	8.0	3.33 x 4.60 x 5.00	3.3
6025SE (150109)	24	LM	1.50	1.09	0.74	0.43	0.17	8.0	3.33 x 4.60 x 5.00	3.3

*LM = Linear Magnetic

Note: Minimum release quantities or regional availability may apply. Consult factory.

300 ST



Linear Diaphragm Pumps & Compressors (Vibrating Armature Type)

Vacuum Performance						Specifications			
MODEL	MOTOR CAPACITY		FLOW l/min @ mbar				MAX. VACUUM mbar CONT./INTERM.	DIMENSIONS (H x W x L) mm	WEIGHT kg
	VOLTAGE	TYPE*	0	-100	-200	-400			
107	230/50	VA	1.2	0.6	-	-	-190	60 x 60 x 90	0.3
113.0	230/50	VA	4.2	2.0	1.2	-	-280	81 x 78 x 113	0.8
113.1	230/50	VA	3.2	2.5	1.6	0.4	-450	81 x 78 x 113	0.8
203.0	230/50	VA	4.6	2.5	1.2	-	-300	91 x 70 x 140	1.6
203.1	230/50	VA	5.5	4.0	2.3	0.6	-450	91 x 70 x 140	1.6
303.0	230/50	VA	5.5	3.5	2.2	0.5	-420	97 x 78 x 165	2.2
303.1	230/50	VA	6.8	5.0	3.6	2.0	-550	97 x 78 x 165	2.2
313	230/50	VA	6.2	3.3	0.7	-	-250	84 x 65 x 162	0.9
363	230/50	VA	8.5	4.4	-	-	-230	84 x 65 x 162	0.9

*VA = Vibrating armature

Note: Minimum release quantities or regional availability may apply. Consult factory.

107





Linear Diaphragm Pumps & Compressors

YP-6A



LP-60HN



AP



Pressure Performance

MODEL	MOTOR CAPACITY		FLOW l/min @ mbar				MAXIMUM PRESSURE mbar	
	VOLTAGE	TYPE*	0 1)	100	200	400	CONTINUOUS	INTERMITTENT
YP-6A	230/50/1	LM	-	6.0	-	-	150.0	150.0
YP-15A	230/50/1	LM	-	15.0	0.5	-	200.0	200.0
YP-20A	230/50/1	LM	-	20.0	9.0	-	200.0	200.0
YP-6V	230/50/1	LM	-	6.0	-	-	150.0	150.0
YP-15V	230/50/1	LM	-	15.0	5.0	-	200.0	200.0
YP-20V	230/50/1	LM	-	20.0	5.0	-	200.0	200.0
YP-30VC	230/50/1	LM	-	35.0	25.0	-	200.0	200.0
YP-40VC	230/50/1	LM	-	48.0	30.0	-	200.0	200.0
YP-50VC	230/50/1	LM	-	61.0	38.0	-	200.0	200.0
YP-60VC	230/50/1	LM	-	70.0	52.0	-	200.0	200.0
YP-70VC	230/50/1	LM	-	93.0	73.0	-	200.0	200.0
AP-30	230/50/1	LM	-	41.0	14.0	-	230.0	240.0
AP-40	230/50/1	LM	-	51.0	21.0	-	230.0	260.0
AP-60	230/50/1	LM	-	80.0	42.0	-	300.0	310.0
AP-80	230/50/1	LM	-	101.0	70.0	-	300.0	405.0
LP-30A	230/50/1	LM	-	40.0	18.0	-	200.0	200.0
LP-40A	230/50/1	LM	-	49.0	26.0	-	200.0	200.0
LP-60HN	230/50/1	LM	-	80.0	60.0	-	200.0	200.0
LP-80HN	230/50/1	LM	-	112.0	76.0	-	250.0	250.0
LP-100H	230/50/1	LM	-	138.0	102.0	-	250.0	250.0
LP-120H	230/50/1	LM	-	148.0	120.0	-	250.0	250.0
LP-150HN	230/50/1	LM	-	200.0	150.0	-	300.0	300.0
LP-200HN	230/50/1	LM	-	250.0	200.0	-	300.0	300.0
LW-200	230/50/1	LM	-	270.0	200.0	-	300.0	300.0
LW-240	230/50/1	LM	-	315.0	245.0	-	300.0	300.0

*LM = Linear Magnetic.

1) Free flow operation not recommended

Note: Minimum release quantities or regional availability may apply. Consult factory.



Linear Diaphragm Pumps & Compressors

5040-A



Pressure Performance

MODEL	MOTOR CAPACITY		FLOW cfm @ psi								MAXIMUM PRESSURE psi	
	VOLTAGE	TYPE*	0 1)	1	2	3	4	5	6	7	CONTINUOUS	INTERMITTENT
5040-A (150037)	115/60/1	LM	-	1.96	1.58	1.12	0.60	0.10	-	-	3.5	5.1
5060-A (150039)	115/60/1	LM	-	2.80	2.38	1.88	1.40	0.84	0.31	-	4.0	6.3
5078S (150074)	115/60/1	LM	-	3.45	3.20	2.75	2.10	1.35	0.50	-	3.5	6.3
5100S (150044)	115/60/1	LM	-	4.37	3.97	3.41	2.71	1.90	1.06	0.26	3.5	7.2
5120S (150045)	115/60/1	LM	-	5.38	4.92	4.32	3.64	2.84	2.00	1.16	3.5	8.3

*LM = Linear Magnetic

1) Free flow operation not recommended

Note: Minimum release quantities or regional availability may apply. Consult factory.



Linear Diaphragm Pumps & Compressors

Vacuum Performance						Specifications		
MODEL	MOTOR CAPACITY		FLOW l/min @ mbar			MAX. VACUUM mbar	DIMENSIONS (H x W x L) mm	WEIGHT kg
	VOLTAGE	TYPE*	0 ¹⁾	-100	-200			
YP-6A	230/50/1	LM	-	-	-	-	111 X 128 X 148	2.1
YP-15A	230/50/1	LM	-	-	-	-	111 X 128 X 148	2.4
YP-20A	230/50/1	LM	-	-	-	-	111 X 128 X 148	2.4
YP-6V	230/50/1	LM	-	5.0	-	-150 / -150	111 X 128 X 148	2.1
YP-15V	230/50/1	LM	-	14.0	3.0	-200 / -200	112 X 128 X 148	2.4
YP-20V	230/50/1	LM	-	19.0	70.0	-200 / -200	113 X 128 X 148	2.4
YP-30VC	230/50/1	LM	-	31.0	20.0	-200 / -200	163 X 175 X 207	4.8
YP-40VC	230/50/1	LM	-	43.0	25.0	-200 / -200	163 X 175 X 207	5.1
YP-50VC	230/50/1	LM	-	58.0	30.0	-200 / -200	163 X 175 X 207	5.5
YP-60VC	230/50/1	LM	-	67.0	42.0	-200 / -200	163 X 175 X 207	5.9
YP-70VC	230/50/1	LM	-	60.0	-	-200 / -200	163 X 175 X 207	6.2
AP-30	230/50/1	LM	-	-	-	-	199 X 174 X 116	4.6
AP-40	230/50/1	LM	-	-	-	-	199 X 174 X 116	4.6
AP-60	230/50/1	LM	-	-	-	-	199 X 174 X 116	4.7
AP-80	230/50/1	LM	-	-	-	-	199 X 174 X 116	4.7
LP-30A	230/50/1	LM	-	-	-	-	200 X 174 X 227	5.0
LP-40A	230/50/1	LM	-	-	-	-	200 X 174 X 227	5.5
LP-60HN	230/50/1	LM	-	-	-	-	200 X 174 X 227	6.0
LP-80HN	230/50/1	LM	-	-	-	-	218 X 179 X 227	8.3
LP-100H	230/50/1	LM	-	-	-	-	218 X 179 X 227	8.3
LP-120H	230/50/1	LM	-	-	-	-	218 X 179 X 227	8.3
LP-150HN	230/50/1	LM	-	-	-	-	218 X 179 X 227	11.0
LP-200HN	230/50/1	LM	-	-	-	-	218 X 179 X 227	11.0
LW-200	230/50/1	LM	-	-	-	-	216 X 220 X 365	14.1
LW-240	230/50/1	LM	-	-	-	-	216 X 220 X 365	14.1

*LM = Linear Magnetic

1) Free flow operation not recommended

Note: Minimum release quantities or regional availability may apply. Consult factory.



YP-6V



YP-30VC



LP-200HN



Linear Diaphragm Pumps & Compressors

Vacuum Performance								Specifications		
MODEL	MOTOR CAPACITY		FLOW cfm @ in. Hg					MAX. VACUUM	DIMENSIONS (H x W x L)	WEIGHT
	VOLTAGE	TYPE*	0	1	2	3	4	in. Hg	in	lb
5040-A (150037)	115/60/1	LM	-	-	-	-	-	-	7.79 x 6.83 x 8.09	3.5
5060-A (150039)	115/60/1	LM	-	-	-	-	-	-	7.79 x 6.83 x 8.09	4.0
5078S (150074)	115/60/1	LM	-	-	-	-	-	-	9.78 x 7.05 x 8.94	18.5
5100S (150044)	115/60/1	LM	-	-	-	-	-	-	9.78 x7.05 x 8.94	18.5
5120S (150045)	115/60/1	LM	-	-	-	-	-	-	9.78 x 7.05 x 8.94	18.5

*LM = Linear Magnetic

Note: Minimum release quantities or regional availability may apply. Consult factory.



5060-A



Liquid Diaphragm Pumps, Motor Driven

1210 DC



5002F



TYPICAL CHARACTERISTICS

safe dry running, self priming, different diaphragm materials possible, connection via nozzle or thread

MODEL	VOLTAGE	MOTOR TYPE	FREE FLOW	PRESSURE HEIGHT	SUCTION HEIGHT	OPERATION	DIMENSIONS (mm) H x W x L
1210	DC	PM	180 ml/min	80 m H ₂ O	6.0 m H ₂ O	Continuous	37 x 23 x 52
5002F	DC	PM	400 ml/min	15 m H ₂ O	6.0 m H ₂ O	Continuous	80 x 30 x 52
5002FZ**	DC	PM	850 ml/min	15 m H ₂ O	5.0 m H ₂ O	Continuous	144 x 30 x 51
F120 stepper	DC/AC*	ST	1-260 ml/min	60 m H ₂ O	4.0 m H ₂ O	Continuous	102 x 59 x 87
F120	DC	PM	900 ml/min	20 m H ₂ O	4.0 m H ₂ O	Continuous	126 x 61 x 101

*DC/AC = With separate electronics, PM = Permanent Magnet, ST = Stepper motor


**Twin

Note: Minimum release quantities or regional availability may apply. Consult factory.



Liquid Diaphragm Pumps, Linear Drive

SMF



TYPICAL CHARACTERISTICS

self priming, individual impulse drive, long life; pulse control, dosing pumps available

MODEL	VOLTAGE	MOTOR TYPE	FREE FLOW	PRESSURE HEIGHT	SUCTION HEIGHT	OPERATION	DIMENSIONS (mm) H x W x L
SMF 2	AC or DC*	LM	120 ml/min	5.0 m H ₂ O	1.0 m H ₂ O	Continuous	46 x 53 x 72
SMF 4	AC or DC*	LM	310 ml/min	6.0 m H ₂ O	2.0 m H ₂ O	Continuous	46 x 53 x 72

*DC = With separate electronics, LM = Linear drive

Note: Minimum release quantities or regional availability may apply. Consult factory.

SR10/30 DC



Liquid Peristaltic Pumps, Direct Driven

TYPICAL CHARACTERISTICS

safe dry running, adjustable via speed, reversible (DC), interchangeable cassettes, wide range of tubing options

MODEL	VOLTAGE	MOTOR TYPE	FREE FLOW	PRESSURE HEIGHT	SUCTION HEIGHT	OPERATION	DIMENSIONS (mm) H x W x L
SR10/30	AC or DC	SP/PM	16-55 ml/min	8 m H ₂ O	8 m H ₂ O	Continuous	68 x 54 x 40
SR10/30	DC	SP/PM	20-80 ml/min	8 m H ₂ O	8 m H ₂ O	Continuous	81 x 56 x 40
SR10/30	DC/AC*	ST	.48-20 ml/min	8 m H ₂ O	8 m H ₂ O	Continuous	38 x 53 x 40
SR10/50	AC or DC	SP/PM	52-220 ml/min	8 m H ₂ O	8 m H ₂ O	Continuous	85 x 60 x 57
SR10/100	AC or DC	PSC/PM	1300-3000 ml/min	8 m H ₂ O	8 m H ₂ O	Continuous	143 x 109 x 119

*DC/AC = With separate electronics, PM = Permanent Magnet, ST = Stepper motor, SP = Shaded Pole, PSC = Permanent split capacitor

Note: Minimum release quantities or regional availability may apply. Consult factory.

SR10/50 DC



SR18



Liquid Peristaltic Pumps, Gear Drive

TYPICAL CHARACTERISTICS


insensitive against contamination, adjustable via speed, pumping of highly viscous liquids, sterilisable tubes, simple changing of tubing, wide range of tubing available

MODEL	VOLTAGE	MOTOR TYPE	FREE FLOW	PRESSURE HEIGHT	SUCTION HEIGHT	OPERATION	DIMENSIONS (mm) H x W x L
SR18	AC	SY	3-50 ml/min	10 m H ₂ O	8 m H ₂ O	Continuous	61.5 x 68 x 90
SR25	AC	SY	.18-14 ml/min	10 m H ₂ O	8 m H ₂ O	Continuous	92 x 86 x 80
SR25	AC or DC	SP/PM	2.3-746 ml/min	10 m H ₂ O	8 m H ₂ O	Continuous	156 x 80 x 108
SR25-300S	DC/AC*	ST	.1-428 ml/min	10 m H ₂ O	8 m H ₂ O	Continuous	96 x 80 x 101

*DC/AC = With separate electronics, PM = Permanent Magnet, ST = Stepper motor, SP = Shaded Pole, SY = Syncro

Note: Minimum release quantities or regional availability may apply. Consult factory.

SR25 DC



Notes

Worldwide Manufacturing and Distribution


SALES OFFICES

Australia
Austria
Brazil
China
Czech Republic
Denmark
France
Germany
Hong Kong
Italy
Japan
Korea
Netherlands
New Zealand
Sweden
Switzerland
United Kingdom
United States

MFG. LOCATIONS ●

Memmingen, Germany
Monroe, LA, USA
Wuxi, China

Representatives in other
countries see
www.gd-thomas.com

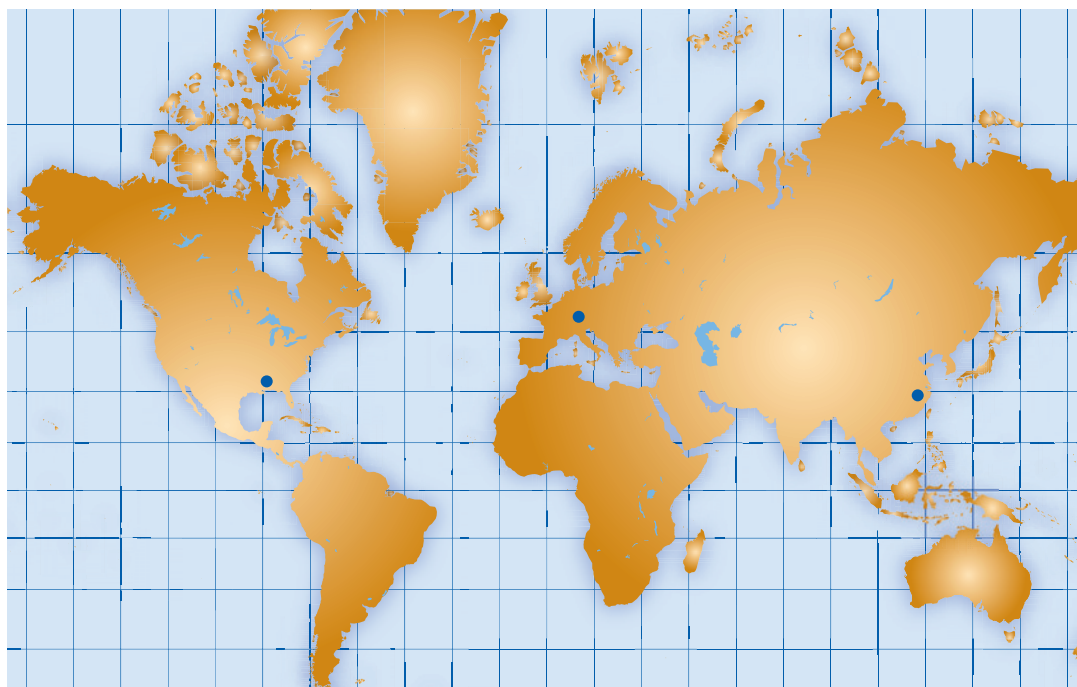

gd-thomas.com

PUMP AND COMPRESSOR SOLUTIONS FOR OEMs WORLDWIDE

The information presented in this material is based on technical data and test results of nominal units. It is believed to be accurate and reliable and is offered as an aid to help in the selection of Thomas products. It is the responsibility of the user to determine the suitability of the product for the intended use and the user assumes all risk and liability in connection therewith. Thomas does not warrant, guarantee or assume any obligation or liability in connection with this information.

Models presented in this catalog are representative of the product family. Photos of products pictured in this catalog do not necessarily represent a specific model number. To obtain further information for custom options, contact your local Thomas office.

Printed in USA
Form No. 850-4006 05/12
©2011 Gardner Denver Thomas, Inc. All rights reserved.


A Gardner Denver Product

Thomas Division
Headquarters
1419 Illinois Avenue
Sheboygan, WI 53081 USA
Phone: +1 920 457 4891
Fax: +1 920 451 4237
www.gd-thomas.com