


STANDARD FIXING AND FASTENINGS




PIN




TRCC

Bolts serrated flanged nut (class 4.8)




TRL

Bolts serrated flanged nut (class 4.8)



H BOLT

Bolts serrated flanged nut (class 4.8)



H BOLT



NUT



FLAT WASHER



PIN

644NNN

EZ

Type	p	Kg /	Code
7 x 80	50	0,60	644001
8 x 90	50	0,80	644002

TRCC BOLTS

648NNN

EZ

651NNN

GEOMET

• 6 x 12	100	0,85	648001	651001
• 6 x 15	100	0,90	648002	
• 6 x 20	100	1,03	648003	651003
• 6 x 30	100	1,10	648132	
• 8 x 18	100	1,40	648004	651004
• 8 x 40	100	2,70	648109	
• 10 x 25	100	3,00	648010	651010

• References available on stock :

529NNN

INOX 316

TRL BOLT

6 x 30	100	1,10	648005
6 x 40	100	1,25	648152

H BOLT

8 x 15	100	1,30	648007	651007
--------	-----	------	--------	--------

H BOLT

H 6 x 20	100	0,60	648045	
H 8 x 20	100	1,20	648120	
H 8 x 25	100	1,50	648101	
H 10 x 20	100	2,00	648046	
H 10 x 25	100	2,00	648048	
H 10 x 50	100	3,80	648071	
H 12 x 25	100	2,50	648021	651021
H 12 x 35	100	2,60	648150	
H 12 x 50	100	2,60	648047	

NUT

Ø 6	100	0,25	648064
Ø 8	100	0,50	648065
Ø 10	100	1,00	648081
Ø 12	100	1,50	648139

Geomet 500 B coating

- Recommended for bolting nut
- no over thickness
- saline spray test to ISO 9227 : 1000 hr
- equivalent to HDG.

FLAT WASHER

Ø 6	100	0,50	648024
Ø 8	100	0,78	648020
Ø 10	100	1,25	648034
Ø 12	100	1,70	648023

529NNN

316 L

STANDARD FIXING AND FASTENINGS

SHAKEPROOF WASHER

648NNN

EZ

651NNN

GEOMET

Type		p	Kg / 	Code
Ø 6		100	0,04	648029
Ø 8		100	0,07	648033
Ø 10		100	0,13	648030
Ø 12		100	0,17	648014

TOPGRIP SPRING NUT

PS 6 TG	100	3,15	648025
PS 8 TG	100	3,35	648031
PS 10 TG	100	3,72	648027
PS 12 TG	100	4,40	648013

NUT

PS 6 N	100	3,00	648035	651035
PS 8 N	100	3,20	648037	651037
PS 10 N	100	3,60	648038	651038
PS 12 N	100	4,25	648039	651039

THREADED ROD AND ROD CONNECTOR

644NNN

EZ

Type			daN	p	Kg / 	Code
THREADED ROD						
PS 6 TF			90	10	0,192	644011
PS 8 TF			160	10	0,336	644003
PS 10 TF			260	10	0,500	644018
PS 12 TF			380	10	0,700	644020
ROD CONNECTOR						
PS 6 MF			90	100	0,004	644012
PS 8 MF			160	100	0,008	644004
PS 10 MF			260	100	0,012	644022
PS 12 MF			380	100	0,016	644023

646NNN

316 L

EARTH BI-METALLIC CONNECTOR STF

651NNN

BRASS

STF 6/50	6 à 50 mm ²	25	0,07	651303
STF 6/35	6 à 35 mm ²	25	0,07	651309
STF 6/16	6 à 16 mm ²	25	0,07	651310

EARTH CONTINUITY CONNECTOR

Type	Kg / p	Code
Earth continuity connector 16mm ²	0,10	651500

END CAP

687NNN

PVC

Type		p	Kg / p	Code
PS 6153		50	0,010	687385
PS 6154		50	0,020	687228
PS 6155		50	0,005	687230

SHAKEPROOF WASHER



TOPGRIP SPRING NUT

for 41 - T-Strut channels




NUT




THREADED ROD


Length. 1 M




ROD CONNECTOR




EARTH BI-METALLIC CONNECTOR STF




EARTH CONTINUITY CONNECTOR




PS 6153
(41 x 21)



PS 6154
(41 x 41)




PS 6155
(25 x 25)



STANDARD fixing AND FASTENINGS



PS 4300
PS 4302




PS 4300 -PS 4302
PERFORATED STEEL BAND

677NNN

G

Type	Thickness mm	Width mm	Ø mm	ml	Kg /	Code
PS 4301	0,8	12		10	0,54	601326
PS 4300	0,8	17	7	10	0,76	677383
PS 4302	1,0	26	8	10	1,54	677384

CABLE PROTECTOR

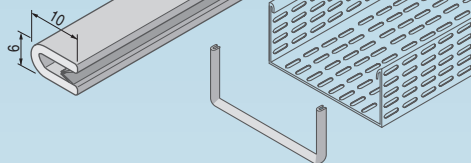


CABLE PROTECTOR

427NNN

PVC

Type		Kg /	Code
Cable protector	10 m	1,12	427729

CLIP-ON CABLE TIE

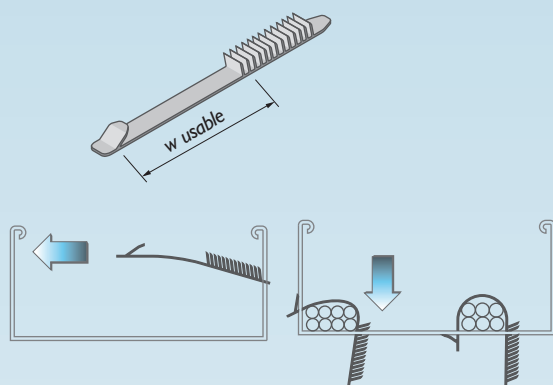


CLIP-ON CABLE TIE

647NNN

P 6.6

Type	w usable mm	p	Kg /	Code
D 65	65	100	0,20	647300
D 100	100	100	0,26	647301
D 145	145	100	0,36	647302


ZINC PAINT



ZINC PAINT

Type	p	Kg / p	Code
Zinc paint 500 ml	1	0,44	688001

ANTIVIBRATION FIXING

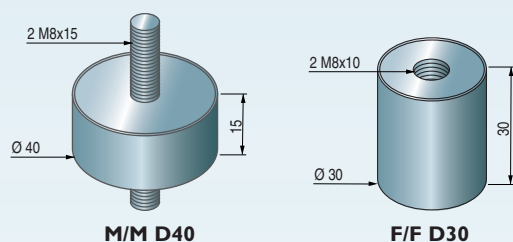

SILENT BLOC

Type	For airconditionning support p. 5-9	p	Kg / p	Code
M/M D40 (4P)		10	0,49	205170
F/F D30 (4P)		10	0,55	205171


Grippler HANGERS



Type Loop end	 daN	L mm	 p	Kg / 	Code
HF22FR	45	2000	10	0,60	823000
HF23FR	45	3000	10	0,80	823001
HF25FR	45	5000	10	1,30	823002
HF33FR	90	3000	10	1,30	823003

Type Stud end	 daN	L mm	 p	Kg / 	Code
HF22EF	45	2000	10	0,60	823004
HF23EF	45	3000	10	0,80	823005
HF33EF	90	3000	10	1,30	823006

LOOP END

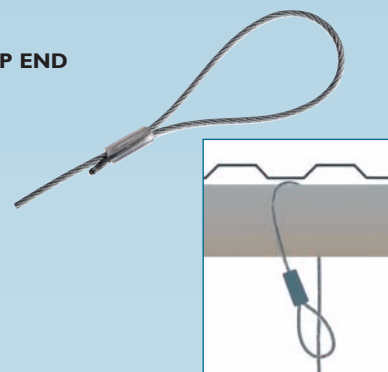

STUD END

