

RECESSED DOWNLIGHTING



TOPAZ™

Friendly Service... Powerful Solutions

Mission

"Topaz is a quality manufacturer providing the electrical distribution industry with the ability to exceed their customers' needs. Through our quality products, extensive inventory and superior customer service we build lasting relationships ... Helping you do your job better."



Topaz Customer Commitments

To ensure high-level service, and to provide you with added-value services that will help you generate more business, we developed Topaz Customer Commitments.



PartnerPledge ensures that we sell to distributors only. Unlike virtually all of our competitors, we will not sell any products to your customer or your customer's customer.



We are well known for the depth and breadth of our inventory. FullFill reflects our promise to you that we can fill over 99% of the orders we receive from existing inventory.



Just give us your order by 4PM and, in most cases, we will get your order out before 5PM on the same day.



 Underwriters Laboratories, Inc. TOPAZ products are manufactured for NEC Installation on Listed Raceways. Product listed by Underwriters Laboratories and certified by the Canadian Standards Association are indicated accordingly.	 Canadian Standards Association
Member:   	
Uniform Code Council (UCC) manufacturer number=751338. This prefix in conjunction with the 5 digit number listed for each item throughout the catalog provides the complete Universal Product Code (UPC) number.	

WARRANTY

All TOPAZ recessed lighting fixtures and trims are warranted for three (3) full years from the date of wholesale purchase. This warranty covers only properly installed TOPAZ recessed lighting fixtures and trims used under normal conditions specified in the product descriptions. For the warranty period TOPAZ will, at its option, repair or replace without charge a defective fixture or trim. It may be necessary to return the fixture or trim to TOPAZ transportation prepaid for TOPAZ to inspect and to determine the validity of the claim. Repair or replacement, as stated above, shall constitute the purchaser's exclusive warranty, which does not extend to transportation, installation, labor or any other consequential charges, nor does it apply to any equipment of another manufacturer used in conjunction with the TOPAZ recessed lighting fixtures and trims.

The information within this catalog is believed to be accurate at the time of printing. Dimensions and specifications are subject to change without notice. TOPAZ LIGHTING CORPORATION does not accept or assume responsibility for typographical errors, changes, omissions or for harm resulting there from.

TABLE OF CONTENTS

4" Compact Fluorescent Cans & Trims2-11

5" Compact Fluorescent Cans & Trims12-19

6" Compact Fluorescent Cans & Trims20-41

8" Compact Fluorescent Cans & Trims42-49

4" Incandescent Line Voltage Cans & Trims50-61

5" Incandescent Line Voltage Cans & Trims62-69

6" Incandescent Line Voltage Cans & Trims70-89

6" Line Voltage Cans & Trims for Sloped Ceilings90-97

3" Low Voltage Cans & Trims98-105

4" Low Voltage Cans & Trims106-117

LED Cans & Trims118-123

Emergency Ballast Recessed Cans124-125

Accessories126-129

Index130-131

Cross Reference132-133





4" Compact Fluorescent Cans & Trims

4" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS





ICSC126AT/V4

New Work 1 X 26 Watt Vertical Mount CFL with 120V NPF Electronic Ballast

- New Construction, IC applications, airtight applications
- 90° adjustable telescoping bar hangers (13 5/8" - 25") with captive nails on flanges and notched for T-Bar ceilings
- Removable housing for easy ballast access
- Uses one 26 watt quad, triple-tube or spiral CF lamp with G(X)24q-3 base
- Thermally protected ballast
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08848



**Meets TITLE 24
High Efficacy
Requirements.**

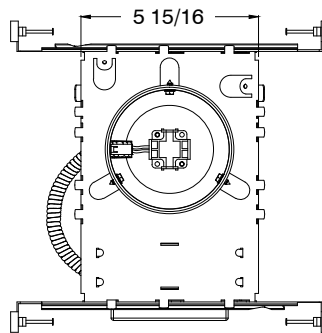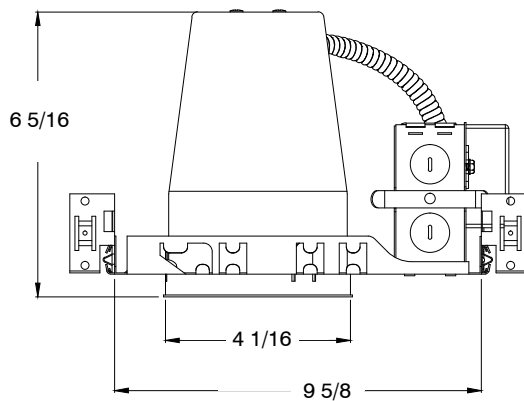

TR830W

White Deep Stepped Baffle with White Ring
• UPC# 09025




TR832W

White Shower Trim with Albalite Lens and Clear Deep Reflector
• UPC# 09027



TR831CL

White Trim with Clear Deep Reflector
• UPC# 09026

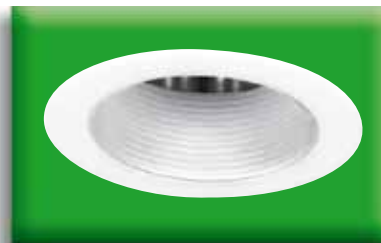

TR834CL/WH

Clear Deep Reflector with White Baffle and White Ring
• UPC# 09028

For a complete listing of 4" compact fluorescent trims, see page 10.



4" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS



ICSC126AT/V4/HU

New Work 1 X 26 Watt Vertical Mount CFL with 120-277V HPF Electronic Ballast

- New Construction, IC applications, airtight applications
- 90° adjustable telescoping bar hangers (13 5/8" - 25") with captive nails on flanges and notched for T-Bar ceilings
- Removable housing for easy ballast access
- Uses one 26 watt quad, triple-tube or spiral CF lamp with G(X)24q-3 base
- Thermally protected ballast
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08851

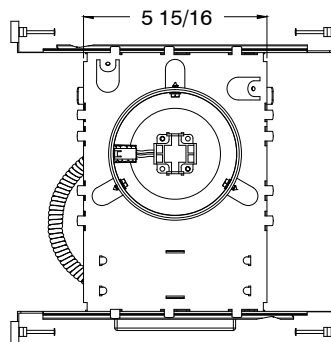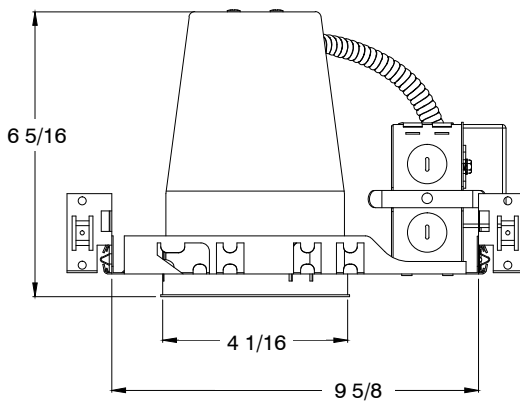

**Meets TITLE 24
High Efficacy
Requirements.**



TR836

White Shower Trim with Frosted Lens, White Ring and Clear Deep Reflector


- UPC# 09029



TR832W

White Shower Trim with Albalite Lens and Clear Deep Reflector


- UPC# 09027

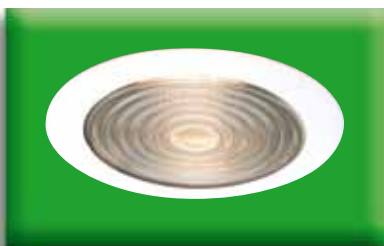

TR838W

Fresnel Shower Trim with Deep Clear Reflector

- UPC# 09030

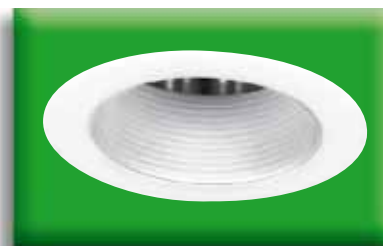

TR834CL/WH

Clear Deep Reflector with White Baffle and White Ring

- UPC# 09028

For a complete listing of 4" compact fluorescent trims, see page 10.

4" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS





ICRC126AT/V4

Old Work 1 X 26 Watt Vertical Mount CFL with 120V NPF Electronic Ballast

- Remodel Construction, IC applications, airtight applications
- Uses one 26 watt quad, triple-tube or spiral CF lamp with G(X)24q-3 base
- Thermally protected ballast
- Four remodel clips to secure housing
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08849



**Meets TITLE 24
High Efficacy
Requirements.**

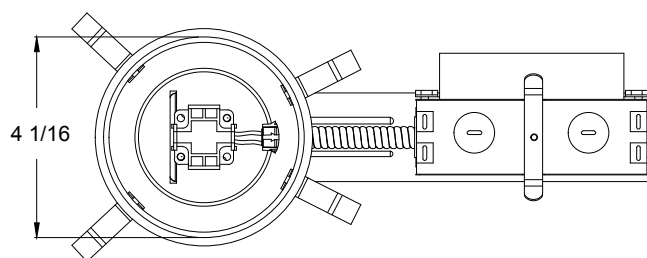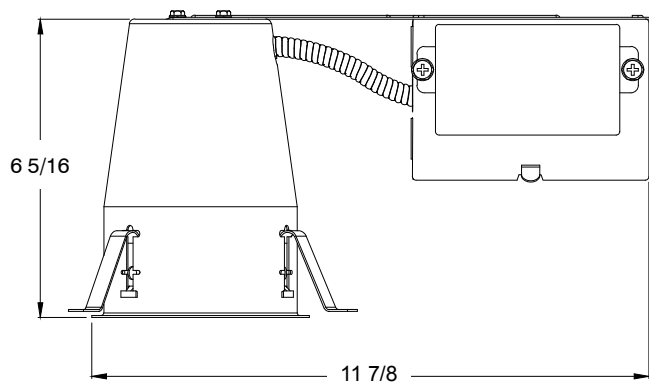

TR830W

**White Deep
Stepped Baffle
with White Ring**
• UPC# 09025




TR832W

**White Shower
Trim with Albalite
Lens and Clear
Deep Reflector**
• UPC# 09027



TR831CL

**White Trim with
Clear Deep
Reflector**
• UPC# 09026

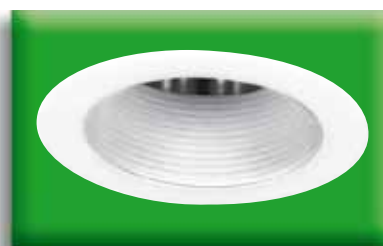

TR834CL/WH

**Clear Deep
Reflector with
White Baffle and
White Ring**
• UPC# 09028

For a complete listing of 4" compact fluorescent trims, see page 10.

4" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS






ICRC126AT/V4/HU

Old Work 1 X 26 Watt Vertical Mount CFL with 120-277V HPF Electronic Ballast

- Remodel Construction, IC applications, airtight applications
- Uses one 26 watt quad, triple-tube or spiral CF lamp with G(X)24q-3 base
- Thermally protected ballast
- Four remodel clips to secure housing
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08850



**Meets TITLE 24
High Efficacy
Requirements.**

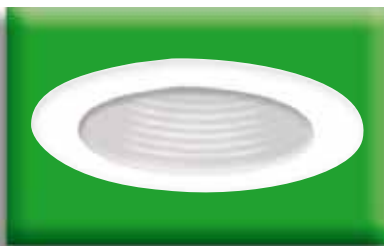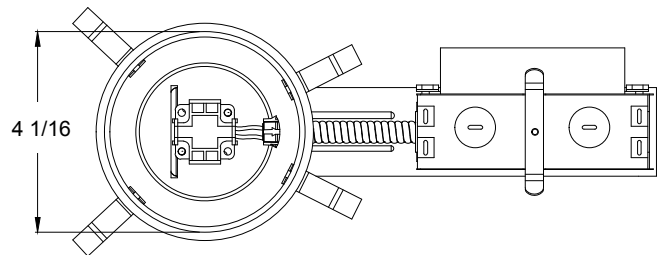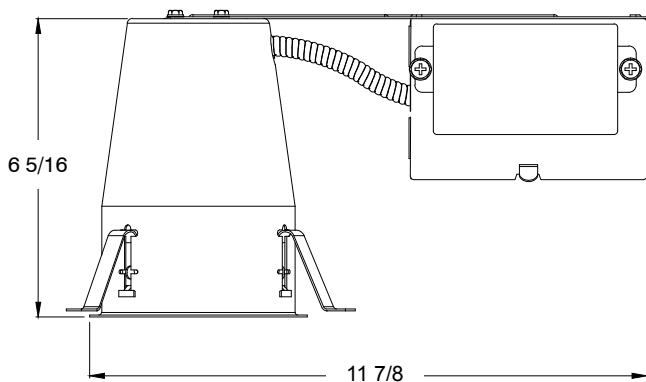

TR830W

White Deep Stepped Baffle with White Ring
• UPC# 09025




TR832W

White Shower Trim with Albalite Lens and Clear Deep Reflector
• UPC# 09027



TR831CL

White Trim with Clear Deep Reflector
• UPC# 09026

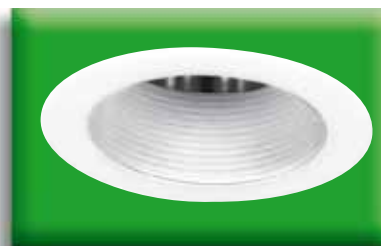

TR834CL/WH

Clear Deep Reflector with White Baffle and White Ring
• UPC# 09028

For a complete listing of 4" compact fluorescent trims, see page 10.

4" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS



GU24 Socket


ICSC118AT/GU24/V4

New Work 120V 11-18 Watt Vertical Mount GU24 CFL

- New Construction, IC applications, airtight applications
- Uses one ENERGY STAR qualified 120V 11-18 watt GU24 base CFL
- 90° adjustable telescoping bar hangers (13 5/8" - 25") with captive nails on flanges and notched for T-Bar ceilings
- Removable housing for J-box access
- Adjustable socket mounting plate for precise beam control
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08985



**Meets TITLE 24
High Efficacy
Requirements.**

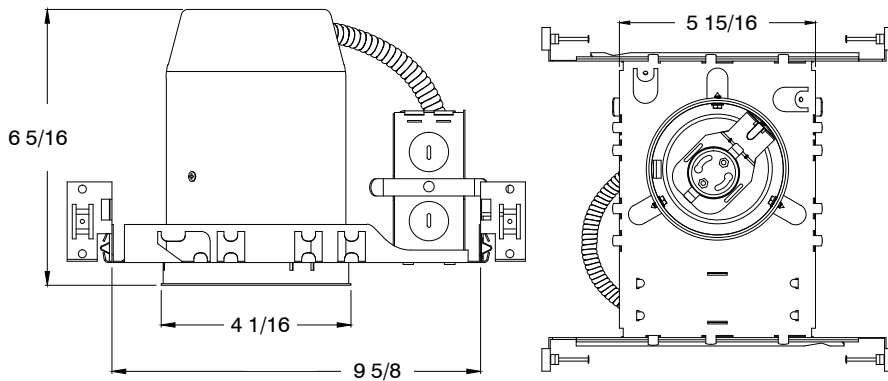

TR840GU/DWB

White GU24 Trim
with White Deep
Stepped Baffle


- UPC# 09031



TR841GU/DCR

White GU24 Trim
with Clear Deep
Reflector

- UPC# 09033

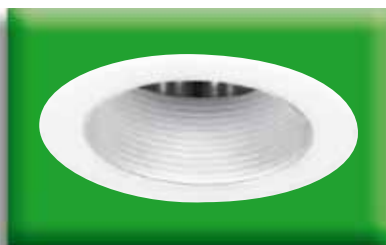

TR834CL/WH

Clear Deep
Reflector with
White Baffle and
White Ring

- UPC# 09028



TR836

White Shower
Trim with Frosted
Lens, White Ring
and Clear Deep
Reflector

- UPC# 09029

For a complete listing of 4" compact fluorescent trims, see page 10.

4" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS






ICRC118AT/GU24/V4

Old Work 120V 11-18 Watt Vertical Mount GU24 CFL

- Remodel Construction, IC applications, airtight applications
- Uses one ENERGY STAR qualified 120V 11-18 watt GU24 base CFL
- Four remodel clips to secure housing
- Adjustable socket mounting plate for precise beam control
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08986



**Meets TITLE 24
High Efficacy
Requirements.**

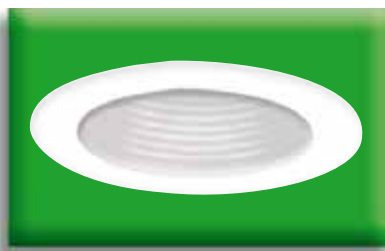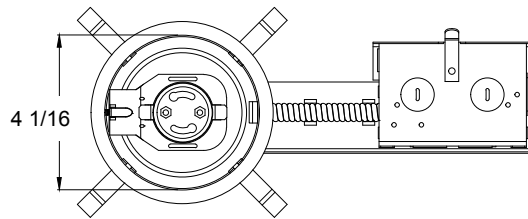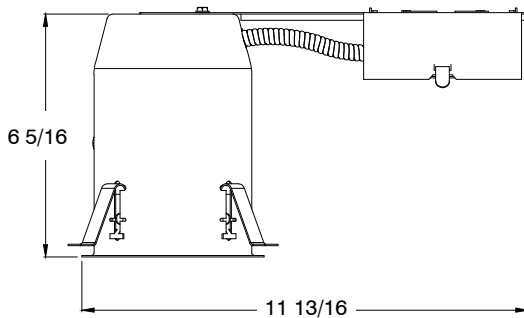

TR840GU/DWB

White GU24 Trim
with White Deep
Stepped Baffle


- UPC# 09031



TR841GU/DCR

White GU24 Trim
with Clear Deep
Reflector

- UPC# 09033

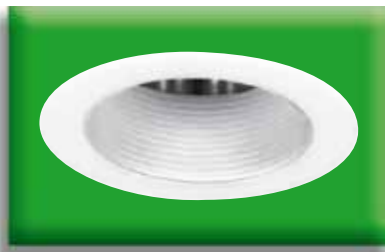

TR834CL/WH

Clear Deep
Reflector with
White Baffle and
White Ring

- UPC# 09028




TR836

White Shower
Trim with Frosted
Lens, White Ring
and Clear Deep
Reflector

- UPC# 09029

For a complete listing of 4" compact fluorescent trims, see page 10.

4" COMPACT FLUORESCENT TRIMS

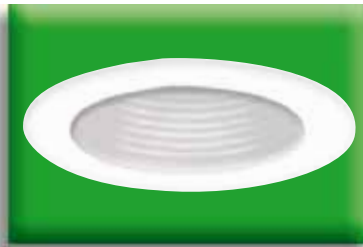

TR830W

White Deep Stepped Baffle with White Ring
• UPC# 09025




TR836

White Shower Trim with Frosted Lens, White Ring and Clear Deep Reflector
• UPC# 09029



TR831CL

White Trim with Clear Deep Reflector
• UPC# 09026

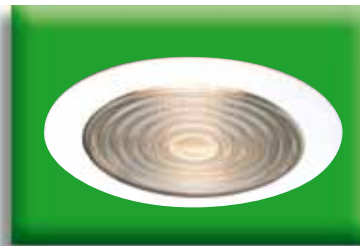

TR838W

Fresnel Shower Trim with Deep Clear Reflector
• UPC# 09030




TR832W

White Shower Trim with Albalite Lens and Clear Deep Reflector
• UPC# 09027



TR840GU/DWB

White GU24 Trim with White Deep Stepped Baffle
• UPC# 09031

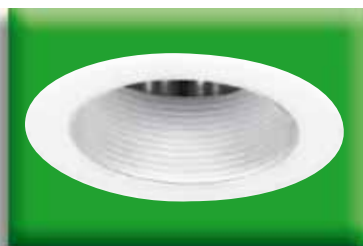

TR834CL/WH

Clear Deep Reflector with White Baffle and White Ring
• UPC# 09028




TR841GU/DCR


White GU24 Trim with Clear Deep Reflector
• UPC# 09033

4" COMPACT FLUORESCENT TRIMS


TR830

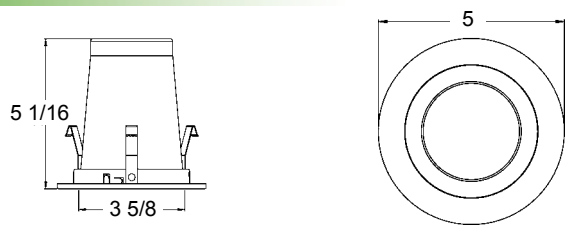


TR836

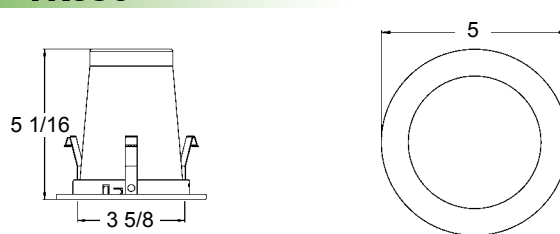


TR831

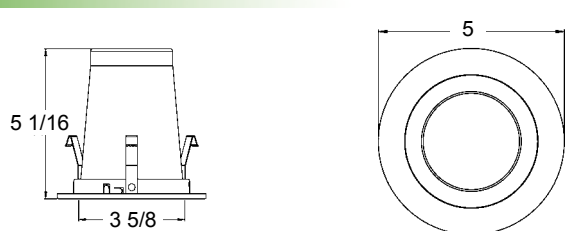


TR838

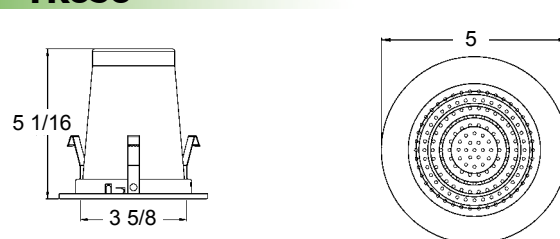


TR832

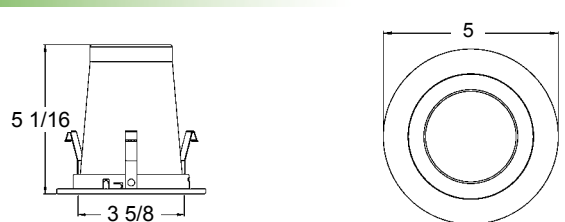


TR840

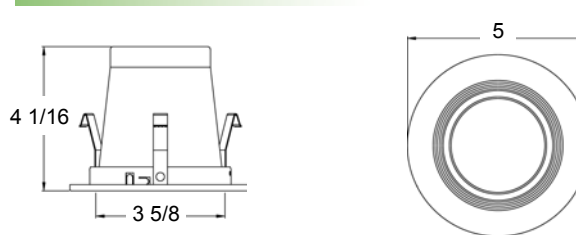

TR834

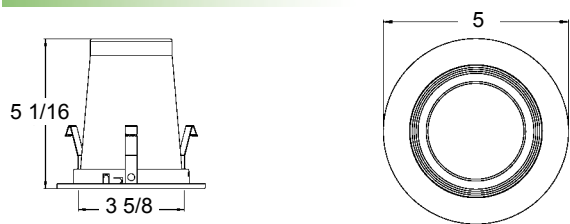

TR841

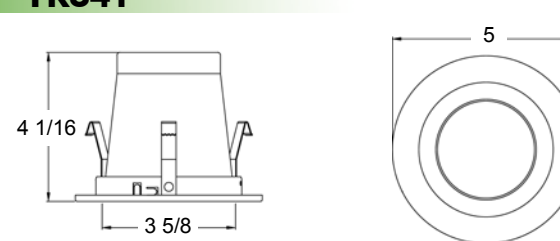





5" Compact Fluorescent Cans & Trims



5" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS



ICSC118AT/V5

New Work 1 X 18 Watt Vertical Mount CFL with 120V NPF Electronic Ballast

- New Construction, IC applications, airtight applications
- 90° adjustable telescoping bar hangers (13 5/8"- 25") with captive nails on flanges and notched for T-Bar ceilings
- Removable housing for easy ballast access
- Adjustable socket mounting plate for precise beam control
- Uses one 18 watt quad, triple-tube or spiral CF lamp with G(X)24q-2 base
- Thermally protected ballast
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08852

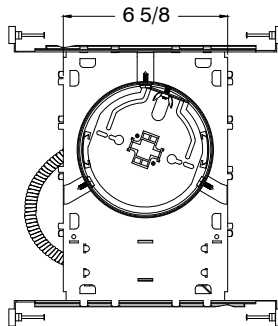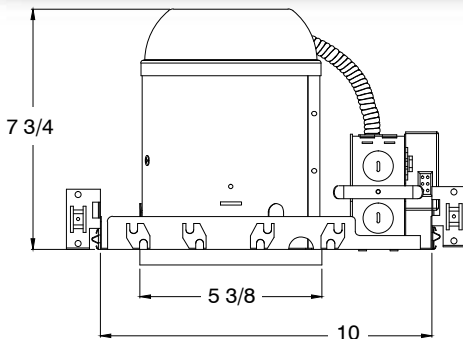

**Meets TITLE 24
High Efficacy
Requirements.**



602WH/WH/R

**Deep White Baffle
with White Ring**
• UPC# 09023



614WH/A

**Albalite Shower
Trim with Deep
Clear Reflector
and White Ring**
• UPC# 08874



606CL/WH/R

**Clear Reflector
with White Ring**
• UPC# 09024



614WH/F

**Frosted Lens
Shower Trim
with Deep Clear
Reflector and
White Ring**
• UPC# 08875



614WH

**Fresnel Shower
Trim with Deep
Clear Reflector
and White Ring**
• UPC# 08873



616CL/WH

**Deep Clear
Reflector with
White Baffle and
White Ring**
• UPC# 08876

For technical drawings of 5" compact fluorescent trims, see page 19.



5" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS



ICSC126AT/V5

New Work 1 X 26 Watt Vertical Mount CFL with 120V NPF Electronic Ballast

- New Construction, IC applications, airtight applications
- 90° adjustable telescoping bar hangers (13 5/8"- 25") with captive nails on flanges and notched for T-Bar ceilings
- Removable housing for easy ballast access
- Adjustable socket mounting plate for precise beam control
- Uses one 26 watt quad, triple-tube or spiral CF lamp with G(X)24q-3 base
- Thermally protected ballast
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08854

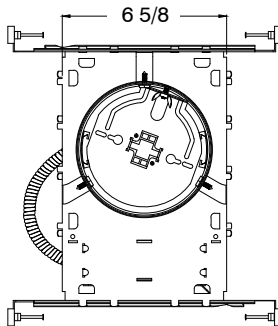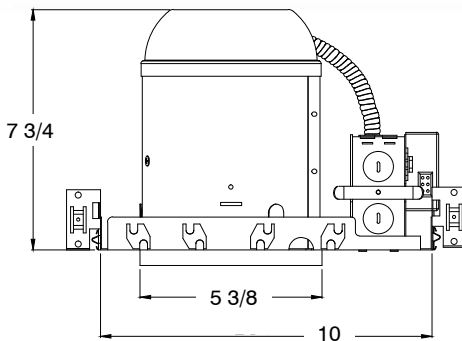

**Meets TITLE 24
High Efficacy
Requirements.**



602WH/WH/R

**Deep White Baffle
with White Ring**
• UPC# 09023



614WH/A

**Albalite Shower
Trim with Deep
Clear Reflector
and White Ring**
• UPC# 08874



606CL/WH/R

**Clear Reflector
with White Ring**
• UPC# 09024



614WH/F

**Frosted Lens
Shower Trim
with Deep Clear
Reflector and
White Ring**
• UPC# 08875



614WH

**Fresnel Shower
Trim with Deep
Clear Reflector
and White Ring**
• UPC# 08873



616CL/WH

**Deep Clear
Reflector with
White Baffle and
White Ring**
• UPC# 08876

For technical drawings of 5" compact fluorescent trims, see page 19.



5" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS



ICSC126AT/V5/HU

New Work 1 X 26 Watt Vertical Mount CFL with 120-277V HPF Electronic Ballast

- New Construction, IC applications, airtight applications
- 90° adjustable telescoping bar hangers (13 5/8" - 25") with captive nails on flanges and notched for T-Bar ceilings
- Removable housing for easy ballast access
- Adjustable socket mounting plate for precise beam control
- Uses one 26 watt quad, triple-tube or spiral CF lamp with G(X)24q-3 base
- Thermally protected ballast
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08853

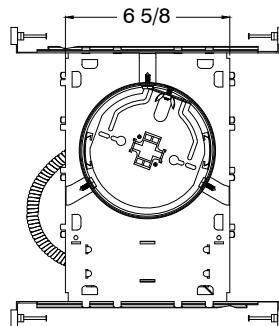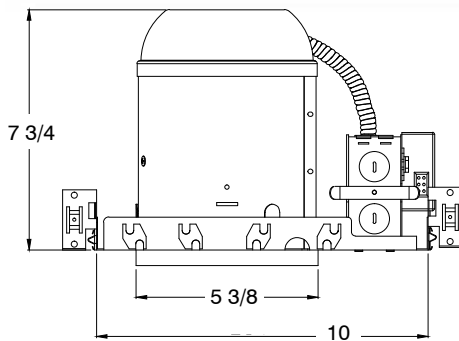

**Meets TITLE 24
High Efficacy
Requirements.**



602WH/WH/R

**Deep White Baffle
with White Ring**
• UPC# 09023



614WH/A

**Albalite Shower
Trim with Deep
Clear Reflector
and White Ring**
• UPC# 08874



606CL/WH/R

**Clear Reflector
with White Ring**
• UPC# 09024



614WH/F

**Frosted Lens
Shower Trim
with Deep Clear
Reflector and
White Ring**
• UPC# 08875



614WH

**Fresnel Shower
Trim with Deep
Clear Reflector
and White Ring**
• UPC# 08873



616CL/WH

**Deep Clear
Reflector with
White Baffle and
White Ring**
• UPC# 08876

For technical drawings of 5" compact fluorescent trims, see page 19.



5" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS



ICRC126AT/V5

Old Work 1 X 26 Watt Vertical Mount CFL with 120V NPF Electronic Ballast

- Remodel Construction, IC applications, airtight applications
- Adjustable socket mounting plate for precise beam control
- Uses one 26 watt quad, triple-tube or spiral CF lamp with G(X)24q-3 base
- Four remodel clips to secure housing
- Thermally protected ballast
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08855

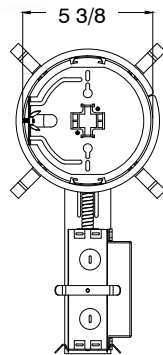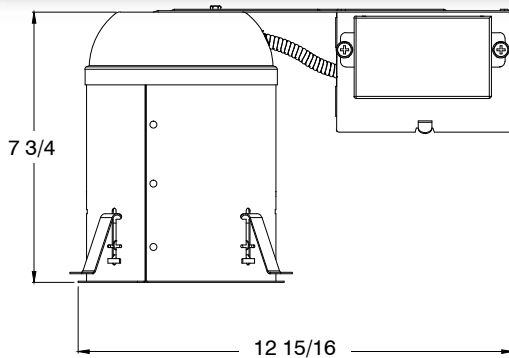

**Meets TITLE 24
High Efficacy
Requirements.**



602WH/WH/R

**Deep White Baffle
with White Ring**
• UPC# 09023



614WH/A

**Albalite Shower
Trim with Deep
Clear Reflector
and White Ring**
• UPC# 08874



606CL/WH/R

**Clear Reflector
with White Ring**
• UPC# 09024



614WH/F

**Frosted Lens
Shower Trim with
Deep Clear Reflector
and White Ring**
• UPC# 08875



614WH

**Fresnel Shower
Trim with Deep
Clear Reflector
and White Ring**
• UPC# 08873



616CL/WH

**Deep Clear Reflector
with White Baffle
and White Ring**
• UPC# 08876

For technical drawings of 5" compact fluorescent trims, see page 19.



5" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS



ICRC126AT/V5/HU

Old Work 1 X 26 Watt Vertical Mount CFL with 120-277V HPF Electronic Ballast

- Remodel Construction, IC applications, airtight applications
- Adjustable socket mounting plate for precise beam control
- Uses one 26 watt quad, triple-tube or spiral CF lamp with G(X)24q-3 base
- Four remodel clips to secure housing
- Thermally protected ballast
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08856

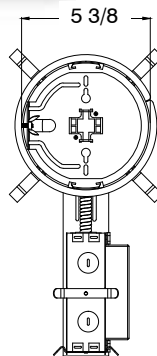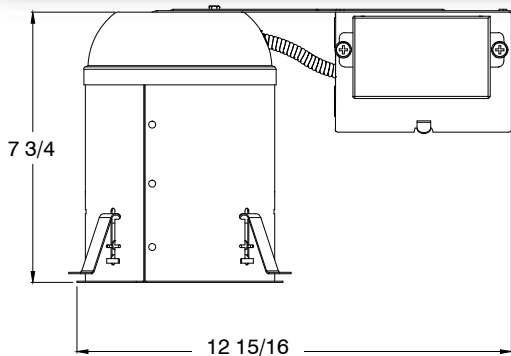

**Meets TITLE 24
High Efficacy
Requirements.**



602WH/WH/R

**Deep White Baffle
with White Ring**
• UPC# 09023



614WH/A

**Albalite Shower
Trim with Deep
Clear Reflector
and White Ring**
• UPC# 08874



606CL/WH/R

**Clear Reflector
with White Ring**
• UPC# 09024



614WH/F

**Frosted Lens
Shower Trim
with Deep Clear
Reflector and
White Ring**
• UPC# 08875



614WH

**Fresnel Shower
Trim with Deep
Clear Reflector
and White Ring**
• UPC# 08873




616CL/WH

**Deep Clear
Reflector with
White Baffle and
White Ring**
• UPC# 08876


For technical drawings of 5" compact fluorescent trims, see page 19.

5" COMPACT FLUORESCENT TRIMS


602

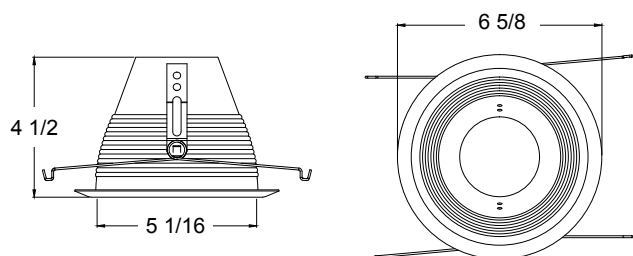


614

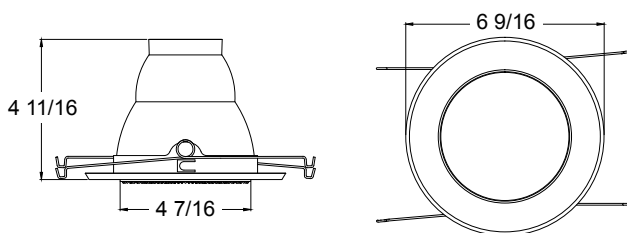

606

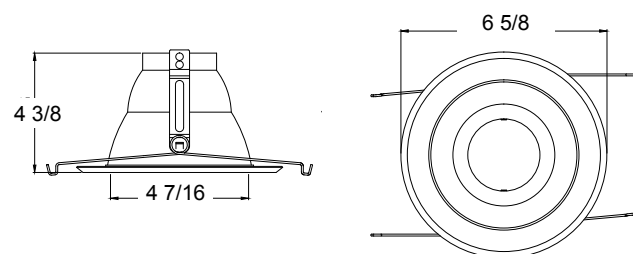

616

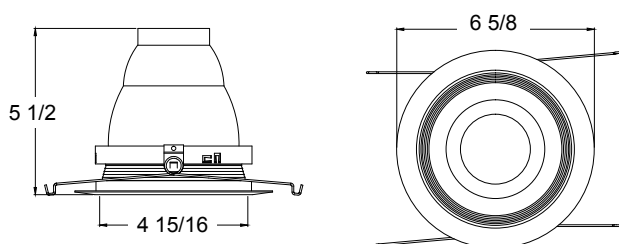





6" Compact Fluorescent Cans & Trims



6" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS




ICSC118AT/V6

New Work 1 X 18 Watt Vertical Mount with 120V NPF Electronic Ballast

- New Construction, IC applications, airtight applications
- 90° adjustable telescoping bar hangers (13 5/8"- 25") with captive nails on flanges and notched for T-Bar ceilings
- Removable housing for easy ballast access
- Adjustable socket mounting plate for precise beam control
- Uses one 18 watt quad, triple-tube or spiral CF lamp with G(X)24q-2 base
- Thermally protected ballast
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08859

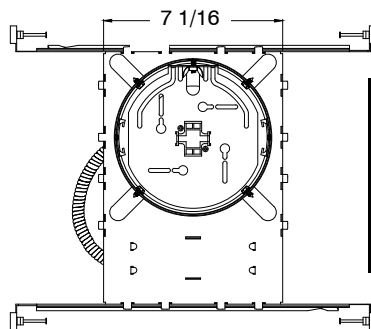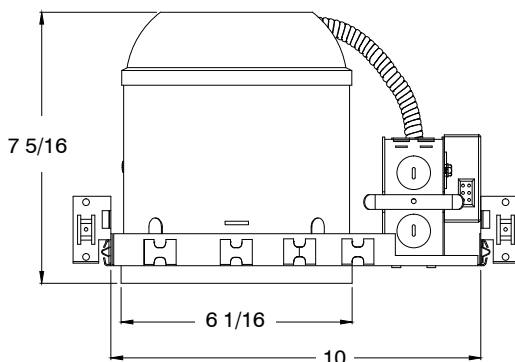

**Meets TITLE 24
High Efficacy
Requirements.**

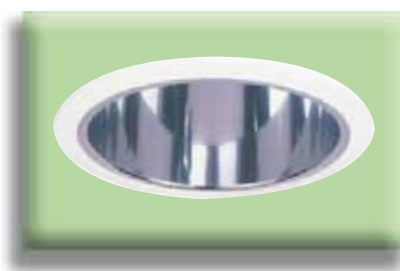

511CL/WH

Clear Deep Reflector with White Ring
• UPC# 02935



560CL

Clear Reflector with White Ring
• UPC# 08871



518WH

White Step Baffle with White Ring
• UPC# 08870



519WH/P/R

Albalite Shower Trim with Clear Deep Reflector and White Plastic Ring
• UPC# 09021

For a complete listing of 6" compact fluorescent trims, see pages 31 and 32.



6" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS



ICSC126AT/V6

New Work 1 X 26 Watt Vertical Mount with 120V NPF Electronic Ballast

- New Construction, IC applications, airtight applications
- 90° adjustable telescoping bar hangers (13 5/8"- 25") with captive nails on flanges and notched for T-Bar ceilings
- Removable housing for easy ballast access
- Adjustable socket mounting plate for precise beam control
- Uses one 26 watt quad, triple-tube or spiral CF lamp with G(X)24q-3 base
- Thermally protected ballast
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08857

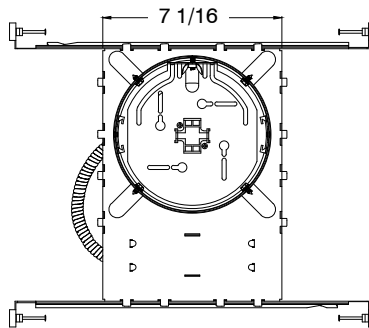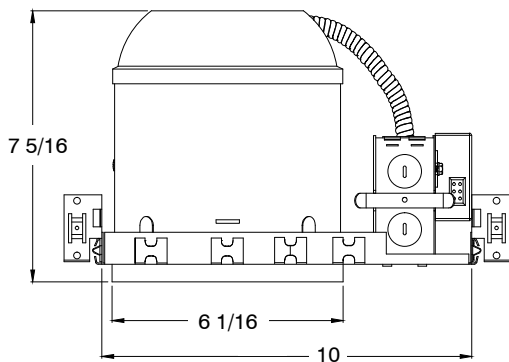

**Meets TITLE 24
High Efficacy
Requirements.**




516WH/WH

White Baffle,
White Wall Wash
• UPC# 03051



520CL/WH

Clear Open
Reflector with
White Ring
• UPC# 04009

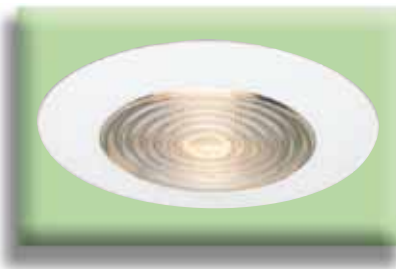

513WH

Fresnel Glass Lens
with White Ring
Shower Trim
• UPC# 02446



526WH/WH/F

Frosted Glass Lens
with White Baffle
and White Ring
• UPC# 09022

For a complete listing of 6" compact fluorescent trims, see pages 31 and 32.


6" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS



ICSC126AT/V6/HU

New Work 1 X 26 Watt Vertical Mount with 120-277V HPF Electronic Ballast

- New Construction, IC applications, airtight applications
- 90° adjustable telescoping bar hangers (13 5/8" - 25") with captive nails on flanges and notched for T-Bar ceilings
- Removable housing for easy ballast access
- Adjustable socket mounting plate for precise beam control
- Uses one 26 watt quad, triple-tube or spiral CF lamp with G(X)24q-3 base
- Thermally protected ballast
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08858

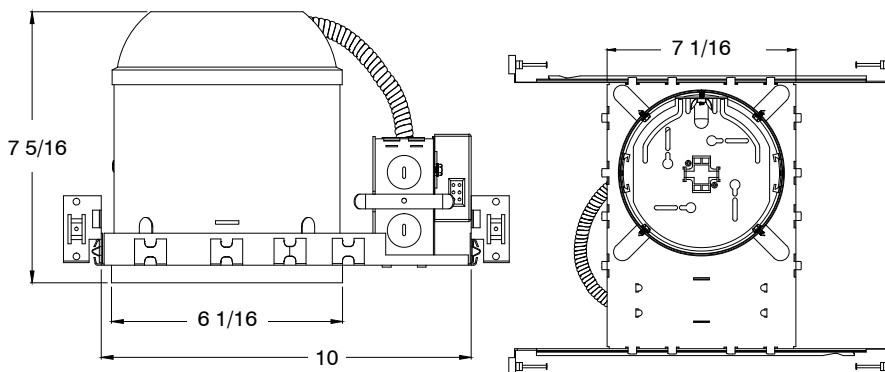

**Meets TITLE 24
High Efficacy
Requirements.**



513WH

**Fresnel Glass Lens
with White Ring
Shower Trim**

• UPC# 02446



510WH

White Wall Wash


• UPC# 02578



512WH/WH

**Clear Deep
Reflector with
White Step Baffle
and White Ring**

• UPC# 08886

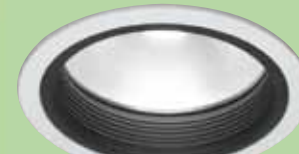

512BL/WH

**Clear Deep
Reflector with
Black Step Baffle
and White Ring**

• UPC# 02497

For a complete listing of 6" compact fluorescent trims, see pages 31 and 32.

6" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS





ICSC126AT/FL/V6

New Work 1 X 26 Watt Vertical Mount with 120V NPF Electronic Ballast

- New Construction, IC applications, airtight applications
- 90° adjustable telescoping bar hangers (13 5/8" - 25") with captive nails on flanges and notched for T-Bar ceilings
- Removable housing for easy ballast access
- G(X)24q-3 socket is mounted in top of can with extra length of wire for optional use as a floating lamp holder with socket supporting trims
- Uses one 26 watt quad, triple-tube or spiral CF lamp with G(X)24q-3 base
- Thermally protected ballast
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 09020



Floating 4-PIN Socket

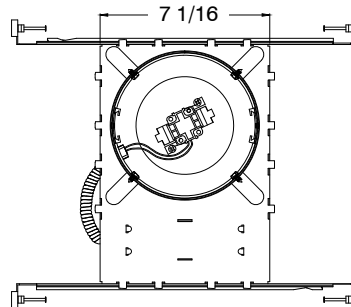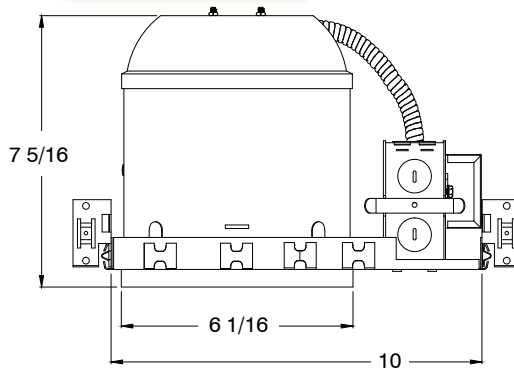

Meets TITLE 24
High Efficacy
Requirements.



502WH/WH/AT

One-Piece Socket Supporting White Step Baffle with White Ring Airtight
• UPC# 07568




502GW/GW/AT

One-Piece Socket Supporting Gloss White Step Baffle with Gloss White Ring Airtight
• UPC# 09019



502GW/GW/AT/FS

One-Piece Socket Supporting Gloss White Step Baffle with Gloss White Ring "Rabbit Ears" Friction Springs Airtight
• UPC# 09018

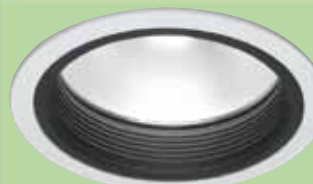

512BL/WH

Clear Deep Reflector with Black Step Baffle and White Ring
• UPC# 02497

For a complete listing of 6" compact fluorescent trims, see pages 31 and 32.

6" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS




ICSC12642AT/V6

New Work 1 X 26, 32 or 42 Watt Vertical Mount with 120-277V HPF Electronic Ballast

- New Construction, IC applications, airtight applications
- 90° adjustable telescoping bar hangers (13 5/8"- 25") with captive nails on flanges and notched for T-Bar ceilings
- Removable housing for easy ballast access
- Adjustable socket mounting plate for precise beam control with universal G(X)24q-3 or -4 lamp holder
- Uses one 26, 32 or 42 watt quad, triple-tube or spiral CF lamp
- Thermally protected ballast
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08861



**Meets TITLE 24
High Efficacy
Requirements.**

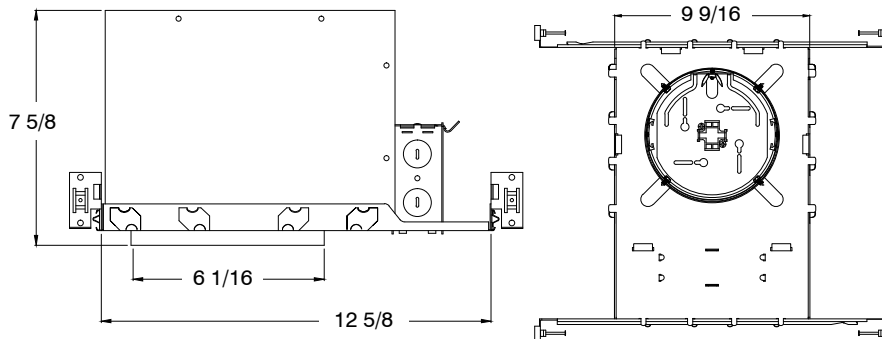

519WH/P/R

Albalite Shower Trim with Clear Deep Reflector and White Plastic Ring
• UPC# 09021




510WH

White Wall Wash
• UPC# 02578



509WH/P

Albalite Lens Shower Trim with Plastic Ring
• UPC# 02933

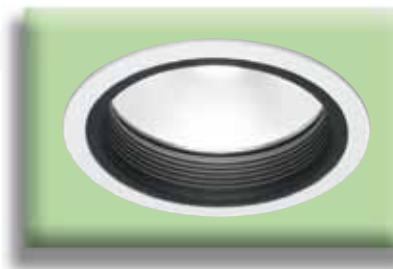

512BL/WH

Clear Deep Reflector with Black Step Baffle and White Ring
• UPC# 02497

For a complete listing of 6" compact fluorescent trims, see pages 31 and 32.

6" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS





ICRC126AT/V6

Old Work 1 X 26 Watt Vertical Mount with 120V NPF Electronic Ballast

- Remodel Construction, IC applications, airtight applications
- Adjustable socket mounting plate for precise beam control
- Uses one 26 watt quad, triple-tube or spiral CF lamp with G(X)24q-3 base
- Thermally protected ballast
- Four remodel clips to secure housing
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08860



**Meets TITLE 24
High Efficacy
Requirements.**

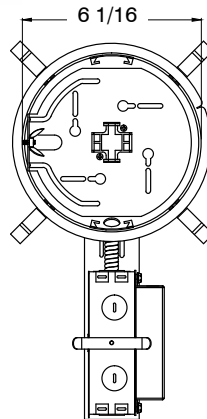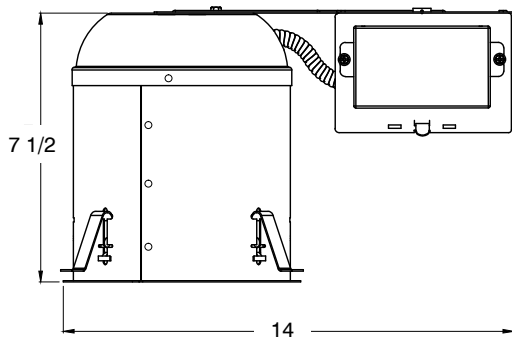

518WH

White Step Baffle with White Ring

- UPC# 08870



510WH

White Wall Wash


- UPC# 02578



512WH/WH

Clear Deep Reflector with White Step Baffle and White Ring

- UPC# 08886

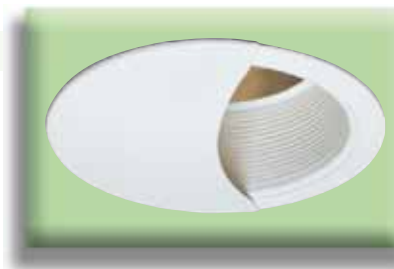

516WH/WH

White Baffle with White Wall Wash

- UPC# 03051

For a complete listing of 6" compact fluorescent trims, see pages 31 and 32.

6" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS





ICRC126AT/V6/HU

Old Work 1 X 26 Watt Vertical Mount with 120-277V HPF Electronic Ballast

- Remodel Construction, IC applications, airtight applications
- Adjustable socket mounting plate for precise beam control
- Uses one 26 watt quad, triple-tube or spiral CF lamp with G(X)24q-3 base
- Thermally protected ballast
- Four remodel clips to secure housing
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08991



**Meets TITLE 24
High Efficacy
Requirements.**

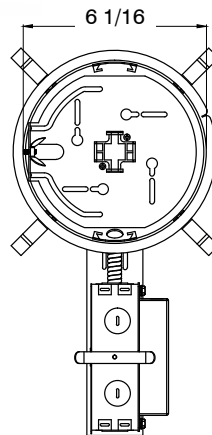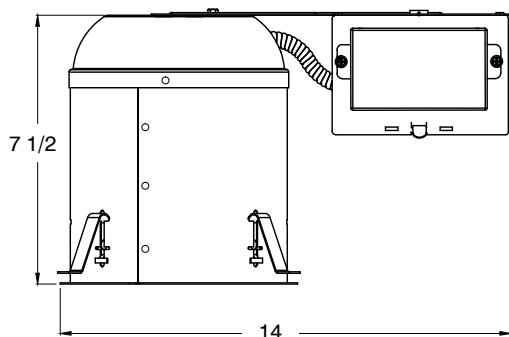

520CL/WH

**Clear Open
Reflector with
White Ring**
• UPC# 04009



510WH

White Wall Wash
• UPC# 02578



512WH/WH

**Clear Deep
Reflector with
White Step Baffle
and White Ring**
• UPC# 08886




526WH/WH/F

**Frosted Glass Lens
with White Baffle
and White Ring**
• UPC# 09022

For a complete listing of 6" compact fluorescent trims, see pages 31 and 32.

6" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS


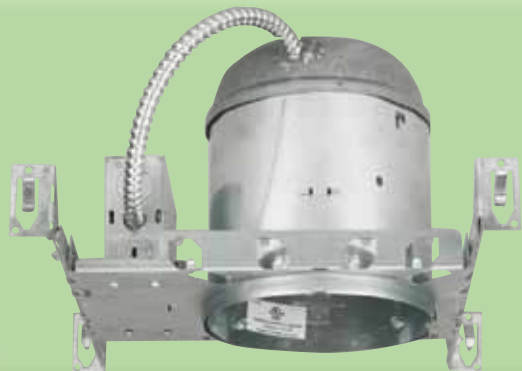


GU24 Socket

ICSC126AT/GU24/V6

New Work 120V 11-27 Watt Vertical Mount for GU24 CFL

- New Construction, IC applications, airtight applications
- For use with ENERGY STAR qualified 120V 11-27W GU24 base CFL's
- 90° adjustable telescoping bar hangers (13 5/8" - 25") with captive nails on flanges and notched for T-Bar ceilings
- Removable housing for J-Box access
- Adjustable socket plate for precise beam control
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08987

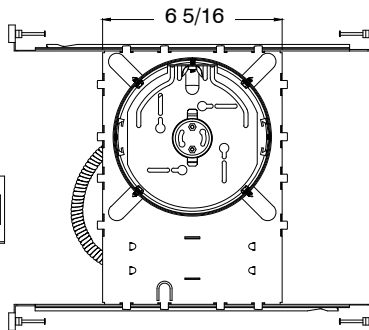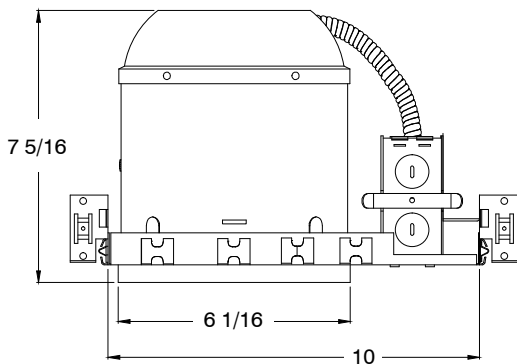

Meets TITLE 24
High Efficacy
Requirements.



513WH

Fresnel Glass Lens
with White Metal
Ring


- UPC# 02446



518WH

White Step Baffle
with White Ring

- UPC# 08870

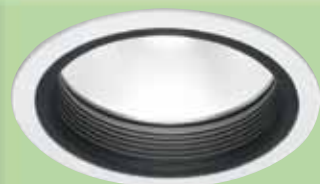

512BL/WH

Clear Deep
Reflector with
Black Step Baffle
and White Ring

- UPC# 02497



519WH/P/R

Albalite Shower Trim
with Clear Deep
Reflector and White
Plastic Ring


- UPC# 09021

For a complete listing of 6" compact fluorescent trims, see pages 31 and 32.

6" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS




GU24 Socket

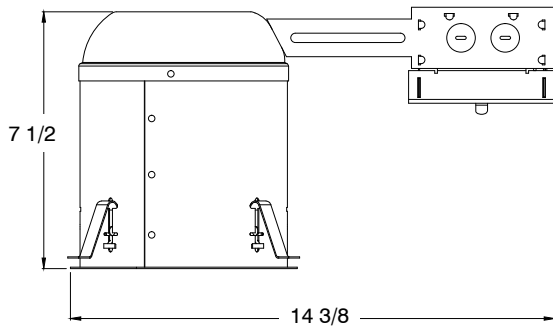

ICRC126AT/GU24/V6

Old Work 120V 11-27 Watt Vertical Mount for GU24 CFL

- Remodel Construction, IC applications, airtight applications
- For use with ENERGY STAR qualified 120V 11-27W GU24 base CFL's
- Four remodel clips to secure housing
- Adjustable socket plate for precise beam control
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08988

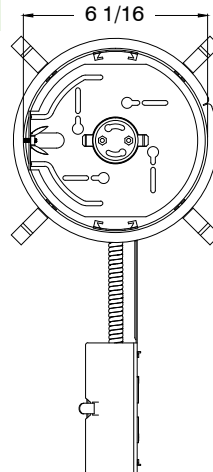

Meets TITLE 24
High Efficacy
Requirements.




512WH/WH

Clear Deep
Reflector with
White Step Baffle
and White Ring
• UPC# 08886



518WH

White Step Baffle
with White Ring
• UPC# 08870

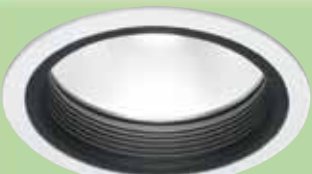

512BL/WH

Clear Deep
Reflector with
Black Step Baffle
and White Ring
• UPC# 02497



519WH/P/R

Albalite Shower Trim
with Clear Deep
Reflector and White
Plastic Ring
• UPC# 09021

For a complete listing of 6" compact fluorescent trims, see pages 31 and 32.

6" VERTICAL COMPACT FLUORESCENT TRIMS




501WH/WH

White Step Baffle
with White Ring
• BR30, PAR30
• UPC# 02577



502GW/GW/AT/FS

One-Piece Socket
Supporting Gloss White Step
Baffle with Gloss White Ring
"Rabbit Ears" Friction Springs
Airtight
• UPC# 09018

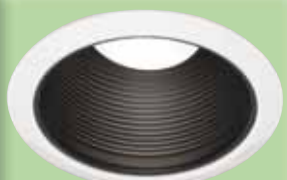

501BL/WH

Black Step Baffle
with White Ring
• BR30, PAR30
• UPC# 02720



509WH

Albalite Lens
Shower Trim with
Metal Ring
• UPC# 02253



501BL/BL

Black Step Baffle
with Black Ring
• BR30, PAR30
• UPC# 03825



509WH/P

Albalite Lens
Shower Trim with
Plastic Ring
• UPC# 02933



501SCH

All Satin Chrome
Step Baffle
• BR30, PAR30
• UPC# 02941



509WH/F

Frosted Lens
Shower Trim with
Plastic Ring
• UPC# 08885



502WH/WH/AT

One-Piece Socket
Supporting White
Step Baffle with
White Ring
Airtight
• UPC# 07568



510WH

White Wall Wash
• UPC# 02578



502GW/GW/AT


One-Piece Socket
Supporting Gloss
White Step Baffle
with Gloss White Ring
Airtight
• UPC# 09019



511CL/WH

Clear Deep
Reflector with
White Ring
• UPC# 02935

6" VERTICAL COMPACT FLUORESCENT TRIMS

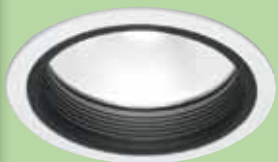

512BL/WH

Clear Deep Reflector with Black Step Baffle and White Ring

• UPC# 02497



519WH/P/R

Albalite Shower Trim with Clear Deep Reflector and White Plastic Ring

• UPC# 09021



512WH/WH

Clear Deep Reflector with White Step Baffle and White Ring

• UPC# 08886



520CL/WH

Clear Open Reflector with White Ring

• UPC# 04009



513WH

Fresnel Glass Lens with White Metal Ring

• UPC# 02446



526WH/WH/F

Frosted Glass Lens with White Baffle and White Ring

• UPC# 09022



516WH/WH

White Baffle with White Wall Wash

• UPC# 03051



560CL

Clear Reflector with White Ring

• UPC# 08871



518WH

White Step Baffle with White Ring

• UPC# 08870





560WH

White Reflector with White Ring



• UPC# 08872

6" VERTICAL COMPACT FLUORESCENT TRIMS


501





511





502




512

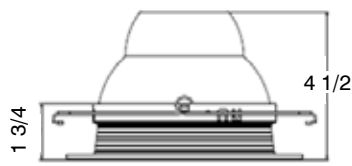



509





513



510




516




6" VERTICAL COMPACT FLUORESCENT TRIMS


518

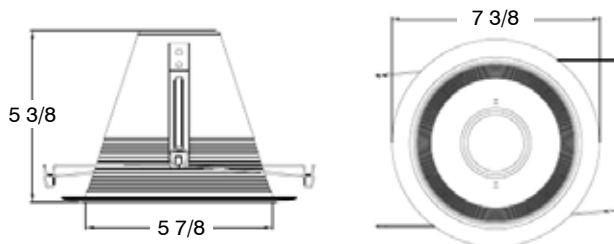


526

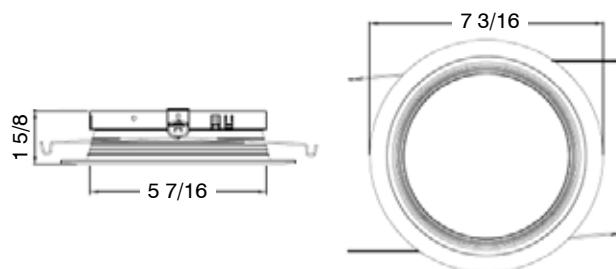


519

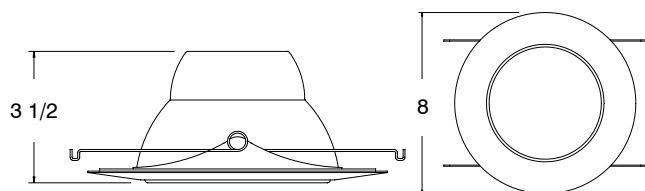

560

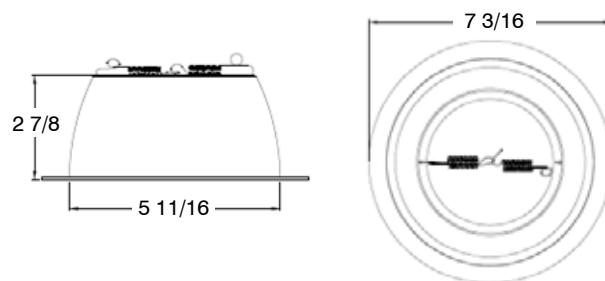

520

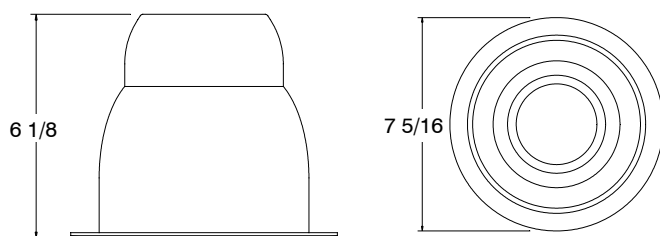



1 X 26/32 WATT VERTICAL MOUNT 6" COMPACT FLUORESCENT CANS AND TRIMS



S132V

New Work 1 X 26 or 32 Watt Vertical Mount with 120V HPF Electronic Ballast


- New Construction, Non-IC applications
- Adjustable Bar Hangers (14½"- 24") with quick install Nail-Less end flanges
- Thermally Protected
- Use one vertically-mounted 26 or 32 watt quad or triple tube compact fluorescent lamp with G(X)24q-3 base
- Listings: UL Feed Through and UL Damp Locations
- UPC# 06987

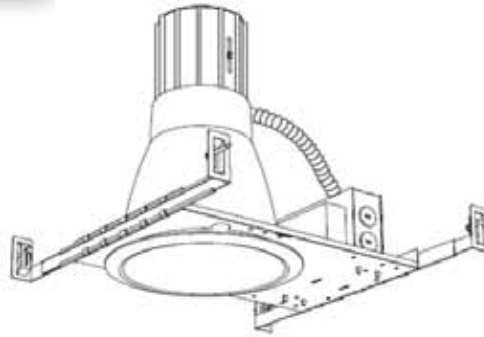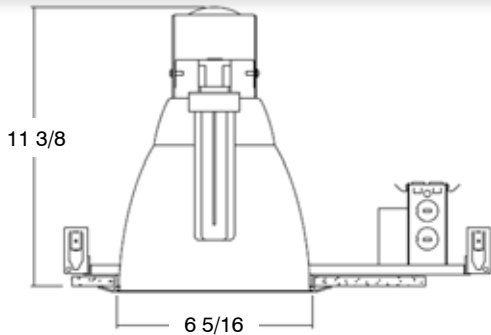

542CL/WH

Clear Reflector with White Ring

- UPC# 04035

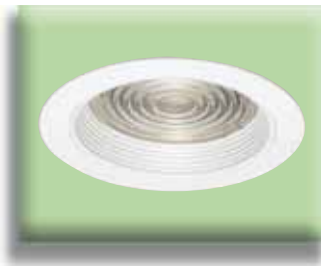

544WH/WH

Fresnel Glass Lens with White Baffle and White Ring

- UPC# 04036




545CL/WH



Clear Reflector with White Ring

- UPC# 04037



542

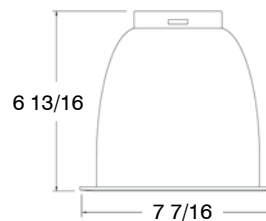

544



545





6" MAGNETIC COMPACT FLUORESCENT CANS & TRIMS



S113V

New Work 1 X 13 Watt Vertical Mount

- New Construction, Non-IC applications
- Adjustable Bar Hangers (14½"- 24") with quick install Nail-Less end flanges
- Magnetic Ballast
- Thermally Protected
- Adjustable Socket Mounting Plate for precise beam control
- Uses one vertically-mounted 13 watt twin-tube (GX23 base) or quad-tube (GX23-2 base) 2-pin compact fluorescent lamp
- Listings: UL Feed Through and UL Damp Locations
- UPC# 02180

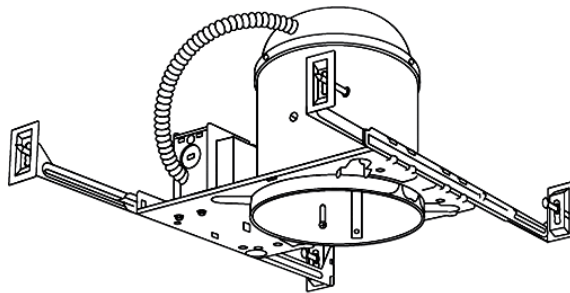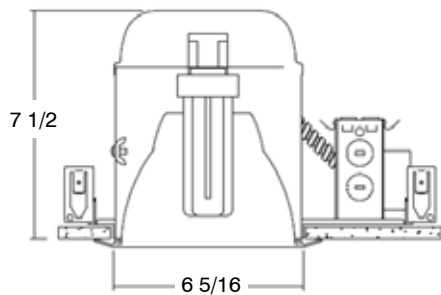

510WH

White Wall Wash
• UPC# 02578



509WH

Albalite Glass Lens with White Metal Ring Shower Trim
• UPC# 02253



511CL/WH

Clear Deep Reflector with White Ring
• UPC# 02935



512WH/WH

Clear Deep Reflector with White Step Baffle and White Ring
• UPC# 08886

For a complete listing of 6" compact fluorescent trims, see pages 39-40.




6" MAGNETIC COMPACT FLUORESCENT CANS & TRIMS



ICS213V

IC New Work 2 X 13 Watt Vertical Mount

- New Construction, IC applications
- Adjustable Bar Hangers (14½"- 24") with quick install Nail-Less end flanges
- Magnetic Ballast
- Thermally Protected
- Adjustable Socket Mounting Plate for precise beam control
- Uses two vertically-mounted 13 watt twin-tube (GX23 base) or quad-tube (GX23-2 base) 2-pin compact fluorescent lamps
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- UPC# 05907

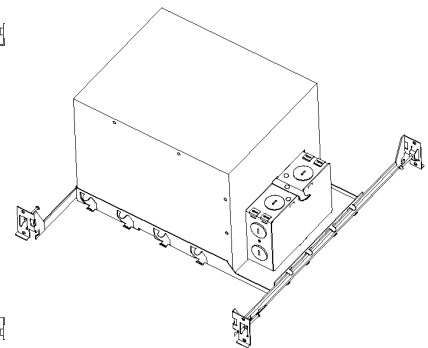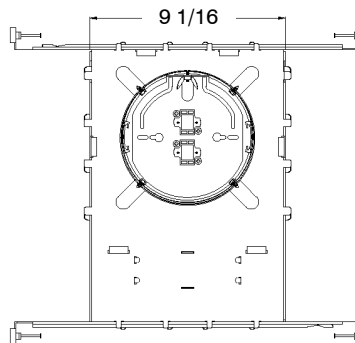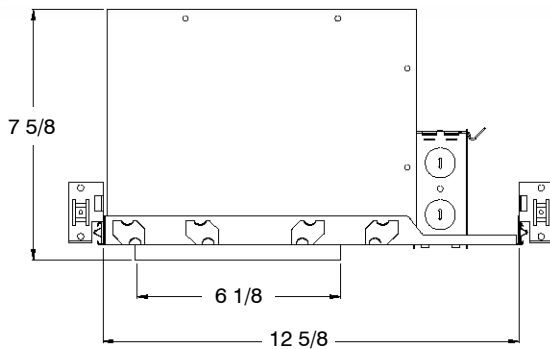

513WH

Fresnel Glass Lens
with White Ring
Shower Trim
• UPC# 02446



520CL/WH

Clear Open
Reflector with
White Ring
• UPC# 04009



516WH/WH

White Baffle,
White Wall Wash
• UPC# 03051



526WH/WH

Fresnel Glass Lens
with White Baffle
and White Ring
• UPC# 04018

For a complete listing of 6" compact fluorescent trims, see pages 39-40.



6" MAGNETIC COMPACT FLUORESCENT CANS & TRIMS



S213H

Non-IC New Work 2 X 13 Watt Horizontal Mount

- New Construction, Non-IC applications
- Adjustable Bar Hangers (14½"- 24") with quick install Nail-Less end flanges
- Magnetic Ballast
- Thermally Protected
- Uses two vertically-mounted 13 watt twin-tube (GX23 base) or quad-tube (GX23-2 base) 2-pin compact fluorescent lamps
- Listings: UL Feed Through and UL Damp Locations
- UPC# 02461

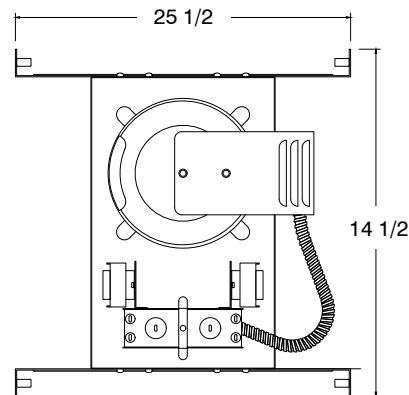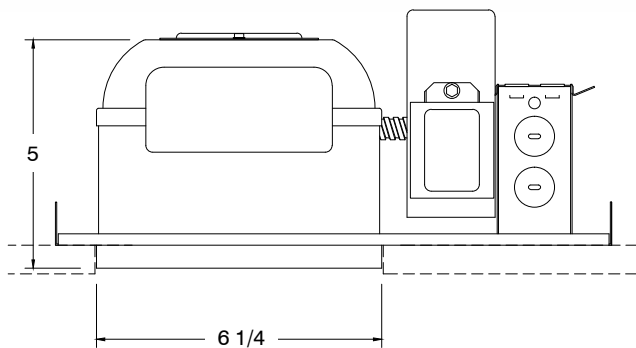

509WH

Albalite Glass Lens
with White Metal
Ring Shower Trim
• UPC# 02253



513WH

Fresnel Glass Lens
with White Ring
Shower Trim
• UPC# 02446



510WH

White Wall Wash
• UPC# 02578



525CL/WH

Clear Reflector
with White Ring
• UPC# 02460

For a complete listing of 6" compact fluorescent trims, see pages 39-40.

6" COMPACT FLUORESCENT TRIMS



509WH

Albalite Glass
Lens with White
Metal Ring
Shower Trim
• UPC# 02253




512WH/WH

Deep Clear
Reflector White
Step Baffle with
White Ring
• UPC# 08886



509WH/F

Frosted Fresnel
Lens with White
Plastic Ring
Shower Trim
• UPC# 08885

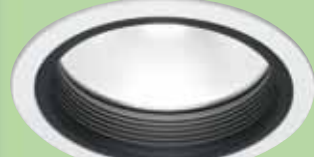

512BL/WH

Deep Clear Reflector
Black Step Baffle with
White Ring
• UPC# 02497



509WH/P

Albalite Glass
Lens with White
Plastic Ring
Shower Trim
• UPC# 02933




513WH

Fresnel Glass Lens
with White Metal
Ring Shower Trim
• UPC# 02446



510WH

White Wall
Wash
• UPC# 02578

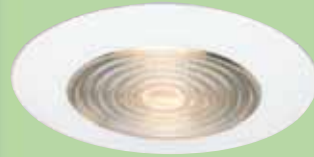

513WH/P

Fresnel Glass Lens
with White Plastic
Ring Shower Trim
• UPC# 08883



511CL/WH

Clear Deep
Reflector with
White Ring
• UPC# 02935



516WH/WH

White Baffle with
White Wall Wash
• UPC# 03051

6" COMPACT FLUORESCENT TRIMS



518WH

White Deep
Stepped Baffle
• UPC# 08870



526WH/WH

Fresnel Glass Lens
with White Baffle
and White Ring
• UPC# 04018



519WH/P/R

Albalite Shower
Trim with Clear
Deep Reflector
and White Plastic
Ring
• UPC# 09021



526WH/WH/F

Fresnel Glass Lens
with White Baffle
and White Ring
• UPC# 09022



520CL/WH

Clear Open
Reflector with
White Ring
• UPC# 04009



560CL

Clear Reflector
with White Ring
• UPC# 08871



525CL/WH

Clear Reflector
with White
Ring
• UPC# 02460




560WH


White Reflector with
White Ring
• UPC# 08872

6" COMPACT FLUORESCENT TRIMS


509

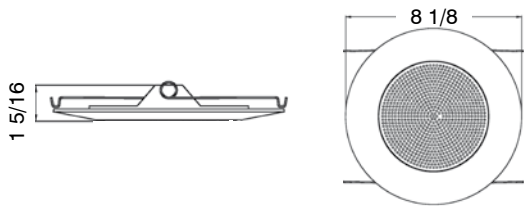


518

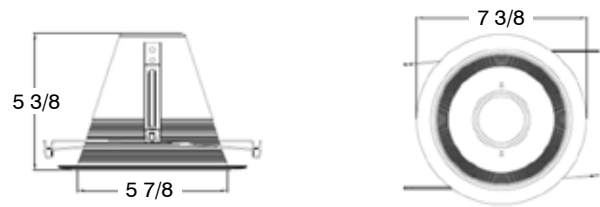


510

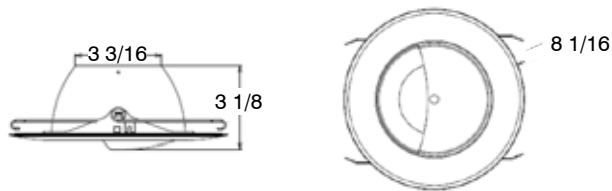


519

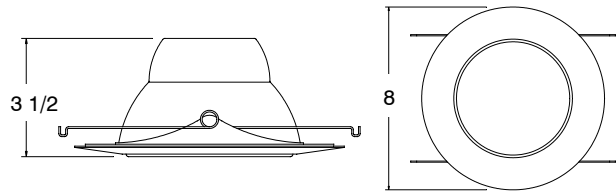


511

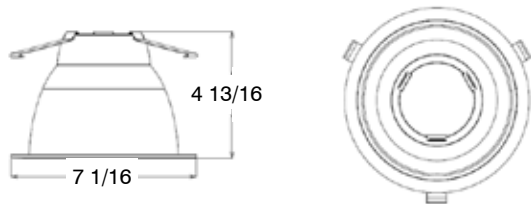


520

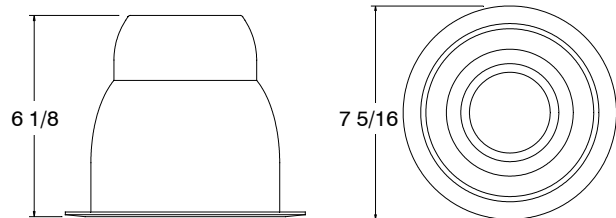

512

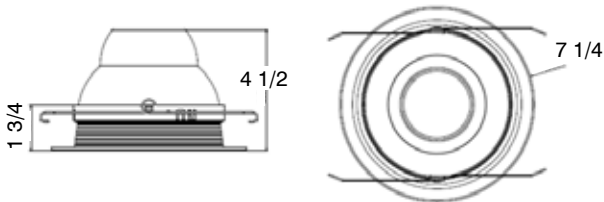


525

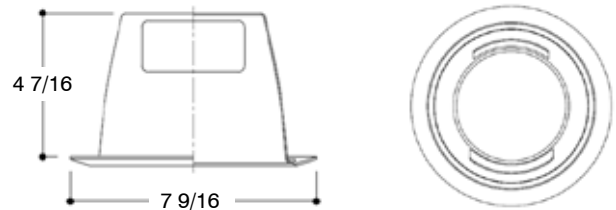


513




526

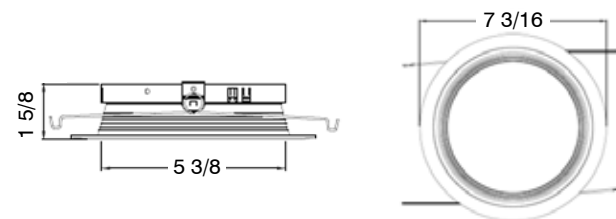

516

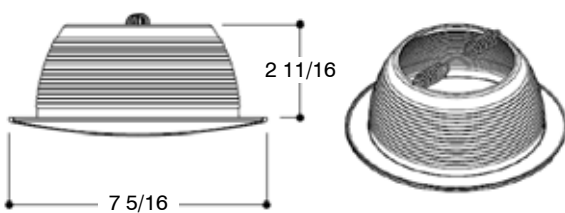

560

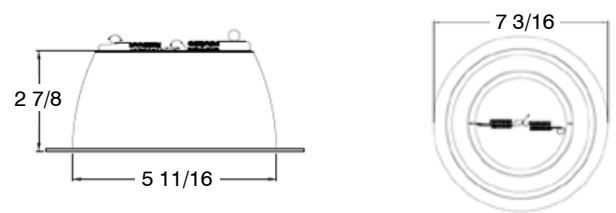






8" Compact Fluorescent Cans & Trims



2 X 18 WATT HORIZONTAL MOUNT 8" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS

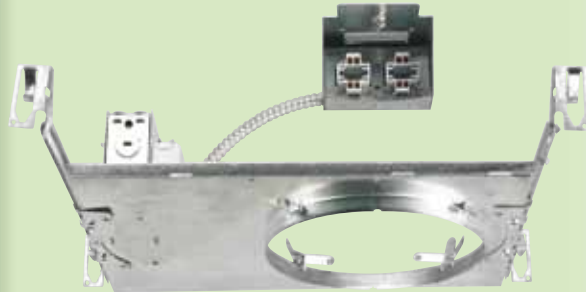

S218H

New Work 2 x 18 Watt Horizontal Mount with 120-277V HPF Electronic Ballast

- New Construction, Non-IC applications
- Adjustable Bar Hangers (14½"- 24") with quick install Nail-Less end flanges
- Thermally Protected
- Uses two horizontally-mounted 18 watt quad-tube (G24q-2 base) fluorescent lamps
- Listings: UL Feed Through and UL Damp Locations
- UPC# 07734

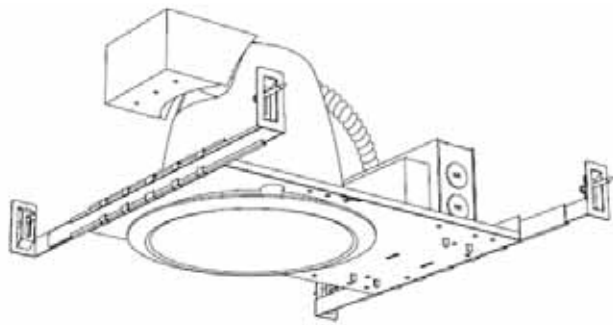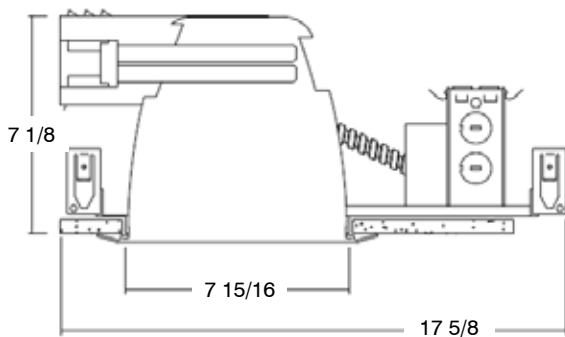

530CL/WH

Clear Reflector with
White Ring
• UPC# 04028



532CL/WH

Clear Reflector with
White Baffle and
White Ring
• UPC# 04031



533WH/WH


Fresnel Glass Lens
with White Baffle and
White Ring
• UPC# 04032



534CL/WH

Loupered Reflector
with White Ring
• UPC# 02929



2 X 26 WATT HORIZONTAL MOUNT 8" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS

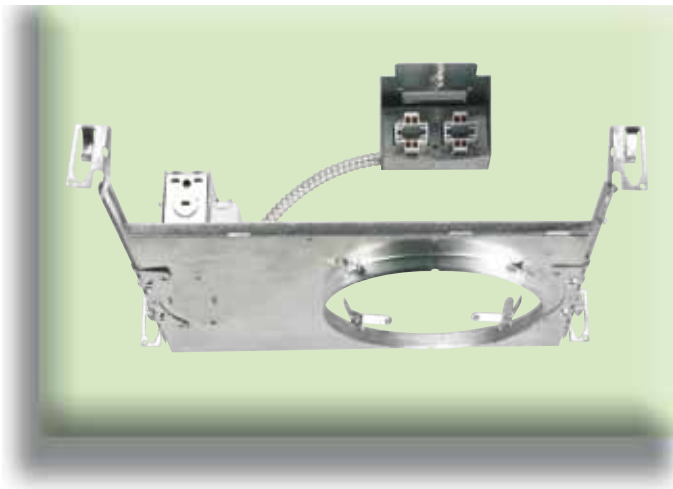

S226H

New Work 2 X 26 Watt Horizontal Mount with 120-277V HPF Electronic Ballast

- New Construction, Non-IC applications
- Adjustable Bar Hangers (14½"- 24") with quick install Nail-Less end flanges
- Thermally Protected
- Uses one or two horizontally-mounted 26 watt quad-tube (G24q-3 base) compact fluorescent lamps
- Listings: UL Feed Through and UL Damp Locations
- UPC# 06998

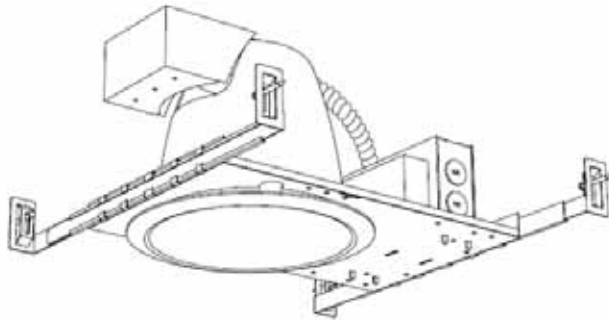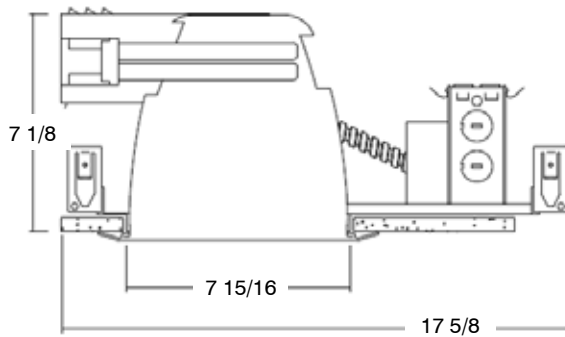

530CL/WH

Clear Reflector with White Ring


- UPC# 04028



532CL/WH

Clear Reflector with White Baffle and White Ring

- UPC# 04031

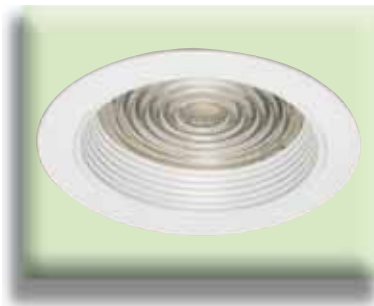

533WH/WH

Fresnel Glass Lens with White Baffle and White Ring

- UPC# 04032




534CL/WH

Louvered Reflector with White Ring

- UPC# 02929



2 X 26 WATT HORIZONTAL MOUNT 8" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS

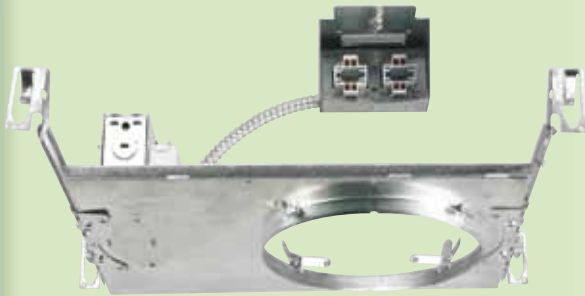

S226H/DIM

New Work 2 x 26 Watt Horizontal Mount with Dimmable 120-277V HPF Electronic Ballast

- New Construction, Non-IC applications
- Adjustable Bar Hangers (14½"- 24") with quick install Nail-Less end flanges
- Can be dimmed with most 1-10V fluorescent dimmers
- Thermally Protected
- Uses one or two horizontally-mounted 26 watt quad-tube (4-pin G24q-3 base) compact fluorescent lamps
- Listings: UL Feed Through and UL Damp Locations
- UPC# 06995

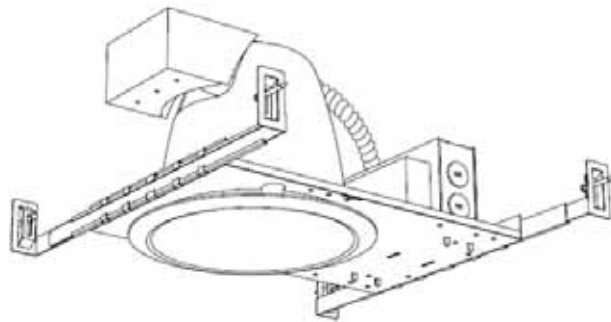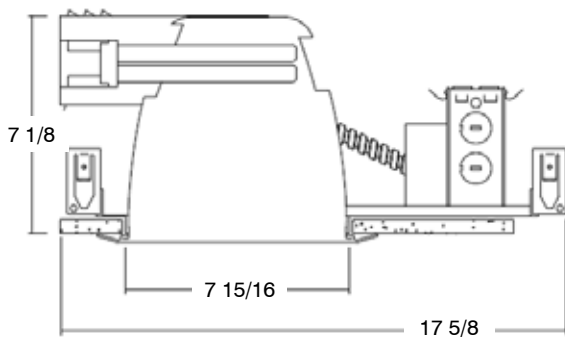

530CL/WH

Clear Reflector with White Ring

- UPC# 04028



532CL/WH

Clear Reflector with White Baffle and White Ring

- UPC# 04031



533WH/WH

Fresnel Glass Lens with White Baffle and White Ring

- UPC# 04032



534CL/WH


Louvered Reflector with White Ring

- UPC# 02929


8" HORIZONTAL COMPACT FLUORESCENT TRIMS



530CL/WH
Clear Reflector
with White Ring
• UPC# 04028

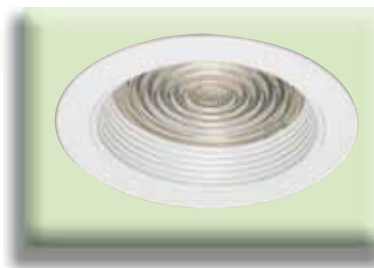

533WH/WH
Fresnel Glass
Lens with White
Baffle and White
Ring
• UPC# 04032

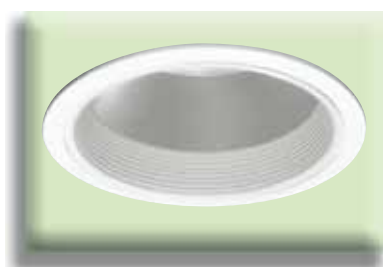


532CL/WH
Clear Reflector
with White
Baffle and
White Ring
• UPC# 04031





534CL/WH
Louvered Reflector
with White Ring
• UPC# 02929



530

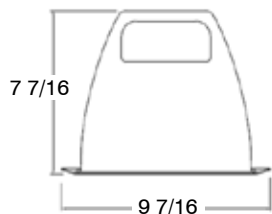



533

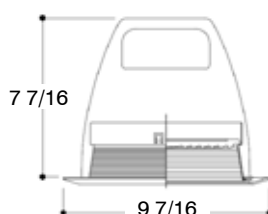


532

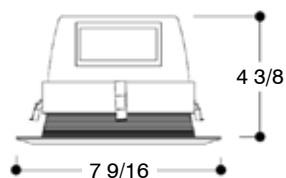

534





1 X 42 WATT VERTICAL MOUNT 8" COMPACT FLUORESCENT CANS AND TRIMS

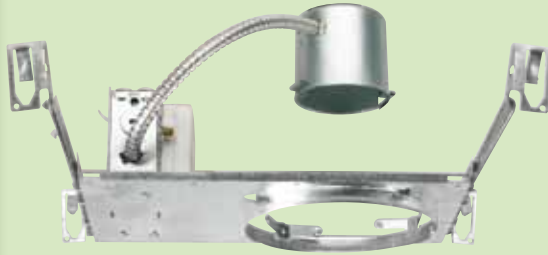

S142V

New Work 1 x 42 Watt Vertical Mount with 120V HPF Electronic Ballast

- New Construction, Non-IC applications
- Adjustable Bar Hangers (14½"- 24") with quick install Nail-Less end flanges
- Thermally Protected
- Use one vertically-mounted 26/32 or 42W quad or triple tube with a G(X)24q-3 base or -4 base
- Listings: UL Feed Through and UL Damp Locations
- UPC# 06988

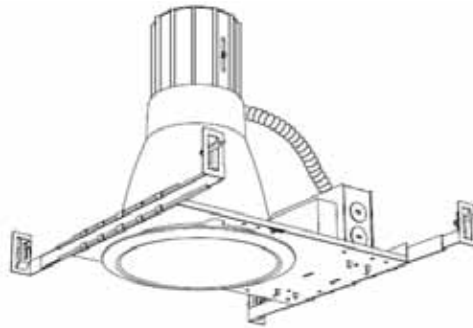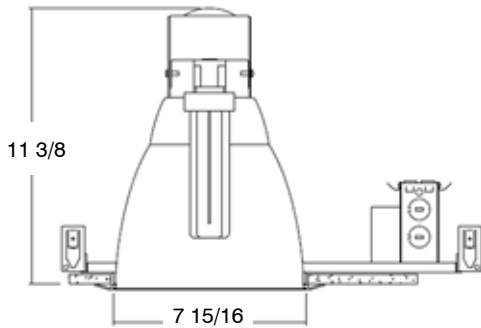

540CL/WH

Clear Reflector with White Ring

- UPC# 04033



541WH

Etched Glass with White Ring

- UPC# 04034





546CL/WH



Clear Reflector with White Baffle and White Ring

- UPC# 04038



540

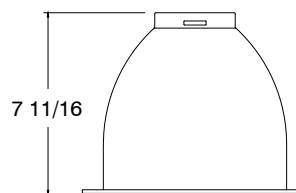

541

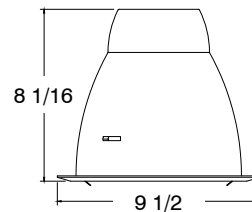

546





2 X 32/42 WATT HORIZONTAL MOUNT 8" COMPACT FLUORESCENT CANS AND TRIMS



S242H/SHALLOW

New Work 2 x 32/42 Watt Horizontal Mount Low Profile with Louvered Trim

- New Construction, Non-IC applications
- Shallow Low Profile 5-5/8" overall height
- Adjustable Mounting Bracket for Multiple Channel Bars & Optional Bar Hangers
- 120V-277V HPF Ballast for (2) 32W or 42W G(X)24q-3 or -4 base lamps
- Thermally Protected
- Self-Framed Aluminum Reflector with 4-cell Parabolic Cross Louver
- Listings: UL Feed Through and UL Damp Locations
- UPC# 06999

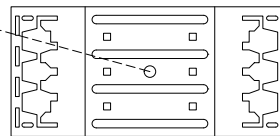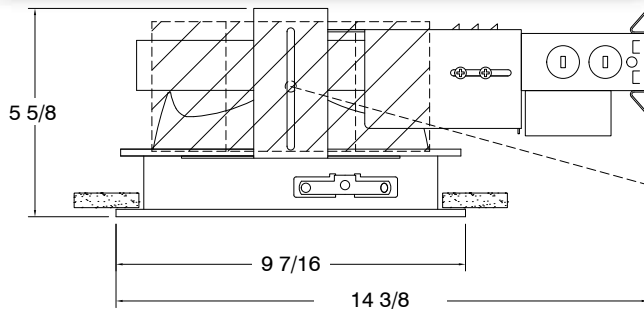



2 X 26 WATT HORIZONTAL MOUNT 8" COMPACT FLUORESCENT CANS AND TRIMS



S226H/SHALLOW

New Work 2 x 26 Watt Horizontal Mount Low Profile with Louvered Trim

- New Construction, Non-IC applications
- Shallow Low Profile 5-5/8" overall height
- Adjustable Mounting Bracket for Multiple Channel Bars & Optional Bar Hangers
- 120V-277V HPF Ballast for (2) 26W G(X)24q-3 base lamps
- Thermally Protected
- Self-Framed Aluminum Reflector with 4-cell Parabolic Cross Louver
- Listings: UL Feed Through and UL Damp Locations
- UPC# 06997

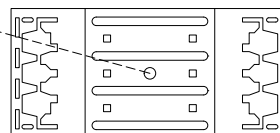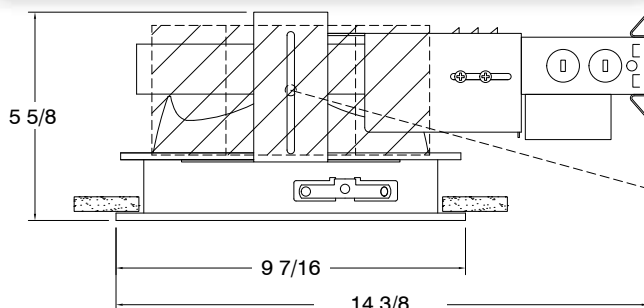




TOPAZ™

Friendly Service... Powerful Solutions



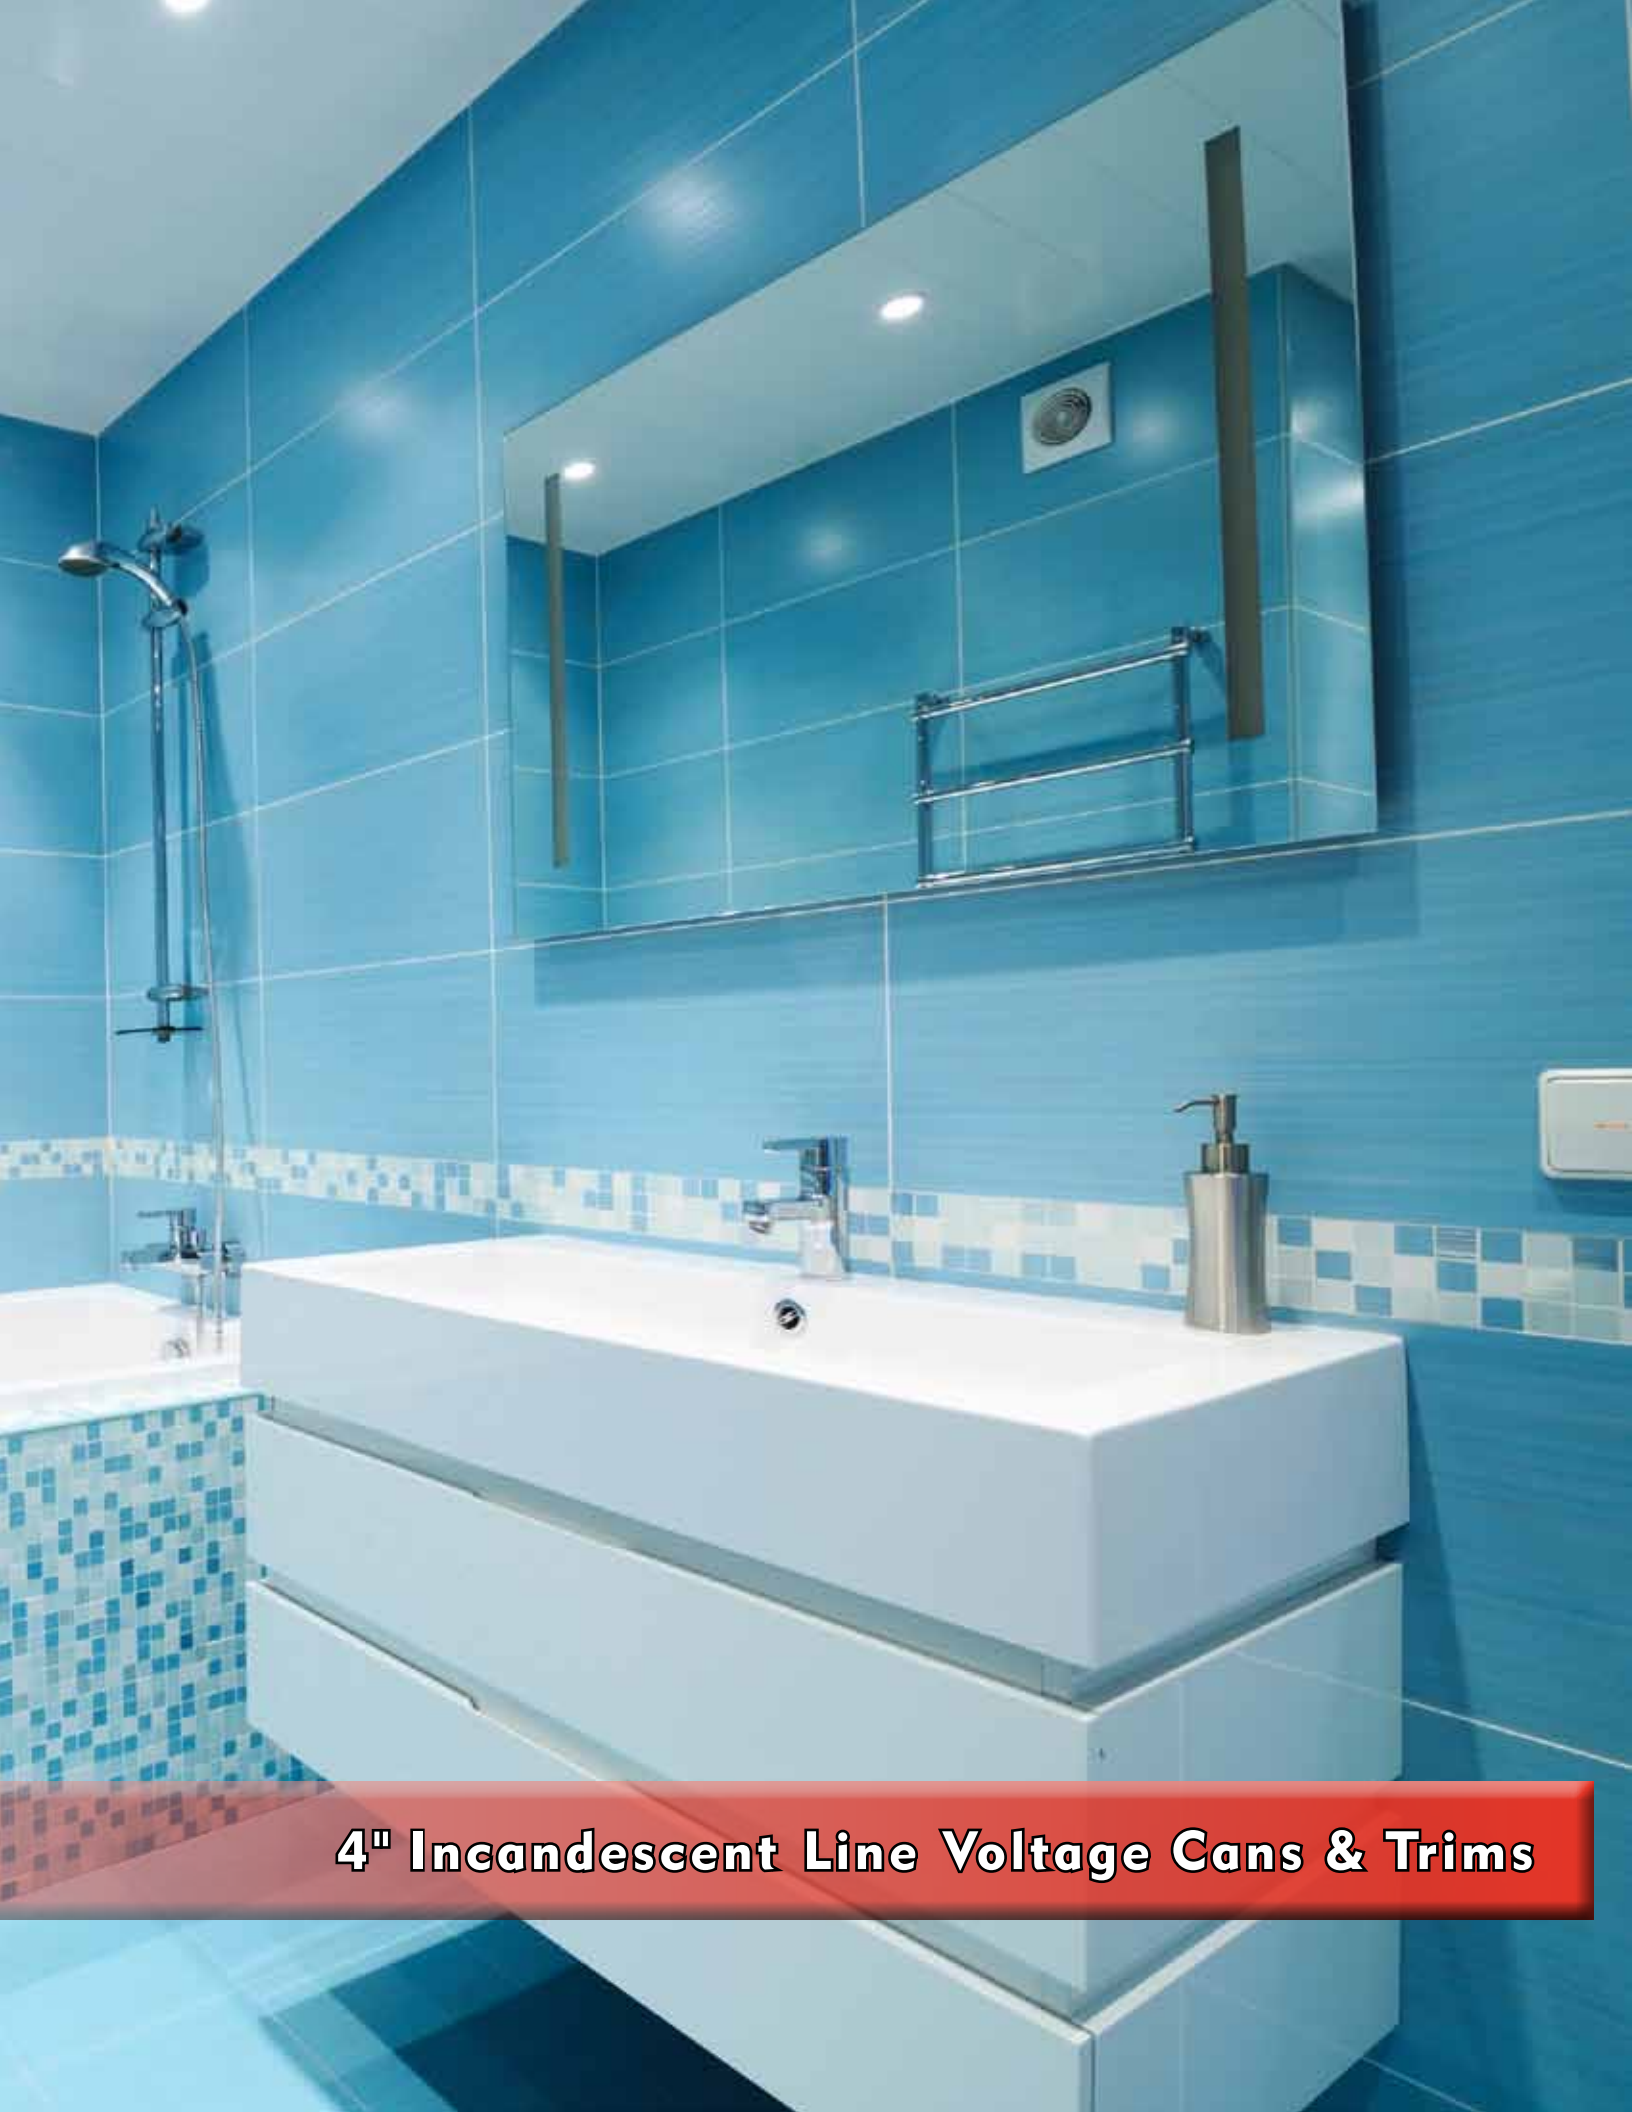

4" Incandescent Line Voltage Cans & Trims



4" INCANDESCENT LINE VOLTAGE CANS & TRIMS



TL807

Non-IC Old Work PAR20 Can

- Remodel, Non-IC applications
- Thermally Protected
- Four remodel clips to secure housing
- 50W max PAR20, R20
- Adjustable Socket Mounting Plate for precise beam control
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Listings: UL Feed Through and UL Damp Locations
- UPC# 01956

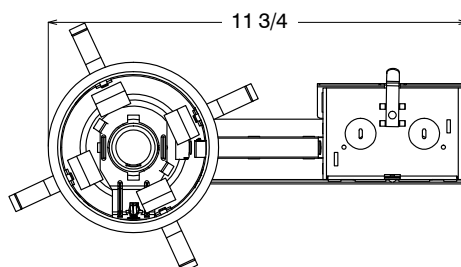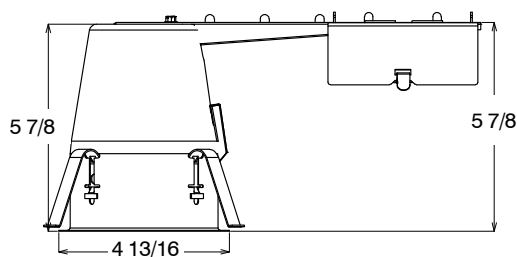

TR811WH/WH

- White Baffle with White Ring**
- R20, PAR20
 - UPC# 02175



TR813WH

- Fresnel Glass White Shower Trim**
- R20, PAR20
 - UPC# 07311



TR812BL/WH

- Black Reflector with White Ring**
- R20, PAR20
 - UPC# 07304



TR814PB

- Polished Brass Eyeball**
- R20, PAR20
 - UPC# 07312

For a complete listing of 4" line voltage trims, see pages 56-58.



4" INCANDESCENT LINE VOLTAGE CANS & TRIMS



TL809

Non-IC New Work PAR20 Can

- New construction, Non-IC applications
- 90° adjustable, telescoping bar hangers (14½"- 24") with quick install end flanges
- Removable housing for J-box access
- Thermally Protected
- 50W max PAR20, R20
- Adjustable socket mounting plate for precise beam control
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Listings: UL Feed Through and UL Damp Locations
- UPC# 02179

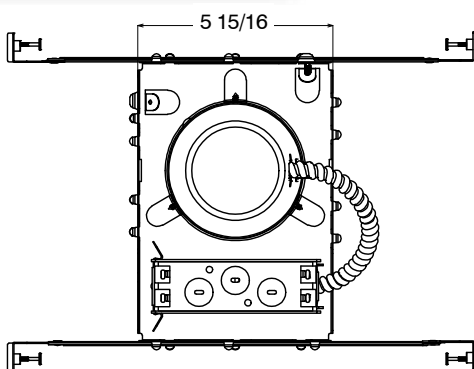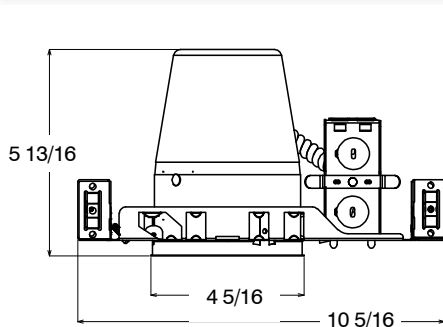

TR815WH/WH

- White Baffle with White Wall Wash**
- R20, PAR20
 - UPC# 02376



TR828WH

- Open White Gimbal with White Ring**
- R20, PAR20
 - UPC# 07322



TR818WH

- White Pin Hole**
- R20, PAR20
 - UPC# 02853




TR828BL

- Open Black Gimbal with Black Ring**
- R20, PAR20
 - UPC# 07319

For a complete listing of 4" line voltage trims, see pages 56-58.



4" INCANDESCENT LINE VOLTAGE CANS & TRIMS

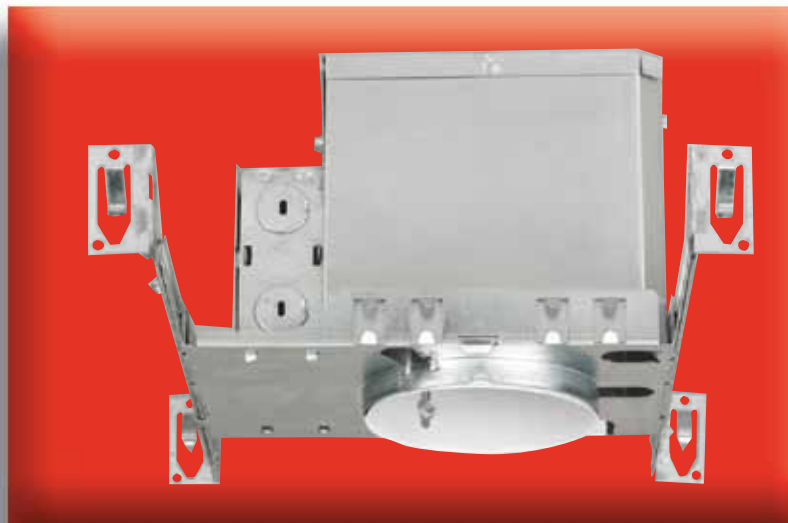

TL809/IC

IC New Work PAR20 Can

- New construction, IC applications
- 90° adjustable, telescoping bar hangers (14½"- 24") with quick install end flanges
- Removable housing for J-box access
- Thermally Protected
- 50W max PAR20, R20
- Adjustable socket mounting plate for precise beam control
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- UPC# 02940

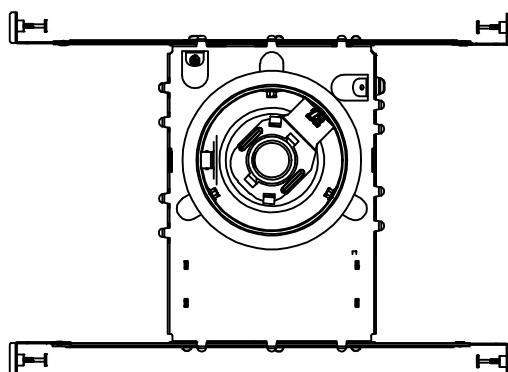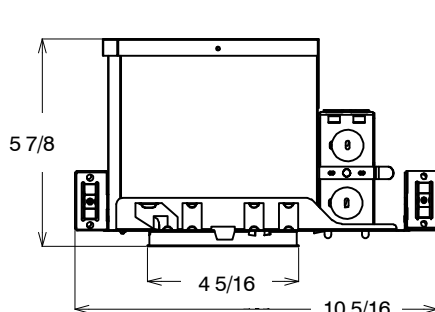

TR815WH/WH

White Baffle with
White Wall Wash

- R20, PAR20
- UPC# 02376



TR828WH

Open White
Gimbal with
White Ring

- R20, PAR20
- UPC# 07322



TR818WH

White Pin Hole

- R20, PAR20
- UPC# 02853



TR828BL

Open Black
Gimbal with
Black Ring

- R20, PAR20
- UPC# 07319

For a complete listing of 4" line voltage trims, see pages 56-58.



4" INCANDESCENT LINE VOLTAGE CANS & TRIMS



TL809/IC/AT

IC New Work PAR20 Can Airtight

- New construction, IC applications, airtight applications
- 90° adjustable, telescoping bar hangers (14½"- 24") with captive nails in end flanges
- Removable housing for J-box access
- Female quick connectors installed
- Thermally Protected
- 50W max PAR20, R20
- Adjustable socket mounting plate for precise beam control
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- UPC# 07527

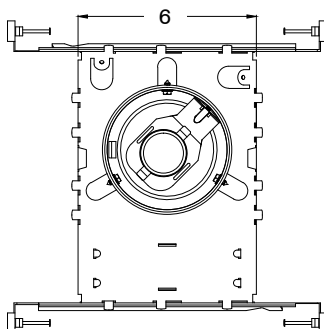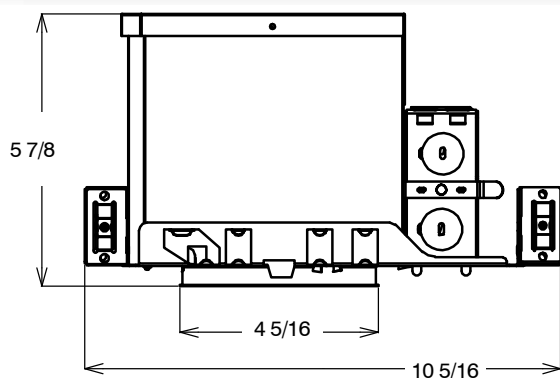

TR815WH/WH

- White Baffle with White Wall Wash**
- R20, PAR20
 - UPC# 02376



TR828WH

- Open White Gimbal with White Ring**
- R20, PAR20
 - UPC# 07322



TR818WH

- White Pin Hole**
- R20, PAR20
 - UPC# 02853



TR828BL

- Open Black Gimbal with Black Ring**
- R20, PAR20
 - UPC# 07319

For a complete listing of 4" line voltage trims, see pages 56-58.

4" INCANDESCENT LINE VOLTAGE TRIMS



TR811WH/WH

White Baffle with White Ring

- R20, PAR20
- UPC# 02175



TR811BL/BL

Black Baffle with Black Ring

- R20, PAR20
- UPC# 02372



TR811WH/PB

White Baffle with Polished Brass Ring

- R20, PAR20
- UPC# 07300



TR812WH/WH

White Reflector with White Ring

- R20, PAR20
- UPC# 07309



TR811BL/WH

Black Baffle with White Ring

- R20, PAR20
- UPC# 02174



TR812CL/WH

Clear Reflector with White Ring

- R20, PAR20
- UPC# 02255

4" INCANDESCENT LINE VOLTAGE TRIMS



TR812GO/WH

**Gold Reflector
with White Ring**

- R20, PAR20
- UPC# 07308



TR813WH/A

**Albalite Lens White
Shower Trim**

- R20, PAR20
- UPC# 09056



TR812BL/WH

**Black Reflector with
White Ring**

- R20, PAR20
- UPC# 07304



TR814WH

White Eyeball

- R20, PAR20
- UPC# 02375



TR813WH

**Fresnel Glass White
Shower Trim**

- R20, PAR20
- UPC# 07311



TR814BL

Black Eyeball

- R20, PAR20
- UPC# 02852

4" INCANDESCENT LINE VOLTAGE TRIMS



TR814PB

Polished Brass Eyeball

- R20, PAR20
- UPC# 07312



TR828WH

Open White Gimbal with White Ring

- R20, PAR20
- UPC# 07322



TR815WH/WH

White Baffle with White Wall Wash

- R20, PAR20
- UPC# 02376



TR828BL

Open Black Gimbal with Black Ring

- R20, PAR20
- UPC# 07319



TR818WH

White Pin Hole

- R20, PAR20
- UPC# 02853




TR829WH

4" White Square Cover with White Round Gimbal


- PAR20
- UPC# 07319

4" INCANDESCENT LINE VOLTAGE TRIMS


TR811

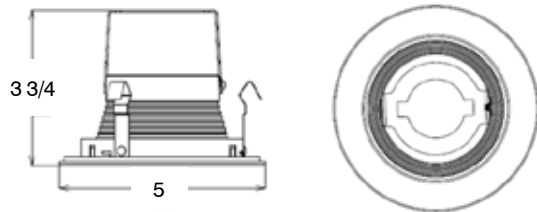


TR815

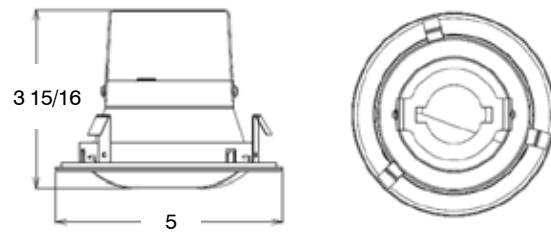


TR812

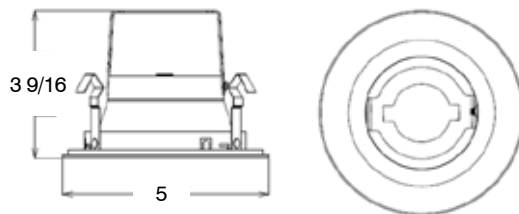


TR818

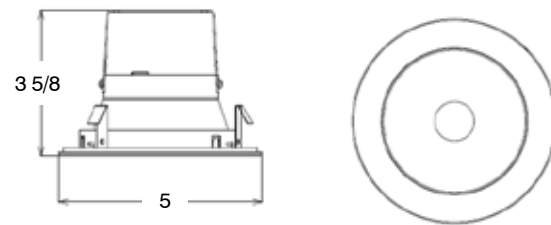


TR813

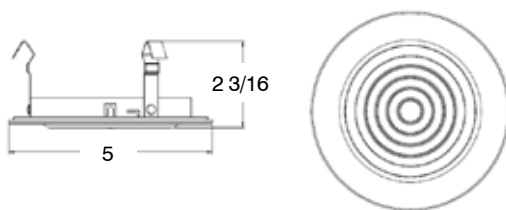


TR828

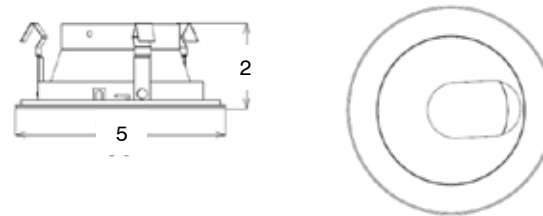

TR814

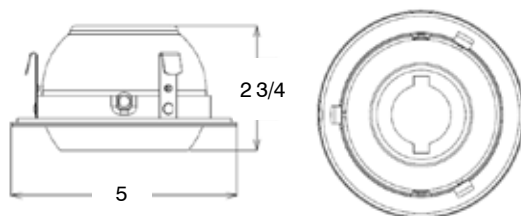

TR829

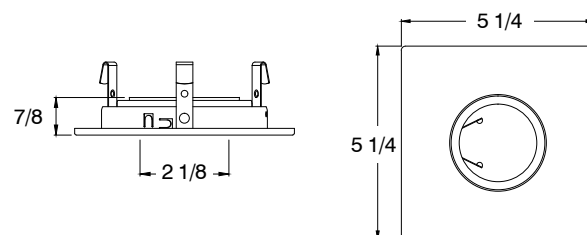

4" GU10 LINE VOLTAGE CANS & TRIMS





TL809GU

New Work Non-IC GU10

- New construction, Non-IC applications
- 90° adjustable, telescoping bar hangers (14½" - 24") with quick install end flanges
- Removable housing for J-box access
- Thermally Protected
- 50W max GU10 MR16 or similar lamp
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Listings: UL Feed Through and UL Damp Locations
- UPC# 08631



GU10 Socket

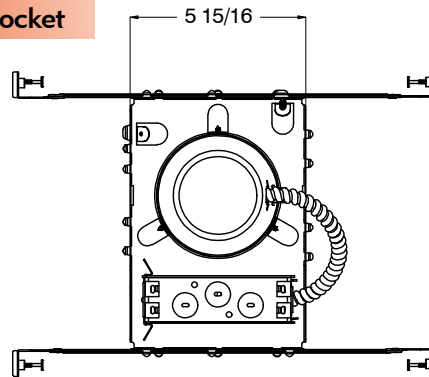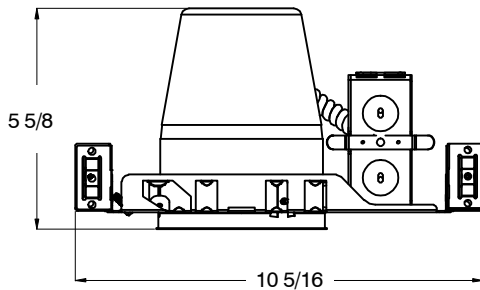

TR611WH/WH

All Steel White Baffle with White Ring

- GU10 MR16
- UPC# 02171



TR617WH/WH

Shallow White Baffle with White Gimbal

- GU10 MR16
- UPC# 07187



TR611BL/BL

All Steel Black Baffle with Black Ring

- GU10 MR16
- UPC# 07125



TR626WH/WH

Premium Bakelite White Baffle with Square White Coilex

- GU10 MR16
- UPC# 02092

For a complete listing of GU10 trims, see pages 113-115.

4" GU10 LINE VOLTAGE CANS & TRIMS






TL807GU

Old Work Non-IC GU10

- Remodel, Non-IC applications
- Four remodel clips to secure housing
- Thermally Protected
- 50W max GU10 MR16 or similar lamp
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Listings: UL Feed Through and UL Damp Locations
- UPC# 08630



GU10 Socket

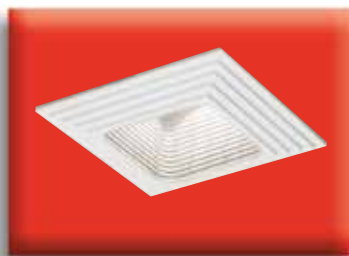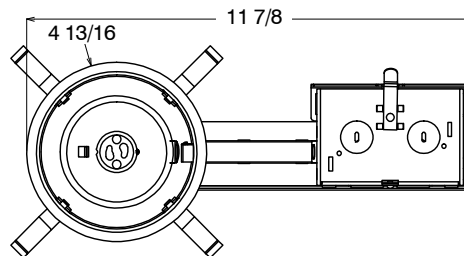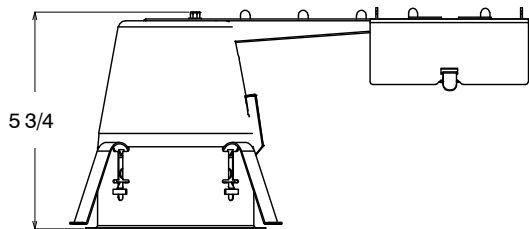

TR629WH/WH

Square White Baffle with Die Cast White Stepped Square Frame

- GU10 MR16
- UPC# 02095



TR633CH

Round Acrylic Tiara with Chrome Center

- GU10 MR16
- UPC# 02108



TR632NK

Round Brushed Nickel Gimbal

- GU10 MR16
- UPC# 07249



TR636WH

Die Cast White Rotating Beacon

- GU10 MR16
- UPC# 02115


For a complete listing of GU10 trims, see pages 113-115.





5" Incandescent Line Voltage Cans & Trims



5" INCANDESCENT LINE VOLTAGE CANS & TRIMS

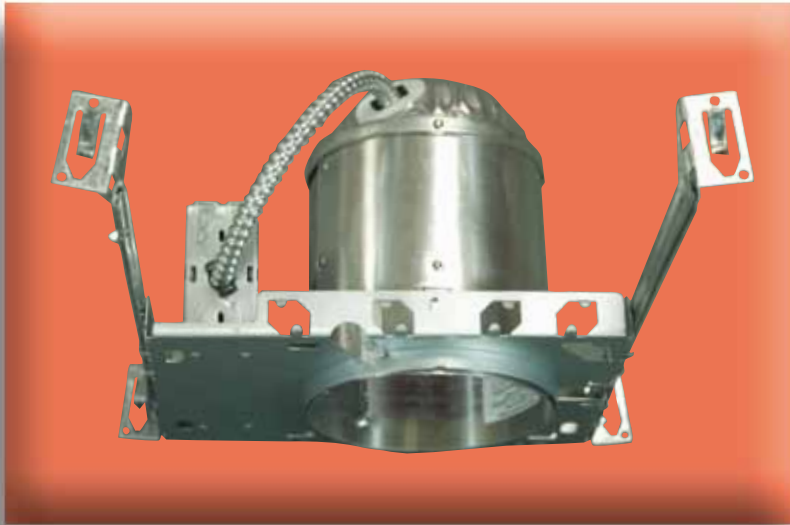

TL502/IC/AT

IC AT New Work

- New construction, IC applications, airtight applications
- 90° Adjustable Telescoping Bar Hangers (14½" - 24") with quick install Nail-Less end flanges
- Removable housing for J-box access
- Thermally protected
- 75W max BR30 or PAR30
- Adjustable socket plate for precise beam control
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- UPC# 07795

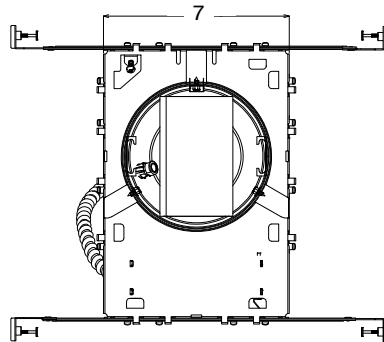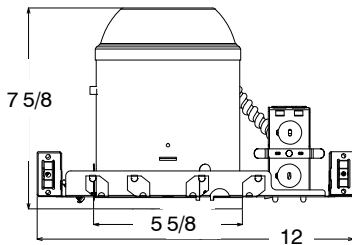

606CL/WH

Clear Reflector with White Ring

- BR30, PAR30
- UPC# 04046



613WH/A

Albalite Glass Lens with White Ring Shower Trim

- BR30, PAR30, A19
- UPC# 09041



602WH/WH

White Step Baffle with White Ring

- BR30, PAR30
- UPC# 02216



614WH/R

Clear Deep Reflector Fresnel Shower Trim with White Ring

- MEDIUM BASE CFL, A15
- UPC# 09052

For a complete listing of 5" incandescent line voltage trims, see page 67.



5" INCANDESCENT LINE VOLTAGE CANS & TRIMS



TL501

Non-IC Old Work

- Remodel, Non-IC applications
- Thermally protected
- Four remodel clips to secure housing
- 75W max BR30 or PAR30
- Adjustable socket plate for precise beam control
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Listings: UL Feed Through and UL Damp Locations
- UPC# 07082

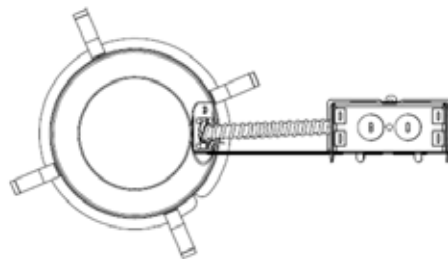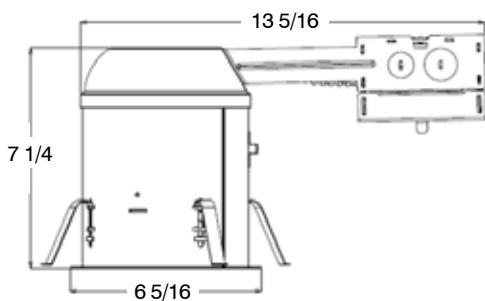

606CL/WH

Clear Reflector with White Ring

- BR30, PAR30
- UPC# 04046



613WH/A

Albalite Glass Lens with White Ring Shower Trim

- BR30, PAR30, A19
- UPC# 09041



602WH/WH

White Step Baffle with White Ring

- BR30, PAR30
- UPC# 02216



602WH/WH/R

Deep White Baffle with White Ring

- BR30, PAR30
- UPC# 09023

For a complete listing of 5" incandescent line voltage trims, see page 67.



5" INCANDESCENT LINE VOLTAGE CANS & TRIMS



TL501/IC/AT

IC AT Old Work

- Remodel, IC applications, airtight applications
- Thermally protected
- Four remodel clips to secure housing
- 75W max BR30 or PAR30
- Adjustable socket plate for precise beam control
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- UPC# 07808

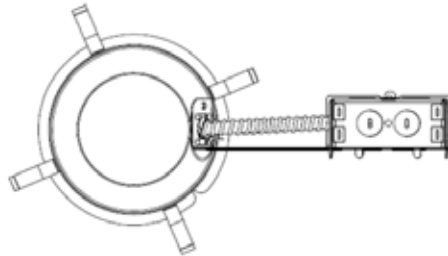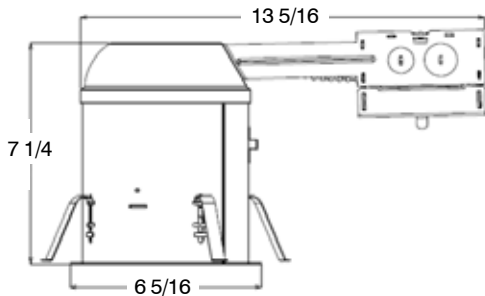

606CL/WH

Clear Reflector with White Ring

- BR30, PAR30
- UPC# 04046



613WH/A

Albalite Glass Lens with White Ring Shower Trim

- BR30, PAR30, A19
- UPC# 09041



602WH/WH

White Step Baffle with White Ring

- BR30, PAR30
- UPC# 02216



616CL/WH/R

Clear Deep Reflector with White Baffle Trim and White Ring

- UPC# 09036

For a complete listing of 5" incandescent line voltage trims, see page 67.

5" INCANDESCENT LINE VOLTAGE TRIMS



602WH/WH

White Step Baffle
with White Ring

- BR30, PAR30
- UPC# 02216



613WH/A

Albalite Glass Lens
with White Ring

- BR30, PAR30, A19
- UPC# 09041



602WH/WH/R

Deep White Baffle
with White Ring

- BR30, PAR30
- UPC# 09023



614WH/R

Clear Deep Reflector
Fresnel Shower Trim
with White Ring

- MEDIUM BASE CFL, A15
- UPC# 09052



603WH/WH

White Shallow
Baffle Trim

- BR30, PAR30
- UPC# 09055



614WH/A

Albalite Shower
Trim with Deep
Clear Reflector and
White Ring

- UPC# 08874



606CL/WH

Deep Clear Reflector
with White Ring

- BR30, PAR30
- UPC# 04046



614WH/F

Frosted Lens
Shower Trim
with Deep Clear
Reflector and
White Ring

- UPC# 08875



613WH

Fresnel Shower Trim
with White Ring

- BR30, PAR30, A19
- UPC# 08378




616CL/WH/R

Clear Deep
Reflector with
White Baffle Trim
and White Ring


- UPC# 09036

5" INCANDESCENT LINE VOLTAGE TRIMS


602

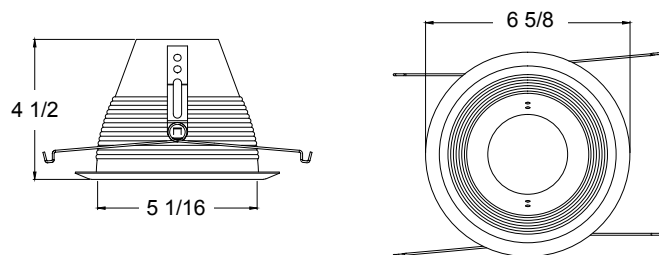


613

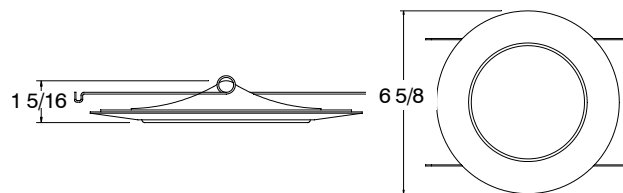


603

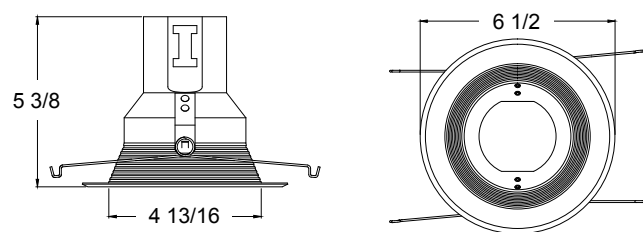


614

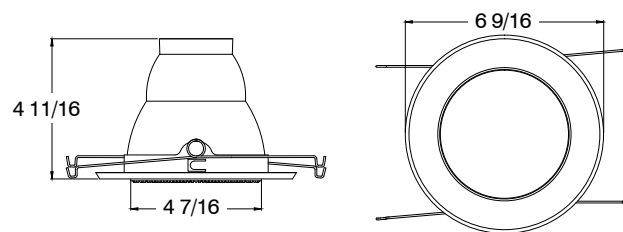

606

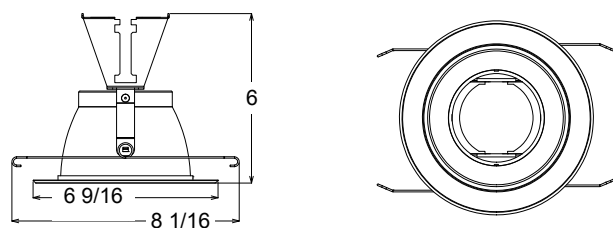


616

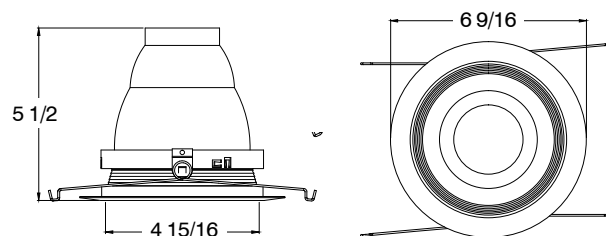


[illegible]



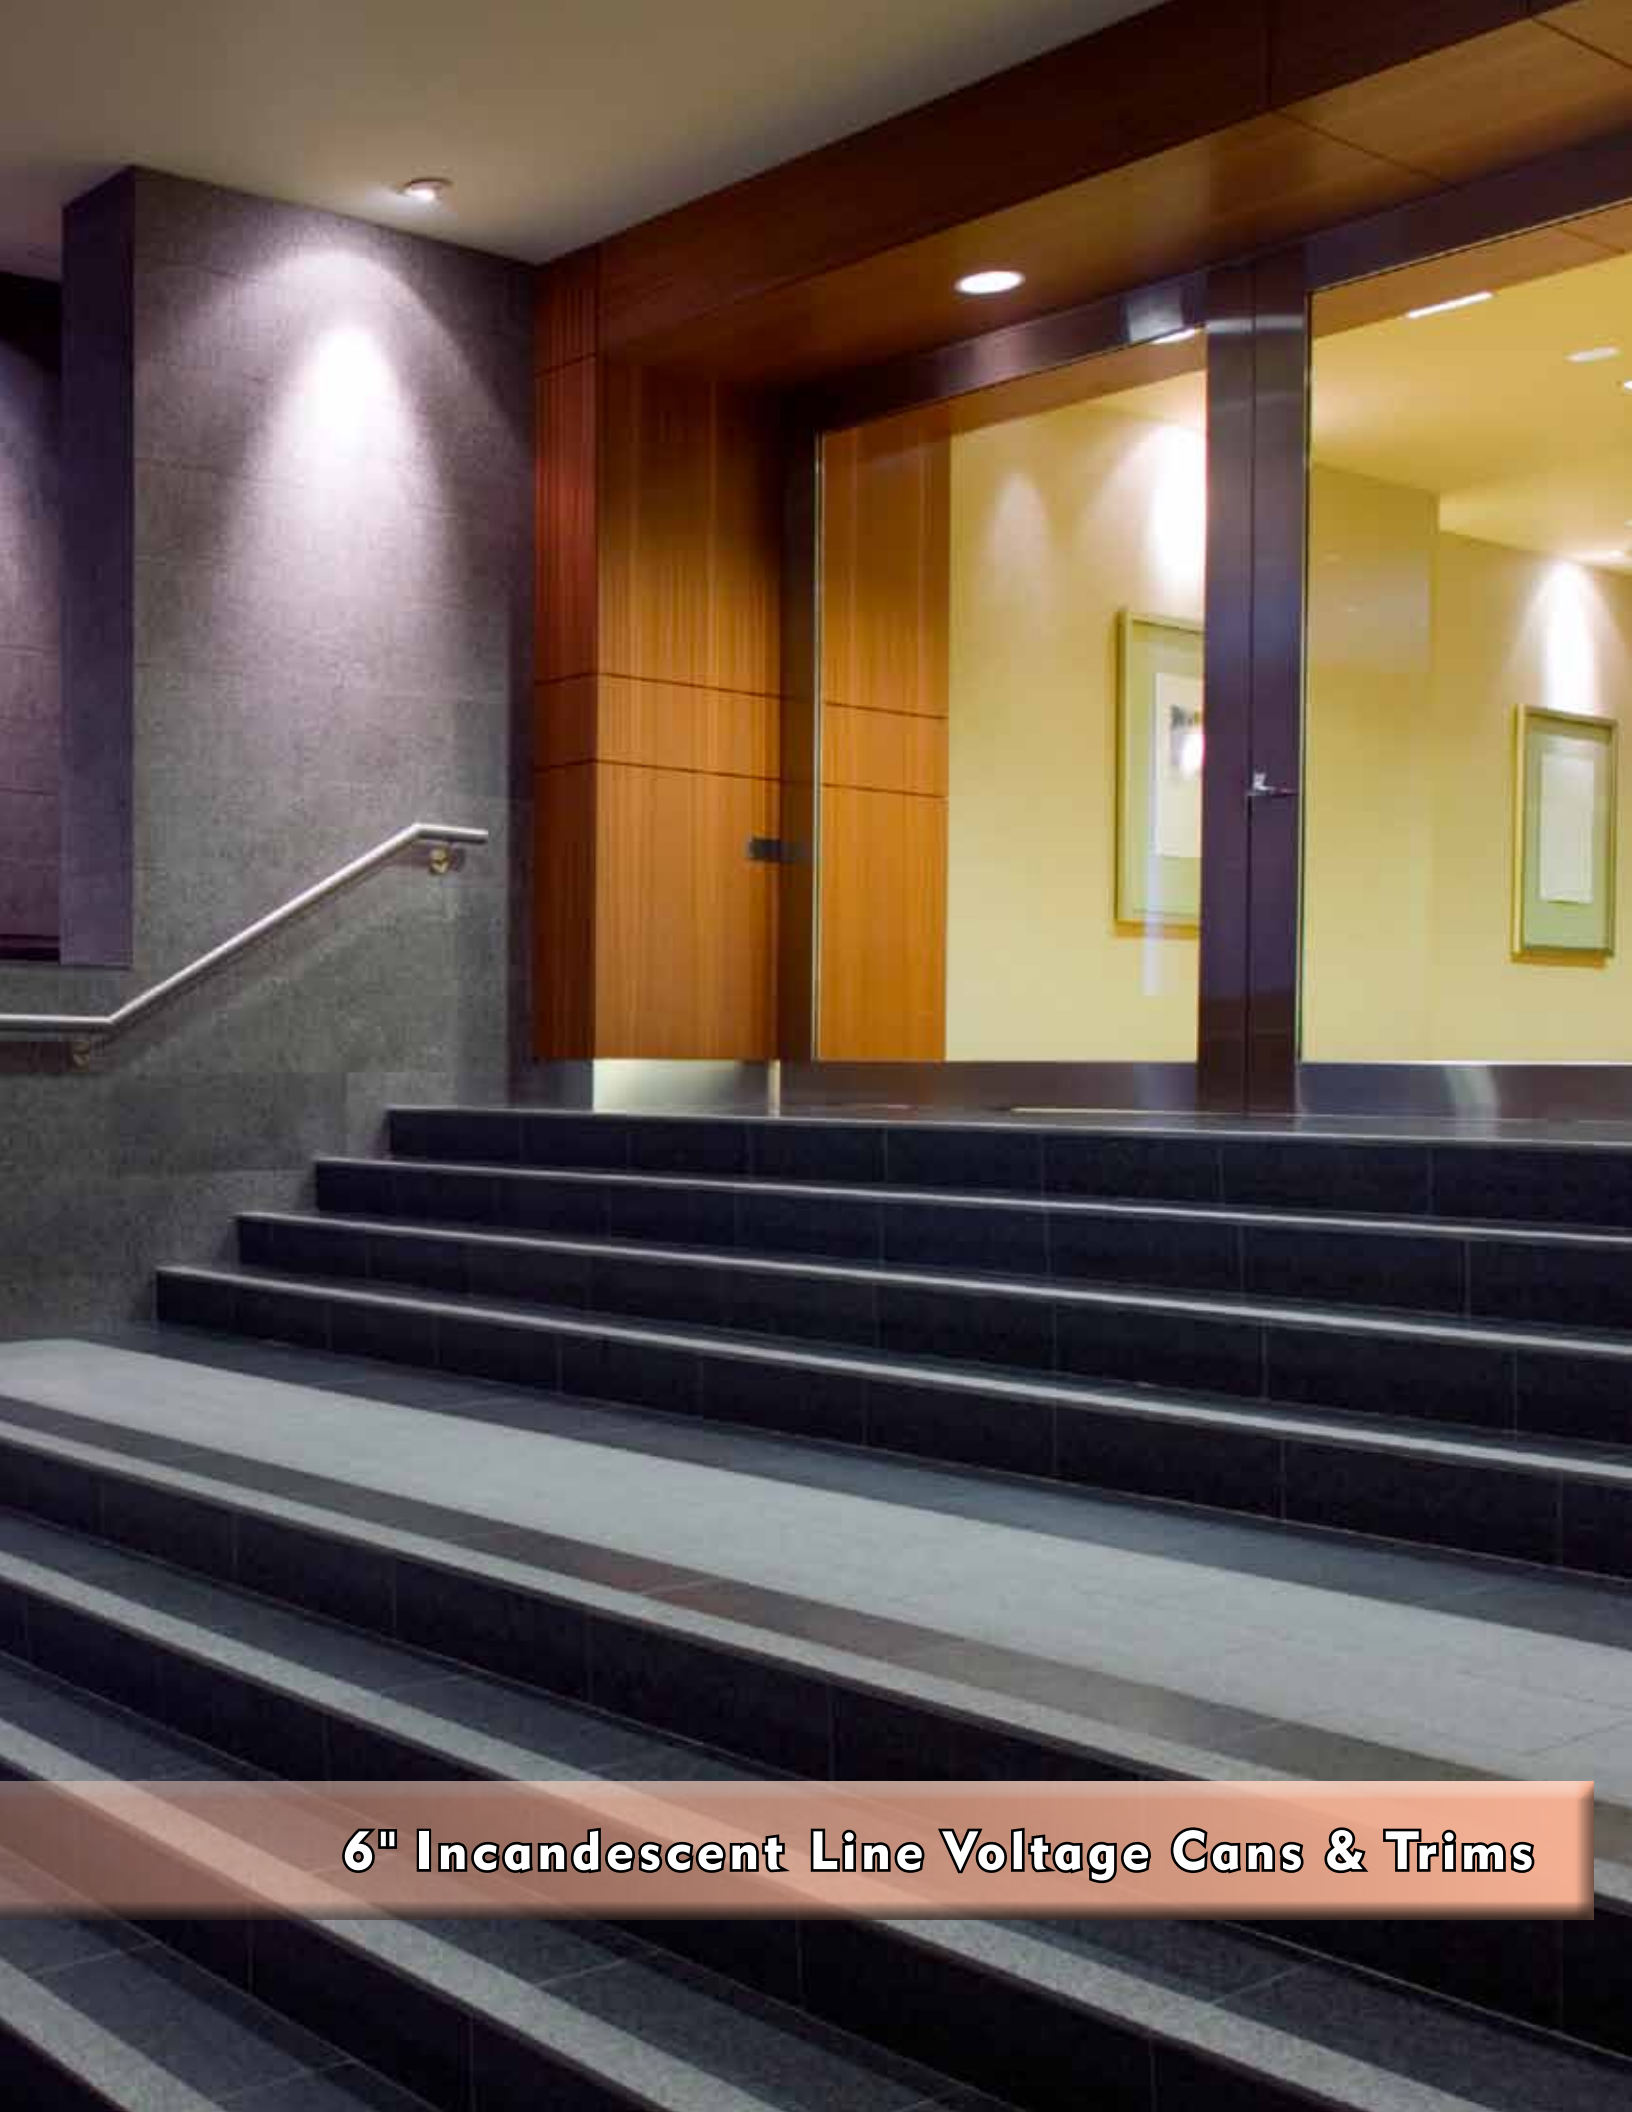

6" Incandescent Line Voltage Cans & Trims




6" INCANDESCENT LINE VOLTAGE CANS & TRIMS

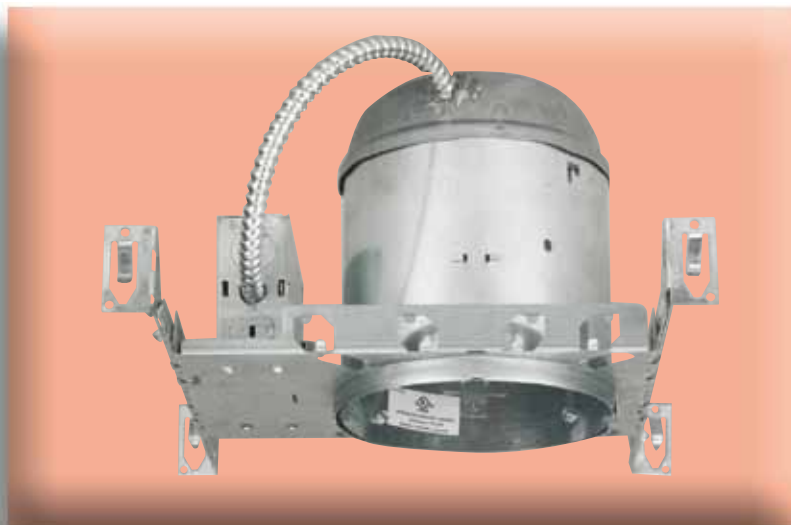

ICS2

Universal IC/Non-IC New Work


- Adjustable Bar Hangers (14½" - 24") with quick install end flanges
- Thermally Protected
- 75W max when in direct contact with insulation
- 150W max for Non-IC applications
- Adjustable Socket Mounting Plate for precise beam control
- Listings: UL for Direct Contact with Insulation;
UL Feed Through and UL Damp Locations
- UPC# 01955

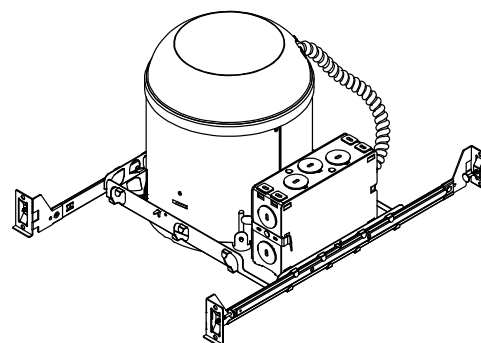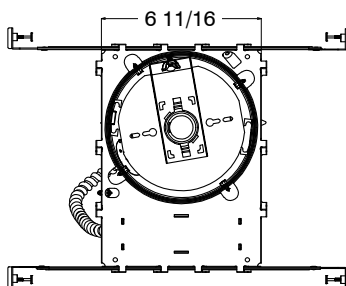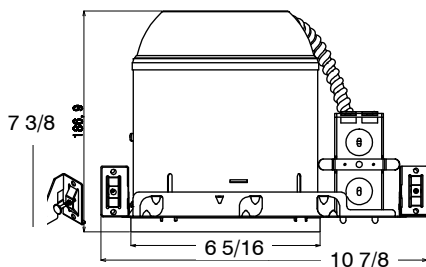

501WH/WH

White Step Baffle with White Ring

- BR30, PAR30
- UPC# 02577

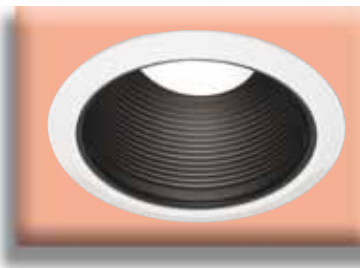

501BL/WH

Black Step Baffle with White Ring

- BR30, PAR30
- UPC# 02720



502WH/WH

White Step Baffle with White Ring

- BR40, PAR38
- UPC# 02252



509WH/P

Albalite Glass Lens with Plastic Ring Shower Trim

- A19
- UPC# 02933

For a complete listing of 6" line voltage trims, see pages 83-86.




6" INCANDESCENT LINE VOLTAGE CANS & TRIMS



ICR3

Universal IC/Non-IC (Old Work) Remodel

- Quick Install Clips
- Thermally Protected
- 75W max when in direct contact with insulation
- 150W max for Non-IC applications
- Adjustable Socket Mounting Plate for precise beam control
- Listings: UL for Direct Contact with Insulation;
UL Feed Through and UL Damp Locations
- UPC# 01954

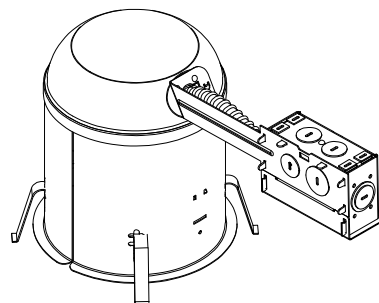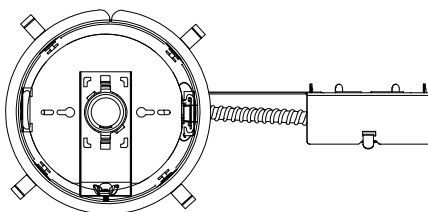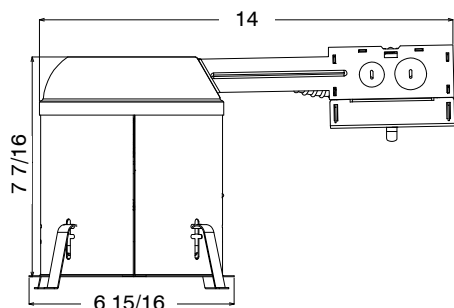

506WH/WH

White Reflector with White Ring

- BR30, PAR30
- UPC# 03047



506CL/WH

Clear Reflector with White Ring

- BR30, PAR30
- UPC# 02045



522WH

Open White Gimbal with White Ring

- PAR30
- UPC# 04015




511WH/WH

White Deep Reflector with White Ring

- BR40, PAR30, PAR38
- BR40, A19
- UPC# 02936

For a complete listing of 6" line voltage trims, see pages 83-86.




6" INCANDESCENT LINE VOLTAGE CANS & TRIMS

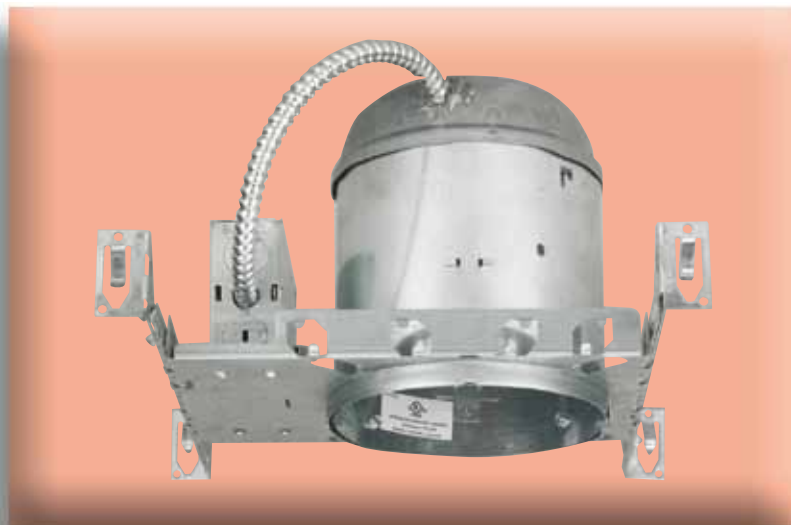

ICS2/AT

IC New Work Airtight

- Adjustable Bar Hangers (14½"- 24") with quick install end flanges
- Thermally Protected
- 75W max when in direct contact with insulation
- 150W max for Non-IC applications
- Adjustable Socket Mounting Plate for precise beam control
- Listings: UL for Direct Contact with Insulation;
UL Feed Through and UL Damp Locations
- UPC# 03147

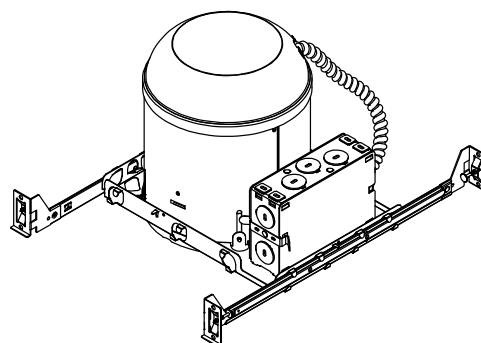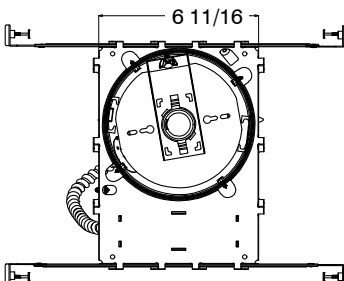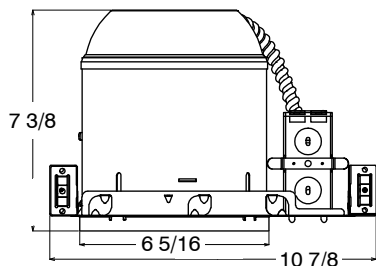

518WH

White Step Baffle with White Ring

- BR40, PAR30, PAR38
- BR40, A19
- UPC# 08870



502BL/WH

Black Step Baffle with White Ring

- BR40, PAR38
- UPC# 03839



505WH

Open White Ring

- BR40, PAR38
- UPC# 02496



507CL/WH

Clear Reflector with White Ring

- BR40, PAR38
- UPC# 02370

For a complete listing of 6" line voltage trims, see pages 83-86.




6" INCANDESCENT LINE VOLTAGE CANS & TRIMS



ICR3/AT

IC/Non-IC Remodel (Old Work) Airtight

- Quick Install Clips
- Thermally Protected
- 75W max when in direct contact with insulation
- 150W max for Non-IC applications
- Adjustable Socket Mounting Plate for precise beam control
- Listings: UL for Direct Contact with Insulation;
UL Feed Through and UL Damp Locations
- UPC# 07526

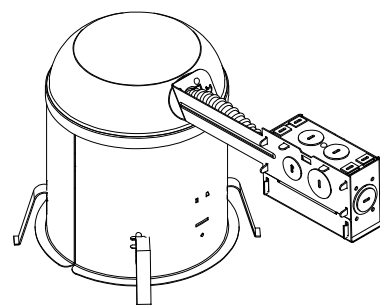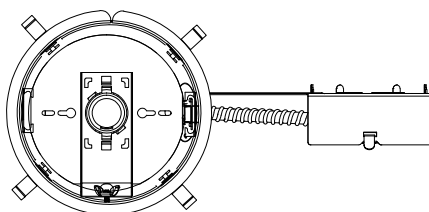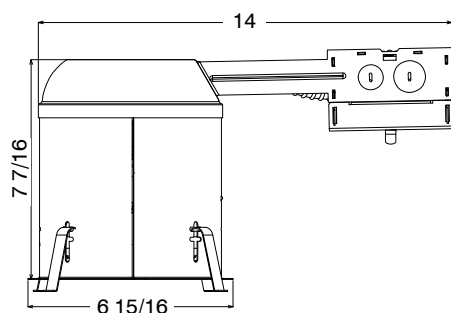

501BL/BL

- Black Step Baffle
with Black Ring**
- BR30, PAR30
 - UPC# 03825



504SCH

- Open Satin Chrome
Trim**
- BR30, PAR30
 - UPC# 02944



506GO/PB

- Gold Reflector with
Polished Brass Ring**
- BR30, PAR30
 - UPC# 03886



506CL/WH

- Clear Reflector with
White Ring**
- BR30, PAR30
 - UPC# 02045

For a complete listing of 6" line voltage trims, see pages 83-86.




6" INCANDESCENT LINE VOLTAGE CANS & TRIMS



ICS2/PREMIUM

Universal IC/Non-IC New Work

- Adjustable Bar Hangers (14½"- 24") with quick install Prenailed Flanges
- Female quick connectors installed
- Thermally Protected
- 75W max when in direct contact with insulation
- 150W max for Non-IC applications
- Adjustable Socket Mounting Plate for precise beam control
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- UPC# 09051

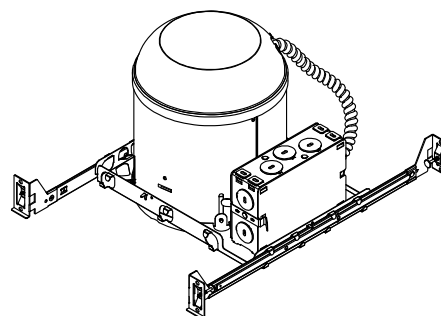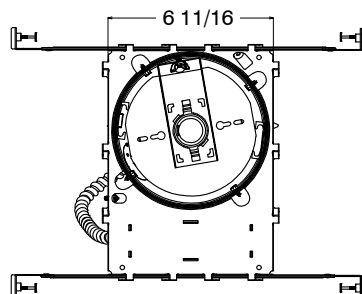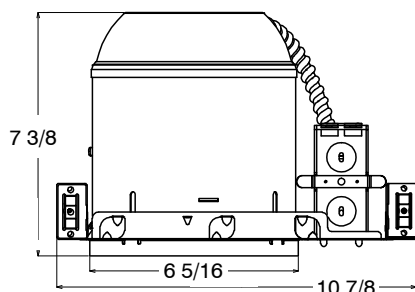

516WH/WH

White Baffle with White Wall Wash

- Any Bulb up to 150W
- UPC# 03051



513WH

Fresnel Glass Lens with White Ring Shower Trim

- A19
- UPC# 02446



511CL/WH

Clear Deep Reflector with White Ring

- BR40, PAR30, PAR38
- BR40, A19
- UPC# 02935



507CL/WH

Clear Reflector with White Ring

- BR40, PAR38
- UPC# 02370

For a complete listing of 6" line voltage trims, see pages 83-86.




6" INCANDESCENT LINE VOLTAGE CANS & TRIMS



ICR3/PREMIUM

Universal IC/Non-IC Old Work

- Female quick connectors installed
- Thermally Protected
- 75W max when in direct contact with insulation
- 150W max for Non-IC applications
- Adjustable Socket Mounting Plate for precise beam control
- Listings: UL for Direct Contact with Insulation;
UL Feed Through and UL Damp Locations
- UPC# 07610

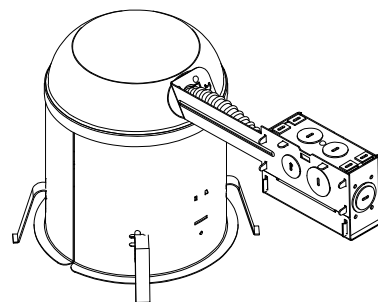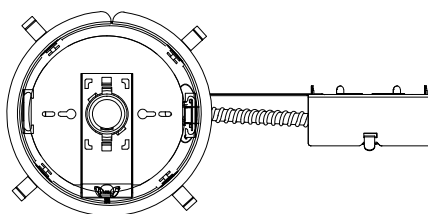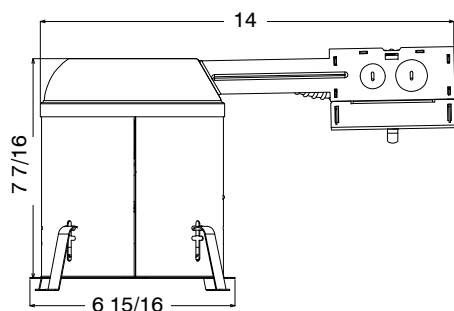

509WH/P

Albalite Glass Lens
with Plastic Ring
Shower Trim

- A19
- UPC# 02933



506CL/CH

Clear Reflector with
Chrome Ring

- BR30, PAR30
- UPC# 03884



506WH/WH

White Reflector with
White Ring

- BR30, PAR30
- UPC# 03047




505PB

Open Polished Brass
Ring

- BR40, PAR38
- UPC# 02931

For a complete listing of 6" line voltage trims, see pages 83-86.




6" INCANDESCENT LINE VOLTAGE CANS & TRIMS

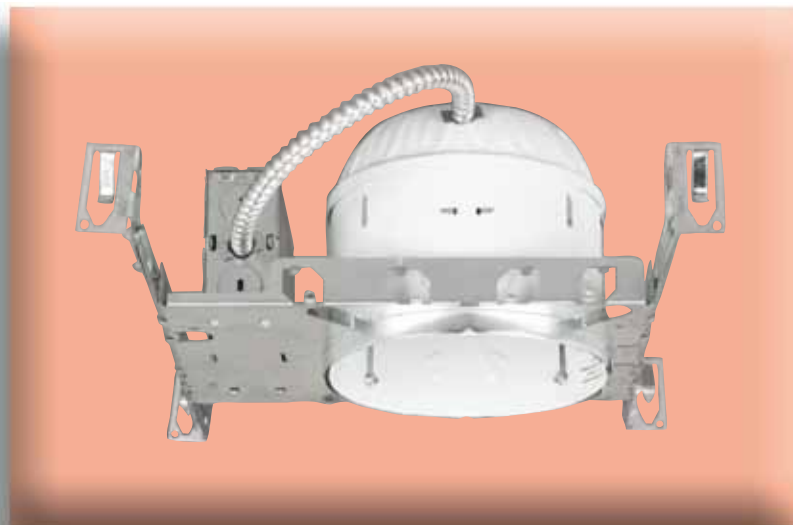

S2/5"

Non-IC Shallow New Work

- Shallow 5-1/2" High
- Adjustable Bar Hangers (14 1/2"- 24") with quick install Nail-Less end flanges
- Thermally Protected
- 175W max
- Adjustable Socket Mounting Plate for precise beam control
- Listings: UL Feed Through and UL Damp Locations
- UPC# 02597

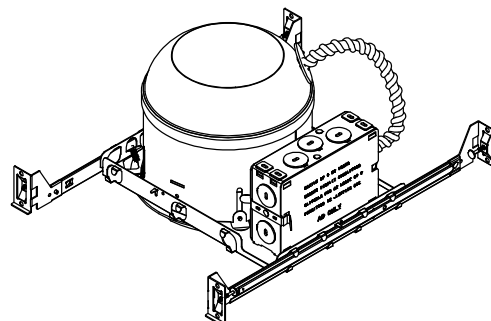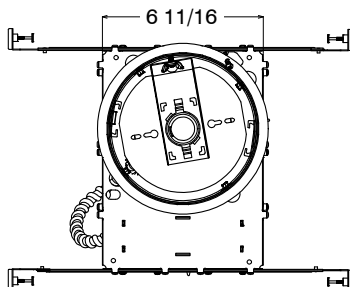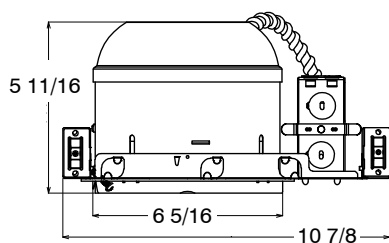

504WH

Open White Trim

- BR30, PAR30
- UPC# 02634



504SCH

Open Satin Chrome Trim

- BR30, PAR30
- UPC# 02944



501BL/WH

Black Step Baffle with White Ring

- BR30, PAR30
- UPC# 02720



509WH

Albalite Glass Lens with Metal Ring

- A19
- UPC# 02253

For a complete listing of 6" line voltage trims, see pages 83-86.





6" INCANDESCENT LINE VOLTAGE CANS & TRIMS



R3/5"

Non-IC Shallow Old Work

- Shallow 5-1/2" High
- Thermally Protected
- 75W max
- Adjustable Socket Mounting Plate for precise beam control
- Listings: UL Feed Through and UL Damp Locations
- UPC# 02047

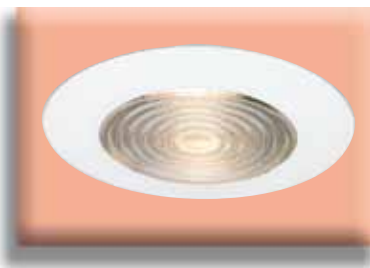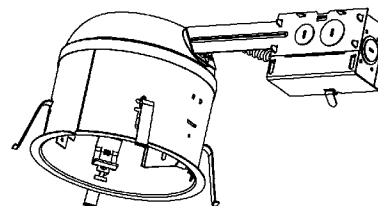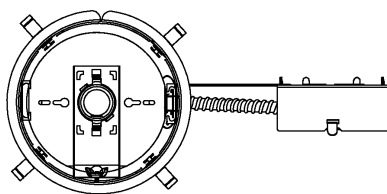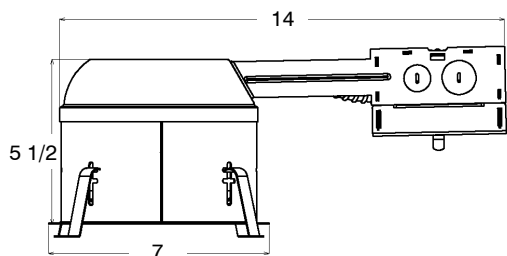

513WH

Fresnel Glass Lens with White Ring Shower Trim

- A19
- UPC# 02446



504SCH

Open Satin Chrome Trim

- BR30, PAR30
- UPC# 02944



501WH/WH

White Step Baffle with White Ring

- BR30, PAR30
- UPC# 02577




510WH

Wall Wash with White Ring

- A19
- UPC# 02578

For a complete listing of 6" line voltage trims, see pages 83-86.




6" INCANDESCENT LINE VOLTAGE CANS & TRIMS

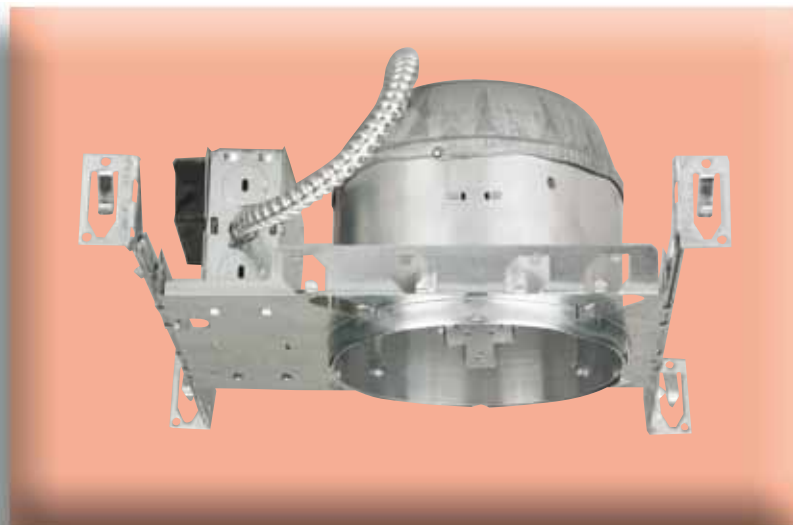

ICS2/5"

IC Shallow New Work

- Shallow 5-1/2" High
- Adjustable Bar Hangers (14 1/2" - 24") with quick install Nail-Less end flanges
- Thermally Protected
- 75W max
- Adjustable Socket Mounting Plate for precise beam control
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- UPC# 07671

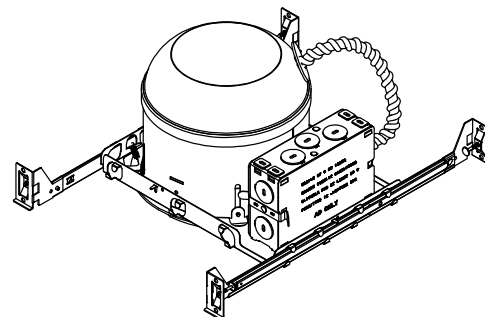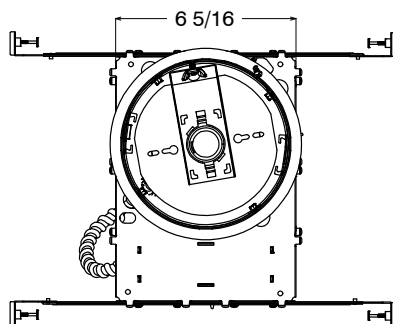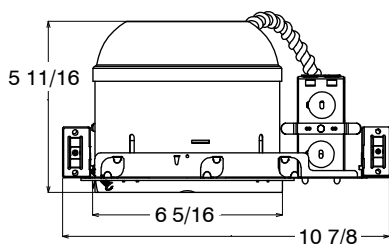

504WH

Open White Trim

- BR30, PAR30
- UPC# 02634



501SCH

All Satin Chrome Step Baffle

- BR30, PAR30
- UPC# 02941



506CL/CH

Clear Reflector with Chrome Ring

- BR30, PAR30
- UPC# 03884



509WH

Albalite Glass Lens with Metal Ring Shower Trim

- A19
- UPC# 02253

For a complete listing of 6" line voltage trims, see pages 83-86.




6" INCANDESCENT LINE VOLTAGE CANS & TRIMS



ICR3/5"

IC Shallow Old Work


- Shallow 5-1/2" High
- Thermally Protected
- 75W max
- Adjustable Socket Mounting Plate for precise beam control
- Listings: UL for Direct Contact with Insulation;
UL Feed Through and UL Damp Locations
- UPC# 07681

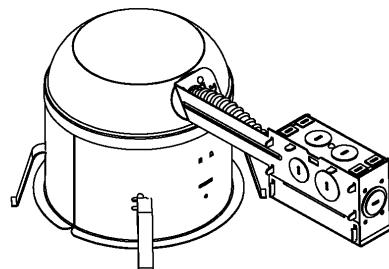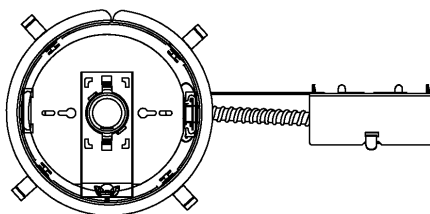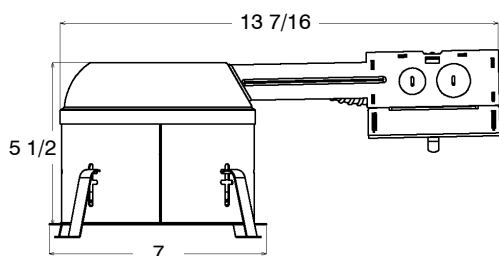

501BL/BL

Black Step Baffle with Black Ring

- BR30, PAR30
- UPC# 03825

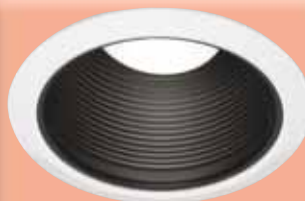

501BL/WH

Black Step Baffle with White Ring

- BR30, PAR30
- UPC# 02720



504SCH

Open Satin Chrome Trim

- BR30, PAR30
- UPC# 02944



506GO/PB

Gold Reflector with Polished Brass Ring

- BR30, PAR30
- UPC# 03886

For a complete listing of 6" line voltage trims, see pages 83-86.

6" INCANDESCENT LINE VOLTAGE CANS & TRIMS






ICS/AT/FL

New Work Incandescent with Floating Lamp Holder, Airtight, Insulation Contact

- New Construction, IC Applications, Airtight Applications
- 75W max PAR30, PAR38, BR30 and BR40
- 90W max with 502AT style trims
- 90° Adjustable bar hangers (13 5/8"-25") with captive nails on flanges
- Removable housing for easy J-box access
- Floating socket for use with socket supporting trims and gimballs
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- UPC# 09016



Floating Ceramic Socket

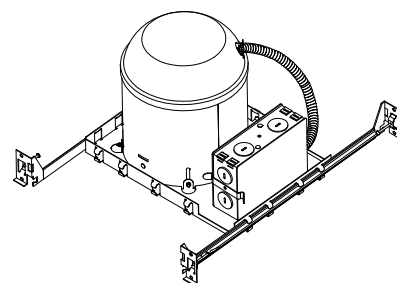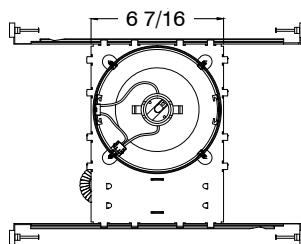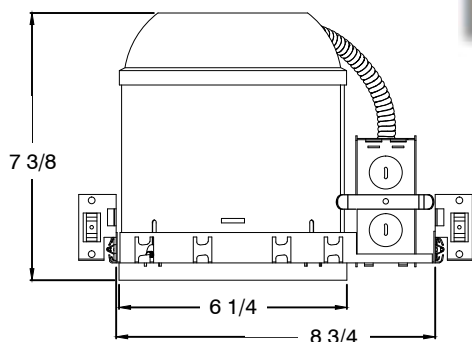

502WH/WH/AT

White Step Baffle with White Ring Airtight

- BR40, PAR38
- UPC# 07568



529WH

Open White Gimbal with White Ring

- PAR38
- UPC# 04025



550WH

Open White Baffle Gimbal with White Ring

- PAR30
- UPC# 04041



514WH/WH

White Step Baffle with White Eyeball

- BR30, PAR30
- UPC# 02939

For a complete listing of 6" line voltage trims, see pages 83-86.

6" INCANDESCENT LINE VOLTAGE TRIMS



501WH/WH

White Step Baffle
with White Ring


- BR30, PAR30
- UPC# 02577



502BL/WH

Black Step Baffle
with White Ring

- BR40, PAR38
- UPC# 03839

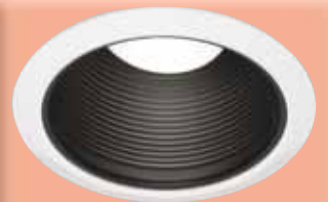

501BL/WH

Black Step Baffle
with White Ring


- BR30, PAR30
- UPC# 02720



502BL/BL

Black Step Baffle
with Black Ring

- BR40, PAR38
- UPC# 03837

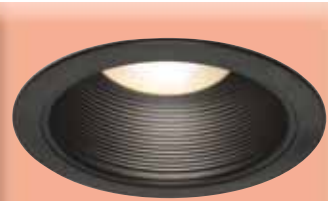

501BL/BL

Black Step Baffle
with Black Ring


- BR30, PAR30
- UPC# 03825



502SCH

Satin Chrome Step
Baffle with Satin
Chrome Ring

- BR40, PAR38
- UPC# 02942

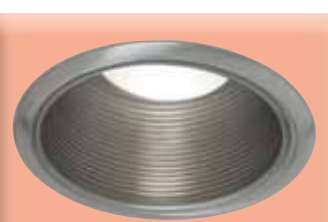

501SCH

All Satin Chrome
Step Baffle

- BR30, PAR30
- UPC# 02941



502GW/GW/AT/FS

Gloss White Step
Baffle with White
Ring, Airtight, Friction
Springs, for Floating
Medium Base Socket

- BR30, BR40, PAR30,
PAR38, A19
- UPC# 09018



502WH/WH

White Step Baffle
with White Ring

- BR40, PAR38
- UPC# 02252



502GW/GW/AT

Gloss White Step
Baffle with White
Ring, Airtight, Torsion
Spring, for floating
Medium Base Socket

- BR30, BR40, PAR30,
PAR38, A19
- UPC# 09019

6" INCANDESCENT LINE VOLTAGE TRIMS



502WH/WH/AT

Matte White Step Baffle with White Ring, Airtight, Torsion Springs, for Floating Medium Base Socket

- BR30, BR40, PAR30, PAR38, A19
- UPC# 07568



505WH

Open White Ring

- BR40, PAR38
- UPC# 02496



503WH

White Eyeball

- BR30, PAR30
- UPC# 02369



505PB

Open Polished Brass Ring

- BR40, PAR38
- UPC# 02931



504WH/NB

Open White Trim

- PAR30
- UPC# 08367



506WH/WH

White Reflector with White Ring

- BR30, PAR30
- UPC# 03047



504WH

Open White Trim

- BR30, PAR30
- UPC# 02634



506CL/WH

Clear Reflector with White Ring

- BR30, PAR30
- UPC# 02045



504SCH

Open Satin Chrome Trim

- BR30, PAR30
- UPC# 02944



506CL/WH/AT

Clear Reflector with White Ring Airtight

- BR30, PAR30
- UPC# 07683

6" INCANDESCENT LINE VOLTAGE TRIMS



506CL/CH

Clear Reflector with
Chrome Ring

- BR30, PAR30
- UPC# 03884



509WH

Albalite Glass Lens
with Metal Ring
Shower Trim

- UPC# 02253



506GO/WH

Gold Reflector with
White Ring

- BR30, PAR30
- UPC# 03887



509WH/P

Albalite Glass Lens
with Plastic Ring
Shower Trim

- UPC# 02933



506GO/PB

Gold Reflector with
Polished Brass Ring

- BR30, PAR30
- UPC# 03886



510WH

Wall Wash with
White Ring

- UPC# 02578



507CL/WH

Clear Reflector
with White Ring

- BR40, PAR38
- UPC# 02370



511WH/WH

White Deep Reflector
with White Ring

- BR40, PAR30, PAR38
- BR40, A19
- UPC# 02936



507WH/WH

White Reflector with
White Ring

- BR40, PAR38
- UPC# 03888



511CL/WH

Clear Deep Reflector
with White Ring

- BR40, PAR30, PAR38
- BR40, A19
- UPC# 02935

6" INCANDESCENT LINE VOLTAGE TRIMS



513WH

Fresnel Glass Lens
with White Ring
Shower Trim

- A19
- UPC# 02446



518WH

White Step Baffle
with White Ring

- BR40, PAR30, PAR38
- BR40, A19
- UPC# 08870



513WH/P

Fresnel Glass Lens
with White Plastic
Ring Shower Trim

- A19
- UPC# 08883



519WH/P/R

Albalite Glass Lens
with White Plastic
Ring, Clear Deep
Reflector

- A19
- UPC# 09021



514WH/WH

White Step Baffle
with White Eyeball

- BR30, PAR30
- UPC# 02939



522WH

Open White Gimbal
with White Ring

- PAR30
- UPC# 04015



515WH/WH

White Baffle with
White Regressed
Eyeball

- BR30, PAR30
- UPC# 02605



529WH

Open White Gimbal
with White Ring

- PAR38
- UPC# 04025



516WH/WH

White Baffle with
White Wall Wash

- Any Bulb up to 150W
- UPC# 03051




550WH

Open White Baffle
Gimbal with
White Ring


- PAR30
- UPC# 04041

6" INCANDESCENT LINE VOLTAGE TRIMS


501

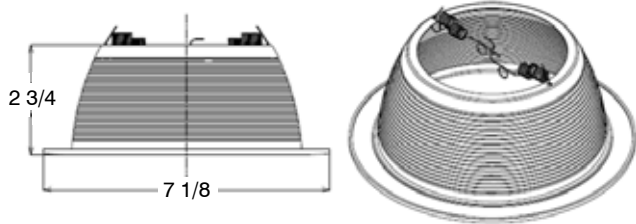

503

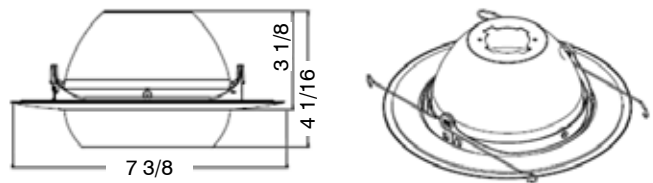


502

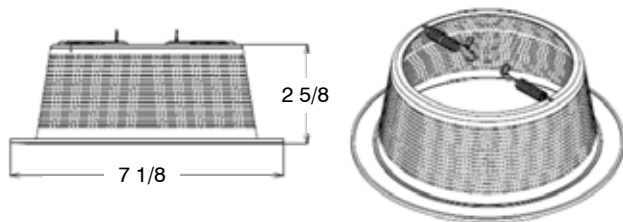


504




502WH/WH/AT

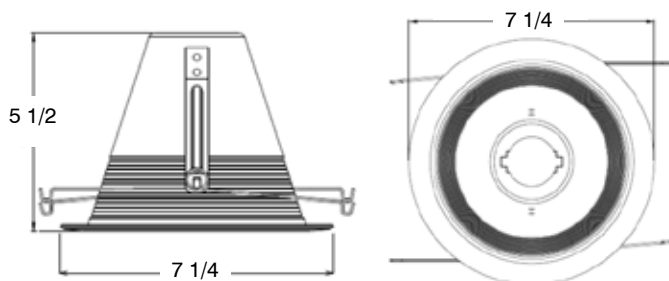


505



502WH/WH/AT/FS

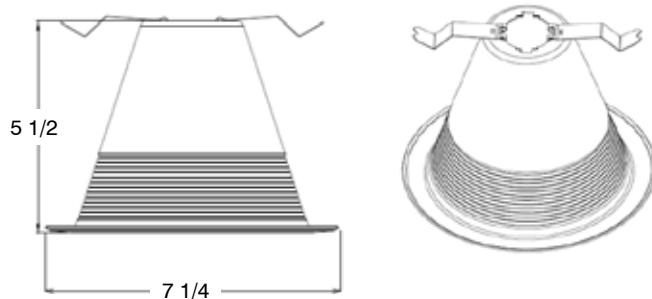


506

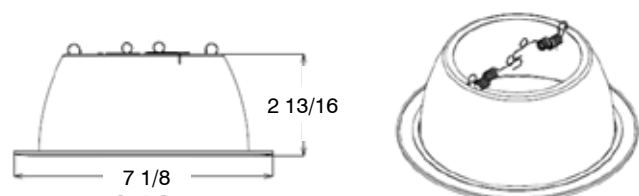


6" INCANDESCENT LINE VOLTAGE TRIMS


507

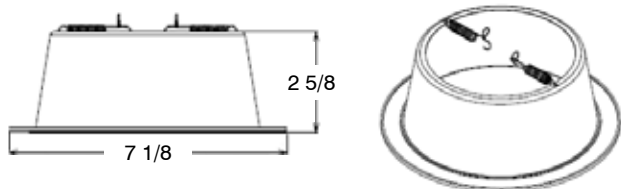


513

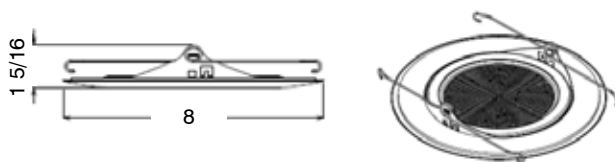


509

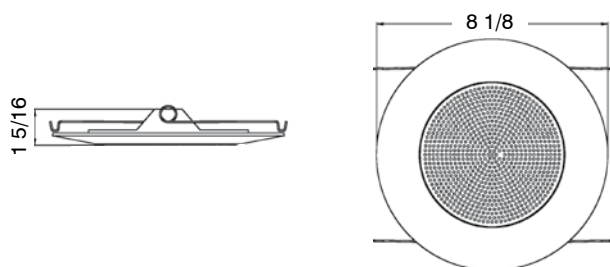


514

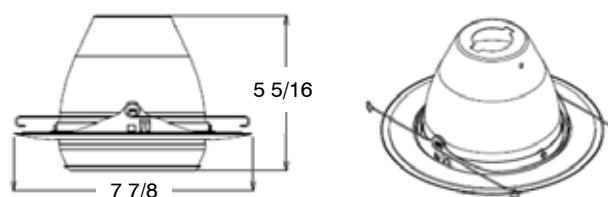


510

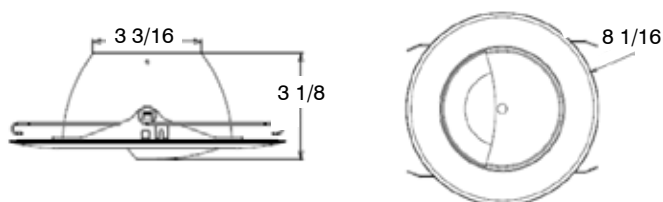


515

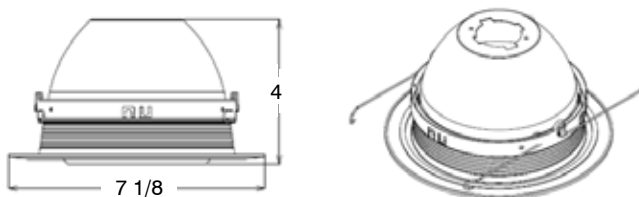

511

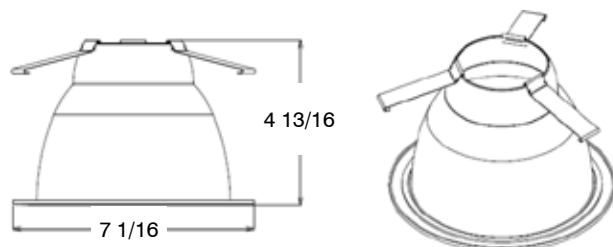


516

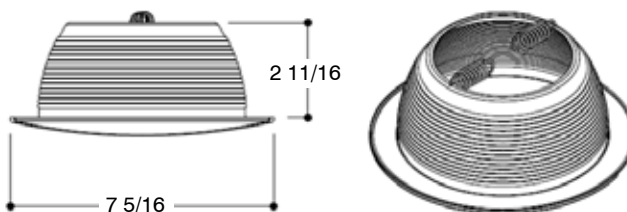


6" INCANDESCENT LINE VOLTAGE TRIMS


518

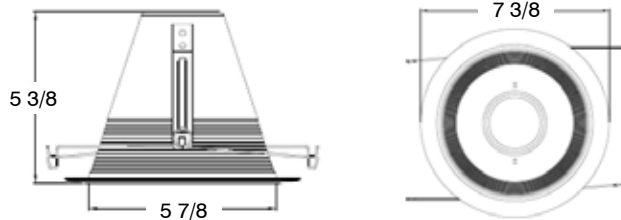


529

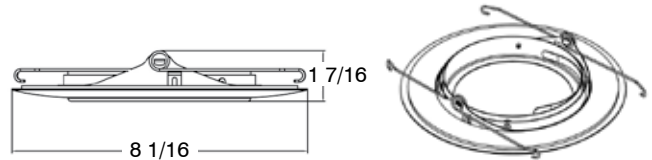


519

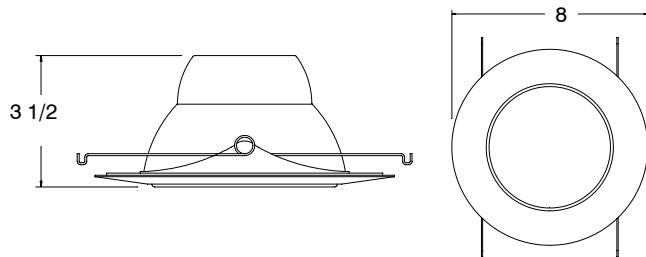


550

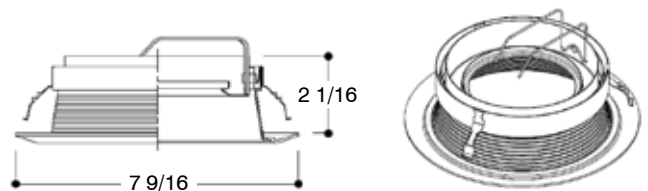

522

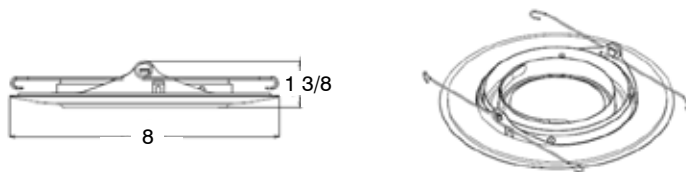



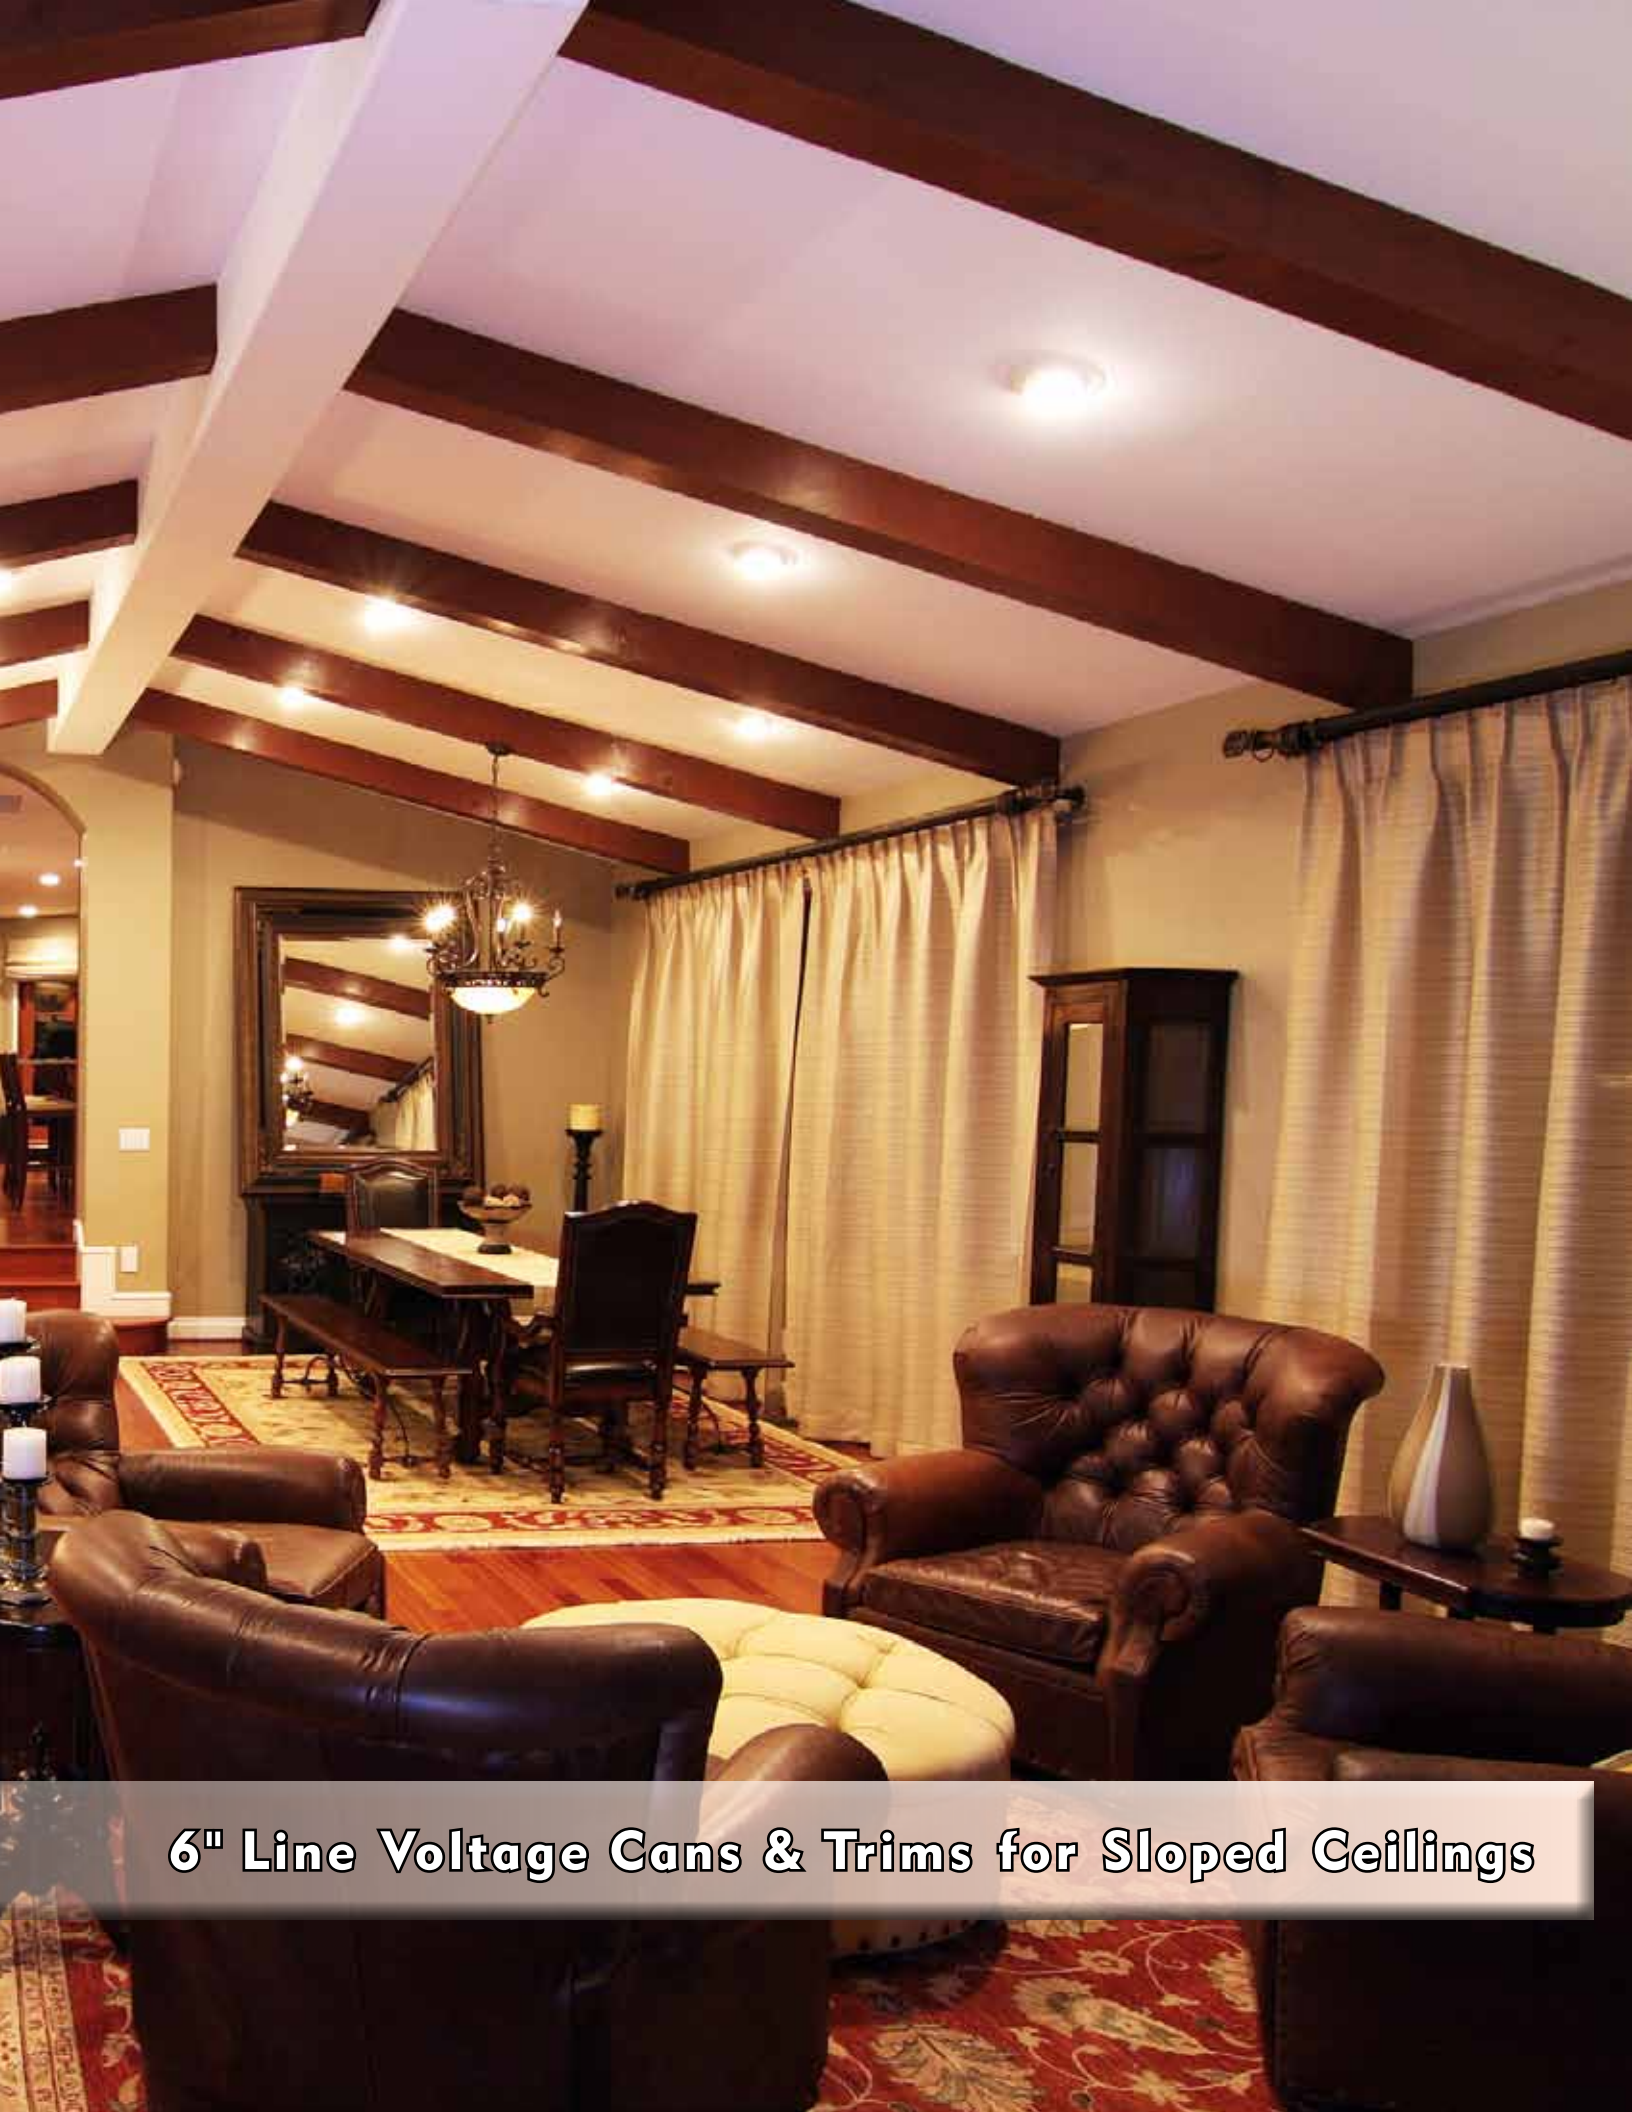

6" Line Voltage Cans & Trims for Sloped Ceilings


6" LINE VOLTAGE CANS & TRIMS FOR SLOPED CEILINGS



ICR3/SLOPE

IC Direct Old Work

- Remodel construction, IC applications
- Designed for use with slopes from 2/12-6/12 (9-27°)
- Three remodel clips to secure housing
- Adjustable socket mounting plate compensates for ceiling slope
- 100W max BR40, PAR38
- Thermally Protected
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- UPC# 01959

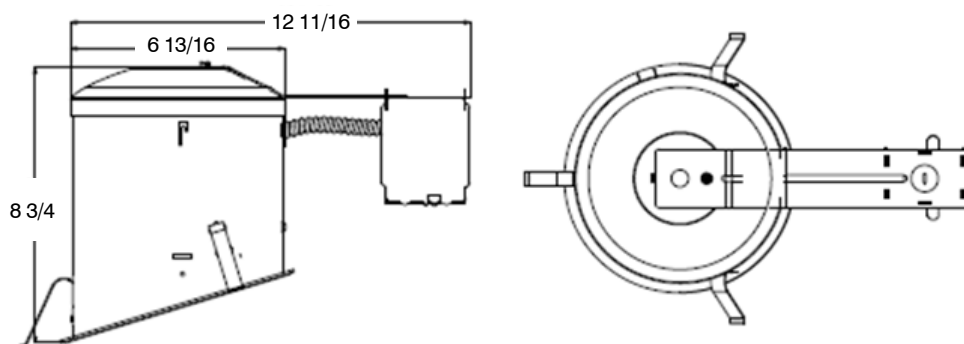

702WH/WH

White Baffle with White Ring

- BR40, PAR38
- UPC# 01972



704WH/WH

White Baffle with White Eyeball

- BR30, PAR30
- UPC# 04227



702BL/WH

Black Baffle with White Ring

- BR40, PAR38
- UPC# 01973



705CL/WH

Clear Reflector with White Ring

- BR40, PAR38
- UPC# 01974



6" LINE VOLTAGE CANS & TRIMS FOR SLOPED CEILINGS



ICS2/SLOPE

IC Direct New Work

- New construction, IC applications
- Designed for use with slopes from 2/12-6/12 (9-27°)
- 90° adjustable bar hangers (14½"- 24") with nail-less end flanges
- Adjustable socket mounting plate
- Removable housing for J-box access
- 100W max BR40, PAR38
- Thermally Protected
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- UPC# 01958

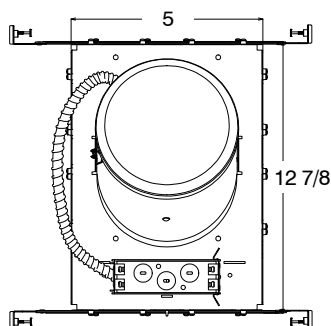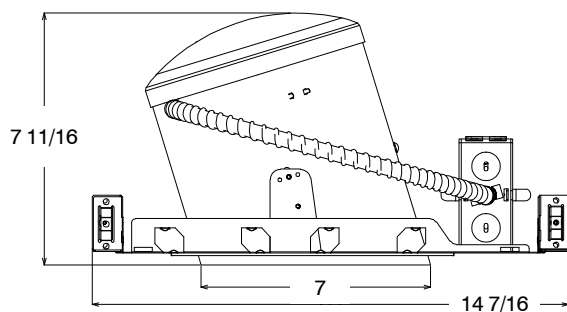

702WH/WH

White Baffle with White Ring

- BR40, PAR38
- UPC# 01972



704WH/WH

White Baffle with White Eyeball

- BR30, PAR30
- UPC# 04227



702BL/WH

Black Baffle with White Ring

- BR40, PAR38
- UPC# 01973



705CL/WH

Clear Reflector with White Ring

- BR40, PAR38
- UPC# 01974




6" LINE VOLTAGE CANS & TRIMS FOR SLOPED CEILINGS



ICS2/SLOPE BOX

IC-Direct New Work

- New construction, IC applications
- Designed for use with slopes from 2/12-6/12 (9-27°)
- 90° adjustable telescoping bar hangers (14½"- 24") with quick install nail-less end flanges
- Adjustable socket mounting plate compensates for ceiling slope
- 100W max BR40, PAR38
- Thermally protected
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- UPC# 01957

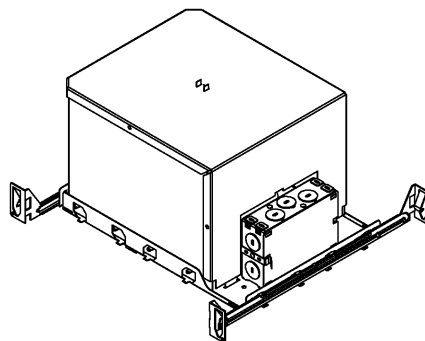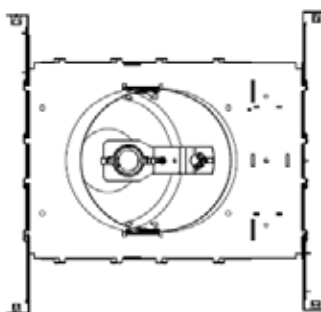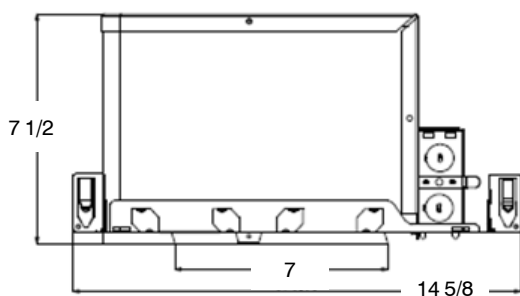

702WH/WH

White Baffle with White Ring

- BR40, PAR38
- UPC# 01972



704WH/WH

White Baffle with White Eyeball

- BR30, PAR30
- UPC# 04227



702BL/WH

Black Baffle with White Ring

- BR40, PAR38
- UPC# 01973



705CL/WH

Clear Reflector with White Ring

- BR40, PAR38
- UPC# 01974




6" LINE VOLTAGE CANS & TRIMS FOR SLOPED CEILINGS



ICS2/SUPERSLOPE

IC-Direct New Work

- New construction, IC applications
- Designed for use with slopes from 7/12-12/12 (30-45°)
- 90° adjustable telescoping bar hangers (14½"- 24") with quick install nail-less end flanges
- Adjustable socket mounting plate compensates for ceiling slope
- 100W max BR40, PAR38
- Thermally protected
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- UPC# 05905

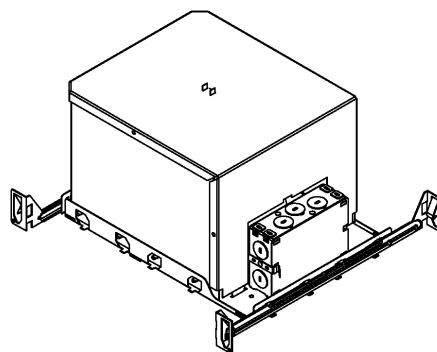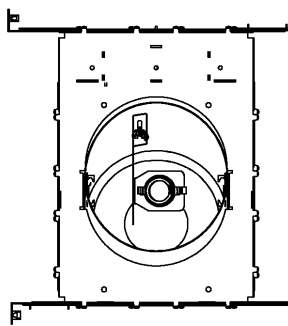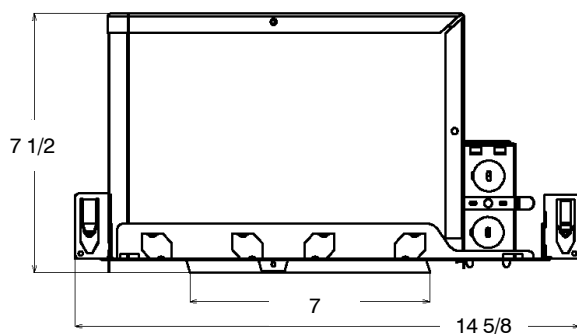

702WH/WH

- White Baffle with White Ring
- BR40, PAR38
 - UPC# 01972



704WH/WH

- White Baffle with White Eyeball
- BR30, PAR30
 - UPC# 04227



702BL/WH


- Black Baffle with White Ring
- BR40, PAR38
 - UPC# 01973



705CL/WH

- Clear Reflector with White Ring
- BR40, PAR38
 - UPC# 01974



6" LINE VOLTAGE CANS & TRIMS FOR SLOPED CEILINGS

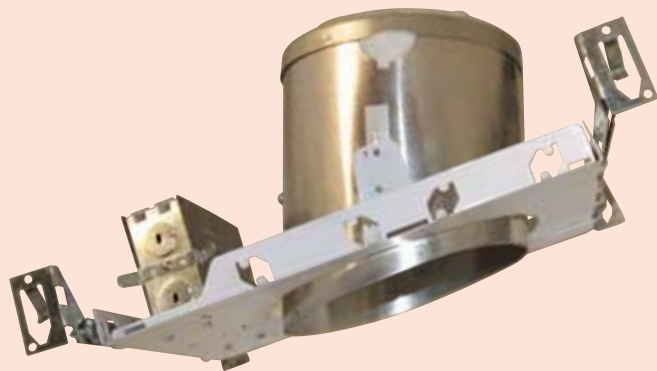

ICS2/AT/SLOPE

IC Direct New Work Airtight

- New construction, IC applications, airtight applications
- Designed for use with slopes from 2/12-6/12 (9-27°)
- 90° adjustable bar hangers (14½" - 24") with nail-less end flanges
- Adjustable socket mounting plate
- Removable housing for J-box access
- 100W max BR40, PAR38
- Thermally Protected
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Listings: UL for Direct Contact with Insulation;
UL Feed Through and UL Damp Locations
- UPC# 08380

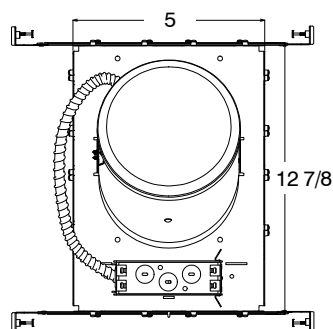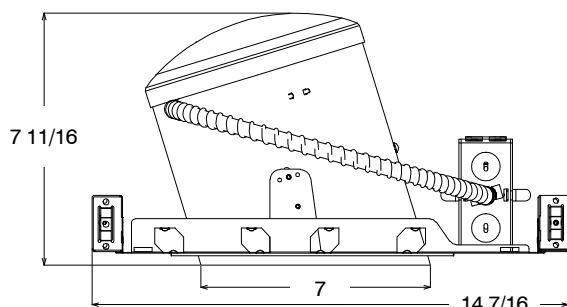

702WH/WH

White Baffle with
White Ring

- BR40, PAR38
- UPC# 01972



704WH/WH

White Baffle with
White Eyeball

- BR30, PAR30
- UPC# 04227



702BL/WH

Black Baffle with
White Ring

- BR40, PAR38
- UPC# 01973



705CL/WH

Clear Reflector with
White Ring

- BR40, PAR38
- UPC# 01974


6" LINE VOLTAGE CANS & TRIMS FOR SLOPED CEILINGS



702WH/WH

White Baffle with White Ring
 • BR40, PAR38
 • UPC# 01972



702

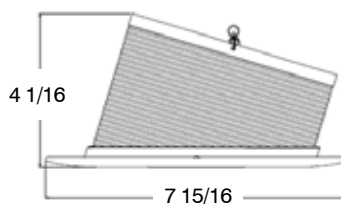

702BL/WH

Black Baffle with White Ring
 • BR40, PAR38
 • UPC# 01973



704

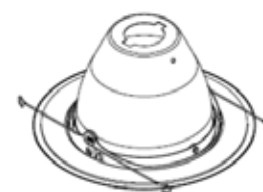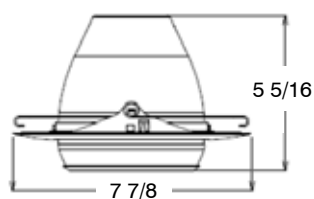

704WH/WH

White Baffle with White Eyeball
 • BR30, PAR30
 • UPC# 04227

705

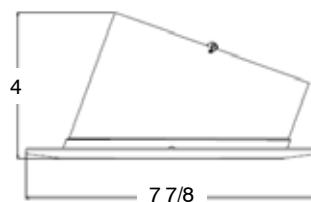

705CL/WH


Clear Reflector with White Ring
 • BR40, PAR38
 • UPC# 01974





3" Low Voltage Cans & Trims


3" LOW VOLTAGE (12V) CANS & TRIMS

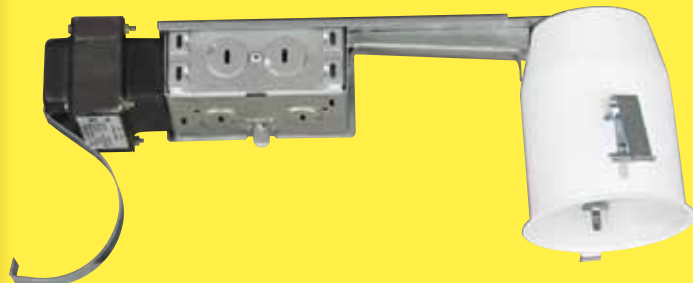

TL301

Non-IC Old Work

- Remodel construction, Non-IC applications
- Two remodel clips to secure housing
- Thermally Protected
- 50W max 12V MR16
- Type "H" Transformer
- With unique flexible support spring for easy installation
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Listings: UL Feed Through and UL Damp Locations
- UPC# 07673

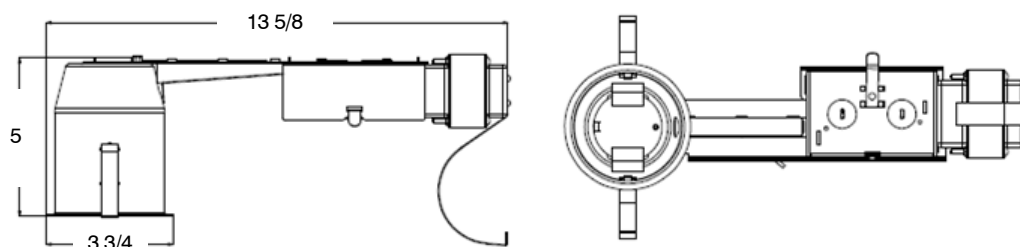

TR311WH/WH

White Baffle with White Ring

- MR16
- UPC# 07676



TR311BL/NK

Black Baffle with Brushed Nickel Ring

- MR16
- UPC# 07711



TR312CL/WH

Clear Reflector with White Ring

- MR16
- UPC# 07677




TR336WH

Die Cast White Rotating Beacon

- MR16
- UPC# 08408

For a complete listing of 3" low voltage trims, see page 104.



3" LOW VOLTAGE (12V) CANS & TRIMS

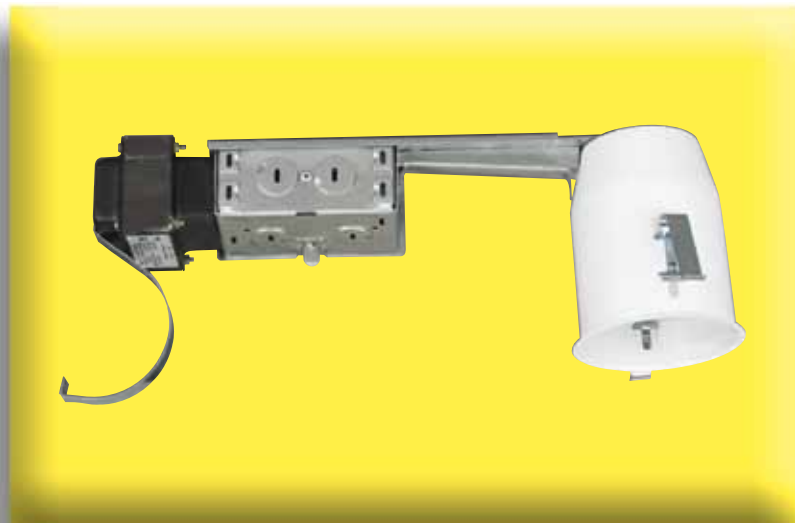

TL301/AT

Non-IC Airtight Old Work

- Remodel construction, Non-IC applications, airtight applications
- Two remodel clips to secure housing
- Thermally Protected
- 50W max 12V MR16
- Type "H" Transformer
- With unique flexible support spring for easy installation
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Listings: UL Feed Through and UL Damp Locations
- UPC# 08629

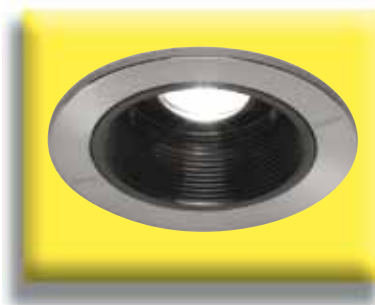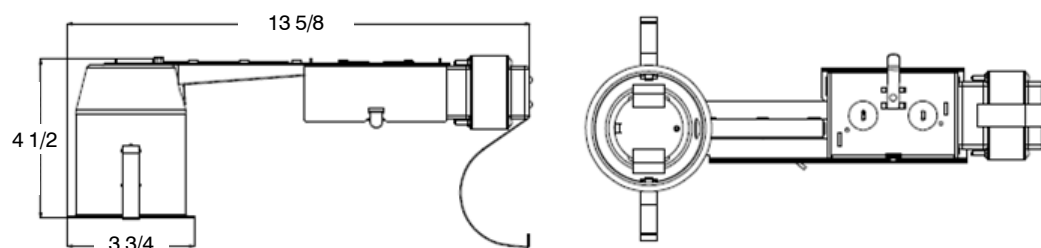

TR311BL/NK

Black Baffle with Brushed Nickel Ring

- MR16
- UPC# 07711



TR332WH

Round White Gimbal

- UPC# 07728



TR312CL/WH

Clear Reflector with White Ring

- MR16
- UPC# 07677




TR336WH

Die Cast White Rotating Beacon

- MR16
- UPC# 08408

For a complete listing of 3" low voltage trims, see page 104.



3" LOW VOLTAGE (12V) CANS & TRIMS

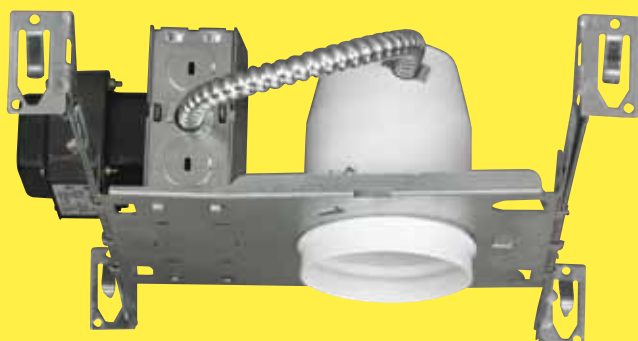

TL302

Non-IC New Work

- New construction, Non-IC applications
- 90° adjustable bar hangers (14-1/2"-24") with quick install end flanges
- Thermally Protected
- 50W max 12V MR16
- Type "H" Transformer
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Listings: UL Feed Through and UL Damp Locations
- UPC# 07674

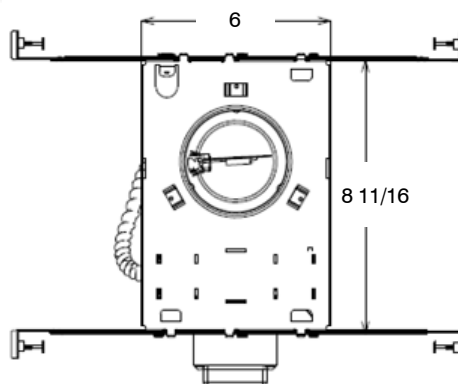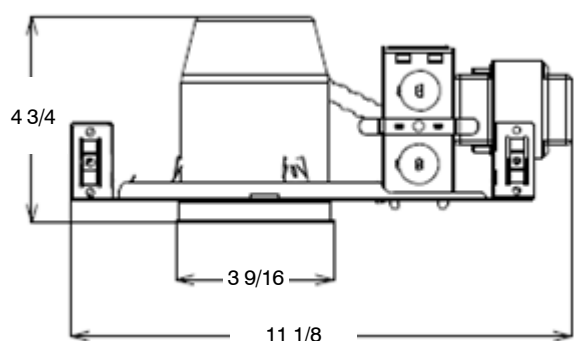

TR311WH/WH

White Baffle with White Ring

- MR16
- UPC# 07676



TR311BL/NK

Black Baffle with Brushed Nickel Ring

- MR16
- UPC# 07711



TR311BL/WH

Black Baffle with White Ring

- MR16
- UPC# 07675



TR312CL/WH

Clear Reflector with White Ring

- MR16
- UPC# 07677

For a complete listing of 3" low voltage trims, see page 104.



3" LOW VOLTAGE (12V) CANS & TRIMS



TL302/IC

IC New Work

- New construction, IC applications
- Dual wall aluminum construction
- 90° adjustable bar hangers (13-5/8"-25") with captive nails on flanges
- Removable housing for J-box and transformer access
- 50W max 12V MR16
- Thermally protected electronic 12VAC 50W transformer
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- UPC# 07710

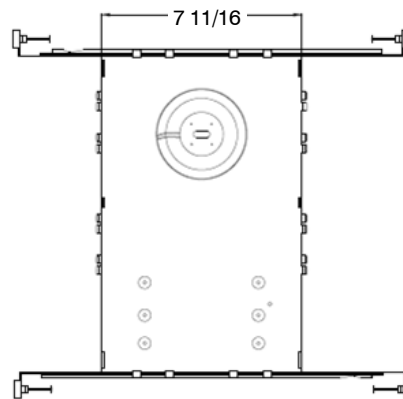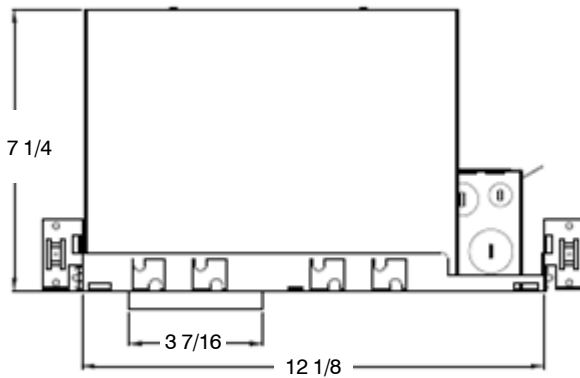

TR311WH/WH

White Baffle with White Ring

- MR16
- UPC# 07676



TR311BL/NK

Black Baffle with Brushed Nickel Ring

- MR16
- UPC# 07711



TR312CL/WH

Clear Reflector with White Ring

- MR16
- UPC# 07677



TR336WH

Die Cast White Rotating Beacon

- MR16
- UPC# 08408

For a complete listing of 3" low voltage trims, see page 104.

3" LOW VOLTAGE (12V) TRIMS



TR311WH/WH

White Baffle with
White Ring

- MR16
- UPC# 07676



TR312CL/WH

Clear Reflector with
White Ring

- MR16
- UPC# 07677



TR311BL/NK

Black Baffle with
Brushed Nickel Ring

- MR16
- UPC# 07711



TR332WH

Round White
Gimbal

- UPC# 07728



TR311BL/WH

Black Baffle with
White Ring

- MR16
- UPC# 07675





TR336WH

Die Cast White
Rotating Beacon



- MR16
- UPC# 08408

3" LOW VOLTAGE (12V) TRIMS



TR311

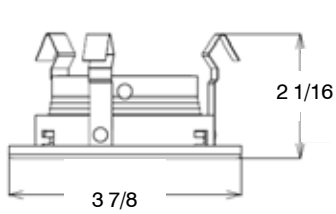



TR332

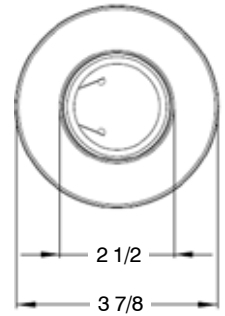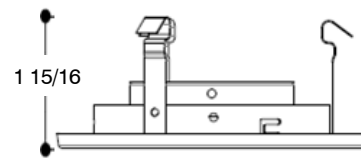

TR312

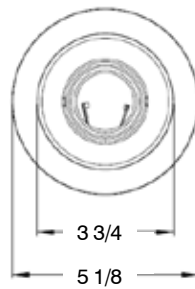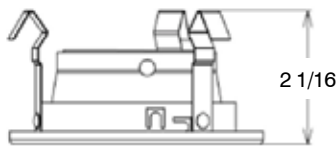

TR336

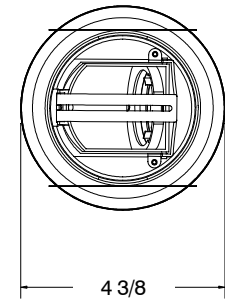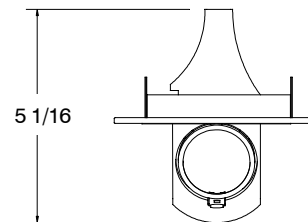






4" Low Voltage Cans & Trims


4" LOW VOLTAGE (12V) CANS & TRIMS

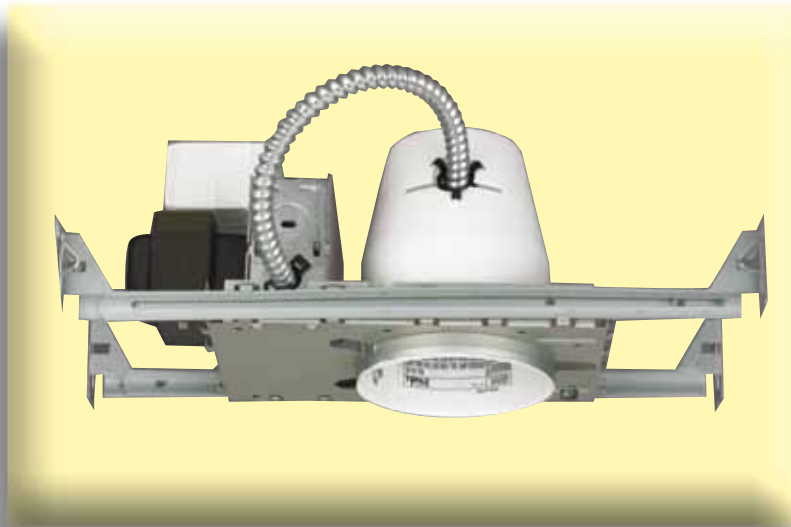

TL602

Non-IC New Work

- New construction, Non-IC applications
- 90° adjustable bar hangers (14½" - 24") with quick install nail-less end flanges
- Removable housing for J-box access
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Thermally protected
- 50W max 12V MR16 lamp
- Type "H" Transformer
- Listings: UL Feed Through and UL Damp Locations
- UPC# 02178

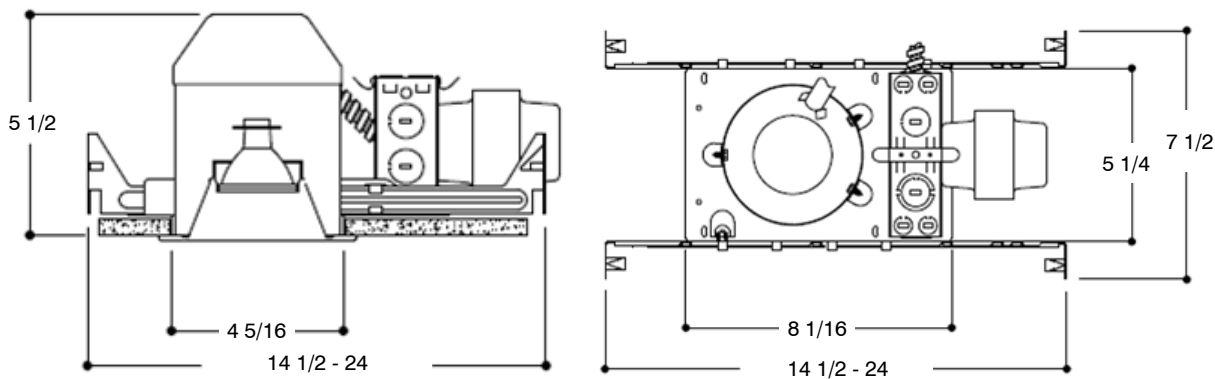

TR611WH/WH

All Steel White Baffle with White Ring

- MR16
- UPC# 02171



TR613WH

White Slot Aperture

- MR16
- UPC# 07159



TR612CL/WH

Clear Reflector with White Ring

- MR16
- UPC# 02613




TR614BL/WH

Deep Black Baffle with White Eyeball

- MR16
- UPC# 07166

For a complete listing of 4" low voltage trims, see pages 113-115.



4" LOW VOLTAGE (12V) CANS & TRIMS

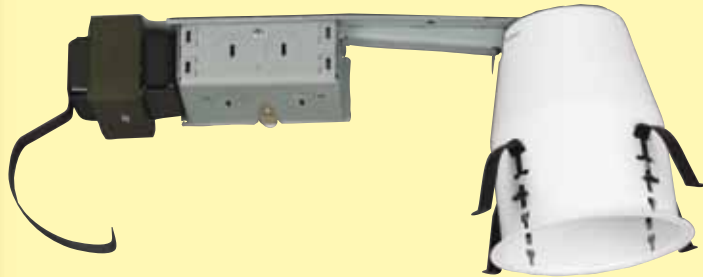

TL601

Non-IC Old Work

- Remodel construction, Non-IC applications
- Four remodel clips to secure housing
- Thermally protected
- 50W max 12V MR16 lamp
- Type "H" Transformer
- Removable housing for J-box access
- Junction box with 1/2" KO's and ROMEX® pry-outs and strain reliefs
- With unique flexible support spring for easy installation
- Listings: UL Feed Through and UL Damp Locations
- UPC# 07695

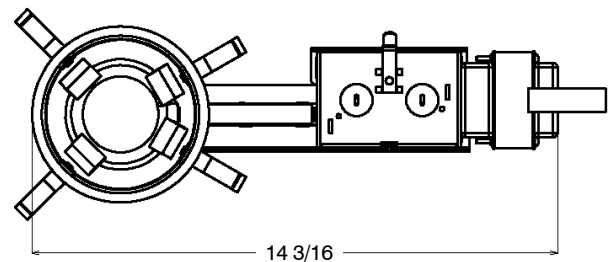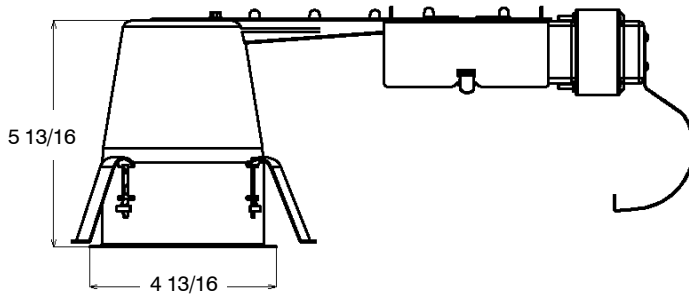

TR611BL/BL

All Steel Black Baffle with Black Ring

- MR16
- UPC# 07125



TR615WH/WH

All White Baffle Wall Wash

- MR16
- UPC# 02079



TR612GO/PB

Gold Reflector with Polished Brass Ring

- MR16
- UPC# 07150



TR622WH

White Square Gimbal with White Square Body

- MR16
- UPC# 07202

For a complete listing of 4" low voltage trims, see pages 113-115.



4" LOW VOLTAGE (12V) CANS & TRIMS



TL602/IC/AT

IC-New Work Airtight

- New construction, IC applications, airtight applications
- 90° adjustable bar hangers (13 5/8"- 25") with quick install end flanges
- Removable housing for J-box access
- Junction box with 1/2" KO's and ROMEX® pry-outs and strain reliefs
- Female Quick Connectors Installed
- Thermally protected dual wall construction
- 50W max 12V MR16 lamp
- Type "H" Transformer
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- UPC# 07528

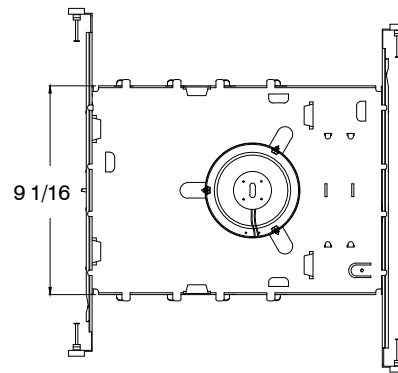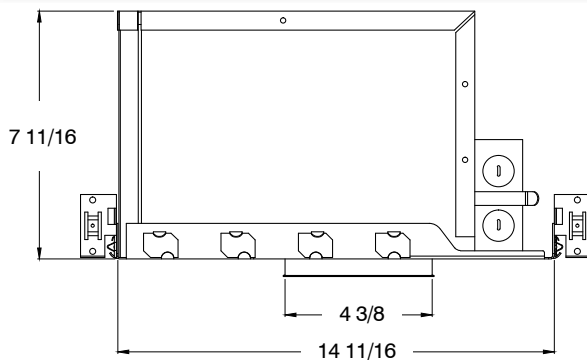

TR615WH/WH

All White Baffle Wall Wash

- MR16
- UPC# 02079



TR633CH

Round Acrylic Tiara with Chrome Center

- MR16
- UPC# 02108



TR617WH/WH

Shallow White Baffle with White Gimbal

- MR16
- UPC# 07187



TR636WH

Die Cast White Rotating Beacon

- MR16
- UPC# 02115

For a complete listing of 4" low voltage trims, see pages 113-115.



4" LOW VOLTAGE (12V) CANS & TRIMS



TL603

Non-IC New Work


- New construction, Non-IC applications
- 90° adjustable bar hangers (14½" - 24") with quick install nail-less end flanges
- Removable housing for J-box access
- Junction box with 1/2" KO's and ROMEX® pry-outs and strain reliefs
- Thermally protected
- 75W max 12V MR16 lamp
- Type "H" Transformer
- Listings: UL Feed Through and UL Damp Locations
- UPC# 02132

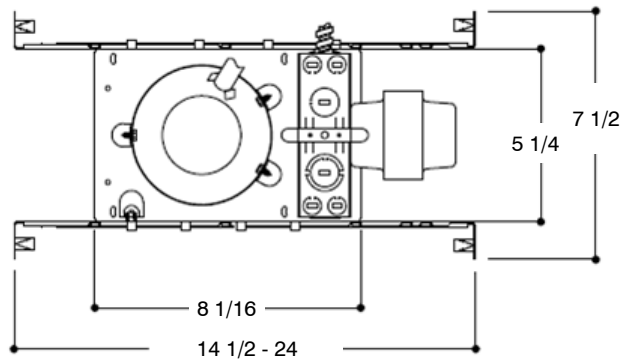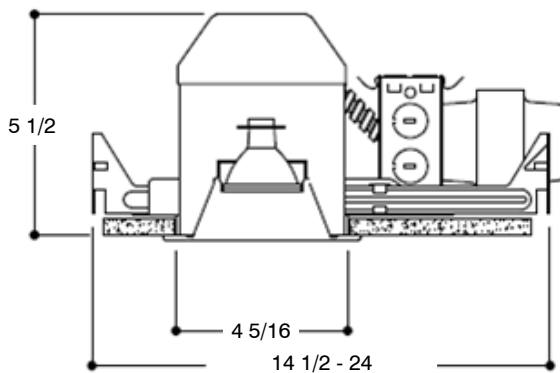

TR611BL/NK

Premium Black Bakelite Baffle with Brushed Nickel Ring

- MR16
- UPC# 07127

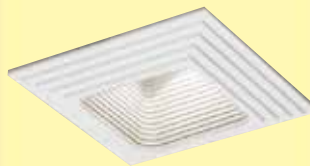

TR629WH/WH

Square White Baffle with Die Cast White Square Steppe

- MR16
- UPC# 02095



TR612CL/CH

Clear Reflector with Chrome Ring

- MR16
- UPC# 02066




TR643WH

Drop Opal Shower Trim

- MR16
- UPC# 02938

For a complete listing of 4" low voltage trims, see pages 113-115.



4" LOW VOLTAGE (12V) CANS & TRIMS

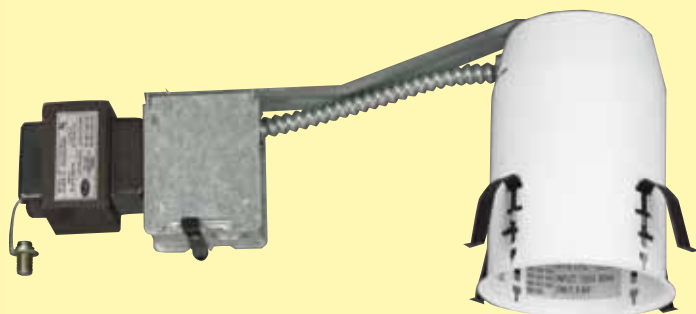

TL604

Non-IC-Old Work

- Remodel construction, Non-IC applications
- Four remodel clips to secure housing
- Junction box with 1/2" KO's and ROMEX® pry-outs and strain reliefs
- Thermally protected
- 75W max 12V MR16 lamp
- Type "H" Transformer
- Listings: UL Feed Through and UL Damp Locations
- UPC# 07093

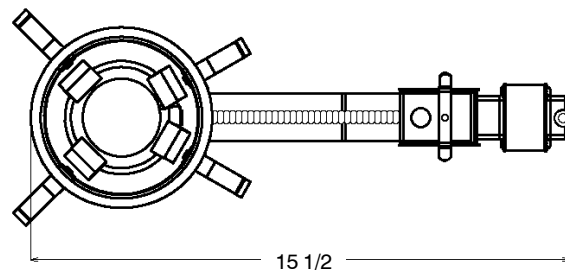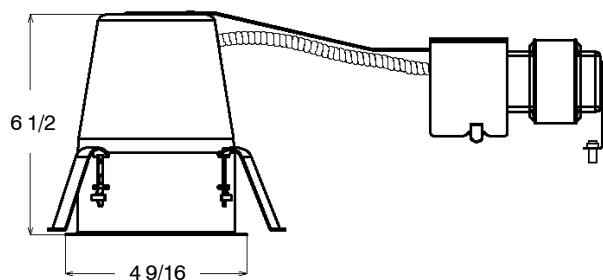

TR615WH/WH

All White Baffle Wall Wash

- MR16
- UPC# 02079



TR622CH

Chrome Square Gimbal with Chrome Square Body

- MR16
- UPC# 07199



TR617BL/NK

Shallow Black Baffle with Brushed Nickel Gimbal

- MR16
- UPC# 07178



TR642WH

Fresnel Glass with White Trim

- MR16
- UPC# 02937

For a complete listing of 4" low voltage trims, see pages 113-115.

4" LOW VOLTAGE (12V) TRIMS



TR611WH/WH

All Steel White Baffle
with White Ring

- MR16
- UPC# 02171



TR612WH/WH

White Reflector with
White Ring

- MR16
- UPC# 02256



TR611BL/WH

All Steel Black Baffle
with White Ring

- MR16
- UPC# 02170



TR612CL/WH

Clear Reflector with
White Ring

- MR16
- UPC# 02613



TR611BL/BL

All Steel Black Baffle
with Black Ring

- MR16
- UPC# 07125



TR612CL/CH

Clear Reflector with
Chrome Ring

- MR16
- UPC# 02066



TR611BL/NK

Premium Black
Bakelite Baffle with
Brushed Nickel Ring

- MR16
- UPC# 07127



TR612CL/NK

Clear Reflector with
Brushed Nickel Ring

- MR16
- UPC# 07145



TR611SCH

Premium Satin
Chrome Bakelite
Baffle with
Satin Chrome Ring

- MR16
- UPC# 02948



TR612GO/PB

Gold Reflector with
Polished Brass Ring

- MR16
- UPC# 07150

4" LOW VOLTAGE (12V) TRIMS



TR613WH

White Slot Aperture

- MR16
- UPC# 07159



TR617WH/WH

Shallow White Baffle
with White Gimbal

- MR16
- UPC# 07187



TR613BL

Black Slot Aperture

- MR16
- UPC# 07156



TR617BL/NK

Shallow Black Baffle
with Brushed Nickel
Gimbal

- MR16
- UPC# 07178



TR614WH/WH

Deep White Baffle
with White Eyeball

- MR16
- UPC# 02172



TR622WH

White Square Gimbal
with White Square
Body

- MR16
- UPC# 07202



TR614BL/WH

Deep Black Baffle
with White Eyeball

- MR16
- UPC# 07166



TR622CH

Chrome Square
Gimbal with Chrome
Square Body

- MR16
- UPC# 07199



TR615WH/WH

All White Baffle
Wall Wash

- MR16
- UPC# 02079



TR622NK

Nickel Square Gimbal
with Nickel
Square Body

- MR16
- UPC# 07201

4" LOW VOLTAGE (12V) TRIMS




TR626WH/WH

Premium Bakelite
White Baffle with
Square White Coilex
• MR16
• UPC# 02092



TR633CH

Round Acrylic Tiara
with Chrome Center
• MR16
• UPC# 02108

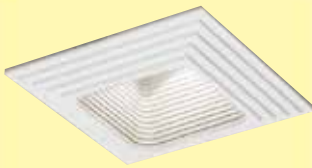

TR629WH/WH

Square White Baffle
with Die Cast
White Square Steppe
• MR16
• UPC# 02095



TR636WH

Die Cast White
Rotating Beacon
• MR16
• UPC# 02115



TR632WH

Round White
Gimbal
• MR16
• UPC# 02101



TR642WH

Fresnel Glass with
White Trim
• MR16
• UPC# 02937



TR632NK

Round Brushed
Nickel Gimbal
• MR16
• UPC# 07249




TR643WH


Drop Opal
Shower Trim
• MR16
• UPC# 02938

4" LOW VOLTAGE (12V) TRIMS


TR611

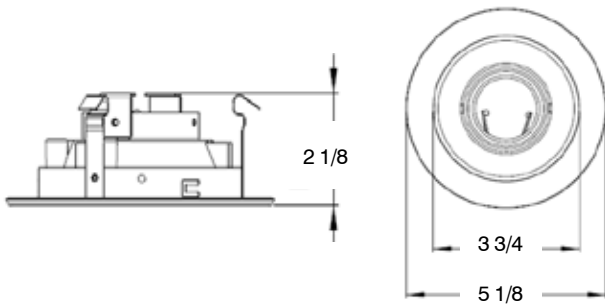


TR615

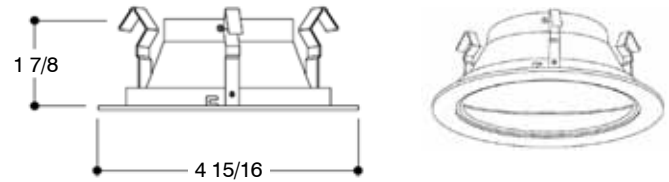


TR612

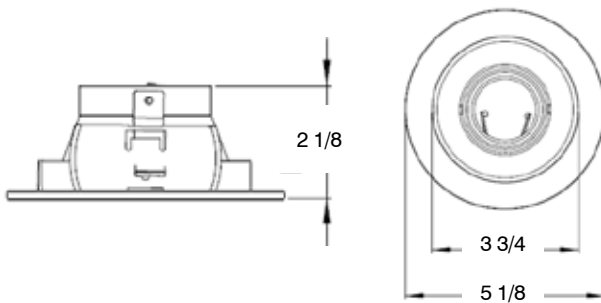


TR617

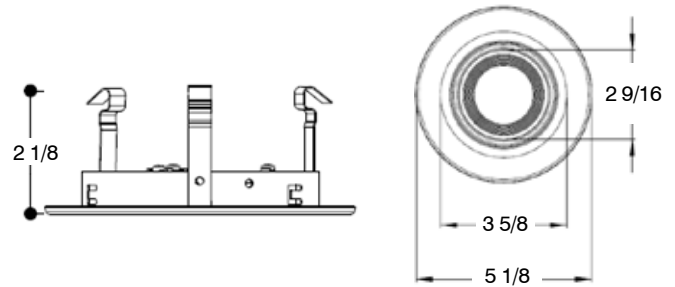


TR613

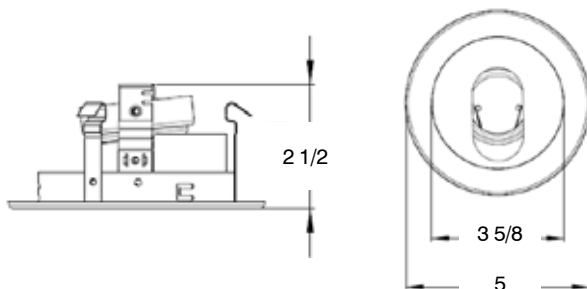


TR622

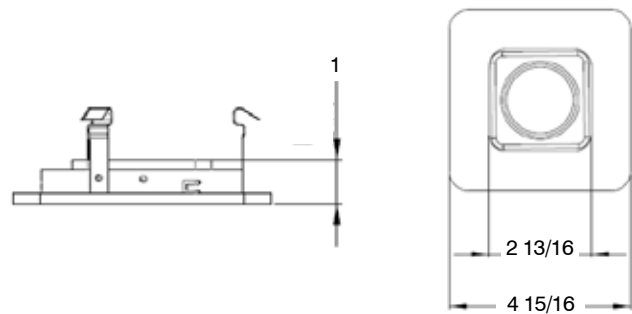

TR614

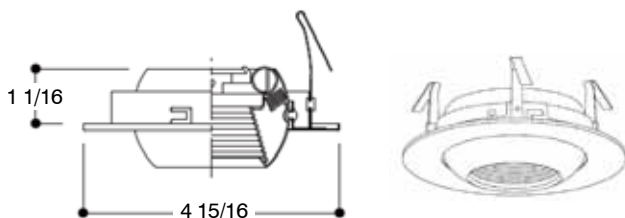


TR626

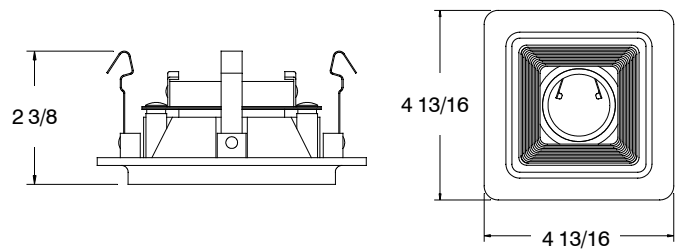


4" LOW VOLTAGE (12V) TRIMS


TR629

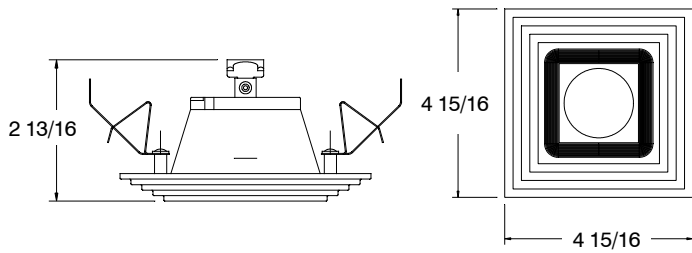


TR636

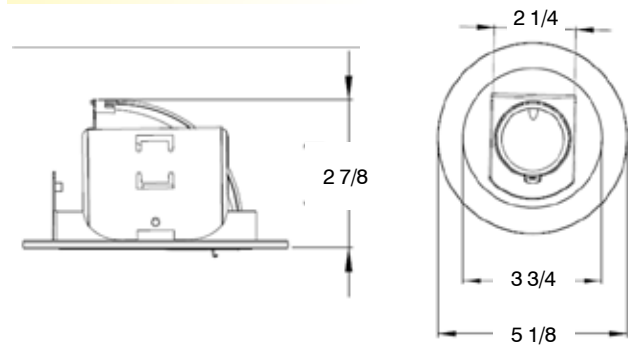


TR632

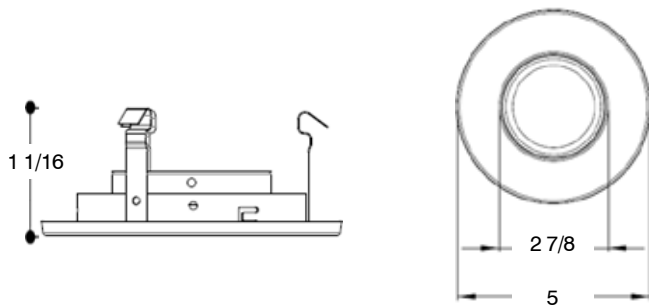


TR642

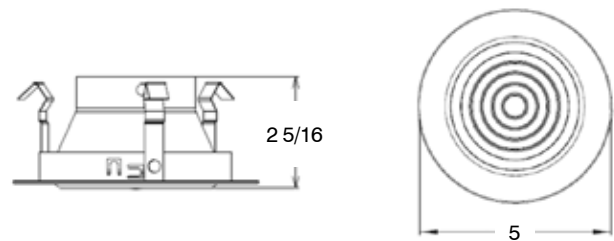


TR633

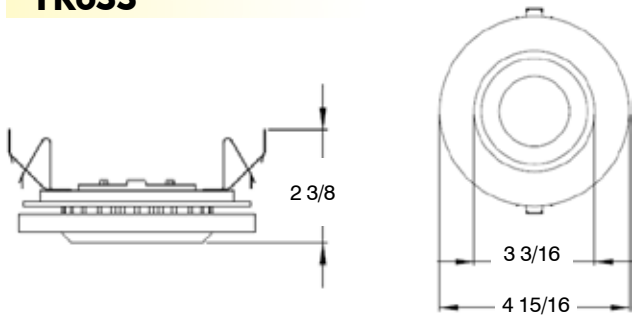

TR643

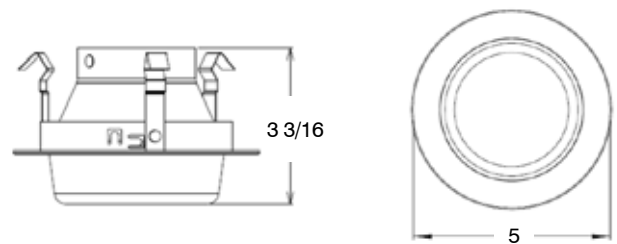



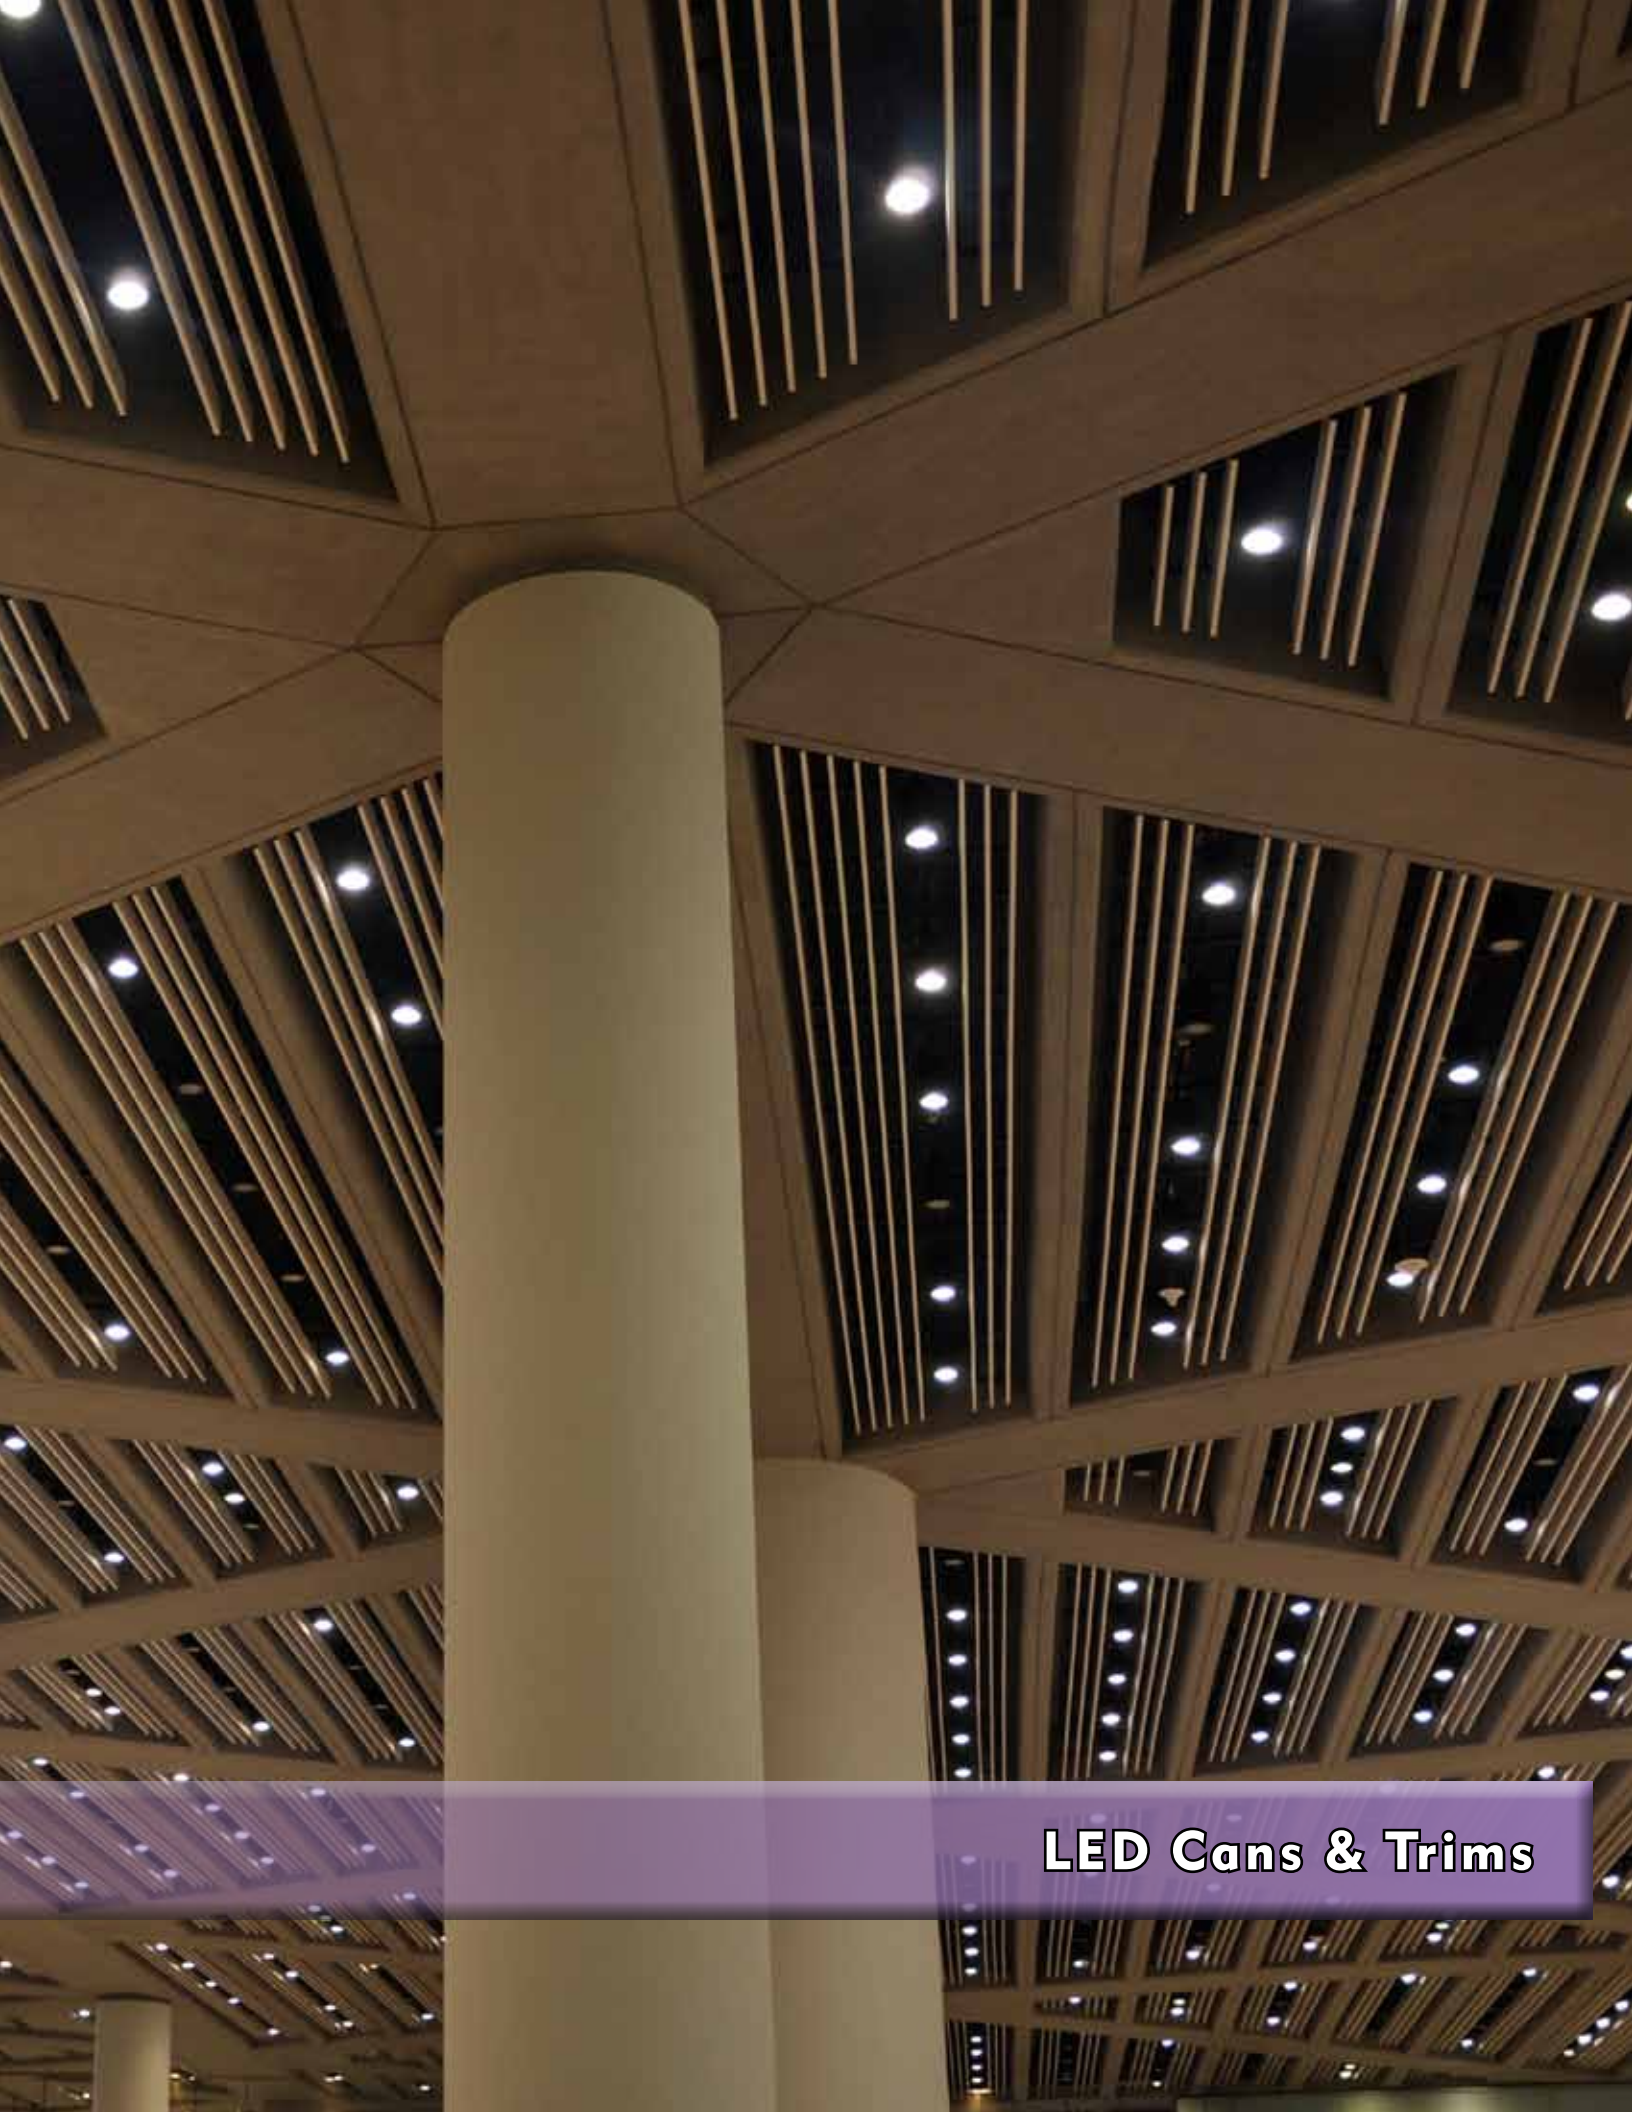

LED Cans & Trims



6" LED CANS & TRIMS



ICSLED16/AT/6

New Work Dimmable IC/AT

- 6" Housing and 16W Driver only (LED module and trim assemblies listed on page 121)
- For new construction, IC applications, airtight applications
- Telescoping bar hangers (13 5/8" - 25") can be adjusted by 90° on the plaster frame, are notched for T-bar ceilings and furnished with pre-installed, captive nails
- 120-240V, Class 2, 700mA constant current driver installed on J-box
- Removable housing for J-box and driver access
- 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Wet Locations
- UPC# 09043

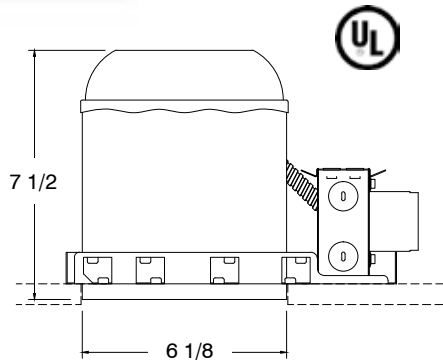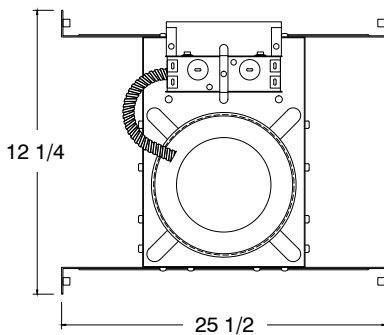



CREE 
LEDs
 CREE® XLAMP® XP-E LEDs



ICRLD16/AT/6


Old Work Dimmable IC/AT

- 6" Housing and 16W Driver only (LED module and trim assemblies listed on page 121)
- Remodel construction, IC applications, airtight applications
- Four remodel clips to secure housing
- 120-240V, Class 2, 700mA constant current driver installed on J-box
- 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Wet Locations
- UPC# 09054

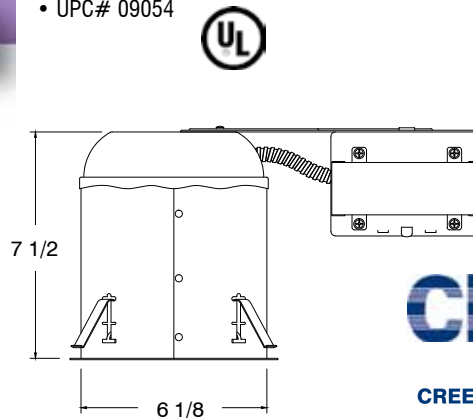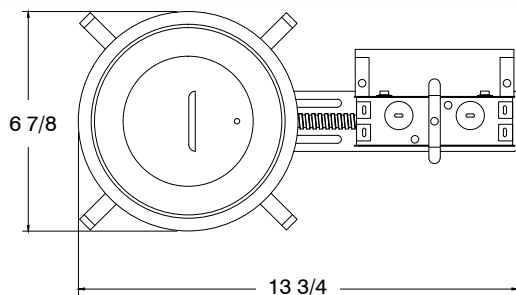

CREE 
LEDs
 CREE® XLAMP® XP-E LEDs

6" 16 WATT LED MODULE AND TRIM ASSEMBLIES

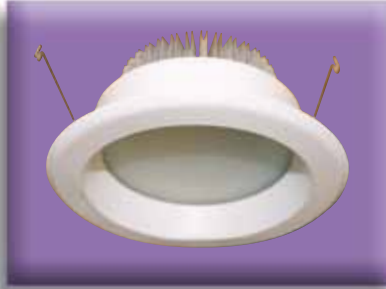

TRLED630WH/WH (Shown)

White Reflector and White Ring, 3000K

• UPC# 09059

TRLED630MA/MA

Matte Aluminum Reflector and Ring, 3000K

• UPC# 09060

TRLED630SN/SN

Satin Nickel Reflector and Ring, 3000K

• UPC# 09061

TRLED640WH/WH

White Reflector and Ring, 4000K

• UPC# 09062

TRLED640MA/MA

Matte Aluminum Reflector and Ring, 4000K

• UPC# 09063

TRLED640SN/SN

Satin Nickel Reflector and Ring, 4000K

• UPC# 09064



TRLED631WH (Shown)

Shallow Trim with White Ring, 3000K

• UPC# 09045

TRLED631SN

Shallow Trim with Satin Nickel Ring, 3000K

• UPC# 09065

TRLED641WH

Shallow Trim with White Ring, 4000K

• UPC# 09066

TRLED641SN

Shallow Trim with Satin Nickel Ring, 4000K

• UPC# 09067



TRLED633WH/WH (Shown)

White Baffle with White Ring, 3000K

• UPC# 09046

TRLED633BL/WH

Black Baffle with White Ring, 3000K

• UPC# 09068

TRLED633SN/SN

Satin Nickel Baffle with Satin Nickel Ring, 3000K

• UPC# 09069

TRLED643WH/WH

White Baffle with White Ring, 4000K

• UPC# 09070

TRLED643BL/WH

Black Baffle with White Ring, 4000K

• UPC# 09071

TRLED643SN/SN

Satin Nickel Baffle with Satin Nickel Ring, 4000K




• UPC# 09072



- Aluminum heat sink and circuit board for optimal heat dissipation
- 16 1 Watt high power LED's
- 900 lumens fixture output
- Dimmable from 100% - 10% with most 0-10V dimmers

- CCT 3000K (630 Series)
- CCT 4000K (640 Series)
- CRI 82
- UL listed for Wet Locations

- Frosted lens for even, glare-free illumination

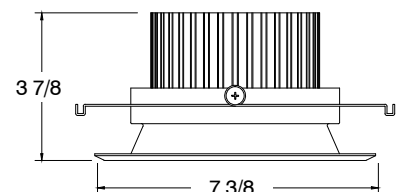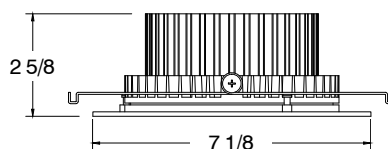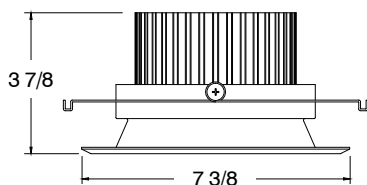



4" LED CANS & TRIMS



ICSLED10/AT/4

New Work Dimmable IC/AT

- 4" Housing and 10W Driver only (LED module and trim assemblies listed on page 123)
- For new construction, IC applications, airtight applications
- Telescoping bar hangers (13 5/8" - 25") can be adjusted by 90° on the plaster frame, are notched for T-bar ceilings and furnished with pre-installed, captive nails
- 120-240V, Class 2, 350mA constant current driver installed on J-box
- Removable housing for J-box and driver access
- 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Wet Locations
- UPC# 09047

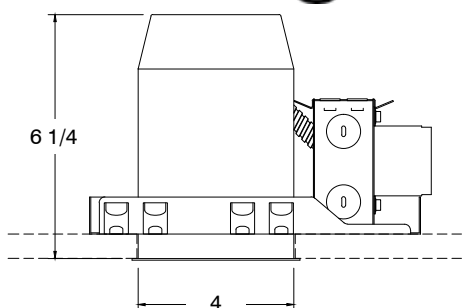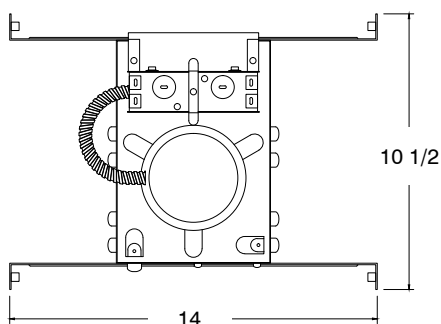



CREE 
LEDs
CREE® XLAMP® XP-E LEDs



ICRLED10/AT/4

Old Work Dimmable IC/AT

- 4" Housing and 10W Driver only (LED module and trim assemblies listed on page 123)
- Remodel construction, IC applications, airtight applications
- Four remodel clips to secure housing
- 120-240V, Class 2, 350mA constant current driver installed on J-box
- 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Wet Locations
- UPC# 09053

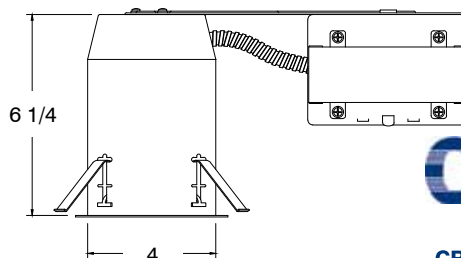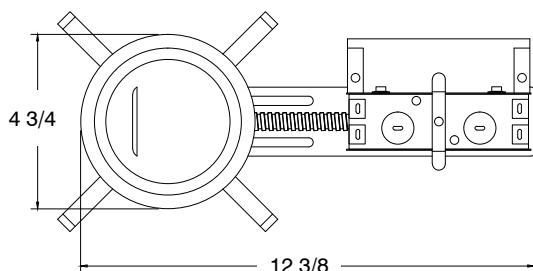

CREE 
LEDs
CREE® XLAMP® XP-E LEDs

4" 10 WATT LED MODULE AND TRIM ASSEMBLIES



TRLED430WH/WH (Shown)

White Reflector and White Ring, 3000K

• UPC# 09075

TRLED430MA/MA

Matte Aluminum Reflector and Ring, 3000K

• UPC# 09076

TRLED430SN/SN

Satin Nickel Reflector and Ring, 3000K

• UPC# 09077

TRLED440WH/WH

White Reflector and Ring, 4000K

• UPC# 09078

TRLED440MA/MA

Matte Aluminum Reflector and Ring, 4000K


• UPC# 09079

TRLED440SN/SN

Satin Nickel Reflector and Ring, 4000K

• UPC# 09080

- Aluminum heat sink and circuit board for optimal heat dissipation
- 10 1 Watt high power LED's
- 500 lumens fixture output
- Dimmable from 100% - 10% with most 0-10V dimmers

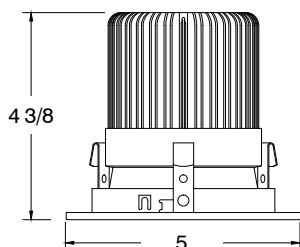

TRLED431WH (Shown)

Shallow Trim with White Ring, 3000K

• UPC# 09049

TRLED431SN

Shallow Trim with Satin Nickel Ring, 3000K

• UPC# 09081

TRLED441WH


Shallow Trim with White Ring, 4000K

• UPC# 09082

TRLED441SN

Shallow Trim with Satin Nickel Ring, 4000K

• UPC# 09083

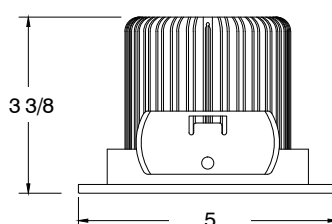

TRLED433WH/WH (Shown)

White Baffle with White Ring, 3000K

• UPC# 09050

TRLED433BL/WH

Black Baffle with White Ring, 3000K

• UPC# 09084

TRLED433SN/SN

Satin Nickel Baffle with Satin Nickel Ring, 3000K

• UPC# 09085

TRLED443WH/WH

White Baffle with White Ring, 4000K

• UPC# 09086

TRLED443BL/WH

Black Baffle with White Ring, 4000K


• UPC# 09087

TRLED443SN/SN


Satin Nickel Baffle with Satin Nickel Ring, 4000K

• UPC# 09088

- Frosted lens for even, glare-free illumination

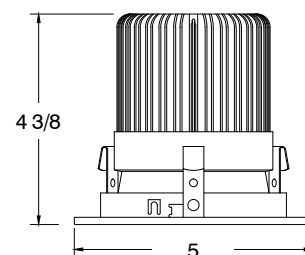



2 X 26 WATT HORIZONTAL MOUNT 8" CFL EMERGENCY CAN & TRIMS

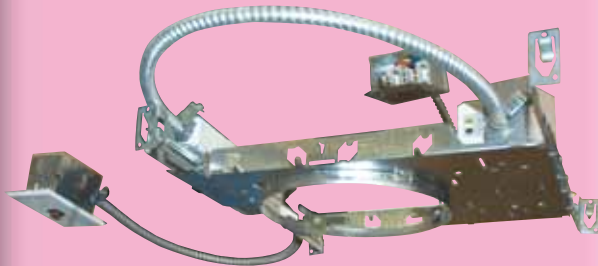

S226H/EM

New Work 2 X 26 Watt Horizontal Mount CFL
Emergency Recessed Fixture with 120-277V
HPF Electronic Ballast and 90 Minute Standby
Capacity

- New Construction, Non-IC applications
- Completely assembled and wired with Test Switch and Charge Light on separate junction box with white trim plate
- Ni-Cad standby battery will power 1x13-42W lamp or 2x13-26W lamps for 90 minutes
- 90° Adjustable telescoping bar hangers (13 5/8" - 24") with quick install Nail-Less end flanges
- Junction box has five 1/2" KO's and two combination 1/2" and 3/4" KO's with ROMEX® pry-outs and strain reliefs
- Thermally Protected
- Listings: UL Feed Through and UL Dry Locations
- UPC# 08628

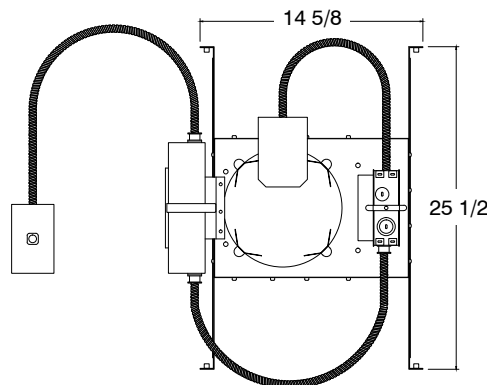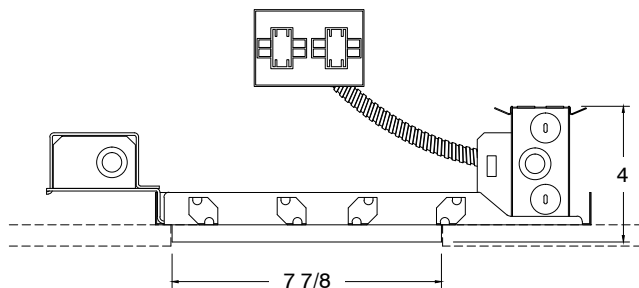

530CL/WH

Clear Reflector
with White Ring
• UPC# 04028



533WH/WH

Fresnel Glass
Lens with White
Baffle and White
Ring
• UPC# 04032



532CL/WH

Clear Reflector
with White
Baffle and
White Ring
• UPC# 04031




534CL/WH

Louvered Reflector
with White Ring
• UPC# 02929

For a complete listing of 8" trims, see page 47.



1 X 26 WATT VERTICAL MOUNT 6" CFL EMERGENCY CAN & TRIMS

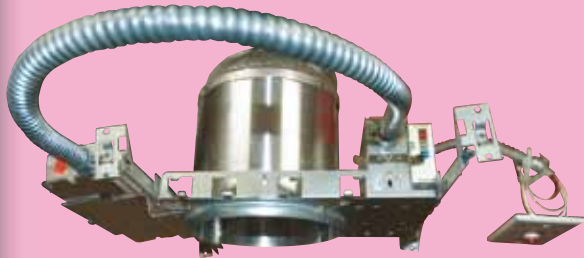

ICSC126AT/V6/EM

New Work 1 X 26 Watt Vertical Mount CFL
Emergency Recessed Fixture with 120-277V
HPF Electronic Ballast and 90 Minute Standby
Capacity

- New Construction, Insulation Contact and Airtight Applications
- Completely assembled and wired with Test Switch and Charge Light with white trim plate
- Ni-Cad standby battery will power 1x13-26W lamp or 2x13-26W lamps for 90 minutes
- 90° Adjustable telescoping bar hangers (13 5/8" - 24") with quick install end flanges
- Junction box has seven 1/2" KO's with ROMEX® pry-outs and strain reliefs
- Thermally Protected
- Listings: UL Feed Through and UL Dry Locations
- UPC# 09058

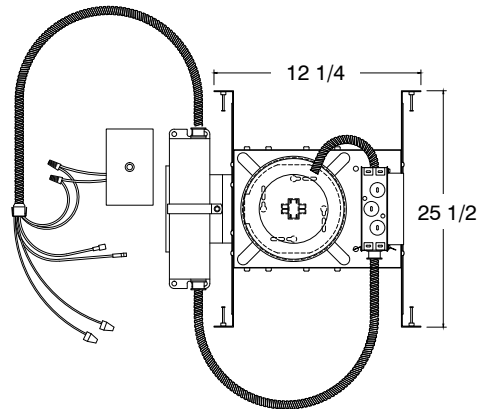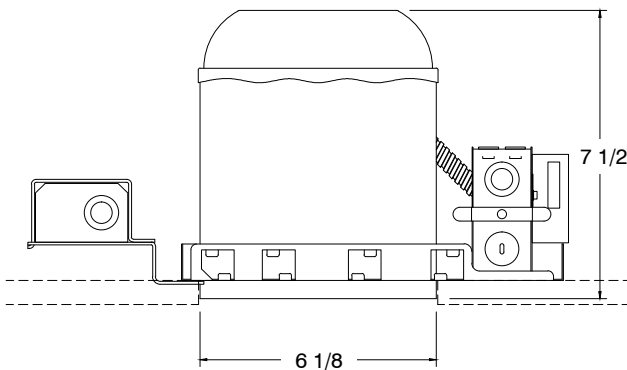

516WH/WH
White Baffle,
White Wall Wash
• UPC# 03051



520CL/WH
Clear Open
Reflector with
White Ring
• UPC# 04009



513WH
Fresnel Glass Lens
with White Ring
Shower Trim
• UPC# 02446



526WH/WH/F
Frosted Glass Lens
with White Baffle
and White Ring
• UPC# 09022

For a complete listing of 6" trims, see pages 31 and 32.





Accessories

ACCESSORIES



Universal Hanger Bars

Misc 101

Universal Hanger Bar
(1 Side)

• UPC# 06208



Clips

Misc 106

Universal Remodel
Clips (set)

• UPC# 06213



Sockets

Misc 102

Base Plate with
Removable Socket

• UPC# 06209



Sockets

Misc 129

GU10 Socket

• UPC# 08445



Sockets

Misc 103

MR16 Socket with
Shield

• UPC# 06210



Socket Adapter

WD-E26/GU24

Socket Adapter
(E26-GU24)

• UPC# 09042



Springs

Misc 104

Coil Spring

• UPC# 06211



Socket Extensions

WD-E26/E26

Ceramic Extension
Socket

(E26-E26)

• UPC# 09043



Springs

Misc 105

Torsion Spring

• UPC# 06212



Socket Extensions

WD2

Phenolic Extension
Socket

(E26-E26)

• UPC# 07432


ACCESSORIES



Rings

Misc 108

8.5" White Ring
• UPC# 06215

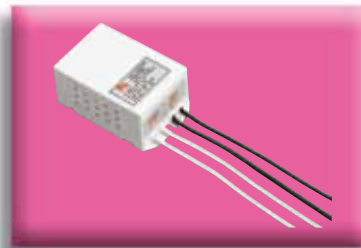

Transformers

Misc 122


120V to 12VAC/50W
Electronic Replacement
Transformer
(Not for use with recessed
cans)
• UPC# 06220



Rings

Misc 109

8.5" Black Ring
• UPC# 06216

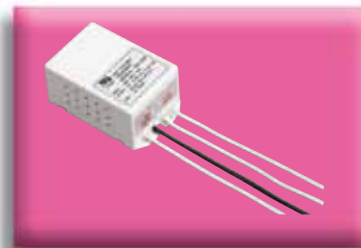

Transformers

Misc 123


120V to 12VAC/75W
Electronic Replacement
Transformer
(Not for use with recessed
cans)
• UPC# 06221



Rings

Misc 110

8.5" Chrome Ring
• UPC# 06217

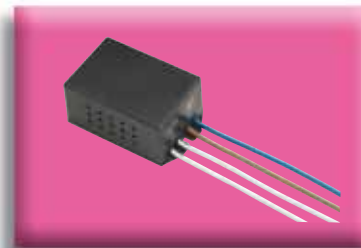

Transformers

Misc 124

220V to 12VAC/50W
Electronic Replacement
Transformer
(Not for use with recessed
cans)
• UPC# 06222



Rings

Misc 111

8.5" Brass Ring
• UPC# 06218



Ballasts

B218/120

1/2 LT PLC18/4P
Electronic
• UPC# 07738



Transformers

Misc 120

120V to 12VAC/50W
Magnetic Replacement
Transformer Mounted
on J-Box Cover
(For use with recessed cans
TL601 & TL602)
• UPC# 07645



Ballasts

B2642UNV/ME

1/2 LT PLC26/4P &
1 LT PLT32 or 42/4P
• UPC# 02568

INDEX

Catalog #	Page
501BL/BL	31,33,75,81,83,87
501BL/WH	31,33,72,78,81,83,87
501SCH	31,33,80,83,87
501WH/WH	31,33,72,79,83,87
502BL/BL	33,83,87
502BL/WH	33,74,83,87
502GW/GW/AT	25,31,33,83,87
502GW/GW/AT/FS	25,31,33,83,87
502SCH	33,83,87
502WH/WH	33,72,83,87
502WH/WH/AT	25,31,33,82,84,87
503WH	84,87
504SCH	34,75,78,79,81,87
504WH	78,80,84,87
504WH/NB	84,87
505PB	77,84,87
505SCH	87
505WH	74,84,87
506CL/CH	77,80,85,87
506CL/WH	73,75,84,87
506CL/WH/AT	84,87
506GO/PB	75,81,85,87
506GO/WH	85,87
506WH/WH	73,77,84,87
507CL/CH	88
507CL/WH	74,76,85,88
507WH/WH	85,88
509WH	31,33,36,38,39,41,78,80,85,88
509WH/F	31,33,39,41
509WH/P	26,31,33,39,41,72,77,85,88
510WH	24,26,27,28,31,33,36,38,39,41,79,85,88
511CL/WH	22,31,33,36,39,41,76,85,88
511WH/WH	31,33,73,85,88
512BL/WH	24,25,26,29,30,32,33,39,41
512WH/WH	24,27,28,30,32,33,36,39,41
513WH	23,24,29,32,33,37,38,39,41,76,79,86,88
513WH/P	33,39,41,86,88
514WH/WH	82,86,88
515WH/WH	86,88
516WH/WH	23,27,32,33,37,39,41,76,86,88
518WH	22,27,29,30,32,34,40,41,74,86,89
519WH/P/R	22,26,29,30,32,34,40,41,86,89
520CL/WH	23,28,32,34,37,40,41
522WH	73
525CL/WH	38,40,41
526WH/WH	34,37,40,41
526WH/WH/F	23,28,32,34,40,41
529WH	82,86,89
530CL/WH	44,45,46,47,124
532CL/WH	44,45,46,47
533WH/WH	44,45,46,47
534CL/WH	44,45,46,47
540CL/WH	48
541WH	47,48
542CL/WH	35
544WH/WH	35
545CL/WH	35
546CL/WH	47,48
550WH	82,86,89
560CL	22,32,34,40,41
560WH	32,34,40,41
602WH/WH	64,65,66,67,68
602WH/WH/R	14,15,16,17,18,19,65,67,68
603WH/WH	67,68
606CL/WH	64,65,66,67,68
606CL/WH/R	14,15,16,17,18,19

Catalog #	Page
613WH	67
613WH/A	64,65,66,67,68
614WH	14,15,16,17,18,19
614WH/A	14,15,16,17,18,19,67,68
614WH/F	14,15,16,17,18,19,67,68
614WH/R	64,67,68
616CL/WH	14,15,16,17,18,19
616CL/WH/R	66,67,68
702BL/WH	92,93,94,95,96,97
702WH/WH	92,93,94,95,96,97
704WH/WH	92,93,94,95,96,97
705CL/WH	92,93,94,95,96,97
B218/120	127
B264UNV/ME	127
ICR3	73
ICR3/5	81
ICR3/AT	75
ICR3/PREMIUM	77
ICR3/SLOPE	92
ICRC118AT/GU24/V4	9
ICRC126AT/GU/24/V6	30
ICRC126AT/V4	6
ICRC126AT/V5	17
ICRC126AT/V6	27
ICRC126AT/V4/HU	7
ICRC126AT/V5/HU	18
ICRC126AT/V6/HU	28
ICSC118AT/GU24/V4	8
ICSC118AT/V5	14
ICSC118AT/V6	22
ICSC12642AT/V6	26
ICSC126AT/GU24/V6	29
ICSC126AT/FL/V6	25
ICSC126AT/V4	4
ICSC126AT/V5	15
ICSC126AT/V6	23
ICSC126AT/V4/HU	5
ICSC126AT/V5/HU	16
ICSC126AT/V6/HU	24
ICSC126AT/V6/EM	125
ICS213V	37
ICS2	72
ICS2/5	80
ICS2/AT/SLOPE	96
ICS2/AT	74
ICS2/PREMIUM	76
ICS2/SLOPE	93
ICS2/SLOPE BOX	94
ICS2/SUPERSLOPE	95
ICS/AT/FL	82
ICSLED16/AT/6	120
ICRLED16/AT/6	120
ICSLED10/AT/4	122
ICRLED10/AT/4	122
Misc 101	126
Misc 102	126
Misc 103	126
Misc 104	126
Misc 105	126
Misc 106	126
Misc 108	127
Misc 109	127
Misc 110	127
Misc 111	127
Misc 120	127
Misc 122	127

INDEX

Catalog #	Page	Catalog #	Page
Misc 123.....	127	TR643WH.....	111,115,117
Misc 124.....	127	TR811BL/BL.....	56,59
Misc 129.....	126	TR811BL/WH.....	56,59
R3/5.....	79	TR811WH/PB.....	56,59
S113V.....	36	TR811WH/WH.....	52,56,59
S132V.....	35	TR812BL/WH.....	52,57,59
S142V.....	48	TR812CL/WH.....	56,59
S2/5.....	78	TR812GO/WH.....	57,59
S213H.....	38	TR812WH/WH.....	56,59
S218H.....	44	TR813WH.....	52,57,59
S226H.....	45	TR813WH/A.....	57,59
S226H/DIM.....	46	TR814BL.....	57,59
S226H/EM.....	124	TR814PB.....	52,58,59
S226H/SHALLOW.....	49	TR814WH.....	57,59
S242H/SHALLOW.....	49	TR815WH/WH.....	53,54,55,58,59
TL301.....	100	TR818WH.....	53,54,55,58,59
TL301/AT.....	101	TR828BL.....	53,54,55,58,59
TL302.....	102	TR828WH.....	53,54,55,58,59
TL302/IC.....	103	TR829WH.....	58,59
TL501.....	65	TR830W.....	4,6,7,10,11
TL501/IC/AT.....	66	TR831CL.....	4,6,7,10,11
TL502/IC/AT.....	64	TR832W.....	4,5,6,7,10,11
TL601.....	109	TR834CL/WH.....	4,5,6,7,8,9,10,11
TL602.....	108	TR836.....	5,8,9,10,11
TL602/IC/AT.....	110	TR838W.....	5,10,11
TL603.....	111	TR840GU/DWB.....	8,9,10,11
TL604.....	112	TR840GU/DCR.....	8,9,10,11
TL807.....	52	TRLED630WH/WH.....	121
TL807GU.....	61	TRLED630MA/MA.....	121
TL809.....	53	TRLED630SN/SN.....	121
TL809GU.....	60	TRLED640WH/WH.....	121
TL809/IC.....	54	TRLED640MA/MA.....	121
TL809/IC/AT.....	55	TRLED640SN/SN.....	121
TR311BL/NK.....	100,101,102,103,104,105	TRLED631WH.....	121
TR311BL/WH.....	102,104,105	TRLED631SN.....	121
TR311WH/WH.....	100,102,103,104,105	TRLED641WH.....	121
TR312CL/WH.....	100,101,102,103,104,105	TRLED641SN.....	121
TR332WH.....	101,104,105	TRLED633WH/WH.....	121
TR336WH.....	100,101,103,104,105	TRLED633BL/WH.....	121
TR611BL/BL.....	60,109,113,116	TRLED633SN/SN.....	121
TR611BL/NK.....	111,113,116	TRLED643WH/WH.....	121
TR611BL/WH.....	113,116	TRLED643BL/WH.....	121
TR611SCH.....	113,116	TRLED643SN/SN.....	121
TR611WH/WH.....	60,108,113,116	TRLED430WH/WH.....	121
TR612CL/CH.....	111,113,116	TRLED430MA/MA.....	121
TR612CL/NK.....	113,116	TRLED430SN/SN.....	121
TR612CL/WH.....	108,113,116	TRLED440WH/WH.....	121
TR612GO/PB.....	109,113,116	TRLED440MA/MA.....	121
TR612WH/WH.....	113,116	TRLED440SN/SN.....	121
TR613BL.....	114,116	TRLED431WH.....	121
TR613WH.....	108,114,116	TRLED431SN.....	121
TR614BL/WH.....	108,114,116	TRLED441WH.....	121
TR614WH/WH.....	114,116	TRLED441SN.....	121
TR615WH/WH.....	109,110,112,114,116	TRLED433WH/WH.....	121
TR617BL/NK.....	112,114,116	TRLED433BL/WH.....	121
TR617WH/WH.....	60,110,114,116	TRLED433SN/SN.....	121
TR622CH.....	112,114,116	TRLED443WH/WH.....	121
TR622NK.....	114,116	TRLED443BL/WH.....	121
TR622WH.....	109,114,116	TRLED443SN/SN.....	121
TR626WH/WH.....	60,115,116	WD-E26/E26.....	126
TR629WH/WH.....	61,111,115,117	WD-E26/GU24.....	126
TR632NK.....	61,115,117	WD2.....	126
TR632WH.....	115,117		
TR633CH.....	61,110,115,117		
TR636WH.....	61,110,115,117		
TR642WH.....	112,115,117		

CROSS REFERENCE

DESCRIPTION	TOPAZ	HALO	JUNO	LIGHTOLIER	ATLITE	CAPRI	PROGRESS
6-1/4" LINE VOLTAGE CANS							
Universal IC/NON-IC New Work	ICS2	H7ICT	IC22	1004IC	WIC2	R10IC	P87
Universal IC/NON-IC Old Work	ICR3	H7RICT	IC122R	1104ICR	WRIC2	RR10IC	P187
Universal IC/NON-IC Shallow New Work	ICS2/5"	H27ICT	IC21	1004SIC	W12	R9	P86
Universal IC/NON-IC Shallow Old Work	ICR3/5"	H27RITC	IC21R	1104SICR	WR12	RR9	P186

6-1/4" LINE VOLTAGE TRIMS

BR30 PAR30 Stepped Baffle	501	310	24	1005	W48	RM30	P8075
BR40 PAR38 Stepped Baffle	502	410	25	1076	W49	RM40	P8066
BR30 PAR30 Eyeball	503	78	229	1082	W76	R18	P8077
BR30 PAR30 Open	504	301	250	1007	W68	R30	P8072
BR40 PAR38 Open	505	401	251	1071	----	----	----
BR30 PAR30 Reflector	506	426	27	1008	WS52	RC30	P8068
BR40 PAR38 Reflector	507	427	----	1010	----	RMS40	P8068
A19 Albalite Glass Lens	509	70	20	1128	W72	SH12IC	P8060
A19 Wall Washer	510	303	261	1085	W50	RB45	P8052
BR40 PAR38 Deep Reflector	511	404	231	1445	----	----	----
BR40 PAR38 Deep Stepped Baffle	512	409	230	1449	----	----	----
A19 Fresnel Glass Lens	513	73	22	1171	W71	R13	P8011
BR30 PAR30 Stepped Eyeball	514	417	229	1122	----	----	P8079
BR30 PAR30 Regressed Eyeball	515	418	248	----	W85	RM38	P8078
BR40 Wall Washer	516	423	261	10	W50	R25	P8052

5" LINE VOLTAGE CANS

Non-IC Old Work (75W)	TL501	H5RT	TC20R	----	WRICATS(IC)	CR5	P185
Non-IC New Work (75W)	TL502	H5T	TC20	----	WICATS	CRR5	P85

5" LINE VOLTAGE TRIMS

BR30 PAR30 Step Baffle	602	5010	205	----	WS13	R238	P8175
BR30 PAR30 Reflector	606	5020	207	----	----	R130	P8172

CROSS REFERENCE

DESCRIPTION	TOPAZ	HALO	JUNO	LIGHTOLIER	ATLITE	CAPRI	PROGRESS
-------------	-------	------	------	------------	--------	-------	----------

4" LINE VOLTAGE CANS

Par20 Old Work	TL807	H99RT	TCI	1002FH/R	LR1	RR4	P832
Par20 New Work	TL809	H99T	TCIR	1002PI	L1	R4	P830

4" LINE VOLTAGE TRIMS

BR20 PAR20 Step Baffle	TR811	993	14	1076	L33	R401	P8044
BR20 PAR20 Reflector	TR812	999	17	1045	L35	R402	P8043
BR20 PAR20 Eyeball	TR814	998	19	1082	L45	R408	P8046
BR20 PAR20 Wall Wash	TR815	992	16	1035	----	----	P8047
BR20 PAR20 Pin Hole	TR818	990	13	2011	----	----	P8042

6 1/4" LINE VOLTAGE CANS For Sloped Ceilings

IC Direct New Work	ICS2/SLOPE	H47ICT	IC926	----	----	CS6SSIC	P645
IC Direct Old Work	ICR3/SLOPE	----	TC926R	----	----	CS6R	P745

6 1/4" LINE VOLTAGE TRIMS For Sloped Ceilings

Step	702	498	610	1154	----	SB4	P8004
Reflector	705	----	615	1154	----	SR4	----

4" LOW VOLTAGE (12V) CANS

Non-IC Old Work	TL601	H1499RT	TC44R	2000LVR	2R1	LVERTX	P818
Non-IC New Work	TL602	H1499T	TC44	2000LV	Z1	LVIEX	P816

4" LOW VOLTAGE (12V) TRIMS

Step Baffle	TR611	1493	444	2005	Z33	LC121	P8037
Reflector	TR612	1421	447	2013	Z35	LC122	P8056
Slot Aperture	TR613	1420	445	2006	Z52	LC119	P8039
Deep Baffle with Eyeball	TR614	1498	448	2022LV	Z45	LC108	P8057
Wall Wash	TR615	----	446	----	Z50	----	P8045
Gimbal	TR617	----	----	----	Z85	----	----

PM-CAT '11 RECESSED

\$5.00



Friendly Service ... Powerful Solutions

Manufacturers of:

- Recessed Downlighting and Fixtures
- Lamps and Lighting Products
- Fittings and Electrical Products

New York:

925 Waverly Avenue
Holtsville, NY 11742

Phone: 800.666.2852
631.758.5507

Fax: 631.758.8026

Email: sales@topaz-usa.com

California:

225 Parkside Drive
San Fernando, CA 91340

Phone: 888.551.2852
818.838.3123

Fax: 888.690.BULB

Email: saleswest@topaz-usa.com

Florida:

2020 West 26th Street, Suite C
Jacksonville, FL 32209

Phone: 800.338.2852

Fax: 772.778.5386

Email: saleseast@topaz-usa.com

www.topaz-usa.com