

Company Profile

TRACO ELECTRONIC AG is a Swiss company with headquarter based in Zurich, Switzerland. As a leading power supply specialist with more than 30 years of experience we are dedicated to the design and manufacturing of high quality DC/DC and AC/DC power conversion products. We are marketing our products worldwide under the registered trademark **TRACOPOWER**.

Our mission is to provide customers with an optimal power supply solution in terms of performance, quality and cost for their specific application.

Product Range

Our product range is focused on five market segments for which we can offer one of the most comprehensive programs of standard products:

- ▶ Low Power DC/DC Converter Modules, 1–250 W
- ▶ Encapsulated AC/DC Power Modules, 4–60 W
- ▶ AC/DC Power Supplies (open frame / encased), 10–1000 W
- ▶ Industrial Power Supplies for DIN–Rail Mounting, 15–1000 W
- ▶ High Power AC/DC and DC/DC Converter up to 22 kW

Detailed technical data of all products can be downloaded from our website: **www.tracopower.com**

Quality Management

All our products are 100 % ATE tested prior to shipment to guarantee full compliance to published specifications. TRACO's global manufacturing facilities are certified to ISO 9001/9002 to assure that quality management systems used in design, production and testing meet highest standards.

TRACO's commitment to quality is supported by a full **3 year product warranty**.

Technical Support

Our experienced team of application engineers is ready to answer any question concerning a TRACOPOWER product, from product specifications to applicable safety standards. If you have a technical problem or question please e-mail your request to **techsupport@traco.ch**.

Availability

The majority of products in this selection guide are available ex-stock and can be shipped from our central warehouse in Zurich within 48 hours. For price and delivery information please contact our headquarters in Switzerland or our franchised distributors. More information on our sales and distribution network you can find on our website.

Product Index

DC/DC Converters		SMD-Package 1 to 15 W		Page
		TES-1 Series	1 W unregulated Output	6
		TES-1V Series	1 W unregulated Output, I/O-Isolation 3000 V	7
		TES-2H Series	2 W unregulated Output	8
		TES-2M Series	2 W I/O-Isolation 4000 VAC, Medical Safety	9
NEW		TDR-2SM Series	2 W regulated Output, 2:1 Input, high Power Density	10
NEW		TDR-2WISM Series	2 W regulated Output, 4:1 Input, high Power Density	11
		TES-2N Series	2 W regulated Output, 2:1 Input Range	12
NEW		TDR-3SM Series	3 W regulated Output, 2:1 Input Range, high Power Density	13
NEW		TDR-3WISM Series	3 W regulated Output, 4:1 Input Range, high Power Density	14
NEW		THL-3WISM Series	3 W regulated Output, 4:1 Input Range, high Power Density	15
		TES-3 Series	3 W regulated Output, 2:1 Input Range	16
		TES-3WI Series	3 W regulated Output, 4:1 Input Range	17
		TES-5 Series	5 W regulated Output, 2:1 Input Range	18
		TES-5WI Series	5 W regulated Output, 4:1 Input Range	19
NEW		THL-6WISM Series	6 W regulated Output, 4:1 Input Range, high Power Density	20
		TON-15 Series	15 W regulated Output, 2:1 Input Range	54
		TON-15WI Series	15 W regulated Output, 4:1 Input Range	55
SIP-Package 1 to 3 W				
		TMA / TME Series	1 W unregulated Output	21
NEW		TRA-1 Series	1 W semi-regulated Output	22
		TMV Series	1 W unregulated Output, I/O-Isolation 3000 V	23
NEW		TRV-1 Series	1 W semi-regulated Output, I/O-Isolation 3000 V	24
		TMH Series	2 W unregulated Output	25
NEW		TMR-2E Series	2 W regulated Output, 2:1 Input Range	26
		TMR-2 Series	2 W regulated Output, 2:1 Input Range	27
		TMR-2WI Series	2 W regulated Output, 4:1 Input Range	28
		TMR-3 Series	3 W regulated Output, 2:1 Input Range	29
		TMR-3WI Series	3 W regulated Output, 4:1 Input Range	30
General Purpose 2 to 30 W				
		TEL-2 Series	2 W DIP-16 Package, 2:1 Input Range	31
		TEL-3 Series	3 W DIP-24 Package, 2:1 Input Range	32
NEW		THL-3WI Series	3 W DIP-16 Package, 4:1 Input Range	33
		TEL-5 Series	5 W DIP-24 Package, 2:1 Input Range	34
NEW		THL-6WI Series	6 W 0.8" x 0.85" Package, 4:1 Input Range	35
NEW		THL-10WI Series	10 W 1" x 1" x 0.4" Package 4:1 Input Range	36
		TEL-15 Series	15 W 2" x 1" x 0.4" Package, 2:1 Input Range	37
NEW		THL-20WI Series	20 W 1" x 1" x 0.4" Package, 4:1 Input Range	38
		TEL-30 Series	30 W 2" x 1" x 0.4" Package, 2:1 Input Range	39
High Performance, High Power Density 2 to 60 W				
NEW		TDR-2 Series	2 W DIP-14 Package, 2:1 Input Range	40
NEW		TDR-2WI Series	2 W DIP-14 Package, 4:1 Input Range	41
NEW		TDR-3 Series	3 W DIP-14 Package, 2:1 Input Range	42
NEW		TDR-3WI Series	3 W DIP-14 Package, 4:1 Input Range	43
		TEN-3 Series	3 W DIP-24 Package, 2:1 Input Range	44
		TEN-3WI Series	3 W DIP-24 Package, 4:1 Input Range	45
		TEN-5 Series	6 W DIP-24 Package, 2:1 Input Range	46
		TEN-5WI Series	6 W DIP-24 Package, 4:1 Input Range	47
		TEN-8 Series	8 W DIP-24 Package, 2:1 Input Range	48
		TEN-8WI Series (new models)	8 W DIP-24 Package, 4:1 Input Range, EN 50155	49
		TEN-10 Series	10 W 2" x 1" x 0.4" Package, 2:1 Input Range	50
		THD-12 Series	12 W DIP-24 Package, 2:1 Input Range	51
		THD-12WI Series	12 W DIP-24 Package, 4:1 Input Range	52
		TEN-12WI Series	12 W 2" x 1" x 0.4" Package, 4:1 Input Range	53
		TON-15 Series	15 W regulated Output, 2:1 Input Range, open Frame	54
		TON-15WI Series	15 W regulated Output, 4:1 Input Range, open Frame	55
NEW		THD-15N Series	15 W DIP-24 Package, 2:1 Input Range	56
NEW		THD-15WIN Series	15 W DIP-24 Package, 4:1 Input Range	57
		THN-15 Series	15 W 1" x 1" x 0.4" Package, 2:1 Input Range	58
		THN-15WI Series	15 W 1" x 1" x 0.4" Package, 4:1 Input Range	59

DC/DC Converters				
	TEN-15 Series	15 W	2" x 1" x 0.4" Package, 2:1 Input Range	60
	TEN-15WI Series	15 W	2" x 1" x 0.4" Package, 4:1 Input Range	61
NEW	THN-20 Series	20 W	1" x 1" x 0.4" Package, 2:1 Input Range	62
NEW	THN-20WI Series	20 W	1" x 1" x 0.4" Package, 4:1 Input Range	63
	TEN-20 Series	20 W	2" x 1" x 0.4" Package, 2:1 Input Range	64
	TEN-20WIN Series	20 W	2" x 1" x 0.4" Package, 4:1 Input Range	65
	TEN-25 Series	25 / 30 W	2" x 1.6" x 0.4" Package, 2:1 Input Range	66
NEW	TEN-25WI Series	25 / 30 W	2" x 1.6" x 0.4" Package, 4:1 Input Range	67
	TEN-30 Series	30 W	2" x 1" x 0.4" Package, 2:1 Input Range	68
	TEN-30WIN Series	30 W	2" x 1" x 0.4" Package, 4:1 Input Range	69
	TEN-30WI Series	30 W	2" x 1.6" x 0.4" Package, 4:1 Input Range	70
NEW	TEN-40N Series	40 W	2" x 1" x 0.4" Package, 2:1 Input Range	71
	TEN-40 Series	40 W	2" x 2" x 0.4" Package, 2:1 Input Range	72
	TEN-40WI Series	40 W	2" x 2" x 0.4" Package, 4:1 Input Range	73
	TEN-60 Series	60 W	2" x 2" x 0.4" Package, 2:1 Input Range	74
High Power Modules 75 to 250 W				
	TEP-75WI Series	75 W	2.4" x 2.3" x 0.5" Package, 4:1 Input Range	75
	TEP-100 Series	100 W	2.4" x 2.3" x 0.5" Package, 2:1 Input Range	76
	TEP-150WI Series	150 W	3.9" x 2.1" x 1.4" Package, 4:1 Input Range	77
NEW	TEP-160 Series	132 – 196 W	2.4" x 2.3" x 0.5" Package, 4:1 Input Range	78
NEW	TEP-160WI Series	132 – 156 W	2.4" x 2.3" x 0.5" Package, 2:1 Input Range	79
NEW	TEP-200 Series	165 – 255 W	2.4" x 2.3" x 0.5" Package, 4:1 Input Range	80
NEW	TEP-200WI Series	165 – 216 W	2.4" x 2.3" x 0.5" Package, 2:1 Input Range	81
Reinforced Insulation – Industrial / Medical Safety				Page
	TMV-EN Series	1 W	SIP-Package, I/O-Isolation 3000 VAC	82
	THI-2M Series	2 W	DIP-16 Package, I/O-Isolation 4000 VAC	83
	THI-2 Series	2 W	DIP-24 Package, I/O-Isolation 2500 VAC	84
	THB-3 Series	3 W	DIP-24 Package, I/O-Isolation 4000 VAC	85
	THP-3 Series	3 W	DIP-24 Package, I/O-Isolation 4000 VAC	86
	THB-6 Series	6 W	DIP-24 Package, I/O-Isolation 4000 VAC	87
Non-isolated (POL) Converters				
	TSR-1 Series	1 A	Switching Regulator, LM78xx Pinout	88
NEW	TSR-3 Series	3 A	Switching Regulator,	89
	TOS Series	6, 10, 16, 30 A	Open Frame, SMD or SIP-Package	90
High Voltage Converters				
	MHV/PHV Series	180 – 2000 VDC	Shielded Metal Case	91
Industrial Converters, DIN-Rail Mount				
	TCL-DC Series	12 – 60 W	DIN-Rail Mount	112
Industrial Converters, High Power				
	TZL Series	60 – 300 W	Metal Casing	92
	TSC Series	150 – 5000 W	19"–Plug-in Module	93
	TSC 19" Series	5 kW – 22 kW	19"–Subrack	94

DC/AC Inverters	Industrial Inverters			
	TSD Series	200 VA – 30 kVA	Sine Wave Output, 19"–Subrack	95
AC/DC Power Supplies	Open Frame Design 12 to 200 W			
	TOP-60 Series	60 W	Open Frame, 4"x 2" Format	96
	TOP-100 Series	100 W	Open Frame, 4"x 2" Format	97
	TOP-200 Series	200 W	Open Frame, 5"x 3" Format	98
	TOF Series	10 – 150 W	Open Frame, High Performance	99
	Encapsulated Modules 4 to 60 W			
	TMLM Series	4 – 20 W	PCB-Mount, Protection Class II	100
	TML Series	20 – 40 W	PCB-, Chassis-Mount, Protection Class I	101
	TMS Series	6 – 25 W	PCB-, Chassis-Mount, Protection Class I	102
	TMP Series	7 – 15 W	PCB-, Chassis-Mount, Protection Class II	103
	TMP Series	30 – 60 W	PCB-, Chassis-Mount, Protection Class II	104
	TMT Series	10 – 50 W	PCB-, Chassis-Mount, Medical Safety UL508	105
	TIW Series	4 – 12 W	Flush Box Mount	106
	Metal Enclosure 15 to 1000 W			
	TXH Series	120 – 360 W	Metal Casing, Screw Terminal Block	107
	TXL Series	15 – 1000 W	Metal Casing, Screw Terminal Block	108
	TEX Series	120 W	Field Power Supply, Waterproof Enclosure	109
	DIN-Rail Mount 15 to 960 W			
	TBL Series	15 – 150 W	Low Profile Plastic Enclosure, Protection Class II	110
	TBL-BC Series	60 W	Power Supply with Battery Controller	111
	TCL Series	24 – 240 W	Slim Profile Plastic Enclosure	112
NEW	TSPC Series	80 – 400 W	Rugged Metal Casing	113
	TSP Series	90 – 600 W	Rugged Metal Casing, High Performance	114
	TSP-3P Series	480 – 960 W	Rugged Metal Casing, 3-Phase Input	115
	TSP-WR Series	180 – 600 W	Rugged Metal Casing, wide 100–500VAC Input	116
	TIS Series	50 – 600 W	Low Profile Metal Casing	118
	Power Conversion Glossary			120

© 2010 by TRACO ELECTRONIC AG, all rights reserved

TES-1 Series ▶ 1 W

- ▶ SMD package with industry standard footprint
- ▶ Single and dual output models
- ▶ I/O isolation 1500 VDC
- ▶ Operating temperature Range $-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$
- ▶ High accuracy of pin co-planarity
- ▶ Qualified for leadfree reflow solder process
- ▶ Available in tape & reel package (500 pcs/reel)



Specifications

Line regulation	non regulated
Load regulation	+10 %/ -5% max.
Ripple & noise	<120mVpk-pk (20 MHz BW)
Short circuit protection	limited 0.5 sec.
Efficiency	80 % typ.
Operating temperature range	$-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$ above $75\text{ }^{\circ}\text{C}$ derating 4.0 %/K
I/O isolation test voltage	1500 VDC
Casing	plastic (UL 94 V-0 rated)


Models

Order code	Input voltage	Output voltage	Output current max.
TES 1-0510		3.3 VDC	300 mA
TES 1-0511		5 VDC	200 mA
TES 1-0519		9 VDC	110 mA
TES 1-0512	5 VDC $\pm 10\%$	12 VDC	84 mA
TES 1-0513		15 VDC	67 mA
TES 1-0521		$\pm 5\text{ VDC}$	$\pm 100\text{ mA}$
TES 1-0522		$\pm 12\text{ VDC}$	$\pm 40\text{ mA}$
TES 1-0523		$\pm 15\text{ VDC}$	$\pm 33\text{ mA}$
TES 1-1211		5 VDC	200 mA
TES 1-1219		9 VDC	110 mA
TES 1-1212		12 VDC	84 mA
TES 1-1213	12 VDC $\pm 10\%$	15 VDC	67 mA
TES 1-1221		$\pm 5\text{ VDC}$	$\pm 100\text{ mA}$
TES 1-1222		$\pm 12\text{ VDC}$	$\pm 40\text{ mA}$
TES 1-1223		$\pm 15\text{ VDC}$	$\pm 33\text{ mA}$
TES 1-2411		5 VDC	200 mA
TES 1-2419		9 VDC	110 mA
TES 1-2412		12 VDC	84 mA
TES 1-2413	24 VDC $\pm 10\%$	15 VDC	67 mA
TES 1-2421		$\pm 5\text{ VDC}$	$\pm 100\text{ mA}$
TES 1-2422		$\pm 12\text{ VDC}$	$\pm 40\text{ mA}$
TES 1-2423		$\pm 15\text{ VDC}$	$\pm 33\text{ mA}$

Dimensions

Single Output Models

Dual Output Models

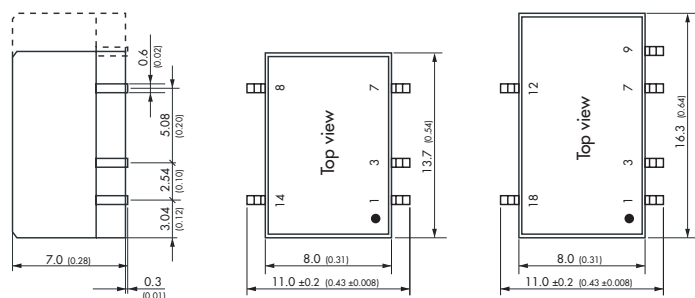

() = Inches

Pin	Single output	Dual output
1	-Vin (GND)	-Vin (GND)
3	+Vin (Vcc)	+Vin (Vcc)
7	-Vout	Common
8	+Vout	
9		-Vout
12		+Vout
14	No con.	
18		+Vout

TES-1V Series ► 1 W

- SMD package with industry standard footprint
- I/O isolation 3000 VDC
- Single and dual output models
- Operating temperature range -40 °C to +85 °C
- Lead frame construction
- High accuracy of pin co-planarity
- Qualified for leadfree reflow solder process
- Available in tape & reel package (500 pcs/reel)



Specifications		Models			
Line regulation	non regulated	Order code	Input voltage	Output voltage	Output current max.
Load regulation	+10 %/ -5% max.	TES 1-0510V		3.3 VDC	260 mA
Ripple & noise	<150mVpk-pk (20 MHz BW)	TES 1-0511V		5 VDC	200 mA
Short circuit protection	limited 0.5 sec.	TES 1-0512V		12 VDC	84 mA
Efficiency	80 % typ.	TES 1-0513V	5 VDC ± 10 %	15 VDC	67 mA
Operating temperature range	-40 °C to +85 °C above 75 °C derating 4.0 %/K	TES 1-0521V		± 5 VDC	± 100 mA
I/O isolation test voltage	3000VDC	TES 1-0522V		± 12 VDC	± 42 mA
I/O isolation capacitance	60 pF typ.	TES 1-0523V		± 15 VDC	± 34 mA
I/O isolation resistance	>10 GOhm	TES 1-1210V		3.3 VDC	260 mA
Casing	plastic (UL 94 V-0 rated)	TES 1-1211V		5 VDC	200 mA
		TES 1-1212V		12 VDC	84 mA
		TES 1-1213V	12 VDC ± 10 %	15 VDC	67 mA
		TES 1-1221V		± 5 VDC	± 100 mA
		TES 1-1222V		± 12 VDC	± 42 mA
		TES 1-1223V		± 15 VDC	± 34 mA
		TES 1-2410V		3.3 VDC	260 mA
		TES 1-2411V		5 VDC	200 mA
		TES 1-2412V		12 VDC	84 mA
		TES 1-2413V	24 VDC ± 10 %	15 VDC	67 mA
		TES 1-2421V		± 5 VDC	± 100 mA
		TES 1-2422V		± 12 VDC	± 42 mA
		TES 1-2423V		± 15 VDC	± 34 mA

Dimensions		
	Pin	Single output
	Pin	Dual output
	1	-Vin (GND)
	2	+Vin (Vcc)
	3	No con.
	5	-Vout
	6	No con.
	7	No con.
	8	+Vout
	10	No con.
	11	No con.
	12	No con.

() = Inches

- ▶ SMD package with industry standard footprint
- ▶ Single and dual output models
- ▶ I/O isolation 1500 VDC
- ▶ Operating temperature range $-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$
- ▶ High accuracy of pin co-planarity
- ▶ Qualified for leadfree reflow solder process
- ▶ Available in tape & reel package (300 pcs/reel)



Models



Line regulation	non regulated
Load regulation	+10 %/ -5% max.
Ripple & noise	<150mVpk-pk (20 MHz BW)
Short circuit protection	limited 0.5 sec.
Efficiency	80 % typ.
Operating temperature range	-40 °C to +85 °C above 75 °C derating 4.0 %/K
I/O isolation test voltage	1500VDC
I/O isolation capacitance	60 pF typ.
I/O isolation resistance	>10 G0hm
Casing	plastic (UL 94 V-0 rated)

Order code	Input voltage	Output voltage	Output current max.
TES 2-0510H	5 VDC $\pm$ 10 %	3.3 VDC	500 mA
TES 2-0511H		5 VDC	400 mA
TES 2-0512H		12 VDC	165 mA
TES 2-0521H		$\pm$ 5 VDC	$\pm$ 200 mA
TES 2-0522H		$\pm$ 12 VDC	$\pm$ 83 mA
TES 2-0523H		$\pm$ 15 VDC	$\pm$ 66 mA
TES 2-1210H	12 VDC $\pm$ 10 %	3.3 VDC	500 mA
TES 2-1211H		5 VDC	400 mA
TES 2-1212H		12 VDC	165 mA
TES 2-1222H		$\pm$ 12 VDC	$\pm$ 83 mA
TES 2-1223H		$\pm$ 15 VDC	$\pm$ 66 mA
TES 2-2410H		3.3 VDC	500 mA
TES 2-2411H	24 VDC $\pm$ 10 %	5 VDC	400 mA
TES 2-2412H		12 VDC	165 mA
TES 2-2422H		$\pm$ 12 VDC	$\pm$ 83 mA
TES 2-2423H		$\pm$ 15 VDC	$\pm$ 66 mA

Pin	Single output	Dual output
1	– Vin (GND)	– Vin (GND)
2	+Vin (Vcc)	+Vin (Vcc)
4	– Vout	Common
5	+ Vout	– Vout
7		+ Vout
8	No con.	
10		No con.

Single output models

Dual output models

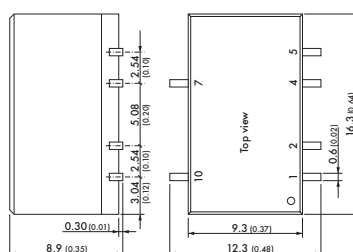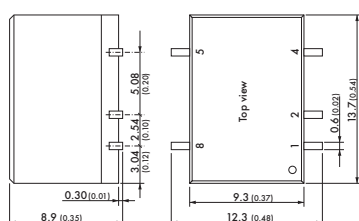

() = Inches

TES-2M Series ▶ 2 W



- ▶ Ultracompact SMD package
- ▶ I/O isolation 4000 VACrms
- ▶ Reinforced insulation rated for working voltage up to 300 VAC
- ▶ Industrial and medical safety approval
- ▶ Operating temperature range -40 °C to +71 °C
- ▶ Qualified for leadfree reflow solder process
- ▶ Available in tape & reel package (200 pcs/reel)



Specifications

Line regulation	non regulated
Load regulation	10 % max.
Ripple & noise	<150 mVpk-pk (20 MHz BW)
Input filter	Pi-filter
Short circuit protection	limited 0.5 sec.
Efficiency	70 % typ.
Operating temperature range	-25 °C to +71 °C above 60 °C derating 2.5 %/K
I/O isolation voltage	4000 VACrms, rated for 300 VAC working voltage
I/O isolation test voltage	6000Vpk (1 sec.)
I/O isolation capacitance	20 pF typ.
I/O isolation resistance	>10,000 MΩhm
Safety standards / approvals	UL 60950-1, IEC/EN 60950-1, UL 60601-1, IEC/EN 60601-1, CB-report
Casing	plastic (UL 94V-0 rated)


Models

Order code	Input voltage	Output voltage	Output current max.
TES 2-0511M		5 VDC	400 mA
TES 2-0512M		12 VDC	165 mA
TES 2-0513M	5 VDC ± 10 %	15 VDC	133 mA
TES 2-0522M		± 12 VDC	± 83 mA
TES 2-0523M		± 15 VDC	± 66 mA
TES 2-1211M		5 VDC	400 mA
TES 2-1212M		12 VDC	165 mA
TES 2-1213M	12 VDC ± 10 %	15 VDC	133 mA
TES 2-1222M		± 12 VDC	± 83 mA
TES 2-1223M		± 15 VDC	± 66 mA
TES 2-2411M		5 VDC	400 mA
TES 2-2412M		12 VDC	165 mA
TES 2-2413M	24 VDC ± 10 %	15 VDC	133 mA
TES 2-2422M		± 12 VDC	± 83 mA
TES 2-2423M		± 15 VDC	± 66 mA

Product with same electrical specifications available in DIP package.

See THI-2M series page 83

Dimensions

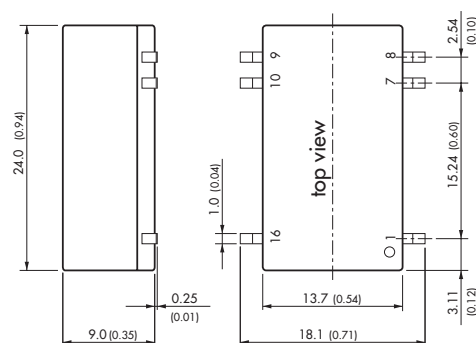

() = Inches

Pin	Single output	Dual output
1	- Vin (GND)	- Vin (GND)
7	No con.	No con.
8	No con.	Common
9	+ Vout	+ Vout
10	- Vout	- Vout
16	+ Vin (Vcc)	+ Vin (Vcc)

TDR-2SM Series ▶ 2 W

- ▶ Compact design in SMD package
- ▶ Wide 2:1 input voltage range
- ▶ Fully regulated outputs
- ▶ No minimum load required
- ▶ I/O-isolation 1500VDC
- ▶ Operating temperature range $-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$ without derating
- ▶ Qualified for leadfree reflow solder process according IPC J-STD-020D
- ▶ Short circuit protection
- ▶ Remote On/Off

NEW
product



Specifications

Line regulation	0.2 % max.
Load regulation	– Single output models: 1.0 % max. – Dual output models: 1.0 % max.
Ripple & noise	<30 mVpk-pk (20 MHz BW) (no external output capacitor required)
Short circuit protection	continuous, automatic recovery
Efficiency	81 % typ.
Operating temperature range	$-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$ without derating
I/O isolation test voltage	1500 VDC
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1
Casing	Epoxy molded (UL 94 V-0 rated)
Remote On/Off	shutdown input for low input current (2.5 mA) in standby operation


Models

Order code	Input voltage	Output voltage	Output current max.
TDR 2-0511SM	4.5 – 9 VDC	5 VDC	400 mA
TDR 2-0512SM		12 VDC	167 mA
TDR 2-0513SM		15 VDC	134 mA
TDR 2-0522SM		$\pm 12\text{ VDC}$	$\pm 83\text{ mA}$
TDR 2-0523SM	9 – 18 VDC	$\pm 15\text{ VDC}$	$\pm 67\text{ mA}$
TDR 2-1211SM		5 VDC	400 mA
TDR 2-1212SM		12 VDC	167 mA
TDR 2-1213SM		15 VDC	134 mA
TDR 2-1222SM	18 – 36 VDC	$\pm 12\text{ VDC}$	$\pm 83\text{ mA}$
TDR 2-1223SM		$\pm 15\text{ VDC}$	$\pm 67\text{ mA}$
TDR 2-2411SM		5 VDC	400 mA
TDR 2-2412SM		12 VDC	167 mA
TDR 2-2413SM	36 – 75 VDC	15 VDC	134 mA
TDR 2-2422SM		$\pm 12\text{ VDC}$	$\pm 83\text{ mA}$
TDR 2-2423SM		$\pm 15\text{ VDC}$	$\pm 67\text{ mA}$
TDR 2-4811SM		5 VDC	400 mA
TDR 2-4812SM		12 VDC	167 mA
TDR 2-4813SM		15 VDC	134 mA
TDR 2-4822SM		$\pm 12\text{ VDC}$	$\pm 83\text{ mA}$
TDR 2-4823SM		$\pm 15\text{ VDC}$	$\pm 67\text{ mA}$

Product with same electrical specifications available in DIP package.

See TDR-2 series page 40

Dimensions

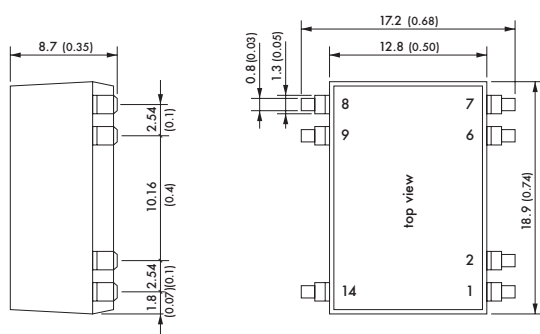

Pin	Single output	Dual output
1	– Vin (GND)	– Vin (GND)
2	Remote On/Off	Remote On/Off
6	No con.	Common
7	No con.	– Vout
8	+ Vout	+ Vout
9	– Vout	Common
14	+ Vin (Vcc)	+ Vin (Vcc)

() = Inches

TDR-2WISM Series ▶ 2 W

- ▶ Compact design in SMD package
- ▶ Ultra wide 4:1 input voltage range
- ▶ Fully regulated outputs
- ▶ No minimum load required
- ▶ I/O-isolation 1500VDC
- ▶ Operating temperature range -40 °C to +85 °C without derating
- ▶ Qualified for leadfree reflow solder process according IPC J-STD-020D
- ▶ Short circuit protection
- ▶ Remote On/Off



NEW
Product

Specifications

Line regulation	0.2 % max.
Load regulation	- Single output models: 1.0 % max. - Dual output models: 1.0 % max.
Ripple & noise	<30 mVpk-pk (20 MHz BW) (no external output capacitor required)
Short circuit protection	continuous, automatic recovery
Efficiency	81 % typ.
Operating temperature range	-40 °C to +85 °C without derating
I/O isolation test voltage	1500 VDC
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1
Casing	Epoxy molded (UL 94 V-0 rated)
Remote On/Off	shutdown input for low input current (2.5 mA) in standby operation


Product with same electrical specifications available in DIP package.

See TDR-2WI series page 41

Models

Order code	Input voltage	Output voltage	Output current max.
TDR 2-1211WISM	4.5 – 18 VDC	5 VDC	400 mA
TDR 2-1212WISM		12 VDC	167 mA
TDR 2-1213WISM		15 VDC	134 mA
TDR 2-1222WISM		± 12 VDC	± 83 mA
TDR 2-1223WISM	9 – 36 VDC	± 15 VDC	± 67 mA
TDR 2-2411WISM		5 VDC	400 mA
TDR 2-2412WISM		12 VDC	167 mA
TDR 2-2413WISM		15 VDC	134 mA
TDR 2-2422WISM	18 – 75 VDC	± 12 VDC	± 83 mA
TDR 2-2423WISM		± 15 VDC	± 67 mA
TDR 2-4811WISM		5 VDC	400 mA
TDR 2-4812WISM		12 VDC	167 mA
TDR 2-4813WISM		15 VDC	134 mA
TDR 2-4822WISM		± 12 VDC	± 83 mA
TDR 2-4823WISM		± 15 VDC	± 67 mA

Dimensions

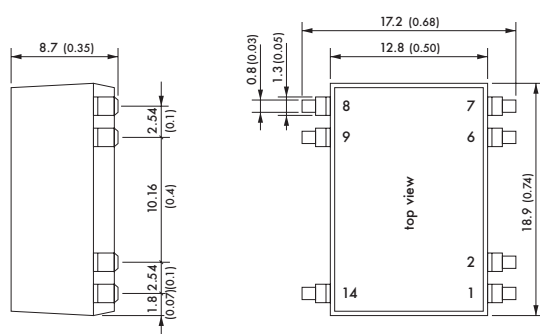

() = Inches

Pin	Single output	Dual output
1	- Vin (GND)	- Vin (GND)
2	Remote On/Off	Remote On/Off
6	No con.	Common
7	No con.	- Vout
8	+ Vout	+ Vout
9	- Vout	Common
14	+ Vin (Vcc)	+ Vin (Vcc)

TES-2N Series ▶ 2 W



- ▶ Low profile SMD package
- ▶ Wide 2:1 input range
- ▶ Fully regulated output
- ▶ I/O isolation 1500 VDC
- ▶ Operating temperature range $-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$
- ▶ Low ripple and noise
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Qualified for leadfree reflow solder process
- ▶ Available in tape & reel package (250 pcs/reel)



Specifications

Line regulation	0.5 % max.
Load regulation	Single output models: 0.75 % max. Dual output models: 2.0 % max.
Ripple & noise	<50 mVpk-pk (20 MHz BW)
Conducted EMI	EN55022, class A, and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	78 % typ.
Operating temperature range	$-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$ above $70\text{ }^{\circ}\text{C}$ derating 3.5 %/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Case	plastic (UL 94 V-0 rated)


Models

Order code	Input voltage	Output voltage	Output current max.
TES 2N-0510	4.5 – 9 VDC	3.3 VDC	500 mA
TES 2N-0511		5 VDC	400 mA
TES 2N-0512		12 VDC	165 mA
TES 2N-0513		15 VDC	135 mA
TES 2N-0521		$\pm 5\text{ VDC}$	$\pm 200\text{ mA}$
TES 2N-0522	9 – 18 VDC	$\pm 12\text{ VDC}$	$\pm 85\text{ mA}$
TES 2N-0523		$\pm 15\text{ VDC}$	$\pm 65\text{ mA}$
TES 2N-1210		3.3 VDC	500 mA
TES 2N-1211		5 VDC	400 mA
TES 2N-1212		12 VDC	165 mA
TES 2N-1213		15 VDC	135 mA
TES 2N-1221	18 – 36 VDC	$\pm 5\text{ VDC}$	$\pm 200\text{ mA}$
TES 2N-1222		$\pm 12\text{ VDC}$	$\pm 85\text{ mA}$
TES 2N-1223		$\pm 15\text{ VDC}$	$\pm 65\text{ mA}$
TES 2N-2410		3.3 VDC	500 mA
TES 2N-2411		5 VDC	400 mA
TES 2N-2412	36 – 75 VDC	12 VDC	165 mA
TES 2N-2413		15 VDC	135 mA
TES 2N-2421		$\pm 5\text{ VDC}$	$\pm 200\text{ mA}$
TES 2N-2422		$\pm 12\text{ VDC}$	$\pm 85\text{ mA}$
TES 2N-2423		$\pm 15\text{ VDC}$	$\pm 65\text{ mA}$
TES 2N-4810		3.3 VDC	500 mA
TES 2N-4811		5 VDC	400 mA
TES 2N-4812		12 VDC	165 mA
TES 2N-4813		15 VDC	135 mA
TES 2N-4821		$\pm 5\text{ VDC}$	$\pm 200\text{ mA}$
TES 2N-4822		$\pm 12\text{ VDC}$	$\pm 85\text{ mA}$
TES 2N-4823		$\pm 15\text{ VDC}$	$\pm 65\text{ mA}$

Product with same electrical specifications available in DIP package.

See TEL-2 series page 31

Dimensions

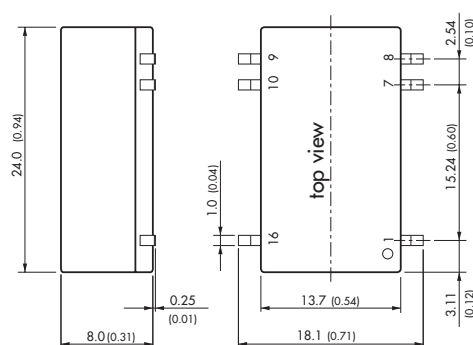

() = Inches

Pin	Single output	Dual output
1	– Vin (GND)	– Vin (GND)
7	No con.	No con.
8	No con.	Common
9	+ Vout	+ Vout
10	– Vout	– Vout
16	+ Vin (Vcc)	+ Vin (Vcc)

TDR-3SM Series ▶ 3 W

- ▶ Compact design in SMD package
- ▶ Wide 2:1 input voltage range
- ▶ Fully regulated outputs
- ▶ No minimum load required
- ▶ I/O-isolation 1500VDC
- ▶ Operating temperature range $-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$
- ▶ Qualified for leadfree reflow solder process according IPC J-STD-020D
- ▶ Short circuit protection
- ▶ Remote On/Off



NEW
product

Specifications

Line regulation	0.2 % max.
Load regulation	– Single output models: 1.0 % max. – Dual output models: 1.0 % max.
Ripple & noise	<30 mVpk-pk (20 MHz BW) (no external output capacitor required)
Short circuit protection	continuous, automatic recovery
Efficiency	81 % typ.
Operating temperature range	$-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$ above $70\text{ }^{\circ}\text{C}$ derating 3.5%/K
I/O isolation test voltage	1500 VDC
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1
Casing	Epoxy molded (UL 94 V-0 rated)
Remote On/Off	shutdown input for low input current (2.5 mA) in standby operation


Product with same electrical specifications available in DIP package.

See TDR-3 series page 42

Models

Order code	Input voltage	Output voltage	Output current max.
TDR 3-0511SM	4.5 – 9 VDC	5 VDC	600 mA
TDR 3-0512SM		12 VDC	250 mA
TDR 3-0513SM		15 VDC	200 mA
TDR 3-0522SM		$\pm 12\text{ VDC}$	$\pm 125\text{ mA}$
TDR 3-0523SM	9 – 18 VDC	$\pm 15\text{ VDC}$	$\pm 100\text{ mA}$
TDR 3-1211SM		5 VDC	600 mA
TDR 3-1212SM		12 VDC	250 mA
TDR 3-1213SM		15 VDC	200 mA
TDR 3-1222SM	18 – 36 VDC	$\pm 12\text{ VDC}$	$\pm 125\text{ mA}$
TDR 3-1223SM		$\pm 15\text{ VDC}$	$\pm 100\text{ mA}$
TDR 3-2411SM		5 VDC	600 mA
TDR 3-2412SM		12 VDC	250 mA
TDR 3-2413SM		15 VDC	200 mA
TDR 3-2422SM	36 – 75 VDC	$\pm 12\text{ VDC}$	$\pm 125\text{ mA}$
TDR 3-2423SM		$\pm 15\text{ VDC}$	$\pm 100\text{ mA}$
TDR 3-4811SM		5 VDC	600 mA
TDR 3-4812SM		12 VDC	250 mA
TDR 3-4813SM		15 VDC	200 mA
TDR 3-4822SM		$\pm 12\text{ VDC}$	$\pm 125\text{ mA}$
TDR 3-4823SM		$\pm 15\text{ VDC}$	$\pm 100\text{ mA}$

Dimensions

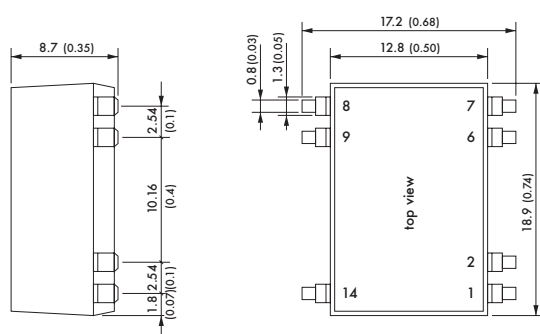

() = Inches

Pin	Single output	Dual output
1	– Vin (GND)	– Vin (GND)
2	Remote On/Off	Remote On/Off
6	No con.	Common
7	No con.	– Vout
8	+ Vout	+ Vout
9	– Vout	Common
14	+ Vin (Vcc)	+ Vin (Vcc)

TDR-3WISM Series ▶ 3 W

- ▶ Compact design in SMD package
- ▶ Ultra wide 4:1 input voltage range
- ▶ Fully regulated outputs
- ▶ No minimum load required
- ▶ I/O-isolation 1500VDC
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ Qualified for leadfree reflow solder process according IPC J-STD-020D
- ▶ Short circuit protection
- ▶ Remote On/Off



NEW
Product

Specifications

Line regulation	0.2 % max.
Load regulation	- Single output models: 1.0 % max. - Dual output models: 1.0 % max.
Ripple & noise	<30 mVpk-pk (20 MHz BW) (no external output capacitor required)
Short circuit protection	continuous, automatic recovery
Efficiency	81 % typ.
Operating temperature range	-40 °C to +85 °C above 70 °C derating 3.5%/K
I/O isolation test voltage	1500 VDC
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1
Casing	Epoxy molded (UL 94 V-0 rated)
Remote On/Off	shutdown input for low input current (2.5 mA) in standby operation


Product with same electrical specifications available in DIP package.

See TDR-3WI series page 43

Models

Order code	Input voltage	Output voltage	Output current max.
TDR 3-1211WISM		5 VDC	600 mA
TDR 3-1212WISM		12 VDC	250 mA
TDR 3-1213WISM	4.5 – 18 VDC	15 VDC	200 mA
TDR 3-1222WISM		± 12 VDC	± 125 mA
TDR 3-1223WISM		± 15 VDC	± 100 mA
TDR 3-2411WISM		5 VDC	600 mA
TDR 3-2412WISM		12 VDC	250 mA
TDR 3-2413WISM	9 – 36 VDC	15 VDC	200 mA
TDR 3-2422WISM		± 12 VDC	± 125 mA
TDR 3-2423WISM		± 15 VDC	± 100 mA
TDR 3-4811WISM		5 VDC	600 mA
TDR 3-4812WISM		12 VDC	250 mA
TDR 3-4813WISM	18 – 75 VDC	15 VDC	200 mA
TDR 3-4822WISM		± 12 VDC	± 125 mA
TDR 3-4823WISM		± 15 VDC	± 100 mA

Dimensions

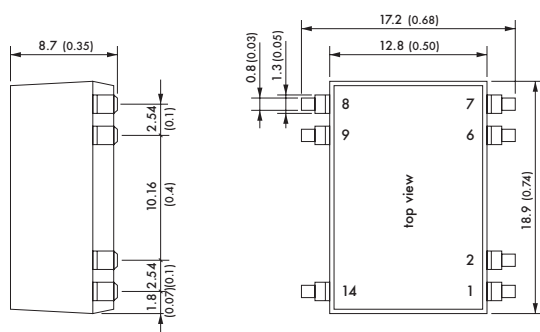

() = Inches

Pin	Single output	Dual output
1	- Vin (GND)	- Vin (GND)
2	Remote On/Off	Remote On/Off
6	No con.	Common
7	No con.	- Vout
8	+ Vout	+ Vout
9	- Vout	Common
14	+ Vin (Vcc)	+ Vin (Vcc)

THL-3WISM Series ▶ 3 W

- ▶ Ultra wide 4:1 input voltage range
- ▶ Fully regulated outputs
- ▶ I/O-isolation 1500VDC
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ Qualified for leadfree reflow solder process according IPC J-STD-020D
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Remote On/Off



NEW
Product

Specifications

Line regulation	0.5% max.
Load regulation	- Single output models: 0.5% max. - Dual output models: 1.0% max.
Ripple & noise	<60 mVpk-pk (20 MHz BW) (no external output capacitor required)
Conducted EMI	EN55022, class A, and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	80 % typ.
Operating temperature range	-40 °C to +85 °C above 70 °C derating 3.5%/K
I/O isolation test voltage	1500 VDC
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1
Casing	Epoxy molded (UL 94 V-0 rated)
Remote On/Off	shutdown input for low input current (5 mA) in standby operation


Models

Order code	Input voltage	Output voltage	Output current max.
THL 3-2410WISM		3.3 VDC	600 mA
THL 3-2411WISM		5 VDC	600 mA
THL 3-2412WISM		12 VDC	250 mA
THL 3-2413WISM	9 – 36 VDC	15 VDC	200 mA
THL 3-2421WISM		± 5 VDC	± 300 mA
THL 3-2422WISM		± 12 VDC	± 125 mA
THL 3-2423WISM		± 15 VDC	± 100 mA
THL 3-4810WISM		3.3 VDC	600 mA
THL 3-4811WISM		5 VDC	600 mA
THL 3-4812WISM		12 VDC	250 mA
THL 3-4813WISM	18 – 75 VDC	15 VDC	200 mA
THL 3-4821WISM		± 5 VDC	± 300 mA
THL 3-4822WISM		± 12 VDC	± 125 mA
THL 3-4823WISM		± 15 VDC	± 100 mA

Product with same electrical specifications available in DIP package.

See THL-3WI series page 33

Dimensions

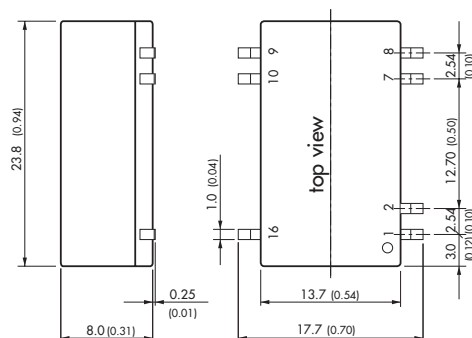

() = Inches

Pin	Single output	Dual output
1	- Vin (GND)	- Vin (GND)
2	Remote On/Off	Remote On/Off
7	No con.	No con.
8	No con.	Common
9	+ Vout	+ Vout
10	- Vout	- Vout
16	+ Vin (Vcc)	+ Vin (Vcc)

TES-3 Series ▶ 3 W



- ▶ Wide 2:1 input range
- ▶ Fully regulated output
- ▶ Operating temperature range $-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$
- ▶ I/O isolation 1500 VDC
- ▶ Low ripple and noise
- ▶ Short circuit protection
- ▶ Qualified for leadfree reflow solder process
- ▶ Available in tape & reel package (150 pcs/reel)




Specifications

Line regulation	0.3 % max.
Load regulation	– Single output models: 1.0 % max. – Dual output models: 1.0 % max.
Ripple & noise	<50 mVpk-pk (20 MHz BW)
Input filter	Pi-filter
Short circuit protection	continuous, automatic recovery
Efficiency	80 % typ.
Operating temperature range	$-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$ above $70\text{ }^{\circ}\text{C}$ derating 3.5 %/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Casing	plastic (UL 94 V-0 rated)

Models

Order code	Input voltage	Output voltage	Output current max.
TES 3-1210	9 – 18 VDC	3.3 VDC	700 mA
TES 3-1211		5 VDC	600 mA
TES 3-1212		12 VDC	250 mA
TES 3-1222		$\pm 12\text{ VDC}$	$\pm 125\text{ mA}$
TES 3-1223	18 – 36 VDC	$\pm 15\text{ VDC}$	$\pm 100\text{ mA}$
TES 3-2410		3.3 VDC	700 mA
TES 3-2411		5 VDC	600 mA
TES 3-2412		12 VDC	250 mA
TES 3-2422		$\pm 12\text{ VDC}$	$\pm 125\text{ mA}$
TES 3-2423	36 – 75 VDC	$\pm 15\text{ VDC}$	$\pm 100\text{ mA}$
TES 3-4810		3.3 VDC	700 mA
TES 3-4811		5 VDC	600 mA
TES 3-4812		12 VDC	250 mA
TES 3-4822		$\pm 12\text{ VDC}$	$\pm 125\text{ mA}$
TES 3-4823		$\pm 15\text{ VDC}$	$\pm 100\text{ mA}$

Dimensions

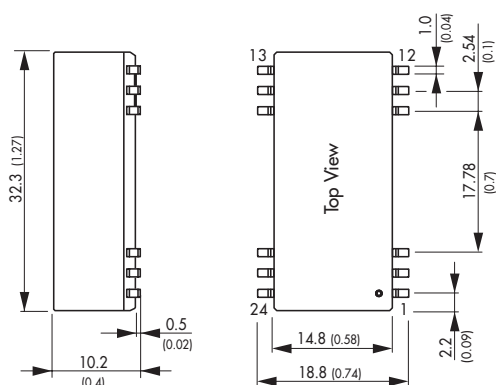

Pin	Single output	Dual output
1	– Vin (GND)	– Vin (GND)
2	– Vin (GND)	– Vin (GND)
3	No con.	No con.
10	No con.	Common
11	No con.	No con.
12	No con.	– Vout
13	+ Vout	+ Vout
14	No con.	No con.
15	– Vout	Common
22	No con.	No con.
23	+ Vin (Vcc)	+ Vin (Vcc)
24	+ Vin (Vcc)	+ Vin (Vcc)

() = Inches

TES-3WI Series ▶ 3 W



- ▶ Ultra-wide 4:1 input voltage range
- ▶ Fully regulated output
- ▶ Operating temperature range -40 °C to +71 °C
- ▶ I/O isolation 1500 VDC
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Remote On/Off
- ▶ Qualified for leadfree reflow solder process
- ▶ Available in tape & reel package (150 pcs/reel)




Specifications

Line regulation	0.3 % max.
Load regulation	– Single output models: 1.0% max. – Dual output models: 2.0% max.
Ripple & noise	<75 mVpk-pk (20 MHz BW)
Input filter	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	85 % typ.
Operating temperature range	-40 °C to +71 °C (no derating)
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Remote On/Off	shutdown input for low input current (10 mA) in standby operation
Casing	plastic (UL 94 V-0 rated)

Models

Order code	Input voltage	Output voltage	Output current max.
TES 3-2410WI		3.3 VDC	750 mA
TES 3-2411WI		5 VDC	600 mA
TES 3-2412WI		12 VDC	250 mA
TES 3-2413WI	9 – 36 VDC	15 VDC	200 mA
TES 3-2421WI		± 5 VDC	± 300 mA
TES 3-2422WI		± 12 VDC	± 125 mA
TES 3-2423WI		± 15 VDC	± 100 mA
TES 3-4810WI		3.3 VDC	750 mA
TES 3-4811WI		5 VDC	600 mA
TES 3-4812WI		12 VDC	250 mA
TES 3-4813WI	18 – 75 VDC	15 VDC	200 mA
TES 3-4821WI		± 5 VDC	± 300 mA
TES 3-4822WI		± 12 VDC	± 125 mA
TES 3-4823WI		± 15 VDC	± 100 mA

Dimensions

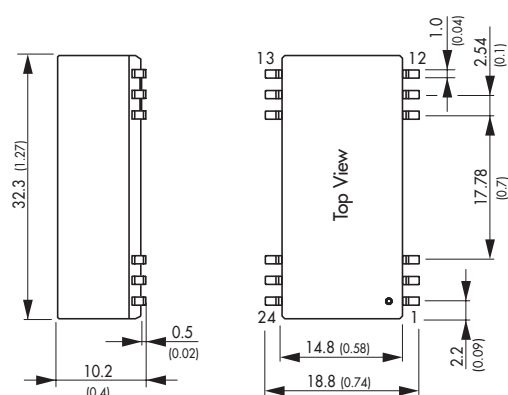

() = Inches

Pin	Single output	Dual output
1	– Vin (GND)	– Vin (GND)
2	– Vin (GND)	– Vin (GND)
3	Remote On/Off	Remote On/Off
10	No con.	Common
11	No con.	No con.
12	No con.	– Vout
13	+ Vout	+ Vout
14	No con.	No con.
15	– Vout	Common
22	No con.	No con.
23	+ Vin (Vcc)	+ Vin (Vcc)
24	+ Vin (Vcc)	+ Vin (Vcc)

TES-5 Series ▶ 5 W



- ▶ Compact SMD package
- ▶ Wide 2:1 input voltage range
- ▶ Fully regulated output
- ▶ Operating temperature range $-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$
- ▶ I/O isolation 1500 VDC
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Qualified for leadfree reflow solder process
- ▶ Available in tape & reel package (150 pcs/reel)




Specifications

Line regulation	0.3 % max.
Load regulation	– Single output models: 1.0% max. – Dual output models: 2.0% max.
Ripple & Noise	<85 mVpk-pk (20 MHz BW)
Input filter	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	85 % typ.
Operating temperature range	$-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$ above $70\text{ }^{\circ}\text{C}$ derating 3.5%/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Remote On/Off	shutdown input for low input current (10 mA) in standby operation
Casing	plastic (UL 94 V-0 rated)

Models

Order code	Input voltage	Output voltage	Output current max.
TES 5-1210		3.3 VDC	1200 mA
TES 5-1211		5 VDC	1000 mA
TES 5-1212		12 VDC	420 mA
TES 5-1213	9 – 18 VDC	15 VDC	335 mA
TES 5-1221		$\pm 5\text{ VDC}$	$\pm 500\text{ mA}$
TES 5-1222		$\pm 12\text{ VDC}$	$\pm 210\text{ mA}$
TES 5-1223		$\pm 15\text{ VDC}$	$\pm 165\text{ mA}$
TES 5-2410		3.3 VDC	1200 mA
TES 5-2411		5 VDC	1000 mA
TES 5-2412		12 VDC	420 mA
TES 5-2413	18 – 36 VDC	15 VDC	335 mA
TES 5-2421		$\pm 5\text{ VDC}$	$\pm 500\text{ mA}$
TES 5-2422		$\pm 12\text{ VDC}$	$\pm 210\text{ mA}$
TES 5-2423		$\pm 15\text{ VDC}$	$\pm 165\text{ mA}$
TES 5-4810		3.3 VDC	1200 mA
TES 5-4811		5 VDC	1000 mA
TES 5-4812		12 VDC	420 mA
TES 5-4813	36 – 75 VDC	15 VDC	335 mA
TES 5-4821		$\pm 5\text{ VDC}$	$\pm 500\text{ mA}$
TES 5-4822		$\pm 12\text{ VDC}$	$\pm 210\text{ mA}$
TES 5-4823		$\pm 15\text{ VDC}$	$\pm 165\text{ mA}$

Dimensions

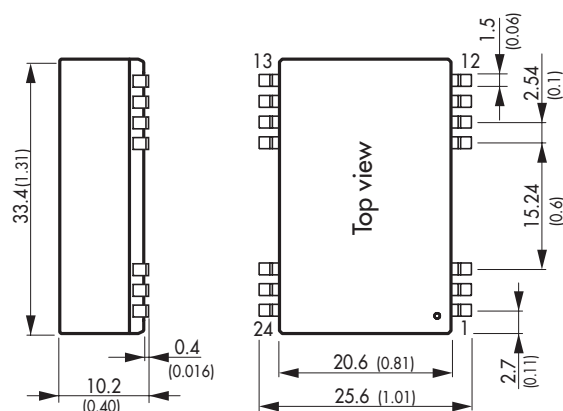

Pin	Single output	Dual output
1	Remote On/Off	Remote On/Off
2	– Vin (GND)	– Vin (GND)
3	– Vin (GND)	– Vin (GND)
9	No con.	Common
10	No con.	No con.
11	No con.	– Vout
12	No con.	No con.
13	No con.	No con.
14	+ Vout	+ Vout
15	No con.	No con.
16	– Vout	Common
22	+ Vin (Vcc)	+ Vin (Vcc)
23	+ Vin (Vcc)	+ Vin (Vcc)
24	No con.	No con.

() = Inches

TES-5WI Series ▶ 5 W



- ▶ Compact SMD package
- ▶ Ultra wide 4:1 input voltage range
- ▶ Fully regulated output
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ I/O isolation 1500 VDC
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Qualified for leadfree reflow solder process
- ▶ Available in tape & reel package (150 pcs/reel)




Specifications

Line regulation	1.0 % max.
Load regulation	1.0% max.
Ripple & noise	<85 mVpk-pk (20 MHz BW)
Input filter	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	82 % typ.
Operating temperature range	-40 °C to +85 °C above 70 °C derating 3.5%/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Remote On/Off	shutdown input for low input current (10 mA) in standby operation
Casing	plastic (UL 94 V-0 rated)

Models

Order code	Input voltage	Output voltage	Output current max.
TES 5-2410WI		3.3 VDC	1200 mA
TES 5-2411WI		5 VDC	1000 mA
TES 5-2412WI		12 VDC	420 mA
TES 5-2413WI	9 – 36 VDC	15 VDC	335 mA
TES 5-2421WI		± 5 VDC	± 500 mA
TES 5-2422WI		± 12 VDC	± 210 mA
TES 5-2423WI		± 15 VDC	± 165 mA
TES 5-4810WI		3.3 VDC	1200 mA
TES 5-4811WI		5 VDC	1000 mA
TES 5-4812WI		12 VDC	420 mA
TES 5-4813WI	18 – 75 VDC	15 VDC	335 mA
TES 5-4821WI		± 5 VDC	± 500 mA
TES 5-4822WI		± 12 VDC	± 210 mA
TES 5-4823WI		± 15 VDC	± 165 mA

Dimensions

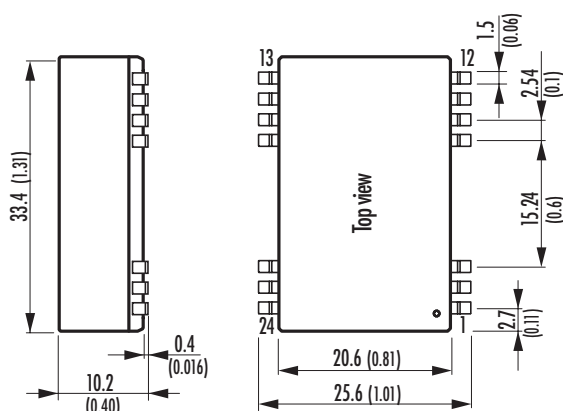

() = Inches

Pin	Single output	Dual output
1	Remote On/Off	Remote On/Off
2	- Vin (GND)	- Vin (GND)
3	- Vin (GND)	- Vin (GND)
9	No con.	Common
10	No con.	No con.
11	No con.	- Vout
12	No con.	No con.
13	No con.	No con.
14	+ Vout	+ Vout
15	No con.	No con.
16	- Vout	Common
22	+ Vin (Vcc)	+ Vin (Vcc)
23	+ Vin (Vcc)	+ Vin (Vcc)
24	No con.	No con.

THL-6WISM Series ▶ 6 W



- ▶ Ultra compact SMD package
- ▶ Ultra wide 4:1 input voltage range
- ▶ Fully regulated output
- ▶ Operating temperature range $-40\text{ }^{\circ}\text{C}$ to $+70\text{ }^{\circ}\text{C}$
- ▶ I/O isolation 1500 VDC
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Qualified for leadfree reflow solder process



NEW
product

Specifications

Line regulation	0.5 % max.
Load regulation	– Single output models: 1.0% max. – Dual output models: 2.0% max.
Ripple & Noise	<60 mVpk-pk typ.(20 MHz BW)
Input filter	EN 55022, class A and FCC, level A (wit external capacitor)
Short circuit protection	continuous, automatic recovery
Efficiency	83 % typ.
Operating temperature range	$-40\text{ }^{\circ}\text{C}$ to $+70\text{ }^{\circ}\text{C}$ above $60\text{ }^{\circ}\text{C}$ derating 2.5%/K
I/O isolation test voltage	1500 VDC
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Remote On/Off	shutdown input for low input current (10 mA) in standby operation
Casing	plastic (UL 94 V-0 rated)


Models

Order code	Input voltage	Output voltage	Output current max.
THL 6-2410WISM		3.3 VDC	1450 mA
THL 6-2411WISM		5 VDC	1200 mA
THL 6-2412WISM		12 VDC	500 mA
THL 6-2413WISM	9 – 36 VDC	15 VDC	400 mA
THL 6-2421WISM		$\pm 5\text{ VDC}$	$\pm 600\text{ mA}$
THL 6-2422WISM		$\pm 12\text{ VDC}$	$\pm 250\text{ mA}$
THL 6-2423WISM		$\pm 15\text{ VDC}$	$\pm 200\text{ mA}$
THL 6-4810WISM		3.3 VDC	1450 mA
THL 6-4811WISM		5 VDC	1200 mA
THL 6-4812WISM		12 VDC	500 mA
THL 6-4813WISM	18 – 75 VDC	15 VDC	400 mA
THL 6-4821WISM		$\pm 5\text{ VDC}$	$\pm 600\text{ mA}$
THL 6-4822WISM		$\pm 12\text{ VDC}$	$\pm 250\text{ mA}$
THL 6-4823WISM		$\pm 15\text{ VDC}$	$\pm 200\text{ mA}$

Product with same electrical specifications available in DIP package.

See THL-6WI series page 35

Dimensions

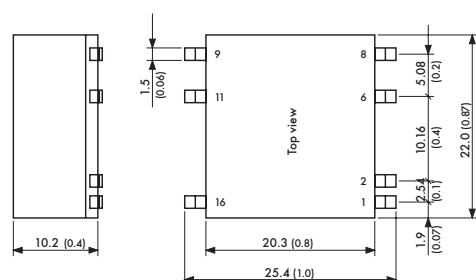

Pin	Single output	Dual output
1	Remote On/Off	Remote On/Off
2	– Vin (GND)	– Vin (GND)
6	No con.	Common
8	No con.	– Vout
9	+ Vout	+ Vout
11	– Vout	Common
16	+ Vin (Vcc)	+ Vin (Vcc)

() = Inches

TMA/TME Series ▶ 1 W

- ▶ Industry standard pinout
- ▶ Non-regulated output
- ▶ Single and dual output models
- ▶ I/O isolation voltage 1000VDC
- ▶ High efficiency
- ▶ Operating temperature range $-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$



Specifications


Line regulation	non regulated
Load regulation	10% max.
Ripple & Noise	– TMA <75 mVpk-pk (20 MHz BW) – TME <150 mVpk-pk (20 MHz BW)
Short circuit protection	limited 1 sec.
Efficiency	80% typ.
Operating temperature range	$-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$ (no derating)
I/O isolation test voltage	1000VDC
Casing	plastic (UL 94 V-0 rated)

Semi-regulated models
See TRA-1 series page 22

Models

Order code	Input voltage	Output voltage	Output current max.
TME 0303S	3.3 VDC $\pm 10\%$	3.3 VDC	260 mA
TME 0305S		5 VDC	200 mA
TME 0503S		3.3 VDC	260 mA
TMA 0505S		5 VDC	200 mA
TME 0509S		9 VDC	110 mA
TMA 0512S		12 VDC	80 mA
TMA 0515S	5 VDC $\pm 10\%$	15 VDC	65 mA
TMA 0505D		$\pm 5\text{ VDC}$	$\pm 100\text{ mA}$
TMA 0512D		$\pm 12\text{ VDC}$	$\pm 40\text{ mA}$
TMA 0515D		$\pm 15\text{ VDC}$	$\pm 35\text{ mA}$
TMA 1205S		5 VDC	200 mA
TME 1209S		9 VDC	110 mA
TMA 1212S		12 VDC	80 mA
TMA 1215S	12 VDC $\pm 10\%$	15 VDC	65 mA
TMA 1205D		$\pm 5\text{ VDC}$	$\pm 100\text{ mA}$
TMA 1212D		$\pm 12\text{ VDC}$	$\pm 40\text{ mA}$
TMA 1215D		$\pm 15\text{ VDC}$	$\pm 35\text{ mA}$
TMA 1505S		5 VDC	200 mA
TMA 1512S		12 VDC	80 mA
TMA 1515S	15 VDC $\pm 10\%$	15 VDC	65 mA
TMA 1505D		$\pm 5\text{ VDC}$	$\pm 100\text{ mA}$
TMA 1512D		$\pm 12\text{ VDC}$	$\pm 40\text{ mA}$
TMA 1515D		$\pm 15\text{ VDC}$	$\pm 35\text{ mA}$
TMA 2405S		5 VDC	200 mA
TME 2409S		9 VDC	110 mA
TMA 2412S		12 VDC	80 mA
TMA 2415S	24 VDC $\pm 10\%$	15 VDC	65 mA
TMA 2405D		$\pm 5\text{ VDC}$	$\pm 100\text{ mA}$
TMA 2412D		$\pm 12\text{ VDC}$	$\pm 40\text{ mA}$
TMA 2415D		$\pm 15\text{ VDC}$	$\pm 35\text{ mA}$

Dimensions

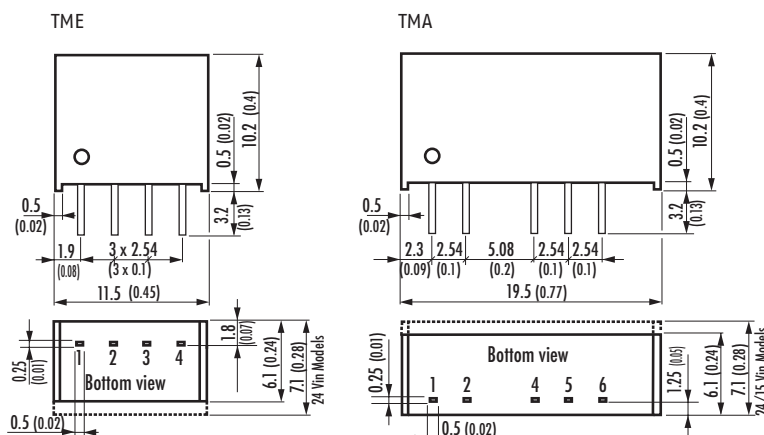

() = Inches

Pin	TMA Single output	TMA Dual output	TME Single output
1	+ Vin (Vcc)	+ Vin (Vcc)	– Vin (GND)
2	– Vin (GND)	– Vin (GND)	+ Vin (Vcc)
3	No Pin	No Pin	– Vout
4	– Vout	– Vout	+ Vout
5	No Pin	Common	
6	+ Vout	+ Vout	

TRA-1 Series ▶ 1 W

- ▶ Semi-regulated output
- ▶ Industry standard pinout
- ▶ Very high efficiency up to 88%
- ▶ Single and dual output models
- ▶ I/O isolation voltage 1000VDC
- ▶ Operating temperature range -40 °C to +85 °C



NEW
product


Specifications

Line regulation	1.2%
Load regulation (20– 100% load)	5% typ for 5V input models 4% typ for 12V input models 3% typ for 24V input models
Ripple & Noise	30 mVpk-pk typ. (20 MHz BW)
Short circuit protection	limited 0.5 sec.
Efficiency	86 % typ.
Operating temperature range	-40 °C to +85 °C (no derating)
I/O isolation test voltage	1000VDC
Casing	plastic (UL 94 V-0 rated)

Models

Order code	Input voltage	Output voltage	Output current max.
TRA 1-0511		5 VDC	200 mA
TRA 1-0519		9 VDC	110 mA
TRA 1-0512		12 VDC	84 mA
TRA 1-0513	5 VDC ± 10 %	15 VDC	67 mA
TRA 1-0521		± 5 VDC	± 100 mA
TRA 1-0522		± 12 VDC	± 42 mA
TRA 1-0523		± 15 VDC	± 34 mA
TRA 1-1211		5 VDC	200 mA
TRA 1-1219		9 VDC	110 mA
TRA 1-1212		12 VDC	84 mA
TRA 1-1213	12 VDC ± 10 %	15 VDC	67 mA
TRA 1-1221		± 5 VDC	± 100 mA
TRA 1-1222		± 12 VDC	± 42 mA
TRA 1-1223		± 15 VDC	± 34 mA
TRA 1-2411		5 VDC	200 mA
TRA 1-2419		9 VDC	110 mA
TRA 1-2412		12 VDC	84 mA
TRA 1-2413	24 VDC ± 10 %	15 VDC	67 mA
TRA 1-2421		± 5 VDC	± 100 mA
TRA 1-2422		± 12 VDC	± 42 mA
TRA 1-2423		± 15 VDC	± 34 mA

Dimensions

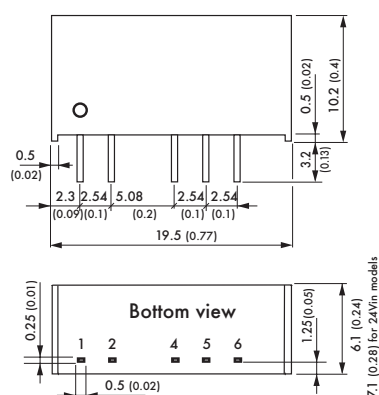


() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
4	- Vout	- Vout
5	No pin	Common
6	+ Vout	+ Vout

TMV Series ▶ 1 W

- ▶ Industry standard pinout
- ▶ Single and dual output models
- ▶ I/O isolation voltage 3000 VDC
- ▶ Operating temperature range $-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$

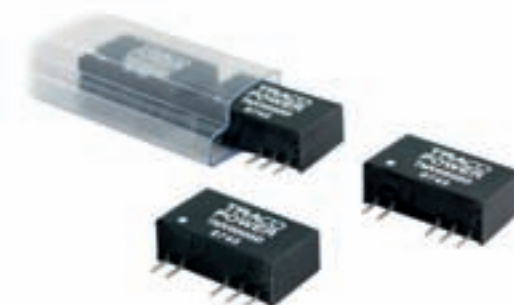

Specifications

Line regulation	non regulated
Load regulation	10% max.
Ripple & noise	<100 mVpk-pk (20 MHz BW)
Short circuit protection	limited 1 sec.
Efficiency	77% typ.
Operating temperature range	$-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$ (no derating)
I/O isolation test voltage	3000 VDC (for 6000 Vpk see TMV-EN series)
I/O isolation capacitance	60 pF typ.
I/O isolation resistance	>10 GOhm
Casing	plastic (UL 94 V-0 rated)


Product available with reinforced insulation
See TMV-EN series page 82

Semi-regulated models
See TRV-1 series page 24

Models

Order code	Input voltage	Output voltage	Output current max.
TMV 0505S		5 VDC	200 mA
TMV 0509S		9 VDC	110 mA
TMV 0512S		12 VDC	80 mA
TMV 0515S	5 VDC $\pm 10\%$	15 VDC	65 mA
TMV 0505D		$\pm 5\text{ VDC}$	$\pm 100\text{ mA}$
TMV 0512D		$\pm 12\text{ VDC}$	$\pm 40\text{ mA}$
TMV 0515D		$\pm 15\text{ VDC}$	$\pm 30\text{ mA}$
TMV 1205S		5 VDC	200 mA
TMV 1212S		12 VDC	80 mA
TMV 1215S	12 VDC $\pm 10\%$	15 VDC	65 mA
TMV 1205D		$\pm 5\text{ VDC}$	$\pm 100\text{ mA}$
TMV 1212D		$\pm 12\text{ VDC}$	$\pm 40\text{ mA}$
TMV 1215D		$\pm 15\text{ VDC}$	$\pm 30\text{ mA}$
TMV 2405S		5 VDC	200 mA
TMV 2412S		12 VDC	80 mA
TMV 2415S	24 VDC $\pm 10\%$	15 VDC	65 mA
TMV 2405D		$\pm 5\text{ VDC}$	$\pm 100\text{ mA}$
TMV 2412D		$\pm 12\text{ VDC}$	$\pm 40\text{ mA}$
TMV 2415D		$\pm 15\text{ VDC}$	$\pm 30\text{ mA}$

Dimensions

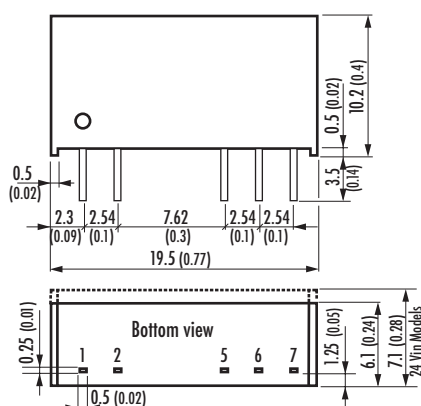

() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
5	- Vout	- Vout
6	No pin	Common
7	+ Vout	+ Vout


TRV-1 Series ▶ 1 W

- ▶ Semi-regulated output
- ▶ Industry standard pinout
- ▶ Very high efficiency up to 88%
- ▶ I/O isolation voltage 3000VDC
- ▶ Operating temperature range -40 °C to +85 °C



NEW
product

Specifications		Models			
Line regulation	1.2%	Order code	Input voltage	Output voltage	Output current max.
Load regulation	5% typ for 5V input models	TRV 1-0511	5 VDC ± 10 %	5 VDC	200 mA
(20- 100% load)	3.5% typ for 12V & 24V input models	TRV 1-0519		9 VDC	110 mA
Ripple & Noise	30 mVpk-pk typ. (20 MHz BW)	TRV 1-0512		12 VDC	84 mA
Short circuit protection	limited 0.5 sec.	TRV 1-0513		15 VDC	67 mA
Efficiency	86 % typ.	TRV 1-1211	12 VDC ± 10 %	5 VDC	200 mA
Operating temperature range	-40 °C to +85 °C (no derating)	TRV 1-1219		9 VDC	110 mA
I/O isolation test voltage	3000VDC	TRV 1-1212		12 VDC	84 mA
Casing	plastic (UL 94 V-0 rated)	TRV 1-1213		15 VDC	67 mA
		TRV 1-2411	24 VDC ± 10 %	5 VDC	200 mA
		TRV 1-2419		9 VDC	110 mA
		TRV 1-2412		12 VDC	84 mA
		TRV 1-2413		15 VDC	67 mA

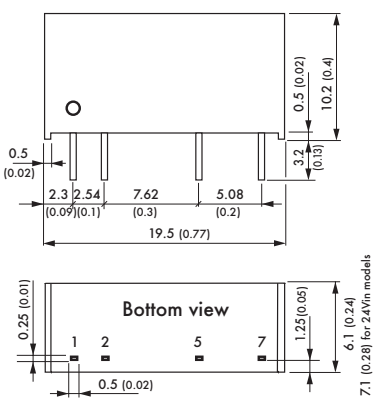Dimensions			Pin	
			1	+ Vin (Vcc)
			2	- Vin (GND)
			5	- Vout
			7	+ Vout

() = Inches

TMH Series ▶ 2 W

- ▶ Industry standard pinout
- ▶ Single and dual output models
- ▶ I/O isolation 1000VDC
- ▶ Operating temperature range -40 °C to +85 °C




Specifications		Models			
Line regulation	non regulated	Order code	Input voltage	Output voltage	Output current max.
Load regulation	10% max.	TMH 0505S		5 VDC	400 mA
Ripple & noise (20 MHz BW)	< 75 mVpk-pk for 5 Vin models <150 mVpk-pk for 12/24 Vin models	TMH 0512S		12 VDC	165 mA
Short circuit protection	limited 1 sec.	TMH 0515S	5 VDC ± 10 %	15 VDC	130 mA
Efficiency	81 % typ. 5 VDC output models 78 % typ.	TMH 0505D		± 5 VDC	± 200 mA
Operating temperature range	-40 °C to +85 °C above 70°C derating 3 %/K	TMH 0512D		± 12 VDC	± 80 mA
I/O isolation test voltage	1000VDC	TMH 0515D		± 15 VDC	± 65 mA
Casing	plastic (UL 94 V-0 rated)	TMH 1205S		5 VDC	400 mA
		TMH 1212S		12 VDC	165 mA
		TMH 1215S	12 VDC ± 10 %	15 VDC	130 mA
		TMH 1205D		± 5 VDC	± 200 mA
		TMH 1212D		± 12 VDC	± 80 mA
		TMH 1215D		± 15 VDC	± 65 mA
		TMH 2405S		5 VDC	400 mA
		TMH 2412S		12 VDC	165 mA
		TMH 2415S	24 VDC ± 10 %	15 VDC	130 mA
		TMH 2405D		± 5 VDC	± 200 mA
		TMH 2412D		± 12 VDC	± 80 mA
		TMH 2415D		± 15 VDC	± 65 mA

Dimensions		
	Pin	Single output
	1	+ Vin (Vcc)
	2	- Vin (GND)
	4	- Vout
	5	No pin
	6	+ Vout
		Dual output
		+ Vin (Vcc)
		- Vin (GND)
		- Vout
		Common
		+ Vout

() = Inches

TMR-2E Series ▶ 2 W

- ▶ Miniature SIP package
- ▶ Wide 2:1 input range
- ▶ Fully regulated outputs
- ▶ Single output
- ▶ High quality/cost performance
- ▶ I/O isolation 1000VDC
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ Low ripple and noise
- ▶ Short circuit protection
- ▶ Remote On/Off

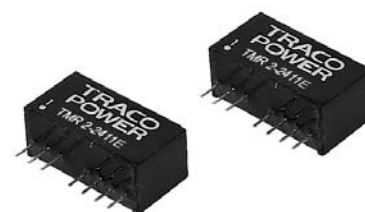

NEW
product


Specifications

Line regulation	0.5 % max.
Load regulation	0.75 % max.
Ripple & noise	<50 mVpk-pk (20 MHz BW) (no external output capacitor required)
Short circuit protection	continuous, automatic recovery
Efficiency	78 % typ. 5 VDC input models: 70 % typ.
Operating temperature range	-40 °C to +85 °C above 65 °C derating 1.5 %/K
I/O isolation test voltage	1000VDC
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1
Casing	plastic (UL 94 V-0 rated)
Remote On/Off	shutdown input for low input current (1 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
TMR 2-0510E	4.5 – 9.0 VDC	3.3 VDC	500 mA
TMR 2-0511E		5 VDC	400 mA
TMR 2-0512E		12 VDC	167 mA
TMR 2-1210E	9 – 18 VDC	3.3 VDC	500 mA
TMR 2-1211E		5 VDC	400 mA
TMR 2-1212E		12 VDC	167 mA
TMR 2-2410E	18 – 36 VDC	3.3 VDC	500 mA
TMR 2-2411E		5 VDC	400 mA
TMR 2-2412E		12 VDC	167 mA
TMR 2-4810E	36 – 75 VDC	3.3 VDC	500 mA
TMR 2-4811E		5 VDC	400 mA
TMR 2-4812E		12 VDC	167 mA

Dimensions

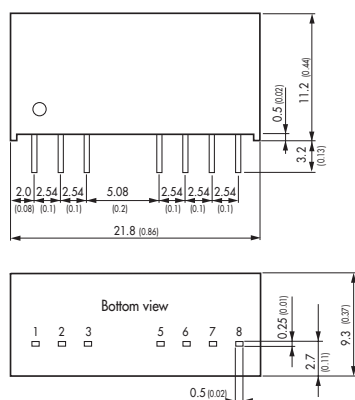

() = Inches

Pin	Single output
1	- Vin (GND)
2	+ Vin (Vcc)
3	Remote On/Off
5	No con.
6	+ Vout
7	- Vout
8	No con.

TMR-2 Series ▶ 2 W



- ▶ Miniature SIP package
- ▶ Wide 2:1 input range
- ▶ Fully regulated outputs
- ▶ Single and dual output models
- ▶ I/O isolation 1000VDC
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ Low ripple and noise
- ▶ Short circuit protection
- ▶ Remote On/Off




Specifications

Line regulation	0.5 % max.
Load regulation	- Single output models: 0.75 % max. - Dual output models: 1.0 % max.
Ripple & noise	<50 mVpk-pk (20 MHz BW) (no external output capacitor required)
Short circuit protection	continuous, automatic recovery
Efficiency	78 % typ. 5 VDC input models: 70 % typ.
Operating temperature range	-40 °C to +85 °C above 75 °C derating 2.0 %/K
I/O isolation test voltage	1000VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	plastic (UL 94 V-0 rated)
Remote On/Off	shutdown input for low input current (1 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
TMR 0510	4.5 – 9.0 VDC	3.3 VDC	500 mA
TMR 0511		5 VDC	400 mA
TMR 0512		12 VDC	165 mA
TMR 0521		± 5 VDC	± 200 mA
TMR 0522		± 12 VDC	± 85 mA
TMR 0523		± 15 VDC	± 65 mA
TMR 1210	9 – 18 VDC	3.3 VDC	500 mA
TMR 1211		5 VDC	400 mA
TMR 1212		12 VDC	165 mA
TMR 1221		± 5 VDC	± 200 mA
TMR 1222		± 12 VDC	± 85 mA
TMR 1223		± 15 VDC	± 65 mA
TMR 2410	18 – 36 VDC	3.3 VDC	500 mA
TMR 2411		5 VDC	400 mA
TMR 2412		12 VDC	165 mA
TMR 2421		± 5 VDC	± 200 mA
TMR 2422		± 12 VDC	± 85 mA
TMR 2423		± 15 VDC	± 65 mA
TMR 4810	36 – 75 VDC	3.3 VDC	500 mA
TMR 4811		5 VDC	400 mA
TMR 4812		12 VDC	165 mA
TMR 4821		± 5 VDC	± 200 mA
TMR 4822		± 12 VDC	± 85 mA
TMR 4823		± 15 VDC	± 65 mA

Dimensions

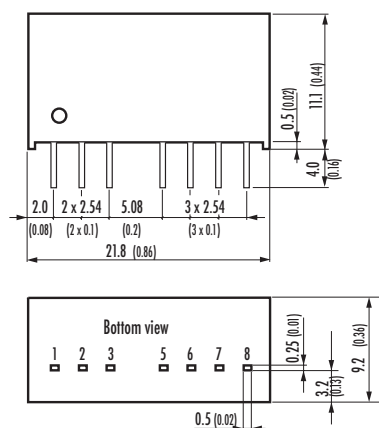

() = Inches

Pin	Single output	Dual output
1	- Vin (GND)	- Vin (GND)
2	+ Vin (Vcc)	+ Vin (Vcc)
3	Remote On/Off	Remote On/Off
5	No con.	No con.
6	+ Vout	+ Vout
7	- Vout	Common
8	No con.	- Vout

TMR-2WI Series ▶ 2 W



- ▶ Miniature SIP package
- ▶ Ultra wide 4:1 input range
- ▶ Fully regulated outputs
- ▶ I/O isolation 1500 VDC
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ Low ripple and noise
- ▶ Short circuit protection
- ▶ Remote On/Off




Specifications

Line regulation	0.5 % max.
Load regulation	– Single output models: 0.75 % max. – Dual output models: 1.0 % max.
Ripple & noise	<50 mVpk-pk (20 MHz BW) (no external output capacitor required)
Short circuit protection	continuous, automatic recovery
Efficiency	80 % typ.
Operating temperature range	-40 °C to +85 °C above 70 °C derating 3.3 %/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	plastic (UL 94 V-0 rated)
Remote On/Off	shutdown input for low input current (1 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
TMR 2-2410WI	9 – 36 VDC	3.3 VDC	500 mA
TMR 2-2411WI		5 VDC	400 mA
TMR 2-2412WI		12 VDC	165 mA
TMR 2-2413WI		15 VDC	135 mA
TMR 2-2421WI		± 5 VDC	± 200 mA
TMR 2-2422WI		± 12 VDC	± 85 mA
TMR 2-2423WI		± 15 VDC	± 65 mA
TMR 2-4810WI	18 – 75 VDC	3.3 VDC	500 mA
TMR 2-4811WI		5 VDC	400 mA
TMR 2-4812WI		12 VDC	165 mA
TMR 2-4813WI		15 VDC	135 mA
TMR 2-4821WI		± 5 VDC	± 200 mA
TMR 2-4822WI		± 12 VDC	± 85 mA
TMR 2-4823WI		± 15 VDC	± 65 mA

Dimensions

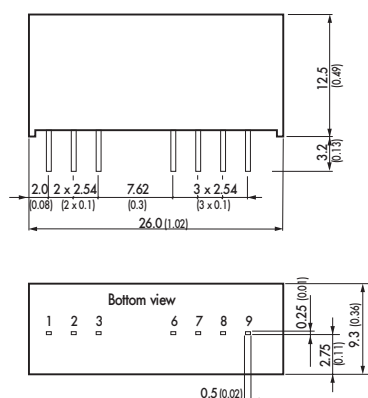

Pin	Single output	Dual output
1	– Vin (GND)	– Vin (GND)
2	+ Vin (Vcc)	+ Vin (Vcc)
3	Remote On/Off	Remote On/Off
6	+ Vout	+ Vout
7	No con.	Common
8	No con.	No con.
9	– Vout	– Vout

() = Inches

TMR-3 Series ▶ 3 W



- ▶ High power density in SIP package
- ▶ Wide 2:1 input range
- ▶ Fully regulated outputs
- ▶ I/O isolation 1500VDC
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ Low ripple and noise
- ▶ Short circuit protection
- ▶ Remote On/Off




Specifications

Line regulation	0.2 % max.
Load regulation	– Single output models: 0.5 % max. – Dual output models: 1.0 % max.
Ripple & noise	<75 mVpk-pk (20 MHz BW) no external output capacitor required
Short circuit protection	continuous, automatic recovery
Efficiency	79 % typ.
Operating temperature range	-40 °C to +85 °C above 70 °C derating 3.3 %/K
I/O isolation test voltage	1500VDC (optional 3000 VDC)
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	plastic (UL 94 V-0 rated)
Remote On/Off	shutdown input for low input current (2.5 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
TMR 3-0510	4.5 – 9.0 VDC	3.3 VDC	700 mA
TMR 3-0511		5 VDC	600 mA
TMR 3-0512		12 VDC	250 mA
TMR 3-0513		15 VDC	200 mA
TMR 3-0521		± 5 VDC	± 300 mA
TMR 3-0522		± 12 VDC	± 125 mA
TMR 3-0523		± 15 VDC	± 100 mA
TMR 3-1210	9 – 18 VDC	3.3 VDC	700 mA
TMR 3-1211		5 VDC	600 mA
TMR 3-1212		12 VDC	250 mA
TMR 3-1213		15 VDC	200 mA
TMR 3-1221		± 5 VDC	± 300 mA
TMR 3-1222		± 12 VDC	± 125 mA
TMR 3-1223		± 15 VDC	± 100 mA
TMR 3-2410	18 – 36 VDC	3.3 VDC	700 mA
TMR 3-2411		5 VDC	600 mA
TMR 3-2412		12 VDC	250 mA
TMR 3-2413		15 VDC	200 mA
TMR 3-2421		± 5 VDC	± 300 mA
TMR 3-2422		± 12 VDC	± 125 mA
TMR 3-2423		± 15 VDC	± 100 mA
TMR 3-4810	36 – 75 VDC	3.3 VDC	700 mA
TMR 3-4811		5 VDC	600 mA
TMR 3-4812		12 VDC	250 mA
TMR 3-4813		15 VDC	200 mA
TMR 3-4821		± 5 VDC	± 300 mA
TMR 3-4822		± 12 VDC	± 125 mA
TMR 3-4823		± 15 VDC	± 100 mA

Dimensions

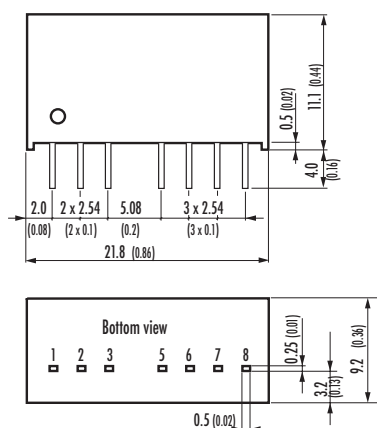

() = Inches

Pin	Single output	Dual output
1	– Vin (GND)	– Vin (GND)
2	+ Vin (Vcc)	+ Vin (Vcc)
3	Remote On/Off	Remote On/Off
5	No con.	No con.
6	+ Vout	+ Vout
7	– Vout	Common
8	No con.	– Vout

TMR-3WI Series ▶ 3 W



- ▶ High power density in SIP package
- ▶ Ultra wide 4:1 input range
- ▶ Fully regulated outputs
- ▶ I/O isolation 1500VDC
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ Low ripple and noise
- ▶ Short circuit protection
- ▶ Remote On/Off




Specifications

Line regulation	0.2 % max.
Load regulation	– Single output models: 0.5 % max. – Dual output models: 1.0 % max.
Ripple & noise	<75 mVpk-pk (20 MHz BW)
Short circuit protection	continuous, automatic recovery
Efficiency	80 % typ.
Operating temperature range	-40 °C to +85 °C above 70 °C derating 3.3 %/K
I/O isolation test voltage	1500VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	plastic (UL 94 V-0 rated)
Remote On/Off	shutdown input for low input current (1 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
TMR 3-1210WI	4.5 – 18 VDC	3.3 VDC	700 mA
TMR 3-1211WI		5 VDC	600 mA
TMR 3-1212WI		12 VDC	250 mA
TMR 3-1213WI		15 VDC	200 mA
TMR 3-1221WI		± 5 VDC	± 300 mA
TMR 3-1222WI		± 12 VDC	± 125 mA
TMR 3-1223WI		± 15 VDC	± 100 mA
TMR 3-2410WI	9 – 36 VDC	3.3 VDC	700 mA
TMR 3-2411WI		5 VDC	600 mA
TMR 3-2412WI		12 VDC	250 mA
TMR 3-2413WI		15 VDC	200 mA
TMR 3-2421WI		± 5 VDC	± 300 mA
TMR 3-2422WI		± 12 VDC	± 125 mA
TMR 3-2423WI		± 15 VDC	± 100 mA
TMR 3-4810WI	18 – 75 VDC	3.3 VDC	700 mA
TMR 3-4811WI		5 VDC	600 mA
TMR 3-4812WI		12 VDC	250 mA
TMR 3-4813WI		15 VDC	200 mA
TMR 3-4821WI		± 5 VDC	± 300 mA
TMR 3-4822WI		± 12 VDC	± 125 mA
TMR 3-4823WI		± 15 VDC	± 100 mA

Dimensions

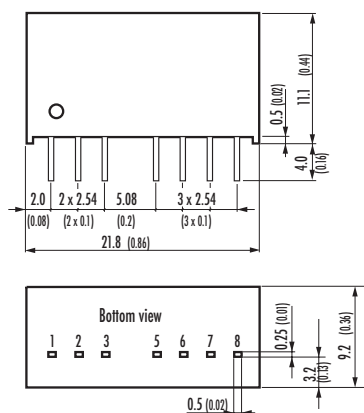

Pin	Single output	Dual output
1	– Vin (GND)	– Vin (GND)
2	+ Vin (Vcc)	+ Vin (Vcc)
3	Remote On/Off	Remote On/Off
5	No con.	No con.
6	+ Vout	+ Vout
7	– Vout	Common
8	No con.	– Vout

() = Inches

TEL-2 Series ▶ 2 W

CB 
Scheme UL 60950-1

- ▶ Ultracompact DIP-16 package
- ▶ Wide 2:1 input voltage range
- ▶ I/O isolation 1500VDC
- ▶ Operating temperature range -40 °C to +75 °C
- ▶ Low ripple and noise
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, Class A
- ▶ Cost optimized design



Specifications

Line regulation	0.5 % max.
Load regulation	– Single output models: 0.75 % max. – Dual output models: 2.0 % max.
Ripple & Noise	<50 mVpk-pk (20 MHz BW)
Conducted EMI	EN55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	78 % typ.
Operating temperature range	–40 °C to +75 °C above 65 °C derating 2.8 %/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Casing	plastic (UL 94 V-0 rated)


Product with same electrical specifications available in SMD package.

See TES-2N series page 12

Models

Order code	Input voltage	Output voltage	Output current max.
TEL 2-0510	4.5 – 9.0 VDC	3.3 VDC	500 mA
TEL 2-0511		5 VDC	400 mA
TEL 2-0512		12 VDC	165 mA
TEL 2-0513		15 VDC	135 mA
TEL 2-0521		± 5 VDC	± 200 mA
TEL 2-0522	9 – 18 VDC	± 12 VDC	± 85 mA
TEL 2-0523		± 15 VDC	± 65 mA
TEL 2-1210		3.3 VDC	500 mA
TEL 2-1211		5 VDC	400 mA
TEL 2-1212		12 VDC	165 mA
TEL 2-1213		15 VDC	135 mA
TEL 2-1221	18 – 36 VDC	± 5 VDC	± 200 mA
TEL 2-1222		± 12 VDC	± 85 mA
TEL 2-1223		± 15 VDC	± 65 mA
TEL 2-2410		3.3 VDC	500 mA
TEL 2-2411		5 VDC	400 mA
TEL 2-2412		12 VDC	165 mA
TEL 2-2413		15 VDC	135 mA
TEL 2-2421	36 – 75 VDC	± 5 VDC	± 200 mA
TEL 2-2422		± 12 VDC	± 85 mA
TEL 2-2423		± 15 VDC	± 65 mA
TEL 2-4810		3.3 VDC	500 mA
TEL 2-4811		5 VDC	400 mA
TEL 2-4812		12 VDC	165 mA
TEL 2-4813		15 VDC	135 mA
TEL 2-4821		± 5 VDC	± 200 mA
TEL 2-4822		± 12 VDC	± 85 mA
TEL 2-4823		± 15 VDC	± 65 mA

Dimensions

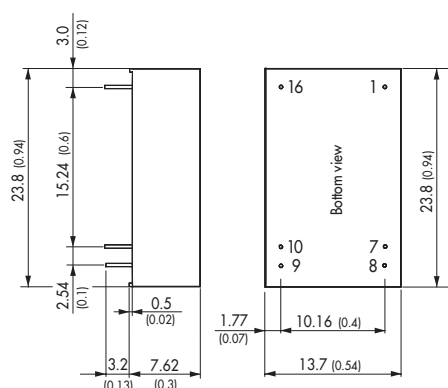

() = Inches

Pin	Single output	Dual output
1	– Vin (GND)	– Vin (GND)
7	No con.	No con.
8	No con.	Common
9	+ Vout	+ Vout
10	– Vout	– Vout
16	+ Vin	+ Vin

TEL-3 Series ▶ 3 W



- ▶ DIP-24 plastic package
- ▶ Wide 2:1 input range
- ▶ Exclusive 10–30 VDC input range models
- ▶ I/O isolation 1500VDC
- ▶ Operating temperature range –40 °C to +85 °C
- ▶ Short circuit protection
- ▶ Available with industry standard pinout
- ▶ Cost optimized design




Specifications

Line regulation	0.5 % max.
Load regulation	– Single output models: 0.5 % max. – Dual output models: 2.0 % max.
Ripple & Noise	<60 mVpk-pk (20 MHz BW)
Input filter	Pi-filter
Short circuit protection	continuous, automatic recovery
Efficiency	80 % typ.
Operating temperature range	–40 °C to +85 °C above 70 °C derating 3.3 %/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Casing	plastic (UL 94 V-0 rated)
Option	metal casing

Models

Order code	Input voltage	Output voltage	Output current max.
TEL 3-0511	4.5 – 9.0 VDC	5 VDC	600 mA
TEL 3-0512		12 VDC	250 mA
TEL 3-0513		15 VDC	200 mA
TEL 3-0522		± 12 VDC	± 125 mA
TEL 3-0523		± 15 VDC	± 100 mA
TEL 3-1211	9 – 18 VDC	5 VDC	600 mA
TEL 3-1212		12 VDC	250 mA
TEL 3-1213		15 VDC	200 mA
TEL 3-1222		± 12 VDC	± 125 mA
TEL 3-1223		± 15 VDC	± 100 mA
TEL 3-2011	10 – 30 VDC	5 VDC	600 mA
TEL 3-2012		12 VDC	250 mA
TEL 3-2013		15 VDC	200 mA
TEL 3-2022		± 12 VDC	± 125 mA
TEL 3-2023		± 15 VDC	± 100 mA
TEL 3-2411	18 – 36 VDC	5 VDC	600 mA
TEL 3-2412		12 VDC	250 mA
TEL 3-2413		15 VDC	200 mA
TEL 3-2422		± 12 VDC	± 125 mA
TEL 3-2423		± 15 VDC	± 100 mA
TEL 3-4811	36 – 75 VDC	5 VDC	600 mA
TEL 3-4812		12 VDC	250 mA
TEL 3-4813		15 VDC	200 mA
TEL 3-4822		± 12 VDC	± 125 mA
TEL 3-4823		± 15 VDC	± 100 mA

Dimensions

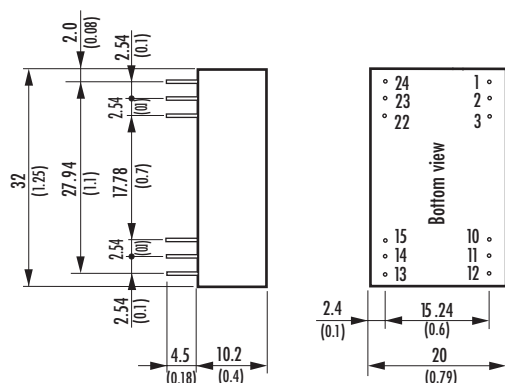

() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	No con.	– Vout
3	No con.	Common
10	– Vout	Common
11	+ Vout	+ Vout
12	– Vin (GND)	– Vin (GND)
13	– Vin (GND)	– Vin (GND)
14	+ Vout	+ Vout
15	– Vout	Common
22	No con.	Common
23	No con.	– Vout
24	+ Vin (Vcc)	+ Vin (Vcc)

THL-3WI Series ▶ 3 W



- ▶ Ultra wide 4:1 input voltage range
- ▶ Fully regulated outputs
- ▶ I/O-isolation 1500VDC
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ Qualified for leadfree reflow solder process according IPC J-STD-020D
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Remote On/Off



NEW
Product

Specifications

Line regulation	0.5% max.
Load regulation	- Single output models: 0.5% max. - Dual output models: 1.0% max.
Ripple & noise	<60 mVpk-pk (20 MHz BW) (no external output capacitor required)
Conducted EMI	EN55022, class A, and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	81 % typ.
Operating temperature range	-40 °C to +85 °C above 70 °C derating 3.5%/K
I/O isolation test voltage	1500 VDC
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1
Casing	Epoxy molded (UL 94 V-0 rated)
Remote On/Off	shutdown input for low input current (5 mA) in standby operation


Models

Order code	Input voltage	Output voltage	Output current max.
THL 3-2410WI	9 – 36 VDC	3.3 VDC	600 mA
THL 3-2411WI		5 VDC	600 mA
THL 3-2412WI		12 VDC	250 mA
THL 3-2413WI		15 VDC	200 mA
THL 3-2421WI		± 5 VDC	± 300 mA
THL 3-2422WI		± 12 VDC	± 125 mA
THL 3-2423WI		± 15 VDC	± 100 mA
THL 3-4810WI	18 – 75 VDC	3.3 VDC	600 mA
THL 3-4811WI		5 VDC	600 mA
THL 3-4812WI		12 VDC	250 mA
THL 3-4813WI		15 VDC	200 mA
THL 3-4821WI		± 5 VDC	± 300 mA
THL 3-4822WI		± 12 VDC	± 125 mA
THL 3-4823WI		± 15 VDC	± 100 mA

Product with same electrical specifications available in SMD package.

See THL-3WISM series page 15

Dimensions

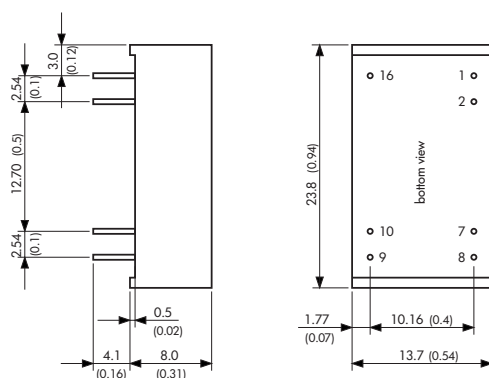


() = Inches

Pin	Single output	Dual output
1	- Vin (GND)	- Vin (GND)
2	Remote On/Off	Remote On/Off
7	No con.	No con.
8	No con.	Common
9	+ Vout	+ Vout
10	- Vout	- Vout
16	+ Vin (Vcc)	+ Vin (Vcc)

TEL-5 Series ▶ 5 W



- ▶ DIP-24 plastic package
- ▶ Wide 2:1 input range
- ▶ High efficiency up to 86 %
- ▶ I/O isolation 1500 VDC
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ Short circuit protection
- ▶ Industry standard pinout
- ▶ Cost optimized design

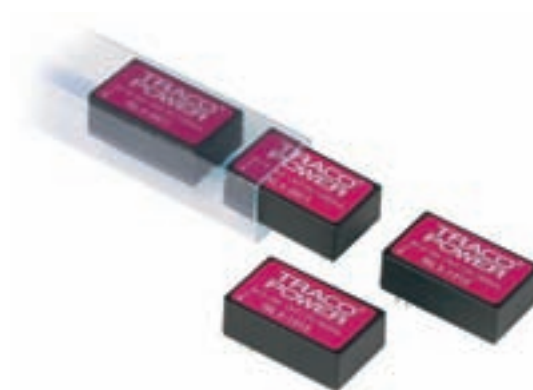


Specifications

Line regulation	0.3 % max.
Load regulation	– Single output models: 1.0 % max. – Dual output models: 2.0 % max.
Ripple & noise	<75 mVpk-pk (20 MHz BW)
Input filter	Pi-filter
Short circuit protection	continuous, automatic recovery
Efficiency	84 % typ.
Operating temperature range	-40 °C to +85 °C above 70 °C derating 3.3 %/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Casing	plastic (UL 94V-0 rated)

Models

Order code	Input voltage	Output voltage	Output current max.
TEL 5-1210		3.3 VDC	1200 mA
TEL 5-1211		5 VDC	1000 mA
TEL 5-1212	9 – 18 VDC	12 VDC	500 mA
TEL 5-1222		± 12 VDC	± 250 mA
TEL 5-1223		± 15 VDC	± 200 mA
TEL 5-2410		3.3 VDC	1200 mA
TEL 5-2411		5 VDC	1000 mA
TEL 5-2412	18 – 36 VDC	12 VDC	500 mA
TEL 5-2422		± 12 VDC	± 250 mA
TEL 5-2423		± 15 VDC	± 200 mA

Dimensions

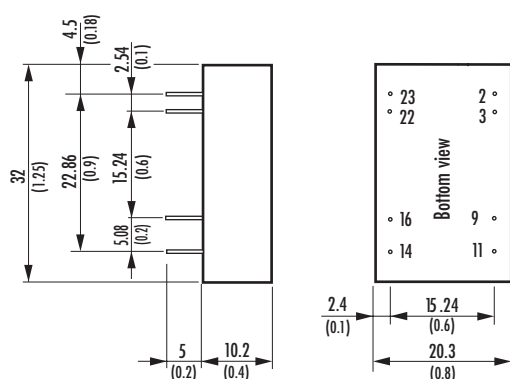

() = Inches

Pin	Single output	Dual output
2	– Vin (GND)	– Vin (GND)
3	– Vin (GND)	– Vin (GND)
9	No pin	Common
11	No con.	– Vout
14	+ Vout	+ Vout
16	– Vout	Common
22	+ Vin (Vcc)	+ Vin (Vcc)
23	+ Vin (Vcc)	+ Vin (Vcc)

THL-6WI Series ▶ 6 W



- ▶ Ultra compact 1" x 0.8" package
- ▶ Ultra wide 4:1 input voltage range
- ▶ Fully regulated output
- ▶ Operating temperature range -40 °C to +70 °C
- ▶ I/O isolation 1500 VDC
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Qualified for leadfree reflow solder process



NEW
Product

Specifications

Line regulation	0.5 % max.
Load regulation	- Single output models: 1.0% max. - Dual output models: 2.0% max.
Ripple & Noise	<60 mVpk-pk typ.(20 MHz BW)
Input filter	EN 55022, class A and FCC, level A (wit external capacitor)
Short circuit protection	continuous, automatic recovery
Efficiency	83 % typ.
Operating temperature range	-40 °C to +70 °C above 60 °C derating 2.5%/K
I/O isolation test voltage	1500 VDC
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Remote On/Off	shutdown input for low input current (10 mA) in standby operation
Casing	plastic (UL 94 V-0 rated)


Models

Order code	Input voltage	Output voltage	Output current max.
THL 6-2410WI	9 – 36 VDC	3.3 VDC	1450 mA
THL 6-2411WI		5 VDC	1200 mA
THL 6-2412WI		12 VDC	500 mA
THL 6-2413WI		15 VDC	400 mA
THL 6-2421WI		± 5 VDC	± 600 mA
THL 6-2422WI		± 12 VDC	± 250 mA
THL 6-2423WI		± 15 VDC	± 200 mA
THL 6-4810WI	18 – 75 VDC	3.3 VDC	1450 mA
THL 6-4811WI		5 VDC	1200 mA
THL 6-4812WI		12 VDC	500 mA
THL 6-4813WI		15 VDC	400 mA
THL 6-4821WI		± 5 VDC	± 600 mA
THL 6-4822WI		± 12 VDC	± 250 mA
THL 6-4823WI		± 15 VDC	± 200 mA

Product with same electrical specifications available in SMD package.

See THL-6WISM series page 20

Dimensions

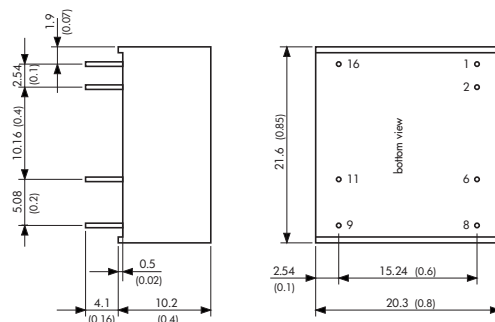

() = Inches

Pin	Single output	Dual output
1	Remote On/Off	Remote On/Off
2	- Vin (GND)	- Vin (GND)
6	No con.	Common
8	No con.	- Vout
9	+ Vout	+ Vout
11	- Vout	Common
16	+ Vin (Vcc)	+ Vin (Vcc)

THL-10WI Series ▶ 10 W



- ▶ 1" x 1" x 0.4" metal package
- ▶ Ultra wide 4:1 input voltage range
- ▶ High efficiency up to 87 %
- ▶ I/O isolation 1500 VDC
- ▶ Input filter to meet EN 55022, class A
- ▶ Short circuit protection
- ▶ Remote On/Off
- ▶ Industry standard pinout

NEW
Product




Specifications

Line regulation	1% max.
Load regulation	– Single output models: 1.0% max. – Dual output models: 2.0% max.
Ripple & noise	<100 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	86 % typ.
Operating temperature range	–40 °C to +75 °C above 60°C derating 2.5 %/K
I/O isolation test voltage	1500 VDC
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1
Casing	metal, with insulated baseplate
Remote On/Off	shutdown input for low current (10 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
THL 10-2410WI	9 – 36 VDC	3.3 VDC	2200 mA
THL 10-2411WI		5.1 VDC	2000 mA
THL 10-2412WI		12 VDC	830 mA
THL 10-2413WI		15 VDC	660 mA
THL 10-2421WI		± 5 VDC	± 1000 mA
THL 10-2422WI		± 12 VDC	± 410 mA
THL 10-2423WI		± 15 VDC	± 330 mA
THL 10-4810WI	18 – 75 VDC	3.3 VDC	2200 mA
THL 10-4811WI		5.1 VDC	2000 mA
THL 10-4812WI		12 VDC	830 mA
THL 10-4813WI		15 VDC	660 mA
THL 10-4821WI		± 5 VDC	± 1000 mA
THL 10-4822WI		± 12 VDC	± 410 mA
THL 10-4823WI		± 15 VDC	± 330 mA

Dimensions

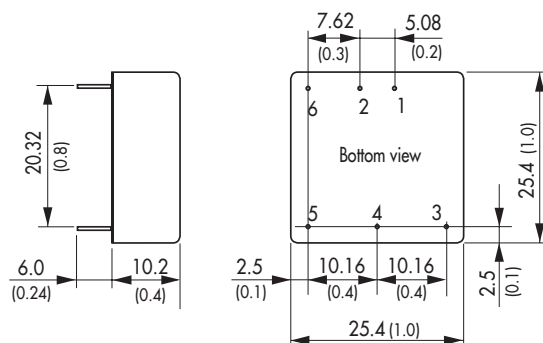

() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	– Vin (GND)	– Vin (GND)
3	+ Vout	+ Vout
4	No pin	Common
5	– Vout	– Vout
6	Remote On/Off	Remote On/Off

TEL-15 Series ► 15 W



- 2" x 1" x 0.4" metal package
- Wide 2:1 input range
- High efficiency up to 86 %
- Operating temperature range -40 °C to +75 °C
- I/O isolation 1500 VDC
- Short circuit protection
- Industry standard pinout
- Cost optimized design




Specifications

Line regulation	1.0 % max.
Load regulation	– Single output models: 0.5 % max. – Dual output models: 2.0 % max.
Ripple & noise	<75 mVpk-pk (20 MHz BW)
Input filter	Pi-filter
Short circuit protection	continuous, automatic recovery
Efficiency	86 % typ.
Operating temperature range	-40 °C to +75 °C above 60 °C derating 2.5 %/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Casing	metal, 6-side shielded with insulated baseplate

Models

Order code	Input voltage	Output voltage	Output current max.
TEL 15-1210		3.3 VDC	3000 mA
TEL 15-1211		5.1 VDC	3000 mA
TEL 15-1212	9 – 18 VDC	12 VDC	1250 mA
TEL 15-1213		15 VDC	1000 mA
TEL 15-1222		± 12 VDC	± 625 mA
TEL 15-1223		± 15 VDC	± 500 mA
TEL 15-2410		3.3 VDC	3000 mA
TEL 15-2411		5.1 VDC	3000 mA
TEL 15-2412	18 – 36 VDC	12 VDC	1250 mA
TEL 15-2413		15 VDC	1000 mA
TEL 15-2422		± 12 VDC	± 625 mA
TEL 15-2423		± 15 VDC	± 500 mA
TEL 15-4810		3.3 VDC	3000 mA
TEL 15-4811		5.1 VDC	3000 mA
TEL 15-4812	36 – 75 VDC	12 VDC	1250 mA
TEL 15-4813		15 VDC	1000 mA
TEL 15-4822		± 12 VDC	± 625 mA
TEL 15-4823		± 15 VDC	± 500 mA

Dimensions

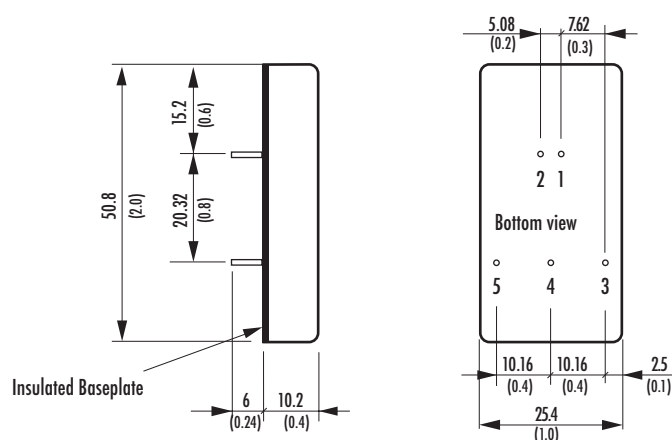

() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
3	+ Vout	+ Vout
4	No pin	Common
5	- Vout	- Vout

THL-20WI Series ▶ 20 W



- ▶ Highest power density 20 W converter
- ▶ 1" x 1" x 0.4" metal package
- ▶ Ultra wide 4:1 input voltage range
- ▶ Highest efficiency up to 90 %
- ▶ I/O isolation 1500 VDC
- ▶ Input filter to meet EN 55022, class A
- ▶ Short circuit protection
- ▶ Remote On/Off
- ▶ Adjustable output voltage
- ▶ Industry standard pinout

NEW
Product




Specifications

Line regulation	1% max.
Load regulation	– Single output models: 1.0% max. – Dual output models: 2.0% max.
Output voltage adjustment	±10% by external resistor (single output models)
Ripple & noise	<100 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	89% typ.
Operating temperature range	–40 °C to +75 °C above 60°C derating 2.5%/K
I/O isolation test voltage	1500 VDC
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1
Casing	metal, with insulated baseplate
Remote On/Off	shutdown input for low current in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
THL 20-2410WI	9 – 36 VDC	3.3 VDC	4500 mA
THL 20-2411WI		5.1 VDC	4000 mA
THL 20-2412WI		12 VDC	1670 mA
THL 20-2413WI		15 VDC	1340 mA
THL 20-2422WI		± 12 VDC	± 835 mA
THL 20-2423WI	18 – 75 VDC	± 15 VDC	± 670 mA
THL 20-4810WI		3.3 VDC	4500 mA
THL 20-4811WI		5.1 VDC	4000 mA
THL 20-4812WI		12 VDC	1670 mA
THL 20-4813WI		15 VDC	1340 mA
THL 20-4822WI		± 12 VDC	± 835 mA
THL 20-4823WI		± 15 VDC	± 670 mA

Dimensions

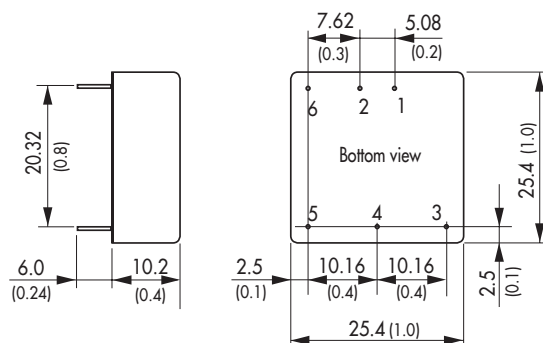

() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	– Vin (GND)	– Vin (GND)
3	+ Vout	+ Vout
4	Trim	Common
5	– Vout	– Vout
6	Remote On/Off	Remote On/Off

TEL-30 Series ▶ 30 Watt

CB 
Scheme UL 60950-1

- ▶ 2" x 1" x 0.4" metal package
- ▶ Wide 2:1 input range
- ▶ High efficiency up to 88 %
- ▶ Operating temperature range -40 °C to +71 °C
- ▶ I/O isolation 1500VDC
- ▶ Short circuit protection
- ▶ Remote On/Off
- ▶ Adjustable output voltage
- ▶ Industry standard pinout
- ▶ Cost optimized design




Specifications

Line regulation	0.3 % max.
Load regulation	1.0 % max.
Output voltage adjustment	±10 % by external resistor
Input filter	Pi-filter
Ripple & noise	<100 mVpk-pk (20 MHz BW)
Short circuit protection	continuous, automatic recovery
Efficiency	86 % typ.
Operating temperature range	-40 °C to +71 °C above 50 °C derating 2 %/K
I/O isolation test voltage	1500VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Casing	metal, 6-side shielded with insulated baseplate

Models

Order code	Input voltage	Output voltage	Output current max.
TEL 30-2409		2.5 VDC	6000 mA
TEL 30-2410		3.3 VDC	6000 mA
TEL 30-2411	18 – 36 VDC	5.1 VDC	5000 mA
TEL 30-2412		12 VDC	2500 mA
TEL 30-2413		15 VDC	2000 mA
TEL 30-4809		2.5 VDC	6000 mA
TEL 30-4810		3.3 VDC	6000 mA
TEL 30-4811	36 – 75 VDC	5.1 VDC	5000 mA
TEL 30-4812		12 VDC	2500 mA
TEL 30-4813		15 VDC	2000 mA

Dimensions

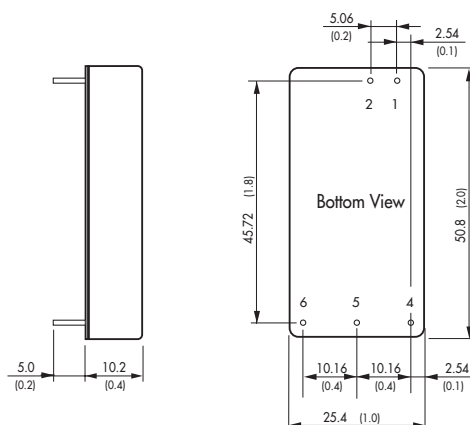

() = Inches

Pin

Pin	Single output
1	+ Vin (Vcc)
2	- Vin (GND)
4	+ Vout
5	- Vout
6	Trim

TDR-2 Series ▶ 2 W

- ▶ Compact design in DIP package
- ▶ Wide 2:1 input voltage range
- ▶ Fully regulated outputs
- ▶ No minimum load required
- ▶ I/O-isolation 1500VDC
- ▶ Operating temperature range -40°C to $+85^{\circ}\text{C}$ without derating
- ▶ Short circuit protection
- ▶ Remote On/Off



NEW
Product

Specifications

Line regulation	0.2 % max.
Load regulation	– Single output models: 1.0 % max. – Dual output models: 1.0 % max.
Ripple & noise	<30 mVpk-pk (20 MHz BW) (no external output capacitor required)
Short circuit protection	continuous, automatic recovery
Efficiency	81 % typ.
Operating temperature range	-40°C to $+85^{\circ}\text{C}$ without derating
I/O isolation test voltage	1500 VDC
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1
Casing	Epoxy molded (UL 94 V-0 rated)
Remote On/Off	shutdown input for low input current (2.5 mA) in standby operation


Product with same electrical specifications available in SMD package.

See TDR-2SM series page 10

Models

Order code	Input voltage	Output voltage	Output current max.
TDR 2-0511	4.5 – 9 VDC	5 VDC	400 mA
TDR 2-0512		12 VDC	167 mA
TDR 2-0513		15 VDC	134 mA
TDR 2-0522		± 12 VDC	± 83 mA
TDR 2-0523		± 15 VDC	± 67 mA
TDR 2-1211	9 – 18 VDC	5 VDC	400 mA
TDR 2-1212		12 VDC	167 mA
TDR 2-1213		15 VDC	134 mA
TDR 2-1222		± 12 VDC	± 83 mA
TDR 2-1223		± 15 VDC	± 67 mA
TDR 2-2411	18 – 36 VDC	5 VDC	400 mA
TDR 2-2412		12 VDC	167 mA
TDR 2-2413		15 VDC	134 mA
TDR 2-2422		± 12 VDC	± 83 mA
TDR 2-2423		± 15 VDC	± 67 mA
TDR 2-4811	36 – 75 VDC	5 VDC	400 mA
TDR 2-4812		12 VDC	167 mA
TDR 2-4813		15 VDC	134 mA
TDR 2-4822		± 12 VDC	± 83 mA
TDR 2-4823		± 15 VDC	± 67 mA

Dimensions

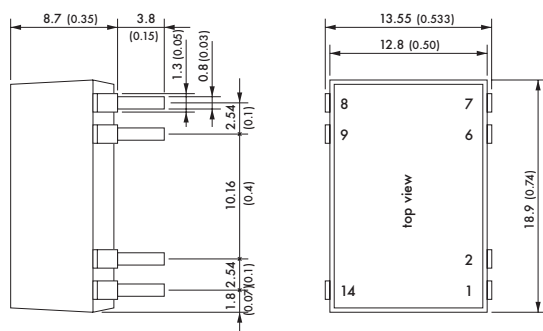

() = Inches

Pin	Single output	Dual output
1	– Vin (GND)	– Vin (GND)
2	Remote On/Off	Remote On/Off
6	No con.	Common
7	No con.	– Vout
8	+ Vout	+ Vout
9	– Vout	Common
14	+ Vin (Vcc)	+ Vin (Vcc)

TDR-2WI Series ▶ 2 W

- ▶ Compact design in DIP package
- ▶ Ultra wide 4:1 input voltage range
- ▶ Fully regulated outputs
- ▶ No minimum load required
- ▶ I/O-isolation 1500VDC
- ▶ Operating temperature range -40°C to $+85^{\circ}\text{C}$ without derating
- ▶ Short circuit protection
- ▶ Remote On/Off



NEW
Product

Specifications

Line regulation	0.2 % max.
Load regulation	– Single output models: 1.0 % max. – Dual output models: 1.0 % max.
Ripple & noise	<30 mVpk-pk (20 MHz BW) (no external output capacitor required)
Short circuit protection	continuous, automatic recovery
Efficiency	81 % typ.
Operating temperature range	-40°C to $+85^{\circ}\text{C}$ without derating
I/O isolation test voltage	1500 VDC
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1
Casing	Epoxy molded (UL 94 V-0 rated)
Remote On/Off	shutdown input for low input current (2.5 mA) in standby operation


Product with same electrical specifications available in SMD package.

See TDR-2WISM series page 11

Models

Order code	Input voltage	Output voltage	Output current max.
TDR 2-1211WI	4.5 – 18 VDC	5 VDC	400 mA
TDR 2-1212WI		12 VDC	167 mA
TDR 2-1213WI		15 VDC	134 mA
TDR 2-1222WI		± 12 VDC	± 83 mA
TDR 2-1223WI	9 – 36 VDC	± 15 VDC	± 67 mA
TDR 2-2411WI		5 VDC	400 mA
TDR 2-2412WI		12 VDC	167 mA
TDR 2-2413WI		15 VDC	134 mA
TDR 2-2422WI	18 – 75 VDC	± 12 VDC	± 83 mA
TDR 2-2423WI		± 15 VDC	± 67 mA
TDR 2-4811WI		5 VDC	400 mA
TDR 2-4812WI		12 VDC	167 mA
TDR 2-4813WI		15 VDC	134 mA
TDR 2-4822WI		± 12 VDC	± 83 mA
TDR 2-4823WI		± 15 VDC	± 67 mA

Dimensions

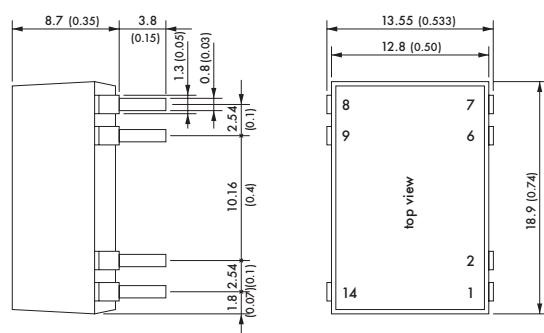

() = Inches

Pin	Single output	Dual output
1	– Vin (GND)	– Vin (GND)
2	Remote On/Off	Remote On/Off
6	No con.	Common
7	No con.	– Vout
8	+ Vout	+ Vout
9	– Vout	Common
14	+ Vin (Vcc)	+ Vin (Vcc)

TDR-3 Series ▶ 3 W

- ▶ Compact design in DIP package
- ▶ Wide 2:1 input voltage range
- ▶ Fully regulated outputs
- ▶ No minimum load required
- ▶ I/O-isolation 1500VDC
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ Short circuit protection
- ▶ Remote On/Off



NEW
Product

Specifications

Line regulation	0.2 % max.
Load regulation	– Single output models: 1.0 % max. – Dual output models: 1.0 % max.
Ripple & noise	<30 mVpk-pk (20 MHz BW) (no external output capacitor required)
Short circuit protection	continuous, automatic recovery
Efficiency	81 % typ.
Operating temperature range	-40 °C to +85 °C above 70 °C derating 3.5%/K
I/O isolation test voltage	1500 VDC
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1
Casing	Epoxy molded (UL 94 V-0 rated)
Remote On/Off	shutdown input for low input current (2.5 mA) in standby operation


Product with same electrical specifications available in SMD package.

See TDR-3SM series page 13

Models

Order code	Input voltage	Output voltage	Output current max.
TDR 3-0511	4.5 – 9 VDC	5 VDC	600 mA
TDR 3-0512		12 VDC	250 mA
TDR 3-0513		15 VDC	200 mA
TDR 3-0522		± 12 VDC	± 125 mA
TDR 3-0523		± 15 VDC	± 100 mA
TDR 3-1211	9 – 18 VDC	5 VDC	600 mA
TDR 3-1212		12 VDC	250 mA
TDR 3-1213		15 VDC	200 mA
TDR 3-1222		± 12 VDC	± 125 mA
TDR 3-1223		± 15 VDC	± 100 mA
TDR 3-2411	18 – 36 VDC	5 VDC	600 mA
TDR 3-2412		12 VDC	250 mA
TDR 3-2413		15 VDC	200 mA
TDR 3-2422		± 12 VDC	± 125 mA
TDR 3-2423		± 15 VDC	± 100 mA
TDR 3-4811	36 – 75 VDC	5 VDC	600 mA
TDR 3-4812		12 VDC	250 mA
TDR 3-4813		15 VDC	200 mA
TDR 3-4822		± 12 VDC	± 125 mA
TDR 3-4823		± 15 VDC	± 100 mA

Dimensions

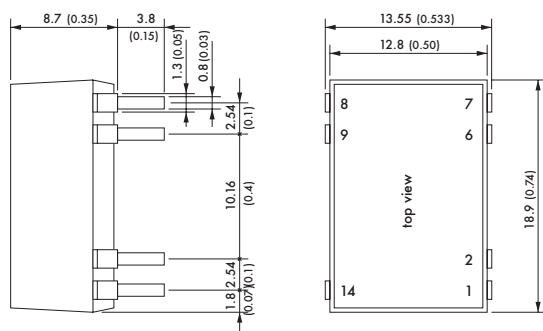

() = Inches

Pin	Single output	Dual output
1	– Vin (GND)	– Vin (GND)
2	Remote On/Off	Remote On/Off
6	No con.	Common
7	No con.	– Vout
8	+ Vout	+ Vout
9	– Vout	Common
14	+ Vin (Vcc)	+ Vin (Vcc)

TDR-3WI Series ▶ 3 W

- ▶ Compact design in DIP package
- ▶ Ultra wide 4:1 input voltage range
- ▶ Fully regulated outputs
- ▶ No minimum load required
- ▶ I/O-isolation 1500VDC
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ Short circuit protection
- ▶ Remote On/Off



NEW
Product

Specifications

Line regulation	0.2 % max.
Load regulation	- Single output models: 1.0 % max. - Dual output models: 1.0 % max.
Ripple & noise	<30 mVpk-pk (20 MHz BW) (no external output capacitor required)
Short circuit protection	continuous, automatic recovery
Efficiency	81 % typ.
Operating temperature range	-40 °C to +85 °C above 70 °C derating 3.5%/K
I/O isolation test voltage	1500 VDC
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1
Casing	Epoxy molded (UL 94 V-0 rated)
Remote On/Off	shutdown input for low input current (2.5 mA) in standby operation


Product with same electrical specifications available in SMD package.

See TDR-3WISM series page 14

Models

Order code	Input voltage	Output voltage	Output current max.
TDR 3-1211WI	4.5 – 18 VDC	5 VDC	600 mA
TDR 3-1212WI		12 VDC	250 mA
TDR 3-1213WI		15 VDC	200 mA
TDR 3-1222WI		± 12 VDC	± 125 mA
TDR 3-1223WI		± 15 VDC	± 100 mA
TDR 3-2411WI		5 VDC	600 mA
TDR 3-2412WI	9 – 36 VDC	12 VDC	250 mA
TDR 3-2413WI		15 VDC	200 mA
TDR 3-2422WI		± 12 VDC	± 125 mA
TDR 3-2423WI		± 15 VDC	± 100 mA
TDR 3-4811WI		5 VDC	600 mA
TDR 3-4812WI		12 VDC	250 mA
TDR 3-4813WI	18 – 75 VDC	15 VDC	200 mA
TDR 3-4822WI		± 12 VDC	± 125 mA
TDR 3-4823WI		± 15 VDC	± 100 mA

Dimensions

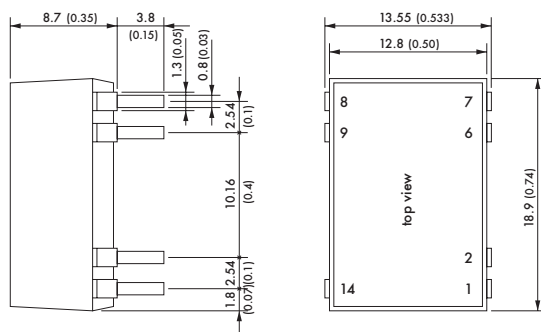

() = Inches

Pin	Single output	Dual output
1	- Vin (GND)	- Vin (GND)
2	Remote On/Off	Remote On/Off
6	No con.	Common
7	No con.	- Vout
8	+ Vout	+ Vout
9	- Vout	Common
14	+ Vin (Vcc)	+ Vin (Vcc)

TEN-3 Series ▶ 3 W



- ▶ DIP-24 plastic package
- ▶ Wide 2:1 input range
- ▶ I/O isolation 1500VDC
- ▶ Operating temperature range -40°C to $+85^{\circ}\text{C}$
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Industry standard pinout




Specifications

Line regulation	0.5% max.
Load regulation	– Single output models: 0.5% max. – Dual output models: 2.0% max.
Ripple & noise	<50 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	80% typ.
Operating temperature range	-40°C to $+85^{\circ}\text{C}$ above 70°C derating 3.3%/K
I/O isolation test voltage	1500VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Casing	plastic (UL 94 V-0 rated)

Models

Order code	Input voltage	Output voltage	Output current max.
TEN 3-0510		3.3 VDC	600 mA
TEN 3-0511		5 VDC	500 mA
TEN 3-0512		12 VDC	250 mA
TEN 3-0513	4.5 – 9.0 VDC	15 VDC	200 mA
TEN 3-0521		± 5 VDC	± 250 mA
TEN 3-0522		± 12 VDC	± 125 mA
TEN 3-0523		± 15 VDC	± 100 mA
TEN 3-1210		3.3 VDC	600 mA
TEN 3-1211		5 VDC	500 mA
TEN 3-1212		12 VDC	250 mA
TEN 3-1213	9 – 18 VDC	15 VDC	200 mA
TEN 3-1221		± 5 VDC	± 250 mA
TEN 3-1222		± 12 VDC	± 125 mA
TEN 3-1223		± 15 VDC	± 100 mA
TEN 3-2410		3.3 VDC	600 mA
TEN 3-2411		5 VDC	500 mA
TEN 3-2412		12 VDC	250 mA
TEN 3-2413	18 – 36 VDC	15 VDC	200 mA
TEN 3-2421		± 5 VDC	± 250 mA
TEN 3-2422		± 12 VDC	± 125 mA
TEN 3-2423		± 15 VDC	± 100 mA
TEN 3-4810		3.3 VDC	600 mA
TEN 3-4811		5 VDC	500 mA
TEN 3-4812		12 VDC	250 mA
TEN 3-4813	36 – 72 VDC	15 VDC	200 mA
TEN 3-4821		± 5 VDC	± 250 mA
TEN 3-4822		± 12 VDC	± 125 mA
TEN 3-4823		± 15 VDC	± 100 mA

Dimensions

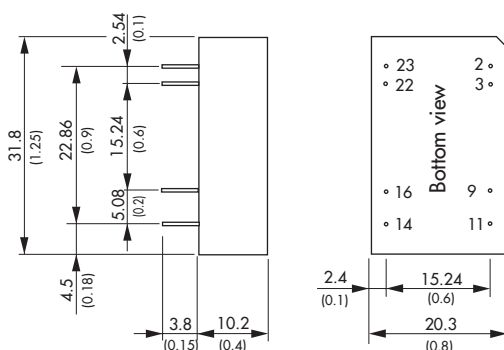


() = Inches

Pin	Single output	Dual output
2	– Vin (GND)	– Vin (GND)
3	– Vin (GND)	– Vin (GND)
9	No pin	Common
11	No con.	– Vout
14	– Vout	+ Vout
16	– Vout	Common
22	+ Vin (Vcc)	+ Vin (Vcc)
23	+ Vin (Vcc)	+ Vin (Vcc)

TEN-3WI Series ▶ 3 W

CB 
Scheme UL 60950-1

- ▶ DIP-24 plastic package
- ▶ Ultrawide 4:1 input range
- ▶ I/O isolation 1500 VDC
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Industry standard pinout

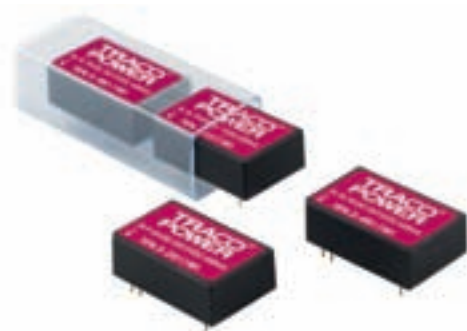


Specifications

Line regulation	1.0% max.
Load regulation	– Single output models: 1.0% max. – Dual output models: 3.0% max.
Ripple & noise	<75 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	82% typ.
Operating temperature range	-40 °C to +85 °C above 70 °C derating 3.3 %/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Casing	plastic (UL 94 V-0 rated)

Models

Order code	Input voltage	Output voltage	Output current max.
TEN 3-2410WI		3.3 VDC	750 mA
TEN 3-2411WI		5 VDC	600 mA
TEN 3-2412WI	9 – 36 VDC	12 VDC	250 mA
TEN 3-2413WI		15 VDC	200 mA
TEN 3-2422WI		± 12 VDC	± 125 mA
TEN 3-2423WI		± 15 VDC	± 100 mA
TEN 3-4810WI		3.3 VDC	750 mA
TEN 3-4811WI		5 VDC	600 mA
TEN 3-4812WI	18 – 75 VDC	12 VDC	250 mA
TEN 3-4813WI		15 VDC	200 mA
TEN 3-4822WI		± 12 VDC	± 125 mA
TEN 3-4823WI		± 15 VDC	± 100 mA

Dimensions

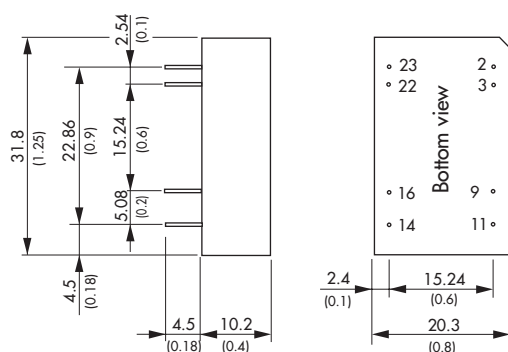

() = Inches

Pin	Single output	Dual output
2	– Vin (GND)	– Vin (GND)
3	– Vin (GND)	– Vin (GND)
9	No pin	Common
11	No con.	– Vout
14	+ Vout	+ Vout
16	– Vout	Common
22	+ Vin (Vcc)	+ Vin (Vcc)
23	+ Vin (Vcc)	+ Vin (Vcc)

TEN-5 Series ▶ 5–6 W



- ▶ DIP-24 metal package
- ▶ Wide 2:1 input range
- ▶ High efficiency up to 86 %
- ▶ Operating temperature range -40°C to $+85^{\circ}\text{C}$
- ▶ I/O isolation 1500 VDC
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Industry standard pinout




Specifications

Line regulation	0.3% max.
Load regulation	– Single output models: 1.0% max. – Dual output models: 2.0% max.
Ripple & noise	<50 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	85% typ. 3.3 VDC models 79% typ.
Operating temperature range	-40°C to $+85^{\circ}\text{C}$ above 70°C derating 3.3%/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Casing	metal, with insulated baseplate

Models

Order code	Input voltage	Output voltage	Output current max.
TEN 5-0510		3.3 VDC	1200 mA
TEN 5-0511		5 VDC	1000 mA
TEN 5-0512		12 VDC	500 mA
TEN 5-0513	4.5 – 7 VDC	15 VDC	400 mA
TEN 5-0521		± 5 VDC	± 500 mA
TEN 5-0522		± 12 VDC	± 250 mA
TEN 5-0523		± 15 VDC	± 200 mA
TEN 5-1210		3.3 VDC	1200 mA
TEN 5-1211		5 VDC	1000 mA
TEN 5-1212		12 VDC	500 mA
TEN 5-1213	9 – 18 VDC	15 VDC	400 mA
TEN 5-1221		± 5 VDC	± 500 mA
TEN 5-1222		± 12 VDC	± 250 mA
TEN 5-1223		± 15 VDC	± 200 mA
TEN 5-2410		3.3 VDC	1200 mA
TEN 5-2411		5 VDC	1000 mA
TEN 5-2412		12 VDC	500 mA
TEN 5-2413	18 – 36 VDC	15 VDC	400 mA
TEN 5-2421		± 5 VDC	± 500 mA
TEN 5-2422		± 12 VDC	± 250 mA
TEN 5-2423		± 15 VDC	± 200 mA
TEN 5-4810		3.3 VDC	1200 mA
TEN 5-4811		5 VDC	1000 mA
TEN 5-4812		12 VDC	500 mA
TEN 5-4813	36 – 75 VDC	15 VDC	400 mA
TEN 5-4821		± 5 VDC	± 500 mA
TEN 5-4822		± 12 VDC	± 250 mA
TEN 5-4823		± 15 VDC	± 200 mA

Dimensions

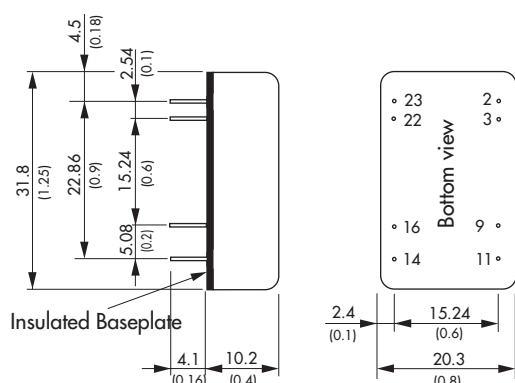

() = Inches

Pin	Single output	Dual output
2	– Vin (GND)	– Vin (GND)
3	– Vin (GND)	– Vin (GND)
9	No pin	Common
11	No con.	– Vout
14	+ Vout	+ Vout
16	– Vout	Common
22	+ Vin (Vcc)	+ Vin (Vcc)
23	+ Vin (Vcc)	+ Vin (Vcc)

TEN-5WI Series ▶ 5–6 W

CB 
Scheme UL 60950-1

- ▶ DIP-24 metal package
- ▶ Ultra wide 4:1 Input Range
- ▶ High efficiency up to 84 %
- ▶ Operating temperature range $-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$
- ▶ I/O isolation 1500VDC
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Industry standard pinout




Specifications

Line regulation	0.5% max.
Load regulation	– Single output models: 1.0% max. – Dual output models: 2.0% max.
Ripple & noise	<75 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	82% typ. 3.3 VDC models 76% typ.
Operating temperature range	$-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$ above $70\text{ }^{\circ}\text{C}$ derating 3.3%/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Casing	metal, with insulated baseplate

Models

Order code	Input voltage	Output voltage	Output current max.
TEN 5-2410WI		3.3 VDC	1200 mA
TEN 5-2411WI		5 VDC	1000 mA
TEN 5-2412WI		12 VDC	500 mA
TEN 5-2413WI	9 – 36 VDC	15 VDC	400 mA
TEN 5-2421WI		$\pm 5\text{ VDC}$	$\pm 500\text{ mA}$
TEN 5-2422WI		$\pm 12\text{ VDC}$	$\pm 250\text{ mA}$
TEN 5-2423WI		$\pm 15\text{ VDC}$	$\pm 200\text{ mA}$
TEN 5-4810WI		3.3 VDC	1200 mA
TEN 5-4811WI		5 VDC	1000 mA
TEN 5-4812WI		12 VDC	500 mA
TEN 5-4813WI	18 – 75 VDC	15 VDC	400 mA
TEN 5-4821WI		$\pm 5\text{ VDC}$	$\pm 500\text{ mA}$
TEN 5-4822WI		$\pm 12\text{ VDC}$	$\pm 250\text{ mA}$
TEN 5-4823WI		$\pm 15\text{ VDC}$	$\pm 200\text{ mA}$

Dimensions

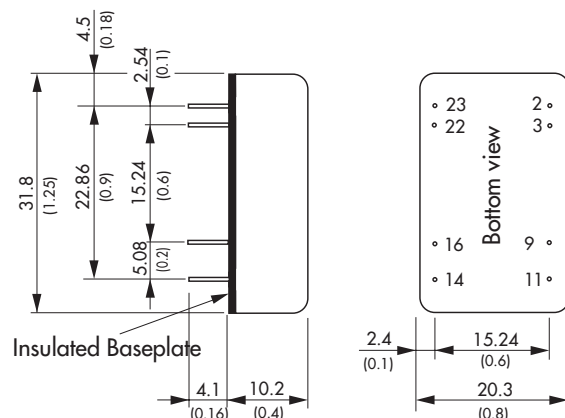

() = Inches

Pin	Single output	Dual output
2	– Vin (GND)	– Vin (GND)
3	– Vin (GND)	– Vin (GND)
9	No pin	Common
11	No con.	– Vout
14	+ Vout	+ Vout
16	– Vout	Common
22	+ Vin (Vcc)	+ Vin (Vcc)
23	+ Vin (Vcc)	+ Vin (Vcc)

TEN-8 Series ▶ 8 W



- ▶ DIP-24 metal package
- ▶ Wide 2:1 input range
- ▶ High efficiency up to 85 %
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ I/O isolation 1500 VDC
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Remote On/Off
- ▶ Industry standard pinout




Specifications

Line regulation	0.2% max.
Load regulation	– Single output models: 0.5% max. – Dual output models: 1.0% max.
Ripple & noise	<50 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	83% typ.
Operating temperature range	-40 °C to +85 °C above 70°C derating 3.3%/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL /UL 60950-1, IEC/EN 60950-1
Casing	metal, 6-side shielded with insulated baseplate
Remote On/Off	shutdown input for low input current (2.5 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
TEN 8-1210	9 – 18 VDC	3.3 VDC	2000 mA
TEN 8-1211		5 VDC	1500 mA
TEN 8-1212		12 VDC	665 mA
TEN 8-1213		15 VDC	535 mA
TEN 8-1221		± 5 VDC	± 800 mA
TEN 8-1222		± 12 VDC	± 335 mA
TEN 8-1223		± 15 VDC	± 265 mA
TEN 8-2410	18 – 36 VDC	3.3 VDC	2000 mA
TEN 8-2411		5 VDC	1500 mA
TEN 8-2412		12 VDC	665 mA
TEN 8-2413		15 VDC	535 mA
TEN 8-2421		± 5 VDC	± 800 mA
TEN 8-2422		± 12 VDC	± 335 mA
TEN 8-2423		± 15 VDC	± 265 mA
TEN 8-4810	36 – 75 VDC	3.3 VDC	2000 mA
TEN 8-4811		5 VDC	1500 mA
TEN 8-4812		12 VDC	665 mA
TEN 8-4813		15 VDC	535 mA
TEN 8-4821		± 5 VDC	± 800 mA
TEN 8-4822		± 12 VDC	± 335 mA
TEN 8-4823		± 15 VDC	± 265 mA

Dimensions

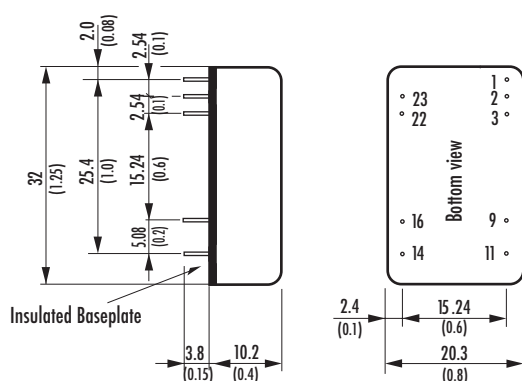

() = Inches

Pin	Single output	Dual output
1	Remote On/Off	Remote On/Off
2	– Vin (GND)	– Vin (GND)
3	– Vin (GND)	– Vin (GND)
9	No con.	Common
11	No con.	– Vout
14	+ Vout	+ Vout
16	– Vout	Common
22	+ Vin (Vcc)	+ Vin (Vcc)
23	+ Vin (Vcc)	+ Vin (Vcc)

TEN-8WI Series ► 8 W



- DIP-24 metal package
- Ultra wide 4:1 input range and high input voltage up to 160 VDC
- Immunity for railway applications
- High efficiency up to 88 %
- Operating temperature range -40 °C to +100 °C
- I/O isolation 1500 VDC
- Short circuit protection
- Remote On/Off
- Industry standard pinout



Specifications


Line regulation	0.2% max.
Load regulation	- Single output models: 0.5 % max. - Dual output models: 1.0 % max.
Ripple & Noise	<50 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (with external capacitor)
Short circuit protection	continuous, automatic recovery
Efficiency	86 % typ.
Operating temperature range	-40 °C to +85 °C above 80 °C derating 4.0%/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL /UL 60950-1, IEC/EN 60950-1, EN 50155
Thermal shock	EN 61373
Casing	metal, 6-side shielded with insulated baseplate
Remote On/Off	shutdown input for low input current (2.5 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
TEN 8-2410WI		3.3 VDC	2400 mA
TEN 8-2411WI		5 VDC	1600 mA
TEN 8-2412WI		12 VDC	666 mA
TEN 8-2413WI	9 – 36 VDC	15 VDC	533 mA
TEN 8-2421WI		± 5 VDC	± 800 mA
TEN 8-2422WI		± 12 VDC	± 333 mA
TEN 8-2423WI		± 15 VDC	± 267 mA
TEN 8-4810WI		3.3 VDC	2400 mA
TEN 8-4811WI		5 VDC	1600 mA
TEN 8-4812WI		12 VDC	666 mA
TEN 8-4813WI	18 – 75 VDC	15 VDC	533 mA
TEN 8-4821WI		± 5 VDC	± 800 mA
TEN 8-4822WI		± 12 VDC	± 333 mA
TEN 8-4823WI		± 15 VDC	± 267 mA
TEN 8-7210WI		3.3 VDC	2400 mA
TEN 8-7211WI		5 VDC	1600 mA
TEN 8-7212WI		12 VDC	666 mA
TEN 8-7213WI	43 – 160 VDC	15 VDC	533 mA
TEN 8-7221WI		± 5 VDC	± 800 mA
TEN 8-7222WI		± 12 VDC	± 333 mA
TEN 8-7223WI		± 15 VDC	± 267 mA

NEW
Models

Dimensions

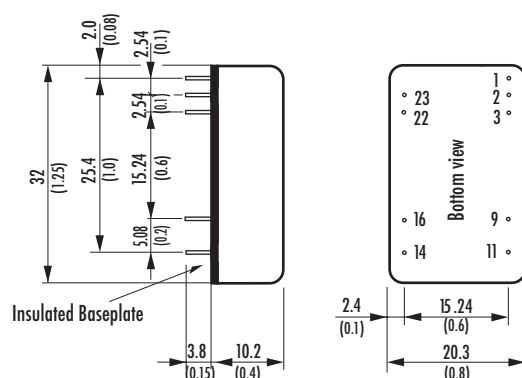

() = Inches

Pin	Single output	Dual output
1	Remote On/Off	Remote On/Off
2	- Vin (GND)	- Vin (GND)
3	- Vin (GND)	- Vin (GND)
9	No con.	Common
11	No con.	- Vout
14	+ Vout	+ Vout
16	- Vout	Common
22	+ Vin (Vcc)	+ Vin (Vcc)
23	+ Vin (Vcc)	+ Vin (Vcc)

TEN-10 Series ► 10 W



- 2" x 1" x 0.4" metal package
- Wide 2:1 input range
- Operating temperature range -40 °C to +85 °C
- I/O isolation 1500 VDC
- Short circuit protection
- Input filter to meet EN 55022, class A
- Industry standard pinout




Specifications

Line regulation	0.3% max.
Load regulation	– Single output models: 0.5% max. – Dual output models: 2.0% max.
Ripple & noise	<50 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	81% typ. 3.3VDC models 75% typ.
Operating temperature range	-40 °C to +85 °C above 70°C derating 3.3%/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL /UL 60950-1, IEC/EN 60950-1
Casing	metal, 6-side shielded with insulated baseplate

Models

Order code	Input voltage	Output voltage	Output current max.
TEN 10-1210	9 – 18 VDC	3.3 VDC	2400 mA
TEN 10-1211		5 VDC	2000 mA
TEN 10-1212		12 VDC	830 mA
TEN 10-1213		15 VDC	670 mA
TEN 10-1215		24 VDC	415 mA
TEN 10-1221	18 – 36 VDC	± 5 VDC	± 1000 mA
TEN 10-1222		± 12 VDC	± 415 mA
TEN 10-1223		± 15 VDC	± 330 mA
TEN 10-2410	36 – 75 VDC	3.3 VDC	2400 mA
TEN 10-2411		5 VDC	2000 mA
TEN 10-2412		12 VDC	830 mA
TEN 10-2413		15 VDC	670 mA
TEN 10-2415		24 VDC	415 mA
TEN 10-2421	36 – 75 VDC	± 5 VDC	± 1000 mA
TEN 10-2422		± 12 VDC	± 415 mA
TEN 10-2423		± 15 VDC	± 330 mA
TEN 10-4810	36 – 75 VDC	3.3 VDC	2400 mA
TEN 10-4811		5 VDC	2000 mA
TEN 10-4812		12 VDC	830 mA
TEN 10-4813		15 VDC	670 mA
TEN 10-4815		24 VDC	415 mA
TEN 10-4821	36 – 75 VDC	± 5 VDC	± 1000 mA
TEN 10-4822		± 12 VDC	± 415 mA
TEN 10-4823		± 15 VDC	± 330 mA

Dimensions

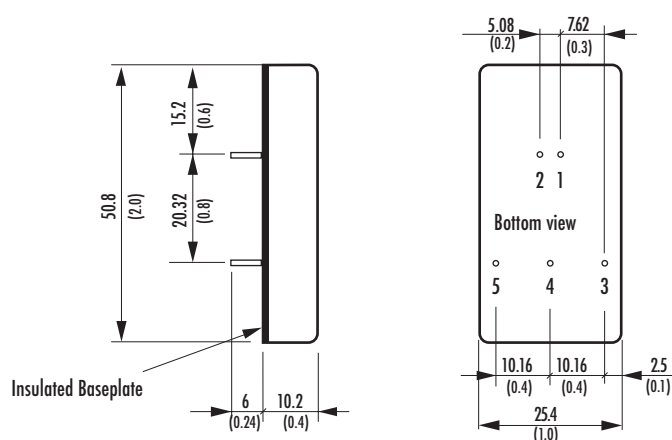

() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
3	+ Vout	+ Vout
4	No pin	Common
5	- Vout	- Vout

THD-12 Series ▶ 12 W



- ▶ DIP-24 metal package
- ▶ High power density
- ▶ Wide 2:1 input range
- ▶ Very high efficiency up to 88 %
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ I/O isolation 1500 VDC
- ▶ Undervoltage lockout
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Remote On/Off
- ▶ Industry standard pinout




Specifications

Line regulation	0.5% max.
Load regulation	- Single output models: 0.5 % max. - Dual output models: 1.0 % max.
Ripple & noise	<85 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	86 % typ.
Operating temperature range	-40 °C to +85°C above 65 °C derating 2.5 %/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	metal, 6-side shielded with insulated baseplate
Remote On/Off	shutdown input for low current (2.5 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
THD 12-1209	9 – 18 VDC	2.5 VDC	3500 mA
THD 12-1210		3.3 VDC	3500 mA
THD 12-1211		5.1 VDC	2400 mA
THD 12-1212		12 VDC	1000 mA
THD 12-1222	18 – 36 VDC	± 12 VDC	± 500 mA
THD 12-1223		± 15 VDC	± 400 mA
THD 12-2409		2.5 VDC	3500 mA
THD 12-2410		3.3 VDC	3500 mA
THD 12-2411		5.1 VDC	2400 mA
THD 12-2412		12 VDC	1000 mA
THD 12-2422	36 – 75 VDC	± 12 VDC	± 500 mA
THD 12-2423		± 15 VDC	± 400 mA
THD 12-4809		2.5 VDC	3500 mA
THD 12-4810		3.3 VDC	3500 mA
THD 12-4811		5.1 VDC	2400 mA
THD 12-4812		12 VDC	1000 mA
THD 12-4822		± 12 VDC	± 500 mA
THD 12-4823		± 15 VDC	± 400 mA

Dimensions

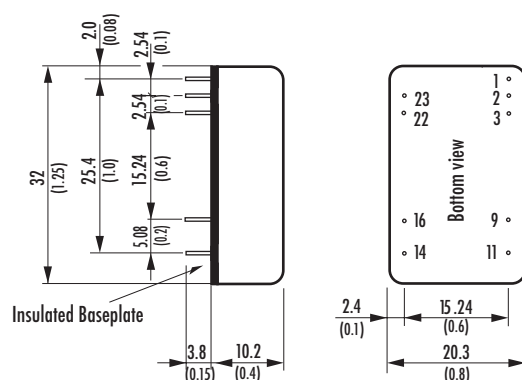

() = Inches

Pin	Single output	Dual output
1	Remote On/Off	Remote On/Off
2	- Vin (GND)	- Vin (GND)
3	- Vin (GND)	- Vin (GND)
9	No con.	Common
11	No con.	- Vout
14	+ Vout	+ Vout
16	- Vout	Common
22	+ Vin (Vcc)	+ Vin (Vcc)
23	+ Vin (Vcc)	+ Vin (Vcc)

THD-12WI Series ► 12 W



- DIP-24 metal package
- High power density
- Ultra wide 4:1 Input Range
- Very high efficiency up to 88 %
- Operating temperature range -40 °C to +85 °C
- I/O isolation 1500 VDC
- Under voltage lockout
- Short circuit protection
- Input filter to meet EN 55022, class A
- Remote On/Off
- Industry standard pinout




Specifications

Line regulation	0.2% max.
Load regulation	– Single output models: 0.5% max. – Dual output models: 1.0% max.
Ripple & noise	<85 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (with external capacitor)
Short circuit protection	continuous, automatic recovery
Efficiency	86% typ.
Operating temperature range	-40 °C to +85°C above 65 °C derating 2.5%/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	metal, 6-side shielded with insulated baseplate
Remote On/Off	shutdown input for low current (2.5 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
THD 12-2410WI	9 – 36 VDC	3.3 VDC	3500 mA
THD 12-2411WI		5.1 VDC	2400 mA
THD 12-2412WI		12 VDC	1000 mA
THD 12-2413WI		15 VDC	800 mA
THD 12-2421WI		± 5 VDC	± 1200 mA
THD 12-2422WI		± 12 VDC	± 500 mA
THD 12-2423WI		± 15 VDC	± 400 mA
THD 12-4810WI	18 – 75 VDC	3.3 VDC	3500 mA
THD 12-4811WI		5.1 VDC	2400 mA
THD 12-4812WI		12 VDC	1000 mA
THD 12-4813WI		15 VDC	800 mA
THD 12-4821WI		± 5 VDC	± 1200 mA
THD 12-4822WI		± 12 VDC	± 500 mA
THD 12-4823WI		± 15 VDC	± 400 mA

Dimensions

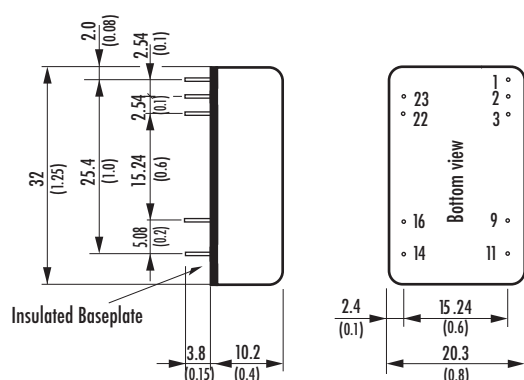

() = Inches

Pin	Single output	Dual output
1	Remote On/Off	Remote On/Off
2	– Vin (GND)	– Vin (GND)
3	– Vin (GND)	– Vin (GND)
9	No con.	Common
11	No con.	– Vout
14	+ Vout	+ Vout
16	– Vout	Common
22	+ Vin (Vcc)	+ Vin (Vcc)
23	+ Vin (Vcc)	+ Vin (Vcc)

TEN-12WI Series ▶ 12 W



- ▶ 2" x 1" x 0.4" metal package
- ▶ Ultra wide 4:1 input range
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ I/O isolation 1500 VDC
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Industry standard pinout




Specifications

Line regulation	0.5% max.
Load regulation	- Single output models: 0.5% max. - Dual output models: 0.5% max.
Ripple & noise	<50 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	83% typ. 3.3 VDC models 78% typ.
Operating temperature range	-40 °C to +85 °C above 60°C derating 2%/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL /UL 60950-1, IEC/EN 60950-1
Casing	metal, 6-side shielded with insulated baseplate
Option	shutdown input for low input current (10 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
TEN 12-2410		3.3 VDC	2400 mA
TEN 12-2411		5 VDC	2000 mA
TEN 12-2412		12 VDC	1000 mA
TEN 12-2413	9 – 36 VDC	15 VDC	800 mA
TEN 12-2421		± 5 VDC	± 1000 mA
TEN 12-2422		± 12 VDC	± 500 mA
TEN 12-2423		± 15 VDC	± 400 mA
TEN 12-4810		3.3 VDC	2400 mA
TEN 12-4811		5 VDC	2000 mA
TEN 12-4812		12 VDC	1000 mA
TEN 12-4813	18 – 75 VDC	15 VDC	800 mA
TEN 12-4821		± 5 VDC	± 1000 mA
TEN 12-4822		± 12 VDC	± 500 mA
TEN 12-4823		± 15 VDC	± 400 mA

Dimensions

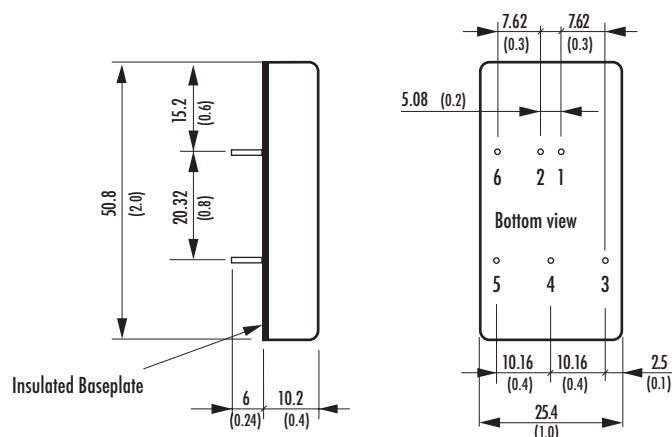

() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
3	+ Vout	+ Vout
4	No pin	Common
5	- Vout	- Vout
6	Remote On/Off (option)	Remote On/Off (option)

TON-15 Series ▶ 15 W

CB 
Scheme UL 60950-1

- ▶ Ultra-compact 1" x 1" footprint
- ▶ Trough hole or SMD version
- ▶ Wide 2:1 input voltage range
- ▶ Very high efficiency up to 88 %
- ▶ I/O-isolation 2250 VDC (basic insulation)
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ Input filter to meet EN 55022, class A
- ▶ Remote On/Off
- ▶ Adjustable output voltage
- ▶ Qualified for leadfree reflow solder process



Specifications

Line regulation	0.2 % max.
Load regulation	0.2 % max.
Output voltage adjustment	±10 % by external resistor
Ripple & noise (20 MHz BW)	<75 mVpk-pk <100 mVpk-pk for 12 & 15 VDC models
Conducted EMI	EN55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	86 % typ.
Operating temperature range	-40 °C to +85 °C above 60 °C derating 2.0 %/K
I/O isolation test voltage	2250 VDC (basic insulation)
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Remote On/Off	shutdown input for low input current (2.5 mA) in standby operation. Negative remote function (forced On) on request.

Trough hole models

Order code *	Input voltage	Output voltage	Output current max.
TON 15-2410	18 – 36 VDC	3.3 VDC	3500 mA
TON 15-2411		5 VDC	3000 mA
TON 15-2412		12 VDC	1250 mA
TON 15-2413		15 VDC	1000 mA
TON 15-4810	36 – 75 VDC	3.3 VDC	3500 mA
TON 15-4811		5 VDC	3000 mA
TON 15-4812		12 VDC	1250 mA
TON 15-4813		15 VDC	1000 mA


SMD models

Order code *	Input voltage	Output voltage	Output current max.
TON 15-2410SM	18 – 36 VDC	3.3 VDC	3500 mA
TON 15-2411SM		5 VDC	3000 mA
TON 15-2412SM		12 VDC	1250 mA
TON 15-2413SM		15 VDC	1000 mA
TON 15-4810SM	36 – 75 VDC	3.3 VDC	3500 mA
TON 15-4811SM		5 VDC	3000 mA
TON 15-4812SM		12 VDC	1250 mA
TON 15-4813SM		15 VDC	1000 mA

Dimensions

SMD Version (SM)

Trough Hole Version

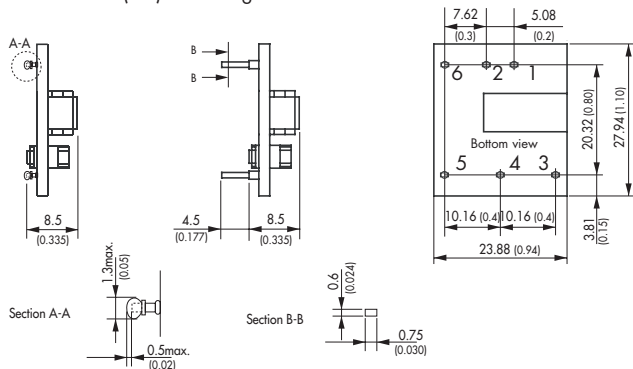

() = Inches

Pin

1	+ Vin (Vcc)
2	- Vin (GND)
3	+ Vout
4	Trim
5	- Vout
6	Remote On/Off

TON-15WI Series ▶ 15 W

CB 
Scheme UL 60950-1

- ▶ Ultra-compact 1" x 1" footprint
- ▶ Trough hole or SMD version
- ▶ Ultra wide 4:1 input voltage range
- ▶ Very high efficiency up to 88 %
- ▶ I/O-isolation 2250 VDC (basic insulation)
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ Input filter to meet EN 55022, class A
- ▶ Remote On/Off
- ▶ Adjustable output voltage
- ▶ Qualified for leadfree reflow solder process



Specifications

Line regulation	0.2 % max.
Load regulation	0.2 % max.
Output voltage adjustment	±10 % by external resistor
Ripple & noise (20 MHz BW)	<75 mVpk-pk <100 mVpk-pk for 12 & 15 VDC models
Conducted EMI	EN55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	86 % typ.
Operating temperature range	-40 °C to +85 °C above 60 °C derating 2.0 %/K
I/O isolation test voltage	2250 VDC (basic insulation)
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Remote On/Off	shutdown input for low input current (2.5 mA) in standby operation. Negative remote function (forced On) on request.

Trough hole models

Order code *	Input voltage	Output voltage	Output current max.
TON 15-2410WI	9 – 36 VDC	3.3 VDC	3500 mA
TON 15-2411WI		5 VDC	3000 mA
TON 15-2412WI		12 VDC	1250 mA
TON 15-2413WI	18 – 75 VDC	15 VDC	1000 mA
TON 15-4810WI		3.3 VDC	3500 mA
TON 15-4811WI		5 VDC	3000 mA
TON 15-4812WI		12 VDC	1250 mA
TON 15-4813WI		15 VDC	1000 mA


SMD models

Order code *	Input voltage	Output voltage	Output current max.
TON 15-2410WISM	9 – 36 VDC	3.3 VDC	3500 mA
TON 15-2411WISM		5 VDC	3000 mA
TON 15-2412WISM		12 VDC	1250 mA
TON 15-2413WISM	18 – 75 VDC	15 VDC	1000 mA
TON 15-4810WISM		3.3 VDC	3500 mA
TON 15-4811WISM		5 VDC	3000 mA
TON 15-4812WISM		12 VDC	1250 mA
TON 15-4813WISM		15 VDC	1000 mA

Dimensions

SMD Version (SM)

Trough Hole Version

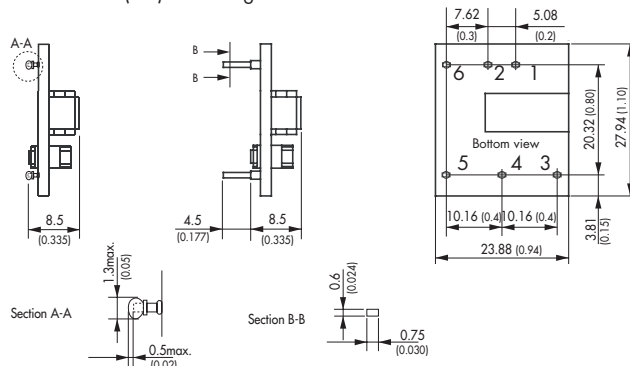

() = Inches

Pin

1	+ Vin (Vcc)
2	- Vin (GND)
3	+ Vout
4	Trim
5	- Vout
6	Remote On/Off

THD-15N Series ▶ 15 W



- ▶ DIP 24 metal package
- ▶ Highest power density
- ▶ Wide 2:1 input range
- ▶ Very high efficiency up to 90 %
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ I/O isolation 1500 VDC
- ▶ Under voltage lockout
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Remote On/Off
- ▶ Industry standard pinout

NEW
Product




Specifications

Line regulation	0.2% max.
Load regulation	– Single output models: 0.5% max. – Dual output models: 1.0% max.
Ripple & noise	<60 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	88% typ.
Operating temperature range	-40 °C to +85°C above 70 °C derating 4.0%/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	metal, 6-side shielded with insulated baseplate
Remote On/Off	shutdown input for low current (2.5 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
THD 15-1210N	9 – 18 VDC	3.3 VDC	4000 mA
THD 15-1211N		5.1 VDC	3000 mA
THD 15-1212N		12 VDC	1250 mA
THD 15-1213N		15 VDC	1000 mA
THD 15-1221N		± 5 VDC	± 1500 mA
THD 15-1222N		± 12 VDC	± 625 mA
THD 15-1223N		± 15 VDC	± 500 mA
THD 15-2410N	18 – 36 VDC	3.3 VDC	4000 mA
THD 15-2411N		5.1 VDC	3000 mA
THD 15-2412N		12 VDC	1250 mA
THD 15-2413N		15 VDC	1000 mA
THD 15-2421N		± 5 VDC	± 1500 mA
THD 15-2422N		± 12 VDC	± 625 mA
THD 15-2423N		± 15 VDC	± 500 mA
THD 15-4810N	36 – 75 VDC	3.3 VDC	4000 mA
THD 15-4811N		5.1 VDC	3000 mA
THD 15-4812N		12 VDC	1250 mA
THD 15-4813N		15 VDC	1000 mA
THD 15-4821N		± 5 VDC	± 1500 mA
THD 15-4822N		± 12 VDC	± 625 mA
THD 15-4823N		± 15 VDC	± 500 mA

Dimensions

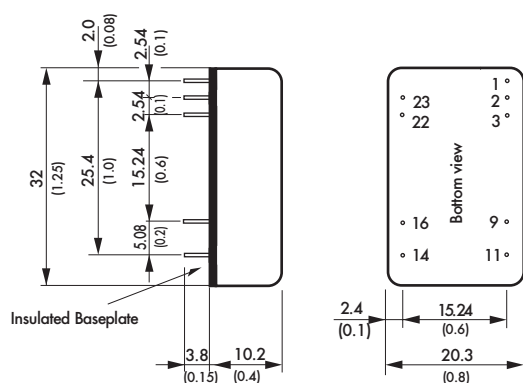

() = Inches

Pin	Single output	Dual output
1	Remote On/Off	Remote On/Off
2	– Vin (GND)	– Vin (GND)
3	– Vin (GND)	– Vin (GND)
9	No con.	Common
11	No con.	– Vout
14	+ Vout	+ Vout
16	– Vout	Common
22	+ Vin (Vcc)	+ Vin (Vcc)
23	+ Vin (Vcc)	+ Vin (Vcc)

THD-15WIN Series ► 15 W



- DIP 24 metal package
- Highest power density
- Ultra wide 4:1 input range
- Very high efficiency up to 90 %
- Operating temperature range -40 °C to +85 °C
- I/O isolation 1500 VDC
- Under voltage lockout
- Short circuit protection
- Input filter to meet EN 55022, class A
- Remote On/Off
- Industry standard pinout

NEW
Product




Specifications

Line regulation	0.2% max.
Load regulation	- Single output models: 0.5 % max. - Dual output models: 1.0 % max.
Ripple & noise	<60 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	88 % typ.
Operating temperature range	-40 °C to +85 °C above 70 °C derating 4.0 %/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	metal, 6-side shielded with insulated baseplate
Remote On/Off	shutdown input for low current (2.5 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
THD 15-2410WIN	9 – 36 VDC	3.3 VDC	4000 mA
THD 15-2411WIN		5.1 VDC	3000 mA
THD 15-2412WIN		12 VDC	1250 mA
THD 15-2413WIN		15 VDC	1000 mA
THD 15-2421WIN		± 5 VDC	± 1500 mA
THD 15-2422WIN		± 12 VDC	± 625 mA
THD 15-2423WIN		± 15 VDC	± 500 mA
THD 15-4810WIN	18 – 75 VDC	3.3 VDC	4000 mA
THD 15-4811WIN		5.1 VDC	3000 mA
THD 15-4812WIN		12 VDC	1250 mA
THD 15-4813WIN		15 VDC	1000 mA
THD 15-4821WIN		± 5 VDC	± 1500 mA
THD 15-4822WIN		± 12 VDC	± 625 mA
THD 15-4823WIN		± 15 VDC	± 500 mA

Dimensions

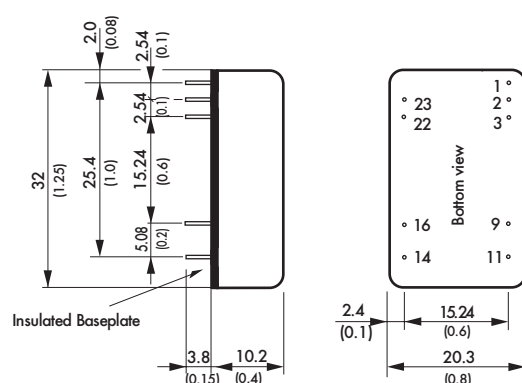

() = Inches

Pin	Single output	Dual output
1	Remote On/Off	Remote On/Off
2	- Vin (GND)	- Vin (GND)
3	- Vin (GND)	- Vin (GND)
9	No con.	Common
11	No con.	- Vout
14	+ Vout	+ Vout
16	- Vout	Common
22	+ Vin (Vcc)	+ Vin (Vcc)
23	+ Vin (Vcc)	+ Vin (Vcc)

THN-15 Series ▶ 15 W

CB 
Scheme UL 60950-1

- ▶ Smallest encapsulated 15 W converter
- ▶ 1" x 1" x 0.4" metal package
- ▶ Wide 2:1 input voltage range
- ▶ Very high efficiency up to 87 %
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ I/O isolation 1500 VDC
- ▶ Short circuit protection
- ▶ Remote On/Off
- ▶ Adjustable output voltage
- ▶ Industry standard pinout




Specifications

Line regulation	0.2% max.
Load regulation	– Single output models: 0.5% max. – Dual output models: 1.0% max.
Output voltage adjustment	±10% by external resistor
Ripple & noise	<100 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (with external capacitor)
Short circuit protection	continuous, automatic recovery
Efficiency	86 % typ.
Operating temperature range	-40 °C to +85 °C above 65 °C derating 2.5 %/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Casing	metal, 6-side shielded with insulated baseplate
Remote On/Off	shutdown input for low current (2.5 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
THN 15-1210		3.3 VDC	4000 mA
THN 15-1211		5.0 VDC	3000 mA
THN 15-1212		12 VDC	1300 mA
THN 15-1213	9 – 18 VDC	15 VDC	1000 mA
THN 15-1221		± 5 VDC	± 1500 mA
THN 15-1222		± 12 VDC	± 625 mA
THN 15-1223		± 15 VDC	± 500 mA
THN 15-2410		3.3 VDC	4000 mA
THN 15-2411		5.0 VDC	3000 mA
THN 15-2412		12 VDC	1300 mA
THN 15-2413	18 – 36 VDC	15 VDC	1000 mA
THN 15-2421		± 5 VDC	± 1500 mA
THN 15-2422		± 12 VDC	± 625 mA
THN 15-2423		± 15 VDC	± 500 mA
THN 15-4810		3.3 VDC	4000 mA
THN 15-4811		5.0 VDC	3000 mA
THN 15-4812		12 VDC	1300 mA
THN 15-4813	36 – 75 VDC	15 VDC	1000 mA
THN 15-4821		± 5 VDC	± 1500 mA
THN 15-4822		± 12 VDC	± 625 mA
THN 15-4823		± 15 VDC	± 500 mA

Dimensions

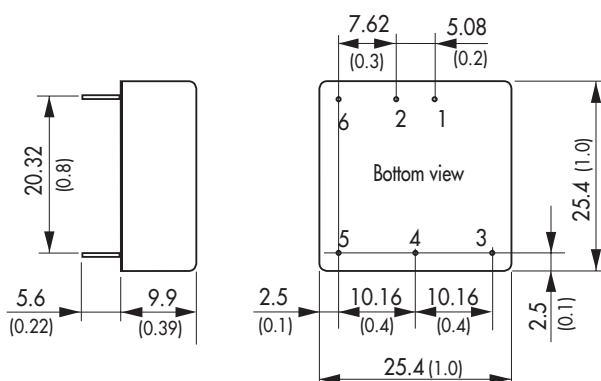

() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
3	+ Vout	+ Vout
4	Trim	Common
5	- Vout	- Vout
6	Remote On/Off	Remote On/Off

THN-15WI Series ▶ 15 W

CB 
Scheme UL 60950-1

- ▶ Smallest encapsulated 15 W converter
- ▶ 1" x 1" x 0.4" metal package
- ▶ Ultra wide 4:1 input voltage range
- ▶ Very high efficiency up to 87 %
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ I/O isolation 1500 VDC
- ▶ Short circuit protection
- ▶ Remote On/Off
- ▶ Adjustable output voltage
- ▶ Industry standard pinout




Specifications

Line regulation	0.5% max.
Load regulation	– Single output models: 0.2% max. – Dual output models: 1.0% max.
Output voltage adjustment	±10% by external resistor (single output models only)
Ripple & noise	<100 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (with external capacitor)
Short circuit protection	continuous, automatic recovery
Efficiency	86 % typ.
Operating temperature range	-40 °C ... +85 °C above 65 °C derating 2.5 %/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Casing	metal, 6-side shielded with insulated baseplate
Remote On/Off	shutdown input for low current (2.5 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
THN 15-2410WI	9 – 36 VDC	3.3 VDC	4000 mA
THN 15-2411WI		5.0 VDC	3000 mA
THN 15-2412WI		12 VDC	1300 mA
THN 15-2413WI		15 VDC	1000 mA
THN 15-2421WI		± 5 VDC	± 1500 mA
THN 15-2422WI	18 – 75 VDC	± 12 VDC	± 625 mA
THN 15-2423WI		± 15 VDC	± 500 mA
THN 15-4810WI		3.3 VDC	4000 mA
THN 15-4811WI		5.0 VDC	3000 mA
THN 15-4812WI		12 VDC	1300 mA
THN 15-4813WI		15 VDC	1000 mA
THN 15-4821WI		± 5 VDC	± 1500 mA
THN 15-4822WI		± 12 VDC	± 625 mA
THN 15-4823WI		± 15 VDC	± 500 mA

Dimensions

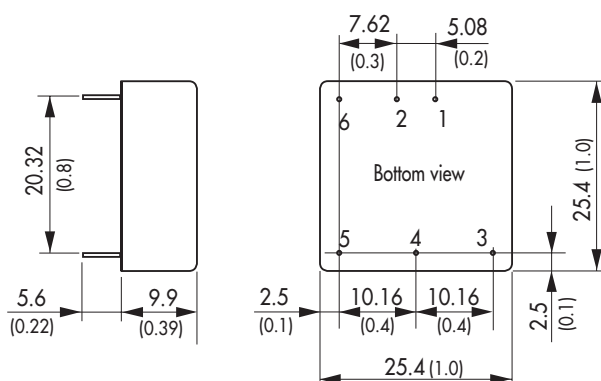

() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
3	+ Vout	+ Vout
4	Trim	Common
5	- Vout	- Vout
6	Remote On/Off	Remote On/Off

TEN-15 Series ▶ 15 W



- ▶ 2" x 1" x 0.4" metal package
- ▶ Wide 2:1 input voltage range
- ▶ Very high efficiency up to 88 %
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ I/O isolation 1500 VDC
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Industry standard pinout




Specifications

Line regulation	1.0% max.
Load regulation	– Single output models: 1.0% max. – Dual output models: 2.0% max.
Ripple & noise	– Single output models <50 mVpk-pk (20 MHz BW) – Dual output models <75 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	84 % typ. 3.3 V models 80 % typ.
Operating temperature range	-40 °C to +85 °C for derating see datasheet
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	metal, 6-side shielded with insulated baseplate

Models

Order code	Input voltage	Output voltage	Output current max.
TEN 15-1210	9 – 18 VDC	3.3 VDC	4000 mA
TEN 15-1211		5 VDC	3000 mA
TEN 15-1212		12 VDC	1250 mA
TEN 15-1213		15 VDC	1000 mA
TEN 15-1221		± 5 VDC	± 1500 mA
TEN 15-1222	18 – 36 VDC	± 12 VDC	± 625 mA
TEN 15-1223		± 15 VDC	± 500 mA
TEN 15-2410		3.3 VDC	4000 mA
TEN 15-2411		5 VDC	3000 mA
TEN 15-2412		12 VDC	1250 mA
TEN 15-2413		15 VDC	1000 mA
TEN 15-2421		± 5 VDC	± 1500 mA
TEN 15-2422		± 12 VDC	± 625 mA
TEN 15-2423		± 15 VDC	± 500 mA
TEN 15-4810	36 – 75 VDC	3.3 VDC	4000 mA
TEN 15-4811		5 VDC	3000 mA
TEN 15-4812		12 VDC	1250 mA
TEN 15-4813		15 VDC	1000 mA
TEN 15-4821		± 5 VDC	± 1500 mA
TEN 15-4822		± 12 VDC	± 625 mA
TEN 15-4823		± 15 VDC	± 500 mA

Dimensions

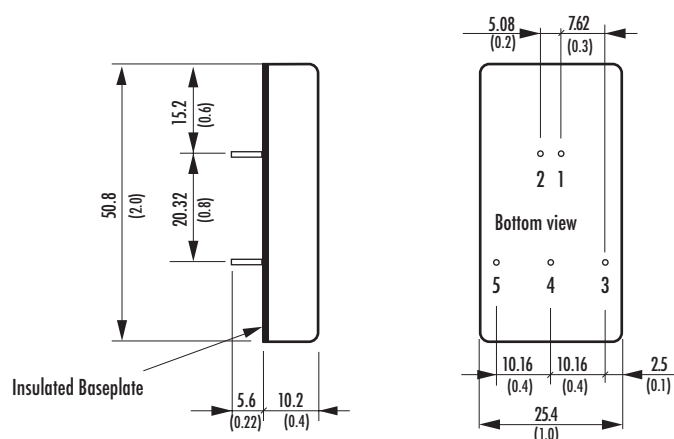

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
3	+ Vout	+ Vout
4	No pin	Common
5	- Vout	- Vout

() = Inches

TEN-15WI Series ▶ 15 W



- ▶ 2" x 1" x 0.4" metal package
- ▶ Ultra wide 4:1 input voltage range
- ▶ Very high efficiency up to 86 %
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ I/O isolation 1500 VDC
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Remote On/Off
- ▶ Industry standard pinout




Specifications

Line regulation	0.5% max.
Load regulation	-Single output models: 2.0 % max. -Dual output models: 2.0 % max.
Ripple & noise	<80 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	86 % typ.
Operating temperature range	-40 °C to +85 °C above 70 °C derating 3.5 %/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	metal, 6-side shielded with insulated baseplate
Remote On/Off	shutdown input for low input current (5 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
TEN 15-2410WI		3.3 VDC	3000 mA
TEN 15-2411WI		5.1 VDC	3000 mA
TEN 15-2412WI	9 – 36 VDC	12 VDC	1250 mA
TEN 15-2422WI		± 12 VDC	± 625 mA
TEN 15-2423WI		± 15 VDC	± 500 mA
TEN 15-4810WI		3.3 VDC	3000 mA
TEN 15-4811WI		5.1 VDC	3000 mA
TEN 15-4812WI	18 – 75 VDC	12 VDC	1250 mA
TEN 15-4822WI		± 12 VDC	± 625 mA
TEN 15-4823WI		± 15 VDC	± 500 mA

Dimensions

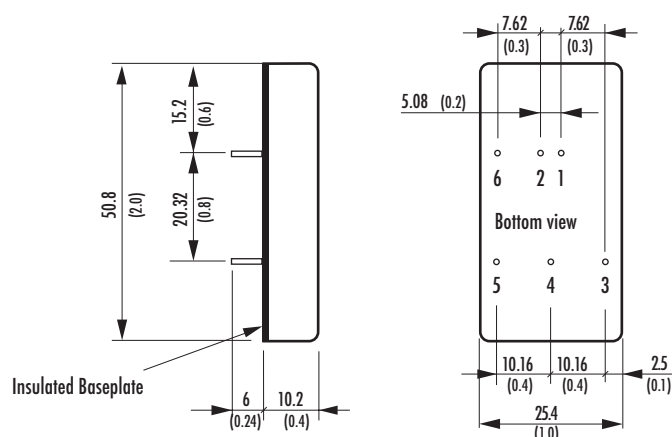

() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
3	+ Vout	+ Vout
4	No pin	Common
5	- Vout	- Vout
6	Remote On/Off	Remote On/Off

THN-20 Series ► 20 W

- Smallest encapsulated 20W converter
- 1" x 1" x 0.4" mm metal package
- Wide 2:1 input voltage range
- Very high efficiency up to 90 %
- Operating temperature range -40 °C to +75 °C
- I/O isolation 1500 VDC
- Low standby current
- No minimum load required
- Short circuit protection
- Remote On/Off
- Adjustable output voltage



NEW
Product


Specifications

Line regulation	0.2% max.
Load regulation	– Single output models: 0.2% max. – Dual output models: 1.0% max.
Output voltage adjustment	±10% by external resistor
Ripple & noise	<100 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	89 % typ.
Operating temperature range	-40 °C to +75 °C above 55 °C derating 2.5 %/K
I/O isolation test voltage	1500 VDC
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1
Casing	metal, 6-side shielded with insulated baseplate
Remote On/Off	shutdown input for low current (1.5 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
THN 20-1210	9 – 18 VDC	3.3 VDC	4500 mA
THN 20-1211		5.0 VDC	4000 mA
THN 20-1212		12 VDC	1670 mA
THN 20-1213		15 VDC	1330 mA
THN 20-1222	18 – 36 VDC	± 12 VDC	± 833 mA
THN 20-1223		± 15 VDC	± 667 mA
THN 20-2410		3.3 VDC	4500 mA
THN 20-2411		5.0 VDC	4000 mA
THN 20-2412	36 – 75 VDC	12 VDC	1670 mA
THN 20-2413		15 VDC	1330 mA
THN 20-2422		± 12 VDC	± 833 mA
THN 20-2423		± 15 VDC	± 667 mA

Dimensions

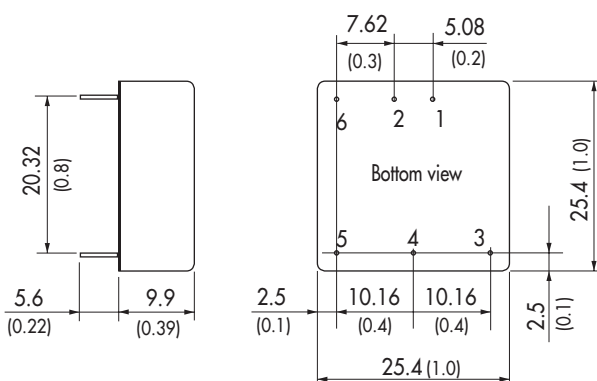

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
3	+ Vout	+ Vout
4	Trim	Common
5	- Vout	- Vout
6	Remote On/Off	Remote On/Off

THN-20WI Series ▶ 20 W



- ▶ Smallest encapsulated 20W converter
- ▶ 1" x 1" x 0.4" mm metal package
- ▶ Ultra wide 4:1 input voltage range
- ▶ Very high efficiency up to 90%
- ▶ Operating temperature range -40 °C to +75 °C
- ▶ I/O isolation 1500 VDC
- ▶ Low standby current
- ▶ No minimum load required
- ▶ Short circuit protection
- ▶ Remote On/Off
- ▶ Adjustable output voltage



NEW
Product


Specifications

Line regulation	0.2% max.
Load regulation	– Single output models: 0.2% max. – Dual output models: 1.0% max.
Output voltage adjustment	±10% by external resistor
Ripple & noise	<100 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	89% typ.
Operating temperature range	-40 °C to +75 °C above 55 °C derating 2.5%/K
I/O isolation test voltage	1500 VDC
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1
Casing	metal, 6-side shielded with insulated baseplate
Remote On/Off	shutdown input for low current (1.5 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
THN 20-2410WI	9 – 36 VDC	3.3 VDC	4500 mA
THN 20-2411WI		5.0 VDC	4000 mA
THN 20-2412WI		12 VDC	1670 mA
THN 20-2413WI		15 VDC	1330 mA
THN 20-2422WI		± 12 VDC	± 833 mA
THN 20-2423WI	18 – 75 VDC	± 15 VDC	± 667 mA
THN 20-4810WI		3.3 VDC	4500 mA
THN 20-4811WI		5.0 VDC	4000 mA
THN 20-4812WI		12 VDC	1670 mA
THN 20-4813WI		15 VDC	1330 mA
THN 20-4822WI		± 12 VDC	± 833 mA
THN 20-4823WI		± 15 VDC	± 667 mA

Dimensions

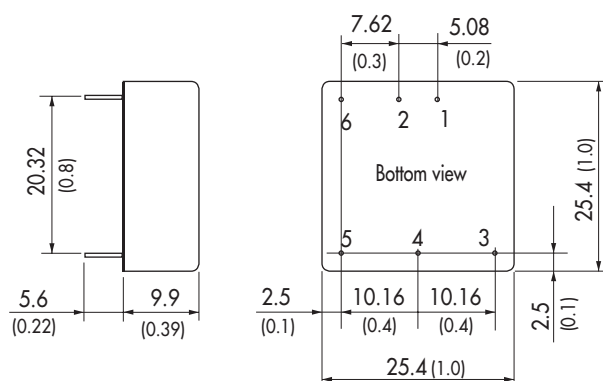


Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
3	+ Vout	+ Vout
4	Trim	Common
5	- Vout	- Vout
6	Remote On/Off	Remote On/Off

TEN-20 Series ► 20 W



- 2" x 1" x 0.4" metal package
- Wide 2:1 input range
- Very high efficiency up to 89 %
- Operating temperature range -40 °C to +85 °C
- I/O isolation 1500 VDC
- Short circuit protection
- Input filter to meet EN 55022, class A
- Remote On/Off
- Industry standard pinout

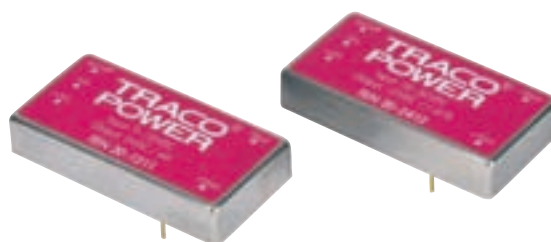


Specifications

Line regulation	0.3% max.
Load regulation	– Single output models: 0.5% max. – Dual output models: 1.0% max.
Ripple & noise	<80 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	85% typ.
Operating temperature range	-40 °C to +85 °C above 70 °C derating 3.5%/K 5V models above 60 °C derating 4%/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	metal, 6-side shielded with insulated baseplate
Remote On/Off	shutdown input for low input current (5 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
TEN 20-1210		3.3 VDC	4000 mA
TEN 20-1211		5 VDC	4000 mA
TEN 20-1212	9 – 18 VDC	12 VDC	1670 mA
TEN 20-1213		15 VDC	1340 mA
TEN 20-1222		± 12 VDC	± 835 mA
TEN 20-1223		± 15 VDC	± 670 mA
TEN 20-2410		3.3 VDC	4000 mA
TEN 20-2411		5 VDC	4000 mA
TEN 20-2412	18 – 36 VDC	12 VDC	1670 mA
TEN 20-2413		15 VDC	1340 mA
TEN 20-2422		± 12 VDC	± 835 mA
TEN 20-2423		± 15 VDC	± 670 mA
TEN 20-4810		3.3 VDC	4000 mA
TEN 20-4811		5 VDC	4000 mA
TEN 20-4812	36 – 75 VDC	12 VDC	1670 mA
TEN 20-4813		15 VDC	1340 mA
TEN 20-4822		± 12 VDC	± 835 mA
TEN 20-4823		± 15 VDC	± 670 mA

Dimensions

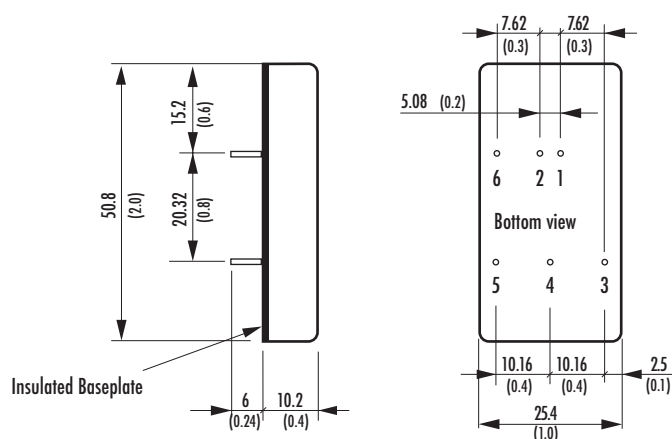

() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
3	+ Vout	+ Vout
4	No pin	Common
5	- Vout	- Vout
6	Remote On/Off	Remote On/Off

TEN-20WIN Series ► 20 W



- 2" x 1" x 0.4" metal package
- Ultra wide 4:1 input voltage range
- High efficiency up to 86 %
- Operating temperature range -40 °C to +85 °C
- I/O isolation 1500 VDC
- Short circuit protection
- Remote On/Off
- Adjustable output voltage
- Industry standard pinout




Specifications

Line regulation	0.2% max.
Load regulation	– Single output models: 0.5 % max. – Dual output models: 3.0 % max.
Output voltage adjustment	Single output models only: $\pm 10\%$ (by external resistor)
Ripple & noise	– Single output models: <75 mVpk-pk (20 MHz BW) – Dual output models: <100 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (with external capacitor)
Short circuit protection	continuous, automatic recovery
Efficiency	85% typ.
Operating temperature range	-40 °C to +85 °C above 65 °C derating 2.5%/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	metal, with insulated baseplate
Remote On/Off	shutdown input for low input current (2.5 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
TEN 20-2410WIN		3.3 VDC	5500 mA
TEN 20-2411WIN		5 VDC	4000 mA
TEN 20-2412WIN		12 VDC	1670 mA
TEN 20-2413WIN	9 – 36 VDC	15 VDC	1330 mA
TEN 20-2421WIN		± 5 VDC	± 2000 mA
TEN 20-2422WIN		± 12 VDC	± 835 mA
TEN 20-2423WIN		± 15 VDC	± 665 mA
TEN 20-4810WIN		3.3 VDC	5500 mA
TEN 20-4811WIN		5 VDC	4000 mA
TEN 20-4812WIN		12 VDC	1670 mA
TEN 20-4813WIN	18 – 75 VDC	15 VDC	1330 mA
TEN 20-4821WIN		± 5 VDC	± 2000 mA
TEN 20-4822WIN		± 12 VDC	± 835 mA
TEN 20-4823WIN		± 15 VDC	± 665 mA

Dimensions

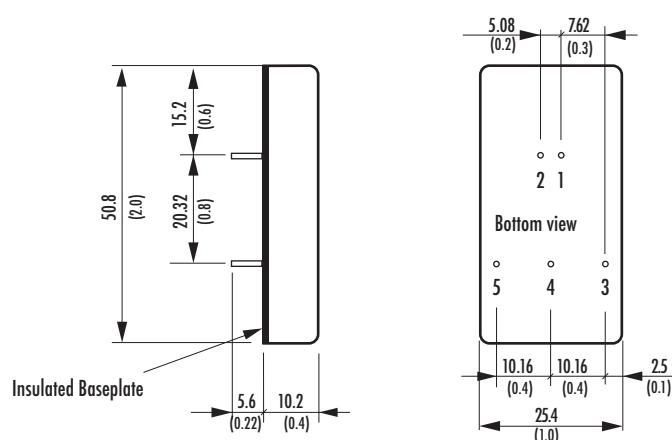

() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
3	+ Vout	+ Vout
4	Trim	Common
5	- Vout	- Vout
6	Remote On/Off	Remote On/Off

TEN-25 Series ▶ 25 to 30 W



- ▶ 2" x 1.6" x 0.4" metal package
- ▶ Wide 2:1 input range
- ▶ Very high efficiency up to 89 %
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ I/O isolation 1500 VDC
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Remote On/Off
- ▶ Adjustable output voltage
- ▶ Industry standard pinout




Specifications

Line regulation	0.3 % max.
Load regulation	– Single output models: 0.5 % max. – Dual output models: 1.0 % max.
Output voltage adjustment	±10 % (by external resistor)
Ripple & noise	<80 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	88 % typ.
Operating temperature range	-40 °C to +85 °C above 60 °C derating 2.5 %/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Casing	metal, 6-side shielded with insulated baseplate
Remote On/Off	shutdown input for low input current (5 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
TEN 25-1210	9 – 18 VDC	3.3 VDC	5500 mA
TEN 25-1211		5 VDC	5000 mA
TEN 25-1212		12 VDC	2500 mA
TEN 25-1213		15 VDC	2000 mA
TEN 25-1222	18 – 36 VDC	± 12 VDC	± 1250 mA
TEN 25-1223		± 15 VDC	± 1000 mA
TEN 25-2410		3.3 VDC	5500 mA
TEN 25-2411		5 VDC	5000 mA
TEN 25-2412		12 VDC	2500 mA
TEN 25-2413		15 VDC	2000 mA
TEN 25-2422	36 – 75 VDC	± 12 VDC	± 1250 mA
TEN 25-2423		± 15 VDC	± 1000 mA
TEN 25-4810		3.3 VDC	5500 mA
TEN 25-4811		5 VDC	5000 mA
TEN 25-4812		12 VDC	2500 mA
TEN 25-4813		15 VDC	2000 mA
TEN 25-4822		± 12 VDC	± 1250 mA
TEN 25-4823		± 15 VDC	± 1000 mA

Dimensions

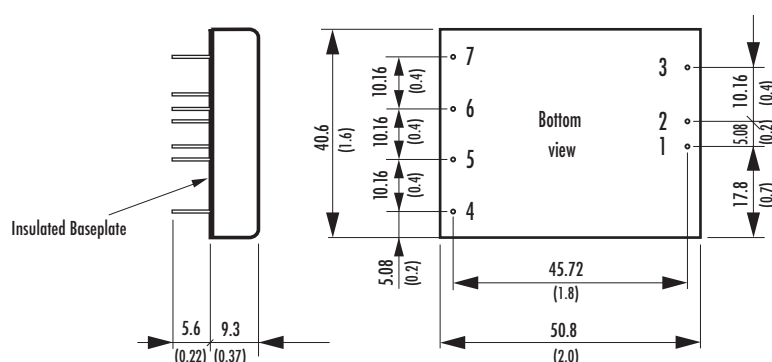

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
3	Remote On/Off	Remote On/Off
4	No pin	+ Vout
5	+ Vout	Common
6	- Vout	- Vout
7	Trim	Trim

() = Inches

TEN-25WI Series ▶ 25 to 30 W



- ▶ 2" x 1.6" x 0.4" metal package
- ▶ Ultra wide 4:1 input range
- ▶ Very high efficiency up to 89 %
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ I/O isolation 1500 VDC
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A
- ▶ Remote On/Off
- ▶ Adjustable output voltage
- ▶ Industry standard pinout



NEW
Product


Specifications

Line regulation	0.5 % max.
Load regulation	– Single output models: 1.0 % max. – Dual output models: 2.0 % max.
Output voltage adjustment	±10 % (by external resistor)
Ripple & noise	<80 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	88 % typ.
Operating temperature range	-40 °C to +85 °C above 55 °C derating 2.0 %/K
I/O isolation test voltage	1500 VDC
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1
Casing	metal, 6-side shielded with insulated baseplate
Remote On/Off	shutdown input for low input current (5 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
TEN 25-2410WI	10 – 40 VDC	3.3 VDC	5500 mA
TEN 25-2411WI		5 VDC	5000 mA
TEN 25-2412WI		12 VDC	2500 mA
TEN 25-2413WI		15 VDC	2000 mA
TEN 25-2422WI	18 – 75 VDC	± 12 VDC	± 1250 mA
TEN 25-2423WI		± 15 VDC	± 1000 mA
TEN 25-4810WI		3.3 VDC	5500 mA
TEN 25-4811WI		5 VDC	5000 mA
TEN 25-4812WI		12 VDC	2500 mA
TEN 25-4813WI		15 VDC	2000 mA
TEN 25-4822WI		± 12 VDC	± 1250 mA
TEN 25-4823WI		± 15 VDC	± 1000 mA

Dimensions

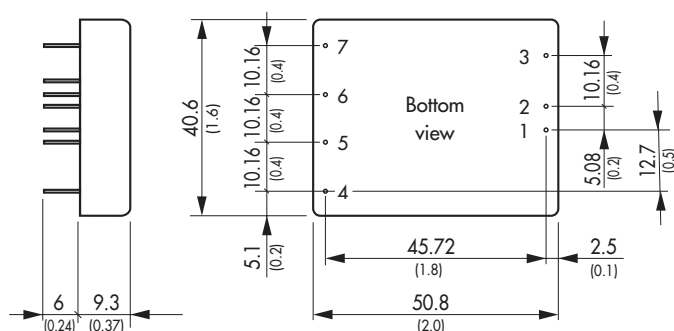

() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
3	Remote On/Off	Remote On/Off
4	No pin	+ Vout
5	+ Vout	Common
6	- Vout	- Vout
7	Trim	Trim

TEN-30 Series ▶ 30 W



- ▶ High power density encapsulated 30 W converter
- ▶ 2" x 1" x 0.4" shielded metal package
- ▶ Wide 2:1 input voltage range
- ▶ Very high efficiency up to 90 %
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ I/O isolation 1500 VDC
- ▶ Short circuit protection
- ▶ Remote On/Off
- ▶ Adjustable output voltage




Specifications

Line regulation	0.2% max.
Load regulation	– Single output models: 0.5% max. – Dual output models: 1.0% max.
Output voltage adjustment	±10% by external resistor (single output models only)
Ripple & noise	– Single output models: <75 mVpk-pk (20 MHz BW) – Dual output models: <100 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (with external capacitor)
Short circuit protection	continuous, automatic recovery
Efficiency	89% typ.
Operating temperature range	-40 °C to +85 °C above 60 °C derating 3.3%/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	metal, with insulated baseplate
Remote On/Off	shutdown input for low input current (2.5 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
TEN 30-1207	9 – 18 VDC	1.5 VDC	8000 mA
TEN 30-1209		2.5 VDC	8000 mA
TEN 30-1210		3.3 VDC	8000 mA
TEN 30-1211		5.1 VDC	6000 mA
TEN 30-1212		12 VDC	2500 mA
TEN 30-1213		15 VDC	2000 mA
TEN 30-1221		±5 VDC	±3000 mA
TEN 30-1222		±12 VDC	±1250 mA
TEN 30-1223		±15 VDC	±1000 mA
TEN 30-2407		1.5 VDC	8000 mA
TEN 30-2409	18 – 36 VDC	2.5 VDC	8000 mA
TEN 30-2410		3.3 VDC	8000 mA
TEN 30-2411		5.1 VDC	6000 mA
TEN 30-2412		12 VDC	2500 mA
TEN 30-2413		15 VDC	2000 mA
TEN 30-2421		±5 VDC	±3000 mA
TEN 30-2422		±12 VDC	±1250 mA
TEN 30-2423		±15 VDC	±1000 mA
TEN 30-4807	36 – 75 VDC	1.5 VDC	8000 mA
TEN 30-4809		2.5 VDC	8000 mA
TEN 30-4810		3.3 VDC	8000 mA
TEN 30-4811		5.1 VDC	6000 mA
TEN 30-4812		12 VDC	2500 mA
TEN 30-4813		15 VDC	2000 mA
TEN 30-4821		±5 VDC	±3000 mA
TEN 30-4822		±12 VDC	±1250 mA
TEN 30-4823		±15 VDC	±1000 mA

Dimensions

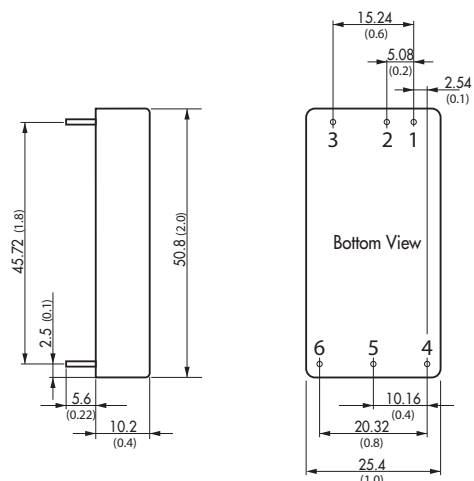

() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
3	Remote On/Off	Remote On/Off
4	+ Vout	+ Vout
5	- Vout	Common
6	Trim	- Vout

TEN-30WIN Series ▶ 30 W



- ▶ High power density encapsulated 30 W converter
- ▶ 2" x 1" x 0.4" shielded metal package
- ▶ Ultra wide 4:1 input voltage range
- ▶ Single- dual- and triple output models
- ▶ Very high efficiency up to 89 %
- ▶ Operating temperature range -40 °C to +71 °C
- ▶ I/O isolation 1500 VDC
- ▶ Short circuit protection
- ▶ Remote On/Off
- ▶ Adjustable output voltage




Specifications

Line regulation	– Single and dual output models: 0.2% max. – Triple output models: 1.0% max.
Load regulation	– Single output models: 0.5% max. – Dual output models: 1.0% max. – Triple output models: Vout 1: 1% max, Vout 2: 5.0% max.
Output voltage adjustment	±10% by external resistor (single output models only)
Ripple & noise	– Single output models: <75 mVpk-pk (20 MHz BW) – Dual output models: <100 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (with external capacitor)
Short circuit protection	continuous, automatic recovery
Efficiency	87 % typ.
Operating temperature range	–40 °C to +71 °C above 60 °C derating 3.3%/K
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	metal, with insulated baseplate
Remote On/Off	shutdown input for low input current (2.5 mA) in standby operation

Models

Order code	Input voltage	Output 1 Vout / Iout max.	Output 2 Vout / Iout max.
TEN 30-2407WIN		1.5 VDC / 8.5 A	
TEN 30-2409WIN		2.5 VDC / 8.0 A	
TEN 30-2410WIN		3.3 VDC / 7.5 A	
TEN 30-2411WIN		5.1 VDC / 6.0 A	
TEN 30-2412WIN		12 VDC / 2.5 A	
TEN 30-2413WIN		15 VDC / 2.0 A	
TEN 30-2421WIN	9 – 36 VDC	+5 VDC / 3.0 A	–5 VDC / 3.0 A
TEN 30-2422WIN		+12 VDC / 1.25 A	–12 VDC / 1.25 A
TEN 30-2423WIN		+15 VDC / 1.0 A	–15 VDC / 1.0 A
TEN 30-2433WIN		3.3 VDC / 5.0 A	±12 VDC / ±0.42 A
TEN 30-2434WIN		3.3 VDC / 5.0 A	±15 VDC / ±0.33 A
TEN 30-2431WIN		5 VDC / 4.0 A	±12 VDC / ±0.42 A
TEN 30-2432WIN		5 VDC / 4.0 A	±15 VDC / ±0.33 A
TEN 30-4807WIN		1.5 VDC / 8.5 A	
TEN 30-4809WIN		2.5 VDC / 8.0 A	
TEN 30-4810WIN		3.3 VDC / 7.5 A	
TEN 30-4811WIN		5.1 VDC / 6.0 A	
TEN 30-4812WIN		12 VDC / 2.5 A	
TEN 30-4813WIN		15 VDC / 2.0 A	
TEN 30-4821WIN	18 – 75 VDC	+5 VDC / 3.0 A	–5 VDC / 3.0 A
TEN 30-4822WIN		+12 VDC / 1.25 A	–12 VDC / 1.25 A
TEN 30-4823WIN		+15 VDC / 1.0 A	–15 VDC / 1.0 A
TEN 30-4833WIN		3.3 VDC / 5.0 A	±12 VDC / ±0.42 A
TEN 30-4834WIN		3.3 VDC / 5.0 A	±15 VDC / ±0.33 A
TEN 30-4831WIN		5 VDC / 4.0 A	±12 VDC / ±0.42 A
TEN 30-4832WIN		5 VDC / 4.0 A	±15 VDC / ±0.33 A

Dimensions

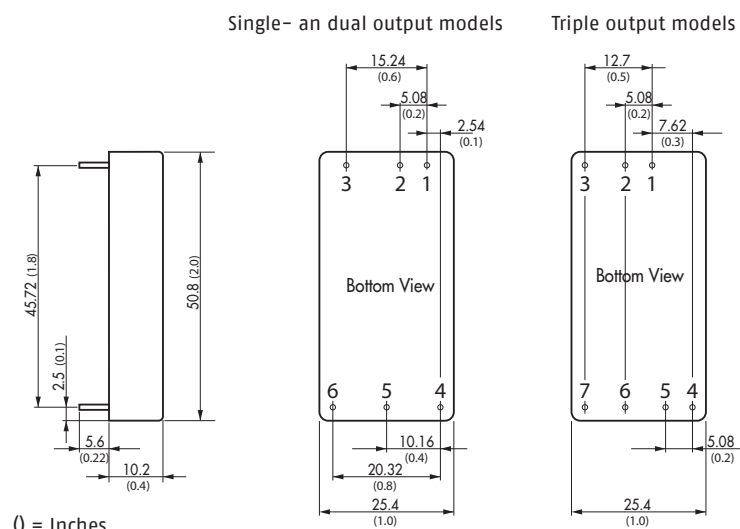

Pin	Single output	Dual output	Triple output
1	+ Vin (Vcc)	+ Vin (Vcc)	+ Vin (Vcc)
2	– Vin (GND)	– Vin (GND)	– Vin (GND)
3	Remote On/Off	Remote On/Off	Remote On/Off
4	Vout 1	Vout 1	+ Vout 2
5	Common	Common	– Vout 2
6	Trim	Vout 2	Common 1/2
7	No pin	No pin	Vout 1

TEN-30WI Series ► 30 W



- 2" x 1.6" x 0.4" metal package
- High power density
- Ultra wide 4:1 input range
- Very high efficiency up to 88 %
- Operating temperature range -40 °C to +85 °C
- I/O isolation 1500 VDC
- Under- / over voltage lockout
- Short circuit protection
- Remote On/Off
- Adjustable output voltage




Specifications

Line regulation	0.5 % max.
Load regulation	- Single output models: 0.5 % max. - Dual output models: 1.0 % max.
Output voltage adjustment	±10 % by external resistor (only for single output models)
Ripple & noise	<75 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (with external capacitor)
Short circuit protection	continuous, automatic recovery
Overvoltage protection	120-170 % of Vout nom.
Efficiency	85 % typ.
Operating temperature range	-40 °C to +85 °C for derating see datasheet
Thermal shutdown	at 115 °C
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	metal, with insulated baseplate
Remote On/Off	shutdown input for low input current (3 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
TEN 30-2408WI	10 - 40 VDC	1.8 VDC	8000 mA
TEN 30-2409WI		2.5 VDC	8000 mA
TEN 30-2410WI		3.3 VDC	6000 mA
TEN 30-2411WI		5 VDC	6000 mA
TEN 30-2412WI		12 VDC	2500 mA
TEN 30-2413WI		15 VDC	2000 mA
TEN 30-2422WI	18 - 75 VDC	± 12 VDC	± 1250 mA
TEN 30-2423WI		± 12 VDC	± 1000 mA
TEN 30-4808WI		1.8 VDC	8000 mA
TEN 30-4809WI		2.5 VDC	8000 mA
TEN 30-4810WI		3.3 VDC	6000 mA
TEN 30-4811WI		5 VDC	6000 mA
TEN 30-4812WI		12 VDC	2500 mA
TEN 30-4813WI		15 VDC	2000 mA
TEN 30-4822WI		± 12 VDC	± 1250 mA
TEN 30-4823WI		± 12 VDC	± 1000 mA

Dimensions

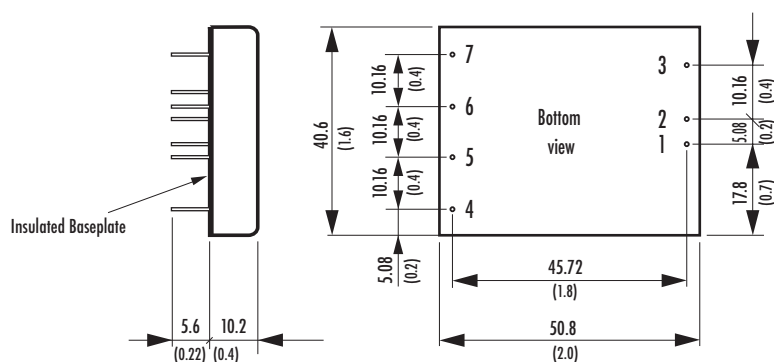

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
3	Remote On/Off	Remote On/Off
4	No pin	+ Vout
5	+ Vout	Common
6	- Vout	- Vout
7	Trim	No con.

() = Inches

TEN-40N Series ▶ 40 W




- ▶ Highest power density 40 W converter
- ▶ 2" x 1" x 0.4" metal package
- ▶ Wide 2:1 input range
- ▶ Excellent efficiency up to 92 %
- ▶ Operating temperature range -40 °C to +71 °C
- ▶ I/O isolation 1500 VDC
- ▶ Short circuit protection
- ▶ Remote On/Off
- ▶ Adjustable output voltage

NEW
Product



Specifications		Models			
Line regulation	0.5 % max.	Order code	Input voltage	Output voltage	Output current max.
Load regulation	- Single output models: 0.5 % max. - Dual output models: 1.0 % max.	TEN 40-1210N		3.3 VDC	8000 mA
Output voltage adjustment	±10 % by external resistor (single output models)	TEN 40-1211N		5.0 VDC	8000 mA
Ripple & noise	100 mVpk-pk typ. (20 MHz BW)	TEN 40-1212N	9 – 18 VDC	12 VDC	3333 mA
Conducted EMI	EN 55022, class A and FCC, level A (internal filter)	TEN 40-1213N		15 VDC	2666 mA
Short circuit protection	continuous, automatic recovery	TEN 40-1222N		±12 VDC	±1666 mA
Efficiency	90 % typ.	TEN 40-1223N		±15 VDC	±1333 mA
Operating temperature range	-40 °C to +71 °C above 55 °C derating 2.5 %/K	TEN 40-2410N		3.3 VDC	8000 mA
I/O isolation test voltage	1500 VDC	TEN 40-2411N		5.0 VDC	8000 mA
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1	TEN 40-2412N	18 – 36 VDC	12 VDC	3333 mA
Casing	metal, with insulated baseplate	TEN 40-2413N		15 VDC	2666 mA
Remote On/Off	shutdown input for low input current (2.5 mA) in standby operation	TEN 40-2422N		±12 VDC	±1666 mA
		TEN 40-2423N		±15 VDC	±1333 mA
		TEN 40-4810N		3.3 VDC	8000 mA
		TEN 40-4811N		5.0 VDC	8000 mA
		TEN 40-4812N	36 – 75 VDC	12 VDC	3333 mA
		TEN 40-4813N		15 VDC	2666 mA
		TEN 40-4822N		±12 VDC	±1666 mA
		TEN 40-4823N		±15 VDC	±1333 mA

Dimensions

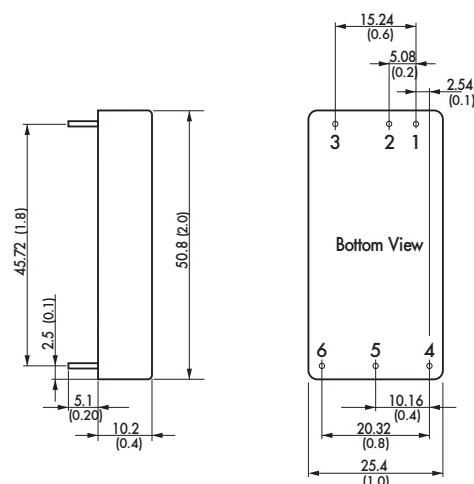


() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
3	Remote On/Off	Remote On/Off
4	+ Vout	+ Vout
5	- Vout	Common
6	Trim	- Vout

TEN-40 Series ► 40 W



- 2" x 2" x 0.4" metal package
- High power density
- Models with 2 isolated outputs (3.3 V / 5 V)
- Triple output models
- Wide 2:1 input range
- Very high efficiency up to 90 %
- Operating temperature range -40 °C to +75 °C
- I/O isolation 1500 VDC
- Short circuit protection
- Remote On/Off
- Adjustable output voltage

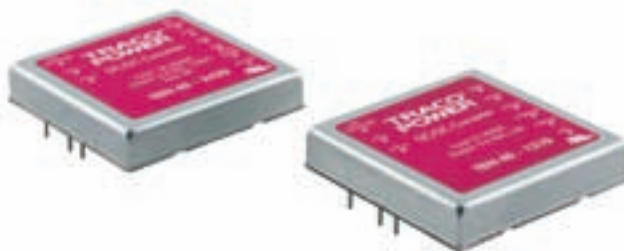

Specifications


Line regulation	1.0 % max.
Load regulation	– Single output models: 0.5 % max. – Dual output models: 1.0 % max. – Triple output models: Vout 1: 1 % max, Vout 2: 5.0 % max.
Output voltage adjustment	±10 % by external resistor (only for single and symmetric dual output models)
Ripple & noise (20 MHz BW)	– 3.3 / 5 VDC output models: <50 mVpk-pk – Symmetric dual output models: <150 mVpk-pk – Asymmetric dual output models: <100 mVpk-pk – all other output models <75 mVpk-pk
Conducted EMI	EN 55022, class A and FCC, level A (with external capacitor)
Short circuit protection	continuous, automatic recovery
Efficiency	86 % typ.
Operating temperature range	-40 °C to +75 °C for derating see datasheet
Thermal protection	shutdown at 115 °C
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL / UL 60950-1, IEC/EN 60950-1
Casing	metal, shielded with insulated baseplate
Remote On/Off	shutdown input for low input current (2.5 mA) in standby operation

Models

Order code	Input voltage	Output 1 Vout / Imax.	Output 2 Vout / Imax
TEN 40-1210		3.3 VDC / 8.0 A	
TEN 40-1211		5 VDC / 8.0 A	
TEN 40-1212		12 VDC / 3.3 A	
TEN 40-1220		*3.3 VDC / 8.0 A	*5 VDC / 8.0 A
TEN 40-1222	9 – 18 VDC	+12 VDC / 1.8 A	-12 VDC / 1.8 A
TEN 40-1223		+15 VDC / 1.4 A	-15 VDC / 1.4 A
TEN 40-1233		3.3 VDC / 6.0 A	±12 VDC / ±0.4 A
TEN 40-1234		3.3 VDC / 6.0 A	±15 VDC / ±0.3 A
TEN 40-1231		5 VDC / 6.0 A	±12 VDC / ±0.4 A
TEN 40-1232		5 VDC / 6.0 A	±15 VDC / ±0.3 A
TEN 40-2410		3.3 VDC / 8.0 A	
TEN 40-2411		5 VDC / 8.0 A	
TEN 40-2412		12 VDC / 3.3 A	
TEN 40-2420		*3.3 VDC / 8.0 A	*5 VDC / 8.0 A
TEN 40-2422	18 – 36 VDC	+12 VDC / 1.8 A	-12 VDC / 1.8 A
TEN 40-2423		+15 VDC / 1.4 A	-15 VDC / 1.4 A
TEN 40-2433		3.3 VDC / 6.0 A	±12 VDC / ±0.4 A
TEN 40-2434		3.3 VDC / 6.0 A	±15 VDC / ±0.3 A
TEN 40-2431		5 VDC / 6.0 A	±12 VDC / ±0.4 A
TEN 40-2432		5 VDC / 6.0 A	±15 VDC / ±0.3 A
TEN 40-4810		3.3 VDC / 8.0 A	
TEN 40-4811		5 VDC / 8.0 A	
TEN 40-4812		12 VDC / 3.3 A	
TEN 40-4820		*3.3 VDC / 8.0 A	*5 VDC / 8.0 A
TEN 40-4822	36 – 75 VDC	+12 VDC / 1.8 A	-12 VDC / 1.8 A
TEN 40-4823		+15 VDC / 1.4 A	-15 VDC / 1.4 A
TEN 40-4833		3.3 VDC / 6.0 A	±12 VDC / ±0.4 A
TEN 40-4834		3.3 VDC / 6.0 A	±15 VDC / ±0.3 A
TEN 40-4831		5 VDC / 6.0 A	±12 VDC / ±0.4 A
TEN 40-4832		5 VDC / 6.0 A	±15 VDC / ±0.3 A

*dynamic current allocation, max. 8 A total output current

Dimensions

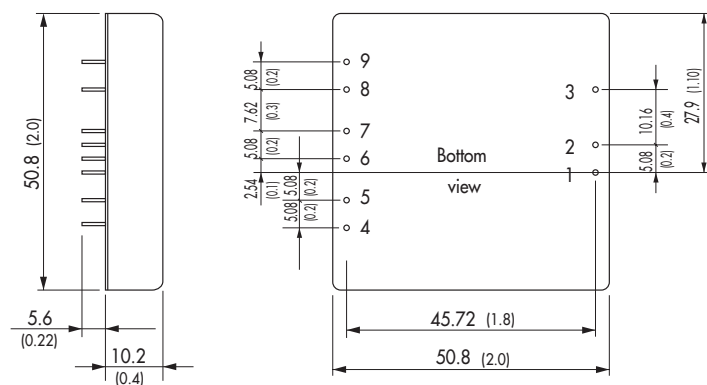

() = Inches

Pin	Single output	Dual output symmetric	Dual output asymmetric	Triple output
1	+ Vin (Vcc)	+ Vin (Vcc)	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)	- Vin (GND)	- Vin (GND)
3	Remote On/Off			
4	No con.	No pin	+Vout 1	+Vout 2
5	-Sense	Vout 1	-Vout 1	Common 2
6	+Sense	Common 1/2	No con.	-Vout 2
7	+Vout	Common 1/2	No con.	+Vout 1
8	-Vout	Vout 2	+Vout 2	-Vout 1
9	Trim	Trim	-Vout 2	No con.

TEN-40WI Series ▶ 40 W



- ▶ 2" x 2" x 0.4" metal package
- ▶ High power density
- ▶ Ultra wide 4:1 input range
- ▶ Very high efficiency up to 88 %
- ▶ Operating temperature range -40 °C to +71 °C
- ▶ Under-/ over voltage lockout
- ▶ I/O isolation 1500 VDC
- ▶ Short circuit protection
- ▶ Remote On/Off
- ▶ Adjustable output voltage




Specifications

Line regulation	0.2 % max.
Load regulation	– Single output models: 0.5 % max. – Dual/Triple output models: 1.0 % max.
Output voltage adjustment	±10 % by external resistor
Ripple & noise (20 MHz BW)	– 3.3 / 5 VDC output models: <50 mVpk-pk – other output models: <75 mVpk-pk
Conducted EMI	EN 55022, class A and FCC, level A (with external capacitor)
Short circuit protection	continuous, automatic recovery
Efficiency	86 % typ.
Operating temperature range	-40 °C to +71 °C for derating see datasheet
Thermal protection	shutdown at 115 °C
I/O isolation test voltage	1500 VDC
Safety standards / approvals	cUL /UL 60950-1, IEC/EN 60950-1
Casing	metal, shielded with insulated baseplate
Remote On/Off	shutdown input for low input current (3 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
TEN 40-2410WI		3.3 VDC	10000 mA
TEN 40-2411WI		5 VDC	8000 mA
TEN 40-2412WI	9 – 36 VDC	12 VDC	3330 mA
TEN 40-2413WI		15 VDC	2660 mA
TEN 40-2422WI		± 12 VDC	± 1667 mA
TEN 40-2423WI		± 15 VDC	± 1333 mA
TEN 40-4810WI		3.3 VDC	10000 mA
TEN 40-4811WI		5 VDC	8000 mA
TEN 40-4812WI	18 – 75 VDC	12 VDC	3333 mA
TEN 40-4813WI		15 VDC	2666 mA
TEN 40-4822WI		± 12 VDC	± 1667 mA
TEN 40-4823WI		± 15 VDC	± 1333 mA

Dimensions

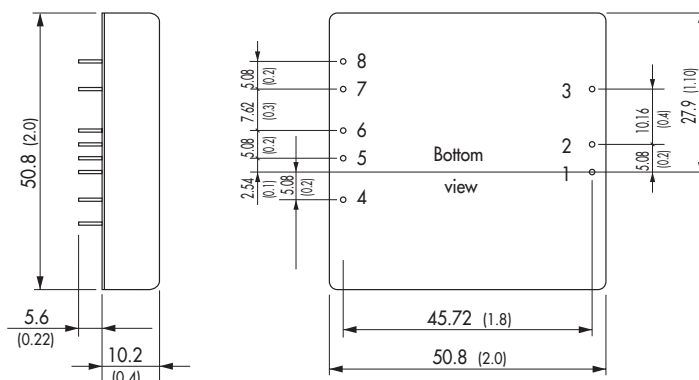

() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
3	Remote On/Off	Remote On/Off
4	- Sense	+ Vout
5	+ Sense	Common
6	+ Vout	Common
7	- Vout	- Vout
8	Trim	Trim

TEN-60 Series ▶ 60 W



- ▶ 2" x 2" x 0.4" metal package
- ▶ Highest power density
- ▶ Wide 2:1 input voltage range
- ▶ Very high efficiency up to 91 %
- ▶ Operating temperature range -40 °C to +71 °C
- ▶ Under-/ over voltage lockout
- ▶ I/O isolation 1500 VDC
- ▶ Short circuit protection
- ▶ Remote On/Off
- ▶ Adjustable output voltage




Specifications

Line regulation	0.2 % max.
Load regulation	0.5 % max.
Output voltage adjustment	±10 % by external resistor
Ripple & noise	- 3.3 / 5 VDC output models <50 mVpk-pk (20 MHz BW) - all other output models <75 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A and FCC, level A (with external capacitor)
Short circuit protection	continuous, automatic recovery
Efficiency	90 % typ.
Operating temperature range	-40 °C to +71 °C above 50 °C derating 2.0 %/K
Thermal protection	shutdown at 120 °C
I/O isolation test voltage	1500 VDC (basic insulation)
Safety standards / approvals	cUL /UL 60950-1, IEC/EN 60950-1
Casing	metal, 6-side shielded with insulated baseplate
Remote On/Off	shutdown input for low input current (2.5 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
TEN 60-2410	18 – 36 VDC	3.3 VDC	14000 mA
TEN 60-2411		5 VDC	12000 mA
TEN 60-2412		12 VDC	5000 mA
TEN 60-2413		15 VDC	4000 mA
TEN 60-4810	36 – 75 VDC	3.3 VDC	14000 mA
TEN 60-4811		5 VDC	12000 mA
TEN 60-4812		12 VDC	5000 mA
TEN 60-4813		15 VDC	4000 mA

Dimensions

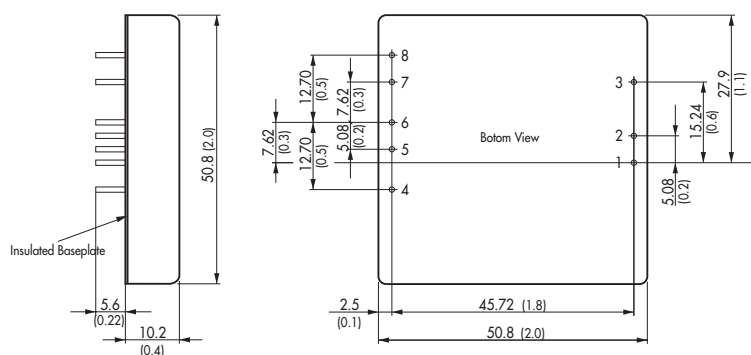

() = Inches

Pin

1	+ Vin (Vcc)
2	- Vin (GND)
3	Remote On/Off
4	- Sense
5	+ Sense
6	+ Vout
7	- Vout
8	Trim

TEP-75WI Series ▶ 75 W



- ▶ High power density
- ▶ Ultra wide 4:1 input voltage range
- ▶ Very high efficiency up to 90 %
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ Soft start
- ▶ Reverse input protection
- ▶ I/O isolation 2250 VDC (basic insulation)
- ▶ Adjustable output voltage
- ▶ Shielded metal case with aluminium baseplate
- ▶ Optional adapter for screw terminal connection, chassis mount and for DIN-rail mount



(Models pictured with chassis mount adapter and heat-sink)

Specifications

Line regulation	0.2% max.
Load regulation	0.3% max.
Output voltage	+10% / -20% adjustable by external resistor
Ripple & noise (20 MHz BW)	- 5 VDC output models: <75 mVpk-pk - other output models: <1 % of Vout
Conducted EMI	EN 55022, class A and FCC, level A (with filter)
Short circuit protection	continuous, automatic recovery
Reverse input protection	parallel diode
Efficiency	88 % typ.
Operating temperature range	-40 °C to +85°C with heat-sink for derating see datasheet
Thermal protection	shutdown at 115 °C
I/O isolation test voltage	2250 VDC (basic insulation)
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	shielded metal case with aluminium baseplate
Remote On/Off	shutdown input for low input current (3 mA) in standby operation
DIN-rail mount	optional adapter for cassis mount version: TEP-MK1

Models

Order code	Input voltage	Output voltage	Output current max.
TEP 75-2410WI		3.3 VDC	20.0 A
TEP 75-2411WI		5.0 VDC	15.0 A
TEP 75-2412WI		12 VDC	6.3 A
TEP 75-2413WI	9 – 36 VDC	15 VDC	5.0 A
TEP 75-2415WI		24 VDC	3.2 A
TEP 75-2416WI		28 VDC	2.7 A
TEP 75-2418WI		48 VDC	1.6 A
TEP 75-4811WI		3.3 VDC	25.0 A
TEP 75-4811WI		5.0 VDC	15.0 A
TEP 75-4812WI		12 VDC	6.3 A
TEP 75-4813WI	18 – 75 VDC	15 VDC	5.0 A
TEP 75-4815WI		24 VDC	3.2 A
TEP 75-4816WI		28 VDC	2.7 A
TEP 75-4818WI		48 VDC	1.6 A


Options

Heat-sink: Order code **TEP-HS1** (separate order)Chassis mount adapter: add suffix **-CM***Chassis mount adapter with EMI-filter: add suffix **-CMF***



* Shipped assembled with converter module

Dimensions


TEP 75WI Module





TEP 75WI Module with heat-sink

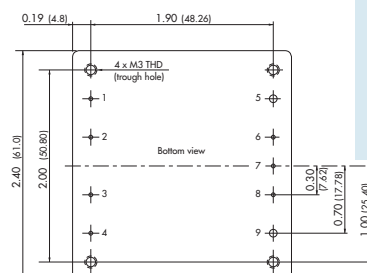

TEP 75WI Module on Chassis mount adapter



TEP 75WI Module on Chassis mount adapter with EMI-filter

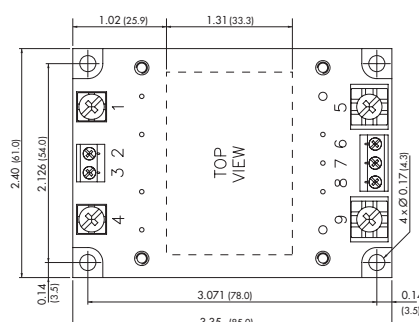

() = mm

Pin

1	- Vin (GND)
2	Case
3	Remote On/Off
4	+ Vin (Vcc)
5	- Vout
6	- Sense
7	Trim
8	+ Sense
9	+ Vout

TEP-100 Series ▶ 100 W



- ▶ High power density
- ▶ Wide 2:1 input voltage range
- ▶ Very high efficiency up to 93 %
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ Soft start
- ▶ Reverse input protection
- ▶ I/O isolation 2250 VDC (basic insulation)
- ▶ Adjustable output voltage
- ▶ Shielded metal case with aluminium baseplate
- ▶ Optional adapter for screw terminal connection, chassis mount and for DIN-rail mount



(Models pictured with chassis mount adapter and heat-sink)

Specifications


Line regulation	0.2% max.
Load regulation	0.3% max.
Output voltage adjustmt	+10 % / -20% adjustable by external resistor
Ripple & noise (20 MHz BW)	- 5 VDC output models: <75 mVpk-pk - other output models: <1 % of Vout
Conducted EMI	EN 55022, class A and FCC, level A (with filter)
Short circuit protection	continuous, automatic recovery
Reverse input protection	parallel diode
Efficiency	92 % typ.
Operating temperature range	-40 °C to +85 °C (with heat-sink) for derating see datasheet
I/O isolation test voltage	2250 VDC (basic insulation)
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	shielded metal case with aluminium baseplate
Remote On/Off	shutdown input for low input current (3 mA) in standby operation
DIN-rail mount	optional adapter for cassis mount version: TEP-MK1

Models



Order code	Input voltage	Output voltage	Output current max.
TEP 100-1210		3.3 VDC	25.0 A
TEP 100-1211		5.0 VDC	20.0 A
TEP 100-1212		12 VDC	8.4 A
TEP 100-1213	9 – 18 VDC	15 VDC	6.7 A
TEP 100-1215		24 VDC	4.2 A
TEP 100-1216		28 VDC	3.6 A
TEP 100-1218		48 VDC	2.1 A
TEP 100-2410		3.3 VDC	25.0 A
TEP 100-2411		5.0 VDC	20.0 A
TEP 100-2412		12 VDC	8.4 A
TEP 100-2413	18 – 36 VDC	15 VDC	6.7 A
TEP 100-2415		24 VDC	4.2 A
TEP 100-2416		28 VDC	3.6 A
TEP 100-2418		48 VDC	2.1 A
TEP 100-4810		3.0 VDC	25.0 A
TEP 100-4811		5.0 VDC	20.0 A
TEP 100-4812		12 VDC	8.4 A
TEP 100-4813	36 – 75 VDC	15 VDC	6.7 A
TEP 100-4815		24 VDC	4.2 A
TEP 100-4816		28 VDC	3.6 A
TEP 100-4818		48 VDC	2.1 A

Dimensions


TEP 100 Module





TEP 100 Module with Heat-sink

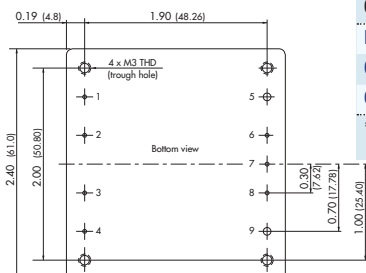

TEP 100 Module on Chassis mount adapter



TEP 100 Module on Chassis mount adapter with EMI-filter

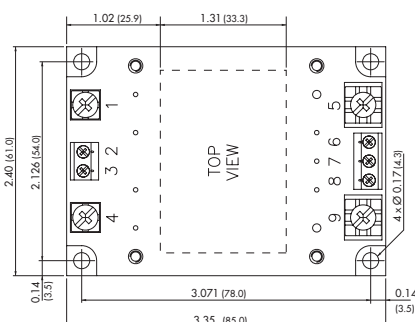

Options

Heat-sink: Order code TEP-HS1 (separate order)

Chassis mount adapter: add suffix -CM*

Chassis mount adapter with EMI-filter: add suffix -CMF*

* Shipped assembled with converter module

Pin	
1	- Vin (GND)
2	Case
3	Remote On/Off
4	+ Vin (Vcc)
5	- Vout
6	- Sense
7	Trim
8	+ Sense
9	+ Vout

() = mm

TEP-150WI Series ► 150 W



- Highest power density
- Wide 4:1 input voltage range
- Very high efficiency up to 87 %
- Over temperature protection
- Selectable output characteristic (CV, CC)
- Adjustable output voltage
- Operating temperature range -40 °C to +75 °C
- Reverse input protection
- I/O isolation 2250 VDC (basic insulation)
- Screw terminal connection
- Easy chassis and wall mounting




Specifications

Line regulation	0.2% max.
Load regulation	0.4% max.
Output voltage adjustment	+20 % by external resistor
Ripple & noise (20 MHz BW)	<1 % of Vout
Conducted EMI	EN 55022, class A and FCC, level A
Short circuit protection	continuous, automatic recovery
Over-temperature protection	switch off at over-temperature, automatic restart.
Reverse input protection	parallel diode
Efficiency	86 % typ.
Operating temperature range	-40 °C to +75 °C for derating see datasheet
Thermal protection	shutdown at 110 °C
I/O isolation test voltage	2250 VDC (basic insulation)
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1
Casing	shielded metal case, IP55
Remote On/Off	shutdown input for low input current (3 mA) in standby operation

Models

Order code	Input voltage	Output voltage	Output current max.
TEP 150-2412WI		12 VDC	12.5 A
TEP 150-2413WI		15 VDC	10.0 A
TEP 150-2415WI	9 – 36 VDC	24 VDC	6.3 A
TEP 150-2416WI		28 VDC	5.4 A
TEP 150-2418WI		48 VDC	3.2 A
TEP 150-4812WI		12 VDC	12.5 A
TEP 150-4813WI		15 VDC	10.0 A
TEP 150-4815WI	18 – 75 VDC	24 VDC	6.3 A
TEP 150-4816WI		28 VDC	5.4 A
TEP 150-4818WI		48 VDC	3.2 A

Dimensions

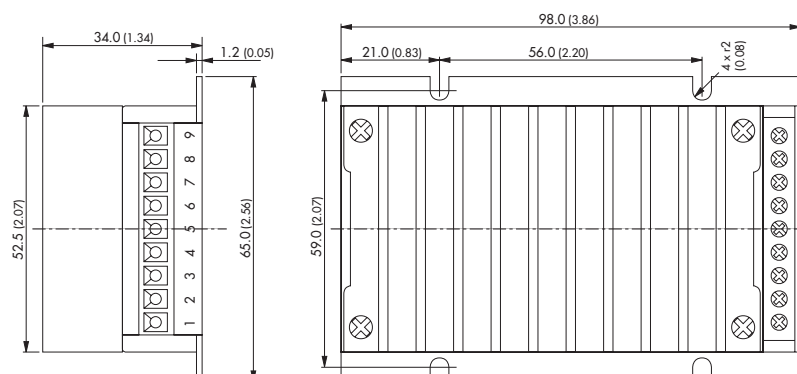

Con.

1	+ Vin (Vcc)
2	+ Vin (Vcc)
3	- Vin (GND)
4	- Vin (GND)
5	Remote On/Off
6	+ Vout
7	- Vout
8	Trim
9	Trim

() = Inches

TEP-160 Series ▶ 132 to 196 W



- ▶ High power density
- ▶ wide 2:1 input voltage range
- ▶ Very high efficiency up to 93 %
- ▶ Soft start
- ▶ Reverse input protection
- ▶ I/O isolation 2250 VDC (basic insulation)
- ▶ Adjustable output voltage
- ▶ Shielded metal case with aluminium baseplate
- ▶ Optional adapter for screw terminal connection, chassis mount and for DIN-rail mount



NEW
product

(Models pictured with chassis mount adapter and heat-sink)

Specifications

Line regulation	0.2% max.
Load regulation	0.3% max.
Output voltage	+10% / -20 % adjustable by external resistor
Ripple & noise (20 MHz BW)	- 5 VDC output models: <75 mVpk-pk - other output models: <1 % of Vout
Conducted EMI	EN 55022, class A and FCC, level A (with filter)
Short circuit protection	continuous, automatic recovery
Reverse input protection	parallel diode
Efficiency	90% typ.
Operating temperature range	-40 °C to +75°C with heat-sink for derating see datasheet
Thermal protection	shutdown at 115 °C
I/O isolation test voltage	2250 VDC (basic insulation)
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	shielded metal case with aluminium baseplate
Remote On/Off	shutdown input for low input current (3 mA) in standby operation
DIN-rail mount	optional adapter for chassis mount version: TEP-MK1

Models

Order code	Input voltage	Output voltage	Output current max.
TEP 160-1210		3.3 VDC	40 A
TEP 160-1211		5.0 VDC	28 A
TEP 160-1212		12 VDC	12 A
TEP 160-1213	9 – 22 VDC	15 VDC	9.5 A
TEP 160-1215		24 VDC	6 A
TEP 160-1216		28 VDC	5 A
TEP 160-1218		48 VDC	3 A
TEP 160-2410		3.3 VDC	40 A
TEP 160-2411		5.0 VDC	30 A
TEP 160-2412		12 VDC	13 A
TEP 160-2413	18 – 36 VDC	15 VDC	10 A
TEP 160-2415		24 VDC	6.5 A
TEP 160-2416		28 VDC	5.5 A
TEP 160-2418		48 VDC	3.3 A
TEP 160-4810		3.3 VDC	45 A
TEP 160-4811		5.0 VDC	34 A
TEP 160-4812		12 VDC	16 A
TEP 160-4813	34 – 75 VDC	15 VDC	13 A
TEP 160-4815		24 VDC	8 A
TEP 160-4816		28 VDC	7 A
TEP 160-4818		48 VDC	4 A
TEP 160-48153		53 VDC	3.7 A

Options

Heat-sink: Order code TEP-HS1 (separate order)


Chassis mount adapter: add suffix -CM*

Chassis mount adapter with EMI-filter: add suffix -CMF*



* Shipped assembled with converter module

Dimensions


TEP 160 Module





TEP 160 Module with heat-sink

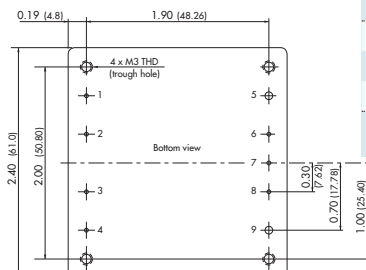

TEP 160 Module on Chassis mount adapter



TEP 160 Module on Chassis mount adapter with EMI-filter

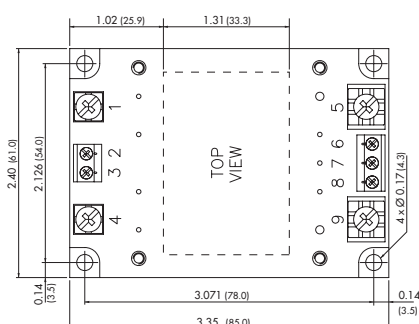

() = mm

Pin	
1	- Vin (GND)
2	Case
3	Remote On/Off
4	+ Vin (Vcc)
5	- Vout
6	- Sense
7	Trim
8	+ Sense
9	+ Vout

TEP-160WI Series ► 132 to 156 W



- High power density
- Ultra wide 4:1 input voltage range
- Very high efficiency up to 91 %
- Soft start
- Reverse input protection
- I/O isolation 2250 VDC (basic insulation)
- Adjustable output voltage
- Shielded metal case with aluminium baseplate
- Optional adapter for screw terminal connection, chassis mount and for DIN-rail mount



NEW
product

(Models pictured with chassis mount adapter and heat-sink)

Specifications

Line regulation	0.2% max.
Load regulation	0.3% max.
Output voltage	+10% / -20 % adjustable by external resistor
Ripple & noise (20 MHz BW)	- 5 VDC output models: <75 mVpk-pk - other output models: <1 % of Vout
Conducted EMI	EN 55022, class A and FCC, level A (with filter)
Short circuit protection	continuous, automatic recovery
Reverse input protection	parallel diode
Efficiency	88 % typ.
Operating temperature range	-40 °C to +75°C with heat-sink for derating see datasheet
Thermal protection	shutdown at 115 °C
I/O isolation test voltage	2250 VDC (basic insulation)
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, EN 50155
Casing	shielded metal case with aluminium baseplate
Remote On/Off	shutdown input for low input current (3 mA) in standby operation
DIN-rail mount	optional adapter for chassis mount version: TEP-MK1

Models

Order code	Input voltage	Output voltage	Output current max.
TEP 160-2410WI		3.3 VDC	40 A
TEP 160-2411WI		5.0 VDC	28 A
TEP 160-2412WI		12 VDC	12 A
TEP 160-2413WI	9 – 36 VDC	15 VDC	9.5 A
TEP 160-2415WI		24 VDC	6.0 A
TEP 160-2416WI		28 VDC	5.0 A
TEP 160-2418WI		48 VDC	3.0 A
TEP 160-4810WI		3.3 VDC	40 A
TEP 160-4811WI		5.0 VDC	30 A
TEP 160-4812WI		12 VDC	13 A
TEP 160-4813WI	18 – 75 VDC	15 VDC	10 A
TEP 160-4815WI		24 VDC	6.5 A
TEP 160-4816WI		28 VDC	5.5 A
TEP 160-4818WI		48 VDC	3.2 A

Options

Heat-sink: Order code **TEP-HS1** (separate order)


Chassis mount adapter: add suffix **-CM***

Chassis mount adapter with EMI-filter: add suffix **-CMF***



* Shipped assembled with converter module

Dimensions


TEP 160WI Module





TEP 160WI Module with heat-sink

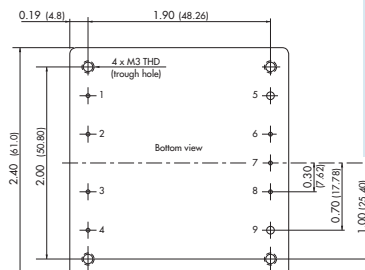

TEP 160WI Module on Chassis mount adapter



TEP 160WI Module on Chassis mount adapter with EMI-filter

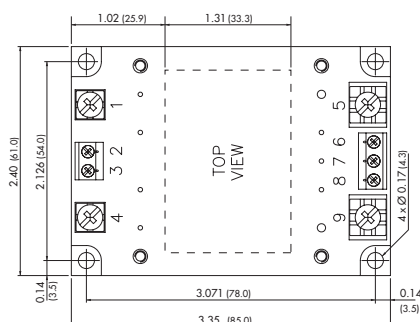

() = mm

Pin

1	- Vin (GND)
2	Case
3	Remote On/Off
4	+ Vin (Vcc)
5	- Vout
6	- Sense
7	Trim
8	+ Sense
9	+ Vout

TEP-200 Series ▶ 165 to 255 W



- ▶ High power density
- ▶ wide 2:1 input voltage range
- ▶ Very high efficiency up to 92 %
- ▶ Soft start
- ▶ Reverse input protection
- ▶ I/O isolation 2250 VDC (basic insulation)
- ▶ Adjustable output voltage
- ▶ Shielded metal case with aluminium baseplate
- ▶ Optional adapter for screw terminal connection, chassis mount and for DIN-rail mount



NEW
product

(Models pictured with chassis mount adapter and heat-sink)

Specifications

Line regulation	0.2% max.
Load regulation	0.3% max.
Output voltage	+10% / -20 % adjustable by external resistor
Ripple & noise (20 MHz BW)	- 5 VDC output models: <75 mVpk-pk - other output models: <1 % of Vout
Conducted EMI	EN 55022, class A and FCC, level A (with filter)
Short circuit protection	continuous, automatic recovery
Reverse input protection	parallel diode
Efficiency	90 % typ.
Operating temperature range	-40 °C to +75°C with heat-sink for derating see datasheet
Thermal protection	shutdown at 115 °C
I/O isolation test voltage	2250 VDC (basic insulation)
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	shielded metal case with aluminium baseplate
Remote On/Off	shutdown input for low input current (3 mA) in standby operation
DIN-rail mount	optional adapter for chassis mount version: TEP-MK1

Models

Order code	Input voltage	Output voltage	Output current max.
TEP 200-1210		3.3 VDC	50 A
TEP 200-1211		5.0 VDC	36 A
TEP 200-1212		12 VDC	15 A
TEP 200-1213	9 – 22 VDC	15 VDC	12 A
TEP 200-1215		24 VDC	7.5 A
TEP 200-1216		28 VDC	6.5 A
TEP 200-1218		48 VDC	3.7 A
TEP 200-2410		3.3 VDC	50 A
TEP 200-2411		5.0 VDC	40 A
TEP 200-2412		12 VDC	18 A
TEP 200-2413	18 – 36 VDC	15 VDC	15 A
TEP 200-2415		24 VDC	9.0 A
TEP 200-2416		28 VDC	7.5 A
TEP 200-2418		48 VDC	4.5 A
TEP 200-4810		3.3 VDC	60 A
TEP 200-4811		5.0 VDC	46 A
TEP 200-4812		12 VDC	21 A
TEP 200-4813	34 – 75 VDC	15 VDC	17 A
TEP 200-4815		24 VDC	10.5 A
TEP 200-4816		28 VDC	9 A
TEP 200-4818		48 VDC	5.2 A
TEP 200-48153		53 VDC	4.7 A

Options

Heat-sink: Order code TEP-HS1 (separate order)


Chassis mount adapter: add suffix -CM*

Chassis mount adapter with EMI-filter: add suffix -CMF*



* Shipped assembled with converter module

Dimensions


TEP 200 Module





TEP 200 Module with heat-sink

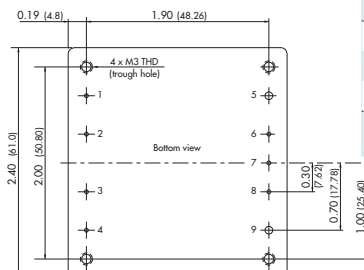

TEP 200 Module on Chassis mount adapter



TEP 200 Module on Chassis mount adapter with EMI-filter

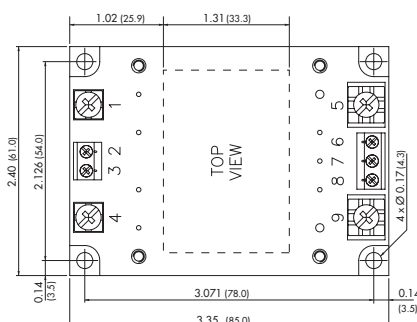

Pin	
1	- Vin (GND)
2	Case
3	Remote On/Off
4	+ Vin (Vcc)
5	- Vout
6	- Sense
7	Trim
8	+ Sense
9	+ Vout

() = mm

TEP-200WI Series ► 165 to 216 W



- High power density
- Ultra wide 4:1 input voltage range
- Very high efficiency up to 91 %
- Soft start
- Reverse input protection
- I/O isolation 2250 VDC (basic insulation)
- Adjustable output voltage
- Shielded metal case with aluminium baseplate
- Optional adapter for screw terminal connection, chassis mount and for DIN-rail mount



NEW
product

(Models pictured with chassis mount adapter and heat-sink)

Specifications

Line regulation	0.2% max.
Load regulation	0.3% max.
Output voltage	+10% / -20 % adjustable by external resistor
Ripple & noise (20 MHz BW)	- 5 VDC output models: <75 mVpk-pk - other output models: <1 % of Vout
Conducted EMI	EN 55022, class A and FCC, level A (with filter)
Short circuit protection	continuous, automatic recovery
Reverse input protection	parallel diode
Efficiency	90% typ.
Operating temperature range	-40 °C to +75°C with heat-sink for derating see datasheet
Thermal protection	shutdown at 115 °C
I/O isolation test voltage	2250 VDC (basic insulation)
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1
Casing	shielded metal case with aluminium baseplate
Remote On/Off	shutdown input for low input current (3 mA) in standby operation
DIN-rail mount	optional adapter for cassis mount version: TEP-MK1

Models

Order code	Input voltage	Output voltage	Output current max.
TEP 200-2410WI		3.3 VDC	50 A
TEP 200-2411WI		5.0 VDC	36 A
TEP 200-2412WI		12 VDC	15 A
TEP 200-2413WI	9 – 36 VDC	15 VDC	12 A
TEP 200-2415WI		24 VDC	7.5 A
TEP 200-2416WI		28 VDC	6.5 A
TEP 200-2418WI		48 VDC	3.7 A
TEP 200-4810WI		3.3 VDC	50 A
TEP 200-4811WI		5.0 VDC	40 A
TEP 200-4812WI		12 VDC	18 A
TEP 200-4813WI	18 – 75 VDC	15 VDC	14 A
TEP 200-4815WI		24 VDC	9.0 A
TEP 200-4816WI		28 VDC	7.5 A
TEP 200-4818WI		48 VDC	4.2 A

Options

Heat-sink: Order code **TEP-HS1** (separate order)


Chassis mount adapter: add suffix **-CM***

Chassis mount adapter with EMI-filter: add suffix **-CMF***



* Shipped assembled with converter module

Dimensions


TEP 200WI Module





TEP 200WI Module with heat-sink

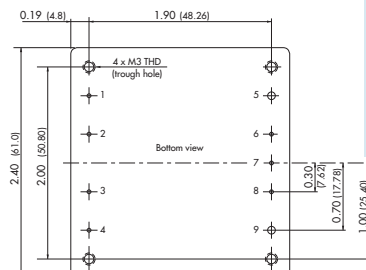

TEP 200WI Module on Chassis mount adapter



TEP 200WI Module on Chassis mount adapter with EMI-filter

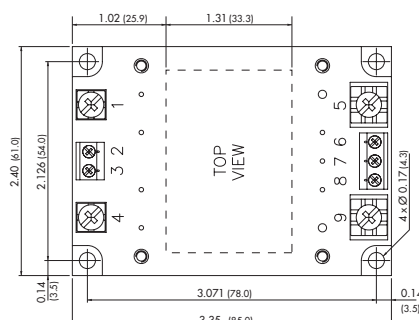

() = mm

Pin

1	- Vin (GND)
2	Case
3	Remote On/Off
4	+ Vin (Vcc)
5	- Vout
6	- Sense
7	Trim
8	+ Sense
9	+ Vout

TMV-EN Series ▶ 1 W

CB 
Scheme UL 60950-1

- ▶ SIP package
- ▶ I/O isolation voltage 3000 VACrms
- ▶ Reinforced insulation rated for 300 VAC working voltage
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ Safety approval to IEC/UL 60950-1




Specifications

Line regulation	non regulated
Load regulation	±10 % max.
Ripple & noise	<120 mVpk-pk (20 MHz BW)
Short circuit protection	limited 1 sec.
Efficiency	67 % typ.
Operating temperature range	-40 °C to +85 °C (no derating)
I/O isolation voltage	3000 VACrms, rated for 300 VAC working voltage
I/O isolation test voltage	6000Vpk (1 sec.)
I/O isolation capacitance	10 pF typ.
I/O isolation resistance	>10 GOhm
Safety standards / approvals	UL 60950-1, IEC/EN 60950-1, CB-report
Casing	plastic (UL 94 V-0 rated)

Models

Order code	Input voltage	Output voltage	Output current max.
TMV 0505EN		5 VDC	200 mA
TMV 0512EN		12 VDC	80 mA
TMV 0515EN	5VDC ± 10 %	15 VDC	65 mA
TMV 0505DEN		± 5 VDC	± 100 mA
TMV 0512DEN		± 12 VDC	± 40 mA
TMV 0515DEN		± 15 VDC	± 30 mA
TMV 1205EN		5 VDC	200 mA
TMV 1212EN		12 VDC	80 mA
TMV 1215EN	12VDC ± 10 %	15 VDC	65 mA
TMV 1205DEN		± 5 VDC	± 100 mA
TMV 1212DEN		± 12 VDC	± 40 mA
TMV 1215DEN		± 15 VDC	± 30 mA

Dimensions

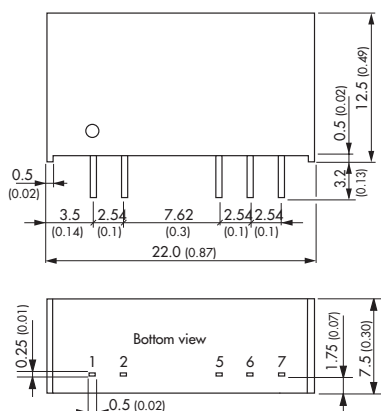

() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)
5	- Vout	- Vout
6	No pin	Common
7	+ Vout	+ Vout

THI-2M Series ▶ 2 W



- ▶ Ultra compact DIP 16 package
- ▶ I/O isolation 4000 VACrms
- ▶ Reinforced insulation rated for working voltage up to 300 VAC
- ▶ Industrial and medical safety approval
- ▶ Operating temperature range -40 °C to +71 °C
- ▶ Short circuit protection



Specifications

Line regulation	non regulated
Load regulation	10 % max.
Ripple & noise	<150 mVpk-pk (20 MHz BW)
Input filter	Pi-filter
Short circuit protection	limited 0.5 sec.
Efficiency	70 % typ.
Operating temperature range	-40 °C to +71 °C above 60 °C derating 2.5 %/K
I/O isolation voltage	4000 VACrms, rated for 300 VAC working voltage
I/O isolation test voltage	6000 Vpk (1 sec.)
I/O isolation capacitance	20 pF typ.
I/O isolation resistance	>10,000 MΩhm
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, cUL/UL 60601-1, IEC/EN 60601-1, CB-report
Casing	plastic (UL 94V-0 rated)


Models

Order code	Input voltage	Output voltage	Output current max.
THI 2-0511M		5 VDC	400 mA
THI 2-0512M		12 VDC	165 mA
THI 2-0513M	5 VDC ± 10 %	15 VDC	133 mA
THI 2-0522M		± 12 VDC	± 83 mA
THI 2-0523M		± 15 VDC	± 66 mA
THI 2-1211M		5 VDC	400 mA
THI 2-1212M		12 VDC	165 mA
THI 2-1213M	12 VDC ± 10 %	15 VDC	133 mA
THI 2-1222M		± 12 VDC	± 83 mA
THI 2-1223M		± 15 VDC	± 66 mA
THI 2-2411M		5 VDC	400 mA
THI 2-2412M		12 VDC	165 mA
THI 2-2413M	24 VDC ± 10 %	15 VDC	133 mA
THI 2-2422M		± 12 VDC	± 83 mA
THI 2-2423M		± 15 VDC	± 66 mA

Product with same electrical specifications available in SMD package.

See TES-2M series page 9

Dimensions

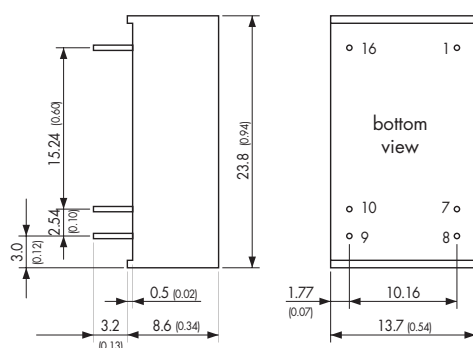

() = Inches

Pin	Single output	Dual output
1	- Vin (GND)	- Vin (GND)
7	No con.	No con.
8	No con.	Common
9	+ Vout	+ Vout
10	- Vout	- Vout
16	+ Vin (Vcc)	+ Vin (Vcc)

THI-2 Series ▶ 2 W

- ▶ DIP-24 plastic package
- ▶ I/O isolation voltage 2500 VACrms
- ▶ Supplementary insulation rated for working voltage up to 250 VAC
- ▶ Regulated output
- ▶ Operating temperature range $-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$
- ▶ Low coupling capacity
- ▶ Short circuit protection




Specifications

Line regulation	0.5 % max.
Load regulation	– Single output models: 1 % max. – Dual output models: 1 % max.
Ripple & noise	<50 mVpk-pk (20 MHz BW)
Input filter	Pi-filter
Short circuit protection	continuous, automatic recovery
Efficiency	61 % typ.
Operating temperature range	$-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$ above $70\text{ }^{\circ}\text{C}$ derating 3 %/K
I/O isolation voltage	2500 VACrms, rated for 250 VAC working voltage
I/O isolation test voltage	6000 Vpk (1 sec.)
I/O isolation capacitance	20 pF typ.
I/O isolation resistance	>10,000 MΩhm
Safety standards	IEC/EN 60950, IEC/EN 60601-1
Casing	plastic (UL 94V-0 rated)

Models

Order code	Input voltage	Output voltage	Output current max.
THI 0511		5 VDC	400 mA
THI 0512		12 VDC	165 mA
THI 0513	5 VDC $\pm 10\%$	15 VDC	130 mA
THI 0520		$\pm 5\text{ VDC}$	$\pm 100\text{ mA}$
THI 0521		$\pm 12\text{ VDC}$	$\pm 80\text{ mA}$
THI 0522		$\pm 15\text{ VDC}$	$\pm 65\text{ mA}$
THI 1211		5 VDC	400 mA
THI 1212		12 VDC	165 mA
THI 1213	12 VDC $\pm 10\%$	15 VDC	130 mA
THI 1220		$\pm 5\text{ VDC}$	$\pm 100\text{ mA}$
THI 1221		$\pm 12\text{ VDC}$	$\pm 80\text{ mA}$
THI 1222		$\pm 15\text{ VDC}$	$\pm 65\text{ mA}$
THI 2411		5 VDC	400 mA
THI 2412		12 VDC	165 mA
THI 2413	24 VDC $\pm 10\%$	15 VDC	130 mA
THI 2420		$\pm 5\text{ VDC}$	$\pm 100\text{ mA}$
THI 2421		$\pm 12\text{ VDC}$	$\pm 80\text{ mA}$
THI 2422		$\pm 15\text{ VDC}$	$\pm 65\text{ mA}$

Dimensions

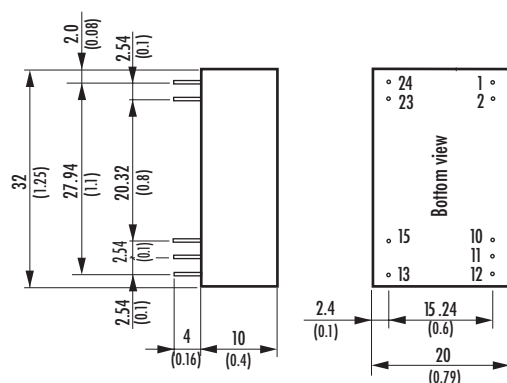

() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
2	+ Vin (Vcc)	+ Vin (Vcc)
10	No pin	Common
11	No pin	Common
12	– Vout	No pin
13	+ Vout	– Vout
15	No pin	+ Vout
23	– Vin (GND)	– Vin (GND)
24	– Vin (GND)	– Vin (GND)

THB-3 Series ▶ 3 W



- ▶ DIP-24 package
- ▶ Wide 2:1 input voltage range
- ▶ I/O isolation voltage 4000 VACrms
- ▶ Reinforced insulation rated for working voltage 300 VAC
- ▶ Industrial and medical safety approvals
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A




Specifications

Line regulation	±0.5 % max.
Load regulation	– Single output models: 1 % max. – Dual output models: 2 % max.
Ripple & noise	<150 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, class A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	83 % typ.
Operating temperature range	-40 °C to +85 °C above 70 °C derating 3.3 %/K
I/O isolation voltage	4000 VACrms, rated for 300 VAC working voltage
I/O isolation test voltage	6000 Vpk (1sec)
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, cUL/UL 60601-1, IEC/EN 60601-1, CB-report
Casing	plastic (UL 94V-0 rated)

Models

Order code	Input voltage	Output voltage	Output current max.
THB 3-0511		5 VDC	600 mA
THB 3-0512		12 VDC	250 mA
THB 3-0515	4.5 – 9 VDC	24 VDC	125 mA
THB 3-0522		± 12 VDC	± 125 mA
THB 3-0523		± 15 VDC	± 100 mA
THB 3-1211		5 VDC	600 mA
THB 3-1212		12 VDC	250 mA
THB 3-1215	9 – 18 VDC	24 VDC	125 mA
THB 3-1222		± 12 VDC	± 125 mA
THB 3-1223		± 15 VDC	± 100 mA
THB 3-2411		5 VDC	600 mA
THB 3-2412		12 VDC	250 mA
THB 3-2415	18 – 36 VDC	24 VDC	125 mA
THB 3-2422		± 12 VDC	± 125 mA
THB 3-2423		± 15 VDC	± 100 mA
THB 3-4811		5 VDC	600 mA
THB 3-4812		12 VDC	250 mA
THB 3-4815	36 – 75 VDC	24 VDC	125 mA
THB 3-4822		± 12 VDC	± 125 mA
THB 3-4823		± 15 VDC	± 100 mA

Dimensions

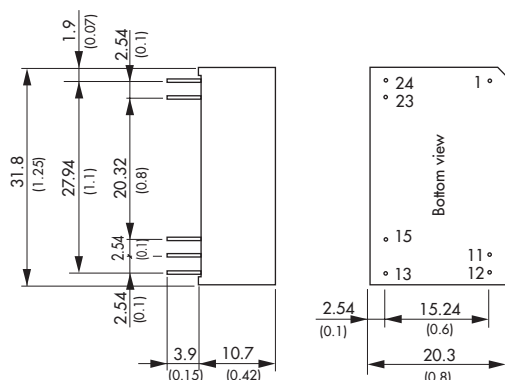


() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
11	No pin	Common
12	- Vout	No pin
13	+ Vout	- Vout
15	No pin	+ Vout
23	- Vin (GND)	- Vin (GND)
24	- Vin (GND)	- Vin (GND)

THP-3 Series ▶ 3 W



- ▶ DIP-24 package
- ▶ Ultra wide 4:1 input voltage range
- ▶ Input voltage up to 160 VDC
- ▶ I/O isolation voltage 4000 VACrms
- ▶ Reinforced insulation rated for working voltage 300 VAC
- ▶ Industrial and medical safety approvals
- ▶ Operating temperature range -40 °C to +85 °C
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A

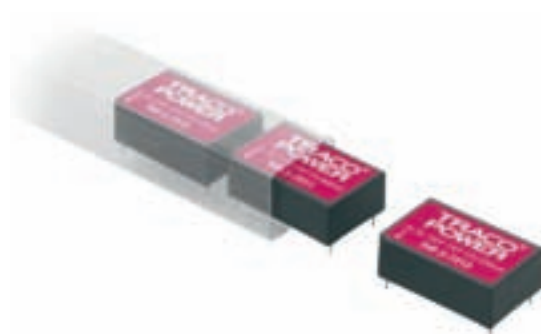


Specifications

Line regulation	0.5 % max.
Load regulation	– Single output models: 1 % max. – Dual output models: 2 % max.
Ripple & noise (20 MHz BW)	<100 mVpk-pk for 5 VDC models <150 mVpk-pk for other models
Conducted EMI	EN 55022, class A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	83 % typ.
Operating temperature range	-40 °C to +85 °C above 70 °C derating 3.3 %/K
I/O isolation voltage	4000 VACrms, rated for 300 VAC working voltage
I/O isolation test voltage	6000 Vpk (1sec)
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, UL 60601-1, IEC/EN 60601-1, CB-report
Casing	plastic (UL 94V-0 rated)

Models

Order code	Input voltage	Output voltage	Output current max.
THP 3-2411	9 – 40 VDC	5 VDC	600 mA
THP 3-2412		12 VDC	250 mA
THP 3-2422		± 12 VDC	± 125 mA
THP 3-2423	18 – 80 VDC	± 15 VDC	± 100 mA
THP 3-4811		5 VDC	600 mA
THP 3-4812		12 VDC	250 mA
THP 3-4822	36 – 160 VDC	± 12 VDC	± 125 mA
THP 3-4823		± 15 VDC	± 100 mA
THP 3-7211		5 VDC	600 mA
THP 3-7212		12 VDC	250 mA
THP 3-7222		± 12 VDC	± 125 mA
THP 3-7223		± 15 VDC	± 100 mA

Dimensions

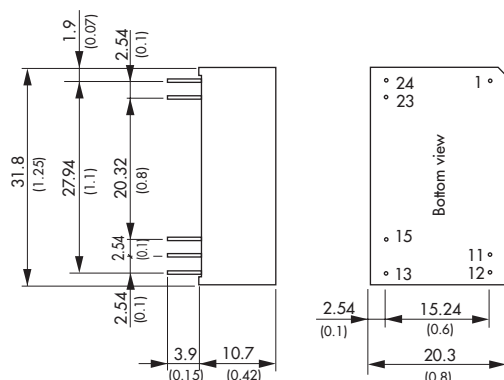

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
11	No pin	Common
12	- Vout	No pin
13	+ Vout	- Vout
15	No pin	+ Vout
23	- Vin (GND)	- Vin (GND)
24	- Vin (GND)	- Vin (GND)

() = Inches

THB-6 Series ▶ 6 W



- ▶ Ultra compact DIP-24 package
- ▶ Wide 2:1 input voltage range
- ▶ I/O isolation voltage 4000 VACrms
- ▶ Reinforced insulation rated for working voltage 300 VAC
- ▶ Industrial and medical safety approvals
- ▶ Operating temperature range -40°C to $+71^{\circ}\text{C}$
- ▶ Low leakage current
- ▶ Short circuit protection
- ▶ Input filter to meet EN 55022, class A




Specifications

Line regulation	0.5 % max.
Load regulation	– Single output models: 1 % max. – Dual output models: 2 % max.
Ripple & noise (20 MHz BW)	<100 mVpk-pk for 5 VDC models <150 mVpk-pk for other models
Conducted EMI	EN 55022, class A (internal filter)
Short circuit protection	continuous, automatic recovery
Efficiency	80 % typ.
Operating temperature range	-40°C to $+71^{\circ}\text{C}$ above 60°C derating 3 %/K
I/O isolation voltage	4000 VACrms, rated for 300 VAC working voltage
I/O isolation test voltage	6000 Vpk (1sec)
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, UL 60601-1, IEC/EN 60601-1, CB-report
Casing	plastic (UL 94V-0 rated)

Models

Order code	Input voltage	Output voltage	Output current max.
THB 6-1211		5 VDC	1000 mA
THB 6-1212	9 – 18 VDC	12 VDC	500 mA
THB 6-1222		± 12 VDC	± 250 mA
THB 6-1223		± 15 VDC	± 200 mA
THB 6-2411		5 VDC	1000 mA
THB 6-2412	18 – 36 VDC	12 VDC	500 mA
THB 6-2422		± 12 VDC	± 250 mA
THB 6-2423		± 15 VDC	± 200 mA
THB 6-4811		5 VDC	1000 mA
THB 6-4812	36 – 75 VDC	12 VDC	500 mA
THB 6-4822		± 12 VDC	± 250 mA
THB 6-4823		± 15 VDC	± 200 mA

Dimensions

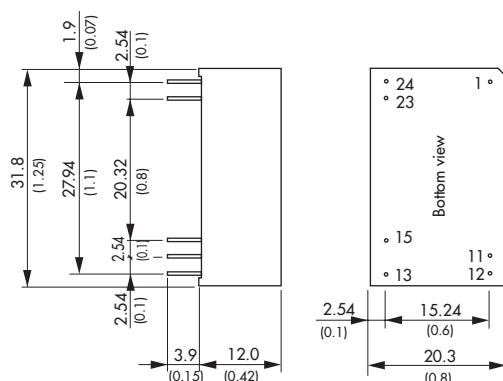

() = Inches

Pin	Single output	Dual output
1	+ Vin (Vcc)	+ Vin (Vcc)
11	No pin	Common
12	– Vout	No pin
13	+ Vout	– Vout
15	No pin	+ Vout
23	– Vin (GND)	– Vin (GND)
24	– Vin (GND)	– Vin (GND)

TSR-1 Series ▶ 1A

- ▶ High performance switching regulator
- ▶ High efficiency up to 96 %
- ▶ No heat-sink required
- ▶ Low standby current
- ▶ Wide input voltage range 4.6–36 VDC
- ▶ Output voltages from 1.5 to 15 VDC
- ▶ Drop in replacement for 3-pin linear regulators (78 series)
- ▶ Short circuit protection
- ▶ Low output ripple & noise



Specifications

Line regulation	0.2 % max.
Load regulation	0.4 % max.
Output voltage adjustment	by external resistor. (SMD models only)
Ripple & noise (20 MHz BW)	<50 mVpk-pk for models up to 6.5 VDC output <75 mVpk-pk for models higher 6.5 VDC output
Short circuit protection	continuous, automatic recovery
Efficiency	90 % typ.
Operating temperature range	–40 °C to +85 °C above 60 °C derating 2.4 %/K
I/O isolation voltage	non-isolated
Standby input current	2 mA typ.
Casing	plastic (UL 94 V-0 rated)


SIP Models

Order code	*Input voltage	Output voltage	Output current max.
TSR 1-2415	4.6 – 36 VDC	1.5 VDC	1000 mA
TSR 1-2418	4.6 – 36 VDC	1.8 VDC	1000 mA
TSR 1-2425	4.6 – 36 VDC	2.5 VDC	1000 mA
TSR 1-2433	4.75 – 36 VDC	3.3 VDC	1000 mA
TSR 1-2450	6.5 – 36 VDC	5.0 VDC	1000 mA
TSR 1-2465	9.0 – 36 VDC	6.5 VDC	1000 mA
TSR 1-2490	12 – 36 VDC	9.0 VDC	1000 mA
TSR 1-24120	15 – 36 VDC	12 VDC	1000 mA
TSR 1-24150	18 – 36 VDC	15 VDC	1000 mA

* For an input voltage higher than 32VDC an input capacitor 22 µF / 50V is required

Models for negative output voltage applications and SMD models, ask factory.

Dimensions



Pinout SIP Models

Pin	
1	+Vin (Vcc)
2	GND
3	+Vout

() = Inches

TSR-3 Series ▶ 3A

- ▶ High performance switching regulator
- ▶ High efficiency up to 95 %
- ▶ Low profile open frame design
- ▶ Adjustable output voltage
- ▶ Remote On/Off
- ▶ Wide input voltage range 2.5–5.5, 4.5–14 and 10–30 VDC
- ▶ Output voltages from 0.6 to 15 VDC
- ▶ Short circuit protection
- ▶ Low output ripple & noise



NEW
Product


Specifications

Line regulation	0.2 % max.
Load regulation	0.8 % max.
Output voltage adjustment	by external resistor.
Ripple & noise (20 MHz BW)	<50 mVpk-pk for models up to 6 VDC output <75 mVpk-pk for models higher 6 VDC output
Short circuit protection	continuous, automatic recovery
Efficiency	93 % typ.
Operating temperature range	–40 °C to +85 °C above 50 °C derating 1.5%/K
I/O isolation voltage	non-isolated
Standby input current	20 mA typ.
Remote On/Off	shutdown input for low input current in standby operation
Casing	plastic (UL 94 V-0 rated)

Models

Order code	*Input voltage	Output voltage adjustable	Output current max.
TSR 3-0533	2.5 – 5.5 VDC	0.6 – 3.3 VDC	3000 mA
TSR 3-1250	4.5 – 14 VDC	0.6 – 6.0 VDC	3000 mA
TSR 3-2450	10 – 30 VDC	3.0 – 6.0 VDC	3000 mA
TSR 3-24150	10 – 30 VDC	5.0 – 15 VDC	3000 mA

Dimensions




() = Inches

Pin

1	Remote On/Off
2	+Vin (Vcc)
3	GND
4	+Vout
5	Trim

TOS Series ► 6 – 30 A

- Models with 6, 10, 16 and 30 A
- Programmable output voltage from 0.75 to 5.5 VDC
- Very high efficiency up to 96 %
- Remote On/Off
- Under-voltage lockout
- Over temperature protection
- Surface mount (SM) or SIP-version
- Surface mount version fully compatible with DOSA standard

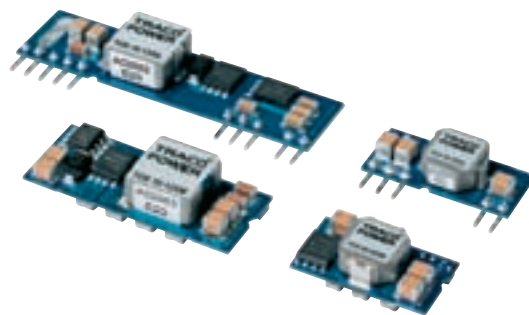

Specifications

Line regulation	0.3 % max.
Load regulation	0.4 % max.
Output voltage	programmable by external resistor
Ripple & noise	<50 mVpk-pk (with output capacitors)
Transient response time	50 µsec. typ. (50% load change)
Short circuit protection	continuous, automatic recovery
Efficiency	93 % typ.
Operating temperature range	-40 °C to +85 °C (for derating see datasheet)
Thermal protection	shutdown at 125 °C
Remote On/Off	shutdown input for low input current (3 mA) in standby operation

Models


Order code SM-version	Input voltage range	Output voltage range	Output current max.
TOS 06-05SM	2.4 – 5.5 VDC	0.75 – 3.3 VDC	6 A
TOS 10-05SM	2.4 – 5.5 VDC	0.75 – 3.3 VDC	10 A
TOS 16-05SM	2.4 – 5.5 VDC	0.75 – 3.3 VDC	16 A
TOS 30-05SM	4.5 – 5.5 VDC	0.80 – 3.6 VDC	30 A
TOS 06-12SM	8.3 – 14.0 VDC	0.75 – 5.0 VDC	6 A
TOS 10-12SM	8.3 – 14.0 VDC	0.75 – 5.0 VDC	10 A
TOS 16-12SM	8.3 – 14.0 VDC	0.75 – 5.0 VDC	16 A
TOS 30-12SM	6.0 – 14.0 VDC	0.80 – 3.6 VDC	30 A*

* 20 A at output voltage higher than 2.75 VDC

Order code SIP-version	Input voltage range	Output voltage range	Output current max.
TOS 06-05SIL	2.4 – 5.5 VDC	0.75 – 3.3 VDC	6 A
TOS 10-05SIL	2.4 – 5.5 VDC	0.75 – 3.3 VDC	10 A
TOS 16-05SIL	2.4 – 5.5 VDC	0.75 – 3.3 VDC	16 A
TOS 30-05SIL	4.5 – 5.5 VDC	0.80 – 5.5 VDC	30 A
TOS 06-12SIL	8.3 – 14.0 VDC	0.75 – 5.0 VDC	6 A
TOS 10-12SIL	8.3 – 14.0 VDC	0.75 – 5.0 VDC	10 A
TOS 16-12SIL	8.3 – 14.0 VDC	0.75 – 5.0 VDC	16 A
TOS 30-12SIL	6.0 – 14.0 VDC	0.80 – 5.5 VDC	30 A*

* 25 A at output voltage higher than 2.75 VDC

Dimensions

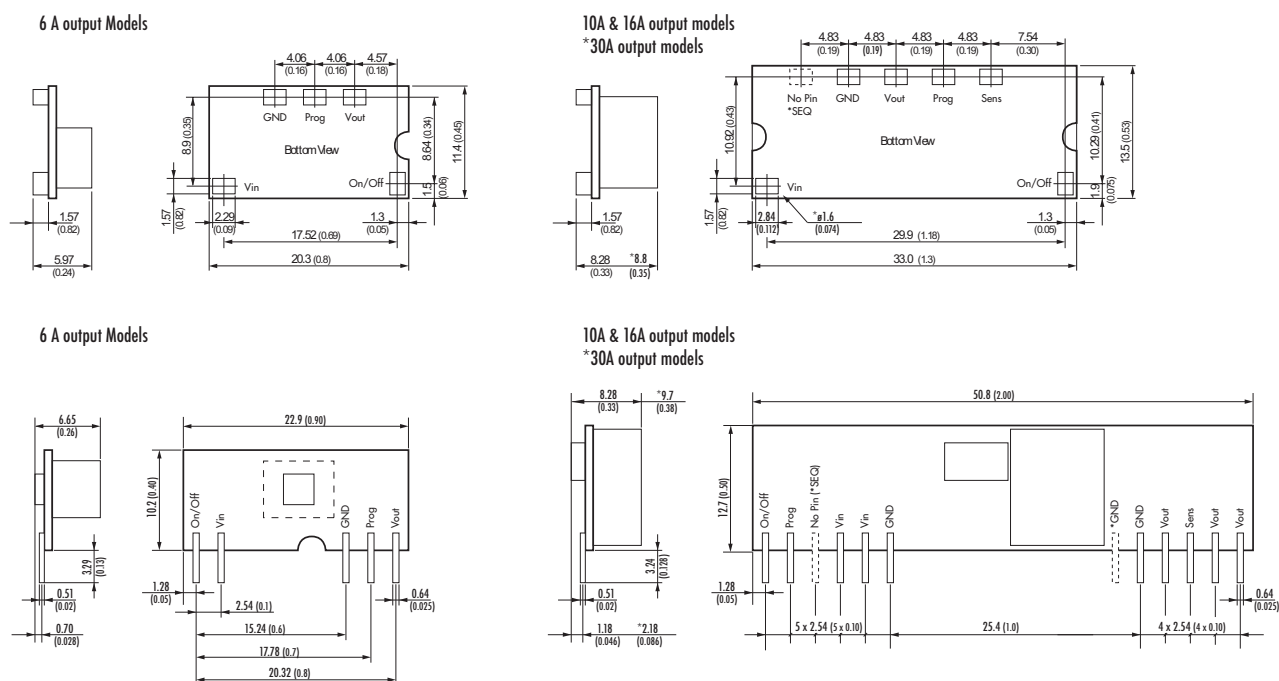

() = Inches

MHV / PHV Series ▶ 2/5 W

- ▶ Ultra compact high voltage power supplies
- ▶ Full SMD-design with ceramic capacitors for high reliability
- ▶ Excellent output stability
- ▶ Low temperature drift
- ▶ Remote voltage programming
- ▶ Short circuit protection
- ▶ PCB-mount or flying lead version
- ▶ Shielded metal casing



Specifications

Line regulation	0.03 % for MHV 0.01 % for PHV
Load regulation	MHV models: 0.08 % PHV models: 0.1 %
Output voltage adjustment	0...100 % (by external resistor or reference voltage)
Ripple & noise	MHV: < 30 mVpk-pk (20 MHz BW) PHV: <100 mVpk-pk (20 MHz BW)
Short circuit protection	continuous
Efficiency	65 % typ.
Operating temperature range	-10 °C to +75 °C above 50 °C derating 4 %/K
Temperature coefficient	0.01 %/K
Stability	0.05 %/8 h drift
Casing	metal
Remote On/Off	Input for MHV 500–2,000 VDC models, optional for PHV models

Models

MHV Models 2 Watt

Order code	Input voltage range	Output voltage	Output current max.	Case
MHV 12-180 S 15 P (N)	10.8 – 13.2 VDC	0 – 180 VDC	15 mA	A
MHV 12-300 S 10 P (N)		0 – 300 VDC	10 mA	A
MHV 12-350 S 07 P (N)		0 – 350 VDC	7 mA	A
*MHV 12-0.5 K 6000 P (N)	10.8 – 16.5 VDC	0 – 500 VDC	6 mA	B
*MHV 12-1.0 K 2000 P (N)		0 – 1000 VDC	2 mA	B
*MHV 12-1.5 K 1300 P (N)		0 – 1500 VDC	1.3 mA	B
*MHV 12-2.0 K 1000 P (N)		0 – 2000 VDC	1 mA	B


* Models with flying leads available, Case C

PHV Models 5 Watt

Order code	Input voltage range	Output voltage	Output current max.	Case
PHV 12-350 S 10 P (N)	10.8–16.5 VDC	0 – 350 VDC	10 mA	D
PHV 12-0.5 K 1000 P (N)		0 – 500 VDC	10 mA	D
PHV 12-1.0 K 5000 P (N)		0 – 1000 VDC	5 mA	D
PHV 12-2.0 K 2500 P (N)		0 – 2000 VDC	2.5 mA	D

Order code P for positive output polarity
Order code N for negative polarity

Dimensions

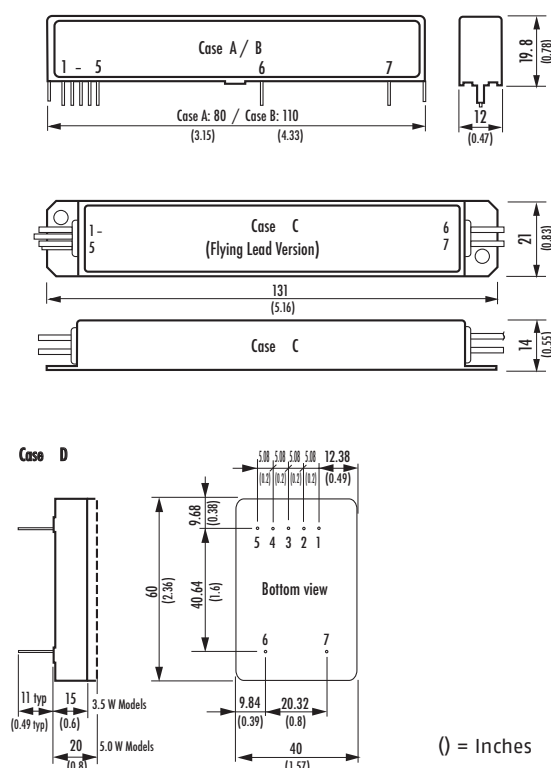

Pin	Case A/B	Case C	Case D
1	+ Vin (Vcc)	+ Vin (VCC)	+ Vin (Vcc)
2	- Vin (GND)	- Vin (GND)	- Vin (GND)
3	Vadj.	Vadj.	Vadj.
4	Vref.	Vref.	Vref.
5	Common	Remote On/Off	Remote On/Off
6	Vout	Common	Common
7	No pin	Vout	Vout

TZL Series ▶ 60 to 300 W

- ▶ Compact metal casing with screw terminal block
- ▶ Wide 2:1 input voltage range
- ▶ I/O isolation 1500VDC
- ▶ Input reverse polarity protection
- ▶ Soft start, low inrush current
- ▶ Overload and short circuit protection
- ▶ Adjustable output voltage
- ▶ Cost optimized design




Specifications

Line regulation	1.0 % max.
Load regulation	1.0 % max.
Output voltage adjustment	±10 % (by internal potentiometer)
Ripple & noise	12VDC output models: <100 mVpk-pk (20 MHz BW) 24VDC output models: <150 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55011 class B, EN 55022 class B and FCC, Level B
EMC immunity	EN 61000-6-1 (light industry)
Short circuit protection	foldback, automatic recovery
Efficiency	80 % typ.
Operating temperature range	-10 °C to +60 °C above 50 °C derating 2.5 %/K
I/O isolation test voltage	1500VDC
Safety standards	IEC/EN 60950-1
Casing	aluminium/steel

Models

Order code	Input voltage range	Output voltage	Output current max.
TZL 060-2412	18 – 36 VDC	12 VDC	5.0 A
TZL 060-2424		24 VDC	2.5 A
TZL 060-4812	36 – 72 VDC	12 VDC	5.0 A
TZL 060-4824		24 VDC	2.5 A
TZL 100-2412	19 – 36 VDC	12 VDC	8.5 A
TZL 100-2424		24 VDC	4.2 A
TZL 100-4812	36 – 72 VDC	12 VDC	8.5 A
TZL 100-4824		24 VDC	4.2 A
TZL 150-2412	19 – 32 VDC	12 VDC	12.5 A
TZL 150-2424		24 VDC	6.3 A
TZL 150-4812	36 – 72 VDC	12 VDC	12.5 A
TZL 150-4824		24 VDC	6.3 A
TZL 300-4812	36 – 72 VDC	12 VDC	26.7 A
TZL 300-4824		24 VDC	13.4 A

Dimensions

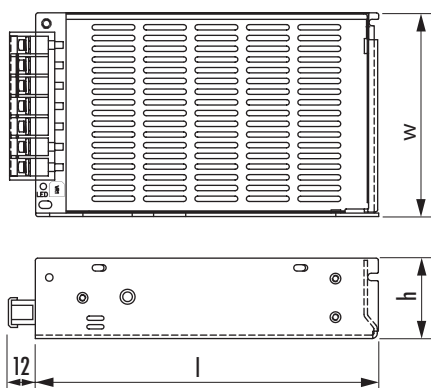

Type	Length l	Width w	Height h
TZL 060	159 (6.26)	95 (3.74)	38 (1.50)
TZL 100	198 (7.80)	95 (3.74)	38 (1.50)
TZL 150	198 (7.80)	99 (3.90)	50 (1.97)
TZL 300	212 (8.35)	115 (4.53)	50 (1.97)

() = Inch

TSC Series ► 150 to 5000 W

- Plug-in modules for 19" subracks
- Robust mechanical design for industrial applications
- Input voltages from 10 to 800VDC
- Standard models with output voltages up to 400VDC
- Also AC input 115/230VAC or 400/480VAC 3P available
- EMI complies with EN 55022, class A
- Available with many standard options



Specifications

Line regulation	0.1 % max.
Load regulation	0.2 % max.
Ripple & noise	<1 % Vout + 30 mVpk-pk (20 MHz BW)
Conducted EMI	EN 55022, Class A
Short circuit protection	continuous, automatic recovery
Overvoltage protection	105 % of Vout
Efficiency	85 % typ.
Operating temperature range	-20 °C to +75 °C
I/O isolation test voltage	2100VDC (Vin < 60VDC) 3500VDC (Vin > 60VDC & VAC input models)
Safety standards	IEC/EN 60950-1

Models

Input voltage range	Output power	Output voltage range
10 – 16 VDC 18 – 36 VDC 36 – 75 VDC 80 – 160 VDC 160 – 320 VDC 320 – 640 VDC 450 – 800 VDC	Models with 150W – 5000W available	4.5 – 5.5 VDC 8 – 10 VDC 11 – 13 VDC 14 – 16 VDC 23 – 26 VDC 26 – 30 VDC 45 – 55 VDC 58 – 68 VDC 100 – 130 VDC 200 – 250 VDC 380 – 400 VDC

Options:

- DIN-rail mounting (150–500 W)
- Inrush current limiting
- Input voltage: 115/230 VAC, single phase or 200/400/480 VAC, three phase
- Input polarity protection
- Output decoupling diode for redundant / parallel operation
- Active current sharing for parallel operation
- Remote On/Off (inhibit)
- Output programmable via analogue signal
- Monitoring of input and output voltage
- RS232 or IEEE488 interface
- Wall mount / chassis mount
- Increased mechanical strength
- Tropical protection

for model selection visit TRACOPOWER website

Dimensions

Power [Watts]	Width [mm]	Depth [mm]	Height [mm]
150	71	160	133 (3U)
250	107		
500	213		
400	107	220	
800	213		
200	51	160	
400	71		
600	107		
1200	213		
850	107	220	267 (6U)
1250	142		
1700	213		
2500	284		
2500	142	300	
5000	284		

TSC 19" Series ▶ 5 to 22 kW

- ▶ 19" subracks
- ▶ Robust mechanical design for industrial applications
- ▶ Input voltages from 20 to 800VDC
- ▶ Standard models with output voltages up to 800VDC
- ▶ Also AC input 115/230VAC or 400/480VAC 3P available
- ▶ EMI complies with EN 55022, Class A
- ▶ Available with many standard options



Specifications

Line regulation	0.1 % max.
Load regulation	0.2 % max.
Ripple & noise	0.5 % V _{mrs}
Conducted EMI	EN 55022-A
Noise Immunity	EN 50082
Short circuit protection	continuous, automatic recovery
Overvoltage protection	105 % of V _{out}
Efficiency	90 % typ.
Operating temperature range	-10 °C to +50 °C
I/O isolation test voltage	2100VDC (V _{in} < 60VDC) 3500VDC (V _{in} > 60VDC & VAC input models)
Safety standards	IEC/EN 60950-1

Models

Input voltage range	Output power	Output voltage range
40 – 64 VDC 50 – 80 VDC 80 – 160 VDC 160 – 320 VDC 320 – 640 VDC 450 – 800 VDC	Models with 5 kW – 22 kW available	4.5 – 5.5 VDC
		8 – 10 VDC
		11 – 13 VDC
		14 – 16 VDC
		23 – 26 VDC
		26 – 30 VDC
		45 – 55 VDC
		58 – 68 VDC
		100 – 130 VDC
		200 – 250 VDC
		380 – 400 VDC
		570 – 600 VDC
		760 – 800 VDC

Options:

- ▶ Input voltage: 115/230 VAC, single phase or 200/400/480 VAC, three phase
- ▶ Input polarity protection
- ▶ Output decoupling diode for redundant / parallel operation
- ▶ Active current sharing for parallel operation
- ▶ Remote On/Off (inhibit)
- ▶ Output programmable via analogue signal
- ▶ Monitoring of input and output voltage
- ▶ RS232 or IEEE488 interface
- ▶ Wall mounting
- ▶ Increased mechanical strength
- ▶ Automatic/manual setting of output characteristic
- ▶ Temperature compensated battery charging voltage
- ▶ Digital Volt- and Ampere meter
- ▶ Tropical protection

for model selection visit TRACOPOWER website

Dimensions

Power [kW]	Width [mm]	Depth [mm]	Height [mm]
5/7.5/10	19"	600	178 (4U)
6/8/12	19"	360/460*	267/400 (6/9U)
22	19"	600	356 (8U)

* depending on output current

TSD Series ► 200 VA to 30 kVA

- 19" subracks or plug-in modules for 19" subrack
- Regulated sine wave output voltage
- Single phase or 3-phase output
- DC input 10 – 800VDC
- Isolation between input and output
- Compact and robust design for industrial environment
- Low standby power consumption



Specifications

Line regulation	0.1 % to 2 % depending on model
Load regulation	1 % typ.
Harmonic distortion	3 % typ.
EMC suppression	EN 55022, Class A
EMC immunity	according to EN 61000-6-2
Output current limitation (steady state)	at 105 % of I _{out} max.
Short circuit current	electronically limited to 3x I _{out} max.
Surge power	2 x P _{nom.} for 1 sec.
Efficiency	75–94 %
No-load input power	20 Watt typ.
Operating temperature	–20 °C to +75 °C above 55 °C derating 2.5 %/K
I/O isolation voltage	3000VDC
Safety standards	IEC/EN60950-1

Models

Input voltage range	Output power	Output voltage
10 – 16 VDC 20 – 32 VDC 40 – 64 VDC 50 – 80 VDC 80 – 160 VDC 160 – 320 VDC 340 – 400 VDC 340 – 640 VDC 450 – 800 VDC	Models with 200 VA – 30 kVA available	Single-phase 115/230 VAC Three-phase 200/400/480 VAC

Options:

- Inrush current limiting
- Input polarity protection
- Remote On/Off (inhibit)
- Output programmable via analog signal
- Monitoring of input and output voltage
- RS232 or IEEE488 interface
- Wall mounting
- Increased mechanical strength
- Tropical protection
- Static Switch for uninterruptible power supply

Dimensions

Models with 1-phase output

Power [kVA]	Depth [mm]	Width [mm]	Height [mm]
up to 0.6	160	213	267 (6U)
up to 1.2	220		
up to 1.6	300	284	
up to 2.5			
up to 10	460	19"	
19" = 483 mm			

Models with 3-phase output

Power [kVA]	Depth [mm]	Width [mm]	Height [mm]
0.6–10	460	19"	267 (6U)
up to 30			267 (3x 6U)

- * for low input voltages there will be less power in relation to the size
- ° for power ratings >3.6 kVA the transformer needs to be installed externally because of weight and size

TOP-60 Series ▶ 60 W



- ▶ 4.0" x 2.0" footprint
- ▶ Supplies 60 W with convection cooling
- ▶ Single-, dual- and triple output models
- ▶ Highest efficiency of 88% typ.
- ▶ Operating temperature range -10 °C to +70 °C
- ▶ Universal input 90–264 VAC
- ▶ Compliance with EN 61000-3-2
- ▶ Low leakage current
- ▶ Protection class II




Specifications

Input voltage range	90–264 VAC, 47–63 Hz
Line regulation	1.0 % max.
Load regulation	0.5 % max. for single output models 2.0 % max. for multi output models
Output voltage adjustment	approx. +5 % of Vout nom. by internal potentiometer
Ripple & noise (20 MHz BW)	<100 mVpk-pk for 3.3 and 5 VDC models <120 mVpk-pk for other models
EMI emission	EN 55011/22 class B, harmonic current EN 61000-3-2
EMC immunity	EN 61000-6-1
Output current limitation	>110 % of Iout max.
Overvoltage protection	>110 % of Vout nom.
Operating temperature	-10 °C to +70 °C (convection cooling) derating 2.0 %/K above 50 °C,
Safety standards / approvals	cUL/UL 60601-1, IEC/EN 60950-1, CB-report
Degree of protection	class II prepared with second fuse

Models

Order code	Output power max.	Output 1	Output 2/3
TOP 60105	55 W	5.0 VDC / 11.0 A	
TOP 60112	60 W	12 VDC / 5.0 A	
TOP 60115	64 W	15 VDC / 4.3 A	
TOP 60124	64 W	24 VDC / 2.7 A	
TOP 60148	64 W	48 VDC / 1.35 A	
TOP 60252	55 W	+5.0 VDC / 6.0 A	+12 VDC / 3.0 A
TOP 60254	55 W	+5.0 VDC / 6.0 A	+24 VDC / 1.5 A
TOP 60522	55 W	+5.0 VDC / 6.0 A	+12 VDC / 3.0 A -12 VDC / 0.5 A
TOP 60533	55 W	+5.0 VDC / 6.0 A	+15 VDC / 2.4 A -15 VDC / 0.5 A
TOP 60316	38 W	+3.3 VDC / 6.0 A	+5.2 VDC / 3.0 A +12 VDC / 0.5 A
TOP 60317	38 W	+5.0 VDC / 6.0 A	+3.3 VDC / 1.5 A +12 VDC / 0.5 A
TOP 60318	55 W	+5.0 VDC / 6.0 A	+24 VDC / 1.5 A -12 VDC / 0.5 A

Dimensions

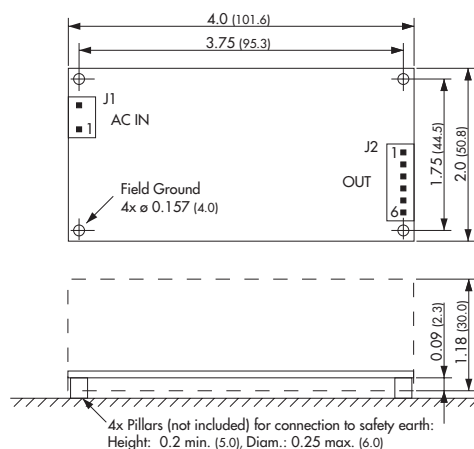

() = mm

TOP-100 Series ▶ 100 W




- ▶ Highest power density in 4.0" x 2.0" footprint
- ▶ Supplies 100 W (convection cooling!)
- ▶ Highest efficiency of 90% typ.
- ▶ Operating temperature range -25 °C to +70 °C
- ▶ Compliance with EN 61000-3-2
- ▶ Low leakage current
- ▶ Safety class I and class II



Specifications	
Input voltage range	93–132 VAC / 167–264 VAC (autorange) 47–63 Hz
Line regulation	0.5 % max.
Load regulation	1.0 % max.
Output voltage adjustment	approx. +5 % of Vout nom. by internal potentiometer
Ripple & noise (20 MHz BW)	<100 mVpk-pk <150 mVpk-pk for 48 V models
EMI emission	EN 55011/22 class B, harmonic current EN 61000-3-2
EMC immunity	EN61000-6-1
Output current limitation	>125% Inom. foldback, automatic recovery
Efficiency	90 % typ.
Operating temperature	-25 °C to +70 °C (convection cooling) derating 2.0 %/K above 50 °C, for 3.3 & 5.0 VDC models: 2.0 %/K above 40 °C
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Degree of protection	class I, class II prepared with second fuse

Models			
Order code	Output power max.	Output voltage	Output current max.
TOP 100-103	66 W	3.3 VDC	20 A
TOP 100-105		5 VDC	20 A
TOP 100-112		12 VDC	8.3 A
TOP 100-115	100 W	15 VDC	6.7 A
TOP 100-124		24 VDC	4.2 A
TOP 100-148		48 VDC	2.1 A

Dimensions

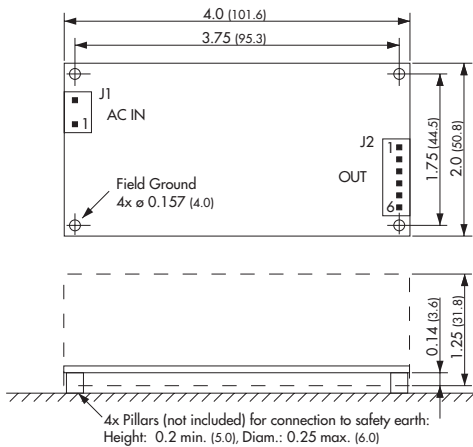

() = mm

TOP-200 Series ▶ 200 W



- ▶ Highest power density in 5.0" x 3.0" footprint
- ▶ Supplies 200 W (convection cooling!)
- ▶ Highest efficiency of 90% typ.
- ▶ Operating temperature range -25 °C to +70 °C
- ▶ Universal input 85–264 VAC
- ▶ Compliance with EN 61000-3-2
- ▶ Low leakage current
- ▶ Protection class I and class II




Specifications

Input voltage range	85–264 VAC, 47–63 Hz
Line regulation	0.5 % max.
Load regulation	1.0 % max.
Ripple & noise (20 MHz BW)	<120 mVpk-pk for other models
EMI emission	EN 55011/22 class B, harmonic current EN 61000-3-2
EMC immunity	EN 61000-6-1
Output current limitation	>110 % of I _{out} max.
Overvoltage protection	>130 % of V _{out} nom.
Operating temperature	-25 °C to +70 °C (convection cooling) derating 2.0 %/K above 40 °C for 12 & 15 VDC models derating 2.0 %/K above 50 °C for 24 & 48 VDC models
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Degree of protection	class I, class II prepared with second fuse

Models

Order code	Output power max.	Output voltage	Output current max.
TOP 200-112	200 W	12 VDC	16 A
TOP 200-115		15 VDC	13 A
TOP 200-124		24 VDC	8.3 A
TOP 200-148		48 VDC	4.2 A

Dimensions

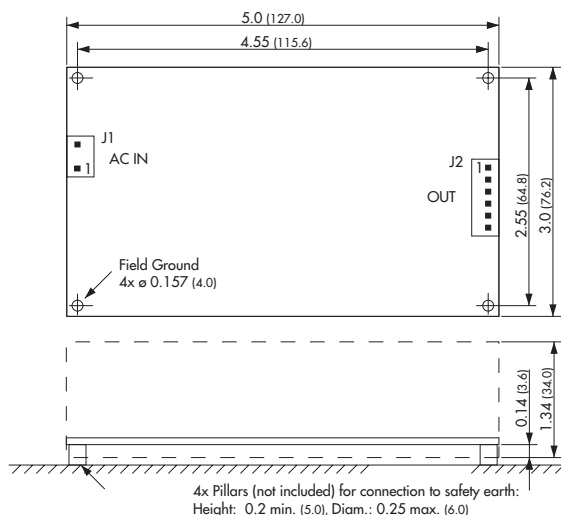

TOF Series ► 10 to 150 W



- High industrial quality standard
- Optional available with case
- Screw terminal or pin connector version
- Universal input voltage 85–264 VAC
- Output voltage adjustable
- EMI meets EN 55022, Class B and FCC, Level B
- Short circuit and overvoltage protection




Specifications

Input voltage range	85–264 VAC, 47–63 Hz 110–370 VDC (10–50 Watt single output models only)
Line regulation	0.5 % max.
Load regulation	0.5 % max. for single output models 2.0 % max. for multi output models
Output voltage adjustment:	±5% for 10–50 Watt single output models ±10% for 75–150 Watt single output models ±15% on output 1 / ±2.5% on output 2 and 3 (multi output models)
Ripple & noise	<1% Vout + 50mVpk-pk (20 MHz BW)
EMI suppression	EN55022, class B and FCC part 15, level B IEC/EN61000-3-2, (75–150 Watt models)
EMC immunity	EN61000-6-1
Output current limitation	>105% of Inom.
Efficiency	78 % typ. for single output models 70 % typ. for multi output models
Operating temperature	–10 °C to +60 °C above 50 °C derating 5.0 %/K
Safety standards / approvals	cUL/UL 60950-1, IEC/EN60950-1, CB-report
Connection	– screw terminal block – Molex pin connector – suffix M (mating connectors included)

Dimensions

Type	Length L1	Width W1	Height H1	Length L2	Width W2	Height H2
TOF 10	105 (4.13)	50 (1.97)	20 (0.79)	125 (4.92)	57 (2.24)	32 (1.26)
TOF 15	125 (4.92)	50 (1.97)	20 (0.79)	145 (4.92)	57 (2.24)	32 (1.26)
TOF 30	133 (5.24)	55 (2.17)	25 (0.98)	163 (6.42)	65 (2.56)	36 (1.42)
TOF 50	195 (7.68)	55 (2.17)	25 (0.98)	225 (8.86)	65 (2.56)	36 (1.42)
TOF 75	222 (8.74)	55 (2.17)	26 (1.02)	252 (9.92)	65 (2.56)	42 (1.65)
TOF 100	222 (8.74)	62 (2.44)	32 (1.26)	252 (9.92)	72 (2.83)	45 (2.00)
TOF 150	222 (8.74)	75 (2.95)	37 (1.46)	252 (9.92)	85 (3.35)	51 (2.00)
TOF 15-T	127 (5.0)	50 (1.97)	22.6 (0.89)	147 (5.8)	57 (2.25)	38 (1.5)
TOF 30-T	140 (5.5)	65 (2.56)	22.6 (0.89)	160 (6.3)	72 (2.83)	38 (1.5)

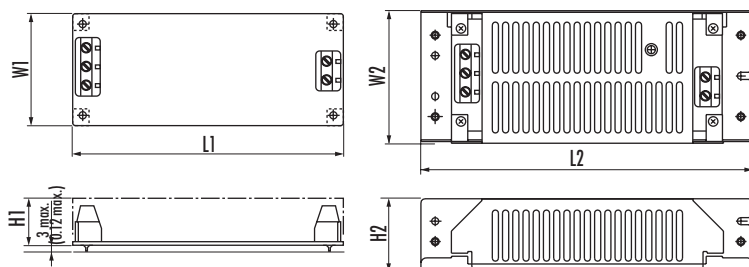

() = Inches

Models

Order code *	Output power max.	Output voltage	Output current max.	Peak current 10 sec. max.
TOF 10-05S		5 VDC	2 A	
TOF 10-12S	10 Watt	12 VDC	0.9 A	
TOF 10-15S		15 VDC	0.7 A	
TOF 10-24S		24 VDC	0.5 A	
TOF 15-05S		5 VDC	3 A	
TOF 15-12S	15 Watt	12 VDC	1.3 A	
TOF 15-15S		15 VDC	1 A	
TOF 15-24S		24 VDC	0.7 A	
TOF 30-05S		5 VDC	6 A	
TOF 30-12S	30 Watt	12 VDC	2.5 A	
TOF 30-15S		15 VDC	2 A	
TOF 30-24S		24 VDC	1.3 A	
TOF 50-05S		5 VDC	10 A	
TOF 50-12S	50 Watt	12 VDC	4.3 A	
TOF 50-15S		15 VDC	3.5 A	
TOF 50-24F		24 VDC	2.2 A	3.0 A
TOF 75-05S		5 VDC	15 A	
TOF 75-12S	75 Watt	12 VDC	6.3 A	
TOF 75-15S		15 VDC	5 A	
TOF 75-24F		24 VDC	3.2 A	4.5 A
TOF 100-05S		5 VDC	20 A	
TOF 100-12S	100 Watt	12 VDC	8.5 A	
TOF 100-15S		15 VDC	6.7 A	
TOF 100-24F		24 VDC	4.5 A	6.3 A
TOF 150-05S		5 VDC	30 A	
TOF 150-12S	150 Watt	12 VDC	12.5 A	
TOF 150-15S		15 VDC	10 A	
TOF 150-24F		24 VDC	6.5 A	9.1 A

* Version with Molex pin connectors – add suffix M

Triple Output Models

Order code *	Output power max.	Output 1 Total power not to exceed max. power	Output 2/3 Total power not to exceed max. power
TOF 15-0522T	15 Watt	5 VDC / 2 A	±12 VDC / ±0.5 A
TOF 15-0533T		5 VDC / 2 A	±15 VDC / ±0.45 A
TOF 30-0522T	30 Watt	5 VDC / 4 A	±12 VDC / +1.2 A/-0.5 A
TOF 30-0533T		5 VDC / 4 A	±15 VDC / +1.0 A/-0.5 A

* Version with Molex pin connectors – add suffix M

Chassis / cover kit

Order code	for models
TOF 10-MC	TOF 10-xx
TOF 15-MC	TOF 15-xx
TOF 30-MC	TOF 30-xx
TOF 50-MC	TOF 50-xx
TOF 75-MC	TOF 75-xx
TOF 100-MC	TOF 100-xx
TOF 150-MC	TOF 150-xx
TOF 15T-MC	TOF 15-xxxT
TOF 30T-MC	TOF 30-xxxT

TMLM Series ▶ 4 to 20 W



- ▶ Ultra compact 20 W in 2" x 1" package
- ▶ Fully encapsulated modules for PCB mount
- ▶ Universal input 85–264 VAC, 47–440 Hz
- ▶ EMI meets EN 55022, class B
- ▶ Safety class II product
- ▶ Low ripple and noise
- ▶ Short circuit and overload protection



Specifications


Input voltage range	90–264 VAC, 47–440 Hz 120–370 VDC (TMLM 04 & TMLM 05 models only)
Line regulation	0.3 % max.
Load regulation	0.5 % max.
Ripple & noise (20 MHz BW)	<1.0 % of Vout <1.5 % of Vout for 3.3 & 5 VDC models
EMI suppression	EN 55011 class B, EN 55022 class B and FCC, level B
EMC immunity	EN61000-6-1
Output current limitation	foldback, automatic recovery
Efficiency	72 % typ.
Operating temperature	–25 °C to +60 °C TMLM 04 Models: above 50 °C derating 2.5 %/K TMLM 05 % TMLM 10 models: above 50 °C derating 3.75 %/K TMLM 20 models: above 40 °C derating 2.5 %/K
Safety standards / approvals	cUL/UL 60950-1, EN 60950-1
Degree of protection	safety class II
Casing	plastic (UL 94V-0 rated)

Models

Order code	Output power	Output 1	Output 2
TMLM 04103	4 W	3.3 VDC / 1200 mA	
TMLM 04105	4 W	5.0 VDC / 800 mA	
TMLM 04109	4 W	9.0 VDC / 444 mA	
TMLM 04112	4 W	12 VDC / 333 mA	
TMLM 04115	4 W	15 VDC / 267 mA	
TMLM 04124	4 W	24 VDC / 167 mA	
TMLM 04253	3.5 W	+5.0 VDC / 600 mA	+3.3 VDC / 150 mA
TMLM 04225	3.6 W	+12 VDC / 250 mA	+5.0 VDC / 120 mA
TMLM 05103	4.1 W	3.3 VDC / 1250 mA	
TMLM 05105	5 W	5.0 VDC / 1000 mA	
TMLM 05112	5 W	12 VDC / 420 mA	
TMLM 05115	5 W	15 VDC / 330 mA	
TMLM 05124	5.5 W	24 VDC / 230 mA	
TMLM 10103	8.2 W	3.3 VDC / 2500 mA	
TMLM 10105	10 W	5.0 VDC / 2000 mA	
TMLM 10112	10 W	12 VDC / 830 mA	
TMLM 10115	10 W	15 VDC / 665 mA	
TMLM 10124	10 W	24 VDC / 420 mA	
TMLM 20103	12 W	3.3 VDC / 3600 mA	
TMLM 20105	18 W	5.0 VDC / 3600 mA	
TMLM 20112	20 W	12 VDC / 1670 mA	
TMLM 20115	20 W	15 VDC / 1330 mA	
TMLM 20124	20 W	24 VDC / 830 mA	

Dimensions


TMLM 04 Models:

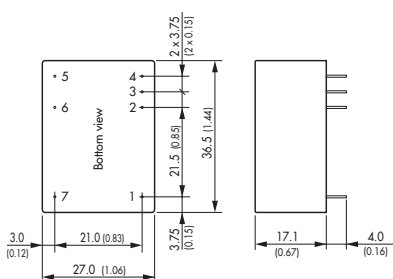


Pin Single output Dual output

Pin	Single output	Dual output
1	No con.	No con.
2	+ Vout	Vout 1
3	– Vout	Common
4	No con.	Vout 2
5	AC (L)	AC (L)
6	AC (N)	AC (N)
7	No con.	No con.


TMLM 05 Models:

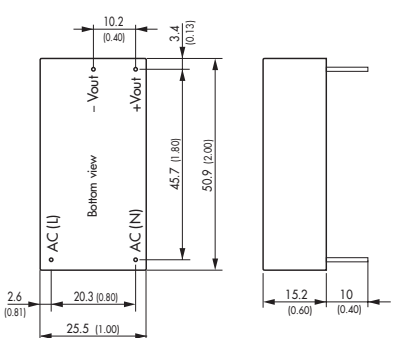

TMLM 10 Models:

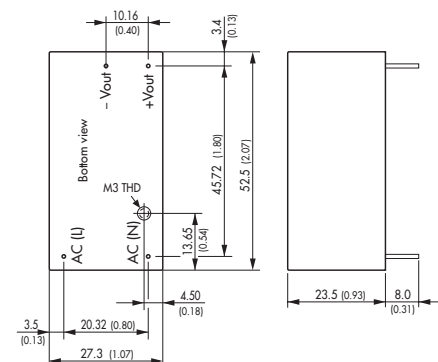

TMLM 20 Models:

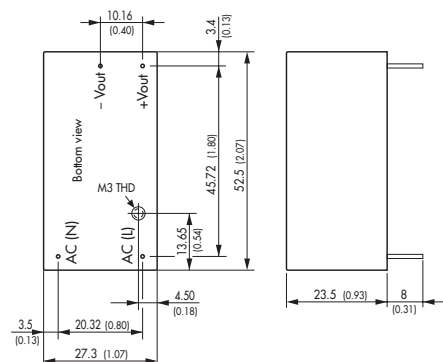

() = Inches

TML Series ▶ 20 to 40 W



- ▶ 2 Package styles available:
 - for PCB mount with solder pins
 - for chassis mount with screw terminal block
- ▶ Single-, dual- and triple output models
- ▶ Universal input 90–264 VAC, 47–440 Hz
- ▶ Protection class I (TML 20) and class II (TML 40)
- ▶ EMI meets EN 55022, class B
- ▶ Short circuit and overload protection



Specifications

Input voltage range	90–264 VAC, 47–440 Hz 100–370 VDC
Line regulation	0.3 % max.
Load regulation	1.0 % max. for single output models 5.0 % max. for multi output models
Ripple & noise (20 MHz BW)	<1.0 % of Vout <1.5 % of Vout for 3.3 & 5 VDC models
EMI suppression	EN 55011 class B, EN 55022 class B and FCC, level B
EMC immunity	EN61000-6-1
Output current limitation	foldback, automatic recovery
Efficiency	80 % typ.
Operating temperature	–25 °C to +60 °C above 50 °C derating 4 %/K
Safety standards / approvals	cUL/UL 60950-1, EN 60950-1
Degree of protection	safety class I (TML 40 W models safety class II)
Casing	plastic (UL 94V-0 rated)


Models

Order code*	Output power	Output 1	Output 2/3
TML 20103		3.3 VDC 4500 mA	
TML 20105		5 VDC 4000 mA	
TML 20112		12 VDC 1670 mA	
TML 20115		15 VDC 1340 mA	
TML 20124	20 W	24 VDC 840 mA	
TML 20205		+5 VDC 2000 mA	–5 VDC 2000 mA
TML 20212		+12 VDC 830 mA	–12 VDC 830 mA
TML 20215		+15 VDC 670 mA	–15 VDC 670 mA
TML 20512		5 VDC 2800 mA	±12 VDC ±250 mA
TML 20515		5 VDC 2800 mA	±15 VDC ±200 mA
TML 40103		3.3 VDC 8000 mA	
TML 40105		5 VDC 8000 mA	
TML 40112		12 VDC 3330 mA	
TML 40115		15 VDC 2670 mA	
TML 40124		24 VDC 1670 mA	
TML 40205	40 W	+5 VDC 4000 mA	–5 VDC 4000 mA
TML 40212		+12 VDC 1670 mA	–12 VDC 1670 mA
TML 40215		+15 VDC 1330 mA	–15 VDC 1330 mA
TML 40252		5 VDC 5000 mA	12 VDC 1250 mA
TML 40254		5 VDC 5000 mA	24 VDC 625 mA
TML 40512		5 VDC 5000 mA	±12 VDC ±600 mA
TML 40515		5 VDC 5000 mA	±15 VDC ±500 mA


* For chassis mount version add suffix C

Dimensions

PCB Mount Version

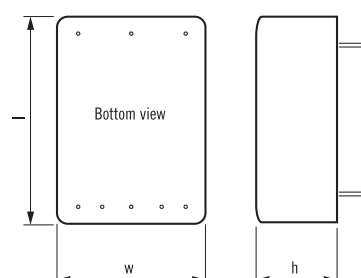

Chassis Mount with Screw Terminals



	Type	Length l	Width w	Height h
PCB mount	TML 20xxx	70.0 (2.76)	48.0 (1.89)	22.0 (0.87)
	TML 40xxx	89.0 (3.50)	63.5 (2.50)	25.0 (0.98)
Chassis mount	TML 20xxxC	96.0 (3.78)	54.6 (2.15)	27.5 (1.08)
	TML 40xxxC	112.9 (4.44)	64.7 (2.55)	31.5 (1.24)

() = Inch

TMS Series ▶ 6 to 25 W

- ▶ Miniature encapsulated power supplies
- ▶ 3 package styles available:
 - for PCB mount with solder pins
 - for chassis mount with FASTON-tabs
 - for chassis mount with screw terminal block
- ▶ Universal input 85–264 VAC
- ▶ Protection class I
- ▶ EMI meets 55022, class B
- ▶ Short circuit protection



Specifications

Input voltage range	85–264 VAC, 47–63 Hz 110–375 VDC
Line regulation	0.4 % max.
Load regulation	1.0 % max. for single output models 2.0 % max. for dual output models
Ripple & noise	<100 mVpk-pk (20 MHz BW)
EMI suppression	EN 55011 class B, EN 55022 class B and FCC, level B
EMC immunity	EN61000-6-1
Output current limitation	>130 % Iout max., foldback, automatic recovery
Efficiency	78 % typ.
Operating temperature	–25 °C to +60 °C above 50 °C derating 5 %/K 5 Vout models: above 40 °C derating 2.5 %/K
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, CB-report
Degree of protection	safety class I
Casing	plastic (UL 94V-0 rated)

Models

Order code*	Output power	Output 1	Output 2
TMS 06105		5 VDC / 1200 mA	
TMS 06112		12 VDC / 500 mA	
TMS 06115	6 W	15 VDC / 400 mA	
TMS 06124		24 VDC / 250 mA	
TMS 06212		+12 VDC / 250 mA	–12 VDC / 250 mA
TMS 06215		+15 VDC / 200 mA	–15 VDC / 200 mA
TMS 10105		5 VDC / 2000 mA	
TMS 10112		12 VDC / 900 mA	
TMS 10115	10 W	15 VDC / 700 mA	
TMS 10124		24 VDC / 450 mA	
TMS 10212		+12 VDC / 450 mA	–12 VDC / 450 mA
TMS 10215		+15 VDC / 350 mA	–15 VDC / 350 mA
TMS 15105		5 VDC / 3000 mA	
TMS 15112		12 VDC / 1300 mA	
TMS 15115	15 W	15 VDC / 1000 mA	
TMS 15124		24 VDC / 650 mA	
TMS 15212		+12 VDC / 650 mA	–12 VDC / 650 mA
TMS 15215		+15 VDC / 500 mA	–15 VDC / 500 mA
TMS 25105		5 VDC / 4600 mA	
TMS 25112		12 VDC / 2000 mA	
TMS 25115	25 W	15 VDC / 1600 mA	
TMS 25124		24 VDC / 1000 mA	
TMS 25212		+12 VDC / 1000 mA	–12 VDC / 1000 mA
TMS 25215		+15 VDC / 800 mA	–15 VDC / 800 mA

* For PCB mount version – no suffix

For chassis mount with Faston-Tabs add suffix F (not for 6 W models)


For chassis mount with screw terminal block add suffix C (not for 6 & 10 W models)

Dimensions

PCB mount version
(no suffix)

Chassis mount with Faston-tabs
(suffix F)

Chassis mount with screw terminal block
(suffix C)

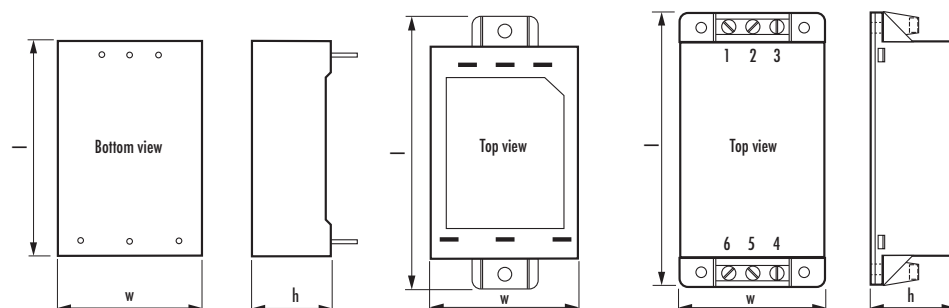

Type	Length l	Width w	Height h
TMS 06	50 (1.97)	40 (1.57)	20 (0.79)
TMS 10	55 (2.17)	45 (1.77)	24 (0.94)
TMS 15	64 (2.52)	45 (1.77)	24 (0.94)
TMS 25	76 (2.99)	51 (2.01)	28 (1.10)
TMS 10F	75 (2.95)	45 (1.77)	24 (0.94)
TMS 15F	84 (3.31)	45 (1.77)	24 (0.94)
TMS 25F	96 (3.78)	51 (2.01)	29 (1.14)
TMS 15C	84 (3.31)	45 (1.77)	26.5 (1.04)
TMS 25C	96 (3.78)	51 (2.01)	29.5 (1.16)

() = Inch

TMT Series ▶ 10 to 50 W



- ▶ Industrial (UL508) and medical safety approvals
- ▶ 2 packages styles available:
 - PCB mount with solder pins
 - Chassis mount with screw terminal block
- ▶ Adapter for DIN-rail mount
- ▶ Single-, dual- and triple output models
- ▶ Universal input 85 – 264 VAC
- ▶ Safety class II
- ▶ Short circuit and overload protection



Specifications

Input voltage range	85–264 VAC, 47–63 Hz 85–370 VDC (derating below 110 VDC input)
Line regulation	0.4 % max.
Load regulation	1.0 % max. for single output models 3.0 % max. for multi output models
Ripple & noise	<150 mVpk-pk (20 MHz BW)
EMI suppression	EN 55011 class B, EN 55022 class B and FCC, level B
EMC immunity	EN 60601-1-2
Output current limitation	>105% Inom. foldback, automatic recovery
Efficiency	83 % typ.
Operating temperature	–25 °C to +60 °C above 50 °C derating 2.5 %/K
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, UL 60601-1, IEC/EN 60601-1, CB-report, UL 508 listed (chassis mount modules)
Degree of protection	class II prepared
Casing	plastic (UL 94V-0 rated)
Option	DIN-rail mount adapter

Models

Order code	Output power	Output 1	Output 2/3
TMT 10105	10 W	5 VDC / 2000 mA	
TMT 10112		12 VDC / 840 mA	
TMT 10115		15 VDC / 670 mA	
TMT 10124		24 VDC / 420 mA	
*TMT 15105	15 W	5 VDC / 3000 mA	
*TMT 15112		12 VDC / 1250 mA	
*TMT 15115		15 VDC / 1000 mA	
*TMT 15124		24 VDC / 625 mA	
*TMT 15212	30 W	+12 VDC / 625 mA	–12 VDC / 625 mA
*TMT 15215		+15 VDC / 500 mA	–15 VDC / 500 mA
*TMT 30105		5 VDC / 6000 mA	
*TMT 30112		12 VDC / 2500 mA	
*TMT 30115	50 W	15 VDC / 2000 mA	
*TMT 30124		24 VDC / 1250 mA	
*TMT 30212		+12 VDC / 1250 mA	–12 VDC / 625 mA
*TMT 30215		+15 VDC / 1000 mA	–15 VDC / 500 mA
*TMT 30252	30 W	5 VDC / 3000 mA	12 VDC / 1200 mA
*TMT 30522		5 VDC / 3000 mA	12 VDC / 1000 mA
*TMT 30515		5 VDC / 3000 mA	15 VDC / 500 mA
*TMT 30503		3.3 VDC / 6000 mA	5 VDC / 1500 mA
TMT 30505	50 W	5 VDC / 5000 mA	3.3 VDC / 1000 mA
*TMT 50105		5 VDC / 9000 mA	
*TMT 50112		12 VDC / 4200 mA	
*TMT 50115		15 VDC / 3400 mA	
*TMT 50124	50 W	24 VDC / 2300 mA	
*TMT 50148		48 VDC / 1150 mA	

* For chassis mount version add suffix C


DIN-rail mount adapter

TMT-MK1	for 15 W chassis mount models
TMT-MK2	for 30 W chassis mount models
TMT-MK5	for 50 W chassis mount models

Dimensions

Type	PCB mount			Chassis mount		
	Length l	Width w	Height h	Length l	Width w	Height h
TMT 10xxx	51 (2.00)	33 (1.30)	21.6 (0.79)			
TMT 15xxx	55 (2.16)	45 (1.77)	24 (0.95)	77 (3.03)	45 (1.77)	26.4 (1.04)
TMT 301xx	76 (2.99)	51 (2.00)	28 (1.10)	96 (3.78)	51 (2.01)	29.5 (1.16)
TMT 3021x	76 (2.99)	51 (2.00)	28 (1.10)	96 (3.78)	51 (2.01)	29.5 (1.16)
TMT 30252	86 (3.39)	58 (2.28)	28 (1.10)	106 (4.17)	58 (2.28)	29.5 (1.16)
TMT 305xx	86 (3.39)	58 (2.28)	28 (1.10)	106 (4.17)	58 (2.28)	29.5 (1.16)
TMT 50xxx	89 (3.50)	64 (2.52)	28 (1.10)	110 (4.33)	64 (2.52)	31.5 (1.24)

Dimensions

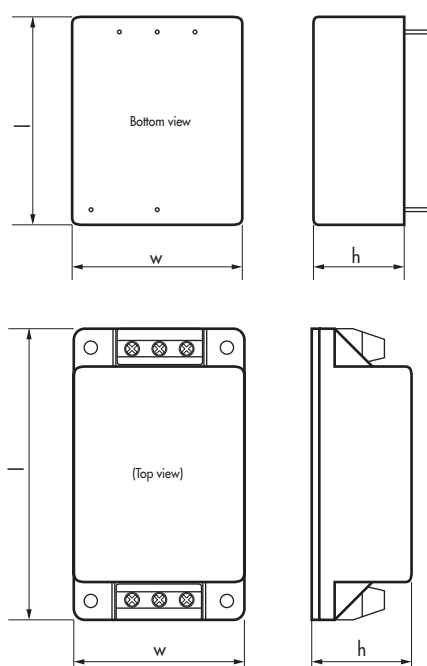

TMP Series ▶ 7 to 15 W



- ▶ Fully encapsulated low profile plastic casing
- ▶ 2 package styles available:
 - For PCB mount with solder pins
 - For chassis mount with screw terminal block
- ▶ Single-, dual- and triple output models
- ▶ Universal input 85–264 VAC, 47–440 Hz
- ▶ Safety class II
- ▶ Short circuit and overload protection



Specifications

Input voltage range	85–264 VAC, 47–440 Hz 120–370 VDC
Line regulation	1.0 % max.
Load regulation	1.0% typ. Output 1 3.0% typ. Output 2 & 3
Ripple & noise (20 MHz BW)	<1.8 % of Vout nom. for 3.3 & 5 VDC outputs <1.0% of Vout nom. for other outputs
EMI suppression	EN 55011 class B, EN 55022 class B and FCC, level B
EMC immunity	EN61000–6–1
Output current limitation	>105% Inom. foldback, automatic recovery
Efficiency	78 % typ.
Operating temperature	–25 °C to +60 °C above 50 °C derating 3.5%/K
Safety standards / approvals	cUL/UL 60950–1, IEC/EN 60950–1, UL 508, CB-report,
Degree of protection	safety class II prepared
Casing	plastic (UL 94V–0 rated)
Option	DIN–rail mount adapter

Models


Order code	Output power	Output 1	Output 2/3
TMP 07103	7 W	3.3 VDC / 1400 mA	
TMP 07105		5.0 VDC / 1400 mA	
TMP 07112		12 VDC / 585 mA	
TMP 07115		15 VDC / 465 mA	
TMP 07124		24 VDC / 290 mA	
TMPM 10103	10 W	3.3 VDC / 2500 mA	
TMPM 10105		5.0 VDC / 2000 mA	
TMPM 10112		12 VDC / 830 mA	
TMPM 10115		15 VDC / 665 mA	
TMPM 10124		24 VDC / 415 mA	
TMP 10103	10 W	3.3 VDC / 2000 mA	
TMP 10105		5.0 VDC / 2000 mA	
TMP 10112		12 VDC / 830 mA	
TMP 10115		15 VDC / 665 mA	
TMP 10124		24 VDC / 415 mA	
TMP 10212		+12 VDC / 380 mA	–12 VDC / 380 mA
TMP 10215		+15 VDC / 300 mA	–15 VDC / 300 mA
*TMP 15105	15 W	5.0 VDC / 3000 mA	
*TMP 15112		12 VDC / 1250 mA	
*TMP 15115		15 VDC / 1000 mA	
*TMP 15124		24 VDC / 625 mA	
*TMP 15148		48 VDC / 310 mA	
*TMP 15212		+12 VDC / 650 mA	–12 VDC / 650 mA
*TMP 15215		+15 VDC / 500 mA	–15 VDC / 500 mA
*TMP 15252		+5.0 VDC / 1500 mA	+12 VDC / 625 mA
*TMP 15512		+5.0 VDC / 2000 mA	+12 VDC / 200 mA
			–12 VDC / 200 mA
*TMP 15515		+5.0 VDC / 2000 mA	+15 VDC / 150 mA
			–15 VDC / 150 mA

* For chassis mount version add suffix C

DIN–rail mount adapter

TMP–MK1 for 15 W chassis mount version

Dimensions

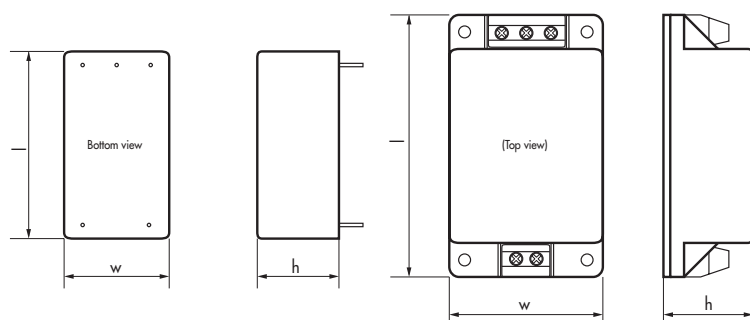

() = Inches

	Type	Length l	Width w	Height h
PCB mount	TMP 07xxx	50.8 (2.00)	25.4 (1.00)	19.3 (0.76)
	TMPM 10xxx	52.4 (2.06)	27.2 (1.07)	23.5 (0.93)
	TMP 10xxx	64 (2.52)	45 (1.77)	19 (0.75)
	TMP 15xxx	74 (2.91)	54 (2.13)	19.3 (0.76)
Chassis mount	TMP 15xxxC	96 (3.78)	54 (2.13)	23.3 (0.88)

TMP Series ▶ 30 to 60 W



- ▶ Fully encapsulated low profile plastic case
- ▶ 2 package styles available:
 - For PCB mount with solder pins
 - For chassis mount with screw terminal block
- ▶ Single-, dual- and triple output models
- ▶ Universal input 85–264 VAC, 47–440 Hz
- ▶ Safety class II
- ▶ Short circuit and overload protection



Specifications

Input voltage range	85–264 VAC, 47–440 Hz 120–370 VDC
Line regulation	1.0 % max.
Load regulation	1.0 % typ. Output 1 3.0 % typ. Output 2 & 3
Ripple & noise (20 MHz BW)	<2% of Vout nom. for 5 VDC outputs <1.3 % of Vout nom. for other outputs
EMI suppression	EN 55011 class B, EN 55022 class B and FCC, level B
EMC immunity	EN61000-6-1
Output current limitation	>105% Inom. foldback, automatic recovery
Efficiency	80 % typ.
Operating temperature	–25 °C to +60 °C above 50 °C derating 3.5 %/K
Safety standards / approvals	cUL/UL 60950-1, IEC/EN 60950-1, UL 508, CB-report,
Degree of protection	safety class II prepared
Casing	plastic (UL 94V-0 rated)
Option	DIN-rail mount adapter

Models


Order code*	Output power	Output 1	Output 2/3
TMP 30105	5.0 VDC / 6000 mA		
TMP 30112	12 VDC / 2500 mA		
TMP 30115	15 VDC / 2000 mA		
TMP 30124	24 VDC / 1250 mA		
TMP 30148	48 VDC / 625 mA		
TMP 30212	+12 VDC / 1300 mA	–12 VDC / 1300 mA	
TMP 30215	+15 VDC / 1000 mA	–15 VDC / 1000 mA	
TMP 30252	+5.0 VDC / 3000 mA	+12 VDC / 1250 mA	
TMP 30512	30 W +5.0 VDC / 3000 mA	+12 VDC / 600 mA	–12 VDC / 600 mA
TMP 30515	+5.0 VDC / 3000 mA	+15 VDC / 500 mA	–15 VDC / 500 mA
TMP 30522	+5.0 VDC / 1500 mA	+12 VDC / 1000 mA	–12 VDC / 250 mA
TMP 30316	+3.3 VDC / 4000 mA	+5.0 VDC / 1500 mA	+12 VDC / 250 mA
TMP 30317	+5.0 VDC / 4500 mA	+3.3 VDC / 1000 mA	+12 VDC / 250 mA
TMP 60105	5.1 VDC / 10'000 mA		
TMP 60112	12 VDC / 5000 mA		
TMP 60115	60 W 15 VDC / 4000 mA		
TMP 60124	24 VDC / 2500 mA		
TMP 60136	36 VDC / 1670 mA		
TMP 60148	48 VDC / 1250 mA		

* For chassis mount version add suffix C

DIN-rail mount adapter

TMP-MK2 for chassis mount versions

Dimensions

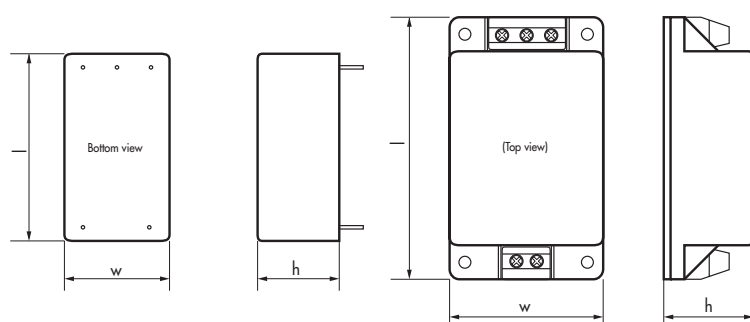

	Type	Length l	Width w	Height h
PCB mount	TMP 30xxx	89.0 (3.50)	63.5 (2.50)	21.5 (0.85)
	TMP 60xxx	89.0 (3.50)	67.5 (2.66)	34.0 (1.34)
Chassis mount	TMP 30xxxC	112.0 (4.41)	63.8 (2.51)	25.6 (1.01)
	TMP 60xxxC	112.0 (4.41)	67.8 (2.67)	38.0 (1.50)

() = Inches

TIW Series ▶ 4 to 12 W

CE CB
Scheme

- ▶ Easy installation into standard flush boxes
- ▶ Dust and waterproof to IP 67
- ▶ Regulated output voltage
- ▶ Safety approval to EN 60950-1 and EN 60335-1
- ▶ Protection class II
- ▶ Short circuit and overload protection




Specifications

Input voltage range	85–264 VAC, 47–63 Hz
Line regulation	1.0 % max.
Load regulation	2.0 %
Ripple & noise (20 MHz BW)	<300 mVp-p for 3.3 – 6.0 VDC models <150 mVp-p for other models
EMI suppression	EN 55022 class B
EMC immunity	EN 61000-6-2
Output current limitation	>2.5 A for 3.3 – 6.0 VDC models >2.5 A for other models
Efficiency	80 % typ.
Operating temperature	–25 °C to +50 °C
Safety standards / approvals	IEC/EN 60950-1, EN 50178 EN 60335-1, CB-report
Degree of protection	class II as per IEC/EN 61140
Casing	IP 67, plastic (UL 94V-0 rated)

Models

Order code	Output power	Output voltage	Output current max.
TIW 06-103	4 W	3.3 VDC	1200 mA
TIW 06-105	5 W	5.0 VDC	1000 mA
TIW 06-106	6 W	6.0 VDC	1000 mA
TIW 12-112	12 W	12 VDC	1000 mA
TIW 12-115	12 W	15 VDC	800 mA
TIW 12-124	12 W	24 VDC	500 mA

Dimensions

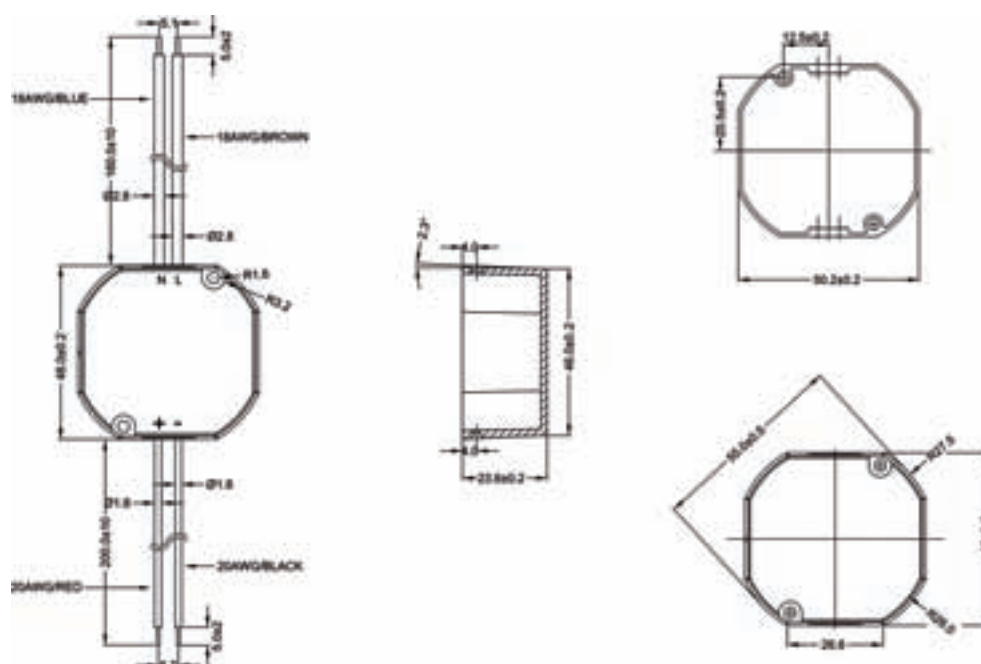

TXH Series ▶ 120 to 360 W



- ▶ Compact U-bracket and enclosed power supplies
- ▶ Screw terminal block
- ▶ Very high efficiency up to 93%
- ▶ No internal fan for 120 W & 240 W models
- ▶ Universal input 90–264 VAC
- ▶ EMI/EMC compliance with EN 61000-6-3 / 61000-6-1
- ▶ Short circuit and overvoltage protection



Specifications

Input voltage range	90–264 VAC, 50/60 Hz
Line regulation	1.0 %
Load regulation	1.0 %
Output voltage adjustment:	±10 % of Vout nom. with potentiometer TXH 360 models only
Ripple & noise	<1 % of Vout nom.
EMI suppression	EN 55011, class B, EN 55022, class B and FCC, part 15, level B, EN 61000-3-2
EMC immunity	EN 61000-6-1
Output current limitation	>110 % of Iout max.
Overvoltage protection	>110 % of Vout nom.
Efficiency	90 % typ.
Operating temperature	–10 °C to +70 °C above 50 °C derating 2.5 %/K
Safety standards / approvals	cUL/UL 60950-1, EN 60950-1, CB-report
Connection	screw terminal block
Casing	120 & 240 W models: U-bracket (optional cover) 360 W models: Metal enclosure

Models


Order code	Output power max.	Output voltage	Output current max.
TXH 120-112	120 W	12 VDC	10 A
TXH 120-124		24 VDC	5 A
TXH 120-148		48 VDC	2.5 A
TXH 240-112	240 W	12 VDC	20 A
TXH 240-124		24 VDC	10 A
TXH 240-148		48 VDC	5 A
TXH 360-112	360 W	12 VDC	30 A
TXH 360-124		24 VDC	15 A
TXH 360-148		48 VDC	7.5 A

Cover


TXH 120-COV	Cover for TXH 120 models
TXH 240-COV	Cover for TXH 240 models

Dimensions

120 W & 240 W models:

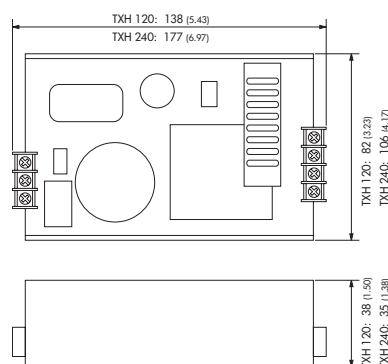

360 W models:

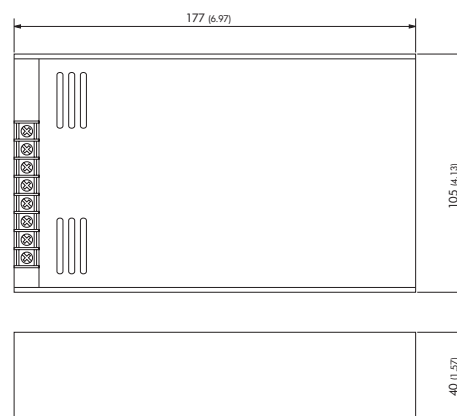

() = Inches

TXL Series ▶ 15 to 1000 W



- ▶ Metal case with screw terminal block
- ▶ Single-, dual- and triple output models
- ▶ Multi output models with isolated outputs
- ▶ Universal input 85–264 VAC
- ▶ Adjustable output voltage
- ▶ EMI/EMC compliance with EN 61000-6-3 / 61000-6-1
- ▶ Short circuit and overvoltage protection




Specifications

Input voltage range	85–264 VAC, 50/60 Hz
Line regulation	1.0 %
Load regulation	2.0 %
Output voltage adjustment:	±10 % of Vout nom. with potentiometer
Ripple & noise	<1 % of Vout nom.
EMI suppression	EN 55011, class B, EN 55022, class B and FCC, part 15, level B, EN 61000-3-2
EMC immunity	EN 61000-6-1
Output current limitation	at 105–150 % of Iout max. (foldback, automatic recovery)
Overvoltage protection	at 115–140 % of Vout nom.
Efficiency	80 % typ.
Operating temperature	–10 °C to +60 °C above 45 °C derating 2 %/K
Safety standards / approvals	cUL/UL 60950-1, EN 60950-1, CB-report
Connection	screw terminal block
Case	aluminium / steel

Dimensions

Case Type	Length l	Width w	Height h
B	62 (2.48)	51 (2.01)	28 (1.10)
C	79 (3.11)	51 (2.01)	29 (1.14)
D	99 (3.90)	82 (3.23)	35 (1.38)
E	160 (6.30)	95 (3.74)	38 (1.50)
J	198 (7.80)	95 (3.74)	38 (1.50)
K	178 (7.00)	99 (3.90)	35 (1.38)
L	198 (7.80)	99 (3.90)	50 (1.97)
N	198 (7.80)	99 (3.90)	45 (1.77)
O	212 (8.35)	115 (4.53)	50 (1.97)
P	275 (10.83)	125 (4.92)	63 (2.48)
Q	295 (11.61)	127 (5.00)	40 (1.57)

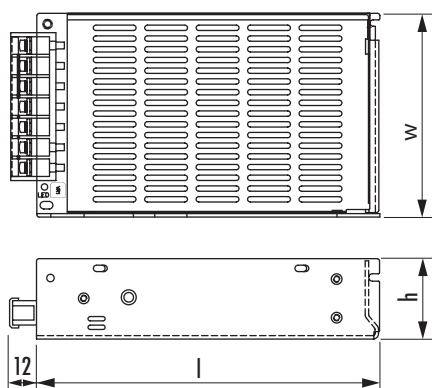

Models

Order code	Output power max.	Output voltage nom.	Output current max.	Case
TXL 015-3.3S	15 W	3.3 VDC	3.0 A	B
TXL 015-05 S		5 VDC	3.0 A	B
TXL 015-12 S		12 VDC	1.3 A	B
TXL 015-15 S		15 VDC	1.0 A	B
TXL 015-24 S		24 VDC	0.63 A	B
TXL 015-48 S	25 W	48 VDC	0.32 A	B
TXL 025-3.3S		3.3 VDC	6.0 A	C
TXL 025-05 S		5 VDC	5.0 A	C
TXL 025-12 S		12 VDC	2.1 A	C
TXL 025-15 S		15 VDC	1.7 A	C
TXL 025-24 S	35 W	24 VDC	1.1 A	C
TXL 025-48 S		48 VDC	0.57 A	C
TXL 035-3.3S		3.3 VDC	9.0 A	D
TXL 035-48 S		48 VDC	0.75 A	D
TXL 050-05 S	50/60 W	5 VDC	10.0 A	D
TXL 060-12 S		12 VDC	5.0 A	D
TXL 060-15 S		15 VDC	4.0 A	D
TXL 060-24 S		24 VDC	2.5 A	D
TXL 060-3.3S		3.3 VDC	15.0 A	E
TXL 060-05 S	60/70 W	5 VDC	12.0 A	E
TXL 070-12 S		12 VDC	6.0 A	E
TXL 070-15 S		15 VDC	4.8 A	E
TXL 070-24 S		24 VDC	3.0 A	E
TXL 070-48 S		48 VDC	1.5 A	E
TXL 100-3.3S	100 W	3.3 VDC	25.0 A	J
TXL 100-05 S		5 VDC	20.0 A	J
TXL 100-12 S		12 VDC	8.5 A	J
TXL 100-15 S		15 VDC	6.8 A	J
TXL 100-24 S		24 VDC	4.5 A	J
TXL 100-48 S	120 W	48 VDC	2.1 A	J
TXL 120-12 S		12 VDC	10.0 A	K
TXL 120-15 S		15 VDC	8.0 A	K
TXL 120-24 S		24 VDC	5.0 A	K
TXL 120-48 S		48 VDC	2.5 A	K
TXL 150-05 S	150 W	5 VDC	30.0 A	L
TXL 150-12 S		12 VDC	12.5 A	L
TXL 150-24 S		24 VDC	6.3 A	L
TXL 150-48 S		48 VDC	3.2 A	L
TXL 220-12 S	220 W	12 VDC	18.4 A	N
TXL 220-24 S		24 VDC	9.2 A	N
TXL 220-48 S		48 VDC	4.6 A	N
TXL 300-24 S	300 W	24 VDC	12.5 A	O
TXL 300-48 S		48 VDC	6.5 A	O
TXL 600-24 S	600 W	24 VDC	25 A	P
TXL 600-48 S		48 VDC	12.5 A	P
TXL 1000-24 S	1000 W	24 VDC	40 A	Q
TXL 1000-48 S		48 VDC	21 A	Q

Multi Output Models

Order code	Output power	Output 1* max.	Output 2*	Output 3* Case
TXL 035-0512D	35 W	+5 VDC / 4.0 A	+12 VDC / 1.5 A	D
TXL 035-0524D		+5 VDC / 4.0 A	+24 VDC / 1.3 A	D
TXL 035-1212D		+12 VDC / 1.5 A	–12 VDC / 1.5 A	D
TXL 035-1515D		+15 VDC / 1.3 A	–15 VDC / 1.3 A	D
TXL 060-0512DI	60 W	5 VDC / 8.0 A	12 VDC / 4.0 A	E
TXL 060-0524DI		5 VDC / 8.0 A	24 VDC / 2.2 A	E
TXL 060-0521TI		5 VDC / 8.0 A	12 VDC / 3.5 A	5 VDC / 1.0 A E
TXL 060-0522TI		5 VDC / 7.0 A	12 VDC / 3.5 A	12 VDC / 1.0 A E
TXL 060-0533TI	100 W	5 VDC / 7.0 A	15 VDC / 3.0 A	15 VDC / 1.0 A E
TXL 060-0534TI		5 VDC / 6.0 A	12 VDC / 1.5 A	24 VDC / 1.2 A E
TXL 100-0512DI		5 VDC / 12 A	12 VDC / 6.0 A	J
TXL 100-0524DI		5 VDC / 10 A	24 VDC / 4.0 A	J
TXL 100-0521TI	100 W	5 VDC / 12 A	12 VDC / 5.0 A	5 VDC / 1.5 A J
TXL 100-0522TI		5 VDC / 12 A	12 VDC / 5.0 A	12 VDC / 1.5 A J
TXL 100-0533TI		5 VDC / 12 A	15 VDC / 3.0 A	15 VDC / 1.5 A J
TXL 100-0534TI		5 VDC / 12 A	12 VDC / 3.0 A	24 VDC / 2.0 A J

60 & 100 Watt models with fully isolated outputs
*Total power not to exceed specified output power

TEX Series ► 120 W



- Sealed, rugged die-cast aluminium casing
- Dust- and water resistant to IP67 & NEMA 4X
- Wide operating temperature range -40 °C to +85 °C
- Easy connection via waterproof plugs
- Universal input voltage 90–264 VAC
- Optional DC input voltage 18–75 VDC
- Adjustable output voltage
- Short circuit and overload protection
- UL 508 listed
- ATEX and ANSI approval for hazardous locations (Class I, Div. 2)



Specifications

Input voltage range	90–264 VAC, 47–63 Hz 85–375 VDC Option: DC Input 18–75 VDC, ask factory
Line regulation	0.5 % max.
Load regulation	1.0 % max.
Output voltage adjustment	12 V model: 12 – 15 VDC, 24 V model: 24 – 28 VDC, with internal potentiometer
Ripple & noise	<100 mVpk-pk (20 MHz BW)
EMI suppression	EN 55011/22 class B, harmonic current EN 61000-3-2, Class A
EMC immunity	EN61000-6-2, SEMI F47
Output current limitation	>125% Inom.
Efficiency	90 % typ.
Operating temperature	-40 °C to +85 °C (convection cooling) above 60 °C derating 2.0 %/K
Safety standards / approvals	UL 508, UL 1604, IEC/EN 60950-1 (CB-Report), EN 50178, EN 60204, EN 61558-2-8, IEC/EN 60079-15 (class I, div.2), UL 60079-15, ANSI/ISA 12.12.01 (class I, div. 2), EN 50021, ATEX 94/9/EC
Degree of protection	safety class I, (IEC 536)
Case protection	IP 67 (IEC 60529), NEMA 4X rated, UL 50
Shock & vibration	meets IEC 60068-2-6, IEC 60068-2-27
Humidity	up to 100 % rel. H with condensation


Models

Order code	Output power	Output voltage	Output current max.
TEX 120-112	120 W	12 VDC	8 A
TEX 120-124	120 W	24 VDC	5 A

Cable assembly

TEX-C11	Input cable assembly 2m
TEX-C21	Output cable assembly 2m

Dimensions

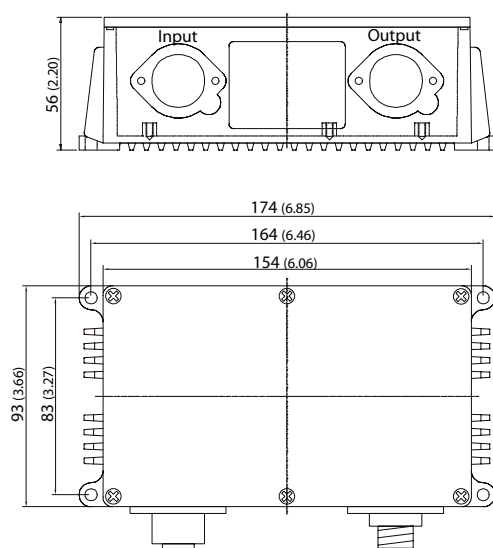


() = Inches

Mating Connectors (not included in shipment)

AC Input: Binder 3-pin female circular plug 693 series: 99-4222-14-04

DC Output: Binder 7-pin male circular plug 693 series: 99-4225-106-07

units are supplied with sealing connector caps



TBL Series ▶ 15 to 150 W



- ▶ Low profile plastic case
- ▶ For building- and industrial automation applications
- ▶ Fits into flat control panels
- ▶ Safety class II, double insulation
- ▶ Universal input voltage 85–264 VAC
- ▶ Adjustable output voltage
- ▶ Short circuit and overload protection
- ▶ UL 508 listed




Specifications

Input voltage range	85–264 VAC, 47–63 Hz TBL 150 models: 85–132 / 187–264 VAC (autorange)
Output regulation	1.0 % max.
Output voltage adjustment range	5 V models: 5.0 – 5.2 VDC 12 V models: 12.0 – 16.0 VDC 24 V models: 24.0 – 28.0 VDC
Ripple & noise	<100 mVpk-pk (20 MHz BW)
EMI emission	EN 55011/22, class B, EN61000-6-3
EMC immunity	EN 61000-6-2
Output current limitation	>100 % of I _{out} max.
Over voltage protection	at 140 % of V _{out} nom.
Efficiency	80 % typ.
Operating temperature	–25 °C ... +70 °C above 60 °C derating 2 %/K
Safety standards / approvals	UL 1310, IEC/EN 60950-1, CB-Report, cUL/UL 508 listed, EN 50178, EN 60204, EN 61558-2-8
Connection	screw terminals
Casing	plastic (UL 94V-0 rated)
Mounting	snap-on mounting on 35 mm DIN-rail

Models

Order code	Output power max.	Output voltage	Output current max.
TBL 015-105		5.0 VDC	2.4 A
TBL 015-112	15 W	12 VDC	1.25 A
TBL 015-124		24 VDC	0.63 A
TBL 030-112	30 W	12 VDC	2.5 A
TBL 030-124		24 VDC	1.25 A
TBL 060-112	60 W	12 VDC	4.5 A
TBL 060-124		24 VDC	2.5 A
TBL 090-112	90 W	12 VDC	6.0 A
TBL 090-124		24 VDC	3.75 A
TBL 150-112	120 W	12 VDC	10 A
TBL 150-124	150 W	24 VDC	6.25 A

Dimensions

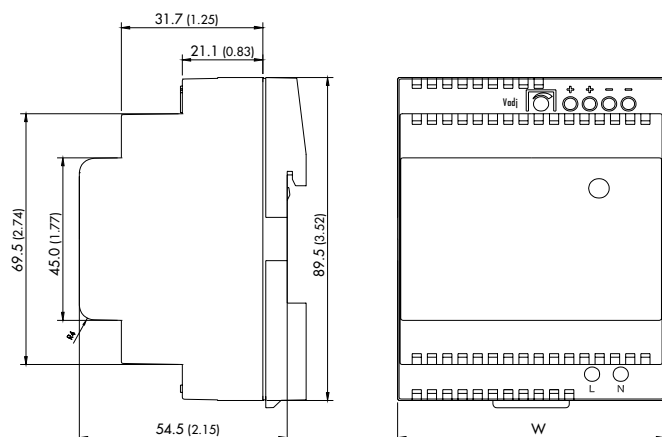

() = Inches

Type	Width (w)
TBL 015	26.3 (1.03)
TBL 030	52.5 (2.07)
TBL 060	70 (2.78)
TBL 090	105 (4.13)
TBL 150	175 (6.89)

TBL-BC Series ▶ 60 W



- ▶ Uninterruptible Power Supply
- ▶ For building automation and security relevant systems
- ▶ Battery capacity supervision
- ▶ Battery temperature supervision
- ▶ External battery size free selectable
- ▶ Safety class II, double insulation
- ▶ Adjustable output voltage
- ▶ Short circuit and overload protection
- ▶ Complies to EN 50131 for alarm equipment
- ▶ UL 508 listed



Specifications


Input voltage range	93–132 VAC / 187–264 VAC (auto range) 50 / 60 Hz
Output voltage	26 – 29.5 VDC adjustable for battery load
Undervoltage lockout	21 – 22.5 VDC (at mains fail)
Battery supervision (only if mains is ok)	internal load 1.1 A, 2 sec every 60 sec. Ok if battery voltage remains >25.5 VDC
Charge characteristics	I–V Curve
EMI emission	EN 55011/22, class B, EN61000–6–3
EMC immunity	EN 61000–6–2
Output current limitation	at 2.4 A constant current
Over voltage protection	at 31 V
Operating temperature	–25 °C to +70 °C above 50 °C derating 2.5 %/K
Safety standards / approvals	IEC/EN 60950–1, CB-Report, cUL/UL 508 listed, EN 50131 security level 4
Connection	screw terminals
Casing	plastic (UL 94V–0 rated)
Mounting	snap-on mounting on 35 mm DIN-rail

Models

Order code	Battery voltage	Max. battery load current	Output voltage adjust.	Max. Power
TBL 060-124BC	24 VDC	2 A	26 – 29.5 VDC	60 W

For 12 VDC battery voltage, ask factory.

Dimensions

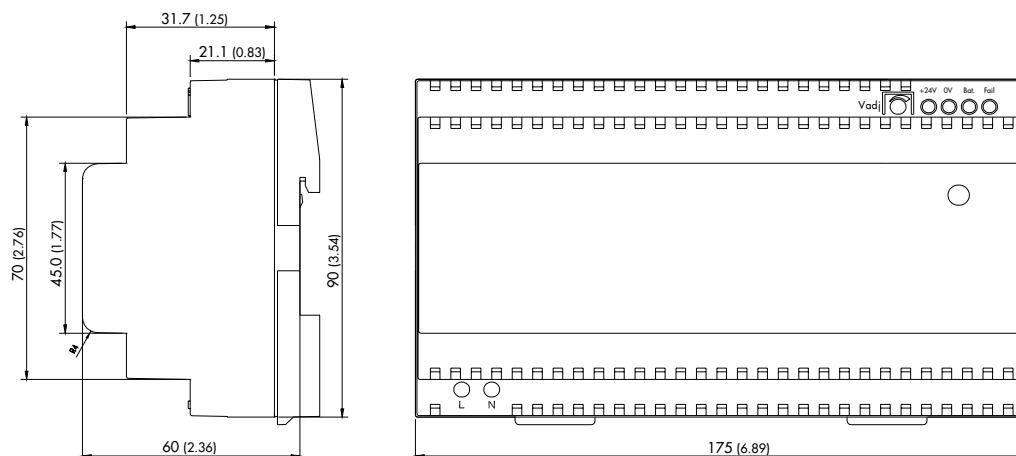

() = Inches

TCL Series ▶ 24 to 240 W



- ▶ Slim plastic case
- ▶ For industrial-, office- and residential environments
- ▶ Available with detachable screw terminals or spring clamps
- ▶ Standard models with 5, 12, 24 and 48VDC output
- ▶ Models with DC input
- ▶ Universal input 85–264 VAC
- ▶ Worldwide safety approval package
- ▶ Adjustable output voltage
- ▶ Power Good signal
- ▶ Parallel and redundant operation



Specifications

Input voltage range	85–264 VAC, 47–63 Hz 85–375 VDC TCL 240 models: 85–132 / 187–264 VAC (autorange)
Output regulation	1.25 % max.
Ripple & noise	<50 mVpk-pk (20 MHz BW)
EMI emission	EN 55011, class B, EN 55022, class B, EN61000-6-3
EMC immunity	EN 61000-6-2 (industrial environment), SEMI F47
Output current limitation	at 130 % of I _{out} max.
Over voltage protection	at 140 % of V _{out} nom.
Efficiency	90 % typ.
DC-OK Signal	open collector / max. 30 mA
Operating temperature	–10 °C ... +70 °C above 50 °C derating 1.7 %/K
Safety standards / approvals	cUL/UL 60950-1, UL 508C listed, IEC/EN 60950-1, CB-Report EN 50178, EN 60204, EN 61558-2-8
Connection	detachable screw terminals or spring clamp terminals
Casing	plastic (UL 94V-0 rated)
Mounting	snap-on mounting on 35 mm DIN-rail or chassis mounting with mounting bracket (included)
Options	output current characteristics set for battery charging applications

Models

Order code	Output power max.	Output voltage (adjustable output)	Output current max.
TCL 024-105		5.1 VDC	4.0 A
TCL 024-112	24 Watt	12 VDC	2.0 A
TCL 024-124 (C)		24 VDC	1.0 A
TCL 060-112 (C)		12 VDC	4.0 A
TCL 060-124 (C)	60 Watt	24 VDC	2.5 A
TCL 060-148 (C)		48 VDC	1.25 A
TCL 120-112 (C)	120 Watt	12 VDC	8.0 A
TCL 120-124 (C)		24 VDC	5.0 A
TCL 240-124	240 Watt	24 VDC	10.0 A

without suffix: detachable screw terminal block
with suffix C: spring clamps


Redundancy Module

Order code	2 Inputs	Output voltage	Output current max.
TCL-REM240	5 – 60 VDC 144 W max./input	V _{in} – 0.9 VDC	8.0 A

Models with DC Input

Order code	Input voltage range	Output voltage (adjustable output)	Output current max.
TCL 012-124 DC	9.5–18 VDC	24 VDC	1.0 A
TCL 024-105 DC		5 VDC	5.0 A
TCL 024-112 DC	18–75 VDC	12 VDC	2.0 A
TCL 024-124 DC		24 VDC	1.0 A
TCL 060-112 DC	18–75 VDC	12 VDC	5.0 A
TCL 060-124 DC		24 VDC	2.5 A


Dimensions

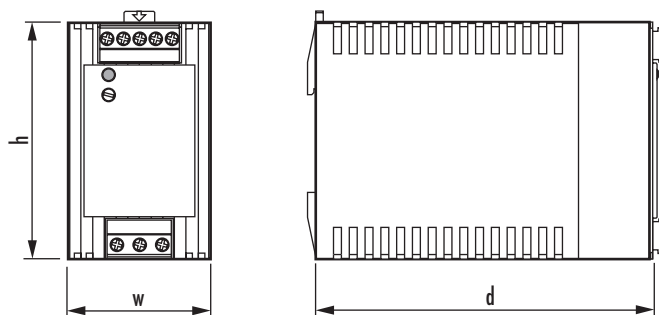

Type	Width w	Height h	Depth d
TCL 012	27 (1.06)	75 (2.95)	100 (3.94)
TCL 024 & REM	27 (1.06)	75 (2.95)	100 (3.94)
TCL 060	45 (1.77)	75 (2.95)	100 (3.94)
TCL 120	85 (3.35)	75 (2.95)	100 (3.94)
TCL 240	85 (3.35)	110 (4.33)	125 (4.92)

() = Inches

TSPC Series ▶ 80 to 480 W



- ▶ Cost optimized design in rugged, compact metal casing for harsh industrial environments
- ▶ Operating temperature range $-25\text{ }^{\circ}\text{C}$ to $+70\text{ }^{\circ}\text{C}$
- ▶ Boost power up to 120%
- ▶ Industrial safety approval package
- ▶ Power Good signal
- ▶ Overload and over temperature protection
- ▶ Vibration and shock proof
- ▶ Detachable screw terminal block



NEW
Product


Specifications

Input voltage range	85–132 VAC / 187–264 VAC by selection switch, 47–63 Hz
Line regulation	0.5 % max.
Load regulation	0.5 % max
Ripple & Noise	<150 mVpk-pk
EMI emission	EN 61204-3, EN 61000-6-3
EMC immunity	EN 61204-3, EN 61000-6-2 (industrial environment), SEMI F47
Output current limitation	at 120 % of Iout max.
Over-temperature protection	switch off at over-temperature, automatic restart.
Output characteristic	suitable for parallel operation
Over voltage protection	45 V
Efficiency	90 % typ.
Operating temperature	$-25\text{ }^{\circ}\text{C}$ to $+70\text{ }^{\circ}\text{C}$ above $60\text{ }^{\circ}\text{C}$ derating 2.5 %/K
Safety standards / approvals	cUL/UL 60950-1 recognized, IEC/EN 60950-1, (CB-Report), UL 508, EN 50178, EN 60204, EN 61558-2-4, FM 3611, IEC/EN 60079-15
Degree of protection	safety class I (IEC 536).
Case protection	IP20 (IEC 529)
Vibration/Shock	IEC 60068-2-6 / IEC 60068-2-27
Connection	detachable screw terminals
Casing	aluminium (chassis) / stainless steel (cover)
Mounting	– snap-on mounting on 35 mm DIN-Rail – wall mounting brackets (option)

Models

¹⁾ Order code	Output power max.	Output voltage nom.	Output current max.
TSPC 080-124	80 W	24 VDC	3.3 A
TSPC 120-124	120 W	24 VDC	5.0 A
TSPC 240-124	240 W	24 VDC	10 A
TSPC 480-124	480 W	24 VDC	20 A

Dimensions

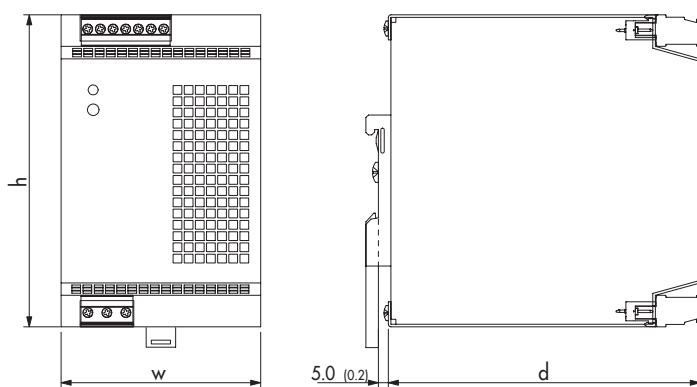

Type	Width w	Height h	Depth d
TSPC 080-124	40 (1.57)	110 (4.33)	110 (4.33)
TSPC 120-124	46 (1.81)	110 (4.33)	110 (4.33)
TSPC 240-124	60 (2.36)	110 (4.33)	110 (4.33)
TSPC 480-124	150 (5.90)	110 (4.33)	115 (4.53)

TSP Series ► 78 to 600 W



- Rugged, ultra compact metal casing for harsh industrial environments
- Operating temperature range -25 °C to +70 °C
- Industrial safety approval package
- ATEX certification for hazardous locations (Opt.)
- Add-on function modules
- Power Good signal, remote On/Off
- Overload and over temperature protection
- Vibration and shock proof
- Detachable screw terminal block



Specifications

Input voltage range	85–264 VAC, 47–63 Hz, autorange
Line regulation	0.5 % max.
Load regulation	0.5 % max
Ripple & Noise	<150 mVpk-pk
EMI emission	EN 61204-3, EN 61000-6-3
EMC immunity	EN 61204-3, EN 61000-6-2 (industrial environment), SEMI F47
Output current limitation	at max. output current (constant current, automatic restart)
Over-temperature protection	switch off at over-temperature, automatic restart.
Output characteristic	selectable for parallel operation or battery charging application
Over voltage protection	20V for 12VDC models, 35V for 24 VDC models, 60V for 48 VDC models
Efficiency	87 % typ.
Operating temperature	-25 °C to +70 °C above 40 °C derating 2 %/K
Safety standards / approvals	cUL/UL 60950-1 recognized, IEC/EN 60950-1, UL 508, (CB-Report), EN 50178, EN 60204, EN 61558-2-4, FM 3611, IEC/EN 60079-15, ANSI/ISA 12.12.01 (Class I, Div. 2), ATEX 94/9/EC (with option EX)
Degree of protection	safety class I (IEC 536).
Case protection	IP20 (IEC 529)
Vibration/Shock	IEC 60068-2-6 / IEC 60068-2-27
Connection	detachable screw terminals
Casing	aluminium (chassis) / stainless steel (cover)
Mounting	- snap-on mounting on 35 mm DIN-Rail - wall mounting brackets (option)

Models

¹⁾ Order code	Output power max.	²⁾ Output voltage nom.	³⁾ Output current max.
TSP 070-112	90 W	12 VDC	6.5 A
TSP 090-124		24 VDC	3.75 A
TSP 090-124N ⁴⁾		24 VDC	3.75 A
TSP 090-148		48 VDC	2.0 A
TSP 140-112	180 W	12 VDC	13.0 A
TSP 180-124		24 VDC	7.5 A
TSP 180-148		48 VDC	4.0 A
TSP 360-124	360 W	24 VDC	15.0 A
TSP 360-148		48 VDC	7.5 A
TSP 600-124		24 VDC	25.0 A
TSP 600-136		36 VDC	16.5 A
TSP 600-148	600 W	48 VDC	12.5 A

¹⁾ Suffix EX: For ATEX certified models (Example TSP 180-124 EX)

²⁾ Output voltage adjustable 12–14 VDC, 24–28 VDC, 48–56 VDC


³⁾ Max. current at nominal output voltage and max. 40°C ambient temperature

⁴⁾ Model meets EN 60950-1 sect. 2.5 and NEC Class2 (limited power source)

Wall mount brackets

TSP-WMK01	for 78 – 180 W models
TSP-WMK02	for 360 – 600 W models

Dimensions

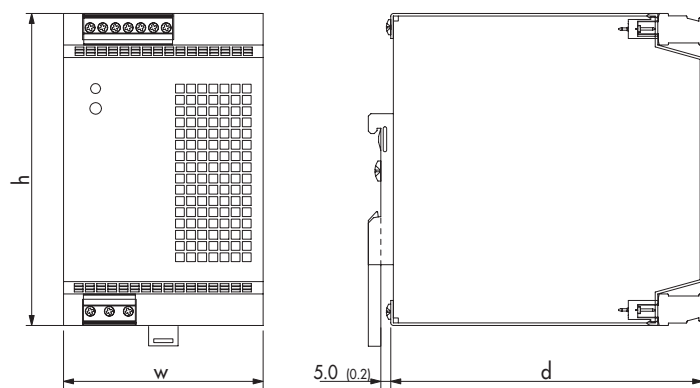

() = Inches

Type	Width w	Height h	Depth d
TSP 070 / 090	35 (1.38)	110 (4.33)	110 (4.33)
TSP 140 / 180	54 (2.13)	110 (4.33)	110 (4.33)
TSP 360	80 (3.15)	125 (4.92)	125 (4.92)
TSP 600	165 (6.50)	125 (4.92)	125 (4.92)

TSP-3P Series ► 240-960 W



- For 3-phase networks with voltage ranges 330-440 VAC and 410-550 VAC
- Rugged, ultra compact metal casing for harsh industrial environments
- ATEX certification for hazardous locations (Opt.)
- Operating temperature range -25 °C to +70 °C
- 200% peak current for up to 5 seconds
- Power Good signal, remote On/Off
- Overload and over temperature protection

**NEW**
Product**Specifications**

Input voltage ranges:	3xAC 330-440 V and 3xAC 410-550 V
Line regulation	1.0 % max
Load regulation	3.0 % max.
Ripple & noise	<100 mVpk-pk
EMI emission	EN 61000-6-3
EMC immunity	EN 61000-6-2 (industrial environment)
Output current limitation	at 220% of nominal current (constant current, automatic restart)
Over-temperature protection	switch off at over-temperature, automatic restart
Over voltage protection	at 35 VDC
Efficiency	88 % typ.
Operating temperature	-25°C to +70°C above 60°C derating 2.5%/K
Safety standards / approvals	cUL/UL 60950-1 recognized, IEC/EN 60950-1, UL 508, (CB-Report), EN 50178, EN 60204, EN 61558-2-4, FM 3611, IEC/EN 60079-15, ANSI/ISA 12.12.01 (Class I, Div. 2), ATEX 94/9/EC (with option EX)
Degree of protection	safety class I (IEC 536)
Case protection	IP20 (IEC 529)
Vibration/Shock	IEC 60068-2-6 / IEC 60068-2-27
Connection	detachable screw terminals
Casing	aluminium (chassis) / stainless steel (cover)
Mounting	- snap-on mounting on 35 mm DIN-Rail - wall mounting brackets (option)

Models**240 W Models**

Order code	Input voltage nom.	Output voltage nom.	Output current nom.*
TSP 240-124-3PAC400	3 AC 400 V	24 VDC	10 A
TSP 240-124-3PAC500	3 AC 500 V	24 VDC	10 A

480 W Models

Order code	Input voltage nom.	Output voltage nom.	Output current nom.*
TSP 480-124-3PAC400	3 AC 400 V	24 VDC	20 A
TSP 480-124-3PAC500	3 AC 500 V	24 VDC	20 A


960 W Models

Order code	Input voltage nom.	Output voltage nom.	Output current nom.*
TSP 960-124-3PAC400	3 AC 400 V	24 VDC	40 A
TSP 960-124-3PAC500	3 AC 500 V	24 VDC	40 A

*200% peak current for up to 5 sec.

Wall mount brackets

TSP-WMK01	for 240 W models
TSP-WMK02	for 480 - 960 W models

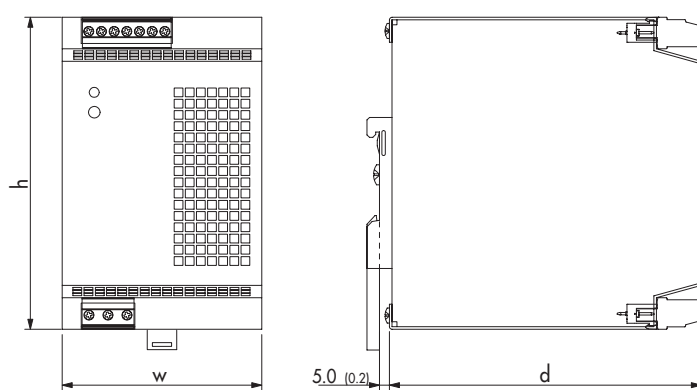Dimensions

Type	Width w	Height h	Depth d
TSP 240	54 (2.13)	110 (4.33)	110 (4.33)
TSP 480	80 (3.15)	125 (4.92)	125 (4.92)
TSP 960	165 (6.50)	125 (4.92)	125 (4.92)

() = Inches

TSP-WR Series ▶ 180 to 600 W



- ▶ For worldwide operation, with ultra wide input voltage ranges from 100 to 500 VAC, for single- and multiphase networks
- ▶ Rugged, ultra compact metal casing for harsh industrial environments
- ▶ Operating temperature range -25 °C to +70 °C
- ▶ Industrial safety approval package
- ▶ Add-on function modules
- ▶ Overload and over temperature protection
- ▶ Power Good signal, remote On/Off
- ▶ Vibration and shock proof
- ▶ Detachable screw terminal block



Specifications

Applicable 3-phase networks	- TN, TT: 500 VAC Star configuration (EN60950+UL508)
	500 VAC Delta (UL508 only)
	- IT: 400 VAC Delta (IEC-62103)
	230 VAC Delta (IEC-60950)
	500 VAC (UL508 only)
Input voltage ranges	85-132VAC / 187-550VAC range selectable by switch
Line regulation	0.5 % max
Load regulation	0.5 % max.
Ripple & noise	<150 mVpk-pk
EMI emission	EN 61204-3, EN 61000-6-3
EMC immunity	EN 61204-3, EN 61000-6-2 (industrial environment), SEMI F47
Output current limitation	at max. output current (constant current, automatic restart)
Over-temperature protection	switch off at over-temperature, automatic restart
Output characteristic	selectable for parallel operation or battery charging application
Over voltage protection	at 35 VDC
Efficiency	88 % typ.
Operating temperature	-25 °C to +70 °C above 40 °C derating 2%/K
Safety standards / approvals	cUL/UL 60950-1 recognized, UL 508, IEC/EN 60950-1, (CB-Report), EN 50178, EN 60204, EN 61558-2-4, FM 3611, IEC/EN 60079-15 (Class I, Div. 2)
Degree of protection	safety class I (IEC 536)
Case protection	IP20 (IEC 529)
Vibration/Shock	IEC 60068-2-6 / IEC 60068-2-27
Connection	detachable screw terminals
Casing	aluminium (chassis) / stainless steel (cover)
Mounting	- snap-on mounting on 35 mm DIN-Rail - wall mounting brackets (option)

Models


¹⁾ Order code	Output power max.	²⁾ Output voltage nom.	²⁾ Output current max.
TSP 180-124WR	180 Watt	24 VDC	7.5 A
TSP 360-124WR	360 Watt	24 VDC	15.0 A
TSP 600-124WR	600 Watt	24 VDC	25.0 A

¹⁾ Output voltage adjustable 24-28 VDC²⁾ Max. current at nominal output voltage and max. 40°C ambient temperature

Wall mount brackets

TSP-WMK01	for 180 W models
TSP-WMK02	for 360 - 600 W models

Dimensions

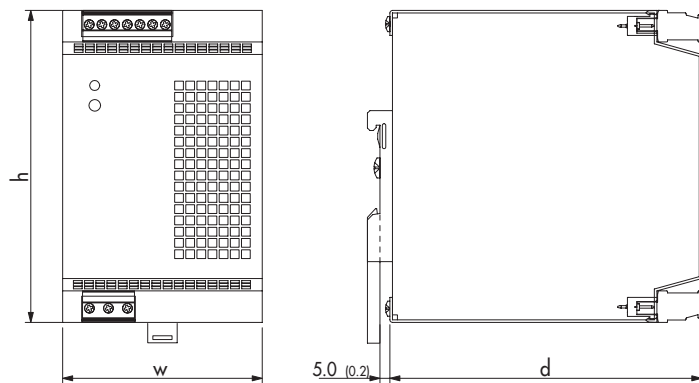

() = Inches

Type	Width w	Height h	Depth d
TSP 180	54 (2.13)	110 (4.33)	110 (4.33)
TSP 360	80 (3.15)	125 (4.92)	125 (4.92)
TSP 600	190 (7.48)	125 (4.92)	125 (4.92)

TSP Series ► Function Modules

- TSP-REM redundancy module with active current sharing for highly reliable parallel operation
- TSP-BCM battery controller module to configure professional DC-backup systems (DC-UPS)
- TSP-BAT battery packs with capacity 3.4 to 12 Ah
- TSP-BFM buffer module to bridge voltage dips and black-outs up to 4 sec. without batteries



Specifications

Redundancy Module



With this module and two power supplies of the TSP series a highly reliable, true redundant power system can be configured without any additional components. This module provides:

- Operation with true current sharing
- Alarm outputs and redundancy OK signal
- Hot swappable inputs can be loaded up to 15A each (resp. 25A with model TSP REM600)

Battery Controller Module



This module provides a professional battery controller to charge and monitor an external lead-acid battery. Together with a power supply of the TSP series and a battery pack a perfect DC-UPS system can be configured. This module provides:

- Battery protection for over voltage, deep discharge, short circuit and reverse connection
- Remote On/Off for battery and power supply
- Alarm outputs for input, output and battery
- Controlled end of charge voltage by temperature sensor

Battery Packs

Sealed, maintenance free Lead-Acid batteries incl. wall mounting kit. Available with 3.4, 7.2 and 12Ah capacity.



Buffer Module



This module will maintain the output voltage of a 24VDC power supply during typical mains faults, short time blackouts or voltage dips of up to ten full 50 Hz cycles. During this buffer period no deterioration of the 24VDC output voltage will occur. This module provides:

- Guaranteed Hold-up-time 200 ms/25A to 4 s/1.2A max.
- Capacitor bank for energy storage, no battery needed!
- Output 24 to 28VDC, 600W max.
- Active ready and inhibit signals

Redundancy Module

Order code	Input	Max. power per input	Output voltage adjust	Output power max.
TSP-REM360	2 x 24 VDC	360 W	24 VDC	360 W
TSP-REM600	2 x Control	600 W	(24 – 27 VDC)	600 W

Battery Controller Module

Order code	Input	Max. power per input	Output voltage nom.	Output power max.
TSP-BCM24	24 VDC and	360 W	24 VDC	360 W
TSP-BCM24A	24 V Battery	600 W	24 VDC	600 W

Battery Pack

Order code	Nominal voltage	Charge Current max.	Nominal Capacity (at 25°C, 77°F)
TSP-BAT24-034		0.80 A	3.4 Ah
TSP-BAT24-072	24 VDC	1.75 A	7.2 Ah
TSP-BAT24-120		3.00 A	12.0 Ah

Buffer Module

Order code	Nominal voltage	Charge Current max.	Nominal Capacity (at 25°C, 77°F)
TSP-BFM24	24...28VDC	200ms typ. @ 25A max. 4.0s max. @ 1.2A	600 W

Dimensions Function Modules

Type	Width	Height	Depth
TSP-REM360	35 (1.38)	110 (4.33)	110 (4.33)
TSP-REM600	54 (2.13)	110 (4.33)	110 (4.33)
TSP-BCM24	35 (1.38)	110 (4.33)	110 (4.33)
TSP-BCM24A	35 (1.38)	110 (4.33)	110 (4.33)
TSP-BFM24	54 (2.13)	110 (4.33)	110 (4.33)

Dimensions Battery Packs

Type	Width	Height h	Depth
TSP-BAT24-034	137 (5.39)	140 (5.51)	76 (2.99)
TSP-BAT24-072	133 (5.24)	157 (6.18)	110 (4.33)
TSP-BAT24-120	199 (7.83)	157 (6.18)	110 (4.33)

() = Inches

TIS Series ▶ 50 to 600 W



- ▶ Low profile metal casing
- ▶ Standard models with 12, 24, 48 and 72VDC
- ▶ For system applications expandable with built-in function modules (see next page)
- ▶ Adjustable output voltage
- ▶ Overload protection
- ▶ Worldwide safety approvals



Specifications

Input voltage range	– 93–132 VAC / 187–264 VAC (user selectable) 50/60 Hz – TIS 50 models: 93–264 VAC (universal input) 50/60 Hz – TIS 500–124–230: 187–264 VAC 50 Hz – TIS 500–124–115: 93–132 VAC 60 Hz
Line regulation	0.2 % max.
Load regulation	1.0 % max.
Ripple & noise	<50 mVpk-pk (20MHz BW)
EMI suppression	EN 55011, class B, EN 55022, class B and FCC, level B
EMC immunity	EN 61000-6-2
Output current limitation	at 110 % of I _{out} max. (constant current)
Overvoltage protection	at 140 % of V _{out} nom.
Efficiency	90 % typ.
Operating temperature	–25°C to +70°C above 50°C derating 2%/K
Safety standard / approvals	cUL/UL 60950-1, UL 508C listed, UL 1604 listed (except for models with options), IEC/EN 60950-1, CB-report
Connection	detachable screw terminals (plugs included) (TIS 600 models: screw terminal blocks)
Casing	stainless steel, aluminium
Mounting	snap-on mounting on 35 mm DIN-Rail or chassis mounting
Note	Output current characteristics suitable for battery charging applications


Models

Order code	Output power max.	Output voltage (adjustable range)	Output current max.
TIS 50-112	50 Watt	12 VDC (12–14 VDC)	3.5 A
TIS 50-124		24 VDC (24–28 VDC)	2 A
TIS 75-112		12 VDC (12–14 VDC)	6 A
TIS 75-124	75 Watt	24 VDC (24–28 VDC)	3 A
TIS 75-148		48 VDC (48–52 VDC)	1.5 A
TIS 150-124	150 Watt	24 VDC (24–28 VDC)	6 A
TIS 150-148		48 VDC (48–52 VDC)	3 A
TIS 300-124		24 VDC (24–28 VDC)	12 A
TIS 300-148	300 Watt	48 VDC (48–52 VDC)	6 A
TIS 300-172		72 VDC (60–76 VDC)	4.2 A
TIS 500-124-230	500 Watt	24 VDC (24–28 VDC)	20 A
TIS 500-124-115		24 VDC (24–28 VDC)	20 A
TIS 600-124		24 VDC (24–28 VDC)	24 A
TIS 600-148	600 Watt	48 VDC (48–52 VDC)	12 A
TIS 600-172		72 VDC (60–76 VDC)	8.5 A

Wall mount brackets

MK-75	for 75 W models
MK-150	for 150 W models
MK-300	for 300 W models
MK-500	for 500 W models
MK-600	for 600 W models

Dimensions

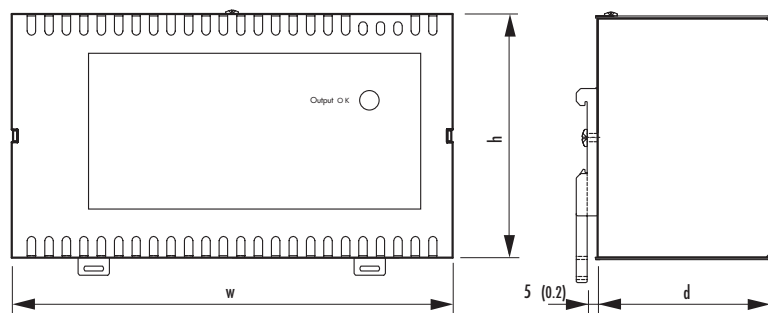

Type	Width w	Height h	Depth d
TIS 50	75 (2.95)	100 (3.94)	56.7 (2.23)
TIS 75	90 (3.54)	114.6 (4.51)	56.7 (2.23)
TIS 150	157 (6.18)	114.6 (4.51)	56.7 (2.23)
TIS 300	207 (8.15)	114.6 (4.51)	83.0 (3.27)
TIS 500	220 (8.66)	130 (8.66)	83.0 (3.27)
TIS 600	243 (9.57)	177.2 (6.98)	83.0 (3.27)

() = Inches

TIS Series ► Models with extended Functions

- Additional functions for system applications in process automation, machine tools, etc.
- Basic TIS series power supplies extended with one of the following integrated functions:
 - True N+1 redundancy operation
 - AC-power fail, DC-OK signal and remote On/Off
 - Battery controller to configure a DC-backup system



Specifications

Redundancy function (RED)	With this function it is possible to parallel up to 5 power supplies with active current sharing for true N+1 operation. De-coupling diodes (OR-ring diodes) and also alarm output to signal a unit failure are included in this option.
Alarm output function (SIG)	Provides 3 functions: AC-Power fail signal and DC-OK signal, both with isolated relay contacts. In addition a remote On/Off input is available to control the power supply.
Back-up battery controller (UDS)	With this function, a professional battery management system to charge and monitor an external battery is added to the basic power supply. In case of a power failure the battery is switched automatically and without any interruption to the DC-output. Power fail and low battery alarm signals are available. During normal operation battery status is checked periodically and the external battery is fully protected under any operation condition. Battery Pack The battery pack contains high quality, maintenance free lead-acid batteries with 3.2 Ah resp. 7.0 Ah capacity fixed together with a resetable fuse in a mounting frame. Together with models TIS 300-124 UDS or TIS 600-124 UDS the battery pack provides a complete and reliable DC-UPS system. Backup time depends on load current and battery capacity.

For further information and power supply specifications please refer to industrial power supplies TIS Series 50–600 Watt. Dimensions same as basic models.

Models


Order code*	Output power max.	Output voltage max.	Output current max.
Models with Redundancy Function			
TIS 150-124 RED	150 W	24 VDC	6 A
TIS 150-148 RED	150 W	48 VDC	3 A
TIS 300-124 RED	300 W	24 VDC	12 A
TIS 300-148 RED	300 W	48 VDC	6 A
TIS 600-124 RED	600 W	24 VDC	24 A
TIS 600-148 RED	600 W	48 VDC	12 A
Models with Alarm Output Function			
TIS 150-124 SIG	150 W	24 VDC	6 A
TIS 150-148 SIG	150 W	48 VDC	3 A
TIS 300-124 SIG	300 W	24 VDC	12 A
TIS 300-148 SIG	300 W	48 VDC	6 A
TIS 600-124 SIG	600 W	24 VDC	24 A
TIS 600-148 SIG	600 W	48 VDC	12 A
Models with Battery Controller Function			
TIS 300-124 UDS	300 W	24 VDC	12 A
TIS 600-124 UDS	600 W	24 VDC	24 A
Battery Pack			
TIS 24-32 AP		24 VDC	3.2 Ah
TIS 24-70 AP		24 VDC	7 Ah

* includes power supply, relative function module and terminal plugs

Power Conversion Glossary

A Ambient Temperature	The temperature of still air immediately surrounding a power supply or converter. The temperature measurement should be made about 100 mm (4 inch) from the body of the converter or underneath of the power supply. See also Operating Temperature .
ATEX	ATEX 94/9/EC is an European Directive which provides the technical requirements to be applied to equipment intended to use in potentially explosive atmospheres. It is named after the French « AT mosphere EX plosible».
B Base Plate	A substrate to which circuit components are mounted or, a metal plate to which the power system is attached. Normally used to draw heat away from critical circuits components.
Basic Insulation	See Insulation
Boost Regulator	A switching converter topology in which an input inductor is used to store energy. This energy is transferred to the output when the shunt switch is turned off. The boost regulator will take an unregulated input voltage, and produce a higher, regulated output voltage.
Breakdown Voltage	See Isolation Voltage
Bridge Converter	A switching converter topology that employs four switching elements (full bridge) or two switching elements (half bridge). Bridge converters provide high output power and low ripple, but are significantly more complex than other types of converter topologies.
Burn-In	The operation of newly manufactured power supplies or converters under load conditions for a period of time prior to shipment. The intend is to eliminate infant mortality of components .The time period and conditions (input power cycling, load switching, temperature, etc.) will vary from product to product.
C Case Temperature, max	The maximum temperature for safe operation of the power supply or converter case. Often used as a specification for DC/DC converters with extended temperature ranges, case temperature is referred to also as base plate temperature.
CB-Report	Document necessary for the mutual recognition of approvals between different national safety test standards. http://www.cbscheme.org/
CE Marking 	The mark consist of the letters CE (C ommunaute E uropeen, European Comitee) and indicates compliance with all relevant EC-directives which concern the marked product. It means that the natural or juristic person which executed or ordered marking has made sure that the good complies with all harmonised directives and has passed all conformity testing procedures required.
CENELEC	The Comite pour Européen de Normalisation Electronique (European Committee for Electrotechnical Standardisation) is a technical committee that recommends standards for adoption by the European Community (EC). These standards (referred to in the applicable EC directive issued by the committee) cover EMI/RFI interferences, intrinsic safety, immunity, etc. http://www.cenelec.org/Cenelec/Homepage.htm

Chassis Ground	The voltage potential of the chassis or enclosure surrounding a power system.
Clearance Distance	The shortest distance (through air) separating two conductors or circuit components.
Common	A conductive path used as a return for two or more circuits. Common is often used interchangeably with ground, which is not technically correct unless it is connected to earth.
Common-Mode Noise	The component of noise which is common to both the DC output and returns lines with respect to an electrically fixed point, usually the chassis ground.
Constant Current	A power supply or converter that regulates its output current to within a specified range regardless of changes in output load, input line and ambient temperature.
Constant Current Limiting	Current-limiting circuit that holds output current at some maximum value whenever an overload of any magnitude is experienced. See graph 1.

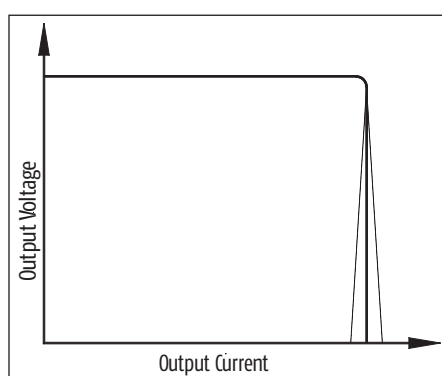

Graph 1: Constant Current Limiting

Continuous Shield	see Six-Sided Shielding .
Convection Cooling	The dissipation of heat via still air. (in contrary to Forced Air Cooling)
Creepage Distance	The shortest distance between two conductors (typically one conductor primary and one conductor secondary).
Cross Regulation	In a multiple output power supply or converter, the percent voltage change at one output caused by the load change on another output.
CSA 	Canadian Standards Association. An independent Canadian organisation testing for public safety, similar to the function of Underwriters Laboratories (UL) in the United States. http://www.csa-international.org/
Current Limiting	A circuit feature that protects the power supply or DC/DC converter (or load) from damage under overload condition. The maximum power supply or DC/DC converter output current is automatically limited to a predetermined, safe value. If the power supply or DC/DC converter is specified for auto restart, normal operation is automatically restored when the overload condition is removed.
Current Limit Knee	On a plot of output voltage vs. output current, the point at which current begins to limit or foldback.
Current Share	Multiple power supplies or DC/DC converters are often connected redundantly (to increase system reliability) or in parallel (to increase system power). When connected in this way, their outputs are connected together and each power supply or DC/DC


converter supplies approximately an equal «share» of the load current. Current sharing can be achieved with external passive circuits (by synchronising multiple power supplies or DC/DC converters and trimming their outputs within a very tight error band) or active circuits (power supplies or converters that feature internal circuits to monitor and adjust output load current). The most popular redundant topology is the «N+1» circuit.

D DC/DC-Converter

A device that accepts a DC input voltage and produces a DC output voltage. Typically the output produced is a different voltage level than the input. However, converters sometimes have the same input/output voltage, and are used to provide potential isolation, noise isolation, power bus regulation, etc.

Derating

The specified reduction of an operating parameter for safe and reliable operation. Generally for power supplies and DC/DC converters, it is the reduction of the output current at elevated temperatures. **See graph 2.**

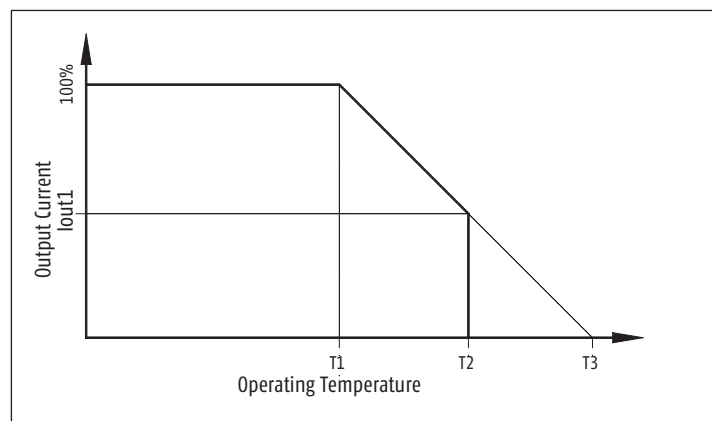

Graph 2: Derating

Differential Mode Noise

That component of noise measured with respect to output or input to its returns; it does not include common-mode noise. **See Ripple and Noise.**

Drift

The change in output voltage of a power supply or DC/DC converter over a specified period of time, following a warm-up period, with all other operating parameters such as line, load and ambient temperature held constant.

Dynamic Current Allocation

A system for a dual positive output power supplies or DC/DC converters where the full rated max. current may be taken from either output in whatever combination is required.

Dynamic Load

An output load that changes rapidly. Normally specified as a load change value during a specified period of time.

Dynamic Response

The output overshoot that occurs when the output load of a power supply or DC/DC converter is a turned on/off or abruptly changed. This overshoot defines the high frequency output impedance of the converter.

E Efficiency

The ratio of total output power to input power expressed in percent. It is normally specified at full load and nominal input voltage.

Electrical Strength


See **Working Voltage**

EMC

Electromagnetic Compatibility, relating to compliance with electromagnetic emissions and susceptibility (immunity) standards.

EMI	Electromagnetic Interferences are electronic disturbances that may interrupt, disturb or otherwise impair the performance of electronic equipment.
EMI Filter	Switch mode power supplies and most DC/DC converters are filtered by using an EMI filter on the input or primary side to be compliant with applicable EMC standards. When power supplies or converters are used in «real» situations, driving active electronic circuits, especially those featuring high speed and/or high power switching, the characteristic of the interferences generated can change dramatically, thereby reducing the effectiveness of the EMI-filter. It is the final equipment as an entity, that is required to conform to the regulations, not the individual internal sub assemblies, like power supplies or converters. So, specifying a power supply or converter which meets the EMI classes does not remove the need for testing of the completed equipment for conformity. The employment of EMI compliant power supplies or converters is not a guarantee of system compliance.
EMI conducted	Conducted EMI is unwanted high-frequency energy caused by the switching transistors, output rectifiers, and transformers in switching power supplies and DC/DC converters and reflected back into the power line. That portion that is present on the input and output lines is known as Conducted EMI. Most Conducted EMI measurements are done between 150 kHz and 30 MHz.
EMI radiated	Radiated EMI is unwanted high-frequency energy caused by the switching transistor, output rectifiers, and zener diodes in switching power supplies and DC/DC converters and emitted into the area surrounding a power supply or DC/DC converter. That portion that is radiated through space is known as Radiated EMI. Most Conducted EMI measurements are done between 30 MHz and 300 MHz or 30 MHz and 1 GHz.
ESD	Electrostatic Discharge. ESD is the current produced by two objects having a static charge when they are brought close enough to produce an arc or discharge.
ESR	Equivalent Series Resistance. The amount of resistance in series with an ideal (loss less) capacitor, which exactly duplicates the performance of a real capacitor. In general, the lower the ESR, the higher the quality of the capacitor and the more effective it is as a filtering device. ESR is a prime determinant of ripple in switching power supplies.
F Faraday Shield	An electrostatic shield between input and output windings of a transformer. This can be used to reduce coupling capacitance, which in turn reduces output common mode noise.
FCC	The Federal Communications Commission is a US government agency that sets standards for, and governs the testing of conducted and radiated emissions. These are system level standards, but they are also used in power supplies and DC/DC converter specifications.
Floating Output	A power supply or DC/DC converter output that is ungrounded and not referenced to another output. Typically, floating outputs are fully isolated and may be referenced positive or negative by the user. Outputs that are not floating share a common return and as such, are referenced to one another.
Flyback Converter	Also called «Buck-Boost» converter, this topology typically uses a single transistor switch and eliminates the need for an output inductor. Energy is stored in the transformer primary during the first half of the switching period when the transistor switches «ON». During the second half of «Flyback period when the transistor is OFF», this energy is transferred to the transformer secondary and load. This technique is cost effective because of a minimum number of components required.

Foldback Current Limiting A power supply or DC/DC converter output protection circuit whereby the output current decreases with increasing overload, reaching a minimum at short circuit. This minimises the internal power dissipation under overload conditions. **See graph 3.**

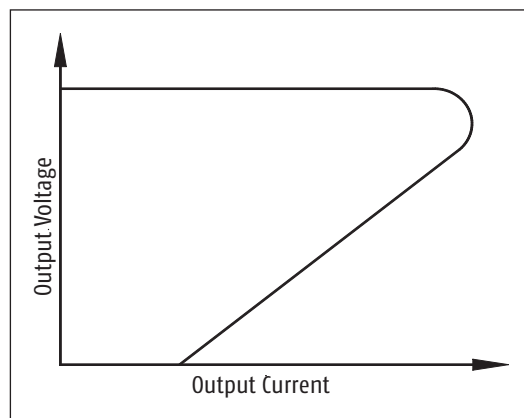

Graph 3: Foldback Current Limiting

Forced Air Cooling The use of a fan (or other air moving equipment) within a system to move air across heat producing components in order to reduce the ambient temperature.

Forward Converter Also called a «Buck-Derived» converter, this topology, like the flyback converter, typically used a single transistor switch. Unlike the flyback converter, energy is transferred to the transformer secondary while the transistor is «ON», and stored in an output inductor.

Free Convection An operating environment in which the natural movement of air (unassisted by fans or blowers) is sufficient to maintain the power supply or DC/DC converter within its operating limits. See also **Convection Cooling**.

Full Bridge Converter A topology that typically operates as a forward converter but uses a bridge circuit, consisting of four switching transistors, to drive the transformer primary, used to handle high power levels.

Full Load The maximum value of output load specified for a power supply or DC/DC converter under continuous operating conditions.

Full Wave Rectifier A circuit (bridge or centre tapped) that rectifies both halves of an AC waveform.

G Galvanic Isolation Two circuits which have no ohmic connection are considered to be «galvanically isolated» from each other. Galvanic isolation (separation) is achieved by using a transformer, opto-coupler, etc.


Ground An electrical connection that is made to earth (or to some conductor that is connected to earth). A power supply or DC/DC converter «common» is not actually ground unless it is connected to earth.

Ground Loop An unwanted feedback condition caused by two or more circuits sharing a common electrical line, usually a common ground line. Voltage gradients in this line caused by one circuit may be capacitively, inductively, or resistively coupled into the other circuits via the common line.

H Half Bridge Converter A power switching circuit similar to the full bridge converter except that only two transistors are used, with the other two replaced by capacitors.

Half-Wave Rectifier Single-diode rectifier circuit that rectifies one-half the AC input wave.

Harmonic Distortion	For sinusoidal AC current waveforms, the distortion characterise by the present of multiple harmonics of the fundamental frequencies. This distortion is caused by the switching action of the power supply.
Heat-Sink	A metal plate, extrusion, case, etc. that is used to transfer heat away from sensitive components and/or circuits.
Hicc-up Mode	Also called Cycle-to-Cycle Mode. An operating mode triggered by an output fault condition (short circuit) in which the power supply or DC/DC converter cycles on and off. The duty cycle of on time to off time maintains the internal power dissipation at a safe level until the fault condition is corrected.
Hold-Up Time	The time during which a power supply's or DC/DC converter's output voltage remains within specification following the loss of input power.
IEC	International Electrotechnical Commission. The IEC is an organisation based in Switzerland (Geneva) that sets standards for electronic products and components. IEC does not conduct any testing, however, their standards have been adopted by most of worldwide national safety agencies. http://www.iec.ch/
Input Transient	A spike or step change in the input line to a power supply or DC/DC converter. Input transient protection circuits are used to shield sensitive components (such as semi-conductors) from possible damage due to transient voltages.
Input Voltage Range	The high and low input voltage limits within which a power supply or DC/DC converter may be operated. A common specification for DC/DC converters is to specify the ratio of high line to low line (i.e. a range of 2:1 for 18VDC to 36VDC or a range of 4:1 for 18VDC to 72VDC).
Inrush Current	A high surge of input current that occurs in power supplies, DC/DC converters, switchers and occasionally in linears upon initial turn on, caused by charging of the input capacitors. Also called Input Surge Current. See graph 4.

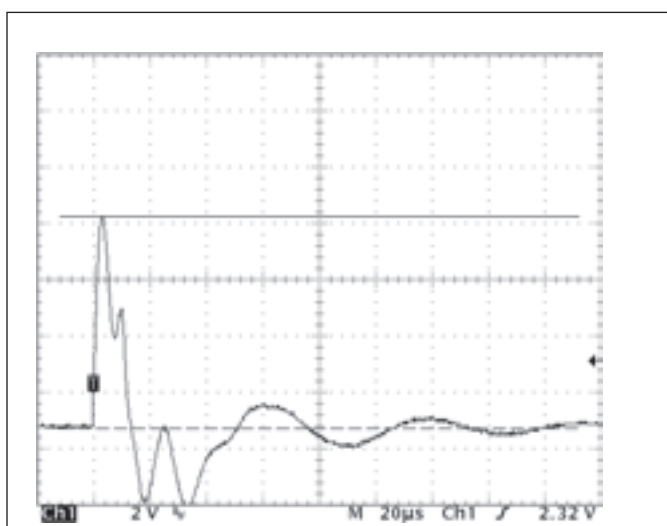

Graph 4: Inrush Current

Inrush Current Limiting	A circuit which limits the inrush current during turn-on of a power supplies and DC/DC converters.
--------------------------------	--

Insulation

Operational Insulation: Insulation needed for proper operation of a power supply or converter. Operational Insulation by definition does not protect against electrical shock.

Basic Insulation: Insulation to provide one layer of "basic protection" against electrical shock.

Supplementary Insulation: Second layer of insulation applied in addition to Basic Insulation in order to ensure protection against electrical shock in the event of a failure of the Basic Insulation.

Double Insulation: Insulation comprising both Basic Insulation and Supplementary Insulation.

Reinforced Insulation: A single insulation system which provides a degree of protection against electric shock equivalent to Double Insulation under the conditions specified in the applicable standards. Note: The term «insulation system» does not imply that the insulation has to be in one homogeneous piece. It may comprise several layers which cannot be tested as supplementary or Basic Insulation.

Insulation Resistance

The resistance offered by an insulating material to current flow.

Internal Power Dissipation

The power dissipated (as heat) within the power supply or DC/DC converter during normal operation. Primarily a function of the power handling capability and efficiency of the power supply or DC/DC converter. Internal power dissipation is given as a maximum specification that cannot be exceeded without risking damage to the power supply or DC/DC converter.

Inverter

A device that delivers AC power when energised from a DC power source. Inverters may be frequency, amplitude, or pulse-width modulated to vary output voltage.

Isolation

The electrical separation between input and output of a power supply or DC/DC converter by means of the power transformer. The isolation resistance (normally in megaohms) and isolation capacitance (normally in picofarads) are generally specified and are a function of materials and spacings employed throughout the power supply or DC/DC converter.

Isolation Test Voltage

The voltage test to determine if the breakdown voltage of a transformer, power supply or DC/DC converter exceeds the minimum requirements. It is performed by applying a high voltage between the two isolated test points. In production the isolation of a power supply or DC/DC converter will be tested for a time period of 1 to 6 seconds max. (according to EN 50116) in order not to cause stress to the insulation material.

Isolation Voltage (rated)

Rated Isolation voltage is defined as the maximum voltage across the isolation barrier (i.e. input to output for converters or primary to secondary for power supplies and transformers) a device can withstand for a fixed time period. Normally this time period is specified with 60 seconds (according to UL/EN/IEC 60950).

The actual breakdown voltage is typically in excess of 1000V higher than the rated isolation voltage. The reason for rating a conservative isolation voltage is to ensure that the isolation testing of a power supply or converter does not degrade the isolation barrier in any way.


L Leakage Current

The current flowing from input to output or input to ground/chassis or output to ground/chassis of an isolated power supply or DC/DC converter at a specified voltage level.

Line Regulation	The variation of an output voltage due to a change in the input voltage, with all other factors held constant. Line regulation is expressed as the maximum percentage change in output voltage as the input voltage varied over its specified range.
Line Voltage	The AC input voltage to a power supply or the DC input voltage to a DC/DC converter.
Load	The electronic components or circuitry connected to the output of a power supply or DC/DC converter. The characteristic (resistance, reactance, etc.) of the load determines the amount of power drawn from the power supply or DC/DC converter. For voltage regulated power supplies and DC/DC converters, the load is the output current.
Load Regulation	Variation of the output voltage due to a change in the output's load within a specified range with all other factors held constant. The load change may be specified for other than no load to full load such as 20% load to full load or 10% load to 90% load and it is expressed as a percentage of the nominal DC output voltage.
Load Sharing	See Current Share .
M Maximum Operating Temperature	The maximum ambient temperature at which a power supply or DC/DC converter will operate without risk of damage.
Maximum Rating	Limit of specifications that, if exceeded, could cause permanent damage to power supplies and converters. These are not continuous ratings, and proper operation is not implied.
Minimum Load	The minimum amount of output load required maintaining normal continuous operating specifications. Usually associated with PWM (Puls Width Modulation) controlled power supplies or DC/DC converters.
Minimum Operating Temperature	The minimum temperature at which the power supply or DC/DC converter will start up.
MTBF	The Mean Time Between Failure is a unit of measure, expressed in hours, that gives an indication of the relative reliability of a power supply or DC/DC converter. MTBF is based upon actual operating data (demonstrated) or derived per the conditions of IEC 61709 standard (calculated). Traco Electronic AG calculates MTBF values for their products in general for ground benign and at +25 ° C ambient. MTBF is not a specification for the lifetime of a product.
N N+1	A power system technology used to achieve higher reliability levels through system redundancy. The system consists of a number of power supplies or DC/DC converters connected in parallel, sharing the power drawn by the system load. One more power supply or DC/DC converter than is necessary to provide full load current is used (i.e. for a 600W load, three 300W power supplies are used). Thus, if any single power supply or DC/DC converter fails, the remaining ones will continue to supply current to the load.
Natural Convection	See Free Convection .
Noise	Noise is the aperiodic, random component of undesired deviations in output voltage. Normally called Ripple and Noise and given as a peak-to-peak value with a specified bandwidth (typically 20 MHz). See also Ripple and Noise .

Nominal Value	Stated or objective value for a quantity, such as output voltage, which may not be the actual value measured.
O Open Frame	A construction of power supplies or DC/DC converters, which are not encased in a metal or plastic casing and are not covered with a potting compound.
Operating Temperature Range	The range of temperatures within which a power supply or DC/DC converter will perform within specified operating parameters.
OR-ing Diodes	Also called decoupling diodes. Diodes, that isolates a faulty power supply or DC/DC converter from the load or other power supplies or DC/DC converters. Typically, these diodes are used externally in the output circuit of a power supply or DC/DC converter.
Output Voltage Accuracy	The maximum allowed deviation of the DC output of a power supply or DC/DC converter from its ideal or nominal value. Expressed as a percentage of output voltage. Often called output voltage tolerance.
OTP	Over Temperature Protection. A protection system for power supplies or DC/DC converters where the power supply or DC/DC converter shuts down if the ambient temperature exceeds the ratings. OTP is intended to save the power supply or DC/DC converter in the event of a failure of the cooling system. OTP usually measures the hottest spot in the power supply or DC/DC converter rather than the ambient temperature.
Overload Protection	See Current Limiting .
OVP	Over Voltage Protection. A protection mechanism for the load circuit which shuts down the supply or crowbars or clamps the output, when its voltage exceeds a preset level.
P Parallel Operation	The connection of the outputs of two or more power supplies or DC/DC converters of the same output voltage to obtain a higher output current than from either power supply or DC/DC converter alone. This requires power supplies or DC/DC converters specifically designed to share the load.
Peak Output Current	The maximum peak current that can be delivered to a load during transient load conditions, such as electric motor starts.
Pi-Filter	A commonly used filter at the input of a switching power supply or DC/DC converter to reduce reflected ripple current. The filter usually consists of two parallel capacitors and a series inductance.
Planar Transformer	Planar transformers use a construction technology to replace conventional wire windings in transformers and inductors with patterned conductors formed on single or multilayer substrates.
Power Density	The ratio of a power supply or DC/DC converter output power to its volume.
Power Factor	In a power supply, the ratio of true input power to apparent input power. In these circuits, power factor is a measure of the input current that is in phase with the input voltage and thus contributing to the average power.


Power Factor Correction	(PFC) Standard power supplies draw line current in pulses around the peaks in line voltage. This may be undesirable for several reasons. PFC circuits ensure that the line current is drawn sinusoidal and in phase with the sinusoidal line voltage. This reduces the harmonics distortion of the power supply and increases the useful power drawn from the mains. PFC circuits can be active or passive.
Power Fail Detect	A circuit that senses the DC voltage across the input capacitors of a switching power supply. Should the AC input line fail, it senses an abnormally low DC level across the capacitors and provides a logic output signal warning of imminent loss of output power.
Power Good Signal	A signal that indicates the status of the DC output of the primary channel of a power supply or a DC/DC converter. Also called DC-OK.
Puls Width Modulation	A circuit used in switching power supplies or DC/DC converters where the switching frequency is held constant and the width of the power pulses is varied, controlling both line and load changes with minimal dissipation.
Push-Pull Converter	A converter topology that typically is configured as a forward converter but uses two transistor switches and a centre tapped transformer. The transistor switches turn on and off alternately.
R Redundant Operation	The ability to connect power supplies or DC/DC converters in parallel so that if one fails the other will provide continuous power to the load. This mode is used in systems when a power supply or a DC/DC converter failure cannot be tolerated. See also N+1 Redundancy .
Reflected Ripple Current	The AC component generated at the input of a power supply or DC/DC converter by the switching operation of the converter, stated as peak-to-peak or RMS. See graph 5 .
Remote Sensing	A method of moving the measuring point for the regulation from the output terminals to the load. Compensates voltage drops in the power distribution bus, but negative impact on dynamic load behaviour must be tolerated.
Reverse Voltage Protection	A feature, which protects a power supply or DC/DC converter against a reverse voltage, applied at the input or output terminals.
Ripple	The periodic AC noise component of the power supply or DC/DC converter output voltage. See graph 5 .

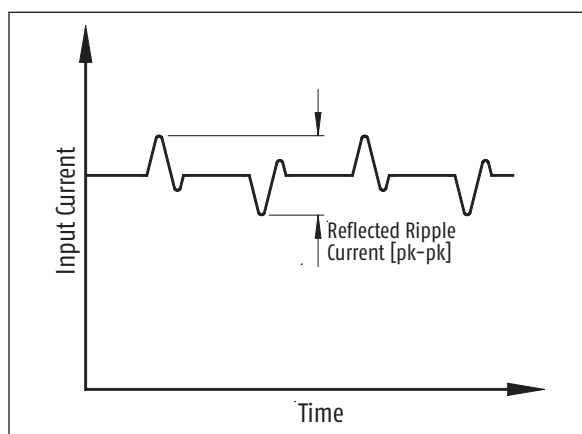

Graph 5: Reflected Ripple Current

Ripple and Noise

The magnitude of AC voltage on the output of a power supply or DC/DC converter, expressed in millivolts peak-to-peak or RMS, at a specified band width (typically 20MHz). This is the result of the feed through of the rectified line frequency, internal switching transients and other random noise. **See graph 6.**

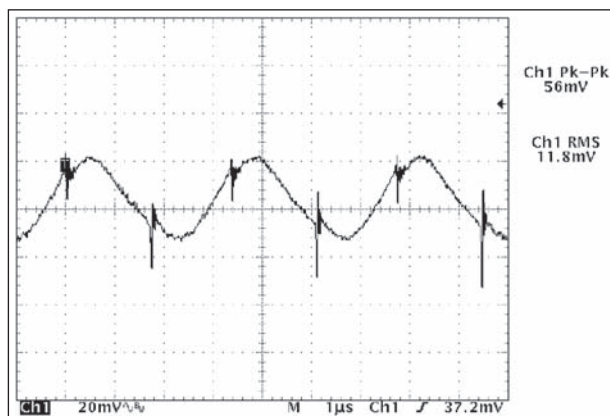

Graph 6: Ripple and Noise

RoHS Directive

This European Directive (2002/95/EC) specifies the maximum concentration of lead and 5 other hazardous substances for 10 categories of electronic products listed in this Directive. Component (built-in) power supplies and DC/DC converter products are not falling under this Directive by law.

http://europa.eu.int/eur-lex/pri/en/oj/dat/2003/l_037/l_03720030213en00190023.pdf

S Safety Class II



The safety class II symbol specifies a power supply product which is double insulated and due to that no protective earth connection is available nor needed. That means that the product is designed with two layers of insulations between hazardous voltage and accessible parts.

SELV

Safety Extra Low Voltage. A term used by safety regulatory body (IEC, UL, CSA, CENELEC, etc.) to describe the highest voltage level (single fault condition included) than can be contacted by a person without causing injury. It is usually defined as 60VDC or 42.4Vpk max..

Sense Lines

An output line used in «Remote Sensing» connection to route the output voltage (at the load or direct on the power supplies or DC/DC converters output) back to control feedback loop. **See Remote Sensing.**

Short Circuit Protection

A feature, which limits the output current of a power supply or DC/DC converter under short circuit conditions, so that the power supply or DC/DC converter will not be damaged.

Six-Sided Shielding

A construction technique in which the circuit is placed into a metal case. This metal shielding minimises any noise radiation from the converter components. A continuous shielded case has the base (or header) welded together, further reducing potential noise leakage.

Soft Start

A feature which limits the start-up switching current (inrush current) of a switching power supply or DC/DC converter and causes the output voltage to rise gradually to its final value.

Standby Current

The current drawn by a power supply or DC/DC converter when it is no load and/or has been shut down by a control signal.

Still Air	An operating environment in which the air surrounding the power supply or DC/DC converter is restricted in small enclosures (often sealed) where it cannot move freely.
Storage Temperature	Temperature range within a power supply or DC/DC converter can be safely stored, non-operating, with no damage to its components.
Surface Mount Technology	(SMT). A space saving technique whereby special leadless components are soldered onto a surface of a PCB.
Switching Frequency	The rate at which the DC voltage is switched in a DC/DC converter or switching power supply.
Switching Regulator	A high-efficiency non-isolated DC/DC converter consisting of inductors and capacitors to store energy and switching elements (typically transistors or SCR's), which open and close as necessary to regulate voltage across the load. The switching duty cycle is generally controlled by a feedback loop to stabilise the output voltage, generally by means of a Pulse-Width Modulation.
Synchronous Rectifiers	A circuit arrangement where the output rectifier diodes of a power supply or DC/DC converter are replaced with active switches such as MOSFET's. The switches are turned on and off under control and act as rectifier. This results in considerably lower losses in the output stage and subsequently much higher efficiency. They are particularly useful with low voltage outputs.
T Temperature Coefficient	The average percent change in output voltage per degrees centigrade change in ambient temperature over a specified temperature range, with load and input voltage held constant.
Transient Recovery Time	The time required for the output voltage of a power supply or DC/DC converter to settle within specified output accuracy limits following a step change in output load current or a step change in input voltage.
U UL listing Mark 	The UL listing mark shows that the whole equipment is approved by UL according to the relevant US safety standard requirements. If a product or equipment is carrying the UL listing mark no additional testing by UL is required. UL will only investigate if the product or equipment is used according to the manufacturers published specifications which has to comply with the UL test report. The «c» in the UL listing mark means that the product complies with relative Canadian safety standards as well.
UL recognition Mark 	The UL recognition mark shows that the product is recognised as a component and has been approved by UL according to the relevant US safety standard requirements. The «c» in the UL listing mark means that the product complies with relative Canadian safety standards as well.
UL	Underwriter Laboratories, an independent, non-profit organisation testing for public safety in the United States. UL recognition or listing is required for equipments used in specific applications. http://www.ul.com/
Universal Input	An AC input to a power supply that accept all the standard voltage levels available from the mains. Typically specified at 85 VAC to 264 VAC (100, 110, 230 and 240 VAC).

UPS	Uninterruptible Power Supply. A system designed to supply power in the event of temporary or permanent loss of AC line power. This is accomplished by means of a back-up battery and a DC/AC inverter or DC/DC converter.
Under Voltage Lockout	A protection system for power supplies or DC/DC converters where the power supply or DC/DC converter is deliberately shut down if the input voltage drops below a pre-defined level. Some hysteresis is usually present to prevent the power supply or DC/DC converter oscillating on and off. Under voltage lockout is usually needed with battery systems where the voltage decreases gradually with the time rather than snaps off quickly.
V Voltage Balance	The difference in magnitude, in percent, between the two output voltages of a dual output power supply or DC/DC converter where the voltages have equal nominal values with opposite polarities.
W Warm-up Time	The time required, after initial turn-on, for a power supply or DC/DC converter to operate within its specifications.
Working voltage (rated)	Rated working voltage or electrical strength is the maximum continuous voltage that can be sustained continuously across the isolation barrier of a power supply or converter without causing stress to the isolation barrier. The rated working voltage is typically much lower than the rated isolation voltage. To define the max. working voltage from a specified isolation voltage is difficult since it depends much on the material and construction of the insulation. A relative conversion table can be found in the IEC/EN/UL 60950-1 safety standard.