

Lasting Value




Desiccant Compressed Air Dryers

Dryspell

- Microprocessor Controller
- Pre-filter rating 0.3 microns (coalescer)
- Shuttle valve for Low Pressure drop
- All Aluminium resist oxidation & scale formation
- Dewpoint better than -40°C
- Design Patented

India's Largest Exporter of Compressed Air Treatment Products

Dryspell Desiccant Dryer offers total cleaning solution for lubricated as well as non-lubricated compressed Air.

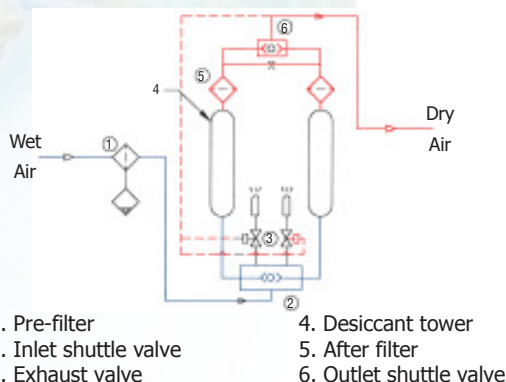

Principle of Operation

Drying Cycle : Moist air from the compressor is sent through the coalescing filter. Here water & oil coalesces, gets purged through the auto drain valve.

The relatively clean air with water vapour passes through the aluminum drying tower filled with desiccant gets completely dried (upto -40°C dew point) and then passes through a built in after filter. The desiccant fines from the towers are completely removed and clean dry air is let out through the outlet port for use.


Regeneration Cycle : During the regeneration cycle. The sudden depressurisation brings out water molecules trapped in the Desiccant pores to the surface of the beads. A small portion dry compressed air from the drying TOWER then passes over the desiccant through the regeneration orifice built in the Top Block. This results in complete regeneration of the Desiccant.

Typical Application



- Paint spray booths • Tool, Valve, Cylinder protection
- Food packaging machine • Auto Garage • Textile & Garment
- SPM • Instrumentation

Recommended Installation

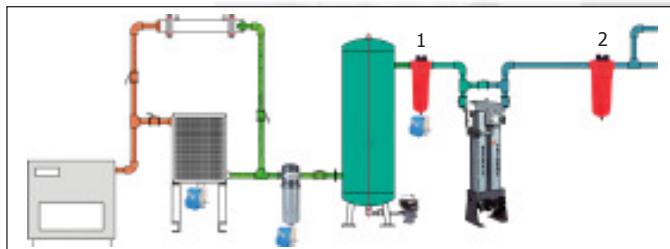

Specifications

Maximum Working Pressure	16 kg / cm ²
Air Inlet Condition	Maximum Fluid Temperature 45°C
Pre-filter rating	0.3 Microns (Coalescer)
Cycle Time	4 Minutes
Regeneration Volume	10%
Air Outlet Conditions	Dry air at -40°C Dew Point
Operating Voltage	85 - 265 V 50 / 60 hz 1 Ph

Model	Flow cfm	End Connection BSP	Dimensions (mm)			Weight KGS	Recommended Accessories	
			H	W	D		Pre filter (1)	Post filter (2)
Dryspell 5	5	½"	390	280	200	9	G 24 P	G 24 Y
Dryspell 10	10	½"	600	280	200	11	G 24 P	G 24 Y
Dryspell 20	20	½"	1015	280	200	16	G 100 P	G 100 Y
Dryspell 30	30	½"	810	350	260	28	G 100 P	G 100 Y
Dryspell 45	45	½"	1055	350	260	34	G 100 P	G 100 Y
Dryspell 60 A	60	¾"	1250	350	285	43	G 100 P	G 100 Y
Dryspell 100	100	1"	1960	440	355	98	G 250 P	G 250 Y
Dryspell 150	150	1½"	1926	450	550	190	G 250 P	G 250 Y
Dryspell 200	200	1½"	1976	450	550	192	G 600 P	G 600 Y
Dryspell 300	300	2"	1976	480	770	235	G 600 P	G 600 Y
Dryspell 350	350	2"	1976	480	930	320	G 600 P	G 600 Y



Manufacturing Facility



Our Presence

Trident Pneumatics Pvt Ltd

5/232, K.N.G. Pudur Road, Coimbatore - 641 108, India. Ph : +91-422-2400492, 2401373 Fax : +91-422-2401376

e-mail : sales@tridentpneumatics.com Website : www.tridentpneumatics.com



Sales & Service Outlets

Ahmedabad
98259 26342

Bangalore
98450 93322

Chennai
99949 19977

Delhi
98113 10726

Hyderabad
98854 45321

Kolkatta
24071900

Mumbai
98673 67726

Pune
27471877



Our other Range of Products

- Time based Auto Drain Valve • Level Sensing Auto Drain Valve • Refrigeration Dryer • Blower Reactivated Dryer • Submicron Filter • Oil Water Separator

