




WEARWELL®

Ergonomic Mats & Flooring

2011-2012
Full Line Catalog

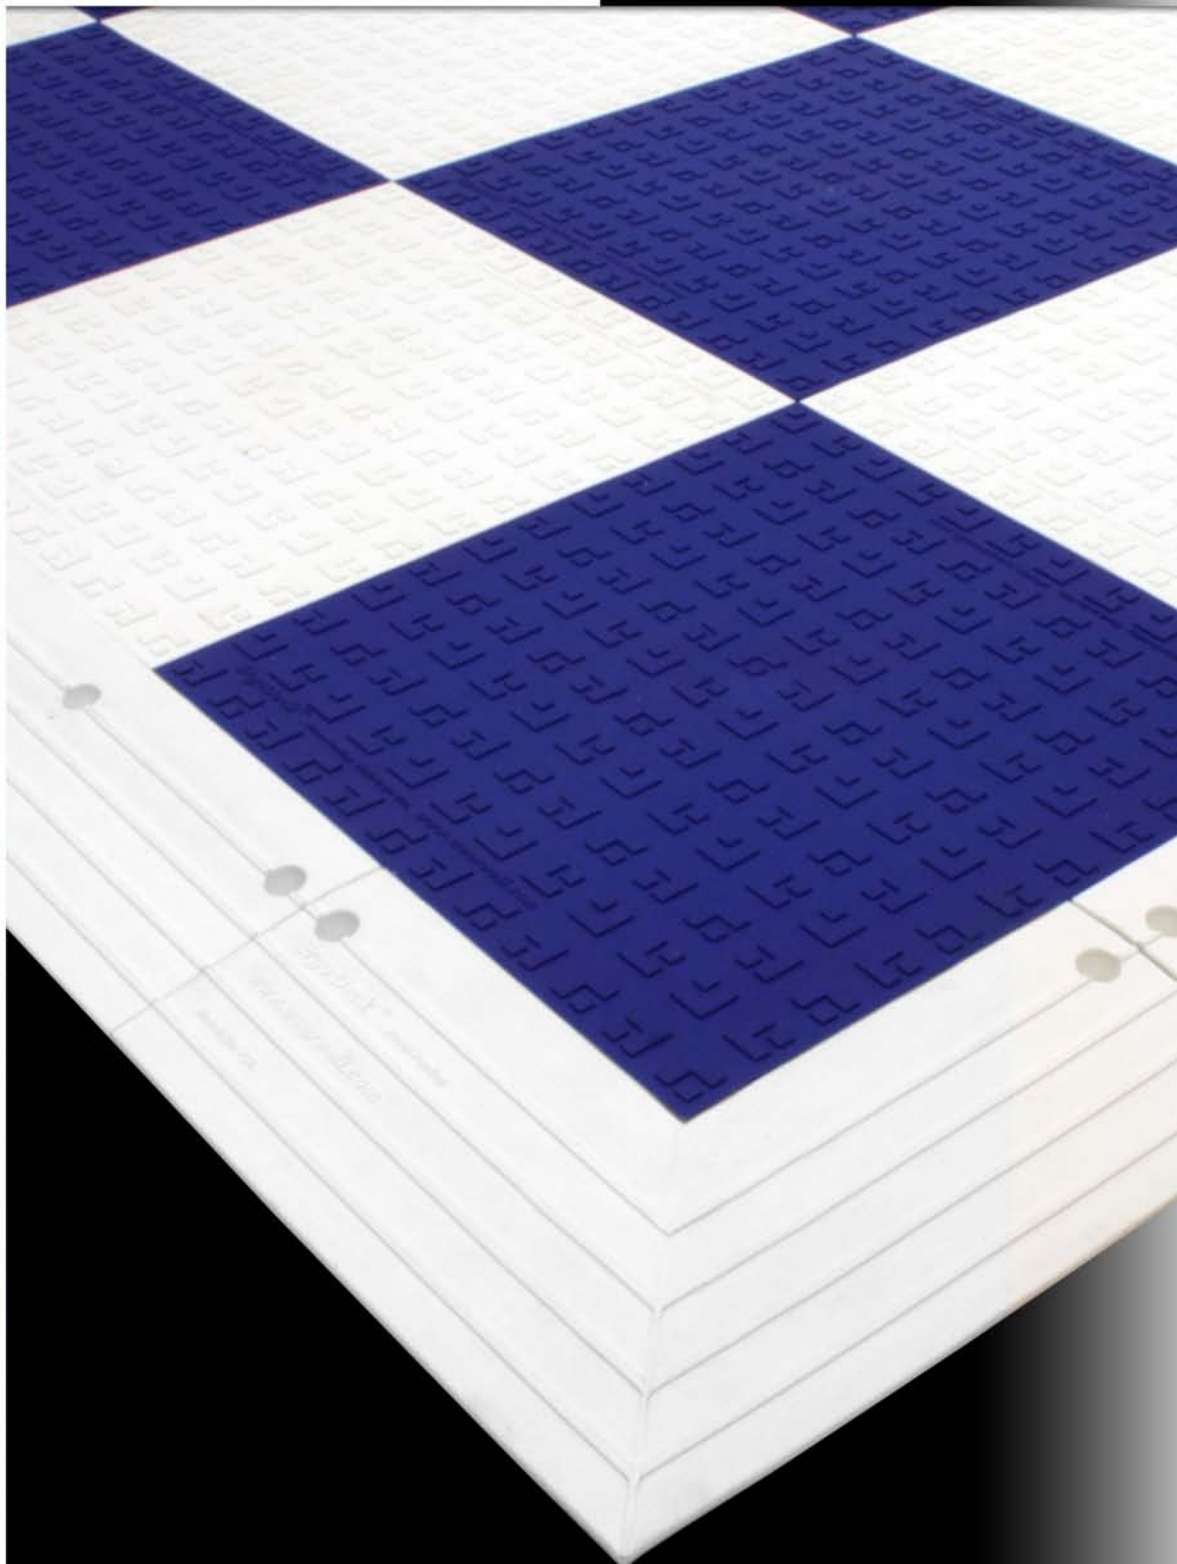

SUPPORT —
FOR HARD WORKING PEOPLE

Product Index

ERGONOMIC FLOORING

Industrial and Commercial

No. 502 Rejuvenator® Connect	8
No. 540 F.I.T.™ Open	13
No. 541 F.I.T.™ Solid	13
No. 542 F.I.T.™ Open w/ GritWorks!®	13
No. 543 F.I.T.™ Solid w/ GritWorks!®	13
No. 560 ErgoDeck® Original Open	10
No. 561 ErgoDeck® Original Open w/ GritWorks!®	10
No. 562 ErgoDeck® Original Solid	10
No. 563 ErgoDeck® Original Solid w/ GritWorks!®	10
No. 564 ErgoDeck® SOFT Open	10
No. 565 ErgoDeck® SOFT Open w/ GritWorks!®	10
No. 566 ErgoDeck® SOFT Solid	10
No. 567 ErgoDeck® SOFT Solid w/ GritWorks!®	10

ERGONOMIC MATTING

Industrial

No. 414 UltraSoft Diamond-Plate	14
No. 415 Diamond-Plate SpongeCote®	14
No. 416 Diamond-Plate w/ GritWorks!®	14
No. 418 SR (Slip-Resistant) Diamond-Plate	17
No. 438 LightWorks Inspection Mat	18
No. 447 WeldSafe®	17
No. 460 Comfort Deck®	24
No. 461 Grit-Top Comfort Deck®	24
No. 465 Emergency Shower and Eyewash Station Mat	24
No. 470 Modular Diamond-Plate	23
No. 474 WorkRite	23
No. 477 WorkSafe®	19
No. 479 Industrial WorkSafe®	22
No. 487 Industrial GritWorks!®	22
No. 495 Diamond-Plate Select	14
No. 497 SMART® Diamond-Plate	14
No. 518 Comfort2Go™	18
No. 570 24/Seven® Solid	20
No. 572 24/Seven® Drainage	20
No. 574 24/Seven® Solid w/ GritWorks!®	20
No. 576 24/Seven® Drainage w/ GritWorks!®	20

Lab, Pharmaceutical, Hospital

No. 419 UltraSoft Tile-Top AM	25
No. 420 Tile-Top AM	25
No. 489 ErgoStance®	28
No. 494 Tile-Top Select	25
No. 496 SMART® Tile-Top	25
No. 501 Rejuvenator®	29
No. 580 Autoclavable Mat	28

Commercial and Retail

No. 427 SoftStep	30
No. 431 Corrugated SpongeCote®	34
No. 433 ComfortPro™	34
No. 440 UltraTred ArmorCote	31
No. 442 Deluxe Tuf Sponge	30
No. 444 Deluxe SoftStep	30
No. 451 Tuf Sponge	30
No. 452 Diamond Tuf Sponge	30
No. 454 Ortho Stand™	35
No. 459 Endurable	32
No. 472 Modular WorkSafe® Light	33
No. 478 WorkSafe® Light	35
No. 513 SubStance	32

ERGONOMIC MATTING CONTINUED

ESD and Contamination Control

No. 092 PermaTack	42
No. 095 Clean Room Mat	42
No. 504 Pür-Comfort	40
No. 785 Electrically Conductive Runner	39
No. 786 Electrically Conductive Anti-Fatigue	37
No. 788 Modular Diamond-Plate ESD	38
No. 789 Modular WorkSafe® Light ESD	38
No. 791 Static Dissipative Anti-Fatigue	39
No. 793 ESD Work Surface Material	41
No. 793 Heel Grounder	40
No. 793 15' Cord	40
No. 793 6' Wrist Strap	41
No. 797 Common Point Cord	41

Non-Conductive

No. 701 Diamond-Plate Switchboard	43
No. 702 Corrugated Switchboard	43
No. 710 Marbleized Military Switchboard	44
No. 711 Smooth Military Switchboard	45
No. 712 Diamond-Plate Military Switchboard	45
No. 720 Double-Duty Switchboard	43

Food Production

No. 222 Sanitizing Footbath Mat	46
No. 482 Grade A®	46

RUNNERS

No. 305 Heavy Duty Corrugated Runner	47
No. 356 Radial Runner	50
No. 381 Standard Corrugated Vinyl Runner	49
No. 383 Textured Kleen-Rite Runner	50
No. 385 Diamond-Plate Runner	49
No. 391 KleenSweep Runner	49
No. 405 Enviro Mat	50
No. 475 KushionWalk	47
No. 480 Abrasive Coated KushionWalk	47
No. 891 Vinyl Grid Air Tread	48
No. 892 Vinyl Grid Gripper Tread	48

ENTRANCE

No. 211 Elite Super Olefin	52
No. 220 Multi-Guard Heavy Duty	52
No. 224 UpFront Reversible Scraper	51
No. 227 OutFront Reversible Scraper	51
No. 229 Mud Chucker™	52
No. 287 Cavalier	53
No. 290 Clean Zone	53

ACCESSORIES

No. 050 GripSafe Reflective Tape	54
No. 051 GripStrips	54
No. 053 LockFast	54
No. 400 Safety Sorb	54
No. 698 Safety Track	54

A Note From The President



The two years since we last introduced a new catalog were certainly challenging. But nonetheless, the wheels of progress continue to turn here at Wearwell. We are often defined by how we respond to adversity. I think you will find in this catalog that at Wearwell, we responded positively and powerfully.

We've searched our souls to get at the real core of what Wearwell is all about. As a result, we can express who we are in four easy to understand principals.

- » **Passion:** We are absolutely consumed by the desire to provide the best ergonomic flooring and matting solutions for our hard working end users. Ergonomics is not a secondary business for Wearwell. Our customers' safety is our Passion!
- » **Innovation:** It is imbedded in our DNA at Wearwell. We empathize with our customers' ergonomic and safety challenges. New products result. But also, new ideas about how to simplify product selection and improve the overall customer experience at Wearwell.
- » **Customization:** Over 95% of Wearwell products can be customized. Additionally, the need to customize on-site is critical. Ergonomic Flooring achieves the look, layout and functionality you desire in a flooring product with the added feature of ergonomic value.
- » **Service:** Certainly, this means delivering quality products on-time. It also means friendly and professional support in every interaction. As well, it means qualified and capable sales pros that can survey customers' facilities and specify the right products for each and every application.

I would especially like to call your attention to the **9 new products** in this catalog that were not included in the previous edition. Each was designed to solve specific problems and support our core principals. They include:

- » **ErgoDeck® Custom Colors**—Now choose from 6 custom colors (pg. 10).
- » **F.I.T.™ Functional Interlocking Tiles**—The most versatile 12" x 12" interlocking ergonomic flooring system (pg. 13).
- » **SMART® Diamond-Plate No. 497** (pg. 14) and **SMART® Tile-Top No. 496** (pg. 25)—These ergonomic mats are Earth and budget friendly.
- » **SubStance No. 513**—Provides superior comfort and durability over traditional sponge products (pg. 32).
- » **ErgoStance® No. 489**—This rubber on rubber mat stays in place on highly finished floors (pg. 28).
- » **Diamond Tuf Sponge No. 452**—This enhanced version of our popular Tuf Sponge features a diamond-embossed surface (pg. 30).
- » **LightWorks Inspection Mat No. 438**—Maximize lighting and comfort in painting and finishing areas (pg. 18).
- » **Corrugated Switchboard No. 702**—The addition of yellow borders increases visibility and safety (pg. 43).
- » **Double-Duty Switchboard No. 720**—First in class for comfort and safety (pg. 43).

Finally, I would like to invite you to visit our website. There you can find even more detailed information regarding our products, including MSDS and Spec Sheets. Please take note of the newest feature on our website. By simply entering your zip code, you can get the contact information for the Wearwell Sales Representative in your specific geography.

I am pleased that this new catalog embodies our core principals throughout. I'm confident you will agree and you will choose Wearwell as your partner for ergonomic flooring and matting solutions. **Thank You!**

Elliot Greenberg
President & CEO
Wearwell



Rep Locator By Postalcode

For searching within the United States, enter a 5-digit postalcode.

For searching within Canada, enter the first 3 letters of your postalcode.

Find Rep

Visit www.wearwell.com and click the [Contact Rep](#) link. You'll see a map that distinguishes Rep Group territories and makes it easy for you to find your Rep Group. To find out who your assigned Rep is, enter your postalcode into the [Rep Locator By Postalcode](#) tool on the left of the screen.

Terms and Definitions

Anti-Microbial— Does not contribute to or support survival or growth of microorganisms when tested in accordance with ASTM G21-96 (2002).

CFR (Cutting Fluid Resistant)— Resists the effects of Mineral Oil based cutting fluids.

COF (Coefficient of Friction)— The measure of traction provided by a surface. It is a measurement of force that must be exerted before an object slips. Therefore, the higher the number, the better the traction. OSHA recommends a COF of .5 in dry areas and .25 in wet. The ADA recommends .6 on flat surfaces and .8 on ramps.

Compression Deflection— The softness or comfort level of a sponge mat. The higher numbers indicate softer material. The thickness of the sponge backing and the flexibility of the surface material also affect softness. We consider .20 - .50 the ideal range.

Customization—Refers to special: (1) lengths, (2) lengths and widths or (3) shapes and configurations, also referred to as Full Custom. Most of our mats can be customized to one of these three levels and are identified as:



Durometer— The measure of hardness/softness of molded rubber and molded PVC mats. As a general rule, lower durometer readings indicate softer materials. Most of our mats range between 45-80 durometer. We consider the ideal range between 45-80.

ESD (Electro-Static Discharge)— When static builds up on a person's body and that person touches another object, the static charge is passed onto the object. This discharge can harm sensitive equipment, but is minimized when the person steps on or touches a Conductive or Static Dissipative mat.

Flex-Link™— Our specially formulated sponge base and made of blown-vinyl.

GritWorks!®— Our unique grit system provides an exceptionally high level of traction.

Life Expectancy—The life expectancy of a mat can vary dramatically depending on a multitude of factors such as: number of shifts per day, amount of foot traffic, exposure to oils, caustic chemicals or fluids, excessive temperatures, cleaning and maintenance schedule, compound, etc. The following is general representation of what our customers experience (your experience may vary):

- **5 Years or more** - Urethane Mats (E.g.: Rejuvenator®)
- **3 to 5 years** - SpongeCote® Mats (E.g.: Diamond-Plate SpongeCote®)
- **1 to 3 years** - Molded Rubber Mats (E.g.: WorkSafe®)
- **1 to 3 years** - Molded PVC Mats (E.g.: ErgoDeck®)
- **6 to 12 months** - PVC Sponges (E.g.: Tuf Sponge)

Natural Rubber— Latex from certain trees and plants is processed into an elastomer with excellent tensile and abrasion resistance, flexibility and resilience; but it has poor resistance to solvents and petroleum products. Useful temperature range is -67° F to +180° F. It performs best in dry areas and when exposed to water.

Nitrile Rubber— A copolymer of acrylonitrile and butadiene. It has excellent physical properties, including resistance to water, petroleum products and fuels. Useful temperature range is -40° F to +275° F. Always request a small sample of the mat to test.

Nitricell® Sponge— A black, closed-cell sponge, compounded of a unique blend of PVC and Nitrile rubber for exceptional resilience that far exceeds typical PVC sponge. Used as the underside sponge of most Wearwell SpongeCote® mats, it's considered by many customers to be our softest and most comfortable sponge.

Ohm (Ω)— A measure of resistance. The higher an ohm reading on a conductive mat, the more difficult it is for the static electric charge to go through the mat and out the ground. Conversely, this means that the lower the ohm reading, the more conductive the material.

- **Conductive** = $1 \times 10^3 \Omega$ to $1 \times 10^6 \Omega$
- **Static Dissipative** = $> 1 \times 10^6 \Omega$ to $1 \times 10^{10} \Omega$

PVC Sponge— Also referred to as blown vinyl sponge, it's a vinyl compound expanded with a blowing agent. PVC sponge mats provide modest comfort and durability at an economical price.

Resilience— The ability of a material to return to its original state after being compressed.

RTG— Resistance top to ground

RTT— Resistance top to top

SMART®— Our line of Green matting manufactured using 100% Recycled urethane sponge and a durable top surface. These products are comfortable, economical and perform well in dry commercial and industrial applications.

SpongeCote®— Our most popular category of ergonomic mats. Each SpongeCote® mat has a durable top surface permanently bonded to a superbly comfortable, long wearing sponge base. These mats offer the highest degree of comfort and longevity for dry work areas.

Tabor Abrasion— Refers to how well the surface of a mat withstands heavy use. The less weight the sample loses, the more durable the product tends to be.

Tensile Strength— A measure of the tear strength of a material (the higher the psi, the stronger the mat).

Urethane— A premium matting compound offering exceptional comfort and durability. Outperforms most rubbers and plastics.

How to Use

You will find our products are broken down into two primary categories: Ergonomic Flooring and Ergonomic Matting. Ergonomic matting is further categorized by industry or application.

Choosing the Right Product

With so many products to choose from we appreciate how confusing it can be to choose the RIGHT product. You will find a variety of tools to make these decisions easier.

- Product Quick Reference (pg. 56)
- Chemical Resistance Chart (pg. 59)
- Specification Data
- Line Drawings
- Performance Scale
- Green Rating
- WATCH (pg. 60)
- Value Continuum (pg. 62)

Understanding Part Numbers

Wearwell's standard product numbers are built using a 3 digit product family code, dimensions and mat and/or trim color.

You will find product family codes clearly identified throughout the catalog as well as the available sizes and thicknesses. Color abbreviations are as follows:

MAT COLORS		MAT COLORS W/ BORDERS	
Color	Abbreviation	Color	Abbreviation
Black	BK	Black/Yellow	BYL
Blue	BL	Black / Orange	BOR
Brown	BN	Black / Chevron	CHV
Charcoal	CH	Black / White	BWH
Gray	GY		
Orange	OR		
Red	RD		
Sandalwood	SA		
Sky Blue	SB		
Tan	TN		
Terra Cotta	TC		

Putting Together Part Numbers

The example below is for our Diamond-Plate SpongeCote® in a 3' x 10' size, 9/16" thick and black in color.

PRODUCT FAMILY	DIMENSIONS					COLOR	PRODUCT NUMBER
	THICKNESS (INCHES W/O FRACTION LINE)	WIDTH	LENGTH				
415	.916	x 3	x 10			BK	= 415.916x3x10BK

Performance Ratings

Many products have a performance rating chart that looks similar to Figure 1.

If there is a performance chart with a solid blue line beneath the gradient line, that means that there is an UltraSoft or a GritWorks!® version of the product available that offers an increased level of performance. Such a chart would look similar to the Figure 2.

In Figure 2, the chart states that there is a GritWorks!® version of the product that offers the same level of anti-fatigue and wear resistance, but offers a higher level of slip resistance.

Figure 1


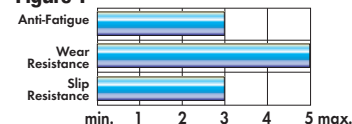


Figure 2

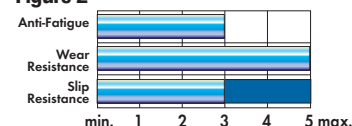

Customization

Wearwell is the industry leader in custom matting. There are 3 levels of customization:

- 1. Custom Cut Lengths:** A mat with a standard width but cut to your designated length. (See product details for increments and maximum lengths)
- 2. Custom Lengths and Widths:** A mat manufactured to both your length and width requirement.
- 3. Full Custom:** This level of customization is what sets Wearwell apart. Our manufacturing process allows for a variety of cutouts, configurations and shapes including circular and oval mats.

Icon Legend

	Dry area only		Contains recycled content (green rating)
	Dry and Wet area: water		Custom lengths
	Dry and Wet area: oil		Custom lengths and widths
	Dry and Wet area: paint		Full Custom
	ESD properties		Non-conductive



Ergonomic Flooring

What Is Ergonomic Flooring?

The long awaited combination of **durability, safety, flexibility, affordability, aesthetics and comfort** in a flooring product.

Why Should I Consider Ergonomic Flooring?

You need to provide safety and ergonomic value to workers that stand **and** are on the move. Only a flooring product can accomplish that.

How Does Ergonomic Flooring Improve My Safety And Ergonomics Program?

There are several benefits. First, it expands the ergonomic value of a resilient floor surface to a larger area than a standard work station mat. Second, gritted versions are available for wet and oily areas to help prevent slips and falls. Third, different versions are available to accommodate different needs. For example, slightly harder products provide ergonomic value, but also allow for heavy cart to roll over the mats and deliver materials to work stations that might otherwise require lifting and more strenuous activity to deliver. Finally, while we always want to prevent any type of slip and fall, should one occur on an ergonomic floor, the likelihood of significant injury is greatly reduced by the softer surface.

How Will Ergonomic Flooring Look Installed?

The product is available in different “tile” sizes, from 12” x 12” to 3’ x 3’. These tiles are specifically designed to interconnect to form a “Positive Lock.” The seams stay tight throughout the life of the product and the tiles will not easily separate unless you intentionally “unzip” them. Depending on style, different colors are also available to enhance the visual appeal of the product. In short, it looks fantastic!

How Do I Install Ergonomic Flooring?


Installation is similar to other flooring products, except there are no adhesives or fasteners required. The tiles have male connectors on two sides and female connectors on the two opposing sides. Simply interconnect the tiles to accommodate any layout. The materials can easily be trimmed to butt up against equipment, walls or other transition points. Ramps are available to provide smooth transitions and prevent tripping.

How Do I Maintain Ergonomic Flooring?

Maintenance is the same as with other types of flooring products. Products are available for both dry and wet areas. Because individual tiles can be removed and replaced with ease, should a section of the flooring get damaged or need to be replaced, you can do so easily without a complete tear-out and re-install. This saves you money in terms of replacement materials and installation labor over the life of the product.

Will Any Modular Mat Work As Ergonomic Flooring?


NO! The simplest way to think of this is that while all Wearwell ergonomic flooring products are modular, not all modular products are suitable as ergonomic flooring. We refer to the “Three P’s” of installation types for clarity. Only “Positive” locking products are considered. These form tight seams and stay put in application until unzipped for easy replacement or reconfiguration. “Permanent” locking systems require adhesives, heat bonding or mechanical fasteners that eliminate the ability to reconfigure or replace sections easily. “Passive” locking systems have connectors that overlay each other without truly locking together. They separate too easily in larger installations which can cause trip hazards and ultimately require adhesives or mechanical fasteners to create a “Permanent” lock.

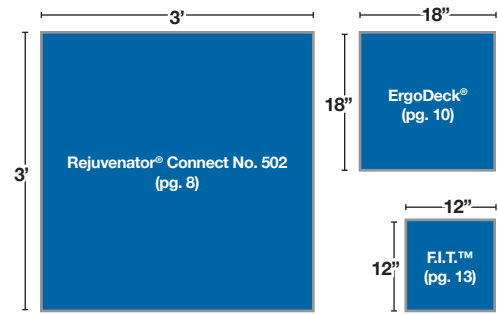

Ergonomic Flooring is available in a range of sizes and styles. For assistance choosing the best ergonomic flooring product for your facility, inquire about a Site Survey. Find out more about Site Surveys on page 64.



F.I.T.™ Functional Interlocking Tiles (pg. 13) interconnect to form a Positive Lock. The Positive Lock allows the flooring system to stay together seamlessly and be rolled up for maintenance or relocation. A Positive Lock will not separate unless you intentionally unzip them. ErgoDeck® (pg. 10) also features this locking system.

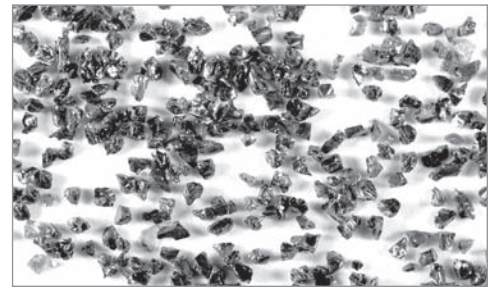

Magnified grit surface. A GritWorks!® surface is available for select products. This surface provides **40% more traction** than OSHA recommends for wet, slippery areas. It is highly recommended to get a grit surface in areas that require extra traction.



Ergonomic Flooring is highly customizable. Pictured above: ErgoDeck® (pg. 10).

Ergonomic Matting

What Is Ergonomic Matting?

The practical, economical, tried-and-true solution for ergonomic issues in work stations and assembly line applications.

Why Should I Consider Ergonomic Matting?

You need to provide safety and ergonomic value to standing workers in numerous applications throughout your facility.

How Does Ergonomic Matting Improve My Safety And Ergonomics Program?

There are several benefits. First, it provides quantifiable improvements in productivity and lost time that save you serious money. Second, there is a huge array of different materials and constructions available to address virtually any application issue you might encounter including comfort, slip prevention, static discharge, weld sparks, contamination control, switchboard and many others. Third, different comfort levels are available to accommodate a wide range of subjective tastes among your workforce. Finally, these products improve morale which makes your work life easier to manage.

How Will Ergonomic Matting Look Installed?

Generally, ergonomic mats are clean and basic geometric shapes that fit nicely into most work station layouts. There are many different options available in terms of appearance. Popular surface design choices include diamond plate, marbled tile-top, corrugated and pebbled. The most common colors are black and black with yellow borders, but other colors are available, depending on the style of product chosen.

How Do I Install Ergonomic Matting?

Typically, these products are ready to “throw down” in a work station right out of the box, so installation is a breeze. Some products are available in long rolls that can quickly be laid out along assembly lines, staging areas or in aisles. Many products can be factory customized in length, width or even basic shapes which eliminates the need to customize on-site in smaller work areas.

How Do I Maintain Ergonomic Matting?

Products are available for both dry and wet areas. Cleaning instructions are available at the back of this catalog for each type of matting product. Most matting products last anywhere from 1-5 years in application. Because mats tend to come in one piece, typically the entire mat is replaced with a new one when necessary.

Ergonomic Matting All Looks The Same. Are There Differences In The Products?

Absolutely!! The unfortunate fact that most mats are black must not lead to a sense of indifference regarding product selection. Wearwell takes great pride in the design and materials we use to create a different experience for the end user from one product type to the next. Take a close look at the layout in this catalog of our Diamond-Plate and Tile-Top products for examples of how products differ dramatically in performance despite a similar appearance.



Visit us online at www.wearwell.com for more information about Ergonomic Mats and Flooring.





Rejuvenator® Connect No. 502



10 Year Resilience Warranty | Extremely Comfortable | Outlasts Plastics & Rubber | UV & Ozone Resistant | Will Not Crush Down

Rejuvenator® is the ultimate ergonomic floor in terms of comfort and construction. Large modular tiles interlock on all four sides to customize on-site virtually any flooring configuration. Interlocking ends and centers are also available to quickly and easily fabricate long runners. These runner components have built in borders that eliminate the need for separate edging and reduces costs and installation time.

- » Exceptional comfort
- » Customize to fit any floor size or configuration including runners
- » Interlocking System prevents separation
- » Easily replace single pieces or sections as needed to reduce costs
- » Virtually indestructible

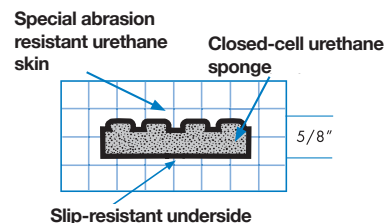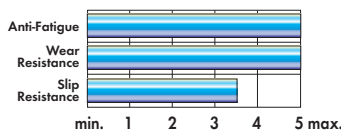

SPECIFICATIONS AND TESTING


Compound	Urethane
Edges	Optional 2" x 39" ramps in black or yellow
Flammability	MVSS 302: "A" Rating per MVSS 302
Coefficient of Friction	ASTM F1677: Dry: .75 Wet: .28
Tabor Abrasion	Fed. Std. 191: < 1% lost @ 1,000 cycles
Temperature Range	ASTM D 1056: -50 to 250 degrees Fahrenheit
Compression Set Under Constant Deflection, 25% (Suffix B), 72%	ASTM D 395: 30 minutes – 5.67, 24 hours – 1.42
Warranty	10 years

Urethane is #1 In:


1. Resilience
2. Comfort
3. Long Term Value

Rejuvenator® Connect comes in a variety of sizes and configurations for a clean, consistent look in **ALL** areas of your facility!

NEW! for Unique Work Areas or Entire Floors

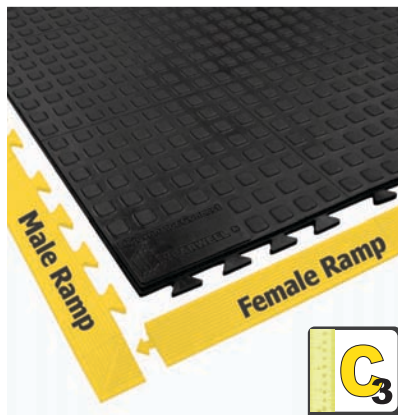

3' x 3' tiles that connect on all sides to create an exceptional ergonomic floor that can be fully customized to any shape or configuration. Optional 2" wide bevels increase safety.

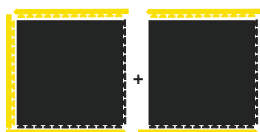

A simple 2 mat configuration.



STOCK ITEMS

Part Number	Description	Size
502.58x3x3BK	Tile	3' x 3'
502.58x2x39M	Male Ramp	2" x 39"
502.58x2x39F	Female Ramp	2" x 39"

Edging is available in Black (BK) or Yellow (YL). Please specify when ordering.

NEW! for Aisles that Require Long Lengths



2' x 5' and 3' x 5' sizes are available in Ends and Centers to create long runs of ergonomic matting. These mats have molded in ramps which reduce installation time and costs.



End Mat w/ Male Connectors (EMBK)


Center Mat (CBK)

End Mat w/ Female Connectors (EFBK)

STOCK ITEMS

Part Number	Description	Size
502.58x2x5CBK	Center Mat	2' x 5'
502.58x2x5EFBK	End Mat w/ Female Connectors	2' x 5'
502.58x2x5EMBK	End Mat w/ Male Connectors	2' x 5'
502.58x3x5CBK	Center Mat	3' x 5'
502.58x3x5EFBK	End Mat w/ Female Connectors	3' x 5'
502.58x3x5EMBK	End Mat w/ Male Connectors	3' x 5'

NEW! for Single Workstations

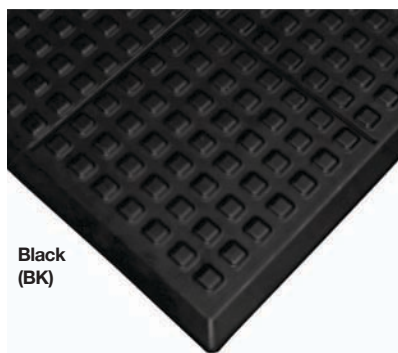

2' x 5' and 3' x 5' single workstation mats with the same surface design as the available runners and interlocking 3' x 3' tiles give your facility a clean and consistent look with the same comfortable product throughout.

2' x 3'

2' x 5'

3' x 5'



STOCK ITEMS

Part Number	Description	Size
502.58x2x3BK	Single Mat	2' x 3'
502.58x2x5BK	Single Mat	2' x 5'
502.58x3x5BK	Single Mat	3' x 5'



ErgoDeck®


Ergonomic Interlocking Tiles that Create a Floor Above a Floor.

A comfortable, **ergonomic floor** that will withstand heavy use. The patented LockSafe® Positive Interlocking System delivers secure connections. Perfect for lean manufacturing, tiles can be unlocked and repositioned as work centers change to fit customer needs.

The optional 6" side safety ramps and corners have countersunk holes for semi-permanent installation. Available in a solid and drainage version and also two comfort levels - **original** for heavy use and cart traffic and **SOFT** for greater worker comfort.



- » Exceptional comfort in wet or dry applications
- » Customize in 3" increments to fit any area or configuration
- » Positive Interlocking System prevents separation
- » Easily replace single pieces or sections as needed to reduce costs
- » **100% Silicone Free** PVC tiles provide maximum durability

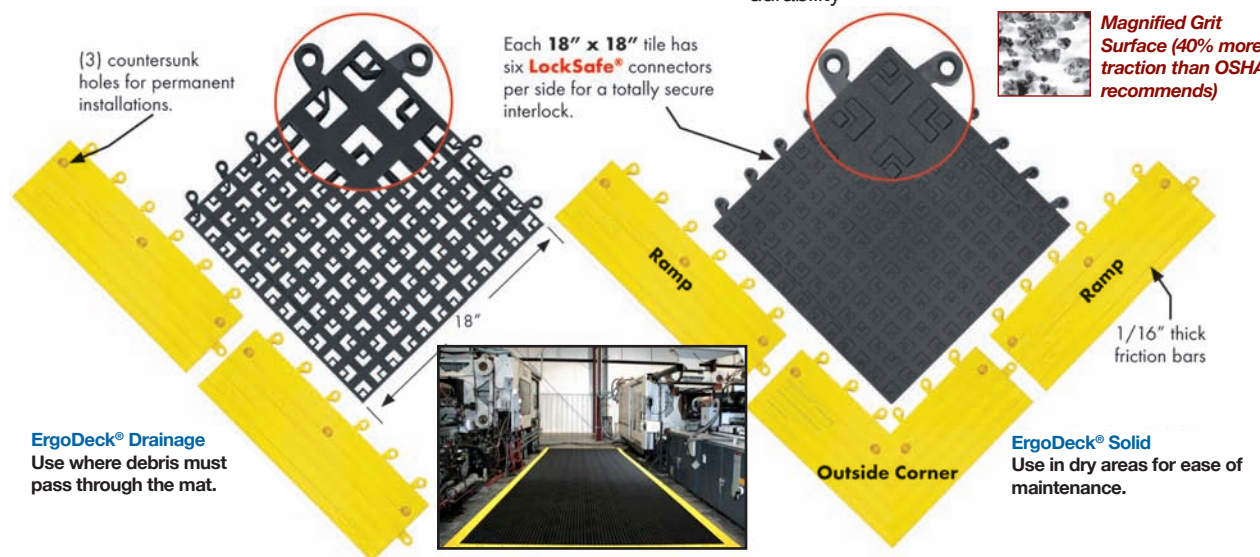

ERGODECK® PRODUCT NAME	PRODUCT NO.	WET AREAS	SLIPPERY FLUIDS	DRY AREAS	OVERSPRAY	HEAVY CARTS	EXTRA COMFORT
Original Open	560	●		●		●	
Original Open w/ GritWorks!®	561	●	●			●	
Original Solid	562			●		●	
Original Solid w/ GritWorks!®	563	●	●		●	●	
SOFT Open	564	●		●			●
NEW SOFT Open w/ GritWorks!®	565	●	●				●
SOFT Solid	566			●			●
NEW SOFT Solid w/ GritWorks!®	567	●	●		●		●

SPECIFICATIONS AND TESTING


Compound	100% PVC compound
Edges	6" x 18" Ramps with countersunk holes for semi-permanent installations
Flammability	MVSS 302: "A" Rating
Tabor Abrasion	ASTM D3884: < 1% loss
Temperature Range	ASTM D1056: 0 to 120°F
Coefficient of Friction	ASTM F1677: No. 560/562/564/566: Dry - .65, Wet - .42, No. 561/563/565/567: Dry - 1.1, Wet - .62
Warranty	3 years



NEW! ErgoDeck® Original Custom Colors

Program Guidelines

Blue Solid is now in stock! For all others, minimum Order Quantity of 50 Cases per Part Number. Ramps and Corners also available in colors. Call for minimums. Lead time is 4-6 weeks.

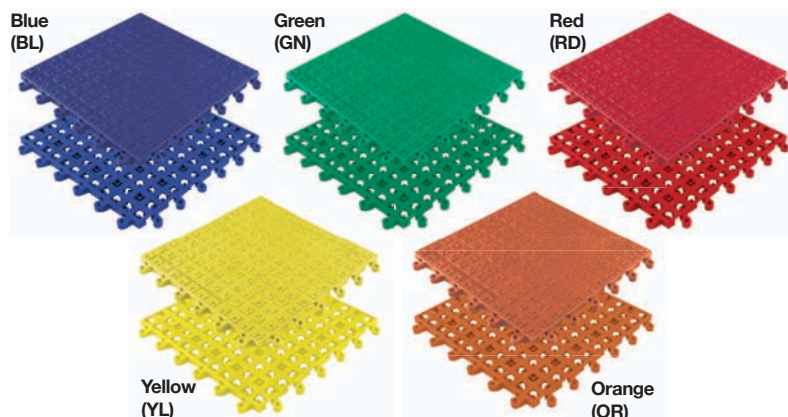

ErgoDeck® WHITE

The solution for paint shops, inspection areas and other environments where maximum visibility is critical.



ErgoDeck® WHITE floor tiles are **totally Silicone free and designed for paint and finish applications**, where maximum light is desired for inspection. The extremely light color of ErgoDeck® WHITE helps to reflect light, revealing blemishes in the final finish.


ErgoDeck® WHITE is a **SOFTER** durometer compound for increased worker comfort and productivity.

Available in TWO Surface Designs:


- 1. SOFT Open** - for areas with vertical airflow
- 2. SOFT Solid** - where airflow is not a consideration

ErgoDeck® Tiles Information


Original & Original w/ Grit

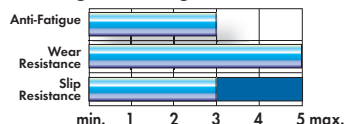

SOFT & SOFT w/ Grit

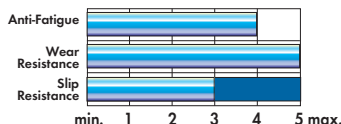

Optional edging

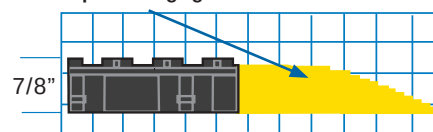

Mats with edging or unique configurations are available in 3" increments. Some mats may require several sections. Please call for pricing.

ErgoDeck® Original Sizes

STOCK ITEMS

Part Number	Color	Description	Size
560.78x18x18BK-CS10	Black	Drainage, Case of 10	18" x 18"
562.78x18x18BL-CS10	Blue	Solid, Case of 10	18" x 18"
561.78x18x18BK-CS10	Black	Drainage w/ Grit, Case of 10	18" x 18"
562.78x18x18BK-CS10	Black	Solid, Case of 10	18" x 18"
563.78x18x18BK-CS10	Black	Solid w/ Grit, Case of 10	18" x 18"

NON-STOCK ITEMS

Part Number	Color	Description	Size
560.78x18x18BL-CS10	Blue	Drainage, Case of 10	18" x 18"
560.78x18x18GN-CS10	Green	Drainage, Case of 10	18" x 18"
560.78x18x18OR-CS10	Orange	Drainage, Case of 10	18" x 18"
560.78x18x18RD-CS10	Red	Drainage, Case of 10	18" x 18"
560.78x18x18YL-CS10	Yellow	Drainage, Case of 10	18" x 18"
562.78x18x18GN-CS10	Green	Solid, Case of 10	18" x 18"
562.78x18x18OR-CS10	Orange	Solid, Case of 10	18" x 18"
562.78x18x18RD-CS10	Red	Solid, Case of 10	18" x 18"
562.78x18x18YL-CS10	Yellow	Solid, Case of 10	18" x 18"

ErgoDeck® Original Edging

STOCK ITEMS

Part Number	Description	Size
560.78x6x15x15-CS4	Outside Corner, Case of 4	6" x 15" x 15"
560.78x6x18-CS10	Ramps, Case of 10	6" x 18"

NON-STOCK ITEMS

Part Number	Description	Size
560.78x6x15x15	Outside Corner, Single	6" x 15" x 15"
560.78x6x18	Ramp, Single	6" x 18"
560.78x6x9x9	Inside Corner, Single	6" x 9" x 9"

Ramps, Inside Corners and Outside Corners are available in Black (BK) or Yellow (YL). Please specify when ordering.

ErgoDeck® SOFT Sizes

STOCK ITEMS

Part Number	Color	Description	Size
564.78x18x18CH-CS10	Charcoal	Drainage, Case of 10	18" x 18"
564.78x18x18WH-CS10	White	Drainage, Case of 10	18" x 18"
565.75x18x18CH-CS10	Charcoal	Drainage w/ Grit, Case of 10	18" x 18"
566.78x18x18CH-CS10	Charcoal	Solid, Case of 10	18" x 18"
566.78x18x18WH-CS10	White	Solid, Case of 10	18" x 18"
567.75x18x18CH-CS10	Charcoal	Solid w/ Grit, Case of 10	18" x 18"

ErgoDeck® SOFT Edging

STOCK ITEMS

Part Number	Description	Size
564.78x6x15x15-CS4	Outside Corner, Case of 4	6" x 15" x 15"
564.78x6x18-CS10	Ramps, Case of 10	6" x 18"

NON-STOCK ITEMS

Part Number	Description	Size
564.78x6x15x15	Outside Corner, Single	6" x 15" x 15"
564.78x6x18	Ramp, Single	6" x 18"
564.78x6x9x9	Inside Corner, Single	6" x 9" x 9"

Ramps, Inside Corners and Outside Corners are available in White (WH) or Charcoal (CH). Please specify when ordering.



NEW! **F.I.T.™ Functional Interlocking Tiles**




The most versatile 12" x 12" interlocking ergonomic flooring system in the market. The patented LockSafe® connections simply snap together and configure to fit your exact workspace.

The top surface and underside of F.I.T.™ tiles are designed to allow rapid drainage of fluids. F.I.T.™ tiles stay together very well making them ideal as a liner for mobile tool storage bins that require frequent removal for cleaning purposes.

- » Exceptional comfort in Wet or Dry Applications
- » Customize in 3" increments to fit any floor size or configuration
- » Positive Interlocking System prevents separation
- » Easily replace single pieces or sections as needed to reduce costs
- » 100% Silicone Free PVC tiles

SPECIFICATIONS AND TESTING

Compound	Recycled PVC
Edges	Optional 3" wide ramps
Flammability per MVSS 302	"A" Rating
Coefficient of Friction per ASTM F 1677	No. 540/542: Dry - .81, Wet - .49 No. 541/543: Dry - 1.1, Wet - .63
Tabor Abrasion per Fed. Std. 191	< 1% lost
Warranty	1 year

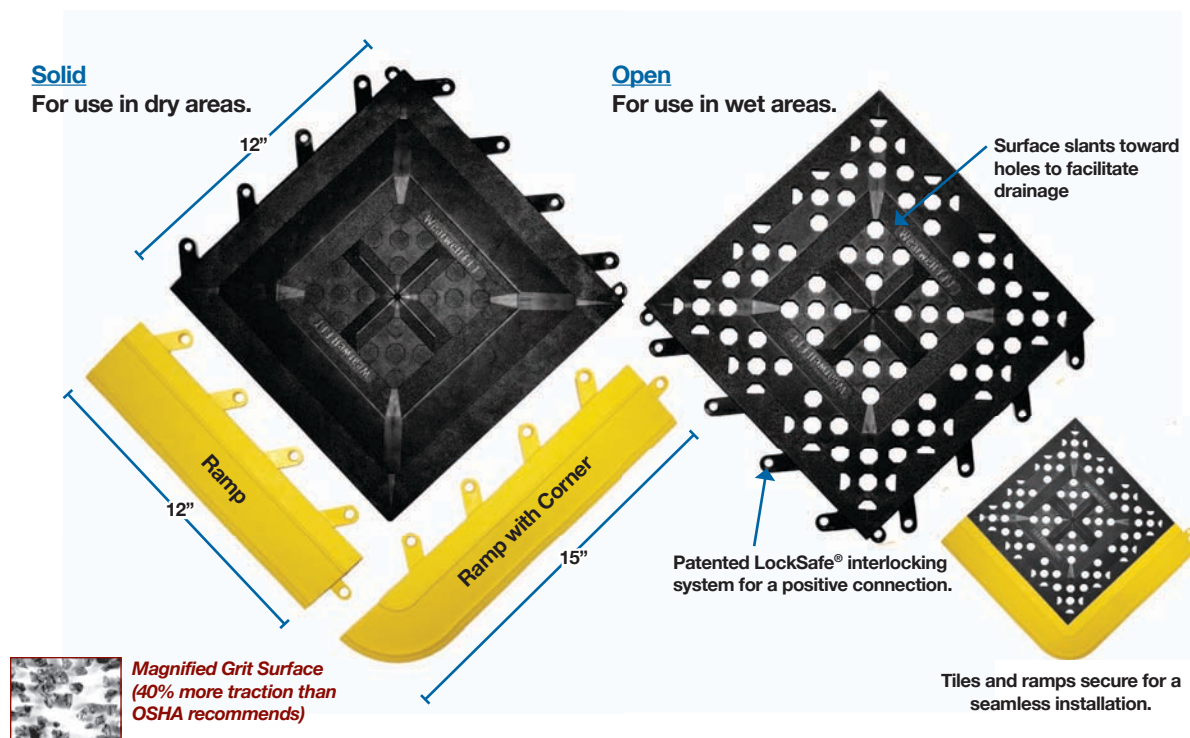

F.I.T.™ Tiles

STOCK ITEMS		
Part Number	Description	Size
540.58x12x12BK-CS20	Drainage, Case of 20	12" x 12"
541.58x12x12BK-CS20	Solid, Case of 20	12" x 12"
542.58x12x12BK-CS20	Drainage w/ Grit, Case of 20	12" x 12"
543.58x12x12BK-CS20	Solid w/ Grit, Case of 20	12" x 12"

F.I.T.™ Edging

STOCK ITEMS			NON-STOCK ITEMS		
Part Number	Description	Size	Part Number	Description	Size
540.58x3x12-CS20	Ramp, Case of 20	3" x 12"	540.58x3x12	Single Ramp	3" x 12"
540.58x3x15-CS4	Ramp w/ Corner, Case of 4	3" x 15"	540.58x3x15	Single Ramp w/ Corner	3" x 15"

Ramps and Ramps w/ Corners are available in Black (BK) or Yellow (YL). Please specify when ordering.



Diamond-Plate Matting

The Diamond Plate pattern is, without question, **the most popular surface design in ergonomic matting** and for very good reasons. Diamond Plate is easy to clean and tough! It provides good **traction to help prevent slips and falls**. And it looks really cool!

But, are all ergonomic mats with a Diamond Plate pattern on the surface the same? **ABSOLUTELY NOT!** As a matter of fact, what differentiates these products is what you can't see – **THE SPONGE MATERIAL**.

Beneath that rugged Diamond Plate surface lies the true heart and soul of the mat – the sponge. The properties of the sponge dictate how the mat will perform in critical criteria such as:

- Overall Comfort
- Longevity In Application
- Ability To Customize
- Mat Movement On Polished Floors
- Contribution To Green Initiatives
- Price Of The Mat

Wearwell introduced the first Diamond Plate mat to the market way back in 1989. And Wearwell has been the Innovator in Diamond Plate matting ever since. Today, Wearwell offers more sponge alternatives than any competitor, including:

1. **Nitricell®**: #1 in market share and customer satisfaction for over 20 years, this **Nitrile** rubber enhanced sponge is the standard by which all others are measured – and fall short!
2. **Flex-Link™**: A simple PVC sponge, designed to provide an alternative similar to what most competitors offer, at a similar price point.
3. **SMART®**: A Rebound Urethane sponge that combines comfort, ecology and economy in a unique product available only from Wearwell.

So don't be fooled by all the "Look Alike" Diamond Plate products out there. Choose from Wearwell's unparalleled range of sponge alternatives to provide you the perfect Diamond Plate product for your needs.



Black/Yellow
(BYL)



Black (BK)



Gray (GY)






Black/Chevron
(CHV)



BEST

BETTER

GOOD

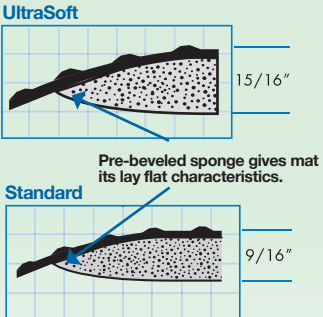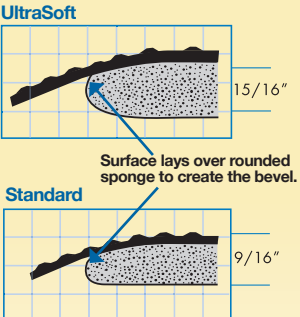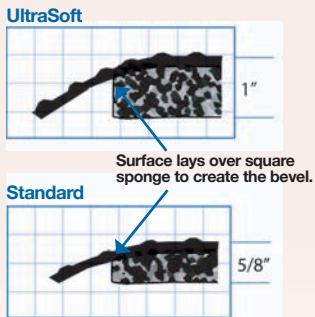	SPONGECOTE®	SELECT	SMART®
Products	UltraSoft Diamond-Plate No. 414, Diamond-Plate SpongeCote® No. 415 and Diamond-Plate with GritWorks!® No. 416	Diamond-Plate Select No. 495	SMART® Diamond-Plate No. 497
Sponge base	Nitrilell®—a premium Nitrile rubber composite sponge formulated for crush-resistance and extended performance.	Dense, closed cell PVC sponge designed with similar performance characteristics to others on the market.	A recycled urethane composite sponge, less durable overall, but truly designed for budget or environmentally conscious operations.
Resilience	Best in its class. It continues to bounce back and provides long-term employee satisfaction.	Good resilience, good recovery.	Good rebound, proven for use in many commercial applications as a flooring system underlayment.
Standing Area	Extends to within 1" of the edge of the mat providing more standing room.	The sponge extends to within 2" - 3" of each edge.	The sponge extends to within 2" - 3" of each edge.
Bevel	Sponge offers built-in trip prevention bevel on standard sizes.	Sponge features rounded corners on stock sizes.	Sponge edges are not beveled.
Warranty	4 years	3 years	1 year
Thicknesses	Available in two thicknesses. 	Available in two thicknesses. 	Available in two thicknesses. 
Colors	Black, Black/Yellow, Gray and Black/Chevron Note: Diamond-Plate w/ GritWorks!® is only available in Black.	Black, Black/Yellow, Gray and Black/Chevron	Black, Black/Yellow, Gray and Black/Chevron
Customization, Application and GREEN Rating	  	  	  
TESTING DATA			
Flammability (surface)	MVSS 302: "A" Rating	MVSS 302: "A" Rating	MVSS 302: "A" Rating
Flammability (sponge)	MIL-P12420C: Burned for < 5 seconds	DOC FF1-70: Flame Retardant Rating	HMIS = 1 Flash Point: >400°F Open Cup, NFPA = 1
Coefficient of Friction per ASTM F1677	No. 414 & No. 415: Dry: .68 No. 416: Dry: 1.10, Wet: 1.0	Dry: .68	Dry: .68
Tabor Abrasion	Fed. Std. 191: < 1% lost @ 1,000 cycles	Fed. Std. 191: < 1% lost @ 1,000 cycles	Fed. Std. 191: < 1% lost @ 1,000 cycles

We Frequently Customize SpongeCote® Products!

If you have a "U" or "L" shaped work area we can make a mat to fit it. If your space requires a circular, oval or triangle mat, simply give us a template. If you have cut-outs in odd places, we can accommodate that too. **The sky is the limit!**

Some mats may require two or more sections depending on size, weight and shipping requirements. Square edges are also available.



BEST

UltraSoft Diamond-Plate No. 414, Diamond-Plate SpongeCote® No. 415 and Diamond-Plate w/ GritWorks!® No. 416

Outperforms other Diamond-Plate sponge products. Our pre-beveled edge assures a perfect lays flat quality. We also extend the sponge within 1" of the mat's surface for 20% more standing area than others in the market. **2X** the resilience and **3X** the life of look-alikes!

Black (BK) and Black w/ Yellow Border Mats (BYL)

STOCK ITEMS

No. 414	No. 415	
Part Number	Part Number	Size
414.1516x2x3	415.916x2x3	2' x 3'
414.1516x3x5	415.916x3x5	3' x 5'
414.1516x2x75	415.916x2x75	2' x 75'
414.1516x3x75	415.916x3x75	3' x 75'
414.1516x4x75	415.916x4x75	4' x 75'

NON-STOCK ITEMS

Part Number	Part Number	Size
414.1516x5x75	415.916x5x75	5' x 75'
414.1516x6x75	415.916x6x75	6' x 75'

3', 4', 5' and 6' Cut up to 75' are also available. Specify Black (BK) or Black/Yellow (BYL) when ordering.

Gray (GY) and Black w/ Chevron Border Mats (CHV)

NON-STOCK ITEMS

No. 414	No. 415	
Part Number	Part Number	Size
414.1516x2x3	415.916x2x3	2' x 3'
414.1516x3x5	415.916x3x5	3' x 5'
414.1516x2x75	415.916x2x75	2' x 75'
414.1516x3x75	415.916x3x75	3' x 75'
414.1516x4x75	415.916x4x75	4' x 75'

3' and 4' Cut up to 75' are also available. Specify Black/Chevron (CHV) or Gray (GY) when ordering.

w/ GritWorks!®

STOCK ITEMS

15/16" Thick	9/16" Thick	
Part Number	Part Number	Size
416.1516x2x3	416.916x2x3	2' x 3'
416.1516x3x5	416.916x3x5	3' x 5'

NON-STOCK ITEMS

Part Number	Part Number	Size
416.1516x2x75	416.916x2x75	2' x 75'
416.1516x3x75	416.916x3x75	3' x 75'
416.1516x4x75	416.916x4x75	4' x 75'

2', 3' and 4' Cut up to 75' are also available.



Magnified Grit Surface
(40% more traction than OSHA recommends)

BETTER

Diamond-Plate Select No. 495

High-tech industrial surface withstands heavy use while its specially formulated blown-vinyl Flex-Link™ sponge base lessens standing worker fatigue.

STOCK ITEMS

15/16" Thick	9/16" Thick	
Part Number	Part Number	Size
495.1516x2x3	495.916x2x3	2' x 3'
495.1516x3x5	495.916x3x5	3' x 5'

NON-STOCK ITEMS

Part Number	Part Number	Size
495.1516x2x75	495.916x2x75	2' x 75'
495.1516x3x75	495.916x3x75	3' x 75'
495.1516x4x75	495.916x4x75	4' x 75'

2', 3' and 4' Cut up to 75' are available. Please specify color: Black (BK) or Black/Yellow (BYL) when ordering.

GOOD

NEW!

SMART® Diamond-Plate No. 497

An economical and Green solution for preventing worker fatigue. Comfort and resilience that surpasses traditional sponges.

STOCK ITEMS

1" Thick	5/8" Thick	
Part Number	Part Number	Size
497.1x2x3	497.58x2x3	2' x 3'
497.1x3x5	497.58x3x5	3' x 5'

NON-STOCK ITEMS


1" Thick	5/8" Thick	
Part Number	Part Number	Size
497.1x2x75	497.58x2x75	2' x 75'
497.1x3x75	497.58x3x75	3' x 75'
497.1x4x75	497.58x4x75	4' x 75'

2', 3' and 4' Cut up to 75' are available. Please specify color: Black (BK) or Black/Yellow (BYL) when ordering.



Diamond-Plate Mats, though most common in industrial or heavily trafficked areas, are also popular in lab environments due to ease of maintenance, resistant surface, overall comfort and performance.

SR (Slip-Resistant) Diamond-Plate No. 418

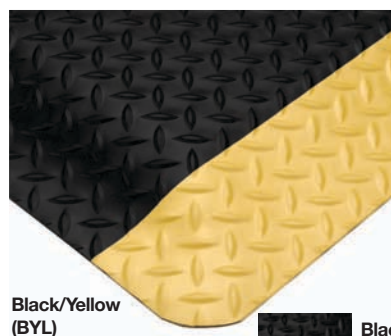


Black/Yellow (BYL)



Black (BK)


Vinyl surface

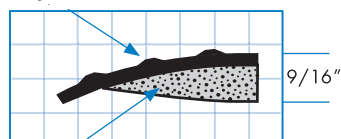

100% Natural rubber sponge base

The unique natural rubber sponge “grips” highly polished floors to minimize mat movement while maintaining comfort and durability.

- » Chemical and abrasion resistant diamond embossed surface
- » 100% rubber sponge base reduces mat movement on highly polished floors
- » Long-term performance and comfort

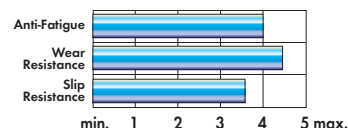

SPECIFICATIONS AND TESTING

Compound	100% natural rubber base and Vinyl Surface
Edges	Safety beveled
Flammability	MVSS 302 “A” Rating
Coefficient of Friction	ASTM F1677: Dry: .68
Tabor Abrasion	Fed Std. 191: 1% lost @ 1,000 cycles
Warranty	3 years

STOCK ITEMS

Part Number	Size
418.916x2x3	2' x 3'
418.916x3x5	3' x 5'

NON-STOCK ITEMS

Part Number	Size
418.916x2x75	2' x 75'
418.916x3x75	3' x 75'
418.916x4x75	4' x 75'

2', 3' and 4' Cut up to 75' are also available. Specify Black (BK) or Black/Yellow (BYL).


WeldSafe® No. 447



Black (BK)


Specially compounded rubber surface outperforms all other anti-fatigue matting in spot-welding applications and repels sparks and hot metal shards. The Nitricell® sponge base offers unparalleled resilience and comfort.

- » 1/8" Thick, heat resistant rubber surface has a melt point of over 500°F
- » Leather embossed texture on surface
- » Unparalleled performance and comfort

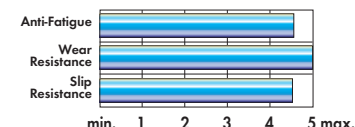

UltraSoft


Thicker rubber surface

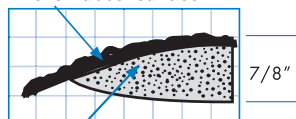

Double-thick Nitricell® sponge

Standard

Thicker rubber surface

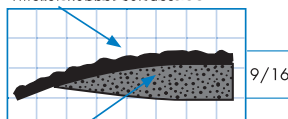

Nitricell® sponge

SPECIFICATIONS AND TESTING

Compound	100% Natural rubber
Edges	Safety beveled
Flammability (surface)	MVSS 302: “A” Rating
Coefficient of Friction	ASTM F1677: Dry: .90, Wet: .36
Tabor Abrasion	Fed. Std. 191: < 1% lost @ 1,000 cycles
Warranty	3 years

STOCK ITEMS

7/8" Thick	9/16" Thick	Size
Part Number	Part Number	Size
447.78x2x3BK	447.916x2x3BK	2' x 3'
447.78x3x5BK	447.916x3x5BK	3' x 5'

NON-STOCK ITEMS


7/8" Thick	9/16" Thick	Size
Part Number	Part Number	Size
447.78x2x75BK	447.916x2x75BK	2' x 75'
447.78x3x75BK	447.916x3x75BK	3' x 75'
447.78x4x75BK	447.916x4x75BK	4' x 75'

2', 3' and 4' Cut up to 75' are available.




NEW!

LightWorks Inspection Mat No. 438

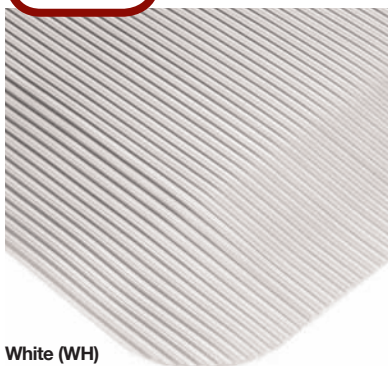


White (WH)

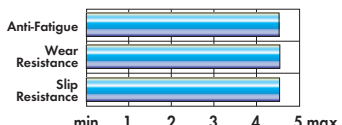

Designed for applications requiring quality assurance through visual inspection, this mat is ideal for painting and finishing areas. The flexible vinyl surface and Nitricell® sponge base provide durability and comfort.

- » Reflects and maximizes lighting
- » Enhances quality assurance
- » Abrasion and chemical resistant
- » **100% Silicone-Free**



SPECIFICATIONS AND TESTING

Compound	Vinyl surface bonded to Nitricell® sponge
Edges	Safety beveled
Flammability	MVSS 302 "A" Rating.
Coefficient of Friction	ASTM F1677: Dry: .84, Wet: .77
Warranty	

STOCK ITEMS

Part Number	Size
438.12x3x5WH	3' x 5'
438.12x3x50WH	3' x 50'

NON-STOCK ITEM


Part Number	Size
438.12x3CUTWH	3' Cut up to 50'

Comfort2Go™ No. 518

Kneel. Stand. Go.




Black (BK)

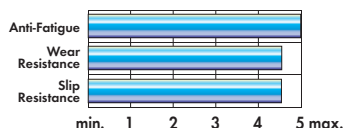

Designed for employees who move from place to place to work. Flexible vinyl surface provides outstanding durability and abrasion resistance while its super-thick Nitrile rubber composite sponge base lessens overall fatigue.

- » Portable and versatile
- » Built in handle for ease of carrying and storing
- » Comfort for standing or kneeling



STOCK ITEM




Part Number	Size
518.78x17x30BK	17" x 30"

SPECIFICATIONS AND TESTING

Compound	100% vinyl surface bonded to a Nitricell® sponge base
Flammability (surface)	MVSS 302: "A" Rating
Flammability (sponge)	MIL-P1240C: Burned for < 5 seconds
Coefficient of Friction	ASTM F1677: Dry: .68
Tabor Abrasion	Federal Standard 191
Warranty	3 years



WorkSafe® No. 477

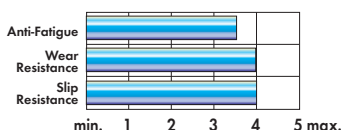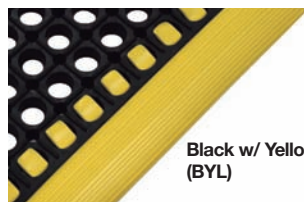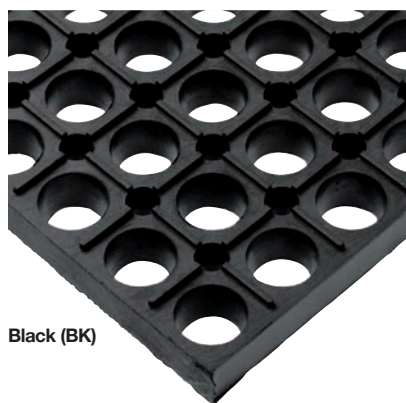


Available as single workstation mats or can be attached together with connector strips to form virtually any size or configuration.

- » Versatile configuration
- » Wide array of connectable sizes



Connector to create long runners.

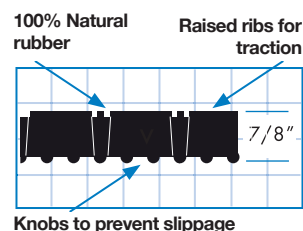

SPECIFICATIONS AND TESTING

Compound	Natural rubber compound
Edges	Optional unattached safety edging
Flammability	MVSS 302: "A" Rating
Coefficient of Friction	ASTM F1677: Dry: > .90, Wet: .36
Durometer	ASTM D2240: 55
Warranty	1 year

STOCK ITEMS



Part Number	Color	Size
477.78x18x24GRBK	Black	18" x 24"
477.78x18x48GRBK	Black	18" x 48"
477.78x28x40	Black/Orange or Black/Yellow	28" x 40"
477.78x2x3GRBK	Black	2' x 3'
477.78x3x30GRBK	Black	3' x 30"
477.78x3x4GRBK	Black	3' x 4'
477.78x3x5GRBK	Black	3' x 5'
477.78x40x124	Black/Orange or Black/Yellow	40" x 124"
477.78x40x52	Black/Orange or Black/Yellow	40" x 52"
477.78x40x64	Black/Orange or Black/Yellow	40" x 64"

CONNECTOR


Part Number
Connector.WSH.BK

We Frequently Customize!

Mats with Edging, Custom widths and unique configurations are available. Some mats may require several sections. Please call for pricing.

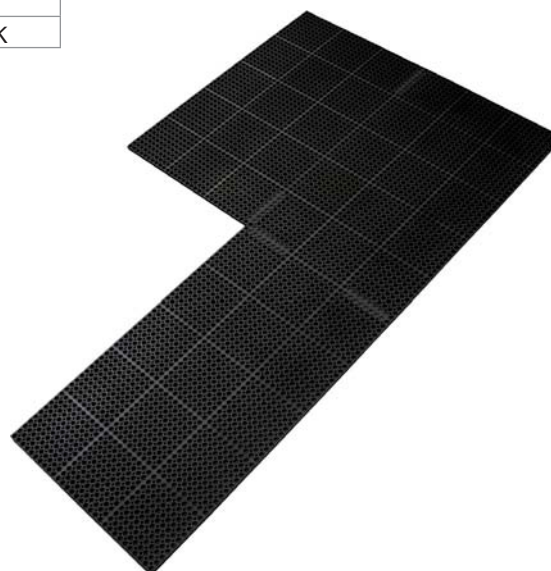
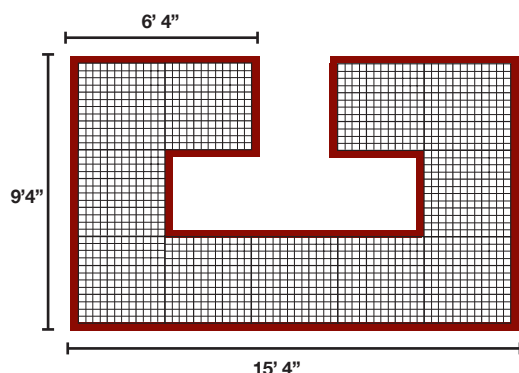


24/Seven® Mats

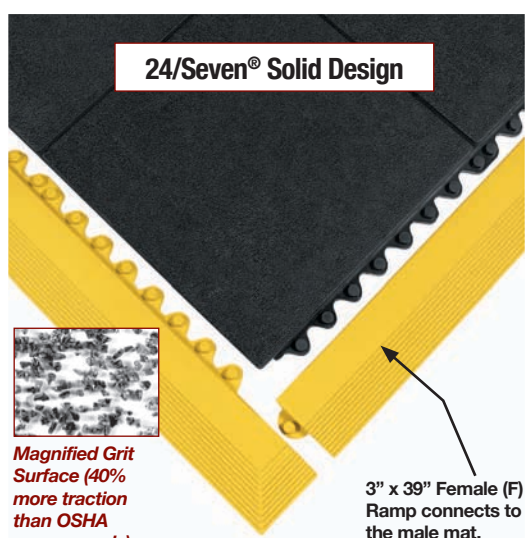

CFR and NBR (Drainage and Solid) versions available with GritWorks!®.

- » These rubber 3' x 3' inter-connecting anti-fatigue mats keep workers productive and comfortable.
- » Drainage mats feature large holes to allow fluids and debris to flow through freely.
- » Solid mats feature an easy to clean textured surface for use in mostly dry areas.
- » The hidden interlocking system connects on all four sides to quickly cover large areas.
- » Ability to replace single tiles saves money and down time.
- » Available in 3 different rubber compounds.

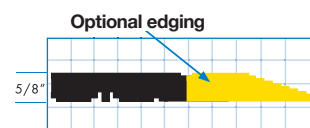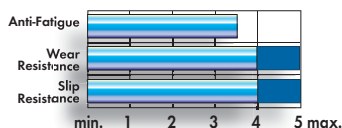

Areas w/ Water or Dry Debris

- » Use the Grease Resistant 24/Seven® Solid (No. 570) or Drainage (No. 572)



Areas with Mineral Oil-based Cutting Fluids

- » Use the **CFR** compound.
- » For additional traction use the **CFR** Gritworks!® Solid No. 574 (**CFR**) or Drainage No. 576 (**CFR**)





Areas with Petroleum-based Fluids

- » These include petrochemicals such as Hydrocarbons, Naphthenes, Paraffins and Petroleum distillates
- » Use our **100% Nitrile (NBR)** compound.
- » For additional traction use the **Nitrile** Gritworks!® Solid No. 574 (**NBR**) or Drainage No. 576 (**NBR**)



We Frequently Customize!

Mats with ramps available. Please call for pricing. Custom widths or unique configurations are available in 12" increments. Some mats may require several sections. Please call for pricing.

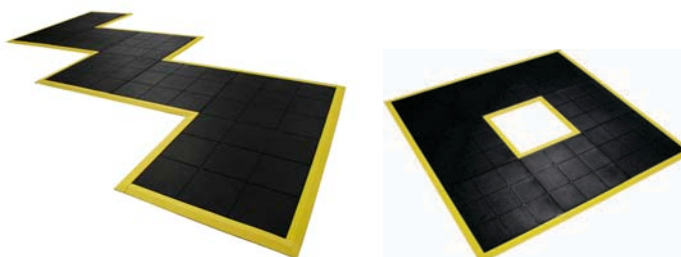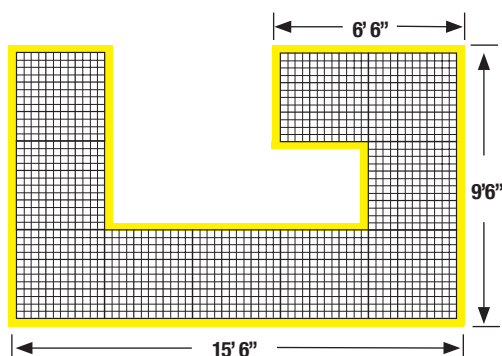

24/Seven® Mats

SPECIFICATIONS AND TESTING

Compounds	1. CFR – an engineered compound designed to resist the effects of mineral oil based cutting fluid 2. GR – Natural rubber compound 3. NBR – 100% Nitrile
Edges	
Flammability	MVSS 302: “A” Rating
Coefficient of Friction	ASTM F1677: Dry: .78, Dry with GritWorks!®: 1.10, Wet: .68 Wet with GritWorks!®: 1.0
Tabor Abrasion	Fed. Std. 191: < 1% lost @ 1,000 cycles
Durometer	ASTM D2240: 55 to 60
Warranty	1 year

STOCK SIZES - NO GRIT			STOCK SIZES - W/ GRIT		
Part Number	Description	Size	Part Number	Description	Size
570.58x3x3BK	Mat, Solid	3' x 3'	574.58x3x3BK	Mat, Solid w/ Grit	3' x 3'
572.58x3x3BK	Mat, Open	3' x 3'	576.58x3x3BK	Mat, Open w /Grit	3' x 3'
572.EDGINGM	Male Edging	3" x 39"			
572.EDGINGF	Female Edging	3" x 39"			

No. 570 and No. 572 are available in the following formulations: **CFR**, **NBR** and **GR**. Please specify when ordering. No. 574 and No. 576 are available in the following formulations: **NBR** and **CFR**. Please specify when ordering.
Ramps are available in the following colors in all formulations: Black (BK) or Yellow (YL). Please specify color and formulation when ordering.
Remember: GR Mats go with GR Ramps, **CFR** Mats go with **CFR** Ramps and **NBR** Mats go with **NBR** Ramps.



Simple. Modular. Easy to Use.

Industrial WorkSafe® No. 479/Industrial GritWorks!® No. 487




Available in Black/Orange (BOR) or Black/Yellow (BYL)



This durable drainage mat has a thick, extra buoyant design for high performance and long-term comfort. The bright safety borders define workstations and a textured surface adds traction.

- » Cutting Fluid Resistant
- » Bright, molded in safety borders.
- » Long-term comfort and value
- » GritWorks!® version increases traction by 40%

Textured Surface CFR Formulation

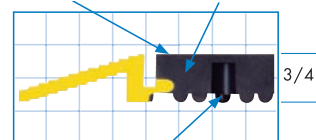

Knobs to prevent slippage

SPECIFICATIONS AND TESTING

Compound	CFR rubber
Edges	Molded in Ramps
Flammability	"A" Rating per MVSS 302
Coefficient of Friction	ASTM F1677: No. 479: Dry: .78, Wet: .68 ASTM F1677: No. 487: Dry: 1.1, Wet: 1.1
Durometer per ASTM D2240	No. 479: 55 No. 480: 60
Tabor Abrasion	Fed. Std. 191: < 1% lost @ 1,000 cycles
Warranty	1 year


STOCK ITEMS

No. 479	w/ GritWorks!® No. 487	
Part Number	Part Number	Size
479.34x2x3	487.34x2x3	2' x 3'
479.34x3x4	487.34x3x4	3' x 4'
479.34x3x5	487.34x3x5	3' x 5'
479.34x3x9.8	487.34x3x9.8	3' x 9' 8"


Available colors: Black/Yellow (BYL) or Black/Orange (BOR). Specify when ordering.




Magnified Grit Surface
(40% more traction than OSHA recommends)

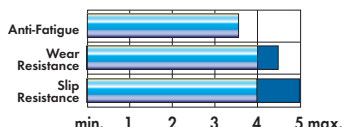


Rugged support for industrial work.

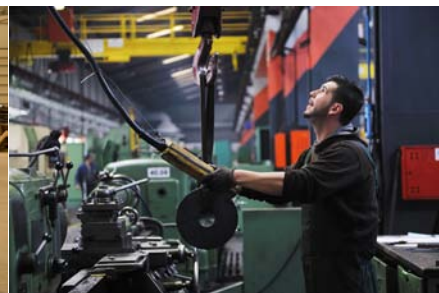

WorkRite No. 474


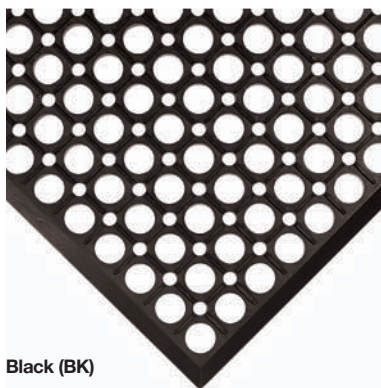


Black (BK)

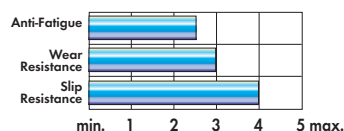

A popular and economical general-purpose drainage mat. WorkRite is ideal for wet commercial or industrial areas.

- » Lightweight design for frequent cleanings
- » Suitable for wet, non-caustic agents
- » Molded-in safety edges

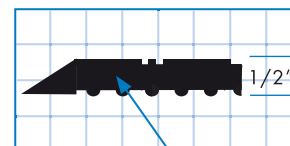

100% Natural rubber

SPECIFICATIONS AND TESTING

Compound	Natural rubber compound
Edges	Integral molded safety edges
Flammability	MVSS 302: "A" Rating. It has a flame spread of < 1.6.
Coefficient of Friction	ASTM F1677: Dry: > .90, Wet: .34
Durometer	ASTM D2240: 55 to 60
Warranty	1 year



STOCK ITEMS

Part Number	Size
474.12x3x5BK	3' x 5'
474.12x3x10BK	3' x 10'
474.12x3x20BK	3' x 20'

Modular Diamond-Plate No. 470



Black (BK)

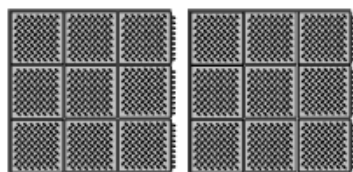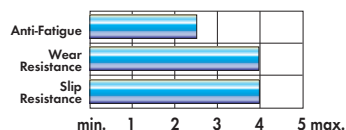


Defined by its lightweight modular design, this anti-fatigue mat is designed for comfort and ease of use. Choose natural rubber (GR) for dry areas and exposure to water or **NBR** for areas with petrochemicals.

- » Low profile
- » Hidden interlock
- » Safety rounded edges



Diamond-Plate surface



Knobs to prevent slippage

SPECIFICATIONS AND TESTING

Compound	Natural rubber or 50% Nitrile Rubber
Edges	Safety rounded
Flammability	MVSS 302: "A" Rating
Coefficient of Friction per ASTM F1677	Dry: > .84, Wet: .78, Oily: .34
Durometer	ASTM D2240: 55
Warranty	1 year

STOCK ITEMS

Part Number	Size
470.12x3x3BK	3' x 3'


Available formulations:
Natural rubber (GR)
or Nitrile rubber (GP).
Specify when ordering.




Comfort Deck® No. 460/Grit-Top Comfort Deck® No. 461

Comprised of substantial 12" x 12" tiles, heat-sealed together to form stock or custom size mats. The high quality PVC compound is resistant to many industrial chemicals and fluids. Use at single workstations or cover a large area.


- » Custom manufactured or stock sizes
- » Permanently bonded tiles
- » High traction surface

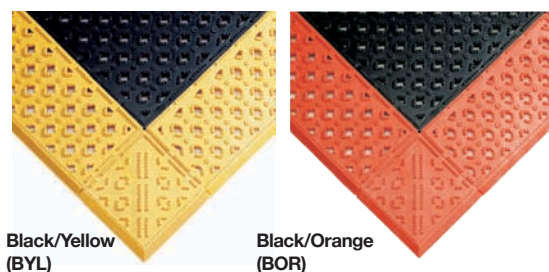

Magnified Grit Surface
(40% more traction than OSHA recommends)

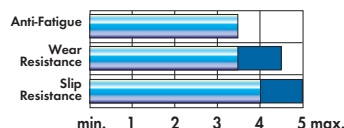

100% PVC

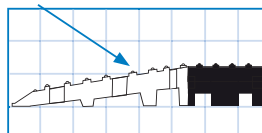

SPECIFICATIONS AND TESTING

Compound	Recycled PVC
Edges	6" ramps on Stock Size mats. Optional on Custom Sizes.
Flammability	MVSS 302: "A" Rating
Coefficient of Friction per ASTM F1677	No. 460: Dry: .68 Wet: .92, No. 461: Dry: 1.10 Wet: .90
Durometer	ASTM D2240: 65
Tabor Abrasion	Fed. Std. 191: <1% lost @ 1,000 cycles
Warranty	1 year

STOCK ITEMS

Comfort Deck® No. 460	Grit-Top Comfort Deck® No. 461	
Part Number	Part Number	Size
460.78x12x12	461.78x12x12	12" x 12" (Black Tile)
460.78x30x36	461.78x30x36	30" x 36"
460.78x30x48	461.78x30x48	30" x 48"
460.78x30x60	461.78x30x60	30" x 60"
460.78x30x72	461.78x30x72	30" x 72"
460.78x30x96	461.78x30x96	30" x 96"
460.78x42x72	461.78x42x72	42" x 72"
460.78x42x96	461.78x42x96	42" x 96"
460.78x42x120	461.78x42x120	42" x 120"
460.78x6x12	n/a	6" x 12" Bevel
460.78x6x6	n/a	6" x 6" Corner

Available colors: Black/Yellow (BYL) or Black/Orange (BOR). Only Black/Yellow (BYL) are in stock.

CUSTOM ITEMS

Comfort Deck® No. 460	Grit-Top Comfort Deck® No. 461	
Part Number	Part Number	Size
460.78CUSTOMBK	461.78CUSTOM (BK, BYL or BOR)	12" increments.

Emergency Shower and Eyewash Station Mat No. 465

Created for high visibility per ANSI recommendations with a high-traction surface design and drainage ports. The highly visible yellow borders are 6" wide. Red (RDYL) is for emergency showers and Green (GNYL) is for eyewash areas.

- » High traction surface design
- » Elevates user above hazardous overflow
- » Wide yellow borders slope for easy access
- » Conforms to ANSI Z535.1-1998 Standard



SPECIFICATIONS AND TESTING

Compound	Recycled PVC
Edges	6" ramps on Stock Size mats.
Flammability	MVSS 302: "A" Rating
Coefficient of Friction	ASTM F1677: Dry: 1.68, Wet: .92
Durometer	ASTM D2240: 65
Tabor Abrasion	Fed. Std. 191: < 1.5% lost @ 1,000 cycles
Warranty	1 year

STOCK ITEMS

Part Number	Size
465.78x30x36	30" x 36"
465.78x30x48	30" x 48"

Available Colors: Red/Yellow (RDYL) or Green/Yellow (GNYL). Please specify when ordering.

Tile-Top Matting

In laboratories, pharmacies and medical environments, the Tile-Top look reigns supreme for ergonomic matting. The marbleized appearance of these matting products is consistent with flooring commonly used in these environments. Plus, the smooth surface is desirable in applications where cleanliness is a very high priority.

However, beyond the general appearance of these products, there are many differences in construction and materials that are used in these mats that can be critically important in deciding what product is best. Not all Tile-Top mats are created equally!

First, there are different top surface options. **Wearwell offers three distinctly different surfaces:**


1. **AM:** An **Anti-Microbial** wear layer is added to a PVC surface to increase durability and reduce the possibility of organic contamination
2. **PVC:** A PVC surface that is easy to clean and relatively economical.
3. **Rubber:** SBR rubber which provides a great combination of durability and chemical resistance.

Beneath these surfaces lies the second essential element of the mat – the sponge. The properties of the sponge dictate how the mat will perform in critical criteria such as:

- Overall Comfort
- Longevity In Application
- Ability To Customize
- Mat Movement On Polished Floors
- Contribution To Green Initiatives
- Price Of The Mat

Wearwell offers more sponge alternatives than any competitor, including:




1. **Nitricell® AM:** This **Nitrile** rubber enhanced sponge is exceptionally comfortable. Additionally, an Anti-Microbial agent is added to the sponge to inhibit the growth of organic contaminants.
2. **Flex-Link™:** A simple PVC sponge, designed to provide an alternative similar to what most competitors offer, at a similar price point.
3. **SMART®:** A Rebound Urethane sponge that combines comfort, ecology and economy in a unique product available only from Wearwell.
4. **Natural Rubber:** This very durable and “grippy” material prevents the mat from moving around on highly polished floors commonly found in labs, pharmacies and medical applications.

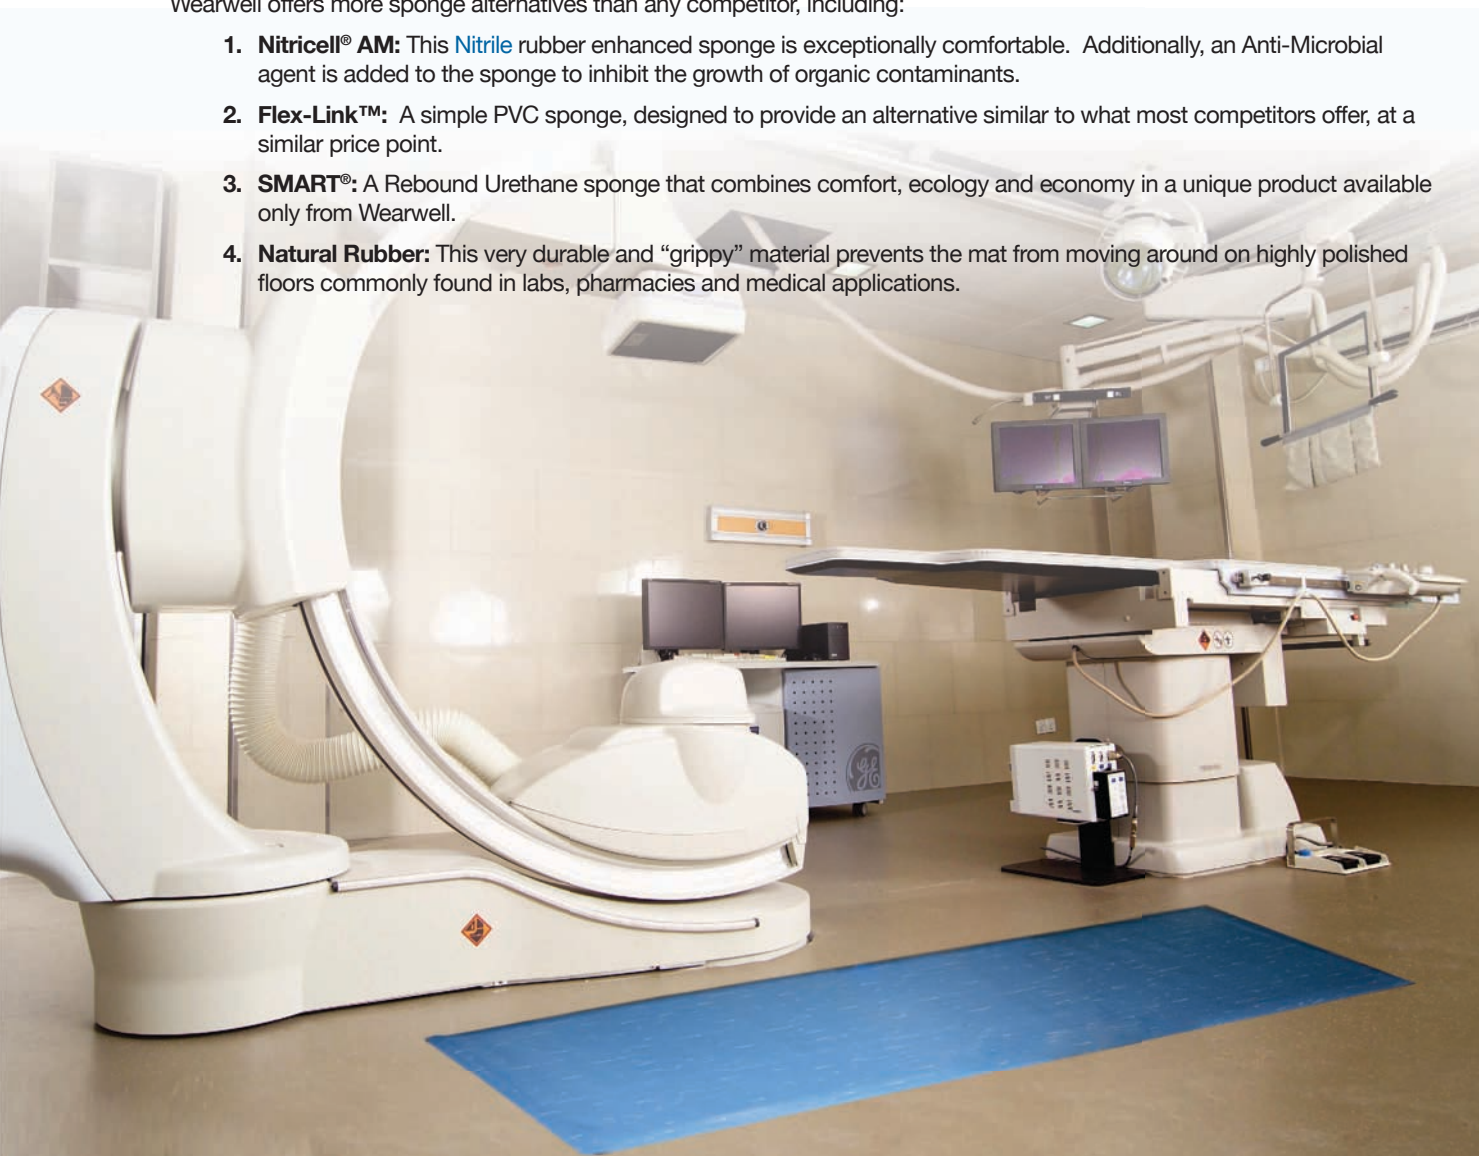

BEST

BETTER

GOOD

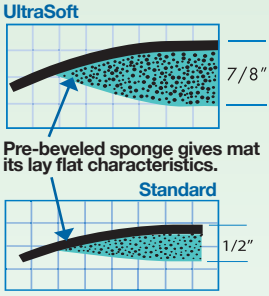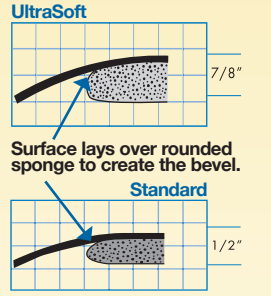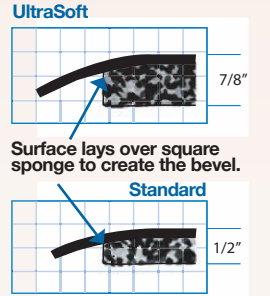	SPONGECOTE®	SELECT	SMART®
Products	UltraSoft Tile-Top AM No. 419AM, Tile-Top SpongeCote® AM No. 420AM	Tile-Top Select No. 494	SMART® Tile-Top No. 496
Sponge base	Nitricell®—a premium Nitrile rubber composite sponge formulated for crush-resistance and extended performance. 100% anti-microbial.	Flex-Link™—Dense, closed cell PVC sponge designed with similar performance characteristics to others on the market.	SMART®—A recycled urethane composite sponge, less durable overall, but truly designed budget or environmentally conscious operations.
Resilience	Best in its class. It continues to bounce back and provides long-term employee satisfaction.	Good resilience, good recovery.	Good rebound, proven for use in many commercial applications as a flooring system underlayment.
Standing Area	Extends to within 1" of the edge of the mat providing more standing room.	The sponge extends to within 2" of each edge.	The sponge extends to within 2" of each edge.
Bevel	Sponge offers built-in trip prevention bevel on standard sizes.	Sponge features rounded corners on stock sizes.	Sponge edges are not beveled.
Warranty	4 years	3 years	1 year
Thicknesses	Available in two thicknesses.  UltraSoft 7/8" Pre-beveled sponge gives mat its lay flat characteristics. Standard 1/2"	Available in two thicknesses.  UltraSoft 7/8" Surface lays over rounded sponge to create the bevel. Standard 1/2"	Available in two thicknesses.  UltraSoft 7/8" Surface lays over square sponge to create the bevel. Standard 1/2"
Customization, Application and GREEN Rating			

TESTING DATA

Flammability (surface)	MVSS 302: "A" Rating	MVSS 302: "A" Rating	MVSS 302: "A" Rating
Flammability (sponge)	MIL-P12420C Burned for < 5 seconds	MIL-P12420C Burned for 5 seconds	No data
Coefficient of Friction	No. 419: Dry: .78 No. 420: Dry: .79	ASTM F1677: Dry: .79	ASTM F1677: Dry: .79
Anti-Microbial	ASTM G21-96 (2002) Passes	ASTM G21-96 (2002) Passes	No data
Tabor Abrasion	1000g, CS-17 wheel, 1000 revs .025g lost (-.1%)	Federal Standard 191 < 1% lost @ 1000 cycles	1000g, CS-17 wheel, 1000 revs .025g lost (-.4%)



BEST

UltraSoft Tile-Top AM No. 419 and Tile-Top AM No. 420

Anti-Microbial (AM) top to bottom. The **AM Nitrile** rubber composite sponge offers maximum comfort and resilience while the AM surface delivers additional abrasion and chemical resistance.



Black (BK)



Gray (GY)



Charcoal (CH)



Blue (BL)



Brown (BN)*



Tan (TN)*



White (WH)*



Sandalwood (SA)*

*Available for No. 420 only.

STOCK ITEMS

No. 419 - 7/8"	No. 420 - 1/2"	
Part Number	Part Number	Size
419.78x2x3	420.12x2x3	2' x 3'
419.78x3x5	420.12x3x5	3' x 5'

NON-STOCK ITEMS

No. 419 - 7/8"	No. 420 - 1/2"	
Part Number	Part Number	Size
419.78x3x10	420.12x3x10	3' x 10'
419.78x2x60	420.12x2x60	2' x 60'
419.78x3x60	420.12x3x60	3' x 60'
419.78x4x60	420.12x4x60	4' x 60'

No. 419

2', 3' and 4' Cut up to 60' are available. Please specify color: Black (BK), Blue (BL), Charcoal (CH) or Gray (GY) when ordering.

No. 420

2', 3' and 4' Cut up to 60' are available. Please specify color: Black (BK), Blue (BL), Charcoal (CH), Gray (GY), Brown (BN), Sandalwood (SA), Tan (TN) or White (WH) when ordering.

BETTER

Tile-Top Select No. 494

The chemical resistant **PVC** surface and a comfortable Flex-Link™ sponge base provides an economic and ergonomic solution.




Blue (BL)



Gray (GY)



Charcoal (CH)



Black (BK)

STOCK ITEMS

7/8" Thick	1/2" Thick	
Part Number	Part Number	Size
494.78x2x3	494.12x2x3	2' x 3'
494.78x3x5	494.12x3x5	3' x 5'

NON-STOCK ITEMS

7/8" Thick	1/2" Thick	
Part Number	Part Number	Size
494.78x2x60	494.12x2x60	2' x 60'
494.78x3x60	494.12x3x60	3' x 60'
494.78x4x60	494.12x4x60	4' x 60'


2', 3' and 4' Cut up to 60' are available. Specify color: Black/White (BWH), Blue (BL), Charcoal (CH) or Gray (GY).

GOOD

NEW!

SMART® Tile-Top No. 496


A **SMART®** solution to standing worker fatigue, this mat is economically priced, environmentally friendly and wears five times longer than common sponge based mats.




Blue (BL)



Gray (GY)



Charcoal (CH)



Black (BK)

STOCK ITEMS

7/8" Thick	1/2" Thick	
Part Number	Part Number	Size
496.78x2x3	496.12x2x3	2' x 3'
496.78x3x5	496.12x3x5	3' x 5'


NON-STOCK ITEMS

7/8" Thick	1/2" Thick	
Part Number	Part Number	Size
496.78x2x60	496.12x2x60	2' x 60'
496.78x3x60	496.12x3x60	3' x 60'
496.78x4x60	496.12x4x60	4' x 60'

2', 3' and 4' Cut up to 60' are available. Please specify color: Black (BK), Blue (BL), Charcoal (CH) or Gray (GY).



NEW! ErgoStance® No. 489

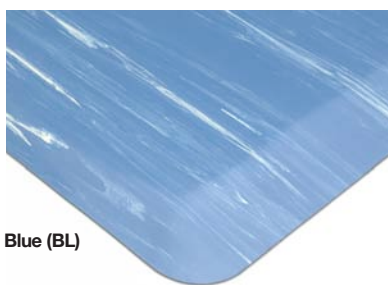

Blue (BL)




Black (BK)




Gray (GY)



Charcoal (CH)

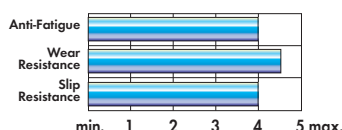

Newly updated Ergo-Stance features a flexible, pliable rubber surface bonded to a super resilient 100% Natural Rubber sponge base. The “grippy” rubber sponge hugs smooth and sealed epoxy floors, making it a great choice for labs, hospitals, pharmacies and other environments where one wants to reduce mat movement. This dense rubber sponge is buoyant and long-lasting and virtually crush-proof. The result is exceptional comfort and performance. We are so confident in this sponge that we have added a 5 year resilience warranty to the mat.

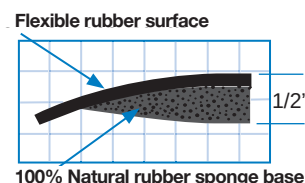

SPECIFICATIONS AND TESTING


Compound	Rubber surface on a rubber sponge base
Edges	Safety beveled
Flammability (surface)	ASTM E162 ASTM E84: 50 or less 75 or less
Flammability (sponge)	MIL-P12420C: Burned for < 5 seconds
Coefficient of Friction	ASTM F1677: Dry: .68, Wet: .17
Warranty	5 Year Resilience Warranty

STOCK ITEMS

Part Number	Size
489.12x2x3	2' x 3'
489.12x3x4	3' x 4'
489.12x3x5	3' x 5'

2', 3' and 4' widths are available in lengths up to 60'. Please specify color: Black (BK), Blue (BL), Charcoal (CH) or Gray (GY) when ordering.


Autoclavable Mat No. 580

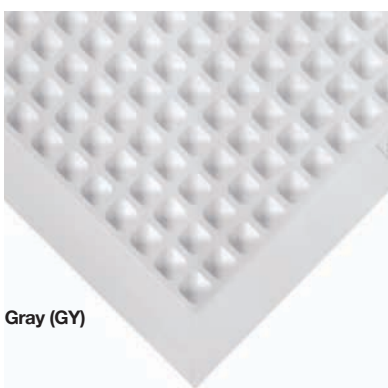

Gray (GY)

STOCK ITEM

Part Number	Size
580.12x2x3GY	2' x 3'

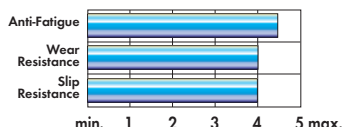


Non-porous rubber compound is 100% anti-microbial and is USP 797 compliant.

- » 100% anti-microbial for sterile areas
- » 100% latex-Free, non-porous rubber compound
- » Withstands extensive sterilization, including autoclaving
- » Domed design provides long-lasting comfort for extended shifts



SBR/Nitrile (totally anti-microbial)

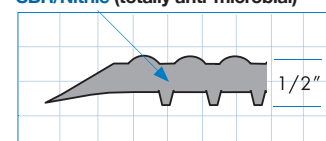

SPECIFICATIONS AND TESTING

Compound	SBR/Nitrile, with an anti-microbial additive passes ASTM G21-96 (2002) – Latex Free
Edges	Safety beveled
Autoclavability	52 autoclave cycles – 120°C @ 15 psi
Flammability	MVSS 302: “A” Rating
Coefficient of Friction	ASTM F1677: Dry: .78, Wet: .68
Tabor Abrasion	Fed. Std. 191 <1% lost @ 1,000g, CS-17 wheel, 1000 revs
Warranty	1 year




Cleaning Instructions

Autoclave—Lay flat in an autoclave. Clean for 20 minutes at 15 psi and 275°F.


Manual Cleaning—Use a mixture of hot water and a mild soap (like Ivory Liquid) with a pH between 4.0 and 9.0 and wipe the mat down. Another option is to use a pre-moistened wipe such as Sani-Cloth HB or SANI-CLOTH® PLUS both of which have very low levels of alcohol.



Rejuvenator® No. 501

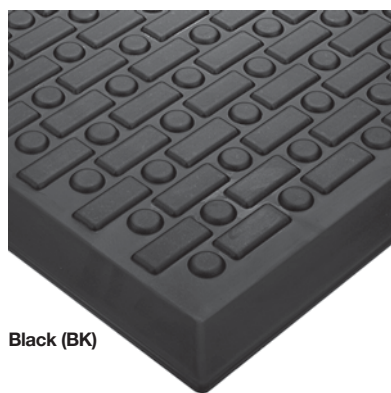


Black (BK)

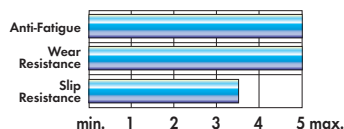

STOCK ITEMS

Part Number	Size
501.58x2x3	2' x 3'
501.58x3x5	3' x 5'

A perfect combination of superior comfort, durability and performance, this ergonomic mat is literally crush resistant. A dense, 1/8" thick urethane skin protects the closed-cell urethane sponge interior and outlasts plastics and rubber.

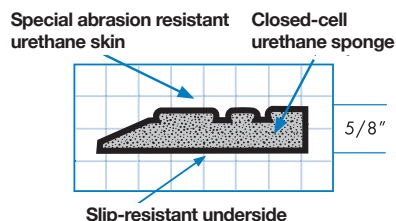

SPECIFICATIONS AND TESTING

Compound	100% Urethane
Edges	Built-in beveled safety ramps
Custom Sizes	If you need custom sizes, see Rejuvenator® Connect No. 502 (pg. 8)
Flammability	MVSS 302: "A" Rating
Coefficient of Friction	ASTM F1677: Dry: .71, Wet: .57
Tabor Abrasion	Fed. Std. 191: < 1% lost @ 1,000 cycles
Temperature Range	ASTM D1056: -50 to 250°F
Compression	ASTM D575: .319 inches @ 35 psi
Warranty	10 years



Pure support for critical work.

VINYL SPONGE MATS —

An excellent choice for practical and economical comfort, these mats reduce floor hardness up to 50% and can easily be cut on-site to fit your work areas.



- Tuf Sponge No. 451
- Deluxe Tuf Sponge No. 442
- Diamond Tuf Sponge No. 452
- SoftStep No. 427
- Deluxe SoftStep No. 444

The primary difference between these mats are thickness and surface design. Otherwise, they all contain the same specifications and pass the same testing that you would expect from a quality Wearwell product.

SPECIFICATIONS AND TESTING

Compound	Blown vinyl sponge
Edges	Safety rounded on stock sizes/rolls. Safety beveled on cut ends.
Flammability	DOC FF1-70 Flame Retardant Rating
Coefficient of Friction	ASTM F1677: Dry: .94 (.60 for SoftStep mats)
Tabor Abrasion	Fed Std. 191 Modified: < 2% lost @ 1,000 cycles
Warranty	1 year

**Ribbed
No. 451/442**





Black/Yellow
(BYL)



Gray (GY)



Black (BK)

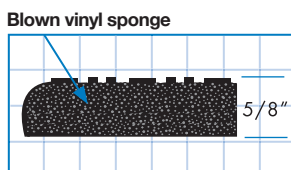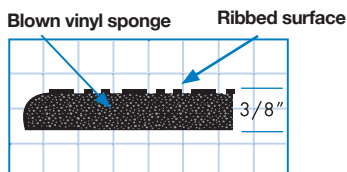

**Pebbled
No. 427/444**





Black/Yellow
(BYL)



Gray (GY)



Black (BK)

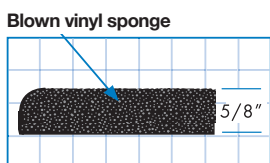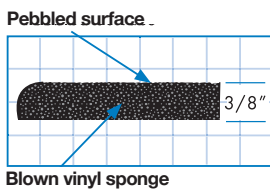



**Diamond
No. 452**



Black (BK)



Black/Yellow (BYL)

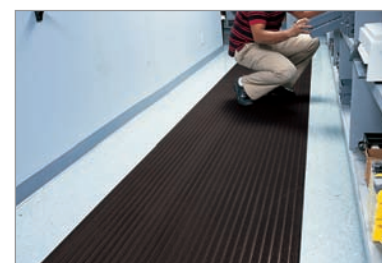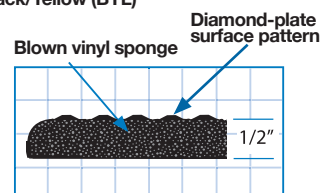

VINYL SPONGE MATS — PART INFORMATION

Ribbed Surface: Tuf Sponge No. 451 and Deluxe Tuf Sponge No. 442

Specify color, Black (BK), Gray (GY) or Black/Yellow (BYL), when ordering.


3/8" THICK STOCK ITEMS

Part Number	Size
451.38x2x3	2' x 3'
451.38x3x5	3' x 5'
451.38x2x60	2' x 60'
451.38x3x60	3' x 60'
451.38x4x60	4' x 60'
451.38x6x60*	6' x 60'

NON- STOCK ITEMS

451.38x2CUT	2' Cut up to 60'
451.38x3CUT	3' Cut up to 60'
451.38x4CUT	4' Cut up to 60'
451.38x6CUT*	6' Cut up to 60'

*Available in Black (BK) only.

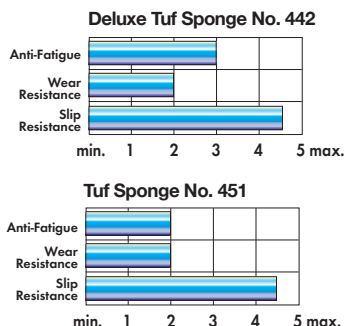

5/8" THICK STOCK ITEMS

Part Number	Size
442.58x2x3	2' x 3'
442.58x3x5	3' x 5'
442.58x2x60	2' x 60'
442.58x3x60	3' x 60'
442.58x4x60	4' x 60'


NON- STOCK ITEMS

442.58x2CUT	2' Cut up to 60'
442.58x3CUT	3' Cut up to 60'
442.58x4CUT	4' Cut up to 60'


Pebbled Surface: Soft Step No. 427 and Deluxe Soft Step No. 444

Specify color, Black (BK), Gray (GY) or Black/Yellow (BYL), when ordering.

Soft Step No. 427



Deluxe Soft Step No. 444



3/8" THICK STOCK ITEMS

Part Number	Size
427.38x2x3	2' x 3'
427.38x3x5	3' x 5'
427.38x3x12	3' x 12'

NON- STOCK ITEMS

427.38x2CUT	2' Cut up to 60'
427.38x3CUT	3' Cut up to 60'
427.38x4CUT	4' Cut up to 60'

5/8" THICK STOCK ITEMS


Part Number	Size
444.58x2x3	2' x 3'
444.58x3x5	3' x 5'

NON- STOCK ITEMS

444.58x2CUT	2' Cut up to 60'
444.58x3CUT	3' Cut up to 60'
444.58x4CUT	4' Cut up to 60'

Diamond Surface: Diamond Tuf Sponge No. 452

Specify color, Black (BK) or Black/Yellow (BYL), when ordering.



1/2" THICK STOCK ITEMS

Part Number	Size
452.12x2x3	2' x 3'
452.12x3x5	3' x 5'
452.12x2x60	2' x 60'
452.12x3x60	3' x 60'
452.12x4x60	4' x 60'

NON- STOCK ITEMS

452.12x2CUT	2' Cut up to 60'
452.12x3CUT	3' Cut up to 60'
452.12x4CUT	4' Cut up to 60'


UltraTred ArmorCote No. 440




Black/Yellow
(BYL)

Versatile, yet affordable, this mat is has a double-thick Urethane coating for extra durability and longer performance.

- » Economic comfort for medium traffic areas
- » Greater abrasion resistance

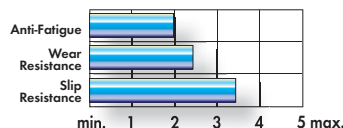

Urethane coating

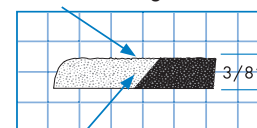

Blown vinyl sponge

STOCK ITEMS

Part Number	Size
440.38x2x3BYL	2' x 3'
440.38x3x5BYL	3' x 5'
440.38x3x12BYL	3' x 12'

2', 3' and 4' Cut up to 60' are available.

NON-STOCK ITEMS


Part Number	Size
440.38x2x60BYL	2' x 60'
440.38x3x60BYL	3' x 60'
440.38x4x60BYL	4' x 60'

NEW!


SubStance No. 513



Black (BK)


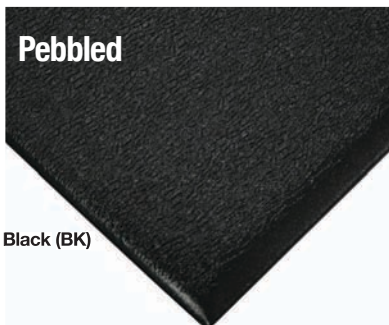


Black (BK)

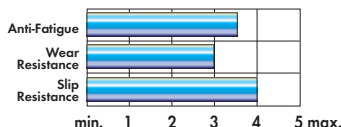

The ultimate combination of comfort and durability in a sponge mat. A tough vinyl-nitrile outer layer defends against wear and tear while a resilient inner layer of blown vinyl-nitrile sponge provides comfort for standing workers. SubStance redefines the idea of “sponge matting” by incorporating best-level performance features into the design and construction of the mat.

- » 2-layer construction permanently bonded together
- » Available in both diamond-embossed or pebbled surface pattern
- » Nitrile enhanced surface is resistant to many chemicals and oils that might be spilled on the mat

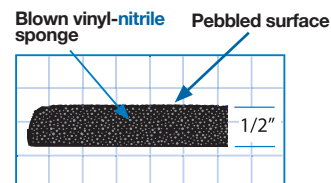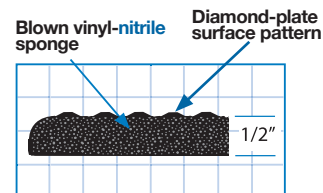

SPECIFICATIONS AND TESTING

Compound	Dual density Vinyl-Nitrile
Tensile Strength	50 lb/in. minimum
Tear Strength	15 lb/in. minimum
Warranty	1 year

DIAMOND: STOCK ITEMS

Part Number	Size
513.12x2x3DPBK	2' x 3'
513.12x3x5DPBK	3' x 5'
513.12x2x60DPBK	2' x 60'
513.12x3x60DPBK	3' x 60'


2' and 3' Cut up to 60' are available.

PEBBLED: STOCK ITEMS

Part Number	Size
513.12x2x3BK	2' x 3'
513.12x3x5BK	3' x 5'
513.12x2x60BK	2' x 60'
513.12x3x60BK	3' x 60'
513.12x4x60BK	4' x 60'

2', 3' and 4' Cut up to 60' are available.



Endurable No. 459

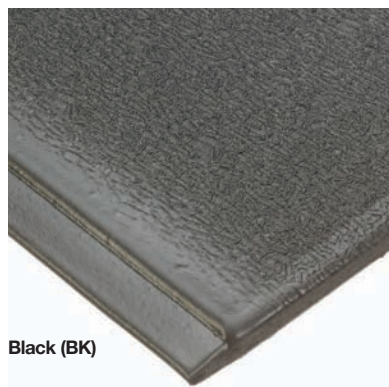

Black (BK)

As a dual density, “two-in-one construction” anti-fatigue mat, Endurable lasts much longer than similar products.

- » Economic comfort for medium traffic areas
- » Dense vinyl surface for durability and abrasion resistance
- » Safety beveled edges

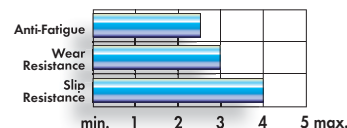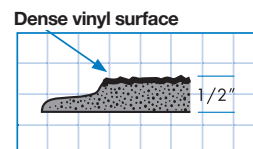

SPECIFICATIONS AND TESTING

Compound	Dual density vinyl sponge
Edges	Safety rounded on stock sizes. Safety beveled on cut lengths.
Flammability (surface)	MVSS 302: “A” Rating
Coefficient of Friction	ASTM F1677: Dry: .91
Tabor Abrasion	Fed. Std. 191: <2% lost @ 1,000 cycles
Warranty	1 year

STOCK ITEMS

Part Number	Size
459.12x2x3BK	2' x 3'
459.12x3x5BK	3' x 5'
459.12x3x12BK	3' x 12'

2', 3' and 4' Cut up to 60' are available.


NON-STOCK ITEMS

Part Number	Size
459.12x2x60BK	2' x 60'
459.12x3x60BK	3' x 60'
459.12x4x60BK	4' x 60'



Lasting support for commercial work.

Modular WorkSafe® Light No. 472

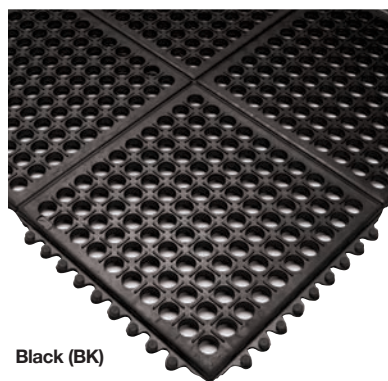


Black (BK)

Innovated for comfort and ease of use, it is popular in high maintenance areas. Choose natural rubber (GR) for dry areas and exposure to water or **Nitrile** (GP) for areas with petrochemicals.

- » Lightweight and easy to clean
- » Hidden connections require no additional attachments
- » Safety rounded edges




Raised ribs for traction

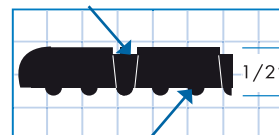

Knobs to prevent slippage

SPECIFICATIONS AND TESTING

Compound	GP: 50% Nitrile , GR: 100% Natural rubber
Edges	Safety Rounded
Flammability	MVSS 302: "A" Rating
Coefficient of Friction	ASTM F1677: Dry: 1.0, Wet: .85
Durometer	ASTM D2240: 55-60
Tabor Abrasion	Fed. Std. 191: 1%
Warranty	1 year

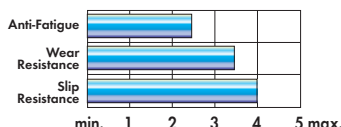

STOCK ITEMS





Thickness	Part Number	Size
1/2"	472.12x3x3BK	3' x 3'

Available formulations for mats: Natural rubber (GR) or 50% **Nitrile** (GP). Please specify when ordering.

ComfortPro™ No. 433

An easy to clean surface that also increases comfort and safety. The flexible corrugated surface provides extra traction.

- » Reduces slip hazards
- » Comfortable
- » Easy to Clean

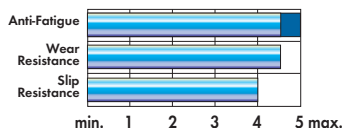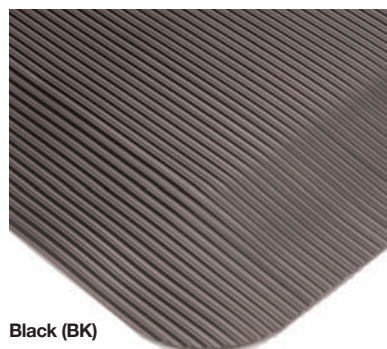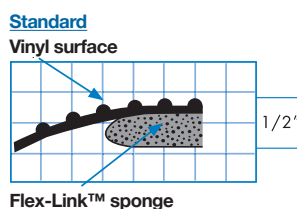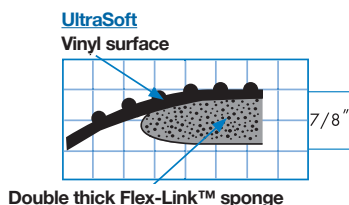

STOCK ITEMS		
7/8" Thick	1/2" Thick	
Part Number	Part Number	Size
433.78x2x3BK	433.12x2x3BK	2' x 3'
433.78x3x5BK	433.12x3x5BK	3' x 5'

NON-STOCK ITEMS		
7/8" Thick	1/2" Thick	
Part Number	Part Number	Size
433.78x2x75BK	433.12x2x75BK	2' x 75'
433.78x3x75BK	433.12x3x75BK	3' x 75'
433.78x4x75BK	433.12x4x75BK	4' x 75'




2', 3' and 4' Cut up to 75' are available.

SPECIFICATIONS AND TESTING

Compound	3/32" thick vinyl surface bonded to a Flex-Link™ sponge
Edges	Safety beveled
Flammability	DOC FF1-70: Flame Retardant Rating
Coefficient of Friction	ASTM F1677: Dry: .60
Warranty	1 year

Corrugated SpongeCote® No. 431

- » Same great features of ComfortPro™
- » More narrow corrugated surface pattern
- » Available w/ yellow safety borders

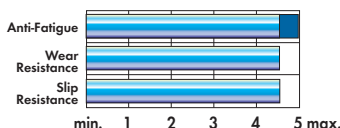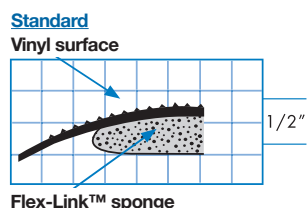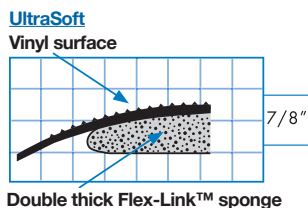

STOCK ITEMS		
7/8" Thick	1/2" Thick	
Part Number	Part Number	Size
431.78x2x3	431.12x2x3	2' x 3'
431.78x3x5	431.12x3x5	3' x 5'

NON-STOCK ITEMS		
7/8" Thick	1/2" Thick	
Part Number	Part Number	Size
431.78x2x60BYL	431.12x2x60BYL	2' x 60' (BYL only)
431.78x3x60BYL	431.12x3x60BYL	3' x 60' (BYL only)
431.78x2x75BK	431.12x2x75BK	2' x 75' (BK only)
431.78x3x75BK	431.12x3x75BK	3' x 75' (BK only)
431.78x4x75BK	431.12x4x75BK	4' x 75' (BK only)

2' and 3' Cut up to 60' are available in Black/Yellow (BYL) only. 2', 3' and 4' Cut up to 75' are available in Black (BK) only.

WorkSafe® Light No. 478





An ideal anti-fatigue mat for wet industrial areas, WorkSafe® Light has a well-engineered drainage system and molded-in edges provide safe access.

- » Lightweight
- » High Performance
- » Cutting Fluid Resistant



CFR Rubber Compound

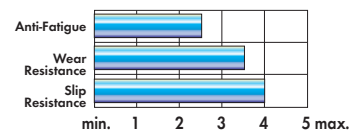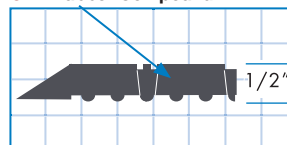


SPECIFICATIONS AND TESTING

Compound	Styrene Butadiene Rubber (A special compound that is resistant to mineral oil based cutting fluid)
Edges	Safety rounded
Flammability	MVSS 302: "A" Rating
Coefficient of Friction	ASTM F1677: Dry: > .90 Wet: .36
Durometer	ASTM D2240: 55
Warranty	1 year

STOCK ITEMS

Part Number	Size
478.12x3x5GY	3' x 5'
478.12x3x10GY	3' x 10'
478.12x3x20GY	3' x 20'



Ortho Stand™ No. 454

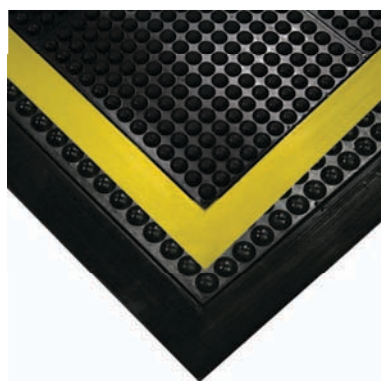

Black w/ Yellow Borders (BYL) or Black w/ Black Borders (BK)

Ideal for commercial and light industrial applications, the hollow-domed surface slightly compresses underfoot to fight fatigue.

- » Economical
- » Enhanced anti-fatigue properties
- » Available with black or yellow borders

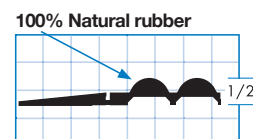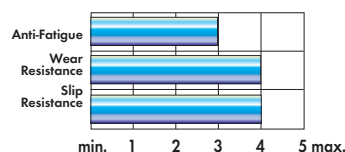

SPECIFICATIONS AND TESTING

Compound	Natural rubber
Edges	Safety beveled integral molded borders
Flammability	MVSS 302: "A" Rating
Coefficient of Friction	ASTM F1677: Dry: 1.01, Wet: .92
Tabor Abrasion	Fed. Std. 191: 1%
Durometer	ASTM D2240: 60
Warranty	1 year

STOCK ITEMS

Part Number	Size
454.12x2x3	2' x 3'
454.12x3x4	3' x 4'

Available Colors: Black (BK) or Black/Yellow (BYL). Specify when ordering.

ESD and Contamination Control

Contamination can occur in many different forms including static electricity, outgassing and particulates.

Wearwell provides matting solutions for all of these types of threats.

Static electricity builds up wherever there is friction between two materials. That friction can be as simple as a person walking across the floor or when small particles rub against each other in the air. Once static electricity builds up, it seeks out a path to ground, often the human body. Through a simple touch, an uncomfortable “shock” is given to the person and sensitive equipment is damaged or destroyed.

To eliminate these hazards, Wearwell offers both **Electrically Conductive** and **Static Dissipative** mats. These products draw the static off workers before they touch susceptible chemicals or components. The resistance or rate at which static is drained is measured in ohms. **The lower the ohm rating or resistance, the faster static will disperse** and therefore, the lower the risk of static electric discharge. There are two commonly accepted levels of resistance: Conductive and Static Dissipative.

- **Conductive** = $1 \times 10^3 \Omega$ to $1 \times 10^6 \Omega$
- **Static Dissipative** = $> 1 \times 10^6 \Omega$ to $1 \times 10^{10} \Omega$

It is important to note that all conductive and dissipative matting must be grounded to be effective.


In addition, either conductive shoes or a heel grounder should be worn to allow the static to drain off the body and through the mat.

Outgassing (or offgassing) is the release of a gas that was dissolved, trapped, frozen or absorbed in a material. The “New Car Smell” is an excellent example of outgassing. Many plastics and rubber materials slowly release gases throughout their lifecycle. This can sometimes be detected in an odor, but often is undetectable. Nonetheless, these gases can be hazardous to certain key processes in a controlled environment. **Wearwell produces products that are specifically designed for minimal outgassing for use in Clean Room Environments.**

Particulates are all the little solid materials that are all around us in our environment. Dust, pollen, vapor, germs, bacteria and soot are common examples. Controlled environments are created specifically to keep particulates out. Wearwell provides matting products that remove particulates from the soles of shoes to assist in controlling the amount of particulates that occur in a controlled environment.









Electrically Conductive Anti-Fatigue No. 786

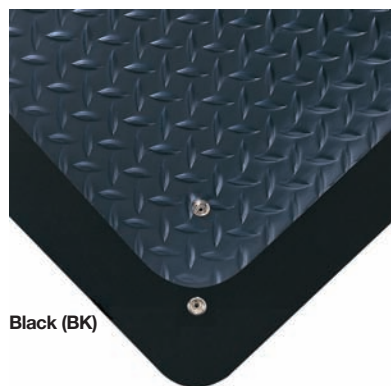

Black (BK)

Electrically Conductive Anti-Fatigue effectively protects sensitive and dramatically reduces fatigue.

- » Vinyl Diamond-Plate or Smooth surfaces drain static electricity from personnel
- » Protect sensitive equipment from damage or eliminate static annoyance
- » Nitricell® sponge base delivers 2X the resilience and 3X the life of typical sponges
- » Lay-flat design and up to 20% more standing area than look-alikes
- » Attached grounding snap

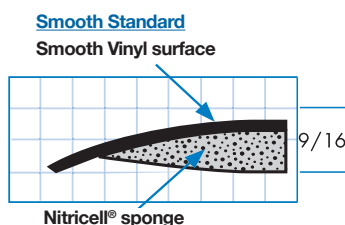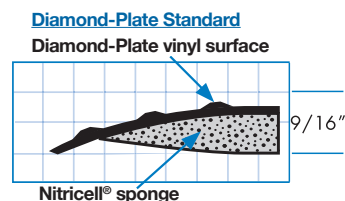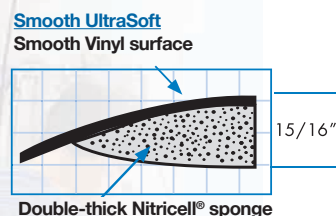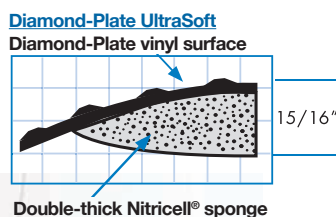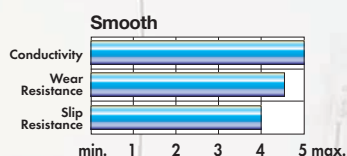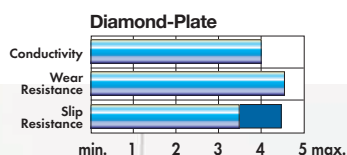

SPECIFICATIONS AND TESTING	Diamond-Plate	Smooth
Compound	Vinyl surface bonded to a Nitricell® sponge	Conductive Vinyl surface bonded to a Nitricell® sponge
Edges	Safety beveled	Safety beveled
RTT (Resistance Top to Top)	1 x 10 ⁵ to 8 x 10 ⁶ Ω	1 x 10 ⁶ Ω
RTG (Resistance to Ground)	1 x 10 ⁵ to 8 x 10 ⁶ Ω	1 x 10 ⁶ Ω
Flammability (surface) per MVSS 302	"A" Rating	"A" Rating
Flammability (sponge) per MIL-P12420C	Burned for < 5 seconds	Burned for < 5 seconds
Coefficient of Friction per ASTM F1677	Dry: .68	Dry: .68
Compression Deflection per ASTM D575	Deflection @35 psi, mm=8.43	Deflection @35 psi, mm=8.43
Tabor Abrasion per Fed. Std. 191	.1 Gram lost @ 1,000 cycles	.025 lost @ 1,000 cycles
Warranty	3 years	3 years


DIAMOND-PLATE STOCK ITEMS		
15/16" Thick	9/16" Thick	
Part Number	Part Number	Size
786.1516x2x3BK	786.916x2x3BK	2' x 3'
786.1516x3x5BK	786.916x3x5BK	3' x 5'
DIAMOND-PLATE NON-STOCK ITEMS		
15/16" Thick	9/16" Thick	
Part Number	Part Number	Size
786.1516x3x75BK	786.916x3x75BK	3' x 75'
786.1516x3CUTBK	786.916x3CUTBK	3' Cut up to 75'
Mats are available with a smooth (SM) or diamond-plate (DP) surface. Please specify when ordering.		

NOTE: Mat must be grounded with a ground cord; workers must wear Heel Grounder or shoes with conductive soles.

Modular Diamond-Plate ESD No. 788 and Modular WorkSafe® Light ESD No. 789





Black (BK)

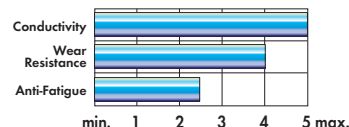

Modular ESD mats are Ideal for individual workstations or combined for larger areas where static discharge is a concern.

- » Modular 3' x 3' ESD mats with interlock on 2 sides
- » Use as a single mat or configure to any space
- » Safety rounded edges
- » Solid style for ease of maintenance or open style for air-flow
- » Attached grounding snap

NOTE: Mat must be grounded with a ground cord; workers must wear Heel Grounder or shoes with conductive soles.

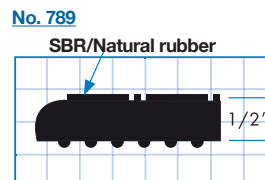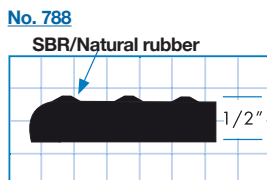


SPECIFICATIONS AND TESTING	NO. 788	NO. 789
Compound	Natural/SBR Rubber	Grease resistant SBR rubber
Edges	Safety Rounded	Safety Rounded
Flammability	MVSS 302: "A" Rating	MVSS 302: "A" Rating
Coefficient of Friction per ASTM F1677	Dry: >.84, Wet: .78, Oily: .34	Dry >.90, Wet .36
Conductivity	RTT: $3.1 \times 10^4 \Omega$ RTG: $1.7 \times 10^4 \Omega$	RTT = $3.1 \times 10^4 \Omega$ RTG = $1.7 \times 10^4 \Omega$
Warranty	1 year	1 year

	STOCK ITEMS		NON-STOCK ITEMS	
Surface	Part Number	Size	Part Number	Size
Diamond-Plate	788.12x3x3GRBK	3' x 3'	788.12CUSTOMGRBK	Custom
Drainage	789.12x3x3GRBK	3' x 3'	789.12CUSTOMGRBK	Custom

Serious support for sensitive work.




Electrically Conductive Runner No. 785

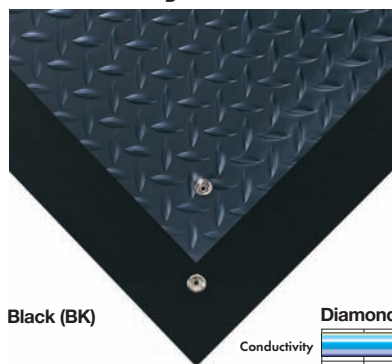

Black (BK)

The Electrically Conductive Runner is ideal in areas where static prevention is a priority. Use in aisles and other heavy use areas.

- » Treated surface drains static electricity from personnel
- » Protect sensitive equipment or eliminate static annoyance
- » Attached grounding snap

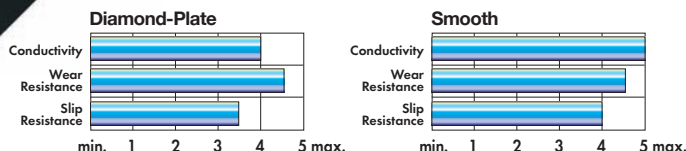

Smooth

Smooth vinyl surface



Diamond-Plate

Diamond-Plate vinyl surface



NOTE: Mat must be grounded with a ground cord; workers must wear Heel Grounder or shoes with conductive soles.

SPECIFICATIONS AND TESTING

Compound	Diamond-Plate: Vinyl surface Smooth: Vinyl
Warranty	1 year

STOCK ITEMS			NON-STOCK ITEMS		
Part Number	Description	Size	Part Number	Description	Size
785.332x3x75SMBK	Smooth	3' x 75'	785.332x3CUTSMBK	Smooth	3' Cut up to 75'
785.532x3x75DPBK	Diamond-Plate	3' x 75'	785.532x3CUTDPBK	Diamond-Plate	3' Cut up to 75'


Static Dissipative Anti-Fatigue No. 791




Gray (GY)

Ideal for manufacturing and commercial areas where static electricity can pose a problem. A metal scrim embedded in the surface ensures speedy dissipation of static electricity and a Nitricell® sponge base ensures employee comfort and productivity.

- » 2X the resilience and 3X the life of typical sponges
- » Lay-flat design and up to 20% more standing area than look-alikes
- » Attached grounding snap

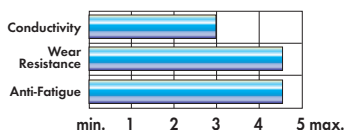

Vinyl surface

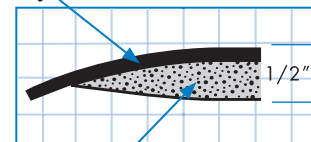

Nitricell® sponge base

SPECIFICATIONS AND TESTING

Compound	1/8" thick vinyl surface bonded to a 3/8" thick Nitricell® Sponge Base
Edges	Safety beveled
Surface Resistivity	EOS/ESD S47.1 RTG – 1×10^7 to $5 \times 10^8 \Omega$, RTT – 1×10^7 to $5 \times 10^8 \Omega$
Flammability (surface)	MVSS 302: "A" Rating
Flammability (sponge)	MIL-P12420C: Burned for < 5 seconds
Coefficient of Friction	ASTM F1677: Dry: .87, Wet: .61
Tabor Abrasion	Fed. Std. 191: < 1% lost @ 1,000 cycles
Warranty	3 years



STOCK ITEMS		NON-STOCK ITEMS	
Part Number	Size	Part Number	Size
791.12x2x3GY	2' x 3'	791.12x3x75GY	3' x 75'
791.12x3x5GY	3' x 5'	791.12x4x75GY	4' x 75'
		791.12x3CUTGY	3' Cut up to 75'
		791.12x4CUTGY	4' Cut up to 75'

NOTE: Mat must be grounded with a ground cord; workers must wear Heel Grounder or shoes with conductive soles.



NEW!

Pur-Comfort No. 504

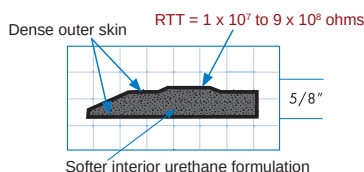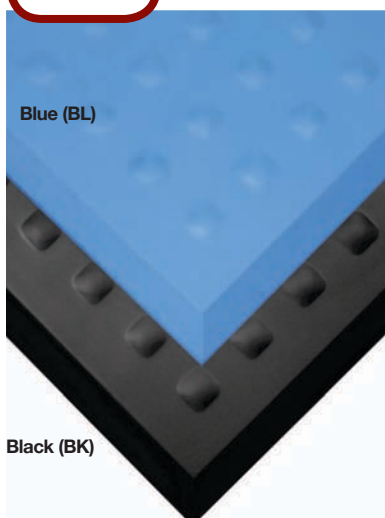

10 YEAR
RESILIENCE WARRANTY

NOTE: Mat must be grounded with a ground cord; workers must wear Heel Grounder or shoes with conductive soles.

Developed to prevent fatigue in controlled environments, this unique and incredibly comfortable anti-fatigue mat is a 100% premium molded urethane.


Packaged for immediate use, each mat is double bagged, cleaned and certified ISO Class 5 Clean Room ready. To clean, simply wipe down with a pre-moistened alcohol-based clean room wipe. For use in sterile applications, Pur-Comfort can also be autoclaved (120°C for 20 minutes at 15 psi) or gamma sterilized.

- » Exceptional comfort
- » Long-term performance
- » Static dissipative when properly grounded



Resistivity

For critical environments where static is an issue, Pur-Comfort has an (RTT) and (RTG) rating of $1 \times 10^7 \Omega$ to $9 \times 10^8 \Omega$. Each mat has one grounding snap.

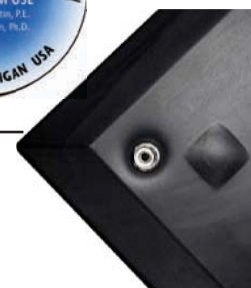

SPECIFICATIONS AND TESTING

Compound	5/8" thick molded Urethane
Edges	Safety beveled
Surface Particulation	No base material emissions being generated
Dynamic Headspace	TEST-RP-CC031.2 A very low level of organics
Resistivity	ANSI/ESD S4.1 - 2006; RTT/RTG = 1×10^7 to $9 \times 10^8 \Omega$
Coefficient of Friction	ASTM F1677: Dry: .75
Tabor Abrasion	Fed. Std. 191: < 1% lost @ 1,000 cycles
Warranty	10 years

STOCK ITEMS

Part Number	Description	Size
504.58x2x3CBB	Clean Room Ready	2' x 3'
504.58x2x3BB	Not Clean Room Ready*	2' x 3'
Available colors: Black (BK) or Blue (BL). Please specify when ordering.		
*Mat is single bagged and topically cleaned.		

REQUIRED ACCESSORIES FOR ESD MATTING



Heel Grounder No. 793

Made for workers wearing insulative shoes, the Heel Grounder allows static electricity to pass from the worker to the ESD matting or flooring.

- » Use with all ESD and Conductive mats
- » Velcro loop for easy attachment
- » One size fits all

STOCK ITEM

Part Number	Size
793.HG	One Size Fits All




15' Cord No. 793

Use this cord to connect all ESD tabletop and floor mats to a building ground.

- » Use with all ESD and Conductive mats
- » Solderless terminal
- » Molded-in fastener has an integral one mega ohm resistor
- » Conforms to 10mm snaps

STOCK ITEM

Part Number	Size
793.15CORD	15'

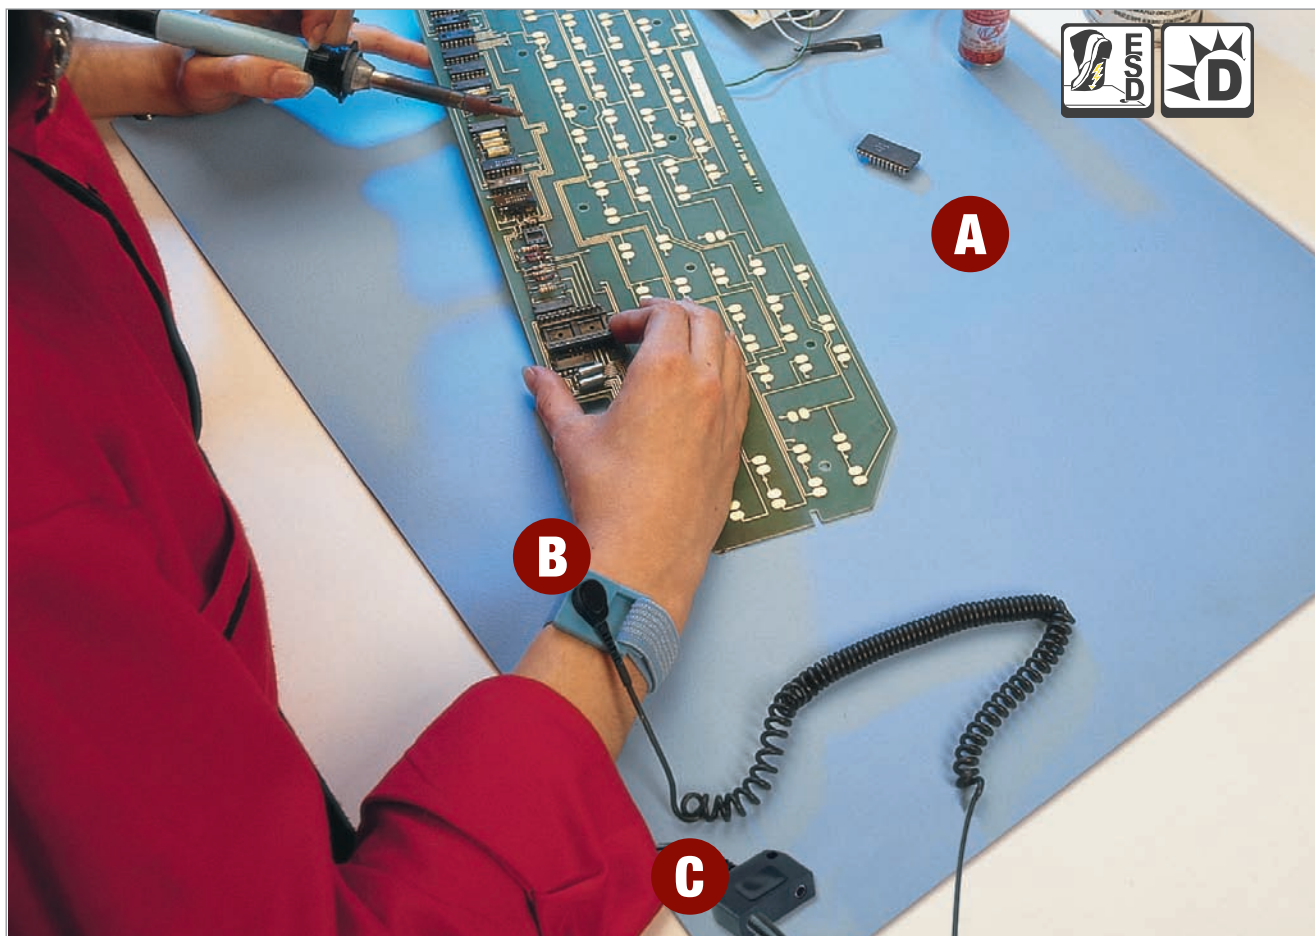

A ESD Work Surface Material No. 793

Designed for work surfaces where static control is imperative, makes ideal for use under computers, where sensitive components are packaged or as a liner for conductive bins.

- » Static dissipative
- » Flexible 3-layer construction
- » Versatile
- » Color: Sky Blue



SPECIFICATIONS AND TESTING

Compound	Three-layer vinyl
Surface	Slightly textured, non-glare
Conductivity	RTT: 1×10^7 to 5×10^8 , RTG: 1×10^7 to 5×10^8
Flame Resistance	> 0.05 inches
Heat Resistance	280°F
Warranty	1 year

	STOCK ITEMS		NON-STOCK ITEMS	
Thickness	Part Number	Size	Part Number	Size
1/8"	793.18x2x3SB	2' x 3'	793.18x2CUTSB	2' Cut
1/8"	793.18x3x4SB	3' x 4'	793.18x3CUTSB	3' Cut

B 6' Wrist Strap No. 793

Use to ground workers to their ESD tabletop mats.

- » Use with ESD table top mats
- » Solderless terminal
- » One size fits all comfort strap

STOCK ITEM	
Part Number	Size
793.6WSTRAP	6'

C Common Point Ground Cord No. 797

The molded -in male fastener connects to the snap on the tabletop mat, while the terminal on the 15' cord connects to a building ground.

- » For use with ESD Wrist Strap
- » Grounds two wrist straps to one point
- » Solderless terminal
- » RTG - 1 mega ohm

STOCK ITEM	
Part Number	Size
797.CPCORD	n/a

PermaTack No. 092


NEW!



Designed to prevent debris and bacteria from entering critical or sterile areas such as labs, pharmacies and medical facilities to prevent cross-contamination and reduce airborne or floor-borne infection.

Traps and holds up to three (3) times more contaminants than standard adhesive mats. The surface regenerates its tack when cleaned and allowed to dry.

- » Permanently tacky surface
- » Electromagnetically attracts airborne particles
- » Adhesive backing holds mat securely in place
- » ESD properties

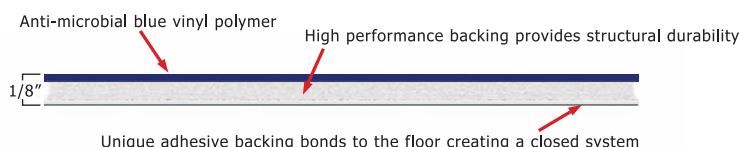

THE BEST LONG-TERM VALUE!

PRODUCT	COST PER DAY
Peel off tacky mat	\$1.83 (1 sheet per day)*
PermaTack	\$1.40 (in service for 1 year)
PermaTack	\$0.70 (in service for 2 years)

*Based on a 24" x 45" disposable mat vs. a 24" x 48" PermaTack. Life expectancy of PermaTack is two (2) years under normal wear conditions with a payback in 9 months.

STOCK ITEMS		NON-STOCK ITEMS		
Part Number	Size	Part Number	Size	Color
092.18x27x10BL	27" x 10'	092.18x27CUTBL	27" Cut	Blue
092.18x27x20BL	27" x 20'	092.18x54CUTBL	54" Cut	Blue
092.18x27x48BL	27" x 48"	092.18x36CUTBL	36" Cut	Blue
092.18x27x72BL	27" x 72"	24", 30" and 54" wide material is available in custom lengths > 5' long. Please call for a quote.		
092.18x36x54BL	36" x 54"			
092.18x54x10BL	54" x 10'			
092.18x54x20BL	54" x 20'			

Cleaning Instructions

DO NOT USE Spic and Span or any other abrasive cleaners or oil-based cleaners.

Recommended Cleaning Agent for Clean Room applications:
NOVACLEAN™ FLOOR CLEAN.

Recommended Cleaning Agent for Sterile applications:
IPA OR STERIS CLEANERS. To maintain the functionality of the mat, the ratio of IPA or Steris to water should not exceed 50%.

Recommended Cleaning Agent for General Applications:
Mix a 25% Ammonia/75% Water solution, use Windex or Simple Green All-Purpose. Other options include non-abrasive, non-oil-based cleaners with PH levels between 4 and 8.



Clean Room Mat No. 095



The tacky surface effectively pulls and traps dirt and dust off shoe soles.

- » Easy to use- pull off and discard
- » Use on low-pile carpet, tile or concrete surfaces




STOCK ITEMS (4 MATS PER CASE)		
Part Number	Sheets per Mat	Size
095.18x36	30 or 60 (White only)	18" x 36"
095.18x45	30 or 60 (White only)	18" x 45"
095.24x45	30 or 60 (White only)	24" x 45"
095.2x3	30	2' x 3'
095.36x45	30	36" x 45"
095.3x5	30	3' x 5'

Mats come with 30 or 60 sheets as indicated in Blue (BL) or White (WH) as specified. Specify color when ordering.

Switchboard Matting







MEETS ASTM D178-01

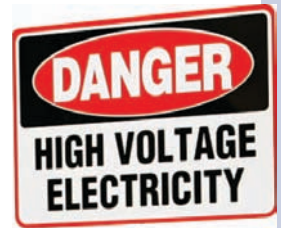


These high performance non-conductive mats conform to ANSI/ASTM D178-01, Type II, Class 2.

SPECIFICATIONS AND TESTING

Compound	No. 701 & No. 702: Vinyl No. 720: Vinyl surface bonded to Nitricell® sponge base
Dielectric Breakdown	ASTM D149-97a (Minimum 30,000 V) PASS
Flame Resistance	ASTM D178-01: 0.224 mm/s
Tabor Abrasion	1% lost @ 1,000 cycles per Fed Std. 191
Coefficient of Friction	.91 Dry per ASTM F1677
Electric Proof Test	20,000
Recommended Max Usage	17,000
Warranty	1 year

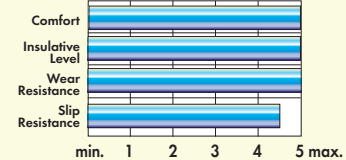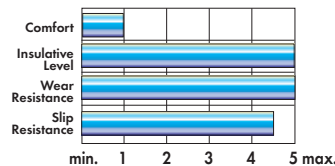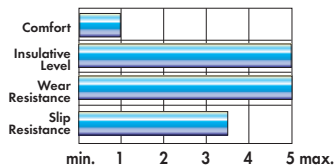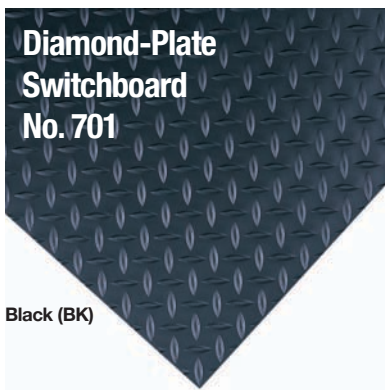

No. 702 is available in 3/8" also, classifying it as Class 3.

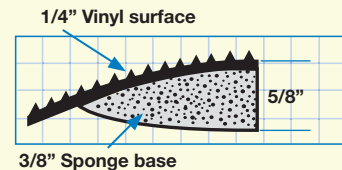

STOCK ITEMS

Diamond-Plate Switchboard No. 701	Corrugated Switchboard No. 702		
Part Number	Part Number	Thickness	Size
701.14x2x75BK	702.14x2x75BK	1/4"	2' x 75'
701.14x3x75BK	702.14x3x75*	1/4"	3' x 75'
701.14x4x75BK	702.14x4x75BK	1/4"	4' x 75'
	702.38x3x75BK	3/8"	3' x 75'

NON-STOCK ITEMS

Diamond-Plate Switchboard No. 701	Corrugated Switchboard No. 702		
Part Number	Part Number	Thickness	Size
701.14x2CUTBK	702.14x2CUTBK	1/4"	2' Cut
701.14x3CUTBK	702.14x3CUT*	1/4"	3' Cut
701.14x4CUTBK	702.14x4CUTBK	1/4"	4' Cut

*Available in Black (BK) or Black/Yellow (BYL). Please specify when ordering.

STOCK ITEMS

Part Number	Size
720.58x3x5	3' x 5'
720.58x3x75	3' x 75'

NON-STOCK ITEMS

Part Number	Size
720.58x3CUT	3' Cut up to 75'

Matting is available in Black (BK) or Black/Yellow (BYL). Please specify when ordering.




Switchboard Matting

MEETS MIL. SPEC. 15562-G

These non-conductive mats deliver a dielectric strength of 30,000 volts.

Marbleized Military Switchboard No. 710

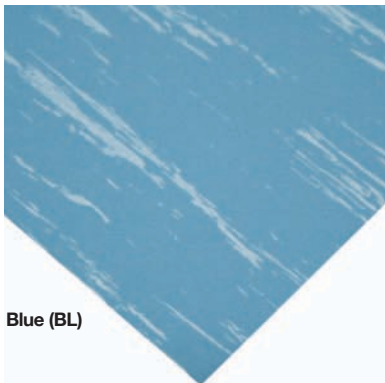

Blue (BL)



Green (GN)

Specially treated for flooring applications, this non-conductive matting meets Mil. Spec. 15562-G, Type I.

When installing several widths of matting side-by-side, it is important to seal the seams to ensure the mat's reliability or consistent insulative properties. For best results, use professional floor installers. They have experience and machinery designed to bond this material.

- » Designed for permanent installation using any vinyl compatible mastic adhesive
- » Non-conductive, smooth marbleized surface
- » Easy to clean with exceptional ozone and oil resistance




Mats and Welding Thread are available in Green (GN) or Blue (BL). Please specify when ordering.

MATTING			
STOCK ITEM		NON-STOCK ITEM	
Part Number	Size	Part Number	Size
710.18x3x75	3' x 75'	710.18x3CUT	3' Cut up to 75'


WELDING THREAD	
STOCK ITEMS	
Part Number	Size
710.18x50	50' in Length
710.18x150	150' in Length
710.THREADROLL	300' in Length

Smooth Military Switchboard No. 711

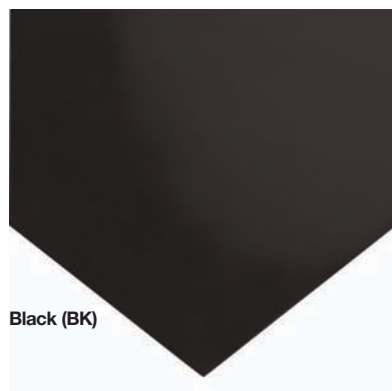

Black (BK)

- » Meets Mil. Spec 15562-G Amend. 3, Type II
- » Easy to clean
- » Exceptional ozone and oil resistance.

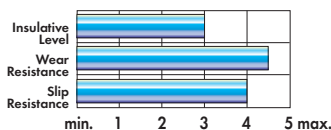



STOCK ITEM		NON-STOCK ITEM	
Part Number	Size	Part Number	Size
711.18x3x75BK	3' x 75'	711.18x3CUTBK	3' Cut up to 75'

Diamond-Plate Military Switchboard No. 712



Gray (GY)

- » Meets the strict military standard 15562-G Amend. 3, Type III.
- » The diamond-plate pattern offers additional traction and abrasion resistance.

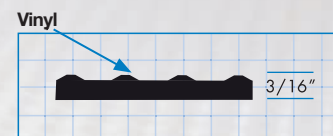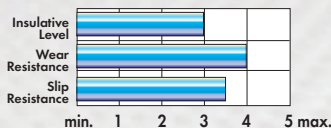

STOCK ITEM		NON-STOCK ITEM	
Part Number	Size	Part Number	Size
712.316x3x75GY	3' x 75'	712.316x3CUTGY	3' Cut up to 75'

Switchboard matting protects workers from harmful, even deadly, shock.



SPECIFICATIONS AND TESTING NO. 710, NO. 711 AND NO. 712	
Dielectric Strength	30,000 volts
Maximum Use Voltage	3,000 VAC
Compound	No. 710: Vinyl No. 711 & No. 712: PVC
Flammability	Mil. 15562-F FMVSS 302 PASS
Classification	No. 710: Mil. Spec. 15562-G, Type I No. 711: Mil. Spec. 15562-G, Type II No. 712: Mil. Spec. 15562-G, Type III
Warranty	1 year

Grade A® No. 482




Terra Cotta (TC)

100% Nitrile Rubber

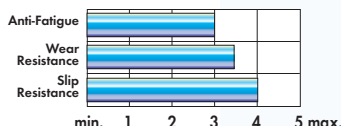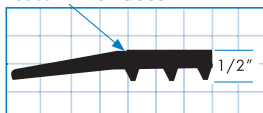

Built-in Handles

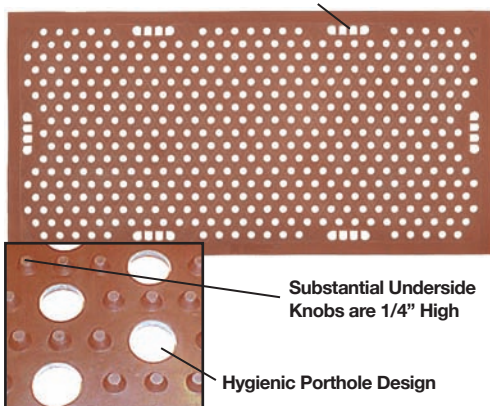

Designed to withstand fluids and oils including vegetable oils, animal fats, citrus, and fish oil. Textured surface increases traction when greasy and wet. Passes NSF test ASTM G21-96 (2002) for resistance to microorganisms. Is permanently anti-microbial and compound additive has GRAS status.

- » 100% anti-microbial rubber
- » Built in handles for easy cleaning
- » Designed for superior drainage and support



SPECIFICATIONS AND TESTING

Compound	100% Nitrile Rubber with special anti-microbial additives
Edges	Molded safety edges
Flammability	MVSS 302: "A" Rating
Coefficient of Friction	ASTM F1677: Dry: .78, Wet: .68
Durometer	ASTM D2240: 55
Temperature Range	ASTM D1056: -20 to 250°F and can be autoclaved
Warranty	2 years

STOCK ITEMS

Part Number	Size	Color
482.12x30x36TC	30" x 36"	Terra Cotta (TC)
482.12x30x60TC	30" x 60"	Terra Cotta (TC)


Sanitizing Footbath Mat No. 222



For complete decontamination, shoe soles must be immersed for one minute.

Designed to keep hygienic areas free of debris and germs.

- » Fill with disinfectant solution to remove contaminants and germs
- » Pliable rubber scrapers dislodge contaminants
- » Available in 1 or 5.5 gallon capacity



SPECIFICATIONS AND TESTING


Compound Edges	Natural rubber Molded and Beveled
Flammability (surface)	Meets DOC FF 1-70
Coefficient of Friction	ASTM F1677: Dry: >1.0, Wet: .98
UV Exposure	ASTM D1171: Excellent
Warranty	1 year

STOCK ITEMS


Part Number	Size
222.12x24x32BK (Standard)	24" x 32"
222.2.5x32x39 (Tall Wall)	32" x 39"

Tall Wall is available in Black (BK) or Black/Yellow (BYL). Specify when ordering.


Tall Wall

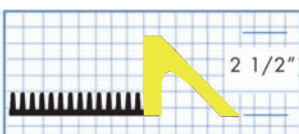

Standard

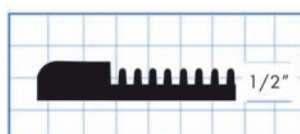



KushionWalk No. 475 and Abrasive Coated KushionWalk No. 480

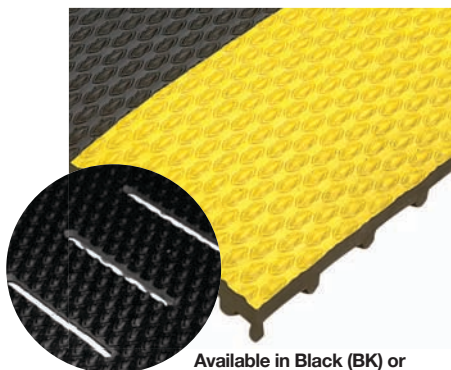

Available in Black (BK) or Black/Yellow (BYL), Unslotted (UNS) or Slotted (SLT).

KushionWalk's high quality PVC formulation and tough construction are ideal for heavy use areas.

- » Industrial tough and abrasion resistant
- » Durable textured surface guards against slipping
- » Optional drainage slots allow run-off and aeration
- » Highly cut resistant. Excellent choice for covering grated walkways

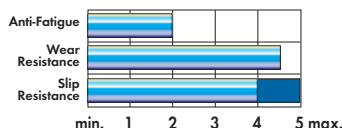

SPECIFICATIONS AND TESTING

Compound	100% Vinyl
Edges	Tapered, machine bevel
Flammability per MVSS 302	"A" Rating
Tabor Abrasion per Fed. Std. 191	No. 475: < 3% @ 1,000 cycles No. 480: < 1% lost @ 1,000 cycles
Coefficient of Friction per ASTM F1677	No. 475: Dry: 1.03, Wet: .81 No. 480: Dry: 1.10, Wet: .110
Warranty	1 year

KushionWalk No. 475 (no grit)

STOCK ITEMS

Part Number	Description	Color	Size
475.38x3x5SLT	Slotted	Black or Black/Yellow	3' x 5'
475.38x3x5UNS	Unslotted	Black or Black/Yellow	3' x 5'
475.38x2x60SLTBK	Slotted	Black	2' x 60'
475.38x2x60UNSBK	Unslotted	Black	2' x 60'
475.38x3x60SLTBK	Slotted	Black	3' x 60'
475.38x3x60UNSBK	Unslotted	Black	3' x 60'

NON-STOCK ITEMS

Part Number	Description	Color	Size
475.38x2x60SLTBYL	Slotted	Black/Yellow	2' x 60'
475.38x2x60UNSBYL	Unslotted	Black/Yellow	2' x 60'
475.38x3x60SLTBYL	Slotted	Black/Yellow	3' x 60'
475.38x3x60UNSBYL	Unslotted	Black/Yellow	3' x 60'
475.38x2CUTSLT	Slotted	Black or Black/Yellow	2' Cut up to 60'
475.38x2CUTUNS	Unslotted	Black or Black/Yellow	2' Cut up to 60'
475.38x3CUTSLT	Slotted	Black or Black/Yellow	3' Cut up to 60'
475.38x3CUTUNS	Unslotted	Black or Black/Yellow	3' Cut up to 60'

Please specify color when ordering.



Magnified Grit Surface (40% more traction than OSHA recommends)


Abrasive Coated Kushion Walk No. 480 (with grit, 40% extra traction)

STOCK ITEMS


Part Number	Size	Part Number	Size
480.38x2x60BK	2' x 60'	480.38x2CUTBK	2' Cut up to 60'
480.38x3x60BK	3' x 60'	480.38x3CUTBK	3' Cut up to 60'

Slotted (SLT) and Unslotted (UNS) versions are available. Please specify when ordering.

Heavy Duty Corrugated Runner No. 305

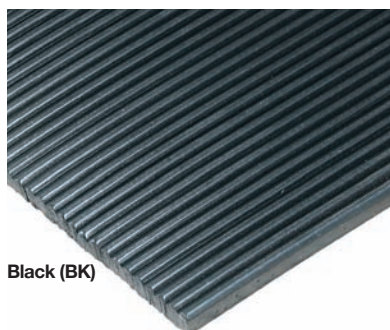


Black (BK)



Protects floors and provides long-lasting slip and chemical resistance in most any environment.

- » Our thickest and toughest runner
- » Withstands abuse in extremely high traffic areas

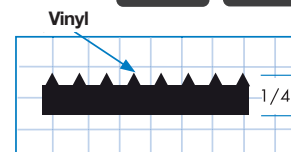


SPECIFICATIONS AND TESTING


Compound	100% Vinyl
Flammability	MVSS 302: "A" Rating
Coefficient of Friction	ASTM F1677: Dry: .91, Wet: .65
Tabor Abrasion	Fed Std. 191 < 1% lost @ 1,000 cycles
Warranty	1 year

STOCK ITEMS

Part Number	Size	Part Number	Size
305.14x2x75BK	2' x 75'	305.14x2CUTBK	2' Cut up to 75'
305.14x3x75BK	3' x 75'	305.14x3CUTBK	3' Cut up to 75'
305.14x4x75BK	4' x 75'	305.14x4CUTBK	4' Cut up to 75'

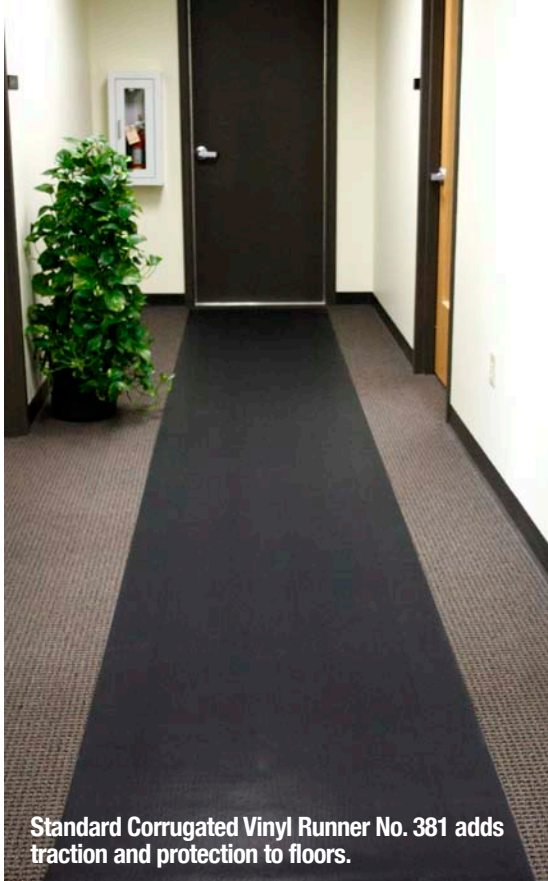

Standard Corrugated Vinyl Runner No. 381 adds traction and protection to floors.

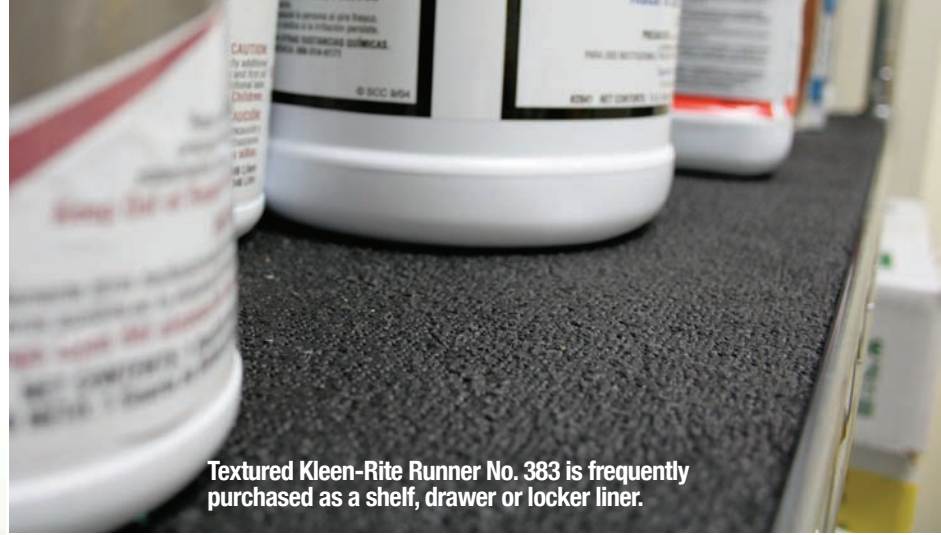


Textured Kleen-Rite Runner No. 383 is frequently purchased as a shelf, drawer or locker liner.


Wearwell runners are extremely versatile. Most people think of using runners for floor protection and as additional traction on smooth or polished floors. That is actually how much of it is used. However, the material is so versatile that we sell it for many other applications including: shelf and drawer liners, work-surface protection, locker liners and even as a floorboard covering in tow motors.

Vinyl Grid Air Tread No. 891 and Vinyl Grid Gripper Tread No. 892

No. 891




Black (BK)




Blue (BL)

No. 892



Black (BK)



Red (RD)

A perfect choice for wet work areas including pools and boats.



Vinyl Grid Air Tread No. 891

Comfortable (open tube) design.
Surface Texture: Smooth, tubular.

Vinyl Grid Gripper Tread No. 892

Reliable slip protection. Surface texture: Tire-like, gripper tread.

- » Elevates workers above slippery areas and allows free drainage
- » Resists UV rays and mildew
- » Ideal for medium duty wet areas

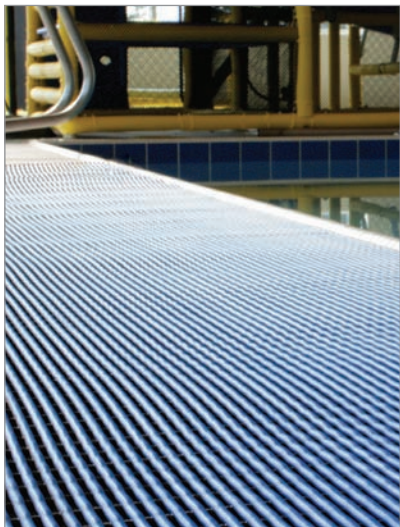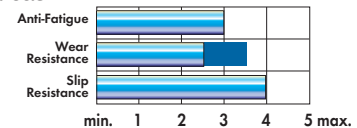


SPECIFICATIONS AND TESTING

Compound	100% Vinyl
Flammability (surface)	MVSS 302: "A" Rating
Coefficient of Friction per ASTM F1677	No. 891: Dry: 1.04, Wet: .92 No. 892: Dry: 1.01 Wet: .83
Tabor Abrasion	Fed. Std. 191: 1% lost @1,000 cycles
Durometer per ASTM D2240	No. 891: 60, No. 892: 75
Warranty	1 year



NO. 891	STOCK ITEMS		NON-STOCK ITEMS	
Thickness	Part Number	Size	Part Number	Size
3/8"	891.38x2x40	2' x 40'	891.38x2CUT	2' Cut up to 40'
3/8"	891.38x3x40	3' x 40'	891.38x3CUT	3' Cut up to 40'
3/8"	891.38x4x40	4' x 40'	891.38x4CUT	4' Cut up to 40'
Available colors: Black (BK) or Blue (BL). Please specify when ordering.				

NO. 892	STOCK ITEMS		NON-STOCK ITEMS	
Thickness	Part Number	Size	Part Number	Size
1/2"	892.12x2x40	2' x 40'	892.12x2CUT	2' Cut up to 40'
1/2"	892.12x3x40	3' x 40'	892.12x3CUT	3' Cut up to 40'
1/2"	892.12x4x40	4' x 40'	892.12x4CUT	4' Cut up to 40'
Available colors: Black (BK) or Red (RD). Please specify when ordering.				

Standard Corrugated Vinyl Runner No. 381

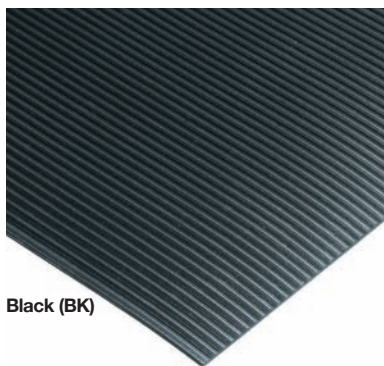

Black (BK)



Our most popular runner, Standard Corrugated Vinyl protects floors, reduces cleaning costs and adds traction where it's needed.

- » Easy to clean surface, chemical resistant
- » Won't curl during use

STOCK ITEMS


Part Number	Size
381.18x2x75BK	2' x 75'
381.18x2x75BK	2' x 105'
381.18x2x75BK	2' x 150'
381.18x3x75BK	3' x 75'
381.18x3x105BK	3' x 105'
381.18x3x150BK	3' x 150'
381.18xx75BK	4' x 75'
381.18x4x105BK	4' x 105'
381.18x4x150BK	4' x 150'

NON-STOCK ITEMS



Part Number	Size
381.18x2CUTBK	2' Cut up to 105'
381.18x3CUTBK	3' Cut up to 105'
381.18x4CUTBK	4' Cut up to 105'



KleenSweep Runner No. 391

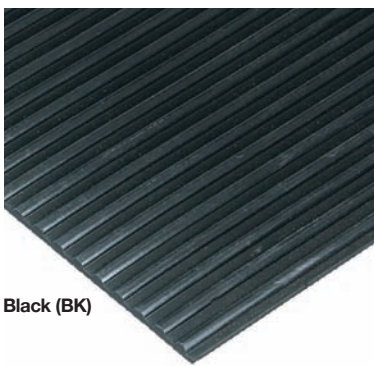

Black (BK)

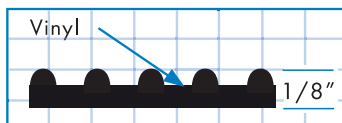

A durable runner named for its easy-to-clean properties.

- » Round-rib design cleans easily
- » Designed for moderate foot traffic in maintained areas
- » Durable vinyl construction

STOCK ITEMS


Part Number	Size
391.18x2x105BK	2' x 105'
391.18x3x105BK	3' x 105'
391.18x4x105BK	4' x 105'

NON-STOCK ITEMS

Part Number	Size
391.18x2CUTBK	2' Cut up to 105'
391.18x3CUTBK	3' Cut up to 105'
391.18x4CUTBK	4' Cut up to 105'





Diamond-Plate Runner No. 385

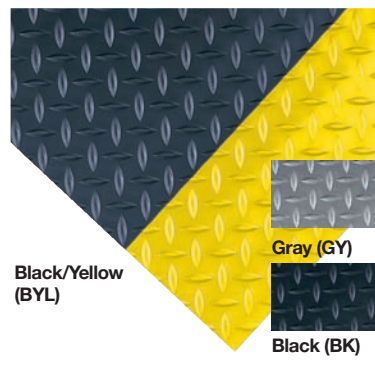

Black/Yellow (BYL)

Gray (GY)

Black (BK)

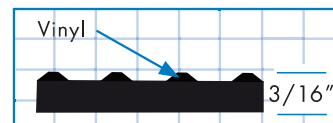

Our industrial strength Diamond-Plate Runner protects floors from heavy foot traffic and increases traction.

- » Industrial strength
- » Provides extra traction
- » Durable vinyl construction

STOCK ITEMS

Part Number	Size
385.316x2x75	2' x 75'
385.316x3x75	3' x 75'
385.316x4x75	4' x 75'

NON-STOCK ITEMS


Part Number	Size
385.316x2CUT	2' Cut up to 75'
385.316x3CUT	3' Cut up to 75'
385.316x4CUT	4' Cut up to 75'

Available Colors: Black (BK), Gray (GY) or Black/Yellow (BYL). Please specify when ordering.




SPECIFICATIONS AND TESTING	No. 381	No. 391	No. 385
Compound	100% Vinyl	Vinyl	100% Vinyl
Coefficient of Friction per ASTM F1677	Dry: .91, Wet: .65	Dry: .84, Wet: .77	Dry: .68, Wet: .17
Tabor Abrasion @ 1000 cycles per Fed. Std. 191	<1% lost	<1% lost	1% lost
Tensile Strength per ASTM D412	n/a	1800 lbs.	1250 lbs.
Flammability per MVSS 302	"A" Rating	"A" Rating	"A" Rating
Warranty	1 year	1 year	1 year

Enviro Mat No. 405

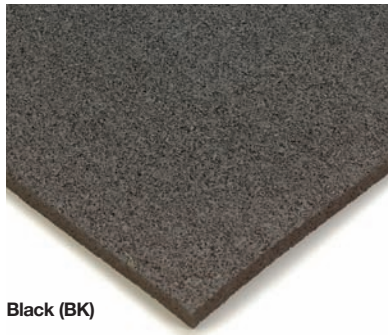

Black (BK)

Recycled tire buffings

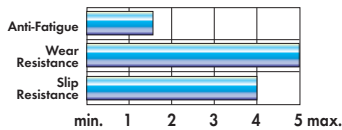


This “green” mat, composed of more than 80% post-consumer recycled content, offers impact resistance where employees walk, work, and even workout.

- » Manufactured from recycled tire buffings
- » Tough enough for heavy use
- » Dense compound provides cushion and impact absorption

STOCK ITEMS	
Part Number	Size
405.38x2x105BK	2' x 105'
405.38x3x105BK	3' x 105'
405.38x4x105BK	4' x 105'
NON-STOCK ITEMS	
Part Number	Size
405.38x2CUTBK	2' Cut up to 105'
405.38x3CUTBK	3' Cut up to 105'
405.38x4CUTBK	4' Cut up to 105'





Radial Runner No. 356

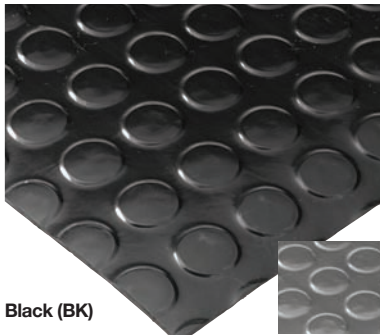

Black (BK)

Gray (GY)

Vinyl



Designed for interior walkways. Complies with NFPA flammability specifications and Type II construction.

- » Ideal for high traffic commercial walkways
- » Surface pattern offers traction and aesthetics
- » Can be permanently installed



STOCK ITEMS	
Part Number	Size
356.18x3x50	3' x 50'
356.18x4x50	4' x 50'
NON-STOCK ITEMS	
Part Number	Size
356.18x3CUT	3' Cut up to 50'
356.18x4CUT	4' Cut up to 50'
Available Colors: Black (BK) or Gray (GY). Please specify when ordering.	



Textured Kleen-Rite Runner No. 383



TPE

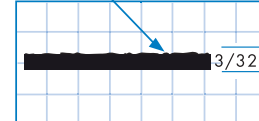

Our most versatile runner prevents slip accidents, but is frequently purchased as a shelf, drawer or locker liner.

- » Protects floors and improves traction
- » Durable and abrasion resistant
- » Easily customized

STOCK ITEMS	
Part Number	Sizes
383.332x3x75BK	3' x 75'
383.332x3x150BK	3' x 150'
383.332x4x75BK	4' x 75'
383.332x4x150BK	4' x 150'
NON-STOCK ITEMS	
Part Number	Sizes
383.332x3CUTBK	3' Cut up to 150'
383.332x4CUTBK	4' Cut up to 150'



SPECIFICATIONS AND TESTING	No. 405	No. 356	No. 383
Compound	Recycled SBR rubber and polyurethane	100% Vinyl	TPE
Coefficient of Friction per ASTM F1677	n/a	Dry: 1.1, Wet: .67	Dry: 1.10, Wet: .32
Tabor Abrasion	Federal Standard 193, modified: < 5% @ 1,000 cycles (H-18) 1000 kg	Fed. Std. 191: 1% lost @ 1,000 cycles	Fed. Std. 191: 1% lost @ 1,000 cycles
Tensile Strength per ASTM D412	n/a	n/a	ASTM D412: 1000 lbs.
Flammability per MVSS 302	“A” Rating	“A” Rating	“A” Rating
Warranty	1 year	1 year	1 year



Outdoor Solution: OutFront Reversible Scraper No. 227




Indoor Solution: Cavalier No. 287

OutFront Reversible Scraper No. 227




Black (BK)

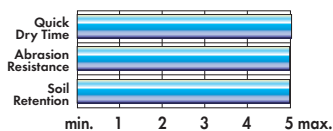

Totally reversible, it can be flipped over to accommodate all weather conditions.

- » Quick-dry drainage ports
- » Flexible scrapers to remove debris and moisture
- » Stiff ridges scrape heavier debris and packed snow

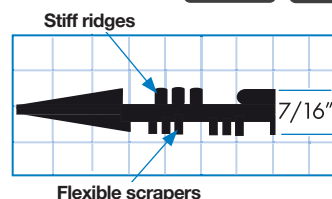

SPECIFICATIONS AND TESTING

Compound	SBR/Natural rubber
Edges	Tapered
Flammability	MVSS 302: "A" Rating
Warranty	1 year

STOCK ITEM

Part Number	Thickness	Size
227.716x3x6BK	7/16"	3' x 6'



UpFront Reversible Scraper No. 224



Black (BK)

Effective, low profile design accommodates tight doorways and underside grippers prevent movement. Also available in a "quick-dry", open slot design to facilitate drainage.

- » Durable rubber compound resists elements
- » Pliable ridges scrape debris, snow and rain off shoes
- » Easy maintenance

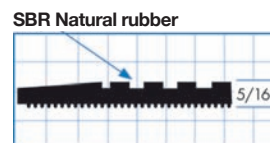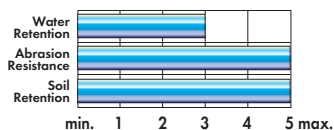


SPECIFICATIONS AND TESTING

Compound	SBR/Natural rubber
Flammability	MVSS 302: "A" Rating
Warranty	1 year

STOCK ITEMS

Part Number	Size
224.516x3x5GRSLTBK (Slotted)	3' x 5'
224.516x3x5GRBK (Unslotted)	3' x 5'

Multi-Guard Heavy Duty No. 220

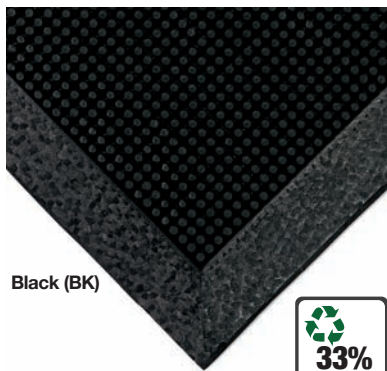


Black (BK)




This high performance outdoor entrance mat removes and holds debris between cleanings.

- » Best line of defense during bad weather conditions
- » Thousands of scraping fingers
- » Effectively captures pounds of dirt

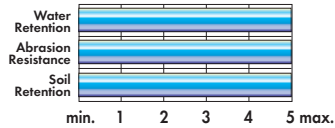

Natural rubber



SPECIFICATIONS AND TESTING

Compound	Natural Rubber
Edges	1" molded and beveled
Flammability	Meets DOC FF1-70 standards
Coefficient of Friction	ASTM F1677: Dry: >1.0, Wet: = .98
UV Exposure	ASTM D1171 Excellent
Temperature Range	ASTM D1056 10 to 120°F
Warranty	1 year

STOCK ITEMS

Part Number	Sizes
220.12x24x32BK	24" x 32"
220.12x28x46BK	28" x 46"
220.12x32x39BK	32" x 39"
220.12x3x5BK	3' x 5'
220.12x3x6BK	3' x 6'

Mud Chucker™ No. 229



Portable shoe scraper removes dirt from the sides and bottoms of boots or shoes.

- » Pliable rubber finger-tips on side walls
- » Portable or permanent




SPECIFICATIONS AND TESTING

Compound	Natural Rubber
Thickness	1" at front edge and 2 3/8" on the sides
Flammability	MVSS 302: "A" Rating
Warranty	1 year

STOCK ITEM

Part Number	Size
229.2.2x12.4x15.25BK	2" x 12" x 15.25"

Elite Super Olefin No. 211

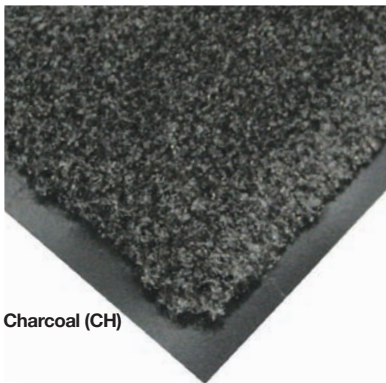


Charcoal (CH)




Performs exceptionally well even in the heaviest traffic areas.

- » Attractive thick pile
- » Quickly soaks up dirt and water
- » Dense fibers remain soft

Olefin pile

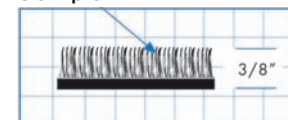

Brown (BN) Black (BK) Blue (BL)

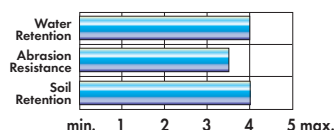

SPECIFICATIONS AND TESTING


Compound	Olefin pile and vinyl
Edges	1" vinyl border
Flammability	Meets DOC FF1-70 & DOC FF2-70 Standards
Coefficient of Friction	ASTM C1028-96: Dry: .84, Wet: .77
Warranty	1 year

STOCK ITEMS

Part Number	Size	Part Number	Size
211.38x2x3	2' x 3'	211.38x3x60	3' x 60'
211.38x3x4	3' x 4'	211.38x4x60	4' x 60'
211.38x3x5	3' x 5'	211.38x6x60	6' x 60'
211.38x3x6	3' x 6'	211.38x3CUT	3' Cut up to 60'
211.38x4x6	4' x 6'	211.38x4CUT	4' Cut up to 60'
211.38x4x8	4' x 8'	211.38x6CUT	6' Cut up to 60'

Available Colors: Black (BK), Blue (BL), Brown (BN) and Charcoal (CH). Specify when ordering.


Cavalier No. 287

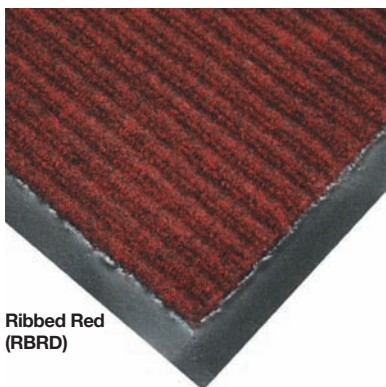


Ribbed Red (RBRD)




Ribbed Charcoal (RBCH)



Ribbed Brown (RBBN)




Ribbed Gray (RBGY)

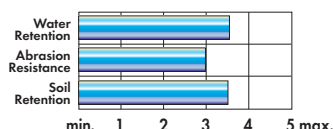

An affordable and attractive entrance solution for any interior.

- » Super coarse, absorptive fibers and two-level construction
- » Hides dirt and traffic patterns

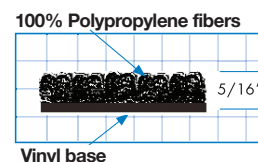

SPECIFICATIONS AND TESTING


Surface Material	100% solution-dyed polypropylene
Backing	Vinyl with 1" border
Coefficient of Friction	ASTM C1028-96: Dry: .8447, Wet: .7749
Flammability	Meets DOC FF1-70 & DOC FF2-70 Standards
Warranty	1 year

STOCK ITEMS

Part Number	Size	Part Number	Size
287.516x3x4	3' x 4'	287.516x3x60	3' x 60'
287.516x3x5	3' x 5'	287.516x4x60	4' x 60'
287.516x3x6	3' x 6'	287.516x6x60	6' x 60'
287.516x4x6	4' x 6'	287.516x3CUT	3' Cut up to 60'
287.516x4x8	4' x 8'	287.516x4CUT	4' Cut up to 60'
		287.516x6CUT	6' Cut up to 60'

Available Colors: Brown (BN), Charcoal (CH), Gray (GY) and Red (RD). Specify when ordering.

Clean Zone No. 290

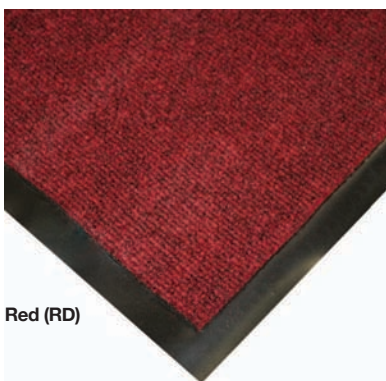

Red (RD)




Charcoal (CH)



Brown (BN)




Gray (GY)

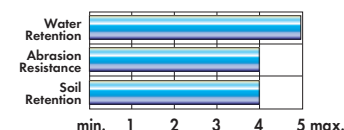

A premium choice for heavily trafficked entrances, its slim-line profile will accommodate even the lowest threshold doorways.

- » Dense, super absorptive, polypropylene fibers
- » Crush-resistant

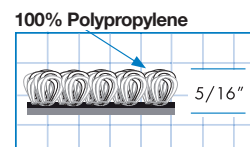


SPECIFICATIONS AND TESTING

Surface Material	100% Polypropylene
Flammability	Meets DOC FF1-70 & DOC FF2-70 Standards
Coefficient of Friction	ASTM F1677 Dry: .8447, Wet: .7749
Warranty	1 year

STOCK ITEMS

Part Number	Size	Part Number	Size
290.516x2x3	2' x 3'	290.516x3x60	3' x 60'
290.516x3x4	3' x 4'	290.516x4x60	4' x 60'
290.516x3x5	3' x 5'	290.516x6x60	6' x 60'
290.516x4x6	4' x 6'	290.516x3CUT	3' Cut up to 60'
290.516x4x8	4' x 8'	290.516x4CUT	4' Cut up to 60'
		290.516x6CUT	6' Cut up to 60'

Available Colors: Brown (BN), Charcoal (CH), Gray (GY) and Red (RD). Specify when ordering.

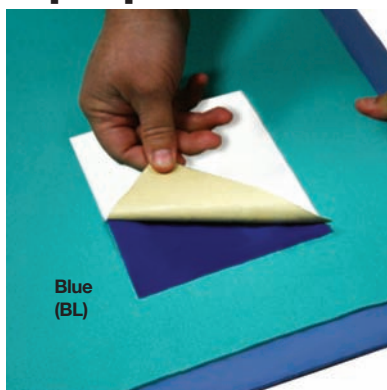GripStrips No. 051

Prevents mats from moving out of place but without leaving a residue on the floor's surface.

- » Use on highly-polished floors to prevent movement of sponge-backed mats
- » Unique polymer is permanently tacky
- » Highly effective; only a few needed even in high traffic areas
- » Strips can be cleaned off and remain tacky

STOCK ITEMS

Part Number	Size
051.6x6BL	6" x 6"

GripSafe Reflective Tape No. 050

Prevent mat movement on concrete, terrazzo, tile, vinyl, or even asphalt.

- » Use indoors and outdoors
- » Hold rubber and vinyl mats in place
- » Define work areas and pathways

**STOCK ITEMS**

Part Number	Size
050.4x45YL	4" x 45'

LockFast No. 053

Tiny grippers secure carpet or sponge-backed mats in place on carpeted surfaces. (Some movement may occur on cut or plush-pile surfaces.)


- » Requires no additional adhesive or fasteners
- » Peel, stick and press to secure mat to carpet

STOCK ITEMS

Part Number	Size
053.1x75BK	1" x 75'


NON-STOCK ITEMS

Part Number	Size
053.1CUTBK	1" Cut up to 75'

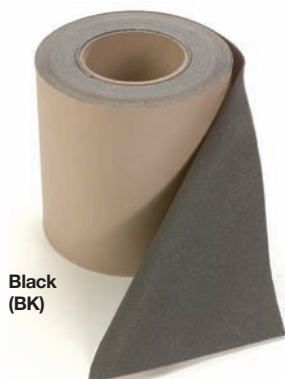Safety Track No. 698

Convenient, long lasting traction on interior ramps, ladders and walkways.

- » Adheres to wood, metal and concrete
- » Simply peel and apply to a clean, dry surface

**SPECIFICATIONS AND TESTING**

Surface Material	Slip-resistant grit
Coefficient of Friction	ASTM F1677 Dry: .95, Wet: .80

STOCK ITEMS

Part Number	Size
698.12x60BK	12" x 60'
698.18x60BK	18" x 60'
698.1x60BK	1" x 60'
698.2x60BK	2" x 60'
698.3x60BK	3" x 60'
698.4x60BK	4" x 60'
698.6x24BK	6" x 24'
698.6x60BK	6" x 60'

Safety Sorb No. 400

Keep your plant cleaner, safer and drier.

- » Confines leaks, drips and oversprays
- » Absorbs up to 10 times its weight in water, grease and oil

**STOCK ITEMS**

Part Number	Thickness	Size
400.14x3x150GY	1/4"	3' x 150'

Functional. Effective. Green.


As the thought leader in the global ergonomic and safety matting industry, we recognize our role and responsibility in promoting industry-leading standards and responding proactively to global issues.

Responsible business practices are key to a company's success. At Wearwell, we recognize that every aspect of our business has an impact on the environment, and that it is our responsibility to mitigate that impact to the best of our ability.

PRODUCT NO.	PRODUCT NAME	% RECYCLED CONTENT	LEED CREDIT	PAGE
220	Heavy Duty Multi-Guard	33%	1 point	52
222	Sanitizing Footbath Mat	33%	1 point	46
224	UpFront Scraper Mat	>33%	1 point	51
227	OutFront Reversible Scraper Mat	>33%	1 point	51
229	Mud Chucker™	>50%	1 point	52
305	Heavy Duty Corrugated Runner	>50%	1 point	47
381	Standard Corrugated Vinyl Runner	>50%	1 point	49
383	Textured Kleen-Rite Rubber Runner	>50%	1 point	50
385	Diamond-Plate Runner	>50%	1 point	49
391	KleenSweep Runner	>50%	1 point	49
400	Safety Sorb	100%	1 point	54
405	Enviro Mat	>80%	1 point	50
414	UltraSoft Diamond-Plate	>50%	1 point	14
415	Diamond-Plate SpongeCote®	>50%	1 point	14
416	Diamond-Plate w/ GritWorks!®	>50%	1 point	14
418	(SR) Diamond-Plate	>50%	1 point	17
431	Corrugated SpongeCote®	>50%	1 point	34
433	ComfortPro™	>50%	1 point	34
447	WeldSafe®	>20%	1 point	17
454	Ortho Stand™	>50%	1 point	35
460	Comfort Deck®	>80%	1 point	24
461	Grit-Top Comfort Deck®	>80%	1 point	24
465	Emergency Shower & Eyewash Mat	>80%	1 point	24
470	Modular Diamond-Plate GR	>50%	1 point	23
472	Modular WorkSafe® Light GR	>33%	1 point	33
474	WorkRite	>33%	1 point	23
477	WorkSafe®	>33%	1 point	19
495	Diamond-Plate Select	>50%	1 point	14
496	Smart® Tile Top	50%	1 point	25
497	Smart® Diamond-Plate UltraSoft	>80%	1 point	14
518	Comfort2Go™	>50%	1 point	18
540	F.I.T.™ Functional Intlock Open	>80%	1 point	13
541	F.I.T.™ Functional Intlock SOLID	>80%	1 point	13
542	F.I.T.™ Functional Intlock Gritted Open	>80%	1 point	13
543	F.I.T.™ Functional Intlock Grit Solid	>80%	1 point	13
560	ErgoDeck® Open	>80%	1 point	10
561	ErgoDeck® Open w/GritWorks!®	>80%	1 point	10
562	ErgoDeck® Solid	>80%	1 point	10
563	ErgoDeck® Solid w/GritWorks!®	>80%	1 point	10
564	ErgoDeck® SOFT Open	>80%	1 point	10
566	ErgoDeck® SOFT Solid	>80%	1 point	10
570	24/Seven® Solid GR	>50%	1 point	20
572	24/Seven® GR	>50%	1 point	20
572	24/Seven® Edging Yellow GR	>50%	1 point	20
572	24/Seven® Edging Black GR	>50%	1 point	20
788	Modular Diamond-Plate ESD	>33%	1 point	38
789	Modular WorkSafe® Light ESD	>33%	1 point	38



Wearwell is a member of the United States Green Building Council. The USGBC is a 501(c)(3) non-profit community of leaders working to make green buildings accessible to everyone. The USGBC created the Leadership in Energy and Environmental Design (LEED) Green Building Rating System™. This system encourages global adoption of sustainable green building and development practices through the implementation of performance criteria.

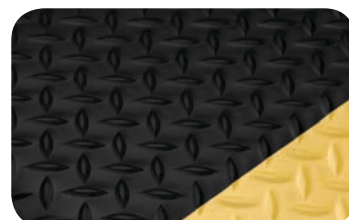

Over 120,000 lbs. of PVC is recycled each year by our manufacturing facility.



In 2007, we transitioned to a new digitized document system that successfully reduced paper consumption and storage by 80%.



Product Quick Reference

		CATALOG PAGE #	SURFACE COMPOUND					ENVIRONMENT				DESIGN				CUSTOM			OTHER				
			URETHANE	NITRILE	PVC	NATURAL RUBBER	CFR RUBBER	SBR RUBBER	DRY	WET	WET/OILY	PAINT	w/ GRIT	DRAINAGE	SOLID	OPTIONAL BORDERS	CART FRIENDLY	SHAPES	LENGTH	WIDTH	MODULAR	NON-CONDUCTIVE	CONDUCTIVE/ESD
PRODUCT																							
092	PermaTack	42			●				●					●								●	●
222	Sanitizing Footbath	46				●			●					●	●								
305	Heavy Duty Corrugated	47			●				●					●				●					
356	Radial Runner	50			●				●					●				●					
381	Standard Corrugated Vinyl	49			●				●					●				●					
383	Textured Kleen-Rite Runner	50			●				●					●				●					
385	Diamond-Plate Runner	49			●				●					●	●			●					
391	KleenSweep Runner	49			●				●					●				●					
405	Enviro Mat	50						●	●					●				●					
414	UltraSoft Diamond-Plate	14			●				●					●	●		●	●	●				
415	Diamond-Plate SpongeCote®	14			●				●					●	●		●	●	●				
416	Diamond-Plate w/ GritWorks!®	14			●				●			●		●			●	●	●				
418	Slip Resistant Diamond-Plate (SR)	17			●				●					●	●		●	●	●				
419	UltraSoft Tile-Top AM	25			●				●					●			●	●	●				●
420	Tile-Top AM	25			●				●					●			●	●	●				●
427	Soft Step	30			●				●					●				●					
431	Corrugated SpongeCote®	34			●				●					●	●			●					
433	ComfortPro™	34			●				●					●				●					
438	LightWorks Inspection Mat	18			●				●			●		●				●					
440	Ultra-Tred ArmorCote	31			●				●					●	●			●					
442	Deluxe Tuf Sponge	30			●				●					●	●			●					
444	Deluxe Soft Step	30			●				●					●	●			●					
447	WeldSafe®	17				●			●					●			●	●	●				
451	Tuf Sponge	30			●				●					●	●			●					
452	Diamond Tuf Sponge	30			●				●					●	●			●					
454	Ortho Stand™	35				●			●	●				●	●								
459	Endurable	32			●				●					●				●					
460	Comfort Deck®	24			●				●	●	●		●	●	●	●	●	●	●				
461	Grit-Top Comfort Deck®	24			●				●	●		●	●	●	●	●	●	●	●				
465	Emergency Shower & Eyewash Station Mat	24			●				●	●			●	●	●								
470	Modular Diamond-Plate (GR & NBR)	23		●		●			●	●	●			●			●	●	●		●		
472	Modular WorkSafe® Light (GR & NBR)	33		●		●			●	●	●			●	●					●			
474	WorkRite	23				●			●	●			●										
475	Kushion Walk	47			●				●	●				●	●	●			●				
477	WorkSafe®	19				●			●	●				●	●	●	●	●	●	●			
478	WorkSafe® Light	35						●	●	●	●			●									
479	Industrial WorkSafe®	22						●	●	●				●		●							
480	Abrasive-Coated Kushion Walk	47			●				●	●	●		●	●	●				●				
482	Grade A®	46		●					●	●	●			●									●
487	Industrial GritWorks!®	22						●	●	●			●		●	●							
489	Ergo-Stance®	28						●	●					●			●	●	●				
494	Tile-Top Select	25			●				●					●				●					
495	Diamond-Plate Select	14			●				●					●	●			●					
496	SMART® Tile-Top	25			●				●					●				●					
497	SMART® Diamond Plate	14			●				●					●	●			●					
501	Rejuvenator®	29	●						●					●									
502	Rejuvenator® Connect	8	●						●					●	●		●	●	●	●			
504	Pur-Comfort	40	●						●					●								●	●
513	SubStance	31			●				●					●				●					
518	Comfort2Go™	18			●				●					●									
540	F.I.T.™ Open	13			●				●	●			●		●	●	●	●	●	●			
541	F.I.T.™ Solid	13			●				●					●	●		●	●	●	●			
542	F.I.T.™ Open with GritWorks!®	13			●				●	●	●		●	●	●	●	●	●	●	●			
543	F.I.T.™ Solid with GritWorks!®	13			●				●	●	●		●	●	●	●	●	●	●	●			

Product Quick Reference

		CATALOG PAGE #	SURFACE COMPOUND					ENVIRONMENT				DESIGN				CUSTOM			OTHER				
			URETHANE	NITRILE	PVC	NATURAL RUBBER	CFR RUBBER	SBR RUBBER	DRY	WET	WET/OILY	PAINT	w/ GRIT	DRAINAGE	SOLID	OPTIONAL BORDERS	CART FRIENDLY	SHAPES	LENGTH	WIDTH	MODULAR	NON-CONDUCTIVE	CONDUCTIVE/ESD
PRODUCT																							
560	ErgoDeck® Open	10																					
561	ErgoDeck® Open w/ GritWorks!®	10																					
562	ErgoDeck® Solid	10																					
563	ErgoDeck® Solid w/ GritWorks!®	10																					
564	ErgoDeck® SOFT Open	10																					
564	ErgoDeck® White SOFT Open	10																					
565	ErgoDeck® SOFT Open Grid with GritWorks!®	10																					
566	ErgoDeck® SOFT Solid	10																					
566	ErgoDeck® White SOFT Solid	10																					
567	ErgoDeck® SOFT Solid with GritWorks!®	10																					
570	24/Seven® Solid GR	20																					
570	24/Seven® Solid CFR	20																					
570	24/Seven® Solid NBR	20																					
572	24/Seven® GR	20																					
572	24/Seven® CFR	20																					
572	24/Seven® NBR	20																					
574	24/Seven® Solid w/ GritWorks!® CFR	20																					
574	24/Seven® Solid w/ GritWorks!® NBR	20																					
576	24/Seven® w/ GritWorks!® CFR	20																					
576	24/Seven® w/ GritWorks!® NBR	20																					
580	Autoclavable Mat	28																					
701	Diamond-Plate Switchboard	43																					
702	Currugated Switchboard	43																					
710	Marbleized Switchboard	44																					
711	Smooth Military Matting	45																					
712	Diamond-Plate Military Matting	45																					
720	Double-Duty	43																					
785	Conductive Runner, Diamond-Plate	39																					
786	Conductive Anti-Fatigue, Diamond-Plate	37																					
786	Conductive Anti-Fatigue, Smooth	37																					
788	Modular Diamond-Plate ESD	38																					
789	Modular WorkSafe® Light ESD	39																					
791	Static Dissipative Anti-Fatigue	39																					
793	ESD Work Surface Material	41																					
891	Vinyl Grid Air-Tread	48																					
892	Vinyl Grid Gripper Tread	48																					

Visit us online at www.wearwell.com/Application-Guide.html to learn more about mats that are best for your area or application.

Mat Cleaning Guidelines

For best results, mats should be cleaned regularly. Simply follow these instructions to keep your mats looking great and functioning effectively.

SpongeCote® Mats, PVC Sponges and Urethane Mats (Dry area mats):

Sweep regularly or dry-mop the surface. These mats can be wet-mopped with mild soap or detergent. For best results use a detergent like Ivory Liquid with a pH between 4.0 - 9.0.

Molded Rubber and PVC Anti-fatigue Mats (those designed for Wet areas):

Use a high-pressure hose (not to exceed 500 psi) and hot water (max 160°F) to rid the mats of oils. For best results use a mild soap or detergent like Ivory Liquid with a PH between 4.0 - 9.0, to clean the mats. Do not use steam (unless specifically recommended), degreasers or caustic chemicals. Do not machine wash or mechanically scrub the mats.

ESD Mats:

ESD Mats: When cleaning ESD mats, it is important to sweep or dry-mop the surface regularly. Also wet-mop or wipe off with mild soap or a static control cleaning solution that will not leave a residue. This will allow the mat to continue to function efficiently.

Runner Mats:

Runner Mats: Simply sweep the surface with a broom or vacuum. Our runners can also be wet-mopped with mild soap. Outdoor Entrance Mats: Take the mats outside and shake them to remove excess dirt and debris. If necessary, use a hose to wash them off.

Carpet Mats:

Our carpet and entrance mats are designed to lower your maintenance costs and still be easily maintained. Carpet mats can be cleaned the same way you maintain your carpeting. Vacuum them daily, and extract or shampoo them when dirt builds up.

PermaTack:

DO NOT USE SPIC AND SPAN OR ANY OTHER ABRASIVE CLEANERS OR OIL-BASED CLEANERS.

Recommended Cleaning Agent for Clean Room applications:


NOVACLEAN™ FLOOR CLEAN.

Recommended Cleaning Agent for Sterile applications:

IPA OR STERIS CLEANERS. To maintain the functionality of the mat, the ratio of IPA or Steris to water should not exceed 50%.

Recommended Cleaning Agent for General Applications:

Mix a 25% Ammonia/75% Water solution, use Windex or Simple Green All-Purpose. Other options include non-abrasive, non-oil-based cleaners with pH levels between 4 and 8.

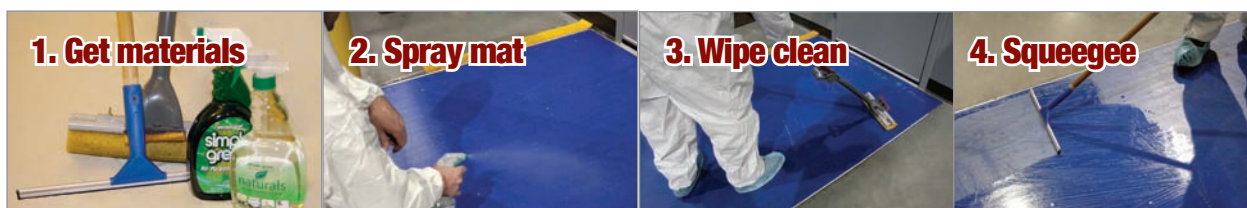

Pur-Comfort:

To clean, simply wipe down with a pre-moistened alcohol-based clean room wipe. For use in sterile applications, Pur-Comfort can also be autoclaved (275°F for 20 minutes at 15 psi) or gamma sterilized.

Autoclavable Mat:

Autoclave—Lay flat in an autoclave. Clean for 20 minutes at 15 psi and 275°F Fahrenheit.

Manual Cleaning—Use a mixture of hot water and a mild soap (like Ivory Liquid) with a pH between 4.0 and 9.0 and wipe the mat down. Another option is to use a pre-moistened wipe such as Sani-Cloth HB or SANI-CLOTH® PLUS both of which have very low levels of alcohol.

Chemical Resistance Data and Information

The resistance levels reflected in this chart are based on moderate exposure, not long-term immersion in any of the above listed fluids.

If your application is more rigorous, please request a sample to test against the chemicals in question. For best results, please use this chart as a guide, and schedule regular maintenance (cleaning) for your mats.

- A = Performs Well
- B = Slightly Affected
- C = Moderately Affected
- D = Highly Affected
- U = Not Recommended
- NT = Not Tested

Chemical	Urethane	Nitrile	PVC	CFR	SBR	Natural Rubber
Acetone	U	U	U	C	C	C
Animal Fats	NT	A	C	U	U	U
Bleach Solution (10% Dilute)	NT	B	B	C	C	C
Boric Acid	B	A	A	A	A	A
Brake Fluid	U	A	B	D	D	D
Brake Fluid - Silicone Based	U	A	B	A	B	B
Chlorine Solution (3% Dilute)	C	A	B	C	C	C
Citric Acid	NT	A	C	C	C	U
Cutting Fluid - Mineral Oil Based	U	B	B	B	C	D
Diesel Oil	U	A	B	U	U	U
Ethylene Acetate	NT	U	NT	U	U	U
Ethylene Glycol	B	A	A	A	A	A
Hydraulic Oil - Petroleum	U	A	B	D	D	D
Hydrochloric Acid Cold - 37% Dilute	U	C	C	B	B	B
Isopropyl Alcohol	A	B	A	B	B	A
Lacquer Solvents	U	U	U	U	U	U
Lindol (Hydraulic Fluid)	NT	U	NT	U	U	U
MEK	U	U	U	U	U	U
Mineral Oil	C	A	B	A	B	U
Naptha	NT	C	U	U	U	U
Napthlene	U	U	U	U	U	U
Petroleum	U	C	B	D	D	D
Salt water	A	A	B	B	B	C
Tolulene	U	U	U	U	U	U
Transmission Fluid - Type A	U	B	A	C	U	U
Trichloroethane	U	U	U	U	U	U
Vegetable Oil	C	A	B	C	C	C

Visit us online at www.wearwell.com/Chemical-Resistance-Guide.html for more specific chemical resistance information.

WATCH OUT!

Matting and Flooring Selection Guide

Wearwell is pleased to introduce a new way of thinking about the selection process for ergonomic matting and flooring. WATCH is intended to be an easy to remember and comprehensive set of criteria to help our customers specify the right products.

Anti-fatigue and safety matting is essential to the development of an ergonomically correct work environment for standing employees. Providing the proper ergonomic matting improves employee productivity, reduces lost time injuries and incidents, upgrades a facility's aesthetics and simply saves money for the organization. But since matting is purchased less frequently than many other Safety products (Ergonomic matting typically lasts 12 months or more in application) making the proper choice can be confusing to any buyer.

Simply remember to **WATCH** for these five elements in your applications:

How Can WATCH Help You?

1. Improve employee productivity
2. Reduce lost time
3. Reduce injuries and incidents
4. Upgrade facility aesthetics
5. Save money!

Wet Conditions
Application Specifics
Tearing
Compression
Heavy Duty



WET CONDITIONS: By nature, fluid degrades anything solid, including mats. This process can be greatly accelerated if the fluid is incompatible with the solid material it touches. Compatibility issues result in accelerated softening or hardening of the material and ultimately, the need to replace the mat. Pooling water increases the risks of slip hazards. Anti-fatigue and safety matting can reduce these risks when properly selected.

APPLICATION SPECIFICS: Many work environments have specific requirements to ensure worker and product safety, as well as overall productivity. OSHA, USDA, FDA, and the military all have rules for product usage in high risk environments. Additionally, unique products features are built into many products to accommodate areas that are wet and slippery, prone to electro-static static discharge, exposed to weld sparks and other application specific variables. Considering the application specifics where flooring and matting are to be used is extremely important.

TEARING: In general, mats are constructed of durable rubber and plastic materials and are resistant to tearing. However, heavy equipment on a mat can create enough torque to create a tear. Thin edges on mats can result in weak points that tear relatively easily. Also, modular mats with seams at the joints can separate over time depending on the connection system. There are many different types of anti-fatigue matting — those that are best suited for light, medium and heavy use areas. If the wrong mat is chosen for an area, the life of the mat is compromised.

COMPRESSION: To be ergonomically useful, a mat needs to be resilient meaning it needs to be flexible enough to resume its original shape or position after being compressed. In addition, an effective anti-fatigue mat needs to provide a soft enough surface that the muscles in the legs and back subtly flex to keep blood circulating. When a mat crushes down and loses its resilience, it is no longer ergonomically useful and should be replaced. Wearwell's Nitricell® sponge instantly springs back, making it one of the most lasting and comfortable products on the market today.

HEAVY DUTY: The top surface of a mat needs to be a slip resistant and aesthetically appropriate for the environment. It also needs to protect the underside of the mat from damage. A high traffic environment can cause the top surface to wear down and the mat to be replaced. A heavy traffic area requires anti-fatigue matting that will withstand abuse.

Knowing what to WATCH for provides peace of mind in the selection process. We encourage you to consider a Wearwell Site Survey.

**Our Wearwell Sales Professionals are
WATCH experts so you don't have to be!**

 **WEARWELL®**
You're in good company.®



WATCH for Wet Conditions. Water, greases/oils and chemicals can affect mat selection.




WATCH for Application Specifics. Are there regulations that need to be followed?



Light, medium and heavy use areas require different types of matting. **WATCH for Tearing.**



How resilient does your mat need to be? **WATCH for Compression.**

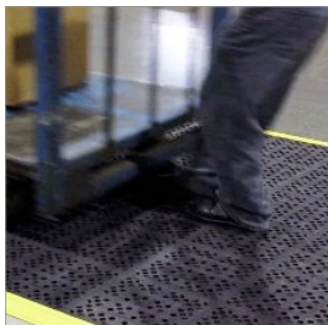


Is your application/area prone to heavy cart traffic and high levels of foot traffic? **WATCH for Heavy Duty.**

Value Continuum

Because Wearwell manufactures so many different types of mats and flooring products, we frequently get asked about the difference in value from one product to the next.

Generally, value in the ergonomic matting and flooring world boils down to *how much money a product costs relative to how long that product will last the customer*. We arrive at that figure by dividing the price per square foot of the product by the expected life of the product in years. The result shows a customer the price per year they are paying for different products.

Here is a very simple Value Continuum for a typical dry area application where we are comparing 3'x 5' 442 Deluxe Tuf Sponge vs. 415 Diamond-Plate Spongecote® vs. 502 Rejuvenator®.

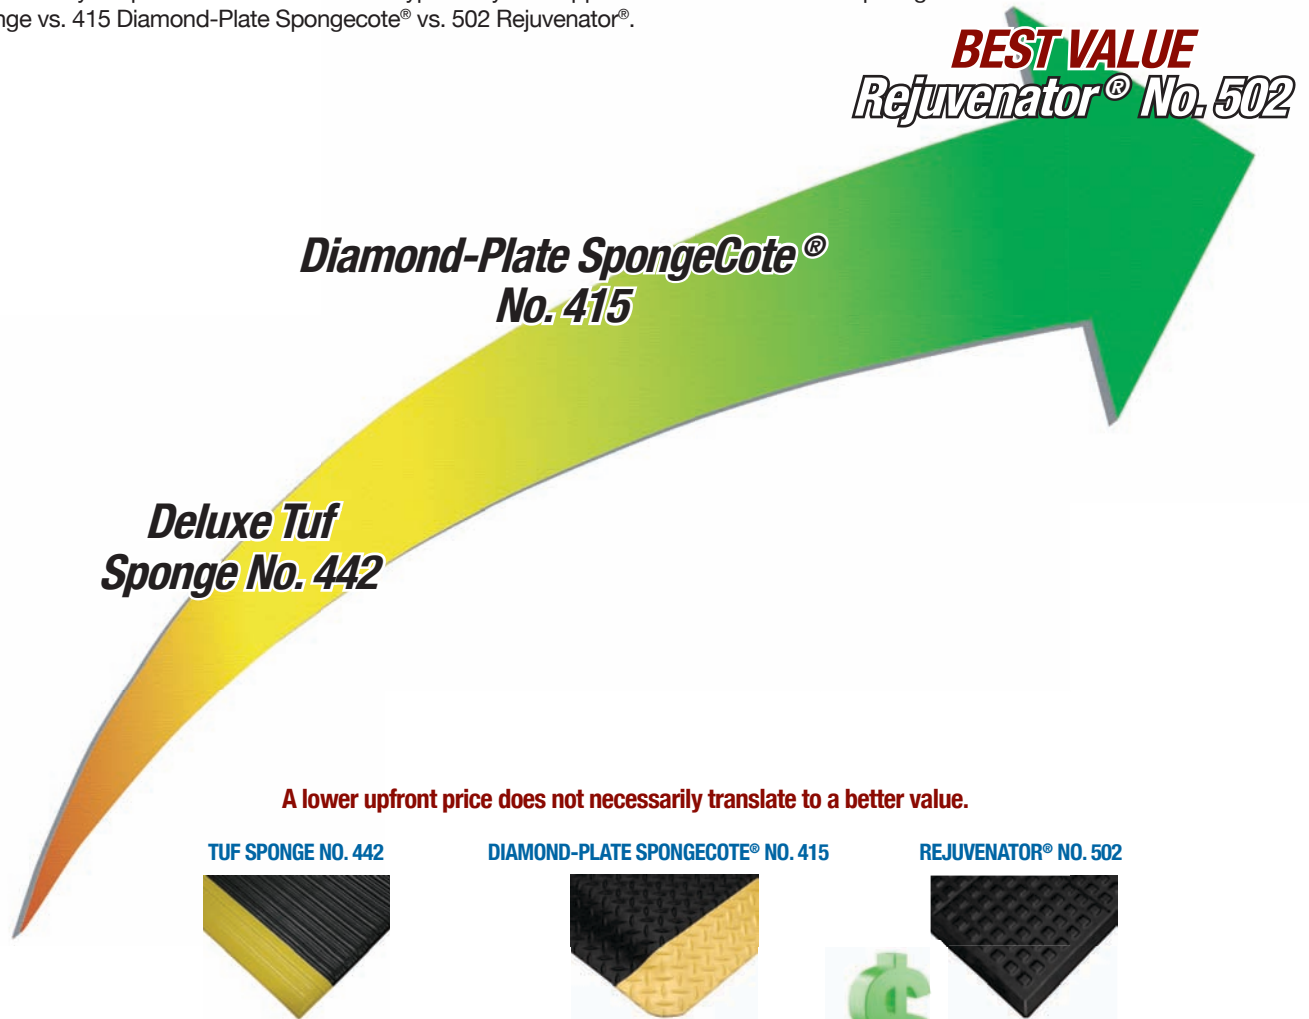

List Price	\$5.67	\$9.07	\$17.86
Life Expectancy	1 year	3 years	8 years
Value	\$5.67/year	\$3.02/year	\$2.23/year



A Value Continuum can be created for virtually any situation.

The specifics of each application are important in determining the variables, such as expected life and the best products to compare.

Consult with your Wearwell Sales Professional to assist in completing a Wearwell Value Continuum for your needs.

Proven Cost-Reduction

Anti-fatigue mats are an integral part of many Ergonomic and Safety Programs. Standing workers love them, but production managers need to be able to **justify the financial investment**. Although perception studies have proven workers feel much better when they use anti-fatigue mats, Wearwell wanted to go a step further and prove that anti-fatigue matting actually increases worker productivity—**resulting in real savings for the company**. This study examines the bottom-line impact of using anti-fatigue matting and essentially proves a positive return on investment (ROI).

Wearwell's 12-month ergonomics study was designed to answer several questions:

- ☒ Does standing on the job contribute to fatigue?
- ☒ Does the use of anti-fatigue matting lessen standing workers' fatigue?
- ☒ Can using anti-fatigue matting can be linked to increased worker productivity?
- ☒ Can anti-fatigue matting generate cost savings?

The company used in the study was a manufacturer of commercial ovens. It was the largest and “best” in terms of wages and benefits employer in a 30-mile radius, but with a high injury rate and a high rate of absenteeism—as high as 10% on Mondays.

More of the Company's Statistics	
No. of Employees	175 in Mfg./Assembly
No. of Shifts	2
Location Population	Less than 5,000
Avg. Employee Tenure	4 Years
Avg. Employee Age	41
Mean Employee Age	35

Before the installation of anti-fatigue matting, a questionnaire was given to workers to assess:

- Their current work surface (i.e. concrete)
- The overall level of fatigue before and after their shift
- The fatigue and discomfort level of their legs and feet before and after their shift

Once the matting was installed, the workers then completed that same questionnaire on a monthly basis for 12 months. The workers' perceptions were very clear. The participants felt considerably less fatigued before and after work when using anti-fatigue mats. In addition, the “at risk” areas of their bodies, such as legs, feet, and lower back, were much more comfortable when anti-fatigue mats were used.

Installation Facts	Before Mats	After Mats	Improvement with Mats
Injury Rate	>3 per month	<1 per month	70%
Absenteeism	5.2% (up to 10% on Mondays)	4%	23%



The installation of anti-fatigue mats resulted in an estimated 2.2% increase in productivity due to lower absenteeism and injury rates and a \$60,000 reduction in insurance premiums. The numbers prove it. Through this study Wearwell® was able to prove that anti-fatigue matting is good for employees and good for the business. The company studied realized a **cost savings of \$360,000 over the course of the one year study**.

Cost Savings Related to Anti-fatigue Mats	
Increased Productivity	\$300,000
Insurance Premium Reduction	\$60,000
Total Cost Savings	\$360,000

Wearwell® Site Survey:

Meet your goals with ergonomic and productivity solutions that work.

Virtually everyone has goals for their facility:

- » Cost Control
- » Productivity Improvement
- » Lost Time Prevention
- » Risk Management and Compliance
- » Down-time Reduction
- » Contamination Control

These are issues that face all of us, day in and day out. What you might not know is that **Wearwell can help you achieve these goals and others** through the proper selection of ergonomic matting.

If you would like to learn more about how we can help, please contact your Wearwell distributor and **request a Wearwell Site Survey**.

A qualified Wearwell expert will review your current matting condition, make suggestions to achieve your goals, take all necessary measurements and create drawings as needed to assure you get the information you require to make the best possible matting choice.



Rep Locator By Postalcode

For searching within the United States, enter a 5-digit postcode.

For searching within Canada, enter the first 3 letters of your postcode.

Find Rep

Visit www.wearwell.com and click the [Contact Rep](#) link. You'll see a map that distinguishes Rep Group territories and makes it easy for you to find your Rep Group. To find out who your assigned Rep is, enter your postcode into the [Rep Locator By Postalcode](#) tool on the left of the screen.

Take advantage of this valuable service today and experience how Wearwell can help you achieve your goals.



Risk Management



Compliance



Down-time Reduction



Productivity Improvement

This image shows a full page of blank, lined paper. It features approximately 20 evenly spaced horizontal grey lines across the entire width of the page, typical of standard notebook or legal pad paper. There are no margins, text, or other markings present.

Notes

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Common Applications Product Guide

We tried to put together a diagram of a building that showed all the different applications for Wearwell ergonomic matting and flooring. But in the end, Wearwell products support hard working people in such a wide variety of facilities, markets and applications that it just wasn't practical. So instead, we thought you might find useful this quick reference to just a few of our most common applications.

Assembly Lines

- » Diamond-Plate SpongeCote®
- » Rejuvenator®
- » ErgoDeck®

Ticket and Gate Counters

- » Diamond-Plate SpongeCote®
- » Rejuvenator®
- » Tile-Top AM

Metals Machining

- » 24/Seven® w/GritWorks!®
- » Industrial GritWorks!®
- » WorkSafe®

Medical Laboratories

- » Tile-Top AM
- » Pür-Comfort
- » Rejuvenator®

Paint Inspection

- » LightWorks
- » Tile-Top AM
- » ErgoDeck®

Electronic Equipment Assembly

- » Electrically Conductive Anti-Fatigue
- » Pür-Comfort
- » Clean Room Mat

Cashier Stations

- » SMART® Tile-Top
- » SubStance
- » Rejuvenator®

Operating Rooms and Surgery Centers

- » Autoclavable Mat
- » Rejuvenator®
- » Tile-Top AM

Baggage Handling

- » ErgoDeck®
- » 24/Seven®
- » F.I.T.™ Functional Interlocking Tiles

Data Recovery Clean Rooms

- » Pür-Comfort
- » Clean Room Mat
- » PermaTrack

Restaurant Kitchens

- » Grade A®
- » WorkRite
- » Modular WorkSafe® Light

Hallways and Aisles

- » Standard Corrugated Vinyl Runner
- » KleenSweep Runner
- » Clean Room Mat

If your application(s) are not listed, please contact a Wearwell Sales Professional to assist in your selection process.



Rev. 05012011
Part No.: C2011

Tennessee Mat Company, Inc.
199 Threet Industrial Rd
Smyrna, TN 37167
Phone: 800-264-3030
Fax: 800-874-4551
E-mail: info@wearwell.com
www.wearwell.com