



Fluid Sensors

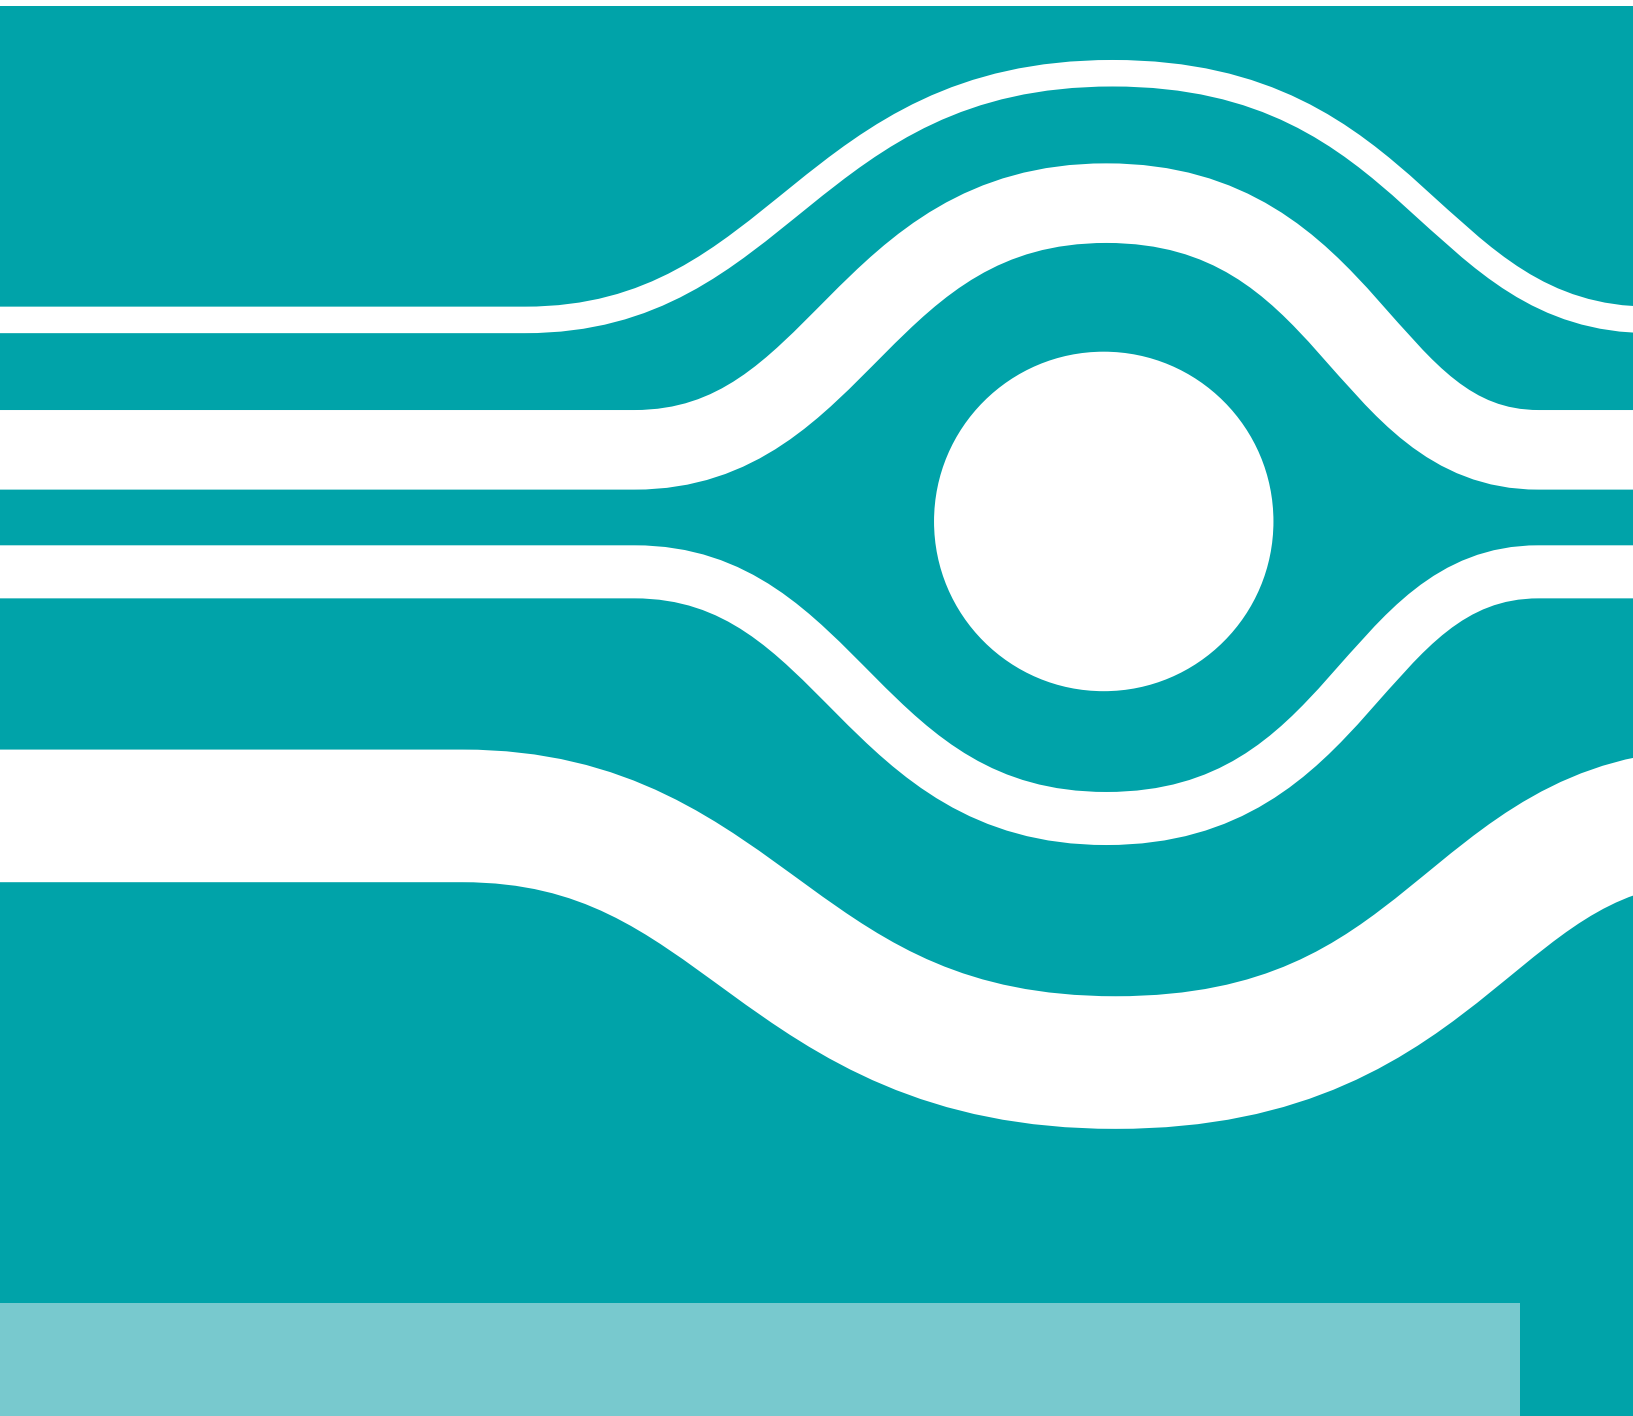

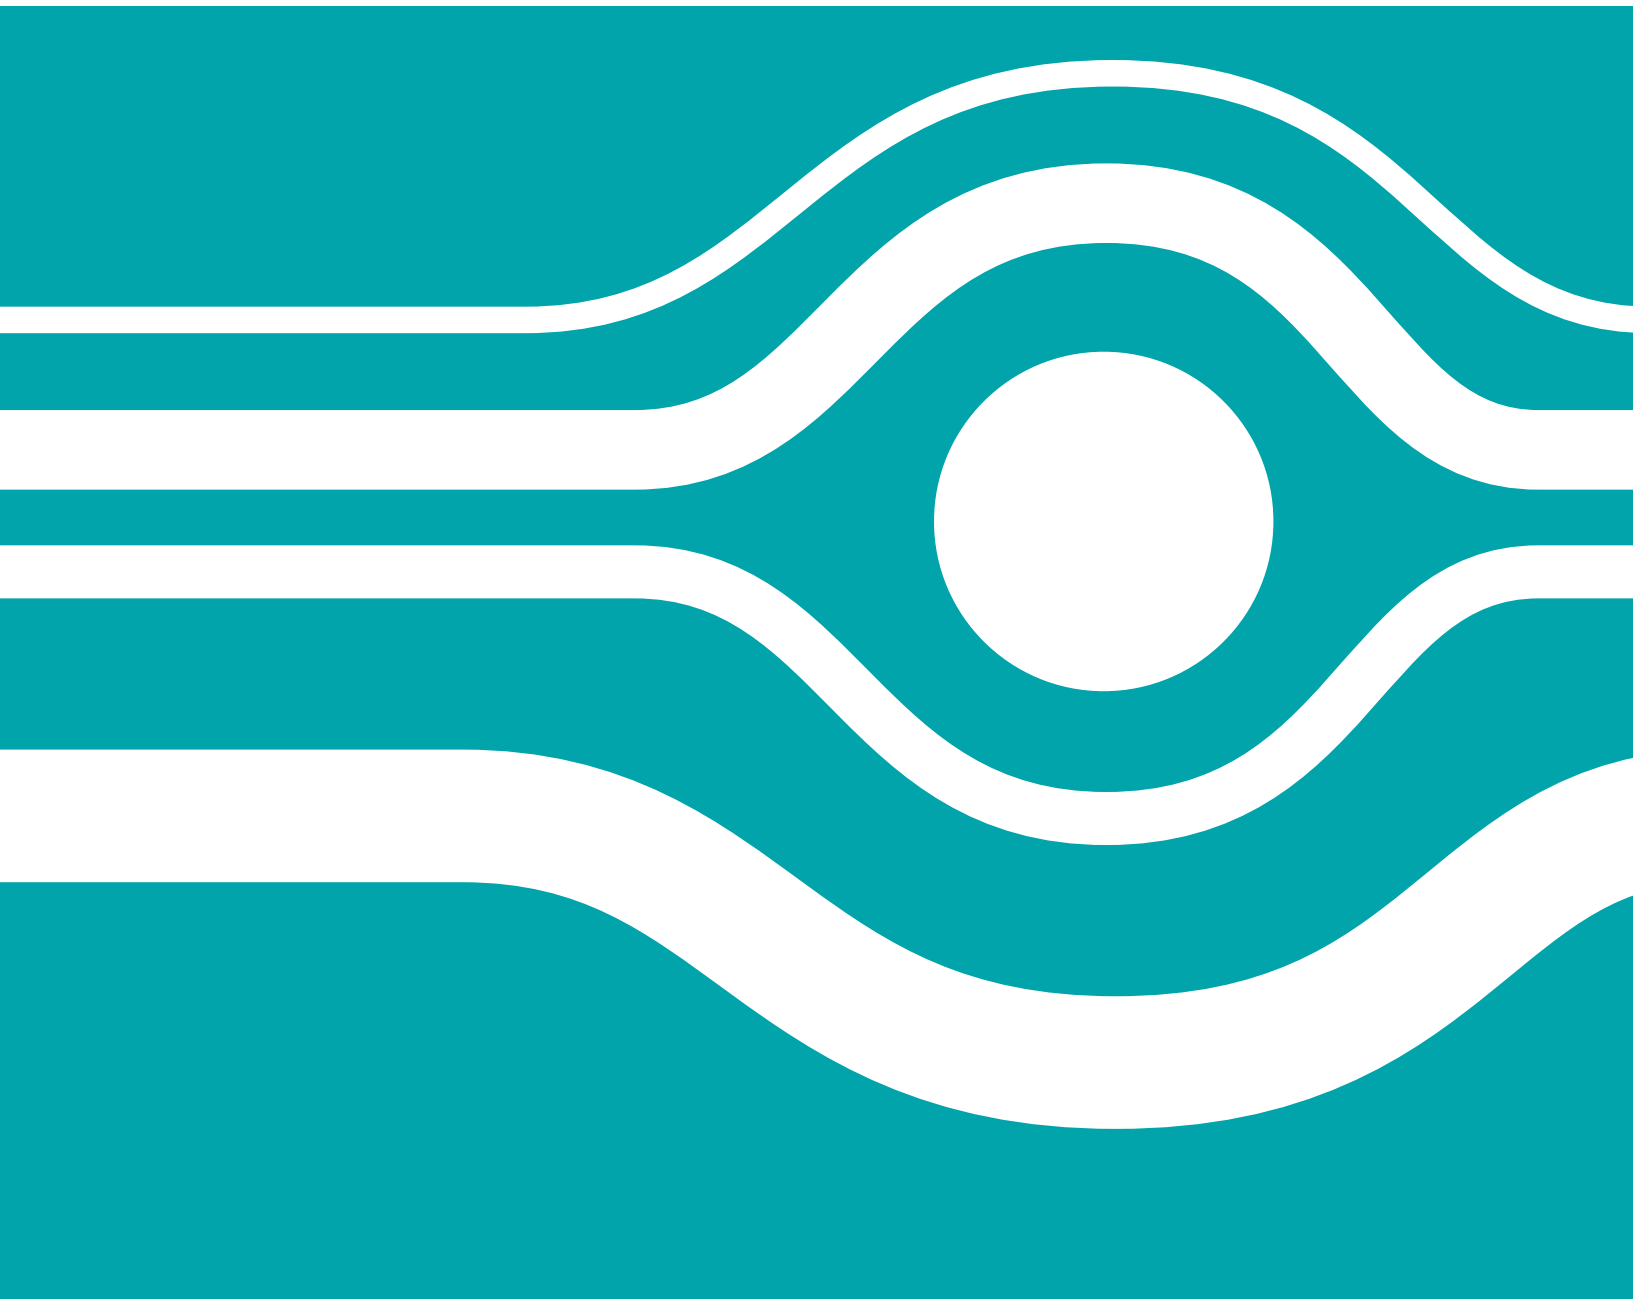

Fluid Sensors

wenglor fluid sensors include flow, pressure and temperature sensors. UniFlow flow sensors measure the speed with which media in closed systems flows. UniBar pressure sensors measure the relative pressure of any media in closed systems. UniTemp temperature sensors measure the temperature of liquid or gaseous media and facilitate the temperature monitoring of processes.

wenglor fluid sensors have a patented measuring method which is absolutely unique in the area of flow sensor technology. As a result, the products are mounted independent of position or flow direction and deliver most accurate measurement results despite being easy to mount.

The uniform design, operating and connection concept makes wenglor fluid sensors extremely easy to use. In particular, the 7-segment display ensures easy and intuitive operation. Another new feature is the separate LED for switching status indication allowing rapid detection of the switching state.

All sensors have a switch output, which can be defined via the menu as normally closed (NC) or normally open (NO). Alternatively, the sensors also have an analog output as current output or voltage output.

Only a small selection of wenglor fluid sensors is listed in the catalog. The full product range of fluid sensors can be found at www.wenglor.com.

On the following pages you will find:

Pressure Sensors	5
Flow Sensors	15
Temperature Sensors	25



Pressure Sensors

UniBar pressure sensors measure the relative pressure in closed systems of any medium in the range of – 1 to 600 bar.

The pressure applied to a pressure sensor is converted into an electronic signal and transmitted to a microprocessor for evaluation by an electronic amplifier. This takes on the evaluation of programmable switching points and finally displays the current pressure on the 7-segment display. The switch output reads out the corresponding switching signal, the analog output and the measurement value (optionally in 0...10 V or 4...20 mA).

Thanks to their front flush design, **pressure sensors with metal membrane** are **piggable** and therefore particularly suitable for areas with increased hygiene requirements, such as the food and pharmaceutical industries.

Only a small selection of wenglor pressure sensors is listed in the catalog. The full product range of pressure sensors can be found at www.wenglor.com. Various plastic and stainless steel housing types, pressure ranges, process connections and outputs can be combined.

Application examples:

- Process monitoring
- Monitoring and regulating pressure in filling systems
- Monitoring of compressed air systems
- Fill level determination in tank/silo systems
- Pressure regulation of aggregates
- Filter monitoring

wenglor pressure sensors at a glance

This table provides information on additional sensors not included in the catalog.
The data sheets are available for download at www.wenglor.com.

All sensors have M12×1 connector. The PNP switch output can be defined via the menu as normally closed or normally open.

Additional options:

- Pressure unit on display foil in bar or MPa
- Analog output as current or voltage output

Housing:

FA (Plastic)

FM (Plastic)

FX (Stainless Steel)



Pressure range	Process connection, female				Process connection, male	
	G1/8"	G1/4"	G3/8"	G1/2"	G1/2"	G1/2" CIP-capable
–1...0 bar	FA	—	—	FA	—	—
–0,5...0 bar	FA	—	—	FA	—	—
–0,25...0 bar	FA	—	—	FA	—	—
–0,1...0 bar	FA	—	—	FA	—	—
0...0,1 bar	FA	—	—	FA	—	—
0...0,5 bar	FA	—	—	FA	—	—
0...1 bar	FA	—	—	FA	—	—
0...6 bar	FA	—	—	FA	—	—
0...10 bar	FA	FA, FM	FA, FM	FA, FM	FA, FM	FA, FM, FX
0...25 bar	—	FA, FM	FA, FM	FA, FM	FA, FM	FA, FM, FX
0...40 bar	—	FA, FM	FA, FM	FA, FM	FA, FM	FA, FM, FX
0...100 bar	—	FA, FM	FA, FM	FA, FM	FA, FM	FA, FM, FX
0...160 bar	—	FA, FM	FA, FM	FA, FM	FA, FM	FA, FM, FX
0...250 bar	—	FA, FM	FA, FM	FA, FM	FA, FM	FA, FM, FX
0...400 bar	—	FA, FM	FA, FM	FA, FM	FA, FM	FA, FM, FX
0...600 bar	—	FA, FM	FA, FM	FA, FM	FA, FM	FA, FM, FX

Pressure Sensor

0...40 bar

Measuring Range

UniBar



- Highly visible output indicator
- Piggable with flush mounting
- Simple operation via the display
- Space-saving process connection thanks to small pressure membrane

Technical Data

Sensor-specific data

Adjustable Range	4...100 %
Medium	Liquids, gases
Switching Hysteresis	2 %
Temperature Drift	0,025 %/K

Environmental conditions

Temperature of medium	-25...80 °C
Ambient temperature	-25...80 °C

Electrical Data

Supply Voltage	16...32 V DC
Current Consumption (U _b = 24 V)	< 60 mA
Switching Outputs	1
Response Time	30 ms
Switching Output / Switching Current	< 250 mA
Switching Output Voltage Drop	< 2 V
Analog Output	4...20 mA
Current Output Load Resistance	< 500 Ohm
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Protection Class	III



Mechanical Data

Adjustment	Menu
Housing Material	Polycarbonate; FKM
Material Control Panel	Polyester
Material in contact with media	1.4435; 1.4571
Degree of Protection	IP67
Connection	M12 x 1; 4-pin
Process connection	G 1/2" CIP-capable

unibar Pressure Sensors measure the relative pressure in closed systems of any medium in the range -1...600 bar.




unibar pressure sensors are very easy to use thanks to the integrated display. The highly visible switching status display enables the rapid localization of affected sensors for maintenance processes.

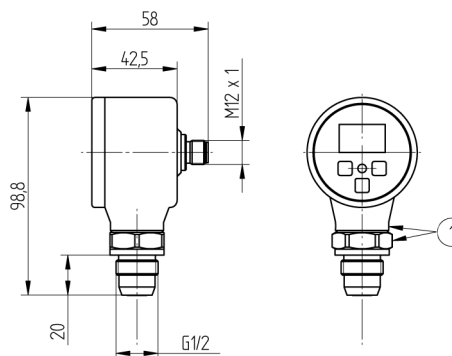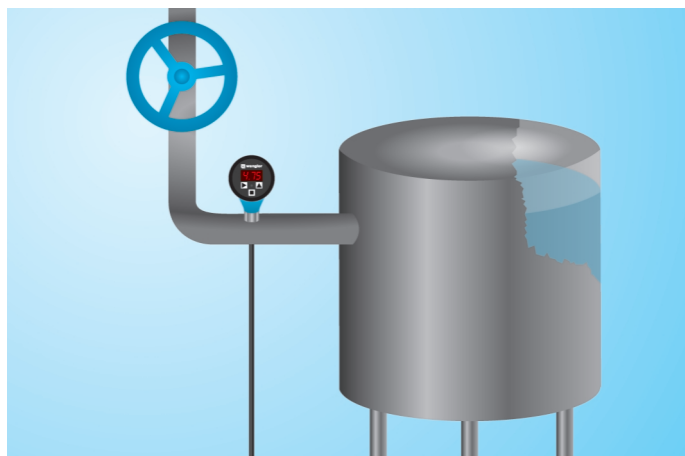Thanks to the metallic sealing edge on the process connection, no further seals are required.



1 = Rotatable relative to housing at 340°
All dimensions in mm (1 mm = 0.03937 Inch)



	Plug Version		
	FFMP001	FFMP002	FFMP003
  			
Part Number			
Analog Output	●	●	●
Scalable analog output	●	●	●
PNP NO/NC switchable	●	●	●
Measuring Range	0...10 bar	0...25 bar	0...40 bar
Maximum overload pressure	20 bar	50 bar	80 bar
Bursting pressure	40 bar	100 bar	160 bar
Connection Diagram No.	533	533	533
Control Panel No.	A05	A05	A05
Suiting Connection Technology No.	21	21	21
Suiting Mounting Technology No.	906	906	906

The complete product range of pressure sensors can be found at www.wenglor.com.
An overview of this can be found in the table of contents.

Ctrl.Panel



01 = Switching Status Indicator 99 = Right button
20 = Enter button
22 = UP Button
60 = Display

Pressure Sensor

0...40 bar

Measuring Range

UniBar



- Highly visible output indicator
- Piggable with flush mounting
- Simple operation via the display
- Space-saving process connection thanks to small pressure membrane

Technical Data

Sensor-specific data

Adjustable Range	4...100 %
Medium	Liquids, gases
Switching Hysteresis	2 %
Temperature Drift	0,025 %/K

Environmental conditions

Temperature of medium	-25...80 °C
Ambient temperature	-25...80 °C

Electrical Data

Supply Voltage	16...32 V DC
Current Consumption (U _b = 24 V)	< 60 mA
Switching Outputs	1
Response Time	30 ms
Switching Output / Switching Current	< 250 mA
Switching Output Voltage Drop	< 2 V
Analog Output	4...20 mA
Current Output Load Resistance	< 500 Ohm
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Protection Class	III



Mechanical Data

Adjustment	Menu
Housing Material	Polycarbonate; FKM
Material Control Panel	Polyester
Material in contact with media	1.4435; 1.4571
Degree of Protection	IP67
Connection	M12 x 1; 4-pin
Process connection	G 1/2" CIP-capable

unibar Pressure Sensors measure the relative pressure in closed systems of any medium in the range -1...600 bar.




unibar pressure sensors are very easy to use thanks to the integrated display. The highly visible switching status display enables the rapid localization of affected sensors for maintenance processes.

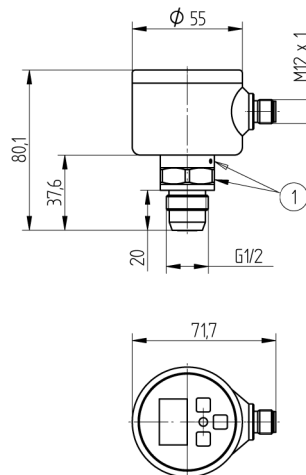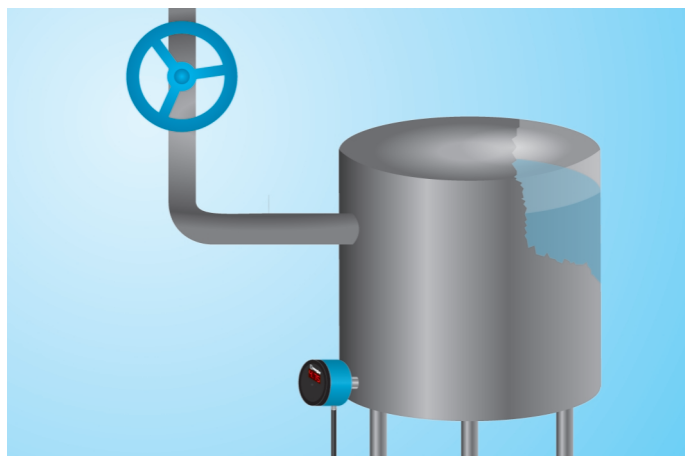Thanks to the metallic sealing edge on the process connection, no further seals are required.



1 = Rotatable relative to housing at 340°
All dimensions in mm (1 mm = 0.03937 Inch)



Plug Version				
	Part Number	FFAP001	FFAP002	FFAP003
  				
Analog Output		●	●	●
Scalable analog output		●	●	●
PNP NO/NC switchable		●	●	●
Measuring Range		0...10 bar	0...25 bar	0...40 bar
Maximum overload pressure		20 bar	50 bar	80 bar
Bursting pressure		40 bar	100 bar	160 bar
Connection Diagram No.		533	533	533
Control Panel No.		A05	A05	A05
Suiting Connection Technology No.		21	21	21
Suiting Mounting Technology No.		906	906	906

The complete product range of pressure sensors can be found at www.wenglor.com.
An overview of this can be found in the table of contents.

Ctrl.Panel



01 = Switching Status Indicator 99 = Right button
20 = Enter Button
22 = UP Button
60 = Display

Pressure Sensor

0...40 bar

Measuring Range

UniBar



- Hygienic Design makes it easy to clean
- Piggable with flush mounting
- Robust stainless steel housing with IP69K
- Space-saving process connection thanks to small pressure membrane

Technical Data

Sensor-specific data

Adjustable Range	4...100 %
Medium	Liquids, gases
Switching Hysteresis	2 %
Temperature Drift	0,025 %/K

Environmental conditions

Temperature of medium	-25...80 °C
Ambient temperature	-25...80 °C

Electrical Data

Supply Voltage	16...32 V DC
Current Consumption (U _b = 24 V)	< 60 mA
Switching Outputs	1
Response Time	1,2 s
Switching Output / Switching Current	< 250 mA
Switching Output Voltage Drop	< 2 V
Analog Output	4...20 mA
Current Output Load Resistance	< 500 Ohm
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Protection Class	III



Mechanical Data

Adjustment	Menu
Housing Material	1.4404; PC; EPDM
Material Control Panel	Polyester
Material in contact with media	1.4435; 1.4571
Degree of Protection	IP67/IP69K
Connection	M12 x 1; 4-pin
Process connection	G 1/2" CIP-capable

unibar Pressure Sensors measure the relative pressure in closed systems of any medium in the range -1...600 bar.

unibar pressure sensors are very easy to use thanks to the removable cover on the integrated display. The highly visible switching status display enables the rapid localization of affected sensors for maintenance processes.

Thanks to the metallic sealing edge on the process connection, no further seals are required.

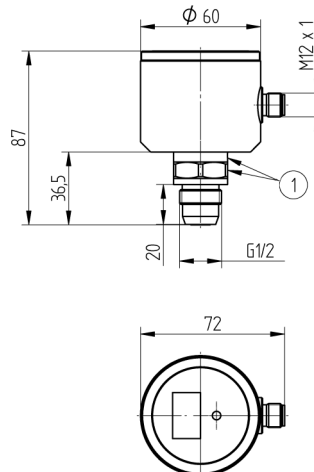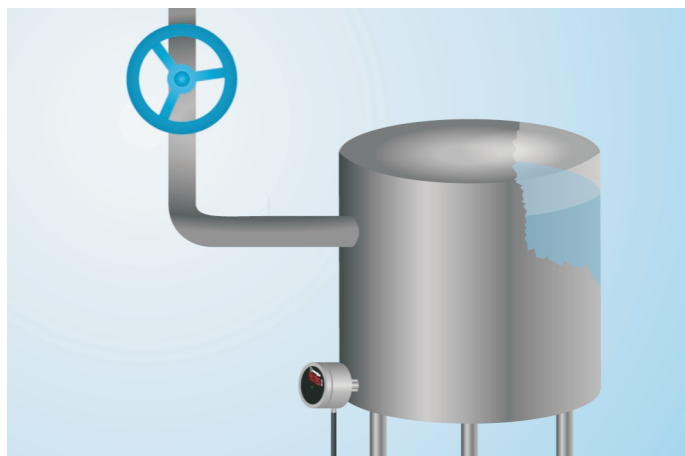


1 = Rotatable relative to housing at 340°
All dimensions in mm (1 mm = 0.03937 Inch)




Plug Version

Part Number	Plug Version		
	FFXP001	FFXP002	FFXP003
Analog Output	●	●	●
Scalable analog output	●	●	●
PNP NO/NC switchable	●	●	●
Measuring Range	0...10 bar	0...25 bar	0...40 bar
Maximum overload pressure	20 bar	50 bar	80 bar
Bursting pressure	40 bar	100 bar	160 bar
Connection Diagram No.	533	533	533
Control Panel No.	A13	A13	A13
Suiting Connection Technology No.	21	21	21
Suiting Mounting Technology No.	906	906	906

Ctrl.Panel

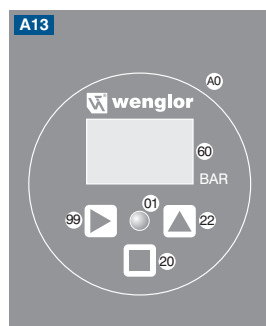

01 = Switching Status Indicator 99 = Right button
20 = Enter Button A0 = Detachable lid
22 = UP Button
60 = Display



Flow Sensors

The UniFlow flow sensors impress with their unique, patented measurement method, which is independent from the flow direction. Alignment of the sensor with the flow direction is not necessary during installation as both the heating and temperature sensors are located in the measurement tip of the flow sensor. Even if the sensor was rotated, it is not necessary to reset the switching point. Flow sensors by wenglor can be mounted in horizontal or vertical positions in the pipe. This position-independent installation provides maximum flexibility.

UniFlow flow sensors from wenglor determine the speed of oily and aqueous media in closed piping systems.

They operate according to the calorimetric principle, which states that a flowing medium absorbs and transports heat energy away. The tip of the sensor is heated, and the medium flowing past it cools it down again. The integrated temperature sensor detects the temperature at the measuring point, which is influenced by the flow speed. The flow speed of the medium can be determined by comparing actual temperature and the heating temperature.

Only a small selection of wenglor flow sensors is listed in the catalog. The full product range of flow sensors can be found at www.wenglor.com. Various plastic and stainless steel housing types, measuring ranges for water and oil, process connections and outputs can be combined.

Application examples:

- Flow rate monitoring in filling machines
- Monitoring of cooling water in power generators
- Cooling water control
- Cooling of ship electronics

wenglor flow sensors at a glance

This table provides information on additional sensors not included in the catalog. The data sheets are available for download at www.wenglor.com.

All sensors have M12×1 connector. The PNP switch output can be defined via the menu as normally closed or normally open.

Additional options:

- Various immersion depths
- Operating pressure 60 bar or 300 bar
- Analog output as current or voltage output

Housing:

FA (Plastic)

FX (Stainless Steel)



Flow speed oil	Process connection			
	G1/4"	G1/2"	G1/2" CIP-capable	Sealing cone M18×1,5
1 m/s	FA	FA	FX	FA

Flow speed water	Process connection			
	G1/4"	G1/2"	G1/2" CIP-capable	Sealing cone M18×1,5
2 m/s	FA	FA	FX	FA
3 m/s	FA	FA	FX	FA

Flow Sensor

15...200 cm/s

Measuring Range

UniFlow



- Highest precision of its class
- Installation in any position
- Measurement independent of flow direction
- Simple operation via the display

Technical Data

Sensor-specific data

Measuring Range	15...200 cm/s
Adjustable Range	15...200 cm/s
Medium	Water
Switching Hysteresis	5 %
Temperature gradient	30 K
Response time in case of temperature jump	10 s

Environmental conditions

Temperature of medium	0...80 °C
Ambient temperature	-20...70 °C
Mechanical Strength	60 bar



Electrical Data

Supply Voltage	16...32 V DC
Current Consumption (U _b = 24 V)	60 mA
Switching Outputs	1
Response Time	1...5 s
Switching Output / Switching Current	< 250 mA
Switching Output Voltage Drop	< 2 V
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Protection Class	III

Mechanical Data




Adjustment	Menu
Housing Material	Polycarbonate; FKM
Material Control Panel	Polyester
Material in contact with media	1.4435; 1.4571; FKM
Degree of Protection	IP67
Connection	M12 × 1; 4-pin
Process connection	Sealing cone M 18 x 1.5
Process connection length	64 mm
Bar length	44 mm

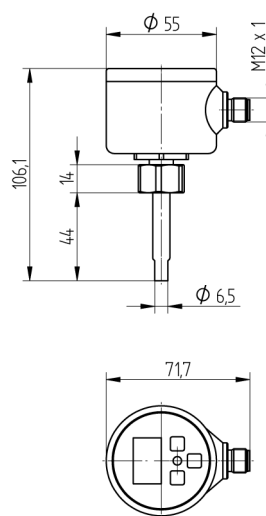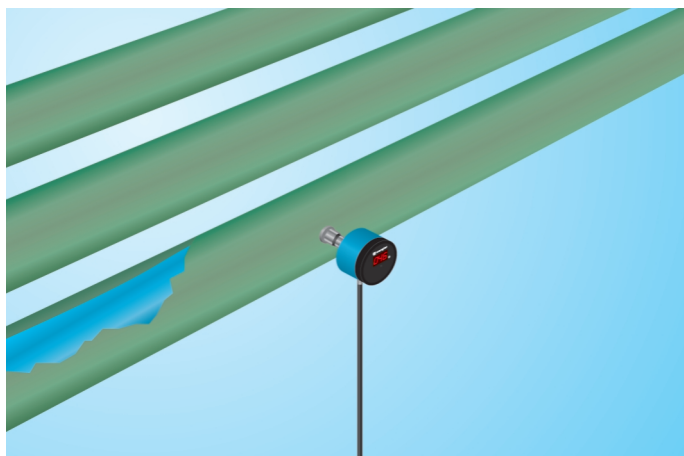wenglor uniflow Flow Sensors measure the flow rate of aqueous and oily media in closed piping systems. uniflow flow sensors are very easy to operate thanks to the integrated display. The highly visible switching status display enables the rapid localization of affected sensors for maintenance processes.




All dimensions in mm (1 mm = 0.03937 Inch)



Plug Version	
  	<div>Part Number</div> <div>FFAF001</div>
PNP NO/NC switchable	●
Connection Diagram No.	532
Control Panel No.	A03
Suiting Connection Technology No.	2 21
Suiting Mounting Technology No.	900 901

The complete product range of flow sensors can be found at www.wenglor.com.
An overview of this can be found in the table of contents.

Ctrl.Panel



01 = Switching Status Indicator 99 = Right button
20 = Enter Button
22 = UP Button
60 = Display

Flow Sensor

10...300 cm/s

Measuring Range

UniFlow



- Highest precision of its class
- Installation in any position
- Measurement independent of flow direction
- Simple operation via the display

Technical Data

Sensor-specific data

Selectable measuring range	10...300 cm/s
Measuring range 1	10...150 cm/s
Adjustable range 1	15...150 cm/s
Measuring range 2	20...300 cm/s
Adjustable range 2	30...300 cm/s
Medium	Water
Switching Hysteresis	5 %
Temperature gradient	30 K
Response time in case of temperature jump	10 s

Environmental conditions

Temperature of medium	0...80 °C
Ambient temperature	-20...70 °C
Mechanical Strength	60 bar



Electrical Data

Supply Voltage	16...32 V DC
Current Consumption (U _b = 24 V)	60 mA
Switching Outputs	1
Response Time	1...5 s
Switching Output / Switching Current	< 250 mA
Switching Output Voltage Drop	< 2 V
Analog Output	4...20 mA
Current Output Load Resistance	< 500 Ohm
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Protection Class	III

Mechanical Data




Adjustment	Menu
Housing Material	Polycarbonate; FKM
Material Control Panel	Polyester
Material in contact with media	1.4435; 1.4571; FKM
Degree of Protection	IP67
Connection	M12 × 1; 4-pin
Process connection	Sealing cone M 18 x 1.5
Process connection length	64 mm
Bar length	44 mm

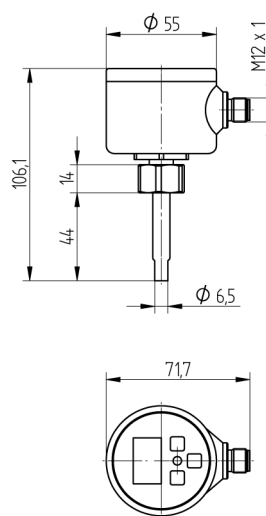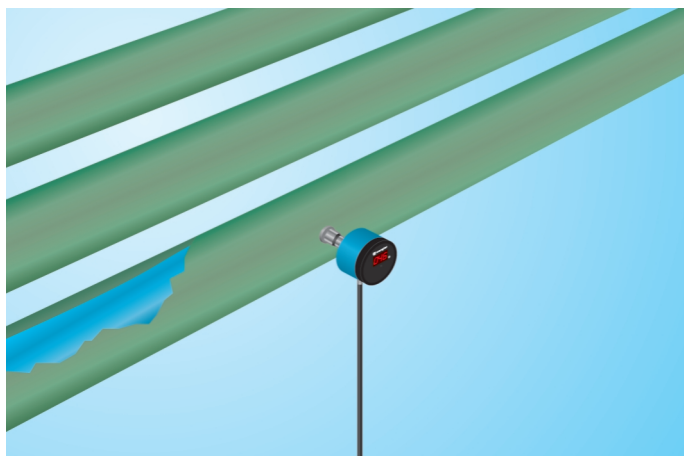wenglor uniflow Flow Sensors measure the flow rate of aqueous and oily media in closed piping systems. uniflow flow sensors are very easy to operate thanks to the integrated display. The highly visible switching status display enables the rapid localization of affected sensors for maintenance processes.




All dimensions in mm (1 mm = 0.03937 Inch)



	Plug Version			
	Part Number	FFAF002		FFAF003
  				
Analog output flow		●		
Analog output temperature				●
Temperature monitoring		●		●
PNP NO/NC switchable		●		●
Connection Diagram No.		533		533
Control Panel No.		A03		A03
Suiting Connection Technology No.		21		21
Suiting Mounting Technology No.		900 901		900 901

The complete product range of flow sensors can be found at www.wenglor.com.
An overview of this can be found in the table of contents.

Ctrl.Panel

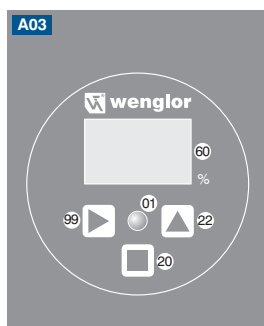

01 = Switching Status Indicator 99 = Right button
20 = Enter Button
22 = UP Button
60 = Display

Flow Sensor

10...300 cm/s


Measuring Range

UniFlow



- Highest precision of its class
- Hygienic Design makes it easy to clean
- Installation in any position
- Measurement independent of flow direction
- Robust stainless steel housing with IP69K

wenglor uniflow Flow Sensors measure the flow rate of aqueous and oily media in closed piping systems. uniflow flow sensors are very easy to operate thanks to the removable cover on the integrated display. The highly visible switching status display enables the rapid localization of affected sensors for maintenance processes. Thanks to the metallic sealing edge on the process connection, no further seals are required.

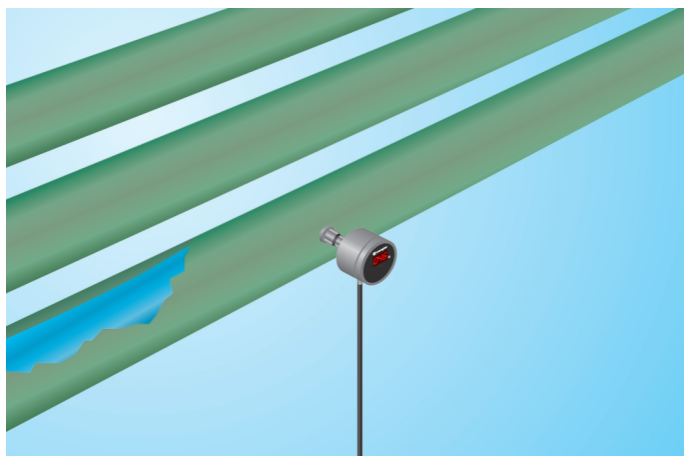

Technical Data

Sensor-specific data

Selectable measuring range	10...300 cm/s
Measuring range 1	10...150 cm/s
Adjustable range 1	15...150 cm/s
Measuring range 2	20...300 cm/s
Adjustable range 2	30...300 cm/s
Medium	Water
Switching Hysteresis	5 %
Temperature gradient	30 K
Response time in case of temperature jump	10 s

Environmental conditions


Temperature of medium	0...80 °C
Ambient temperature	-20...70 °C
Mechanical Strength	60 bar

Electrical Data

Supply Voltage	16...32 V DC
Current Consumption (U _b = 24 V)	60 mA
Switching Outputs	1
Response Time	1...5 s
Switching Output / Switching Current	< 250 mA
Switching Output Voltage Drop	< 2 V
Analog Output	4...20 mA
Current Output Load Resistance	< 500 Ohm
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Protection Class	III

Mechanical Data

Adjustment	Menu
Housing Material	1.4404; PC; EPDM
Material Control Panel	Polyester
Material in contact with media	1.4435; 1.4571
Degree of Protection	IP67/IP69K
Connection	M12 × 1; 4-pin
Process connection	G 1/2" CIP-capable
Process connection length	48 mm
Bar length	10 mm

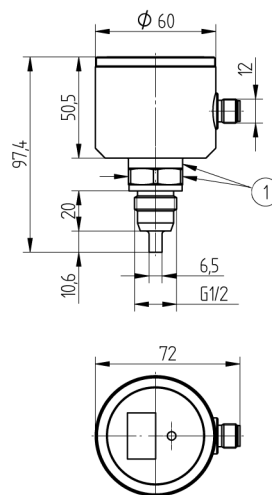


1 = Rotatable relative to housing at 340°
All dimensions in mm (1 mm = 0.03937 Inch)




	Plug Version	
	Part Number	
	FFXF001	FFXF002
Analog output flow	●	
Analog output temperature		●
Temperature monitoring	●	●
PNP NO/NC switchable	●	●
Connection Diagram No.	533	533
Control Panel No.	A12	A12
Suiting Connection Technology No.	21	21
Suiting Mounting Technology No.	906	906

The complete product range of flow sensors can be found at www.wenglor.com.
An overview of this can be found in the table of contents.

Ctrl.Panel

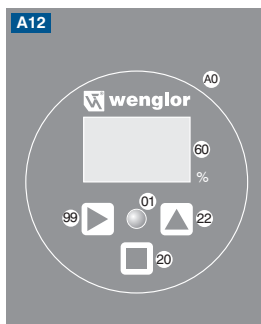

01 = Switching Status Indicator 99 = Right button
20 = Enter Button A0 = Detachable lid
22 = UP Button
60 = Display

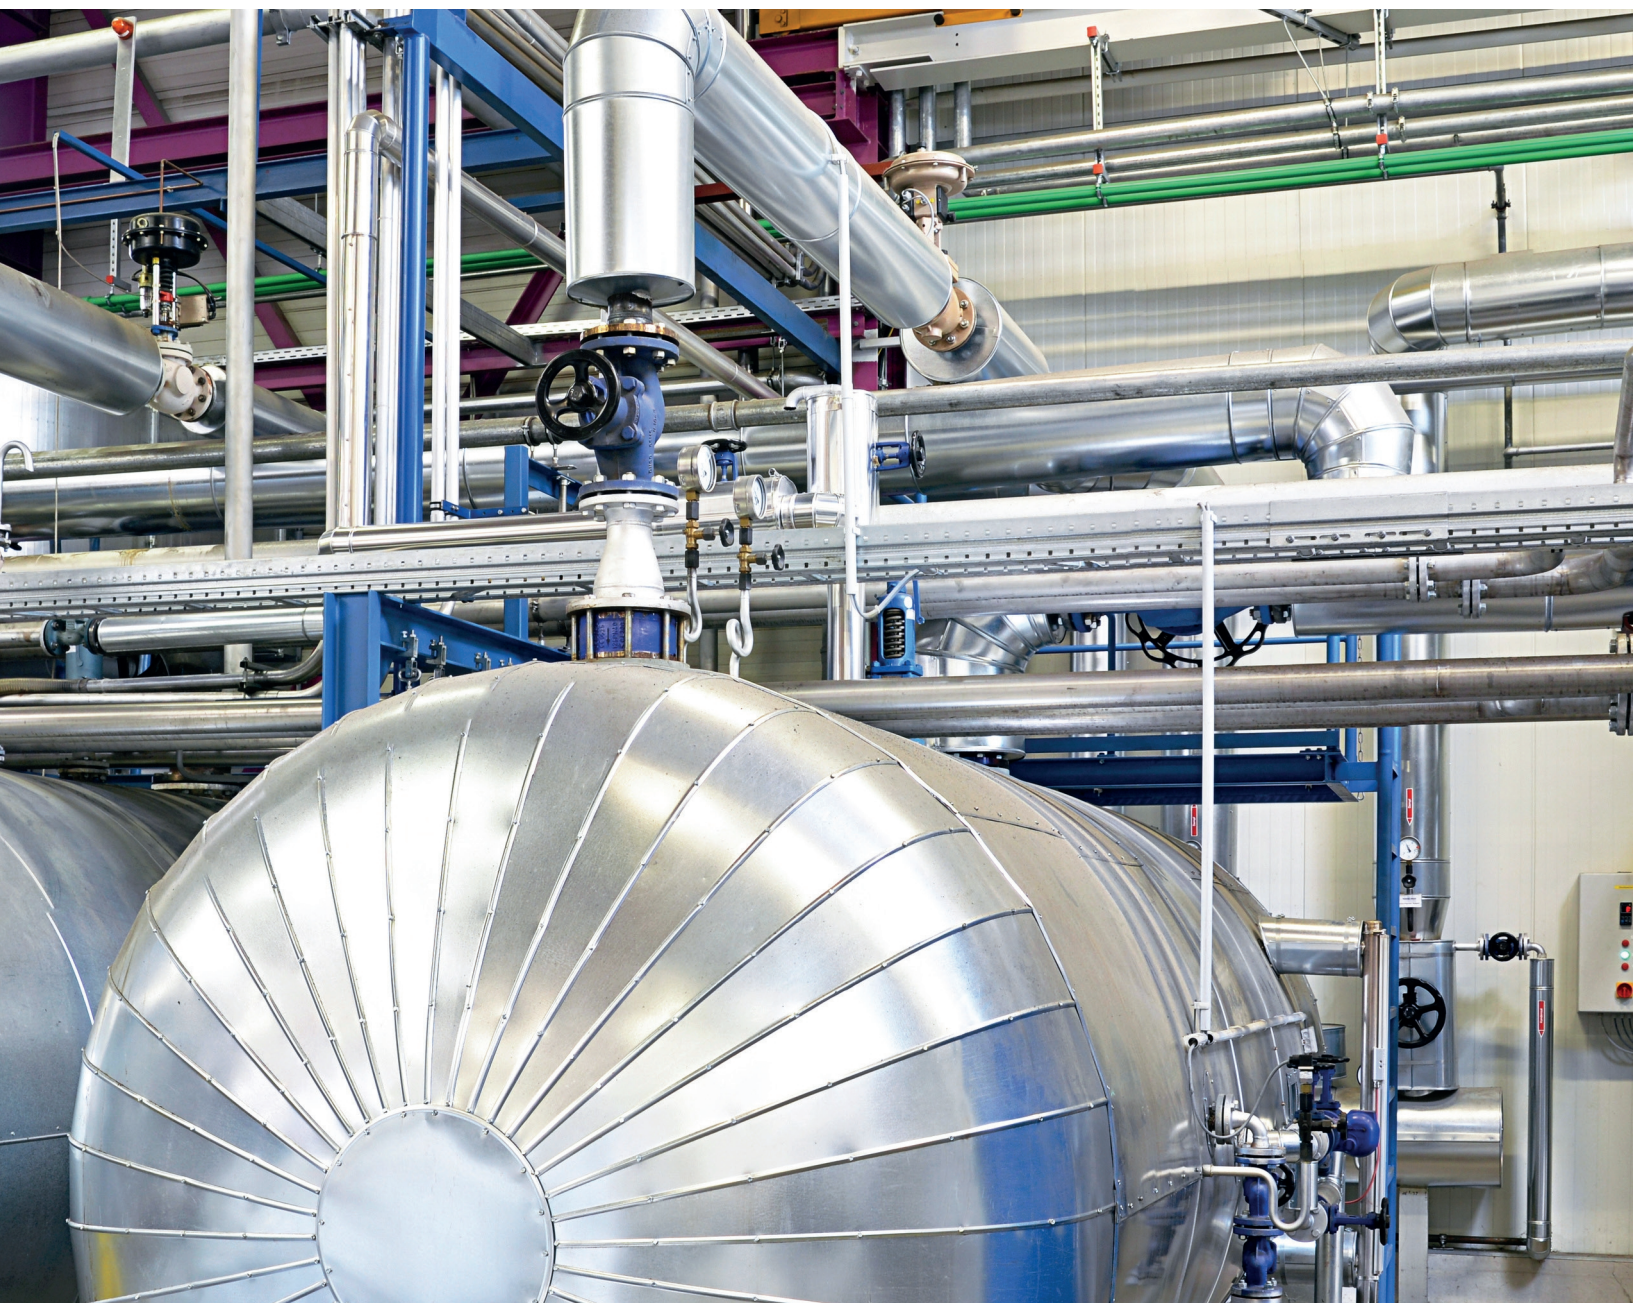

Temperature Sensors

UniTemp temperature sensors measure the temperature of liquid or gaseous media and facilitate the temperature monitoring of processes.

The measurement tip of the wenglor temperature sensors contains a sensor which detects temperature changes and converts them into an electric signal. An electronic amplifier detects the change and converts it into an electrical signal. This signal is then processed by a microprocessor and converted into a temperature value (in degrees Celsius). Individually adjustable switching points allow for temperature monitoring across a wide range of different ambient conditions.

wenglor temperature sensors impress with their compact design, particularly as a result of their large measuring range of 0 to 200 °C.

Only a small selection of wenglor temperature sensors is listed in the catalog. The full product range of temperature sensors can be found at www.wenglor.com. Various plastic and stainless steel housing types, process connections and outputs can be combined.

Application examples:

- Temperature monitoring in brewing processes
- Monitoring flow and return temperatures in solar thermal energy
- Temperature regulation in cheese production
- Temperature measuring for tempering furnaces

wenglor temperature sensors at a glance

This table provides information on additional sensors not included in the catalog.
The data sheets are available for download at www.wenglor.com.

All sensors have M12×1 connector. The PNP switch output can be defined via the menu as normally closed or normally open.

Additional options:

- Various immersion depths
- Analog output as current or voltage output

Housing:

FA (Plastic)

FX (Stainless Steel)



Temperature Range	Process connection				
	G1/4"	G1/2"	G1/2" CIP-capable	Sealing cone M18×1,5	Insulation displacement connector 6 mm
0...140 °C	FA	FA	FA, FX	FA	FA, FX
0...200 °C	—	—	—	—	FA, FX

Temperature Sensor

0...140 °C


Temperature Measurement Range

UniTemp



- Highly visible output indicator
- Simple operation via the display
- Temperature range: 0...200 °C available

unitemp Temperature Sensors measure the temperature of liquid or gaseous media and facilitate the temperature monitoring of processes.

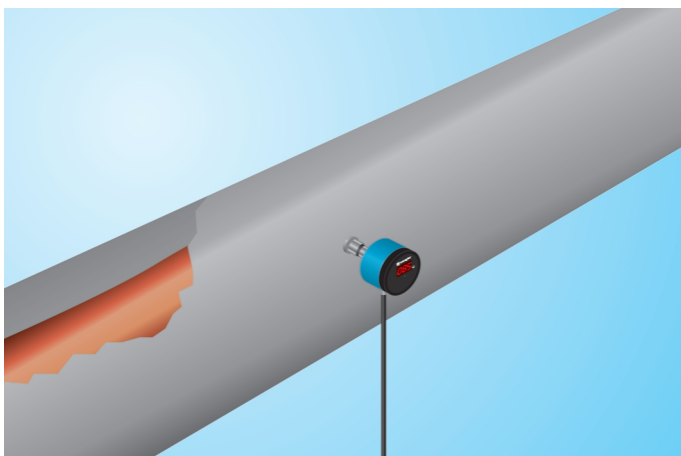

Technical Data

Sensor-specific data

Temperature Measurement Range	0...140 °C
Adjustable Range	2...139 °C
Medium	Liquids, gases
Resolution	1 °C
Switching Hysteresis	2 °C
Response Time	0,3 s

Environmental conditions


Temperature of medium	0...140 °C
Ambient temperature	-20...80 °C
Mechanical Strength	60 bar

Electrical Data

Supply Voltage	16...32 V DC
Current Consumption (U _b = 24 V)	60 mA
Switching Outputs	1
Switching Output / Switching Current	< 250 mA
Switching Output Voltage Drop	< 2 V
Analog Output	4...20 mA
Current Output Load Resistance	< 500 Ohm
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Protection Class	III




Mechanical Data

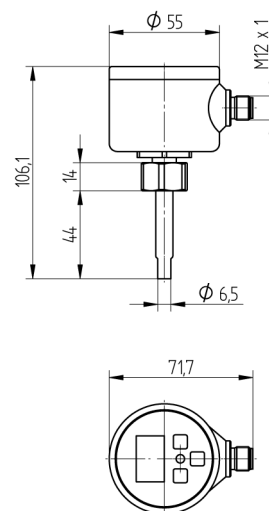Adjustment	Menu
Housing Material	Polycarbonate; FKM
Material Control Panel	Polyester
Material in contact with media	1.4435; 1.4571; FKM
Degree of Protection	IP67
Connection	M12 × 1; 4-pin
Process connection	Sealing cone M 18 x 1.5
Process connection length	64 mm
Bar length	44 mm




All dimensions in mm (1 mm = 0.03937 Inch)



Plug Version	
  	Part Number
	FFAT001
Analog Output	●
PNP NO/NC switchable	●
Connection Diagram No.	533
Control Panel No.	A01
Suiting Connection Technology No.	21
Suiting Mounting Technology No.	900 901

The complete product range of temperature sensors can be found at www.wenglor.com.
An overview of this can be found in the table of contents.

Ctrl.Panel

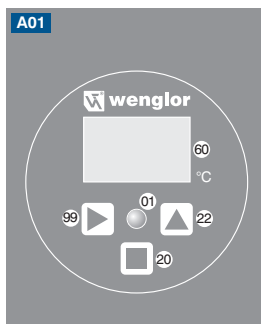

01 = Switching Status Indicator 99 = Right button
20 = Enter button
22 = UP Button
60 = Display

Temperature Sensor

0...140 °C

Temperature Measurement Range

UniTemp



- Hygienic Design makes it easy to clean
- Robust stainless steel housing with IP69K
- Simple operation via the display
- Temperature range: 0...200 °C available

Technical Data

Sensor-specific data

Temperature Measurement Range	0...140 °C
Adjustable Range	2...139 °C
Medium	Liquids, gases
Resolution	1 °C
Switching Hysteresis	2 °C
Response Time	0,3 s

Environmental conditions

Temperature of medium	0...140 °C
Ambient temperature	-20...80 °C
Mechanical Strength	60 bar

Electrical Data

Supply Voltage	16...32 V DC
Current Consumption (U _b = 24 V)	60 mA
Switching Outputs	1
Switching Output / Switching Current	< 250 mA
Switching Output Voltage Drop	< 2 V
Analog Output	4...20 mA
Current Output Load Resistance	< 500 Ohm
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Protection Class	III



Mechanical Data




Adjustment	Menu
Housing Material	1.4404; PC; EPDM
Material Control Panel	Polyester
Material in contact with media	1.4435; 1.4571
Degree of Protection	IP67/IP69K
Connection	M12 × 1; 4-pin
Process connection	G 1/2" CIP-capable
Process connection length	48 mm
Bar length	10 mm

unitemp Temperature Sensors measure the temperature of liquid or gaseous media and facilitate the temperature monitoring of processes.

uniflow temperature sensors are very easy to operate thanks to the removable cover on the integrated display. The highly visible switching status display enables the rapid localization of affected sensors for maintenance processes.

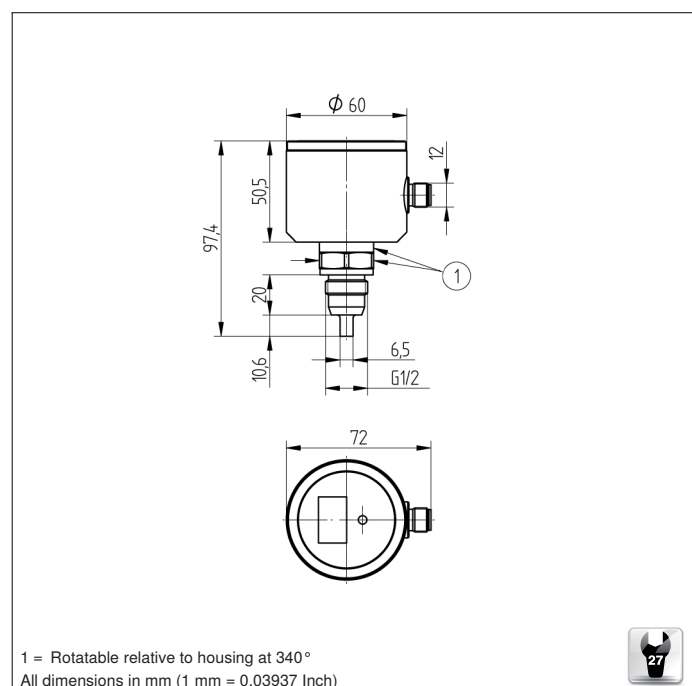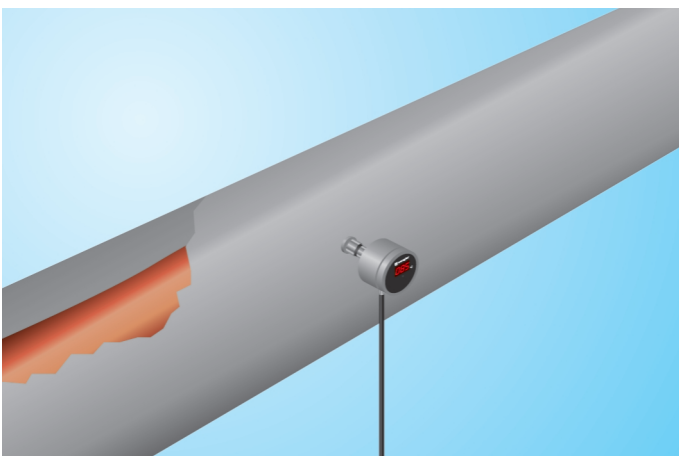Thanks to the metallic sealing edge on the process connection, no further seals are required.



Plug Version	
Part Number	FFXT001
  	
Analog Output	●
PNP NO/NC switchable	●
Connection Diagram No.	533
Control Panel No.	A11
Suiting Connection Technology No.	21
Suiting Mounting Technology No.	906

The complete product range of temperature sensors can be found at www.wenglor.com.
An overview of this can be found in the table of contents.


Ctrl.Panel



01 = Switching Status Indicator 99 = Right button
20 = Enter Button A0 = Detachable lid
22 = UP Button
60 = Display

Connection Diagrams


Legend

+	Supply Voltage +	nc	not connected
–	Supply Voltage 0 V	U	Test Input
~	Supply Voltage (AC Voltage)	Ū	Test Input inverted
A	Switching Output (NO)	W	Trigger Input
Ā	Switching Output (NC)	O	Analog Output
V	Contamination/Error Output (NO)	O–	Ground for the Analog Output
Ṽ	Contamination/Error Output (NC)	BZ	Block Discharge
E	Input (analog or digital)	AMV	Valve Output
T	Teach Input	a	Valve Control Output +
Z	Time Delay (activation)	b	Valve Control Output 0 V
S	Shielding	SY	Synchronization
RxD	Interface Receive Path	E+	Receiver-Line
TxD	Interface Send Path	S+	Emitter-Line
RDY	Ready	≡	Grounding
GND	Ground	SnR	Switching Distance Reduction
CL	Clock	Rx +/–	Ethernet Receive Path
E/A	Output/Input programmable	Tx +/–	Ethernet Send Path
	IO-Link	Bus	Interfaces-Bus A(+)/B(–)
PoE	Power over Ethernet	La	Emitted Light disengageable
IN	Safety Input	Mag	Magnet activation
OSSD	Safety Output	RES	Input confirmation
Signal	Signal Output	EDM	Contactor Monitoring

Wire Colors according to DIN IEC 757

BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green Yellow

532



533

