


In-Stock ... On-Time!



Boxes and Covers



Fittings



Weatherproof Products



Hanging and Support



Devices and Wall Plates



Fasteners

Phone: 847-455-0188 | Fax: 847-455-0334 | sales@garvinindustries.com

www.garvinindustries.com



24151-OWR

3-1/2" Octagon Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

1-1/2" Deep



24151-BLNK

25151-1/2

Application: These octagon boxes are used when installing ceiling or wall lighting fixtures. Extension rings are available to provide more box volume when additional wiring support is required. These junction boxes can also be used as an outlet box for a surface conduit or convenience outlet.

Advantages: Garvin Industries' octagon boxes and extension rings are made with a versatile combination head 8-32 screw. These octagon boxes allow economical box installation when minimum wire capacity is required.

Field Names: 30 box, 30 extension ring, octagon box, extension box, 3-1/2" octagon junction box, octagon electrical box, hexagon box, old work octagon box, ceiling box, octagon ceiling box, ceiling box with bracket, octagon extension ring.

Material: Steel



24151-1/2 IN USE

Part Number	Side Knockouts Bottom Knockouts	Accessories	Similar Products or Spec	ial Features	Std. Pkg.
24151-1/2	(4) 1/2" (1) 1/2"		Thomas & Betts 24151-1/2 Hubbell Raco 110	Crouse Hinds TP256 EGS Appleton 30-1/2	50
24151-R	NM Clamps		Thomas & Betts 24151-N Hubbell Raco 112	Crouse Hinds TP260 EGS Appleton 560L	50
24151-F	(3) 1/2" (1) 1/2"	1/2" Setback Vertical Bracket	Thomas & Betts 24151-V Hubbell Raco 119	Crouse Hinds TP259 EGS Appleton 560LVB	50
24151-FR	NM Clamps	1/2" Setback Vertical Bracket	Thomas & Betts 24151-NV Hubbell Raco 119	Crouse Hinds TP259 EGS Appleton 560LVB	50
24151-OWR	NM Clamps	Old Work Clips & Ears		Old Work "cut in" boxes with ears allow for an easy addition of outlets and fixtures in existing walls and ceilings.	
24151-BLNK*	Blank Sides Blank Bottom		Less all holes and knockouts. A Let us manufacture a custom s	Add only the knockouts you need. solution for you!	50
25151-1/2	(4) 1/2" Extension Ring		Thomas & Betts 25151-1/2 Hubbell Raco 111	Crouse Hinds TP258 EGS Appleton	50

*Call for price and availability.

3-1/2" Octagon Box Covers



Various Device Combinations



Part Number	Configuration	Std. Pkg.
24C1	Blank	50
24C6	(1) 1/2" Conduit Knockout	50
24CDR	Duplex Receptacle	50
24CPO	Power Outlet Receptacle (1.594")	50
24CSR	Single Receptacle (1.41")	50
24CTS	Toggle Switch	50
24CBPO	Toggle Switch On/Off Emergency, Oil Burner	25
651-3	Round Opening 1.40" Raised .34" No device Tabs	50

Application: These octagon box covers are used to cover existing wires in octagon boxes or to attach multiple electrical device types directly onto octagon boxes.

Advantages: Garvin Industries' octagon box covers allow an economical installation of devices to octagon boxes.

Field Names: Octagon cover, blank octagon cover, octagon device cover, duplex octagon cover, toggle switch octagon cover, outlet cover for single receptacle, toggle octagon cover, octagon toggle cover, octagon receptacle cover, octagon blank.

Material: Steel



24C1 IN USE

Custom Manufactured Solutions!

Blank Boxes: Let Us Customize a Solution Today!

Blank Boxes in All Styles and Sizes...Ready to Add the Knockouts, Slots, and Holes that You Need.

- · Rugged steel, cast iron or aluminum
- Stocking programs for qualified products
- Design the features to your needs & specs
- Quick delivery for industry standard modifications
- You dream it, we will build it exactly as you require
- Cuts excess field labor...



Call Today 847-455-0188



56111

3-1/2" & 4" Round Pan Boxes

56112

847-455-0188 FAX 847-455-0334 garvinindustries.com

1/2" Conduit Knockouts & Clamps for Nonmetallic Sheathed Cables

56111-OW



56111-R

Application: These ceiling pan boxes have conduit knockouts or clamps for nonmetallic sheathed cable. They are used to mount ceiling and wall lighting fixtures when a shallow depth box is required.

Advantages: Garvin Industries' ceiling pans have a shallow depth that allows boxes to be surface mounted directly on studs. Their versatile combination head 8-32 screw can securely fasten fixtures to electrical junction boxes using a slotted, Phillips, or Robertson head screwdriver.

Field Names: Pan box, round box, round outlet box, round fixture box, biscuit box, pancake box, shallow depth box, electrical mud box, sconce light box, round electrical box, round conduit box.





56111-OW IN USE

Part Number	Box Diameter	Knockouts	Depth		Similar Products or Speci	al Features	Std. Pkg.
46111	3-1/2"	(3) 1/2" (4) Pryouts	1/2"		Thomas & Betts 36115C Hubbell Raco 292	Crouse Hinds TP266 EGS Appleton	50
46111-OW	3-1/2"	(5) 1/2" Conduit	1/2"		Comes complete with old work for mounting in existing walls.	"cut in" ears and bracket	50
46111-R	3-1/2"	NM Clamps	1/2"		Thomas & Betts 36125D Hubbell Raco 292	Crouse Hinds TP266 EGS Appleton 510LC	50
56113	4"	(5) 1/2" Conduit	1/4"	Super Shallow	Extra shallow box can be surfactorywall when 1/4" or 3/8" drywall boxes have a quick installation	ll overlay is installed. These	50
56111	4"	(5) 1/2" Conduit	1/2"		Thomas & Betts 56111 Hubbell Raco 293	Crouse Hinds TP269 EGS Appleton 4CL	50
56111-OW	4"	(2) 1/2" Conduit	1/2"		Comes complete with old work for mounting in existing walls.	"cut in" ears and bracket	50
56111-R	4"	NM Clamps	1/2"		Crouse Hinds TP267		50
56112	4"	(2) 1/2" Conduit	1/2"	Fan Support	Thomas & Betts 56111-CFB Hubbell Raco 295		50

Boxes & Covers


Octagon Concrete Boxes



ELECTRICAL . LOW VOLTAGE . LIGHTING

Octagon Concrete Boxes

OCR-400FAN

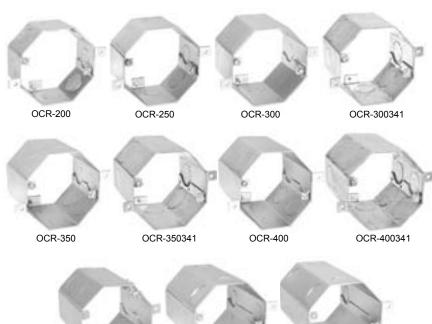

OCR-500

Application: These octagon concrete boxes are used in poured concrete construction. They are installed on wooden or steel concrete forms. Once the forms are removed, the boxes and conduit are buried in concrete and the end is open to the room wall or ceiling, ready for wire pulling.

Advantages: Garvin Industries' extra long external mounting tabs allow an easy installation by nailing or screwing the boxes to wooden or steel concrete forms. Knockouts are sealed against box surface to prevent concrete slurry and water from entering the box. The top covers are removable allowing any before-pour work. Garvin Industries' 52181 series (on page 8) is available with silicone sealed joints.

Field Names: Concrete rings, concrete boxes, mud boxes, mud rings, deck boxes, high-rise floor boxes, octagon concrete rings.

Material: Steel





OCR-350 FORM MOUNTING

OCR-400FAN IN CONCRETE

Part Number	Box Depth	Side Knockouts		Similar Products		Std. Pkg.
OCR-200	2"	(4) 1/2" & (4) 3/4"		Thomas & Betts 54531-1234 Hubbell Raco 270RAC	Crouse Hinds TP620 EGS Appleton OCR2	10
OCR-250	2-1/2"	(4) 1/2" & (4) 3/4"		Thomas & Betts 54541-1234 Hubbell Raco 271	Crouse Hinds TP622 EGS Appleton OCR212	10
OCR-300	3"	(4) 1/2" & (4) 3/4"		Thomas & Betts 54551-1234 Hubbell Raco 272	Crouse Hinds TP628 EGS Appleton OCR3	10
OCR-300341	3"	(4) 3/4" & (4) 1"		Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	10
OCR-350	3-1/2"	(8) 1/2" & (8) 3/4"		Thomas & Betts 54561-1234 Hubbell Raco 273	Crouse Hinds TP635 EGS Appleton	5
OCR-350341	3-1/2"	(8) 3/4" & (8) 1"		Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	5
OCR-400	4"	(8) 1/2" & (8) 3/4"		Thomas & Betts 54571-1234 Hubbell Raco 274	Crouse Hinds TP644 EGS Appleton OCR4	5
OCR-400341	4"	(8) 3/4" & (8) 1"		Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	5
OCR-400FAN	4"	(8) 1/2" & (8) 3/4"	Fan & Fixture Support	Thomas & Betts 54551-1234 Hubbell Raco 284	Crouse Hinds EGS Appleton	5
OCR-500	5"	(8) 1/2" & (8) 3/4"		Thomas & Betts 54581-1234 Hubbell Raco 275	Crouse Hinds EGS Appleton	5
OCR-600	6"	(8) 1/2" & (8) 3/4"		Thomas & Betts 24591-1234 Hubbell Raco 276	Crouse Hinds EGS Appleton	5


OCR-600



Octagon Concrete Box Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

Concrete Box Covers

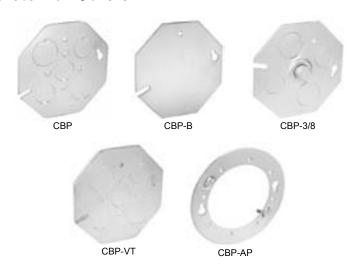

Application: These octagon, concrete-box covers are fitted with octagon concrete boxes to enclosed electrical wiring and provide a means of conduit attachment.

Advantages: Garvin Industries octagon concrete box covers have knockouts that are sealed with the surface of the cover to prevent entry of concrete slurry, water and debris. Each cover has a 10-32 tapped ground hole.

Field Names: Concrete box covers, concrete box blanks, concrete box rings, mud box cover, mud box ring, octagon concrete ring covers, octagon concrete cover.

Material: Steel



CBP IN USE

Part Number	Knockouts	Accessories	Similar Products or Spec	cial Features	Std. Pkg.
СВР	(3) 1/2" & (2) 3/4"		Thomas & Betts CBP Hubbell Raco 890	Crouse Hinds TP648 EGS Appleton OCP	50
CBP-B	Blank		Hubbell Raco 892	Crouse Hinds TP649	50
CBP-3/8	(2) 1/2" & (2) 3/4"	3/8" Threaded Fixture Stud	Thomas & Betts CBP-3/8 Hubbell Raco 891	Crouse Hinds TP650 EGS Appleton OCP38	50
CBP-VT	(3) 1/2" & (2) 3/4"	Air Plenum Gasket	Chicago plenum - 1/2" { gasket for air plenum sp	& 3/4" knockouts with paces above drop ceilings.	50
CBP-AP		Adapter Plate for 4" Octagon Extension Ring or Cover	The open space in plate conv to accept 4" octagon extensio		50

Easy Identification Solutions!

Painted Boxes, Covers & Connectors

Color Coded Boxes, Covers, Connectors & Components Make It Easy to Identify the System in the Conduit!

- Save time by quickly identifying the wire in the boxes and pipe
- Cuts mistakes and rework on jobsite
- Great for future updating of wire and devices when advances in technology require it
- Economical price compared to field painting and packaging
- Superior quality to field painting
- Custom colors upon request!
- · Satisfies inspectors curiosity!





3-1/2" Deep with Conduit Knockouts







52181-SPKR

52181-1/2-SPKR

Application: These electrical junction boxes are installed in walls and ceilings where extra depth is needed for speakers, strobes, signals and other electrical and electronic notifications/alerts. Speaker (SPKR) boxes have extra-long external mounting tabs allowing the box to be nailed or screwed onto wood or metal concrete forms.

Advantages: Garvin Industries' labor-saving design eliminates the need to awkwardly install boxes and extension rings to accommodate deep devices.

Field Names: 4S Box, 1900 box, 1900 electrical box, 1900 junction box, extra-deep 1900 box, speaker box, conduit box, J-box, concentric box, conduit junction box, outlet box, dry-wall mud box, deep device box, signal box, 4" square box, 4" square deep box, 4" square junction box.

Material: Steel



52181-SPKR IN USE

Part Number	Side Knockouts Bottom Knockouts	Box Application	Similar Products or Special Features	Std. Pkg.
52181-SPKR	(4) 1/2", (4) 3/4" Raised Ground	Concrete Forms	Sealed, concrete tight. External tabs allow installer to nail/screw box to forms for stability during pour. Raised ground screw, extra screws.	10
52181-1/2-SPKR	(8) 1/2" Raised Ground	Concrete Forms	Sealed, concrete tight. External tabs allow installer to nail/screw box to forms for stability during pour. Raised ground screw, extra screws.	10
52181-3/4-SPKR	(8) 3/4" Raised Ground	Concrete Forms	Sealed, concrete tight. External tabs allow installer to nail/screw box to forms for stability during pour. Raised ground screw, extra screws.	10

Poured Concrete Solutions!

Electroform Concrete Pipe Inserts

Stop Losing Pipes During Concrete Pours!

- Rugged malleable iron construction
- Gasketed flange seals out concrete slurry, dirt and debris
- 1/2", 3/4", and 1" sizes available
- Straight and ninety degree styles in stock
- Fits most standard connectors and couplings
- Unique mounting holes and slots make form removal quick and easy and will not dislodge during setup



See Page 178 for more information!



4" Octagon Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

1-1/2" Deep with Conduit Knockouts



Application: These octagon boxes are used to install ceiling and wall lighting fixtures, fans, or convenience outlets and devices.

Advantages: Garvin Industries' octagon boxes are made with a versatile combination head screw.

Field Names: 4-O box, octagon box, octagon junction box, outlet box, ceiling box, octagon ceiling box, 8B box, hexagon box, round outlet box, wall sconce box, 8BO box, 4" octagon box, 4" octagon ceiling box, 4" octagon plenum box, 4" octagon plenum box, 9B plenum box, 9B plenum box.



54151-S IN USE

Part Number	Side Knockouts Bottom Knockouts		Similar Products or Special F	Features	Std. Pkg.
54151-1/2	(4) 1/2" (5) 1/2"		Thomas & Betts 54151-1/2 Hubbell Raco 125	Crouse Hinds TP274	50
54151-1/2BB	(4) 1/2" Blank Bottom		Straight 1/2" side knockouts and bl appliances and applications.	ank bottom for custom OEM	50
54151-3/4	(4) 3/4" (3) 1/2" & (2) 3/4"		Thomas & Betts 54151-3/4 Hubbell Raco 126	Crouse Hinds TP276	50
54151-3/4BB	(4) 3/4" Blank Bottom		Straight 3/4" side knockouts and bl appliances and applications.	ank bottom for custom OEM	50
54151-FANNB	(4) 1/2" (5) 1/2"	Fan & Fixture Support	Thomas & Betts 54151-CFB	Hubbell Raco 296	25
54151-S	(2) 1/2" & (2) 3/4" (3) 1/2" & (2) 3/4"		Thomas & Betts 54151-1234 Hubbell Raco 127	Crouse Hinds TP278 EGS Appleton 40SPL	50
54151-VT	(4) 1/2" (5) 1/2"		Chicago plenum "air tight" kn	ockouts for all air handling spaces.	50
54151-BLNK	Blank Sides Blank Bottom		Tamper and vandal proof box less holes & knockouts you need. Let u	all holes & knockouts. Add only the s customize a solution!	50
54151-OW	(2) 1/2" (3) 1/2" & (2) 3/4"	Old Work Clips & Ears	Octagon box with "Old Work" clips applications in walls or ceilings	and plaster ears for retrofit "cut in"	50
54151-DE	(4) 1/2" (5) 1/2"	4 Mounting Tabs	` '	ounting tabs help ensure a perfect install ency lights, cameras and other devices.	50
54151-DEOW	(2) 1/2" (3) 1/2" & (2) 3/4"	4 Mounting Tabs & Old Work Clips	Dual direction (4) 8-32 threaded meanit signs, sconce lights or camera	ounting tabs with old work clips to add s to existing walls or ceilings.	50

Boxes & Covers

4" Octagon **Boxes**



1-1/2" Deep with Conduit Knockouts & Mounting Brackets



Application: These octagon boxes with conduit knockouts and mounting brackets are installed in ceiling and walls for mounting fixtures, fans, convenience junction boxes or

Advantages: Garvin Industries' labor-saving brackets allow the box to be mounted directly onto structural members and provide an unobstructed path for conduit and cable installa-


Field Names: 4-O box, octagon box, octagon junction box, outlet box, ceiling box, octagon ceiling box, 8B box, hexagon box, round outlet box, 8BO Box, ceiling bracket box, 8B setup, 8B fan setup, fan box with bracket, octagon bracket box, 8B box wire bar hanger, octagon box with bar hanger.

Material: Steel





54151-HU



54151-FAN IN USE



54151-J IN USE

Part Number	Side Knockouts Bottom Knockouts	Bracket s Style		Similar Products or Spe	ecial Features	Std. Pkg.
54151-F	(3) 1/2" (3) 1/2" & (2) 3/4"	Flat Vertical		Thomas & Betts 54151-V Hubbell Raco 161	Crouse Hinds TP282 EGS Appleton	25
54151-FAN	(3) 1/2" (5) 1/2"	New Construction	Fan & Fixture Support	Flat vertical bracket for new fan installs.	construction allows easy ceiling	25
54151-FANBH	(4) 1/2" (1) 1/2"	New Construction Bar Hanger	Fan & Fixture Support	Thomas & Betts 54151-CFB Hubbell Raco 926	BHL Crouse Hinds TP276	25
54151-FANOW	(4) 1/2" (1) 1/2"	Old Work Bar Hanger	Fan & Fixture Support	Hubbell Raco 936		25
54151-HU	(4) 1/2" (2) 1/2" & (2) 3/4"	New Construction Bar Hanger		Thomas & Betts 54151-J1/2 Hubbell Raco 324	Crouse Hinds TP372 EGS Appleton SX11S4012	25
54151-J	(4) 1/2" (5) 1/2"	"J" Flush Mount Wood Spike		Thomas & Betts 54151-L Hubbell Raco 158	Crouse Hinds TP280 EGS Appleton	25
54151-FANWP	(3) 1/2" Water Tight (2) 1/2" Water Tight	Flat Vertical	Fan & Fixture Support	Weatherproof Fan Bo	×	25


54151-FANWP



4" Octagon **Boxes**

847-455-0188 FAX 847-455-0334 garvinindustries.com

1-1/2" Deep with Clamps for Flexible Metal Conduits

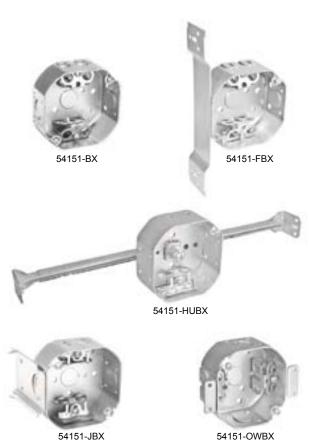

Application: These octagon boxes are installed in walls and ceilings for lighting fixtures and other outlet devices that are powered using flexible metal conduits.

Advantages: Garvin Industries' cable clamps save both time and money by allowing the flexible metal conduits to be easily terminated in boxes without the need for costly external box connectors. Various mounting brackets allow easy box box connectors. Various mounting brackets allow easy box positioning along studs or joists.

Field Names: 4-O box, octagon box, octagon junction box, outlet box, ceiling box, octagon ceiling box, 8B box, hexagon box, round outlet box, 8B box ceiling box with bracket, ceiling box with J bracket, 8B box with bracket, 5" ceiling box, 4" ceiling box with bracket.



54151-BX IN USE

Part Number	Side Knockouts Bottom Knockouts	Bracket	Similar Products or Spec	ial Features	Std. Pkg.
54151-BX	(2) 1/2" & (4) BX/MC Clamps (1) 1/2"		Thomas & Betts 54151-A Hubbell Raco 153	Crouse Hinds TP310 EGS Appleton 551L	25
54151-FBX	(2) 1/2" & (4) BX/MC Clamps (1) 1/2"	Flat Vertical	Thomas & Betts 54151-AV Hubbell Raco 155	Crouse Hinds TP314	25
54151-HUBX	(2) 1/2" & (4) BX/MC Clamps (1) 1/2"	16"-24" Adjustable Bar Hanger	Hubbell Raco 325	Crouse Hinds TP368	25
54151-JBX	(2) 1/2" & (4) BX/MC Clamps (1) 1/2"	Flush Mount	Thomas & Betts 54151-AL Hubbell Raco 157	Crouse Hinds TP312 EGS Appleton 551LJB	25
54151-OWBX	(4) BX/MC Clamps (1) 1/2"	Old Work Clips & Ears	Old work "cut in" box. Great fo to existing walls using EMT co	r adding outlets and other devices nduit or flexible metal cable.	25



1-1/2" Deep with Clamps for Nonmetallic Sheathed Cables











Application: These octagon boxes are installed in walls and ceilings for lighting fixtures and other outlet devices that are powered using nonmetallic sheathed cables.

Advantages: Garvin Industries' cable clamps save both time and money by allowing nonmetallic sheathed cables to be easily terminated in the box without the need for costly external box connectors. Various mounting brackets allow easy box positioning along studs or joists.

Field Names: 4-O box, octagon box, octagon junction box, outlet box, ceiling box, octagon ceiling box, 8B box, hexagon box, round outlet box, 8B box, NM cable box, 8B box with bracket, 8B box with J bracket, ceiling box, 8B ceiling box, ceiling box with bracket, octagon conduit box, 8B conduit



54151-R IN USE

Part Number	Side Knockouts Bottom Knockouts Bracket		Similar Products or Spec	Std. Pkg.	
54151-R	(2) 1/2" & (4) NM Clamps (1) 1/2"		Thomas & Betts 54151-N Hubbell Raco 146	Crouse Hinds TP298 EGS Appleton 561L	25
54151-FR	(2) 1/2" & (4) NM Clamps (1) 1/2"	Flat Vertical	Thomas & Betts 54151-NV Hubbell Raco 164	Crouse Hinds TP304 EGS Appleton	25
54151-HUR	(2) 1/2" & (4) NM Clamps (1) 1/2"	16"-24" Adjustable Bar Hanger	Hubbell Raco 326	Crouse Hinds TP376	25
54151-JR	(2) 1/2" & (4) NM Clamps (1) 1/2"	Flush Mount	Thomas & Betts 54151-NL Hubbell Raco 160	Crouse Hinds TP302 EGS Appleton 561LJB	25
54151-OWR	(4) NM Clamps (1) 1/2"	Old Work Clips & Ears	Thomas & Betts 54151-NE Hubbell Raco 150	Crouse Hinds TP306 EGS Appleton 561LXE	25



4" Octagon Extension Rings

847-455-0188 FAX 847-455-0334 garvinindustries.com

1-1/2" Deep with Conduit Knockouts









Application: These extension rings with conduit knockouts provide added wire capacity to existing octagon (8B) boxes and serve as outlet boxes for surface conduits.

Advantages: Garvin Industries electrical box extension rings prevent the labor-intensive removal of older outlet boxes, connectors and devices when extra wire capacity is needed. Adapter slots on the bottoms of the extension rings allow easy, slide-on attachment to existing electrical junction boxes.

Field Names: Extension rings, extension box, 8B extension collar, add-a-depth box, 8B extension ring, 4-O extension box, box extender, junction box adapter, 8BO extension box, octagon extension ring, octagon extension, 8B octagon extension, ceiling extension ring, 4" ceiling extension ring.

Material: Steel



55151-1/2 IN USE

Part Number	Side Knockouts	Similar Products		Std. Pkg.
55151-1/2	(4) 1/2"	Thomas & Betts 55151-1/2 Hubbell Raco 128	Crouse Hinds TP284 EGS Appleton	50
55151-S	(2) 1/2", (2) 3/4"	Thomas & Betts 55151-1234 Hubbell Raco 130	Crouse Hinds TP286 EGS Appleton 40ESPL	50
55151-3/4	(4) 3/4"	Hubbell Raco 131 RAC		50
55151-VT	(4) 1/2"			50

Quick Shot Ceiling Grid Wire!

Ceiling Grid Pencil Rod Tie Wire

Installs in Seconds Using Powder Actuated Tool!

- · Fits most powder actuated guns
- 12 and 14 gauge wire available
- Easily twists on to boxes, ceiling grid or conduit brackets
- · Custom lengths available on request
- Preinstalled mounting clip and concrete nail
- Galvanized steel construction
- In stock! On time!



See Page 321 for more information!

4" Octagon Boxes



2-1/8" Deep with Conduit Knockouts



Application: These octagon boxes are used to install ceiling and wall lighting fixtures, fans, convenience junction boxes and devices.

Advantages: Garvin Industries' deep octagon boxes are made with a versatile combination head screw. They also come with labor-saving installation and mounting tabs that align with most lighting fixtures.

Field Names: 4-O box, octagon box, octagon junction box, outlet box, ceiling box, octagon ceiling box, 8B box, hexagon box, round outlet box, 8BO conduit box, 8B ceiling box, 8B deep box, 4" ceiling box, ceiling outlet box, deep ceiling box, deep 8B box.





54171-SVT IN USE

54171-DE IN USE

Part Number	Side Knockouts Bottom Knockout		Similar Products or Spec	ial Features	Std. Pkg.
54171-1/2	(4) 1/2" (3) 1/2" & (2) 3/4"		Thomas & Betts 54171-1.2 Hubbell Raco 165	Crouse Hinds TP288	25
54171-1/2BB	(4) 1/2" Blank Bottom		Blank bottom is great for surfa	ce mounting on electrical appliances.	25
54171-3/4	(4) 3/4" (3) 1/2" & (2) 3/4"		Thomas & Betts 54171-3/4 Hubbell Raco 166	Crouse Hinds TP290	25
54171-S	(2) 1/2" & (2) 3/4" (3) 1/2" & (2) 3/4"		Thomas & Betts 54171-1234 Hubbell Raco 167	Crouse Hinds TP292 EGS Appleton 40DSPL	25
54171-1	(4) 1" (3) 1/2" & (2) 3/4"		Thomas & Betts 54171-1	Crouse Hinds TP294	25
54171-SVT	(2) 1/2" & (2) 3/4" (3) 1/2" & (2) 3/4"	Chicago Plenum	Chicago plenum "air tigh	nt" 1/2" & 3/4" knockouts	25
54171-FANNB	(4) 1/2" (5) 1/2"	Fan & Fixture Support	Thomas & Betts 54171-CFB	Hubbell Raco 299	25
54171-BLNK	Blank Sides Blank Bottom			Tamper and vandal proof, add only the needed lots, holes and knockouts for a specific application.	25
54171-DE	(2) 1/2" & (2) 3/4" (3) 1/2" & (2) 3/4"		` ,	ed mounting tabs ensures a perfect install of exit cy lights, cameras and other devices.	25
54171-DEOW	(2) 1/2" (3) 1/2" & (2) 3/4"	4 Mounting Tabs & Old Work Clips	Dual direction (4) 8-32 threade signs, sconce lights or camera	ed mounting tabs with old work clips to add exit s to existing walls or ceilings.	25



4" Octagon Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

2-1/8" Deep with Conduit Knockouts







Application: These octagon boxes are used to install ceiling and wall lighting fixtures, fans, convenience outlets.

Advantages: Garvin Industries' octagon boxes are made with a versatile combination head screw that can securely fasten a fixture or device using a slotted, Phillips, or Robertson head screwdriver. They also come with labor-saving brackets and mounting tabs that align with most lighting fixtures.

Field Names: 4-O box, octagon box, octagon junction box, outlet box, ceiling box, octagon ceiling box, 8B box, hexagon box, round outlet box, old work octagon box, cut in box, deep 8B box, 8B deep box with bracket, 8B deep J box, 8B deep octagon box, 8B box with bar hanger, 8B box setup, 8B deep box set up, deep ceiling box with bracket, deep ceiling box with bar hanger.



54171-FAN IN USE



Part Number	Side Knockouts Bottom Knockouts	Bracket or Accessories	54171-FANBH IN USE Special Features	Std. Pkg.
54171-OW	(2) 1/2" (3) 1/2" & (2) 3/4"	Plaster Ears & Old Work Clips	Old work "cut in" boxes are used for adding a fixture, outlet, security camera or other devices in existing wall surfaces.	25
54171-SBB	(2) 1/2" & (2) 3/4" Blank Bottom		Blank bottom for surface mounting on electrical appliances and other OEM applications.	25
54171-TBAR	(4) T-Bar Slots (2) 1/2"	Back Side Tie Wire Tab	Break-away side tabs allow box to fit snugly on ceiling T-bar grid. The tab on back of the box allows tie wire to be secured to the ceiling structure. Recommended for low-voltage applications only.	25
54171-FAN	(3) 1/2" (5) 1/2"	Vertical Bracket Fan Support	Supplied with mounting hardware. Bracket has self-adhesive strips to hold boxes in place while lag bolts are installed with both hands.	25
54171-FANBH	(4) 1/2" Blank Bottom	New Construction Fan Bar Hanger	Sliding bar hanger and mounting hardware. For mounting ceiling fans in open joists.	25
54171-FANOW	(4) 1/2" Blank Bottom	Old Work Fan Bar Hanger	Old work hanger twists out and penetrates ceiling joists for a secure installation of ceiling fans and chandeliers in existing hollow ceilings.	25
54171-F	(3) 1/2" (5) 1/2"	Flat Vertical 1/2" Setback	Flat vertical bracket mounts directly to the side of upright structural members	25
54171-FANWP	(3) 1/2" Water Tight (2) 1/2" Water Tight	Flat Vertical	Weatherproof Fan Box	25



2-1/8" Deep with Clamps for Flexible Metal Conduits





Application: These octagon boxes are installed in walls and ceilings for lighting fixtures and other outlet devices powered using flexible metal conduits.

Advantages: Garvin Industries' cable clamps save both time and money by allowing flexible metal conduits to be easily terminated in the box without the need for costly external box connectors.

Field Names: 4-O box, octagon box, octagon junction box, outlet box, ceiling box, octagon ceiling box, 8B box, hexagon box, round outlet box, octagon cut-in box, old work junction box, old work outlet box, 8BO conduit box, ceiling bracket box, ceiling box with bracket.

Material: Steel



Part Number	Side Knockouts Bottom Knockouts	Bracket	Similar Products	54171-FBX IN USE	Std. Pkg.
54171-BX	(2) 1/2" & (4) BX/MC (1) 1/2"		Thomas & Betts 54171-N	Crouse Hinds TP317	25
54171-FBX	(1) 1/2" & (4) BX/MC (1) 1/2"	Flat Vertical	Thomas & Betts 54171-NV	Crouse Hinds TP338	25

2-1/8" Deep with Clamps for Nonmetallic Sheathed Cables







Application: These octagon boxes with clamps for nonmetallic sheathed cable are installed in walls and ceilings for lighting fixtures and other outlet devices that are powered using nonmetallic sheathed cables or conduit.

Advantages: Garvin Industries' cable clamps save both time and money by allowing the nonmetallic sheathed cable to be easily terminated in the box without the need for costly external box connectors. These boxes also have a versatile combination head screw that securely fastens plaster rings and adapters to an electrical junction box using a slotted, Phillips, or Robertson head screwdriver.

Field Names: 4-O box, octagon box, octagon junction box, outlet box, ceiling box, octagon ceiling box, 8B box, hexagon box, round outlet box, octagon cut-in box, old work junction box, old work outlet box, 8BO box, ceiling box with bracket, 8B box with bracket, 8B ceiling box with bracket.



Part Number	Side Knockouts Bottom Knockouts	Bracket	Similar Products	54171-R IN USE	Std. Pkg.
54171-R	(2) 1/2" & (4) NM (1) 1/2"		Thomas & Betts 54171-A Hubbell Raco 175	Crouse Hinds TP316 EGS Appleton 561LD	25
54171-FR	(1) 1/2" & (4) NM (1) 1/2"	Flat Vertical	Thomas & Betts 54171-AV Hubbell Raco 177	Crouse Hinds TP320	25
54171-JR	(2) 1/2" & (4) NM (1) 1/2"	Flush Mount	Thomas & Betts 54171-AL Hubbell Raco 176	Crouse Hinds TP318 EGS Appleton 551LDJB or 561LDJB	25



4" Octagon Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

3-1/2" Deep with Conduit Knockouts





54181-OW



54181-BLNK






Application: These extra deep octagon boxes are used to install ceiling and wall lighting fixtures, security cameras, convenience outlets or deep devices that need extra room.

Advantages: Garvin Industries' octagon boxes are made with a versatile combination head screw that securely fastens devices using a slotted, Phillips, or Robertson head screwdriver. They also come with labor saving installation brackets and mounting tabs that align with most lighting fixtures.

Field Names: 4-O box, octagon box, octagon junction box, outlet box, ceiling box, octagon ceiling box, 8B box, hexagon box, round outlet box, old work octagon box, cut in box, deep 8B box, ceiling box with bracket, 8B box with bracket, deep 8B box with bracket, deep 8B set up.

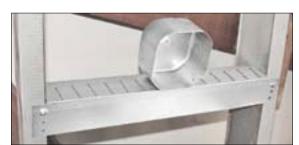

54181-ADJ IN USE

Part Number	Side Knockouts Bottom Knockouts	Accessories	Description	Std. Pkg.
54181-S	(2) 1/2" & (2) 3/4" (3) 1/2" & (2) 3/4"		For mounting deep devices in walls and ceiling.	25
54181-OW	(2) 1/2" (3) 1/2" & (2) 3/4"	Old Work Clips & Plaster Ears	Cut in old work box to add deep devices in existing walls and ceiling	25
54181-ADJ	(2) 1/2" & (1) 3/4" (3) 1/2" & (2) 3/4"	16" Two Way Box Positioning Bracket	This versatile bracket allows boxes to be adjusted horizontally in stud wall spaces from right to left and in and out to the required finished wall depth.	25
54181-TBAR	(2) 1/2" (3) 1/2" & (2) 3/4"	24" Sliding Bracket with Adjustable Depth	Sliding brackets are used on ceiling tiles to adjust boxes to a perfect position	25
54181-BLNK	Blank Box No Holes or KO's		Blank box less all holes and knockouts. Let us customize a solution for you today!	25



Flat Covers for Use with or without Electrical Devices



Application: These flat covers are used to blank up existing boxes or to attach electrical devices, switches & receptacles.

Advantages: Garvin Industries flat covers provide a quick and easy way to cover or terminate exposed electrical wire.

Field Names: 8B cover, flat blank octagon cover, blank up plate, octagon device covers, octagon switch cover, octagon industrial cover, 8B Chicago plenum cover, round electrical box cover, 8B plenum cover, 8B blank up, 8B device cover.



54C1-VT IN USE

0	Pa
54C42	

Part Number	Description	Similar Products or Sp	ecial Features	Std. Pkg.
54C1	Octagon Blank	Thomas & Betts 54C1 Hubbell Raco 722	Crouse Hinds TP322 EGS Appleton 8403	50
54C1-R	Round Blank	Thomas & Betts 54C1 Hubbell Raco	Crouse Hinds TP323 EGS Appleton	50
54C1-VT	Octagon Gasketed	Flat, blank, gasketed screws for air plenun	cover with (2) 8-32 box n spaces.	25
54C6	Octagon 1/2" Knockout	Thomas & Betts 54C6 Hubbell Raco 724	Crouse Hinds TP328 EGS Appleton 8413	50
54C6-R	Round 1/2" Knockout	Flat round cover with 1/2" conduit knockout		
54C40	Octagon Duplex Outlet	Thomas & Betts 5402LR Hubbell Raco 731	Crouse Hinds TP336 EGS Appleton 8420LR	50
54C41	Octagon 1.4" Single Receptacle	Thomas & Betts 5401LR Hubbell Raco	Crouse Hinds TP336 EGS Appleton 8420LR	50
54CBPO	Toggle Switch ON/OFF Emergency, Oil Burner	Painted red with white lette oil burner.	ring to indicate ON/OFF for	25
54C42	Octagon Toggle Switch	Thomas & Betts Hubbell Raco 729	Crouse Hinds TP335 EGS Appleton	50




4" Octagon & Round Box Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

White Ceiling Blank-Up Canopies



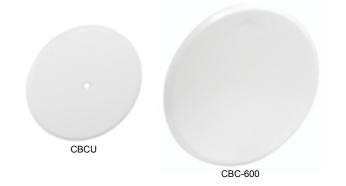

Application: These white ceiling blank up canopies are used to cover electrical wires or discontinued recessed can light openings in ceilings or walls.

Advantages: Garvin Industries ceiling blank up canopies are available in ceiling white premium powder-coated paint which is highly scratch resistant. Flat covers are perfect for wallpaper overlay. The tapered, 1/4" outside edge covers are perfect for hiding oversize box openings or drywall and plaster imperfections. They come pre-painted with flat head 8-32 screws included.

Field Names: Ceiling blank, ceiling blank-up canopy, round blank plate, round closure plate, ceiling trim plate, ceiling hole cover, recessed can light covers, 8B blank up.



CBC-350 IN USE








CBC-600 INSTALLATION IN ABANDONED RECESSED CAN LIGHT OPEN HOLE

Part Number	Edge Taper	Outside Diameter	Holes C-C	Used With	Special Features	Std. Pkg.
CBC-F	Flat	5"	2-3/4"	Raised Ring or 3-1/2" Box	Covers octagon box opening or ring when wallpaper overlay is required	25
CBC-275	1/4"	5"	2-3/4"	Raised Ring or 3-1/2" Box	Blank with ceiling white color for exposed locations	25
CBC-350	1/4"	5"	3-1/2"	4" Octagon Box	Blank with ceiling white color for exposed locations	25
CBCU	1/4"	5"	Universal Mounting Strap	Raised Ring, 3-1/2" & 4" Octagon Box	Universal mounting strap spans all center distances. Uses one (1) center screw.	25
CBC-600	1/4"	6"	No Holes	Abandoned 4" & 5" Recessed Can Light Fixtures	White. Spring tension keeps cover tight on ceiling surface. Hides ugly holes of abandoned recessed light fixtures in ceilings. Plastic hub threads safely into medium socket.	25
CBC-800	1/4"	8"	No Holes	Abandoned 6" & 7" Recessed Can Light Fixtures	White. Spring tension keeps cover tight on ceiling surface. Hides ugly holes of abandoned recessed light fixtures in ceilings. Plastic hub threads safely into medium socket.	25
CBC-1200	1/4"	12"	No Holes	Abandoned 8" & 10" Recessed Can Light Fixtures	White. Spring tension keeps cover tight on ceiling surface. Hides ugly holes of abandoned recessed light fixtures in ceilings. Plastic hub threads safely into medium socket.	25



#8-32 Mounting Ear Tabs 2-3/4" on Centers

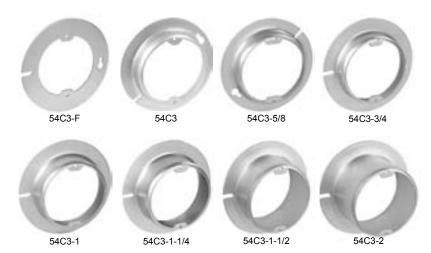

Application: These raised covers are used for mounting lighting fixtures, security cameras, motion detectors and other devices on walls and ceilings.

Advantages: Garvin Industries' mounting ear tabs align with most lighting fixtures. There are various selections of raised depths allowing flush alignment of the ring with drywall, plaster, tile or other finished surface.

Field Names: Octagon plaster ring, round-to-round plaster ring, round raised ring, octagon mud ring, octagon drywall ring, raised octagon device ring, raised octagon cover, 8B raised ring, 8B plaster ring, 8B mud ring, round mud ring.



54C3 IN USE

Part Number	Raised	Similar Products or Spe	Similar Products or Special Features	
54C3-F	Flat	Flat cover, no raise.		25
54C3	1/2"	Thomas & Betts 54C3-1/2 Hubbell Raco 737	Crouse Hinds TP332 EGS Appleton 8409A	25
54C3-5/8	5/8"	Thomas & Betts 54C3 Hubbell Raco 727	Crouse Hinds TP326 EGS Appleton 8409	25
54C3-3/4	3/4"	Thomas & Betts 54C3-3/4	Crouse Hinds TP331 EGS Appleton 8409B	25
54C3-1	1"	Thomas & Betts 54C3-1 Hubbell Raco 732	Crouse Hinds TP333 EGS Appleton 8409C	25
54C3-1-1/4	1-1/4"	Thomas & Betts 54C3-1-1/4	Thomas & Betts 54C3-1-1/4	
54C3-1-1/2	1-1/2"	Raised 1-1/2" for extra thick	Raised 1-1/2" for extra thick drywall, plaster or tile.	
54C3-2	2"	Raised 2" for extra thick dryv	wall, plaster or tile.	25



4" Round Swivel Fixture Hangers

847-455-0188 FAX 847-455-0334 garvinindustries.com

Mounts to Round or Octagon Boxes & Rings











SC-5075HFR GSCR-5075 Patent US 6,649,837 B2

Application: These fixture hangers are used to secure industrial lighting fixtures, security cameras, motion detectors, occupancy sensors and other electrical/electronic devices from overhead ceiling installations. Great in industrial settings where the pipe stem or fixture might be subjected to motion or vibration.

Advantages: Garvin Industries' center ball joint and knuckle design allows the installed pipe to swing 20° from vertical in any direction without damaging the pipe joints or wires. This feature protects wires and connectors from the occasional bumps in industrial settings.

Field Names: Swivel cover, swivel hanger, swivel fixture hanger, ball cover, knuckle cover, ball hanger, swivel ball hanger, fixture hanger, raised fixture hanger, 8B swivel cover.

Material: Steel & Malleable Iron

INDUSTRIAL FIXTURE HANGING NOW A ONE-MAN JOB!





Hang pipe/ball assembly in cover, then connect wiring.

Secure cover with one screw.



GSCR-5075 WITH WIRE ELECTRICALLY BONDING SWIVEL PIVOT & STEEL COVER

Part Number	Pipe Size	Similar Products or Special Features			
SC-50R 1/2"		Thomas & Betts SHR1234 Hubbell Raco 895	Crouse Hinds EGS Appleton		
SC-50R-VT	1/2" or 3/4"	Gasketed for air plenum s detectors and other electri	paces. Mounts light fixtures, security cameras, motion c and electronic devices.	25	
SC-75R	3/4"	Thomas & Betts SHR1234 Hubbell Raco 895	Crouse Hinds EGS Appleton	25	
SC-5075HFR	1/2" or 3/4"	easy step. Wire termination can	The hinged door allows the installer to mount the cover on box and hang fixtures in one easy step. Wire termination can be completed with the door open. Removable threaded swivel ball allows a "hands free" labor-saving install. Fixture hanging is now a one man job.		
GSCR-5075	1/2" or 3/4"	Dedicated ground wire connects permanently bond for a proper of	s swivel-ball knuckle and steel cover, so the two ground.	25	

4" Round Lamp Holders



Mounts on 4" Octagon Boxes & Raised Rings













Part Std. Construction Number Pkg. Octagon Box Mount Only PF-52 50 Tamper/Vandal Resistant Solid Riveted Assembly PL-50 Plastic 25 PL-51 Plastic 50 PF-50 Porcelain 48 PF-51 Porcelain 50 PF-51-DU Porcelain with 50 **Duplex Receptacle**

Application: These lamp holders attach to octagon boxes or raised device rings when convenience lights are needed.

Advantages: Garvin Industries' lamp holders allow the installer to economically add an exposed light source to applications where covered lamps are not required.

Field Names: Lamp holder, keyless lamp holder, convenience light, porcelain lamp holder, light bulb socket, bulb holder, porcelain pull, porcelain keyless.

Material: Steel, Porcelain or Plastic






PF-50 IN USE



Brass & Stainless Steel Floor Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

Standard 20 Amp Decorative and GFCI Devices (Preinstalled)

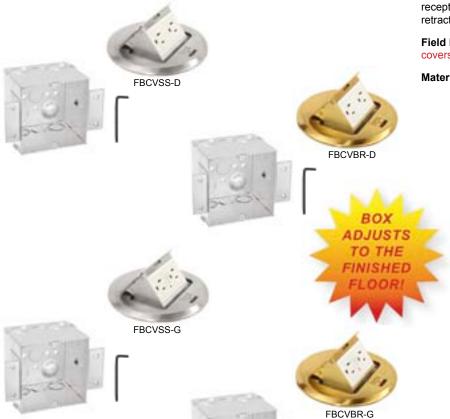

Application: Garvin Industries' floor boxes are mounted in locations where wall outlets are not available. They are great for floors, furniture walls or anywhere power is needed.

Advantages: "Pop Up" feature allows users to access receptacle only when needed. The cover snaps closed with a retractable locking hasp. Beautifies any space.

Field Names: Floor box, brass floor covers, pop-up floor box covers.

Material: Brass, Stainless Steel and Galvanized Steel



CLOSING THE FBCVSS-D


Part Number	Description	Cover Material	Attached Device	Additonal Features	Std. Pkg.
FBCVSS-D-KIT	Kit includes "Pop Up" floor box cover, 4" Sq., 3-1/2" deep box and Allen wrench to adjust box mounting tabs to finished floor.	Stainless Steel	20A Decorative	Locking hasp retracts to pop up device for use. Adjustable side brackets allow box to be raised to finished floor height so cover mounts properly.	10
FBCVBR-D-KIT	Kit includes "Pop Up" floor box cover, 4" Sq., 3-1/2" deep box and Allen wrench to adjust box mounting tabs to finished floor.	Brass	20A Decorative	Locking hasp retracts to pop up device for use. Adjustable side brackets allow box to be raised to finished floor height so cover mounts properly.	10
FBCVSS-G-KIT	Kit includes "Pop Up" floor box cover, 4" Sq., 3-1/2" deep box and Allen wrench to adjust box mounting tabs to finished floor.	Stainless Steel	20A GFCI	Locking hasp retracts to pop up device for use. Adjustable side brackets allow box to be raised to finished floor height so cover mounts properly.	10
FBCVBR-G-KIT	Kit includes "Pop Up" floor box cover, 4" Sq., 3-1/2" deep box and Allen wrench to adjust box mounting tabs to finished floor.	Brass	20A GFCI	Locking hasp retracts to pop up device for use. Adjustable side brackets allow box to be raised to finished floor height so cover mounts properly.	10

4" Square Junction Boxes



1-1/4" & 1-1/2" Deep with Conduit Knockouts





Advantages: Garvin Industries' 4S Boxes can be surface or flush mounted when multidirectional conduit runs are necessary. Red painted boxes are also available to easily distinguish fire alarm circuits. These boxes include a raised ground provision.

Field Names: 4S Box, 1900 box, 1900 electrical box, 1900 junction box, conduit box, J-box, concentric box, conduit junction box, outlet box, drywall mud box, standard 1900 box, square conduit box.





52151-SRC WITH WELDED ROD COUPLER

52141-1/2 IN USE









52151-SVTRC
Patent Pending

Part Number	Side Knockouts Bottom Knockouts	Box Depth	Box Construction	Similar Products or Special Fe	eatures	Std. Pkg.
52141-1/2	(12) 1/2" (4) 1/2"	1-1/4"	Drawn	Thomas & Betts 52141-1/2 Hubbell Raco 185	Crouse Hinds TP408 EGS Appleton 4SL-1/2	50
52151-1/2	(12) 1/2" (4) 1/2"	1-1/2"	Welded	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton 4S-1/2	50
52151-1/2DR	(12) 1/2" (4) 1/2"	1-1/2"	Drawn	Thomas & Betts 52151-1/2 Hubbell Raco 190	Crouse Hinds TP410 EGS Appleton 4S-1/2DR	50
52151-3/4	(8) 3/4" (2) 1/2", (2) 3/4"	1-1/2"	Welded	Thomas & Betts 52151-1/2 Hubbell Raco 190	Crouse Hinds TP410 EGS Appleton 4S-1/2DR	50
52151-3/4DR	(8) 3/4" (2) 1/2", (2) 3/4"	1-1/2"	Drawn	Thomas & Betts 52151-3/4 Hubbell Raco 191	Crouse Hinds TP412 EGS Appleton 4S-3/4DR	50
52151-3/4-VT	(8) 3/4" (3) 1/2", (2) 3/4"	1-1/2"	Drawn	Chicago plenum "air tight" knockouts for 3/4" conduit runs		50
52151-RED	(6) 1/2", (6) 1/2"-3/4" (2) 1/2", (2) 1/2"-3/4"	1-1/2"	Welded	Painted red for dedicated fire alarm	and life-safety circuits	50
52151-S	(6) 1/2", (6) 1/2"-3/4" (2) 1/2", (2) 3/4"	1-1/2"	Welded	Thomas & Betts 52151-1234EW Hubbell Raco 189	Crouse Hinds TP404 EGS Appleton 4S-EK	50
52151-BLNK	Blank Side Blank Bottom	1-1/2"	Drawn	Tamper and vandal proof box less all holes & knockouts. Add only the knockouts you need! Let us customize a solution for you!		50
52151-SRC	(6) 1/2", (6) 1/2"-3/4" (2) 1/2", (2) 3/4"	1-1/2"	Welded	1/4" threaded rod coupling is welded to the back of box for quick mounting on the threaded rod. Cut the rod to desired length and spin box on, in one easy step.		50
52151-SVTRC	(8) 1/2", (4) 3/4" (2) 1/2", (2) 3/4"	1-1/2"	Drawn	1/4" threaded rod coupling is quick mounting on threaded respin box on in one easy step.	welded to the back of box for od. Cut rod to desired length ar Chicago plenum "air tight" kno	50 nd ckouts.



4" Square Junction Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

1-1/2" Deep with Conduit Knockouts



Application: These 4" square boxes with conduit knockouts are installed in walls or ceilings for lighting fixtures, switches, receptacles or other outlet devices. Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions.

Advantages: Garvin Industries' 4S Boxes can be surface or flush mounted when multidirectional conduit runs are necessary. Red painted boxes are also available to easily distinguish fire alarm circuits.

Field Names: 4S Box, 1900 box, 1900 electrical box, 1900 junction box, conduit box, J-box, concentric box, conduit junction box, outlet box, drywall mud box, 4" square box, 4" square junction box, 4" square outlet box, standard 1900 box, 1900 plenum box, standard 1900 plenum box, vapor tight box, fire alarm box.









52151-SDA "DUAL ACCESS" BOX IN USE

			32131-3DA DOALAGEESG BOX IN GGE			
Part Number	Side Knockouts Bottom Knockouts	Box Construction	Similar Products or Special Features			
52151-SDA (6) 1/2", (6) 1/2"-3/4" Open with Mounting Tabs & 8-32 Screws On Both Sides of Box		Welded	Dual "backdoor" access extension ring allows for entry to devices, wires and wire nuts after they have been installed on plaster ring. Blank cover encloses wires in ring and attaches to bottom tapped 8-32 ears.			
52151-SVTDA	(6) 1/2", (6) 1/2"-3/4" Open with Mounting Tabs & 8-32 Screws On Both Sides of Box	Drawn	entry to devices, wires ar	ckdoor" access extension ring allows for nd wire nuts after they have been installed ver encloses wires in ring and attaches to	50	
52151-SDR	(6) 1/2", (6) 1/2"-3/4" (3) 1/2", (2) 3/4"	Drawn	Thomas & Betts 52151-1234 Hubbell Raco 192	Crouse Hinds TP414 EGS Appleton 4S-SPL-DR	50	
52151-SOS	(8) 1/2", (4) 3/4" (3) 1/2", (2) 3/4"	Drawn	Thomas & Betts Hubbell Raco	Crouse Hinds TP414 EGS Appleton 4S-SPL or 4SSPLDR	50	
52151-SPT	(6) 1/2", (6) 3/4" (2) 1/2", (2) 3/4"	Welded	Thomas & Betts Hubbell Raco 192SM	Crouse Hinds TP404PF EGS Appleton	50	
52151-SVT	(8) 1/2", (4) 3/4" (3) 1/2", (2) 3/4"	Drawn	Chicago plenum "air tight air spaces.	" knockouts for all plenum	50	
52151-SVTRED	(8) 1/2", (4) 3/4" (3) 1/2", (2) 3/4"	Drawn	Chicago plenum "air tight for dedicated fire alarm of	" knockouts, painted red circuits in plenum air space.	50	
52151-SVTSS	(8) 1/2", (4) 3/4" (3) 1/2", (2) 3/4"	Drawn		vater tight knockouts for use in wash s. Chicago Plenum "air tight" knockouts.	50	

4" Square **Junction Boxes**



1-1/2" Deep with Conduit Knockouts & Mounting Brackets



52151-FSQ

Application: These bracket boxes with conduit knockouts are used when 4" square boxes must be mounted directly to wood or metal studs. Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions.

Advantages: Garvin Industries' 4" square boxes with attached brackets allow a quick easy installation on structural members and keep the boxes upright for an easy and solid conduit connection.

Field Names: Bracket box, 4S bracket box, metal stud box, vertical bracket box, wood bracket box, nail-on bracket box, flush-mount bracket box, conduit bracket box, bracketed outlet box, 1900 bracket box, offset bracket box.





52151-B IN USE

52151-DWS IN USE









52151-FSDA IN USE





52151-FS IN USE

52151-FSQ IN USE

Part Number	Side Knockouts Bottom Knockouts	Box Construction	Bracket Style	Similar Products or Special	Features	Std. Pkg.
52151-AB	(4) 1/2", (5) 1/2"-3/4" (3) 1/2", (2) 3/4"	Welded	Right Angle	Right angle bracket gives extra rito wood or metal studs screw to t		25
52151-B	(9) 1/2" (2) 1/2", (2) 3/4"	Welded	Flush Mount	Thomas & Betts 52151-B1234 Hubbell Raco 193	Crouse Hinds TP418 EGS Appleton 4S-BEK	25
52151-DWS	(6) 1/2", (3) 1/2"-3/4" (3) 1/2", (2) 3/4"	Drawn	Vertical Drywall	Thomas & Betts 52151-DV1234 Hubbell Raco 208	Crouse Hinds EGS Appleton 4S-OBK	25
52151-F	(9) 1/2" (3) 1/2", (2) 3/4"	Welded	Flat Vertical	Thomas & Betts 52151-CV1234 Hubbell Raco 196	Crouse Hinds TP423 EGS Appleton 4S-VBEKPL	25
52151-3/4F	(6) 3/4" (3) 1/2", (2) 3/4"	Welded	Flat Vertical	Thomas & Betts 52151-CV314 Hubbell Raco 199	Crouse Hinds TP469 EGS Appleton 4SVB34PL	25
52151-FS	(6) 1/2", (3) 1/2"-3/4" (3) 1/2", (2) 1/2"-3/4"	Welded	Flat Vertical	Thomas & Betts 52151-CV1234 Hubbell Raco 196	Crouse Hinds TP423 EGS Appleton 4S-VBEKPL	25
52151-FSDA	(4) 1/2", (5) 1/2"-3/4" Open with Mounting Tabs & 8-32 Screws On Both Sides of Rii	Welded	Flat Vertical	Dual "backdoor" access allows fo wire nuts after they have been insenctoses wires in ring and attache	stalled on plaster ring. Blank co	
52151-FSQ	(4) 1/2", (5) 1/2"-3/4" (3) 1/2", (2) 3/4"	Welded	Flat Vertical	Vertical bracket with pre-installed No more expensive fasteners! We	•	25



4" Square Junction Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

1-1/2" Deep with Conduit Knockouts & Mounting Brackets





Patent Pending





Application: These bracket boxes with conduit knockouts are used when 4" square boxes must be mounted directly to wood or metal studs. Square boxes are used to bring power to a number of electrical devices when multiple conductor runs are split in two or more directions.

Advantages: Garvin Industries' 4" square boxes with attached brackets allow a quick installation and keep the boxes upright for an easy conduit connection.

Field Names: Bracket box, 4S bracket box, metal stud box, vertical bracket box, wood bracket box, nail-on bracket box, flush-mount bracket box, conduit bracket box, bracketed outlet box, 1900 bracket box, 1900 box with bracket.



52151-SWB IN USE

Part Number	Side Knockouts Bottom Knockouts	Box Construction	Bracket Style	Similar Products or Specia	l Features	Std. Pkg.
52151-MS	(4) 1/2", (5) 1/2"-3/4" (3) 1/2", (2) 1/2"-3/4"	Welded	Metal Stud	Thomas & Betts 52151-MS1234 Hubbell Raco 193	Crouse Hinds EGS Appleton	25
52151-MSDA	(4) 1/2", (5) 1/2" & 3/4" Open with Mounting Tabs & 8-32 Screws On Both Sides of I		Metal Stud	Dual "backdoor" access allows f wire nuts after they have been in encloses wires in box and attact	nstalled on plaster ring. Blank cov	25 ⁄er
52151-SVTWB	(6) 1/2", (3) 3/4" (3) 1/2", (2) 3/4"	Drawn	Vertical Wood Spike	Chicago plenum "air tight" wooden studs.	knockouts and bracket for	25
52151-SWB	(4) 1/2", (5) 1/2"-3/4" (3) 1/2", (2) 1/2"-3/4"	Welded	Vertical Wood Spike	Thomas & Betts 52151-V1234 Hubbell Raco 197	Crouse Hinds TP425 EGS Appleton 4S-ABEK	25
52151-WB	(9) 1/2" (3) 1/2", (2) 1/2"-3/4"	Welded	Vertical Wood Spike	Thomas & Betts 52151-V1234 Hubbell Raco 197	Crouse Hinds TP425 EGS Appleton 4S-ABEK	25



1-1/2" Deep with Clamps for Flexible Metal Conduits











Application: These 4" square boxes are installed in walls or ceilings for lighting fixtures, switches, receptacles or other outlet devices where flexible metal conduits are used. Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions.

Advantages: Garvin Industries' 4" square boxes come with built-in clamps for flexible metal conduits to speed up installation and save connector costs.

Field Names: Flexible conduit box, conduit junction box, electrical flex conduit box, flex conduit box, outlet box, 4S box, MC cable box, AC cable box, 1900 bracket box with clips.

Material: Steel



52151-BX IN USE

Part Number	Side Knockouts Bottom Knockouts	Box Construction	Bracket Style	Similar Products		Std. Pkg.
52151-BX	(6) 1/2" & (4) BX/MC (1) 1/2"	Welded		Thomas & Betts 52151-X Hubbell Raco 213	Crouse Hinds TP454 EGS Appleton 4SXEK	50
52151-BBX	(6) 1/2" & (4) BX/MC (1) 1/2"	Welded	Flush Mount	Thomas & Betts 52151-BX Hubbell Raco 224	Crouse Hinds TP456 EGS Appleton 4SXBEKPL	25
52151-FBX	(2) 1/2", (1) 1/2"-3/4", (4) BX/MC (1) 1/2"	C Welded	Flat Vertical	Thomas & Betts 52151-CVX Hubbell Raco 218	Crouse Hinds TP459 EGS Appleton 4SXVBEKPL	25
52151-MSBX	(2) 1/2", (1) 1/2"-3/4", (4) BX/MC (1) 1/2"	C Welded	Metal Stud	Thomas & Betts 52151-MSX Hubbell Raco 229	Crouse Hinds EGS Appleton	25
52151-WBBX	(2) 1/2", (1) 1/2"-3/4", (4) BX/MC (1) 1/2"	C Welded	Wood Spike Vertical	Thomas & Betts 52151-VX Hubbell Raco 219	Crouse Hinds TP461 EGS Appleton 4SXABEK	25

Perfect "Finished Surface" Fit!

Adjustable Plaster Rings

Device Ring With Adjustable Inner Ring That Can Be Extended or Retracted for the Perfect Flush Fit.

- Comes in 4" square, 1gang, 2 gang and square to round
- · Also comes in 3 gang for multi gang box
- Adjustable inner ring extends or retracts with 2 easy screws
- Perfect device fit with finished wall surface
- Adds safety—no more floating devices
- Great for prefab when devices are installed with power tails, when finished wall depth is unknown
- Rugged steel construction
- · Patented design



See Page 49 for more information!



4" Square Junction Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

1-1/2" Deep with Clamps for Nonmetallic Sheathed Cables





Application: These 4" square boxes are installed in walls or ceilings for lighting fixtures, switches, receptacles or other outlet devices where nonmetallic sheathed cables are used. Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions.

Advantages: Garvin Industries' 4" square boxes come with built-in clamps for nonmetallic sheathed cables to speed up installation and save connector costs.

Field Names: 4S box, 1900 box, 1900 electrical box, 1900 junction box, conduit box, J-box, concentric box, conduit junction box, outlet box, drywall mud box, NM cable box, 1900 box with cable clamps, 1900 bracket box.



52151-R IN USE

Part Number	Side Knockouts Bottom Knockouts	Box Construction	Bracket Style	Similar Products or Special Features		
52151-BR	(2) 1/2", (1) 1/2"-3/4" (4) NM (1) 1/2"	Welded	Flush Mount	Thomas & Betts 52151-N Hubbell Raco 225	Crouse Hinds TP446 EGS Appleton 4SRBEK	25
52151-FR	(2) 1/2", (1) 1/2"-3/4" (4) NM (1) 1/2"	Welded	Flat Vertical	Thomas & Betts 52151-CVN Hubbell Raco 223	Crouse Hinds TP449 EGS Appleton 4SRVBEKPL	25
52151-MSR	(2) 1/2", (1) 1/2"-3/4" (4) NM (1) 1/2"	Welded	Metal Stud	Thomas & Betts 52151-MSN Hubbell Raco 228	Crouse Hinds EGS Appleton	25
52151-R	(6) 1/2" (4) NM (1) 1/2"	Welded		Thomas & Betts 52151-N Hubbell Raco 211	Crouse Hinds TP444 EGS Appleton 4SREK	50
52151-WBR	(2) 1/2", (1) 1/2"-3/4" (4) NM (1) 1/2"	Welded	Wood Spike Vertical	Thomas & Betts 52151-VN Hubbell Raco 220	Crouse Hinds TP445 EGS Appleton 4SRABEK	25

4" Square **Extension Rings**



1-1/2" Deep with **Conduit Knockouts**



Application: These extension rings with conduit knockouts are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire.

Advantages: Garvin Industries' extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional wiring is needed. Their bottom mounting slots allow a quick installation onto existing boxes. Red painted extensions rings are also available for fire alarm circuit identification.

Field Names: Extension rings, extension boxes, box collars, box extenders, box extension, plenum extension rings, fire alarm extension ring, plenum sandwich plate, 1900 extension rings, 1900 extension box, 1900 plenum extension, 4S extension ring, 4S plenum extension.



52151-SVT BOX WITH 53C1-VT DOUBLE-GASKETED SEALING RING AND 53151-SVT EXTENSION RING

Part Number	Side Knockouts	Box Construction	1	Similar Products or Specia	l Features	Std. Pkg.
53151-1/2	(12) 1/2"	Welded		Thomas & Betts 53151-1/2 Hubbell Raco 201	Crouse Hinds TP424 EGS Appleton 4SE-1/2	50
53151-3/4	(8) 3/4"	Welded		Thomas & Betts 53151-3/4 Hubbell Raco 202	Crouse Hinds TP426 EGS Appleton 4SE-3/4	50
53151-RED	(6) 1/2", (6) 1/2"-3/4"	Welded	Fire Alarm Red	Thomas & Betts Hubbell Raco 911-6		50
53151-S	(6) 1/2", (6) 1/2"-3/4"	Welded		Thomas & Betts 53151-1234 Hubbell Raco 203	Crouse Hinds TP833 EGS Appleton 4SES	50
53151-SUB	(6) 1/2", (6) 1/2"-3/4" Fits Handy Boxes & 1 or 2 Gang Ri	Welded		Thomas & Betts 53151-1234UB Hubbell Raco 187	Crouse Hinds TP422 EGS Appleton 4SSBESPL	50
53151-SVT	(8) 1/2", (4) 3/4"	Drawn		Chicago plenum "air tight" gasketed sealing ring 53C	knockouts must be used with double 1-VT	50
53151-SVTDA	(8) 1/2", (4) 3/4"	Drawn			knockouts with threaded tabs on both access on front or back of box.	50
53C1-VT	Flat open ring	Stamped steel double gaskete		Double gasketed ring crea extension ring.	tes air tight seal between box and	25



4" Square **Junction Boxes**

847-455-0188

FAX 847-455-0334 garvinindustries.com

Go Green on the Jobsite!

Energy Efficient Temporary Work Light

- 105 watt high-output compact fluorescent lamp offers 80% energy savings over traditional metal halide
- Very light-weight-2 lbs.
- · Versatile snap hook design easily attaches to many structural members
- · Standard box knockouts allows hard wire with pipe or flex cable wiring options
- No ballast in fixture means no replacement costs later to fix a bad ballast
- · Gasketed covers and sealed knockouts are great for damp locations
- · Premium high visibility "green" powder



See Page 371 for more information!

Installs Before or After Wire Pull!

Split Collar Ground Bushings

Installs before or after wire pull (unlike solid bushings)

- · Insulated throat to protect wires
- Extra tight clamp-on design ensures solid ground
- Adjustable lug allows versatile positioning on pipe
- 1/2" 6" sizes available
- Manufactured from rugged die cast zinc
- Patented



See Page 172 for more information!

Only Stock One Lock!

Universal Breaker Lock

One Lock Fits All...

- Eliminates need to stock multiple breaker locks.
- Fits most common one pole circuit breakers.
- No need to make costly trips to the jobsite to identify panel.
- · Reusable.
- · Corrosion resistant.
- · Patent pending.



Fits most circuit breakers:

- BR • THQB
- CH MP QOB • CHB • Q
- HOM BAB BQ TB
- THQP • BL

Fits most brands:

- GE
- Westinghouse
- Siemens Bryant
- T & B Homeline
- Murray
- · Cutler Hammer
- Square D
- and more...

See Page 338 for more information!

Boxes & Covers

4" Square **Junction Boxes**



2-1/8" Deep with **Conduit Knockouts**



52171-S

Application: These 4" square boxes with conduit knockouts are installed in walls or ceilings for lighting fixtures, switches, receptacles or other outlet devices. Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions.

Advantages: Garvin Industries' 4S Boxes can be surfaceor flush mounted when multidirectional conduit runs are necessary. Red painted boxes are also available to easily distinguish fire alarm circuits.

Field Names: 4S box, 1900 box, 1900 electrical box, 1900 junction box, conduit box, J-box, concentric box, conduit junction box, outlet box, drywall mud box, conduit J box, conduit outlet box, deep 1900 box, deep 4S box, deep plenum box, 3/4" plenum box, Chicago plenum junction box, 1900 deep box, 1900 deep plenum box, 1900 deep fire alarm box, 1900 deep combo box.



52171-S IN USE

Part Number	Side Knockouts Bottom Knockouts	Box Construction	Similar Products or Special Features	Std. Pkg.
52171-1/2	(12) 1/2" (4) 1/2"	Welded	Straight 1/2" knockouts	25
52171-1/2DR	(12) 1/2" (4) 1/2"	Drawn	Straight 1/2" knockouts	25
52171-3/4	(8) 3/4" (2) 1/2", (2) 3/4"	Welded	Thomas & Betts 52171-3/4 Crouse Hinds TP432 Hubbell Raco 231	25
52171-3/4DR	(8) 3/4" (2) 1/2", (2) 3/4"	Drawn	Straight 3/4" knockouts	25
52171-3/4-VT	(8) 3/4" (3) 1/2", (2) 3/4"	Drawn	Chicago plenum "air tight" knockouts for 3/4" conduit runs	
52171-3/4RED	(8) 3/4" (2) 1/2", (2) 3/4"	Welded	Painted red for dedicated fire alarm and life-safety circuits	
52171-3/4-1	(4) 1", (4) 3/4" (2) 1/2", (2) 3/4"	Welded	For 3/4" and 1" conduit runs. Straight across from each other on box sides.	
52171-3/4-1VT	(4) 1", (4) 3/4" (3) 1/2", (2) 3/4"	Drawn	Chicago plenum "air tight" knockouts for 3/4" & 1" conduit runs straight across from each other on box sides.	
52171-S	(8) 1/2", (4) 1/2"-3/4" (2) 1/2", (2) 1/2"-3/4"	Welded	Thomas & Betts 52171-1234E Crouse Hinds TP403 Hubbell Raco 232	25



4" Square **Junction Boxes**

847-455-0188 FAX 847-455-0334 garvinindustries.com

2-1/8" Deep with Conduit Knockouts



Application: These 4" square boxes with conduit knockouts are installed in walls or ceilings for lighting fixtures, switches, receptacles or other outlet devices. Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions.

Advantages: Garvin Industries' 4S Boxes can be surfaceor flush mounted when multidirectional conduit runs are

or flush mounted when multidirectional conduit runs are necessary. Red painted boxes are also available to easily distinguish fire alarm circuits.

Field Names: 4S Box, 1900 box, 1900 electrical box, 1900 junction box, conduit box, J-box, concentric box, conduit junction box, outlet box, drywall mud box, plenum box, deep plenum box, 1900 plenum box, Chicago plenum box, conduit J box, conduit outlet box, deep 1900 box, deep 4S box, deep plenum box, 3/4" plenum box, Chicago plenum junction box, 1900 deep plenum box, 1900 deep fire alarm box.

Material: Steel

LABOR-SAVING SOLUTIONS!





52171-SRC IN USE

52171-SVT IN USE Patented air tight slugs easily pop out with screw driver for 1/4"-20 threaded rod. No on-site drilling required!

Part Number	Side Knockouts Bottom Knockouts	Box Construction	Similar Products or Special Features	Std. Pkg.
52171-SOS	(8) 1/2", (4) 3/4" (3) 1/2", (2) 3/4"	Drawn	Crouse Hinds TP434 "Old Style" knockouts with 3/4" in middle of side walls	25
52171-SBB	(8) 1/2", (4) 3/4" Blank Bottom	Drawn	Combination 1/2" & 3/4" knockouts with blank bottom Great for surface mounting on electrical appliances.	25
52171-SPT	(6) 1/2", (6) 1/2" & 3/4" (2) 1/2", (2) 3/4"	Welded	Thomas & Betts 52171-1234EP Crouse Hinds TP403PF Hubbell Raco 232SM Includes #14 AWG stranded pigtail	25
52171-SVT	(8) 1/2", (4) 3/4" (3) 1/2", (2) 3/4"	Drawn	Chicago plenum "air tight" knockouts for 1/2" & 3/4" conduit runs	25
52171-SVTRED	(8) 1/2", (4) 3/4" (3) 1/2", (2) 3/4"	Drawn	Chicago plenum "air tight" knockouts, painted red for dedicated fire alarm and life safety circuits	25
52171-SVTSS	(8) 1/2", (4) 3/4" (3) 1/2", (2) 3/4"	Drawn	Stainless steel box with "sealed" knockouts for use in wash down and damp locations.	25
52171-SRC	(6) 1/2", (6) 1/2"-3/4" (2) 1/2", (2) 3/4"	Welded	1/4" threaded rod coupling is welded to the back of box for quick mounting on the threaded rod. Cut the rod to desired length and spin box on, in one easy step.	25
52171-SVTRC	(8) 1/2", (4) 3/4" (2) 1/2", (2) 3/4"	Drawn	1/4" threaded rod coupling is welded to the back of box for quick mounting on the threaded rod. Cut the rod to desired length and spin box on, in one easy step. Chicago plenum "air tight" knockouts.	25

4" Square **Junction Boxes**



2-1/8" Deep with **Conduit Knockouts**









52171-1DR





Patent Pending

52171-BLNK

Application: These 4" square boxes with conduit knockouts are installed in walls or ceilings for lighting fixtures, switches, receptacles or other outlet devices. Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions.

Advantages: Garvin Industries' 4S Boxes can be surface or flush mounted when multidirectional conduit runs are necessary. Red painted boxes are also available to easily distinguish fire alarm boxes.

Field Names: 4S box, 1900 box, 1900 electrical box, 1900 junction box, conduit box, J-box, concentric box, conduit junction box, outlet box, drywall mud box, plenum box, deep plenum box, 1900 plenum box, Chicago plenum box, 1900 deep box, deep 1900 box, 1900 deep plenum, 1900 plenum deep.









52171-SDA IN USE

Part Number	Side Knockouts Bottom Knockouts	Box Construction	Similar Products or Special Features		Std. Pkg.
52171-RED	(6) 1/2", (6) 1/2"-3/4" (2) 1/2", (2) 3/4"	Welded	Painted red for dedicated fire alarm and life safety circuits		25
52171-SDA	Open with Mounting Tabs & 8-32 Screws On Both Sides of Box	Welded	Dual "backdoor" access allows for access to devices, wires and wire nuts after they have been installed on plaster ring. Blank cover encloses wires in box and attaches to back-side, tapped 8-32 ears.		25
52171-SDR	(6) 1/2", (6) 1/2"-3/4" (2) 1/2", (2) 3/4"	Drawn	Thomas & Betts Hubbell Raco	Crouse Hinds TP438 EGS Appleton	25
52171-1	(8) 1" (2) 1/2", (2) 3/4"	Welded	Thomas & Betts 52171-1 Hubbell Raco 233	Crouse Hinds TP436 EGS Appleton 4SD1	25
52171-1DR	(8) 1" (2) 1/2", (2) 3/4"	Drawn	For 1" conduit runs		25
52171-1-VT	(8) 1" (3) 1/2", (2) 3/4"	Drawn	Chicago plenum "air tight" knockouts for 1" conduit runs		25
52171-BLNK	Blank Side Blank Bottom	Drawn	Tamper and vandal proof box less all holes & knockouts. Add only the knockouts you need, we customize solutions!		25



4" Square Junction Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

2-1/8" Deep with Conduit Knockouts & Mounting Brackets





Application: These bracket boxes with conduit knockouts are used when 4" square boxes must be mounted directly to wood or metal studs. Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions.

Advantages: Garvin Industries' 4" square boxes with attached brackets allow a quick easy installation to structural members and keep the boxes upright for an effortless conduit connection.

Field Names: Bracket box, 4S bracket box, metal stud box, vertical bracket box, wood bracket box, nail-on bracket box, 1900 bracket box, bracketed junction box, conduit box with bracket, stud box, outlet box, bracketed J box, deep 4S bracket box, deep 1900 bracket box, 1900 bracket box.



52171-AB IN USE

Part Number	Side Knockouts Bottom Knockouts	Bracket Style	Similar Products or Special Features	
52171-AB	(4) 1/2", (5) 1/2"-3/4" (3) 1/2", (2) 1/2"-3/4"	Vertical Right Angle	Right angle bracket provides extra rigid support when attached to wood or metal studs. Allows quick attachment to structural members.	25
52171-F	(9) 1/2" (5) 1/2"	Flat Vertical	Thomas & Betts 52171-CV1234 Crouse Hinds TP451 Hubbell Raco 237	25
52171-FSDA	(4) 1/2", (5) 1/2"-3/4" Open with Mounting Tabs & 8-32 Screws On Both Side of Box	Flat Vertical	Dual "backdoor" access box allows cover or plaster ring to be mounted on either side of the box after device install. Check the wire connections after device install.	
52171-FS	(6) 1/2", (3) 1/2"-3/4" (3) 1/2", (2) 1/2"-3/4"	Flat Vertical	Thomas & Betts 52171-CV1234 Crouse Hinds TP451 Hubbell Raco 237	25
52171-FRED	(4) 1/2", (5) 1/2"-3/4" (3) 1/2", (2) 1/2"-3/4"	Flat Vertical	Painted fire alarm red to identify life-safety circuits.	
52171-FSOS	(6) 1/2", (3) 3/4" (3) 1/2", (2) 3/4"	Flat Vertical	Old style 1/2" & 3/4" knockouts. No concentric combinations.	
52171-FSQ	(4) 1/2", (5) 1/2"-3/4" (3) 1/2", (2) 3/4"	Flat Vertical	Vertical bracket with pre-installed quick mount screws set on bracket for easy installation on wood or metal studs. No need to buy costly fasteners.	25

ELECTRICAL . LOW VOLTAGE . LIGHTING

2-1/8" Deep with Conduit Knockouts & Mounting Brackets





4" Square

Junction Boxes

52171-MS 52171-MSDA



CB-11A



Application: These bracket boxes with conduit knockouts are used when 4" square boxes must be mounted directly to wood or metal studs. Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions.

Advantages: Garvin Industries' 4" square boxes with attached brackets allow a quick installation and keep the boxes upright for simple conduit connection.

Field Names: Bracket box, 4S bracket box, metal stud box, vertical bracket box, wood bracket box, nail-on bracket box, 1900 bracket box, bracketed junction box, conduit box with bracket, stud box, outlet box, bracketed J box, deep 4S bracket box, deep 1900 with metal stud bracket, 1900 deep bracket box, 1900 deep with metal stud bracket.





CB-11A MOUNTING OPTIONS BUILT-IN DEVICE RING



52171-SWB INSTALLATION

Part Number	Side Knockouts Bottom Knockouts	Bracket Style			Std. Pkg.
52171-MS	(4) 1/2", (5) 1/2"-3/4" (3) 1/2", (2) 3/4"	Metal Stud	Thomas & Betts 52171-MS1234	Hubbell Raco 238	25
52171-MSDA	(4) 1/2", (5) 1/2"-3/4" Open with Mounting Tabs & 8-32 Screws On Both Sides of Box	Metal Stud	Dual "backdoor" access allows for entry to devices, wires and wire nuts after they have been installed on plaster ring. Blank cover encloses wires in box and attaches to bottom tapped 8-32 ears.		25
52171-WB	(9) 1/2" (3) 1/2", (2) 1/2"-3/4"	Wood Spike Vertical	Thomas & Betts 52171-V1234 Hubbell Raco 235	Crouse Hinds TP437	25
52171-SWB	(4) 1/2", (5) 1/2"-3/4" (3) 1/2", (2) 3/4"	Wood Spike Vertical	Thomas & Betts 52171-V1234 Hubbell Raco 235	Crouse Hinds TP437	25
CB-11A	(10) 1/2" (2) 1/2"	Combo Vertical Horizontal	One gang, 2-1/2" deep box with preinstalled one-gang device ring 1/2" raised. Mounts to wall stud in vertical or horizontal profile.		25



4" Square Junction Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

2-1/8" Deep with Mounting Brackets & Clamps for Flexible Metal Conduits







52171-MSBX



Application: These bracket boxes with clamps for flexible metal conduits are used when 4" square boxes must be mounted directly to wood or metal studs. They are installed in walls or ceilings for lighting fixtures, switches, receptacles or other outlet devices where flexible metal conduits are used. Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions.

Advantages: Garvin Industries' 4" square bracket boxes come with built-in clamps for flexible metal conduits to speed up installation and save connector costs.

Field Names: Flexible conduit box, conduit junction box, electric flex conduit box, flex conduit box, outlet box, 4S box, 1900 bracket box, 52171 box, MC cable box, 1900 deep box with clips. 1900 deep bracket box with clips.

Material: Steel



52171-BX IN USE

Part Number	Side Knockouts Bottom Knockouts	Bracket Style	Similar Products or Speci	Std. Pkg.	
52171-BX	(6) 1/2", (4) BX (1) 1/2"		Thomas & Betts 52171-X Hubbell Raco 248	Crouse Hinds TP431 EGS Appleton 4SXD	25
52171-FBX	(2) 1/2", (1) 1/2"-3/4", (4) BX (1) 1/2"	Flat Vertical	Thomas & Betts 52171-CVX Hubbell Raco 241	Crouse Hinds TP440	25
52171-MSBX	(2) 1/2", (1) 1/2"-3/4", (4) BX (1) 1/2"	Metal Stud	Thomas & Betts 52171-MSX Hubbell Raco 243		25
52171-WBBX	(2) 1/2", (1) 1/2"-3/4", (4) BX (1) 1/2"	Wood Spike Vertical	Crouse Hinds TP440 Hubbell Raco 241		25

Eliminate Locknuts Forever!

Snap Lock Connectors for Flexible Metal Conduit

Specially Designed Connector Eliminates the Need to Tighten Locknut Inside Conduit Box.

- Snaps on to conduit boxes and enclosures
- Secure set screw bites on flexible metal conduit
- Cuts installation time of wiring assemblies 50%
- · Rugged die cast metal construction
- Patented design
- Easy on hands and fingers, prevents locknuts from skinning fingers



See Page 208 for more information!

4" Square Junction Boxes



2-1/8" Deep with Mounting Brackets & Clamps for Nonmetallic Sheathed Cables










Application: These bracket boxes with clamps for nonmetallic sheathed cables are used when 4" square boxes must be mounted directly to wood or metal studs. They are installed in walls or ceilings for lighting fixtures, switches, receptacles or other outlet devices where nonmetallic sheathed cables are used. Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions.

Advantages: Garvin Industries' 4" square bracket boxes come with built-in clamps for nonmetallic sheathed cables to speed up installation and save connector costs.

Field Names: 4S Box, 1900 box, 1900 electrical box, 1900 junction box, conduit box, J-box, concentric box, conduit junction box, outlet box, drywall mud box. NM cable box, 1900 box with cable clamps, 1900 bracket box, 1900 deep with bracket, 1900 deep box with bracket.



52171-FR IN USE

Part Number	Side Knockouts Bottom Knockouts	Bracket Style	Similar Products or Spec	ial Features	Std. Pkg.
52171-R	(6) 1/2", (4) NM (1) 1/2"		Thomas & Betts 52171-N Hubbell Raco 242	Crouse Hinds TP450	50
52171-FR	(3) 1/2", (4) NM (1) 1/2"	Flat vertical	Thomas & Betts 52171-VN Hubbell Raco 240	Crouse Hinds TP452	25
52171-MSR	(3) 1/2", (4) NM (1) 1/2"	Metal stud	Metal stud bracket and NM ca	ble clamps	25
52171-WBR	(3) 1/2",(4) NM (1) 1/2"	Wood spike vertical	Vertical wood spike bracket an	d NM cable clamps	25



4" Square Extension Rings

847-455-0188 FAX 847-455-0334 garvinindustries.com

2-1/8" Deep with Conduit Knockouts



Application: These extension rings with conduit knockouts are added to junction boxes to increase wiring capacity and provide access for additional conduit runs and electrical wire.

Advantages: Garvin Industries' extension rings prevent the need to remove old conduit boxes and wiring from circuits when additional wiring capacity is needed. Their bottom mounting slots allow quick installation onto existing boxes. Red painted extensions rings are also available for fire alarm circuits. Chicago plenum boxes require double gasketed ring #53C1-VT.

Field Names: Extension rings, extension boxes, box collars, box extenders, box extension, plenum extension ring, Chicago plenum box ring, air tight box extension ring, 1900 extension rings, 1900 deep extension rings, plenum sandwich plate, 1900 deep plenum rings.



53171-SVT IN USE

Part Number	Side Knockouts	Box Construction	Similar Products or Special Features	Std. Pkg.
53171-3/4	(8) 3/4"	Drawn	Straight 3/4" knockouts	25
53171-S	(6) 1/2", (6) 1/2"-3/4"	Welded	Thomas & Betts 53171-1234 Crouse Hinds TP841	25
53171-SVT	(8) 1/2", (4) 3/4"	Drawn	Chicago plenum "air tight" 1/2" & 3/4" knockouts on all four sides.	25
53171-1	(8) 1"	Drawn	Thomas & Betts 53171-1	25
53C1-VT	Flat open ring	Stamped Steel Double Gasketed	Double gasketed flat open ring creates air tight seal between Chicago plenum box and extension ring.	25
53171-OW	Open back for low voltage cables	Welded	For "cut in" old work applications includes snap in clips and plaster ears. Great for adding low voltage devices to existing walls.	25
53171-SVTDA	(8) 1/2", (4) 3/4"	Drawn	Chicago plenum "air tight" knockouts with threaded tabs on both sides of box for dual side wiring access on front or back of the box.	25



3-1/2" Deep with Conduit Knockouts









52181-3/4SPKR









Application: These electrical junction boxes are installed in walls and ceilings where extra depth is needed for dimmers, cameras, speakers, strobes, signals and other electrical and electronic devices.

Advantages: Garvin Industries' labor-saving design eliminates the need to awkwardly install boxes and extension rings to accommodate deep devices.

Field Names: Extra deep 4S box, extra deep 1900 box, extra deep 1900 electrical box, extra deep 1900 junction box, conduit box, J-box, concentric box, conduit junction box, outlet box, drywall mud box, speaker box, deep 1900 box, extra deep junction box, deep conduit box, deep outlet box, extra deep fire alarm box, 1900 extra deep fire alarm box.

Material: Steel






52181-SPKR IN USE On Concrete Form

52181-3/4SPKR ON FORM

52181-OW INSTALLATION STEPS







Cut hole, insert box

Snap in clips.

Tighten screws for tight fit on walls.

Part Number	Side Knockouts Bottom Knockouts	Special Features	Special Features	Std. Pkg.
52181-S	(4) 1/2"-3/4", (2) 3/4", (2) 1" (2) 1/2", (2) 3/4"	Standard Box Style	1/2", 3/4" and 1" knockouts with raised ground provision.	25
52181-SPKR	(4) 1/2", (4) 3/4" Raised Ground	Mounting tabs for concrete forms	Sealed, concrete tight. External tabs allow installer to nail/screw box to forms for stability during pour. Raised ground hump with screw.	25
52181-1/2-SPKR	(8) 1/2" Raised Ground	Mounting tabs for concrete forms	Sealed, concrete tight. External tabs allow installer to nail/screw box to forms for stability during pour. Raised ground hump with screw.	10
52181-3/4-SPKR	(8) 3/4" Raised Ground	Mounting tabs for concrete forms	Sealed, concrete tight. External tabs allow installer to nail/screw box to forms for stability during pour. Raised ground hump with screw.	10
52181-RED	(4) 1/2"-3/4", (2) 3/4", (2) 1" (2) 1/2", (2) 3/4"	Fire alarm red	Painted red for dedicated fire alarm and life safety circuits	10
52181-OW	(8) 1/2", (4) 1/2"-3/4" (3) 1/2", (2) 1/2"-3/4"	Old work clips and plaster ears	Old work "cut in" box can be added to existing walls when deep devices (speakers, strobes, etc.) are required to update a structure.	25
52181-BLNK	Blank Side Blank Bottom	Blank Box	Less all holes and knockouts. We will customize to your job requirements or blueprint.	10
52181-SVT	(8) 1/2" & (4) 3/4" (3) 1/2" & (2) 3/4"	"Air-tight" knockouts	Chicago plenum "air tight" knockouts 1/2" & 3/4" combination	10

4" Square Junction Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

3-1/2" Deep with Mounting Brackets & Conduit Knockouts



Application: These electrical junction boxes are installed in walls and ceilings where extra depth is needed for dimmers, cameras, speakers, strobes, signals and other electrical and electronic devices.

Advantages: Garvin Industries' labor-saving design eliminates the need to awkwardly install boxes and extension rings to accommodate deep devices.

Field Names: 4S Box, 1900 box, 1900 electrical box, 1900 junction box, conduit box, J-box, concentric box, conduit junction box, outlet box, drywall mud box, fire alarm box, deep 1900 box, extra deep junction box, deep conduit box, deep outlet box, 1900 deck box.





52181-DEK IN USE FOR HIGH-BAY LIGHT MOUNTING

Part Number	Side Knockouts Bottom Knockouts	Bracket Style	Special Features	Std. Pkg.
52181-AB	(4) 1/2"-3/4", (2) 3/4", (2) 1' (2) 1/2", (2) 3/4"	' Vertical Right Angle	Mounts directly to face of wood or metal stud for a secure and sturdy installation.	10
52181-DEK	(8) 1/2", (8) 1/2"-3/4" Raised Ground	Ceiling Deck Side Flanges	Dual mounting flanges allow direct mount to steel ceiling deck pan. Eliminates conduit offset bending. Each conduit runs directly to a knockout across the top or down in the cavity of the ceiling deck pan grid. Fits in all newer deck pan ceilings.	10
52181-FS	(5) 1/2", (5) 1/2"-3/4" (2) 1/2", (2) 3/4"	Flat Vertical	Vertical bracket is set back for 1/2", 5/8", 3/4" or 1" drywall.	25
52181-FRED	(5) 1/2", (5) 1/2"-3/4" (2) 1/2", (2) 3/4"	Flat Vertical	Painted red for dedicated fire alarm and life-safety circuits. Vertical bracket is set back for 1/2", 5/8", 3/4" or 1" drywall.	10
52181-ADJ	(5) 1/2", (5) 1/2"-3/4" (2) 1/2", (2) 3/4"	Two Way Adjustable	Ceiling/wall bracket allows box to be raised/lowered to finished drywall depth and moved left/right for perfect vertical and horizontal positioning location in wall/ceiling.	10
52181-VTBAF	(4) 1/2" & (2) 3/4" (3) 1/2" & (2) 3/4"	Ceiling Grid Span Bar	Chicago plenum "air tight" box on ceiling grid mounting bar/bracket. Box slides on mounting bar for perfect location on ceiling tile. Works with standard and revealed ceiling tiles. Adjustable screws allow box depth to be changed for a perfect flush mount on ceiling tiles.	10

4" Square Junction Boxes



4" Deep with Conduit Knockouts







52191-3/4





Application: These electrical junction boxes are installed in walls and ceilings where extra depth is needed for dimmers, cameras, speakers, strobes, signals and other electrical and electronic devices.

Advantages: Garvin Industries' labor-saving design eliminates the need to awkwardly install boxes and extension rings to accommodate deep devices.

Field Names: Extra deep 4S box, extra deep 1900 box, extra deep 1900 electrical box, extra deep 1900 junction box, conduit box, J-box, concentric box, conduit junction box, outlet box, drywall mud box, speaker box, deep 1900 box, extra deep junction box, deep conduit box, deep outlet box.



52191-BLNK IN USE

Part Number	Side Knockouts Bottom Knockouts	Box Construction	Special Features	Std. Pkg.
52191-OW	(6) 1/2", (6) 1/2"-3/4" (2) 1/2", (2) 3/4"	Welded	For "cut in" old work applications come with snap in clips and plaster ears.	10
52191-S	(4) 1/2"-3/4", (2) 3/4", (2) 1" (2) 1/2", (2) 3/4"	Welded	1/2", 3/4" and 1" knockouts with raised ground provision.	10
52191-RED	(4) 1/2"-3/4", (2) 3/4", (2) 1" (2) 1/2", (2) 3/4"	Fire alarm red	Painted red for dedicated fire alarm and life safety circuits	10
52191-3/4	(8) 3/4" (2) 1/2" & (2) 3/4"	Welded	Straight 3/4" knockouts	10
52191-1	(8) 1" (2) 1/2" & (2) 3/4"	Welded	1" conduit knockouts	10
52191-BLNK	Blank Side	Less all holes Blank Bottom	Less all holes and knockouts. We will customize to your job and knockouts requirements or blueprint.	10



4" Square Box Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

Flat Covers



Application: These flat covers are used to cover box wiring and provide a means for access when future conduit runs are required.

Advantages: Garvin Industries' flat covers have unique mounting slots or captivated screws that allow quick access to circuits so additional wiring can be pulled.

Field Names: 1900 cover, 4S cover, 4S blank cover, box cover, box blank, blank plenum cover, 4S box cover, 4S plenum cover, Chicago plenum J box cover, junction box cover, vapor tight cover, 1900 blank, 1900 plenum blank.



52C1 IN USE

Part Number	Description	Similar Products or Special	Features	Std. Pkg.
52C1	4" Square Blank Cover	Thomas & Betts 52C1 Hubbell Raco 752	Crouse Hinds TP472 EGS Appleton 8465	50
52C1-RED	4" Square Blank Cover, Red	Painted red for alarm and life safe Hubbell Raco 911-8	ety circuits.	50
52C1-GS	4" Square Blank Cover with 10-32 Green Ground Screw	Great for prefab boxes used with Allows proper grounding of pre-in	Garvin Industries' dual access box! stalled devices on rings.	50
52C1-TOG	4" Square Blank Cover with 15 AMP Toggle Switch Installed	Economical On/Off switch on 4" s appliances that require On/Off sw	quare flat cover. Great for HVAC and other ritching	25
52C1-VT	4" Square Blank, Gasketed Cover with Captivated, 8-32 Box Screws	Thomas & Betts 52C1-VT Hubbell Raco 762	Crouse Hinds TP850 EGS Appleton	25
52C1-VTRED	4" Square Blank, Gasketed Cover with Captivated, 8-32 Box Screws. Red	Painted red for alarm and li Hubbell Raco 911-8	fe safety circuits.	25
53C1-VT	Double-Gasketed Flat Ring	Creates "air tight" seal between extension ring being added	veen existing Chicago plenum box and	25
52C6	4" Square Cover with 1/2" Knockout	Thomas & Betts 52C6 Hubbell Raco 753	Crouse Hinds TP478 EGS Appleton 8474	50
52C6-VT-SS	Stainless Steel Cover with 1/2" Sealed Knockout	Water resistant stainless st conduit knockout. Great for	eel gasketed cover with sealed 1/2" damp locations or wash down areas.	50
629NG	4" Square Blank Cover with Captivated 8-32 Box Screws	Flat blank steel cover, no gasket,	steel plate only with captive 8-32 box screws	. 50
52C1-OCT	4" Square Cover with four Threaded 8-32 Mounting Holes & Two Through Holes to Fit on 4" Octagon Boxes.	This conversion plate mounts on mounting tabs for life safety and of	Octagon boxes and provides 4" square other low voltage devices.	25



One Gang Prefab Box Mount Device Rings



Part Number	Raised	Description	Std. Pkg.
SLR-150	1/2"	One gang raised for 1/2" drywall	25
SLR-158	5/8"	One gang raised for 5/8" drywall	25
SLR-175	3/4"	One gang raised for 3/4" drywall	25

Application: These one-gang, square-drawn device rings mount directly onto structural members and provide a means to secure boxes to rings. Vertical or horizontal device profile.

Advantages: Garvin Industries' prefab box rings eliminate the need for external brackets to mount boxes upright.

Field Names: Prefab rings box mounting rings, box device covers, plaster ring, plaster frame.

Material: Steel



SLR-150 IN USE

Old Box in Wall? Convert It, Don't Replace It!

Old Box Ear Tab Conversion Clips

Clips Install on Old Conduit Box Ears and Align Mounting Tabs for Use With Current Device Rings & Covers.

- Simple to use, easily screws on to old box in wall or ceiling
- · No more demolition of old boxes and wiring
- Rugged steel construction
- · Saves labor costs

- No replacement boxes required
- · Save connector and rewiring costs
- · Installs in seconds
- Sold in pairs, comes with attachment screw





See Page 116 for more information!



4" Square Raised Device Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

Two Gang Prefab Box Mount Device Rings



Part Number	Raised	Description	Std. Pkg.
SLR-250	1/2"	Two gang raised for 1/2" drywall	25
SLR-258	5/8"	Two gang raised for 5/8" drywall	25
SLR-275	3/4"	Two gang raised for 3/4" drywall	25


Application: These two-gang, square-drawn device rings mount directly to structural members and provide a means to secure boxes to rings. Vertical or horizontal device profile.

Advantages: Garvin Industries' prefab box rings eliminate the need for external brackets to mount boxes upright.

Field Names: Prefab rings box mounting rings, box device covers, plaster ring, plaster frame.

Material: Steel





SLR-250 MOUNTING OPTIONS



SLR-250 USED TO MOUNT A CHICAGO PLENUM BOX WITH NO BOX DRILLING.

Versatile Industrial Fixture Hanging!

Swivel Fixture Hangers

Quickly Install Fixtures, Exit Signs, Cameras, and Other Devices in Industrial Settings

- Grounding swivel cover: cover & attached swivel pivot hub are bonded to help prevent the risk of accidental shock
- 4-11/16" swivel cover: Fits standard 4-11/16" boxes
- All items are great for replacing existing fixtures in industrial settings
- <u>Hands free swivel cover:</u> hinged door allows quick installation & wiring in one easy step
- For square and octagon boxes
- Cuts installation time by 50%
- 4" octagon and square version fits standard boxes
- Accommodates 1/2" or 3/4" conduit



See Page 21 for more information!

4" Square **Raised Device Covers**



One Gang **Device Rings**



52C23

52C22

Application: These raised device covers are used with 4" square boxes to mount switches, receptacles and devices.

Advantages: Garvin Industries' one-gang device rings have angled slots on the covers that compensate for up to 12° of box misalignment on upright framing members.

Field Names: Switch cover, plaster ring, mud ring, drywall ring, mud cover, tile ring, switch ring, receptacle cover, raised device ring, raised device cover, combination box cover, square device box cover, plaster frame, 1900 plaster ring, 1 gang plaster, 1900 1 gang plaster ring, 1900 1 gang mug ring, 1900 mud ring.

Material: Steel



52C62A IN USE

Part Number	Raised	Similar Products or Speci	al Features	Std. Pkg.
52C62A	Flat No raise	Thomas & Betts 52C0 Hubbell Raco 787	Crouse Hinds TP480 EGS Appleton 8468F	50
52C62	1/4"	Thomas & Betts 52C62 Hubbell Raco 771	Crouse Hinds TP482 EGS Appleton 8468B	50
52C13	1/2"	Thomas & Betts 52C13 Hubbell Raco 772	Crouse Hinds TP484 EGS Appleton 8468A	50
52C13-P	1/2" Plastic	This nonmetallic version is an earlow voltage or power device i		50
52C14-5/8	5/8"	Thomas & Betts 52C14-5/8 Hubbell Raco 768	Crouse Hinds TP489 EGS Appleton 8468C	50
52C14	3/4"	Thomas & Betts 52C14 Hubbell Raco 773	Crouse Hinds TP486 EGS Appleton 8468	50
52C15	1"	Thomas & Betts 52C15 Hubbell Raco 774	Crouse Hinds TP488 EGS Appleton 8466A	25
52C16	1-1/4"	Thomas & Betts 52C16 Hubbell Raco 775	Crouse Hinds TP490 EGS Appleton 8466	25
52C22	1-1/2"	Thomas & Betts 52C50-1-1/2 Hubbell Raco 785	Crouse Hinds TP528 EGS Appleton 846150	25
52C23	2"	Thomas & Betts 52C50-2 Hubbell Raco 786	Crouse Hinds TP530 EGS Appleton 846200	25
AMR1	1/2" to 1-1/2"	Telescoping 1 gang inner ring a for a perfect fit every time.	adjusts to finished wall surface	50

Patent Pending

One Gang Square Drawn Offset Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

One Gang Offset Device Rings



Application: These offset-device covers are used to move a switch, outlet or plug to one side of a box away from obstacles present on the job, or for easier wiring access. They're commonly used on old boxes in walls that need offset device installation due to large obtrusive trim mouldings.

Advantages: Garvin Industries' one-gang, offset-device ring design allows the installer to move devices "offset" in any direction. The cover's flat surface is keyed to hold plaster or drywall mud.

Field Names: Offset plaster ring, offset mud ring, offset device cover, offset device ring, offset plaster frame, 1900 offset plaster ring.

Material: Steel



52C11 IN USE


Part Number	Raised	Similar Products or Special Features	Std. Pkg.
52C09	Flat	No raise, flat offset device cover.	25
52C10	1/4"	Thomas & Betts 52C10	25
52C11	1/2"	Thomas & Betts 52C11	25
52C12	5/8"	Raised for 5/8" drywall	25
52C12-3/4	3/4"	Raised for 3/4" drywall	25
52C12-1	1"	Raised for 1" drywall	25

Life Safety Code Requirement

Lockable Universal Breaker Lock

- Fits on any manufacturer 1 pole breaker
- Lockable to comply with NEC 760.4(B)
- Red color per NFPA 72

Part #: UBL-2



See Page 338 for more information!



4" Square Box Partitions



Application: These box partitions for 4" square boxes are used when low-voltage and power devices are installed next to each other in one box. They separate line voltage and low-voltage into their own compartments. To prevent breaking off too many scored tabs it is recommended that the partition be in place in the box before the tab is broken off.

Advantages: Garvin Industries' box partitions prevent any harmful interference that power devices can induce in low-voltage devices that are installed next to them.

Field Names: Box partitions, low voltage box partitions, low voltage box dividers, box separators, box dividers.



LVP42 INSTALLATION WITH BREAK-OFF TABS FOR EASY SIZING

Part Number	For Box Depth	For Raised Covers	Similar Products		Std. Pkg.
LVP41	1-1/2"	1/2", 3/4" & 1"	Thomas & Betts 52PS1 Hubbell Raco 706RAC	Crouse Hinds TP860 EGS Appleton	50
LVP42	1-1/2"	1-1/4", 1-1/2" & 2"	Thomas & Betts 52PD1 Hubbell Raco 708	Crouse Hinds TP861 EGS Appleton	50
LVP41D	2-1/8"	1/2", 3/4" & 1"	Thomas & Betts 52PS2 Hubbell Raco 707RAC	Crouse Hinds TP862 EGS Appleton	50
LVP42D	2-1/8"	1-1/4", 1-1/2" & 2"	Thomas & Betts 52PD2 Hubbell Raco 709	Crouse Hinds TP863 EGS Appleton	50



Adjustable-Depth Raised Device Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

For 4" Square & Three Gang Boxes



Application: These raised device covers for 4" square and three-gang boxes are used in ceilings, walls and floors when finished surface depth is unknown or in question.

Advantages: Garvin Industries' 4" square and three-gang, adjustable device rings allow a perfect "flush" installation to finished surfaces so devices are securely fastened and well grounded to rings.

Field Names: Adjustable: plaster ring, mud ring, device cover, switch cover, device ring, switch ring, mud cover, adjustable depth device cover, adjustable depth plaster ring, adjustable depth mud cover, 1900 plaster rings, gang box ring.





Ring retracted.

Ring extended.

AMR0 IN USE





Ring retracted.

Ring extended.

AMR3 IN USE

Part Number	Style	Raised Depth Range	Special Features	Std. Pkg.
AMR0	4" Square to Round	3/4" to 1-1/2"	Telescoping round inner ring adjusts to finished wall surface for a perfect fit every time!	50
AMR1	4" Square One Gang	3/4" to 1-1/2"	Telescoping 1 gang inner ring adjusts to finished wall surface for a perfect fit every time!	50
AMR2	4" Square Two Gang	3/4" to 1-1/2"	Telescoping 2 gang inner ring adjusts to finished wall surface for a perfect fit every time!	50
AMR3	Gang Box Three Gang	3/4" to 1-1/2"	Telescoping 3 gang inner ring adjusts to finished wall surface for a perfect fit every time!	50

Boxes & Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com



Two Gang Device Rings



4" Square

Raised Device Covers

Application: These two-gang, square-drawn device covers are used to mount switches, devices and receptacles in junction boxes.

Advantages: Garvin Industries' selection of various ring depths allows the installer to achieve flush fits with the finished surfaces. The angled slots on the covers compensate for up to 12° of box misalignment on upright framing members.

Field Names: Switch cover, plaster ring, mud ring, drywall ring, mud cover, tile ring, switch ring, receptacle cover, raised device ring, raised device cover, two gang plaster ring, two gang device cover, two gang plaster frame, 1900 plaster ring, 1900 2 gang plaster ring, 1900 2 device plaster ring.

Material: Steel



52C20A IN USE

AMR2 IN USE





Ring retracted.

Ring extended.

Part Number Raised		Similar Products or Special Features	
52C20A	Flat No raise	Thomas & Betts 52C00 Crouse Hinds TP494 Hubbell Raco 791 EGS Appleton 8470F	50
52C20	1/4"	Thomas & Betts 52C20 Crouse Hinds TP496 Hubbell Raco 777 EGS Appleton 8470B	50
52C17	1/2"	Thomas & Betts 52C17 Crouse Hinds TP498 Hubbell Raco 778 EGS Appleton 8470A	50
52C18-5/8	5/8"	Thomas & Betts 52C18-5/8 Crouse Hinds TP499 Hubbell Raco 769 EGS Appleton 8470C	50
52C18	3/4"	Thomas & Betts 52C18 Crouse Hinds TP500 Hubbell Raco 779 EGS Appleton 8470	50
52C19	1"	Thomas & Betts 52C19 Crouse Hinds TP502 Hubbell Raco 780 EGS Appleton 8469A	25
52C21	1-1/4"	Thomas & Betts 52C21 Crouse Hinds TP501 Hubbell Raco 781 EGS Appleton 8469B	25
52C24	1-1/2"	Thomas & Betts 52C53-1-1/2 Crouse Hinds TP540 Hubbell Raco 795 EGS Appleton 847150	25
52C25	2"	Thomas & Betts 52C54-2 Crouse Hinds TP542 Hubbell Raco 796 EGS Appleton 847200	25
AMR2	3/4" to 1-1/2"	Telescoping 2 gang inner ring adjusts to finished wall surface for a perfect fit every time!	50



4" Square to Round **Raised Device Covers**

847-455-0188 FAX 847-455-0334 garvinindustries.com

Square to Round **Device Rings**





Application: These raised device covers are used to mount light fixtures, security cameras and other devices in walls and ceilings.

Advantages: Garvin Industries' square-to-round device rings convert a square box to a round ceiling or wall opening with 8-32 threaded mounting tabs, 2.75" c.c (center-to-center). For ceiling lights or wall sconce lights. The angled slots on For ceiling lights or wall sconce lights. The angled slots on the covers compensate for up to 12° of box misalignment on upright framing members.

Field Names: Square-to-Round: switch cover, plaster ring, mud ring, drywall ring, mud cover, tile ring, switch ring, receptacle cover, raised device ring, raised device cover, square plaster frame, 1900 plaster ring, 1900 square to round ring, 1900 square to round.

Material: Steel





Ring retracted.

Ring extended.

AMR0 IN USE

Part Number	Raised	Similar Products or Special Features	Std. Pkg.
52C3-F	Flat No Raise	Square to round ring, no raise.	50
52C3	1/2"	Thomas & Betts 52C3-1/2 Crouse Hinds TP476 Hubbell Raco 767 EGS Appleton 8461A	50
52C3-5/8	5/8"	Thomas & Betts 52C3 Crouse Hinds TP477 Hubbell Raco 756 EGS Appleton 8461	50
52C3-3/4	3/4"	Thomas & Betts 52C3-3/4 Crouse Hinds TP475 Hubbell Raco 759 EGS Appleton 8461B	50
52C3-1	1"	Thomas & Betts 52C3-1 Crouse Hinds TP479 Hubbell Raco 757 EGS Appleton 8461C	50
52C3-1-1/4	1-1/4"	Thomas & Betts 52C3-1-1/4 Crouse Hinds TP483 Hubbell Raco 758 EGS Appleton 8461D	25
52C3-1-1/2	1-1/2"	1-1/2" raised for plaster, drywall or tile.	25
52C3-2	2"	2" raised for plaster, drywall or tile.	25
AMR0	3/4" to 1-1/2"	Telescoping round inner ring adjusts to finished wall surface for a perfect fit every time!	25

Dual Direction 8-32 Device Mounting Tabs



Application: These dual-direction, square-to-round device covers are mounted on ceilings or walls for proper alignment of any device or fixture with canopy installed. Typically used on exit signs, emergency lights, ceiling fixtures, security cameras, wall sconce lights and electronic devices.

Advantages: Garvin Industries' dual-direction mounting tabs allow the installer to obtain a perfect fit for signal, lighting and security cameras without having to disassemble canopies. They align fixture mounting holes every time.

Field Names: Square-to-Round: switch cover, plaster ring, mud ring, drywall ring, mud cover, tile ring, switch ring, receptacle cover, raised device ring, raised device cover.

Material: Steel

Part Number	Raised	Std. Pkg.
EXR-F	Flat No raise	25
EXR-1/2	1/2"	25
EXR-5/8	5/8"	25
EXR-3/4	3/4"	25
EXR-1	1"	25
EXR-1-1/4	1-1/4"	25
EXR-1-1/2	1-1/2"	25
EXR-2	2"	25



Replace Old Industrial Fixtures!

Plate Mounts to Any Style Box & Provides Holes to Hang New Energy Efficient T5 Fixtures

- · Attaches to any ceiling box or device ring
- No need to re-pipe to new location for adding fixture
- 1/2" knockout allows access to box through cover
- Use with chain and hooks or cable
- May be used in industrial or commercial applications
- Rugged steel construction




See Page 375 for more information!



4" Square Swivel Hangers

847-455-0188 FAX 847-455-0334 garvinindustries.com

For 4" Square Boxes

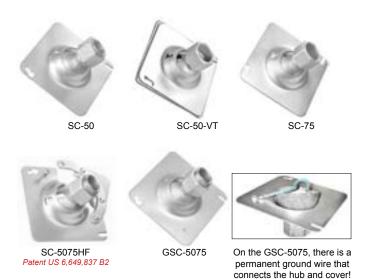

Application: These 4" square swivel-fixture hangers are used to hang light fixtures, security cameras, speakers and other electrical/electronic devices from standard 4" square junction boxes.

Advantages: Garvin Industries' 4" square swivel-fixture hangers allow quick and easy installation of lights, cameras and other devices directly to existing junction boxes. They require no extra mounting boxes and hangers, and allow a 20° swing from vertical. They are great for industrial settings where hanging fixtures are bumped or jostled occasionally.

Field Names: Swivel cover, ball hanger, swivel fixture hanger, swivel hanger, industrial fixture hanger, swivel aligner, box aligner, swivel ball hanger, swivel fixture aligner.



SC-5075HF IN USE



Part Number	Pipe Size	Construction	Similar Products or Spe	ecial Features	Std. Pkg.
SC-50	1/2"	Solid One Piece Cover	Thomas & Betts SH1234 Hubbell Raco 896	Crouse Hinds EGS Appleton	25
SC-50-VT	1/2" or 3/4"	Solid One Piece Gasketed Cover	Gasketed for air plenu cameras, motion detec	m spaces. It mounts light fixtures, security ctors and other electric or electronic devices.	25
SC-75	3/4"	Solid One Piece Cover	Thomas & Betts SH1234 Hubbell Raco 897	Crouse Hinds EGS Appleton	25
SC-5075HF	1/2" or 3/4"	Hinged Cover Door for Wire Access	fixtures in one easy step. Wi	nstaller to mount the cover on box and hang re termination can be completed with the door anging in place. "Hands Free" labor-saving install. e man job.	25
GSC-5075	1/2" or 3/4"	Solid, One Piece, Ground Wire, Pre-installed	Dedicated ground wire conne two permanently bond to ach	ects swivel-ball knuckle and steel cover, so the nieve proper grounding.	25



Toggle Switch for Oil & Gas Furnace Burners





















BPO-PS1T







Application: These covers are used when an emergency shut-off switch is needed on a box circuit. They are used on furnace burner controls and other gas and oil powered applications.

Advantages: Garvin Industries' highly-visible, red plate is silk-screened with fuel type and power on/off indication that promotes safe furnace operation.

Field Names: Boiler plate, burner plate, burner cover, emergency cover plate, oil switch off plate, gas burner plate, on off toggle cover, 1900 covers.



BP-1936 IN USE

Part Number	Fits Box Type	Device Configuration	Fuel Type	Power Indication	Std. Pkg.
BP-PS1T	Handy/Utility or Raised cover	(1) Toggle	Gas	On/Off	25
BP-1935	4" Square	(1) Toggle	Gas	On/Off	25
BP-19350	Handy/Utility	(1) Toggle	Gas	On/Off	25
BP-1936	4" Square	(2) Toggle	Gas	On/Off	25
BPO-1935	4" Square	(1) Toggle	Oil	On/Off	25
BPO-19350	Handy/Utility	(1) Toggle	Oil	On/Off	25
BPO-1936	4" Square	(2) Toggle	Oil	On/Off	25
BPO-PS1T	Handy/Utility or Raised cover	(1) Toggle	Oil	On/Off	25
24CBPO	3-1/2" Octagon	(1) Toggle	Oil	On/Off	25
54CBPO	4" Octagon	(1) Toggle	Oil	On/Off	25



4" Square Industrial Surface Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

1/2" Raised



Application: These 4" square industrial surface covers are used to mount electrical devices on 4" square boxes in industrial settings, or when boxes are surface mounted or positioned in exposed work applications.

Advantages: Garvin Industries' 4" square, industrial surface covers allow for quick installation of devices and switches onto steel covers before they are mounted to the box. There is no bonding jumper required on covers with crushed corners, covers that have two or more device attachments (attachment screws included), or devices installed with the included lockwasher.

Field Names: Garvin cover, raised surface cover, exposed work cover, crushed corner cover, surface cover, device cover, switch cover, raised switch cover, raised surface cover, industrial cover, industrial device cover, 1900 cover, 4S cover, toggle lock.





G1935 IN USE

TOGLOK IN USE

Part Number	Device Configuration	Similar Products		Std. Pkg.
G1929	Blank - No device	Thomas & Betts Hubbell Raco 804C	Crouse Hinds TP503 EGS Appleton 8360	50
G1932	(1) Single Receptacle, 1.406"	Thomas & Betts RS-11 Hubbell Raco 801C	Crouse Hinds TP514 EGS Appleton 8363	50
G1933	(2) Single Receptacles, 1.406"	Thomas & Betts RS-10 Hubbell Raco 807C	Crouse Hinds EGS Appleton	50
G1934	(1) 30-50 Amp Receptacle, 2.141"	Thomas & Betts RS-13 Hubbell Raco 810C	Crouse Hinds TP518 EGS Appleton 8377	50
G1935	(1) Toggle Switch	Thomas & Betts RS-9 Hubbell Raco 800C	Crouse Hinds TP512 EGS Appleton 8361	50
G1936	(2) Toggle Switches	Thomas & Betts RS-5 Hubbell Raco 803C	Crouse Hinds TP508 EGS Appleton 8367	50
G1937	(1) Toggle Switch & (1) Single Receptacle, 1.406"	Thomas & Betts RS-1 Hubbell Raco 805C	Crouse Hinds TP504 EGS Appleton 8368	50
TOGLOK	Toggle Switch Lockout Device	This device fits over toggle s off position when needed.	witches to lock them in on or	10

1/2" Raised



G1938











Application: These 4" square industrial surface covers are used to mount electrical devices on 4" square boxes in industrial settings, or when boxes are surface mounted or positioned in exposed work applications.

Advantages: Garvin Industries' 4" square industrial surface covers allow for quick installation of devices and switches onto steel covers before they are mounted to the box. There is no bonding jumper required on covers with crushed corners, covers that have two or more device attachments (attachment screws included), or devices installed with the included lockwasher.

Field Names: Garvin cover, raised surface cover, exposed work cover, crushed corner cover, surface cover, device cover, switch cover, raised switch cover, raised surface cover, industrial cover, industrial device cover, 1900 cover, 4S cover.



G1939 IN USE

Part Number	Device Configuration	Similar Products		Std. Pkg.
G1938	(1) Duplex Receptacle	Thomas & Betts RS-12 Hubbell Raco 902C	Crouse Hinds TP516 EGS Appleton 8365N	50
G1939	(2) Duplex Receptacles	Thomas & Betts RS-8 Hubbell Raco 907C	Crouse Hinds TP510 EGS Appleton 8371N	50
G1940	(1) Duplex & (1) Single Receptacle, 1.406"	Thomas & Betts RS-3 Hubbell Raco 806C	Crouse Hinds EGS Appleton	50
G1941	(1) Duplex & (1) Toggle Switch	Thomas & Betts RS-2 Hubbell Raco 906C	Crouse Hinds TP506 EGS Appleton 8375N	50
G1942	(1) 20 Amp Receptacle, 1.594"	Thomas & Betts RS-4 Hubbell Raco 812C	Crouse Hinds TP507 EGS Appleton 8379	50
G1943	(1) 30 Amp Locking Receptacle, 1.719"	Thomas & Betts RS-15 Hubbell Raco 811C	Crouse Hinds TP519 EGS Appleton	50



4" Square Industrial Surface Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

1/2" Raised



Application: These 4" square industrial surface covers are used to mount electrical devices on 4" square boxes in industrial settings, or when boxes are surface mounted or positioned in exposed work applications.

Advantages: Garvin Industries' 4" square industrial surface covers allow for quick installation of devices and switches onto steel covers before they are mounted to the box. There is no bonding jumper required on covers with crushed corners, covers that have two or more device attachments (attachment screws included), or devices installed with the included lockwasher.

Field Names: Garvin cover, raised surface cover, exposed work cover, crushed-corner cover, surface cover, device cover, switch cover, raised switch cover, raised surface cover, industrial cover, industrial device cover, 1900 cover, 4S cover.



G1950 IN USE

Part Number	Device Configuration	Similar Products		Std. Pkg.
G1944	(1) 30-50 Amp Receptacle, 2.141" Diameter	Thomas & Betts RS-13 Hubbell Raco 810C	Crouse Hinds TP518 EGS Appleton 8377	50
G1947	(1) Decorative or GFCI Receptacle	Thomas & Betts RS-16-CC Hubbell Raco 808C	Crouse Hinds TP513 EGS Appleton 8362	50
G1948	(1) Decorative or GFCI & (1) Toggle Switch	Thomas & Betts RS-18-CC Hubbell Raco 814C	Crouse Hinds TP515 EGS Appleton 8374	50
G1949	(1) 30-60 Amp Receptacle, 2.441" Diameter	Thomas & Betts Hubbell Raco 813C	Crouse Hinds EGS Appleton	50
G1950	(2) Decorative or GFCI Receptacles	Thomas & Betts RS-17-CC Hubbell Raco 809C	Crouse Hinds TP511 EGS Appleton	50
G1951	(1) Duplex & (1) Decorative or GFCI Receptacle	Thomas & Betts RS-19-CC Hubbell Raco 915C	Crouse Hinds TP517 EGS Appleton 8373N	50



1-1/2" Deep with **Conduit Knockouts**









Patent Pending

Application: These 4-11/16" square boxes with conduit knockouts are larger boxes that are installed when largersized conductors are required. These boxes are great for industrial applications.

Advantages: Garvin Industries' shallow 5S boxes can be used where reduced wall depth imposes limitations. They also have versatile, combination-head screws that securely fasten a cover to an electrical junction box using a slotted, Phillips, or Robertson head screwdriver.

Field Names: 11B box, 11B junction box, 5S box, shallow 11B box, shallow 5S box, shallow electrical box, shallow junction box, shallow conduit box, 2100 box, 5" box, 4 11/16" box, shallow 4 11/16" box.

Material: Steel



72151-S IN USE

Part Number	Side Knockouts Bottom Knockouts	Similar Products or Spec	ial Features	Std. Pkg.
72151-1/2	(12) 1/2" (2) 1/2", (2) 3/4"	Straight 1/2" knockouts on all f	our sides.	25
72151-3/4	(8) 3/4" (2) 1/2" & (2) 3/4"	Straight 3/4" knockouts on all f	our sides.	25
72151-S	(8) 1/2", (4) 1/2"-3/4" (2) 1/2", (2) 3/4"	Thomas & Betts 72151-1234 Hubbell Raco 247	Crouse Hinds TP549 EGS Appleton	25
72151-SVT	(8) 1/2", (4) 3/4" (3) 1/2", (2) 3/4"	1/2" and 3/4" air tight kn air spaces.	ockouts for plenum	25

Need Protection from the Weather?

3 Gang Weatherproof Boxes and Covers!

3 Gang Weatherproof Covers:

- Available in single receptacle, GFCI, duplex, decorative, and toggle switch
- Spring-loaded, self-closing lids create a water tight seal when the device or switch is not in use
- · Made from rugged die cast aluminum
- · Neoprene gasket and screws included

3 Gang Weatherproof Boxes:

- · 3 gang, seven hole weatherproof boxes
- 1/2", 3/4" or 1" threaded holes
- 2-5/8" Depth
- · Made from rugged die cast aluminum
- . Mounting lugs & closure plugs included for easy installation
- · Premium powder coated paint



See Page 242 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

2-1/8" Deep with Conduit Knockouts



72171-RED

Application: These 4-11/16" square boxes with conduit knockouts are larger boxes that are installed when larger sized conductors are required. These boxes are great for industrial applications.

Advantages: Garvin Industries' 2-1/8" deep 5S boxes provide extra volume for wiring and devices. Red painted boxes are also available to easily distinguish fire alarm circuits. They also have versatile combination head screws that can securely fasten a cover to an electrical junction box using a slotted, Phillips, or Robertson head screw driver.

Field Names: 11B box, 11B junction box, 5S box, 11B box, 5S box, electrical box, junction box, 11B fire alarm box, 11B plenum box, 11 box deep.



72171-RED IN USE

Part Number	Side Knockouts Bottom Knockouts	Box Construction	Similar Products or Speci	al Features	Std. Pkg.
72171-1/2	(12) 1/2" (2) 1/2", (2) 3/4"	Drawn	Straight 1/2" conduit knockouts	on all sides of the box.	25
72171-3/4	(12) 3/4" (2) 1/2", (2) 3/4"	Drawn	Thomas & Betts 72171-3/4 Hubbell Raco	Crouse Hinds EGS Appleton	25
72171-3/4-1	(6) 3/4", (4) 1" (2) 1/2", (2) 3/4"	Drawn	Thomas & Betts 72171-3/4-1 Hubbell Raco 265	Crouse Hinds EGS Appleton	25
72171-3/4RED	(12) 3/4" (2) 1/2", (2) 3/4"	Drawn	Painted red for designating fire	alarm and life safety circuits.	25
72171-3/4-VT	(12) 3/4" (3) 1/2", (2) 3/4"	Drawn	Chicago plenum "air tigh	t" 3/4" knockouts on side walls.	25
72171-3/4-1-VT	(6) 3/4", (4) 1" (3) 1/2", (2) 3/4"	Drawn	Chicago plenum "air tigh across on side walls.	t" 3/4" & 1" knockouts straight	25
72171-1	(8) 1" (2) 1/2", (2) 3/4"	Drawn	Thomas & Betts 72171-1 Hubbell Raco 258	Crouse Hinds EGS Appleton	25
72171-1-VT	(8) 1" (3) 1/2", (2) 3/4"	Drawn	Chicago plenum 1" Knoc	kouts	25
72171-RED	(6) 1/2", (6) 1/2"-3/4" (2) 1/2", (2) 3/4"	Drawn	Painted red for designating fire	alarm and life safety circuits.	25



2-1/8" Deep with **Conduit Knockouts**








Patent Pending



72171-SVTRED

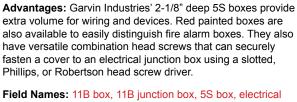



Application: These 4-11/16" square boxes with conduit knockouts are larger boxes that are installed when larger

sized conductors are required. These boxes are great for



industrial applications.



72171- SVTSS





72171-BLNK



72171-1-1/4VT









52171-SDA "DUAL ACCESS" BOX IN USE

Part Number	Side Knockouts Bottom Knockouts	Box Construction	Similar Products or Specia	l Features	Std. Pkg.
72171-S	(6) 1/2", (6) 1/2"-3/4" (2) 1/2", (2) 3/4"	Drawn	Thomas & Betts 72171-1234 Hubbell Raco 257	Crouse Hinds EGS Appleton	25
72171-SDA 8-3	(6) 1/2", (6) 1/2"-3/4" Open with Mounting Tabs & 32 Screws On Both Sides of B	Welded	Dual-access box allows covers of mounted on either side of the bo	,	25
72171-SVT	(8) 1/2", (4) 3/4" (3) 1/2", (2) 3/4"	Drawn	Chicago plenum "air-tight"	1/2" and 3/4" knockouts.	25
72171-SVTRED	(8) 1/2", (4) 3/4" (3) 1/2", (2) 3/4"	Drawn	Chicago plenum "air-tight" Fire alarm red color.	' 1/2" and 3/4" knockouts.	25
72171-SVTSS	(8) 1/2", (4) 3/4" (3) 1/2", (2) 3/4"	Welded	Chicago plenum "air-tight" Stainless steel boxes are		25
72171-SVTWM	(8) 1/2", (4) 3/4" Wire Mold Slots	Drawn	Chicago plenum "air-tight" Wire mould punch out in t	' 1/2" and 3/4" knockouts. he bottom of the box.	25
72171-1-1/4	(4) 1-1/4" (2) 1/2", (2) 3/4"	Drawn	For 1-1/4" conduit runs		25
72171-1-1/4VT	(4) 1-1/4" (3) 1/2", (2) 3/4"	Drawn	Chicago plenum "air-tight"	' 1-1/4" knockouts.25	
72171-BLNK	Blank Box	Drawn	Blank box less all holes and kno solution for your next job!	ckouts. Let us customize a	25

847-455-0188 FAX 847-455-0334 garvinindustries.com

2-1/8" Deep with Clamps for Flexible Metal Conduits







72171-MSBX

flexible metal conduits are larger boxes that are installed when larger sized conductors or wiring devices that use flexible metal conduits are installed. These boxes are great for industrial applications. Advantages: Garvin Industries' 2-1/8" deep 5S boxes come

Application: These 4-11/16" square boxes with clamps for

with built in clamps for flexible metal conduits to speed up installation and save connector costs. They also have versatile combination head screws that can securely fasten a conduit to an electrical junction box using a slotted, Phillips, or Robertson head screw driver.

Field Names: 11B box, 11B junction box, 5S box, shallow 11B box, shallow 5S box, shallow electrical box, shallow junction box, 5S bracket box, 11B bracket box.

Material: Steel

Part Number	Side Knockouts Bottom Knockouts	Bracket Style	Std. Pkg.
72171-BX	(6) 1/2"-3/4", (4) BX (3) 1/2", (2) 3/4"		25
72171-FBX	(6) 1/2"-3/4", (4) BX (3) 1/2", (2) 3/4"	Flat Vertical	25
72171-MSBX	(3) 1/2"-3/4", (4) BX (3) 1/2", (2) 3/4"	Metal Stud	25



72171-BX IN USE

Go Green on the Jobsite!

Energy Efficient Temporary Work Light

- 105 watt high-output compact fluorescent lamp offers 80% energy savings over traditional metal halide
- Very light-weight—2 lbs.
- · Versatile snap hook design easily attaches to many structural members
- · Standard box knockouts allows hard wire with pipe or flex cable wiring options
- · No ballast in fixture means no replacement costs later to fix a bad ballast
- · Gasketed covers and sealed knockouts are great for damp locations
- Premium high visibility "green" powder coating



See Page 371 for more information!

2-1/8" Deep with Conduit Knockouts & Mounting Brackets





Part Number	Side Knockouts Bottom Knockouts	Bracket Style	Std. Pkg.
72171-FS	(5) 1/2", (5) 1/2"-3/4" (3) 1/2", (2) 3/4"	Flat Vertical	25
72171-MS	(5) 1/2", (5) 1/2"-3/4" ((3) 1/2", (2) 3/4"	Metal Stud	25

Application: These 4-11/16" square bracket boxes with conduit knockouts are larger boxes that are used when boxes must be mounted directly to wood or metal studs. They are installed when larger sized conductors or wiring devices are required. These boxes are great for industrial applications.

Advantages: Garvin Industries' 2-1/8" deep 5S boxes provide extra volume for wiring and devices. They also have versatile, combination-head screws that can securely fasten a conduit to an electrical junction box using a slotted, Phillips, or Robertson head screw driver.

Field Names: 11B box, 11B junction box, 5S box, deep 11B box, shallow 5S box, shallow electrical box, deep junction box, 5S bracket box, 11B bracket box, 11B deep bracket box, 11B deep metal stud box.

Material: Steel



72171-FS IN USE

Only Stock One Lock!

Universal Breaker Lock

One Lock Fits All...

- Eliminates need to stock multiple breaker locks.
- Fits most common one pole circuit breakers.
- No need to make costly trips to the jobsite to identify panel.
- Reusable.
- · Corrosion resistant.
- · Patent pending.



Fits most circuit breakers:

- BR THQB QQ
- PBR PINUB PUU
- CH MP QOB • CHB • Q • HOM
- CHB Q HOM BAB • BQ • TB
- BAB BQ THQP BL

Fits most brands:

- GF
- Westinghouse
- Siemens
- T & B
- Bryant
- Homeline
- MurraySquare D
- Cutler Hammerand more...

See Page 338 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

3" Deep with Conduit Knockouts









72181-3/4





72181-1-1/4

Application: These 4-11/16" square boxes with conduit knockouts are larger boxes that are installed when larger and deeper devices are required. These boxes are great for industrial applications or when additional bend radius is needed in boxes.

Advantages: Garvin Industries' 3" deep 5S boxes provide extra volume for wiring and devices. They also have versatile combination head screws that can securely fasten a cover to an electrical junction box using a slotted, Phillips, or Robertson head screw driver.

Field Names: 11B box, 11B junction box, 5S box, deep 11B box, deep 5S box, deep electrical box, deep junction box, 5S bracket box, 11B bracket box, 11B deep box, 11B deep combo box.

Material: Steel



72181-1 IN USE

Part Number	Side Knockouts Bottom Knockouts	Box Depth	Std. Pkg.
72181-BLNK	Blank Sides Blank Bottom	3"	25
72181-S	(2) 1/2", (10) 1/2"-3/4" (2) 1/2", (2) 3/4"	3"	25
72181-3/4	(12) 3/4" (2) 1/2", (2) 3/4"	3"	25
72181-1	(8) 1" (2) 1/2", (2) 3/4"	3"	25
72181-1-1/4	(4) 1-1/4" (2) 1/2", (2) 3/4"	3"	25

Versatile Hanging!

Wide Mouth Heavy Duty Beam Clamps

- Fits 1/4", 3/8", and 1/2" threaded rods and fasteners
- Stamped steel or malleable iron versions available
- Spring steel, standard style electrical, top beam clamps and hammer on versions available
- Spring steel, light duty clamps accommodate 10-24 or 1/4'-20 rod
- Custom beam clamps made to your specifications
- · Let us design a solution for you



See Pages 310-312 for more information!

4-11/16" Extension Rings



1-1/2" & 2-1/8" Deep with Conduit Knockouts



Application: These extension rings with conduit knockouts are added to junction boxes to increase wiring capacity and provide access for additional conduit runs.

Advantages: Garvin Industries' extension rings prevent having to remove the old conduit boxes and wiring when additional wiring is needed. Their mounting slots allow a quick installation in existing boxes.

Field Names: Extension rings, extension boxes, box collars, box extenders, box extension, 11B extension rings, plenum extension rings, plenum extension boxes, 5S extension rings, 5S box extenders, 2100 extension ring, 11B extension rings, 11B plenum extension rings, 11B sandwich plate, 11B plenum sandwich plate.



73171-S IN USE

Part Number	Side Knockouts/Description	Box Depth	Similar Products or Special Features	Std. Pkg.
73151-S	(6) 1/2", (6) 1/2"-3/4"	1-1/2"	Thomas & Betts 73151-1234 Crouse Hinds TP550 EGS Appleton	25
73171-1/2	(12) 1/2"	2-1/8"	Straight, 1/2" knockouts	25
73171-3/4	(12) 3/4"	2-1/8"	Straight, 3/4" knockouts	25
73171-RED	(6) 1/2", (6) 1/2"-3/4"	2-1/8"	Painted red to designate fire alarm and life-safety circuits.	25
73171-S	(6) 1/2", (6) 1/2"-3/4"	2-1/8"	Thomas & Betts 73171-1234 Crouse Hinds TP564 Hubbell Raco 262 EGS Appleton	25
73171-SVT	(8) 1/2", (4) 3/4"	2-1/8"	Chicago plenum "air tight" 1/2" & 3/4" knockouts.	25
73C1-VT	Double Gasketed Steel Ring	Flat	Flat gasketed ring creates an "air tight" seal between Chicago plenum box and extension ring.	25
73171-1	(8) 1"	2-1/8"	Thomas & Betts 73171-1 Crouse Hinds Hubbell Raco EGS Appleton	25



4-11/16" Square Box Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

Flat Covers



Application: These flat covers are used to cover box wiring and provide a means for access when future conduit runs are required. Swivel fixture covers allow hanging of industrial light fixtures.

Advantages: Garvin Industries' flat covers allow a quick addition of a conduit run so additional circuit wiring can be pulled.

Field Names: 5S cover, box cover, box blank, plenum blank, plenum cover, 11B blank, 11B cover, 5S cover, 5S blank cover, 11B swivel cover, 4-11/16" swivel hanger, 5S swivel hanger, ball hanger, box aligner, 2100 swivel cover fixtures, 2100 cover box, 11B plenum blank, 11B plenum sandwich, 4 11/16" plenum cover, 4 11/16" plenum sandwich plate.



SC-507511B IN USE

	4	1
-98		
	73C1-\	/T

Part Number	Description	Std. Pkg.
SC-507511B	Swivel fixture hanger for 1/2" or 3/4" pipe is great for hanging light fixtures, security cameras, motion detectors and other electrical or electronic devices	10
72C1	Flat, blank cover	50
72C1-GS	Flat, blank cover with 10-32 green ground screw.	50
72C1-RED	Flat, blank, red cover designating fire alarm and life safety circuits.	50
72C1-VT	Flat, blank, gasketed cover with captive 8-32 box screws for Chicago plenum spaces.	25
72C1-VTRED	Flat, blank, gasketed cover with captive 8-32 box screws. Painted red to designate fire alarm and life safety circuits in Chicago plenum spaces.	25
72C6	Flat with 1/2" conduit knockout	50
72C6-VTSS	Stainless steel, gasketed with 1/2" conduit knockout for damp locations or wash down areas.	50
73C1-VT	Flat ring double gasketed for use with Chicago plenum boxes that require extension rings.	25

One Gang Device Rings



72C23

Application: These one gang raised device covers are used to mount switches or receptacles on junction boxes for different finished-wall surface depths. Tapped 6-32 device mounting tabs accept switches devices and receptacles.

Advantages: Garvin Industries' selection of various ring depths allow the installer to achieve a flush fit with the finished surface. The angled slots on the covers compensate for up to 12° of box misalignment on upright framing members.

Field Names: 4-11/16" plaster ring, 4-11/16" mud ring, 4-11/16" drywall ring, 5S device ring, 5S plaster ring, 5S mud ring, 11B plaster ring, 11B mud ring, 11B device ring, 11B device cover, 2100 raised device cover, 11B plaster frame, 11B 1 gang plaster ring, 11B 1 gang drywall ring.

Material: Steel



72C16 IN USE

Part Std

Std. Number	Raised	Similar Products or Description	
72C62A Flat No raise		Flat cover with two 6-32 tapped holes for switch, receptacle or other device.	
72C62	1/4"	Thomas & Betts 72C62 Crouse Hinds TP574 Hubbell Raco EGS Appleton 8485B	50
72C13	1/2"	Thomas & Betts 72C13 Crouse Hinds TP576 Hubbell Raco 837 EGS Appleton 8485A	50
72C14-5/8	5/8"	Thomas & Betts 72C14-5/8 Crouse Hinds TP579 Hubbell Raco 843 EGS Appleton 8485C	50
72C14	3/4"	Thomas & Betts 72C14 Crouse Hinds TP678 Hubbell Raco 838 EGS Appleton 335	25
72C15	1"	Thomas & Betts 72C15 Crouse Hinds TP580 Hubbell Raco 839 EGS Appleton 8485D	25
72C16	1-1/4"	Thomas & Betts 72C16 Crouse Hinds TP582 Hubbell Raco 842 EGS Appleton 8485E	25
72C22	1-1/2"	Thomas & Betts 72C50-1-1/2 Crouse Hinds TP529 Hubbell Raco 898 EGS Appleton	25
72C23	2"	Thomas & Betts 72C51-2 Crouse Hinds TP531 Hubbell Raco 899 EGS Appleton	25

4-11/16" Raised Device Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

Two Gang Device Rings



LVP51 / LVP52

72C25

Application: These two gang raised device covers are used to mount switches or receptacles.

Advantages: Garvin Industries' selection of various ring depths allow the installer to achieve a perfect flush fit with the finished surface. The angled slots on the covers compensate for up to 12° of box misalignment on upright framing members.

Field Names: 4-11/16" plaster ring, 4-11/16" mud ring, 4-11/16" drywall ring, 5S device ring, 5S plaster ring, 5S mud ring, 11B plaster ring, 11B mud ring, 11B device ring, 11B device cover, 2100 raised device cover, 11B plaster frame.



72C21 IN USE

Part Number	Raised	Similar Products or Specia	al Features	Std. Pkg.
72C20A	Flat No raise	Flat cover with four, 6-32 tapped	d device holes	50
72C20	1/4"	1/4" raised with four, 6-32 tappe	ed device holes	50
72C17	1/2"	Thomas & Betts 72C17 Hubbell Raco 841	Crouse Hinds TP584 EGS Appleton 8486A	50
72C18-5/8	5/8"	Thomas & Betts 72C18-5/8 Hubbell Raco 818	Crouse Hinds TP587 EGS Appleton 8486C	25
72C18	3/4"	Thomas & Betts 72C18 Hubbell Raco 840	Crouse Hinds TP586 EGS Appleton 8486	25
72C19	1"	Thomas & Betts 72C19 Hubbell Raco 819	Crouse Hinds TP589 EGS Appleton 8486D	25
72C21	1-1/4"	Thomas & Betts 72C21 Hubbell Raco 820	Crouse Hinds TP593 EGS Appleton 8486E	25
72C24	1-1/2"	Thomas & Betts 72C53-1-1/2 Hubbell Raco 885	Crouse Hinds TP541 EGS Appleton	25
72C25	2"	Thomas & Betts 72C54-2 Hubbell Raco	Crouse Hinds TP543 EGS Appleton	25
LVP51	For use with 1-1/2" Deep Boxes	For 1/2", 5/8", 3/4" and 1" raised	frings.	25
LVP52	For use with 2-1/8" Deep Boxes	For 1-1/4", 1-1/2" and 2" raised	rings.	25

We Manufacture Solutions... ELECTRICAL • LOW VOLTAGE • LIGHTING

Square to Round Device Rings



Application: These raised device covers are used to mount many applications including, light fixtures, ceiling covers, and security cameras.

Advantages: Garvin Industries' square-to-round device rings convert a square box to a round ceiling or wall opening with 8-32 threaded mounting tabs for ceiling lights or wall sconce lights. The angled slots on the covers compensate for up to 12° of box misalignment on upright framing members.

Field Names: Square-to-Round: switch cover, plaster ring, mud ring, drywall ring, mud cover, tile ring, switch ring, receptacle cover, raised device ring, raised device cover, 2100 raised device cover, square to round plaster frame, 11B square to round cover, 4 11/16" square to round cover.



72C3-5/8 IN USE

Part Number	Raised	Similar Products or Spec	ial Features	Std. Pkg.
72C3-F	Flat No raise	Flat square to round box cove mounting tabs.	Flat square to round box cover with two 8-32 tapped mounting tabs.	
72C3	1/2"	Thomas & Betts 72C3-1/2 Hubbell Raco 829	Crouse Hinds TP569 EGS Appleton 8488A	25
72C3-5/8	5/8"	Thomas & Betts 72C3 Hubbell Raco 835	Crouse Hinds TP570 EGS Appleton 8488B	25
72C3-3/4	3/4"	Thomas & Betts 72C3-3/4 Hubbell Raco	Crouse Hinds TP571 EGS Appleton 8488C	25
72C3-1	1"	Thomas & Betts 72C3-1 Hubbell Raco 757	Crouse Hinds TP479 EGS Appleton 8461C	25
72C3-1-1/4	1-1/4"	Thomas & Betts 72C3-1-1/4 Hubbell Raco 758	Crouse Hinds TP483 EGS Appleton 8461D	25
72C3-1-1/2	1-1/2"	1-1/2" raised for plaster, drywa	all or tile.	25
72C3-2	2"	2" raised for plaster, drywall or	tile.	25



4-11/16"Industrial Surface Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

1/2" Raised



Application: These 1/2" raised surface covers with included screws and nuts are used to mount electrical devices on 4-11/16" square boxes in industrial settings. They are also used when boxes are surface mounted or positioned in exposed work applications.

Advantages: Garvin Industries' 4-11/16" industrial surface covers allow for a quick installation of devices and switches on steel covers before they are mounted onto a box.

Field Names: Garvin cover, raised surface cover, exposed work cover, crushed-corner cover, surface cover, device cover, switch cover, raised switch cover, 5S device cover, 11B Garvin cover, 11B industrial cover, 11B raised surface cover, 11B cover, 4 11/16 cover.



72C38 IN USE

Part Number	Device Configuration	Similar Products or Spe	cial Features	Std. Pkg.
72C29	Blank Cover	There are no device openings. Let us customize a device opening for you today!		25
72C32	(1) Single Receptacle, 1.406"	Thomas & Betts RSL-11 Hubbell Raco	Crouse Hinds TP724 EGS Appleton 8494	25
72C35	(1) Toggle Switch	Thomas & Betts RSL-9 Hubbell Raco 870RAC	Crouse Hinds TP720 EGS Appleton 8489	25
72C36	(2) Toggle Switches	Thomas & Betts RSL-5 Hubbell Raco	Crouse Hinds TP726 EGS Appleton 8490	25
72C37	(2) Round Receptacles, 1.406"	For round receptacle 1.406"	diameter.	
72C38	(1) Duplex Receptacle	Thomas & Betts RSL-12 Hubbell Raco 972	Crouse Hinds TP722 EGS Appleton 8491N	25
72C39	(2) Duplex Receptacles	Thomas & Betts RSL-8 Hubbell Raco 979	Crouse Hinds TP728 EGS Appleton 8492N	25
72C40	(2) Round Receptacles, 1.62"	For round receptacle 1.62" di	ameter.	

4-11/16" Industrial Surface Covers



1/2" Raised

Boxes & Covers



Application: These 1/2" raised surface covers with included screws and nuts are used to mount electrical devices on 4-11/16" square boxes in industrial settings. They are also used when boxes are surface mounted or positioned in exposed work applications.

Advantages: Garvin Industries' 4-11/16" industrial surface covers allow for a quick installation of devices and switches on steel covers before they are mounted onto a box.

Field Names: Garvin cover, raised surface cover, exposed work cover, crushed-corner cover, surface cover, device cover, switch cover, raised switch cover, 5S device cover, 11B Garvin cover, 11B industrial cover, 11B raised surface cover, 11B cover, 4 11/16" cover.



72C47 IN USE

Part Number	Device Configuration	Similar Products		Std. Pkg.
72C41	(1) Duplex & (1) Toggle Switch	Thomas & Betts RSL-2 Hubbell Raco	Crouse Hinds EGS Appleton	25
72C42	(1) 20 Amp Receptacle, 1.594"	Thomas & Betts RSL-4 Hubbell Raco 887	Crouse Hinds TP730 EGS Appleton 8496	25
72C44	(1) 30-50 Amp Receptacle, 2.141"	Thomas & Betts RSL-13 Hubbell Raco 878	Crouse Hinds TP732 EGS Appleton 8498	25
72C47	(1) Decorative or GFCI Receptacle	Thomas & Betts RSL-16 Hubbell Raco 856	Crouse Hinds TP738 EGS Appleton 8484	25
72C48	(1) Decorative/GFCI & (1) Toggle Switch	Thomas & Betts RSL-18 Hubbell Raco 858	Crouse Hinds EGS Appleton	25
72C49	(2) Decorative/GFCI Receptacles	Thomas & Betts RSL-14 Hubbell Raco 888	Crouse Hinds TP734 EGS Appleton 8499	25
72C50	(1) 30-60 Amp Receptacle, 2.441"	Thomas & Betts RSL-17 Hubbell Raco 857	Crouse Hinds TP741 EGS Appleton	25
72C51	(1) Duplex & (1) Decorative/GFCI Receptacle	Thomas & Betts RSL-19 Hubbell Raco 959	Crouse Hinds EGS Appleton	25



5-1/2" Square Fire Alarm Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

Red Fire Alarm Notification Boxes





Application: These fire alarm and life safety boxes are used to mount speakers, strobes, and other life safety devices on walls and ceilings.

Advantages: Garvin Industries' fire alarm boxes have an extra wide and deep design that fits most fire alarm devices while allowing extra deep devices to also fit perfectly. They have a 97.5 cubic inch wire capacity and versatile knockout configuration. These boxes may be surface mounted or attached to various industry straps and hangers. They are painted red to easily distinguish them as fire alarm circuits.

Field Names: Speaker box, fire alarm box, life safety speaker boxes.

Material: Steel



92181-1/2RED IN USE


Part Number	Side Knockouts Bottom Knockouts	Raised Ground	Mounting Provision	Std. Pkg.
92181-1/2RED	(12) 1/2" (1) 1/2"	Yes	Multiple Holes & Slots	25
92181-3/4RED	(12) 3/4" (1) 3/4"	Yes	Multiple Holes & Slots	25

Protect Previously Terminated Wires in Pipe!

Split Open Insulating Bushings for EMT & Threaded Rigid Conduit

Easy Installation Around Existing Wire in Pipe!

- · Models offered for EMT and RIGID conduit
- Open, split design allows easy snap-on and screw-on installation
- Installs before or after wire pull
- Insulates the sharp edges of pipe and conduit
- · Samples upon request



See Page 136 & 176 for more information!



1-1/2" & 2-1/2" Deep with Conduit Knockouts






Application: These 6" square boxes provide extra wire capacity allowing cables to be properly routed and housed. They ensure that there are no sharp bends that may damage the cables inner conductors.

Advantages: Garvin Industries' 6" square junction boxes allow the installer to house electric and data wires and cables. Additionally, they allow the installer to route them to ensure the inner conductor remains intact and capable of fast signal transmission. Be sure to comply with the minimum bend radius of cable manufactures. 6" square boxes eliminate the problem of crowding in small boxes that can damage the integrity of cables. Boxes are available 1-1/2", 2-1/2", and 3-1/2" depths. They support CAT 5E, CAT 6, augmented CAT 6, CAT 7, augmented CAT 7, and fiber optic cables. They have versatile 1/2" to 1-1/2" knockouts that can accommodate many pipe sizes.

Field Names: 6" square box, data box.



6250-3/4 IN USE

Part Number	Side Knockouts Bottom Knockouts	Depth	Std. Pkg.
6150-3/4	(12) 3/4" (3) 1/2", (2) 3/4"	1-1/2"	10
6150-S	50-S (6) 1/2", (6) 1/2"-3/4" (2) 1/2", (2) 3/4"		10
6150-BLNK	Blank Box No Holes or KO's	1-1/2"	10
6250-3/4	(12) 3/4" (3) 1/2", (2) 3/4"	2-1/2"	10
6250-S	(6) 1/2", (6) 1/2"-3/4" (2) 1/2", (2) 3/4"	2-1/2"	10
6250-1	(12) 1" (3) 1/2", (2) 3/4"	2-1/2"	10
6250-1-1/4	(8) 1-1/4" (3) 1/2", (2) 3/4"	2-1/2"	10
6250-BLNK	Blank Side Blank Bottom	2-1/2"	10

6" Square Junction Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

3-1/2" Deep with Conduit Knockouts



Application: These 6" square boxes provide extra wire capacity allowing cables to be properly routed and housed. They ensure that there are no sharp bends that may damage the cables inner conductors.

Advantages: Garvin Industries' 6" square junction boxes allow the installer to house electric and data wires and cables. Additionally, they allow the installer to route them to ensure the inner conductor remains intact and capable of fast signal transmission. Be sure to comply with the minimum bend radius of cable manufactures. 6" square boxes eliminate the problem of crowding in small boxes that can damage the integrity of cables. Boxes are available 1-1/2", 2-1/2", and 3-1/2" depths. They support CAT 5E, CAT 6, augmented CAT 6, CAT 7, augmented CAT 7, and fiber optic cables. They have versatile 1/2" to 1-1/2" knockouts that can accommodate many pipe sizes.

Field Names: 6" square box, data box.

Material: Steel

Part Number	Side Knockouts Bottom Knockouts	Depth	Std. Pkg.
6350-3/4	(12) 3/4" (3) 1/2", (2) 3/4"	3-1/2	10
6350-S	(6) 1/2", (6) 1/2"-3/4" (2) 1/2", (2) 3/4"	3-1/2	10
6350-1	(12) 1" (3) 1/2", (2) 3/4"	3-1/2	10
6350-1-1/4	(8) 1-1/4" (3) 1/2", (2) 3/4"	3-1/2	10
6350-1-1/2	(4) 1-1/2" (3) 1/2", (2) 3/4"	3-1/2	10
6350-BLNK	Blank Side Blank Bottom	3-1/2	10



6350-3/4 IN USE

Low Voltage Jacks

Pata, Phone & Cable Jack Wallplate Combo!

- Available in 1 or 2 port models
- White or ivory colors for any room interior
- Installs on device ring in seconds with included wallplate screws
- RJ-11 phone, coaxial "F" for cable and RJ-45 for data cable
- Allows multiple appliances to connect in one location
- Premium quality! Stop overpaying for other manufacturer's brand name



See Page 322 for more information!

6" Square Covers & Raised Device Rings



Flat Covers & Box Conversion Rings





Application: These flat covers are used with 6" square boxes to cover wires. They can also be used to convert boxes so they can accept 4" or 4-11/16" square rings or devices that mount on 4" box configurations.

Advantages: Garvin Industries' flat covers eliminate the need to buy special raised rings or accessories to install devices.

Field Names: 6" plaster ring, 6" blank cover.

Material: Steel





6BC IN USE

6CP IN USE

Part Number	Raised	Special Features	Std. Pkg.
6BC	Flat No Raise	Blank cover closes up 6" square boxes	25
6CP	Flat No Raise	Open plate for converting 6" boxes to accept standard 4" and 4-11/16" square plaster rings or boxes.	25

End Rooftop Code Violations!

Pipe Elevation Blocks

- "Cut to Length" sizes... You Save Money!
- Lightweight for easy transport to rooftop.
- Built in channels allow QUICK & EASY Install
- Lifetime Guarantee!




See Page257 for more information!



6" Square Covers & Raised Device Rings

847-455-0188 FAX 847-455-0334 garvinindustries.com

One Gang Device Covers

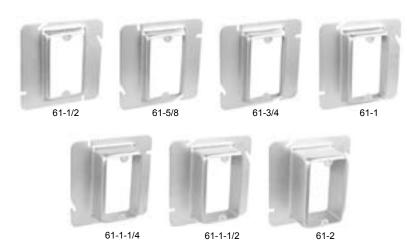

Application: These raised device rings are used to mount numerous electronic and electrical devices to 6" square boxes.

Advantages: Garvin Industries' one gang device covers quickly and securely mount to boxes and provide access to install switches, devices, receptacles and other electronic/ electrical appliances.

Field Names: 6" plaster rings, 6" mud rings, 6" device rings.

Material: Steel



61-3/4

Part Number	Size	Std. Pkg.
61-1/2	1/2"	25
61-5/8	5/8"	25
61-3/4	3/4"	25
61-1	1"	25
61-1-1/4	1 1/4"	25
61-1-1/2	1 1/2"	25
61-2	2"	25

Custom Length Conduit Nipples!

Threaded Rigid or EMT Pipe Nipples Cut to Your Desired Length!

- Sizes: 1/2" up to 4"
- · Rigid or EMT available
- Quick turnaround on most sizes and styles
- Custom hole punching and slotting available
- Painting available on request
- Stocking program available for qualified volumes




See Page 166 for more information!

6" Square Covers & **Raised Device Rings**



Two Gang **Device Covers**

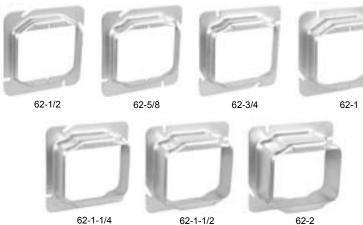



Application: These raised device rings are used to mount numerous electronic and electrical devices to 6" square boxes.

Advantages: Garvin Industries' two gang device covers quickly and securely mount to boxes and provide access to install switches, devices, receptacles and other electronic/ electrical appliances.

Field Names: 6" plaster rings, 6" mud rings, 6" device rings.

Material: Steel



62-3/4 IN USE

Part Number	Size	Std. Pkg.
62-1/2	1/2"	25
62-5/8	5/8"	25
62-3/4	3/4"	25
62-1	1"	25
62-1-1/4	1 1/4"	25
62-1-1/2	1 1/2"	25
62-2	2"	25

Fastest Low Voltage Cable Hang!

Quick Shot Bridle Rings

Ready! Aim!! Hang!!!

Quick Shot:

- 1-1/2", 2", and 4" sizes available for multiple cable bundles
- · Comes with or without saddle for data and fiber optic cable installs
- · Concrete nail and washer combo fits most manufacturer's powder actuated fastening tools

Standard Style:

- Standard bridle ring available 1/2" to 4" with wood screw or machine screw
- · Bridle rings with toggle wing set for hollow walls also available
- 1/4"-20 and 10-24 machine threads or wood screw also available



See Page 290 for more information!



Handy Utility Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

Mini Handy Box & Device Cover





G19180 G19190 Application: These extra small handy boxes and covers are ideal for tight spaces in stud walls and when limited surface mounting space is available.

Advantages: Garvin Industries' extra slim design allows the installer to mount junction boxes in crowded spaces, or when minimal wire capacity is needed. They are not used for device installations.

Field Names: Mini handy box, small handy box, undersized handy box, tiny utility box, small conduit box, small junction

Material: Steel





G19180 IN USE

G19190 IN USE

Part Std. Number Size **Knockouts Special Features** Pkg. G19180 3-3/4" x 1-1/2" (11) 1/2" Offset sidewall ears 50 x 1-1/2" Deep 3-3/4" x 1-1/2" G19190 Blank cover with captive screws. 50

1-1/4" & 1-1/2" Deep









Application: These handy utility boxes are used for convenience outlets, switches and small junction boxes in exposed work applications. They are great for appliances and machinery. Extension rings are available to provide a means of adding additional wire capacity or to serve as outlet boxes for surface conduits.

Advantages: Garvin Industries' handy utility boxes have a small, rectangular design that allow for power outlets and switches to be installed in small places. They can easily be customized with special holes or knockouts for OEM applications. Handy utility boxes with brackets are available when boxes must be mounted directly to wood or metal studs.

Field Names: Handy box, utility box, 2x4 box, switch box, device box, handy/utility box extension ring.

Material: Steel or Aluminum



G19280 IN USE

Part Number	Depth	Box or Ext. Ring	Knockout Size	Similar Products or Spec	ial Features	Std. Pkg.
G19279	1-1/4"	Вох	(10) 1/2"	Extra-shallow box for application	ons with limited wall depth.	50
G19280	1-1/2"	Box	(10) 1/2"	Thomas & Betts 58351-1/2 Hubbell Raco 650	Crouse Hinds TP588 EGS Appleton	50
G19280-E	1-1/2"	Extension Ring	(8) 1/2"	Thomas & Betts Hubbell Raco 653	Crouse Hinds TP592 EGS Appleton	50
G19280-EA	1-1/2"	Extension Ring	(8) 1/2"	Aluminum handy box ex Sealed 1/2" knockouts for	tension ring for wet locations. or air plenum spaces.	50



1-7/8" Deep









G19281-F





Application: These handy utility boxes are used for convenience outlets, switches and small junction boxes in exposed work applications. They are great for appliances and machinery. Extension rings are available to provide a means of adding additional wire capacity or to serve as outlet boxes for surface conduits.

Advantages: Garvin Industries' handy utility boxes have a small, rectangular design that allow for power outlets and switches to be installed in small places. They can easily be customized with special holes or knockouts for OEM applications. Handy utility boxes with brackets are available when boxes must be mounted directly to wood or metal studs.

Field Names: Handy box, utility box, 2x4 box, switch box, device box, handy box extension ring, utility box extension ring.





G19281 IN USE

G19281-F IN USE

Part Number	Depth	Bracket Style	Box or Ext. Ring	Knockout Size	Similar Products or Specia	al Features	Std. Pkg.
G19281	1-7/8"		Box	(10) 1/2"	Thomas & Betts 58361-1/2 Hubbell Raco 660	Crouse Hinds TP594 EGS Appleton	50
G19281-3/4	1-7/8"		Вох	(7) 3/4"	Thomas & Betts 58361-3/4 Hubbell Raco 663	Crouse Hinds TP596 EGS Appleton	50
G19281-AB	1-7/8"	Angle Bracket	Box	(8) 1/2"	Thomas & Betts Hubbell Raco 661	Crouse Hinds EGS Appleton	25
G19281-BLNK	1-7/8"		Вох	Blank Sides Blank Bottom	Blank box! Add only the holes & customize a solution for you too		50
G19281-F	1-7/8"	Flat Vertical	Вох	(8) 1/2"	Thomas & Betts 58361-V1/2 Hubbell Raco 662	Crouse Hinds TP598 EGS Appleton	25
G19281NGH	1-7/8"		Box	(11) 1/2"	No raised ground provision, thre Three, 1/2" knockouts in bottom	· ·	50
G19281-E	1-7/8"		Extension Ring	(8) 1/2"	Thomas & Betts 59361-1/2 Hubbell Raco 665	Crouse Hinds TP600 EGS Appleton	50



Handy Utility Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

2-1/8" & 2-1/2" Deep



Application: These handy utility boxes are used for convenience outlets, switches and small junction boxes in exposed work applications. They are great for appliances and machinery. Extension rings are available to provide a means of adding additional wire capacity or to serve as outlet boxes for surface conduits.

Advantages: Garvin Industries' handy utility boxes have a small, rectangular design that allow for power outlets and switches to be installed in small places. They can easily be customized with special holes or knockouts for OEM applications. Handy utility boxes with brackets are available when boxes must be mounted directly to wood or metal studs.

Field Names: Handy box, utility box, 2x4 box, switch box, device box, handy box extension ring, utility box extension ring, handy box with bracket.



G19281 IN USE

Part Number	Depth	Bracket Style	Box or Ext. Ring	Knockout Size	Similar Products or Speci	al Features	Std. Pkg.
G19282	2-1/8"		Вох	(10) 1/2"	Thomas & Betts 58371-1/2 Hubbell Raco 670RAC	Crouse Hinds TP604 EGS Appleton	50
G19282-3/4	2-1/8"		Вох	(7) 3/4"	Thomas & Betts 58371-3/4 Hubbell Raco 674	Crouse Hinds TP606 EGS Appleton	50
G19282-AB	2-1/8"	Angle Bracket	Вох	(8) 1/2"	Thomas & Betts 58371-T1/2 Hubbell Raco 671	Crouse Hinds EGS Appleton	25
G19282-BLNK	2-1/8"		Blank Box	Blank Side Blank Bottom	No holes & knockouts. Let us c	ustomize to your specifications.	25
G19282-F	2-1/8"	Flat Vertical	Вох	(8) 1/2"	Thomas & Betts 58371-V1/2 Hubbell Raco 678	Crouse Hinds TP608 EGS Appleton	25
G19282NGH	2-1/8"		Вох	(11) 1/2"	No raised ground provision, thre Three, 1/2" knockouts in bottom	· ·	50
4SSLD-1/2	2-1/2"		Extra deep Box	(11) 1/2"	No raised ground provision, three, 1/2" knockouts in bottom	· ·	50



All Device Styles



Application: These handy utility box covers are used to close handy utility boxes and provide toggle, duplex, GFCI and various other convenience outlets.

Advantages: Garvin Industries' has a variety of handy utility box covers including blank, switch and receptacle. Their tapered edges allow the covers to also be used as a single-gang wallplates.

Field Names: Handy box cover, utility box cover, 2x4 box cover, switch box cover, device box cover, handy box extension ring cover, utility box extension ring cover.

Material: Steel or Aluminum



G19470 IN USE

Part Number	Device Type	Similar Products or Spe	cial Features	Std. Pkg.
G19290	Blank	Thomas & Betts 58C1 Hubbell Raco 860	Crouse Hinds TP608 EGS Appleton 2540	100
G19290-ALUM	Blank	Blank aluminum cover with no	o screws included.	25
G19320	Single receptacle 1.41"	Thomas & Betts 58C5 Hubbell Raco 863	Crouse Hinds TP612 EGS Appleton 2539	25
G19350	Toggle switch	Thomas & Betts 58C30 Hubbell Raco 865	Crouse Hinds TP618 EGS Appleton 2594	100
G19380	Duplex receptacle	Thomas & Betts 58C7 Hubbell Raco 864	Crouse Hinds TP616 EGS Appleton 2510	100
G19390	0.47" bushed hole	Thomas & Betts 58C11 Hubbell Raco	Crouse Hinds EGS Appleton	25
G19420	20 Amp receptacle, 1.594"	Thomas & Betts 58C4 Hubbell Raco 867	Crouse Hinds TP610 EGS Appleton 2538	25
G19430	1/2" knockout	Thomas & Betts 58C6 Hubbell Raco 861	Crouse Hinds TP614 EGS Appleton 2555	100
G19470	GFCI/Decorative receptacle	Thomas & Betts 58C16 Hubbell Raco	Crouse Hinds TP613 EGS Appleton 180G	100
BP-19350	(1) Toggle, Gas Furnace	Emergency burner plate with	"On/Off" markings for gas burner.	25
BPO-19350	(1) Toggle, Oil Furnace	Emergency burner plate with	"On/Off" markings for oil burner.	25



Oversized Handy Boxes & Device Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

4-1/8" Long, 2-1/8" Wide and 1-7/8" Deep

G20380



G20430

G20470

Application: These oversized handy utility boxes are used for convenience outlets, switches and small junction boxes in exposed work applications. They are great for appliances and machinery.

Advantages: Garvin Industries' oversized handy utility boxes have a rectangular design that allow for power outlets and switches to be installed in small places. They can easily be customized with special holes or knockouts for OEM applications. Oversized handy utility boxes with brackets are available on request for use when boxes must be mounted directly to wood or metal studs.

Field Names: Oversized: handy box, utility box, 2x4 box, switch box, device box.



G20281 IN USE

Part Number	Description	Box or Cover	Knockout Size	Special Features	Std. Pkg.
G20281	Handy Box	Вох	(10) 1/2"	Extra wide handy box for big devices & receptacles	25
G20290	Blank	Cover		Blank cover, no device openings	25
G20320	Single Receptacle 1.41"	Cover		For power outlet single receptacle s	25
G20350	Toggle Switch	Cover		For single pole, 3 way or 4 way toggle switches	25
G20380	Duplex Receptacle	Cover		For duplex receptacle or stack device switch	25
G20430	1/2" Conduit Knockout	Cover	(1) 1/2"	To add conductors to boxes with 1/2" conduits	25
G20470	GFCI/Decorative	Cover		For GFCI, decorative or other block style devices	25

FAX 847-455-0334 garvinindustries.com



1-1/2" Deep







Switch

Boxes

Application: These switch boxes are used to support toggle switches, duplex devices, decorative devices and a variety of electrical outlets.

Advantages: Garvin Industries' switch boxes allow versatility of wiring design because they are gangable for multiple switches or device installations. Their plaster ears allow easy "cut in" when outlets or switches need to be added to existing shallow depth walls.

Field Names: Gem box, switch box, gem dandy, old work switch box, plaster box, conduit box, plaster ear box, steel switch box, remote box, shallow remodel box.

Material: Steel





G500-BX IN USE

G500-R IN USE

Part Number	Box Depth	Knockouts	Similar Products		Std. Pkg.
G500	1-1/2"	(4) 1/2" Conduit	Thomas & Betts Hubbell/Raco 400	Crouse Hinds TP114 EGS Appleton 94	50
G500-BX	1-1/2"	MC cable clamps	Thomas & Betts Hubbell/Raco	Crouse Hinds TP106 EGS Appleton	50
G500-R	1-1/2"	NM cable clamps	Thomas & Betts SWB25 Hubbell/Raco 410	Crouse Hinds TP100 EGS Appleton 95	50

2" Deep







Part Number	Box Depth	Side Knockouts Bottom Knockouts	Similar Products		Std. Pkg.
G600	2"	(6) 1/2" (2) 1/2"	Thomas & Betts LXMCOW Hubbell/Raco 420	Crouse Hinds TP130 EGS Appleton 111	50
G600-BX	2"	(4) MC Cable Clamps (1) 1/2"	Thomas & Betts LXMOW Hubbell/Raco 440	Crouse Hinds TP120 EGS Appleton 171F	50
G600-R	2"	(4) NM Cable Clamps (1) 1/2"	Thomas & Betts LXMWOW Hubbell/Raco 445	Crouse Hinds TP116 EGS Appleton	50



Switch Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

2-1/4" Deep Beveled Corners







G601BVRLE

G601BVROW G601BVR

Application: These 2-1/4" deep beveled corner boxes are used in shallow walls to attach a variety of electrical wall outlet devices including toggle switches and decorative devices.

Advantages: Garvin Industries' switch boxes allow versatility of wiring design because they are gangable for multiple switches or device installations. Their plaster ears allow easy "cut in" when outlets or switches need to be added to existing standard depth walls.

Field Names: Gem box, switch box, gem dandy, old work switch box, plaster box, conduit box, plaster ear box, steel switch box, gem box with bracket, old work box with bracket.

Material: Steel

Part Number	Box Depth	Side Knockouts Bottom Knockouts	Special Features	Std. Pkg.	
G601BVRLE	2-1/4"	(4) NM Cable (1) 1/2"	NM Clamps, No Ears	50	
G601BVROW	2-1/4"	(4) NM Cable (1) 1/2"	NM Clamps, Old Work Clips & Ears	50	
G601BVR	2-1/4"	(4) NM Cable (1) 1/2"	NM Clamps, Old Work Ears	50	

Move It Over!

Offset Pevice Rings

Never Tear Out a Box Again! Move Devices Over and Away from Obstructions.

- Quick fix when wide trim moulding interferes with box placement
- Use with boxes or low voltage devices
- Move over a plug, outlet, device, or switch
- Flat surface is keyed to hold plaster and drywall mud
- Raised from flat to 1" for various finished wall depths
- Rugged steel construction



See Page 47 for more information!

Switch Boxes



2-1/2" Deep










G601-OW











Advantages: Garvin Industries' switch boxes allow versatility of wiring design because they are gangable for multiple switches or device installations. Their plaster ears allow easy "cut in" when outlets or switches need to be added to existing standard depth walls.

Field Names: Gem box, switch box, gem dandy, old work switch box, plaster box, conduit box, plaster ear box, steel switch box, gem box with bracket, old work box with bracket.

Material: Steel





EGS Appleton 222LE

12.20	100
POS	333
N.	100
	100
YAU	151102
170	100
G	301-LE

(2) 1/2

Part Number	Box Depth	Side Knockouts Bottom Knockouts	Special Features	Similar Products		Std. Pkg.
G601	2-1/2"	(6) 1/2" (2) 1/2"		Thomas & Betts CDOW Hubbell Raco 500	Crouse Hinds TP218 EGS Appleton	50
G601-3/4	2-1/2"	(6) 3/4" (2) 3/4"		Thomas & Betts CDOW3/4 Hubbell Raco 503	Crouse Hinds EGS Appleton	50
G601-BX	2-1/2"	(6) 1/2", (4) MC (1) 1/2"		Thomas & Betts LXOW25 Hubbell Raco 518	Crouse Hinds TP178 EGS Appleton 173F	50
G601-R	2-1/2"	(6) 1/2", (4) NM (1) 1/2"		Thomas & Betts LXWOW25 Hubbell Raco 512	Crouse Hinds TP162 EGS Appleton 384	50
G601-OW	2-1/2"	(6) 1/2" (1) 1/2"	Old work Clips	Thomas & Betts CDOWTG25 Hubbell Raco 506 or 509	Crouse Hinds TP217 EGS Appleton 2220W	50
G601-F	2-1/2"	(4) 1/2" (2) 1/2"	Flat Vertical Bracket	Thomas & Betts CDV Hubbell Raco 504	Crouse Hinds TP222 EGS Appleton 222VBPL	25
G601-FBX	2-1/2"	MC Cable Clamps	Flat Vertical Bracket	Thomas & Betts LXV25 Hubbell Raco 524	Crouse Hinds TP184 EGS Appleton 173FVB	25
G601-FR	2-1/2"	NM Cable Clamps	Flat Vertical Bracket	Thomas & Betts LXWV Hubbell Raco 531	Crouse Hinds TP170 EGS Appleton 384VBPL	25
G601-LE	2-1/2"	(6) 1/2"	No Plaster	Thomas & Betts CDLE	Crouse Hinds TP214	50

Hubbell Raco 501


Ears



Switch Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

2-3/4" Deep

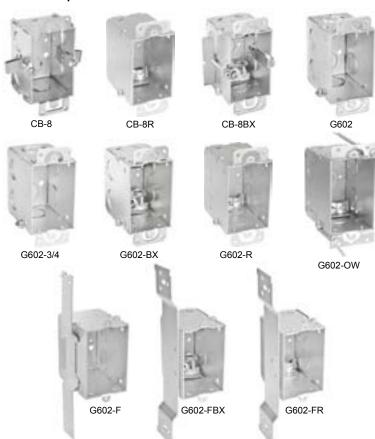

Application: These 2-3/4" deep switch boxes are used to support toggle switches, duplex devices, decorative devices and a variety of electrical outlets.

Advantages: Garvin Industries' deep switch boxes allow versatility of wiring design because they are gangable for multiple switches or device installations. Their plaster ears and old work clips allow easy "cut in" when outlets or switches need to be added to existing deep walls.

Field Names: Gem box, switch box, gem dandy, old work switch box, plaster box, conduit box, plaster ear box, steel switch box, gem box with bracket, old work box with bracket, gem box with plaster ears, gem box with ears.





G602-BX IN USE

G602-R IN USE

Part Number	Box Depth	Side Knockouts Bottom Knockouts	Special Features	Similar Products		Std. Pkg.
CB-8	2-1/2"	(6) 1/2" (2) 1/2"	Old work clips	Thomas & Betts CDOWTG25 Hubbell Raco 513	Crouse Hinds TP217 EGS Appleton 2220W	25
CB-8R	2-1/2"	(6) 1/2" (4) NM Clamps	Old work clips	Thomas & Betts LXWOWC Hubbell Raco 508	Crouse Hinds TP163 EGS Appleton 384OW	25
CB-8BX	2-1/2"	(6) 1/2" (4) BX Clamps	Old work clips	Thomas & Betts LXOWC Hubbell Raco	Crouse Hinds TP179 EGS Appleton 173FHB	25
G602	2-3/4"	(6) 1/2" (2) 1/2"		Thomas & Betts CW1/2 Hubbell Raco 560	Crouse Hinds TP676 EGS Appleton 333	50
G602-3/4	2-3/4"	(6) 3/4" (2) 3/4"		Thomas & Betts CW3/4 Hubbell Raco 565	Crouse Hinds TP678 EGS Appleton 335	50
G602-BX	2-3/4"	MC Cable Clamps		Thomas & Betts CWX Hubbell Raco 570RAC	Crouse Hinds TP668 EGS Appleton 174F	50
G602-R	2-3/4"	NM Cable Clamps		Thomas & Betts CWN25 Hubbell Raco 567	Crouse Hinds TP662 EGS Appleton 389	50
G602-OW	2-3/4"	(6) 1/2" (2) 1/2"	Old work Clips	Extra-deep, old work "cut in" be or device in an existing wall.	ox with ears to add a switch	50
G602-F	2-3/4"	(4) 1/2" (2) 1/2"	Flat Vertical Bracket	Thomas & Betts CWV1/2 Hubbell Raco 562	Crouse Hinds TP680/677 EGS Appleton 333VB	25
G602-FBX	2-3/4"	MC Cable Clamps	Flat Vertical Bracket	Flat vertical bracket with BX cla	amps	25
G602-FR	2-3/4"	NM Cable Clamps	Flat Vertical Bracket	Flat vertical bracket with NM cl	amps	25
		NO 10				_

Switch Boxes



3-1/2" Deep

Boxes & Covers



















Application: These 3-1/2" deep switch boxes are used to support toggle switches, duplex devices, decorative devices and a variety of electrical outlets that require extra box

Advantages: Garvin Industries' extra deep switch boxes allow versatility of wiring design because they are gangable for multiple switches or device installations. Their plaster ears and old work clips allow easy "cut in" when outlets or switches need to be added to existing deep walls.

Field Names: Gem box, switch box, gem dandy, old work switch box, plaster box, conduit box, plaster ear box, steel switch box, deep gem box, deep gem box with bracket.





G603-BX IN USE

G603-R IN USE

Part Number	Box Depth	Knockouts	Special Features	Similar Products		Std. Pkg.
G603	3-1/2"	(6) 1/2" (2) 1/2"		Thomas & Betts CY1/2 Hubbell Raco 590	Crouse Hinds TP252 EGS Appleton 333D	25
G603-3/4	3-1/2"	(6) 3/4" (2) 3/4"		Thomas & Betts CY3/4 Hubbell Raco 591	Crouse Hinds TP254 EGS Appleton 336	25
G603-BX	3-1/2"	MC Cable Clamps		Thomas & Betts CX Hubbell Raco 600	Crouse Hinds TP244 EGS Appleton 175F	25
G603-FBX	3-1/2"	MC Cable Clamps	Flat Vertical Bracket	Thomas & Betts CXV Hubbell Raco 604	Crouse Hinds TP246 EGS Appleton 175FVB	25
G603-R	3-1/2"	NM Cable Clamps		Thomas & Betts CXWOW Hubbell Raco 601	Crouse Hinds TP238 EGS Appleton 384D	25
G603-FR	3-1/2"	NM Cable Clamps	Flat Vertical Bracket	Thomas & Betts CXWV Hubbell Raco 605	Crouse Hinds TP242 EGS Appleton 384DVBPL	25
G603-LE	3-1/2"	(6) 1/2" (2) 1/2"	No Plaster Ears	Thomas & Betts CYLE Hubbell Raco 592	Crouse Hinds TP248 EGS Appleton 333DLE	25
G603-OW	3-1/2"	(6) 1/2" (2) 1/2"	Old work Clips	Old work "cut in" boxes are for in existing deep wall surfaces	or adding switches or devices s.	25

Dual Power Device Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

2-1/2" Deep with Conduit Knockouts







Application: These dual power boxes are used when line voltage and low voltage devices must be mounted in the same location.

Advantages: Garvin Industries' dual power boxes have steel partitions to separate the closed line voltage side from the low voltage device mounted next to it. They ensure there will be no interference between the two circuits. Additionally, their bushed holes ensure low voltage cables will not be damaged on box edges.

Field Names: Low voltage box, dual power box, hybrid low voltage box.

Material: Steel



DPB-2 IN USE

Part Number	Accessories	Description	Std. Pkg.
DPB-2	_	Two gang device box for one power outlet and one low voltage device.	25
DPB-2F	Flat Vertical Bracket	Two gang device box for one power outlet and one low voltage device.	25
DPB-2OW	Old Work Clips & Plaster Ears	Two gang old work "cut in" device box for one power outlet and one low voltage device. Great for power and low voltage combo box needed behind computers, flat screen televisions and other electronic appliances.	25

Identify the Right Wires!

Colored Wire Markers

- No more math calculations
- Avoid "re-pulls" and wasted labor hours
- Ensures your work complies with National Electrical Code (NEC)





2-1/8" Deep with Conduit Knockouts



Application: These multi device switch boxes with conduit knockouts allow electricians to install multiple devices in one box location. A larger wire capacity box can be used for extra deep devices.

Advantages: Garvin Industries' labor saving multiple device ears permit various electrical devices to be installed in one conduit box. The drawn boxes are ideal for exposed locations. The OW boxes can be cut in to existing walls to add multiple electrical or low voltage devices.

Field Names: Switch box, multi-gang switch box, three-gang masonry box, three-gang tile box, 3 gang old work box, 4 gang old work switch box, 4 gang cut in box, 3 gang cut in box, multi gang box with bracket, deep multi gang box.





MGSB-3F IN USE



Part Number	Side Knockouts Bottom Knockouts	Bracket	Other Features	Similar Products or Spec	cial Features	Std. Pkg.
MGSB-2	(4) 1/2", (4) 1/2"-3/4" (4) 1/2", (2) 3/4"			Thomas & Betts Hubbell Raco 683	Crouse Hinds TP395 EGS Appleton 132APSPL	25
MGSB-2OW	(4) 1/2", (4) 1/2"-3/4" (3) 1/2", (2) 3/4"	Plaster Ears	Old Work Clips	Old work "cut in" boxes are us two outlets in existing walls.	sed for adding	25
MGSB-2F	(2) 1/2", (4) 1/2"-3/4" (3) 1/2", (2) 3/4	Flat Vertical		Thomas & Betts Hubbell Raco 681	Crouse Hinds TP391 EGS Appleton 132APFBSPL	25
MGSB-3	(4) 1/2", (6) 1/2"-3/4" (3) 1/2", (2) 3/4"			Thomas & Betts 3G4D1/2 Hubbell Raco	Crouse Hinds EGS Appleton	25
MGSB-3OW	(6) 1/2"-3/4" (3) 1/2", (2) 3/4"	Plaster Ears	Old Work Clips	Old work "cut in" boxes are us three outlets in existing walls.	9	25
MGSB-3F	(2) 1/2", (6) 1/2"-3/4" (3) 1/2", (2) 3/4"	Flat Vertical		Thomas & Betts 3G4D1/2 Hubbell Raco	Crouse Hinds EGS Appleton	20
MGSB-4	(4) 1/2", (8) 1/2"-3/4" (5) 1/2", (3) 3/4"			Thomas & Betts 4G4D1/2 Hubbell Raco	Crouse Hinds EGS Appleton	20
MGSB-4OW	(8) 1/2"-3/4" (5) 1/2", (3) 3/4"	Plaster Ears	Old Work Clips	Old work "cut in" boxes are us four outlets in existing walls.	sed for adding	20
MGSB-4F	(2) 1/2", (8) 1/2"-3/4" (5) 1/2", (3) 3/4"	Flat Vertical		Thomas & Betts 4G4DV1/2 Hubbell Raco	Crouse Hinds EGS Appleton	20
88		Visit www.ga	rvinindustries co	m for blueprints and specification she	ets	



Multi Device Switch Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

2-1/2" & 3-1/2" Deep with Mounting Brackets



TB-425-F





Application: These multi device switch boxes with conduit knockouts are used when multiple devices or outlets are required in one box. These larger capacity boxes are ideal for today's designs where there is a need to install more than two devices at one location.

Advantages: Garvin Industries' multi device switch boxes allow quick mounting of a large capacity deep box when multiple switches, outlets and other electrical and low voltage devices must be terminated in one location.

Field Names: Switch box, multi gang switch box, three-gang masonry box, three-gang tile box, bracketed masonry box, brick box with bracket.

Material: Steel



TB-325-F IN USE

Part Number	No. Of Gangs	Box Depth	Bracket	Side Knockouts Bottom Knockouts	Std. Pkg.
TB-325-F	3	2-1/2"	Flat Vertical	(8) 1/2"-3/4" (6) 1/2"-3/4"	5
TB-335-F	3	3-1/2"	Flat Vertical	(14) 1/2"-3/4" (6) 1/2"-3/4"	5
TB-425-F	4	2-1/2"	Flat Vertical	(10) 1/2"-3/4" (8) 1/2"-3/4"	5
TB-435-F	4	3-1/2"	Flat Vertical	(18) 1/2"-3/4" (8) 1/2"-3/4"	5

End Wall Obstruction Headaches

4" Round "Cut-In" Pan Boxes

- Low profile box no thicker than the DRYWALL!
- Guaranteed to mount in front of plumbing pipes, HVAC Duct & PVC already in the wall opening!
- Add new dome camera, sconce lights, alarms, etc. to any wall

Part #: 56111-OW



See Page 5 for more information!



Go Green on the Jobsite!

Energy Efficient Temporary Work Light

- 105 watt high-output compact fluorescent lamp offers 80% energy savings over traditional metal halide
- Very light-weight-2 lbs.
- Versatile snap hook design easily attaches to many structural members
- Standard box knockouts allows hard wire with pipe or flex cable wiring options
- No ballast in fixture means no replacement costs later to fix a bad ballast
- Gasketed covers and sealed knockouts are great for damp locations
- Premium high visibility "green" powder coating



See Page 371 for more information!

Installs Before or After Wire Pull!

Split Collar Ground Bushings

Installs before or after wire pull (unlike solid bushings)

- · Insulated throat to protect wires
- Extra tight clamp-on design ensures solid ground
- Adjustable lug allows versatile positioning on pipe
- 1/2" 6" sizes available
- Manufactured from rugged die cast zinc
- Patented



See Page 172 for more information!

Proven Remodel Solution

4" Square "Cut-In" Box

- Add NEW devices to existing walls and ceilings
- Easy "Snap-In" clips SAVE time and money
- You gain extra capacity with 3-1/2" depth & 1/2" and 3/4" KO's
- Proven to work with fire alarm, speaker, stobes, etc.

Part #: 52181-OW



See Page 40 for more information!



Masonry Boxes


847-455-0188 FAX 847-455-0334 garvinindustries.com

2-1/2" Deep

TB-325









TB-325-G

Application: These masonry boxes are used for mounting switches, plugs, outlets and other electronic and electrical devices in masonry, brick and block walls. The Gangable versions offer installers the ability to add devices in the field. Use 2-1/2" deep boxes in 4" block walls. Use 3-1/2" deep boxes in 6" or 8" deep walls.

Advantages: Garvin Industries' extra deep design allows for deep devices, numerous wires, switches and other electronic and electrical devices.

Field Names: Tile box, gang box, brick box, masonry box, gangable tile box, gangable masonry box, solid masonry box, solid concrete box.





TB-125 IN USE

TB-325-G ILLUSTRATING EASY GANG ADDITION



TB-325 SOLID BOX

Part Number	No. Of Gangs	Solid or Gangable	Side Knockouts	Bottom Knockouts	Similar Products		Std. Pkg.
TB-125	1	Solid	(6) 1/2"-3/4"	(2) 1/2"-3/4"	Thomas & Betts GW125 Hubbell Raco 690	Crouse Hinds TP682 EGS Appleton M1250	20
TB-125-G	1	Gangable	(6) 1/2"-3/4"	(2) 1/2"-3/4"	Thomas & Betts GW125G Hubbell Raco 688	Crouse Hinds EGS Appleton	20
TB-225	2	Solid	(8) 1/2"-3/4"	(4) 1/2"-3/4"	Thomas & Betts GW225 Hubbell Raco 691	Crouse Hinds TP683 EGS Appleton M2250	10
TB-225-G	2	Gangable	(8) 1/2"-3/4"	(4) 1/2"-3/4"	Thomas & Betts GW225G Hubbell Raco	Crouse Hinds EGS Appleton	10
TB-325	3	Solid	(10) 1/2"-3/4"	(6) 1/2"-3/4"	Thomas & Betts GW325 Hubbell Raco 692	Crouse Hinds TP684 EGS Appleton M3250	10
TB-325-G	3	Gangable	(10) 1/2"-3/4"	(6) 1/2"-3/4"	Thomas & Betts GW325G Hubbell Raco	Crouse Hinds EGS Appleton	10
TB-425	4	Solid	(12) 1/2"-3/4"	(8) 1/2"-3/4"	Thomas & Betts GW425 Hubbell Raco 693	Crouse Hinds TP685 EGS Appleton M4250	5
TB-425-G	4	Gangable	(12) 1/2"-3/4"	(8) 1/2"-3/4"	Thomas & Betts GW425G Hubbell Raco	Crouse Hinds EGS Appleton	5



2-1/2" Deep




Application: These masonry boxes are used for mounting switches, plugs, outlets and other electronic and electrical devices in masonry, brick and block walls. The Gangable versions offer installers the ability to add devices in the field. Use 2-1/2" deep boxes in 4" block walls. Use 3-1/2" deep boxes in 6" or 8" deep walls.

Advantages: Garvin Industries' extra deep design allows for deep devices, numerous wires, switches and other electronic and electrical devices.

Field Names: Tile box, gang box, brick box, masonry box, gangable tile box, gangable masonry box, solid masonry box, solid concrete box.







TB-525 IN USE





Part Number	No. Of Gangs	Solid or Gangable	Side Knockouts	Bottom Knockouts	Similar Products or Spec	ial Features	Std. Pkg.
TB-525	5	Solid	(14) 1/2"-3/4"	(10) 1/2"-3/4"	Thomas & Betts GW525 Hubbell Raco 693	Crouse Hinds TP686 EGS Appleton	5
TB-525-G	5	Gangable	(14) 1/2"-3/4"	(10) 1/2"-3/4"	Thomas & Betts Hubbell Raco 694	Crouse Hinds EGS Appleton	5
TB-625	6	Solid	(16) 1/2"-3/4"	(12) 1/2"-3/4"	Thomas & Betts GW625 Hubbell Raco 960	Crouse Hinds TP687 EGS Appleton	1
TB-625-G	6	Gangable	(16) 1/2"-3/4"	(12) 1/2"-3/4"	Thomas & Betts GW625G Hubbell Raco	Crouse Hinds EGS Appleton	1
TB-725-G	7	Gangable	(18) 1/2"-3/4"	(14) 1/2"-3/4"	For 7 devices or receptacles		1
TB-825-G	8	Gangable	(20) 1/2"-3/4"	(16) 1/2"-3/4"	For 8 devices or receptacles		1
TB-925-G	9	Gangable	(22) 1/2"-3/4"	(18) 1/2"-3/4"	For 9 devices or receptacles		1
TB-1025-G	10	Gangable	(24) 1/2"-3/4"	(20) 1/2"-3/4"0	For 10 devices or receptacles		1



Masonry Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

3-1/2" Deep



Application: These masonry boxes are used for mounting switches, plugs, outlets and other electronic and electrical devices in masonry, brick and block walls. The Gangable versions offer installers the ability to add devices in the field. Use 2-1/2" deep boxes in 4" block walls. Use 3-1/2" deep boxes in 6" or 8" walls.

Advantages: Garvin Industries' extra deep design allows for deep devices, numerous wires, switches and other electronic and electrical devices.

Field Names: Tile box, gang box, brick box, masonry box, gangable tile box, gangable masonry box, solid masonry box, solid concrete box.



TB-135 IN USE




TB-435 IN USE

Part Number	No. Of Gangs	Solid or Gangable	Side Knockouts	Bottom Knockouts	Similar Products or Spe	ecial Features	Std. Pkg.
TB-135	1	Solid	(8) 1/2"-3/4"	(2) 1/2"-3/4"	Thomas & Betts GW135 Hubbell Raco 695	Crouse Hinds TP690 EGS Appleton M1350	20
TB-135-G	1	Gangable	(8) 1/2"-3/4"	(2) 1/2"-3/4"	Thomas & Betts GW135G Hubbell Raco 689	Crouse Hinds EGS Appleton	20
TB-235	2	Solid	(12) 1/2"-3/4"	(4) 1/2"-3/4"	Thomas & Betts GW235 Hubbell Raco 696	Crouse Hinds TP691 EGS Appleton M2350	10
TB-235-G	2	Gangable	(12) 1/2"-3/4"	(4) 1/2"-3/4"	Thomas & Betts GW235G Hubbell Raco	Crouse Hinds EGS Appleton	10
TB-335	3	Solid	(16) 1/2"-3/4"	(6) 1/2"-3/4"	Thomas & Betts GW335 Hubbell Raco 697	Crouse Hinds TP692 EGS Appleton M3350	10
TB-335-G	3	Gangable	(16) 1/2"-3/4"	(6) 1/2"-3/4"	Thomas & Betts GW335G Hubbell Raco	Crouse Hinds EGS Appleton	5
TB-435	4	Solid	(20) 1/2"-3/4"	(8) 1/2"-3/4"	Thomas & Betts GW435 Hubbell Raco 698	Crouse Hinds TP693 EGS Appleton M4350	5
TB-435-G	4	Gangable	(20) 1/2"-3/4"	(8) 1/2"-3/4"	Thomas & Betts GW435G Hubbell Raco	Crouse Hinds EGS Appleton	5



3-1/2" Deep

Boxes & Covers







Application: These masonry boxes are used for mounting switches, plugs, outlets and other electronic and electrical devices in masonry, brick and block walls. The Gangable versions offer installers the ability to add devices in the field. Use 2-1/2" deep boxes in 4" block walls. Use 3-1/2" deep boxes in 6" or 8" walls.


Advantages: Garvin Industries' extra deep design allows for deep devices and numerous wires. The gangable design allows multiple devices, switches and other electronic and electrical devices.

Field Names: Tile box, gang box, brick box, masonry box, gangable tile box, gangable masonry box, solid masonry box, solid concrete box.

Material: Steel



TB-835-G



TB-535 IN USE



TB-735-G



Part Number	No. Of Gangs	Solid or Gangable	Side Knockouts	Bottom Knockouts	Similar Products or Spec	cial Features	Std. Pkg.
TB-535	5	Solid	(24) 1/2"-3/4"	(10) 1/2"-3/4"	Thomas & Betts GW535 Hubbell Raco 699	Crouse Hinds TP694 EGS Appleton	1
TB-535-G	5	Gangable	(24) 1/2"-3/4"	(10) 1/2"-3/4"	Thomas & Betts GW535G Hubbell Raco	Crouse Hinds EGS Appleton	1
TB-635	6	Solid	(28) 1/2"-3/4"	(12) 1/2"-3/4"	Thomas & Betts GW635 Hubbell Raco 965	Crouse Hinds TP695 EGS Appleton	1
TB-635-G	6	Gangable	(28) 1/2"-3/4"	(12) 1/2"-3/4"	Thomas & Betts GW635G Hubbell Raco	Crouse Hinds EGS Appleton	1
TB-735-G	7	Gangable	(32) 1/2"-3/4"	(14) 1/2"-3/4"	For 7 devices or receptacles		1
TB-835-G	8	Gangable	(36) 1/2"-3/4"	(16) 1/2"-3/4"	For 8 devices or receptacles		1
TB-935-G	9	Gangable	(40) 1/2"-3/4"	(18) 1/2"-3/4"	For 9 devices or receptacles		1
TB-1035-G	10	Gangable	(44) 1/2"-3/4"	(20) 1/2"-3/4"	For 10 devices or receptacles		1



Masonry Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

Masonry Box Extension Rings









TRY-525 TRY-625

	107-222	16A-025	
Part Number	Depth	Description	Std. Pkg.
TBX-125	2-1/2"	One gang masonry box extension ring. ½" & ¾" knockouts.	5
TBX-225	2-1/2"	Two gang masonry box extension ring. ½" & ¾" knockouts.	5
TBX-325	2-1/2"	Three gang masonry box extension ring. ½" & ¾" knockouts.	5
TBX-425	2-1/2"	Four gang masonry box extension ring. ½" & ¾" knockouts.	5
TBX-525	2-1/2"	Five gang masonry box extension ring. ½" & ¾" knockouts.	5

Six gang masonry box extension ring. ½" & ¾" knockouts.

Application: Masonry box extension rings are used when additional wiring capacity is required in standard masonry

Advantages: Extension rings create more space for wires, devices and other electrical or electronic devices to be added to a box.

Field Names: Extension rings, extension boxes, masonry box collars, box extenders, box extensions.

Material: Steel




Custom Boxes, Covers & Device Partitions

TBD-250

2-1/2"

TBX-625





They snap into place in one easy step.

Field Names: Tile box partition, masonry box partition, tile box divider, box separator, box divider, box partition.

Material: Plastic

5



TBD-250 IN USE

Description	Similar Products or Spec	ial Features	Std. Pkg.
For 2-1/2" deep masonry boxes	Thomas & Betts PGW25G Hubbell Raco 675	Crouse Hinds TP820 EGS Appleton LVP250	50
For 3-1/2" deep masonry boxes	Thomas & Betts PGW35G Hubbell Raco 676	Crouse Hinds TP821 EGS Appleton LVP350	50
3-1/2" Deep, three gang masonry box, les	ss all holes & knockouts.		10
Duplex cover for three gang masonry box	х.		10
Toggle cover for three gang masonry box	С.		10
	For 2-1/2" deep masonry boxes For 3-1/2" deep masonry boxes 3-1/2" Deep, three gang masonry box, let Duplex cover for three gang masonry box	For 2-1/2" deep masonry boxes Thomas & Betts PGW25G Hubbell Raco 675 For 3-1/2" deep masonry boxes Thomas & Betts PGW35G	For 2-1/2" deep masonry boxes Thomas & Betts PGW25G Hubbell Raco 675 For 3-1/2" deep masonry boxes Thomas & Betts PGW25G Hubbell Raco 675 Thomas & Betts PGW35G Hubbell Raco 676 Crouse Hinds TP820 EGS Appleton LVP250 Crouse Hinds TP821 EGS Appleton LVP350 3-1/2" Deep, three gang masonry box, less all holes & knockouts. Duplex cover for three gang masonry box.


TBD-350



1-5/8" Deep with Conduit Knockouts



GB-1588



Advantages: Garvin Industries' gang boxes save time in installation because there is no need to gang boxes together.

Field Names: Multi-gang box, gang box, multi-gang switch box, multiple device box, extra large junction box, extra long junction box, extra long outlet box.

Material: Steel



(26) 1/2"-3/4"



GB-1583 IN USE

Part Number	No. of Gangs	Side Knockouts	Bottom Knockouts	Similar Products or Sp	ecial Features	Std. Pkg.
GB-1582	2	(12) 1/2"-3/4"	(4) 1/2", (2) 3/4"	Thomas & Betts 2G-1234 Hubbell Raco 951	Crouse Hinds TP629 EGS Appleton 2G5075	25
GB-1583	3	(14) 1/2"-3/4"	(6) 1/2", (4) 3/4"	Thomas & Betts 3G-1234 Hubbell Raco 952	Crouse Hinds TP630 EGS Appleton 3G5075	20
GB-1584	4	(16) 1/2"-3/4"	(6) 1/2", (4) 3/4"	Thomas & Betts 4G-1234 Hubbell Raco 953	Crouse Hinds TP631 EGS Appleton 4G5075	20
GB-1585	5	(18) 1/2"-3/4"	(6) 1/2", (4) 3/4"	Thomas & Betts 5G-1234 Hubbell Raco 954	Crouse Hinds TP640 EGS Appleton 5G5075	10
GB-1586	6	(20) 1/2"-3/4"	(6) 1/2", (4) 3/4"	Thomas & Betts 6G-1234 Hubbell Raco 955	Crouse Hinds TP641 EGS Appleton 6G5075	5
GB-1587	7	(22) 1/2"-3/4"	(6) 1/2", (4) 3/4"	7-gang box with conduit know	ockouts	5
GB-1588	8	(24) 1/2"-3/4"	(6) 1/2", (4) 3/4"	8-gang box with conduit kno	ockouts	5

GB-1589

GB-1589

9-gang box with conduit knockouts

5

(6) 1/2", (4) 3/4"



Multi-Gang **Boxes**

847-455-0188 FAX 847-455-0334 garvinindustries.com

Application: These gang boxes are used when multiple electrical or low voltage devices must be mounted in one

location. They can also be used as large capacity junction

Advantages: Garvin Industries' gang boxes save time in installation because there is no need to gang boxes together. Field Names: Multi-gang box, gang box, multi-gang switch box, multiple device box, extra large junction box, extra long

junction box, extra long outlet box.

Material: Steel

2-1/2" Deep with Conduit Knockouts













Part Number	No. of Gangs	Side Knockouts	Bottom Knockouts	Std. Pkg.
GB-2122	2	(12) 1/2"-3/4"	(4) 1/2", (2) 3/4"	25
GB-2123	3	(14) 1/2"-3/4"	(6) 1/2", (4) 3/4"	20
GB-2124	4	(16) 1/2"-3/4"	(6) 1/2", (4) 3/4"	20
GB-2125	5	(18) 1/2"-3/4"	(6) 1/2", (4) 3/4"	10
GB-2126	6	(20) 1/2"-3/4"	(6) 1/2", (4) 3/4"	5
GB-2127	7	(22) 1/2"-3/4"	(6) 1/2", (4) 3/4"	5
GB-2128	8	(24) 1/2"-3/4"	(6) 1/2", (4) 3/4"	5
GB-2129	9	(26) 1/2"-3/4"	(6) 1/2", (4) 3/4"	5



2-1/2" Deep with 3/4" & 1" Conduit Knockouts









GB-2127341



GB-2126341



Application: These gang boxes are used when multiple electrical or low voltage devices must be mounted in one location. They can also be used as large capacity junction boxes.

Advantages: Garvin Industries' gang boxes save time in installation because there is no need to gang boxes together. Their 3/4" and 1" concentric knockouts allow for large wire capacity.

Field Names: Multi-gang box, gang box, multi-gang switch box, multiple device box, extra large junction box, extra long junction box, extra long outlet box.



GB-2123341 IN USE

Part Number	No. of Gangs	Side Knockouts	Bottom Knockouts	Std. Pkg.
GB-2122341	2	(8) 3/4"-1", (4) 1/2"-3/4"	(4) 1/2", (2) 3/4"	25
GB-2123341	3	(10) 3/4"-1", (4) 1/2"-3/4"	(6) 1/2", (4) 3/4"	20
GB-2124341	4	(12) 3/4"-1", (4) 1/2"-3/4"	(6) 1/2", (4) 3/4"	20
GB-2125341	5	(14) 3/4"-1", (4) 1/2"-3/4"	(6) 1/2", (4) 3/4"	10
GB-2126341	6	(16) 3/4"-1", (4) 1/2"-3/4"	(6) 1/2", (4) 3/4"	5
GB-2127341	7	(18) 3/4"-1", (4) 1/2"-3/4"	(6) 1/2", (4) 3/4"	5
GB-2128341	8	(20) 3/4"-1", (4) 1/2"-3/4"	(6) 1/2", (4) 3/4"	5
GB-2129341	9	(22) 3/4"-1", (4) 1/2"-3/4"	(6) 1/2", (4) 3/4"	5




Multi-Gang Box Extension Rings

when needed.

847-455-0188 FAX 847-455-0334 garvinindustries.com

Application: These gang box extension rings mount to the same length existing box to provide additional wire capacity

1-5/8" Deep with Conduit Knockouts

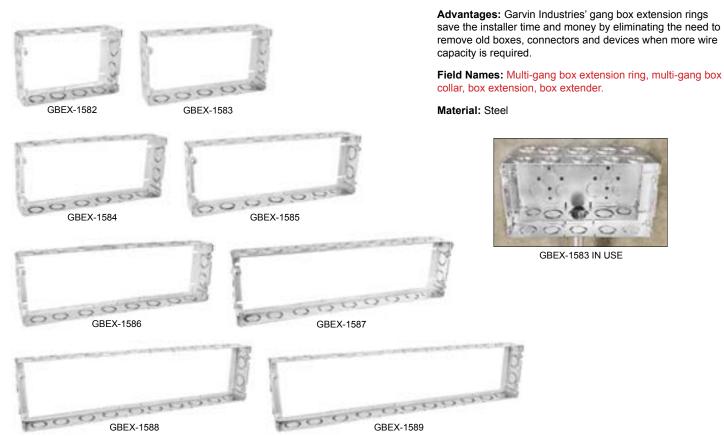

No. of Gangs	Side Knockouts	Std. Pkg.
2	(12) 1/2"-3/4"	25
3	(14) 1/2"-3/4"	20
4	(16) 1/2"-3/4"	20
5	(18) 1/2"-3/4"	10
6	(20) 1/2"-3/4"	5
7	(22) 1/2"-3/4"	5
8	(24) 1/2"-3/4"	5
9	(26) 1/2"-3/4"	5
	Gangs 2 3 4 5 6 7 8	Gangs Knockouts 2 (12) 1/2"-3/4" 3 (14) 1/2"-3/4" 4 (16) 1/2"-3/4" 5 (18) 1/2"-3/4" 6 (20) 1/2"-3/4" 7 (22) 1/2"-3/4" 8 (24) 1/2"-3/4"



2-1/2" Deep with Conduit Knockouts



Application: These gang box extension rings mount to the same length existing box to provide additional wire capacity when needed.

Advantages: Garvin Industries' gang box extension rings save the installer time and money by eliminating the need to remove old boxes, connectors and devices when more wire capacity is required.

Field Names: Multi-gang box extension ring, multi-gang box collar, box extension, box extender.







GBEX-1583 IN USE





Part Number	No. of Gangs	Side Knockouts	Std. Pkg.
GBEX-2122	2	(12) 1/2"-3/4"	25
GBEX-2123	3	(14) 1/2"-3/4"	20
GBEX-2124	4	(16) 1/2"-3/4"	20
GBEX-2125	5	(18) 1/2"-3/4"	10
GBEX-2126	6	(20) 1/2"-3/4"	5
GBEX-2127	7	(22) 1/2"-3/4"	5
GBEX-2128	8	(24) 1/2"-3/4"	5
GBEX-2129	9	(26) 1/2"-3/4"	5




GBDC-124

Multi-Gang Box Raised Device Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

1/2" Raised





covers allow the installer to mount multiple devices in one box location and attach finished wallplates flush with interior drywall plaster or tile surfaces.

Field Names: Multi gang plaster ring, mud ring, tile ring, drywall ring, device ring, device cover, plaster frame.

Material: Steel





GBDC-123 IN USE



GBDC-125

No. of Gangs	Std. Pkg.
2	20
3	20
4	10
5	10
6	5
7	5
8	5
9	5
	2 3 4 5 6 7 8

Multi-Gang Box Raised Device Covers



Boxes & Covers

3/4" Raised



Application: These gang box raised covers are used when multiple electrical or low voltage devices must be installed in finished wall applications. Garvin Industries' gang boxes accept all manufacturers' wallplates. Each cover fits corresponding box size and one box size smaller.

Advantages: Garvin Industries' gang box raised device covers allow the installer to mount multiple devices in one box location and attach finished wallplates flush with interior drywall plaster or tile surfaces.

Field Names: Multi gang plaster ring, mud ring, tile ring, drywall ring, device ring, device cover, plaster frame.



GBDC-343 IN USE






Part Number	No. of Gangs		Similar Products or Special Features		Std. Pkg.
GBDC-342	2		Thomas & Betts 2GC Hubbell Raco 821	Crouse Hinds TP657 EGS Appleton 2GC75	20
GBDC-343	3		Thomas & Betts 3GC Hubbell Raco 822	Crouse Hinds TP653 EGS Appleton 3GC75	20
AMR3	3	ADJUSTABLE DEPTH	1/2" to 1-1/2" telescoping 3 gang inner ring adjusts to finished wall surface for a perfect fit every time.		50
GBDC-344	4		Thomas & Betts 4GC Hubbell Raco 823	Crouse Hinds TP655 EGS Appleton 4GC75	10
GBDC-345	5		Thomas & Betts 5GC Hubbell Raco 824	Crouse Hinds TP661 EGS Appleton	10
GBDC-346	6		Thomas & Betts 6GC Hubbell Raco 825	Crouse Hinds TP667 EGS Appleton 6GC75	5
GBDC-347	7		7-gang device ring raised	3/4"	5
GBDC-348	8		8-gang device ring raised	3/4"	5
GBDC-349	9		9-gang device ring raised	3/4"	5



Multi-Gang Box Flat Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

Blank

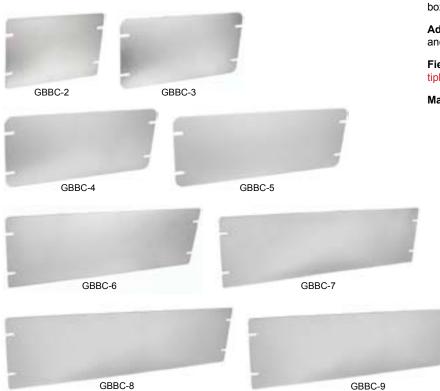

Application: These blank, multi-gang box covers are used to cover electrical wires and connectors inside multi gang boxes.

Advantages: Garvin Industries' flat covers provide a fast and convenient means to cover electrical junction boxes.

Field Names: Gang box cover, multi gang box cover, multiple device cover, gang device cover, blank box cover.



GBBC-3 IN USE

Part Number	No. of Gangs Similar Products or Special Features		Std. Similar Products or Special Features Pkg.	
GBBC-2	2	Thomas & Betts 2GCB Crouse Hinds TP802 Hubbell Raco 844 EGS Appleton	20	
GBBC-3	3	Thomas & Betts 3GCB Crouse Hinds TP803 Hubbell Raco 845 EGS Appleton	20	
GBBC-4	4	Thomas & Betts 4GCB Crouse Hinds TP804 Hubbell Raco 846 EGS Appleton	10	
GBBC-5	5	Thomas & Betts 5GCB Crouse Hinds TP805 Hubbell Raco 847 EGS Appleton	10	
GBBC-6	6	Thomas & Betts 6GCB Crouse Hinds TP806 Hubbell Raco 848 EGS Appleton	5	
GBBC-7	7	Thomas & Betts 7GCB Crouse Hinds Hubbell Raco 849 EGS Appleton	5	
GBBC-8	8	Thomas & Betts 8GCB Crouse Hinds Hubbell Raco 850 EGS Appleton	5	
GBBC-9	9	Thomas & Betts 9GCB Crouse Hinds Hubbell Raco 851 EGS Appleton	5	
	N. 4.		400	

Decorative/GFCI



GBGFI-8





Application: These decorative and GFCI gang box covers are used to attach electrical and low voltage switches, devices and receptacles that require the standard rectangular block style openings.

Advantages: Garvin Industries' flat covers provide a fast and convenient means to cover electrical junction boxes or attach, decorative, and GFCI devices.

Field Names: Gang box cover, multi gang box cover, multiple device cover, gang device cover, duplex cover, GFCI cover, junction box cover.

Material: Steel



GBGFI-3 IN USE

Part Number	No. of Gangs	Std. Pkg.
GBGFI-2	2	5
GBGFI-3	3	5
GBGFI-4	4	5
GBGFI-5	5	5
GBGFI-6	6	1
GBGFI-7	7	1
GBGFI-8	8	1
GBGFI-9	9	1

GBGFI-9



Multi-Gang Box Flat Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

Duplex Device








Application: These duplex device covers are used to conceal electrical wires and connectors inside multi gang boxes. These covers may also be used to attach electrical and low voltage switches, devices and receptacles that require a duplex opening.


Advantages: Garvin Industries' duplex device covers provide a fast and convenient means to cover electrical junction boxes or attach duplex devices.

Field Names: Gang box cover, multi gang box cover, multiple device cover, gang device cover, duplex cover, junction box cover.



GBDUP-3 IN USE





No. of Gangs	Std. Pkg.
2	5
3	5
4	5
5	5
6	1
7	1
8	1
9	1
	Gangs 2 3 4 5 6 7 8



Toggle Switch



Application: These toggle switch covers are used to enclose electrical wires and connectors inside multi-gang boxes and to attach toggle switches.

Advantages: Garvin Industries' toggle switch multi-gang covers provide a fast and convenient means to cover electrical junction boxes and attach toggle switches.

Field Names: Gang box cover, multi gang box cover, multiple device cover, gang device cover, toggle cover, junction box cover, switch cover.



GBTC-3 IN USE



Part Number	No. of Gangs	Similar Products	Std. Pkg.
GBTC-2	2	Thomas & Betts 2GCS	5
GBTC-3	3	Thomas & Betts 3GCS	5
GBTC-4	4	Thomas & Betts 4GCS	5
GBTC-5	5	Thomas & Betts 5GCS	5
GBTC-6	6	Thomas & Betts 6GCS	1
GBTC-7	7	Thomas & Betts 7GCS	1
GBTC-8	8	Thomas & Betts 8GCS	1
GBTC-9	9	Thomas & Betts 9GCS	1

Multi-Gang Box Device Partitions/Dividers

847-455-0188 FAX 847-455-0334 garvinindustries.com

Flat, 1/2" and 3/4" Raised





Application: These multi-gang box partitions/dividers are used to separate low voltage and electrical power devices when they are installed next to each other in a multi gang box.

Advantages: Garvin Industries' flat and raised dividers create a shield between power and low voltage signals that prevents electrical interference and disturbance all the way up to the finished surface.

Field Names: Box partition, box divider, multi gang box separators, box segmenter, junction box divider.

Material: Steel



GBP-15812 IN USE

Part Number	For Box Depth	For Raised Device Cover	Similar Products or S	Special Features	Std. Pkg.
GBP-158-F	1-5/8"	Flat	For flat covers with all device openings		50
GBP-15812	1-5/8"	1/2"	Thomas & Betts SGP Hubbell Raco 974	Crouse Hinds TP876 EGS Appleton	50
GBP-15834	1-5/8"	3/4"	Thomas & Betts SGP Hubbell Raco 974	Crouse Hinds TP876 EGS Appleton	50
GBP-212-F	2-1/2"	Flat	For flat covers with all de	vice openings	50
GBP-21212	2-1/2"	1/2"	Thomas & Betts DGP Hubbell Raco 949	Crouse Hinds TP877 EGS Appleton	50
GBP-21234	2-1/2"	3/4"	Thomas & Betts DGP Hubbell Raco 949	Crouse Hinds TP877 EGS Appleton	50


Money Saving J-Hook Alternative!

"G" Cable Support Hook

Money Saving Alternative to J-Hooks Support Data and Fiber Optic Cables

- · Rugged steel construction
- Wide base supports all cable cat 5e, 6,
 7, and fiber optic per industry standards
- Screws in quickly and easily to a variety of beam clamps and threaded hangers
- Open slot allows wire insertion but won't allow them to spill out like hooks will
- Available Sizes: 1-1/2", 2", & 4" Diameter

Part #: CAT-150, 200 or 400



See Page 285 for more information!

Boxes & Covers



Wire Termination & Box Grounding



Application: These box grounding accessories aid in safe electrical grounding path to help prevent any electrical shock. Grounding screws thread into boxes and provide a means of fastening the ground conductors. Grounding wires fasten into the boxes and are then connected to wiring systems or devices. Grounding clips provide an easy method of fastening grounding conductors to the edges of steel outlet boxes.

Advantages: Garvin Industries' box grounding accessories save time by preventing the installer from having to strip wire and assemble the grounding units in boxes.

Field Names: Ground screw, ground clip, grounding screw, grounding clip, old work clip, pigtail, power pig tails, standard pig tails, grounding jumper, ground wire, insulated ground wire, wire leads, power leads.



PTST14GN IN USE



DTQT IN LIGE


D 1	147	147		0	PTST IN USE	
Part Number	Wire Size	Wire Type	Color	Overall Length	Attachment	Std. Pkg.
GS			Green	3/8"	10-32 Screw	100
GC			Green	1/4"	Clip	100
PTST14GN	14 Gauge	Stranded	Green	8"	Fork Terminal & Captive Screw	100
PTST14BK	14 Gauge	Stranded	Black	8"	Fork & Strip Terminal	100
PTST14WH	14 Gauge	Stranded	White	8"	Fork & Strip Terminal	100
PTST14RD	14 Gauge	Stranded	Red	8"	Fork & Strip Terminal	100
PTST14YE	14 Gauge	Stranded	Yellow	8"	Fork & Strip Terminal	100
PTST12GN	12 Gauge	Stranded	Green	8"	Fork Terminal & Captive Screw	100
PTST12GN-NGS	12 Gauge	Stranded	Green	8"	Fork & Strip Terminal	100
PTST12BK	12 Gauge	Stranded	Black	8"	Fork & Strip Terminal	100
PTST12WH	12 Gauge	Stranded	White	8"	Fork & Strip Terminal	100
PTST12RD	12 Gauge	Stranded	Red	8"	Fork & Strip Terminal	100
PTST12YE	12 Gauge	Stranded	Yellow	8"	Fork & Strip Terminal	100



Box Installation Accessories

847-455-0188 FAX 847-455-0334 garvinindustries.com

Wire Termination & Box Grounding

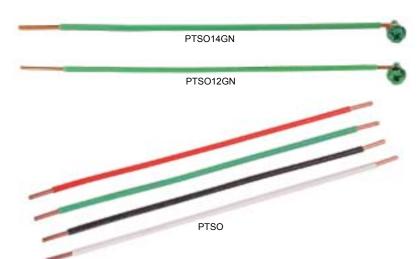

Application: These box grounding accessories aid in safe electrical grounding path to help prevent any electrical shock. Grounding screws thread into boxes and provide a means of fastening the ground conductors. Grounding wires fasten into the boxes and are then connected to wiring systems or devices. Grounding clips provide an easy method of fastening grounding conductors to the edges of steel outlet boxes.

Advantages: Garvin Industries' box grounding accessories save time by preventing the installer from having to strip wire and assemble the grounding units in boxes.

Field Names: Ground screw, ground clip, grounding screw, grounding clip, old work clip, pigtail, power pig tails, standard pig tails, grounding jumper, ground wire, insulated ground wire, wire leads, power leads.

Part Number	Wire Size	Wire Type	Color	Overall Length	Attachment	Std. Pkg.
PTSO14GN	14 Gauge	Solid	Green	8"	Captive Screw &	100
PTSO14BK	14 Gauge	Solid	Black	8"	Strip Strip & Strip	100
PTSO14WH	14 Gauge	Solid	White	8"	Strip & Strip	100
PTSO14RD	14 Gauge	Solid	Red	8"	Strip & Strip	100
PTSO14YE	14 Gauge	Solid	Yellow	8"	Strip & Strip	100
PTSO12GN	12 Gauge	Solid	Green	8"	Captive Screw &	100
PTSO12BK	12 Gauge	Solid	Black	8"	Strip Strip & Strip	100
PTSO12WH	12 Gauge	Solid	White	8"	Strip & Strip	100
PTSO12RD	12 Gauge	Solid	Red	8"	Strip & Strip	100
PTSO12YE	12 Gauge	Solid	Yellow	8"	Strip & Strip	100

Surface Mount Fire Alarm Box!

5-1/2" Square with Slots for Various Mounting Provisions

Classic Design! High Visibility!

- 97.5 cubic inch wire capacity and raised ground provision
- Great for extra deep devices, horns, strobes, speakers, etc.
- Attractive, smooth powder coated red finish
- Versatile knockouts for 1/2" or 3/4" conduit
- Accommodates most standard hangers and straps
- Rugged steel construction withstands the harshest commercial or residential setting




See Page 71 for more information!



Push In "Quick" Wiring Connectors



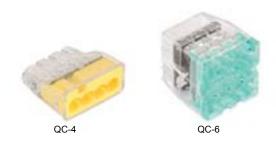


Application: These push in "quick" wiring nut connectors are used to connect wire pigtail leads on devices to supply wires and cables in electrical junction boxes.

Advantages: Garvin Industries' push in design allows stranded and solid copper wires to be quickly connected to other conductors without the hassle of taping and laborwasting, screw-on wire connectors.

Field Names: quick connectors, push on connectors, wire nut connectors.

Material: Plastic



QC-3 IN USE

Part Number	No. of Ports	Solid Wire Range	Stranded Wire Range	Std. Pkg.
QC-1	2	12-20 AWG	12-16 AWG	100
QC-2	2	12-20 AWG	12-16 AWG	100
QC-3	3	12-20 AWG	12-16 AWG	100
QC-4	4	12-20 AWG	12-16 AWG	100
QC-6	6	12-20 AWG	12-16 AWG	100

Speedy Bonding & Grounding!

Copper and Aluminum Terminal Lugs

Open Lay In Lug Speeds Wire Connection!

- . Available in sizes up to 250 MCM-6
- . Copper or Aluminum versions available
- . Open tay in lug for easy wire insertion
- Great for use in load centers, terminal boxes or enclosures
- . Helps maintain code compliance
- . In stock! On time!



See Page 198 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

Switch Box Accessories





Application: Old work clips are mounted to boxes with ears to securely install boxes in hollow walls. Switch box supports secure a switch box to drywall, plaster or tile when an upright structural member cannot be used for mounting. Extension rings are added to switch boxes for additional wiring capac-

Advantages: Garvin Industries' switch box accessories make mounting and securing of switch boxes easy and quick.

Field Names: Box clips, battleships, madison hangers, switch box supports, switch box extension rings, switch box battleships, box cleats, bracket set, hold it switch box supports, ice skates, madison clips, monkey bars, rabbit ears, steamboats, two men in a boat, f straps, jiffy clip box support.

Material: Steel





Insert supports.

Bend support tabs. SBS INSTALLATION




SBEX IN USE


Part Number	Description	Similar Products or Spo	ecial Features	Std. Pkg.
OWC	Old work clip snaps on edges of boxes with ears and bites down on drywall to securely mount boxes in existing hollow walls.	Thomas & Betts OWC Hubbell Raco 969	Crouse Hinds TP651 EGS Appleton 892	100
OWE	Old work box plaster ears catch on wall surfaces and prevent boxes from falling in finished walls.	Old work ears can be screw	ed on any box.	100
SBS	Old work switch box supports mount boxes in hollow wall, 1-7/8" long legs	Thomas & Betts 820D Hubbell Raco 977 or 8977	Crouse Hinds TP708 EGS Appleton 896	100 (pairs)
SBS-L	Old work switch box supports, with 2-1/2" long legs, to mount box in hollow wall when drywall, plaster or tile are very thick.	Extra long legs for thick finis	shed wall surface.	100 (Pairs)
SBEX	Switch box extension ring adds depth to existing boxes. Telescoping design adjusts to proper wall depth.	Thomas & Betts SBEX Hubbell Raco 976	Crouse Hinds TP709 EGS Appleton 1490	50



Cable Protection Plates



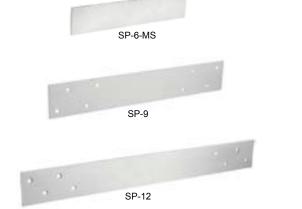



Advantages: Garvin Industries' cable protection plates provide a greater area of protection. These plates are pregalvanized for added corrosion protection. Metal stud plates "MS" have a peel and stick hands free install.

Field Names: Stud plates, safety plates, nail plates, cable plates, wire protectors, boca plates.

Material: Steel





SP-3 IN USE

SP-3-MS IN USE



Part Number	Description	Similar Products or S	Special Features	Std. Pkg.
SP-3	3" long steel cable protection plate with wood spike for easy hammer on installation on wood studs.	Thomas & Betts CP1 Hubbell Raco 2709	Crouse Hinds TP659 EGS Appleton	100
SP-3-MS	3" long steel cable protection plate with "peel and stick" adhesive backing for application on metal studs	For metal studs. No tools in place.	required! Just peel and stick	100
SP-6	6" long steel cable protection plate with wood spike for easy hammer on installation	Thomas & Betts CP6 Hubbell Raco	Crouse Hinds EGS Appleton	50
SP-6-MS	6" long steel cable protection plate with peel and stick adhesive backing for application on metal studs	For metal studs. No tools	required! Just peel & stick in place	. 50
SP-9	9" long steel cable protection plate	Protects multiple cables i	n a 9" area of the stud wall.	50
SP-12	12" long steel cable protection plate	Protects multiple cables i	n a 12" area of the stud wall.	50
SP-18	18" long steel cable protection plate	Protects multiple cables i	n a 18" area of the stud wall.	50
SP-24	24" long steel cable protection plate	Protects multiple cables i	n a 24" area of the stud wall.	50

847-455-0188 FAX 847-455-0334 garvinindustries.com

Wire & Device **Protection Plates**

















MGMR2





Application: These protection plates snap right in to device rings to protect wires in boxes or mount directly over devices to protect them while drywall plaster or tile are being

Advantages: Garvin Industries' wire and device protection plates protects wires in boxes from drywall routers, paint, plaster, dust and other debris. Models WPPDUP & WPPTOG slide off device without the need to remove device screws.

Field Names: Protection plates, device protection plates, wire protection plates.

Material: Steel

WPP1 WIRE PROTECTOR INSTALLATION





Exposed wires.

Install WPP1.




Wires are protected.

Part Number	Material	Special Features	Std. Pkg.
WPP1	Steel	Snaps into one gang steel plaster rings to cover wires.	50
WPPDUP	Steel	Covers duplex and decorative devices that are preinstalled on plaster rings during drywall and painting. Slides off device quickly and easily when ready for final trim plate.	50
WPPTOG	Steel	Covers toggle switches and other deep devices that are preinstalled on plaster rings during drywall and painting. Slides off device quickly and easily when ready for final trim plate.	50
MGMR1	Steel	Snaps in 1 gang steel plaster rings.	50
MGMR2	Steel	Snaps in 2 gang steel plaster rings.	50
MGMR0	Steel	Snaps in square to round raised rings.	50
MGR0	Steel	Snaps in round plastic or octagon boxes.	50
MGR1	Steel	Snaps in plastic one gang boxes.	50
MGR2	Steel	Snaps in plastic two gang boxes.	50
MGR3	Steel	Snaps in plastic three gang boxes.	50
MGR4	Steel	Snaps in plastic four gang boxes.	50



Mounting Brackets

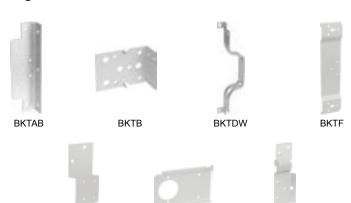

BKTJ

Application: These brackets are welded or riveted to electrical boxes to quickly mount boxes to wall and ceiling structural members.

Advantages: Garvin Industries' brackets allow boxes to be hammered or screwed on to building structural member quickly and easily.

Field Names: Wood bracket, metal stud bracket, J-bracket, ceiling fan bracket, flat vertical bracket, B bracket, J bracket.

Material: Steel

Part Number	Description	Similar Products or Sp	ecial Features	Std. Pkg.
BKTAB	Face or side mount on front edge of stud	Thomas & Betts "T" Hubbell Raco "A" or "B"	Crouse Hinds EGS Appleton	50
ВКТВ	Face mount on front edge of stud	Thomas & Betts "S" or "B" Hubbell Raco "LB"	Crouse Hinds "F" EGS Appleton	50
BKTDW	Face mount, positions box away from stud	Thomas & Betts "DV" Hubbell Raco "W"	Crouse Hinds EGS Appleton	50
BKTF	Side mount on stud, flat vertical	Thomas & Betts "CV" Hubbell Raco "FM"	Crouse Hinds "VS" EGS Appleton	50
BKTFAN	Side mount to ceiling joist, heavy-duty steel	Thomas & Betts "CFB" Hubbell Raco "FA"	Crouse Hinds EGS Appleton	50
BKTJ	Side mount to ceiling joist, hammer-on wood spike	Thomas & Betts "L" Hubbell Raco "J"	Crouse Hinds "C" EGS Appleton	50
BKTWB	Side mount with wood spike	Thomas & Betts "SV" Hubbell Raco "FH"	Crouse Hinds "VP" EGS Appleton	50

BKTWB

Custom Manufactured Solutions!

BKTFAN

We Specialize in Unique Custom Solutions!

Send Us Your Product Idea, Sketch, Blueprint or Sample and Let Our Engineers Develop a Solution That is Right for You!

- · Metal stamping and fabrication
- · Die casting and machining
- Drilling, tapping, threading, bending, and prefab assemblies
- Full line prefab services
- · Patent and royalty agreements
- Stocking programs available for qualifying products





847-455-0188 FAX 847-455-0334 garvinindustries.com

Knockout Seals (Screw/Bar Type)






KOS-200VT (FOR CHICAGO AIR PLENUM)

Application: These screw/bar type knockout seals are inserted in discontinued open box knockouts to protect exposed wires. They are used in standard, air tight or dust tight applications when they have a gasket.

Advantages: Garvin Industries' one piece pre assembled screw and backer bar slides on open knockout holes without removing box devices or covers.

Field Names: Closure plugs, knockout plug, knockout seal, KO seal, knockout filler.

Material: Steel



KOS-50 IN USE



KOS-50VT IN USE

Part Number	Knockout Size	Preinstalled Gasket?		Std. Pkg.
KOS-50	1/2"	No		100
KOS-50-VT	1/2"	Yes	"Chicago Plenum"	10
KOS-75	3/4"	No		100
KOS-75-VT	3/4"	Yes	"Chicago Plenum"	10
KOS-100	1"	No		50
KOS-100-VT	1"	Yes	"Chicago Plenum"	10
KOS-125	1-1/4"	No		10
KOS-125-VT	1-1/4"	Yes	"Chicago Plenum"	5
KOS-150	1-1/2"	No		10
KOS-150-VT	1-1/2"	Yes	"Chicago Plenum"	5
KOS-200	2"	No		10
KOS-200-VT	2"	Yes	"Chicago Plenum"	5
KOS-250	2-1/2"	No		10
KOS-250-VT	2-1/2"	Yes	"Chicago Plenum"	5
KOS-300	3"	No		10
KOS-300-VT	3"	Yes	"Chicago Plenum"	5
KOS-350	3-1/2"	No		10
KOS-350-VT	3-1/2"	Yes	"Chicago Plenum"	5
KOS-400	4"	No		10
KOS-400-VT	4"	Yes	"Chicago Plenum"	5
KOS-500	5"	No		10
KOS-500-VT	5"	Yes	"Chicago Plenum"	5
KOS-600	6"	No		10
KOS-600-VT	6"	Yes	"Chicago Plenum"	5



Knockout Seals (Snap in Style)



SNAP-200

Part Number	Size Knockout	Std. Pkg.
SNAP50	1/2"	100
SNAP75	3/4"	100
SNAP100	1"	50
SNAP125	1-1/4"	50
SNAP150	1-1/2"	25
SNAP200	2"	25

Application: These snap in style knockout seals are inserted in discontinued open box knockouts to protect exposed wires.

Advantages: Garvin Industries' snap in knockout seals, close and secure open knockout holes without removing box devices or covers.

Field Names: Closure plugs, knockout plug, knockout seal, KO seal, knockout filler, snap in plugs, snap in KO seal.

Material: Steel



SNAP-50 IN USE

Old Box Ear Tab **Conversion Clips**



Application: These old box ear tab conversion clips mount on boxes in existing walls. They convert the ear tabs on old style boxes to accept all manufacturers current plaster rings and covers.

Advantages: Garvin Industries' conversion clips save countless labor hours by converting old boxes. They eliminate the need to tear out old boxes, rewire, pipe, and install new devices. Additionally, they convert ear tabs in seconds.

Field Names: Box ear converters, box ear tab converters.

Material: Steel



CONVERSION CLIPS ON OLD BOX



NOW EARS ACCEPT RINGS

Std. Part Number Description Pkg. 100

EC

Steel tabs that mount on old style junction boxes and extend new ear tabs out so they can accept all styles of covers and plaster rings. They eliminate the need to remove old boxes from existing walls.

Pair



847-455-0188 FAX 847-455-0334 garvinindustries.com

Reducing Washers




Application: These reducing washers are used when connectors are smaller than the knockout hole they are intended to fill in a box or enclosure.

Advantages: Garvin Industries' all-steel construction ensures a strong, secure and durable installation of connector and conduit to the box or enclosure.

Field Names: Reducing washers, donut washers, doughnut washers.





RW-7550 IN USE

Part	Reduces Kno	ckout Hole			Std.
Number	From	То	Similar Products		Pkg
RW-7550	3/4"	1/2"	Metallics JR100 Cully 33400	Crouse Hinds 342 Raco 1365	100
RW-10050	1"	1/2"	Metallics JR101 Cully 33402	Crouse Hinds 343 Raco 1366	100
RW-10075	1"	3/4"	Metallics JR102 Cully 33404	Crouse Hinds 344 Raco 1367	100
RW-12550	1-1/4"	1/2"	Metallics JR103 Cully 33406	Crouse Hinds 345 Raco 1368	50
RW-12575	1-1/4"	3/4"	Metallics JR104 Cully 33408	Crouse Hinds 346 Raco 1369	50
RW-125100	1-1/4"	1"	Metallics JR105 Cully 33410	Crouse Hinds 347 Raco 1370	50
RW-15050	1-1/2"	1/2"	Metallics JR106 Cully 33412	Crouse Hinds 348 Raco 1371	50
RW-15075	1-1/2"	3/4"	Metallics JR107 Cully 33414	Crouse Hinds 349 Raco 1372	50
RW-150100	1-1/2"	1"	Metallics JR108 Cully 33416	Crouse Hinds 350S Raco 1373	50
RW-150125	1-1/2"	1-1/4"	Metallics JR109 Cully 33418	Crouse Hinds 351 Raco 1374	50



Reducing Washers



Application: These reducing washers are used when connectors are smaller than the knockout hole they are intended to fill in a box or enclosure.

Advantages: Garvin Industries' all-steel construction ensures a strong, secure and durable installation of connector and conduit to the box or enclosure.

Field Names: Reducing washers, donut washers, doughnut

Material: Zinc Plated Steel

Part	Reduces Kno	ckout Hole			Std.
Number	From	То	Similar Products		Pkg.
RW-20050	2"	1/2"	Metallics JR110 Hubbell Raco 1375	Crouse Hinds 352 Cully 33420	50
RW-20075	2"	3/4"	Metallics JR111 Hubbell Raco 1376	Crouse Hinds 353 Cully 33422	50
RW-200100	2"	1"	Metallics JR112 Hubbell Raco 1377	Crouse Hinds 354 Cully 33424	50
RW-200125	2"	1-1/4"	Metallics JR113 Hubbell Raco 1378	Crouse Hinds 355 Cully 33426	50
RW-200150	2"	1-1/2"	Metallics JR114 Hubbell Raco 1379	Crouse Hinds 356 Cully 33428	50
RW-25050	2-1/2"	1/2"	Metallics Hubbell Raco	Crouse Hinds 360 Cully	50
RW-25075	2-1/2"	3/4"	Metallics JR115 Hubbell Raco	Crouse Hinds 361 Cully	50
RW-250100	2-1/2"	1"	Metallics JR116 Hubbell Raco 1380	Crouse Hinds 362 Cully 33432	50
RW-250125	2-1/2"	1-1/4"	Metallics JR117 Hubbell Raco 1381	Crouse Hinds 363 Cully 33432	50
RW-250150	2-1/2"	1-1/2"	Metallics JR118 Hubbell Raco 1382	Crouse Hinds 364 Cully 33434	50
RW-250200	2-1/2"	2"	Metallics JR19 Hubbell Raco 1383	Crouse Hinds 365 Cully 33436	50

Pipe Protection Solution!

EMT & Rigid Pipe Protection Caps

Steel Cap Has Set Screw that Locks In Place and Prevents Vandalism and Destruction of Raceway

- Welded one piece construction seals out rocks, dirt, debris and water
- Set screw locks it in place and keeps vandals at bay
- Styles available for EMT and Rigid conduit
- Easy to remove when wire pull begins
- Will not distort threads on conduit
- · Corrosion resistant galvanized steel



See Page 144 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

Reducing Washers




Application: These reducing washers are used when connectors are smaller than the knockout hole they are intended to fill in a box or enclosure.

Advantages: Garvin Industries' all-steel construction ensures a strong, secure and durable installation of connector and conduit to the box or enclosure.

Field Names: Reducing washers, donut washers, doughnut washers.





RW-7550 IN USE

Part	Reduces Kn	ockout Hole			Std.
Number	From	То	Similar Products		Pkg.
RW-30050	3"	1/2"	Metallics Raco	Crouse Hinds Cully	25
RW-30075	3"	3/4"	Metallics Raco	Crouse Hinds Cully	25
RW-300100	3"	1"	Metallics Raco	Crouse Hinds 366 Cully 33438	25
RW-300125	3"	1-1/4"	Metallics Raco 1384	Crouse Hinds 367 Cully	25
RW-300150	3"	1-1/2"	Metallics Raco 1385	Crouse Hinds 368 Cully 33440	25
RW-300200	3"	2"	Metallics JR120 Raco 1386	Crouse Hinds 369 Cully 33441	25
RW-300250	3"	2-1/2"	Metallics Raco 1387	Crouse Hinds 370S Cully 33443	25
RW-35050	3-1/2"	1/2"	Metallics Raco	Crouse Hinds Cully	25
RW-35075	3-1/2"	3/4"	Metallics Raco	Crouse Hinds Cully	25
RW-350100	3-1/2"	1"	Metallics Raco	Crouse Hinds Cully	25
RW-350125	3-1/2"	1-1/4"	Metallics Raco	Crouse Hinds Cully	25
RW-350150	3-1/2"	1-1/2"	Metallics Raco	Crouse Hinds Cully 33442	25
RW-350200	3-1/2"	2"	Metallics JR121 Raco 1389	Crouse Hinds 372 Cully 33444	25
RW-350250	3-1/2"	2-1/2"	Metallics Raco 1389	Crouse Hinds 373 Cully 34446	25
RW-350300	3-1/2"	3"	Metallics Raco 1391	Crouse Hinds 374 Cully 33448	25



Reducing Washers



Application: These reducing washers are used when connectors are smaller than the knockout hole they are intended to fill in a box or enclosure.

Advantages: Garvin Industries' all-steel construction ensures a strong, secure and durable installation of connector and conduit to the box or enclosure.

Field Names: Reducing washers, donut washers, doughnut washers.

washers.

Material: Zinc Plated Steel

Part Number	Reduces Kno From	ckout Hole To	Similar Products		Std. Pkg.
RW-40050	4"	1/2"	Metallics Raco	Crouse Hinds Cully	10
RW-40075	4"	3/4"	Metallics Raco	Crouse Hinds Cully	10
RW-400100	4"	1"	Metallics Raco	Crouse Hinds Cully	10
RW-400125	4"	1-1/4"	Metallics Raco	Crouse Hinds Cully	10
RW-400150	4"	1-1/2"	Metallics Raco	Crouse Hinds Cully	10
RW-400200	4"	2"	Metallics Raco 1392	Crouse Hinds 375 Cully 33450	10
RW-400250	4"	2-1/2"	Metallics Raco 1393	Crouse Hinds 376 Cully 33452	10
RW-400300	4"	3"	Metallics Raco 1394	Crouse Hinds 377 Cully 33454	10
RW-400350	4"	3-1/2"	Metallics Raco	Crouse Hinds 378 Cully 33456	10

Caulk, Putty, Collars, Sleeves, & Inserts Garvin Manufactures Solutions for All Your Fire Stop Challenges! • Fire stop collars available in 1" 2", 3", and 4" pipe sizes • Putty sticks and pads surround box opening • Caulk seals penetrations in stud walls, ceilings, and floors. See Page 377 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

Knockout Insulating Bushings





Part Number	Fits Knockout Opening	Material	Std. Pkg.
KOBR-50	1/2"	Rubber	50
KOB-50	1/2"	Plastic	50
KOB-75	3/4"	Plastic	50
KOB-100	1"	Plastic	50


Application: These knockout bushings are made from smooth plastic and snap in to knockout openings. This allows low voltage wires and cables to be run to devices inside boxes or enclosures.

Advantages: Garvin Industries' labor saving snap in design does not require any special tools for installation. They lock in place on the knockout openings so wires can be pulled through the opening without loosening the bushing. Their smooth surface protects wires from the sharp edges on boxes or enclosures. They can be used on boxes in dropped ceilings or interior walls.

Field Names: Knockout bushing, knock out bushings, knockout filler, wire bushing, knockout insert.

Material: Plastic





KOBR-50 IN USE

KOB-50 IN USE

Installs Before or After Wire Pull!

Split Collar Ground Bushings

Installs before or after wire pull (unlike solid bushings)

- · Insulated throat to protect wires
- Extra tight clamp-on design ensures solid ground
- Adjustable lug allows versatile positioning on pipe
- 1/2" 6" sizes available
- Manufactured from rugged die cast zinc
- Patented



See Page 172 for more information!



Set Screw Connectors (Uninsulated)





Application: These uninsulated electrical connectors are used in dry locations to bond EMT thinwall conduits to electrical junction boxes or enclosures. Garvin Industries' uninsulated, steel set-screw connectors provide concrete-tight connections when taped and properly secured with the included locknut. They are rated for electrical applications above 600 volts

Advantages: Garvin Industries' heavy-gauge steel construction maintains mechanical protection and solid grounding of the conduit to the designated electrical junction box or enclosure. Set-screw connectors are made with a versatile combination head screw that can securely fasten a conduit to an electrical junction box using a slotted, Phillips, or Robertson head screw driver. Set-screw connectors are also zinc electroplated for excellent corrosion protection.

Field Names: Set-screw connectors, electrical connector, EMT thinwall conduit connector, conduit connector, electrical fittings, set-screw fittings, steel connectors, steel set-screw connectors, steel EMT fitting, steel EMT connector, steel EMT SS connector, steel set-screw thinwall connector.



SSCN-50 IN USE

			00014-30 IIV 00L	
Part Number	Size	Similar Products		Std. Pkg.
SSCN-50	1/2"	Thomas & Betts TC121A Hubbell Raco 2002	Crouse Hinds 450S EGS Appleton 4050S	50
SSCN-75	3/4"	Thomas & Betts TC122A Hubbell Raco 2003	Crouse Hinds 451 EGS Appleton 4075S	50
SSCN-100	1"	Thomas & Betts TC123A Hubbell Raco 2004	Crouse Hinds 452 EGS Appleton 4100S	25
SSCN-125	1-1/4"	Thomas & Betts TC124A Hubbell Raco 2005	Crouse Hinds 453 EGS Appleton 4125S	25
SSCN-150	1-1/2"	Thomas & Betts TC125A Hubbell Raco 2006	Crouse Hinds 454 EGS Appleton 4150S	25
SSCN-200	2"	Thomas & Betts TC126A Hubbell Raco 2008	Crouse Hinds 455 EGS Appleton 4200S	10
SSCN-250	2-1/2"	Thomas & Betts TC127A Hubbell Raco 2140	Crouse Hinds 456 EGS Appleton 4250S	10
SSCN-300	3"	Thomas & Betts TC128A Hubbell Raco 2142	Crouse Hinds 457 EGS Appleton 4300S	5
SSCN-350	3-1/2"	Thomas & Betts TC129A Hubbell Raco 2144	Crouse Hinds 458 EGS Appleton 4350S	5
SSCN-400	4"	Thomas & Betts TC1210A Hubbell Raco 2146	Crouse Hinds 459 EGS Appleton 4400S	5



847-455-0188 FAX 847-455-0334 garvinindustries.com

Set Screw Connectors (Insulated)





Application: These insulated electrical connectors are used in dry locations to bond EMT thinwall conduits to electrical junction boxes or enclosures. Garvin Industries' insulated, steel set-screw connectors provide concrete-tight connections when taped and properly secured with the included locknut. They are rated for electrical applications above 600 volts

Advantages: Garvin Industries' heavy-gauge steel construction maintains mechanical protection and solid grounding of the conduit to the designated electrical junction box or enclosure. Set-screw connectors are made with a versatile combination head screw that can securely fasten a conduit to an electrical junction box using a slotted, Phillips, or Robertson head screw driver. Set-screw connectors are zinc electroplated for excellent corrosion protection in damp locations. The plastic throat liner ensures that electrical wires and conductors do not get nicked or skinned by sharp metal edges.

Field Names: Insulated set-screw connectors, electrical connector, EMT thinwall conduit connector, conduit connector, electrical fittings, set-screw fittings, insulated steel SS connector, insulated steel EMT connector, insulated steel connector, insulated thinwall connectors.



SSCN-75I IN USE

			00011101111002	
Part Number	Size	Similar Products		Std. Pkg.
SSCN-50I	1/2"	Thomas & Betts TC721A Hubbell Raco 2122	Crouse Hinds 1450 EGS Appleton 4050ST	50
SSCN-75I	3/4"	Thomas & Betts TC722A Hubbell Raco 2123	Crouse Hinds 1451 EGS Appleton 4075ST	50
SSCN-100I	1"	Thomas & Betts TC723A Hubbell Raco 2124	Crouse Hinds 1452 EGS Appleton 4100ST	25
SSCN-125I	1-1/4"	Thomas & Betts TC724A Hubbell Raco 2125	Crouse Hinds 1453 EGS Appleton 4125ST	25
SSCN-150I	1-1/2"	Thomas & Betts TC725A Hubbell Raco 2126	Crouse Hinds 1454 EGS Appleton 4150ST	25
SSCN-200I	2"	Thomas & Betts TC726A Hubbell Raco 2128	Crouse Hinds 1455 EGS Appleton 4200ST	10
SSCN-250I	2-1/2"	Thomas & Betts TC727A Hubbell Raco 2160	Crouse Hinds 1456 EGS Appleton 4250ST	10
SSCN-300I	3"	Thomas & Betts TC728A Hubbell Raco 2162RAC	Crouse Hinds 1457 EGS Appleton 4300ST	5
SSCN-350I	3-1/2"	Thomas & Betts TC729A Hubbell Raco 2164	Crouse Hinds 1458 EGS Appleton 4350ST	5
SSCN-400I	4"	Thomas & Betts TC7210A Hubbell Raco 2166	Crouse Hinds 1459 EGS Appleton 4400ST	5



Set Screw Couplings





Application: These electrical couplings are used in dry locations to connect the ends of two EMT thinwall conduits together to extend the raceway. Garvin Industries' steel, setscrew couplings provide concrete-tight connections when taped and properly secured with the included set-screws. These steel set-screw couplings are rated for electrical applications above 600 volts.

Advantages: Garvin Industries' heavy-gauge steel construction maintains mechanical protection and solid grounding of one conduit to another. Set-screw couplings are made with a versatile combination head screw that can securely fasten one conduit to another using a slotted, Phillips, or Robertson head screw driver. Set-screw couplings are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Set-screw couplings, electrical coupling, EMT thinwall conduit coupling, conduit coupling, electrical fittings, set-screw fittings, steel set-screw couplings, steel set-screw EMT couplings, steel EMT couplings, steel set-screw thinwall couplings.



SSCP-75 IN USE

Part Number	Size	Similar Products	Std. Pkg.
SSCP-50	1/2"	Thomas & Betts TK121A Crouse Hinds 460 Hubbell Raco 2022 EGS Appleton 5050S	50
SSCP-75	3/4"	Thomas & Betts TK122A Crouse Hinds 461 Hubbell Raco 2023 EGS Appleton 5075S	50
SSCP-100	1"	Thomas & Betts TK123A Crouse Hinds 462 Hubbell Raco 2024 EGS Appleton 5100S	25
SSCP-125	1-1/4"	Thomas & Betts TK124A Crouse Hinds 463 Hubbell Raco 2025 EGS Appleton 5125S	25
SSCP-150	1-1/2"	Thomas & Betts TK125A Crouse Hinds 464 Hubbell Raco 2026 EGS Appleton 5150S	25
SSCP-200	2"	Thomas & Betts TK126A Crouse Hinds 465 Hubbell Raco 2028 EGS Appleton 5200S	10
SSCP-250	2-1/2"	Thomas & Betts TK127A Crouse Hinds 466 Hubbell Raco 2150 EGS Appleton 5250S	10
SSCP-300	3"	Thomas & Betts TK128A Crouse Hinds 467 Hubbell Raco 2152 EGS Appleton 5300S	5
SSCP-350	3-1/2"	Thomas & Betts TK129A Crouse Hinds 468 Hubbell Raco 2154 EGS Appleton 5350S	5
SSCP-400	4"	Thomas & Betts TK1210A Crouse Hinds 469 Hubbell Raco 2156 EGS Appleton 5400S	5



847-455-0188 FAX 847-455-0334 garvinindustries.com

Compression Connectors (Uninsulated)



Application: These uninsulated compression connectors are used to bond EMT thinwall conduits to electrical junction boxes or enclosures. Garvin Industries' uninsulated, steel compression connectors provide concrete-tight connections when taped, and are rated for electrical applications above 600 volts.

Advantages: Garvin Industries' heavy-gauge steel construction maintains mechanical protection and solid grounding of the conduit to the designated electrical junction box or enclosure. Garvin Industries' labor-saving design allows the electrician to quickly tighten these connectors on EMT conduits. Compression connectors are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Compression connectors, electrical connector, EMT thinwall conduit connector, conduit connector, electrical fittings, compression fittings, steel thinwall compression connectors, steel EMT compression connectors, steel compression connectors, steel EMT connectors.



CCN-75 IN USE

Part Number	Size	Similar Products		Std. Pkg.
CCN-50	1/2"	Thomas & Betts TC11A Hubbell Raco 2902	Crouse Hinds 650S EGS Appleton 7050S	50
CCN-75	3/4"	Thomas & Betts TC12A Hubbell Raco 2903	Crouse Hinds 651S EGS Appleton 7075S	50
CCN-100	1"	Thomas & Betts TC13A Hubbell Raco 2904	Crouse Hinds 652 EGS Appleton 7100S	25
CCN-125	1-1/4"	Thomas & Betts TC14A Hubbell Raco 2905	Crouse Hinds 653 EGS Appleton 7125S	25
CCN-150	1-1/2"	Thomas & Betts TC15A Hubbell Raco 2906	Crouse Hinds 654 EGS Appleton 7150S	25
CCN-200	2"	Thomas & Betts TC16A Hubbell Raco 2908	Crouse Hinds 655 EGS Appleton 7200S	10
CCN-250	2-1/2"	Thomas & Betts TC17A Hubbell Raco 2940	Crouse Hinds 656 EGS Appleton 7250S	10
CCN-300	3"	Thomas & Betts TC18A Hubbell Raco 2942	Crouse Hinds 657 EGS Appleton 7300S	5
CCN-350	3-1/2"	Thomas & Betts TC19A Hubbell Raco 2944	Crouse Hinds 658 EGS Appleton 7350S	5
CCN-400	4"	Thomas & Betts TC110A Hubbell Raco 2946	Crouse Hinds 659 EGS Appleton 7400S	5



Compression Connectors (Insulated)



Application: These insulated compression connectors are used to bond EMT thinwall conduits to electrical junction boxes or enclosures. Garvin Industries' insulated steel compression connectors provide concrete-tight connections when taped and are rated for electrical applications above 600 volts.

Advantages: Garvin Industries' heavy-gauge steel construction maintains mechanical protection and solid grounding of the conduit to the designated electrical junction box or enclosure. The plastic throat liner ensures that electrical wires and conductors do not get nicked or skinned by sharp metal edges. Compression connectors are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Insulated compression connectors, electrical connector, EMT thinwall conduit connector, conduit connector, electrical fittings, compression fittings, conduit connector, insulated steel thinwall compression connectors, insulated steel EMT compression connectors, insulated steel compression connectors, insulated steel EMT connectors.



CCN-50I IN USE

Part Number	Size	Similar Products	Std. Pkg.
CCN-50I	1/2"	Thomas & Betts TC711A Crouse Hinds 1650 Hubbell Raco 2912 EGS Appleton 7050ST	50
CCN-75I	3/4"	Thomas & Betts TC712A Crouse Hinds 1651 Hubbell Raco 2913 EGS Appleton 7075ST	50
CCN-100I	1"	Thomas & Betts TC713A Crouse Hinds 1652 Hubbell Raco 2914 EGS Appleton 7100ST	25
CCN-125I	1-1/4"	Thomas & Betts TC714A Crouse Hinds 1653 Hubbell Raco 2915 EGS Appleton 7125ST	25
CCN-150I	1-1/2"	Thomas & Betts TC715A Crouse Hinds 1654 Hubbell Raco 2916 EGS Appleton 7150ST	25
CCN-200I	2"	Thomas & Betts TC716A Crouse Hinds 1655 Hubbell Raco 2918 EGS Appleton 7200ST	10
CCN-250I	2-1/2"	Thomas & Betts TC717A Crouse Hinds 1656 Hubbell Raco 2960 EGS Appleton 7250ST	10
CCN-300I	3"	Thomas & Betts TC718A Crouse Hinds 1657 Hubbell Raco 2962 EGS Appleton 7300ST	5
CCN-350I	3-1/2"	Thomas & Betts TC719A Crouse Hinds 1658 Hubbell Raco 2964 EGS Appleton 7350ST	5
CCN-400I	4"	Thomas & Betts TC7110A Crouse Hinds 1659 Hubbell Raco 2966 EGS Appleton 7400ST	5



847-455-0188 FAX 847-455-0334 garvinindustries.com

Compression Connectors (Rain Tight)



Application: These rain-tight compression connectors are used in wet locations to bond EMT thinwall conduits to electrical junction boxes or enclosures. Garvin Industries' rain-tight EMT compression connectors have been designed to comply with the new rain-tight test requirements along with the 2008 NEC 358.42 and 314.15 requirements.

Advantages: Garvin Industries' heavy-gauge construction maintains mechanical protection and solid grounding of the conduit to designated electrical junction boxes or enclosures. Compression connectors are zinc electroplated for excellent corrosion protection in damp locations. Garvin Industries' rain-tight EMT compression connectors come with the fitting preassembled making them ready to install on the conduit. Rain-tight compression connectors are installed like any other steel EMT compression fitting and require no special tools.

Field Names: Rain-tight compression connectors, rain-tight electrical connector, rain-tight EMT thinwall conduit connector, rain-tight conduit connector, rain-tight compression fittings, rain-tight compression fittings, rain-tight connector, steel raintight connectors, steel raintight thinwall connectors.

Part Number	Size	Similar Products		Std. Pkg.
CCNR-50	1/2"	Thomas & Betts TC111A Hubbell Raco 2912RT	Crouse Hinds 650RT EGS Appleton 7050SR	50
CCNR-75	3/4"	Thomas & Betts TC112A Hubbell Raco 2913RT	Crouse Hinds 651RT EGS Appleton 7075SR	50
CCNR-100	1"	Thomas & Betts TC113A Hubbell Raco 2914RT	Crouse Hinds 652RT EGS Appleton 7100SR	25
CCNR-125	1-1/4"	Thomas & Betts TC114A Hubbell Raco 2915RT	Crouse Hinds 653RT EGS Appleton 7125SR	25
CCNR-150	1-1/2"	Thomas & Betts TC115A Hubbell Raco 2916RT	Crouse Hinds 654RT EGS Appleton 7150SR	25
CCNR-200	2"	Thomas & Betts TC116A Hubbell Raco 2918RT	Crouse Hinds 655RT EGS Appleton 7200SR	10
CCNR-250	2-1/2"	Thomas & Betts TC117A Hubbell Raco 2960RT	Crouse Hinds 656RT EGS Appleton	10
CCNR-300	3"	Thomas & Betts TC118A Hubbell Raco 2962RT	Crouse Hinds 657RT EGS Appleton	5
CCNR-350	3-1/2"	Thomas & Betts TC119A Hubbell Raco 2964RT	Crouse Hinds 658RT EGS Appleton	5
CCNR-400	4"	Thomas & Betts TC1110A Hubbell Raco 2966RT	Crouse Hinds 659RT EGS Appleton	5



Compression Couplings



Application: These compression couplings are used to connect the ends of two EMT thinwall conduits together to extend the electrical raceway. Garvin Industries' steel compression couplings provide concrete-tight connections when taped and are rated for electrical applications above 600 volts.

Advantages: Garvin Industries' heavy-gauge steel construction maintains mechanical protection and solid grounding of one conduit to another. Compression couplings are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Compression couplings, electrical coupling, EMT thinwall conduit coupling, conduit coupling, electrical fittings, compression fittings, conduit coupling, steel compression couplings, steel compression EMT couplings, steel compression thinwall couplings.



CCP-75 IN USE

Part Number	Size	Similar Products		Std. Pkg.
CCP-50	1/2"	Thomas & Betts TK111A Hubbell Raco 2922	Crouse Hinds 660S EGS Appleton 6050S	50
CCP-75	3/4"	Thomas & Betts TK112A Hubbell Raco 2923	Crouse Hinds 661S EGS Appleton 6075S	50
CCP-100	1"	Thomas & Betts TK113A Hubbell Raco 2924	Crouse Hinds 662 EGS Appleton 6100S	25
CCP-125	1-1/4"	Thomas & Betts TK114A Hubbell Raco 2925	Crouse Hinds 663 EGS Appleton 6125S	25
CCP-150	1-1/2"	Thomas & Betts TK115A Hubbell Raco 2926	Crouse Hinds 664 EGS Appleton 6150S	25
CCP-200	2"	Thomas & Betts TK116A Hubbell Raco 2928	Crouse Hinds 665 EGS Appleton 6200S	10
CCP-250	2-1/2"	Thomas & Betts TK117A Hubbell Raco 2950	Crouse Hinds 666 EGS Appleton 6250S	10
CCP-300	3"	Thomas & Betts TK118A Hubbell Raco 2952	Crouse Hinds 667 EGS Appleton 6300S	5
CCP-350	3-1/2"	Thomas & Betts TK119A Hubbell Raco 2954	Crouse Hinds 668 EGS Appleton 6350S	5
CCP-400	4"	Thomas & Betts TK1110A Hubbell Raco 2956	Crouse Hinds 669 EGS Appleton 6400S	5



847-455-0188 FAX 847-455-0334 garvinindustries.com

Compression Couplings (Rain Tight)



Application: These rain-tight compression couplings are used in wet locations to connect the ends of two EMT thinwall conduits together to extend the raceway. Garvin Industries' rain-tight steel EMT compression couplings have been designed to comply with the new rain-tight test requirements along with the 2008 NEC 358.42 and 314.15 requirements.

Advantages: Garvin Industries' heavy-gauge steel construction maintains mechanical protection and solid grounding of one conduit to another. Compression couplings are zinc electroplated for excellent corrosion protection in damp locations. Garvin Industries' rain-tight EMT compression couplings come with the fitting preassembled making them ready to install on the conduit. Rain-tight compression couplings are installed like any other steel EMT compression fitting and require no special tools.

Field Names: Rain-tight compression couplings, rain-tight electrical coupling, rain-tight EMT thinwall conduit coupling, rain-tight conduit coupling, rain-tight electrical fittings, rain-tight compression fittings.

Part Number	Size	Similar Products		Std. Pkg.
CCPR-50	1/2"	Thomas & Betts Hubbell Raco 2922RT	Crouse Hinds 660RT EGS Appleton 6050SR	50
CCPR-75	3/4"	Thomas & Betts Hubbell Raco 2923RT	Crouse Hinds 661RT EGS Appleton 6075SR	50
CCPR-100	1"	Thomas & Betts Hubbell Raco 2924RT	Crouse Hinds 662RT EGS Appleton 6100SR	25
CCPR-125	1-1/4"	Thomas & Betts Hubbell Raco 2925RT	Crouse Hinds 663RT EGS Appleton 6125SR	25
CCPR-150	1-1/2"	Thomas & Betts Hubbell Raco 2926RT	Crouse Hinds 664RT EGS Appleton 6150SR	10
CCPR-200	2"	Thomas & Betts Hubbell Raco 2928RT	Crouse Hinds 665RT EGS Appleton 6200SR	10
CCPR-250	2-1/2"	Thomas & Betts Hubbell Raco 2950RT	Crouse Hinds 666RT EGS Appleton	10
CCPR-300	3"	Thomas & Betts Hubbell Raco 2952RT	Crouse Hinds 667RT EGS Appleton	5
CCPR-350	3-1/2"	Thomas & Betts Hubbell Raco 2954RT	Crouse Hinds 668RT EGS Appleton	5
CCPR-400	4"	Thomas & Betts Hubbell Raco 2956RT	Crouse Hinds 669RT EGS Appleton	5
	V:-:+	inimply at vice a constant by blue puints and anacification shoots		420



Set Screw Connectors (Uninsulated)






Application: These uninsulated set-screw connectors are used in dry locations to bond EMT thinwall conduits to electrical junction boxes or enclosures. Garvin Industries' uninsulated, die-cast zinc, set-screw connectors provide concrete-tight connections when taped and properly secured with the included locknut. Garvin Industries' set-screw electrical connectors are rated for electrical applications above 600 volts.

Advantages: Garvin Industries' rugged metallic construction maintains mechanical protection and solid grounding of the conduit to the designated electrical junction box or enclosure. They are also zinc electroplated for excellent corrosion protection.

Field Names: Set-screw connectors, electrical connector, EMT thinwall conduit connector, conduit connector, electrical fittings, set-screw fittings, conduit connector, set-screw thinwall connectors, set-screw EMT connectors.



SSNZ-50 IN USE

Part Number	Size	Similar Products	Std. Pkg.
SSNZ-50	1/2"	Thomas & Betts TC-221-SC Crouse Hinds 450DC Hubbell Raco 2602 EGS Appleton TC501	50
SSNZ-75	3/4"	Thomas & Betts TC-222-SC Crouse Hinds 451DC Hubbell Raco 2603 EGS Appleton TC502	50
SSNZ-100	1"	Thomas & Betts TC-223-SC Crouse Hinds 452DC Hubbell Raco 2604 EGS Appleton TC503	25
SSNZ-125	1-1/4"	Thomas & Betts TC-224-SC Crouse Hinds 453DC Hubbell Raco 2605 EGS Appleton TC504	25
SSNZ-150	1-1/2"	Thomas & Betts TC-225-SC Crouse Hinds 454DC Hubbell Raco 2606 EGS Appleton TC505	25
SSNZ-200	2"	Thomas & Betts TC-226-SC Crouse Hinds 455DC Hubbell Raco 2608 EGS Appleton TC506	10
SSNZ-250	2-1/2"	Thomas & Betts TC-227-SC Crouse Hinds 456DC Hubbell Raco 2640 EGS Appleton TC507	10
SSNZ-300	3"	Thomas & Betts TC-228-SC Crouse Hinds 457DC Hubbell Raco 2642 EGS Appleton TC508	5
SSNZ-350	3-1/2"	Thomas & Betts TC-229-SC Crouse Hinds 458DC Hubbell Raco 2644 EGS Appleton TC509	5
SSNZ-400	4"	Thomas & Betts TC-2210-SC Crouse Hinds 459DC Hubbell Raco 2646 EGS Appleton TC510	5



847-455-0188 FAX 847-455-0334 garvinindustries.com

Set Screw Connectors (Insulated)






SSN7-400L

Application: These insulated, set-screw connectors are used in dry locations to bond EMT thinwall conduits to electrical junction boxes or enclosures. Garvin Industries' insulated, die-cast zinc, set-screw connectors provide concrete-tight connections when taped and properly secured with the included locknut. Garvin Industries' set-screw electrical connectors are rated for electrical applications above 600 volts.

Advantages: Garvin Industries' rugged metallic construction maintains mechanical protection and solid grounding of the conduit to the designated electrical junction box or enclosure. The plastic throat liner helps ensure electrical wires and conductors don't get nicked or skinned by sharp metal edges.

Field Names: Set-screw connectors, electrical connector, EMT thinwall conduit connector, conduit connector, electrical fittings, set-screw fittings, insulated set-screw connector, insulated set-screw EMT connectors, insulated set-screw thinwall connectors.



SSNZ-50I IN USE

Part Number	Size	Similar Products	Std. Pkg.
SSNZ-50I	1/2"	Thomas & Betts TC-221-SC Crouse Hinds 450DC Hubbell Raco 2602 EGS Appleton TC501	50
SSNZ-75I	3/4"	Thomas & Betts TC-222-SC Crouse Hinds 451DC Hubbell Raco 2603 EGS Appleton TC502	50
SSNZ-100I	1"	Thomas & Betts TC-223-SC Crouse Hinds 452DC Hubbell Raco 2604 EGS Appleton TC503	25
SSNZ-125I	1-1/4"	Thomas & Betts TC-224-SC Crouse Hinds 453DC Hubbell Raco 2605 EGS Appleton TC504	25
SSNZ-150I	1-1/2"	Thomas & Betts TC-225-SC Crouse Hinds 454DC Hubbell Raco 2606 EGS Appleton TC505	25
SSNZ-200I	2"	Thomas & Betts TC-226-SC Crouse Hinds 455DC Hubbell Raco 2608 EGS Appleton TC506	10
SSNZ-250I	2-1/2"	Thomas & Betts TC-227-SC Crouse Hinds 456DC Hubbell Raco 2640 EGS Appleton TC507	10
SSNZ-300I	3"	Thomas & Betts TC-228-SC Crouse Hinds 457DC Hubbell Raco 2642 EGS Appleton TC508	5
SSNZ-350I	3-1/2"	Thomas & Betts TC-229-SC Crouse Hinds 458DC Hubbell Raco 2644 EGS Appleton TC509	5
SSNZ-400I	4"	Thomas & Betts TC-2210-SC Crouse Hinds 459DC Hubbell Raco 2646 EGS Appleton TC510	5



Set Screw Couplings



Application: These set-screw couplings are used in dry locations to connect the ends of two EMT thinwall conduits together. Garvin Industries' die-cast zinc, set-screw couplings provide concrete-tight connections when taped and properly secured with the included set-screw. Garvin Industries' set-screw electrical couplings are rated for electrical applications above 600 volts.

Advantages: Garvin Industries' rugged metallic construction maintains mechanical protection and solid grounding of one conduit to another.

Field Names: Set-screw couplings, electrical coupling, EMT thinwall conduit coupling, conduit coupling, electrical fittings, set-screw fittings, conduit coupling.



SSPZ-50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
SSPZ-50	1/2"	Thomas & Betts TK-221 Hubbell Raco 2622	Crouse Hinds 460DC EGS Appleton TC511	50
SSPZ-75	3/4"	Thomas & Betts TK-222 Hubbell Raco 2623	Crouse Hinds 461DC EGS Appleton TC512	50
SSPZ-100	1"	Thomas & Betts TK-223 Hubbell Raco 2624	Crouse Hinds 462DC EGS Appleton TC513	25
SSPZ-125	1-1/4"	Thomas & Betts TK-224 Hubbell Raco 2625	Crouse Hinds 463DC EGS Appleton TC514	25
SSPZ-150	1-1/2"	Thomas & Betts TK-225 Hubbell Raco 2626	Crouse Hinds 464DC EGS Appleton TC515	25
SSPZ-200	2"	Thomas & Betts TK-226 Hubbell Raco 2628	Crouse Hinds 465DC EGS Appleton TC516	10
SSPZ-250	2-1/2"	Thomas & Betts TK-227 Hubbell Raco 2670	Crouse Hinds 466DC EGS Appleton TC517	10
SSPZ-300	3"	Thomas & Betts TK-228 Hubbell Raco 2672	Crouse Hinds 467DC EGS Appleton TC518	5
SSPZ-350	3-1/2"	Thomas & Betts TK-229 Hubbell Raco 2674	Crouse Hinds 468DC EGS Appleton TC519	5
SSPZ-400	4"	Thomas & Betts TK-2210 Hubbell Raco 2676	Crouse Hinds 469DC EGS Appleton TC520	5



847-455-0188 FAX 847-455-0334 garvinindustries.com

Compression Connectors (Uninsulated)



Application: These uninsulated compression connectors are used in dry locations to bond EMT thinwall conduits to electrical junction boxes or enclosures. Garvin Industries' uninsulated compression connectors provide concrete-tight connections when taped and properly secured with the included locknut. Garvin Industries' uninsulated compression connectors are rated for electrical applications above 600 volts.

Advantages: Garvin Industries' rugged metallic construction maintains mechanical protection and solid grounding of the conduit to the designated electrical junction box or enclosure. Compression connectors come with oversized, hex compression nuts to ensure an easy wrench installation.

Field Names: Compression connectors, electrical connector, EMT thinwall conduit connector, conduit connector, electrical fittings, compression fittings.



CCNZ-50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
CCNZ-50	1/2"	Thomas & Betts TK-211-SC Hubbell Raco 2802	Crouse Hinds 650DC EGS Appleton TC601	50
CCNZ-75	3/4"	Thomas & Betts TK-212-SC Hubbell Raco 2803	Crouse Hinds 651DC EGS Appleton TC602	50
CCNZ- 100	1"	Thomas & Betts TK-213-SC Hubbell Raco 2804	Crouse Hinds 652DC EGS Appleton TC603	25
CCNZ-125	1-1/4"	Thomas & Betts TK-214-SC Hubbell Raco 2805	Crouse Hinds 653DC EGS Appleton TC604	25
CCNZ-150	1-1/2"	Thomas & Betts TK-215-SC Hubbell Raco 2806	Crouse Hinds 654DC EGS Appleton TC605	25
CCNZ-200	2"	Thomas & Betts TK-216-SC Hubbell Raco 2808	Crouse Hinds 655DC EGS Appleton TC606	10
CCNZ-250	2-1/2"	Thomas & Betts TK-217-SC Hubbell Raco 2840	Crouse Hinds 656DC EGS Appleton TC607	10
CCNZ-300	3"	Thomas & Betts TK-218-SC Hubbell Raco 2842	Crouse Hinds 657DC EGS Appleton TC608	5
CCNZ-350	3-1/2"	Thomas & Betts TK-219-SC Hubbell Raco 2844	Crouse Hinds 658DC EGS Appleton TC609	5
CCNZ-400	4"	Thomas & Betts TK-220-SC Hubbell Raco 2846	Crouse Hinds 659DC EGS Appleton TC610	5



Compression Couplings



Application: These electrical compression couplings are used to connect the ends of two EMT thinwall conduits together to extend the electrical raceway. Garvin Industries' compression couplings provide concrete-tight connections and are rated for electrical applications above 600 volts.

Advantages: Garvin Industries' rugged metallic construction maintains mechanical protection and solid grounding of one conduit to another. Compression couplings come with oversized, hex compression nuts to ensure an easy wrench installation.

Field Names: Compression couplings, electrical coupling, EMT thinwall conduit coupling, conduit coupling, electrical fittings, compression fittings.



CCPZ-50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
CCPZ-50	1/2"	Thomas & Betts Hubbell Raco 2822	Crouse Hinds 660DC EGS Appleton TC611	50
CCPZ-75	3/4"	Thomas & Betts Hubbell Raco 2823	Crouse Hinds 661DC EGS Appleton TC612	50
CCPZ-100	1"	Thomas & Betts Hubbell Raco 2824	Crouse Hinds 662DC EGS Appleton TC613	25
CCPZ-125	1-1/4"	Thomas & Betts Hubbell Raco 2825	Crouse Hinds 663DC EGS Appleton TC614	25
CCPZ-150	1-1/2"	Thomas & Betts Hubbell Raco 2826	Crouse Hinds 664DC EGS Appleton TC615	25
CCPZ-200	2"	Thomas & Betts Hubbell Raco 2828	Crouse Hinds 665DC EGS Appleton TC616	10
CCPZ-250	2-1/2"	Thomas & Betts Hubbell Raco 2870	Crouse Hinds 666DC EGS Appleton TC617	10
CCPZ-300	3"	Thomas & Betts Hubbell Raco 2872	Crouse Hinds 667DC EGS Appleton TC618	5
CCPZ-350	3-1/2"	Thomas & Betts Hubbell Raco 2874	Crouse Hinds 668DC EGS Appleton TC619	5
CCPZ-400	4"	Thomas & Betts Hubbell Raco 2876	Crouse Hinds 669DC EGS Appleton TC620	5



847-455-0188 FAX 847-455-0334 garvinindustries.com

Insulating Bushings



Application: These insulating bushings are used to protect low voltage cables from damage caused by sharp edges on the end of EMT conduits. They may be used with many low voltage cables including coaxial, computer, telephone, category 5E, category 6, audio, video, fire alarm system, security system, and thermostat cables.

Advantages: Garvin Industries' insulating bushings have a tight press fit that firmly holds it while the installer snaps it in place on the end of conduits. It will not fall off when cables are pulled. These bushings require no special tools for installation. These insulating bushings are an economical means of protecting cables passing through EMT conduits.

Field Names: Insulating bushing, insulator bushing, press on bushing, bang on bushing, insulated bushing, EMT bushings, cable protector, snap-on insulator bushing, conduit bushing, conduit insulator, conduit edge bushing, hammer-on insulating bushing.

Material: Plastic



IB-50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
IB-50	1/2"	Bridgeport TWB-51	Arlington EMT50	50
IB-75	3/4"	Bridgeport TWB-52	Arlington EMT75	50
IB-100	1"	Bridgeport TWB-53	Arlington EMT100	25
IB-125	1-1/4"	Bridgeport TWB-54	Arlington EMT125	25
IB-150	1-1/2"	Bridgeport TWB-55	Arlington EMT150	25
IB-200	2"	Bridgeport TWB-56	Arlington EMT200	25
IB-250	2-1/2"	Bridgeport TWB-57	Arlington EMT250	10
IB-300	3"	Bridgeport TWB-58	Arlington EMT300	10
IB-350	3-1/2"	Bridgeport TWB-59	Arlington EMT350	5
IB-400	4"	Bridgeport TWB-60	Arlington EMT400	5

Insulating Bushings, Split





EMT Conduit

Fittings

Application: These split insulating bushings are used after wire pull to protect low voltage cables from damage caused by sharp edges on EMT conduits. They are used with power, coaxial, computer, telephone, category 5E, category 6, audio, video, alarm system, security system, and thermostat cables.

Advantages: Garvin Industries' split insulating bushings allow the installer to add insulating bushings after low voltage wires have been pulled through EMT conduit. There is no need to disconnect existing wires and cables when installing them. They satisfy inspector requirements of having insulating bushings on existing pipes. Their easy to install design allows them to be effortlessly snapped on to EMT conduits. Additionally, their smooth plastic edges protect wires from nicks, scratches and cuts.

Field Names: Split insulating bushing, split insulator bushing, split press on bushing, split bang on bushing, split insulated bushing, split EMT bushings, split cable protector.

Material: Plastic



IBS-50 IN USE

Part Number	Size	Std. Pkg.
IBS-50	1/2"	50
IBS-75	3/4"	50
IBS-100	1"	25
IBS-125	1-1/4"	25
IBS-150	1-1/2"	25
IBS-200	2"	25
IBS-250	2-1/2"	10
IBS-300	3"	10
IBS-350	3-1/2"	5
IBS-400	4"	5



847-455-0188 FAX 847-455-0334 garvinindustries.com

Offset Connectors





OCC-75

Application: These offset connectors are used when electricians need to change the direction or slightly change the elevation of EMT conduits entering electrical boxes or enclosures.

Advantages: Garvin Industries' labor-saving design eliminates the need to do time-consuming offset conduit bending before connecting conduits to electrical junction boxes or enclosures. They are available in both set-screw and compression design.

Field Names: Offset conduit connectors, offset connectors, angled connectors, offset EMT connectors.



OCS-75 IN USE



OCC-75 IN USE

Part Number	Style	Size	Similar Products	Std. Pkg.
OCS-50	Set-screw	1/2"	Crouse Hinds 2400 Bridgeport Raco 2622	1620-DC2 10
OCS-75	Set-screw	3/4"	Crouse Hinds 2401 Bridgeport Raco 2623	1621-DC2 10
OCS-100	Set-screw	1"	For 1" EMT Conduit	10
OCC-50	Compression	1/2"	Thomas & Betts TO211SC Raco 1952	10
OCC-75	Compression	3/4"	Thomas & Betts TO212 Raco 1953	10

90° Inside Corner Couplings Pull Elbows





ECS-75

Application: These 90° inside corner couplings are used to change the direction of EMT conduit runs in any direction by 90 degrees. They are ideal for continuing the conduit run in tight spaces and areas where bending the conduit is not possible.

Advantages: Garvin Industries' 90 degree inside corner couplings are easy to install and allow for a 90° turn when conduits cannot be bent. Rugged die-cast zinc construction.

Field Names: 90 degree coupling connector, 90° conduit coupling, space saving connector, capped corner coupling, inside corner elbow.

Material: Die-cast zinc



ECS-50 IN USE

Part Number	Size	Style	Similar Products	Std. Pkg.
ECS-50	1/2"	Set-screw	Thomas & Betts TL291	10
ECS-75	3/4"	Set-screw	Thomas & Betts TL292	10

EMT Conduit

Fittings

Two-Piece Connectors



TPC-50

Application: Garvin Industries Two piece connectors are used when space inside and around the electrical junction box is limited and the installer needs a low profile, less bulky

Advantages: The split body of this fitting allows quick installation of EMT conduit to electrical junction boxes, enclosures and light fixtures.

Field Names: Two piece connector, EMT connector, splitbody connector, slip-fit connector.

Part Number	Size	Description	Std. Pkg.
TPC-50	1/2"	Two-piece design screws together in 1/2" conduit knockout.	50
TPC-75	3/4"	Two-piece design screws together in 3/4" conduit knockout.	25
TPC-100	1"	Two-piece design screws together in 1" conduit knockout.	25



847-455-0188 FAX 847-455-0334 garvinindustries.com

Combination Couplings (EMT to Flexible Metal Conduit)



Application: These EMT to flexible metal conduit squeezetype combination couplings are used to connect EMT conduits to flexible metal conduits.

Advantages: Garvin Industries' rugged metallic construction maintains mechanical protection and solid grounding of one conduit to another. They allow a quick connection between different conduits to create one continuous raceway. Their smooth interior surface ensures a snag-free wire pull every time. Garvin Industries' squeeze-type combination couplings are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Squeeze couplings, combo couplings, flex couplings, combination coupling, flexible metal conduit couplings, BX cable combination couplings, metal clad cable combination couplings, go-to coupling, go-for-em coupling, from-to coupling.

Material: Die-cast zinc



SQZEMT-38 IN USE

Part Number	Flex Size	to	EMT Size	Similar Products	SQZEMT-38 IN USE	Std. Pkg.
SQZEMT-38	3/8"		1/2"	Thomas & Betts Hubbell Raco 1941	Crouse Hinds 280DC EGS Appleton EFC-50	50
SQZEMT-50	1/2"		1/2"	Thomas & Betts Hubbell Raco 1942	Crouse Hinds EGS Appleton EFC-75	25
SQZEMT-75	3/4"		3/4"	Thomas & Betts Hubbell Raco 1943	Crouse Hinds EGS Appleton EFC-100	25
SQZEMT-100	1"		1"	Thomas & Betts TX223 Hubbell Raco	Crouse Hinds EGS Appleton	10

Combination Couplings (Rigid to EMT)



Application: Garvin Industries Rigid to EMT Conduit couplings are used when an installer needs to convert from EMT to rigid conduit mid-run when they are installing the electrical raceway.

Advantages: These combination couplings allow an installer to quickly and easilly switch from one type of conduit to another. One side of the coupling is threaded for Rigid pipe and the other side accepts EMT conduit. Quick compression glands bite tightly onto the EMT conduit.

Field Names: Combination coupling, rigid to emt coupling, combination connectors, from to couplings.

Material: Zinc-plated steel

Part Number	Rigid Size	EMT Size	Std. Pkg.
RTE50	1/2"	1/2"	25
RTE75	3/4"	3/4"	25
RTE100	1"	1"	10
RTE125	1-1/4"	1-1/4"	10



90° EMT Elbows



Part	Trade Size		Std.
Number	Size		Pkg.
EMT-5090	1/2"		50
EMT-7590	3/4"		50
EMT-10090	1"		20
EMT-12590	1-1/4"	For complete product specifications, visit www.garvinindustries.com	20
EMT-15090	1-1/2"		15
EMT-20090	2"		10
EMT-25090	2-1/2"		5
EMT-30090	3"		1
EMT-35090	3-1/2"		1
EMT-40090	4"		1

Application: These 90° EMT elbows are used to connect steel EMT conduits together allowing 90 degree bends.

Advantages: Garvin Industries' 90 degree elbows are factory made, saving time and material costs.

Field Names: 90 degree elbow, pre bent 90 degree elbow, TW elbow, EMT elbow.

Material: Electrical Metallic Tubing

Too Much Wire??..... Try These!

Over Sized Jumbo Handy Boxes and Covers

Handy Box is Much Larger than Traditional Boxes and Accommodates Increased Wire Capacity.

- Boxes have the following dimensions:
 4-1/8" long x 2-1/8" wide x 1-7/8" deep
- Covers come in blank, duplex, gfci, and single receptacle styles
- · Great when extra wire capacity is needed
- Rugged steel construction
- 1/2" trade knockouts
- Raised ground provision for surface mounted applications
- Mini sized handy box & cover also available



See Page 81 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

45° EMT Elbows



Part Number	Trade Size	Std. Pkg.
EMT-5045	1/2"	50
EMT-7545	3/4"	50
EMT-10045	1"	20
EMT-12545	1-1/4"	20
EMT-15045	1-1/2"	15
EMT-20045	2"	10
EMT-25045	2-1/2"	5
EMT-30045	3"	1
EMT-35045	3-1/2"	1
EMT-40045	4"	1

For complete product specifications, visit www.garvinindustries.com

Application: These 45° EMT elbows are used to connect steel EMT conduits together allowing 45 degree bends.

Advantages: Garvin Industries' 45 degree elbows are factory made, saving time and material costs.

Field Names: 45 degree elbow, pre bent 45 degree elbow, TW elbow, EMT elbow.

Material: Electrical Metallic Tubing



Pull Elbows (Set Screw EMT to EMT)



Application: These set-screw EMT pull elbows are used when 90° turns are needed in conduits and when wires must be pulled through elbows before making the turn. Their removable gasket and cover allow for wires to be pulled and fed back into pipes at a 90° angle or turn.

Advantages: Garvin Industries' set-screw pull elbows come ready to use with a gasket and cover that seals out dirt, dust and moisture. This removable gasket and cover allow for wires to be pulled and fed back into pipes at a 90° angle or turn.

Field Names: Set-screw pull elbow, EMT handy ells, EMT set-screw ells, Jakes, EMT Jakes, handy pull ells.

Material: Die-cast zinc



PESS-50 IN USE

Part Number	EMT Size	Similar Products		Std. Pkg.
PESS-50	1/2"	Thomas & Betts TL 201 Hubbell Raco 2752	Crouse Hinds 850 EE DC EGS Appleton THL500	10
PESS-75	3/4"	Thomas & Betts TL 202-SC Hubbell Raco 2753	Crouse Hinds 875 EE DC EGS Appleton THL750	5
PESS-100	1"	Thomas & Betts TL-203 Hubbell Raco 2754	Crouse Hinds 8100 EE DC EGS Appleton	10
PESS-125	1-1/4"	Thomas & Betts TL-204 Hubbell Raco	Crouse Hinds 8125 EE DC EGS Appleton	5

Custom Length Cuts!

Threaded Rod, Conduit, Strut

Any Size...Any Length...Any Time!

- End costly field cuts and time wasted measuring
- · Quick delivery on all sizes in stock
- Threading services also available on rigid pipe
- EMT and rigid pipe sizes available
- No sharp edges to cut wires passing through pipes
- Stocking programs available
- In stock! On time!



847-455-0188 FAX 847-455-0334 garvinindustries.com


Pull Elbows (EMT to Box)



Application: These set-screw EMT pull elbows are used when 90° turns are needed in conduits and when wires must be pulled through elbows before making the turn into the electrical junction box or enclosure.

Advantages: Garvin Industries' set-screw pull elbows come ready with a gasket and cover that seals out dirt, dust and moisture. This removable gasket and cover allow for wires to be pulled and fed back into pipes changing the direction as they enter boxes or enclosures. The locknut feature on Garvin Industries' pull elbows secures the connection.

Field Names: Pull elbow, EMT handy ells, EMT set-screws ells, Jakes, EMT Jakes.



PESSB-50 IN USE

Part Number	EMT Size	Similar Products		Std. Pkg.
PESSB-50	1/2"	Thomas & Betts TL-211 Hubbell Raco 2762	Crouse Hinds 850 EB DC Bridgeport 51DC2	10
PESSB-75	3/4"	Thomas & Betts TL-212 Hubbell Raco 2763	Crouse Hinds 875 EB DC Bridgeport 52DC2	5
PESSB-100	1"	Thomas & Betts Hubbell Raco	Crouse Hinds 8100 EB DC Bridgeport 53DC2	25
PESSB-125	1-1/4"	Thomas & Betts Hubbell Raco	Crouse Hinds 8125 EB DC Bridgeport 54DC2	20



Pipe Caps



Part Number	Size	Std. Pkg.
CAPE50	1/2"	50
CAPE75	3/4"	50
CAPE100	1"	25
CAPE125	1-1/4"	25
CAPE150	1-1/2"	10
CAPE200	2"	10
CAPE250	2-1/2"	5
CAPE300	3"	5
CAPE350	3-1/2"	5
CAPE400	4"	5

Application: These vandal-resistant pipe caps are used to protect EMT conduit runs that have been stubbed up and temporarily set in place. They are zinc plated steel and seal out rocks, dirt, debris, and anything vandals may use to clog the conduits that are set on the job site waiting for wire pulls. They may also be used to protect abandoned pipes.

Advantages: Garvin Industries' set-screw design locks the zinc plated steel cap on the pipe preventing vandals from removing it and filling the pipe with debris. One-piece construction also further ensures vandals cannot tamper with it. These vandal resistant caps may be used on EMT conduits and have a one-piece, quick set-screw design that does not require any taping and will not distort pipe threads. They are also zinc electroplated for excellent corrosion protection.

Field Names: Pipe Cap, pipe cover, vandal resistant pipe cap, conduit cap, conduit cover, conduit protector, pipe protector, pipe closure plug.

Material: Zinc Plated Steel



CAPE50 IN USE

Need Electrical Supplies....

On The Jobsite!

Why wait until you get back to the shop to make your supply list...

- More than 3,000 products online
- · Request for Quotation direct from website
- · Detailed descriptions and images
- · Videos, spec sheets, blueprints, and more...

In-Stock...On-Time... Everytime!

www.garvinindustries.com





847-455-0188 FAX 847-455-0334 garvinindustries.com

Box Spacers





Application: These box spacer connectors are used as a short raceway to connect electrical junction boxes or enclosures. The locknuts for bonding the spacer to electrical boxes are included. These box spacers are used in 1/2" or 3/4" box knockout openings.

Advantages: Garvin Industries' box spacers allow standard electrical junction boxes to be joined back to back in open wall stud spaces. These box spacers save both time and money by eliminating the need for additional conduit runs to connect boxes together. There are multiple lengths for various stud wall depths. They come in 1/2" or 3/4" knockouts sizes. They can be used as a short raceway in multiple applications.

Field Names: Back to back connector, box spacer connectors

Material: Die-cast zinc



BB-1/2 IN USE

Part Number	Knockout Size	Gap Spacing	Description	Std. Pkg.
BB-1/2	1/2"	.20"	Connects boxes and enclosures through 1/2" conduit knockout opening.	100
BB-1/2-2	1/2"	2"	Extra long 2" spacer!	100
BB-3/4	3/4"	.29"	Connects boxes through 3/4" conduit knockout openings.	50

Fastest PreFab Guaranteed!

4" Square Dual Access "Backdoor" Box

This Box Allows Preinstalled Devices, Rings, & Other Box Components—for Quick Termination at Job Sites!

- Open back box allows conduit, connectors, and wire device termination in seconds
- Rugged steel construction
- Combination 1/2" & 3/4" moon knockouts
- Quickly terminate wire and close off open back in seconds with blank cover
- · Let us prefab devices and wire pigtails
- Made to order custom assemblies welcome



See Page 25 for more information!



Mogul LB Style



Application: Mogul conduit bodies are attached to threaded rigid conduits when a change of direction in the conduit run requires wires to be pulled and fed through in a new direction. Removable cover and gasket allow for easy wire pulling and feed through. Commonly used for electrical service entrance wires or as an economical convenience box when extra wire capacity is needed.

Advantages: Extra wire capacity and angled body allow the installer to easily bend wires into the smooth turns. Powder coated finish and watertight gasket create a weatherproof installation. Their removable cover makes general maintenance and future wire pulling easy and convenient.

Field Names: Mogul conduit, mogul conduit body, mogul entrance ell, mogul service entrance elbow, mogul LB.



MOLB-200 IN USE

Part Number	Size	Similar Products		Std. Pkg.
MOLB-100	1"	Thomas & Betts MALB3 Bridgeport	Crouse Hinds BLB3 EGS Appleton BLB 100-A	2
MOLB-125	1-1/4"	Thomas & Betts MALB4 Bridgeport MLB44	Crouse Hinds BLB4 EGS Appleton BLB 125-A	2
MOLB-150	1-1/2"	Thomas & Betts MALB5 Bridgeport MLB45	Crouse Hinds BLB5 EGS Appleton BLB 150-A	1
MOLB-200	2"	Thomas & Betts MALB6 Bridgeport MLB46	Crouse Hinds BLB6 EGS Appleton BLB 200-A	1
MOLB-250	2-1/2"	Thomas & Betts MALB7 Bridgeport MLB47	Crouse Hinds BLB7 EGS Appleton BLB 250-A	1
MOLB-300	3"	Thomas & Betts MALB8 Bridgeport MLB48	Crouse Hinds BLB8 EGS Appleton BLB 300-A	1
MOLB-350	3-1/2"	Thomas & Betts MALB9 Bridgeport MLB49	Crouse Hinds BLB9 EGS Appleton BLB 350-A	1
MOLB-400	4"	Thomas & Betts MALB10 Bridgeport M0	Crouse Hinds BLB10 EGS Appleton BLB 400-A	1
440				



847-455-0188 FAX 847-455-0334 garvinindustries.com

LB Style



Application: Conduit bodies are attached to threaded rigid or IMC conduits when a change of direction is required. Removable cover and gasket allow for easy wire pulling and feed through. Commonly used for electrical service entrance wires or as an economical convenience box when extra wire space is needed.

Advantages: Garvin Industries' LB style conduit bodies save time and money by eliminating costly bending of large conduits in order to change the directions of conduit runs. They allow the installer to easily bend wires into the smooth turns. Powder coated finish and watertight gasket create a weatherproof installation. Their removable cover makes general maintenance and future wire pulling easy and convenient.

Field Names: Conduit, conduit body, entrance ell, service entrance elbow, LB.



LB50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
LB50	1/2"	Thomas & Betts ALB1 Bridgeport LB41CG	Crouse Hinds LB15MT EGS Appleton LB 50-A	10
LB75	3/4"	Thomas & Betts ALB2 Bridgeport LB42CG	Crouse Hinds LB25MT EGS Appleton LB 75-A	10
LB100	1"	Thomas & Betts ALB3 Bridgeport LB43CG	Crouse Hinds LB35MT EGS Appleton LB 100-A	5
LB125	1-1/4"	Thomas & Betts ALB4 Bridgeport LB44CG	Crouse Hinds LB45MT EGS Appleton LB 125-A	2
LB150	1-1/2"	Thomas & Betts ALB5 Bridgeport LB45CG	Crouse Hinds LB55MT EGS Appleton LB 150-A	2
LB200	2"	Thomas & Betts ALB6 Bridgeport LB46CG	Crouse Hinds LB65MT EGS Appleton LB 200-A	1
LB250	2-1/2"	Thomas & Betts ALB7 Bridgeport LB47CG	Crouse Hinds LB75MT EGS Appleton LB 250-A	1
LB300	3"	Thomas & Betts ALB8 Bridgeport LB48CG	Crouse Hinds LB85MT EGS Appleton LB 300-A	1
LB350	3-1/2"	Thomas & Betts ALB9 Bridgeport LB49CG	Crouse Hinds LB95MT EGS Appleton LB 350-A	1
LB400	4"	Thomas & Betts ALB10 Bridgeport LB50CG	Crouse Hinds LB105MT EGS Appleton LB 400-A	1

FAX 847-455-0334 garvinindustries.com

ELECTRICAL . LOW VOLTAGE . LIGHTING

LR Style



Rigid & IMC

Fittings

Application: Conduit bodies are attached to threaded rigid or IMC conduits when a change of direction is required. Removable cover and gasket allow for easy wire pulling and feed through. Commonly used as an economical convenience box when extra wire space is needed.

Advantages: Garvin Industries' LR style conduit bodies save time and money by eliminating costly bending of large conduits in order to change the directions of conduit runs. They allow the installer to easily bend wires into the smooth turns. Powder coated finish and watertight gasket create a weatherproof installation. Their removable cover makes general maintenance and future wire pulling easy and convenient.

Field Names: Conduit, conduit body, entrance ell, service entrance elbow, LR.



LR50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
LR50	1/2"	Thomas & Betts ALR1 Bridgeport LR41CG	Crouse Hinds LR15MT EGS Appleton LR 50-A	10
LR75	3/4"	Thomas & Betts ALR2 Bridgeport LR42CG	Crouse Hinds LR25MT EGS Appleton LR 75-A	10
LR100	1"	Thomas & Betts ALR3 Bridgeport LR43CG	Crouse Hinds LR35MT EGS Appleton LR 100-A	5
LR125	1-1/4"	Thomas & Betts ALR4 Bridgeport LR44CG	Crouse Hinds LR45MT EGS Appleton LR 125-A	5
LR150	1-1/2"	Thomas & Betts ALR5 Bridgeport LR45CG	Crouse Hinds LR55MT EGS Appleton LR 150-A	5
LR200	2"	Thomas & Betts ALR6 Bridgeport LR46CG	Crouse Hinds LR65MT EGS Appleton LR 200-A	2
LR250	2-1/2"	Thomas & Betts ALR7 Bridgeport LR47	Crouse Hinds EGS Appleton LR 250-A	2
LR300	3"	Thomas & Betts ALR8 Bridgeport LR48	Crouse Hinds EGS Appleton LR 300-A	1
LR350	3-1/2"	Thomas & Betts ALR9 Bridgeport LR49	Crouse Hinds EGS Appleton LR 350-A	1
LR400	4"	Thomas & Betts ALR10 Bridgeport LR50	Crouse Hinds EGS Appleton LR 400-A	1



847-455-0188 FAX 847-455-0334 garvinindustries.com

LL Style



Application: Conduit bodies are attached to threaded rigid or IMC conduits when a change of direction is required. Removable cover and gasket allow for easy wire pulling and feed through. Commonly used as an economical convenience box when extra wire space is needed.

Advantages: Garvin Industries' LL style conduit bodies save time and money by eliminating costly bending of large conduits in order to change the directions of conduit runs. They allow the installer to easily bend wires into smooth turns. Powder coated finish and watertight gasket create a weatherproof installation. Their removable cover makes general maintenance and future wire pulling easy and convenient.

Field Names: Conduit, conduit body, entrance ell, service entrance elbow, LL.



LL50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
LL50	1/2"	Thomas & Betts ALL1 Bridgeport LL41CG	Crouse Hinds LL15MT EGS Appleton LL 50-A	10
LL75	3/4"	Thomas & Betts ALL2 Bridgeport LL42CG	Crouse Hinds LL25MT EGS Appleton LL 75-A	10
LL100	1"	Thomas & Betts ALL3 Bridgeport LL43CG	Crouse Hinds LL35MT EGS Appleton LL 100-A	5
LL125	1-1/4"	Thomas & Betts ALL4 Bridgeport LL44CG	Crouse Hinds LL45MT EGS Appleton LL 125-A	2
LL150	1-1/2"	Thomas & Betts ALL5 Bridgeport LL45CG	Crouse Hinds LL55MT EGS Appleton LL 150-A	2
LL200	2"	Thomas & Betts ALL6 Bridgeport LL46CG	Crouse Hinds LL65MT EGS Appleton LL 200-A	1
LL250	2-1/2"	Thomas & Betts ALL7 Bridgeport LL47	Crouse Hinds EGS Appleton LL 250-A	1
LL300	3"	Thomas & Betts ALL8 Bridgeport LL48	Crouse Hinds EGS Appleton LL 300-A	1
LL350	3-1/2"	Thomas & Betts ALL9 Bridgeport LL49	Crouse Hinds EGS Appleton LL 350-A	1
LL400	4"	Thomas & Betts ALL10 Bridgeport LL50	Crouse Hinds EGS Appleton LL 400-A	1



T Style



Application: Conduit bodies are attached to threaded rigid or IMC conduits when a change of direction is required. Removable cover and gasket allow for easy wire pulling and feed through. Commonly used as an economical convenience box when extra wire space is needed.

Advantages: Garvin Industries' T style conduit bodies save time and money by eliminating costly bending of large conduits to change the directions of conduit runs. They allow the installer to easily bend wires into smooth turns. Powder coated finish and watertight gasket create a weatherproof installation. Their removable cover makes general maintenance and future wire pulling easy and convenient.

Field Names: Conduit, conduit body, entrance ell, service entrance elbow, T.



LT50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
LT50	1/2"	Thomas & Betts AT1 Bridgeport T41CG	Crouse Hinds T15MT EGS Appleton T 50-A	10
LT75	3/4"	Thomas & Betts AT2 Bridgeport T42CG	Crouse Hinds T25MT EGS Appleton T 75-A	10
LT100	1"	Thomas & Betts AT3 Bridgeport T43CG	Crouse Hinds T35MT EGS Appleton T 100-A	5
LT125	1-1/4"	Thomas & Betts AT4 Bridgeport T44CG	Crouse Hinds T45MT EGS Appleton T 125-A	5
LT150	1-1/2"	Thomas & Betts AT5 Bridgeport T45CG	Crouse Hinds T55MT EGS Appleton T 150-A	5
LT200	2"	Thomas & Betts AT6 Bridgeport T46CG	Crouse Hinds T65MT EGS Appleton T 200-A	2
LT250	2-1/2"	Thomas & Betts AT7 Bridgeport T47	Crouse Hinds EGS Appleton T 250-A	2
LT300	3"	Thomas & Betts AT8 Bridgeport T48	Crouse Hinds EGS Appleton T 300-A	1
LT350	3-1/2"	Thomas & Betts AT9 Bridgeport T49	Crouse Hinds EGS Appleton T 350-A	1
LT400	4"	Thomas & Betts AT10 Bridgeport T50	Crouse Hinds EGS Appleton T 400-A	1



847-455-0188 FAX 847-455-0334 garvinindustries.com

C Style



Application: Conduit bodies are attached to threaded rigid or IMC conduits when a change of direction is required. Removable cover and gasket allow for easy wire pulling and feed through. Commonly used as an economical convenience box when extra wire space is needed.

Advantages: Garvin Industries' C style conduit bodies save time and money by eliminating costly bending of large conduits to change the directions of conduit runs. They allow the installer to easily bend wires into smooth turns. Powder coated finish and watertight gasket create a weatherproof installation. Their removable cover makes general maintenance and future wire pulling easy and convenient.

Field Names: Conduit, conduit body, entrance ell, service entrance elbow, C.



LC50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
LC50	1/2"	Thomas & Betts AC1 Bridgeport C41CG	Crouse Hinds C15MT EGS Appleton C 50-A	10
LC75	3/4"	Thomas & Betts AC2 Bridgeport C42CG	Crouse Hinds C25MT EGS Appleton C 75-A	10
LC100	1"	Thomas & Betts AC3 Bridgeport C43CG	Crouse Hinds C35MT EGS Appleton C 100-A	5
LC125	1-1/4"	Thomas & Betts AC4 Bridgeport C44CG	Crouse Hinds C45MT EGS Appleton C 125-A	2
LC150	1-1/2"	Thomas & Betts AC5 Bridgeport C45CG	Crouse Hinds C55MT EGS Appleton C 150-A	2
LC200	2"	Thomas & Betts AC6 Bridgeport C46CG	Crouse Hinds C65MT EGS Appleton C 200-A	1
LC250	2-1/2"	Thomas & Betts AC7 Bridgeport C47	Crouse Hinds EGS Appleton C 250-A	1
LC300	3"	Thomas & Betts AC8 Bridgeport C48	Crouse Hinds EGS Appleton C 300-A	1
LC350	3-1/2"	Thomas & Betts AC9 Bridgeport C49	Crouse Hinds EGS Appleton C 350-A	1
LC400	4"	Thomas & Betts AC10 Bridgeport C50	Crouse Hinds EGS Appleton C 400-A	1



LB Style (Service Entrance)



Application: Conduit bodies are attached to threaded rigid or IMC pipe in opposite directions. Removable cover and gasket allow for easy wire pulling and feed through. Commonly used for electrical service entrance wires or as an economical convenience box when extra wire space is needed.

Advantages: Extra wire capacity and angled body allow installer to easily bend wires into smooth turns. Powder coated finish and watertight gasket create a weatherproof installation.

Field Names: Conduit, conduit body, entrance ell, service entrance elbow, LB.



SLB200 IN USE

Part Number	Size	Similar Products		Std. Pkg.
SLB50	1/2"	Thomas & Betts 1490 Bridgeport 1025	Crouse Hinds SLB1 EGS Appleton SLB 50	20
SLB75	3/4"	Thomas & Betts 1491 Bridgeport 1026	Crouse Hinds SLB2 EGS Appleton SLB 75	20
SLB100	1"	Thomas & Betts 1492 Bridgeport 1027	Crouse Hinds SLB3 EGS Appleton SLB 100	10
SLB125	1-1/4"	Thomas & Betts 1493 Bridgeport 1028	Crouse Hinds SLB4 EGS Appleton SLB 125	5
SLB150	1-1/2"	Thomas & Betts 1494 Bridgeport 1029	Crouse Hinds SLB5 EGS Appleton SLB 150	5
SLB200	2"	Thomas & Betts 1495 Bridgeport 1030	Crouse Hinds SLB6 EGS Appleton SLB 200	3



847-455-0188 FAX 847-455-0334 garvinindustries.com

Screw Covers



Application: These screw covers and gasket seals protect wires from weather damage. In addition, they serve as an easy access panel for future wire pulls.

Advantages: Garvin Industries' covers include rubber gasket and screws.

Field Names: Conduit body cover, conduit cover & gasket, screw cover, LB cover.

Material: Die-cast Aluminum & Neoprene Gasket

Part Number	Size	Similar Products		Std. Pkg.
CG-50	1/2"	Thomas & Betts SCV1 Bridgeport SC41	Crouse Hinds 150 EGS Appleton K50A	100
CG-75	3/4"	Thomas & Betts SCV2 Bridgeport SC42	Crouse Hinds 250 EGS Appleton K75A	50
CG-100	1"	Thomas & Betts SCV3 Bridgeport SC43	Crouse Hinds 350 EGS Appleton K100A	50
CG-125150	1-1/4" & 1-1/2"	Thomas & Betts SCV4 Bridgeport SC44	Crouse Hinds 450 EGS Appleton K125 & 150A	25
CG-200	2"	Thomas & Betts SCV5 Bridgeport SC46	Crouse Hinds 650 EGS Appleton K200A	10
CG-250300	2-1/2" & 3"	Thomas & Betts CV6 Bridgeport SC47	Crouse Hinds 850D EGS Appleton K250 & 300A	10
CG-350400	3-1/2" & 4"	Thomas & Betts CV7 Bridgeport SC49	Crouse Hinds 950D EGS Appleton K350 & 400A	5

Custom Manufactured Solutions!

We Specialize in Unique Custom Solutions!

Send Us Your Product Idea, Sketch, Blueprint or Sample and Let Our Engineers Develop a Solution That is Right for You!

- Metal stamping and fabrication
- · Die casting and machining
- Drilling, tapping, threading, bending, and prefab assemblies
- Full line prefab services
- · Patent and royalty agreements
- Stocking programs available for qualifying products





X Style



MX1CG

Application: These X style conduit fittings are used for junction or crossing of conduit runs. They provide access to wiring connectors.

Advantages: Garvin Industries' X style conduit fittings provide access for wire pulling and making splices or connections.

Field Names: X-condulet, x fitting.



MX1CG IN USE

Part	Trade	Nominal Dimensions			Std.
Number	Size	Α	В	С	Pkg.
MX1CG	1/2"	5-7/16"	2-13/16"	2-1/8"	10
MX2CG	3/4"	6-1/16"	2-15/16"	2-7/16"	10
MX3CG	1"	7-1/8"	3-9/16"	2-11/16"	5
MX4CG	1-1/4"	9-1/8"	4-7/16"	3-1/16"	5
MX5CG	1-1/2"	9-1/8"	4-7/16"	3-1/4"	5
MX6CG	2"	11-3/4"	5-3/8"	4-1/16"	2



847-455-0188 FAX 847-455-0334 garvinindustries.com

LB Style



Application: Conduit bodies are attached to threaded rigid conduits when a turn is required and conduit bending is not convenient or possible. Removable cover and gasket allow for easy wire pulling and feed through. Commonly used for electrical service entrance wires or as an economical convenience box when extra wire space is needed.

Advantages: Garvin Industries' threaded hubs allow a quick pipe connection. Their extra wire capacity and smooth interior allow the installer to easily bend wires into smooth turns. Zinc electroplated finish and watertight gasket create a weatherproof installation.

Field Names: Conduit, conduit body, entrance ell, service entrance elbow, LB.



MLB50 IN USE

Part Number	Size	Similar Products	Std. Pkg.
MLB50	1/2"	Thomas & Betts LB17 Crouse Hind Bridgeport LB61 EGS Appleto	
MLB75	3/4"	Thomas & Betts LB27 Crouse Hind Bridgeport LB62 EGS Appleto	
MLB100	1"	Thomas & Betts LB37 Crouse Hind Bridgeport LB63 EGS Appleto	
MLB125	1-1/4"	Thomas & Betts LB47 Crouse Hind Bridgeport LB64 EGS Appleto	
MLB150	1-1/2"	Thomas & Betts LB57 Crouse Hind Bridgeport LB65 EGS Appleto	0
MLB200	2"	Thomas & Betts LB67 Crouse Hind Bridgeport LB66 EGS Appleto	
MLB250	2-1/2"	Thomas & Betts LB77 Crouse Hind Bridgeport LB67 EGS Appleto	
MLB300	3"	Thomas & Betts LB87 Crouse Hind Bridgeport LB68 EGS Appleto	
MLB350	3-1/2"	Thomas & Betts LB97 Crouse Hind Bridgeport LB69 EGS Appleto	
MLB400	4"	Thomas & Betts LB107 Crouse Hind Bridgeport LB70 EGS Appleto	



LL Style



Application: Conduit bodies are attached to threaded rigid conduits when a turn is required and conduit bending is not convenient or possible. Removable cover and gasket allow for easy wire pulling and feed through. Commonly used as an economical convenience box when extra wire space is needed.

Advantages: Garvin Industries' threaded hubs allow a quick pipe connection. Their extra wire capacity and smooth interior allow the installer to easily bend wires into smooth turns. Zinc electroplated finish and watertight gasket create a weatherproof installation.

Field Names: Conduit, conduit body, entrance ell, service entrance elbow, LL.



MLL50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
MLL50	1/2"	Thomas & Betts LL17 Bridgeport LL61	Crouse Hinds LL50M EGS Appleton LL50M	1
MLL75	3/4"	Thomas & Betts LL27 Bridgeport LL62	Crouse Hinds LL75M EGS Appleton LL75M	1
MLL100	1"	Thomas & Betts LL37 Bridgeport LL63	Crouse Hinds LL100M EGS Appleton LL100M	1
MLL125	1-1/4"	Thomas & Betts LL47 Bridgeport LL64	Crouse Hinds LL125M EGS Appleton LL125M	1
MLL150	1-1/2"	Thomas & Betts LL57 Bridgeport LL65	Crouse Hinds LL150M EGS Appleton LL150M	1
MLL200	2"	Thomas & Betts LL67 Bridgeport LL66	Crouse Hinds LL200M EGS Appleton LL200M	1
MLL250	2-1/2"	Thomas & Betts LL77 Bridgeport LL67	Crouse Hinds LL250M EGS Appleton LL250M	1
MLL300	3"	Thomas & Betts LL87 Bridgeport LL68	Crouse Hinds LL300M EGS Appleton LL300M	1
MLL350	3-1/2"	Thomas & Betts LL97 Bridgeport	Crouse Hinds LL350M EGS Appleton LL350M	1
MLL400	4"	Thomas & Betts LL107 Bridgeport	Crouse Hinds LL400M EGS Appleton LL400M	1



847-455-0188 FAX 847-455-0334 garvinindustries.com

LR Style



Application: Conduit bodies are attached to threaded rigid conduits when a turn is required and conduit bending is not convenient or possible. Removable cover and gasket allow for easy wire pulling and feed through. Commonly used as an economical convenience box when extra wire space is needed.

Advantages: Garvin Industries' threaded hubs allow a quick pipe connection. Their extra wire capacity and smooth interior allow the installer to easily bend wires into smooth turns. Zinc electroplated finish and watertight gasket create a weatherproof installation.

Field Names: Conduit, conduit body, entrance ell, service entrance elbow, LR.



MLR50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
MLR50	1/2"	Thomas & Betts LR17 Bridgeport LR61	Crouse Hinds LR50M EGS Appleton LR50M	1
MLR75	3/4"	Thomas & Betts LR27 Bridgeport LR62	Crouse Hinds LR75M EGS Appleton LR75M	1
MLR100	1"	Thomas & Betts LR37 Bridgeport LR63	Crouse Hinds LR100M EGS Appleton LR100M	1
MLR125	1-1/4"	Thomas & Betts LR47 Bridgeport LR64	Crouse Hinds LR125M EGS Appleton LR125M	1
MLR150	1-1/2"	Thomas & Betts LR57 Bridgeport LR65	Crouse Hinds LR150M EGS Appleton LR150M	1
MLR200	2"	Thomas & Betts LR67 Bridgeport LR66	Crouse Hinds LR200M EGS Appleton LR200M	1
MLR250	2-1/2"	Thomas & Betts LR77 Bridgeport LR67	Crouse Hinds LR250M EGS Appleton LR250M	1
MLR300	3"	Thomas & Betts LR87 Bridgeport LR68	Crouse Hinds LR300M EGS Appleton LR300M	1
MLR350	3-1/2"	Thomas & Betts LR97 Bridgeport	Crouse Hinds LR350M EGS Appleton LR350M	1
MLR400	4"	Thomas & Betts LR107 Bridgeport	Crouse Hinds LR400M EGS Appleton LR400M	1





Application: Conduit bodies are attached to threaded rigid conduits when a turn is required and conduit bending is not convenient or possible. Removable cover and gasket allow for easy wire pulling and feed through. Commonly used as an economical convenience box when extra wire space is needed.

Advantages: Garvin Industries' threaded hubs allow a quick pipe connection. Their extra wire capacity and smooth interior allow the installer to easily bend wires into smooth turns. Zinc electroplated finish and watertight gasket create a weatherproof installation.

Field Names: Conduit, conduit body, entrance ell, service entrance elbow, T.



MT50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
MT50	1/2"	Thomas & Betts T17 Bridgeport T61	Crouse Hinds T50M EGS Appleton T50M	1
MT75	3/4"	Thomas & Betts T27 Bridgeport T62	Crouse Hinds T75M EGS Appleton T75M	1
MT100	1"	Thomas & Betts T37 Bridgeport T63	Crouse Hinds T100M EGS Appleton T100M	1
MT125	1-1/4"	Thomas & Betts T47 Bridgeport T64	Crouse Hinds T125M EGS Appleton T125M	1
MT150	1-1/2"	Thomas & Betts T57 Bridgeport T65	Crouse Hinds T150M EGS Appleton T150M	1
MT200	2"	Thomas & Betts T67 Bridgeport T66	Crouse Hinds T200M EGS Appleton T200M	1
MT250	2-1/2"	Thomas & Betts T77 Bridgeport T67	Crouse Hinds T250M EGS Appleton T250M	1
MT300	3"	Thomas & Betts T87 Bridgeport T68	Crouse Hinds T300M EGS Appleton T300M	1
MT350	3-1/2"	Thomas & Betts T97 Bridgeport	Crouse Hinds T350M EGS Appleton T350M	1
MT400	4"	Thomas & Betts T107 Bridgeport	Crouse Hinds T400M EGS Appleton T400M	1



847-455-0188 FAX 847-455-0334 garvinindustries.com

C Style



Application: Conduit bodies are attached to threaded rigid conduits when a turn is required and conduit bending is not convenient or possible. Removable cover and gasket allow for easy wire pulling and feed through. Commonly used as an economical convenience box when extra wire space is needed.

Advantages: Garvin Industries' threaded hubs allow a quick pipe connection. Their extra wire capacity and smooth interior allow the installer to easily bend wires into smooth turns. Zinc electroplated finish and watertight gasket create a weatherproof installation.

Field Names: Conduit, conduit body, entrance ell, service entrance elbow, C.



MC50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
MC50	1/2"	Thomas & Betts C17 Bridgeport C61	Crouse Hinds C50M EGS Appleton C50M	1
MC75	3/4"	Thomas & Betts C27 Bridgeport C62	Crouse Hinds C75M EGS Appleton C75M	1
MC100	1"	Thomas & Betts C37 Bridgeport C63	Crouse Hinds C100M EGS Appleton C100M	1
MC125	1-1/4"	Thomas & Betts C47 Bridgeport C64	Crouse Hinds C125M EGS Appleton C125M	1
MC150	1-1/2"	Thomas & Betts C57 Bridgeport C65	Crouse Hinds C150M EGS Appleton C150M	1
MC200	2"	Thomas & Betts C67 Bridgeport C66	Crouse Hinds C200M EGS Appleton C200M	1
MC250	2-1/2"	Thomas & Betts C77TB Bridgeport C67	Crouse Hinds C250M EGS Appleton C250M	1
MC300	3"	Thomas & Betts C87 Bridgeport C68	Crouse Hinds C300M EGS Appleton C300M	1
MC350	3-1/2"	Thomas & Betts Bridgeport	Crouse Hinds C350M EGS Appleton C350M	1
MC400	4"	Thomas & Betts Bridgeport	Crouse Hinds C400M EGS Appleton C400M	1



Screw Covers with Gaskets



Application: These screw covers with gaskets mount on mating size conduit bodies to cover exposed electrical wires and create a watertight seal.

Advantages: Garvin Industries' screw covers prevent water, dust, and debris from entering boxes and damaging conductors

Field Names: Conduit body cover, raised dome cover, screw covers.

Material: Steel & Neoprene Gasket

Part Number	Size	Similar Products		Std. Pkg.
DOM-50	1/2"	Thomas & Betts 170S Bridgeport SC-61	Crouse Hinds K50S EGS Appleton 170	1
DOM-75	3/4"	Thomas & Betts 270S Bridgeport SC-62	Crouse Hinds K75S EGS Appleton 270	1
DOM-100	1"	Thomas & Betts 370S Bridgeport SC-63	Crouse Hinds K100S EGS Appleton 370	1
DOM-125150	1-1/4" or 1-1/2"	Thomas & Betts 470S/570S Bridgeport SC-64	Crouse Hinds K125S EGS Appleton 470/570	1
DOM-200	2"	Thomas & Betts 670S Bridgeport SC-66	Crouse Hinds K200S EGS Appleton 670	1
DOM-250300	2-1/2" or 3"	Thomas & Betts 870S Bridgeport SC-67	Crouse Hinds K250S EGS Appleton 870	1
DOM-350400	3-1/2" or 4"	Thomas & Betts 970S Bridgeport SC-69	Crouse Hinds K350S EGS Appleton 970	1

Installs Before or After Wire Pull!

Split Collar Ground Bushings

Installs before or after wire pull (unlike solid bushings)

- · Insulated throat to protect wires
- Extra tight clamp-on design ensures solid ground
- Adjustable lug allows versatile positioning on pipe
- 1/2" 6" sizes available
- Manufactured from rugged die cast zinc
- Patented



See Page 172 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

Compression Connectors



RT200

Application: These compression connectors are used in dry locations to bond unthreaded rigid or IMC conduits to electrical junction boxes or electrical enclosures. Garvin Industries' steel compression connectors provide concrete-tight connections when taped.

Advantages: Garvin Industries' heavy-gauge steel construction maintains mechanical protection and solid grounding of the conduit to the designated electrical junction box or enclosure. They eliminate the need to thread bald conduits to attach them to electrical junction boxes or enclosures. Compression connectors are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Rigid compression connectors, no thread connectors, threadless connectors, heavywall compression connectors, threadless pipe connectors.

Material: 1/2' - 2" Zinc Plated Steel, 2-1/2" - 4" Malleable Iron



RT50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
RT50	1/2"	Thomas & Betts HC-401 Hubbell Raco 1802	Crouse Hinds CPR1 EGS Appleton NTC50	25
RT75	3/4"	Thomas & Betts HC-402 Hubbell Raco 1803	Crouse Hinds CPR2 EGS Appleton NTC75	25
RT100	1"	Thomas & Betts HC-403 Hubbell Raco 1804	Crouse Hinds CPR3 EGS Appleton NTC100	25
RT125	1-1/4"	Thomas & Betts HC-404 Hubbell Raco 1805	Crouse Hinds CPR4 EGS Appleton NTC125	10
RT150	1-1/2"	Thomas & Betts HC-405 Hubbell Raco 1806	Crouse Hinds CPR5 EGS Appleton NTC150	5
RT200	2"	Thomas & Betts HC-406 Hubbell Raco 1808	Crouse Hinds CPR6 EGS Appleton NTC200	5
RT250	2-1/2"	Thomas & Betts 8721 Hubbell Raco 1810	Crouse Hinds CPR7 EGS Appleton NTC250	5
RT300	3"	Thomas & Betts 8821 Hubbell Raco 1812	Crouse Hinds CPR8 EGS Appleton NTC300	5
RT350	3-1/2"	Thomas & Betts 8851 Hubbell Raco 1814	Crouse Hinds CPR9 EGS Appleton NTC350	5
RT400	4 "	Thomas & Betts 8971 Hubbell Raco 1816	Crouse Hinds CPR10 EGS Appleton NTC400	5



Compression Couplings



Application: These compression couplings are used in dry locations to connect the ends of two unthreaded rigid or IMC conduits together. Garvin Industries' steel compression couplings provide concrete-tight connections.

Advantages: Garvin Industries' heavy-gauge steel construction maintains mechanical protection and solid grounding of one conduit to another. These couplings eliminate the need to thread bald conduits to couple them together. Compression couplings are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Rigid compression couplings, no thread couplings, threadless couplings, heavywall compression couplings, threadless conduit couplings, IMC conduit couplings.

Material: 1/2' - 2" Zinc Plated Steel, 2-1/2" - 4" Malleable



RTC75 IN USE

Part Number	Size	Similar Products		Std. Pkg.
RTC50	1/2"	Thomas & Betts HK-401 Hubbell Raco 1822	Crouse Hinds CPR21 EGS Appleton NTCC50	25
RTC75	3/4"	Thomas & BettsHK-402 Hubbell Raco 1823	Crouse Hinds CPR22 EGS Appleton NTCC75	25
RTC100	1"	Thomas & Betts HK-403 Hubbell Raco 1824	Crouse Hinds CPR23 EGS Appleton NTCC100	10
RTC125	1-1/4"	Thomas & Betts HK-404 Hubbell Raco 1825	Crouse Hinds CPR24 EGS Appleton NTCC125	10
RTC150	1-1/2"	Thomas & Betts HK-405 Hubbell Raco 1826	Crouse Hinds CPR25 EGS Appleton NTCC150	10
RTC200	2"	Thomas & Betts HK-406 Hubbell Raco 1828	Crouse Hinds CPR26 EGS Appleton NTCC200	10
RTC250	2-1/2"	Thomas & Betts HK-407 Hubbell Raco 1830	Crouse Hinds CPR27 EGS Appleton NTCC250	5
RTC300	3"	Thomas & Betts HK-408 Hubbell Raco 1832	Crouse Hinds CPR28 EGS Appleton NTCC300	5
RTC350	3-1/2"	Thomas & Betts HK-409 Hubbell Raco 1834	Crouse Hinds CPR29 EGS Appleton NTCC350	5
RTC400	4 "	Thomas & Betts HK-4010 Hubbell Raco 1836	Crouse Hinds CPR30 EGS Appleton NTCC400	5



847-455-0188 FAX 847-455-0334 garvinindustries.com

Set Screw Connectors





Application: These set-screw connectors are used in dry locations to bond unthreaded rigid or IMC conduits to electrical junction boxes or electrical enclosures. Garvin Industries' steel set-screw connectors provide concrete-tight connections when taped.

Advantages: Garvin Industries' heavy-gauge steel construction maintains mechanical protection and solid grounding of the conduit to the designated electrical junction box or enclosure. These connectors eliminate the need to thread bald conduits to connect them to boxes or enclosures. Set-screw connectors are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Rigid set-screw connectors, no thread set-screw connectors, threadless set-screw connectors, rigid conduit set-screw connectors.

Material: Zinc Plated Steel or Malleable Iron




RS-150 IN USE

Part Number	Size	Material	Similar Products		Std. Pkg.
RS-50	1/2"	Malleable Iron	Thomas & Betts HC-101 Hubbell Raco 3002	Crouse Hinds 150P EGS Appleton SNTC50	25
RS-75	3/4"	и	Thomas & Betts HC-102 Hubbell Raco 3003	Crouse Hinds 151P EGS Appleton SNTC75	25
RS-100	1"	и	Thomas & Betts HC-103 Hubbell Raco 3004	Crouse Hinds 152P EGS Appleton SNTC100	10
RS-125	1-1/4"	и	Thomas & Betts HC-104 Hubbell Raco 3005	Crouse Hinds 153P EGS Appleton SNTC125	10
RS-150	1-1/2"	и	Thomas & Betts HC-105 Hubbell Raco 3006	Crouse Hinds 154P EGS Appleton SNTC150	10
RS-200	2"	и	Thomas & Betts HC-106 Hubbell Raco 3008	Crouse Hinds 155P EGS Appleton SNTC200	10
RS-250	2-1/2"	Steel	Thomas & Betts HC-107 Hubbell Raco 2140	Crouse Hinds 456 EGS Appleton 4250S	5
RS-300	3"	и	Thomas & Betts HC-108 Hubbell Raco 2142	Crouse Hinds 457 EGS Appleton 4300S	5
RS-350	3-1/2"	и	Thomas & Betts HC-109 Hubbell Raco 2144	Crouse Hinds 458 EGS Appleton 4350S	5
RS-400	4"	и	Thomas & Betts HC-110 Hubbell Raco 2146	Crouse Hinds 469 EGS Appleton 4400S	5
RS-500	5"	Malleable Iron	Thomas & Betts Hubbell Raco	Crouse Hinds 160P EGS Appleton	5
RS-600	6"	ц	Thomas & Betts Hubbell Raco	Crouse Hinds 161P EGS Appleton	5

Set Screw Couplings





Advantages: Garvin Industries' heavy-gauge steel construction maintains mechanical protection and solid grounding of one conduit to another. These set-screw couplings eliminate the need to thread bald conduits to fit old threaded couplings. Set-screw couplings are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Rigid set-screw couplings, no thread setscrew couplings, threadless set-screw couplings, rigid conduit set-screw couplings.

Material: Zinc Plated Malleable Iron



RSC-50 IN USE



Rigid & IMC

Fittings

Part Number	Size	Similar Products		Std. Pkg.
RSC-50	1/2"	Thomas & Betts HK-101 Hubbell Raco 3022	Crouse Hinds 160 EGS Appleton SNTCC50	25
RSC-75	3/4"	Thomas & Betts HK-102 Hubbell Raco 3023	Crouse Hinds 161 EGS Appleton SNTCC75	25
RSC-100	1"	Thomas & Betts HK-103 Hubbell Raco 3024	Crouse Hinds 162 EGS Appleton SNTCC100	10
RSC-125	1-1/4"	Thomas & Betts HK-104 Hubbell Raco 3025	Crouse Hinds 163 EGS Appleton SNTCC125	10
RSC-150	1-1/2"	Thomas & Betts HK-105 Hubbell Raco 3026	Crouse Hinds 164 EGS Appleton SNTCC150	5
RSC-200	2"	Thomas & Betts HK-106 Hubbell Raco 3028	Crouse Hinds 165 EGS Appleton SNTCC200	5



847-455-0188 FAX 847-455-0334 garvinindustries.com

Three Piece Couplings



Application: These three-piece couplings are used to connect threaded rigid or IMC conduits that are not able to be turned. Garvin Industries' steel three-piece couplings provide concrete-tight connections.

Advantages: Garvin Industries' heavy-gauge steel construction maintains mechanical protection and solid grounding of one conduit to another. Three-piece couplings are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Three piece couplings, three piece coupler, conduit union, 3 piece conduit union, Erickson.

Material: Zinc Plated Malleable Iron



3PC50 IN USE

Part Number	Size	Similar Products	Std. Pkg.
3PC50	1/2"	Thomas & Betts EK-401 Crouse Hinds 190M Hubbell Raco 1502 EGS Appleton EC50	25
3PC75	3/4"	Thomas & Betts EK-402 Crouse Hinds 191 Hubbell Raco 1503 EGS Appleton EC75	25
3PC100	1"	Thomas & Betts EK-403 Crouse Hinds 192 Hubbell Raco 1504 EGS Appleton EC100	20
3PC125	1-1/4"	Thomas & Betts EK-404 Crouse Hinds 193 Hubbell Raco 1505 EGS Appleton EC125	20
3PC150	1-1/2"	Thomas & Betts EK-405 Crouse Hinds 194 Hubbell Raco 1506 EGS Appleton EC150	10
3PC200	2"	Thomas & Betts EK-406 Crouse Hinds 195 Hubbell Raco 1508 EGS Appleton EC200	10
3PC250	2-1/2"	Thomas & Betts EK-407 Crouse Hinds 196 Hubbell Raco 1510 EGS Appleton EC250	2
3PC300	3"	Thomas & Betts EK-408 Crouse Hinds 197 Hubbell Raco 1512 EGS Appleton EC300	2
3PC350	3-1/2"	Thomas & Betts EK-409 Crouse Hinds 198 Hubbell Raco 1514 EGS Appleton EC350	1
3PC400	4"	Thomas & Betts EK-410 Crouse Hinds 199 Hubbell Raco 1516 EGS Appleton EC400	1
3PC500	5"	Thomas & Betts EK-411 Crouse Hinds 188 Hubbell Raco 1520 EGS Appleton EC500	1
3PC600	6"	Thomas & Betts EK-412 Crouse Hinds 189 Hubbell Raco 1524 EGS Appleton EC600	1



Rigid Conduit Nipples





Application: These rigid conduit nipples are used with threaded rigid and IMC conduits to connect fixtures to electrical boxes and enclosures or are used with locknuts to connect two junction boxes.

Advantages: Garvin Industries' rigid conduit nipples have rugged metallic construction to ensures mechanical protection and durability.

Field Names: Close nipples, pipe nipples, pipe canopy, fixture stems, fixture nipples.





RN50C IN USE

RN50600 IN USE

Part Number	Trade Size	Length	Similar Products		Std. Pkg.
RN50C	1/2"	Close	Thomas & Betts 3770	Crouse Hinds 1500	25
RN50150	1/2"	1-1/2"	Thomas & Betts 3772	Crouse Hinds 1501	25
RN50200	1/2"	2"	Thomas & Betts 9005	Crouse Hinds 1502	10
RN50300	1/2"	3"	Thomas & Betts 9037	Crouse Hinds 1503	5
RN50400	1/2"	4"	Thomas & Betts 3782	Crouse Hinds 1504	5
RN50600	1/2"	6"	Thomas & Betts 9008	Crouse Hinds 1506	5
RN50800	1/2"	8"	Thomas & Betts 3798	Crouse Hinds 1507	5
RN501000	1/2"	10"	Thomas & Betts 3806	Crouse Hinds	5
RN501200	1/2"	12"	Thomas & Betts 3814	Crouse Hinds	5
RN75C	3/4"	Close	Thomas & Betts 3854	Crouse Hinds 1508	25
RN75150	3/4"	1-1/2"	Thomas & Betts 3856	Crouse Hinds	25
RN75200	3/4"	2"	Thomas & Betts 3858	Crouse Hinds 1509	10
RN75300	3/4"	3"	Thomas & Betts 9011	Crouse Hinds 1510	5
RN75400	3/4"	4"	Thomas & Betts 9013	Crouse Hinds 1511	5
RN75600	3/4"	6"	Thomas & Betts 9015	Crouse Hinds 1513	5
RN75800	3/4"	8"	Thomas & Betts 9019	Crouse Hinds 1514	5
RN751000	3/4"	10"	Thomas & Betts 9104	Crouse Hinds	5
RN751200	3/4"	12"	Thomas & Betts 3898	Crouse Hinds	5



847-455-0188 FAX 847-455-0334 garvinindustries.com

Rigid Conduit Nipples





Application: These rigid conduit nipples are used with threaded rigid and IMC conduits to connect fixtures to electrical boxes and enclosures or are used with locknuts to connect two junction boxes.

Advantages: Garvin Industries' rigid conduit nipples have rugged metallic construction to ensures mechanical protection and durability.

Field Names: Close nipples, pipe nipples, pipe canopy, fixture stems, fixture nipples.

Part Number	Trade Size	Length	Similar Products		Std. Pkg.
RN100C	1"	Close	Thomas & Betts 3955	Crouse Hinds	25
RN100150	1"	1-1/2"	Thomas & Betts	Crouse Hinds 1515	25
RN100200	1"	2"	Thomas & Betts 3959	Crouse Hinds 1516	10
RN100300	1"	3"	Thomas & Betts 3963	Crouse Hinds 1517	5
RN100400	1"	4"	Thomas & Betts 3967	Crouse Hinds 1518	5
RN100600	1"	6"	Thomas & Betts 3975	Crouse Hinds 1520	5
RN100800	1"	8"	Thomas & Betts 3983	Crouse Hinds 1521	5
RN1001000	1"	10"	Thomas & Betts 3991	Crouse Hinds	5
RN1001200	1"	12"	Thomas & Betts 8049	Crouse Hinds	5
RN125C	1-1/4"	Close	Thomas & Betts 4048	Crouse Hinds 1522	25
RN125150	1-1/4"	1-1/2"	Thomas & Betts	Crouse Hinds	25
RN125200	1-1/4"	2"	Thomas & Betts 9021	Crouse Hinds	10
RN125300	1-1/4"	3"	Thomas & Betts 4056	Crouse Hinds 1524	5
RN125400	1-1/4"	4"	Thomas & Betts 4060	Crouse Hinds 1525	5
RN125600	1-1/4"	6"	Thomas & Betts 4068	Crouse Hinds 1527	5
RN125800	1-1/4"	8"	Thomas & Betts 4076	Crouse Hinds 1528	5
RN1251000	1-1/4"	10"	Thomas & Betts 4084	Crouse Hinds	5
RN1251200	1-1/4"	12"	Thomas & Betts 9038	Crouse Hinds	5
		Visit www.garvinindustries.com	for blueprints and specification sheets.		167



Rigid Conduit Nipples





Application: These rigid conduit nipples are used with threaded rigid and IMC conduits to connect fixtures to electrical boxes and enclosures or are used with locknuts to connect two junction boxes.

Advantages: Garvin Industries' rigid conduit nipples have rugged metallic construction to ensures mechanical protection and durability.

Field Names: Close nipples, pipe nipples, pipe canopy, fixture stems, fixture nipples.



Part Number	Trade Size	Length	Similar Products		Std. Pkg.
RN150C	1-1/2"	Close	Thomas & Betts 4141	Crouse Hinds 1529	25
RN150150	1-1/2"	1-1/2"	Thomas & Betts	Crouse Hinds	25
RN150200	1-1/2"	2"	Thomas & Betts 4144	Crouse Hinds	10
RN150300	1-1/2"	3"	Thomas & Betts 4148	Crouse Hinds 1531	5
RN150400	1-1/2"	4"	Thomas & Betts 5152	Crouse Hinds 1532	5
RN150600	1-1/2"	6"	Thomas & Betts 9105	Crouse Hinds 1534	5
RN150800	1-1/2"	8"	Thomas & Betts 4168	Crouse Hinds 1535	5
RN1501000	1-1/2"	10"	Thomas & Betts 9024	Crouse Hinds	5
RN1501200	1-1/2"	12"	Thomas & Betts 4183	Crouse Hinds	5
RN200C	2"	Close	Thomas & Betts 4224	Crouse Hinds 1536	25
RN200150	2"	1-1/2"	Thomas & Betts	Crouse Hinds	25
RN200200	2"	2"	Thomas & Betts	Crouse Hinds 1536	10
RN200300	2"	3"	Thomas & Betts 9026	Crouse Hinds 1538	5
RN200400	2"	4"	Thomas & Betts 9028	Crouse Hinds 1539	5
RN200600	2"	6"	Thomas & Betts 9107	Crouse Hinds 1541	5
RN200800	2"	8"	Thomas & Betts 9029	Crouse Hinds 1542	5
RN2001000	2"	10"	Thomas & Betts 4259	Crouse Hinds	5
RN2001200	2"	12"	Thomas & Betts 4267	Crouse Hinds	5



847-455-0188 FAX 847-455-0334 garvinindustries.com

Threaded Couplings



RC-200

	K	(0-200
Part Number	Size	Std. Pkg.
RC-50	1/2"	100
RC-75	3/4"	100
RC-100	1"	50
RC-125	1-1/4"	50
RC-150	1-1/2"	25
RC-200	2"	25
RC-250	2-1/2"	25
RC-300	3"	10
RC-350	3-1/2"	10
RC-400	4"	10

Application: These threaded couplings are used to join two ends of threaded rigid conduits or IMC conduits together. They can also be used with chase nipples and connectors to bond threaded conduits to electrical junction boxes or enclosures.

Advantages: Garvin Industries' versatile threaded design works with all standard threaded connectors. These couplings are often used as a component to convert flexible metal conduits to EMT thinwall, rigid conduit or liquid-tight conduits by using the related threaded connectors.

Field Names: Rigid couplings, threaded rigid couplings, heavywall couplings, threaded heavywall couplings, rigid couplers, heavywall couplers, threaded couplers.

Material: Zinc Plated Steel



RC-50 IN USE

Short Threaded Couplings





Part For Pipe Overall Std. Number Size Length Pkg. HC50 1/2" 3/4" 50 HC75 3/4" 3/4" 50 HC100 1" 3/4" 25 MRC1250 1" 5/8" 25 2" 3/4" 25 MRC2300 MRC4350 4" 1" 25

Application: These short threaded couplings are used with chase nipples to provide short raceways and connections between electrical boxes that are mounted on fixed position mounting brackets made by Erico, B-Line or Minerallac.

Advantages: Garvin Industries' short threaded couplings allow wires to be easily pulled from one box to the other box on a fixed-position, wall-mounting bracket. Their perfect length fills the space between boxes and gives solid support and a secure bond to connectors and boxes. They are available for 1/2", 3/4" and 1" box knockout sizes.

Field Names: Rigid couplings, threaded rigid couplings, heavywall couplings, threaded heavywall couplings, rigid couplers, heavywall couplers, threaded couplers, short couplings.



HC50 IN USE



PRODUCT SPOTLIGHT

Check Out These

Innovative Products!

Split Collar Ground Bushings



1/2" to 6" Sizes page 172

4" Square "Cut In" Box



All Box Depths page 40



Super Bright Energy Saving Temporary Work Light

page 371

Universal Breaker Lock



page 338



Quick Shot Bridle Rings

page 290

Quick-Shot Threaded Rod Studs



Custom Lengths page 301

Quick Hang Swivel Fixture Hangers



pages 21, 53



Hollow Wall Bridle Ring Toggle Sets

page 292

Data Cable 6" Square Boxes



pages 72-75



EMT / Rigid Pipe Caps

page 144

Wide Mouth Heavy Duty Beam Clamps



page 311

Universal Breaker Lock with Lock & Key



page 338



847-455-0188 • info@garvinindustries.com www.garvinindustries.com



847-455-0188 FAX 847-455-0334 garvinindustries.com

Pipe Caps







CAPR500 & CAPR600

Part Number	Size	Std. Pkg.
CAPR50	1/2"	50
CAPR75	3/4"	50
CAPR100	1"	25
CAPR125	1-1/4"	25
CAPR150	1-1/2"	10
CAPR200	2"	10
CAPR250	2-1/2"	5
CAPR300	3"	5
CAPR350	3-1/2"	5
CAPR400	4"	5
CAPR500	5"	5
CAPR600	6"	5

Application: These vandal-proof pipes caps are used to protect rigid conduit runs that have been stubbed up and temporarily set in place. They are zinc plated steel and seal out rocks, dirt, debris, and anything vandals may use to clog the conduits that are set on the job site waiting for wire pulls.

Advantages: Garvin Industries' set-screw design locks the steel cap on the pipe opening preventing vandals from removing it and filling the pipe with debris. One-piece construction also further ensures vandals cannot tamper with it. These vandal proof caps may be used on rigid conduits and have a one-piece, quick set-screw design that does not require any taping and will not distort the pipe threads. They are also zinc electroplated for excellent corrosion protection.

Field Names: Pipe cap, pipe cover, vandal resistant pipe cap, conduit cap, conduit cover, conduit protector, rigid pipe protector.

Material: Zinc Plated Steel



CAPR50 IN USE



CAPR500 / CAPR600 IN USE

Need Electrical Supplies....

On The Jobsite!

Why wait until you get back to the shop to make your supply list...

- More than 3,000 products online
- · Request for Quotation direct from website
- · Detailed descriptions and images
- · Videos, spec sheets, blueprints, and more...

In-Stock...On-Time... Everytime!

www.garvinindustries.com





Grounding Bushings (Split Collar)





GCH	łK250
Patent	Danding

Part Number	Size	Std. Pkg.	Part Number	Size	Std. Pkg.
SGB50	1/2"	50	GCHK50	1/2"	50
SGB75	3/4"	25	GCHK75	3/4"	25
SGB100	1"	25	GCHK100	1"	25
SGB125	1-1/4"	25	GCHK125	1-1/4"	25
SGB150	1-1/2"	25	GCHK150	1-1/2"	25
SGB200	2"	25	GCHK200	2"	25
SGB250	2-1/2"	10	GCHK250	2-1/2"	10
SGB300	3"	10	GCHK300	3"	10
SGB350	3-1/2"	10	GCHK350	3-1/2"	10
SGB400	4"	10	GCHK400	4"	10
SGB500	5"	10	GCHK500	5"	10
SGB600	6"	10	GCHK600	6"	10

Application: These split grounding bushings are used on old conduits that require grounding wires to be installed without disconnecting the existing wires. They may be used on EMT, rigid conduit and IMC conduits. Their versatile grounding lug positioning and two-screw clamp-on action ensures a tight bond.

Advantages: Garvin Industries' split grounding bushing design allows ground bushings to be installed without removing existing wires in the raceway. They save countless labor hours and ensure that power stays on while the grounding bushing is installed. They may be used on EMT, rigid conduit and IMC conduits. Additionally, their versatile lay-in lug can be mounted in multiple spots on bushings. These bushings feature dual-rated aluminum grounding lugs that accept wire gauges # 4 - # 14 Copper or Aluminum wire.

Field Names: Split collar ground bushing, split grounding bushing, split ground bushing, open ground bushing, adjustable grounding bushing, ground bushing, grounding bushing, removable grounding bushing, clamp on split grounding bushing, 2 piece ground bushing, 2 piece ground bushing.

Material: Die-cast Steel





SGB50 INSTALLATION



GCHK IN USE

Versatile Industrial Fixture Hanging!

Swivel Fixture Hangers

Quickly Install Fixtures, Exit Signs, Cameras, and Other Devices in Industrial Settings

- Grounding swivel cover: cover & attached swivel pivot hub are bonded to help prevent the risk of accidental shock
- 4-11/16" swivel cover: Fits standard 4-11/16" boxes
- All items are great for replacing existing fixtures in industrial settings
- Hands free swivel cover: hinged door allows quick installation & wiring in one easy step
- For square and octagon boxes
- Cuts installation time by 50%
- 4" octagon and square version fits standard boxes
- Accommodates 1/2" or 3/4" conduit



See Page 21 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

Grounding Bushings (Threaded)



Application: These threaded grounding bushings are used to provide a means of grounding rigid or IMC conduits.

Advantages: Garvin Industries' lay-in lug style threaded grounding bushings make it easy to insert a grounding wire. They feature dual-rated aluminum grounding lugs that may be used with both copper and aluminum grounding conductors. Their insuliner temperature is rated at 150°C and their construction ensures mechanical protection for the raceway. Threaded grounding bushings are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Ground bushing, threaded ground bushing, threaded grounding bushing, insulated grounding bushing, bond bushings, bonding bushings.

Material: 1/2-4" Die-cast zinc, 5" & 6" Malleable Iron



UGB-50 IN USE

Part Number	Size	Minimum Wire Size	Maximum Wire Size	Similar Products		Std. Pkg.
UGB-50	1/2"	#14	#4	Thomas & Betts BG-201 Hubbell Raco 1212	Crouse Hinds GL 1 DC EGS Appleton GBL100	25
UGB-75	3/4"	#14	#4	Thomas & Betts BG-202 Hubbell Raco 1213	Crouse Hinds GL 2 DC EGS Appleton GBL200	25
UGB-100	1"	#14	#4	Thomas & Betts BG-203 Hubbell Raco 1214	Crouse Hinds GL 3 DC EGS Appleton GBL300	25
UGB-125	1-1/4"	#14	#1/0	Thomas & Betts BG-204 Hubbell Raco 1215	Crouse Hinds GL 4 DC EGS Appleton GBL400	10
UGB-150	1-1/2"	#14	#1/0	Thomas & Betts BG-205 Hubbell Raco 1216	Crouse Hinds GL 5 DC EGS Appleton GBL500	10
UGB-200	2"	#14	#1/0	Thomas & Betts BG-206 Hubbell Raco 1218	Crouse Hinds GL 6 DC EGS Appleton GBL600	10
UGB-250	2-1/2"	#6	#250	Thomas & Betts BG-207 Hubbell Raco 1290	Crouse Hinds GL 7 DC EGS Appleton GBL700	5
UGB-300	3"	#6	#250	Thomas & Betts BG-208 Hubbell Raco 1292 RAC	Crouse Hinds GL 8 DC EGS Appleton GBL800	5
UGB-350	3-1/2"	#6	#250	Thomas & Betts BG-209 Hubbell Raco 1294	Crouse Hinds GL 9 DC EGS Appleton GBL900	5
UGB-400	4"	#6	#250	Thomas & Betts BG-210 Hubbell Raco 1296	Crouse Hinds GL 10 DC EGS Appleton GBL1000	5



Insulating Bushings (Threaded)



Part Number	Size	Std. Pkg.
CON-50	1/2"	100
CON-75	3/4"	50
CON-100	1"	25
CON-125	1-1/4"	25
CON-150	1-1/2"	10
CON-200	2"	10
CON-250	2-1/2"	10
CON-300	3"	10
CON-350	3-1/2"	5
CON-400	4"	5
CON-500	5"	5
CON-600	6"	5

Application: These threaded insulating bushings are used on threaded rigid or IMC conduits to prevent wires from being damaged by sharp edges on conduits.

Advantages: Garvin Industries' threaded insulating bushings easily screw on threaded conduits. Their smooth throat design ensures that wires will not be damaged during wire pulling.

Field Names: Insulating bushing, wire protector bushing, MIB, B bushing.

Material: Die-cast zinc (5" & 6" are Malleable Iron)



CON-50 IN USE

Go Green on the Jobsite!

Energy Efficient Temporary Work Light

- 105 watt high-output compact fluorescent lamp offers 80% energy savings over traditional metal halide
- Very light-weight—2 lbs.
- Versatile snap hook design easily attaches to many structural members
- Standard box knockouts allows hard wire with pipe or flex cable wiring options
- No ballast in fixture means no replacement costs later to fix a bad ballast
- Gasketed covers and sealed knockouts are great for damp locations
- Premium high visibility "green" powder coating



See Page 371 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

Insulating Bushings (Threaded Plastic)



Application: These threaded insulating bushings are used on threaded rigid or IMC conduits to prevent wires from being damaged as they pass through the end of the conduit. Garvin Industries' insulating bushings provide smoothly rounded surfaces at the end of raceways.

Advantages: Garvin Industries' threaded insulating bushings are made of high-impact polypropylene that is temperature rated at 105°C and easily screws onto threaded conduits.

Field Names: Insulating bushing, wire protector bushing, insulator bushing, rigid bushings, A bushings, threaded plastic bushing, threaded insulating bushings.

Material: Plastic



IBT-50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
IBT-50	1/2"	Thomas & Betts BU-501 Hubbell Raco 1402	Crouse Hinds H 931 EGS Appleton PB-100-D	100
IBT-75	3/4"	Thomas & Betts BU-502 Hubbell Raco 1403	Crouse Hinds H 932 EGS Appleton PB-200-D	100
IBT-100	1"	Thomas & Betts BU-503 Hubbell Raco 1404	Crouse Hinds H 933 EGS Appleton PB-300-D	50
IBT-125	1-1/4"	Thomas & Betts BU-504 Hubbell Raco 1405	Crouse Hinds H 934 EGS Appleton PB-400-D	50
IBT-150	1-1/2"	Thomas & Betts BU-505 Hubbell Raco 1406	Crouse Hinds H 935 EGS Appleton PB-500-D	50
IBT-200	2"	Thomas & Betts BU-506 Hubbell Raco 1408	Crouse Hinds H 936 EGS Appleton PB-600-D	10
IBT-250	2-1/2"	Thomas & Betts BU-507 Hubbell Raco 1410	Crouse Hinds H 937 EGS Appleton PB-700-D	10
IBT-300	3"	Thomas & Betts BU-508 Hubbell Raco 1412	Crouse Hinds H 938 EGS Appleton PB-800-D	10
IBT-350	3-1/2"	Thomas & Betts BU-509 Hubbell Raco 1414	Crouse Hinds H 939 EGS Appleton PB-900-D	10
IBT-400	4"	Thomas & Betts BU-510 Hubbell Raco 1416	Crouse Hinds H 940 EGS Appleton PB-1000-D	10
IBT-500	5"	Thomas & Betts BU-512 Hubbell Raco 1420	Crouse Hinds H 941 EGS Appleton PB-1100-D	10
IBT-600	6"	Thomas & Betts BU-513 Hubbell Raco 1424	Crouse Hinds H 942 EGS Appleton PB-1200-D	10



Insulating Bushings (Split Threaded Plastic)



IBTS-400

Part Number	Size	Std. Pkg.
IBTS-50	1/2"	50
IBTS-75	3/4"	50
IBTS-100	1"	25
IBTS-125	1-1/4"	25
IBTS-150	1-1/2"	25
IBTS-200	2"	25
IBTS-250	2-1/2"	10
IBTS-300	3"	10
IBTS-350	3-1/2"	10
IBTS-400	4"	10
IBTS-500	5"	10
IBTS-600	6"	10

Application: These split, threaded insulating bushings are used on threaded rigid or IMC conduits when existing wires have already been pulled and an insulating bushing is required on the pipe.

Advantages: Garvin Industries' split, threaded insulating bushing design easily wraps around cables and screws on, ensuring a secure and tight fit. They can even be used with PVC cement to ensure the plastic remains glued together.

Field Names: Split insulating bushing, split wire protector bushing, split insulating bushing, split open insulating bushing, split insulator bushing, split rigid bushing, split a bushings.

Material: Plastic





IBTS-200 INSTALLATION

Replace Old Industrial Fixtures!

Plate Mounts to Any Style Box & Provides Holes to Hang New Energy Efficient T5 Fixtures

- · Attaches to any ceiling box or device ring
- No need to re-pipe to new location for adding fixture
- 1/2" knockout allows access to box through cover
- Use with chain and hooks or cable
- May be used in industrial or commercial applications
- Rugged steel construction



See Page 375 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

Pipe Cap Bushings (Pennies)



Application: These bushing pennies are used inside insulating bushings to cap off EMT, rigid and IMC conduits that are not in use.

Advantages: Garvin Industries' bushing pennies prevent dust, dirt, rocks and debris from falling in the conduit and clogging the pipe. They save and protect conduits making them suitable for later use. They can later be used with pull line and other pre-inserted wire pulling aids. They are also zinc electroplated for excellent corrosion protection.

Field Names: Push penny, bushing pennies, pipe cap pennies, insulator pennies, insulator caps.



PNY50 IN USE (SEE PAGE 175 FOR IBT THREADED PLASTIC BUSHINGS SHOWN ABOVE)

Part Number	Size	Similar Products		Std. Pkg.
PNY50	1/2"	Thomas & Betts Bridgeport 1661	Crouse Hinds 90 EGS Appleton P50	50
PNY75	3/4"	Thomas & Betts Bridgeport 1662	Crouse Hinds 91 EGS Appleton P75	50
PNY100	1"	Thomas & Betts Bridgeport 1663	Crouse Hinds 92 EGS Appleton P100	25
PNY125	1-1/4"	Thomas & Betts Bridgeport 1664	Crouse Hinds 93 EGS Appleton 125	25
PNY150	1-1/2"	Thomas & Betts Bridgeport 1665	Crouse Hinds 94 EGS Appleton 150	25
PNY200	2"	Thomas & Betts Bridgeport 1666	Crouse Hinds 95 EGS Appleton	25
PNY250	2-1/2"	Thomas & Betts Bridgeport 1667	Crouse Hinds 96 EGS Appleton	10
PNY300	3"	Thomas & Betts Bridgeport 1668	Crouse Hinds 97 EGS Appleton	10
PNY350	3-1/2"	Thomas & Betts Bridgeport 1669	Crouse Hinds 98 EGS Appleton	5
PNY400	4"	Thomas & Betts Bridgeport 1670	Crouse Hinds 99 EGS Appleton	5
PNY500	5"	Thomas & Betts Bridgeport 1671	Crouse Hinds EGS Appleton	5
PNY600	6"	Thomas & Betts Bridgeport	Crouse Hinds EGS Appleton	5



Concrete Form Pipe Inserts





Part Std. Number Style Size Pkg. EF50 **STRAIGHT** 1/2" 10 EF75 **STRAIGHT** 3/4" 10 1" EF100 **STRAIGHT** 10 EFL50 90° 1/2" 10 EFL75 90° 3/4" 10 1" **EFL100** 90° 10

Application: These concrete electro form pipe inserts connect rigid conduit to wood forms being used to make walls, floors and ceilings in poured concrete structures. Once the concrete is poured conduits are buried and forms are stripped allowing the threaded access point on these connectors to be exposed in finished room walls. The threaded access point on these pipe inserts create a quick and easy means of continuing the conduit run in the finished concrete shell structure.

Advantages: Garvin Industries' concrete form pipe inserts have multiple slots and holes that ensure the connectors stay fastened to wood forms and do not become dislodged during the concrete pour. Garvin Industries' unique rubber gasket seals pipes and prevents concrete slurry from distorting threaded holes on the connectors. Their rugged malleable iron construction creates solid grounding while their smooth interior surface helps wires do not get snagged when they are pulled after the concrete pour.

Field Names: Concrete form pipe inserts, electroform pipe inserts, concrete box connectors, concrete ells.

Material: Malleable Iron





EF-50 IN USE

EFL-50 IN USE

Device Compatible Concrete Box?

4" Square Extra Deep Concrete Boxes

This box offers extra depth for speakers, strobes, horns and other deep devices. Attaches in one quick step to concrete forms.

- 4" square profile accepts standard high and low voltage devices
- 3-1/2" extra deep for speaker modules, horns, strobes, or extra wire etc.
- Versatile 1/2", 3/4" or combination 1/2"
 & 3/4" knockouts
- (2) 8-32 box screws are included
- Sealed knockouts, joints and corners prevent concrete slurry from entering the box and distorting threaded connectors
- 10-32 raised ground provision allows quick grounding
- Extra long external mounting tabs allow quick attachment to concrete forms.



See Page 8 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

45° and 90° Rigid Elbows



Part Number	Trade Size		Std. Pkg.
45° Rigid Elbows			
RE-5045	1/2"		50
RE-7545	3/4"		50
RE-10045	1"		20
RE-12545	1-1/4"		20
RE-15045	1-1/2"		10
RE-20045	2"		10
RE-25045	2-1/2"		5
RE-30045	3"		5
RE-35045	3-1/2"		5
RE-40045	4"	For complete product	5
		specifications, visit	
90° Rigid Elbows		www.garvinindustries.com	
RE-5090	1/2"	, and the second	50
RE-7590	3/4"		50
RE-10090	1"		20
RE-12590	1-1/4"		20
RE-15090	1-1/2"		10
RE-20090	2"		10
RE-25090	2-1/2"		5
RE-30090	3"		5
RE-35090	3-1/2"		5
RE-40090	4"		5

Application: These rigid elbows are used to connect rigid or IMC conduits together allowing 45 or 90 degree bends.

Advantages: Garvin Industries' rigid elbows are factory made, saving time and material costs.

Field Names: Rigid 45, rigid 90, rigid elbow, galvanized 45, galvanized 90, GRC 45, GRC 90.

Material: Galvanized Steel



RE-10090 IN USE

Speed Wire Pulls!

Pull Line & Tapes Glide Through Conduit In Seconds

- 230 pounds tensile strength pull twine comes in center dispensing pail for use with blower/vacuum systems
- Conduit measuring tape saves wire and time on the job
- Sequential foot markings are printed on the tape
- Polyester pull tape has tensile strength from 1,250 to 2,500 pounds
- Low stretch durable construction works great for fiber optic, data cables or electric work





See Page 384 for more information!



Male Pipe Enlargers



Application: These male pipe enlargers are used to connect one rigid or IMC pipe size to the next larger size in order to accommodate the installation. They offer smaller male pipe threads and provide the next larger female thread opening for the addition of larger conduit sizes.

Advantages: Garvin Industries' male pipe enlargers eliminate the need to tear out old conduits and replace them with new pipes by allowing the use of existing rigid or IMC conduits.

Field Names: Male enlargers, pipe enlargers, pipe converter, threaded pipe adapter, male adapter, pipe size adapter, pipe converter hub from to reducer, from to enlarger.

Material: Malleable Iron



E5075 IN USE 3/4" PIPE TO 1/2" HOLE

Part Number	Enlarges & 0 Pipe Size to	Connects Pipe Size	Similar Products	Std. Pkg.
E5075	1/2"	3/4"	EGS Appleton ME50-75	10
E75100	3/4"	1"	EGS Appleton ME50-75	10
E100125	1"	1-1/4"	EGS Appleton ME100-125	10
E125150	1-1/4"	1-1/2"		10

Easy Identification Solutions!

Painted Boxes, Covers & Connectors

Color Coded Boxes, Covers, Connectors & Components Make It Easy to Identify the System in the Conduit!

- · Save time by quickly identifying the wire in the boxes and pipe
- · Cuts mistakes and rework on jobsite
- · Great for future updating of wire and devices when advances in technology require it



- · Economical price compared to field painting and packaging
- · Superior quality to field painting
- · Custom colors upon request!
- · Satisfies inspectors curiosity!



847-455-0188 FAX 847-455-0334 garvinindustries.com

Floor/Ceiling Flanges



FF-200

Application: These floor flanges are used to connect threaded rigid or IMC conduits to flat surfaces. The threaded hub allows pipes to be screwed in and securely fastened.

Advantages: Garvin Industries' floor flanges provide a solid means of support for 1/2" through 4" threaded pipes. Great for hanging security cameras, smoke detectors, fire alarm signals/strobes and other low-voltage and electronic signaling devices from ceilings. These floor flanges may also be used in a variety of other applications as required.

Field Names: Floor flanges, plumbers flange, floor flange, plumbers pipe hub, threaded mounting hub, pipe hub, wall hub, floor hub.

Material: Malleable Iron



FF-50 IN USE

Part Number	Size	Similar Products	Std. Pkg.
FF50	1/2"	Thomas & Betts 401	25
FF75	3/4"	Thomas & Betts 402	25
FF100	1"	Thomas & Betts 403	25
FF125	1-1/4"	Thomas & Betts 404	25
FF150	1-1/2"	Thomas & Betts 405	25
FF200	2"	Thomas & Betts 406	25

One Piece Strut Clamps!

Quickly Fasten EMT or Rigid Conduit to Overhead Strut

- 1/2" through 4" sizes available
- Clamp comes with pipe saddle to prevent slippage
- Speeds installation time compared to traditional clamps
- · Combination phillips/hex head screw
- Corrosion resistant zinc plated steel
- In stock! On time!



See Page 267 for more information!



Watertight Hubs (Standard)



Application: These watertight hubs are used with threaded rigid or IMC conduits to connect and bond them to threaded openings in boxes or enclosures. Garvin Industries' die-cast zinc, watertight hubs may be used in both wet and dry locations

Advantages: Garvin Industries' watertight hubs have a rugged metallic construction to ensure mechanical protection and durability. The watertight hubs also have an insulated throat to protect wires and reduce the effort of pulling wires. Garvin Industries' watertight hubs also feature an O-ring to provide a rain-tight seal on electrical boxes or enclosures.

Field Names: watertight hub, watertight hub, seal tight hub, watertight connector, weatherproof pipe hub, conduit hub.

Material: Die-cast zinc



WH50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
WH50	1/2"	Thomas & Betts H050-SC Hubbell Raco 1702	Crouse Hinds ST 1 EGS Appleton HUB50D	25
WH75	3/4"	Thomas & Betts H075-SC Hubbell Raco 1703	Crouse Hinds ST 2 EGS Appleton HUB75D	10
WH100	1"	Thomas & Betts H100-SC Hubbell Raco 1704	Crouse Hinds ST 3 EGS Appleton HUB100D	10
WH125	1-1/4"	Thomas & Betts H125-SC Hubbell Raco 1705	Crouse Hinds ST 4 EGS Appleton HUB125D	10
WH150	1-1/2"	Thomas & Betts H150-SC Hubbell Raco 1706	Crouse Hinds ST 5 EGS Appleton HUB150D	10
WH200	2"	Thomas & Betts H200-SC Hubbell Raco 1708	Crouse Hinds ST 6 EGS Appleton HUB200D	10
WH250	2-1/2"	Thomas & Betts H250-SC Hubbell Raco 1710	Crouse Hinds ST 7 EGS Appleton HUB250D	5
WH300	3"	Thomas & Betts H300-SC Hubbell Raco 1712	Crouse Hinds ST 8 EGS Appleton HUB300D	5
WH350	3-1/2"	Thomas & Betts H350-SC Hubbell Raco 1714	Crouse Hinds ST 9 EGS Appleton HUB350D	5
WH400	4"	Thomas & Betts H400-SC Hubbell Raco 1716	Crouse Hinds ST 10 EGS Appleton HUB400D	5



847-455-0188 FAX 847-455-0334 garvinindustries.com

Watertight Hubs (Grounding Lugs)



Application: These watertight hubs with grounding lugs are used to secure threaded rigid or IMC conduits to electrical boxes or enclosures. They have insulated throats to protect wires from damage.

Advantages: Garvin Industries' watertight hubs with grounding lugs screw together in one quick easy motion; there is no need for welding and bonding to electrical boxes or enclosures. They seal out moisture in wet locations and their lay-in lug design make it simple for ground wire installation.

Field Names: Watertight hubs, weatherproof box hubs, water proof hubs, weatherproof connectors, weather proof connectors, watertight hubs, conduit hub.

Material: Die-cast zinc



WHG50 IN USE

Part Number	Size	Minimum Wire Slze	Maximum Wire Size	Similar Products		Std. Pkg.
WHG50	1/2"	#14	#4	Thomas & Betts Hubbell Raco	Crouse Hinds STG1 EGS Appleton HUBG50D	25
WHG75	3/4"	#14	#4	Thomas & Betts Hubbell Raco	Crouse Hinds STG 2 EGS Appleton HUBG75D	10
WHG100	1"	#14	#4	Thomas & Betts Hubbell Raco	Crouse Hinds STG 3 EGS Appleton HUBG100D	10
WHG125	1-1/4"	#14	#1/0	Thomas & Betts Hubbell Raco	Crouse Hinds STG 4 EGS Appleton HUBG125D	10
WHG150	1-1/2"	#14	#1/0	Thomas & Betts Hubbell Raco	Crouse Hinds STG 5 EGS Appleton HUBG150D	10
WHG200	2"	#14	#1/0	Thomas & Betts Hubbell Raco	Crouse Hinds STG 6 EGS Appleton HUBG200D	10
WHG250	2-1/2"	#8	#1/0	Thomas & Betts Hubbell Raco	Crouse Hinds STG 7 EGS Appleton HUBG250D	5
WHG300	3"	#8	#1/0	Thomas & Betts Hubbell Raco	Crouse Hinds STG 8 EGS Appleton HUBG300D	5
WHG350	3-1/2"	#6	#3/0	Thomas & Betts Hubbell Raco	Crouse Hinds STG 9 EGS Appleton HUBG350D	5
WHG400	4"	#6	#3/0	Thomas & Betts Hubbell Raco	Crouse Hinds STG 10 EGS Appleton HUBG400D	5



Service Entrance Caps (Clamp-on)



Part Number	Size	Std. Pkg.
SEC50	1/2"	15
SEC75	3/4"	10
SEC100	1"	7
SEC125	1-1/4"	5
SEC150	1-1/2"	5
SEC200	2"	1
SEC250	2-1/2"	1
SEC300	3"	1
SEC350	3-1/2"	1
SEC400	4"	1

Application: These service entrance caps attach to the end of threaded rigid conduits that are being used to bring overhead power to buildings or homes. Their clamp-on design and large insulator yoke allows the cables from meters to be hung outside of service heads without the fear of abrasion while waiting for the utility power connections. Available sizes are 1/2"-4".

Advantages: Garvin Industries' labor-saving, clamp-on design eliminates the need to screw on a threaded service head. Two screw clamping action bites tightly on the threaded rigid conduits to ensure they will remain in place during severe/harsh weather.

Field Names: Service entrance caps, weather heads, service entrance heads, service entrance kits, cobra heads, weather caps, utility service caps, meter heads, service heads

Material: Cast Zinc



SEC50 IN USE

Custom Manufactured Solutions!

We Specialize in Unique Custom Solutions!

Send Us Your Product Idea, Sketch, Blueprint or Sample and Let Our Engineers Develop a Solution That is Right for You!

- · Metal stamping and fabrication
- Die casting and machining
- Drilling, tapping, threading, bending, and prefab assemblies
- Full line prefab services
- Patent and royalty agreements
- Stocking programs available for qualifying products





847-455-0188 FAX 847-455-0334 garvinindustries.com

Reducing Bushings



Application: These reducing bushings are used with threaded rigid or IMC conduits to reduce the size of female hubs in order to accommodate smaller sized conduits or male threaded hubs.

Advantages: Garvin Industries' rugged, steel construction maintains mechanical protection and solid grounding of the conduit to the designated electrical junction box or enclosure. Reducing bushings are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Reducer, reducer bushings, reducing bushings, reducing hub, threaded reducer, pipe reducer, pipe thread converter, pipe adapter bushing.



				RB-7550 IN USE	
Part Number	Male Exterior Threads	Female Interior Threads	Similar Products	NB-7330 IN GGE	Std. Pkg.
RB-5038	1/2"	3/8"	Thomas & Betts Hubbell Raco 1141	Crouse Hinds EGS Appleton RB50-38	100
RB-7550	3/4"	1/2"	Thomas & Betts RB-121 Hubbell Raco 1142	Crouse Hinds 251 EGS Appleton RB75-50	50
RB-10050	1"	1/2"	Thomas & Betts RB-131 Hubbell Raco 1143	Crouse Hinds 252 EGS Appleton RB100-50	50
RB-10075	1"	3/4"	Thomas & Betts RB-132 Hubbell Raco 1144	Crouse Hinds 260 EGS Appleton RB100-75	50
RB-12550	1-1/4"	1/2"	Thomas & Betts RB-141 Hubbell Raco 1145	Crouse Hinds 253 EGS Appleton RB125-50	20
RB-12575	1-1/4"	3/4"	Thomas & Betts RB-142 Hubbell Raco 1146	Crouse Hinds 261 EGS Appleton RB125-75	20
RB-125100	1-1/4"	1"	Thomas & Betts RB-143 Hubbell Raco 1147	Crouse Hinds 268 EGS Appleton RB125-100	20
RB-15050	1-1/2"	1/2"	Thomas & Betts RB-151 Hubbell Raco 1148	Crouse Hinds 254 EGS Appleton RB150-50	10
RB-15075	1-1/2"	3/4"	Thomas & Betts RB-152 Hubbell Raco 1149	Crouse Hinds 262 EGS Appleton RB150-75	10
RB-150100	1-1/2"	1"	Thomas & Betts RB-153 Hubbell Raco 1150	Crouse Hinds 269 EGS Appleton RB150-100	10
RB-150125	1-1/2"	1-1/4"	Thomas & Betts RB-154 Hubbell Raco 1151	Crouse Hinds 275 EGS Appleton RB150-125	10
RB-20050	2"	1/2"	Thomas & Betts RB-161 Hubbell Raco 1152	Crouse Hinds 255 EGS Appleton RB200-50	10
RB-20075	2"	3/4"	Thomas & Betts RB-162 Hubbell Raco 1153	Crouse Hinds 263 EGS Appleton RB200-75	10
RB-200100	2"	1"	Thomas & Betts RB-163 Hubbell Raco 1154	Crouse Hinds 270 S EGS Appleton RB200-100	10
RB-200125	2"	1-1/4"	Thomas & Betts RB-164 Hubbell Raco 1155	Crouse Hinds 276 EGS Appleton RB200-125	10
RB-200150	2"	1-1/2"	Thomas & Betts RB-165 Hubbell Raco 1156	Crouse Hinds 281 EGS Appleton RB200-150	10



Reducing Bushings



Application: These reducing bushings are used with threaded rigid or IMC conduits to reduce the size of female hubs in order to accommodate smaller sized conduits or male threaded hubs.

Advantages: Garvin Industries' rugged, steel construction maintains mechanical protection and solid grounding of the conduit to the designated electrical junction box or enclosure. Reducing bushings are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Reducer, reducer bushings, reducing bushings, reducing hub, threaded reducer, pipe reducer, pipe thread converter, pipe adapter bushing.

Material: Malleable Iron

Part Number	Male Exterior Threads	Female Interior Threads	Similar Products		Std. Pkg.
RB-25050	2-1/2"	1/2"	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	5
RB-25075	2-1/2"	3/4"	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	5
RB-250100	2-1/2"	1"	Thomas & Betts Hubbell Raco	Crouse Hinds 282 EGS Appleton RB250-100	5
RB-250125	2-1/2"	1-1/4"	Thomas & Betts Hubbell Raco 1160	Crouse Hinds 283 EGS Appleton RB250-125	5
RB-250150	2-1/2"	1-1/2"	Thomas & Betts RB-175 Hubbell Raco 1161	Crouse Hinds EGS Appleton RB250-150	5
RB-250200	2-1/2"	2"	Thomas & Betts RB-176 Hubbell Raco 1162	Crouse Hinds 285 EGS Appleton RB250-200	5
RB-300100	3"	1"	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton RB300-100	1
RB-300125	3"	1-1/4"	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton RB300-125	1
RB-300150	3"	1-1/2"	Thomas & Betts Hubbell Raco	Crouse Hinds 288 EGS Appleton RB300-150	1
RB-300200	3"	2"	Thomas & Betts RB-186 Hubbell Raco 1168	Crouse Hinds 289 EGS Appleton RB300-200	1
RB-300250	3"	2-1/2"	Thomas & Betts RB-187 Hubbell Raco 1169	Crouse Hinds 290M EGS Appleton RB300-250	1



847-455-0188 FAX 847-455-0334 garvinindustries.com

Reducing Bushings



Application: These reducing bushings are used with threaded rigid or IMC conduits to reduce the size of female hubs in order to accommodate smaller sized conduits or male threaded hubs.

Advantages: Garvin Industries' rugged, steel construction maintains mechanical protection and solid grounding of the conduit to the designated electrical junction box or enclosure. Reducing bushings are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Reducer, reducer bushings, reducing bushings, reducing hub, threaded reducer, pipe reducer, pipe thread converter, pipe adapter bushing.

Material: Malleable Iron

Part Number	Male Exterior Threads	Female Interior Threads	Similar Products		Std. Pkg.
RB-350200	3-1/2"	2"	Thomas & Betts Hubbell Raco 1175	Crouse Hinds 291 EGS Appleton RB350-200	1
RB-350250	3-1/2"	2-1/2"	Thomas & Betts Hubbell Raco 1176	Crouse Hinds 292 EGS Appleton RB350-250	1
RB-350300	3-1/2"	3"	Thomas & Betts Hubbell Raco 1177	Crouse Hinds 293 EGS Appleton RB350-300	1
RB-400200	4"	2"	Thomas & Betts Hubbell Raco	Crouse Hinds 294 EGS Appleton RB400-200	1
RB-400250	4"	2-1/2"	Thomas & Betts Hubbell Raco	Crouse Hinds 295 EGS Appleton RB400-250	1
RB-400300	4"	3"	Thomas & Betts RB-187 Hubbell Raco 1185	Crouse Hinds 296 EGS Appleton RB400-300	1
RB-400350	4"	3-1/2"	Thomas & Betts Hubbell Raco 1186	Crouse Hinds 297 EGS Appleton RB400-350	1
RB-500400	5"	4"	Thomas & Betts Hubbell Raco	Crouse Hinds 298 EGS Appleton RB500-400	1
RB-600500	6"	5"	Thomas & Betts Hubbell Raco	Crouse Hinds 299 EGS Appleton RB600-500	1



Combination Couplings (Rigid to Flexible Metal Conduit)



Application: These combination couplings are used to connect flexible metal conduits to threaded rigid or IMC conduits.

Advantages: Garvin Industries' combination couplings have a construction that ensures mechanical protection. Combination couplings are also zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Combination couplings, combination fittings, combination flexible metal conduit fittings, from to coupling, from to connector, flex to EMT coupling, EMT to flex coupling, pipe to flex coupling.

Material: Malleable Iron



RTF50 IN USE

Part Number	Rigid	Flex Size		RTF50 IN USE	Std.
	Size		Similar Products		Pkg.
RTF50	1/2"	1/2"	Thomas & Betts Hubbell Raco 1552	Crouse Hinds 65 EGS Appleton RCC50	25
RTF75	3/4"	3/4"	Thomas & Betts Hubbell Raco 1553	Crouse Hinds 66 EGS Appleton RCC75	25
RTF100	1"	1"	Thomas & Betts Hubbell Raco	Crouse Hinds 67 EGS Appleton	10
RTF125	1-1/4"	1-1/4"	Thomas & Betts Hubbell Raco	Crouse Hinds 68 EGS Appleton	10

Combination Couplings (Rigid to EMT)



Application: Garvin Industries Rigid to EMT Conduit couplings are used when an installer needs to convert from EMT to rigid conduit mid-run when they are installing the electrical raceway.

Advantages: These combination couplings allow an installer to quickly and easilly switch from one type of conduit to another. One side of the coupling is threaded for Rigid pipe and the other side accepts EMT conduit. Quick compression glands bite tightly onto the EMT conduit.

Field Names: Combination coupling, rigid to emt coupling, combination connectors, from to couplings.

Material: Zinc-plated steel

Part Number	Rigid Size	EMT Size	Std. Pkg.
RTE50	1/2"	1/2"	25
RTE75	3/4"	3/4"	25
RTE100	1"	1"	10
RTE125	1-1/4"	1-1/4"	10



847-455-0188 FAX 847-455-0334 garvinindustries.com

Pull Elbows, 90°





Application: These pull elbows are used to bond threaded rigid or IMC conduits to form 90° turns in conduit running to electrical junction boxes or enclosures.

Advantages: Garvin Industries' pull elbows come standard with a gasket and screw cover that are removable to aid in wire pulling through the fittings.

Field Names: Handy ells, pull ells, pulling ells, pull elbows, Jakes, handy pull Jakes.

Material: Die-cast zinc & Rubber Gasket





PF-50 IN USE

PEB-50 IN USE

			PE-30 IN U	SE PEB-30 IN USE	
Part Number	Size	Connection	Similar Products		Std. Pkg.
PE-50	1/2"	Rigid/Rigid	Thomas & Betts HL-601 Hubbell Raco 2652	Crouse Hinds 850RR DC EGS Appleton FFL50	10
PE-75	3/4"	Rigid/Rigid	Thomas & Betts HL-602 Hubbell Raco 2653	Crouse Hinds 875RR DC EGS Appleton FFL75	10
PE-100	1"	Rigid/Rigid	Thomas & Betts HL-603 Hubbell Raco 2654	Crouse Hinds 8100RR DC EGS Appleton FFL100	10
PE-125	1-1/4"	Rigid/Rigid	Thomas & Betts HL-604 Hubbell Raco 2655	Crouse Hinds 8125RR DC EGS Appleton FFL125	5
PEB-50	1/2"	Rigid/Box	Thomas & Betts HL-611 Hubbell Raco 2662	Crouse Hinds 850RB DC EGS Appleton MFL50	10
PEB-75	3/4"	Rigid/Box	Thomas & Betts HL-612 Hubbell Raco 2663	Crouse Hinds 875RB DC EGS Appleton MFL75	10
PEB-100	1"	Rigid/Box	Thomas & Betts Hubbell Raco 2664 RAC	Crouse Hinds 8100RB DC EGS Appleton MFL100	10
PEB-125	1-1/4"	Rigid/Box	Thomas & Betts Hubbell Raco	Crouse Hinds 8125RB DC EGS Appleton MFL125	5

Fixture Stems & Canopies!

Let Us Cut, Thread & Color Your Stem to the Perfect Length!

- Powder coated fixture stems beautify any interior
- Custom length to meet your room requirements
- 1/4", 3/8", 1/2", 3/4" and other sizes available—ask our sales team
- Custom colors for qualifying quantities
- Stocking programs available
- Canopy comes in multiple styles for various architectural ceiling requirements



See Page 373 for more information!



Threaded Bushed Nipples



Application: These insulated threaded bushed nipples are used with threaded female conduit couplings to connect conduits to electrical boxes and enclosures or are used with locknuts to connect two junction boxes.

Advantages: Garvin Industries' rugged metallic construction ensures mechanical protection and durability for both die-cast zinc and malleable-iron threaded bushed nipples. Their insulated throat liner protects wires from sharp edges on conduits.

Field Names: Conduit nipples, conduit bushed nipples, threaded nipples.

Material: 1/2"- 4" die-cast zinc; 5" & 6" Malleable Iron



CHN-50I IN USE

Part Number	Size	Similar Products		Std. Pkg.
CHN-50I	1/2"	Thomas & Betts HA-801 Hubbell Raco 1662	Crouse Hinds 50D EGS Appleton CN50	100
CHN-75I	3/4"	Thomas & Betts HA-802 Hubbell Raco 1663	Crouse Hinds 51D EGS Appleton CN75	50
CHN-100I	1"	Thomas & Betts HA-803 Hubbell Raco 1664	Crouse Hinds 52D EGS Appleton CN100	25
CHN-125I	1-1/4"	Thomas & Betts HA-804 Hubbell Raco 1665	Crouse Hinds 53D EGS Appleton CN125	25
CHN-150I	1-1/2"	Thomas & Betts HA-805 Hubbell Raco 1666	Crouse Hinds 54D EGS Appleton CN150	25
CHN-200I	2"	Thomas & Betts HA-806 Hubbell Raco 1668	Crouse Hinds 55D EGS Appleton CN200	25
CHN-250I	2-1/2"	Thomas & Betts HA-807 Hubbell Raco 1670	Crouse Hinds 56D EGS Appleton CN250	10
CHN-300I	3"	Thomas & Betts HA-808 Hubbell Raco 1672	Crouse Hinds 57D EGS Appleton CN300	10
CHN-350I	3-1/2"	Thomas & Betts HA-809 Hubbell Raco 1674	Crouse Hinds 58D EGS Appleton CN350	5
CHN-400I	4"	Thomas & Betts HA-810 Hubbell Raco 1676	Crouse Hinds 59D EGS Appleton CN400	5
CHN-500I	5"	Thomas & Betts Hubbell Raco	Crouse Hinds 1060 EGS Appleton CN500	5
CHN-600I	6"	Thomas & Betts Hubbell Raco	Crouse Hinds 1061 EGS Appleton CN600	5



847-455-0188 FAX 847-455-0334 garvinindustries.com

Threaded Nipples (Extra Long Thread)



Application: These threaded nipples are used with threaded, female conduit couplings to connect conduits to electrical boxes and enclosures or used with locknuts to connect two junction boxes.

Advantages: Garvin Industries' threaded nipples with extra long threads are ideal to span the 1" gap that needs a conduit chase installed.

Field Names: Conduit nipples, threaded nipples.

Material: Die-cast zinc

Part Number	Size	Thread Length	Similar Products	Std. Pkg.
CHN-50100	1/2"	1"	Thomas & Betts HA-211	25
CHN-75100	3/4"	1"	Thomas & Betts HA-212	25
CHN-100100	1"	1"	Thomas & Betts HA-213	25

Drop Rod In Record Time!

Quick Shot Threaded Rod Studs

Ask About Our Custom Cut to Length Rod Studs

- Available in smooth, bald rod or threaded 1/4-20 or 3/8-16 sizes
- Works with most manufacturer's powder actuated fastening tools
- Threaded studs have coupler sleeve that allows rod length adjustment
- May also be screw mounted if powder actuated guns are prohibited on jobsite
- No more manual fastening and drilling holes in ceiling
- Used for numerous electrical, low voltage, HVAC, sprinkler, and lighting applications



See Page 301 for more information!



Conduit Nipples (Offset)



Application: These offset nipples are used to connect two boxes or enclosures when knockouts are not in line. They offset the conduit connections by 3/4".

Advantages: Garvin Industries' offset nipples have a rugged metallic construction to ensure mechanical protection and durability. They also reduce the need to do offset conduit bending.

Field Names: Offset nipples, offset conduit nipples, angled conduit nipples.

Material: Die-cast zinc & Malleable Iron



OCN50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
OCN50	1/2"	Thomas & Betts HO-221 Hubbell Raco 1452	Crouse Hinds 300DC EGS Appleton RN-50	100
OCN75	3/4"	Thomas & Betts HO-222 Hubbell Raco 1453	Crouse Hinds 301DC EGS Appleton RN-75	100
OCN100	1"	Thomas & Betts HO-223 Hubbell Raco 1454	Crouse Hinds 302DC EGS Appleton RN-100	50
OCN125	1-1/4"	Thomas & Betts HO-224 Hubbell Raco 1455	Crouse Hinds 303DC EGS Appleton RN-125	50
OCN150	1-1/2"	Thomas & Betts HO-225 Hubbell Raco 1456	Crouse Hinds 304DC EGS Appleton RN-150	50
OCN200	2"	Thomas & Betts HO-226 Hubbell Raco 1458	Crouse Hinds 305DC EGS Appleton RN-200	10
OCN250	2-1/2"	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	10
OCN300	3"	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	10
OCN350	3-1/2"	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	5
OCN400	4"	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	5
100		V6.16	same face blue prints and specification	1 1



847-455-0188 FAX 847-455-0334 garvinindustries.com

Locknuts (Heavy Duty)



Application: These heavy-duty locknuts are used in dry locations to secure threaded conduits or connectors to electrical junction boxes or enclosures.

Advantages: Garvin Industries' heavy-gauge steel construction maintains mechanical protection and solid grounding of the conduit to the designated electrical junction box or enclosure. Heavy-duty locknuts are zinc electroplated for excellent corrosion protection in damp locations. Serrated teeth on the locknut bite into the box and enclosure to prevent vibratory loosening of the connection.

Field Names: Lock nuts, conduit nuts, locking nuts, jam nuts, coupling nuts, pipe locking nuts, locknuts.



LN-50 IN USE

Part Number	Size	Similar Products or Specia	Std. Pkg.	
LN-38	3/8"	3/8" Steel Locknut		100
LN-50	1/2"	Thomas & Betts LN-101-SC Hubbell Raco 1002	Crouse Hinds 11 EGS Appleton BL50	100
LN-75	3/4"	Thomas & Betts LN-102 Hubbell Raco 1003	Crouse Hinds 12 EGS Appleton BL75	100
LN-100	1"	Thomas & Betts LN-103 Hubbell Raco 1004	Crouse Hinds 13 EGS Appleton BL100	50
LN-125	1-1/4"	Thomas & Betts LN-104 Hubbell Raco 1005	Crouse Hinds 14 EGS Appleton BL125	50
LN-150	1-1/2"	Thomas & Betts LN-105 Hubbell Raco 1006	Crouse Hinds 15 EGS Appleton BL150	25
LN-200	2"	Thomas & Betts LN-106 Hubbell Raco 1008	Crouse Hinds 16 EGS Appleton BL200	10
LN-250	2-1/2"	Thomas & Betts LN-107 Hubbell Raco 1010	Crouse Hinds 17 EGS Appleton BL250	10
LN-300	3"	Thomas & Betts LN-108 Hubbell Raco 1012	Crouse Hinds 18 EGS Appleton BL300	10
LN-350	3-1/2"	Thomas & Betts LN-109 Hubbell Raco 1014	Crouse Hinds 19 EGS Appleton BL350	5
LN-400	4"	Thomas & Betts LN-110 Hubbell Raco 1016	Crouse Hinds 20 EGS Appleton BL400	5
LN-500	5"	Thomas & Betts LN-111 Hubbell Raco 1020	Crouse Hinds 22 EGS Appleton BL500	5
LN-600	6"	Thomas & Betts LN-112 Hubbell Raco 1024	Crouse Hinds 23 EGS Appleton BL600	5



Locknuts (Grounding)



Application: These grounding locknuts are used on threaded conduits or connectors to bond locknuts when additional locking and grounding connections are required, such as when severe vibration is encountered.

Advantages: Garvin Industries' heavy-gauge steel construction of these grounding locknuts maintains mechanical protection and durability. Serrated teeth on the locknut bite into the box and enclosure to prevent vibratory loosening of the connection. Grounding locknuts are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Grounding locknuts, grounding conduit nuts, grounding locking nuts, grounding jam nuts, grounding coupling nuts, grounding pipe locking nuts, grounding bonding locknuts.



LNG-50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
LNG-50	1/2"	Thomas & Betts LG-401 Hubbell Raco 1242	Crouse Hinds GL 11 EGS Appleton GL50	100
LNG-75	3/4"	Thomas & Betts LG-402 Hubbell Raco 1243	Crouse Hinds GL 12 EGS Appleton GL75	100
LNG-100	1"	Thomas & Betts LG-403 Hubbell Raco 1244	Crouse Hinds GL 13 EGS Appleton GL100	50
LNG-125	1-1/4"	Thomas & Betts LG-404 Hubbell Raco 1245	Crouse Hinds GL 14 EGS Appleton GL125	50
LNG-150	1-1/2"	Thomas & Betts LG-405 Hubbell Raco 1246	Crouse Hinds GL 15 EGS Appleton GL150	25
LNG-200	2"	Thomas & Betts LG-406 Hubbell Raco 1248	Crouse Hinds GL 16 EGS Appleton GL200	25
LNG-250	2-1/2"	Thomas & Betts LG-407 Hubbell Raco 1250	Crouse Hinds GL 17 EGS Appleton GL250	10
LNG-300	3"	Thomas & Betts LG-408 Hubbell Raco 1252	Crouse Hinds GL 18 EGS Appleton GL300	10
LNG-350	3-1/2"	Thomas & Betts LG-409 Hubbell Raco 1254	Crouse Hinds GL 19 EGS Appleton GL350	5
LNG-400	4"	Thomas & Betts LG-410 Hubbell Raco 1256	Crouse Hinds GL 20 EGS Appleton GL400	5
LNG-500	5"	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	5
LNG-600	6"	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	5



847-455-0188 FAX 847-455-0334 garvinindustries.com


Locknuts (Sealing)



Application: These sealing locknuts are used to secure threaded conduits or connectors to electrical junction boxes or enclosures in wet locations. Their gasketed surface provides a watertight seal against the box surface.

Advantages: Garvin Industries' sealing locknuts allow standard junction boxes to be used with unthreaded conduit knockout openings in wet locations. Serrated teeth on the locknut bite into the box and enclosure to prevent vibratory loosening of the connection. Gasketed sealing locknuts are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Sealing locknuts, sealing conduit nuts, sealing locking nuts, sealing jam nuts, sealing coupling nuts, sealing pipe locking nuts.



LNS-50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
LNS-50	1/2"	Thomas & Betts LS-101 Hubbell Raco	Crouse Hinds 11X EGS Appleton BLSG50	50
LNS-75	3/4"	Thomas & Betts LS-102 Hubbell Raco	Crouse Hinds 12X EGS Appleton BLSG75	50
LNS-100	1"	Thomas & Betts LS-103 Hubbell Raco	Crouse Hinds 13X EGS Appleton BLSG100	25
LNS-125	1-1/4"	Thomas & Betts LS-104 Hubbell Raco	Crouse Hinds 14X EGS Appleton BLSG125	25
LNS-150	1-1/2"	Thomas & Betts LS-105 Hubbell Raco	Crouse Hinds 15X EGS Appleton BLSG150	10
LNS-200	2"	Thomas & Betts LS-106 Hubbell Raco	Crouse Hinds 16X EGS Appleton BLSG200	10
LNS-250	2-1/2"	Thomas & Betts LS-107 Hubbell Raco	Crouse Hinds 17X EGS Appleton BLSG250	5
LNS-300	3"	Thomas & Betts LS-108 Hubbell Raco	Crouse Hinds 18X EGS Appleton BLSG300	5
LNS-350	3-1/2"	Thomas & Betts LS-109 Hubbell Raco	Crouse Hinds 19X EGS Appleton BLSG350	5
LNS-400	4"	Thomas & Betts LS-110 Hubbell Raco	Crouse Hinds 20X EGS Appleton BLSG400	5
LNS-500	5"	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton BLSG500	5
LNS-600	6"	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton BLSG600	5

Fittings

Grounding & Bonding



Ground Clamps for Bare or Armored Ground Wire



Application: These ground clamps are used to ground copper or aluminum wires to water pipes, ground rods, rebar or other structural members, ensuring a positive grounding connection to the earth. These clamps may be used on pipe sizes up to 6" and are made to accommodate bare or armored ground cable.

Advantages: Garvin Industries' unique, labor-saving design allows the upper portion of clamps to slide open easily and attach to structural pipes and rebar without having to remove the screws. The rotational movement of the clamps allows quick removal when necessary. Their cast bronze construction assures ground path continuity and provides excellent corrosion protection in damp locations. They work with both solid- and stranded-conductor ground wire.

Field Names: Ground clamp, water pipe clamps, acorn clamps, bronze pipe clamps, water bond clamp, jumper clamp, bond clamp.

Material: Cast Bronze



GCB50100 IN USE

Part Number	Pipe Size	Wire Range	Casting Material	Ground Cable	Std. Pkg.
GCBZ50100	1/2" to 1"	8 Solid - 2 Stranded	Zinc	Bare Wire	25
GCB50100	1/2" to 1"	10 Solid - 2 Stranded	Bronze	Bare Wire	25
GCBB50100	1/2" to 1"	10 Solid - 2 Stranded	Bronze	Bare Wire	25
GCB50100LI	1/2" to 1"	8 Stranded - 4/0 Stranded (For DIRECT BURIAL)	Bronze	Bare Wire	25
GCB125200	1-1/4" to 2"	10 Solid - 2 Stranded	Bronze	Bare Wire	10
GCB250400	2-1/2" to 4"	10 Solid - 2 Stranded	Bronze	Bare Wire	5
GCB450600	4-1/2" to 6"	10 Solid - 4 Stranded	Bronze	Bare Wire	5
GCR50100	1/2" to 1"	10 Solid - 2 Stranded	Bronze	Bare Wire	25
GCA50100	1/2" to 1"	8 Solid - 4 Stranded	Bronze	Armored	20
GCA125200	1-1/4" to 2"	8 Solid - 4 Stranded	Bronze	Armored	10
GCA250400	2-1/2" to 4"	8 Solid - 4 Stranded	Bronze	Armored	5
GCA450600	4-1/2" to 6"	8 Solid - 4 Stranded	Bronze	Armored	5



GCB50100LI IN USE



GCA50100 IN USE



Grounding & Bonding Fittings

847-455-0188 FAX 847-455-0334 garvinindustries.com

Ground Clamps with Assembled Strap & Hub



Part Number	Pipe Size	Hub Size	Std. Pkg.
GCH5010050*	1/2" to 1"	1/2"	10
GCH5010075*	1/2" to 1"	3/4"	10
GCH50100100*	1/2" to 1"	1"	10
H50	Hub Only	1/2"	25
H75	Hub Only	3/4"	25
H100	Hub Only	1"	20

^{*}For two-screw clamp version with enhanced bonding, add -CHI after the part number when ordering.

Application: These ground clamps are used to ground copper or aluminum wires to water pipes, ground rods, rebar or other structural members, ensuring a positive grounding connection to the earth. These clamps may be used on pipe sizes up to 1" and are made to accommodate bare or armored ground cables.

Advantages: Garvin Industries" unique labor-saving design allows the upper portion of clamps to slide open easily and, attach to ground members without having to remove the screws. The rotational movement of the clamps allows quick removal when necessary. Their cast bronze construction assures ground path continuity and provides excellent corrosion protection in damp locations. They work with both solid and stranded ground wire. Their threaded hub provides a set screw clamp connection point when grounding wires must be run in conduits.

Field Names: Ground clamp, water pipe clamps, acorn clamps, bronze pipe clamps, jumper clamps, bond clamps, water bond clamps.

Material: Bronze Casting & Copper Strap



GCH5010050 IN USE

Ground Rod Clamps




Part Number	Pipe Size	Std. Pkg.
GRC50	1/2"	20
GRC58	5/8"	20
GRC75	3/4"	10



GRC50 IN USE

Lay-In Lugs





Application: These ground straps are used to provide positive grounding points in load centers or other metal enclosures where they are needed. The solderless terminal lugs are used to connect wires to metal enclosures.

Advantages: Garvin Industries' ground straps and terminal lugs quickly provide an access point when wires must be bonded or grounded in terminal boxes, load centers or enclosures.

Field Names: Wire lugs, solderless terminal lugs, mechanical lugs.

Material: Aluminum or Copper

Part Number	Material	Lug Size	DIM A	DIM B	DIM C	Weight Per C	Std. Pkg.
4/14AL	Aluminum	4/14	1-1/16"	3/8"	3/4"	1.9	100
1/0-8AL	Aluminum	1/0-8	1-1/12"	5/8"	1-1/8"	6.6	100
3/0-6AL	Aluminum	3/0-6	2"	13/16"	1-1/2"	16.4	50
250MCM-6AL	Aluminum	250MCM-6	2-3/16"	13/16"	1-11/16"	18.8	50
4/14CL	Copper	4/14	1-1/16"	3/8"	3/4"	4.4	100
1/0-8CL	Copper	1/0-8	1-1/12"	5/8"	1-1/8"	15.9	100
3/0-6CL	Copper	3/0-6	2"	13/16"	1-1/2"	40.0	50
250MCM-6CL	Copper	250MCM-6	2-3/16"	13/16"	1-11/16"	50.3	50

Intersystem Bonding Bridge



Part Number	Description	Std. Pkg.
IBB03	Intersystem Bonding Bridge	1

Application: This bonding terminal meets the requirement of the 2008 NEC Article 250.49 "Bonding for Other Systems" which requires all utility (telephone, cable, satellite, etc.) grounding conductors to be bonded to ground in a single location in small, commercial and residential applications.

The IBB03 connects directly to the grounding electrode with a lay-in style lug. Integrated mounting holes provide for a quick, compact installation. It is constructed of corrosion-resistant aluminum and tin-plated for maximum conductivity. A weatherable, polycarbonate cover, which may be painted, is included for additional protection and to create an aesthetically-pleasing installation.

Advantages: Meets 2008 NEC Article 250.49.

Features: Stainless steel hardware. Lay-in style lugs. One-piece construction. Tin-plated. Polycarbonate cover.

Conductor Ranges

6-2 AWG Grounding electrode conductor 14-4 Bonding conductors (4)

Material: Corrosion-resistant Aluminum



Grounding & Bonding Fittings

847-455-0188 FAX 847-455-0334 garvinindustries.com

Split Bolt Connectors



Application: These split bolt connectors are used for tap and wire splicing on copper wires and copper weld conductors.

Advantages: Garvin Industries' split bolt connectors have a quick-turn threaded body allowing an easy installation. They are highly resistant to corrosion and seasonal cracking. They tightly compress and bond separate conductors together to form a solid electrical connection.

Field Names: Split bolts, split bolt bug, split bolt kearnys, split bolt seruit, seruit connector, IK4 connector, servit connectors.

Material: Silicon Bronze



SBLT-1 IN USE

Part		& Tap of Equal	Min Tap with 1 Max	Std.	
Number	Min	Max	Main	Pkg.	
SBLT-1	16 STR	8 STR	16 STR	10	
SBLT-2	10 SOL	6 SOL	16 SOL	10	
SBLT-3	8 SOL	4 SOL	16 SOL	10	
SBLT-4	6 SOL	2 STR	14 STR	10	
SBLT-5	4 SOL	1/0 STR	14 SOL	10	
SBLT-6	2 SOL	3/0 STR	12 SOL	10	

Installs Before or After Wire Pull!

Split Collar Ground Bushings

Installs before or after wire pull (unlike solid bushings)

- · Insulated throat to protect wires
- Extra tight clamp-on design ensures solid ground
- Adjustable lug allows versatile positioning on pipe
- 1/2" 6" sizes available
- Manufactured from rugged die cast zinc
- Patented



See Page 172 for more information!

Fittings

Liquid-tight Conduit Connectors



Straight Connectors (with Grounding Lugs)



GLTC-150

Application: These straight connectors with insulated throats and grounding lugs are used in both indoor and outdoor locations on flexible metallic, liquid-tight conduits when copper or aluminum jumper installations are required.

Advantages: Garvin Industries' straight connectors are designed to slip onto the conduit quickly and to grip the conduit jacket, speeding up installation while ensuring a perfect seal that prevents pullouts. All components of these connectors can be easily disassembled and reused. Additionally, the included sealing washers provide liquid-tight seals when connectors are terminated in threadless openings. The heavy-duty locknuts and grounding lug included with every Garvin liquid-tight connector ensure the continuity of the grounding. Connectors are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Grounding seal tight connectors, liquid-tight connectors, watertight connectors.

Material: Zinc Plated Malleable Iron, Aluminum Ground Lug



GLTC-50 IN USE

					GLIC-50 IN USE	
Part Number	Size	Minimum Wire Size	Maximum Wire Size	Similar Products		Std. Pkg.
GLTC-38	3/8"	#14	#4	Thomas & Betts 5231GR Hubbell Raco 3511-3	Crouse Hinds LTB38G EGS Appleton STB38L	25
GLTC-50	1/2"	#14	#4	Thomas & Betts 5232 GR Hubbell Raco 3512-3	Crouse Hinds LTB50G EGS Appleton STB50L	25
GLTC-75	3/4"	#14	#4	Thomas & Betts 5233 GR Hubbell Raco 3513-3	Crouse Hinds LTB75G EGS Appleton STB75L	25
GLTC-100	1"	#14	#4	Thomas & Betts 5234 GR Hubbell Raco 3514-3	Crouse Hinds LTB100G EGS Appleton STB100L	5
GLTC-125	1-1/4"	#14	#4	Thomas & Betts Hubbell Raco 3515-3	Crouse Hinds LTB125G EGS Appleton STB125L	5
GLTC-150	1-1/2"	#14	#4	Thomas & Betts Hubbell Raco 3516-3	Crouse Hinds LTB150G EGS Appleton STB150L	2
GLTC-200	2"	#14	#4	Thomas & Betts Hubbell Raco 3518-3	Crouse Hinds LTB200G EGS Appleton STB200L	1
GLTC-250	2-1/2"	#8	#1/0	Thomas & Betts Hubbell Raco 3520-3	Crouse Hinds LTB250G EGS Appleton STB250L	1
GLTC-300	3"	#8	#1/0	Thomas & Betts Hubbell Raco 3522-3	Crouse Hinds LTB300G EGS Appleton STB300L	1
GLTC-350	3-1/2"	#6	#3/0	Thomas & Betts Hubbell Raco 3524-3	Crouse Hinds LTB350G EGS Appleton STB350L	1
GLTC-400	4"	#6	#3/0	Thomas & Betts Hubbell Raco 3526-3	Crouse Hinds LTB400G EGS Appleton STB400L	1
GLTC-500	5"	#6	#250MCM	Thomas & Betts Hubbell Raco	Crouse Hinds LTB500G EGS Appleton STB500L	1
GLTC-600	6"	#6	#250MCM	Thomas & Betts Hubbell Raco	Crouse Hinds LTB600G EGS Appleton STB600L	1



Liquid-tight Conduit Connectors

847-455-0188 FAX 847-455-0334 garvinindustries.com

45° Connectors (with Grounding Lugs)



Application: These 45° connectors with insulated throats and grounding lugs are used in both indoor and outdoor locations on flexible metallic, liquid-tight conduits when copper or aluminum jumper installations are required.

Advantages: Garvin Industries' 45° connectors are designed to slip onto the conduit quickly and grip the conduit jacket, speeding up installation while ensuring a liquid-tight seal that prevents pullouts. Garvin Industries' malleable iron castings match with other components perfectly without strain or distortion. All components of these connectors can be easily disassembled and reused. Additionally, the included sealing washers provide liquid-tight seals when connectors are terminated in threadless openings. The heavy-duty locknuts and grounding lug included with every Garvin liquid-tight connector ensure the continuity of the grounding. Connectors are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Grounding seal tight connectors, liquid-tight connectors, watertight connectors.

Material: Zinc Plated Malleable Iron, Aluminum Ground Lug



GLTC-5045 IN USE

Part Number	Size	Minimum Wire Slze	Maximum Wire Slze	Similar Products		Std. Pkg.
GLTC-3845	3/8"	#14	#4	Thomas & Betts 5241GR Hubbell Raco 3561-3	Crouse Hinds LTB3845G EGS Appleton STB4538L	25
GLTC-5045	1/2"	#14	#4	Thomas & Betts 5242GR Hubbell Raco 3562-3	Crouse Hinds LTB5045G EGS Appleton STB4550L	25
GLTC-7545	3/4"	#14	#4	Thomas & Betts 5243GR Hubbell Raco 3563-3	Crouse Hinds LTB7545G EGS Appleton STB4575L	10
GLTC-10045	1"	#14	#4	Thomas & Betts 5244GR Hubbell Raco 3564-3	Crouse Hinds LTB10045G EGS Appleton STB45100L	10
GLTC-12545	1-1/4"	#14	#4	Thomas & Betts Hubbell Raco 3565-3	Crouse Hinds LTB12545G EGS Appleton STB45125L	5
GLTC-15045	1-1/2"	#14	#4	Thomas & Betts Hubbell Raco 3566-3	Crouse Hinds LTB15045G EGS Appleton STB45150L	2
GLTC-20045	2"	#14	#4	Thomas & Betts Hubbell Raco 3568-3	Crouse Hinds LTB20045G EGS Appleton STB45200L	1
GLTC-25045	2-1/2"	#8	#1/0	Thomas & Betts Hubbell Raco	Crouse Hinds LTB25045G EGS Appleton STB45250L	1
GLTC-30045	3"	#8	#1/0	Thomas & Betts Hubbell Raco	Crouse Hinds LTB30045G EGS Appleton STB45300L	1
GLTC-35045	3-1/2"	#6	#3/0	Thomas & Betts Hubbell Raco	Crouse Hinds LTB35045G EGS Appleton	1
GLTC-40045	4"	#6	#3/0	Thomas & Betts Hubbell Raco	Crouse Hinds LTB40045G EGS Appleton STB45400L	1

ittings

Liquid-tight Conduit Connectors



90° Connectors (with Grounding Lugs)



Application: These 90 degree connectors with insulated throats and grounding lugs are used in both indoor and outdoor locations on flexible metallic, liquid-tight conduits when copper or aluminum jumper installations are required.

Advantages: Garvin Industries' 90° connectors are designed to slip on to the conduit quickly and grip the conduit jacket, speeding up installation while ensuring a liquid-tight seal that prevents pullouts. Garvin Industries' malleable iron castings match with other components perfectly without strain or distortion. All components of these connectors can be easily disassembled and reused. Additionally, the included sealing washers provide liquid-tight seals when connectors are terminated in threadless openings. The heavy-duty locknuts and grounding lug included with every Garvin liquid-tight connector ensure the continuity of the grounding. Connectors are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Grounding seal-tight connectors, liquid-tight connectors, watertight connectors.

Material: Zinc Plated Malleable Iron, Aluminum Ground Lug



GLTC-5090 IN USE

Part Number	Size	Minimum Wire Size	Maximum Wire Size	Similar Products		Std. Pkg.
GLTC-3890	3/8"	#14	#4	Thomas & Betts 5251GR Hubbell Raco 3541-3	Crouse Hinds LT3890G EGS Appleton STB9038L	25
GLTC-5090	1/2"	#14	#4	Thomas & Betts 5252GR Hubbell Raco 3542-3	Crouse Hinds LT5090G EGS Appleton STB9050L	25
GLTC-7590	3/4"	#14	#4	Thomas & Betts 5253GR Hubbell Raco 3543-3	Crouse Hinds LT7590G EGS Appleton STB9075L	10
GLTC-10090	1"	#14	#4	Thomas & Betts 5254GR Hubbell Raco 3544-3	Crouse Hinds LT10090G EGS Appleton STB90100L	10
GLTC-12590	1-1/4"	#14	#4	Thomas & Betts Hubbell Raco 3545-3	Crouse Hinds LT12590G EGS Appleton STB90125L	5
GLTC-15090	1-1/2"	#14	#4	Thomas & Betts Hubbell Raco 3546-3	Crouse Hinds LT15090G EGS Appleton STB90150L	2
GLTC-20090	2"	#14	#4	Thomas & Betts Hubbell Raco 3548-3	Crouse Hinds LT20090G EGS Appleton STB90200L	1
GLTC-25090	2-1/2"	#8	#1/0	Thomas & Betts Hubbell Raco 3550-3	Crouse Hinds LT25090G EGS Appleton STB90250L	1
GLTC-30090	3"	#8	#1/0	Thomas & Betts Hubbell Raco 3552-3	Crouse Hinds LT30090G EGS Appleton STB90300L	1
GLTC-35090	3-1/2"	#6	#3/0	Thomas & Betts Hubbell Raco	Crouse Hinds LT35090G EGS Appleton	1
GLTC-40090	4"	#6	#3/0	Thomas & Betts Hubbell Raco 3556-3	Crouse Hinds LT40090G EGS Appleton STB90400L	1



Liquid-tight Conduit Connectors

847-455-0188 FAX 847-455-0334 garvinindustries.com

Straight Connectors (Insulated Throat)



Application: These insulated straight connectors are used on flexible metallic liquid-tight conduits and Type-B flexible, nonmetallic, liquid-tight conduits. They are used to positively bond conduits to boxes or enclosures in both wet and damp locations.

Advantages: Garvin Industries' straight connectors are designed to slip onto the conduit quickly and to grip the conduit jacket, speeding up installation while ensuring a strong, liquid-tight seal that decreases the risk of pullouts. All components of these connectors can be easily disassembled and reused. Additionally, the included sealing washers provide liquid-tight seals when connectors are terminated in threadless openings. The heavy-duty locknuts included with every Garvin liquid-tight connector ensure the continuity of the grounding. Connectors are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: Seal tight connectors, liquid-tight connectors, watertight connectors, watertight connectors, insulated seal tight connectors, insulated liquid-tight connector.

Material: Zinc Plated Malleable Iron



LTC-50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
LTC-38	3/8"	Thomas & Betts LT-700 Hubbell Raco 3511RAC	Crouse Hinds LTB38 EGS Appleton STB-38	20
LTC-50	1/2"	Thomas & Betts LT-701 Hubbell Raco 3512RAC	Crouse Hinds LTB50 EGS Appleton STB-50	20
LTC-75	3/4"	Thomas & Betts LT-702 Hubbell Raco 3513RAC	Crouse Hinds LTB75 EGS Appleton STB-75	10
LTC-100	1"	Thomas & Betts LT-703 Hubbell Raco 3514RAC	Crouse Hinds LTB100 EGS Appleton STB-100	5
LTC-125	1-1/4"	Thomas & Betts LT-704 Hubbell Raco 3515RAC	Crouse Hinds LTB125 EGS Appleton STB-125	5
LTC-150	1-1/2"	Thomas & Betts LT-705 Hubbell Raco 3516	Crouse Hinds LTB150 EGS Appleton STB-150	5
LTC-200	2"	Thomas & Betts LT-706 Hubbell Raco 3518	Crouse Hinds LTB200 EGS Appleton STB-200	5
LTC-250	2-1/2"	Thomas & Betts Hubbell Raco 3520	Crouse Hinds LTB250 EGS Appleton STB-250	5
LTC-300	3"	Thomas & Betts Hubbell Raco 3522	Crouse Hinds LTB300 EGS Appleton STB-300	5
LTC-350	3-1/2"	Thomas & Betts Hubbell Raco 3524	Crouse Hinds LTB350 EGS Appleton STB-350	5
LTC-400	4"	Thomas & Betts Hubbell Raco 3526	Crouse Hinds LTB400 EGS Appleton STB-400	5

Liquid-tight **Conduit Connectors**



45° Connectors (Insulated Throat)



Application: These insulated 45 degree connectors are used on flexible metallic liquid-tight conduits and Type-B, flexible, nonmetallic, liquid-tight conduits. They are used to positively bond conduits to boxes or enclosures.

Advantages: Garvin Industries' 45° connectors are designed to slip onto the conduit quickly and to grip the conduit jacket, speeding up installation while ensuring a strong, liquid-tight seal that decreases the risk of pullouts. Garvin Industries' malleable iron castings match with other components perfectly without strain or distortion. All components of these connectors can be easily disassembled and reused. Additionally, the included sealing washers provide liquid-tight seals when connectors are terminated in threadless openings. The heavy-duty locknuts included with every Garvin liquid-tight connector ensure the continuity of the grounding. Connectors are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: 45 degree seal tight connectors, 45 degree liquid-tight connectors, 45 degree watertight connectors, 45 degree watertight connectors, insulated seal tight connectors, insulated liquid-tight connectors.

Material: Zinc Plated Malleable Iron



LTC-5045 IN USE

Part Number	Size	Similar Products	Std. Pkg.
LTC-3845	3/8"	Thomas & Betts LT-950 Crouse Hinds LTB3845 Hubbell Raco 3561 EGS Appleton STB-4538	20
LTC-5045	1/2"	Thomas & Betts LT-951 Crouse Hinds LTB5045 Hubbell Raco 3562 EGS Appleton STB-4550	20
LTC-7545	3/4"	Thomas & Betts LT-952 Crouse Hinds LTB7545 Hubbell Raco 3563 EGS Appleton STB-4575	10
LTC-10045	1"	Thomas & Betts LT-953 Crouse Hinds LTB10045 Hubbell Raco 3564 EGS Appleton STB-45100	5
LTC-12545	1-1/4"	Thomas & Betts Crouse Hinds LTB12545 Hubbell Raco 3565 EGS Appleton STB-45125	5
LTC-15045	1-1/2"	Thomas & Betts Crouse Hinds LTB15045 Hubbell Raco 3566 EGS Appleton STB-45150	5
LTC-20045	2"	Thomas & Betts Crouse Hinds LTB20045 Hubbell Raco 3568 EGS Appleton STB-45200	5
LTC-25045	2-1/2"	Thomas & Betts Crouse Hinds LTB25045 Hubbell Raco EGS Appleton STB-45250	5
LTC-30045	3"	Thomas & Betts Crouse Hinds LTB30045 Hubbell Raco EGS Appleton STB-45300	5
LTC-35045	3-1/2"	Thomas & Betts Crouse Hinds LTB35045 Hubbell Raco EGS Appleton STB-45350	5
LTC-40045	4"	Thomas & Betts Crouse Hinds LTB40045 Hubbell Raco EGS Appleton STB-45400	5



Liquid-tight Conduit Connectors

847-455-0188 FAX 847-455-0334 garvinindustries.com

90° Connectors (Insulated Throat)



Application: These insulated 90° connectors are used on flexible, metallic, liquid-tight conduits and Type-B, flexible, nonmetallic, liquid-tight conduits. They are used to positively bond conduits to boxes or enclosures.

Advantages: Garvin Industries' 90 degree connectors are designed to slip onto the conduit quickly and to grip the conduit jacket, speeding up installation while ensuring a strong, liquid-tight seal that decreases the risk of pullouts when 90 degree bends are required. Garvin Industries' malleable iron castings match with other components perfectly without strain or distortion. All components of these connectors can be easily disassembled and reused. Additionally, the included sealing washers provide liquid-tight seals when connectors are terminated in threadless openings. The heavy-duty locknuts included with every Garvin liquid-tight connector ensure the continuity of the grounding. Connectors are zinc electroplated for excellent corrosion protection in damp locations.

Field Names: 90 degree seal tight connectors, 90 degree liquid-tight connectors, 90 degree watertight connectors, 90 degree watertight connectors, insulated seal tight connectors, insulated liquid-tight connectors.

Material: Zinc Plated Malleable Iron



LTC-5090 IN USE

Part Number	Size	Similar Products	E10-3090 IN USE	Std. Pkg.
LTC-3890	3/8"	Thomas & Betts LT-990 Hubbell Raco 3541 RAC	Crouse Hinds LTB3890 EGS Appleton STB-9038	20
LTC-5090	1/2"	Thomas & Betts LT-991 Hubbell Raco 3542	Crouse Hinds LTB5090 EGS Appleton STB-9050	20
LTC-7590	3/4"	Thomas & Betts LT-992 Hubbell Raco 3543	Crouse Hinds LTB7590 EGS Appleton STB-9075	10
LTC-10090	1"	Thomas & Betts LT-993 Hubbell Raco 3544	Crouse Hinds LTB10090 EGS Appleton STB-90100	5
LTC-12590	1-1/4"	Thomas & Betts Hubbell Raco 3545	Crouse Hinds LTB12590 EGS Appleton STB-90125	5
LTC-15090	1-1/2"	Thomas & Betts Hubbell Raco 3546	Crouse Hinds LTB15090 EGS Appleton STB-90150	5
LTC-20090	2"	Thomas & Betts Hubbell Raco 3548	Crouse Hinds LTB20090 EGS Appleton STB-90200	5
LTC-25090	2-1/2"	Thomas & Betts Hubbell Raco 3550	Crouse Hinds LTB25090 EGS Appleton STB-90250	5
LTC-30090	3"	Thomas & Betts Hubbell Raco 3552	Crouse Hinds LTB30090 EGS Appleton STB-90300	5
LTC-35090	3-1/2"	Thomas & Betts Hubbell Raco	Crouse Hinds LTB35090 EGS Appleton STB-90350	5
LTC-40090	4"	Thomas & Betts Hubbell Raco 3556	Crouse Hinds LTB40090 EGS Appleton STB-90400	5



Straight Connectors (Nonmetallic)



Application: These nonmetallic straight connectors are used in both wet and dry locations when conduits and fittings are not subjected to physical damage. Type-B conduits and fittings are used whenever flexibility is required for the installation, operation, or maintenance of electrical appliances.

Advantages: Garvin Industries' gray, nonmetallic, PVC plastic construction provides superior corrosion resistance and flexibility. It is designed to withstand harsh weather and extreme temperature changes. Each connector comes standard with a neoprene O-ring and locknut.

Field Names: Plastic liquid-tight connector, nonmetallic seal tight connectors, liquid-tight connectors, watertight connectors, watertight connectors.

Material: PVC Plastic



NMLT-38 IN USE

Part Number	Size	Similar Products	NWEI-50 IN GSE	Std. Pkg.
NMLT-38	3/8"	Thomas & Betts Hubbell Raco 4721	Crouse Hinds EGS Appleton	20
NMLT-50	1/2"	Thomas & Betts Hubbell Raco 4722	Crouse Hinds LT50NM EGS Appleton	20
NMLT-75	3/4"	Thomas & Betts Hubbell Raco 4723	Crouse Hinds LT75NM EGS Appleton	20
NMLT-100	1"	Thomas & Betts Hubbell Raco 4724	Crouse Hinds LT100NM EGS Appleton	10
NMLT-125	1-1/4"	Hubbell Raco 4725	Crouse Hinds LT125NM	10
NMLT-150	1-1/2"	Hubbell Raco 4726	Crouse Hinds LT150NM	5
NMLT-200	2"	Hubbell Raco 4727	Crouse Hinds LT200NM	5

Installs Before or After Wire Pull!

Split Collar Ground Bushings

Installs before or after wire pull (unlike solid bushings)

- · Insulated throat to protect wires
- Extra tight clamp-on design ensures solid ground
- Adjustable lug allows versatile positioning on pipe
- 1/2" 6" sizes available
- Manufactured from rugged die cast zinc
- Patented



See Page 172 for more information!



Liquid-tight **Conduit Connectors**

847-455-0188 FAX 847-455-0334 garvinindustries.com

90° Connectors (Nonmetallic)



Application: These nonmetallic 90 degree connectors are used in both wet and dry locations when conduits and fittings are not subjected to physical damage. Type-B conduits and fittings are used whenever flexibility is required for the installation, operation, or maintenance of electrical appliances.

Advantages: Garvin Industries' gray, nonmetallic, PVC plastic construction provides superior corrosion resistance and flexibility. It is designed to withstand harsh weather and extreme temperature changes. Each connector comes standard with a neoprene O-ring and locknut.

Field Names: Plastic liquid-tight connector, nonmetallic: 90 Degree Seal Tight Connectors, 90 Degree Liquid-tight Connectors, 90 Degree Watertight Connectors, 90 Degree Watertight Connectors.

Material: PVC Plastic



		NML1-3890 IN USE	Std.
Size	Similar Products		Pkg.
3/8"	Thomas & Betts Hubbell Raco 4731	Crouse Hinds EGS Appleton	20
1/2"	Thomas & Betts Hubbell Raco 4732	Crouse Hinds LT5090NM EGS Appleton	20
3/4"	Thomas & Betts Hubbell Raco 4733	Crouse Hinds LT7590NM EGS Appleton	20
1"	Thomas & Betts Hubbell Raco 4734	Crouse Hinds LT10090NM EGS Appleton	10
1-1/4"	Hubbell Raco 4735	Crouse Hinds LT12590NM	10
1-1/2"		Crouse Hinds LT15090NM	5
2"		Crouse Hinds LT20090NM	5
	3/8" 1/2" 3/4" 1" 1-1/4" 1-1/2"	3/8" Thomas & Betts Hubbell Raco 4731 1/2" Thomas & Betts Hubbell Raco 4732 3/4" Thomas & Betts Hubbell Raco 4733 1" Thomas & Betts Hubbell Raco 4733 Hubbell Raco 4734 1-1/4" Hubbell Raco 4735 1-1/2"	Size Similar Products Thomas & Betts Hubbell Raco 4731 Thomas & Betts Hubbell Raco 4732 Thomas & Betts Hubbell Raco 4732 Thomas & Betts Hubbell Raco 4732 Thomas & Betts Hubbell Raco 4733 Thomas & Betts Hubbell Raco 4733 Thomas & Betts Hubbell Raco 4734 Thomas & Betts Hubbell Raco 4735 Thomas & Betts Hubbell Raco 4735


Money Saving J-Hook Alternative!

"G" Cable Support Hook

Money Saving Alternative to J-Hooks Support Data and Fiber Optic Cables

- · Rugged steel construction
- · Wide base supports all cable cat 5e, 6, 7, and fiber optic per industry standards
- · Screws in quickly and easily to a variety of beam clamps and threaded hangers
- · Open slot allows wire insertion but won't allow them to spill out like hooks will
- · Available Sizes: 1-1/2", 2", & 4" Diameter

Part #: CAT-150, 200 or 400



See Page 285 for more information!



Snap In Connectors











Patented







SNLK-38DU Patented





SNLK-5090

Application: These snap-in, quick connectors are used to connect flexible metal conduits to boxes, enclosures, lighting fixtures and other appliances. Available in a variety of styles, straight and 90°, they can be screwed into flexible metal conduits or clamped on the outside of jackets.

Advantages: Garvin Industries' unique patented design has built-in locking ridges and spring steel pressure clips that eliminate the need to use standard locknuts on the inside of boxes to secure conduit fittings. They quickly snap in place on knockout openings in seconds. Their smooth, inner-throat surface ensures that wires will not be skinned or cut by any sharp edges as they are pulled through fittings. Additionally, these fittings may be installed without removing box covers or light-fixture canopies.

Field Names: Snap-in connector, snap-lock connector, quick-snap connector, flex connector, flex metal conduit connector, snap in BX connector, snap in MC cable connector.

Material: Die-cast zinc & Spring Steel





SNLK-38 IN USE

SNLK-3890 IN USE





SNLK-38SD IN USE

SNLK-38SS IN USE



SNLK-38DU IN USE

Part Number	Flexible Conduit Size	Style	Description	Std. Pkg.
SNLK-38	3/8"	Screw In	Screws in to the internal threads of 3/8" flexible metal conduits	25
SNLK-3890	3/8"	Saddle Clamp	Clamps on to the external ridges of flexible metal conduit with two screws	25
SNLK-38SD	3/8"	Saddle Clamp	Clamps saddle on to the external ridges of flexible metal conduits with one screw	25
SNLK-38SS	3/8"	Set-screw	One set-screw bites on ridges of flexible metal conduits	25
SNLK-38DU	3/8"	Saddle Clamp	Made for two flexible metal conduits entering a single box or enclosure. One set-screw and saddle combine to securely fasten multiple conductors quickly	25
SNLK-50	1/2"	Screw In	Screws in to the internal threads of 1/2" flexible metal conduits	25
SNLK-5090	1/2"	Saddle Clamp	Clamps on to the external ridges of flexible metal conduit with two screws	25



847-455-0188 FAX 847-455-0334 garvinindustries.com

Squeeze Connectors (Straight)





Application: These squeeze-type connectors with insulated throats are used in dry locations to bond flexible metal conduits to boxes or enclosures.

Advantages: Garvin Industries' rugged metallic construction maintains mechanical protection and solid grounding of the conduit to the designated electrical junction box or enclosure. Their insulated plastic throats help reduce the threat of wires from being cut or skinned by sharp edges when being pulled through conduits.

Field Names: Squeeze connector, flex connector, squeeze type flex connector, squeeze type BX connector, flexible metal conduit connector.

Material: Die-cast zinc 3/8"-2", Malleable Iron 2"-4"



SQZ-38 IN USE

Part Number	Size	Similar Products		Std. Pkg.
SQZ-38I	3/8"	Thomas & Betts XC-269 Hubbell Raco 2191	Crouse Hinds 1707DC EGS Appleton SC38	50
SQZ-50I	1/2"	Thomas & Betts XC-270 Hubbell Raco 2192	Crouse Hinds 1708DC EGS Appleton SC50	25
SQZ-75I	3/4"	Thomas & Betts XC-272 Hubbell Raco 2193	Crouse Hinds 1709DC EGS Appleton SC75	25
SQZ-100I	1"	Thomas & Betts XC-273 Hubbell Raco 2194	Crouse Hinds 1710DC EGS Appleton SC100	25
SQZ-125I	1-1/4"	Thomas & Betts XC-274 Hubbell Raco 2195 RAC	Crouse Hinds 1711DC EGS Appleton SC125	10
SQZ-150I	1-1/2"	Thomas & Betts XC-275 Hubbell Raco 2196 RAC	Crouse Hinds 1712DC EGS Appleton SC150	10
SQZ200I	2"	Thomas & Betts XC-276 Hubbell Raco 2198	Crouse Hinds 1713DC EGS Appleton SC200	10
SQZ-250I	2-1/2"	Thomas & Betts XC-907 Hubbell Raco 3310	Crouse Hinds 1714DC EGS Appleton SC250	5
SQZ-300I	3"	Thomas & Betts XC-908 Hubbell Raco 3312	Crouse Hinds 1715DC EGS Appleton SC300	5
SQZ-350I	3-1/2"	Thomas & Betts Hubbell Raco 3314	Crouse Hinds 1721DC EGS Appleton SC350	5
SQZ-400I	4"	Thomas & Betts Hubbell Raco 3316	Crouse Hinds 1722DC EGS Appleton SC400	5



Squeeze Connectors (90°)





Application: These 90 degree squeeze type connectors with insulated throats are used in dry locations to bond flexible metal conduits to boxes or enclosures.

Advantages: Garvin Industries' rugged metallic construction maintains mechanical protection and solid grounding of the conduit to the designated electrical junction box or enclosure. Their insulated plastic throats help reduce the threat of wires from being cut or skinned by sharp edges when being pulled through conduits.

Field Names: 90 degree squeeze connector, 90 degree flex connector, 90 degree squeeze type flex connector, 90 degree squeeze type BX connector, 90 degree flexible metal conduit connector.

Material: Die-cast zinc 3/8"-2", Malleable Iron 2"-4"



SQZ-3890I IN USE

Part Number	Size	Similar Products		Std. Pkg.
SQZ-3890I	3/8"	Thomas & Betts XC-490 Hubbell Raco 2691	Crouse Hinds 1724DC EGS Appleton AC90	50
SQZ-5090I	1/2"	Thomas & Betts XC-491 Hubbell Raco 2692	Crouse Hinds 1736DC EGS Appleton AC95	25
SQZ-7590I	3/4"	Thomas & Betts XC-492 Hubbell Raco 2693	Crouse Hinds 1738DC EGS Appleton AC96	25
SQZ-10090I	1"	Thomas & Betts XC-493 Hubbell Raco 2694	Crouse Hinds 1739DC EGS Appleton AC97	25
SQZ-12590I	1-1/4"	Thomas & Betts XC-494 Hubbell Raco 2695	Crouse Hinds 1740DC EGS Appleton AC98	10
SQZ-15090I	1-1/2"	Thomas & Betts XC-495 Hubbell Raco 2696	Crouse Hinds 1741DC EGS Appleton AC985	10
SQZ-20090I	2"	Thomas & Betts XC-496 Hubbell Raco 2698	Crouse Hinds 1742DC EGS Appleton ACI90	5
SQZ-25090I	2-1/2"	Thomas & Betts XC-497 Hubbell Raco 3210	Crouse Hinds 1744 EGS Appleton	5
SQZ-30090I	3"	Thomas & Betts XC-498 Hubbell Raco 3212	Crouse Hinds 1745 EGS Appleton	5
SQZ-35090I	3-1/2"	Thomas & Betts Hubbell Raco 3214	Crouse Hinds 1746 EGS Appleton	5
SQZ-40090I	4"	Thomas & Betts Hubbell Raco 3216	Crouse Hinds 1747 EGS Appleton	5



847-455-0188 FAX 847-455-0334 garvinindustries.com

Saddle Connectors (Insulated Throat)



Application: These saddle connectors are used on flexible metal conduits, armored clad cables and metal clad cables. Their dual-grip saddle and quick screw tightly fit on flexible metal cables ensuring the metal jacket will not be damaged or distorted protecting the wires.

Advantages: Garvin Industries' saddle connectors have a quick combo-head screw design that saves both time and labor. These saddle connectors' smooth pulling surface and insulated throat prevent wire damage. The angled teeth on the locknut means the connectors will not loosen if cables are twisted or turned. They are also zinc electroplated for excellent corrosion protection.

Field Names: Flexible metal cable connector, flex Connector, armored cable connector, saddle connector, MC connector, metal clad cable connector, BX connector.




DB38IC IN USE

Part Number	Size	Similar Products		Std. Pkg.
DB38IC	3/8"	Thomas & Betts Hubbell Raco 3301DB	Crouse Hinds ACB38 EGS Appleton	50
DB50IC	1/2"	Thomas & Betts Hubbell Raco 3302DB	Crouse Hinds ACB50 EGS Appleton	50
DB75IC	3/4"	Thomas & Betts Hubbell Raco 3303DB	Crouse Hinds ACB75 EGS Appleton	50
DB100IC	1"	Thomas & Betts Hubbell Raco 3304DB	Crouse Hinds ACB100 EGS Appleton	25
DB125IC	1-1/4"	Thomas & Betts Hubbell Raco 3305DB	Crouse Hinds ACB125 EGS Appleton	25
DB150IC	1-1/2"	Thomas & Betts Hubbell Raco 3306DB	Crouse Hinds ACB150 EGS Appleton	25
DB200IC	2"	Thomas & Betts Hubbell Raco 3308DB	Crouse Hinds ACB200 EGS Appleton	25
DB250IC	2-1/2"	Thomas & Betts Hubbell Raco 3310DB	Crouse Hinds ACB250 EGS Appleton	10
DB300IC	3"	Thomas & Betts Hubbell Raco 3312DB	Crouse Hinds ACB300 EGS Appleton	10
DB350IC	3-1/2"	Thomas & Betts Hubbell Raco 3314DB	Crouse Hinds ACB350 EGS Appleton	5
DB400IC	4"	Thomas & Betts Hubbell Raco 3316DB	Crouse Hinds ACB400 EGS Appleton	5

45° Saddle Connectors (Insulated Throat)





Advantages: Garvin Industries' 45° saddle connectors have a quick combo-head screw design that saves both time and labor. These saddle connectors' smooth pulling surface and insulated throat prevent wire damage. The angled teeth on the locknut means the connectors will not loosen if cables are twisted or turned. They are also zinc electroplated for excellent corrosion protection.

Field Names: 45 degree flexible metal cable connector, 45 degree flex connector, 45 degree armored cable connector, 45 degree saddle connector, 45 degree MC connector, 45 degree metal clad cable connector, 45 degree BX connec-

Material: Zinc Plated Malleable Iron



Part Number	Size	Similar Products		DB3845IC	Std. Pkg.
DB3845IC	3/8"	Thomas & Betts Hubbell Raco	Crouse Hinds ACB3845 EGS Appleton		50
DB5045IC	1/2"	Thomas & Betts Hubbell Raco	Crouse Hinds ACB5045 EGS Appleton		25
DB7545IC	3/4"	Thomas & Betts Hubbell Raco	Crouse Hinds ACB7545 EGS Appleton		25

Flexible Metal

Conduit Fittings

90° Saddle Connectors (Insulated Throat)



DB3845IC

Part Number	Size	Similar Products ⁰¹		Std. Pkg.
DB3890IC	3/8"	Thomas & Betts Hubbell Raco 3201DB	Crouse Hinds ACB3890 EGS Appleton	50
DB5090IC	1/2"	Thomas & Betts Hubbell Raco 3202DB	Crouse Hinds ACB5090 EGS Appleton	50
DB7590IC	3/4"	Thomas & Betts Hubbell Raco 3203DB	Crouse Hinds ACB7590 EGS Appleton	25
DB10090IC	1"	Thomas & Betts Hubbell Raco 3204DB	Crouse Hinds ACB10090 EGS Appleton	25



DB3890



847-455-0188 FAX 847-455-0334 garvinindustries.com

Multipurpose NM/BX Cable Connector



Application: These versatile connectors are used to connect non-metallic sheathed cable, flexible metal conduit, or armored cables to the tiny 1/4" knockout provisions that are common on various industry light fixtures.

Advantages: These connectors are designed to save labor by allowing the installer to quickly screw the clamp onto a variety of non-metallic and metallic cables that supply power to light fixtures and small appliances. Fits 1/4" knockouts with "flats."

Field Names: Baby Romex connector, baby bx connector, multi-purpose connector, 1/4" knockout connector, small NM cable connector, light fixture connector, baby light fixture connector, extra small light fixture connector.

Material: Die-cast zinc

Part Number	Description	Std. Pkg.
MPC25	Fits 1/4" knockout. Multi Purpose Cable Connector. Can be used with any of the following:	50
	NM Cable: 14/2 to 12/2 Steel/Alum Armored Cable: 14/2 to 12/2 Flexible Metal Conduit: 3/8"	

Set Screw Type



Part Number	Size	Std. Pkg.
OF654	3/8" For 1/2" Knockout	100
OF655	3/4" For 3/4" Knockout	50

Application: These set-screw connectors are used with flexible metal conduits that are made from steel. They are not recommended for use one aluminum-clad cables.

Advantages: Garvin Industries' set-screw type, flexible metal conduit connectors have a quick triple-head combo screw that makes installation fast and labor-saving. The screws' tight-biting design means that steel clad cables will not loosen when subject to vibration.

Field Names: Flexible metal cable connector, flex connector, armored cable connector, MC connector, metal clad cable connector, BX connector.

Material: Die-cast zinc



Fast Lock Connectors (Insulated Throat)




D-50 FLC-75L

Application: These fast-lock connectors with insulated throats are used to connect flexible metal conduits, such as metal-clad cables or armored cables, to electrical junction boxes or enclosures.

Advantages: Garvin Industries' fast-lock connectors snap into box knockout openings and do not require locknuts to secure them. They accept multiple cable sizes. Fast-lock connectors are made with a versatile combination head screw that can be securely fastened using a slotted, Phillips, or Robertson head screw driver. They are also zinc electroplated for excellent corrosion protection.

Field Names: Quick lock connectors, easy lock connectors, fast lock connectors, snap in connectors, snap in flex connectors, duplex connectors, BX connectors, MC connectors.



FLC-50 IN USE

Part Number	Size	Special Features	Std. Pkg.
FLC-50	1/2"	Steel MC Interlocking (MCI) 14-2 (0.470) to 12-4 (0.520), AL MC Interlocking (MCI) 14-2 (0.460) to 12-4 (0.590), Steel AC 14-2 (0.454) to 12-4 (0.556) 1/2" 50 500, AL AC 14-2 (0.485) to 12-4 (0.565), Steel RWFMC, AL RWFMC, AL FMC 3/8".	50
FLC-50L	1/2"	AL MC Interlocking (MCI) 10-3 (0.582) to 8-2 (0.650), Steel RWFMC, AL RWFMC, AL FMC 1/2", Steel AC 10-4 (0.625) to 6-3 (0.842) 1/2" 50 500, AL AC 10-4 (0.625) to 8-4 (0.770), Steel MC Interlocking (MCI) 10-3 (0.594) to 6-2 (0.746).	50
FLD-50	1/2"	AL MC Interlocking (MCI) 10-3 (0.582) to 8-2 (0.650), Steel RWFMC, AL RWFMC, AL FMC 1/2", Steel AC 10-4 (0.625) to 6-3 (0.842) 3/4" 25 250, AL AC 10-4 (0.625) to 8-4 (0.770), Steel MC Interlocking (MCI) 10-3 (0.594) to 6-2 (0.746).	50
FLC-75L	3/4"	Steel MC Interlocking (MCI) 10-3 (0.594) to 6-2 (0.746), AL MC Interlocking (MCI) 10-3 (0.582) to 8-2 (0.650) Steel AC 10-4 (0.625) to 6-3 (0.842) 3/4" 25 250, AL AC 10-4 (0.625) to 8-4 (0.770), Steel RWFMC, AL RWFMC, AL FMC 1/2".	50



847-455-0188 FAX 847-455-0334 garvinindustries.com

Combination Couplings EMT to Flexible Metal Conduit (Squeeze Type)



Application: These combination couplings are used to connect flexible metal conduits to EMT thinwall conduits. They are commonly used when flexibility is needed while creating an electrical raceway that feeds lighting fixtures or appliances in varying locations or hard-to-reach areas.

Advantages: Garvin Industries' combination couplings provide much-needed flexibility in running conduits. They save both time and money with their quick, screw type install and eliminating the need to bend EMT conduits.

Field Names: Flex couplings, flex conduit couplings, from to couplings, combination coupling, EMT to Flex couplings, conversion couplings.

Material: Die-cast zinc



SQZEMT-50 IN USE

Part Number	EMT Size	Flex Size	Similar Products		Std. Pkg.
SQZEMT-38	1/2"	3/8"	Thomas & Betts Hubbell Raco	Crouse Hinds 780DC EGS Appleton EFC-50	50
SQZEMT-50	1/2"	1/2"	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton EFC-75	25
SQZEMT-75	3/4"	3/4"	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton EFC-100	25
SQZEMT-100	1"	1"	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	10

One-Stop Chicago Plenum Solutions!

Chicago Plenum Boxes, Covers, Wiring Assemblies & Accessories

Specially Designed Boxes, Covers and Wire Assemblies Meet Restrictive Chicago Plenum Code Requirements!

- Plenum boxes have no holes, slots, or penetrations to allow air infiltration
- Full Range 1/2" to 1-1/4" box knockouts are sealed to create an air tight surface
- Gasketed covers and rings insure top edge of box is sealed to outside air flow
- Flexible metal conduit has a special interlocking air tight design to prevent air penetration and also aids in flexibility
- Gasketed knockout seals create air tight cover of abandoned knockouts



See Page 33 for more information!



Combination Couplings Rigid to Flexible Metal Conduit



Part Number	Style	Size	Std. Pkg.
OF694	Set-screw	1/2"	25
OF695	Set-screw	3/4"	25

Application: These combination couplings are used to connect flexible metal conduits to rigid thinwall conduits. They are commonly used when flexibility is needed for lighting fixtures in varying locations.

Advantages: Garvin Industries' combination couplings provide much-needed flexibility in running conduits. They save both time and money with their quick, screw-type installation. They also eliminate the need to bend conduits.

Field Names: Flex couplings, flex conduit couplings, from to coupling, flex to rigid coupling.

Material: Die-cast zinc



OF694 IN USE

Screw In Connectors & Couplings (Chicago Plenum)







1 1011-50

FMCP-38

Application: These Chicago plenum screw-in connectors are specifically used with Garvin Industries' "air tight" Chicago plenum flexible metal conduits for use in air plenum spaces. These connectors attach plenum flex conduit to Garvin Chicago plenum boxes and enclosures.

Advantages: Garvin Industries' Chicago plenum connectors screw in easily to Chicago plenum flexible metal conduits and create an air-tight seal. They must be used with other Garvin Chicago plenum boxes and covers.

Field Names: Plenum flex connector, Chicago Plenum connector, plenum whip connector.

Material: Die-cast zinc & Rubber Gasket



Part Number	Style	Tubing Size	Fits Knockout	FMT-38 IN USE Description	Std. Pkg.
FMT-38	Connector	3/8"	1/2"	Screws in to Chicago plenum 3/8" flexible metal conduit and creates an "air tight" seal.	100
FMT-3890	90° Connector	3/8"	1/2"	90° Connector screws in to 3/8" Chicago plenum tubing and connects to box or fixture.	100
FMT-50	Connector	1/2"	1/2"	Screws in to Chicago plenum 1/2" flexible metal conduit and creates an "air tight" seal.	100
FMCP-38	Coupling	3/8"		3/8" coupling creates an "air tight" raceway so lengths of Chicago plenum flexible metal conduit can be extended.	100
FMCP-50	Coupling	1/2"		1/2" coupling creates an "air tight" raceway so lengths of Chicago plenum flexible metal conduit can be extended.	100



847-455-0188 FAX 847-455-0334 garvinindustries.com

Screw In Connectors (Insulated Throat)



OF682-S

Part Number	Size	Std. Pkg.
OF671-S	3/8"	50
OF672-S	1/2"	50
OF673-S	3/4"	25
OF674-S	1"	25
OF675-S	1-1/4"	10
OF681-S	1-1/2"	10
OF682-S	2"	10

Screw In Couplings



Application: These connectors screw into the interior ridges of flexible metal conduits and provide a smooth pulling surface for wires when connected to electrical junction boxes or enclosures.

Advantages: Garvin Industries' screw-in connectors with insulated throats require no screws, clamps or fasteners to secure the connectors. They save both time and money by connecting directly into the interior threads of flexible metal conduits.

Field Names: Flex connectors, screw in flex connectors, BX connectors, MC connectors, flexible metal conduit connectors

Material: Die-cast zinc



OF682-S IN USE

Application: These screw-in couplings are used to join two lengths of flexible metal conduits together to form a single connected raceway for electrical wire pulls.

Advantages: Garvin Industries' screw-in couplings make it possible to connect cut lengths of flexible metal conduits for running branch circuits. They save both time and material costs!

Field Names: Flex couplings, screw in flex couplings, BX coupling, MC coupling, flexible metal conduit coupling.

Material: Die-cast zinc



OF676 IN USE

Part Number	Size	Similar Products		Std. Pkg.
OF676	1/2"	Thomas & Betts XK241 Hubbell Raco 2272	Crouse Hinds 791DC EGS Appleton	50
OF677	3/4"	Thomas & Betts XK242 Hubbell Raco 2273	Crouse Hinds 792DC EGS Appleton	25
OF678	1"	Thomas & Betts XK243 Hubbell Raco	Crouse Hinds 793DC EGS Appleton	10
OF679	1-1/4"	Thomas & Betts XK244 Hubbell Raco	Crouse Hinds 794DC EGS Appleton	10
OF685	1-1/2"	Thomas & Betts XK245 Hubbell Raco	Crouse Hinds 795DC EGS Appleton	10
OF686	2"	Thomas & Betts XK246 Hubbell Raco	Crouse Hinds 796DC EGS Appleton	10



Insulating Bushings (Screw In Type)



Part Number	Size	Std. Pkg.
FB-50	1/2"	50
FB-75	3/4"	25
FB-100	1"	25

Application: These screw-in bushings are used to insulate the sharp cut edge of flexible metal conduit so wires passing through the raceway will not be damaged.

Advantages: Garvin Industries' screw-in bushings allow smooth installation of low voltage fire alarm, security and data cables in flexible metal conduits. Cables enter and exit the raceway without damage from sharp edges when termination of the devices is required in the field. The bushings are zinc electroplated for excellent corrosion protection.

Field Names: Screw in insulating bushing, flex bushing, flex insulating bushing, flexible metal conduit bushing, flexible conduit bushing.

Material: Zinc Plated Steel



FB-50 IN USE

Need Electrical Supplies....

On The Jobsite!

Why wait until you get back to the shop to make your supply list...

- More than 3,000 products online
- · Request for Quotation direct from website
- · Detailed descriptions and images
- Videos, spec sheets, blueprints, and more...

In-Stock...On-Time...Everytime!

www.garvinindustries.com





Flexible Metal Conduit Fittings

847-455-0188 FAX 847-455-0334 garvinindustries.com

Insulating Bushings (Anti Short Circuit)



Application: These anti-short-circuit bushings are used to create insulating barriers against sharp edges of flexible metal conduits that have been cut in the field. They protect wires passing through flexible metal conduits.

Advantages: Garvin Industries' bushings snap in place on the cut edge of flexible metal conduits. They help prevent short circuits and rework. Additionally, they help ensure wires are protected from damage.

Field Names: Red heads, anti short circuit bushings, red devils, O bushings.

Material: Thermo Plastic, Red Color



ASB-4 IN USE

Part Number	Size	For Use With	Similar Products	Std.	Pkg.
ASB-0	5/16"	14-2, 14-3, 12-2	Thomas & Betts IT-100-SC	Crouse Hinds ASB 0	20
ASB-1	7/16"	12-4, 10-2, 10-3, 2-1	Thomas & Betts IT-102	Crouse Hinds ASB 2	20
ASB-2	3/8"	14-4, 12-3, 6-1, 4-1	Thomas & Betts IT-101	Crouse Hinds ASB 1	20
ASB-3	1/2"	10-4, 8-2, 8-3, 1-1	Thomas & Betts IT-103	Crouse Hinds ASB 3	10
ASB-4	3/4"	8-4, 6-4, 6-3, 6-2, 4-3, 4-2	Thomas & Betts IT-104	Crouse Hinds ASB 4	10
ASB-5	1"	3-1, 2-1, 2-1/0, 1-300MCM 1-350MCM, 1-400MCM 1-450MCM, 1-500MCM	Thomas & Betts	Crouse Hinds ASB 5	10
ASB-6	1-1/4"	4-1, 4-1/0, 4-2/0, 3-1/0 3-2/0, 3-3/0, 2-4/0,1-600MCM 1-750MCM, 1-800MCM, 1-900MCM	Thomas & Betts	Crouse Hinds ASB 6	10
ASB-7	1-1/2"	4-3/0, 4-4/0, 3-4/0, 3-250MCM 3-300MCM, 2-250MCM 2-300MCM, 2-350MCM, 1-1000MCM	Thomas & Betts	Crouse Hinds ASB 7	10
ASB-8	2"	4-250MCM, 4-300MCM, 4-350MCM 4-400MCM, 4-450MCM, 4-500MCM 3-350MCM, 3-400MCM, 3-450MCM -500MCM, 2-400MCM, 2-450MCM, 2-500MCM	Thomas & Betts	Crouse Hinds ASB 8	10

Power Cord & Cable Connectors



Nonmetallic Cable Connectors (Screw Type)



Application: These nonmetallic cable connectors with two screws and a strap are used to connect nonmetallic cables to electrical junction boxes and enclosures.

Advantages: Garvin Industries' two-screw design and serrated lock nut securely fasten cables to boxes and enclosures.

Field Names: NM connector, cable connector, 14/2 connector, nonmetallic cable connector, two screw connector.

Material: Die-cast zinc



RXCN50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
RXCN38	3/8"	Thomas & Betts NC201 Hubbell Raco 2661	Crouse Hinds 759DC EGS Appleton C-510	100
RXCN50	1/2"	Thomas & Betts Hubbell Raco 2711	Crouse Hinds EGS Appleton 7286	100
RXCN75	3/4"	Thomas & Betts NC202 Hubbell Raco 2863	Crouse Hinds 2631 EGS Appleton 15233-DC	50
RXCN100	1"	Thomas & Betts NC203 Hubbell Raco 2864	Crouse Hinds 2632 EGS Appleton 15234-DC	50
RXCN125	1-1/4"	Thomas & Betts NC204 Hubbell Raco	Crouse Hinds 2633 EGS Appleton 15235-DC	50
RXCN150	1-1/2"	Thomas & Betts NC205 Hubbell Raco 2856	Crouse Hinds 2670 EGS Appleton	25
RXCN200	2"	Thomas & Betts NC206 Hubbell Raco 2858	Crouse Hinds 2671 EGS Appleton	10



Power Cord & Cable Connectors

847-455-0188 FAX 847-455-0334 garvinindustries.com

Cord Grip Strain Relief Connectors



Application: These cord grip strain relief connectors are used to secure and seal cords or cables entering enclosures or raceways.

Advantages: Garvin Industries' cord grip strain relief connectors have a easy installation, cords can be inserted without disassembling fittings.

Field Names: Cord grips, cord connectors.

Material: Zinc Plated Steel, Neoprene Grommet



CG50250 IN USE

Part Number	Trade Size	Color Code	Cable Min.	Range Max.	Unit Quantity	Std. Pkg.	Weight Per C
CG50250	1/2"	Red	0.15	0.25	25	100	10.0
CG50350	1/2"	White	0.25	0.35	25	100	10.0
CG50450	1/2"	Blue	0.34	0.45	25	100	10.0
CG50560	1/2"	Green	0.45	0.56	25	100	10.0
CG50650	1/2"	Brown	0.55	0.65	25	100	10.0
CG75250	3/4"	Red	0.15	0.25	10	50	14.0
CG75350	3/4"	White	0.25	0.35	10	50	14.0
CG75450	3/4"	Blue	0.35	0.45	10	50	14.0
CG75560	3/4"	Green	0.45	0.56	10	50	14.0
CG75650	3/4"	Brown	0.55	0.65	10	50	14.0
CG75750	3/4"	Yellow	0.65	0.75	10	50	14.0
CG75850	3/4"	Purple	0.75	0.85	10	50	14.0

Power Cord & Cable Connectors



Service Entrance Connectors



Part Number	Size	Std. Pkg.
UF100	1"	10
UF125	1-1/4"	10
UF150	1-1/2"	10
UF200	2"	10

Application: These underground feeder cable connectors are used to connect underground electrical service feeder cables to electrical boxes, enclosures and meter boxes.

Advantages: Garvin Industries' rugged metallic construction provides a moisture resistant connection to multiple outdoor electrical and lighting requirements.

Field Names: UF connector, underground feeder connector, service entrance cable connector, snap in cable connector.

Material: Die-cast zinc

Only Stock One Lock!

Universal Breaker Lock

One Lock Fits All...

- Eliminates need to stock multiple breaker locks.
- Fits most common one pole circuit breakers.
- No need to make costly trips to the jobsite to identify panel.
- Reusable.
- · Corrosion resistant.
- · Patent pending.



Fits most circuit breakers:

- BR • THQB • 00
- CH • MP QOB
- Q • CHB • HOM
- BAB • BQ TB
- THQP • BL

Fits most brands:

- GE
- Westinghouse
- Siemens
- T & B
- Bryant
- Homeline
- Murray Square D
- · Cutler Hammer • and more...

See Page 338 for more information!



Power Cord & Cable Connectors

847-455-0188 FAX 847-455-0334 garvinindustries.com

Nonmetallic Cable Connectors (Snap In)



RXS-38


Part Number	Fits Knockout	Std. Pkg.	
RXS-38	1/2"	100	
RXS-50	1/2"	50	
RXS-75	3/4"	50	

Application: These nonmetallic, snap-in cable connectors are used in dry locations to connect one or two runs of nonmetallic sheathed cable to a conduit box or enclosure.

Advantages: Garvin Industries' nonmetallic, snap-in cable connectors require no tools for installation. The connector snaps into a box knockout and fits tightly on NM cable. Simply pull cables through the self locking plastic teeth on the connectors and terminate in the box or enclosure.

Field Names: Snap in connector, one piece connector, snap on connector, plastic a hole, button connector.

Material: Plastic



RXS-38 IN USE

Wire Protection Solution!

Snap In Wire Protector Plates

Temporary Plates Snap In to Protect Wiring During Dry Wall Installation.

- Rugged steel construction
- · Snap in labor saving design
- Fits most manufacturer device ring configurations
- Covers wires and cables and protects wire from cuts, nicks, scrapes, painting, and mud
- Reusable design saves money
- Helps insure wire colors remain clear for proper termination
- No more dust, dirt, paint, and debris
- 1, 2, 3, & 4 gang standard. Also available square to round.



See Page 113 for more information!

Heavy Duty Cast Iron Boxes and Covers



FS & FD Cast Iron **Device Boxes & Covers**











FD Series

FSC Series

FDC Series









Application: These FS and FD cast iron device boxes and covers are used where conductors need heavier and more durable boxes to make connections and splices on termina-

Advantages: Garvin Industries' FS and FD cast iron device boxes and covers can be used for terminations, feed through wiring or device holders.

Field Names: Junction box heavy duty, malleable boxes.

Material: Zinc Plated Malleable Iron



FDC50 IN USE

FS50 1/2" 5-1/4" 2-15/16" 2-1/8" FS75 3/4" 5-1/4" 2-15/16" 2-1/8" FS100 1" 5-1/4" 2-15/16" 2-1/8" FD50 1/2" 5-1/4" 3" 2-7/8" FD75 3/4" 5-1/4" 3" 2-7/8" FD75 3/4" 5-1/4" 3" 2-7/8" FSC50 1/2" 6-1/16" 2-15/16" 2-1/8" FSC75 3/4" 6-1/16" 2-15/16" 2-1/8" FSC75 3/4" 6-1/16" 2-15/16" 2-1/8" FSC100 1" 6-1/16" 2-15/16" 2-1/8" FDC50 1/2" 6-1/16" 3" 2-7/8" FDC50 1/2" 6-1/16" 3" 2-7/8" FDC75 3/4" 6-1/16" 3" 2-7/8" FDC75 3/4" 6-1/16" 3" 2-7/8" FDC75 3/4" 6-1/16" 3" 2-7/8" FDC75 TSCVB — Cast Iron Blank Cover	Part	Trade	Nomi	inal Dimens	sions	
FS75 3/4" 5-1/4" 2-15/16" 2-1/8" FS100 1" 5-1/4" 2-15/16" 2-1/8" FD50 1/2" 5-1/4" 3" 2-7/8" FD75 3/4" 5-1/4" 3" 2-7/8" FD100 1" 5-1/4" 3" 2-7/8" FSC50 1/2" 6-1/16" 2-15/16" 2-1/8" FSC75 3/4" 6-1/16" 2-15/16" 2-1/8" FSC100 1" 6-1/16" 2-15/16" 2-1/8" FDC50 1/2" 6-1/16" 3" 2-7/8" FDC50 1/2" 6-1/16" 3" 2-7/8" FDC75 3/4" 6-1/16" 3" 2-7/8" FDC75 3/4" 6-1/16" 3" 2-7/8" FDC75 3/4" 6-1/16" 3" 2-7/8" FDC75	Number	Size	Α	В	С	
FS100 1" 5-1/4" 2-15/16" 2-1/8" FD50 1/2" 5-1/4" 3" 2-7/8" FD75 3/4" 5-1/4" 3" 2-7/8" FD100 1" 5-1/4" 3" 2-7/8" FSC50 1/2" 6-1/16" 2-15/16" 2-1/8" FSC75 3/4" 6-1/16" 2-15/16" 2-1/8" FSC100 1" 6-1/16" 2-15/16" 2-1/8" FDC50 1/2" 6-1/16" 3" 2-7/8" FDC75 3/4" 6-1/16" 3" 2-7/8" FDC75 3/4" 6-1/16" 3" 2-7/8" FDC75 3/4" 6-1/16" 3" 2-7/8" FDC75	FS50	1/2"	5-1/4"	2-15/16"	2-1/8"	
FD50 1/2" 5-1/4" 3" 2-7/8" FD75 3/4" 5-1/4" 3" 2-7/8" FD100 1" 5-1/4" 3" 2-7/8" FSC50 1/2" 6-1/16" 2-15/16" 2-1/8" FSC75 3/4" 6-1/16" 2-15/16" 2-1/8" FSC100 1" 6-1/16" 3" 2-7/8" FDC50 1/2" 6-1/16" 3" 2-7/8" FDC50 1/2" 6-1/16" 3" 2-7/8" FDC75 3/4" 6-1/16" 3" 2-7/8" FDC75	FS75	3/4"	5-1/4"	2-15/16"	2-1/8"	
FD75 3/4" 5-1/4" 3" 2-7/8" FD100 1" 5-1/4" 3" 2-7/8" FSC50 1/2" 6-1/16" 2-15/16" 2-1/8" FSC75 3/4" 6-1/16" 2-15/16" 2-1/8" FSC100 1" 6-1/16" 2-15/16" 2-1/8" FDC50 1/2" 6-1/16" 3" 2-7/8" FDC75 3/4" 6-1/16" 3" 2-7/8" FDC75 3/4" 6-1/16" 3" 2-7/8" FDC100 1" 6-1/16" 3" 2-7/8" FSCVB — Cast Iron Blank Cover FSCVT — Cast Iron Toggle Cover FSCVD — Cast Iron Duplex Cover	FS100	1"	5-1/4"	2-15/16"	2-1/8"	
FD100 1" 5-1/4" 3" 2-7/8" FSC50 1/2" 6-1/16" 2-15/16" 2-1/8" FSC75 3/4" 6-1/16" 2-15/16" 2-1/8" FSC100 1" 6-1/16" 3" 2-7/8" FDC50 1/2" 6-1/16" 3" 2-7/8" FDC75 3/4" 6-1/16" 3" 2-7/8" FDC75 3/4" 6-1/16" 3" 2-7/8" FDC100 1" 6-1/16" 3" 2-7/8" FDC100 1" 6-1/16" Toggle Cover FSCVD — Cast Iron Duplex Cover	FD50	1/2"	5-1/4"	3"	2-7/8"	
FSC50 1/2" 6-1/16" 2-15/16" 2-1/8" FSC75 3/4" 6-1/16" 2-15/16" 2-1/8" FSC100 1" 6-1/16" 2-15/16" 2-1/8" FDC50 1/2" 6-1/16" 3" 2-7/8" FDC75 3/4" 6-1/16" 3" 2-7/8" FDC70 1" 6-1/16" 3" 2-7/8" FDC100 1" 6-1/16" 3" 2-7/8" FSCVB — Cast Iron Blank Cover FSCVT — Cast Iron Duplex Cover	FD75	3/4"	5-1/4"	3"	2-7/8"	
SC75 3/4" 6-1/16" 2-15/16" 2-1/8" SC100	FD100	1"	5-1/4"	3"	2-7/8"	
1" 6-1/16" 2-15/16" 2-1/8" FDC50 1/2" 6-1/16" 3" 2-7/8" FDC75 3/4" 6-1/16" 3" 2-7/8" FDC100 1" 6-1/16" 3" 2-7/8" FSCVB — Cast Iron Blank Cover FSCVT — Cast Iron Toggle Cover FSCVD — Cast Iron Duplex Cover	FSC50	1/2"	6-1/16"	2-15/16"	2-1/8"	
FDC50 1/2" 6-1/16" 3" 2-7/8" FDC75 3/4" 6-1/16" 3" 2-7/8" FDC100 1" 6-1/16" 3" 2-7/8" FSCVB — Cast Iron Blank Cover FSCVT — Cast Iron Toggle Cover FSCVD — Cast Iron Duplex Cover	FSC75	3/4"	6-1/16"	2-15/16"	2-1/8"	
## FDC75	FSC100	1"	6-1/16"	2-15/16"	2-1/8"	
FDC100 1" 6-1/16" 3" 2-7/8" FSCVB — Cast Iron Blank Cover FSCVT — Cast Iron Toggle Cover FSCVD — Cast Iron Duplex Cover	FDC50	1/2"	6-1/16"	3"	2-7/8"	
- Cast Iron Blank Cover - Cast Iron Toggle Cover - Cast Iron Duplex Cover	FDC75	3/4"	6-1/16"	3"	2-7/8"	
Cast Iron Toggle Cover SCVD — Cast Iron Duplex Cover	FDC100	1"	6-1/16"	3"	2-7/8"	
FSCVD — Cast Iron Duplex Cover	FSCVB	_	Cast Iron	Blank Cover		
	FSCVT	_	Cast Iron	Toggle Cover		
FSCG — Gasket Only	FSCVD	_	Cast Iron	Duplex Cover		
	FSCG	_	Gasket O	nly		



Weatherproof Boxes & Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

Wire Splice Junction Boxes



Application: These weatherproof, wire-splice junction boxes are used in outdoor locations when multiple wires must be spliced and connected to each other inside junction boxes.

Advantages: Garvin Industries' wire-splice boxes come with external mounting tabs and a snap-lock hinged door attached. They are great for many types of wires requiring connection points, including speaker wires, thermostat cables, and coaxial or data cables. Their hinged-cover design makes future access to wires quick and easy. The clear plastic window allows visual access to modules installed in boxes.

Field Names: Weatherproof box, weatherproof, BAPI box, weatherproof junction box, splice box.

Material: Plastic



WPSL IN USE

Part Number	Dimensions	Knockouts	Description	Std. Pkg.
WPSS	4-3/4" x 1-1/2" x 1-1/2"	(2) 1/2"	Slim line weatherproof splice box	25
WPSL	4-3/4" x 3" x 1-1/2"	(5) 1/2"	Large weatherproof splice box	25

One Gang Weatherproof Boxes



2" Deep





Application: These 2" deep, one-gang weatherproof boxes are used for branch circuit wiring in wet, damp and dry locations. They may even be used as weatherproof junction boxes to install receptacles, switches and GFCI devices.

Advantages: Garvin Industries' one-gang, weatherproof boxes have reinforced connector outlets and come with an innovative, powder-coated finish that promotes maximum durability, weather protection and scratch resistance. They come standard with detachable lugs, two closure plugs and ground screws, making installation fast and easy. They have many box mounting configurations making them versatile for installation. Garvin Industries' one-gang boxes have internal threads on their hubs that comply with NEMA requirements and accept threaded fittings and conduits.

Field Names: Weatherproof box, water tight box, watertight box, weather resistant box, weatherproof junction box, weather proof box, liquid tight box, liquidtight box, sealed electrical box, outdoor electrical box, outdoor electrical box.

Material: Rugged Cast Aluminum with Premium Powder-coated Finish



WP2503 IN USE

Part Number	Threaded Hub	# Holes		Similar Products		Std. Pkg.
WP2503	1/2"	3		Thomas & Betts IH3-1 Hubbell Raco 5320-0	Crouse Hinds TP7010 EGS Appleton WSM150	20
WP2504	1/2"	4		Thomas & Betts IH4-1 Hubbell Raco 5321-0	Crouse Hinds TP7026 EGS Appleton WSL150	20
WP2505	1/2"	5		Thomas & Betts IH5-1 Hubbell Raco 5322-0	Crouse Hinds TP7042 EGS Appleton WSP150	20
WP2505X	1/2"	5	Multi Direction Conduit Hubs	Thomas & Betts IH5S2-1 Hubbell Raco 5323-0	Crouse Hinds TP7058 EGS Appleton WSX150	20
WP2753	3/4"	3		Thomas & Betts IH3-2 Hubbell Raco 5324-0	Crouse Hinds EGS Appleton WSM175	12
WP2754	3/4"	4		Thomas & Betts Hubbell Raco 5330-0	Crouse Hinds TP7034 EGS Appleton WSL175	12
WP2755	3/4"	5		Thomas & Betts IH5-2 Hubbell Raco 5331-0	Crouse Hinds TP7050 EGS Appleton WSP175	12
WP2755X	3/4"	5	Multi Direction Conduit Hubs	Thomas & Betts IH5S2-2 Hubbell Raco 5332-0	Crouse Hinds TP7066 EGS Appleton WSX175	12
WP21003	1"	3		Thomas & Betts IH03-3 Hubbell Raco	Crouse Hinds EGS Appleton WSM110	12



One Gang **Weatherproof Boxes**

847-455-0188 FAX 847-455-0334 garvinindustries.com

2-5/8" Deep





WP258754



WP258755X





WP258505X

WP2581003





WP2581005X

Application: These 2-5/8" deep, one-gang weatherproof boxes are used for branch circuit wiring in wet, damp and dry locations. They may be used as weatherproof junction boxes to install receptacles, switches and GFCI devices.

Advantages: Garvin Industries' one-gang, weatherproof boxes have reinforced connector outlets and come with an innovative powder-coated finish that promotes maximum durability, weather protection and scratch resistance. They come standard with detachable lugs, two closure plugs and ground screws, making installation fast and easy. These boxes have many mounting configurations making them versatile for installation. Garvin Industries' one-gang boxes have internal threads on their hubs that comply with NEMA requirements and accept threaded fittings and conduits.

Field Names: Weatherproof box, water tight box, watertight box, weather resistant box, weatherproof junction box, weather proof box, liquid tight box, liquidtight box, sealed

Material: Rugged Cast Aluminum with Premium Powdercoated Finish



WP258505X IN USE

Part Number	Threaded Hub	# Holes		Similar Products		Std. Pkg.
WP258503	1/2"	3		Thomas & Betts IHD3-1 Hubbell Raco 5385-0	Crouse Hinds TP7074 EGS Appleton WDM175	20
WP258504	1/2"	4		Thomas & Betts IHD4-1 Hubbell Raco	Crouse Hinds TP7074 EGS Appleton	20
WP258505X	1/2"	5	Multi Direction Conduit Hubs	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton WDX150	20
WP258753	3/4"	3		Thomas & Betts IHD3-2 Hubbell Raco 5386-0	Crouse Hinds TP7078 EGS Appleton WDM175	10
WP258754	3/4"	4		Thomas & Betts IHD4-2 Hubbell Raco	Crouse Hinds TP7078 EGS Appleton WDM175	10
WP258755X	3/4"	5	Multi Direction Conduit Hubs	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton WDX175	10
WP2581003	1"	3		Thomas & Betts IHD3-3 Hubbell Raco 5387-0	Crouse Hinds TP7082 EGS Appleton WDM110	10
WP2581005X	1"	5	Multi Direction Conduit Hubs	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton WDX110	10

1" Deep









WDEVDZ



WPEXR1

Threaded Std. Part # Number Hub Holes Pkg. WPEXB504 1/2" 4 12 WPEXB506 12 WPEXB754 3/4" 12 WPEXB756 3/4" 6 12 WPEXR1 24

Application: These 1" deep, one-gang, weatherproof extension rings are used in conjunction with one-gang, weatherproof boxes when additional wiring space is required. The adapters on the extension boxes allow for "take offs" to be added

Advantages: Garvin Industries' one-gang, weatherproof extension rings come with an innovative powder-coated finish that promotes maximum durability, weather protection and scratch resistance. Garvin Industries eliminates extra costs because installation hardware, gaskets, ground screws and closure plugs are all included. Garvin Industries' one-gang extension boxes have internal threads on their hubs that comply with NEMA requirements and accept all threaded fittings and conduits.

Field Names: Weather proof extension rings, weather proof extension boxes, weather proof adapter box, weather proof extend ring, weather proof add a depth box, weatherproof extension rings, weatherproof extension boxes, T11 box, T11 weatherproof extension box.

Material: Rugged Cast Aluminum with Premium Powdercoated Finish



WPEXR1 IN USE

Easy Identification Solutions!

Painted Boxes, Covers & Connectors

Color Coded Boxes, Covers, Connectors & Components Make It Easy to Identify the System in the Conduit!

- Save time by quickly identifying the wire in the boxes and pipe
- Cuts mistakes and rework on jobsite
- Great for future updating of wire and devices when advances in technology require it



- Economical price compared to field painting and packaging
- Superior quality to field painting
- Custom colors upon request!
- · Satisfies inspectors curiosity!



One Gang Flanged Extension Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

1-1/2" Deep







WPEXF504



WPEXF506



WPEXF752



WPEXF754



WPEXF756

Application: These 1-1/2" deep, one-gang, weatherproof extension rings are used with one-gang weatherproof boxes when additional wiring space is required. The adapters on the extension boxes allow for "take offs" to be added to new boxes and devices.

Advantages: Garvin Industries' one-gang weatherproof extension rings come with an innovative powder-coated finish that promotes maximum durability, weather protection and scratch resistance. Garvin Industries eliminates extra costs because installation hardware, gaskets, ground screws and closure plugs are all included. Garvin Industries' one-gang extension boxes have internal threads on their hubs that comply with NEMA requirements and accept all threaded fittings and conduits.

Field Names: Weather proof extension rings, weather proof extension boxes, weather proof adapter box, weather proof extend ring, weather proof add a depth box, weatherproof extension rings, weatherproof extension boxes, T11 box.

Material: Rugged Cast Aluminum with Premium Powder-coated Finish



WPEXF504 IN USE

Part Number	Hole Size	# Holes	Similar Products		Std. Pkg.
WPEXF502	1/2"	2	Thomas & Betts IHEF2-1 Hubbell Raco 5412-0	Crouse Hinds EGS Appleton	10
WPEXF504	1/2"	4	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton WEFX50	10
WPEXF506	1/2"	6	Thomas & Betts IHEF652-1 Hubbell Raco 5414-0	Crouse Hinds EGS Appleton	10
WPEXF752	3/4"	2	Thomas & Betts IHEF2-2 Hubbell Raco 5413-0	Crouse Hinds EGS Appleton	10
WPEXF754	3/4"	4	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton WEFX75	10
WPEXF756	3/4"	6	Thomas & Betts IHEF6S2-2 Hubbell Raco 5415-0	Crouse Hinds EGS Appleton	10



Application: These one-gang in-use weatherproof covers

outlet requires weatherproof protection while cords are installed. These covers have a versatile installation: they can

Advantages: Garvin Industries' weatherproof in-use covers with interchangeable inserts have a unique snap-fit design that makes installation easy and fast. Their high impact, polycarbonate construction ensures durability in all locations

Field Names: Weatherproof in use covers, weatherproof covers, weather proof in use covers, weather proof bubble covers, weather proof plastic covers, weather proof device covers, weather proof while in use covers, weather proof in

with interchangeable inserts are used when an outdoor

In Use Covers with **Interchangeable Inserts**






Patent US 6,982,381



and eliminates the risk of rust and corrosion.

be both device and box mounted.



	(2) C	
	. 6 6	
20.2	(E003 DOIN)	
	112 D.	
	\vdash	\vdash
Burn Freeze		
THE STREET		
WIU2V Patent US 6,982,381		
Patent US 6,982,381		

Part Number	# of Gangs	Profile	Depth	Similar Products		Std. Pkg.
WIU1V	1-Gang	Vertical	2-3/4"	Thomas & Betts CKNM Hubbell Raco 5730-0	Crouse Hinds EGS Appleton WC1U1	20
WIU2V	2-Gang	Vertical	2-1/4"	Thomas & Betts 2CKNM Hubbell Raco 5789-0	Crouse Hinds EGS Appleton	20




One Gang In Use Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

Universal Device Covers





Application: These universal, one-gang device covers are used when an outdoor outlet requires weatherproof protection. These covers have a versatile installation; they can be mounted either horizontally or vertically.

Advantages: Garvin Industries' weatherproof universal device covers have a rugged construction that promotes maximum durability, weather protection and scratch resistance. These device covers have self-closing lids protecting the receptacle when it is not in use. Additionally, the self-closing lids are padlock lockable, promoting safety and preventing use by small children and other unwanted users from accessing the electrical outlet.

Field Names: Weatherproof in use covers, weatherproof covers, weather proof in use covers, weather proof bubble covers, weather proof plastic covers, weather proof device covers, weather proof while in use covers, weather proof in service covers, outhouse cover, T11 box.

Material: High-impact Polycarbonate. Rugged Cast Aluminum with Premium Powder-coated Finish in "M" Versions.








WIU1UD INSERTS



WIU2UD Patent Pending












WIUM1UD INSERTS

		3			• • • • • • •		
Part Number	# of Gangs	Profile	Depth	Material	Similar Products		Std. Pkg.
WIU1U	1	Vertical or Horizontal	2-3/4"	Plastic	Thomas & Betts CKNMD Hubbell Raco	Crouse Hinds EGS Appleton WC1U1	8
WIU1UD	1	Vertical or Horizontal	3-1/2"	Plastic	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton WCD1U1	8
WIUM1UD	1	Vertical or Horizontal	3-1/2"	Metal	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	8
WIU2UD	2	Vertical or Horizontal	3-1/2"	Plastic	Thomas & Betts 2CKNMD Hubbell Raco	Crouse Hinds EGS Appleton	8
WIUM2UD	2	Vertical or Horizontal	3-1/2"	Metal	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	8

One Gang Weatherproof Box Covers



All Device Styles

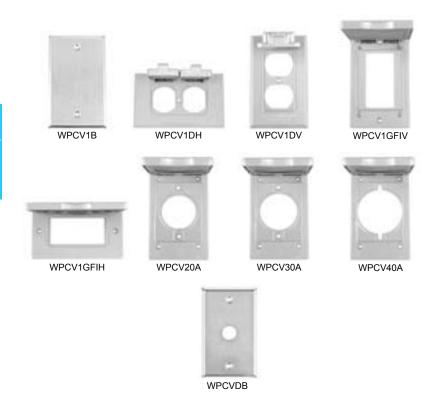

Application: These one-gang covers are used when an outdoor outlet requires weatherproof protection.

Advantages: Garvin Industries' weatherproof device covers have a rugged cast construction and an innovative powder-coated finish that promotes maximum durability, weather protection and scratch resistance. These device covers have self-closing lids protecting the receptacle when it is not in use. Garvin Industries saves both time and money by including installation hardware and gaskets.

Field Names: Blank weather proof cover, duplex weather proof cover, horizontal weather proof cover, vertical weather proof cover, GFCI weather proof cover, 20 AMP weather proof cover, 30 AMP weather proof cover, 50 AMP weather proof cover, weatherproof covers, outhouse cover, T11 cover.

Material: Rugged Cast Aluminum with Premium Powder-coated Finish



WPCV1GFIV IN USE

Part Number	Description	Similar Products or Special Features		
WPCV1B	Blank	Thomas & Betts CCB Hubbell Raco 5173-0	Crouse Hinds TP7292 EGS Appleton WCB1	20
WPCV1DH	1 Duplex Horizontal	Thomas & Betts CCU Hubbell Raco 5180-0	Crouse Hinds TP7207 EGS Appleton WVD1	20
WPCV1DV	1 Duplex Vertical	Thomas & Betts CCU Hubbell Raco 5146-0	Crouse Hinds TP7199 EGS Appleton	20
WPCV1GFIV	1 GFCI Vertical	Thomas & Betts CCGV Hubbell Raco 5103-0	Crouse Hinds TP7240 EGS Appleton WVG1	20
WPCV1GFIH	1 GFCI Horizontal	Thomas & Betts CCG Hubbell Raco 5101-0	Crouse Hinds TP7236 EGS Appleton WHG1	20
WPCV20A	20A Receptacle 1.625" Vertical	Thomas & Betts CCSV-TL Hubbell Raco 5031-0	Crouse Hinds TP7210 EGS Appleton WVP161	20
WPCV30A	30A Receptacle 1.75" Vertical	Thomas & Betts Hubbell Raco 5029-0	Crouse Hinds EGS Appleton	20
WPCV40A	40-50 AMP Receptacle 2.125" Vertical	Thomas & Betts Hubbell Raco 5030-0	Crouse Hinds TP7218 EGS Appleton WVP211	20
WPCVDB	.6875" Hole	For doorbell or buzzer applica	tions. Stainless steel.	20



One Gang Weatherproof Box Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

All Device Styles









WPCVLVR









Application: These one-gang device covers are used when an outdoor outlet requires weatherproof protection.

Advantages: Garvin Industries' weatherproof device covers have a rugged die cast construction and an innovative powder-coated finish that promotes maximum durability, weather protection and scratch resistance. These device covers have self-closing lids protecting the receptacle when it is not in use. Garvin Industries saves both time and money by including installation hardware and gaskets.

Field Names: Locking weather proof cover, switch weather proof cover, in use weather proof cover, toggle switch weather proof cover, weatherproof covers, outhouse cover, T11 cover.

Material: Rugged Cast Aluminum with Premium Powdercoated Finish. In-use Cover in High-impact Polycarbonate.



WPCVLOKREC IN USE

Part Number	Description	Similar Products or Special Features		
WPCVLOKDUP	Duplex with Padlock	Thomas & Betts Hubbell Raco 5027-0	Crouse Hinds EGS Appleton	20
WPCVLOKGFI	GFCI with Padlock	Thomas & Betts Hubbell Raco 5028-0	Crouse Hinds EGS Appleton	20
WPCVLOKREC	Single Receptacle 1.41" Diameter with Padlock	Thomas & Betts Hubbell Raco 5031-0	Crouse Hinds EGS Appleton	20
WPCVLVR	1 Lever and 15 AMP Single Pole Switch Included	Thomas & Betts SW20-1/710 Hubbell Raco	Crouse Hinds EGS Appleton	20
WPCVSR	Single Receptacle 1.41" Diameter	Thomas & Betts CCS Hubbell Raco 5152-0	Crouse Hinds EGS Appleton WJS1	20
WPCVTOG	Toggle Switch	Thomas & Betts SW1 Hubbell Raco 5121-0	Crouse Hinds TP7260 EGS Appleton WCT115	20
WPCV1GWIU	Mounts Vertical or Horizontal	In use bubble cover accepts 8 c	lifferent devices	20



All Device Styles







Application: These one-gang device covers are used when an outdoor outlet requires weatherproof protection. These covers have versatile installation. They can be both device and box mounted vertically or horizontally.

Advantages: Garvin Industries' weatherproof device covers have a plastic construction that promotes maximum durability, weather protection and scratch resistance. Garvin Industries saves both time and money by including installation hardware and gaskets.

Field Names: Combination device weather proof cover, multi device weather proof cover, weatherproof covers, outhouse cover, T11 cover.

Material: Plastic





WP1CPDV IN USE

WP1CPDH IN USE

Part Number	Description	Profile	Std. Pkg.
WP1CPDH	Duplex/Combo. Device - Horizontal	Horizontal	20
WP1CPDV	Duplex/Combo. Device - Vertical	Vertical	20
WP1CPGV	GFCI or Decorative - Vertical	Vertical	20

Prefab Services & Custom Assemblies!

Stop Wasting Time... Start Saving Money!

- Preinstalled boxes, covers, connectors, devices, and wire leads
- Quick connectors and special junction boxes aids field termination and connection
- A variety of in-stock devices to choose from for the proper install
- Hanging and support mock ups for any job
- · You design it and we do the prefab
- · Call today





One Gang Weatherproof Box Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

Raised Covers







Application: These raised, one-gang weatherproof box covers are used in conjunction with one-gang rectangular weatherproof boxes. They provide an easy installation point for lamp holders and other weatherproof electrical photocells, lights, and motion sensor accessories.

Advantages: Garvin Industries' weatherproof, raised box covers have a rugged die cast construction and an innovative powder-coated finish that promotes maximum durability, weather protection and scratch resistance. They come ready with installation hardware, gaskets and closure plugs.

Field Names: Weather proof cluster covers, rectangular weather proof covers, 3 hole weather proof cover, weather proof lamp holder covers, weatherproof covers, T11 covers, outhouse covers.

Material: Rugged Cast Aluminum with Premium Powder-coated Finish



WPRE1 IN USE

Part Number	# of Outlets	Hole Size	Similar Products		Std. Pkg.
WPRE1	1	1/2"	Thomas & Betts LC11 Hubbell Raco 5186-0	Crouse Hinds TP7312 EGS Appleton WC1150	25
WPRE2	2	1/2"	Thomas & Betts LC21 Hubbell Raco	Crouse Hinds TP7316 EGS Appleton WC1250	25
WPRE3	3	1/2"	Thomas & Betts LC31 Hubbell Raco 5189-0	Crouse Hinds TP7320 EGS Appleton WC1350	25

Custom Manufactured Solutions!

We Specialize in Unique Custom Solutions!

Send Us Your Product Idea, Sketch, Blueprint or Sample and Let Our Engineers Develop a Solution That is Right for You!

- Metal stamping and fabrication
- · Die casting and machining
- Drilling, tapping, threading, bending, and prefab assemblies
- Full line prefab services
- · Patent and royalty agreements
- Stocking programs available for qualifying products



Two Gang Weatherproof Boxes



2" Deep





Application: These 2" deep, two-gang weatherproof boxes are used for branch circuit wiring in wet, damp and dry locations. They may even be used as weatherproof junction boxes to install receptacles, switches and GFCI devices.

Advantages: Garvin Industries' two-gang, weatherproof boxes have reinforced connector outlets and come with an innovative powder-coated finish that promotes maximum durability, weather protection and scratch resistance. They come standard with detachable lugs, two closure plugs and ground screw; making installation fast and easy. Garvin Industries' two-gang boxes have internal threads on their hubs that comply with NEMA requirements and accept most threaded fittings and conduits.

Field Names: Two-gang weatherproof box, two-gang water tight box, two-gang watertight box, two-gang weather resistant box, two-gang weatherproof junction box, two-gang weather proof box, two-gang liquid tight box, two-gang liquidtight box, two-gang sealed electrical boxes, T11 box.

Material: Rugged Cast Aluminum with Premium Powder-coated Finish



WP2G503 IN USE

Part Number	Hole Size	# Holes	Similar Products		Std. Pkg.
WP2G503	1/2"	3	Thomas & Betts 2IH3-1 Hubbell Raco 5333-0	Crouse Hinds EGS Appleton WSM250	12
WP2G504	1/2"	4	Thomas & Betts 2IH4-1 Hubbell Raco 5335-0	Crouse Hinds TP7094 EGS Appleton	12
WP2G505	1/2"	5	Thomas & Betts 2IH5-1 Hubbell Raco 5337-0	Crouse Hinds TP7102 EGS Appleton WSP250	12
WP2G753	3/4"	3	Thomas & Betts 2IH3-2 Hubbell Raco 5341-0	Crouse Hinds TP7090 EGS Appleton WSM275	12
WP2G754	3/4"	4	Thomas & Betts 2IH4-2 Hubbell Raco 5343-0	Crouse Hinds TP7098 EGS Appleton	12
WP2G755	3/4"	5	Thomas & Betts 2IH5-2 Hubbell Raco 5345-0	Crouse Hinds TP7106 EGS Appleton WSP275	12
WP2G756	3/4"	6	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	12
WP2G1003	1"	3	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton WSM210	12
WP2G1004	1"	4	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	12



WP2G757X

Two Gang Weatherproof Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

2" Deep



WP2G1009

Application: These 2" deep, two-gang weatherproof boxes are used for branch circuit wiring in wet, damp and dry locations. They may even be used as weatherproof junction boxes to install receptacles, switches and GFCI devices.

Advantages: Garvin Industries' two-gang, weatherproof boxes have reinforced connector outlets and come with an innovative powder-coated finish that promotes maximum durability, weather protection and scratch resistance. They come standard with detachable lugs, two closure plugs and ground screws making installation fast and easy. Garvin Industries' two-gang boxes have internal threads on their hubs that comply with NEMA requirements and accept all threaded fittings and conduits.

Field Names: Two-gang weatherproof box, two-gang water tight box, two-gang watertight box, two-gang weather resistant box, two-gang weatherproof junction box, two-gang weather proof box, two-gang liquid tight box, two-gang liquidtight box, two-gang sealed electrical boxes, T11 boxes.

Material: Rugged Cast Aluminum with Premium Powder-coated Finish



WP2G507 IN USE

Part Number	Hole Size	# Holes	Outlet Configuration	Similar Products	WP2G507 IN USE	Std. Pkg.
WP2G505X	1/2"	5	Multi Direction Conduit Hubs	Thomas & Betts 2IH5S2-1 Hubbell Raco 5334-0	Crouse Hinds TP7118 EGS Appleton WSX250	12
WP2G506X	1/2"	6	Multi Direction Conduit Hubs	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton WSR250	12
WP2G507	1/2"	7		Thomas & Betts 2IH7-1 Hubbell Raco 5340-0	Crouse Hinds TP7110 EGS Appleton WST250	12
WP2G507X	1/2"	7	Multi Direction Conduit Hubs	Thomas & Betts 2IH7S2-1 Hubbell Raco 5338-0	Crouse Hinds EGS Appleton	12
WP2G509	1/2"	9		Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	12
WP2G755X	3/4"	5	Multi Direction Conduit Hubs	Thomas & Betts 2IH5S2-2 Hubbell Raco 5342-0	Crouse Hinds TP7122 EGS Appleton WSX275	12
WP2G756X	3/4"	6	Multi Direction Conduit Hubs	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton WSR275	12
WP2G757	3/4"	7		Thomas & Betts 2IH7-2 Hubbell Raco 5348-0	Crouse Hinds TP7114 EGS Appleton WST275	12
WP2G757X	3/4"	7	Multi Direction Conduit Hubs	Thomas & Betts 2IH752-2 Hubbell Raco 5346-0	Crouse Hinds EGS Appleton	12
WP2G1009	3/4"	9		Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	12
WP2G1005X	1"	5	Multi Direction Conduit Hubs	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	12

WP2G1005X

Two Gang Weatherproof Boxes



2-5/8" Deep









WP2G258757X

WP2G258505

00

WP2G2581007X

Application: These 2-5/8" deep, two-gang weatherproof boxes are used for branch circuit wiring in wet, damp and dry locations. They may be used as weatherproof junction boxes to install receptacles, switches and GFCI devices.

Advantages: Garvin Industries' two-gang, weatherproof boxes have reinforced connector outlets and come with an innovative powder-coated finish that promotes maximum durability, weather protection and scratch resistance. They come standard with detachable lugs, two closure plugs and ground screws making installation fast and easy. Garvin Industries' two-gang boxes have internal threads on their hubs that comply with NEMA requirements and accept all threaded fittings and conduits.

Field Names: Two-gang weatherproof box, two-gang water tight box, two-gang watertight box, two-gang weather resistant box, two-gang weatherproof junction box, two-gang weather proof box, two-gang liquid tight box, two-gang liquidtight box, two-gang sealed electrical box, two-gang seal tight box, T11 box.

Material: Rugged Cast Aluminum with Premium Powder-coated Finish



WP2G258505 IN USE

Part Number	Hole Size	# Holes	Outlet Configuration	Similar Products		Std. Pkg.
WP2G258505	1/2"	5		Thomas & Betts 2IHD5-1 Hubbell Raco	Crouse Hinds TP7126 EGS Appleton WDP250	10
WP2G258755	3/4"	5		Thomas & Betts 2IHD5-2 Hubbell Raco 5388-0	Crouse Hinds TP7130 EGS Appleton WDP275	10
WP2G2581005	1"	5		Thomas & Betts 2IHD5-3 Hubbell Raco 5389-0	Crouse Hinds TP7134 EGS Appleton WDP210	10
WP2G258757X	3/4"	7	Multi Direction Conduit Hubs	Thomas & Betts Hubbell Raco	Crouse Hinds TP7137 EGS Appleton WDK275	10
WP2G2581007X	1"	7	Multi Direction Conduit Hubs	Thomas & Betts Hubbell Raco	Crouse Hinds TP7142 EGS Appleton WDK210	10



Two Gang Weatherproof Extension Rings

WP2EXB758

847-455-0188 FAX 847-455-0334 garvinindustries.com

1" Deep





Std. Part Hole Number Holes Size Pkg. WP2EXB506 1/2" 6 10 WP2EXB756 3/4" 10 WP2EXB508 1/2" 8 10 WP2EXB758 3/4" R 10 WPEXR2 10

Application: These 1" deep, two-gang weatherproof extension rings are used in conjunction with two-gang weatherproof boxes when additional wiring space is required. The adapters on the extension boxes allow for "take offs" to be added to new boxes and devices.

Advantages: Garvin Industries' two-gang, weatherproof extension rings come with an innovative powder-coated finish that promotes maximum durability, weather protection and scratch resistance. Garvin Industries eliminates extra costs because installation hardware, gaskets, ground screws and closure plugs for the two and six outlet styles are all included. Garvin Industries' one-gang extension boxes have internal threads on their hubs that comply with NEMA requirements and accept all threaded fittings and conduits.

Field Names: Two-gang weather proof extension rings, two-gang weather proof extension boxes, two-gang weather proof adapter box, two-gang weather proof extend ring, two-gang weather proof add a depth box, two-gang weather-proof extension rings, T11 box.

Material: Rugged Cast Aluminum with Premium Powder-coated Finish




WPEXR2 IN USE

Hassel-Free Grounding Install!

Water Pipe Ground Clamp With Lay In Lug

Lay In Lug Allows Wires to Easily Drop In and Tighten Down.

- Open lay in lug style speeds installation time
- Cast body has a hinged design that opens easily to fit on water pipes and rebar
- Cast bronze body
- Easy access for hard to reach spaces in crawlspaces, basements, etc...



See Page 196 for more information!

Two Gang Weatherproof **Box Covers**



All Device Styles









WPCV2GDUPSW









WPCV2GGFISW

Application: These two-gang device covers are used when an outdoor outlet requires weatherproof protection. These covers have a versatile installation that can be both device and box mounted.

Advantages: Garvin Industries' weatherproof device covers have a rugged die-cast construction and an innovative powder-coated finish that promotes maximum durability, weather protection and scratch resistance. These device covers have self-closing lids protecting the receptacle when it is not in use. Garvin Industries saves both time and money by including installation hardware and gaskets.

Field Names: Two-gang blank weather proof cover, twogang duplex weather proof cover, two-gang horizontal weather proof cover, two-gang vertical weather proof cover, two-gang GFCI weather proof cover, two-gang 20 AMP weather proof cover, two-gang 30 AMP weather proof cover, two-gang 50 AMP weather proof cover, two-gang weatherproof covers, outhouse cover, T11 cover.

Material: Rugged Cast Aluminum with Premium Powdercoated Finish





WP2C2SW

WP2CLPO60



VVI	IN U	UF		

Std.

Number	Description	Similar Products		Pkg.
WPCV2B	Blank	Thomas & Betts 2CCB Hubbell Raco 5175-0	Crouse Hinds TP7296 EGS Appleton WCB24	20
WPCV2DUP	2 Duplex Receptacles	Thomas & Betts 2CCD Hubbell Raco 5148-0	Crouse Hinds TP7228 EGS Appleton WVDD2	20
WPCV2G1DUP	1 Duplex Oversized Receptacle Horizontal Profile	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	20
WPCV2GDUPSW	1 Duplex & 1 Single Receptacle, 1.41" Diameter	Thomas & Betts 2CCSD Hubbell Raco 5160-0	Crouse Hinds TP7224 EGS Appleton WVSC2	20
WPCV2GFI	2 GFCI or Decorative Receptacles	Thomas & Betts 2CCG Hubbell Raco 5145-0	Crouse Hinds TP7252 EGS Appleton WVGG2	20
WPCV2GGFIDUP	1 GFCI & 1 Duplex Receptacle	Thomas & Betts 2CCDG Hubbell Raco 5033-0	Crouse Hinds TP7248 EGS Appleton WVDG2	20
WPCV2GGFISW	1 GFCI & 1 Single Receptacle 1.41" Diameter	Thomas & Betts 2CCSG Hubbell Raco	Crouse Hinds TP7244 EGS Appleton WVSG2	20
WP2C2S	Two Switches or Single Receptacles 1.406" Diameter	Thomas & Betts Hubbell Raco 5092-0	Crouse Hinds TP7220 EGS Appleton WVSS2	20
WP2C2SW	Two Levers with Two 15A Single Pole Toggle Switches Included!	Thomas & Betts SW2 Hubbell Raco 5124-0	Crouse Hinds TP7272 EGS Appleton WVT215	20
WP2CLPO60	One 30, 50, 60 Amp (3 & 4 Wire) Built In Padlock Hasp 2.468" Diameter	Thomas & Betts Hubbell Raco 5036-0	Crouse Hinds EGS Appleton	20

Part



Three Gang Weatherproof Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com

2-5/8" Deep







3G757 WP3G1007

Application: These 2-5/8" deep, three-gang, weatherproof boxes are used for branch circuit wiring in wet, damp and dry locations. They may be used as weatherproof junction boxes to install receptacles, switches and GFCI devices.

Advantages: Garvin Industries' three-gang, weatherproof boxes have reinforced connector outlets and come with an innovative powder-coated finish that promotes maximum durability, weather protection and scratch resistance. They come standard with detachable lugs, two closure plugs and ground screws making installation fast and easy. Garvin Industries' three-gang boxes have internal threads on their hubs that comply with NEMA requirements and accept all threaded fittings and conduits.

Field Names: Three-gang weatherproof box, three-gang water tight box, three-gang watertight box, three-gang weather resistant box, three-gang weatherproof junction box, three-gang weather proof box, three-gang liquid tight box, three-gang liquidtight box, three-gang sealed electrical box, outhouse cover, T11 cover.

Material: Rugged Cast Aluminum with Premium Powder-coated Finish

Part Number	Hole Size	# Holes	Special Features	Std. Pkg.
WP3G507	1/2"	7	3 Device Openings for 1/2" Conduits	12
WP3G757	3/4"	7	3 Device Openings for 3/4" Conduits	12
WP3G1007	1"	7	3 Device Openings for 1" Conduits	12

Go Green on the Jobsite!

Energy Efficient Temporary Work Light

- 105 watt high-output compact fluorescent lamp offers 80% energy savings over traditional metal halide
- Very light-weight-2 lbs.
- Versatile snap hook design easily attaches to many structural members
- Standard box knockouts allows hard wire with pipe or flex cable wiring options
- No ballast in fixture means no replacement costs later to fix a bad ballast
- Gasketed covers and sealed knockouts are great for damp locations
- Premium high visibility "green" powder coating




See Page 371 for more information!

Three Gang Weatherproof Box Covers



All Device Styles









WPCV3GTOG

Application: These three-gang device covers are used with Garvin Industries' three-gang weatherproof boxes when an outdoor outlet requires weatherproof protection. These covers have a versatile installation and can be both device and box mounted. Blank covers are used when multigang boxes are used as junction boxes and require weatherproof protection.

Advantages: Garvin Industries' weatherproof device covers have a rugged die-cast construction and an innovative powder-coated finish that promotes maximum durability, weather protection and scratch resistance. These device covers have self-closing lids protecting the receptacle when it is not in use. Garvin Industries saves both time and money by including installation hardware and gaskets.

Field Names: Three-gang blank weather proof cover, three-gang duplex weather proof cover, three-gang GFCI weather proof cover, three-gang decorative weather proof cover, three-gang single receptacle weather proof cover, three-gang toggle weather proof cover, three-gang weather proof cover, three-gang weather proof cover, three-gang weather proof cover, outhouse covers, T11 cover.

Material: Rugged Cast Aluminum with Premium Powder-coated Finish





WPCV3GDUP IN USE

WPCV3GGFI IN USE





WPCV3GREC IN USE

WPCV3GTOG IN USE

Part Number	Description	Std. Pkg.
WPCV3GB	Blank	20
WPCV3GDUP	Duplex	20
WPCV3GGFI	GFCI	20
WPCV3GREC	Single Receptacles 1.41" Diameter	20
WPCV3GTOG	Toggle Switch	20



4 Gang & Round Weatherproof Boxes

847-455-0188 FAX 847-455-0334 garvinindustries.com





Application: These 1-1/2" deep, round, weatherproof boxes are used for branch circuit wiring in wet, damp and dry locations. They are used as weatherproof junction boxes to install receptacles, switches and GFCI devices, or with round, cluster covers and round, lamp-holder combinations.

Advantages: Garvin Industries' 4" round weatherproof boxes have reinforced connector outlets and come with an innovative powder-coated finish that promotes maximum durability, weather protection and scratch resistance. They come standard with cast-in mounting lugs, closure plugs and ground screws making installation fast and easy. Garvin Industries' 4" round boxes have internal threads on their hubs that comply with NEMA requirements and accept all threaded fittings and conduits.

Field Names: Round weatherproof box, round water tight box, round watertight box, round weather resistant box, round weatherproof junction box, round weather proof box, round liquid tight box, round liquidtight box, round sealed electrical box, T11 box.

Material: Rugged Cast Aluminum with Premium Powder-coated Finish



WPR505

Part Number	Hole Size	# Holes	Similar Products		Std. Pkg.
WPR505	1/2"	5	Thomas & Betts S-47 Hubbell Raco 5361-0	Crouse Hinds TP7146 EGS Appleton WRX50	20
WPR755	3/4"	5	Thomas & Betts S-48 Hubbell Raco 5372-0	Crouse Hinds TP7150 EGS Appleton WRX75	20

Versatile Hanging!

Wide Mouth Heavy Duty Beam Clamps

- Fits 1/4", 3/8", and 1/2" threaded rods and fasteners
- Stamped steel or malleable iron versions available
- Spring steel, standard style electrical, top beam clamps and hammer on versions available
- Spring steel, light duty clamps accommodate 10-24 or 1/4"-20 rod
- Custom beam clamps made to your specifications
- Let us design a solution for you



See Pages 310-312 for more information!

4" Round Weatherproof Extension Rings



1-1/2" Deep







WPEXRR

Application: These 1-1/2" deep, round, weatherproof extension rings are used in conjunction with 4" round weatherproof boxes when additional wiring space is required. The adapters on the extension boxes allow for "take offs" to be added to new boxes and devices.

Advantages: Garvin Industries' 4" round, weatherproof extension rings have reinforced connector outlets and come with an innovative powder-coated finish that promotes maximum durability, weather protection and scratch resistance. Garvin Industries eliminates extra costs because installation hardware, gaskets, ground screws and closure plugs are included.

Field Names: Weatherproof box extension ring, water tight box extension ring, watertight box extension ring, weather resistant box extension ring, weatherproof junction box extension ring, weather proof box extension ring, liquid tight box extension ring, liquidtight box extension ring, sealed electrical box extension ring, T11 box.

Material: Rugged Cast Aluminum with Premium Powdercoated Finish

Part Number	Hole Size	# Holes	Similar Products or Spe	ecial Features	Std. Pkg.
WPEXR504	1/2"	4	Thomas & Betts SE-47 Hubbell Raco 5363-0	Crouse Hinds EGS Appleton WERX50	10
WPEXR754	3/4"	4	Thomas & Betts SE-48 Hubbell Raco	Crouse Hinds EGS Appleton WERX75	10
WPEXRR	Blank	No Holes	Blank sided extension ring w	rith no threaded holes.	10

Guarantee Cable Performance

6" Square Pata Boxes

Insure Proper Bend Radius on All Sensitive Data Cables

- Box Depths Available: 1-1/2", 2-1/2" & 3-1/2"
- All Conduit Knockout Sizes Available
- Mating Device Rings, Blank Covers and Plates
- Custom Styles Available on Request.



See Page 72-73 for more information!



4" Round Weatherproof Covers

847-455-0188 FAX 847-455-0334 garvinindustries.com

All Device Styles



Application: These device covers are installed with 4" round weatherproof boxes when an outdoor outlet requires weatherproof protection.

Advantages: Garvin Industries' round weatherproof device covers have a rugged metal construction and an innovative powder-coated finish that promotes maximum durability and longevity under harsh weather conditions. Garvin Industries saves both time and money by including installation hardware and gaskets.

Field Names: Weatherproof cluster cover, weatherproof round cover, round weatherproof cover, weather proof cluster cover, weather proof round cover.

Material: Rugged Cast Aluminum with Premium Powder-coated Finish



WPRCV502 IN USE

Part Number	Hole Size	# of Holes	Elevation Profile	Similar Products		Std. Pkg.
WPRCVB	Blank	No Holes	Flat	Thomas & Betts SS-B Hubbell Raco 5374-0	Crouse Hinds TP7158 EGS Appleton WCBR	20
WPRCV501	1/2"	1	Raised Dome	Thomas & Betts S-1 Hubbell Raco 5193	Crouse Hinds TP7300 EGS Appleton WCR150	20
WPRCV502	1/2"	2	Raised Dome	Thomas & Betts Hubbell Raco	Crouse Hinds TP7304 EGS Appleton WCR250	20
WPRCV503R	1/2"	3	Raised Rectangular Cluster	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	20
WPRCV503	1/2"	3	Raised Dome	Thomas & Betts S-3 Hubbell Raco 5197-0	Crouse Hinds TP7308 EGS Appleton WCR350	20

Fastest Low Voltage Cable Hang!

Quick Shot Bridle Rings

Ready! Aim!! Hang!!!

Quick Shot:

- 1-1/2", 2", and 4" sizes available for multiple cable bundles
- Comes with or without saddle for data and fiber optic cable installs
- Concrete nail and washer combo fits most manufacturer's powder actuated fastening tools

Standard Style:

- Standard bridle ring available 1/2" to 4" with wood screw or machine screw threads
- Bridle rings with toggle wing set for hollow walls also available
- 1/4"-20 and 10-24 machine threads or wood screw also available



See Page 290 for more information!

Weatherproof Box Accessories



Closure Plugs, Gaskets & Box Holders











conditions and general wear and tear.

Field Names: Weatherproof closure plug, threaded closure

ensure a weather-tight seal.

Field Names: Weatherproof closure plug, threaded closure plug, die cast closure plug, weather proof closure plug, abandon plug, weatherproof gaskets.

Application: These closure plugs and gaskets are used with weatherproof boxes, extension rings, and cluster covers to

Advantages: Garvin Industries' closure plugs are rugged, die-cast aluminum, ensuring durability under harsh weather

Material: Rugged Cast Aluminum with Premium Powdercoated Finish & Neoprene Black Gasket



WPCP50 IN USE

Part Number	Size/Type	Std. Pkg.
WPCP50	1/2"	100
WPCP75	3/4"	100
WPCP100	1"	100
WPRGSKT	Round Gasket	20
WPGSKT1G	1 Gang Gasket	20
WPGSKT2G	2 Gang Gasket	20
WPGSKT3G	3 Gang Gasket	20
WPBH50	For 1/2"EMT Conduit with Screw & Gasket for Water Tight Seal	50



Boxes & **Enclosures**

847-455-0188 FAX 847-455-0334 garvinindustries.com

Quickflash **Box Flashing Panels**







Patent US 6,395,984 B1





QF3PAN Patent US 6,395,984 B1



QFPSGR Patent US 6,395,984 B1



QFPIPE Patent US 6,395,984 B1

Application: These rubber flashing panels are used on exterior wall penetrations to seal out moisture, air, bugs and other potentially harmful elements that may infiltrate the home around edges of installed electrical boxes and rings.

Advantages: When box flashing panels are used properly with house wrap they provide a superior moisture and air barrier.

Field Names: Box flashing panels, flash panels, flashing

Material: Plastic

Part Number	For Use With	Finished Wall Details	Std. Pkg.
QF40CT	4" Steel Octagon Box 1-1/2" Deep	One coat stucco and EIFS systems	12
QF4PAN	4" Round Steel Pan Box 1/2" Deep	Three coat stucco and lap siding	12
QF3PAN	3" Round Steel Pan Box 1/2" Deep	Three coat stucco and lap siding	12
QFPSGR	Plastic Single Gang Ring 1/2" Raised	Three coat stucco and lap siding	12
QFPIPE	EMT Conduit or PVC Pipe 1/2", 3/4"	One coat stucco and EIFS systems	12

Fastest Low Voltage Cable Hang!

Quick Shot Bridle Rings

Aim!! Ready! Hang!!!

Quick Shot:

- 1-1/2", 2", and 4" sizes available for multiple cable bundles
- · Comes with or without saddle for data and fiber optic cable installs
- · Concrete nail and washer combo fits most manufacturer's powder actuated fastening tools

Standard Style:

- Standard bridle ring available 1/2" to 4" with wood screw or machine screw
- . Bridle rings with toggle wing set for hollow walls also available
- 1/4"-20 and 10-24 machine threads or wood screw also available



See Page 290 for more information!



Wall "Kick Plate" Support Brackets



Part Number	Fits Box Size	Box Center Off Floor	Std. Pkg.
KP4-12	4" sq.	12"	25
KP4-13	4" sq.	13"	25
KP4-14	4" sq.	14"	25
KP4-15	4" sq.	15"	25
KP4-16	4" sq.	16"	25
KP4-18	4" sq.	18"	25
KP4-24	4" sq.	24"	25

Application: These wall "kick plate" support brackets are used to support electrical boxes from floor or concrete forms. They also help prevent electrical boxes from being pushed back into the wall cavity during drywall installation.

Advantages: Garvin Industries' fold back stabilizers ensure an easy and secure electrical box installation in wall applications. They are designed to mount square boxes on walls 12" to 24" above the floor. Garvin Industries' floor and wall kick plate support brackets have box screws that are exposed after mounting so the conduits can be secured from the front of the box opening. Additionally, their multiple heights accommodate a variety of finished floor heights.

Field Names: Kick plates, box wall bracket, box support bracket, floor to wall box bracket.

Material: Galvanized Steel



KP4-12 IN USE

Prefab Services & Custom Assemblies!

Stop Wasting Time... Start Saving Money!

- · Preinstalled boxes, covers, connectors, devices, and wire leads
- Quick connectors and special junction boxes aids field termination and connection
- · A variety of in-stock devices to choose from for the proper install
- · Hanging and support mock ups for any job
- · You design it and we do the prefab
- · Call today



How Do You Spend Your Time?





Custom Prefab Solutions Guaranteed to...

- Increase job site productivity up to 15 times
- End excessive and costly material handling
- Expedite project completion with made-to-order solutions
- Enhance profit dollars ... Make More Money!!!





Phone: 847-455-0188 | sales@garvinindustries.com | www.garvinindustries.com

Boxes & Enclosures garvinindustries.com



Box Mounting Brackets



SCREW-MOUNT VERSION



SLIDING VERSION

Application: These box mounting brackets are used to secure conduit boxes in stud walls.


Advantages: Garvin Industries' box mounting brackets allow the installer to quickly and easily mount 4" square and 4-11/16" square conduit boxes in stud walls.

Field Names: Box mounting brackets, box brackets, 4S box brackets, screw gun bracket.

Material: Galvanized Steel

Part Number	Fits Sq. Box	Box Depth	Stud Wal Center Dista	·-	Std. Pkg.
BMB16150	4" or 4-11/16"	1-1/2"	16"		50
BMB16218	4" or 4-11/16"	2-1/8"	16"		50
BMB16250	4" or 4-11/16"	2-1/2"	16"		50
BMB16350	4" or 4-11/16"	3-1/2"	16"		50
BMB16SL	4" or 4-11/16"	1-1/2" or 2-1/8"	16"	SL Boxes slide horizontally between	50
BMB616SL	6"	1-1/2", 2-1/2", 3-1/2"	16"	studs for perfect device positioning	50
BMB24150	4" or 4-11/16"	1-1/2"	24"		50
BMB24218	4" or 4-11/16"	2-1/8"	24"		50
BMB24250	4" or 4-11/16"	2-1/2"	24"		50
BMB24350	4" or 4-11/16"	3-1/2"	24"		50
BMB24SL	4" or 4-11/16"	1-1/2" or 2-1/8"	24"	SL Boxes slide horizontally between	50
BMB624SL	6"	1-1/2", 2-1/2", 3-1/2"	24"	studs for perfect device positioning	50

Multi Box Mounting Bracket

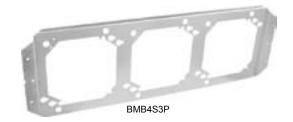

Application: These multi-box mounting brackets are used to secure conduit boxes in stud walls.

Advantages: Garvin Industries' multi box mounting brackets allow the installer to quickly and easily mount 4" and 4-11/16" square conduit boxes in stud walls.

Field Names: Box mounting brackets, box brackets, 4S box brackets, 5S Brackets

Material: Galvanized Steel



BMB4S3P IN USE Part Box Stud Width Std. C.C. **Similar Products** Number Size Pkg. BMB4S3P 4" or 4-11/16" 16" Three box locations can be used with Garvin Industries' HC-50, HC-75, 50 Square HC-100 connectors and bushed nipples to connect side knockouts on boxes.



Boxes & Enclosures

847-455-0188 FAX 847-455-0334 garvinindustries.com

Universal Box Mounting Brackets





Application: These universal box mounting brackets are used to support electrical boxes mounted to metal or wood studs. They screw directly to the face of metal or wood studs.

Advantages: Garvin Industries' universal box mounting brackets are made from pregalvanized steel ensuring durability and mechanical protection. Stand off, fold back stabilizer tabs keep boxes from twisting in wall cavities. These brackets are great for prefab!

Field Names: Box mounting brackets, box brackets, 4S box brackets.

Material: Galvanized Steel



BB4-25 IN USE

Part Number	Fits Box Sizes	# Of Mounting Tabs	Std. Pkg.
BB4-25	4" Square or 4-11/16" Square	Single Side Mounting Tab	50
BB4-26	4" Square or 4-11/16" Square	Dual Side Mounting Tabs	50
BB6-26	6"	Dual Side Mounting Tabs	50

Old Box in Wall? Convert It, Don't Replace It!

Old Box Ear Tab Conversion Clips

Clips Install on Old Conduit Box Ears and Align Mounting Tabs for Use With Current Device Rings & Covers.

- Simple to use, easily screws on to old box in wall or ceiling
- No more demolition of old boxes and wiring
- Rugged steel construction
- · Saves labor costs

- No replacement boxes required
- · Save connector and rewiring costs
- Installs in seconds
- Sold in pairs, comes with attachment screw



See Page 116 for more information!

Boxes & Enclosures



Mounting Brackets





Application: These mounting brackets are welded or riveted to boxes allowing them to be mounted quickly and easily in stud walls or ceiling joist applications.

Advantages: Garvin Industries' built-in brackets may also be added to other Garvin boxes to suit your field application. Garvin Industries' will weld or rivet these brackets to any box or cover. Let us customize a solution for you!

Field Names: Drywall bracket, fan bracket, F bracket, angle bracket, J bracket, flat vertical bracket, metal stud bracket, wood stud bracket.

Material: Steel

Part Number	Special Features	Std. Pkg.
ВКТАВ	Garvin Industries' "AB" brackets are designed to position electrical boxes against the side of studs. They are screwed onto the face of upright vertical structural members.	50
ВКТВ	Garvin Industries' "B" brackets are designed to face mount boxes on the front edges of wood or metal studs. They are ideal for applications when space in between studs is limited.	50
BKTDW	Garvin Industries' "DW" brackets are designed to position electrical boxes away from the sides of studs so the trim moulding of door frames is clear.	50
BKTF	Garvin Industries' "F" brackets are designed with side screw holes to mount them into the side of studs.	50
BKTFAN	Garvin Industries' "FAN" brackets are designed to mount on the flat interior side of studs.	50
ВКТЈ	Garvin Industries' "J" brackets are designed to spur slotted holes for toenailing. The gauging notches are at 3/8" and 1/2".	50
BKTWB	Garvin Industries' "WB" brackets are designed to side mount octagon, square, switch and handy utility boxes. They have gauging tabs and recessed nailing spike for wood studs and joists.	50

Fastest PreFab Guaranteed!

4" Square Pual Access "Backdoor" Box

This Box Allows Preinstalled Devices, Rings, & Other Box Components—for Quick Termination at Job Sites!

- Open back box allows conduit, connectors, and wire device termination in seconds
- Rugged steel construction
- Combination 1/2" & 3/4" moon knockouts
- Quickly terminate wire and close off open back in seconds with blank cover
- Let us prefab devices and wire pigtails
- Made to order custom assemblies welcome



See Page 25 for more information!



Boxes & Enclosures

847-455-0188 FAX 847-455-0334 garvinindustries.com

Box Support Brackets (Far Side)



Part Number	Raises Box Flush For Wall Depth	Std. Pkg.
ABS	4"	100
ABS6	6"	100

Application: These far-side box support brackets are used for 1-1/2" and 2-1/8" deep boxes. The ABS model is used with 4" metal studs and the ABS6 is used with 6" metal studs. They are primarily used to keep boxes from twisting back into wall cavities during drywall construction.

Advantages: Garvin Industries' far-side box support brackets hold boxes rigidly in metal stud walls when devices need to be installed.

Field Names: Farside box supports, box standoffs, box leg supports.

Material: Galvanized Steel



ABS IN USE

Cut In Box "Old Work" Mounting Clips



Application: These cut in box "old work" mounting clips are used to convert any standard box with ears to old work boxes

Advantages: Garvin Industries' "old work" mounting clips are designed to be used with 1/2" or 5/8" thick standard drywall. One pair of clips are required per box.

Field Names: Old work clips, retro fit box clips, cut in clips.

Material: Zinc Plated Steel



OWC IN USE (2 SIDES)


Part Number	Similar Products		Std. Pkg
owc	Thomas & Betts OWC Hubbell Raco	Crouse Hinds TP651 EGS Appleton	100

Boxes & Enclosures



Fixed Length Box Bar Hangers



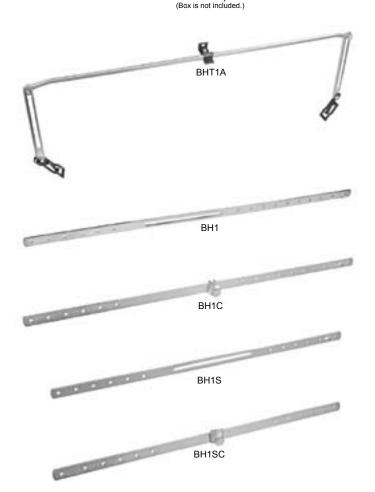

Application: These fixed-length, box bar hangers are used on metal or wood studs for box positioning in walls and ceilings. They are also used to mount boxes on ceiling "T-bar" grid and other structural members.

Advantages: Garvin Industries' fixed-length, box bar hangers are available for 1-1/2" or 2-1/8" deep boxes. The locator dimples on the face of the bars allow for exact positioning of single or multiple boxes. The dimple feature also provides a quick start of screws and reinforcement to prevent the electrical box mounting screws from stripping out when boxes are being mounted. Garvin Industries' adjustable-brace design allows ground screws to clear when boxes are mounted. The boxes attach easily with self tapping screws making the installation virtually effortless.

Field Names: Bar hangers, box mounting bar hangers, box mounting brackets.

Material: Steel




BHT1 IN USE ABOVE CEILING TILES

Part Number	Description	Std. Pkg.
BHT1	This 24" ceiling grid T-bar bracket is used with boxes that are 1-1/2" or 2-1/8" deep. (Box is not included.)	50
BHT1A	This 24" ceiling grid T-bar bracket has an adjustable 8" height.	50
BH1	This 24" straight bar hanger is used for mounting ceiling boxes. It is slotted and includes two stove bolts per unit for a fast and inexpensive installation.	50
BH1C	This 24" straight bar hanger with BH-C box clip is used for mounting ceiling boxes.	50
BH1S	This 20" straight bar hanger is used for mounting ceiling boxes. It is slotted and includes two stove bolts per unit for a fast and inexpensive installation.	50
BH1SC	This 20" straight bar hanger with BH-C box clip is used for mounting ceiling boxes.	50



Boxes & Enclosures

847-455-0188 FAX 847-455-0334 garvinindustries.com

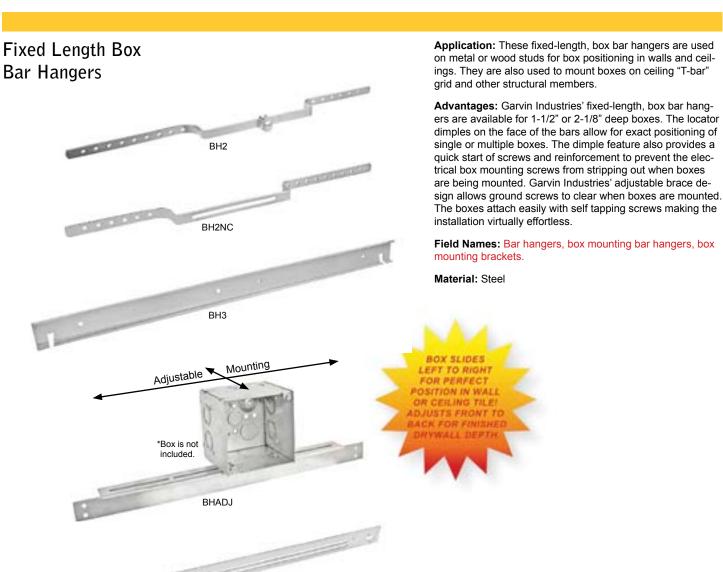

Number	Description	Std. Pkg.
BH2	This 21" offset (1-1/2") bar hanger is used to mount boxes with a plaster or mud ring.	50
BH2NC	This 21" offset (1-1/2") bar hanger is used to mount boxes with a plaster or mud ring. It is slotted and includes two stove bolts per unit for a fast and inexpensive installation.	50
ВН3	This straight bracket is used to mount architectural recess lights 25-1/4" long and have notches that are 24" apart to be used on a T-bar.	50
BHADJ	This 16" C-C bracket with numerous threaded holes allows boxes to be moved left to right in wall openings, and out to perfect finished wall depths. NOTE: Box is not included.	25
BHTBAR	This 24" T-bar bracket has slots that allow ceiling boxes to be adjusted to fit any position on finished ceiling tile.	25
ВНС	Clip and screw set is used with BH-1, BH-1S and BH-2NC.	50
BHTC	Clip and screw set is used with BHT-1 and BHT-1A.	50

BHTBAR



Adjustable Length Box Bar Hangers



Application: These adjustable-length bar hangers allow electrical boxes to be quickly and easily installed between ceiling joists or wall studs.

Advantages: Garvin Industries' adjustable-length bar hangers have a versatile design that allows boxes to be installed anywhere along the length of the bar. Garvin's BHA1 includes a 3/8" trade size stud to accommodate fixture stems. The BHA1C clip installs in 1/2" knockouts located on the bottom of boxes.

Field Names: Adjustable bar hangers, adjustable box mounting bar hangers, adjustable box mounting brackets.

Material: Steel



BH1 IN USE


Part Number	Size	Similar Products		Std. Pkg.
BHA1	16" to 24"	Thomas & Betts BH-S Hubbell Raco 920	Crouse Hinds TP354 EGS Appleton SX160	50
BHA1C	16" to 24"	Thomas & Betts Hubbell Raco 922	Crouse Hinds EGS Appleton SX26	50
BHA16	11" to 18"	Thomas & Betts Hubbell Raco BHA-16	Crouse Hinds EGS Appleton	50
BHA24	17" to 26"	Thomas & Betts Hubbell Raco BHA-24	Crouse Hinds EGS Appleton	50

Square Boxes 3-1/2" and 4" Deep Extra depth accommodates deep devices, speakers and strobes Great for cameras and sound Huge wire capacity Fits most electric or electronic modules No more struggling with shallow boxes and costly extension rings Standard 4" square mounting tab profile See Pages 40-42 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

Conduit Elevation Blocks



CEB-12
Patent Pending

Application: These elevation blocks are used to raise conduits off of exterior roof surfaces. When electrical conduits or struts are used on roof top applications they must be elevated above the surface of the rubber roof.

Advantages: Garvin Industries' pipe elevation blocks have a "built in channel" eliminating the need to cut strut channel, saving both time and material. The blocks are constructed from very lightweight and durable materials preventing rot, rust or deterioration.

Field Names: Pipe block, pipe riser, conduit support block, pipe curb, pipe standoff, pipe bumper.

Material: Plastic

Part Number	Height	Length	Material	Max Load Capacity	Std. Pkg.
CEB-6	4"	6"	Plastic	776 lb.	10
CEB-12	4"	12"	Plastic	1000 lb.	10
CEB-18	4"	18"	Plastic	1500 lb.	10
CEB-24	4"	24"	Plastic	3100 lb.	10
CEB-78	4"	78"	Plastic	9300 lb.	10

Installs Before or After Wire Pull!

Split Collar Ground Bushings

Installs before or after wire pull (unlike solid bushings)

- · Insulated throat to protect wires
- Extra tight clamp-on design ensures solid ground
- Adjustable lug allows versatile positioning on pipe
- 1/2" 6" sizes available
- Manufactured from rugged die cast zinc
- Patented



See Page 172 for more information!



Conduit Hangers (Multi Function Clip)





Application: These multifunction-clip conduit hangers are used to attach conduits or boxes to flanges, wires or rods.

Advantages: Garvin Industries' multifunction-clip conduit hangers allow the installer versatile support of conduits in multiple applications.

Field Names: Multi function conduit clips, conduit clamps.

Material: Steel



Part Number	Conduit Size	Similar Products	APSKC1234	Std. Pkg.
APS	Fits 1/8" - 3/8" flanges, attaches to #12 wire through 3/8" rod, attaches #10-24 or 1/4"-20 threaded bridle rings.	Cooper B-Line BW2 Erico 4Z34	Minerallac APS	50
APSKC1234	1/2" & 3/4" conduit hanger and clip assembly.	Cooper B-Line BG812W2 Erico 4Z34812M	Minerallac APSKC1234	50
APSKC1	1" conduit hanger and clip assembly.	Cooper B-Line BG16W2 Erico 4Z3416M	Minerallac APSKC1	50

Conduit Hanger Wing Clips



Application: These Conduit Support Clips attach flexible metal, EMT and rigid conduits to threaded rod and other drop wires that are attached to building structures.

Advantages: Conduits can be quickly and easily attached to drop rods and wires. No tools are required for installation. Spring steel flexing action holds the conduit tightly against the support rod to prevent swaying of the electrical raceway.

Field Names: Bat wings, conduit clips, conduit spring clips.

Material: Spring steel with "E" coat corrosion protection.





CWC-38 IN USE

CWC-100 IN USE

				0110 00 111 00E 0110 110	OOL
Part Number	EMT	Supports Rigid	Conduit Flexible Metal	Description	Std. Pkg.
CWC-38	3/8"	1/4"	3/8"	Attaches conduit to 1/4" threaded rod and ceiling grid drop wires.	100
CWC-50	1/2	3/8"	1/2"	Attaches conduit to 1/4" threaded rod and ceiling grid drop wires.	100
CWC-75	3/4"	1/2"	3/4"	Attaches conduit to 1/4" threaded rod and ceiling grid drop wires.	100
CWC-100	1"	3/4"	1"	Attaches conduit to 1/4" threaded rod and ceiling grid drop wires.	100
CWC-125	1-1/4"	1"	1-1/4"	Attaches conduit to 1/4" threaded rod and ceiling grid drop wires.	100



847-455-0188 FAX 847-455-0334 garvinindustries.com

Conduit Hangers (Wood or Metal Stud)



Application: These wood or metal stud conduit hangers support horizontal runs of conduits, flexible conduits, MC, PVC, BX or AC cables through metal studs.

Advantages: Garvin Industries' wood or metal stud conduit hangers attach easily with a single sheet metal screw. When installed properly these conduit hangers help prevent conduit and cable vibration.

Field Names: Conduit support clips, conduit clamps, conduit straps.

Material: Plated Steel



BAKC1234 IN USE

Part Number	Conduit Size	Similar Products		Std. Pkg.
BAKC38	3/8"	Cooper B-Line BG6H7 Erico FB6M	Minerallac BAKC38	50
BAKC1234	1/2" or 3/4"	Cooper B-Line BG812H7 Erico FB812M	Minerallac BAKC1234	50

Go Green on the Jobsite!

Energy Efficient Temporary Work Light

- 105 watt high-output compact fluorescent lamp offers 80% energy savings over traditional metal halide
- Very light-weight-2 lbs.
- Versatile snap hook design easily attaches to many structural members
- Standard box knockouts allows hard wire with pipe or flex cable wiring options
- No ballast in fixture means no replacement costs later to fix a bad ballast
- Gasketed covers and sealed knockouts are great for damp locations
- Premium high visibility "green" powder coating



See Page 371 for more information!



Conduit Hangers (Flange Mount)



Application: These flange-mount conduit hangers are used to suspend conduits from the bottom of beams.

Advantages: Garvin Industries' flange-mount conduit hangers quickly attach conduits to beams using only a hammer. Fasteners will rotate 360° making multidirectional conduit runs a snap.

Field Names: Conduit support clips, conduit clamps, conduit clips.

Material: Plated Steel



BC18KC1234 IN USE



BC516KC1234 IN USE

				BC516KC1234 IN USE	
Part Number	Flange Thickness	Conduit Size	Similar Products		Std. Pkg.
BC18KC38	1/8" to 1/4"	3/8"	Cooper B-Line BG6U24 Erico 6M24	Minerallac BC18KC38	50
BC18KC1234	1/8" to 1/4"	1/2" or 3/4"	Cooper B-Line BG812518U24 Erico 812M24	Minerallac BC18KC1234	50
BC18KC1	1/8" to 1/4"	1"	Cooper B-Line BG16U24 Erico 16M24	Minerallac BC18KC1	50
BC18KC114	1/8" to 1/4"	1-1/4"	Cooper B-Line BG20U24 Erico 20M24	Minerallac BC18KC114	50
BC18KC112	1/8" to 1/4"	1-1/2"	Cooper B-Line BG24U24 Erico 24M24	Minerallac BC18KC112	50
BC18KC2	1/8" to 1/4"	2"	Cooper B-Line BG32U24 Erico 32M24	Minerallac BC18KC2	50
BC516KC38	5/16" to 1/2"	3/8"	Cooper B-Line BG6U58 Erico 6M58	Minerallac BC516KC38	50
BC516KC1234	5/16" to 1/2"	1/2" or 3/4"	Cooper B-Line BG812S18U58 Erico 812M58	Minerallac BC516KC1234	50
BC516KC1	5/16" to 1/2"	1"	Cooper B-Line BG16U58 Erico 16M58	Minerallac BC516KC1	50
BC516KC114	5/16" to 1/2"	1-1/4"	Cooper B-Line BG20U58 Erico 20M58	Minerallac BC516KC114	50
BC516KC112	5/16" to 1/2"	1-1/2"	Cooper B-Line BG24U58 Erico 24M58	Minerallac BC516KC112	50
BC516KC2	5/16" to 1/2"	2"	Cooper B-Line BG32U58 Erico 32M58	Minerallac BC516KC2	50

How Do You Spend Your Time?





Custom Prefab Solutions Guaranteed to...

- Increase job site productivity up to 15 times
- End excessive and costly material handling
- Expedite project completion with made-to-order solutions
- Enhance profit dollars ... Make More Money!!!





Phone: 847-455-0188 | sales@garvinindustries.com | www.garvinindustries.com



Phone: 847-455-0188 | Fax: 847-455-0334 sales@garvinindustries.com

www.garvinindustries.com



Electrical Junction Boxes and Covers

Electrical Junction Boxes and Covers accommodate electrical & low voltage wiring and devices such as switches, receptacles, speakers, strobes, security cameras, and light fixtures. Boxes also provide excellent protection for wiring when they are combined with our device rings, industrial covers, wall plates, or light fixture canopies. We specialize in the customization of electrical boxes and covers.

See pages 3-121



Electrical Fittings

Electrical fittings and Conduit Bodies are used to connect EMT conduit, Rigid conduit, Flexible Metal Conduit, Liquid Tight Conduit, PVC conduit or non metallic cables to electrical junction boxes or enclosures. They come in a variety of styles and are manufactured from malleable iron, steel, zinc, aluminum, or plastic. Available sizes 3/8" up to 6" in diameter.

See pages 122-223



Weatherproof Boxes and Covers

Weatherproof Boxes & Covers are used in outdoor & wet locations to house branch circuit wiring or to accommodate electrical & electronic wiring devices such as switches, receptacles, speakers, dimmers, security cameras, and light fixtures. Weatherproof boxes provide excellent protection for wiring when they are closed with a gasketed cover, wall plate, or extension ring. Boxes and covers come in one, two, or three gang configurations and depths range from 1" to 2-5/8" deep.

See pages 224-246



Hanging and Support

We manufacture a variety of innovative brackets, clamps, straps and supports designed to speed the installation of electrical boxes and enclosures, pipes & conduits, low voltage cables, light fixtures & various other products used to build the electrical infrastructure in buildings.

See pages 247-321

In-Stock...On-Time!





Devices and Wall Plates

See pages 322-351

Garvin offers a broad range of electrical devices including duplex receptacles, decorative switches & receptacles, GFCI receptacles, toggle switches, slide dimmers and various industrial grade receptacles. Our occupancy and vacancy sensors are designed to reduce power consumption in rooms. Wall plates are made to accommodate most standard industry switches and receptacles and come in plastic, painted steel, & stainless steel finishes.

Fasteners

We manufacture a variety of fasteners designed to securely attach our electrical boxes and enclosures, fittings, and clamps to a variety of surfaces. Our fasteners include a variety of anchors, washers, screws, nuts and bolts.

See pages 352-367



Lighting

We offer a broad range of high output energy saving compact fluorescent & zero energy alternatives in various color temperatures & wattages. Many of these products offer energy savings of 80% - 90% over old inefficient lighting options. Garvin Industries also manufactures wiring assemblies, conduit nipples, zero energy exit signs and a variety of fixture and canopy accessories for industrial and interior commercial lighting spaces. See pages 368-376



Tools and Accessories

Tools and installation accessories are designed to speed job site performance of conduit bending, wire pulling & termination, temporary power & lighting, fire stopping, cleaning, marking, and many other routine installation procedures. Our unique products often cut the labor hours required for repetitive tasks by 50% or more.

See pages 377-388



Conduit Hangers (Spring Steel)



Application: These spring steel conduit hangers are used to install conduit with a beam clamp. They can be installed both horizontally and vertically. These conduit hangers can support 3/8" to 2" conduit runs.

Advantages: Garvin Industries' spring steel conduit hangers eliminate the need for additional fasteners. Their spring steel plated construction makes them durable and secure.

Field Names: Spring steel conduit hangers, black conduit hangers, black minnies, spring steel minnies, squeeze type conduit hangers.

Material: Spring Steel, Black



KC1234T IN USE


Part Number	Size	Similar Products or Spe	cial Features	Std. Pkg.
KC38T	3/8"	Cooper B-Line BG64T Erico 6M4I	Minerallac KC38T EGS Appleton	100
KC1234T	1/2" or 3/4"	Cooper B-Line BG8124T Erico 812M4I	Minerallac KC1234T EGS Appleton	100
KC1T	1"	Cooper B-Line BG164T Erico 16M4I	Minerallac KC1T EGS Appleton	50
KC114T	1-1/4"	Cooper B-Line BG204T Erico 20M4I	Minerallac KC114T EGS Appleton	50
KC112T	1-1/2"	Cooper B-Line BG244T Erico 24M4I	Minerallac KC112T EGS Appleton	50
KC2T	2"	Cooper B-Line BG324T Erico 32M4I	Minerallac KC2T EGS Appleton	50

Faster Jobsite Install...

4" Square "Quickie" Boxes With Preinstalled Fasteners

Preinstalled Screws on the Bracket Allow for Boxes to Mount to Studs in a Flash!

- No more buying fasteners
- No more losing fasteners
- No more wasted labor inserting fasteners
- Available on square boxes, 1-1/2" deep and 2-1/8" deep
- · Works on wood or metal studs



See Page 26 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

Conduit Hangers (Bolt & Nut)



Application: These conduit hangers are used in both wet and dry locations to support runs of rigid/IMC and EMT conduits from ceilings and walls.

Advantages: Garvin Industries' conduit hangers include a bolt and nut to make a speedy and economical installation. The zinc plated steel provides durability and corrosion protection.

Field Names: Conduit hangers, cowboy hangers, mae west hangers, minnies, stand off straps, standard conduit hangers, minis, pipe hangers.

Material: Zinc Plated Steel



CH-50 IN USE

Part Number	EMT Conduit	Rigid Conduit	Similar Products or Spe	ecial Features	Std. Pkg.
CH-50	1/2"	3/8" or 1/2"	Thomas & Betts 6H0B Hubbell Raco 2052	Crouse Hinds 0-B EGS Appleton H50WB	50
CH-75	3/4"	3/4"	Thomas & Betts 6H1B Hubbell Raco 2053	Crouse Hinds 1-B EGS Appleton H75WB	25
CH-100	1"	1"	Thomas & Betts 6H2B Hubbell Raco 2054	Crouse Hinds 2-B EGS Appleton H100WB	25
CH-125	1-1/4"		Thomas & Betts 6H3B Hubbell Raco 2041	Crouse Hinds 2 1/2-B EGS Appleton H125WB	25
CH-150	1-1/2"	1-1/4"	Thomas & Betts 6H4B Hubbell Raco 2055	Crouse Hinds 3-B EGS Appleton H150WB	25
CH-175		1-1/2"	Thomas & Betts Hubbell Raco	Crouse Hinds EGS Appleton	25
CH-200	2"	2"	Thomas & Betts 6H5B Hubbell Raco 2058	Crouse Hinds 5-B EGS Appleton H200WB	25
CH-250	2-1/2"	2-1/2"	Thomas & Betts 6H6B Hubbell Raco 2057	Crouse Hinds 6-B EGS Appleton H250WB	10
CH-300	3"	3"	Thomas & Betts 6H7B Hubbell Raco 2059	Crouse Hinds 7-B EGS Appleton H300WB	10
CH-350	3-1/2"	3-1/2"	Thomas & Betts 6H8B Hubbell Raco 2060	Crouse Hinds 8-B EGS Appleton H350WB	10
CH-400	4"	4"	Thomas & Betts 6H9B Hubbell Raco 2061	Crouse Hinds 9-B EGS Appleton H400WB	5

Conduit Hangers (Stainless Steel)





Pipes &

Conduits

Part Number	EMT Conduit	Rigid Conduit	Std. Pkg.
CHSS-50	1/2"	3/8" or 1/2"	50
CHSS-75	3/4"	3/4"	25
CHSS-100	1"	1"	25
CHSS-125	1-1/4"	1-1/4"	25
CHSS-150	1-1/2"	1-1/2"	25
CHSS-200	2"	2"	10
CHSS-250	2-1/2"	2-1/2"	10
CHSS-300	3"	3"	10
CHSS-350	3-1/2"	3-1/2"	10
CHSS-400	4"	4"	10

Application: These stainless steel conduit hangers are ideal for wet locations to support runs of rigid/IMC and EMT conduits from ceilings and walls.

Advantages: Garvin Industries' conduit hangers have the bolt and nut to make a speedy and inexpensive installation. Stainless-steel construction provides durability and corrosion protection in wet locations.

Field Names: Conduit hangers, cowboy hangers, mae west hangers, minnies, stand off straps, standard conduit hangers, mini's, pipe hangers

Material: 304 Stainless Steel



CHSS-50 IN USE

Strut Clamps (Snap In)




Part Number	Size	Conduit Type	Std. Pkg.
STC50	1/2"	EMT or FLEX	50
STC75	3/4"	EMT or FLEX	50
STC100	1"	EMT or FLEX	50

Application: These snap-in strut clamps are used to support light and medium duty runs of EMT conduit.

Advantages: Garvin Industries' snap-in strut clamps have a quick and easy snap-in installation on strut channel. Clamps will not rot, rust or corrode, making them great for indoor and outdoor applications.

Field Names: Clutch clamp, strut clamp, snap in strut

Material: High Strength Resin



STC50 IN USE



Strut Clamps (Two Piece)



STE100

Zinc-plated Steel Strut Clamps

Part Number	Size	Type Conduit	Std. Pkg.
STE50	1/2"	EMT	100
STE75	3/4"	EMT	100
STE100	1"	EMT	50
STE125	1-1/4"	EMT	50
STE150	1-1/2"	EMT	50
STE200	2"	EMT	50
STR50	1/2"	RIGID	100
STR75	3/4"	RIGID	100
STR100	1"	RIGID	50
STR125	1-1/4"	RIGID	50
STR150	1-1/2"	RIGID	50
STR200	2"	RIGID	50
STR250	2-1/2"	RIGID	50
STR300	3"	RIGID	25
STR350	3-1/2"	RIGID	25
STR400	4"	RIGID	25
STU50	1/2"	UNIVERSAL	100
STU75	3/4"	UNIVERSAL	100
STU100	1"	UNIVERSAL	100
STU125	1-1/4"	UNIVERSAL	50
STU150	1-1/2"	UNIVERSAL	50
STU200	2"	UNIVERSAL	50
STU250	2-1/2"	UNIVERSAL	50
STU300	3"	UNIVERSAL	25
STU350	3-1/2"	UNIVERSAL	25
STU400	4"	UNIVERSAL	25

Application: These universal strut clamps are used to mount EMT and rigid conduit from strut channel.

Advantages: Garvin Industries' two piece construction provides a tight fit in strut. Additionally, their screw tight clamping action secures conduit in overhead strut channel or wall mount applications.

Field Names: Strut clamps, strut hangers, conduit clamps, conduit strut clamps, strut straps, stainless steel strut straps.

Material: Zinc Plated Steel and 304 Stainless Steel



STU50 IN USE





304 Stainless Steel Strut Clamps

Size	Type Conduit	Std. Pkg.
1/2"	RIGID	100
3/4"	RIGID	100
1"	RIGID	50
1-1/4"	RIGID	50
1-1/2"	RIGID	50
2"	RIGID	50
2-1/2"	RIGID	50
3"	RIGID	25
3-1/2"	RIGID	25
4"	RIGID	25
	1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3" 3-1/2"	Size Conduit 1/2" RIGID 3/4" RIGID 1" RIGID 1-1/4" RIGID 1-1/2" RIGID 2" RIGID 2-1/2" RIGID 3" RIGID 3-1/2" RIGID

FAX 847-455-0334



Strut Clamps (One Piece Universal)



Pipes &

Conduits

Application: These one piece universal strut clamps are used to mount EMT and rigid conduit from strut.

Advantages: Garvin Industries' innovative one piece design ensures a tight fit in struts. Additionally, their one screw tight clamping action secures conduits to overhead strut channel securely.

Field Names: Strut clamps, strut hangers, conduit clamps, conduit strut clamps, one piece strut clamps, 1 piece strut clamps, strut clamps.

Material: Zinc Plated Steel



OPSC-50 IN USE

Part Number	EMT Size	RIGID Size	Similar Products	Std. Pkg.
OPSC-38	3/8"	_	_	100
OPSC-50	1/2"	_	Erico SCH8B	100
OPSC-75	3/4"	1/2"	Erico SCH12B	50
OPSC-100	1"	3/4"	Erico SCH16B	50
OPSC-125	1-1/4"	1"	Erico SCH20B	50
OPSC-150	1-1/2"	1-1/4"	Erico SCH24B	50
OPSC-200	2"	1-1/2"	Erico SCH32B	25
OPSC-200R	_	2"	Erico SCH40B	25
OPSC-250	2-1/2"	2-1/2"	Erico SCH48B	25
OPSC-300	3"	3"	Erico SCH56B	10
OPSC-350	3-1/2"	3-1/2"	Erico SCH64B	10
OPSC-400	4"	4"	Erico SCH72B	10



847-455-0188 FAX 847-455-0334 garvinindustries.com

Conduit Straps (Hammer On for Cable)



Part Number	Attaches To	Flexible Metal Conduit Size	Std. Pkg.
BXC	Metal Stud	3/8"	100
NSBX-50	Wood Stud	1/2"	100
NSBX-75	Wood Stud	3/4"	50

Application: These hammer-on cable support straps are used on flexible metal conduits and MC/BX cables to attach them to various surfaces. BXC is a push-up clip that attaches BX, MC or AC cable to metal studs.

Advantages: Garvin Industries flexible metal cable or conduit straps quickly attach to many surfaces.

Field Names: Nailstraps nail clips, conduit clips, conduit straps.

Material: Steel





BXC IN USE ON METAL STUD OPENING

NSBX-50 IN USE

Need Electrical Supplies....

On The Jobsite!

Why wait until you get back to the shop to make your supply list...

- More than 3,000 products online
- Request for Quotation direct from website
- · Detailed descriptions and images
- · Videos, spec sheets, blueprints, and more...

In-Stock...On-Time...Everytime!

www.garvinindustries.com





Conduit Straps (Hammer On for Pipe)



Application: These conduit supports are used to mount EMT conduits to wood studs or ceiling joists.

Advantages: Garvin Industries' conduit supports are pregalvanized for added corrosion protection and are mounted using a hammer. Their double-sided teeth and pointed tip prevent accidental pull out. The "FS" version has an angled point to penetrate hard wood in older structures.

Field Names: Nail straps, conduit straps, nail clips, nail on straps, J hook.

Material: Galvanized Steel



NS-100 IN USE

Part Number	EMT Conduit	Rigid Conduit	Similar Products or Spec	cial Features	Std. Pkg.
NS-50FS	1/2"	3/8"	Flat smooth edge and pointed easily and quickly.	tip hammers in to wood	100
NS-50	1/2"	3/8"	Thomas & Betts N101SC Hubbell Raco 2252	Bridgeport 920-NS EGS Appleton	100
NS-75	3/4"	1/2"	Thomas & Betts N102SC Hubbell Raco 2253	Bridgeport 921-NS EGS Appleton	100
NS-100	1"	3/4"	Thomas & Betts N103SC Hubbell Raco 2254	Bridgeport 922-NS EGS Appleton	100

Need Protection from the Weather?

3 Gang Weatherproof Boxes and Covers!

3 Gang Weatherproof Covers:

- Available in single receptacle, GFCI, duplex, decorative, and toggle switch
- Spring-loaded, self-closing lids create a water tight seal when the device or switch is not in use
- Made from rugged die cast aluminum
- · Neoprene gasket and screws included

3 Gang Weatherproof Boxes:

- 3 gang, seven hole weatherproof boxes
- 1/2", 3/4" or 1" threaded holes
- 2-5/8" Depth
- · Made from rugged die cast aluminum
- Mounting lugs & closure plugs included for easy installation
- Premium powder coated paint



See Page 242 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

Conduit Straps (One Hole)



Application: These conduit straps are used to mount EMT conduits to any surface.

Advantages: Garvin Industries' zinc plated steel construction provides mechanical protection for the conduit straps. Garvin Industries' one-hole conduit strap design allows the installer to easily position the strap before mounting pipes on walls. Additionally, the oversized bolt-hole design makes conduit alignment with box knockout quick and easy.

Field Names: Conduit straps, conduit clip, one hole strap.

Material: Zinc Plated Steel



OHS-50 IN USE

Part Number	Size	Similar Products or Special Features	Std. Pkg.
OHS-38	3/8"	For 3/8" EMT or flexible metal conduits.	100
OHS-50	1/2"	For 1/2" EMT or flexible metal conduits.	100
OHS-75	3/4"	Thomas & Betts HS102 Neer 1902 Hubbell Raco 2083 Bridgeport 921-S	100
OHS-100	1"	Thomas & Betts HS103 Neer 1903 Hubbell Raco 2084 Bridgeport 922-S	50
OHS-125	1-1/4"	Thomas & Betts HS104 Neer 1904 Hubbell Raco 2085 Bridgeport 923-S	50
OHS-150	1-1/2"	Thomas & Betts HS105 Neer 1905 Hubbell Raco 2086 Bridgeport 924-S	25
OHS-200	2"	Thomas & Betts HS106 Neer 1906 Hubbell Raco 2088 Bridgeport 925-S	25
OHS-250	2-1/2"	Thomas & Betts HS107 Neer 1807 Hubbell Raco 1337 Bridgeport 907-S	25
OHS-300	3"	Thomas & Betts HS108 Neer 1808 Hubbell Raco 1339 Bridgeport 908-S	10
OHS-350	3-1/2"	Thomas & Betts HS109 Neer 1809 Hubbell Raco 1340 Bridgeport 909-S	10
OHS-400	4"	Thomas & Betts HS110 Neer 1810 Hubbell Raco 1341 Bridgeport 910-S	10
		Visit www.garvinindustries.com for bluenrints and specification sheets	271



Conduit Straps (One Hole - Stainless Steel)





Part Number	Size	Std. Pkg.
OHSS-50	1/2"	50
OHSS-75	3/4"	50
OHSS-100	1"	25
OHSS-125	1-1/4"	25
OHSS-150	1-1/2"	25
OHSS-200	2"	25
OHSS-250	2-1/2"	10
OHSS-300	3"	10
OHSS-350	3-1/2"	10
OHSS-400	4"	10

Application: These stainless steel conduit straps are used to mount EMT conduits in wet locations.

Advantages: Garvin Industries' stainless steel construction provides mechanical protection and corrosion protection of the conduit straps. Garvin Industries' one-hole conduit strap design allows the installer to easily position the strap before mounting. Additionally, the oversized bolt-hole design makes aligning the pipe quick and easy.

Field Names: Conduit straps, conduit clip, one hole strap.

Material: 304 Stainless Steel



OHSS-50 IN USE

Multiple Devices In One Location!

Old Work Multi Gang Switch Boxes

- 2, 3, and 4 Gang Old Work Boxes Can Be Added to Existing Walls to Handle Multiple Devices.
- Accommodates 2,3, or 4 devices
- · Preinstalled old work clips allows for cut in to existing walls
- 2-1/8" deep for various device requirements
- · Clamping action gives secure install on drywall, plaster or tile
- · Rugged steel construction
- · Great for electrical or low voltage applications



See Page 88 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

Conduit Straps (Two Hole)



Application: These two hole conduit straps are used to mount EMT conduits to multiple flat surfaces.

Advantages: Garvin Industries' zinc plated steel construction provides mechanical protection for the conduit straps. Garvin Industries' oversized bolt hole design makes aligning the fastener and conduit quick and easy.

Field Names: Two hole strap, two hole conduit strap, 2 hole strap

Material: Zinc Plated Steel



THS-50 IN USE

Part Number	Size	Similar Products	Std. Pkg.
THS-25	1/4"	For 1/4" flexible metal conduits, cords or cables.	50
THS-38	3/8"	For 3/8" flexible metal conduits, cords or cables.	50
THS-50	1/2"	For 1/2" flexible metal conduits, cords or cables.	50
THS-75	3/4"	Thomas & Betts TS902 Bridgeport 1921 Hubbell Raco 2093 Neer TH1902	50
THS-100	1"	Thomas & Betts TS903 Bridgeport 1922 Hubbell Raco 2094 Neer TH1903	25
THS-125	1-1/4"	Thomas & Betts TS904 Bridgeport 1923 Hubbell Raco 2095 Neer TH1904	25
THS-150	1-1/2"	Thomas & Betts TS905 Bridgeport 1924 Hubbell Raco 2096 Neer TH1905	25
THS-200	2"	Thomas & Betts TS906 Bridgeport 1925 Hubbell Raco 2098 Neer TH1906	25
THS-250	2-1/2"	Thomas & Betts Bridgeport 1907 Hubbell Raco 2239 Neer TH1807	25
THS-300	3"	Thomas & Betts Bridgeport 1908 Hubbell Raco 2240 Neer TH1808	10
THS-350	3-1/2"	Thomas & Betts Bridgeport 1909 Hubbell Raco 2241 Neer TH1809	10
THS-400	4"	Thomas & Betts Bridgeport 1910 Hubbell Raco 2242 Neer TH1810	10

How Do You Spend Your Time?





Custom Prefab Solutions Guaranteed to...

- Increase job site productivity up to 15 times
- End excessive and costly material handling
- Expedite project completion with made-to-order solutions
- Enhance profit dollars ... Make More Money!!!





Phone: 847-455-0188 | sales@garvinindustries.com | www.garvinindustries.com



847-455-0188 FAX 847-455-0334 garvinindustries.com

Conduit Straps (Two Hole - Stainless Steel)





Part Std. Number Size Pkg. THSS-25 1/4" 50 **THSS-38** 3/8" 50 THSS-50 1/2" 50 THSS-75 3/4" 50 1" THSS-100 25 **THSS-125** 1-1/4" 25 THSS-150 1-1/2" 25 2" THSS-200 10 THSS-250 2-1/2" 10 3" **THSS-300** 10

3-1/2"

4"

Application: These stainless steel conduit straps are used to mount EMT, rigid, or PVC conduits in wet locations.

Advantages: Garvin Industries' stainless steel construction provides mechanical protection and corrosion protection of the conduit straps. Garvin Industries' oversized bolt hole design makes aligning the fastener quick and easy.

Field Names: Two hole strap, two hole conduit strap, 2 hole strap

Material: 304 Stainless Steel



THSS-50 IN USE

Multi Gang Boxes and Covers

THSS-350

THSS-400

Put Multiple Pevices In One Location!

10

10

Ask About Our Customization Services for Multi Gang Applications.

- Boxes offered 2 gang thru 9 gang, 1-5/8" deep and 2-1/2" deep
- Versatile 1/2", 3/4" or 3/4" and 1" knockouts
- Extension rings available for all box sizes when extra wire is required in a box
- Raised device covers for all boxes raised 1/2" or 3/4" for plaster, tile or drywall
- Flat covers available for duplex, toggle, GFCI or blank
- Rugged steel construction



See Page 96 for more information!

FAX 847-455-0334 garvinindustries.com



Conduit Clamps (Right Angle)



Pipes &

Conduits

Application: These right-angle conduit clamps are used to mount EMT or rigid conduits across or perpendicular to beam, channel or angle supports.

Advantages: Garvin Industries' right-angle conduit clamps have an easy installation. They are pregalvanized for added durability and corrosion protection. They provide a secure connection and tight clamping action capable of withstanding heavy loads.

Field Names: RC clamps, right angle clamps, corn clamps, camel toe clamps, parrot beak clamps, U bolt clamps, korn

Material: Galvanized Steel & Malleable Iron



RA50 IN USE

Part Number	Size	Similar Products	Std. Pkg.
RA50	1/2"	Thomas & Betts RC-1/2 Crouse Hinds RAC50HD Hubbell Raco EGS Appleton PC-50RA	50
RA75	3/4"	Thomas & Betts RC-3/4 Crouse Hinds RAC75HD Hubbell Raco EGS Appleton PC-75RA	50
RA100	1"	Thomas & Betts RC-1 Crouse Hinds RAC100HD Hubbell Raco EGS Appleton PC-100RA	25
RA125	1-1/4"	Thomas & Betts RC-1 1/4 Crouse Hinds RAC125HD Hubbell Raco EGS Appleton PC-125RA	25
RA150	1-1/2"	Thomas & Betts RC-1 1/2 Crouse Hinds RAC150HD Hubbell Raco EGS Appleton PC-150RA	25
RA200	2"	Thomas & Betts RC-2 Crouse Hinds RAC200HD Hubbell Raco EGS Appleton PC-200RA	10
RA250	2-1/2"	Thomas & Betts RC-2 1/2 Crouse Hinds RAC250HD Hubbell Raco EGS Appleton PC-250RA	10
RA300	3"	Thomas & Betts RC-3 Crouse Hinds RAC300HD Hubbell Raco EGS Appleton PC-300RA	10
RA350	3-1/2"	Thomas & Betts RC-3 1/2 Crouse Hinds RAC350HD Hubbell Raco EGS Appleton PC-350RA	5
RA400	4"	Thomas & Betts RC-4 Crouse Hinds RAC400HD Hubbell Raco EGS Appleton PC400-RA	5



847-455-0188 FAX 847-455-0334 garvinindustries.com

Conduit Clamps (Beam Edge)



EDG200

Application: These beam-edge conduit clamps are used to mount EMT or rigid conduits perpendicular to beam, channel and angle supports.

Advantages: Garvin Industries' beam-edge conduit clamps have an easy installation and tight clamping action. They are pregalvanized for added durability and corrosion protection. They provide a secure connection and are capable of withstanding heavy loads.

Field Names: Edge pipe clamp, EC clamp, edge clamp.

Material: Galvanized Steel & Malleable Iron



EDG50 IN USE

Part Number	Conduit Size	Similar Products		Std. Pkg.
EDG50	1/2"	Thomas & Betts EC-1/2 Hubbell Raco	Crouse Hinds ETC50HD EGS Appleton PC-50ET	50
EDG75	3/4"	Thomas & Betts EC-3/4 Hubbell Raco	Crouse Hinds ETC75HD EGS Appleton PC-75ET	50
EDG100	1"	Thomas & Betts EC-1 Hubbell Raco	Crouse Hinds ETC100HD EGS Appleton PC-100ET	50
EDG125	1-1/4"	Thomas & Betts EC-1 1/4 Hubbell Raco	Crouse Hinds ETC125HD EGS Appleton PC-125ET	25
EDG150	1-1/2"	Thomas & Betts EC-1 1/2 Hubbell Raco	Crouse Hinds ETC150HD EGS Appleton PC-150ET	25
EDG200	2"	Thomas & Betts EC-2 Hubbell Raco	Crouse Hinds ETC200HD EGS Appleton PC-200ET	25
EDG250	2-1/2"	Thomas & Betts EC-2 1/2 Hubbell Raco	Crouse Hinds ETC250HD EGS Appleton PC-250ET	10
EDG300	3"	Thomas & Betts EC-3 Hubbell Raco	Crouse Hinds ETC300HD EGS Appleton PC-300ET	10

FAX 847-455-0334 garvinindustries.com



Conduit Clamps (Parallel Beam)



Pipes &

Conduits

Application: These parallel-beam conduit clamps are used to mount EMT, rigid, or IMC conduits parallel to beam, channel and angle supports.

Advantages: Garvin Industries' parallel-beam conduit clamps have an easy installation. They are pregalvanized for added durability and corrosion protection. They provide a secure connection and are capable of withstanding heavy loads.

Field Names: Parallel clamp, PC clamp. Material: Zinc Plated Steel & Malleable Iron



PAR50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
PAR50	1/2"	Thomas & Betts PC-1/2 Hubbell Raco	Crouse Hinds EGS Appleton PC50PAR	50
PAR75	3/4"	Thomas & Betts PC-3/4 Hubbell Raco	Crouse Hinds EGS Appleton PC75PAR	50
PAR100	1"	Thomas & Betts PC-1 Hubbell Raco	Crouse Hinds EGS Appleton PC100PAR	50
PAR125	1-1/4"	Thomas & Betts PC-1 1/4 Hubbell Raco	Crouse Hinds EGS Appleton PC125PAR	25
PAR150	1-1/2"	Thomas & Betts PC-1 1/2 Hubbell Raco	Crouse Hinds EGS Appleton PC150PAR	25
PAR200	2"	Thomas & Betts PC-2 Hubbell Raco	Crouse Hinds EGS Appleton PC200PAR	25
PAR250	2-1/2"	Thomas & Betts PC-2 1/2 Hubbell Raco	Crouse Hinds EGS Appleton PC250PAR	10
PAR300	3"	Thomas & Betts PC-3 Hubbell Raco	Crouse Hinds EGS Appleton PC300PAR	10
PAR350	3-1/2"	Thomas & Betts PC-3 1/2 Hubbell Raco	Crouse Hinds EGS Appleton PC350PAR	10
PAR400	4"	Thomas & Betts PC-4 Hubbell Raco	Crouse Hinds EGS Appleton PC400PAR	10



847-455-0188 FAX 847-455-0334 garvinindustries.com

Conduit Clamps (J Style For Beam)



Part Number	Size	Std. Pkg.
JCL50	1/2"	50
JCL75	3/4"	50
JCL100	1"	25
JCL150	1-1/2"	25

Application: These J-style conduit beam clamps are used with all types of metallic and flexible conduits.

Advantages: Garvin Industries' J-style clamp is designed to be used where conduits must be clamped directly to the beam. These clamps may also be used for parallel conduit runs and 90° conduit runs. Their malleable iron construction provides a secure and durable connection.

Field Names: J clamps, channel clamps.

Material: Malleable Iron



JCL50 IN USE

Easy Identification Solutions!

Painted Boxes, Covers & Connectors

Color Coded Boxes, Covers, Connectors & Components Make It Easy to Identify the System in the Conduit!

- Save time by quickly identifying the wire in the boxes and pipe
- Cuts mistakes and rework on jobsite
- Great for future updating of wire and devices when advances in technology require it



- · Economical price compared to field painting and packaging
- Superior quality to field painting
- · Custom colors upon request!
- · Satisfies inspectors curiosity!

FAX 847-455-0334 garvinindustries.com



Conduit Straps (One Hole Rigid)



Pipes &

Conduits

Application: These one-hole conduit straps are used in both wet and dry locations to mount rigid or IMC conduits.

Advantages: Garvin Industries' one-hole rigid conduit straps have a malleable construction to ensure mechanical protection and durability. The oversized bolt holes make positioning the fastener quick and easy.

Field Names: 1 hole straps, rigid one hole straps, rigid conduit strap, rigid pipe support.

Material: Malleable Iron



OHSR-100 IN USE

Part Number	Size	Similar Products	Std. Pkg.
OHSR-38	3/8"	Thomas & Betts 1275 Crouse Hinds Hubbell Raco 1301 EGS Appleton 14-38G	50
OHSR-50	1/2"	Thomas & Betts 1276 Crouse Hinds 510 Hubbell Raco 1302 EGS Appleton 14-50G	50
OHSR-75	3/4"	Thomas & Betts 1277 Crouse Hinds 511 Hubbell Raco 1303 EGS Appleton 14-75G	50
OHSR-100	1"	Thomas & Betts 1278 Crouse Hinds 512 Hubbell Raco 1304 EGS Appleton 14-100G	25
OHSR-125	1-1/4"	Thomas & Betts 1279 Crouse Hinds 513 Hubbell Raco 1305 EGS Appleton 14-125G	25
OHSR-150	1-1/2"	Thomas & Betts 1280 Crouse Hinds 514 Hubbell Raco 1305 EGS Appleton 14-150G	25
OHSR-200	2"	Thomas & Betts 1281 Crouse Hinds 515 Hubbell Raco 1308 EGS Appleton 14-200G	25
OHSR-250	2-1/2"	Thomas & Betts 1262 Crouse Hinds 516 Hubbell Raco 1312 EGS Appleton 14-250G	25
OHSR-300	3"	Thomas & Betts 1283 Crouse Hinds 517 Hubbell Raco 1314 EGS Appleton 14-200G	10
OHSR-350	3-1/2"	Thomas & Betts 1284 Crouse Hinds 518 Hubbell Raco 1315 EGS Appleton 14-350G	10
OHSR-400	4"	Thomas & Betts 1285 Crouse Hinds 519 Hubbell Raco 1316 EGS Appleton 14-400G	10
OHSR-500	5"	Thomas & Betts 1267 Crouse Hinds 520 Hubbell Raco 1320 EGS Appleton 14-500G	10
OHSR-600	6"	Thomas & Betts Crouse Hinds 521 Hubbell Raco 1324 EGS Appleton 14-600G	10



Clamp Back Spacers



Application: These clamp back spacers are used in wet and dry locations in conjunction with malleable rigid conduit straps to create space between the conduit and mounting surface. These clamp back spacers can prevent the buildup of snow and rain between the conduit and mounting surface when used for outdoor applications.

Advantages: Garvin Industries' clamp back spacers have a zinc plated malleable iron construction for added durability. Their elongated bolt holes make alignment with the straps easy and quick. They also position pipes for insertion in boxes or enclosures.

Field Names: Clamp back spacer, clamp back.

Material: Zinc Plated Malleable Iron



CLB-50 IN USE

Part Number	Size	Similar Products		Std. Pkg.
CLB-50	1/2"	Thomas & Betts Hubbell Raco 1342	Crouse Hinds CB1 EGS Appleton 141G	50
CLB-75	3/4"	Thomas & Betts Hubbell Raco 1343	Crouse Hinds CB2 EGS Appleton 142G	50
CLB-100	1"	Thomas & Betts Hubbell Raco 1344	Crouse Hinds CB3 EGS Appleton 143G	50
CLB-125	1 1/4"	Thomas & Betts Hubbell Raco 1345	Crouse Hinds CB4 EGS Appleton 144G	25
CLB-150	1-1/2"	Thomas & Betts Hubbell Raco 1346	Crouse Hinds CB5 EGS Appleton 145G	25
CLB-200	2"	Thomas & Betts Hubbell Raco 1348	Crouse Hinds CB6 EGS Appleton 146G	25
CLB-250	2-1/2"	Thomas & Betts Hubbell Raco 1347	Crouse Hinds CB7 EGS Appleton 147G	25
CLB-300	3"	Thomas & Betts Hubbell Raco 1349	Crouse Hinds CB8 EGS Appleton 148G	25
CLB-350	3-1/2"	Thomas & Betts Hubbell Raco 1350	Crouse Hinds CB9 EGS Appleton 149G	10
CLB-400	4"	Thomas & Betts Hubbell Raco 1351	Crouse Hinds CB10 EGS Appleton 150G	10
CLB-500	5"	Thomas & Betts Hubbell Raco	Crouse Hinds CB11 EGS Appleton	10
CLB-600	6"	Thomas & Betts Hubbell Raco	Crouse Hinds CB12 EGS Appleton	10



Conduit Straps (Two Hole Rigid)



Application: These two-hole rigid and IMC conduit straps are used where higher load bearing supports are needed.

Advantages: Garvin Industries' two-screw straps allow the installer to secure pipes on walls and ceilings. They also prevent accidental pullout in high traffic areas.

Field Names: Rigid 2 hole straps, two hole straps, rigid conduit supports.

Material: Zinc Plated Steel



THSR-50 IN USE

Part Number	Size	Similar Products	Std. Pkg.
THSR-50	1/2"	Thomas & Betts HS901 Crouse Hinds 496-3 Hubbell Raco 2232 EGS Appleton TH18	
THSR-75	3/4"	Thomas & Betts HS902 Crouse Hinds 496-4 Hubbell Raco 2233 EGS Appleton TH18	
THSR-100	1"	Thomas & Betts HS903 Crouse Hinds 496-5 Hubbell Raco 2234 EGS Appleton TH18	
THSR-125	1-1/4"	Thomas & Betts HS904 Crouse Hinds 496-6 Hubbell Raco 2235 EGS Appleton TH18	
THSR-150	1-1/2"	Thomas & Betts HS905 Crouse Hinds 496-7 Hubbell Raco 2236 EGS Appleton TH18	
THSR-200	2"	Thomas & Betts HS906 Crouse Hinds 496-8 Hubbell Raco 2238 EGS Appleton TH18	
THSR-250	2-1/2"	Thomas & Betts HS907 Crouse Hinds 496-9 Hubbell Raco 2239 EGS Appleton TH18	
THSR-300	3"	Thomas & Betts HS908 Crouse Hinds 496-1 Hubbell Raco 2240 EGS Appleton TH18	
THSR-350	3-1/2"	Thomas & Betts HS908 Crouse Hinds 496-1 Hubbell Raco 2241 EGS Appleton TH18	
THSR-400	4"	Thomas & Betts HS910 Crouse Hinds 496-1 Hubbell Raco 2242 EGS Appleton TH18	
THSR-500	5"	Thomas & Betts Crouse Hinds Hubbell Raco EGS Appleton	10
THSR-600	6"	Thomas & Betts Crouse Hinds Hubbell Raco EGS Appleton	10



Low Voltage & **Data Cables**

847-455-0188 FAX 847-455-0334 garvinindustries.com

Device Mounting Brackets



Application: These brackets are mounted to studs or drywall to attach low voltage devices and plates in new construction or existing walls.

Advantages: Garvin Industries' unique design allows brackets to be mounted vertically or horizontally. The "EV" style is made with light gauge steel. Additionally the "WBF" style includes mounting screws and can be used to add a low voltage device on 1/2" through 1-1/2" drywall, tile or plaster walls.

Field Names: Box eliminators, low voltage plates.

Material: Zinc Plated Steel





WBF-1 IN USE

SLR-150 IN USE

Part Number	For Drywall	Device Openings	Special Features	Std. Pkg.
SLR-150	1/2" or 5/8"	1	New construction. Vertical or horizontal mount. Heavy gauge steel. Square drawn device opening.	50
SLR-250	1/2" or 5/8"	2	New construction. Vertical or horizontal mount. Heavy gauge steel. Square drawn device opening.	50
SLR-350	1/2" or 5/8"	3	New construction. Vertical or horizontal mount. Heavy gauge steel. Square drawn device opening.	25
SLR-450	1/2" or 5/8"	4	New construction. Vertical or horizontal mount. Heavy gauge steel. Square drawn device opening.	10
SLR-1-EV	1/2" or 5/8"	1	New construction. Vertical or horizontal positioning. Light gauge steel.	50
SLR-2-EV	1/2" or 5/8"	2	New construction. Vertical or horizontal positioning. Light gauge steel.	50
WBF-1	3/8" to 1-1/2"	1	Old work "cut in" to add one device to existing walls. Includes 2 drywall screws.	100
WBF-2	3/8" to 1-1/2"	2	Old work "cut in" low voltage plates to add two devices to existing walls. Includes 3 drywall screws.	50

"J" Cable Support Hooks

Low Voltage & **Data Cables**



Application: These various types of "J" cable support hooks are versatile and can be attached to a wide variety of structures using beam clamps, clips and other support components available from Garvin Industries. These support hooks eliminate the problem of point loads that can cause cable performance damage to sensitive cables such as fiber optic, CAT 5E, 6, 7 or many others.

Advantages: Garvin Industries' "J" cable support hooks are an inexpensive alternative to cable trays. They provide support to sensitive voice and data cables without causing stress. Their continuous, wide-base radius design supports the natural bends and curves of cable.

Field Names: J hooks, cable hooks, cable supports.

Material: Galvanized Steel



JHK-32-BW2

JHK-64-BC



JHK-32 IN USE

JHK-32-AB IN USE





Part Number	Size	Mounting Attachments	Std. Pkg.
JHK-12	3/4"		50
JHK-12-BW2	3/4"	Wing for #12 to 1/4" Rod	50
JHK-21	1-5/16"		50
JHK-21-AB	1-5/16"	Angle Bracket	50
JHK-21-BC	1-5/16"	1/4" Beam Clamp	50
JHK-21-BW2	1-5/16"	Wing for #12 to 1/4" Rod	50
JHK-21-BW6	1-5/16"	Wing for 3/8" Rod	50
JHK-32	2"		50
JHK-32-AB	2"	Angle Bracket	50
JHK-32-BC	2"	1/4-20 Beam Clamp	50
JHK-32-BW2	2"	Wing for #12 to 1/4" Rod	50
JHK-32-BW6	2"	Wing for 3/8" Rod	50
JHK-64	4"		25
JHK-64-AB	4"	Angle Bracket	25
JHK-64-BC	4"	1/4-20 Beam Clamp	25



Low Voltage & Data Cables

847-455-0188 FAX 847-455-0334 garvinindustries.com

Looped Cable Harnesses



Application: These looped cable support harnesses are versatile and can be attached to a wide variety of structures using beam clamps, clips and other support components available from Garvin Industries. These support harnesses eliminate the problem of point loads that can cause cable damage to sensitive cables such as fiber optic cables CAT 5E, 6, 7, etc.

Advantages: Garvin Industries' looped cable support harnesses are an inexpensive alternative to cable trays and J hooks. They provide support to sensitive voice and data cables without causing stress. Their continuous wide base radius design supports the natural bends and curves of cable.

Field Names: CAT cable hooks, cable hooks, cable supports, data cable hooks, bridle hooks.

Material: Zinc Plated Steel



CAT200 IN USE

Part Number	Loop Size	Threaded Stud Size	Special Features	Std. Pkg.
CAT150	1-1/2"	1/4-20	Looped saddle prevents cable fall out and eliminates the need for cable ties.	50
CAT200	2"	1/4-20	Looped saddle prevents cable fall out and eliminates the need for cable ties.	50
CAT400	4"	1/4-20	Looped saddle prevents cable fall out and eliminates the need for cable ties.	25

One Box! Separate Voltage Compartments!

Dual Power Box

"Dual Power" Boxes Separate Low & High Voltage Devices and Prevent Interference

- Permanently attached steel partition separates low voltage and line voltage to insure no cross over of signals
- · Comes with or without mounting bracket
- Preinstalled steel partition saves time and labor
- Rubber grommets on sharp knockout edges insures low voltage wires will not be damaged when installed.
- Enclosed box insures device terminations remain safe and secure
- Rugged steel construction



See Page 87 for more information!



Wall Hanger Cable Supports



Part Std. Number Size Pkg. WHCS75 3/4" 50 WHCS100 1" 50 **WHCS125** 1-1/4" 50 **WHCS150** 1-1/2" 50 WHCS200 2"

Application: These one-hole cable support hooks are used to support low voltage and data cables when cable bundles are surface mounted to walls. They are for large or small cable bundles up to 2".

Advantages: Garvin Industries' cable supports have a peel and stick self-adhesive strips allowing hangers to be mounted to walls as cables are pulled. Their self-closing support ensures cables are locked in bundles and won't spill out. They have no sharp edges, preventing cable jackets from being cut. Additionally, their quick, one-hole screw mount design saves labor in installation.

Field Names: Cable support hook, wall hanger cable support.

Material: Galvanized Steel



WHCS200 IN USE

Overhead Cable Support Hangers



Part Number	Size	Std. Pkg.
OCSH75	3/4"	50
OCSH100	1"	50
OCSH125	1-1/4"	50
OCSH150	1-1/2"	50
OCSH200	2"	50

Application: These overhead cable support hangers screw onto the top or bottom of overhead beams to support low voltage or data cables.

Advantages: Garvin Industries' labor-saving, overheadcable support hanger design quickly screws onto wood or metal beams to support overhead cable runs.

Field Names: Cable support hooks, overhead cable support hanger.

Material: Galvanized Steel



OCSH200 IN USE



Low Voltage & Data Cables

847-455-0188 FAX 847-455-0334 garvinindustries.com

Two Hole Cable Support Hangers




Part Number	Size	Std. Pkg.
THCS-75	3/4"	50
THCS-100	1"	50
THCS-125	1-1/4"	50
THCS-150	1-1/2"	50
THCS-200	2"	50

Application: These two-hole cable support hangers are used in vertical or horizontal positions to support low voltage and data cables.

Advantages: Garvin Industries' two-hole cable support hangers have two screw supports and a wide base to support all data cables in horizontal overhead runs or vertical riser runs in stud walls. They are an economical alternative to expensive "J" hooks and clamps.

Field Names: Cable support straps, cable support hooks.

Material: Galvanized Steel



THCS-200 IN USE

Drive Rings (Nail On)



Std. Pkg. **Part Mstr Crtn** Number Size DRV-1/2 1/2" 50/1000 DRV-5/8 5/8" 25/1000 DRV-7/8 7/8" 25/500 DRV-1-1/4 1-1/4" 25/250

Application: These nail-on drive rings are used to support communications cables and other low voltage wires.

Advantages: Garvin Industries' quick, nail-on drive rings with looped harness save time and provide a very economical support in wet or dry locations. They may also be used on wood surfaces or with beam clamps that accept drive pins

Field Names: Drive ring, drive pins, dive hooks.

Material: Case Hardened Galvanized Steel



DRV-7/8 IN USE

How Do You Spend Your Time?





Custom Prefab Solutions Guaranteed to...

- Increase job site productivity up to 15 times
- End excessive and costly material handling
- Expedite project completion with made-to-order solutions
- Enhance profit dollars ... Make More Money!!!






Phone: 847-455-0188 | sales@garvinindustries.com | www.garvinindustries.com



Low Voltage & Data Cables

847-455-0188 FAX 847-455-0334 garvinindustries.com

Bridle Rings (Saddled)

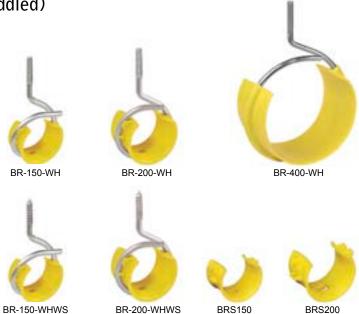


Part Cable Threaded Std. Number **Loop Size** Stud Size Pkg. BR-150-WH 1-1/2" 1/4-20 100 BR-200-WH 2" 1/4-20 100 BR-400-WH 4" 1/4-20 25 BR-150-WHWS 1-1/2" Wood Screw 50 BR-200-WHWS 2" Wood Screw 50 **BRS150** Plenum-Rated Saddle 1-1/2" 50 **BRS200** 2" Plenum-Rated Saddle 50

Application: These saddled bridle rings are used to support sensitive fiber optic and data cables.

Advantages: Garvin Industries' saddled bridle rings are an inexpensive alternative to cable trays and J hooks. They provide support to sensitive voice and data cables without causing stress.

Field Names: Bridal rings, wire harness, cable saddle, cable support harness, bridle rings, cable rings, cable supports.

Material: Zinc Plated Steel, Plastic



BR-200-WHWS IN USE

PreFab Box Mount!

Box Mounting Pevice Rings

Built In Mounting Tabs Allow for Quick Mount to Wood or Metal Studs.

- Device ring with external mounting tab can be used with or without conduit box
- Great for power or low voltage applications
- Versatile mounting tabs allow for vertical or horizontal device install
- One and two gang versions assemble to box quickly in one easy step
- · Can be mounted on wood or metal studs
- Great for prefabricating devices and power tails with cover guard
- Rigid box install for secure conduit attachment
- Various depths available for any drywall, tile, or plaster finshed wall surface



See Page 44-45 for more information!



Bridle Rings (Concrete Nail & Washer)











BR-150-SSCWH

BR-200-SSCWH



Application: These quick-shot, concrete nail and washer

surfaces with a powder actuated tool.

structures for lighter cable loads.

Material: Zinc Plated Steel

set bridle rings are used to support communications cables

and other sensitive low voltage cables. They are fastened to

Advantages: Garvin Industries' unique patented design allows a super fast installation of bridle rings with any powder actuated fastening tool. They may also be nailed to wood

Field Names: Bridal rings, quick shot bridle rings, nail on bridle rings, bridle rings, cable rings, cable supports.

BR-400-SSC INSTALLATION WITH A POWDER GUN

BR-400-SSC Patent US 6,364,266 B1

Part Number	Cable Loop Size	Attachments	Special Features	Std. Pkg.
BR-150-SSC	1-1/2"	Pre-assembled Concrete Nail & Washer	Used with non data sensitive wires and cables	100
BR-150-SSCWH	1-1/2"	Pre-assembled, Wire Harness Concrete Nail & Washer	Used with data and fiber optic cables	100
BR-200-SSC	2"	Pre-assembled Concrete Nail & Washer	Used with non data sensitive wires and cables	100
BR-200-SSCWH	2"	Pre-assembled, Wire Harness Concrete Nail & Washer	Used with data and fiber optic cables	100
BR-400-SSC	4"	Pre-assembled Concrete Nail & Washer	Used with non data sensitive wires and cables	50



847-455-0188 FAX 847-455-0334 garvinindustries.com

Bridle Rings (Screw Mounted)









Application: These quick-screw bridle rings screw mount to wood, concrete or steel surfaces and are used to support communications cables and other low voltage cables.

Advantages: Garvin Industries' unique patented design allows a super-fast installation of bridle rings with any screw gun. Their versatile installation allows them to be installed onto wood, concrete or steel surfaces quickly and quietly in office settings.

Field Names: Bridal rings, quick shot bridle rings, nail on bridle rings, bridle rings, cable rings, cable supports.

Material: Zinc Plated Steel



BR-200NP IN USE

4	
	400NP 6,364,266 B1

Part Number	Cable Loop Size	Attachments	Special Features	Std. Pkg.
BR-150NP	1-1/2"		Used with non data sensitive wires and cables	100
BR-150NPWH	1-1/2"	Wire Harness	Used with data and fiber optic cables	100
BR-200NP	2"		Used with non data sensitive wires and cables	100
BR-200NPWH	2"	Wire Harness	Used with data and fiber optic cables	100
BR-400NP	4"		Used with non data sensitive wires and cables	50
				221

Bridle Rings (Toggle Wing Set)








Application: These toggle-wing set bridle rings are used to support communications cables and other low voltage cables on existing hollow walls and bar joist surfaces.

Advantages: Garvin Industries' unique patented design allows the installer to drill holes in hollow walls and insert toggle wings to surface mount cables through the attached bridle ring.

Field Names: Bridal ring, bridle ring, toggle wing, bridle rings, cable rings, cable supports.

Material: Zinc Plated Steel



BR-150-TW IN USE

			BR 100 111 II 00E				
Part Number	Cable Loop Size	Attachments	Threaded Leg	Special Features	Std. Pkg.		
BR-150-TW	1-1/2"	Toggle Wing, Washer & Thumb Nut	1/4-20	Standard threaded leg for hollow walls, 3-1/2" long	50		
BR-200-TW	2"	Toggle Wing, Washer & Thumb Nut	1/4-20	Standard threaded leg for hollow walls, 3-1/2" long	50		
BR-400-TW	4"	Toggle Wing, Washer & Thumb Nut	1/4-20	Standard threaded leg for hollow walls, 3-1/2" long	25		

Guaranteed Quality Electrical Tape!

Multiple Colors for Marking & Identification

- Colors offered include black, brown, blue, gray, orange, red, white, and yellow
- 3/4" wide x 66 feet long
- PVC Material prevents accidental shock hazards
- Adhesive sticks to dirty, grimy wire in hot or cold weather
- Duct tape also available
- · Call your sales representative today



See Page 386 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

Bridle Rings (No Thread)







Application: These nonthreaded, smooth-shaft bridle rings are used to support communications cables and other low voltage wires.

Advantages: Garvin Industries' bridle rings may be used with bat wings and other clips for hanging cables from ceiling grids, drop attachments and pencil rods.

Field Names: Bridle ring, no thread bridle ring, smooth bridle ring, bald bridle rings.

Material: Zinc Plated Steel Rod



BR-20010NT IN USE

Part Number	Cable Loop Size	Formed Wire Diameter	Similar Products		Std. Pkg.
BR-5010NT	1/2"	.160" Unthreaded	Cooper B-Line BR8	Erico 2BR8	100
BR-7510NT	3/4"	.160" Unthreaded	Cooper B-Line BR12	Erico 2BR12	100
BR-12510NT	1-1/4"	.160" Unthreaded	Cooper B-Line BR20	Erico 2BR20	100
BR-20010NT	2"	.160" Unthreaded	Cooper B-Line BR32	Erico 2BR32	100

Guarantee Cable Performance

6" Square Pata Boxes

Insure Proper Bend Radius on All Sensitive Data Cables

- Box Depths Available: 1-1/2", 2-1/2" & 3-1/2"
- All Conduit Knockout Sizes Available
- Mating Device Rings, Blank Covers and Plates
- Custom Styles Available on Request.



See Page 72-73 for more information!



Bridle Rings (Machine Screw Thread)

BR-200



BR-400

Application: These machine-screw thread bridle rings are used to support communications cables and other low voltage wires.

Advantages: Garvin Industries' bridle rings allow a quick and inexpensive way to support non-sensitive wires and cables from structural members. These bridle rings may be used with any 10-24 or 1/4-20 threaded clamps or supports.

Field Names: Bridle rings, bridal rings, bridle rings, cable rings, cable supports.

Material: Zinc Plated Steel



BR-200 IN USE

Part Number	Cable Loop Size	Threaded Leg	Similar Products		Std. Pkg.
BR-501024	1/2"	10-24	Cooper B-Line BR-8T Erico 2BRT8		100
BR-751024	3/4"	10-24	Cooper B-Line BR-12T Erico 2BRT12		100
BR-1001024	1"	10-24	Cooper B-Line Erico		100
BR-1251024	1-1/4"	10-24	Cooper B-Line BR-20T Erico 2BRT20		100
BR-1501024	1-1/2"	10-24	Cooper B-Line Erico		100
BR-2001024	2"	10-24	Cooper B-Line BR-32T Erico 2BRT32		100
BR-125	1-1/4"	1/4-20	Cooper B-Line BR20-4T Erico 4BRT20		100
BR-150	1-1/2"	1/4-20	Cooper B-Line Erico	Minerallac 646R	100
BR-200	2"	1/4-20	Cooper B-Line BR32-4T Erico 4BRT32	Minerallac 648R	100
BR-400	4"	1/4-20	Cooper B-Line BR64-4T Erico 4BRT64	Minerallac 654R	50



847-455-0188 FAX 847-455-0334 garvinindustries.com



Application: These bridle rings are used in damp locations where traditional bridle rings will rust.

Advantages: Stainless steel prevents corrosion and rust on cable infrastructure indoors or outdoors.

Field Names: Stainless steel bridle rings, stainless steel cable rings, stainless steel cable supports.

Material: 304 Stainless Steel



Part Number	Cable Loop Size	Threaded Leg	Similar Products	BR-200-SS304 IN USE	Std. Pkg.
BR-125-SS304	1-1/4"	1/4-20	Cooper B-Line BR20-4T Erico 4BRT20		100
BR-150-SS304	1-1/2"	1/4-20	Cooper B-Line Erico	Minerallac 646R	100
BR-200-SS304	2"	1/4-20	Cooper B-Line BR32-4T Erico 4BRT32	Minerallac 648R	100
BR-400-SS304	4"	1/4-20	Cooper B-Line BR64-4T Erico 4BRT64	Minerallac 654R	50

Bridle Rings (Wood Screw Thread)



Application: These wood-screw thread bridle rings are installed on wooden beams and studs to support communications cables and other low voltage wires.

Advantages: Garvin Industries' unique wood-screw thread allows direct mounting to wood studs and ceiling joists without any extra fasteners or clamps to complete the installation.

Field Names: Wood screw bridle rings, lag screw bridle rings, bridle rings, cable rings, cable supports.

Material: Zinc Plated Steel



Part Number	Cable Loop Size	Threaded	Similar Products	BR-200-WS IN USE	Std. Pkg.
BR-100-WS	1"	Wood Screw	Cooper B-Line BR16-3W Erico	Minerallac 634RW	100
BR-125-WS	1-1/4"	Wood Screw	Cooper B-Line Erico	Minerallac	100
BR-150-WS	1-1/2"	Wood Screw	Cooper B-Line BR24-4W Erico	Minerallac 646RW	100
BR-200-WS	2"	Wood Screw	Cooper B-Line BR32-4W Erico 4BRT32WS	Minerallac 648RW	100



Distribution Rings



Application: These distribution rings are used when support for multiple vertical or horizontal cable runs is required on walls or ceilings.

Advantages: Garvin Industries' distribution rings have a smooth surface that prevent cables from being damaged. They are made with high strength aluminum, plastic or steel depending on the ring and the installation needs.

Field Names: Distribution rings, D rings, cable rings, 13A, 13B, 13C.

Material: Aluminum, Plastic & Steel





DST-200 IN USE





Material	Inside Diameter	Std. Pkg.
Metal	2"	50
Plastic	2"	50
Metal	3"	50
Plastic	3"	50
Metal	5"	25
Plastic	5"	25
Steel	8"	25
Steel	12"	25
	Metal Plastic Metal Plastic Metal Plastic Steel	MaterialDiameterMetal2"Plastic2"Metal3"Plastic3"Metal5"Plastic5"Steel8"



847-455-0188 FAX 847-455-0334 garvinindustries.com

Distribution Rings







Part Support Std. Number Loop Color Pkg. 17A 7/8" x 1-1/2" Green 100 17AB 7/8" x 1-1/2" Black 100 17AW 7/8" x 1-1/2" White 100 17B 1" x 1-7/8" Green 100 17BB 1" x 1-7/8" Black 100 17BW 1" x 1-7/8" White 100 17C 1-3/8" x 2-3/4" Green 100 17CB 1-3/8" x 2-3/4" Black 100 17CW 1-3/8" x 2-3/4" White 100

Application: These distribution rings are used when support for small cable runs is required on walls, or communication boards and racks.

Advantages: Garvin Industries' distribution rings have a smooth non-conductive surface that prevents cables from being damaged. They are made with a durable and long lasting painted steel. They are commonly used on communication back boards and other flat surfaces to sort and structure wires. Their black, white and green colors match many communication racks or room mouldings. The green distribution rings matches old belcore spec.

Field Names: D rings, distribution rings, backboard D rings, open D rings.

Material: Aluminum ODR Series, Painted Steel 17 Series



17CW IN USE

Distribution Rings (Drop-in, Open Style)







Part Number	Std. Pkg.
ODR-250	50
ODR-350	50
ODR-375	50



ODR-350 IN USE



Wire Distribution Spools





Application: These wire distribution spools are used to neatly organize internal pairs of wires as they are being terminated on communication backboards and racks.

Advantages: Garvin Industries' wire distribution spools provide a quick and easy means to support wires on wood or metal surfaces.

Field Names: Wire distribution spools, mushroom spools, spoolies, wire distribution post.

Material: Plastic



WDSWS IN USE

Part Number	Thread Type	Color	Mounts To	Std. Pkg.
WDS	No Screw	White	Wood, Steel or Concrete Surfaces. Screws Not Included	100
WDSWS	Wood Screw	White	Wood Surfaces Only	100
WDSMS	12-24 Machine Screw	Black	Threaded Stud for Data Racks & Channel	100

Go Green on the Jobsite!

Energy Efficient Temporary Work Light

- 105 watt high-output compact fluorescent lamp offers 80% energy savings over traditional metal halide
- Very light-weight-2 lbs.
- Versatile snap hook design easily attaches to many structural members
- Standard box knockouts allows hard wire with pipe or flex cable wiring options
- No ballast in fixture means no replacement costs later to fix a bad ballast
- Gasketed covers and sealed knockouts are great for damp locations
- Premium high visibility "green" powder coating




See Page 371 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

Cable Ties

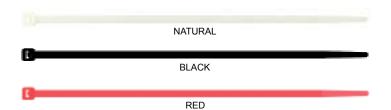

Application: These cable ties are used to neatly organize multiple cables into a structured bundle.

Advantages: Garvin Industries' cable ties are an economical way to bind and control cables so they are neat and organized. Their interlocking teeth mean that cables are permanently secured.

Field Names: Cable wraps, cable ties, tie wraps, cable tyes, cable wraps, cable clips, cable straps, plenum cable ties, tie straps, tie offs.

Material: Plastic





Part Number	Length	Color	Tensile Strength	Space Rating	Std. Pkg.
CT-5	5"	Natural	18 lb.	Riser	100
CT-5-BK	5"	Black	18 lb.	Riser	100
CT-5-PL	5"	Red	50 lb.	Plenum	100
CT-7	7"	Natural	50 lb.	Riser	100
CT-7-BK	7"	Black	50 lb.	Riser	100
CT-7-PL	7"	Red	50 lb.	Plenum	100
CT-11	11"	Natural	50 lb.	Riser	100
CT-11-BK	11"	Black	50 lb.	Riser	100
CT-11-PL	11"	Red	50 lb.	Plenum	100
CT-14	14"	Natural	50 lb.	Riser	100
CT-14-BK	14"	Black	50 lb.	Riser	100
CT-14-PL	14"	Red	50 lb.	Plenum	100
CTM	3/4"	Natural	Cable-tie Mount		100
CTMBK	3/4"	Black	Cable-tie Mount		100



Stop Fire!

Caulk, Putty, Collars, Sleeves, & Inserts

Garvin Manufactures Solutions for All Your Fire Stop Challenges!


- Fire stop collars available in 1° 2°, 3°, and 4° pipe sizes
- Putty sticks and pads surround box opening
- Caulk seals penetrations in stud walls, ceilings, and floors
- Device inserts available in duplex, toggle and mud ring openings
- . Great for low voltage cable applications
- . In stock! On time!



See Page 377 for more information!



Cable Ties (Screw Mount)



Part Number	Length	Color	Tensile Strength	Max Bundle	Std. Pkg.
CTS-7	7"	Natural	50 lb.	1-3/4"	100
CTS-7-BK	7"	Black	50 lb.	1-3/4"	100
CTS-11	11"	Natural	50 lb.	3"	100
CTS-11-BK	11"	Black	50 lb.	3"	100
CTS-14	14"	Natural	50 lb.	4"	100
CTS-14-BK	14"	Black	50 lb.	4"	100

Application: These screw-mount cable ties are screwed directly to the surface and provide a means of support for multiple cables.

Advantages: Garvin Industries' screw-mount cable ties require no cable-tie mounting pad to mount cable runs.

Field Names: Sticky backs, black beauty, screw mount cable ties, screw on tie wraps.

Material: Plastic



CTS-7 IN USE

Metal Stud Grommets



Application: These metal-stud grommets are used to protect wires from damage that can be caused by sharp edges on metal studs. They also help reduce vibratory rattling of metallic conduits.

Advantages: Garvin Industries' metal-stud grommets have an easy and inexpensive installation because no tools are required and all pieces are the same shape eliminating the cost of stocking right and left grommet parts.

Field Names: Insulating grommet, metal stud grommet.

Material: Plastic



G100 IN USE


Part Number	Description	Similar Products		Std. Pkg.
G100	Universal Metal Stud Grommet	Cooper B-Line BM1 Erico ESG1	Minerallac G100 EGS Appleton	100



Beams & Purlins

847-455-0188 FAX 847-455-0334 garvinindustries.com

Threaded Rod Studs (Quick Shot)

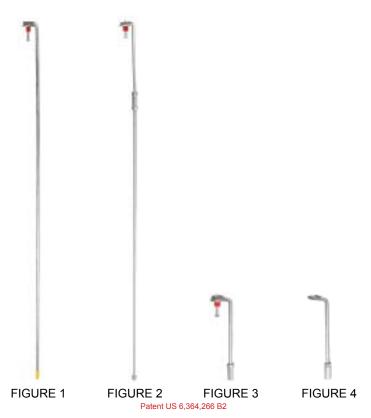

Application: These threaded-rod studs are used to quickly and easily hang smooth or threaded rods in any length. They are used to mount and support numerous electrical boxes, enclosures and lighting fixtures.

Advantages: Garvin Industries' patented, quick-shot concrete nail and washer design allows for multiple lengths of rod to be attached to the structure in any location. Their unique coupler allows rod length to be quickly and easily adjusted in the field and the "NP" (no pin) style allows a screw mount to any surface.

Field Names: Threaded rod, custom threaded rod, quick shot threaded rod.

Material: Zinc Plated Steel





STF14 INSTALLATION


STF1430 INSTALLATION

Part Number	Thread Size	Overall Length	Applicable Figure	Description	Std. Pkg.
STF0030	Smooth Unthreaded Rod .25" Diameter	30"	1	Smooth unthreaded rod 30" long	50
STF0036	Smooth Unthreaded Rod .25" Diameter	36"	1	Smooth unthreaded rod 36" long	50
STF14	1/4-20	Coupler	3	1/4-20 angled mounting coupler with concrete nail and washer	50
STF14NP	1/4-20	Coupler	4	1/4-20 angled mounting coupler for screw mount applications	50
STF1430	1/4-20	30"	2	1/4-20 threaded rod 24" long with concrete nail coupler	50
STF1436	1/4-20	36"	2	1/4-20 threaded rod 30" long with concrete nail coupler	50
STF1454	1/4-20	54"	2	1/4-20 threaded rod 48" long with concrete nail coupler	50
STF1466	1/4-20	66"	2	1/4-20 threaded rod 60" long with concrete nail coupler	25
STF38	3/8-16	Coupler	3	3/8-16 angled mounting coupler with concrete nail and washer	25
STF38NP	3/8-16	Coupler	4	3/8-16 angled mounting coupler for screw mount applications	25
STF3830	3/8-16	30"	2	3/8-16 threaded rod 24" long with concrete nail coupler	25
STF3836	3/8-16	36"	2	3/8-16 threaded rod 30" long with concrete nail coupler	25
	Vis	it www.garvinir	ndustries.com for b	lueprints and specification sheets.	301

Beams & **Purlins**



Threaded Rods











Application: These threaded rods are cut to length to hang and support various electrical boxes, hangers, support devices, pipes and lighting fixtures. Rod couplings attach the two lengths of rods together.

Advantages: Garvin Industries' threaded rods are zinc plated for corrosion protection. Their versatile 10 foot length can be cut as needed for a variety of field uses. Garvin Industries also offers threaded rods in pre-cut length from 1 ft. to 10 ft.

Field Names: Threaded rod, all threaded rod, rod coupling nuts, rod nuts, sleeve nuts.

Material: Zinc Plated Steel



Part Number	Size	Length	Std. Pkg.	Part Number	Size	Length	Std. Pkg.
TR1420	1/4-20	10 ft.	500 ft.	TR3816-5	3/8-16	5 ft.	10
TR3816	3/8-16	10 ft.	250 ft.	TR3816-6	3/8-16	6 ft.	10
TR1213	1/2-13	10 ft.	120 ft.	TR3816-7	3/8-16	7 ft.	10
	CUT TO	LENGTH		TR3816-8	3/8-16	8 ft.	10
TR1420-1	1/4-20	1 ft.	10	TR3816-9	3/8-16	9 ft.	10
TR1420-2	1/4-20	2 ft.	10	TR1213-1	1/2-13	1 ft.	10
TR1420-3	1/4-20	3 ft.	10	TR1213-2	1/2-13	2 ft.	10
TR1420-4	1/4-20	4 ft.	10	TR1213-3	1/2-13	3 ft.	10
TR1420-5	1/4-20	5 ft.	10	TR1213-4	1/2-13	4 ft.	10
TR1420-6	1/4-20	6 ft.	10	TR1213-5	1/2-13	5 ft.	10
TR1420-7	1/4-20	7 ft.	10	TR1213-6	1/2-13	6 ft.	10
TR1420-8	1/4-20	8 ft.	10	TR1213-7	1/2-13	7 ft.	10
TR1420-9	1/4-20	9 ft.	10	TR1213-8	1/2-13	8 ft.	10
TR3816-1	3/8-16	1 ft.	10	TR1213-9	1/2-13	9 ft.	10
TR3816-2	3/8-16	2 ft.	10	RDC1420	1/4-20	Rod Coupling	50
TR3816-3	3/8-16	3 ft.	10	RDC3816	3/8-16	Rod Coupling	50
TR3816-4	3/8-16	4 ft.	10	RDC1213	1/2-13	Rod Coupling	50



Beams & **Purlins**

847-455-0188 FAX 847-455-0334 garvinindustries.com

Gripple® Loop Hangers



Part Number	Length	Load Rating	Attachment Style	Std. Pkg.
HF02-5	5 ft.	100 lb.	Loop	10
HF02-10	10 ft.	100 lb	Loop	10
HF02-20	20 ft.	100 lb	Loop	10
HF02-30	30 ft.	100 lb	Loop	10

Gripple® Stud Hangers



different appliances from structural beams and supports including, busbars, ladder racks, conduit fixtures, cables, and speakers.

Application: These loop hangers are used to hang many

Advantages: Garvin Industries' labor-saving Gripple® loop hanger design is seven times faster than competing brands or traditional methods. Their internal "sure lock" release ensures that only the installer is able to adjust length and positioning. Additionally, low material costs and precut lengths prevent scrap on job sites.

Field Names: Gripples, gripple hangers.

Material: Steel Cable

Application: These stud hangers are used to hang many different devices from structural beams and supports including, busbars, ladder racks, conduit fixtures, cables, and speakers.

Advantages: Garvin Industries' labor saving Gripple® stud hanger design is seven times faster than competing brands or traditional methods. Their internal "sure lock" release ensures that only the installer is able to adjust length and positioning. Additionally, low material costs and precut lengths prevent scrap on job sites.

Field Names: Gripples, gripple hangers.

Material: Steel Cable

Part Number	Length	Load Rating	Attachment Style	Std. Pkg.
HFSG2-5	5 ft.	100 lb.	1/4" Stud	10
HFSG2-10	10 ft.	100 lb	1/4" Stud	10
HFSG2-15	15 ft.	100 lb	1/4" Stud	10
HFSG2-30	30 ft.	100 lb	1/4" Stud	10





Application: These 90° eyelet hangers are used to hang many different devices from structural beams and supports including, busbars, ladder racks, conduit fixtures, cables, and speakers.

Advantages: Garvin Industries' labor-saving, Gripple® 90° eyelet hanger design is seven times faster than competing brands or traditional methods. Their internal "sure lock" release ensures that only the installer is able to adjust length and positioning. Additionally, low material costs and precut lengths prevent scrap on job sites.

Field Names: Gripples, gripple hangers.

Material: Steel Cable

Part Number	Length	Load Rating	Attachment Style	Std. Pkg.
HF1490G2-5	5 ft.	100 lb.	90° 1/4" Eyelet	10
HF1490G2-10	10 ft.	100 lb	90° 1/4" Eyelet	10
HF1490G2-15	15 ft.	100 lb	90° 1/4" Eyelet	10
HF1490G2-30	30 ft.	100 lb	90° 1/4" Eyelet	10

Gripple® Barrel Hangers



Application: These barrel hangers are used to hang many different devices from structural beams and supports including, busbars, ladder racks, conduit fixtures, cables, and speakers.

Advantages: Garvin Industries' labor-saving, Gripple® barrel hanger design is seven times faster than competing brands or traditional methods. Their internal "sure lock" release ensures that only the installer is able to adjust length and positioning. Additionally, low material costs and precut lengths prevent scrap on job sites.

Field Names: Gripples, gripple hangers.

Material: Steel Cable

Part Number	Length	Load Rating	Attachment Style	Std. Pkg.
HFBQG2-10	10 ft.	100 lb	Barrel Hanger Threaded 1/4"	10
HFBQG2-15	15 ft.	100 lb	Barrel Hanger Threaded 1/4"	10



Beams & Purlins

847-455-0188 FAX 847-455-0334 garvinindustries.com

Gripple® Hook Hangers



Part Load **Attachment** Std. Number Length Rating Style Pkg. HFHK2-5 5 ft. 100 lb. 10 Single Hook HFHK2-10 10 ft. 100 lb Single Hook 10 HFHK2-15 15 ft. 100 lb Single Hook 10 HFHK2-30 30 ft. 100 lb 10

Application: These hook hangers are used to hang many different devices from structural beams and supports including, busbars, ladder racks, conduit fixtures, cables, and speakers.

Advantages: Garvin Industries' labor saving Gripple® hook hanger design is seven times faster than competing brands or traditional methods. Their internal "sure lock" release ensures that only the installer is able to adjust length and positioning. Additionally, low material costs and precut lengths prevent scrap on job sites.

Application: These "Y" toggle hangers are used to hang many different devices from structural beams and supports including, busbars, ladder racks, conduit fixtures, cables,

Advantages: Garvin Industries' labor-saving, Gripple® "Y" toggle hanger design is seven times faster than competing brands or traditional methods. Their internal "sure lock" release ensures that only the installer is able to adjust length and positioning. Additionally, low material costs and precut

Field Names: Gripples, gripple hangers.

Material: Steel Cable

Gripple® "Y" Toggle Hangers



Field Names: Gripples, gripple hangers.

Material: Steel Cable

lengths prevent scrap on job sites.

and speakers.

Part Number	Length	Load Rating	Attachment Style	Std. Pkg.
HFYTG2-518	5 ft.	100 lb.	Y-Fit Toggle 18"	10
HFYTG2-1018	10 ft.	100 lb	Y-Fit Toggle 18"	10
HFYTG2-1518	15 ft.	100 lb	Y-Fit Toggle 18"	10
HFYTG2-3018	30 ft.	100 lb	Y-Fit Toggle 18"	10

FAX 847-455-0334 garvinindustries.com



Gripple® "Y" Hook Hangers



Beams &

Purlins

Part Number	Length	Load Rating	Attachment Style	Std. Pkg.
HFYHK2-518	5 ft.	100 lb.	Y-Fit Hooks 18"	10
HFYHK2-1018	10 ft.	100 lb	Y-Fit Hooks 18"	10
HFYHK2-2018	20 ft.	100 lb	Y-Fit Hooks 18"	10

Application: These "Y" hook hangers are used to hang many different devices from structural beams and supports including, busbars, ladder racks, conduit fixtures, cables, and speakers.

Advantages: Garvin Industries' labor saving Gripple® "Y" hook hanger design is seven times faster than competing brands or traditional methods. Their internal "sure lock" release ensures that only the installer is able to adjust length and positioning. Additionally, low material costs and precut lengths prevent scrap on job sites.

Field Names: Gripples, gripple hangers.

Material: Steel Cable

Gripple® Release Tools



Part Number	Description	Std. Pkg.	
HFK	Standard Release Key	10	
HFK-1	Easy Grip Release Key	4	

Application: Gripple® release keys allow the installer to release the "sure lock" to adjust length and positioning of hangers.

Advantages: Garvin Industries' Gripple® hangers have an internal "sure lock" release to ensure that only the installer is able to adjust length and positioning.

Field Names: Gripples, gripple hangers.

Material: Steel Cable



Beams & Purlins

847-455-0188 FAX 847-455-0334 garvinindustries.com

Angle Brackets





Application: These angle brackets are used to mount a variety of hangers when field conditions require a 90° angle.

Advantages: Garvin Industries' angle brackets give the installer access for overhead hanging and support.

Field Names: Angle bracket, angle hanger, offset brackets

Material: Steel



BAINUSE

Part Number	Bracket Style	Size	Similar Products		Std. Pkg.
BA-1/4	Angle Bracket	1/4" Unthreaded Hole	Cooper B-Line BH7 Erico AB	Minerallac BA	100
BAT-3/8	Angle Bracket	3/8" Threaded Hole	1/4" thick steel threaded fo	r 3/8" rod.	50

Threaded Rod Hangers





Application: These overhead, threaded support fasteners are used to suspend #8 wires, 1/4" and 3/8" plain or threaded rods from overhead mountings with clearance holes of 1/4" bolts.

Advantages: Garvin Industries' threaded-rod support brackets allow threaded rods to be added quickly and easily to any overhead structure.

Field Names: Offset brackets, angle brackets, offset hanger.

Material: Plated Steel



R014T IN USE

Part Number	Thread Impression	Description	Std. Pkg.
TRH-1420	1/4-20	Quick-Shot threaded rod hanger	100
TRH-3816	3/8-16	Quick-Shot threaded rod hanger	100
R014T	1/4-20	Screw-on threaded rod hanger	100
R038T	3/8-16	Screw-on threaded rod hanger	100



Bar Joist Truss Hangers



Part Number	Threaded Stud Size	Std. Pkg.
TTH38	3/8-16	50
TTH12	1/2-13	50

Application: These bar joist truss hangers are used to hang electrical, fire suppression, plumbing and HVAC fixtures in open-web, bar-joist truss systems.

Advantages: Garvin Industries' bar-joist truss hangers efficiently use space and balance the load evenly on the bar joist while delivering a fast, strong and safe solution for mechanical attachment in both the upper and lower chords of the truss. There are no special tools needed for installation, making it fast and easy.

Field Names: Bar joist hanger, bar joist fixture hanger, truss hanger, joist hanger.

Material: Galvanized Steel



TTH38 IN USE

Only Stock One Lock!

Universal Breaker Lock

One Lock Fits All...

- Eliminates need to stock multiple breaker locks.
- Fits most common one pole circuit breakers.
- No need to make costly trips to the jobsite to identify panel.
- Reusable.
- · Corrosion resistant.
- · Patent pending.



Fits most circuit breakers:

- BR • THQB • 00
- CH MP QOB
- CHB • Q HOM
- BAB • BQ TB
- THQP • BL

Fits most brands:

- GF
- Westinghouse
- Siemens Bryant
- T & B
- Murray
- Homeline
- Square D
- Cutler Hammer • and more...

See Page 338 for more information!



Beams & Purlins

847-455-0188 FAX 847-455-0334 garvinindustries.com

Hammer On Beam Clamps



Application: These hammer-on beam clamps are used to suspend boxes, fixtures and bridle rings to beam flanges.

Advantages: Garvin Industries' quick, hammer-on design eliminates the hardware costs and installation hours associated with traditional beam clamps.

Field Names: Multi purpose clamp, hammer on beam clamp, bang on beam clamp, multi purpose clip.

Material: Spring Steel Black



BC18 IN USE

Part Number	Flange Thickness	Thread Impression	Similar Products		Std. Pkg.
BC18	1/8" to 1/4"	1/4-20	Cooper B-Line BU24 Erico M24	Minerallac BC18	100
BC18ST	1/8" to 1/4"	1/4-20 with 1/4" Threaded Stud	Cooper B-Line BU24S Erico M24S	Minerallac BC18ST	100
BC516	5/16" to 1/2"	1/4-20	Cooper B-Line BU58 Erico M58	Minerallac BC516	100
BC516ST	5/16" to 1/2"	1/4-20 with 1/4" Threaded Stud	Cooper B-Line BU58S Erico M58S	Minerallac BC516ST	100
BC916	9/16" to 3/4"	1/4-20	Cooper B-Line BU912 Erico M912	Minerallac BC916	100
BC916ST	9/16" to 3/4"	1/4-20 with 1/4"Threaded Stud	Cooper B-Line BU912S Erico M912S	Minerallac BC916ST	100

Fastest PreFab Guaranteed!

4" Square Dual Access "Backdoor" Box

This Box Allows Preinstalled Devices, Rings, & Other Box Components—for Quick Termination at Job Sites!

- Open back box allows conduit, connectors, and wire device termination in seconds
- Rugged steel construction
- Combination 1/2" & 3/4" moon knockouts
- Quickly terminate wire and close off open back in seconds with blank cover
- Let us prefab devices and wire pigtails
- Made to order custom assemblies welcome



See Page 25 for more information!

Beams & **Purlins**



Beam Clamps (Stamped Steel)







BC-1420-SS







BMC442

Application: These beam clamps are used with conduit hangers, bridle rings and drop rods sized 10-24, 1/4-20 or 3/8-16. They are tapped for rods on their bottoms and backs, except part # 602BSS, it is tapped only for bottoms.

Advantages: Garvin Industries' beam clamps provide an economical means of hanging medium-duty loads. Their threaded backs and bottoms allow for versatility in design. Additionally, their hardened, cup-point screw and heavygauge steel body will not distort when tightened on the

Field Names: Beam clamps, stamped steel beam clamps, C style beam clamps, fullman clamps.

Material: Zinc Plated Steel & Stainless Steel



Part Number	Jaw Opening	Threaded Holes	Load Capacity	BC-1420 IN USE WITH BRIDLE RING Special Features	Std. Pkg.
BC-1024	3/4"	10-24	100 lbs.	Back and bottom tapped 10-24.	100
BC-1420	3/4"	1/4-20	100 lbs.	Back and bottom tapped 1/4-20.	100
BC-1420-SS	3/4"	1/4-20	150 lbs.	Back and bottom tapped 1/4-20. Stainless steel.	100
BC-3816	15/16"	3/8-16	200 lbs.	Back and bottom tapped 3/8-16	25
BC-3816-SS	15/16"	3/8-16	200 lbs.	Bottom only tapped 3/8-16. Stainless steel body is great for use in wet locations.	25
BMC442	3/4"	Metric M6	100 lbs.	Back and bottom tapped for "M6" metric threaded rods.	50

Beam Clamps (Spring Steel)



Application: These steel beam clamps are used to support light-duty loads from structural beams.

Advantages: Garvin Industries' beam clamps have an easy and fast installation and fit beam flanges up to 3/4". Additionally, they have sharp teeth that bite into beam surfaces to protect against slippage.

Field Names: Light duty beam clamp, spring steel clamp.

Material: Steel, Black



BC1 IN USE

Part Number	Jaw Opening	Thread Impression	Color	Similar Products		Std. Pkg.
BC1	3/4"	10-24 and 1/4-20 with additional 3/8" clear hole.	Black	Cooper B-Line BC1 Erico BC	Minerallac 500	100



Beams & **Purlins**

847-455-0188 FAX 847-455-0334 garvinindustries.com

Beam Clamps (Malleable Iron)








MBC-1420



MBC-1420WM







Advantages: Garvin Industries' heavy-duty beam clamps are used to hang medium, light, or heavy loads from structural beams. Their hardened, cup-point screw and malleable iron body will not distort or slip off the beam edge when tightened.

Application: These beam clamps are used with con-

Field Names: Malleable iron beam clamps, fullman clamps, wide mouth beam clamp, oversize beam clamp.

Material: Malleable Iron



MBC-1420 IN USE



MBC-3816EV

MBC-1213



MBC-3816

MBC-1213XL



MBC-1213WM

Part Number	Threaded Holes	Jaw Opening	Maximum Load* (lbs.)		Similar Products		Std. Pkg.
MBC-1024	10-24	7/8"	250		Thomas & Betts 509 Hubbell Raco	Crouse Hinds 530 EGS Appleton BH500-10	100
MBC-1420	1/4-20	7/8"	250		Thomas & Betts 500-SC Hubbell Raco 2524	Crouse Hinds 531 EGS Appleton BH500	100
MBC-1420WM	1/4-20	3-1/8"	200	Extra Wide Mouth	Huge jaw opening accommod	dates extra thick beams.	50
MBC-3816EV	3/8-16	13/16"	40		Compact size fits tight space load capacity when 3/8" rod is	,	50
MBC-3816	3/8-16	1-3/8"	500		Thomas & Betts 502 Hubbell Raco 2536	Crouse Hinds 533 EGS Appleton BH502	25
MBC-3816WM	3/8-16	3-1/8"	300	Extra Wide Mouth	Huge jaw opening accommod	dates extra thick beams.	25
MBC-1213	1/2-13	1-3/8"	700		Thomas & Betts 507 Hubbell Raco 2538	Crouse Hinds 534 EGS Appleton BH503	10
MBC-1213XL	1/2-13	31/32"	200		Extra heavy duty body suppo	• • • • • • • • • • • • • • • • • • • •	10
MBC-1213WM	1/2-13	3-1/8"	400	Extra Wide Mouth	Huge jaw opening accommod	dates extra thick beams.	10

*NOTE: The testing load is 3 times the maximum load.

Beam Clamps (Reversible)



Purlins











JFC-5811



JFC-3410







Material: Malleable Iron, Black

clamps, plumbers clamps.

for various beam flange thickness.

installation finished height.



Application: These reversible beam clamps are used when drop-rod length must be adjusted to accommodate the field

Advantages: Garvin Industries' mounting holes are fully threaded through the body allowing drop rod length adjustment. Their hardened cup point set screws come with jam nuts to prevent vibratory loosening in industrial settings. Additionally, clamps come in both short or wide jaw openings

Field Names: Pipe fitters beam clamps, reversible beam clamps, top beam clamps, wide mouth beam clamps, fitters

JFC / MFC IN USE

16	3	3/8
		8
		1961
н		图
u		2394
7		

MFC-3410

Part Number	Jaw Opening	Size	Std. Pkg.
JFC-1420	3/4"	1/4-20	50
JFC-3816	3/4"	3/8-16	25
JFC-1213	3/4"	1/2-13	25
JFC-5811	7/8"	5/8-11	25
JFC-3410	1"	3/4-10	25
MFC-3816	1-1/4"	3/8-16	25
MFC-1213	1-1/4"	1/2-13	25
MFC-5811 1-3/8"		5/8-11	25
MFC-3410	1-3/8"	3/4-10	25



Beams & Purlins

847-455-0188 FAX 847-455-0334 garvinindustries.com

"C" Style Beam Clamps











SCC-1213SS

Application: These beam clamps are used as structural attachments to metal beams, purlins, channels and angle irons. They are used to support boxes, enclosures and fixtures from threaded rods.

Advantages: Garvin Industries' heavy-duty beam clamps support heavy loads. Additionally, they can be used on beams and purlins that have 45° flanges or other structural designs that make it impossible to use standard beam clamps.

Field Names: C-clamp beam clamp, cup clamp.

Material: Malleable Iron, Steel or 304 Stainless Steel





MCC-1213 IN USE

Tapped Hole Size	Description	Std. Pkg.
3/8-16 1/2-13 5/8-11 3/4-10	Malleable iron, electrogalvanized "C" clamps for heavy vertical loads.	25 25 25 25
1/2-13 5/8-11	Malleable iron, plain finish "C" clamps for heavy-duty loads.	25 25 25 25
3/8-16 1/2-13 5/8-11 3/4-10	Steel, electrogalvanized "C" clamps with locknut.	25 25 25 25
3/8-16 1/2-13 5/8-11 3/4-10	Steel, plain finish "C" clamps with locknut.	25 25 25 25
3/8-16 1/2-13 5/8-11 3/4-10	304 Stainless steel, "C" clamps with locknut.	25 25 25 25
	3/8-16 1/2-13 5/8-11 3/4-10 3/8-16 1/2-13 5/8-11 3/4-10 3/8-16 1/2-13 5/8-11 3/4-10 3/8-16 1/2-13 5/8-11 3/4-10	3/8-16 Malleable iron, electrogalvanized "C" clamps for heavy vertical loads. 1/2-13 5/8-11 3/4-10 3/8-16 Malleable iron, plain finish "C" clamps for heavy-duty loads. 1/2-13 5/8-11 3/4-10 3/8-16 Steel, electrogalvanized "C" clamps with locknut. 1/2-13 5/8-11 3/4-10 3/8-16 Steel, plain finish "C" clamps with locknut. 3/8-16 1/2-13 5/8-11 3/4-10 3/8-16 304 Stainless steel, "C" clamps with locknut.



FAX 847-455-0334 garvinindustries.com



Hammer On Beam Clamp Assemblies



Application: These hammer-on, beam-clamp assemblies are used to suspend #8 wires or 1/4" rods from overhead mountings and have a clearance hole for 1/4" bolts.

Advantages: Garvin Industries' quick, hammer-on design saves labor and hardware costs and provides an economical way to install threaded rods.

Field Names: Multi purpose clamp, hammer on clamp, multi purpose clip.

Material: Steel



Part Number	Beam Flange Thickness	Rod Size	Similar Products	R1814T IN USE	Std. Pkg.
R1814T	1/8" to 1/4"	1/4-20	Cooper B-Line BH4E24 Erico 4TI24	Minerallac R1814T	100
R51614T	5/16" to 1/2"	1/4-20	Cooper B-Line BH4E58 Erico 4TI58	Minerallac R51614T	100
R91614T	9/16" to 3/4"	1/4-20	Cooper B-Line BH4E912 Erico 4TI912	Minerallac R91614T	100

Beams &

Purlins

Perforated Hanger Iron



Application: Perforated strapping is used for hanging large sized pipes, ducts or other miscellaneous items.

Advantages: Garvin Industries' perforated holes allow multiple lengths of steel strap to hang various electrical, HVAC or low voltage conduits, boxes, cables and ducts.

Field Names: perforated hanger iron, band iron, hanger strap, plumbers tape, band tape, hanger tape.

Material: Steel



PHI IN USE

Part Number	Width	Length	Std. Pkg.
PHI	3/4"	100 Feet	50



847-455-0188 FAX 847-455-0334 garvinindustries.com

Channel (Deep)



Application: Strut channel is used to support conduits, fixtures, and ventilation systems from structural beams and other support members.

Advantages: Garvin Industries' strut channel comes in a variety of depths, widths and finishes allowing the installer to hang and support many different conduits and fixtures from walls and overhead structural members.

Field Names: Strut, galvanized strut, strut channel.

Material: 12 Gauge Steel & 10 Gauge Steel



FS200HLG (Top) & FS200SS (Bottom)

Part	Mounting					
Number	Width	Depth	Finish	Provision	Length	Pkg.
FS200SS	1-5/8"	1-5/8"	Galvanized	9/16" x 1-1/8" Slots 2" On Centers	10 ft.	1
FS200SSG	1-5/8"	1-5/8"	Green	9/16" x 1-1/8" Slots 2" On Centers	10 ft.	1
FS200SL	1-5/8"	1-5/8"	Galvanized	13/32" x 3" Slots 4" On Centers	10 ft.	1
FS200SLG	1-5/8"	1-5/8"	Green	13/32" x 3" Slots 4" On Centers	10 ft.	1
FS200HL	1-5/8"	1-5/8"	Galvanized	9/16" Holes 1-7/8" On Centers	10 ft.	1
FS200HLG	1-5/8"	1-5/8"	Green	9/16" Holes 1-7/8" On Centers	10 ft.	1
FS280BLNK	2"	2"	Galvanized	Blank Channel No Slots, No Holes	10 ft.	1

Custom Manufactured Solutions!

We Specialize in Unique Custom Solutions!

Send Us Your Product Idea, Sketch, Blueprint or Sample and Let Our Engineers Develop a Solution That is Right for You!

- Metal stamping and fabrication
- · Die casting and machining
- Drilling, tapping, threading, bending, and prefab assemblies
- Full line prefab services
- · Patent and royalty agreements
- Stocking programs available for qualifying products





Channel (Shallow)



Application: Strut channel is used to support conduits, fixtures, and ventilation systems from structural beams and other support members.

Advantages: Garvin Industries' strut channel comes in a variety of depths, widths and finishes allowing the installer to hang and support many different conduits and fixtures from walls and overhead structural members.

Field Names: Strut, galvanized strut, strut channel.

Material: 14 Gauge Steel



FSHLG (Top) & FS500SS (Bottom)

Part				Mounting		Std.
Number	Width	Depth	Finish	Provision	Length	Pkg.
FS500SS	1-5/8"	13/16"	Galvanized	9/16" x 1-1/8" Slots 2" On Centers	10 ft.	1
FS500SSG	1-5/8"	13/16"	Green	9/16" x 1-1/8" Slots 2" On Centers	10 ft.	1
FS500SL	1-5/8"	13/16"	Galvanized	13/32" x 3" Slots 4" On Centers	10 ft.	1
FS500SLG	1-5/8"	13/16"	Green	13/32" x 3" Slots 4" On Centers	10 ft.	1
FS500HL	1-5/8"	13/16"	Galvanized	9/16" Holes 1-7/8" On Centers	10 ft.	1
FS500HLG	1-5/8"	13/16"	Green	9/16" Holes 1-7/8" On Centers	10 ft.	1

Fixture Stems & Canopies!

Let Us Cut, Thread & Color Your Stem to the Perfect Length!

- Powder coated fixture stems beautify any interior
- Custom length to meet your room requirements
- 1/4", 3/8", 1/2", 3/4" and other sizes available—ask our sales team
- Custom colors for qualifying quantities
- Stocking programs available
- Canopy comes in multiple styles for various architectural ceiling requirements



See Page 373 for more information!



Square Strut Washers





SW STYLE

SW -G STYLE

Part Number	Outside Diameter	Bolt Size	Coating	Std. Pkg.
SW-1/4	1-5/8"	1/4"	Zinc Plated	100
SW-1/4-G	1-5/8"	1/4"	Green Painted	100
SW-3/8	1-5/8"	3/8"	Zinc Plated	100
SW-3/8-G	1-5/8"	3/8"	Green Painted	100
SW-1/2	1-5/8"	1/2"	Zinc Plated	100
SW-1/2-G	1-5/8"	1/2"	Green Painted	100
SW-5/8	1-5/8"	5/8"	Zinc Plated	100
SW-5/8-G	1-5/8"	5/8"	Green Painted	100
SW-3/4	1-5/8"	3/4"	Zinc Plated	100
SW-3/4-G	1-5/8"	3/4"	Green Painted	100
SW-2-3/8	2"	3/8"	Zinc Plated	100
SW-2-1/2	2"	1/2"	Zinc Plated	100
SW-2-5/8	2"	5/8"	Zinc Plated	100
SW-2-3/4	2"	3/4"	Zinc Plated	100

Application: These 1/4" thick strut washers are used to secure strut fittings and channel with nuts.

Advantages: Garvin Industries' strut washers are available painted green or with a zinc plated finish. Bolt sizes are available from 1/4"-3/4".

Field Names: Strut washers, square washers, saddle wash-

Material: Zinc Plated or Painted



SW-3/8-G IN USE



Locking Strut Nuts, Bolts & Saddle Washers








Part Connection Std. Number Size **Point** Pkg. Threaded Hole LSN-1/4 1/4-20 50 For Rod or Bolt LSN-3/8 3/8-16 Threaded Hole 50 For Rod or Bolt LSB-1/4 1/4-20 1-1/2" Long 50 Threaded Stud LSB-3/8 3/8-16 1-1/2" Long 50 Threaded Stud SDL-3/8 3/8-16 Saddle Washer For 3/8" Threaded 50 Rod With Nut Preinstalled SDL-1/2 1/2-13 Saddle Washer For 1/2" Threaded 50 Rod With Nut Preinstalled

Application: These locking strut nuts and strut bolts are used to hang boxes, fixtures and appliances from threaded rod hangers.

Advantages: Garvin Industries' locking strut nuts and bolts eliminate the need to use numerous fasteners to hang boxes, enclosures and fixtures from threaded rods. Their snap-in design saves time and labor.

Field Names: Strut nuts, spring nuts, strut bolts, strut hangers, twist on strut nuts.

Material: Steel



LSN-3/8 IN USE






LSB-3/8 IN USE

SDL-3/8 IN USE



Spring Nuts

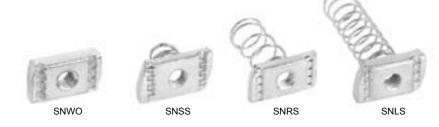

Application: These spring nuts are inserted inside strut channel to accept 1/4", 3/8" or 1/2" threaded fasteners or bolts.

Advantages: Garvin Industries' spring nuts provide a quick and easy way to hang or mount multiple products from a

Field Names: Spring Nuts, strut nuts, boingie nuts.

Material: Zinc Plated Steel

single strut channel.




SNRS3816 IN USE

Part Number	For Rod Size	Spring Size	Similar Products		Std. Pkg.
SNWO1420	1/4-20	No Spring	Cooper B-Line N221WO Powerstrut PSNS-1/4	Unistrut P3006-1420	50
SNWO3816	3/8-16	No Spring	Cooper B-Line N228WO Powerstrut PSNS-3/8	Unistrut P3008	50
SNWO1213	1/2-13	No Spring	Cooper B-Line N525WO Powerstrut PSNS-1/2	Unistrut P3013	50
SNSS1420	1/4-20	Short Spring	Cooper B-Line TN224 Powerstrut PSSS-1/4	Unistrut P4006-1420	50
SNSS3816	3/8-16	Short Spring	Cooper B-Line TN228 Powerstrut PSSS-3/8	Unistrut P4008	50
SNSS1213	1/2-13	Short Spring	Cooper B-Line TN525 Powerstrut PSSS-1/2	Unistrut P4010	50
SNRS1420	1/4-20	Regular Spring	Cooper B-Line N224 Powerstrut PSRS-1/4	Unistrut P1006-1420	50
SNRS3816	3/8-16	Regular Spring	Cooper B-Line N228 Powerstrut PSRS-3/8	Unistrut P1008	50
SNRS1213	1/2-13	Regular Spring	Cooper B-Line N225 Powerstrut PSRS-1/2	Unistrut P1010	50
SNLS1420	1/4-20	Long Spring	Cooper B-Line N724 Powerstrut PSLS-1/4	Unistrut P5506-1420	50
SNLS3816	3/8-16	Long Spring	Cooper B-Line N728 Powerstrut PSLS-3/8	Unistrut 5508	50
SNLS1213	1/2-13	Long Spring	Cooper B-Line N725 Powerstrut PSLS-1/2	Unistrut 5510	50




Service Entrance

Service Drop Brackets & Clamps

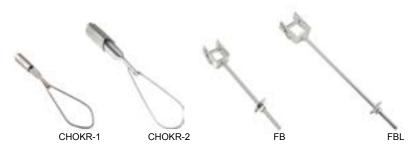





Advantages: Garvin Industries' unique bracket and clamp designs allow a safe and secure installation of power drop cables on the outside of buildings. Their corrosion-resistant materials and electro-galvanized finish ensure a long life in all climates.

Field Names: Chicken catcher, chicken choker, wedge clamp, service clamp, Chinese finger, fork bolt, service drop plate, eye plate, service dead end plate, porcelain wire holder, roof tie, roof jack, stand off bracket.



SDP IN USE



Part Number	Product Description	Material	Special Features	Std. Pkg.
CHOKR-1	Wedge Clamp	Aluminum	Reduces strain of sagging overhead cables, ASCR wire size #6-#4.	10
CHOKR-2	Wedge Clamp	Aluminum	Reduces strain of sagging overhead cables, ASCR wire size #6-#1/0	10
FB	Forkbolt	Steel	12" threaded bolt with "U" shape provides an attachment point on building for miscellaneous drop wire clamps.	10
FBL	Forkbolt Extra Long	Steel	18" threaded bolt with "U" shape and extra long threaded leg provides an attachment point on building with deep walls for miscellaneous drop wire clamps.	10
PWHA	Wire Holder	Porcelain & Steel	Adjustable porcelain wire holder for multiple pipe sizes.	10
PWHH	Wire Holder	Porcelain & Steel	Heavy duty with wood screw stud and steel reinforced body.	10
PWHL	Wire Holder	Porcelain	Light duty with wood screw stud.	10
PWHM	Wire Holder	Porcelain	Medium duty with wood screw stud.	10
RFT-100	Roof Tie	Steel	Clamps on roof joist and provides a means of attachment for multiple drop wire clamps.	10
SDP	Service Drop Plate	Steel	Bolts to building structure to provide a means of attachment for multiple drop wire clamps.	10
SOB-1	Utility Pole Pipe Stand Off Bracket	Steel	Mounts to utility pole to support vertical pipes running up the pole. Tight clamping action ensures a stable install on various pipe sizes.	10



Cable Support Straps





Application: These cable-support straps are used to support and secure service entrance cables to building structures.

Advantages: Garvin Industries' cable-support straps provide an economical means of quickly attaching service cable to any structure.

Field Names: Cable straps, service entrance straps.

Material: Zinc Plated Steel

٠	Part Number	Style	Trade Size	Wire Size	Std. Pkg.
2 2 3	OSE150	1 Hole Service Entrance Strap	1/2"	8/3 - 4/3	50
5	OSE175	1 Hole Service Entrance Strap	3/4"	3/3 - 2/3	50
ש בו	OSE1100	1 Hole Service Entrance Strap	1"	1 - 2/0	50
<u> </u>	OSE1200	1 Hole Service Entrance Strap	2"	3/0 - 4/0	50
	TSE250	2 Hole Service Entrance Strap	1/2"	8/3 - 4/3	50
	TSE275	2 Hole Service Entrance Strap	3/4"	3/3 - 2/3	50
	TSE2100	2 Hole Service Entrance Strap	1"	1 - 2/0	50
	TSE2200	2 Hole Service Entrance Strap	2"	3/0 - 4/0	50

Easy Identification Solutions!

Painted Boxes, Covers & Connectors

Color Coded Boxes, Covers, Connectors & Components Make It Easy to Identify the System in the Conduit!

- Save time by quickly identifying the wire in the boxes and pipe
- · Cuts mistakes and rework on jobsite
- Great for future updating of wire and devices when advances in technology require it



- Economical price compared to field painting and packaging
- Superior quality to field painting
- · Custom colors upon request!
- · Satisfies inspectors curiosity!



Ceiling "T-Bar" Grid

847-455-0188 FAX 847-455-0334 garvinindustries.com

Ceiling Grid Tie Wire





Application: These ceiling-grid tie wires mount to ceilings and allow the installer to hang ceiling grids or support multiple electrical boxes, conduit hangers, and other cable support brackets.

Advantages: Garvin Industries' concrete nail and clip allow drop wires to be quickly installed with any powder-actuated tool.

Field Names: Tie wire, lathers wire, ceiling grid tie wire, stone off tie wire, pencil rod, ceiling grid rod.

Material: Steel



PR-4 IN USE

Part Number	Length	Rod Gauge	Special Features	Std. Pkg.
PR-4	4 Feet	14 Gauge	Concrete nail and angle clip preinstalled	100
PR-412	4 Feet	12 Gauge	Concrete nail and angle clip preinstalled	134
PR-6	6 Feet	14 Gauge	Concrete nail and angle clip preinstalled	100
PR-8	8 Feet	14 Gauge	Concrete nail and angle clip preinstalled	100
PR-10	10 Feet	14 Gauge	Concrete nail and angle clip preinstalled	50
PR-12	12 Feet	14 Gauge	Concrete nail and angle clip preinstalled	50
TW340	340 Feet Black Annealed Steel	16 Gauge	Roll off tie wire used to secure many miscellaneous items when screws cannot be used. Great for concrete pours!	1
TW450	450 Feet Black Annealed Steel	16 Gauge	Roll off tie wire used to secure many miscellaneous items when screws cannot be used. Great for concrete pours!	1

Deep Octagon Slider Box!

3-1/2" Peep Octagon Box on Slider Bracket for Ceiling Tile

Perfect Position Every Time!

- Slides across ceiling tile for perfect position in room
- Depth adjusts up to 2" for flat or revealed ceiling tiles
- Bracket fits on ceiling grid and locks in place
- Great for cameras, emergency lights, and exit signs that need a fixed position on celling tile
- Works great when last minute field changes are required
- . In stock! On time!

See Page 17 for more information!

Modular **Wall Jacks**



RJ-11 & Coaxial "F" Connectors



WJFI



69

400.

WJF2W

69





WJ642I

68 WJF2I





Application: These RJ-11 & Coaxial "F" connectors are used for phone and cable connections.

Advantages: Garvin Industries' RJ-11 & Coaxial "F" connectors are available in both white and ivory making them easily compatible with any decor.

Field Names: F connectors, cable connectors, coax connectors, RG6 cable connectors, phone jacks, coax jacks, phone connectors, RG6U jacks.

Material: Steel and Plastic



WJF2W IN USE

tes	4.		60	*		
& Wallplates	69		9	69		
\ \ \ \ \	WJ64FW	WJ64FI	WJ64F2W	WJ64F2I		
Devices	Part Number	Jacks	Color	Similar Products		Std. Pkg.
	WJ64W	(1) RJ-11 Phone	White	40249-00W Hubbell NS730W	Ideal 85-207	50
	WJ64I	(1) RJ-11 Phone	Ivory	40249-00I Hubbell NS730I	Ideal 85-206	50
	WJ642W	(2) RJ-11 Phone	White	40244-00W Hubbell	Ideal 85-209	50
	WJ642I	(2) RJ-11 Phone	Ivory	40244-00W Hubbell	Ideal 85-208	50
	WJFW	(1) F Connector Coaxial	White	80781-00W Hubbell NS750W	Ideal 85-201	50
	WJFI	(1) F Connector Coaxial	Ivory	80781-00I Hubbell NS750I	Ideal 85-200	50
	WJF2W	(2) F Connector Coaxial	White	80781-00W Hubbell	Ideal 85-203	50
	WJF2I	(2) F Connector Coaxial	Ivory	80781-00I Hubbell	Ideal 85-202	50
	WJ64FW	1-RJ-11 & 1-F Connector	White	40259-00W Hubbell NS747W	Ideal 85-203	50
	WJ64FI	1-RJ-11 & 1-F Connector	Ivory	40259-00I Hubbell NS747I	Ideal 85-202	50
	WJ64F2W	2-RJ-11 & 2-F Connector	White			50
	WJ64F2I	2-RJ-11 & 2-F Connector	lvory			50



Modular Wall Jacks

847-455-0188 FAX 847-455-0334 garvinindustries.com

RJ45 for Category 5E Cables







Application: These modular wall jacks are installed in walls to add data jacks or outlets for ease of connection to existing network or internet.

Advantages: Garvin Industries' modular wall jacks keep cable length to a minimum by adding connection points to the network or internet for each computer in a room.

Field Names: CAT 5E jack, CAT 5E connector, RJ45 jack, data jack.

uala jack.

Material: Plastic

Part Number	Jacks	Color	Description	Std. Pkg.
WJ88W	1-RJ45 CAT 5E	White	Used to connect one computer to a network or internet	50
WJ882W	2-RJ45 CAT5E	White	Used to connect two computers to a network or internet	50
WJ8864W	1-RJ45 CAT5E & 1-RJ-11	White	Used when one phone and one computer are connected in the same location.	50

Add Devices Quick and Easy...

4" Square "Retrofit" Open Back Box

Add a Fire Alarm, Security Camera or Other Device to an Existing Wall.

- Open back for low voltage cable
- Easy snap in clips provide strong, rigid attachment to drywall, plaster, or tile
- · Rugged steel construction

- Mounting tab alignment is the same as standard 4" square boxes
- Fits most low voltage devices
- · Quickly "Cuts In" to existing hollow walls



See Page 39 for more information!



Standard (15 & 20 Amp)





GFCI15BK



GFCI15IV



GFCI15AL



GFCI15GY



GFCI20WH



GFCI20AL

Application: These GFCI outlets are installed when power is required in wet locations where the risk of electrical shock is higher than usual.

Advantages: Garvin Industries' rugged design and color choices allow safe power conditions in all applications.

Field Names: GFI outlet, GFI device, GFCI, GFCI device, GFCI receptacle, GFCI duplex device.



GFCI15WH IN USE



GFCI20GY



GFCI20IV

GFCI20BK

Part Number	Amps	Color	Std. Pkg.
GFCI15WH	15	White	10
GFCI15IV	15	Ivory	10
GFCI15AL	15	Almond	10
GFCI15GY	15	Gray	10
GFCI15BK	15	Black	10
GFCI20WH	20	White	10
GFCI20IV	20	Ivory	10
GFCI20AL	20	Almond	10
GFCI20GY	20	Gray	10
GFCI20BK	20	Black	10



Occupancy & Vacancy Sensors

847-455-0188 FAX 847-455-0334 garvinindustries.com

Decorative Style









OSSW



Application: These decorative style occupancy and vacancy sensors are used to automatically turn light on when a person enters an area.

Advantages: Garvin Industries' occupancy and vacancy sensors are available in ivory or white making them compatible with almost any décor. Additionally, Garvin Industries' OSSI and OSSW models have an always ON or always OFF function.

Field Names: Occupancy sensors, vacancy sensors, motion sensors, title 24 motion sensor.



OSPW IN USE

Part Number	Capture Area	Sensor Coverage	Color	Power Down	Special Features	Std. Pkg.
OSDSW	180°	1,300 sq. ft.	White	Auto Off	Occupancy Sensor	10
OSDSI	180°	1,300 sq. ft.	Ivory	Auto Off	Occupancy Sensor	10
OSPW	150°	1,300 sq. ft.	White	Auto Off	Occupancy Sensor	10
OSPI	150°	1,300 sq. ft.	lvory	Auto Off	Occupancy Sensor	10
OSSW	150°	1,300 sq. ft.	White	Auto Off	Always on Feature	10
OSSI	150°	1,300 sq. ft.	Ivory	Auto Off	Always on Feature	10

Move It Over!

Offset Pevice Rings

Never Tear Out a Box Again! Move Devices Over and Away from Obstructions.

- Quick fix when wide trim moulding interferes with box placement
- Use with boxes or low voltage devices
- Move over a plug, outlet, device, or switch
- Flat surface is keyed to hold plaster and drywall mud
- Raised from flat to 1" for various finished wall depths
- · Rugged steel construction



See Page 47 for more information!

Decorative Receptacles



Residential Grade









DR15TRSI





Application: These decorative receptacles are installed in walls to provide power to numerous electrical appliances.

Advantages: Garvin Industries' residential grade decorative receptacles have a longer and wider straps. These straps provide 40% more contact area to wall boards, reducing the risk of floating devices. They come with the terminal screws backed out and have versatile combination head screws that can be securely fastened using a slotted, Phillips, or Robertson head screw driver.

Field Names: Decorative receptacle, decorative device, decorative outlet, decorative plug, decorator receptacle, decorator device, decorator outlet, rocker outlet, rocker device, rocker plug, rocker receptacle, block outlet, block receptacle, block device.



DR20SI IN USE

Part Number	Color	Amps	Special Feature	Similar Products		Std. Pkg.
DR15SW	White	15		5325-SW Hubbell RRD15SW	885-SW Cooper 1107-9W	10
DR15SI	Ivory	15		5325-SI Hubbell RRD15SI	885-SI Cooper 1107-9V	10
DR15TRSW	White	15	Tamper Resistant	DR15-GW Hubbell RRD15TRW	885-TRW Cooper	10
DR15TRSI	Ivory	15	Tamper Resistant	DR15-GI Hubbell RRD15TRI	885-TRI Cooper	10
DR20SW	White	20		16342-W Hubbell HBL2152WA	26242-W Cooper 6350W	10
DR20SI	Ivory	20		16342-l Hubbell HBL2152IA	26242-I Cooper 6350	10



Decorative Rocker Switches

847-455-0188 FAX 847-455-0334 garvinindustries.com

Residential Grade



Application: These decorative rocker switches are installed in walls to open and close circuits allowing electricity to flow to electrical lights or appliances.

Advantages: Garvin Industries' decorative rocker switches are made from thermoplastic making them durable and virtually unbreakable. Their ultrasonic welded body and integrated construction of the straps and bodies provide superior integrity. Their long, wide mounting strap provides more contact area to wall boards eliminating most floating devices.

Field Names: Decor switches, decorator switches, decorative switches, block device, block switch, rocker switch, paddle switch, paddle device.



DS15W IN USE

Part Number	Color	Amps	Description	Similar Products		Std. Pkg.
DS15W	White	15	Single Pole	5061W Hubbell RSD115W	TM870-W Cooper 7501W	10
DS15I	Ivory	15	Single Pole	5061I Hubbell RSD115I	TM870-I Cooper 7501V	10
DS15BK	Black	15	Single Pole	5061E Hubbell RSD115BK	TM870-BK Cooper 7501BK	10
DS315W	White	15	3 Way	5063W Hubbell RSD315W	TM873-W Cooper 7503W	10
DS315I	Ivory	15	3 Way	5063I Hubbell RSD315I	TM873-I Cooper 7503I	10
DS315BK	Black	15	3 Way	5063E Hubbell RSD315BK	TM873-BK Cooper7503BK	10
DS415W	White	15	4 Way	5064W Hubbell RSD415W	TM874-W Cooper 7504W	10
DS415I	Ivory	15	4 Way	5064I Hubbell RSD415I	TM874-I Cooper 7504V	10
DS415BK	Black	15	4 Way	5064E Hubbell RSD415BK	TM874-BK Cooper7504BK	10



Residential & Commercial Grade



TS315I











TS20W

TS415W

TS415I





Application: These toggle switches are installed when a mechanical "flip switch" is required to open or close electrical circuits feeding power to lights or electrical appliances.

Advantages: Garvin Industries' residential and commercial grade toggle switches have a longer, wider strap that provides 40% more contact area to wall boards eliminating most floating devices. Their innovative design cam action mechanism ensures quiet switch action and their rugged top and bottom housing eliminates call backs because of job site breakages. Garvin Industries' toggle switches have versatile combination head screws that can be securely fastened using a slotted, Phillips, or Robertson head screw driver making the installation fast and easy.

Field Names: Toggle switch, flip switch, light switch.



TS15W IN USE

Part Number	Amps	Color	Description	Similar Products		Std. Pkg.
TS15W	15	White	Single Pole Back or side wired	1451-W Hubbell RS115W	660WG Cooper 1301-7W	10
TS15I	15	Ivory	Single Pole Back or side wired	1451-l Hubbell RS115l	660IG Cooper 1301-7V	10
TS15GY	15	Gray	Single Pole Back or side wired			10
TS315W	15	White	3 Way Back or side wired	1453-W Hubbell RS315W	663WG Cooper 1303-7W	10
TS315I	15	Ivory	3 Way Back or side wired	1453-l Hubbell RS315l	663IG Cooper 1303-7V	10
TS415W	15	White	4 Way Back or side wired	54504-2W Hubbell RS415W	664WG Cooper 1242-7W	10
TS415I	15	Ivory	4 Way Back or side wired	54504-2I Hubbell RS415I	664IG Cooper 1242-7I	10
TS20W	20	White	Single Pole Back or side wired	CS120-2W Hubbell C5120W	CS20AC1N Cooper CS120W	10
TS20I	20	Ivory	Single Pole Back or side wired	CS120-2I Hubbell C5120I	CS20AC1I Cooper CS120V	10
TS320W	20	White	3 Way Back or side wired	Three-way, White, 20A togo	gle switch.	10
TS320I	20	Ivory	3 Way Back or side wired	Three-way, Ivory, 20A toggl	e switch.	10



Duplex Receptacles

847-455-0188 FAX 847-455-0334 garvinindustries.com

Residential Grade



Application: These duplex receptacles are installed in walls when two plugs must be energized in one location to provide power to electrical appliances.

Advantages: Garvin Industries' residential grade duplex receptacles have a longer, wider strap that provides 40% more contact area to wall boards eliminating most floating installations. They have a high impact resistant thermoplastic face and body virtually eliminating job site breakage. Their double wide ground contacts ensure long term ground retention. Garvin Industries' duplex receptacles come with the terminal screws backed out and have versatile combination head screws. The R15TRSW and R15TRSI have a tamper resistant design to protect children from electrical injuries.

Field Names: Duplex outlet, duplex receptacle, duplex device, duplex plug, wall plug, wall outlet, electrical outlet, electrical plug.



R15SW IN USE

Part Number	Amps	Color	Description	Similar Products		Std. Pkg.
R15SW	15	White	Back and side wired	5320SW Hubbell RR15W	3232-SW Cooper 270-9W	10
R15SI	15	Ivory	Back and side wired	5320SI Hubbell RR15I	3232-SI Cooper 270-9V	10
R15SG	15	Gray	Back and side wired			10
R15TRSW	15	White	Tamper Resistant Back and side wired	Hubbell HBL8200SGWA	TR62-W	10
R15TRSI	15	Ivory	Tamper Resistant Back and side wired	Hubbell HBL8200SGIA	TR62-I	10
R20W	20	White	Back and side wired	CR20W	CR20-W Cooper CR20W	10
R20I	20	Ivory	Back and side wired	CR20I	CR20-I Cooper CR20V	10
						000

Commercial Grade









CR20BK

Application: These duplex receptacles are installed in walls when two plugs must be energized in one location to provide power to electrical appliances used in commercial spaces.

Advantages: Garvin Industries' commercial grade duplex receptacles have a durable high impact and chemical resistant nylon face and a compact design that meets the demands of commercial grade performance. Their automatic grounding system eliminates the need for bonding jumpers in grounding metal enclosures. They also provide a redundant measure of ground continuity when jumpers are

Field Names: Duplex outlet, duplex receptacle, duplex device, duplex plug, wall plug, wall outlet, electrical outlet, electrical plug, commercial outlet, commercial receptacle.



CR15W IN USE

Part Number	Color	Amps	Similar Products		Std. Pkg.
CR15W	White	15	CR15W Hubbell CR15W	CR15W Cooper CR15W	10
CR15I	Ivory	15	CR15I Hubbell CR15I	CR15I Cooper CR15V	10
CR20W	White	20	CR20W Hubbell CR20W	CR20W Cooper CR20W	10
CR20I	Ivory	20	CR20I Hubbell CR20I	CR20I Cooper CR20V	10
CR20BK	Black	20	20 Amp Black		10



Duplex Receptacles

847-455-0188 FAX 847-455-0334 garvinindustries.com

Industrial Grade



Application: These receptacles are used to provide protection to critical equipment. Industrial grade duplex receptacles provide an isolated grounding path to the building's isolated grounding system.

Advantages: Garvin Industries' industrial grade duplex receptacles have a durable impact resistant body. They have tapered lead-in slots on the back wiring holes that secure wires tightly. Their automatic grounding system eliminates the need for bonding jumpers in grounding metal enclosures and provides a redundant measure of ground continuity where jumpers are used.

Field Names: Industrial grade duplex receptacle, IR device, industrial device.



IGR15OR IN USE

Part Number	Color	Amps	Similar Products		Std. Pkg.
IR15W	White	15	5252-W Hubbell 5262W	5252-W Cooper 5262W	10
IR15I	Ivory	15	5252-I Hubbell 5262I	5252-I Cooper 5262V	10
IGR15OR	Orange with Isolated Ground	15	5262-IG Hubbell IG5262	1G52628SP Cooper 5262RN	10
IR20W	White	20	5362-W Hubbell 5362W	5352-I Cooper 5362W	10
IR20I	Ivory	20	5362-l Hubbell 5362l	5352-I Cooper 5362V	10
IGR20OR	Orange with Isolated Ground	20	5362-IG Hubbell IG5362	1G536205P Cooper 5362RN	10



Hospital Grade









HR20W





Application: These duplex receptacles are designed to meet performance standards of high abuse areas found in hospitals and other health care institutions. These devices are tested to "hospital grade" standards.

Advantages: Garvin Industries' hospital grade duplex receptacles have a thermoplastic shutter and an impact resistant nylon body ensuring a durable and secure installation. Their one piece brass alloy grounding, encapsulated ground contacts and high performance copper alloy contacts provide additional security and durability to the installation. Garvin Industries' hospital grade receptacles have versatile combination head screws that can be securely fastened using a slotted, Phillips, or Robertson head screw driver making the installation fast and convenient.

Field Names: Hospital grade, duplex outlet, duplex receptacle, duplex device.

Material: Plastic & Steel



Part Number	Color	Amps	Similar Products	HR15R IN USE	Std. Pkg.
HR15W	White	15	8200W Hubbell 8200W	8200-W Cooper 8200W	10
HR15I	Ivory	15	82001 Hubbell 82001	8200-I Cooper 8200V	10
HR15R	Red	15	8200R Hubbell HBL8200R	8200-RED Cooper 8200RD	10
HR20W	White	20	8300W Hubbell 8300W	8300-W Cooper 8300W	10
HR20I	Ivory	20	83001 Hubbell 83001	8300-I Cooper 8300V	10
HR20R	Red	20	8300R Hubbell HBL8300R	8300-RED Cooper 8300RD	10

Start Making Money!

Make Your Product Idea a Reality

For Years You Have Had Great Product Ideas, Let Us Help You Realize the Profit Potential!

- Free product feasibility studies
- Product development partnership agreements
- Royalty payments for products that sell
- Fast development of prototypes and samples
- Exclusive and confidential relationship
- References available on request





Single **Receptacles**

847-455-0188 FAX 847-455-0334 garvinindustries.com

Commercial Grade*







SR20250I

*All devices are side-wired. Please call if your application requires back-wired.

Application: These devices are installed in walls or ceilings when one plug needs to be energized at a single location to provide electricity for electrical appliances.

Advantages: Garvin Industries' commercial grade single receptacles have a durable high impact and chemical resistant nylon face and a compact design that meets the demands of commercial grade performance. Their automatic grounding system eliminate the need for bonding jumpers in grounding metal enclosures and provides a redundant measure of ground continuity where jumpers are used.

Field Names: Simplex receptacle, single receptacle, SR receptacle, round receptacle, single device.

Material: Impact Resistant Nylon Body



Part Number	Color	Amps	Volts	Similar Products	SR15W IN USE	Std. Pkg.
SR15W	White	15	125	5088-W	5251-W	10
				Hubbell HBL5251W	Cooper 817W	
SR15I	Ivory	15	125	5088-I	5251-l	10
				Hubbell HBL5251I	Cooper 817V	
SR15250W	White	15	250	5089-W	5651-W	10
			Hubbell HBL5661-W	Cooper 816W		
SR15250I	Ivory	15	250	5089-I	5651-l	10
	- ,			Hubbell HBL5661-I	Cooper 816V	
SR20W	White	20	125	5891-W	5351-W	10
				Hubbell HBL5361-W	Cooper 1877W	
SR20I	Ivory	20	125		5351-I	10
	,			Hubbell HBL5361-I	Cooper 1877V	
SR20250W	White	20	250		5851-W	10
		_•		Hubbell HBL5461W	Cooper 1876W	. •
SR20250I	Ivory	20	250	5823-I	5851-I	10
S. 1202001	,	_0		Hubbell HBL5461I	Cooper 1876V	

Speed Conduit Pulls!

Flexible Conduit Pulling Tool

Screws On to Flexible Conduit & Hooks On to Fish Tape for Secure Pull Every Time!

- Available sizes 3/8" through 2"
- Hardened spring steel coil action tightens on conduit to prevent slippage during conduit pull
- Works on flexible metal conduit, plastic conduit, blue conduit, and smurf tube
- · Patented design



See Page 383 for more information!

STK315I

STKR15I

Residential Grade



STKR15W

Application: These stack devices are installed when multiple lights or electrical appliances require switches or receptacles in one location.

Advantages: Garvin Industries' stack devices come in one piece and have a nickel plated brass strap. They have integral ground contacts locked into the back, body and face to prevent strap separation. The stack devices have break off provisions so both devices can be wired on the same circuit or on separate ones. The receptacles have triple wide line contacts and double wide ground contacts to ensure long term plug retention.

Field Names: Stack devices, stacked switches, stack switch, stack rocker switch, rocker switch, 3 way stack device switch, double eagle.

Material: Impact Resistant Nylon Body



STK215W IN USE

Part Number	Style	Color	Amps	Similar Products		Std. Pkg.
STK215W	Double Rocker	White	15	1754-W	TM811-W Cooper 3282W	10
STK215I	Double Rocker	Ivory	15	1754-l	TM811-I Cooper 3282V	10
STK315W	Triple Rocker	White	15	1755-W	TM8111-W Cooper 3283W	10
STK315I	Triple Rocker	Ivory	15	1755-I	TM8111-I Cooper 3283V	10
STKR15W	Rocker Switch with 15A Receptacle	White	15	5225-W Hubbell RC108W	691-W Cooper 3274W	10
STKR15I	Rocker Switch with 15A Receptacle	Ivory	15	5225-I Hubbell RC108I	691-I Cooper 3274V	10



Decorative Slide Style







Application: These decorative slide dimmers are installed as an alternative to traditional on and off switches. They allow the lighting in the room to be adjusted depending on the mood and desirability of the user.

Advantages: Garvin Industries decorative slide style dimmers are available with an illuminated off position that allows them to be easily seen in the dark.

Field Names: Slide dimmers, slide switch.

Material: Plastic & Steel



DD703W IN USE

Part Number	Wattage	Color	Description		Similar Product	ts	Std. Pkg.
DD703W	700	White	Single Pole & Three Way		6631-W	90680-W	10
DD703LW	700	White	Single Pole & Three Way Illuminated Through Top of Switch		6633-W	90683-W	10
DDLV503LW	/ 500	White	Single Pole &Three Way Illuminated Through Top of Switch	Low Voltage Magnetic Only	6628-W	95681-W	10

Dimmers

Slide Dimmers









Application: These slide dimmers are installed as an alternative to traditional on and off switches. They allow the lighting in the room to be adjusted depending on the mood and desirability of the user. They have a 700 watt max rating.

Advantages: Garvin Industries decorative slide style dimmers are available with an illuminated off position that allows them to be easily seen in the dark.

Field Names: Dimmer switch, slide dimmer switch.

Part Number	Wattage	Color	Special Feature	Similar Products		Std. Pkg.
SLD-600W	600	White		1P106W	SS600-W Lutron S600PWH	12
SLD-600I	600	Ivory		1P106IV	SS600-I Lutron S600PIV	12
SLD-603W	600	White	On/Off Switch w/ LED Indicator	3W106W	SS600-W Lutron S603PWH	12
SLD-603I	600	Ivory	On/Off Switch w/ LED Indicator	3W106IV	SS600-I Lutron S603PIV	12
SLD-633W	600	White	3-Way, On/Off Sw. w/ LED Indicator	3W106W	SS603-W Lutron S603PWH	12

Dimmers



Rotary Dimmers & Fan Controls







RDP603W







Application: These rotary dimmers and fan controls are installed in walls as manual light controls for most incandescent fixtures.

Advantages: Garvin Industries' rotary fan controls allow the speed of the fan to be adjusted to aid in the cooling and heating of a room. They are available in both ivory and white, making them attractive with any décor.

Field Names: Fan control, fan switch.

Material: Plastic



RD600W

Part Number	Wattage	Color	Description	Similar Products		Std. Pkg.
RD600W	600	White	Single Pole, Rotary Dimmer & Turn to On	6681-W Hubbell R61W	90601-W	10
RD600I	600	Ivory	Single Pole, Rotary Dimmer & Turn to On	6681-I Hubbell R61I	90601-I	10
RDP603W	600	White	Single Pole, 3 Way Push On & Off Preset	6683-W Hubbell R63W	90603-W	10
RDP603I	600	Ivory	Single Pole, 3 Way Push On & Off Preset	6683-I Hubbell R63I	90603-I	10
RFSC25W	_	White	Rotary Fan Speed Control, 5 amp	6616XW	94301-W	10
RFSC25I	_	Ivory	Rotary Fan Speed Control, 5 amp	6616XI	94301-I	10

Go Green on the Jobsite!

Energy Efficient Temporary Work Light

- 105 watt high-output compact fluorescent lamp offers 80% energy savings over traditional metal halide
- Very light-weight—2 lbs.
- · Versatile snap hook design easily attaches to many structural members
- · Standard box knockouts allows hard wire with pipe or flex cable wiring options
- · No ballast in fixture means no replacement costs later to fix a bad ballast
- · Gasketed covers and sealed knockouts are great for damp locations
- Premium high visibility "green" powder coating



See Page 371 for more information!



Industrial Grade Receptacles

847-455-0188 FAX 847-455-0334 garvinindustries.com

Range & Dryer Receptacles









Application: These receptacles are installed in walls for energizing oven ranges and clothing dryers.

Advantages: Garvin Industries' range and dryer receptacles have a heavy gauge galvanized steel mounting strap for corrosion protection. Their high strength glass nylon body resists breakage in these high abuse areas.

Field Names: Dryer receptacle, range receptacle, range plug, dryer plug, straight blade receptacle, NEMA receptacle.

Material: High Strength Glass Nylon Body & Galvanized Steel Strap



SBR30-3 IN USE

Part Number	Amps	Poles	Wires	Appliance	Similar Products		Std. Pkg.
SBR30-3	30	3	3	Dryer	5207 Hubbell RR330F	3860 Cooper 38B	10
SBR30-4	30	3	4	Dryer	278 Hubbell RR430F	3894 Cooper 1257	10
SBR50-3	50	3	3	Oven or Range	5206 Hubbell RR350F	3890 Cooper 32B	10
SBR50-4	50	3	4	Oven or Range	279 Hubbell RR450F	3864 Cooper 1258	10

Identify the Right Wires!

Colored Wire Markers

- No more math calculations
- Avoid "re-pulls" and wasted labor hours
- Ensures your work complies with National Electrical Code (NEC)



Device **Accessories**



Locking Mechanisms





UBL2 IN USE







Material: Plastic & Steel

Application: See Below



Advantages: Garvin Industries' device accessories have a quick and easy installation. They save both time and money

Field Names: Switch lock out, switch guard, outlet retainer, breaker lock, breaker lock out, circuit breaker lock.

along with solving many job site problems.

UBL1 IN USE ON CIRCUIT-BREAKER PANEL

Std. Pkg.

100

10

50

		UBL2
	Part Number	
S	OR	
Naliplates	TOGLOK	
& Wall	UBL1	
vices		
evic	UBL1-RED	
Õ	UBL1-BLU	

UBL2

Description	
Outlet retainer ring for oversize drywall openings.	

This "lock out" device mounts over toggle switches allowing locks or bolts to be installed to secure switches in

the "on or off" position. There are a variety of old panels with different circuit locks; Garvin Industries' patent pending reusable and corrosion resistant universal breaker lockout device secures any brand circuit breaker in ON or OFF position It eliminates the need to stock breaker locks and make costly trips to job sites to identify panel. Additionally, the

UBL1-RED Same as above painted red to meet NFPA-72. 50 **UBL1-BLU** Same as above painted blue for data network circuits. 50

set screw and rigid leg prevents the lock from slipping off the breaker and disrupting power flow.

Universal breaker lock with padlock and keys. Colored red per NFPA-72 requirements. 1

Device Cover Guards





Part Number	Dimensions	Device Coverage	Std. Pkg.
DG-650	6-1/2" x 4-1/2" x 2"	Small or Medium	10
DG-900	9" x 6-1/2" x 2-3/4"	Large	10

Application: These attractive high strength plastic covers guard sensitive electronic devices that are surface mounted on walls and ceilings.

Advantages: Garvin Industries' device cover guards have an attractive dome shape with superior tear drop venting holes to keep the devices cool. They feature a clear viewing window for easy device monitoring. Additionally they come with a lock and key to ensure security and vandal resistance.

Field Names: Thermostat cover, plastic wall cover, plastic vandal cover, plastic device cover.

Material: High Strength Resin



DG-900 IN USE



Painted Steel (All Device Styles)













Application: These one gang steel wallplates are used

rings. They also protect the wiring inside of the boxes. Advantages: Garvin Industries' painted steel one gang wallplates have a smooth and durable steel construction. The white and ivory colors easily match any décor.

to cover devices installed on one gang boxes and plaster

Field Names: Wallplate, wall plates, goof plates, midway plates, switch plates, device plates, outlet plates, face

Material: Painted Steel









PS1DW IN USE

	2
PSXPD1W	PSXPD1I

Part Std. Number Color **Device Opening** Similar Products or Special Features Pkg. PS1DW White 25 **Duplex Receptacle** Hubbell Mulberry 86101 PS1DI Ivory **Duplex Receptacle** 25 Hubbell Mulberry 99101 PS1GW White Decorative or GFCI 25 Hubbell Mulberry 86401 PS1GI Ivory Decorative or GFCI 25 Hubbell Mulberry 99401 PS1RW White Single Receptacle 25 Hubbell Mulberry 86091 PS1RI Single Receptacle 25 Ivory Hubbell Mulberry 99091 PS1TW White Toggle Switch 25 Hubbell Mulberry 86071 PS1TI Toggle Switch 25 Ivory Hubbell Mulberry 99071 PSXPD1W White Duplex & Old Phone Extra long condo plate accepts one duplex receptacle & 10 Receptacle one round receptacle for old phone outlets. PSXPD1I Ivory Duplex & Old Phone Extra long condo plate accepts one duplex receptacle & 10 Receptacle one round receptacle for old phone outlets.



Toggle Bolts



Part Number	Size	Length	Std. Pkg.
TOG3163	3/16"	3"	50
TOG3164	3/16"	4"	50
TOG143	1/4"	3"	50
TOG144	1/4"	4"	50
TOG383	3/8"	3"	50
TOG384	3/8"	4"	50

Application: These toggle bolts are used to secure boxes and clamps that are surface mounted on hollow walls.

Advantages: Garvin Industries' toggle bolts allow a quick and easy fastening point on hollow walls for light duty applications.

Field Names: Butterfly bolts, toggle bolts, umbrella bolts.

Material: Zinc Plated Steel



TOG143 IN USE

Only Stock One Lock!

Universal Breaker Lock

One Lock Fits All...

- Eliminates need to stock multiple breaker locks.
- Fits most common one pole circuit breakers.
- No need to make costly trips to the jobsite to identify panel.
- Reusable.
- · Corrosion resistant.
- Patent pending.



Fits most circuit breakers:

- BR THQB QO
- CH MP QOB
- CHB Q HOM
- BAB BQ TB
- THQP BL

Fits most brands:

- GE
- Westinghouse
- Siemens
- T & B • Homeline
- BryantMurray
- Cutler Hammer
- Square D
- and more...

See Page 338 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

Round Head Machine Screws





Application: These round head machine screws come in various sizes and can be used in many applications.


Advantages: Garvin Industries' provides round head machine screws in many sizes and lengths ensuring that any-depth product can easily be mounted in threaded holes. These screws are zinc plated steel to provide durability and corrosion protection.

Field Names: Round head screws, machine screws, box

Part Number	Size	Length	Std. Pkg.
MS63250	6-32	1/2"	100
MS63275	6-32	3/4"	100
MS632100	6-32	1"	100
MS632125	6-32	1-1/4"	100
MS632150	6-32	1-1/2"	100
MS632200	6-32	2"	100
MS83250	8-32	1/2"	100
MS83275	8-32	3/4"	100
MS832100	8-32	1"	100
MS832125	8-32	1-1/4"	100
MS832150	8-32	1-1/2"	100
MS832200	8-32	2"	100
		Vicit wasan	garvinindusti



Round Head Machine Screws

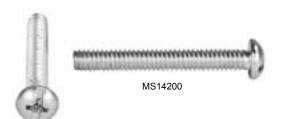

Application: These round head machine screws come in various sizes and can be used in many applications.

Advantages: Garvin Industries' provides round head machine screws in many sizes and lengths ensuring that any-depth product can easily be mounted in threaded holes. These screws are zinc plated steel to provide durability and corrosion protection.

Field Names: Round head screws, machine screws, box screws



MS14200 IN USE

Part Number	Size	Length	Std. Pkg.
MS1438	1/4-20	3/8"	100
MS1450	1/4-20	1/2"	100
MS1475	1/4-20	3/4"	100
MS14100	1/4-20	1"	100
MS14125	1/4-20	1-1/4"	100
MS14150	1/4-20	1-1/2"	100
MS14200	1/4-20	2"	100
MS14300	1/4-20	3"	100
MS14400	1/4-20	4"	100



847-455-0188 FAX 847-455-0334 garvinindustries.com

Round Head Machine Screws



Application: These round head machine screws come in various sizes and can be used in many applications. Hex nuts are used to secure threaded bolts on slip fit holes.

Advantages: Garvin Industries' provides round head machine screws in many sizes and lengths ensuring that any-depth product can easily be mounted in threaded holes. These screws are zinc plated steel to provide durability and corrosion protection.

Field Names: Round head screws, machine screws, box

screws

Part Number	Size	Length	Std. Pkg.
MS3838*	3/8-16	3/8"	50
MS3850	3/8-16	1/2"	50
MS3875	3/8-16	3/4"	50
MS38100	3/8-16	1"	50
MS38125	3/8-16	1-1/4"	50
MS38150	3/8-16	1-1/2"	50
MS38175*	3/8-16	1-3/4"	50
MS38200	3/8-16	2"	50
MS38300	3/8-16	3"	50
MS38400	3/8-16 *Slotted Hear	4" d Only	50



Hex Head Bolts



Application: These hex head bolts come in various sizes and can be used in many applications.

Advantages: Garvin Industries' provides fully threaded hex head bolts in many sizes and lengths ensuring that any desired hex head bolt can be found easily. These hex head bolts are zinc plated steel to provide durability and corrosion protection.

Field Names: Hex head bolts, hex bolts, hex nuts.



HB38125 IN USE

S
3.
נה
\equiv
تة
۳.
S
ಹ
LL.

Part Number	Size	Length	Std. Pkg.
HB3875	3/8"	3/4"	50
HB38100	3/8"	1"	50
HB38125	3/8"	1-1/4"	50
HB38150	3/8"	1-1/2"	50
HB38175	3/8"	1-3/4"	50
HB38200	3/8"	2"	50
HB38300	3/8"	3"	50
HB38400	3/8"	4"	50
HB5075	1/2"	3/4"	50
HB50100	1/2"	1"	50
HB50125	1/2"	1-1/4"	50



847-455-0188 FAX 847-455-0334 garvinindustries.com

Hex Head Bolts





HB50200

Part Number	Size	Length	Std. Pkg.
HB50150	1/2"	1-1/2"	50
HB50175	1/2"	1-3/4"	50
HB50200	1/2"	2"	50
HB50300	1/2"	3"	50
HB50400	1/2"	4"	50
HN632	6-32	Hex Nuts	50
HN832	8-32	Hex Nuts	50
HN1420	1/4-20	Hex Nuts	50
HN3816	3/8-16	Hex Nuts	50

Application: These hex head bolts come in various sizes and can be used in many applications. Hex nuts are used to fasten an electrical box, enclosure or conduit hanger to threaded rods or bolts.

Advantages: Garvin Industries' provides fully threaded hex head bolts in many sizes and lengths ensuring that any desired hex head bolt can be found easily. These hex head bolts are zinc plated steel to provide durability and corrosion protection.

Field Names: Hex head bolts, hex bolts, hex nuts.

Material: Zinc Plated Steel

Device Leveling Solution!

1/2-13

HN1213

Self Leveling "Dual Profile" Low Voltage Device Rings

50

Hex Nuts

One and Two Gang Device Rings With Tabs Installs Quickly Without Measuring or Using a Level.

- Self leveling tabs insures a perfect finished device opening
- Rugged steel construction.
- 6-32 mounting tabs for most electric or low voltage devices
- · Vertical or horizontal mounting
- Quickly screws to face and side of stud wall upright
- Dual mounting holes gives rigid strong device ring that won't bend back in wall opening
- Available for new construction or existing old work cut in applications



See Page 283 for more information!



Drywall Screws (Bugle Head)



Application: These screws are specifically designed to be used on various wood and plastic surfaces.

Advantages: Garvin industries' coarse threads provide a

secure mount every time.

Field Names: Drywall screws, bugle head screws.

Material: Steel, Plated Black



DWS6200 IN USE

Part Number	Description	Length	Std. Pkg.
DWS6125	Phillips Coarse Thread, Black	1-1/4"	100
DWS6158	Phillips Coarse Thread, Black	1-5/8"	100
DWS6200	Phillips Coarse Thread, Black	2"	100

Wood & Steel Hangers



Threaded

Hole

1/4-20

3/8-16

1/4-20

3/8-16

Length

2"

2-1/2"

1"

Description

For wood, vertical mounting.

For wood, vertical mounting.

For steel, vertical mounting.

For steel, vertical mounting.




Application: These wood screws are specifically designed to be used on wood applications to provide tapped 1/4-20 and 3/8-16 threaded rod attachment points. These steel screws are ideal for hanging threaded rod to any steel structure.

Advantages: Garvin Industries' combination screws and threaded hangers save labor and fastener costs.

Field Names: Wood hangers, drop hangers, wood anchors, joist anchors, steel hanger, steel anchor.

Material: Zinc Plated Steel





SMY142W

Part Number

SMY142W

SMY382W

SMY141S

SMY381S

847-455-0188 FAX 847-455-0334 garvinindustries.com

Concrete Screws



Application: These screws are specially designed to be used in concrete applications.

Advantages: Garvin Industries' concrete screws eliminate the need for drop in anchors.

Field Names: Concrete screws, cement screws, brick screws, tap it screws.

Material: Coated Steel



TAP14125 IN USE

Part Number	Size	Length	Std. Pkg.
TAP14125	1/4"	1-1/4"	100
TAP14175	1/4"	1-3/4"	100
TAP14225	1/4"	2-1/4"	100

Too Much Wire??..... Try These!

Over Sized Jumbo Handy Boxes and Covers

Handy Box is Much Larger than Traditional Boxes and Accommodates Increased Wire Capacity.

- Boxes have the following dimensions:
 4-1/8" long x 2-1/8" wide x 1-7/8" deep
- Covers come in blank, duplex, gfci, and single receptacle styles
- · Great when extra wire capacity is needed
- Rugged steel construction
- 1/2" trade knockouts
- Raised ground provision for surface mounted applications
- Mini sized handy box & cover also available



See Page 81 for more information!

FAX 847-455-0334 garvinindustries.com



Fender Washers (Round)







STYLE "WC"


Advantages: Garvin Industries' round fender washers ensure that various products can be securely mounted with screws and bolts. These round fender washers are zinc plated steel to guarantee durability and corrosion protection.

Field Names: Fender washer, paine washers, P washers, electrical trade washers, flat washers.

Application: These round fender washers come in various

sizes and can be used in many applications.

Material: Zinc Plated Steel



12W IN USE



18WC IN USE

Part Number		Outside Diameter	Bolt Size	Std. Pkg.
1AW		3/4"	8-32	100
2W		9/16"	1/8"	100
3W		1/2"	3/16"	100
4W		1-1/4"	3/16"	100
5W		1/2"	1/4" or 3/16"	100
6W		9/16"	1/4" or 3/16"	100
7W		7/8"	1/4" or 3/16"	100
8W		31/32"	1/4"	100
8AW		1-1/4"	1/4"	100
9W		5/8"	5/16"	100
11W		31/32"	3/8"	100
12W		1-1/2"	1/4" or 3/16"	100
13W		1-1/2"	1/2"	100
14W		1-1/2"	3/8"	100
14AW		1-1/4"	3/8"	100
15W		2"	1/4" or 3/16"	50
16W		2"	3/8"	50
17W		2"	1/2"	50
18WC	(Slotted)	1-1/2"	1/4" or 3/16"	100
19W		2-1/2"	1/4" or 3/16"	100

Faster Jobsite Install...

4" Square "Quickie" Boxes With Preinstalled Fasteners

Preinstalled Screws on the Bracket Allow for Boxes to Mount to Studs in a Flash!

- . No more buying fasteners
- . No more losing fasteners
- No more wasted labor inserting fasteners
- Available on square boxes, 1-1/2" deep and 2-1/8" deep
- · Works on wood or metal studs



See Page 26 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

Fender Washers (Octagon)



Part Number	"Flats" Outside Diameter	Bolt Size	Std. Pkg.
12WFS	1-1/2"	1/4" or 3/16"	100
13WFS	1-1/2"	1/2"	100
14WFS	1-1/2"	3/8"	100

Lock Washers



Part Number	Size	Std. Pkg.
LW632	6-32	100
LW832	8-32	100
LW1024	10-24	100
LW1420	1/4-20	100
LW3816	3/8-16	100
LW1213	1/2-13	100

Application: These octagon fender washers come in various sizes and can be used in many applications.

Advantages: Garvin Industries' provides octagon fender washers with different diameters for many bolt sizes ensuring that any desired octagon fender washer can be found easily. They also perfectly fit in strut channels for hanging any product. These octagon fender washers are zinc plated steel to guarantee durability and corrosion protection.

Field Names: Flat sided washer, octagon fender washers, hexagon washers.

Material: Zinc Plated Steel



12WFS IN USE

Application: These lock washers are made of hardened steel with a bent surface so that the deformation of the washers under stress will prevent bolt loosening.

Advantages: These lock washers help lock bolts in place when they are tightened on surfaces that may be subjected to vibratory loosening of screws or bolts.

Field Names: Lock washer, split washer, split ring washer.

Material: Steel



LW832 IN USE

FAX 847-455-0334 garvinindustries.com



Bar Joist Washers



Part Number	For Bolt Size	Std. Pkg.	
23WBJ	1/4"	200	
24WBJ	3/8"	200	

Application: These curved, rectangular washers clamp on open-web bar-joist trusses and allow for multiple items to be hung along ceiling joists.

Advantages: Garvin Industries' bar joist washers allow the installer to easily mount boxes, hangers and clamps anywhere along linear, open bar-joist grids.

Field Names: Bar joist washers, bar washers, joist washers.

Material: Zinc Plated Steel



23WBJ IN USE

Versatile Industrial Fixture Hanging!

Swivel Fixture Hangers

Quickly Install Fixtures, Exit Signs, Cameras, and Other Devices in Industrial Settings

- Grounding swivel cover: cover & attached swivel pivot hub are bonded to help prevent the risk of accidental shock
- 4-11/16" swivel cover: Fits standard 4-11/16" boxes
- · All items are great for replacing existing fixtures in industrial settings
- Hands free swivel cover: hinged door allows quick installation & wiring in one easy step
- · For square and octagon boxes
- Cuts installation time by 50%
- 4" octagon and square version fits standard boxes
- Accommodates 1/2" or 3/4" conduit



See Page 21 for more information!

847-455-0188



Square Strut Washers







Application: These 1/4" thick strut washers are used to secure strut fittings and channel with nuts.

Advantages: Garvin Industries' strut washers are available painted green or with a zinc plated finish. Bolt sizes are available from 1/4"-3/4".

Field Names: Strut washers, square washers, saddle washers, stainless steel strut washers.

Material: Zinc Plated, Painted or Stainless Steel







					0144.040.0 1144.005	
Part Number	Outside Diameter	Bolt Size	Coating	Similar Products	SW-3/8-G IN USE	Std. Pkg.
						. ng.
SW-1/4	1-5/8"	1/4"	Zinc Plated	Cooper B-Line B2002N Unistrut P1062EG	Superstrut AB241-1/4PG Powerstrut PS619-1/4EG	100
SW-1/4-G	1-5/8"	1/4"	Green Painted	Cooper B-Line B2006RN Unistrut P1062GR	Superstrut AB241-1/4GR Powerstrut PS619-1/4GRN	100
SW-1/4-SS	1-5/8"	1/4"	304 Stainless Steel			
SW-3/8	1-5/8"	3/8"	Zinc Plated	Cooper B-Line B2012N Unistrut P1063EG	Superstrut AB241-3/8PG Powerstrut PS619-3/8EG	100
SW-3/8-G	1-5/8"	3/8"	Green Painted	Cooper B-Line B2016RN Unistrut P1063GR	Superstrut AB241-3/8GR Powerstrut PS619-3/8GRN	100
SW-3/8-SS	1-5/8"	3/8"	304 Stainless Steel			
SW-1/2	1-5/8"	1/2"	Zinc Plated	Cooper B-Line B2022N Unistrut P1064EG	Superstrut AB241-1/2PG Powerstrut PS619-1/2EG	100
SW-1/2-G	1-5/8"	1/2"	Green Painted	Cooper B-Line B2026RN Unistrut P1064GR	Superstrut AB241-1/2GR Powerstrut PS619- 1/2GRN	100
SW-1/2-SS	1-5/8"	1/2"	304 Stainless Steel			
SW-5/8	1-5/8"	5/8"	Zinc Plated	Cooper B-Line B202-1ZN Unistrut P1964EG	Superstrut AB241-5/8PG Powerstrut PS619-5/8EG	100
SW-5/8-G	1-5/8"	5/8"	Green Painted	Cooper B-Line B202-1GRN Unistrut P1964GR	Superstrut AB241-5/8GR Powerstrut PS619-5/8GRN	100
SW-5/8-SS	1-5/8"	5/8"	304 Stainless Steel			
SW-3/4	1-5/8"	3/4"	Zinc Plated	Cooper B-Line B202-2ZN Unistrut P2471EG	Superstrut AB241-3/4PG Powerstrut PS619-3/4EG	100
SW-3/4-G	1-5/8"	3/4"	Green Painted	Cooper B-Line B202-2GRN Unistrut P2471GR	Superstrut AB241-3/4GR Powerstrut PS619-3/4GRN	100
SW-3/4-SS	1-5/8"	3/4"	304 Stainless Steel			
SW-2-3/8	2"	3/8"	Zinc Plated	2" square for 3/8" bolt		100
SW-2-1/2	2"	1/2"	Zinc Plated	2" square for 1/2" bolt		100
SW-2-5/8	2"	5/8"	Zinc Plated	2" square for 5/8" bolt		100
SW-2-3/4	2"	3/4"	Zinc Plated	2" square for 3/4" bolt		100

garvinindustries.com

Anchors



EZ Anchor Kits





KIT8EZ (50 Sets)





KIT10PAK (100 Sets)

Application: These anchor kits are used to mount boxes, hangers and various clamps on drywall or plaster walls.

Advantages: Garvin Industries' EZ anchor kits provide all components necessary to complete cost effective fastening installations.

Field Names: Easy anchors, bantam plugs, EZ anchors, sure wall anchors, zip anchors, quick anchors, the bat anchors, EZ kits.



EZ ANCHOR INSTALLED

Number	Description	Pkg.
KIT8EZ	# 8 x 1-1/2" Drywall & Plaster EZ Anchor Kit (50 Anchor/Screw Sets)	1
KIT10PAK	# 10 x 1" Screws with Plastic Anchors & Masonry Drill Bit (100 Anchor/Screw Sets)	1

Go Green on the Jobsite!

Energy Efficient Temporary Work Light

- 105 watt high-output compact fluorescent lamp offers 80% energy savings over traditional metal halide
- Very light-weight—2 lbs.
- Versatile snap hook design easily attaches to many structural members
- Standard box knockouts allows hard wire with pipe or flex cable wiring options
- No ballast in fixture means no replacement costs later to fix a bad ballast
- Gasketed covers and sealed knockouts are great for damp locations
- Premium high visibility "green" powder coating



See Page 371 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

Lead Anchors (Machine Screw)



Application: These expansive, screw anchors are used in walls to provide a threaded wall insert for mounting various boxes, hangers and straps. They are not to be used in ceilings. Lead anchor set tools are used to forcibly strike threaded anchors and set them in pre-drilled holes. Striking the anchors causes them to expand, securely wedging them in walls. When bolts and screws are inserted they further expand the anchors, providing a sturdy, secure fastening point on solid walls.

Advantages: Garvin Industries' lead anchors provide a quick, convenient and economical way to insert a threaded fastening point in a solid block wall.

Field Names: Caulking anchor, rawl plug, caulk in anchor, machine screw anchor, tap in anchor, tamp it anchor, lead anchor, AJ anchors.

Material: Lead & Steel



AJTL1420 IN USE

Part Number	Description	Size	Std. Pkg.
AJ1420	Anchors & Set Tool	1/4"	100
AJ3816	Anchors & Set Tool	3/8"	50
AJ1213	Anchors & Set Tool	1/2"	50
AJTL1420	Set Tool Only		1
AJTL3816	Set Tool Only		1
AJTL1213	Set Tool Only		1

garvinindustries.com

Anchors



Drop-in Anchors & Set Tools



Application: These expansive, drop-in, screw anchors are used in solid walls to provide a threaded anchor point for fastening boxes, hangers and conduits to solid walls. Garvin Industries' drop-in anchors are of a steel construction that can be used in walls or ceilings to mount various boxes, hangers and straps.

Advantages: Garvin Industries' drop-in anchors and set tools are of a steel construction that can be used in walls or ceilings to mount various boxes, hangers and straps.

Field Names: Drop in anchors, wall anchors, set anchors, screw anchor expanders.

Material: Steel



DI1420/DITL1420 IN USE

Part Number	Description	Size	Std. Pkg.
DI1420	Anchors & Set Tool	1/4"	100
DI3816	Anchors & Set Tool	3/8"	50
DI1213	Anchors & Set Tool	1/2"	50
DITL1420	Set Tool Only		1
DITL3816	Set Tool Only		1
DITL1213	Set Tool Only		1

Cover Unused Can Lights

Recessed Can Light Covers

No Tools Required - INSTALLS in 30 Seconds

- · Eliminates heat loss through can light holes
- Tapered edge and smooth white finish blend with ceiling surface
- · Safely covers abandoned can lights
- Multiple sizes for any can light diameter up to 12"



See Page 372 for more information!



Part Number	Size	Std. Pkg.
HWS1420	1/4-20	100
HWS3816	3/8-16	100

Application: These hollow-wall anchor sets are used to anchor light- and medium-duty loads in hollow walls. When inserted in wall and tightened, they collapse and provide a sturdy attachment hole for screws and bolts.

Advantages: Garvin Industries' hollow-wall anchor sets provide a quick and economical installation when a fastening point is needed in hollow walls.

Field Names: Hollow wall anchor set.

Material: Steel

Quick Shot Bridle Rings

Ready! Aim!! Hang!!!

Quick Shot:

- 1-1/2", 2", and 4" sizes available for multiple cable bundles
- Comes with or without saddle for data and fiber optic cable installs
- Concrete nail and washer combo fits most manufacturer's powder actuated fastening tools

Standard Style:

- Standard bridle ring available 1/2" to 4" with wood screw or machine screw threads.
- Bridle rings with toggle wing set for hollow walls also available
- 1/4"-20 and 10-24 machine threads or wood screw also available



See Page 290 for more information!



Versatile Industrial Fixture Hanging!

Swivel Fixture Hangers

Quickly Install Fixtures, Exit Signs, Cameras, and Other Devices in Industrial Settings

- Grounding swivel cover: cover & attached swivel pivot hub are bonded to help prevent the risk of accidental shock
- 4-11/16" swivel cover: Fits standard 4-11/16" boxes
- · All items are great for replacing existing fixtures in industrial settings
- Hands free swivel cover: hinged door allows quick installation & wiring in one easy step
- · For square and octagon boxes
- Cuts installation time by 50%
- 4" octagon and square version fits standard boxes
- Accommodates 1/2" or 3/4" conduit



See Page 21 for more information!

End Wall Obstruction Headaches

4" Round "Cut-In" Pan Boxes

- Low profile box no thicker than the DRYWALL!
- Guaranteed to mount in front of plumbing pipes, HVAC Duct & PVC already in the wall opening!
- Add new dome camera, sconce lights, alarms, etc. to any wall

Part #: 56111-OW



See Page 5 for more information!

Installs Before or After Wire Pull!

Split Collar Ground Bushings

Installs before or after wire pull (unlike solid bushings)

- Insulated throat to protect wires
- Extra tight clamp-on design ensures solid ground
- · Adjustable lug allows versatile positioning on pipe
- 1/2" 6" sizes available
- · Manufactured from rugged die cast zinc
- Patented



See Page 172 for more information!



Wiring Assemblies

847-455-0188 FAX 847-455-0334 garvinindustries.com

Chicago Plenum Wiring Assemblies





Application: These wiring assemblies are installed in "air plenum" ceilings to distribute power to Chicago plenum lighting fixtures. The 6-foot long, corrugated steel tubing provides a sealed flexible raceway to prevent the penetration of air, vapor, and dust.

Advantages: Garvin Industries' Chicago Plenum wiring assemblies create an "air tight" sealed, wire raceway to prevent smoke from exiting box enclosures or conduits. The preassembled components cut labor hours significantly and enhance safety.

Field Names: Plenum whip, air tight whip, smoke tight whip, Chicago plenum wire, Chicago plenum tubing, Chicago plenum conduit, plenum flex whip.

Material: Steel, Copper & Die-cast Zinc



PWHP-2A IN USE


Chicago Plenum Wiring Assemblies Fit 1/2" Box Knockouts!

Part Number	Size	# Conductors	Wire Colors	Wire Gauge	Std. Pkg.
PWHP-2A	3/8"	2	Black, White	# 14 STR	25
PWHP-2A12	3/8"	2	Black, White	# 12 STR	25
PWHP-3A	3/8"	3	Black, White, Green	# 14 STR	25
PWHP-3A12	3/8"	3	Black, White, Green	# 12 STR	25
PWHP-4A	3/8"	4	Black, White, Green, Red	# 14 STR	25
PWHP-4A12	3/8"	4	Black, White Green, Red	# 12 STR	25
PWHP-5A	1/2"	2	Black, White	# 14 STR	25

Wiring Assemblies



Chicago Plenum Flexible Metal Tubing & Connectors (No Wires)

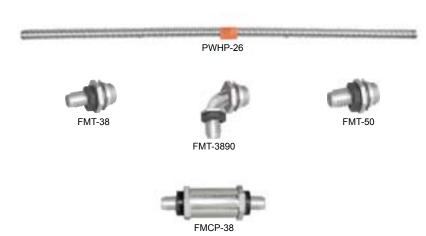

Application: These Chicago Plenum conduits are installed in "air plenum" ceilings to distribute power to lighting fixtures. The various length of corrugated steel tubing interlocks and creates a sealed air, vapor, and dust resistant flexible metal conduit.

Advantages: Garvin Industries' Chicago Plenum tubing creates an "air tight" sealed, wire raceway to prevent smoke from exiting box enclosures or conduits. The preassembled components cut labor hours by 50%!

Field Names: Plenum whip, air tight whip, smoke tight whip, Chicago plenum whip.

Material: Steel, Copper & Die-cast Zinc



PWHP-18 IN USE



FMT-38 IN USE



FMCP-38 IN USE

Part Number	Tubing Length	Size	Std. Pkg.
PWHP-12	12"	3/8"	25
PWHP-14	14"	3/8"	25
PWHP-18	18"	3/8"	25
PWHP-26	26"	3/8"	25
PWHP-36	36"	3/8"	25
PWHP-48	48"	3/8"	25
PWHP-72	72"	3/8"	25
PWHP-5	72"	1/2"	25
FMT-38	Straight Gasketed Connector	3/8" (Fits 1/2" Knockout)	100
FMT-3890	90° Gasketed Connector	3/8" (Fits 1/2" Knockout)	100
FMT-50	Straight Gasketed Connector	1/2" (Fits 1/2" Knockout)	100
FMCP-38	Plenum Tubing Coupling	3/8"	25
FMCP-50	Plenum Tubing Coupling	1/2"	25





Job Site Temporary Work Lights



Shatter

Guard

Part







TLSG





Application: These job-site work lights provide an economical and safe means of temporarily lighting a job site. They are designed to cover a large area and provide mobility due to their light weight.

Advantages: Garvin Industries' job-site work lights are of a heavy-duty construction to increase durability and safety. They also allow a huge 80% energy savings over traditional metal halide lights. *Go green today* with Garvin Industries' energy efficient, temporary work lights!

Field Names: Temp lights, temporary work lights, cage

lights

Material: Steel





TL105CF INSTALLATION

Std.

Number	Description	Pkg.				
TLF	Job site caged light fixtures for medium base lamps comes complete with two connectors, wire leads and sealed box. Painted high visibility green. Direct wire, no ballast needed!					
TL105CF	Job site temporary light fixtures with 105 watt high output compact fluorescent lamp. Gasketed, sealed box prevents dust, dirt and debris from compromising connections. Snap hook on top allows an easy install on multiple structural members and swings when hit in high abuse areas. The caged design protects the glass on lamps. They are powder coated green for high visibility. Additionally, wire leads on fixtures allow a quick connection every time! No ballast replacement needed. Direct wire! Light weight for ease of handling in awkward positions.	1				
TL105CFW	Completely wired with cord and plug ready to use! Job site temporary light fixtures with 105 watt high output compact fluorescent lamp. They feature a jacket that is 16 gauge with 3 conductors, a 6 ft. SJTW rated cord and a standard molded plug. Gasketed, sealed box prevents dust, dirt and debris from compromising connections. Snap hook on top allows an easy install on multiple structural members and swings when hit in high abuse areas. The caged design protects the glass on lamps They are powder coated green for high visibility. Additionally, wire leads on fixtures allow a quick connection every time! No ballast replacement needed. Direct wire! Light weight for ease of handling in awkward positions.					
TLSG	Shatter guard helps prevent accidental breakage of the lamp from open end of cage inside the temporary light fixture.	1				
CLS	These lamp sockets are installed to safely attach a light bulb to an electric current enabling the light bulb to illuminate.	10				
TLH	Snap hook carabiner for temp light.	10				



Lamp Holders













Std.

Pkg.

50

50

50

50

50

50

Application: These lamp holders are mounted on octagon boxes or raised rings where a convenience light is needed.

Advantages: Garvin Industries' lamp holders have a quick and easy installation in any location.

Field Names: Porcelain lampholders, lamp holders, light sockets, round light holder, convenience socket, keyless lampholder, keyless socket.

Material: Porcelain, Steel or Plastic



PF-52 IN USE

Recessed Can Light "Blank Up" Covers

Material

Porcelain

Porcelain with

Pull Chain

Porcelain with

Duplex Receptacle & Pull Chain Steel & Porcelain, Vandal Resistant

> Solid Riveted Assembly **Plastic**

> > Plastic with

Pull Chain









CBC-600 INSTALLATION IN ABANDONED RECESSED CAN LIGHT OPEN HOLE

Part Number	Edge Taper	Outside Diameter	Holes C-C	Used With	Special Features	Std. Pkg.
CBC-600	1/4"	6"	No Holes	Abandoned 4" & 5" Recessed Can Light Fixtures	White. Spring tension keeps cover tight on ceiling surface. Hides ugly holes of abandoned recessed light fixtures in ceilings. Plastic hub threads safely into medium socket.	25
CBC-800	1/4"	8"	No Holes	Abandoned 6" & 7" Recessed Can Light Fixtures	White. Spring tension keeps cover tight on ceiling surface. Hides ugly holes of abandoned recessed light fixtures in ceilings. Plastic hub threads safely into medium socket.	25
CBC-1200	1/4"	12"	No Holes	Abandoned 8" & 10" Recessed Can Light Fixtures	White. Spring tension keeps cover tight on ceiling surface. Hides ugly holes of abandoned recessed light fixtures in ceilings. Plastic hub threads safely into medium socket.	25

Part

PF-50

PF-51

PF-52

PL-50

PL-51

PF-51-DU

Number



Fixture Stems & Canopy Sets

847-455-0188 FAX 847-455-0334 garvinindustries.com

Light Fixture Stems & Nuts



Application: These light-fixture canopy sets and fixture extension stems are used in finished spaces to hang lighting fixtures from ceilings.

Advantages: Garvin Industries' light-fixture canopies are a quick and easy way to hang fixtures and redecorate any space.

Field Names: Canopy stems, fixture stems, threaded nipples, conduit fixture stems, conduit extenders, pipe extensions, fixture swivel ball set, canopy sets, fixture canopy set.

Material: Steel With a Powder-coated Finish

Part Number	Diameter	Length	Color	Std. Pkg.
LFS-375-12WH	3/8"IPS	12"	White	1
LFS-375-18WH	3/8"IPS	18"	White	1
LFS-375-24WH	3/8"IPS	24"	White	1
LFS-375-36WH	3/8"IPS	36"	White	1
LFS-375-48WH	3/8"IPS	48"	White	1
LFS-375-NUT	3/8"IPS	Stem Fixture Nut		1
LFS-16WHT	3/8" IPS	Coupler	White	1

^{*} Additional lengths, 1/4" IPS, 1/2"IPS and other colors are available on a special-order basis. CALL FOR PRICING!

Canopy Sets





Part Stem Std. **Used With** Pkg. Number Color Description C500 3/8"IP White For hanging fluorescent lighting and exit signs 1 C545 3/8"IP White 45° swivel canopy set for hanging fluorescent lighting and exit signs C545ADJKIT 3/8"IP White Adjustable field cut swivel kits with tools included

Fixture Accessories



Fixture Extensions & Supports



Part Number	Size	Description	Std. Pkg.
FXL50	1/2"	Male Loop used with Chain	50
FXE1116	11/16"	Fixture Extension	50
FXE0100	1"	Fixture Extension	50
FXE0138	1-3/8"	Fixture Extension	50
FXS1838	1/8" Female to 3/8" Male	No Bolt Stud	50
LFP	1/4" Threaded Hole	No Box Screw On Fixture Plate	50
CFN18	1/8"	Conduit Fixture Nut	50
CFN14	1/4"	Conduit Fixture Nut	50
CFN38	3/8"	Conduit Fixture Nut	50
CFN38X	3/8" Oversized	Conduit Fixture Nut	50

Application: These accessories are used to aid the installation of light fixtures for finished requirements.

Advantages: Garvin Industries' fixture accessories allow a quick and easy installation.

Field Names: Fixture studs, fixture nut, fixture stem, hickeys, fixture extensions.

Material: Steel



I ED

Perfect Device Alignment Every Time!

Square to Round Ring With Pual Mounting Tabs

Mounting Tabs are Always Perfectly Aligned for Signs, Fixtures, or Cameras...



See Page 52 for more information!




Fixture Accessories

847-455-0188 FAX 847-455-0334 garvinindustries.com

Chains, Hooks & Plates













Application: These high-bay fixture hooks, chains and plates are installed on boxes or structural members to aid in hanging a variety of linear and high-bay light fixtures.

Advantages: Garvin Industries' chain and hook fixtures provide a safe and economical way to hang lights in industrial settings. Garvin Industries' unique cover allows T5 high-bay fixtures to be mounted on any style of existing boxes with hooks and chains. There is no need to re-pipe and wire when changing fixtures from high-bay to linear fluorescent.

Field Names: Fixture hook, fixture conversion plate.

Material: Steel, Die-cast Zinc



LFCOV IN USE

Part Number	Description	Similar Products / A	Application	Std. Pkg.
JC-100	# 12 Single Loop Chain	Metallics JC12 Minerallac JC12100	Cully 72012	1 CTN/100 ft.
SH-11	# 11 Gauge S Hook	Metallics JSK1 Minerallac	Cully 70016	100
SH-12	# 12 Gauge S Hook	Metallics JSK2 Minerallac SH212	Cully 70020	100
VBKT	V Bracket	"V" brackets mount to n fixtures with Jack chain	netal ceiling decks to hang or cables.	100
CPMH1	0 ,	sed to hang light fixtures from mun high-abuse areas. 3/4" thread,	ultiple structural members. Preinstalled set screw helps locknut included.	25
LFCOV	fluorescent fixtures can be m	nounted on the same box. The ho	achment points and knockouts so linear high bay les on the outside of the cover are designed for "S" hooks res replace metal halide or mercury vapor fixtures in industri	25 ial settings.

Energy Saving Lamps



High Output **Compact Fluorescent Lamps**









Application: These lamps are used to replace standard, inefficient bulbs in commercial and industrial light fixtures. They are suitable for indoor or outdoor use and have a silent, flicker-free, rapid start.

Advantages: Garvin Industries' lamps come in various wattages and color temperatures and provide an 80% energy savings over traditional incandescent lamps. They operate reliably down to (-13°F) and can be used in medium- or mogul-base fixtures.

Field Names: Energy saving light bulbs, energy saving lamps, compact fluorescent lamps, compact fluorescent light bulbs.



C105651MED IN USE

Part Number	Watts	Color Temperature	Base Type	Operating Voltage	Std. Pkg.
C105651MED	105	6500K	Medium	120	1
C105652MOG	105	6500K	Mogul	277	1
C105351MED	105	3500K	Medium	120	1
C85641MED	85	6400K	Medium	120	1
C85501MED	85	5000K	Medium	120	1
C85411MED	85	4100K	Medium	120	1
C85271MED	85	2700K	Medium	120	1
MOGADP		converts oversized "mogul' base lamps and bulbs.	base fixtures so they	can be used with	1
MOGENLG	Adapter	converts medium base fixtu	ures to accept mogul si	tyle bulbs.	1



Fire Stop & Penetration Sealing

847-455-0188 FAX 847-455-0334 garvinindustries.com









Part Number	Description	Size	Std. Pkg.
FSCLR2	Collar	2"	1
FSCLR3	Collar	3"	1
FSCLR4	Collar	4"	1
FSPLW	Pillow	8" x 4" x 2"	1
FSPTY	Putty Stick	18 cubic inches	1
FSPAD	Putty Pad	7" x 7" x 1/8"	1
FSCLK10	Caulk	10.3 oz.	1
FSCLK28	Caulk	28.0 oz.	1
CONC	CRETE HOLE SEALS, 4-HR F	RE RATING WITH FOAM	
FSCS-300	For 3" Dia. Hole	For 3-1/2" Thick Slab	1
FSCS-400	For 4" Dia. Hole	For 3-1/2" Thick Slab	1
FSCS-500	For 5" Dia. Hole	For 3-1/2" Thick Slab	1

Application: These fire-stop collars are ready to use fire-stop devices that are made of galvanized inserts for firestopping combustible pipes. These fire-stop pillows are used on wall and floor openings through fire separations where temporary or permanent fire stops are required. Pillows are ideal where cable retrofitting is frequent or anticipated. Fire-stop caulk is a low cost noncombustible material that is used to fill the space around wires, pipes, ducts and other mechanical items penetrating steel and wood-framed construction. These fire stop putty pads are designed to protect electrical outlet boxes.

Advantages: Garvin Industries' fire-stop pillows allow for quick and clean single product installation. Pillows are self-supporting – no wire lath or mesh is required. Garvin Industries' fire-stop caulk fulfills fire-blocking requirements for resuming the integrity of non-rated penetrations through ceiling and floor openings.





FSCLK10 IN USE

FSPAD IN USE

CORE SEAL PLATE INSTALLATION

It takes less than a minute!



1) Adjust nut and bracket down the threaded rod.



Insert bracket and the threaded rod in hole.



3) Tighten in place with supplied Allen wrench



 Inject flame-retardant foam to fill CPS chamber in floor.





CPS Under-floor View


Fools & Installation

FAX 847-455-0334

Fire Stop & **Penetration Sealing**




Device Inserts





FS2GFI





FS2TOG

Application: These device inserts are installed around electrical devices or in boxes to create a fire stop that seals out flames.

Advantages: Garvin Industries' device inserts significantly impede the progress of fires from exiting electrical boxes or enclosures.

Field Names: Box fire-stop pads.



FS1DUP

Part Number	For Use On	Std. Pkg.
FS1G	1 Gang Box or Mud Ring	10
FS2G	2 Gang Box or Mud Ring	10
FS1TOG	1 Gang Toggle Cover	10
FS2TOG	2 Gang Toggle Cover	10
FS1GFI	1 Gang Decorative Cover	10
FS2GFI	2 Gang Decorative Cover	10
FS1DUP	1 Gang Duplex Cover	10
FS2DUP	2 Gang Duplex Cover	10

Duct Seal





Application: This duct seal is used to seal around junction boxes, flashing and service entrances.

Advantages: Garvin Industries' duct seal is a permanently soft, nontoxic compound that can be painted almost immediately after application. It will also not affect other plastic materials or corrode metals.

Field Names: Duck seal, duct seal, duct filler.



Part Number	Size	Similar Products	DS5 IN USE	Std. Pkg.
DS1	1 lb.	Thomas & Betts DX-1 Bridgeport DS-100	Ideal 31-601 EGS Appleton DUC-1	5
DS5	5 lb.	Thomas & Betts DX-5 Bridgeport DS-500	Ideal 31-605 EGS Appleton DUC-5	5



Job Site Temporary Power

847-455-0188 FAX 847-455-0334 garvinindustries.com

Job Site Temporary Work Lights







Application: These job-site work lights provide an economical and safe means of temporarily lighting a job site. They are designed to cover a large area and provide mobility due to their light weight.

Advantages: Garvin Industries' job-site work lights are of a heavy-duty construction to increase durability and safety. They also allow a huge 80% energy savings over traditional metal halide lights. *Go green today* with Garvin Industries' energy efficient, temporary work lights!

Field Names: Temp lights, temporary work lights, cage

lights

Material: Steel

	TEI TEI03CI W	
Part Number	Description	Std. Pkg.
TLF	Job site light fixtures for medium base lamps, with two connectors, wire leads and sealed box. Direct-wire, no ballast needed!	1
TL105CF	Job site temporary light fixtures with 105 watt high output compact fluorescent lamp. Gasketed, sealed junction box, carabiner on top for easy install, powder coated green, direct-wire!	1
TL105CFW	Completely wired with cord and plug ready to use! Job site temporary light fixtures with 105 watt high output compact fluorescent lamp. 6' cord is 16 gauge with 3 conductors, SJTW rated with a standard molded plug, gasketed junction box. Carabiner on top for easy install, powder coated green, direct-wire!	1

Industrial Power Adapters




IPA4D





IPA6D







IPA8G

Part Number	No. of Outlets	Device Style	Amps	Std. Pkg.
IPA4D	4	DUPLEX	20	5
IPA4G	4	GFCI PROTECTED	20	5
IPA6D	6	DUPLEX	20	5
IPA6G	6	GFCI PROTECTED	20	5
IPA6GWP	6	GFCI - WEATHERPROOF	20	5
IPA8D	8	DUPLEX	20	5
IPA8G	8	GFCI PROTECTED	20	5

Application: These industrial power adapters allow multiple electric appliances to be energized from a single line.

Advantages: These power adapters, prewired with cord & plug, allow mutiple appliances to be energized in many locations. Great mobility in industrial settings. Helps reduce plugging & unplugging of devices as is common with single or three-socket extension cords.

Field Names: Industrial power strip, power adapter, power plugs, power outlets.

Job Site Temporary Power



GFI Protected Power Cords



Application: These GFI-protected power cords are used to energize power tools and other electrical appliances.

Advantages: Garvin Industries has various current capabilities and cord lengths available for any requirement.

Field Names: Power cords, extension cords, triple-tap extension cords, multi-tap extension cords, power plug.



GFI153



GFI15100





GFI202



GFI203

NOTE: 20 Amp GFI cords will not connect to standard, 15 Amp extension cords.


	Part Number	AMPS	Style	Length	Std. Pkg.
	GFI153	15	3 Outlets	2 ft.	5
Tools & Installation	GFI1525	15	3 Outlets	25 ft.	5
nstal	GFI1550	15	3 Outlets	50 ft.	5
Is & I	GFI15100	15	3 Outlets	100 ft.	5
Too	GFI202	20	In Line GFCI NEMA L5-20	2 ft.	5
	GFI203	20	In Line GFCI NEMA L5-20	3 ft.	5
	GFI2025	20	In Line GFCI NEMA L5-20	25 ft.	5
	GFI155A	15	5 Outlet Adapter		5
	GFI15QB	15	4 Outlet Box	6 ft.	5
	GFI15PLUG	15	Attachable GFCI Male Plug		5



847-455-0188 FAX 847-455-0334 garvinindustries.com

Wire Markers & Pulling Aids







MRK1 MR Patents US 6,311,637 & US 5862774

Application: These numbered and color-coded electrical wire markers are used as a marking method and system for identifying wire associated with a particular electrical circuit.

Advantages: Garvin Industries' wire markers include an identifier and color indication that is associated with a particular color or wire color in a specific electrical circuit.

Field Names: Wire markers, cable markers, wire labels, wire



MRK1 IN USE

Part Number	Description	Std. Pkg.
MRK	Garvin Industries' black & white wire markers are used to to identify wires associated with a particular circuit (1-45).	10
MRK1	Garvin Industries' 120/240 volt, color coded wire marker books include an identifier and color indication that is associated with a particular color or wire color associated with that particular electrical circuit. Three phase wire markers comply with Chicago and NEC codes.	10
MRK2	These blank, self laminating, write-on wire markers allow the installer flexibility while marking and identifying wires.	10
PULPAL	Universal box cover with rollers to aid in pulling wires through conduit and boxes.	10

Cover Ugly Ceiling Holes!

6" Recessed Can Light Blank Up Canopy

Blank Ceiling Plate Attaches to Existing Fixture Eliminating the Open, Ugly Abandoned Holes in Ceiling

- Plastic insert and attached spring screw directly into existing fixture replacing the old light bulb
- The recoil action of the spring raises the canopy up against the ceiling and covers the old, ugly opening with a beautiful smooth surface that blends with existing ceiling surface
- 7" diameter covers drywall imperfections and cut hole ragged edges
- · Ceiling white powder coated finish
- · Custom colors available upon request



See Page 19 for more information!



Wire Lubrication



Application: Wire lube is inserted in conduits or on wires to reduce drag as they are pulled through steel conduits.

Advantages: Garvin Industries' wire lubrication provides corrosion protection and lubrication in the core and inside wires and on the exterior surfaces to reduce friction as the wires are moved.

Field Names: Wire lube, cable pull compound, gorilla snot, wire pulling lubricant, cable pulling lubricant, wire gel, wire slick.



PUL1Q IN USE

Part Number	Туре	Size	Similar Items		Std. Pkg.
PUL1Q	Wire Lube	1 Quart Tube	Ideal 31-358 3M WLX-97	NSI SWL1Q Greenlee CRM-0	1
PUL1G	Wire Lube	1 Gallon Pail	ldeal 31-351 3M WLX-1	NSI SWL1G Greenlee CRM-1	1
PUL5G	Wire Lube	5 Gallon Pail	ldeal 31-355 3M WLX-5	NSI SWL-5G Greenlee CRM-5	1

Versatile Hanging!

Tools & Installation

Wide Mouth Heavy Duty Beam Clamps

- Fits 1/4", 3/8", and 1/2" threaded rods and fasteners
- Stamped steel or malleable iron versions available
- Spring steel, standard style electrical, top beam clamps and hammer on versions available
- Spring steel, light duty clamps accommodate 10-24 or 1/4'-20 rod
- Custom beam clamps made to your specifications
- · Let us design a solution for you



See Pages 310-312 for more information!



847-455-0188 FAX 847-455-0334 garvinindustries.com

Flexible Metal Conduit Pulling Tools



Part Number	Fits Flex Conduit Size	Std. Pkg.
FP38	3/8"	25
FP50	1/2"	25
FP75	3/4"	25

Application: These flexible-metal conduit pulling tools screw onto the exterior of MC cable and flexible-metal conduits providing a hook with which to easily pull cables through the walls and ceilings.

Advantages: Garvin industries' flexible-metal conduit pulling tools grab flexible-metal conduits and easily glide through hollow and insulated walls and ceilings. The spring-steel construction tightly grabs the flex conduit without damaging the raceway.

Field Names: Wire-pulling tool, wire-pulling aide, wire-pulling pal.

Material: Zinc Plated Spring Steel



FP38 SCREWS ON FLEX



FP38 PULLING FLEX CABLE

Custom Manufactured Solutions!

We Specialize in Unique Custom Solutions!

Send Us Your Product Idea, Sketch, Blueprint or Sample and Let Our Engineers Develop a Solution That is Right for You!

- Metal stamping and fabrication
- Die casting and machining
- Drilling, tapping, threading, bending, and prefab assemblies
- Full line prefab services
- · Patent and royalty agreements
- Stocking programs available for qualifying products





Conduit Measuring Tapes, Pull Line & Pull Tapes



Application: These tapes are blown into conduits to accurately measure and pull wires and cables. They may also be used in open ceilings or walls.

Advantages: Garvin Industries' conduit measuring tape allows the installer to fish and measure conduit runs in one operation. They feature permanent printed measurements every foot from 0 to 3,000 ft. They have a strong waterproof polyester construction. Garvin Industries' pull tape has a durable and stretch resistant construction for easily pulling and installing wire and fiber optic cables in PVC and HDPE ducts. Garvin Industries' pull tapes are factory lubricated to reduce burn-through in inner duct and has easy-to-read footage markings for a quick and accurate measurement.

Field Names: Pull line, jet line, blow line, pull twine, pull rope, twine in bucket, pull tape, pulling tape, conduit measuring tape, mule tape, flat strap, slick tape and slick line.

Material: Polyester & Polyolefin



	Part Number	Put Up	Length	Tensile Strength	Description	Std. Pkg.
Ilation	CMT-3000	Spool In Box	3,000 ft.	160 lb.	Conduit measuring tape	1
Insta	PL-230	Pail	6,500 ft.	230 lb.	Pull line in a center dispensing pail	1
	PL-500	Pail	2,200 ft.	500 lb.	Pull line in a center dispensing pail	1
ŏ	PT-1250-3K	Spool In Box	3,000 ft.	1,250 lb.	Polyester pulling tape 1/2" wide	1
	PT-1250-5K	Spool In Box	5,000 ft.	1,250 lb.	Polyester pulling tape 1/2" wide	1
	PT-1800-3K	Spool In Box	3,000 ft.	1,800 lb.	Polyester pulling tape 5/8" wide	1
	PT-1800-5K	Spool In Box	5,000 ft.	1,800 lb.	Polyester pulling tape 5/8" wide	1
	PT-2500-3K	Spool In Box	3,000 ft.	2,500 lb.	Polyester pulling tape 3/4" wide	1
	PT-2500-5K	Spool In Box	5,000 ft.	2,500 lb.	Polyester pulling tape 3/4" wide	1



847-455-0188 FAX 847-455-0334 garvinindustries.com

Conduit Benders & Pipe Marking Tools



Application: These conduit benders are used on EMT pipes to create bends in many shapes so wiring can be run to destination appliances requiring electric power.

Advantages: Garvin Industries' conduit benders have a non-slip, contoured pedal design to provide additional leverage during use. They have cast-in markings for stub-ups, saddle bends, back-to-back bends, and head-up or down bending. They also have a strong, stable square-hook design.

Field Names: Bender heads, conduit benders, Chicago bender heads.

Material: Aluminum, Steel or Malleable Iron



BHSS50 & HNDL IN USE

Part Number	Pipe Size	Material	Attachment Style	Color	Description	Std. Pkg.
BH50	1/2"	Aluminum	Threaded	Gray	Short radius bender heads.	1
BHSS50	1/2"	Malleable Iron	Set Screw	Green	Short radius bender heads.	1
HNDL		Steel	Threaded	Yellow	Steel tube handle for use with all bender heads.	1



Electrical Tape & Duct Tape



Application: These PVC electrical tapes are used to insulate exposed electrical wires.

Advantages: Garvin Industries' PVC electrical tape helps prevent short circuits and shock hazards.

Field Names: PVC tape, electrical tape, phase tape, electricians tape, jap wrap.

Material: PVC

0	
TAPEYE	TAPEDT

Part Number	Size	Color	Similar Items		Std. Pkg.
TAPEBK	3/4" X 60 ft.	Black	Cully 94315 Metallics	Dottie ST34BLK	10
TAPEBR	3/4" X 60 ft.	Brown	Cully 94361 Metallics	Dottie PT34BR	10
TAPEBU	3/4" X 60 ft.	Blue	Cully 94366 Metallics	Dottie PT34BL	10
TAPEGN	3/4" X 60 ft.	Green	Cully 94365 Metallics	Dottie PT34G	10
TAPEGY	3/4" X 60 ft.	Gray	Cully 94368 Metallics	Dottie PT34GR	10
TAPEOR	3/4" X 60 ft.	Orange	Cully 94363 Metallics	Dottie PT340	10
TAPERD	3/4" X 60 ft.	Red	Cully 94362 Metallics	Dottie PT34R	10
TAPEWH	3/4" X 60 ft.	White	Cully 94369 Metallics	Dottie PT34Y	10
TAPEYE	3/4" X 60 ft.	Yellow	Cully 94364 Metallics	Dottie PT34Y	10
TAPEDT	2" X 60 yd.	Gray	Cully 94396 Metallics	Dottie DT260	10



Paints & Cleaning Accessories

847-455-0188 FAX 847-455-0334 garvinindustries.com

Spray Paints













PNTOR







for both outdoor and indoor electrical applications.

Advantages: Garvin Industries' spray paints are long lasting, available in multiple colors and can be used on steel, plastic and concrete.

Application: These variously-colored spray paints are used

Field Names: Spray paint



Part Number	Color	Std. Pkg.
PNTBK	Black	10
PNTBR	Brown	10
PNTBU	Blue	10
PNTGN	Green	10
PNTOR	Orange	10
PNTPU	Purple	10
PNTRD	Red	10
PNTWH	White	10
PNTYE	Yellow	10

Paints & Cleaning Accessories



Wipers & Rags





Application: These wipers and rags are used for any cleaning needs that may arise up during installations.

Advantages: Garvin Industries' wipers and rags provide an economical way to clean wires, boxes and conduits.

Field Names: Wiping rags, wipers, rags.

Part Number	Description	Similar Products		Std. Pkg.
SCRUBS	Scrubs in a bucket	Cully 37440 Metallics WSCB72	Klein 51425 Ideal	1
WRSS-10	Clean, sterilized, sweat shirt wipers, multiple colors, 10 lb. box	Cully Metallics	Klein Ideal	1
WRSS-25	Clean, sterilized, sweat shirt wipers, multiple colors, 25 lb. box	Cully 37590 Metallics BR025	Klein Ideal	1
PL-GARVIN	4 gallon utility pail, lid not included			1
PL-LID	Lid for 4 gallon utility pail			1

Prefab Device Shields!		
	ver Protects uring Drywall	
	evice In Seconds. move Device Screws!	
Rugged steel construction 2 depths available for devices or switches	Fits most manufacturer's commercial and residential devices Saves time and money	
Slides on and off in seconds	Reusable over time for added savings	See Page 113 for more information



Index by **Product Field Names**

847-455-0188 FAX 847-455-0334 garvinindustries.com

Color Deliver			0400 0 5		OD D. WELL T	=	DARLR	
1	NUMERICALS		2100 Cover Box 2100 Extension Ring	65 64	8B Box With Bracket 8B Box With J Bracket	11-17 12	BAPI Box Bar Hangers	225 254-256
100							S .	308
12.5 S. Left Falses Box Particle 4.5, 71.07 24.5 Box Covers 14.5 Covers 14					S .		•	362
11 lies Desp								362
110 Carg Divest Ring							•	111
18	•		•					309-314
18 Ban Leep	11B 1 Gang Plaster Ring	66						385 5
18 18 18 18 18 18 18 18								300
1885 1896 1897 1896							•	258-264
1910 Cores	-			334			•	258-264
110 Dept Doo								
1110 Despo Describe Dos								4, 7, 18
1111 Device Come 100	•				•			7, 18, 43, 65
110 Department 150 Depar								344 344
118 Desire Cover 69-70	•				•			344
1816 Extension Rings								344
116 Fire Airm Dox			4 Gang Cut In Box	88	8B Plenum Box	9,14	Blank Up Plate	18
118 Galaris Cover								232
118 Instinctional Cover					•			326-327
10 Author 10 A								326
118 Med Ring	11B Junction Box	58-63						326 327
18 Paris Pring 19 10 10 10 10 10 10 10								384
18 Penium Box 9.25, 33 90 Ammored Cable Connector 213 Boing Plate 4,1								112
18 Plenum Box								4,18, 54
118 Flerum Extension Rings			4" Square Box	8-25	90° BX Connector	213	Boingie Nuts	318
118 Flemum Sandwich 166 4 5 5 5 5 5 5 5 5 5					. •			
118 Flasted Surface Cover 677							ū	173-175
118 Randwich Plate		64						196-197 173-175
118 Square-Round Cover	11B Raised Surface Cover	69-70						53
118 Squiet Cours 0								65
13A	•				. 0			43, 65
1988			45° Armored Cable Connector	212	90° Metal Clad Cable Connector	208-213	Box Brackets	250-251
1900 Cang Plaster Ring								111
14/2 Connector							•	111
1000 1 Cang Pilester Ring								30, 39, 64 43, 65
1900 Deck	1900 1 Gang Mud Ring	46						44-45
1900 2 Gang Plaster King 50 45" Metal Clad Cable Connector								48, 95, 107
1900 Blank	_							283
1900 Box 23-42 45 548 Irgit Cornectors 2.04 A Bushings 75 Box Fire-Stop Pads			45° Saddle Connector	212	90° Handy Ells	189	Box Extender 13, 30, 39	, 64, 99-100
1900 Box With Cable Clamps					Α			
1900 Box With Cable Clamps					A Rushings	175		378
1900 Bracket Box 1900 Cover 43, 54-57 45 Box 23-41 AC Cable Box 28 Box Mounting Bar Hangers 254 250	1900 Box With Cable Clamps	29, 38						247 253
1900 Bracket Box With Clips	1900 Bracket Box					246		254-255
1900 Deck Box								250-255
1900 Deep Box With Fracket 38			4S Box Brackets	250-251	·		Box Mounting Rings	44-45
900 Deep Bracket Box 45 Bracket Box 26-36 35 Box Screws 35-25 Box Screws 35-2								48, 95
1900 Deep Bracket Box 36 45 Cover 43 55 Cover 44 55 Cover 55 Cover 56 Cover 55 Cover 56 Cover 55 Cover 56 Cover 55 Cover 56 Co								353-355
1900 Deep Bracket Box With Clips 37 4S Plenum Cover 43 Adjustable Depth Mud Cover 44 Box Separators 48, 95 and 1900 Deep Combo Box 32 4S Plenum Extension 30 Adjustable Depth Plaster Ring 49 Box Separators 48, 95 and 1900 Deep Extension Rings 39 5° Box 50 AMP Weather Proof Cover 232 All Tight Box 50 AMP Weather Proof Cover 232 Air Tight Box Extension Ring 30. 39 Box Support Bracket 246 Box 50 AMP Weather Proof Cover 232 Air Tight Box Extension Ring 30. 39 Box Support Bracket 246 Box 50 AMP Weather Proof Cover 232 Air Tight Whip 369-370 Bracket Box 240 Anchors 365 Bracket Box 369-370 Bracket Box 370 Bracket Box 3					,			48, 95, 107
1900 Deep Combo Box 32 45 Plenum Extension 30 Adjustable Depth Plaster Ring 49 Box Spacer Connectors 1900 Deep Extension Rings 39 5° Box	1900 Deep Bracket Box With Clips	37	_					48, 95, 107
1900 Deep Extension Rings 39 5" Box 58 Adjustable Grounding Bushing 172 Box Standoffs 246 246 247					Adjustable Depth Plaster Ring	49	·	145
1900 Deep Plenum Box 34 50 AMP Weather Proof Cover 232 Air Tight Box Extension Ring 30.39 Box Wall Bracket 248 248 249								253
1900 Deep Plenum Box 32-33 52 171 Box 31-40	•		5" Ceiling Box	11	,			248-255
1900 Deep Plenum Rings 39 55 Blank Cover 65 65 AJ Anchors 365 Blank Cover 365 Blank Cove	•							248-252
1900 Deep With Bracket 38 58 Box 58-63 All Threaded Rod 302 Bracketed J Box 303 304 55 Box 58-63 All Threaded Rod 302 Bracketed J Box 304 305 Bracketed J Box 307 Bracketed Masonry Box 307 Bracketed Masonry Box 307 Bracketed Masonry Box 308 Bracketed Masonry Box 309 Bracketed Masonr					0 1			26-36
1900 Deep With Metal Stud Bracket 36 55 Box Extenders 64 Angle Bracket 252,307 Bracketed Masonry Box 1900 Electrical Box 8-41 55 Bracket Box 61-63 Angle Bracket 307 Bracketed Outlet Box 1900 Extra Deep Fire Alarm Box 40 55 Brackets 250 Angle Hanger 307 Bracketed Outlet Box 1900 Extra Deep Fire Alarm Box 40 55 Cover 65 Angled Conduit Nipples 192 Breaker Lock Out 1900 Junction Box 8-41 55 Device Cover 69-70 Angled Connectors 137 Brick Box 1900 Mud Ring 46 55 Device Ring 66-67 Anti Short Circuit Bushings 219 Brick Box With Bracket 1900 Plenum Blank 43 55 Extension Rings 66-67 B Bracket 114 Brick Box 1900 Plenum Box 25, 33-34 1900 Plenum Deep 34 55 Swivel Hanger 65 B Bushing 174 Brick Box 1900 Plenum Extension 30 6" Device Rings 75-76 Back to Back Connector 145 Brick Box 1900 Plenum Extension 30 6" Device Rings 75-76 Back to Back Connector 145 Brick Brick Ring 285 Bushing 174 Brick Ring 285 Bushing 174 Brick Ring 285 Bushing 175 Brick Box 1900 Plenum Extension 30 6" Device Rings 75-76 Back to Back Connector 145 Brick Ring 285 Bushing 175 Badd Bridle Rings 293 Bulb Holder 1900 Square-Round Ring 51 6" Plaster Ring 74-76 Bald Bridle Rings 293 Bulb Holder 1900 Square-Round Ring 172 172 172 172 172 172 173 174 174 174 174 175 1								248-255 35-36
1900 Externion Rings 30, 39 58 Bracket Box 61-63 Angle Brackets 307 Bracketed Outlet Box 590 Extra Deep Fire Alarm Box 40 55 Cover 65 Angled Connectors 137 Bracketed Lock Out 590 Bracket Box 66-67 Angled Connectors 137 Bracketed Lock Out 590 Bracket Box 65 Angled Connectors 137 Bracketed Lock Out 590 Bracket Box 65 Angled Connectors 137 Bracketed Lock Out 590 Bracket Box 66-67 Angled Connectors 137 Bracketed Lock Out 590 Bracket Box 66-67 Angled Connectors 137 Bracketed Lock Out 590 Bracket Box 66-67 Angled Connectors 137 Bracket Box 58 Bracket Box 66-67 Angled Connectors 137 Bracket Box 590 Bracket Box 590 Bracket Box 590 Bracket Box 590 Bracket Lock Out 590 Bracket Box 590	1900 Deep With Metal Stud Bracket	t 36						89
1900 Extra Deep Fire Alarm Box					Angle Brackets			3-63
1900 Junction Box	S .							338
1900 Mud Ring			5S Cover	65			Breaker Lock Out	338
1900 Offset Plaster Ring					S .			91-94
1900 Plaster Ring	· ·		•					89
1900 Plenum Blank	•					200*213		359
1900 Plenum Box 25, 33-34 5S Swivel Hanger 65 B Bracket 114 Bridle Hooks 285 1900 Plenum Deep 34 6" Blank Cover 74 B Bushing 174 Bridle Hooks 285 1900 Plenum Extension 30 6" Device Rings 75-76 Back to Back Connector 145 Bridle Ring 285 1900 Square-Round Ring 51 6" Mud Rings 75-76 Backboard D Rings 296-298 Bugle Head Screws	-		ŭ		В			289-295 289-295
1900 Plenum Deep 34 6" Blank Cover 74 B Busning 174 Back to Back Connector 145 Bronze Pipe Clamps 196 Bronze Pipe Clamps 196 Bronze Pipe Clamps 196 Bronze Pipe Clamps 196 Back to Back Connector 145 Bronze Pipe Clamps 196 Bronze Pipe Clamps 196 Back board D Rings 296-298 Bald Bridle Rings 296-298 Bald Bridle Rings 296-298 Bald Bridle Rings 296 Bald Br							S .	289-295
1900 Square-Round 51 6" Device Rings 75-76 Back to Back Connector 145 Bronze Pipe Clamps 1960 Square-Round Ring 51 6" Mud Rings 75-76 Backboard D Rings 296-298 Bugle Head Screws 1960 Square-Round Ring 51 6" Plaster Ring 74-76 Bald Bridle Rings 293 Bull Cover 21,53,65 Ball Cover 21,53,65 Ball Hanger 21,53,65 Ball Hanger 21,53,65 Ball Hanger 21,53,65 Band Iron 314 Box 2-1/8" W,1-7/8" D, Oversized Handy Box 81 BB Box Ceiling Box With Bracket 11 Bang On Beam Clamp 159 Bang On Beam Clamp 159 Bang On Bushing 175 Bang On Bushing 159 Bang On Bushing 159 Bark Device Rings 293 Bull Holder 1960 Burner Cover 4, 1 Bang On Beam Clamp 1960 Bark 1960 Bar								289-295
1900 Square-Round Ring 51 6" Mud Rings 75-76 Backboard D Rings 298-298 Bugle Head Screws 1900 Square-Round Ring 51 6" Plaster Ring 74-76 Bald Bridle Rings 293 Bull Cover 21,53,65 2 Piece Ground Bushing 172 8 Ball Cover 18-19, 372 Ball Cover 21,53,65 Ball Hanger								196-197
2 Hole Strap 273-275 6 Square Box 72-73 Ball Cover 21,53,65 2 Piece Ground Bushing 172 8B Blank Up 18-19, 372 Ball Hanger 21,53,65 Burner Cover 4, 1 20 AMP Weather Proof Cover 232 8B Box Ceiling Box With Bracket 11 Box Setup 15 Bang On Bushing 15, 136, 136, 136, 136, 136, 136, 136, 136			6" Mud Rings	75-76	_			358
2 Piece Ground Bushing 172 8 B Blank Up 18-19, 372 8B Blank Up 18-19			•					22
2 Piece Grounding Bushing 172 8B Box 9-18 9-18 Band Iron 314 8B Box 2-1/8" W,1-7/8" D, Oversized Handy Box 81 8B Box Setup 15	-							4, 18, 54
20 AMP Weather Proof Cover 232 8B Box Ceiling Box With Bracket 11 Bang On Beam Clamp 309 Butterfly Bolts 2-1/8" N,1-7/8" D, Oversized Handy Box 81 8B Box Setup 15 Bang On Bushing 135, 136 Butterfly Bolts Button Connector								4, 18, 54 177
2-1/8 W,1-7/8 D, Oversized Handy Box 81 8B Box Setup 15 Bang On Bushing 135, 136 Button Connector								352
								223
88 Box Wire Bar Hanger 10, 15 Bx Cable Combination Couplings 211	2100 B0X	58	8B Box Wire Bar Hanger	10, 15	Bantam Plugs	364	BX Cable Combination Couplings	211-217

847-455-0188 FAX 847-455-0334 garvinindustries.com

Index by **Product Field Names**



BX Connector	211-217	Compression Fittings	125-134	Decorator Outlet	326	EMT Bushings	135
BX Coupling	217	Concentric Box	8-42 7	Decorator Receptacle	326 327	EMT Floor	140-141 142-143
С		Concrete Box Blanks Concrete Box Connectors	7 178	Decorator Switches Deep 11B Box	62-63	EMT Handy Ells EMT Jakes	142-143
С	151,159	Concrete Box Covers	7	Deep 1900 Box	32-42	EMT Set-Screw Ells	142-143
C Style Beam Clamps	310-313	Concrete Box Rings	7	Deep 1900 Bracket Box	35	EMT Thinwall Conduit Connector	122-133
Cable Clips	299	Concrete Boxes	6	Deep 1900 With Metal Stud Bracket		EMT Thinwall Conduit Coupling	124-134
Cable Connector	220,322	Concrete Ells	178	Deep 4S Box	32-33	EMT to Flex Coupling	188-215
Cable Hooks	284-285	Concrete Form Pipe Inserts	178	Deep 4S Bracket Box	35-36	EMT to Flex. Metal Conduit Coupling	
Cable Markers Cable Plates	381	Concrete Rings	6	Deep 5S Box	63	Energy Saving Lamps	376
Cable Plates Cable Protector	112 135	Concrete Screws	359	Deep 8B Box	14-17	Energy Saving Light Bulbs	376
Cable Pull Compound	382	Conduit Benders	385 147-159	Deep 8B Box With Bracket	17 17	Entrance Ell Erickson	147-159
Cable Pulling Lubricant	382	Conduit Body Conduit Body Cover	153,160	Deep 8B Set Up Deep 8B With Bracket	17	Exposed Work Cover	165 55-70
Cable Rings	289-296	Conduit Box , 5-1/2" & 6" Square		Deep Geiling Box	14		3, 30, 39, 64
Cable Straps	299,320	Conduit Box, 4" Square	23-57	Deep Ceiling Box With Bar Hanger	15	Extension Cords	380
Cable Support Harness	289-295	Conduit Box, 4-11/16" Square	58-70	Deep Ceiling Box With Bracket	15		3, 30 , 39, 64
Cable Support Hook	289-295	Conduit Box, Handy Utility	77-81	Deep Conduit Box 40-43	3, 63, 71-74	Extra Deep 1900 Box	40, 42
Cable Support Straps	287	Conduit Box, Multi Gang	96-107	Deep Device Box	85-94	Extra Deep 1900 Electrical Box	40, 42
Cable Supports	284-295	Conduit Box, Octagon & Round	3-22	Deep Electrical Box 40-43	3, 63, 71-74	Extra Deep 1900 Junction Box	40, 42
Cable Ties	299	Conduit Box, Switch	82-95	Deep Gem Box	86	Extra Deep 4S Box	40, 42
Cable Tyes	299	Conduit Bushed Nipples	190-191	Deep Gem Box With Bracket	86	Extra Deep Fire Alarm Box	40
Cable Wraps Cage Lights	299 371		5-136, 172-176	Deep Junction Box	62-63	•	40-42, 96-98
Cage Lights Camel Toe Clamps	276	Conduit Cap	5-187, 218-219	Deep Multi Gang Box	88 3 100	Extra Long Junction Box	96-98
Canopies Ceiling Blank	19, 372		144,171 9-260, 267-268	Deep Outlet Box	3-100	Extra Long Outlet Box	96-98 40-42
Canopy Sets	373	•	0, 269, 271-272	Deep Plenum Box 14, 25, 3 Device Box	0-33, 58-60 77-79, 81	Extra-Deep 1900 Box Eye Plate	40-42 319
Capped Corner Coupling	138	Conduit Connector	122-164	Device Box Device Box Cover	80	EZ Anchors	364
CAT 5E Connector	323	Conduit Coupling	124-134	Device Box Cover 49, 55-57, 69-7		EZ Kits	364
CAT 5E Jack	323	Conduit Cover	144,171	Device Insulators	351	F	334
CAT Cable Hooks	284-291	Conduit Cover & Gasket	153	Device Plates	339-340		
Caulk In Anchor	365	Conduit Edge Bushing	135	Device Protection Plates	113	F Bracket	252
Caulking Anchor	365	Conduit Extenders	373		49, 101-102	F Connectors	322
Ceiling Blank-Up Canopy	19, 372	Conduit Fixture Stems	373	Device Sealing Gaskets	351	F Straps	111
Ceiling Box	9-17 12, 16-17	Conduit Hangers	258, 265-266	Die Cast Closure Plug	246	Face Plates	339-340 351
Ceiling Box With Bracket Ceiling Box With J Bracket	12, 10-17	Conduit Hub Conduit Insulator 135	182-183 5-136, 172-176,	Dimmer Switch	335	Faceplate Screws Fan Box With Bracket	10, 15
Ceiling Bracket Box	10, 16		5-136, 172-176, 5-187, 218-219	Distribution Rings	296-297 117-120	Fan Bracket	252
Ceiling Extension Ring	13	Conduit Junction Box	3-121	Donut Washers Double Eagle	334	Fan Control	336
Ceiling Fan Bracket	114	Conduit Measuring Tape	384	Doughnut Washers	117-120	Fan Switch	336
Ceiling Grid Rod	321	Conduit Nipples	190-191	Drive Hooks	287	Farside Box Supports	253
Ceiling Grid Tie Wire	321	Conduit Nuts	193	Drive Pins	287	Fast Lock Connectors	214
Ceiling Hole Cover	19, 372	Conduit Outlet Box	3-100	Drive Ring	287	Fender Washer	360
Ceiling Outlet Box	14	Conduit Protector	144, 171	Drop Hangers	358	Fire Alarm Box	25, 41, 71
Ceiling Trim Plate	19, 372	Conduit Straps	259-272	Drop In Anchors	366	Fire Alarm Extension Ring	30
Cement Screws	359 279	Conduit Strut Clamps Conduit Support Block	267-268 257	Dryer Plug	337	Fitters Clamps Fixture Canopy Set	312 373
Channel Clamps Chicago Bender Heads	385	Conduit Support Clips	257 259-260	Drywall Bracket	252	Fixture Canopy Set Fixture Conversion Plate	373 375
•	0-33, 58-60	Conduit Union	165	Drywall Mud Box. NM Cable Box Drywall Screws	38 358	Fixture Extensions	374
	30,39,43,64	Conduit, Plenum	369-370	Dual Power Box	87		, 53, 65, 375
Chicago Plenum Conduit	369	Convenience Light	22, 371-374	Duck Seal	379	Fixture Hook	375
Chicago Plenum Connector	216	Convenience Socket	372	Duct Filler	379	Fixture Nipples	166-168
•	, 21, 43, 65	Conversion Couplings	215	Duct Seal	379	Fixture Nut	374
•	0-33, 58-60	Cord Connectors	221	Duplex Connectors	214		168, 373-374
Chicago Plenum Tubing	369	Cord Grips	221	Duplex Device	329-332	Fixture Studs	374
Chicago Plenum Whip	369-370	Cord Lock	31	Duplex Faceplate	342		, 53, 65, 375
Chicago Plenum Wire Chicken Catcher	369 319	Cord Locker Corn Clamps	31 276	Duplex Goof Plate	342	Flash Panels Flashing Panels	247 247
Chicken Choker	319	Coupling Nuts	193	Duplex Octagon Cover Duplex Outlet	4, 18 329-332	Flat Blank Octagon Cover	4, 7, 18
Chinese Finger	319	Cowboy Hangers	265-266	Duplex Outlet Duplex Plate	342-349	Flat Sided Washer	361
Circuit Breaker Lock	338	Crushed Corner Cover	55-70	Duplex Plate Duplex Plug	329, 330	Flat Vertical Bracket	114, 252
Clamp Back	281	Custom Threaded Rod	301	Duplex Receptacle	329-332	Flat Washers	360
Clamp Back Spacer	281	D		Duplex Wall Plate	342	Flex Bushing	218
Clamp On Split Grounding Bushing	172		000 007	Duplex Weather Proof Cover	224-240	Flex Conduit Box	28, 37
Close Nipples	166-168	D Rings	296-297	E		Flex Conduit Couplings	216
Closure Plugs	115-116	Data Box Data Cable Hooks	72-73 284-298		204	Flex Conduit Couplings	215-216
Clutch Clamp	266 322	Data Jack	323	Easy Anchors Easy Lock Connectors	364 214	Flex Couplings	208-217
Coax Connectors Coax Jacks	322 322	Deck Boxes	6-8	EC Clamp	214 277	Flex Couplings 1 Flex Insulating Bushing	139, 215-217 218
Cobra Heads	184	Décor Outlet	327	Edge Clamp	277	Flex to EMT Coupling	188
	4-57, 69-70	Décor Receptacle	327	Edge Pipe Clamp	277	Flex to EMT Coupling Flexible Meta	
	39,188,215	Decor Switch	327	Elbow LB	147	Conduit Fittings	216
Comb. Device Weather Proof Cvr	240-245	Decor Switches	327	Elbow Mogul LB	146	Flexible Conduit Box	28, 37
Combination Fittings	188	Decorative Device	326	Electrical Connector	122-220	Flexible Conduit Bushing	218
Comb. Flex. Metal Conduit Fittings	215-217	Decorative Outlet	326	Electrical Coupling	122-222	Flexible Metal Cable Connector	211, 213
	38, 346-347	Decorative Plug	326	Electrical Fittings	122-222	Flexible Metal Conduit Bushing	218
	38, 346-347	Decorative Receptacle Decorative Switch Faceplate	326 343-345	Electrical Mud Box	5	Flexible Metal Conduit Connector	208-217
Combo Wallplates	339-351	Decorative Switch Goof Plate	343-345 343-345	Electrical Outlet	329-335	Flex to EMT Conduit Coupling	139, 217
Commercial Pecentacle	330	Decorative Switch Plate	343-345 343-345	Electrical Plug	329-335	Flex to EMT Conduit Coupling Flex to Rigid Conduit Coupling	215 216
Commercial Receptacle Compact Fluorescent Lamps	330 376	Decorative Switch Wall Plate	343-345	Electrical Tape Electrical Trade Washers	386 360	Flip Switch	328
Compact Fluorescent Lamps Compact Fluorescent Light Bulbs	376 376	Decorative Switches	327	Electricians Tage	386	Floor Boxes	23
Compression Connectors	125,133	Decorative Wall Plate	340	Electroform Pipe Inserts	178	Floor Flange	181
Compression Couplings	128,134	Decorator Device	326	Emergency Cover Plate	54	Floor Hub	181
	0, 10-1			- 3,	٠.		



Index by **Product Field Names**

847-455-0188 FAX 847-455-0334 garvinindustries.com

Grounding Collp								
First liber	Floor to Wall Box Bracket	248	Hexagon Washers	361	Light Sockets	372	No Thread Connectors	161
Full Part California 10 10 10 10 10 10 10 1	Flush-Mount Bracket Box		Hickeys	374				162
Pollow Will Arows Feel 977 Logistiff See 22-227 Normalish Celebro Connector 140 15			•		. •			163
Decisional Columns	Fullman Clamps	310-311						164
Calcardinate 6 Calc	G							220
Glavament Shirt 10-10 10	Galvanized 90	170					•	206
Glavatheric Shart 15-3116 Gasty 20x							Nonmetallic: 90° Seal Tight Connecto	ors 207
Camp Box			Hybrid Low Voltage Box	07			0	
Gargia Dec Nome 193-100 Cost Scales 111 Cost (Company Sensor S			ı				O Bushings	219
Gasgin Being Gering Cover (19-10) Gasgin Being Gering Gering Cover (19-10) Gasgin Being Gering Cover (19-10) Gasgin Be			Ice Skates	111	•			325
Gerap Device Cover 103-166 Mil. Convoid Couplings 162 Low Voltage Rox 24 Clappon Box Vin Bur Hanger 140 C								4, 18
Gargabe New York Search (Congress of Congress of Congr	Gang Device Cover	103-106	IMC Conduit Couplings	162			Octagon Box	9-17
Care	Gangable Masonry Box	91-94	In Use Weather Proof Cover	233		48	Octagon Box With Bar Hanger	10
Sas Burne Pieble	Gangable Tile Box		Industrial Cover		Low Voltage Box Partitions	48	Octagon Bracket Box	10
Gaselate & Box Holders					Low Voltage Plates	283		9-17
Gaskers & Sob rebiders 244					LR	148, 157	•	7
Cem Box With Ears See See Common See See Common See See Common See See Common See Se					М			7
Sem Box With Bracket						005		6
Gen Bio XVIII) Flaster Earn 55								12 4, 18
Gem Banky 194-29 Insulated Count of Wem 108-109 Marken Hangers 25-50 Cargon Drawing Ring 17-50			•				•	4, 16
Gen Dandy			•		·		•	4, 18
GFC Device 324								20
GECL Device S24					•			13
GEOL Dipoles Device 324 Insulated Set-Serve Monrector 123-131 Mallacibe Boxes 224 Octagen Fender Weshins								13
GECI Sekutch Acceptance FCCI Switch Acceptanc							0	361
GECI Switch Faceplate GECI Switch Gerif Plate 343 Insulated Steel Commercion Com. 131 Masonny Box Partition GECI Switch Plate 343 Insulated Steel Commercion Com. 126 Masonny Box Partition 345 Insulated Steel Commercion Com. 127 Masonny Box Partition 346 Cologinal Resident Steel EMT Commercion 127 Masonny Box Partition 347 Insulated Steel EMT Commercion 127 Masonny Box Partition 348 Insulated Steel EMT Commercion 127 Masonny Box Partition 349 Insulated Steel EMT Commercion 127 Masonny Box Partition 340 Insulated Steel EMT Commercion 127 Masonny Box Partition 341 Insulated Steel EMT Commercion 127 Masonny Box Partition 342 Insulated Steel EMT Commercion 127 Masonny Box Partition 343 Insulated Steel EMT Commercion 127 Masonny Box Partition 344 Insulated Steel EMT Commercion 127 Masonny Box Partition 345 Masonny Box Partition 127 Masonny Box Partition 346 Masonny Box Partition 127 Masonny Box Partition 347 Insulated Commercion 127 Masonny Box Partition 348 Masonny Box Partition 127 Masonny Box Partition 349 Masonny Box Partition 127 Masonny Box Partition 349 Masonny Box Partition 127 Masonny Box Partition 340 Masonny Box Partition 127 Masonny Box Partition 341 Masonny Box Partition 127 Masonny Box Partition 342 Masonny Box Partition 343 Masonny Box Partition 344 Masonny Box Partition 345 Masonny Box Partition 345 Masonny Box Partition 345 Masonny Box Partition 346 Masonny Box Partition 346 Masonny Box Partition 346 Masonny Box Partition 347 Masonny Box Partition 348 Masonny Box Partition 348 Masonny Box Partition 349 Masonny Box Partition 349 Masonny Box Partition 340 Masonny Box Partition 340 Masonny Box Partition 340 Masonny Box Partition	•						S .	18
GECI Switch Goof Plate FOEL Switch Wall Plate GECI Washer Profectore 221 Insulated Steel EMT Compress. Com. 226 GET Device GET Devi								9-17
GFCI Water Prof Cover 343	GFCI Switch Goof Plate			onn. 126		95	•	20
Second Second Control 123 26 Second								20
GFI Device 324 Insulated Steel St Connection 123 Metal Clard Cable Connection 211, 213 Cargon Topigle Cover Corp. For Country 124 Metal Stud Bax 28-36 Offices 144, 282 Offices Planactes Corp. For Country 144 Stud Bax 144, 282 Offices Planactes Corp. For Country 144 Metal Stud Bax 144, 282 Offices Planactes Corp. For Country 144 Metal Stud Bax 144, 282 Offices Planactes Corp. For Country 144 Metal Stud Brancket 114, 282 Offices Connections Corp. For Country 144 Offices Corp. F					. 0			4, 18
GFI Outlet 324								18
Co-Fro-Excupling 139								4, 18
Goor Plates 339-340 Insulating Boshaing 135, 174-175 Gorilla Snot 339-340 Insulating Gormet 300 Gorilla Snot 360			•					26
Sorial Short Sage Insulating Growner Sorial Onto Con-To-Coupling 139 Insulation Stabiling 135, 175 Michaey Plates 339-340 Offset Conduct Nipples Gropple Hangers 303-306 Insulation Capas 177 Minhaey Dates 339-340 Offset Device Cover Groupple Hangers 303-306 Insulation Pathing 174 Minhaey Dates 339-340 Offset Device Cover Groupple Hangers 303-306 Insulation Pathing 174 Minhaey Dates 377 Minhaey Dates	. •							307
Go-To Coupling 139 Insulator Capps 135, 175 MIB 174 Offset Device Cover Gropple Sangers 303-306 Insulator Capps 177 Mile May Plates 339-340 Offset Device Cover Offset Device Ring Offs								137
GRC 90							• • • • • • • • • • • • • • • • • • • •	192 137
Gripple Angers 303-306 Insulator Pennies 177 Mini Handy Box 77 Offset Device Ring Gripples 303-306 Insulator Pennies 177 J Minis 285-268 Offset Ething Cound Clamp 196-197 J Fracket 114, 252 Minis 285-268 Offset Ething Cound Clamp 196-197 J J J J J J J J J	. •							47
Ground Bushing 172-173 172-174								47
Ground Clip 196-197	•				-			137
Ground Clamp				00.				307
Ground Clip 108-109 J Clamps 279 700	•		J				-	47
Ground Strew 198-109 Jeamps 279 Mogul Entrance Ell 146 Offset Plaster Frame Fr	•		J Bracket	114, 252				192
Counding Bushing		108-109	J Clamps	279		146	Offset Plaster Frame	47
Grounding Bushing 194	Ground Strap	198	J Hook	270, 284	Mogul Service Entrance	146	Offset Plaster Ring	47
Seconding Bushing	Ground Wire	108-109			Monkey Bars	111	Oil Switch Off Plate	54
Grounding Clip	Grounding Bonding Locknuts						Old Work Box With Bracket	83-85
Strounding Conduit Nuts								108-109
Sequence	• .							15, 17
Grounding Jam Nuts								82-89
Grounding Jumper 108-109								54
Stronding Locking Nuts 194 Joist Hanger 308 Multi Gang Box Cover 103-106 One Piece Strut Clamps Open D Rings	•				•		·	272
Grounding Locknuts 194								223
Grounding Pipe Locking Nuts 194			· ·		•			268 297
Grounding Screw 108-109 Junction Box 3-122 Multi Gang Plaster Ring 101-102 Outdoor Electrical Box Grounding Seal Tight Connectors 200-201 Junction Box Divider 107 Multi Gang Switch Box 89 Outhouse Cover 25 25 25 25 25 25 25 2								172
Grounding Seal Tight Connectors 200-201 Junction Box Divider 107 Multi Gang Switch Box 89 Outhouse Cover 23								226
Grounding Straps 198			Junction Box Divider					230-242
Multi-Gang Box Collar Multi-Gang Box Extension Ring Multi-Gang Box Extension Ring Multi-Gang Box Collar Multi-Gang B					•			3-122
HAMMER ON BEAR Clamp 309 Keyless Socket 322, 372 Multi-Gang Box Collar 99-100 Outlet Retainer 99-100 Outlet Retain								4, 18
Hammer On Beam Clamp 309 Keyless Socket 372 Multi-Gang Box Collar 99-100 Outlet Retainer	•							339-340
Hammer On Clamp Hammer-On Insulating Bushing Hammer-On Insulating Bushing Handy Box Handy Box Handy Box Cover Handy Box Extension Ring Handy Box Extension Ring Handy Box With Bracket Handy Box With Bracket Handy Pull Ells Handy Pull Jakes Handy Pull Jakes Handy Pull Box Handy Box Extension Ring Handy Pull Els Handy Pull Gorperssion Connectors Heavywall Compression Couplings Heavywall Couplers Hex Bolts Hex Bolts Has Box Handy Box Handy Box Handy Box Handy Pull Bulb Handy Box Handy Pull Box Handy Pull Els Handy Pull File Hulti-Gang Switch Box Hulti-Gang Switc					Multi-Gang Box Collar	99-100	Outlet Retainer	338
Hammer On Clamp Hammer-On Insulating Bushing Hammer-On Insulating Bushing Hammer-On Insulating Bushing Hammer-On Insulating Bushing Handy Box 77-79 Knockout Bushing Knockout Bushing Handy Box 77-79 Knockout Filler Knockout Insert Handy Box Extension Ring Handy Pull Elis Handy Pull Jakes Handy Pull Jakes Handy Pull Jakes Handy Fill Handy Box Extension Ring Handy Box Extension Ring Handy Box Extension Ring Handy Pull Jakes Handy Pul	•							286
Handy Box Cover 80 Knockout Filler 115-121 Multiple Device Cover 103-106 Handy Box Cover 80 Knockout Plug 115-121 Multi-Tap Extension Cords 380 P Washers Handy Box Extension Ring 78-79 Knockout Plug 115-121 Multi-Tap Extension Cords 380 P Washers Handy Box Extension Ring 78-79 Knockout Plug 115-121 Multi-Tap Extension Cords 298 Paddle Device Paddle Switch Handy Box With Bracket 79 Knuckle Cover 21, 53, 65, 375 Handy Pull Ells 142 KO Seal 115-121 N Paine Washers Handy Pull Jakes 189 L Nail Clips 270 Pancake Box Handy/Utility Box Extension Ring 77 Hanger Strap 314 Lag Screw Bridle Rings 295 Nail On Bridle Rings 290-291 Parallel Clamp Heavywall Compression Connectors 161 Lamp Holder 22, 372 Nail Plates 112 PC Clamp Heavywall Couplers 169-170 LB Cover 153 Nail-Straps 270 Pencil Rod Hex Bolts 356-357 Lead Anchor 365 NEMA Receptacle 337 Phone Connectors Hex Nuts 356-357 Light Bulb Socket 22 NM Connector 220 Pigtail 100	•				Multi-Gang Switch Box			311
Handy Box Cover 80 Knockout Insert 121 Multi-Tap Extension Cords 380 P Washers Handy Box Extension Ring 78-79 Knockout Plug 115-121 Multi-Tap Extension Cords 380 P Washers Handy Box Extension Ring Cover 80 Knockout Seal 115-121 Multi-Tap Extension Cords 380 P Washers Handy Box Extension Ring Cover 80 Knockout Seal 115-121 Mushroom Spools 298 Paddle Device Paddle Switch Handy Box With Bracket 79 Knuckle Cover 21, 53, 65, 375 N Paine Washers Handy Pull Ells 142 KO Seal 115-121 N Pan Box Handy Pull Jakes 189 L Nail Clips 270 Pancake Box Handy/Utility Box Extension Ring 77 Parotake Rox Heavywall Compression Connectors 161 Lamp Holder 22, 372 Nail On Bridle Rings 290-291 Parallel Clamp Heavywall Compression Couplings 162 Lathers Wire 321 Nail Straps 270 Parot Beak Clamps Heavywall Couplers 169-170 LB 152, 155 Nail-On Bracket Box 26-36 Perforated Hanger Iron Heavywall Couplings 169-170 LB Cover 153 Nailstraps Nail Clips 269 Phase Tape Hex Head Bolts 356-357 Lead Anchor 365 NEMA Receptacle 337 Phone Connectors Hex Nuts 36-357 Light Bulb Socket 22 NM Connector 220 Pigtail 100	•						P	
Handy Box Extension Ring 78-79 Knockout Plug 115-121 Mushroom Spools 298 Paddle Device Paddle Switch Paddle					•			000
Handy Box Extension Ring Cover 80 Knockout Seal 115-121 Knuckle Cover 21, 53, 65, 375 N Paddle Switch Paddle Switch Pane Washers Pane Box Pane Washers Pane Box Pane Washers Pane Box Pane Washers Pa								360
Handy Box With Bracket 79 Knuckle Cover 21, 53, 65, 375 N Paine Washers Handy Pull Ells 142 KO Seal 115-121 N Pan Box Handy Pull Jakes 189 L Nail Clips 270 Pancake Box Handy/Utility Box Extension Ring 77 Handy/Utility Box Extension Ring 77 Lag Screw Bridle Rings 295 Nail On Bridle Rings 290-291 Parallel Clamp Panger Strap Analy Pull Compression Connectors 161 Lamp Holder 22, 372 Nail Plates 112 PC Clamp Parrot Beak Clamps Heavywall Compression Couplings 162 Lathers Wire 321 Nail Plates 112 PC Clamp Pencil Rod Heavywall Couplers 169-170 LB Cover 153 Nail-On Bracket Box 26-36 Perforated Hanger Iron Hex Bolts 356-357 Lead Anchor 365 NEMA Receptacle 337 Phone Connectors Hex Nuts 356-357 Light Bulb Socket 22 NM Connector 220 Pigtail 10					Mushroom Spools	298		327
Handy Pull Ells 142 KO Seal 115-121 Nail Clips 270 Pancake Box Handy/Utility Box Extension Ring 77 Hanger Strap 314 Lag Screw Bridle Rings 295 Nail On Bridle Rings 290-291 Parallel Clamp Heavywall Compression Connectors 161 Lamp Holder 22, 372 Nail Plates 112 PC Clamp Heavywall Compression Couplings 162 Lathers Wire 321 Nail Straps 270 Penroit Beak Clamps Heavywall Couplers 169-170 LB Cover 153 Nail-On Bracket Box 26-36 Perforated Hanger Iron Hex Bolts 356-357 Lead Anchor 365 NEMA Receptacle 337 Phone Connectors Hex Nuts 356-357 Light Bulb Socket 22 NM Connector 220 Pigtail 100								327 360
Handy Pull Jakes 189 L Nail Clips 270 Pancake Box Handy/Utility Box Extension Ring 77 Hanger Strap 314 Lag Screw Bridle Rings 295 Nail On Bridle Rings 290-291 Parallel Clamp Heavywall Compression Connectors 161 Lamp Holder 22, 372 Nail On Straps 270 Parrot Beak Clamps Heavywall Compression Couplings 162 Lathers Wire 321 Nail Straps 270 Pencil Rod Heavywall Couplers 169-170 LB 152, 155 Nail-On Bracket Box 26-36 Perforated Hanger Iron Heavywall Couplings 169-170 LB Cover 153 Nailstraps Nail Clips 269 Phase Tape Hex Head Bolts 356-357 Lead Anchor 365 NEMA Receptacle 337 Phone Connectors Hex Nuts 356-357 Light Bulb Socket 22 NM Connector 220 Pigtail 10	•				N			360 5
Handy/Utility Box Extension Ring Hanger Strap Heavywall Compression Connectors Heavywall Couplers Heavywall Couplers Heavywall Couplings Heavywall Couplings Heavywall Couplers Heavywal					Nail Clins	270		5 5
Hanger Strap 314 Lag Screw Bridle Rings 295 Nail On Straps 270 Parrot Beak Clamps Heavywall Compression Connectors 161 Lamp Holder 22, 372 Nail Plates 112 PC Clamp Heavywall Compression Couplings 162 Lathers Wire 321 Nail Straps 270 Pencil Rod Heavywall Couplers 169-170 LB Cover 153 Nail-On Bracket Box 26-36 Perforated Hanger Iron Heavywall Couplings 169-170 LB Cover 153 Nailstraps Nail Clips 269 Phase Tape Hex Bolts 366-357 Lead Anchor 365 NEMA Receptacle 337 Phone Connectors Hex Head Bolts 356-357 Life Safety Speaker Boxes 71 NM Cable Box 12, 29 Phone Jacks Hex Nuts 366-357 Light Bulb Socket 22 NM Connector 220 Pigtail 10	•		L		•			278
Heavywall Compression Connectors 161 Lamp Holder 22, 372 Nail Plates 112 PC Clamp Heavywall Compression Couplings 162 Lathers Wire 321 Nail Straps 270 Pencil Rod Heavywall Couplings 169-170 LB 152, 155 Nail-On Bracket Box 26-36 Perforated Hanger Iron Hex Bolts 356-357 Lead Anchor 153 Nailstraps Nail Clips 269 Phase Tape Hex Head Bolts 356-357 Life Safety Speaker Boxes 71 NM Cable Box 12, 29 Phone Jacks Hex Nuts 150 <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>276</td></t<>								276
Heavywall Compression Couplings 162 Habers Wire Lathers Wire 321 Jack Nail Straps 270 Pencil Rod Heavywall Couplings 169-170 LB Cover 153 Jack Nail-On Bracket Box 26-36 Perforated Hanger Iron Hex Bolts 356-357 Lead Anchor 153 Jack Nailstraps Nail Clips 269 Phase Tape Hex Head Bolts 356-357 Light Bulb Socket 17 Jack NEMA Receptacle 337 Phone Connectors Hex Nuts 356-357 Light Bulb Socket 22 Jack NM Connector 20 Pigtail 10	• .		•		•		-	278
Heavywall Couplers 169-170 LB 152, 155 Nail-On Bracket Box 26-36 Perforated Hanger Iron Heavywall Couplings 169-170 LB Cover 153 Nailstraps Nail Clips 269 Phase Tape Hex Bolts 356-357 Lead Anchor 365 NEMA Receptacle 337 Phone Connectors Hex Head Bolts 356-357 Light Bulb Socket 22 NM Connector 12, 29 Phone Jacks Hex Nuts 356-357 Light Bulb Socket 22 NM Connector 220 Pigtail 10							-	321
Heavywall Couplings 169-170 LB Cover 153 Nailstraps Nail Clips 269 Phase Tape Hex Bolts 356-357 Lead Anchor 365 NEMA Receptacle 337 Phone Connectors Hex Head Bolts 356-357 Light Bulls Oschet 22 NM Connector 220 Pigtail 10								314
Hex Head Bolts 356-357 Life Safety Speaker Boxes 71 NM Cable Box 12, 29 Phone Jacks							•	386
Hex Nuts 356-357 Light Bulb Socket 22 NM Connector 220 Pigtail 10	Hex Bolts	356-357				337	Phone Connectors	322
Light Duty Poor Clare 210								322
Hexagon Box 9-17 Light Data Scalin Scalin Statisty Silv No Thread Bridle Ring 293 Pipe Adapter Bushing 18								108-109
	Hexagon Box	9-17	Eight Duty Death Clamp	310	No Thread Bridle Ring	293	Pipe Adapter Bushing	185-187

847-455-0188 FAX 847-455-0334 garvinindustries.com

Index by **Product Field Names**



Pipe Block	257	Quick Lock Connectors	214	Round Light Holder	372	Snap In Cable Connector	222
Pipe Bumper	257	Quick Shot Bridle Rings	290-291	Round Liquid Tight Box	243	Snap In Connector	208, 223
Pipe Canopy	166-168	Quick Shot Threaded Rod	301	Round Liquidtight Box	243	Snap In Connectors	214
Pipe Cap	144, 171	Quick Snap Connectors	208	Round Mud Ring	20	Snap In Flex Connectors	214
Pipe Cap Pennies	177	R		Round Outlet Box	5-17	Snap In KO Seal	116
Pipe Closure Plug	144			Round Raised Ring	20	Snap In MC Cable Connector	208
Pipe Converter	180	Rabbit Ears	111	Round Receptacle	333	Snap In Plugs	116
Pipe Converter Hub From-Reducer	180	Rags	388	Round Sealed Electrical Box	243	Snap In Strut Clamps	266
Pipe Cover	144, 171	Rain-Tight Compression Connectors Rain-Tight Compression Couplings	127 129	Round Water Tight Box	243	Snap Lock Connector	208
Pipe Curb	257 180	Rain-Tight Compression Fittings	123	Round Wasther Breef Box	243 243	Snap On Connector	223 135
Pipe Enlargers Pipe Extensions	373	Raintight Compression Fittings	129	Round Weather Proof Box Round Weather Resistant Box	243	Snap-On Insulator Bushing Solderless Terminal Lugs	198
Pipe Fitters Beam Clamps	312	Rain-Tight Conduit Connector	127	Round Weather Resistant Box Round Weatherproof Box	243	Solid Concrete Box	91-94
Pipe Hangers	258-266	Rain-Tight Conduit Coupling	129	Round Weatherproof Cover	245	Solid Masonry Box	91-94
Pipe Hub	181	Rain-Tight Electrical Connector	127	Round Weatherproof Junction Box	243	Space Saving Connector	138
Pipe Locking Nuts	193	Rain-Tight Electrical Coupling	129	Round-To-Round Plaster Ring	20	Speaker Box	8, 40, 42, 71
Pipe Nipples	166-168	Rain-Tight Electrical Fittings	127, 129	s		Splice Box	225
Pipe Reducer	185-187	Rain-Tight EMT Thinwall Cond. Conn.		_		Split A Bushings	176
Pipe Riser	257	Rain-Tight EMT Thinwall Cond. Coupl		Saddle Connector	211-215	Split Bang On Bushing	136
Pipe Size Adapter	180	Raised Device Cover	44-102	Saddle Washers	363	Split Bolt Bug	199
Pipe Standoff	257	Raised Device Ring	44-102 160	Safety Plates	112 5	Split Bolt Kearnys	199
Pipe Thread Converter	185-187	Raised Dome Cover Raised Fixture Hanger	21	Sconce Light Box Screw Anchor Expanders	366	Split Bolt Seruit	199
Pipe-Flex Coupling Plaster Box	188 82-86	Raised Octagon Cover	20	Screw Cover	153	Split Coble Protector	199
Plaster Ear Box	82-86	Raised Octagon Device Ring	20	Screw Covers	160	Split Cable Protector Split Collar Ground Bushing	136 172
Plaster Frame	6∠-66 44-102	Raised Surface Cover	55-70	Screw Gun Bracket	250	Split Collar Ground Bushing Split EMT Bushings	172
Plaster Ring	44-102	Raised Switch Cover	55-70	Screw In Flex Connectors	217	Split Ground Bushing	172
Plastic A Hole	223	Range Plug	337	Screw In Flex Couplings	217	Split Grounding Bushing	172
Plastic Device Cover	338	Range Receptacle	337	Screw In Insulating Bushing	218	Split Insulated Bushing	136
Plastic Liquid-Tight Connector	206-207	Rawl Plug	365	Screw Mount Cable Ties	300	Split Insulating Bushing	136, 176
Plastic Vandal Cover	338	RC Clamps	276	Screw On Tie Wraps	300	Split Insulator Bushing	136, 176
Plastic Wall Cover	338		3, 329-333	Seal Tight Connectors	203	Split Open Insulating Bushing	176
Plenum Blank	65		50-52, 68	Seal Tight Hub	182	Split Press On Bushing	136
Plenum Box	33-34	Recessed Can Light Covers	19, 372 235	Sealed Electrical Box Sealed Electrical Box Extension Ring	226-227	Split Rigid Bushing	176
Plenum Cable Ties	299	Rectangular Weather Proof Covers Red Devils	235 219	Sealing Conduit Nuts	244 195	Split Wire Protector Bushing	176
Plenum Ceiling Box Plenum Cover	9 65	Red Heads	219	Sealing Conduit Nots Sealing Coupling Nuts	195	Spoolies	298
Plenum Extension Boxes	64	Reducer	185-187	Sealing Jam Nuts	195	Spray Paint Spring Nuts	387 317-318
Plenum Extension Ring	30, 39, 64	Reducer Bushings	185-187	Sealing Locking Nuts	195	Spring Steel Conduit Hangers	264
Plenum Flex Connector	216	Reducing Bushings	185-187	Sealing Locknuts	195	Spring Steel Minnies	264
Plenum Flex Whip	369	Reducing Hub	185-187	Sealing Pipe Locking Nuts	195	Square Conduit Box	23-76
Plenum Sandwich Plate	30, 39	Reducing Washers	117-120	Seruit Connector	199	Square Device Box Cover	23-76
Plenum Whip	369-370	Remote Box	82	Service Clamp	319	Square Plaster Frame	23-76
Plenum Whip Connector	216	Removable Grounding Bushing	172	Service Dead End Plate	319	Square-Round Plaster Frame	51-52, 68
Plumbers Clamps	312	Reversible Beam Clamps	312	Service Drop Plate	319	Square Washers	363
Plumbers Flange	181	RG6 Cable Connectors	322 322	Service Entrance	147 222	Square-To-Round: Switch Cover	51-52, 68
Plumbers Pipe Hub	181	RG6U Jacks Right Angle Clamps	322 276	Service Entrance Cable Connector Service Entrance Caps	184	Squeeze Connector	209
Plumbers Tape Porcelain Keyless	314 22	Rigid 2 Hole Straps	282	Service Entrance Claps Service Entrance Elbow	148-159	Squeeze Couplings	139 209
Porcelain Lamp Holder	22, 372	Rigid 90	179	Service Entrance Heads	184	Squeeze Type BX Connector Squeeze Type Conduit Hangers	264
Porcelain Pull	22, 372	Rigid Bushings	175	Service Entrance Kits	184	Squeeze Type Conduit Hangers Squeeze Type Flex Connector	209
Porcelain Wire Holder	319	Rigid Compression Connectors	161	Service Entrance Straps	320	SR Receptacle	333
Power Adapter	379	Rigid Compression Couplings	162	Service Heads	184	Stack Devices	334
Power Board	379	Rigid Conduit Set-Screw Connectors	163	Servit Connectors	199	Stack Rocker Switch	334
Power Cords	380	Rigid Conduit Set-Screw Couplings	164	Set Anchors	366	Stack Switch	334
Power Leads	108-109	Rigid Conduit Strap	280	Set-Screw Connectors	122-131	Stacked Switches	334
Power Lock	31	Rigid Conduit Supports	282	Set-Screw Couplings	124, 132	Stainless Steel Beam Clamps	310
Power Lock Out	31	Rigid Couplers Rigid Couplings	169-170 169-170	Set-Screw EMT Connectors Set-Screw Fittings	130 122-132	Stainless Steel Boxes	25, 33, 60
Power Lockout	31 31	Rigid Couplings Rigid Elbow	179	Set-Screw Pull Elbow	142	Stainless Steel Bridle Rings	295
Power Lockout Power Outlets	379	Rigid One Hole Straps	280	Set-Screw Thinwall Connectors	130	Stainless Steel "C" Beam Clamps Stainless Steel Covers	313 43, 65
Power Pig Tails	108-109	Rigid Pipe Protector	144, 171	Shallow 11B Box	58-61	Stainless Steel Covers Stainless Steel Cover Plates	348-350
Power Plug	380	Rigid Pipe Support	280	Shallow 1900 Box	23	Stainless Steel Device Plates	348-350
Power Plugs	379	Rigid Set-Screw Connectors	163	Shallow 4 11/16" Box	58	Stainless Steel Goof Plates	348-350
Power Security Box	31	Rigid Set-Screw Couplings	164	Shallow 5S Box	58-62	Stainless Steel Outlet Plates	348-350
Pre Bent 45° Elbow	141	Rigid to Flex. Metal Conduit Coupling	188	Shallow Conduit Box	58	Stainless Steel Strut Clamps	267
Pre Bent 90° Elbow	140	RJ45 Jack	323	Shallow Depth Box	5	Stainless Steel Strut Washers	363
Press On Bushing	135	Rocker Device	326	Shallow Electrical Box Shallow Junction Box	58-62	Stainless Steel Switch Plates	348-350
Protection Plates	113	Rocker Outlet	326 326		58-62	Stainless Steel Wallplates	348-350
Pull Elbow Pull Ells	143, 189	Rocker Plug Rocker Receptacle	326	Shallow Remodel Box Signal Box	82 8	Stamped Steel Beam Clamps	310
Pull Line	189 384	Rocker Switch	327-334	Simplex Receptacle	333	Stand Off Bracket Stand Off Straps	319 265
Pull Rope	384	Rod Coupling Nuts	302	Single Device	333	Stand Off Straps	266
Pull Tape	384	Rod Nuts	302	Single Receptacle	333	Standard Conduit Hangers	265-266
Pull Twine	384	Roof Jack	319	Sleeve Nuts	302	Standard Pig Tails	108-109
Pulling Ells	189	Roof Tie	319	Slide Dimmer Switch	335	Steamboats	111
Pulling Tape	384	Round Blank Plate	19, 372	Slide Dimmers	335	Steel Compression Connectors	125
Push On Connectors	110	Round Box	5	Slide Switch	335	Steel Compression Couplings	128
Push Penny	177	Round Closure Plate	19, 372	Small Conduit Box	77 77	Steel Compression EMT Couplings	
PVC Tape	386	Round Conduit Box	5	Small Handy Box	77 77	Steel Compression Thinwall Coupl	
Q		Round Electrical Box Round Electrical Box Cover	5 18	Small Junction Box Smoke Tight Whip	77 369-370	Steel Connectors	122
Quick Anchors	364	Round Fixture Box	18 5	Smooth Bridle Ring	293	Steel EMT Connector	
Quick Connectors	110	Round Head Screws	353-355	Snap In BX Connector	208	Steel EMT Connector Steel EMT Connectors	122 125
				- p	_,,	S.SGI EMT OUTHOUGH	123



Index by **Product Field Names**

847-455-0188 FAX 847-455-0334 garvinindustries.com

121

298

298

382

289

381

198

381

110

113

382

383

383

383

358 114

26-36

358

295

252

154

154

364

174-175

108-109 382

Wire Bushing

Wire Harness

Wire Labels

Wire Leads Wire Lube

Wire Lugs

Wire Markers

Wire Protectors
Wire Pulling Lubricant
Wire Slick

Wire-Pulling Aide

Wire-Pulling Tool

Wirepulling Pal

Wood Anchors

Wood Bracket Wood Bracket Box

Wood Hangers

X Fitting

X-Condulet

Zip Anchors

Wood Stud Bracket

Wood Screw Bridle Rings

X

Z

Wire Nut Connectors

Wire Protection Plates

Wire Protector Bushing

Wire Gel

Wire Distribution Post

Wire Distribution Spools

Steel EMT Couplings 124	Three Piece Couplings	165	Universal Ground Strap	198
Steel EMT Fitting 122	Three-Gang GFCI Weather Proof Cvr.	242	Utility Box	77-81
Steel EMT SS Connector 122	Three-Gang Liquid Tight Box	241	Utility Box Cover	80
Steel Raintight Connectors 127	Three-Gang Liquidtight Box	241	Utility Box Extension Ring	78-79
Steel Raintight EMT Connectors 127 Steel Raintight Thinwall Connectors 127	Three-Gang Masonry Box Three-Gang Sealed Electrical Box	88-89 241	Utility Sonios Cops	80 184
Steel Set-Screw Connectors 122	Three-Gang 1-Recep.Weath. Proof Cvr	241	Utility Service Caps	104
Steel Set-Screw Couplings 124		88-89	V	
Steel Set-Screw EMT Couplings 124	Three-Gang Toggle Weath. Proof Cvr.	242	Vacancy Sensors	325
Steel Set-Screw Thinwall Connector 122	Three-Gang Water Tight Box	241	Vandal Resistant Pipe Cap	144, 171
Steel Set-Screw Thinwall Couplings 124	Three-Gang Watertight Box	241	Vapor Tight Box	25
Steel Switch Box 82-86	Three-Gang Weather Proof Box	241	Vapor Tight Cover	43 26-36
Steel Thinwall Compress.Connectors 125	Three-Gang Weather Proof Cover	242 241	Vertical Bracket Box Vertical Weather Proof Cover	232
Sticky Backs 300 Stone Off Tie Wire 321	Three-Gang Weather Resistant Box Three-Gang Weatherproof Box	241		202
Straight Blade Receptacle 337	Three-Gang Weatherproof Cover	242	W	
Strut 315	Three-Gang Weatherproof Junc. Box	241	Wall Anchors	366
Strut Bolts 317	Tie Offs	299	Wall Hanger Cable Support	286
Strut Channel 315-316	Tie Straps	299	Wall Hub	181
Strut Clamp 266	Tie Wire	321	Wall Outlet Wall Plate Gaskets	329-330 351
Strut Clamps 267-268	Tie Wraps	299	Wall Plates	339-340
Strut Hangers 267-268, 317		91-94	Wall Plug	329-330
Strut Nuts 318 Strut Straps 267	Tile Box Divider Tile Box Partition	95 95	Wall Sconce Box	5, 9
Strut Washers 363	Tile Ring 46, 50-52, 68, 10		Wallplate	339-340
Stud Box 35-36	Tiny Utility Box	77	Wallplate Gaskets	351
Stud Plates 112	Title 24 Motion Sensor	325	Wallplate Screws	351
Support Brackets Kick Plates 248	Toggle Bolts	352	Water Bond Clamp	196
Sure Wall Anchors 364	Toggle Cover	106	Water Bine Clamps	197 196-197
Surface Cover 55-57, 69, 70	Toggle Lock	55	Water Pipe Clamps Water Proof Hubs	183
Switch Box 77-89	Toggle Octagon Cover	4, 18	Water Tight Box	226-227
Switch Box Battleships 111 Switch Box Extension Rings 111	Toggle Switch Toggle Switch Faceplate	328 341	Water Tight Box Extension Ring	244
Switch Box Extension Kings 111 Switch Box Supports 111	Toggle Switch Faceplate Toggle Switch Goof Plate	341	Watertight Box	226-227
Switch Cover 46-57, 109	Toggle Switch Octagon Cover	4, 18	Watertight Box Extension Ring	244
Switch Guard 338	Toggle Switch Plate	341	Watertight Connector	182
Switch Lock Out 338	Toggle Switch Wall Plate	341		00-203, 206
Switch Plates 339-340	Toggle Switch Weather Proof Cover	233	Watertight Hub Watertight Hubs	182 183
Switch Ring 46-52, 68	Toggle Wing	292	Weather Caps	184
Switch Weather Proof Cover 233 Swivel Aligner 53	Top Beam Clamps	312	Weather Heads	184
Swivel Ball Hanger 21, 53, 65, 375	Triple-Tap Extension Cords Truss Hanger	380 308	Weather Proof Adapter Box	228-229
Swivel Cover 21, 53, 65, 375		10-141	Weather Proof Add A Depth Box	228-229
Swivel Fixture Aligner 21, 53, 65, 375	Twine In Bucket	384	Weather Proof Box	226-227
Swivel Fixture Hanger 21, 53, 65, 375	Twist On Strut Nuts	317	Weather Proof Box Extension Ring	244
Swivel Hanger 21, 53, 65, 375	Two Gang Device Cover	50	Weather Proof Bubble Covers	230-231 246
Т	Two Gang Duplex Weather Proof Cvr.	240	Weather Proof Closure Plug Weather Proof Cluster Cover	245
T 150, 158	Two Gang Plaster Frame Two Gang Plaster Ring	50 50	Weather Proof Cluster Covers	235
T11 Box 228-244		3-275	Weather Proof Connectors	183
T11 Boxes 237	•	3-275	Weather Proof Device Covers	230-231
T11 Cover 228-244	Two Hole Straps	282	Weather Proof Extend Ring	228-229
T11 Covers 235	Two Men In A Boat	111	Weather Proof Extension Boxes	228-229
T11 Weatherproof Extension Box 228 Tamp It Anchor 365	Two Screw Connector	220	Weather Proof Extension Rings Weather Proof In Service Covers	228-229 230-231
Tamp It Anchor 365 Tap In Anchor 365	Two-Gang 20 AMP Weather Proof Cvr.	240	Weather Proof In Use Covers	230-231
Tap It Screws 359	Two-Gang 30 AMP Weather Proof Cvr.	240	Weather Proof Lamp Holder Covers	235
Temp Lights 371	Two-Gang 50 AMP Weather Proof Cvr. Two-Gang Blank Weather Proof Cover	240 240	Weather Proof Plastic Covers	230-231
Temporary Work Lights 371	Two-Gang GFCI Weather Proof Cover	240	Weather Proof Round Cover	245
The Bat Anchors 364	Two-Gang Horizontal Weath. Proof Cvr	240	Weather Proof While In Use Cvrs.	230-231
Thermostat Cover Guard 338	Two-Gang Liquid Tight Box 23	86-238	Weather Resistant Box	226-227
Threaded Closure Plug 246	Two-Gang Liquidtight Box 23	86-238	Weather Resistant Box Extension Ri	
Threaded Couplers 169-170 Threaded Ground Bushing 173	Two-Gang Seal Tight Box	238	Weatherproof Weatherproof Box	225 225-227
Threaded Ground Bushing 173 Threaded Grounding Bushing 173	•	86-238	Weatherproof Box Extension Ring	244
Threaded Heavywall Couplings 169-170	Two-Gang Vertical Weather Proof Cvr.	240	Weatherproof Box Hubs	183
Threaded Insulating Bushings 175		36-238 36-238	Weatherproof Closure Plug	246
Threaded Mounting Hub 181	Two-Gang Weather Proof Adapter Box	239	Weatherproof Cluster Cover	245
Threaded Nipples 190-191, 373	Two-Gang Weath. Prf. Add Depth Box	239	Weatherproof Connectors	183
Threaded Pipe Adapter 180		86-238	Weatherproof Covers	230-235
Threaded Plastic Bushing 175	Two-Gang Weather Proof Extend Ring	239	Weatherproof Extension Boxes	228-229
Threaded Reducer 185-187 Threaded Rigid Couplings 160, 170	Two-Gang Weath. Proof Extension Box	239	Weatherproof Gaskets	228-229
Threaded Rigid Couplings 169-170 Threaded Rod 301-302	Two-Gang Weath. Proof Extens. Rings	239	Weatherproof Gaskets Weatherproof In Use Covers	246 230-231
Threadless Conduit Couplings 162		6-238	Weatherproof Junction Box	225-227
Threadless Connectors 161		36-238	Weatherproof J Box Extension Ring	244
Threadless Couplings 162	Two-Gang Weatherproof Covers Two-Gang Weatherproof J Box 23	240 86-238	Weatherproof Pipe Hub	182
Threadless Pipe Connectors 161		.5 200	Weatherproof Round Cover	245
Threadless Set-Screw Connectors 163	U		Wedge Clamp	319
Threadless Set-Screw Couplings 164	U Bolt Clamps	276	Wide Mouth Beam Clamp	311
Three Gang Blank Weather Proof Cvr. 242	UF Connector	222	Wide Mouth Beam Clamps	312
Three Gang Dupley Weather Proof Cyr 242 Three Gang Dupley Weather Proof Cyr 243	Umbrella Bolts	352	Wining Rags	388 388
Three Gang Duplex Weather Proof Cvr. 242 Three Piece Coupler 165	Underground Feeder Connector	222 77	Wiping Rags Wire	381
Tilled Flede Couplei 100	Undersized Handy Box	11	5	301

1AW

1/0-8AL

1/0-8CL

12WFS

11W

12W

13W

5W

NUMERICALS

52151-MSR

52151-R 52151-RED

52151-SDA 52151-SDR

52151-SOS

52151-SPT

52151-SRC

52151-SVT

52181-S 52181-SPKR

52181-VTBAR

52191-BLNK

52191-OW

52191-S

52C09 52C1

52C10 52C11

52C12

52C13

52C13-P 52C14

52C12-1 52C12-3/4

52191-RED

52181-SVT

52191-1 52191-3/4

24 24

26 24 26

26 28 24

29 28 26

28

52151-S

360

198

360

361 360

Product Index



13W	360	52151-SVI
13WFS	361	52151-SVTDA
14AW	360	52151-SVTRC
14W	360	52151-SVTRED
14WFS	361	52151-SVTSS
15W	360	52151-SVTWB
16W	360	52151-SWB
17A	297	52151-WB
17AB	297	52151-WBBX
		52151-WBR
17AW	297	52171-1
17B	297	52171-1/2
17BB	297	
17BW	297	52171-1/2DR
17C	297	52171-1DR
17CB	297	52171-1-VT
17CW	297	52171-3/4
17W	360	52171-3/4-1
18WC	360	52171-3/4-1VT
19W	360	52171-3/4DR
23WBJ	362	52171-3/4RED
24151-1/2	3	52171-3/4-VT
24151-BLNK	3	52171-AB
24151-F	3	52171-BLNK
24151-FR	3	52171-BX
24151-PK 24151-OWR	3	52171-F
	3	52171-FBX
24151-R		52171-FR
24C1	4	52171-FRED
24C6	4	52171-FRED
24CBPO	4, 54	
24CDR	4	52171-FSDA
24CPO	4	52171-FSOS
24CSR	4	52171-FSQ
24CTS	4	52171-MS
24WBJ	362	52171-MSBX
250MCM-6AL	198	52171-MSDA
250MCM-6CL	198	52171-MSR
25151-1/2	3	52171-R
2W	360	52171-RED
3/0-6AL	198	52171-S
3/0-6CL	198	52171-SBB
3PC100	165	52171-SDA
3PC125	165	52171-SDR
3PC150	165	52171-SOS
	165	52171-SPT
3PC200		52171-SRC
3PC250	165	52171-SKC
3PC300	165	52171-SVTRC
3PC350	165	
3PC400	165	52171-SVTRED
3PC50	165	52171-SVTSS
3PC500	165	52171-SWB
3PC600	165	52171-WB
3PC75	165	52171-WBBX
3W	360	52171-WBR
4SSLD-1/2	79	52181-1/2-SPKR
4W	360	52181-3/4-SPKR
4/14AL	198	52181-AB
4/14CL	198	52181-ADJ
46111	5	52181-BLNK
46111-OW	5 5	52181-DEK
		52181-FRED
46111-R	5	52181-FRED
52141-1/2	24	52181-PS 52181-OW
52151-1/2	24	
52151-1/2DR	24	52181-RED

29 29 24 24 25 25 25 25 25 25 25 25 25 25 25 25 25	52C14-5/8 52C15 52C16 52C17 52C18 52C18 52C19 52C1-GS 52C1-GS 52C1-GS 52C1-VT 52C1-RED 52C1-VT 52C1-VTRED 52C20 52C21 52C23 52C24 52C23 52C24 52C25 52C3 52C3-1-1/2 52C3-1-1/4 52C3-2 52C3-1-1/4 52C3-2 52C3-1-1/4 52C3-1-1/4 52C3-2 52C3-1-1/4 52C3-1-1/4 52C3-1-1/2 52C3-1-1/4 52C3-1-1/2 52C3-1-1/4 52	
42	54171-DEOW	
43	54171-FAN	
47 47	54171-FANBH 54171-FANNB	
47 47	54171-FANOW 54171-FANWP	
47	54171-FBX	
46	6/17/1 ED	

	ELECTRIC	AL • LOW
46 54171-R 46 54171-S	16 14	72171-SDA 72171-SVT
46 54171-SBB	15	72171-SVTR
50 54171-SVT 50 54171-TBAR	14 15	72171-SVTS 72171-SVTV
50 54181-ADJ	17	72181-1
50 54181-BLNK 43 54181-OW	17 17	72181-1-1/4 72181-3/4
43 54181-S	17	72181-BLNK
43 54181-TBAR 43 54C1	17 18	72181-S 72C1
43 54C1-R	18	72C13
43 54C1-VT 50 54C3	18 20	72C14 72C14-5/8
50 54C3 50 54C3-1	20	72C15
50 54C3-1-1/2 46 54C3-1-1/4	20 20	72C16 72C17
46 54C3-2	20	72C18
50 54C3-3/4 50 54C3-5/8	20 20	72C18-5/8 72C19
51 54C3-F	20	72C1-GS
51 54C40 51 54C41	18 18	72C1-RED 72C1-VT
51 54C42	18	72C1-VTREI
51 54C6 51 54C6-R	18 18	72C20 72C20A
51 54CBPO	18, 54	72C21
51 55151-1/2 43 55151-3/4	13 13	72C22 72C23
46 55151-S	13	72C24
46 55151-VT 43 56111	13 5	72C25 72C29
30 56111-OW	5	72C3
30 56111-R 30 56112	5 5	72C3-1 72C3-1-1/2
30 56112 30 56113	5	72C3-1-1/2 72C3-1-1/4
30 602BSS 30 61-1	310 75	72C32 72C3-2
30 61-1 30 61-1/2	75 75	72C3-2/72C3-3/4
39 61-1-1/2 39 61-1-1/4	75 75	72C35 72C3-5/8
39 61-2	75 75	72C3-5/6 72C36
39 61-3/4 39 61-5/8	75 75	72C37 72C38
39 61-5/8 39 6150-3/4	75 72	72C36 72C39
30, 39, 43 6150-BLNK	72	72C40
9 6150-S 9 62-1	72 76	72C3-F 72C41
9 62-1/2 9 62-1-1/2	76 76	72C42 72C44
9 62-1-1/2	76 76	72C44 72C47
11 62-2 9 62-3/4	76 76	72C48 72C49
9 62-5/8	76 76	72C50
10 6250-1 10 6250-1-1/4	72 72	72C51 72C6
10 6250-3/4	72	72C62
10 6250-BLNK 9 6250-S	72 72	72C62A 72C6-VTSS
10 629NG	43	73151-S
11 6350-1 12 6350-1-1/2	73 73	73171-1 73171-1/2
10 6350-1-1/4	73	73171-3/4
11 6350-3/4 12 6350-BLNK	73 73	73171-RED 73171-S
10 6350-S	73	73171-SVT
11 651-3 12 6BC	4 74	73C1-VT 7W
9 6CP	74	8AW
11 6W 12 72151-1/2	360 58	8W 92181-1/2RE
12 72151-3/4	58	92181-3/4RE
9 72151-S 9 72151-SVT	58 58	9W
14 72171-1	59	
14 72171-1/2 14 72171-1-1/4	59 60	ABS ABS6
14 72171-1-1/4VT	60	AJ1213
14 72171-1-VT 16 72171-3/4	59 59	AJ1420 AJ3816
14 72171-3/4-1	59	AJTL1213
14 72171-3/4-1-VT 15 72171-3/4RED	59 59	AJTL1420 AJTL3816
15 72171-3/4-VT	59	AMR0
15 72171-BLNK 14 72171-BX	60 61	AMR1 AMR2
15 72171-FBX	61	AMR3
15 72171-FS 16 72171-MS	62 62	APS APSKC1
16 72171-MSBX	61	APSKC1234
16 72171-RED	59	ASB-0

16 14 15 14 15 17 17 17 17 17 18 18 18 20 20 20 20 20 20 20 20 20 20 30 31 31 31 31 31 31 31 31 31 31 31 31 31	72171-SDA 72171-SVT 72171-SVTRED 72171-SVTSS 72171-SVTWM 72181-31/4 72181-31/4 72181-31/4 72181-31/4 72181-31/4 72181-5/8 72C14 72C15 72C16 72C17 72C18 72C16 72C17 72C18 72C19 72C20 72C2	A	60 600 600 600 603 633 633 633 655 666 666 666 667 677 677 667 667 667
59 60 60 59 59 59 59 59 60 61 61 62 62 61 59 60	ABS ABS6 AJ1213 AJ1420 AJ3816 AJTL1213 AJTL1420 AJTL3816 AMR0 AMR1 AMR2 AMR3 APS APSKC1 APSKC1234 ASB-0 ASB-1		253 253 365 365 365 365 365 365 49, 51 46, 49 49, 50 49, 102 258 258 219 219

52151-3/4 52151-3/4DR

52151-3/4F

52151-AB

52151-BBX 52151-BLNK

52151-BR

52151-BX 52151-DWS

52151-F

52151-FBX

52151-FS 52151-FSDA

52151-FSQ

52151-MSBX

52151-MSDA

52151-MS

52151-FR

52151-B

52151-3/4-VT

16 15

72171-RED

72171-S

54171-FR

54171-JR 54171-OW

46 46



Product Index

847-455-0188 FAX 847-455-0334 garvinindustries.com

ASB-2		219	BR-100-WS	295	CG-125150	153	DOM-50	160	FS200SL	315
ASB-3 ASB-4		219 219	BR-125 BR-1251024	294 294	CG-200 CG-250300	153 153	DOM-75 DPB-2	160 87	FS200SLG FS200SS	315 315
ASB-5		219	BR-1251024 BR-12510NT	293	CG-250300 CG-350400	153	DPB-2F	87	FS200SSG	315
ASB-6	:	219	BR-125-SS304	295	CG-50	153	DPB-2OW	87	FS280BLNK	315
ASB-7		219	BR-125-WS	295	CG50250	221	DR15SI	326	FS2DUP	378
ASB-8		219	BR-150 BR-1501024	294 294	CG50350 CG50450	221 221	DR15SW DR15TRSI	326 326	FS2G FS2GFI	378 378
	В		BR-150NP	291	CG50560	221	DR15TRSW	326	FS2TOG	378
BA-1/4	:	307	BR-150NPWH	291	CG50650	221	DR20SI	326	FS50	224
BAKC1234		259	BR-150-SS304 BR-150-SSC	295 290	CG-75 CG75250	153 221	DR20SW DRV-1/2	326 287	FS500HL FS500HLG	316 316
BAKC38		259	BR-150-SSCWH	290 290	CG75350	221	DRV-1/2 DRV-1-1/4	287	FS500SL	316
BAT-3/8 BB-1/2		307 145	BR-150-TW	292	CG75450	221	DRV-5/8	287	FS500SLG	316
BB-1/2-2		145	BR-150-WH	289	CG75560	221	DRV-7/8	287	FS500SS	316
BB-3/4		145	BR-150-WHWS BR-150-WS	289 295	CG75650 CG75750	221 221	DS1 DS15BK	378 327	FS500SSG FS75	316 224
BB4-25		251 251	BR-200	294	CG75850	221	DS15I	327	FSC50 – FSC100	224
BB4-26 BB6-26		251 257	BR-2001024	294	CH-50 - CH-400	265	DS15W	327	FSCG	224
BC1		310	BR-20010NT BR-200NP	293 291	CHN-100100 CHN-50I – CHN-600I	191 190	DS315BK DS315I	327 327	FSCLK10 FSCLK28	377 377
BC-1024		310	BR-200-SS304	295	CHN-50100	190	DS315W	327	FSCLR2 – FSCLR4	377
BC-1420 BC-1420-SS		310 310	BR-200NPWH	291	CHN-75100	191	DS415BK	327	FSCS-300 - FSCS-500	377
BC18		309	BR-200-SSC	290	CHOKR-1	319	DS415I	327	FSCVB	224
BC18KC1		260	BR-200-SSCWH BR-200-TW	290 292	CHOKR-2 CHSS-50 – CHSS400	319 266	DS415W DS5	327 378	FSCVD FSCVT	224 224
BC18KC112		260	BR-200-WH	289	CLB-50 - CLB-600	281	DST-1200	296	FSPAD	377
BC18KC114 BC18KC1234		260 260	BR-200-WHWS	289	CLS	371	DST-200	296	FSPLW	377
BC18KC2		260	BR-200-WS BR-400	295 294	CMT-3000 CON-50 – CON-600	384 174	DST-200-P DST-300	296 296	FSPTY FXE0100	377 374
BC18KC38		260	BR-400NP	291	CP75SS	351	DST-300-P	296	FXE0138	374
BC18ST BC-3816		309 310	BR-400-SS304	295	CPMH1	375	DST-500	296	FXE1116	374
BC-3816-SS		310	BR-400-SSC	290	CPS100I	351	DST-500-P	296	FXL50	374
BC516	;	309	BR-400-TW BR-400-WH	292 289	CPS100W CPS50I	351 351	DST-800 DWS6125	296 358	FXS1838	374
BC516KC1		260	BR-501024	294	CPS50W	351	DWS6158	358	G	
BC516KC112 BC516KC114		260 260	BR-5010NT	293	CPS516I	351	DWS6200	358	G100	300
BC516KC1234		260	BR-751024 BR-7510NT	294 293	CPS516W CPS75I	351 351	E		G19180 G19190	77 77
BC516KC2		260	BRS150	289	CPS75W	351	E100125	180	G19279	77
BC516KC38 BC516ST		260 309	BRS200	289	CR15I	330	E125150	180	G19280	77
BC916		309	BXC	269	CR15W	330	E5075	180	G19280-E	77
BC916ST	;	309	С		CR20BK CR20I	330 330	E75100 EC	180 116	G19280-EA G19281	77 78
BH1		254	•		CR20W	330	ECS-50	138	G19281-3/4	78
BH1C BH1S		254 254	C105351MED	376	CT-11	299	ECS-75	138	G19281-AB	78
BH1SC		254	C105651MED C105652MOG	376 376	CT-11-BK CT-11-PL	299 299	EDG50 – EDG300 EF100	277 178	G19281-BLNK G19281-E	78 78
BH2		255	C500	373	CT-11-PL	299	EF50	178	G19281-E	78 78
BH2NC BH3		255 255	C545	373	CT-14-BK	299	EF75	178	G19281NGH	78
BH50		385	C545ADJKIT	373 376	CT-14-PL CT-5	299 299	EFL100	178 178	G19282 G19282-3/4	79 79
BHA1		256	C85271MED C85411MED	376	CT-5-BK	299	EFL50 EFL75	178	G19282-AB	79
BHA16 BHA1C		256 256	C85501MED	376	CT-5-PL	299	EMT-5045 - EMT-40045	141	G19282-BLNK	79
BHA24		256 256	C85641MED	376	CT-7	299	EMT-5090 - EMT-40090	140	G19282-F	79
BHADJ		255	CAPE50 - CAPE400 CAPR50 - CAPR600	144 171	CT-7-BK CT-7-PL	299 299	EXR-1 EXR-1/2	52 52	G19282NGH G1929 – G1937	79 55
BHC BHSS50		255 385	CAT150	285	CTM	299	EXR-1-1/2	52	G19290	80
BHT1		363 254	CAT200	285	CTMBK	299	EXR-1-1/4	52	G19290-ALUM	80
BHT1A	:	254	CAT400 CB-11A	285 36	CTS-11 CTS-11-BK	300 300	EXR-2 EXR-3/4	52 52	G19320 G19350	80 80
BHTBAR		255	CB-8	85	CTS-14	300	EXR-5/8	52	G1938 – G1943	56
BHTC BKTAB	114,	255 252	CB-8BX	85	CTS-14-BK	300	EXR-F	52	G19380	80
BKTB	114,		CB-8R CBC-275	85 19	CTS-7 CTS-7-BK	300 300	F		G19390 G19420	80 80
BKTDW	114, :		CBC-275 CBC-350	19	CWC-50 – CWC-125	258	FB	319	G19430	80
BKTF BKTFAN	114, : 114, :		CBC-600	19, 372			FB-50 - FB100	218	G1944 – G1951	57
BKTJ	114,		CBC-800 CBC-1200	19, 372	D		FBCVSS-D-KIT FBCVBR-D-KIT	23 23	G19470 G20281	80 81
BKTWB	114,		CBC-1200 CBC-F	19, 372 19	DB10090IC	213	FBCVSS-G-KIT	23	G20290	81
BMB16150 BMB16218		250 250	CBCU	19	DB38IC – DB400IC DB3845IC	211 212	FBCVBR-G-KIT	23	G20320	81
BMB16250		250 250	CBP	7	DB3890IC	213	FBL	319	G20350	81
BMB16350	;	250	CBP-3/8 CBP-AP	7 7	DB5045IC	212	FD50 – FD100 FDC 50 – FDC100	224 224	G20380 G20430	81 81
BMB16SL		250	CBP-B	7	DB5090IC	213	FF50 – FF200	181	G20470	81
BMB616SL BMB24150		250 250	CBP-VT	7	DB7545IC DB7590IC	212 213	FLC-50	214	G500	82
BMB24218		250	CCN-50 – CCN-500	125	DD703LW	335	FLC-50L	214	G500-BX	82
BMB24250		250	CCN-50I - CCN-400I CCNR-50 - CCNR-400	126 127	DD703W	335	FLC-75L FLD-50	214 214	G500-R G600	82 82
BMB24350 BMB24SL		250 250	CCNZ-50 - CCNZ-400	133	DDLV503LW DG-650	335 338	FMCP-38	216,370	G600-BX	82
BMB4S3P		250 250	CCP-50 - CCP-400	128	DG-900	338	FMCP-50	216	G600-R	82
BMB624SL	:	250	CCPR-50 – CCPR-400 CCPZ-50 – CCPZ-400	129 134	DI1213	366	FMT-38 FMT-3890	216, 370 216, 370	G601 G601-3/4	84 84
BMC442	;	310	CEB-6	257	DI1420	366	FMT-5090	216, 370	G601BVR	83
BP-1935 BP-19350		54 54	CEB-18	257	DI3816 DITL1213	366 366	FP38 – FP75	383	G601BVRLE	83
BP-1936		54	CEB-24	257	DITL1213	366	FS100	224	G601BVROW	83
BPO-1935		54	CEB-78 CFN14	257 374	DITL3816	366	FS1DUP FS1G	378 378	G601-BX G601-F	84 84
BPO-19350		54 54	CFN18	374	DOM-100	160 160	FS1GFI	378	G601-FBX	84
BPO-1936 BPO-PS1T		54 54	CFN38	374	DOM-125150 DOM-200	160 160	FS1TOG	378	G601-FR	84
BP-PS1T		54	CFN38X CG-100	374 153	DOM-250300	160	FS200HL FS200HLG	315 315	G601-LE G601-OW	84 84
BR-1001024	:	294	55-100	100	DOM-350400	160	1 JZUUI ILU	313	2301 011	04

85 85

85 85 85

85 85 85

86 86 86

86 86 86

86 86

96 97

98

101 102

G601-R G602 G602-3/4

G602-BX G602-F

G602-FBX

G602-FR

G602-OW G602-R

G603

G603-3/4

G603-BX

G603-FBX G603-FR

GB-1582 - G1589

GB-2122 – GB-2129 GB-2122341 – GB-2129341 GBBC-2 – GBBC-9

G603-LE G603-OW G603-R

Product Index



GBDC-122 – GBDC-129 GBDC-342 – GBDC-349 GBDUP-2 – GBDUP-9 GBEX-1582 – GBEX-1589 GBEX-2122 – GBEX-2129 GBGFI-2 – GBGFI-9 GBP-15812 99 100 107 GBP-15834 107 GBP-158-F GBP-21212 107 GBP-21234 107 GBP-212-F 107 GBTC-2 - GBTC-9 106 108 GCA125200 GCA250400 196 GCA450600 196 GCA50100 GCB125200 196 196 GCB250400 196 196 196 GCB450600 GCB50100 GCB50100LI GCBB50100 196 GCBZ50100 196 GCH50100100 GCH5010050 197 GCH5010075 197 GCHK50 - GCHK600 GCR50100 196 GFCI15AL 324 GFCI15BK GFCI15GY 324 GFCI15IV 324 GFCI15WH GFCI20AL 324 GFCI20BK 324 GFCI20GY GFCI20IV 324 324 GFCI20WH GFI15100 GFI1525 380 380 GFI1550 GFI155A 380 380 GFI15PLUG GFI15QB 380 GFI202 380 GFI2025 GFI203 GLTC-38 – GLTC-600 380 200 GLTC-3845 - GLTC-40045 GLTC-3890 - GLTC-40090 202 GRC50 197 GRC58 GRC75 197 197 GS 108 GSC-5075 53 GSCR-5075 21 Н

> 356 356

> 357

169

303

304

305

HEN	306	LEC 375 MILT	272	LYTDW	247	NIMI T 3800 NIMI T 30000	207
HFK HFK-1	306 306	LFS-375-NUT LL50 – LL400	373 149	LXTDW LXTGI	347 347	NMLT-3890 – NMLT-20090 NS-100	207 270
HFSG2-5 – HFSG2-30	303	LN-38 – LN-600	193	LXTGW	347	NS-50	270
HFYHK2-518 – HFYHK2-2018	306	LNG-50 – LNG-600	194	LXTRI	347	NS-50FS	270
HFYTG2-518 - HFYTG2-3018	305	LNS-50 - LNS-600	195	LXTRW	347	NS-75	270
HN1213	357	LR50 – LR400	148	LXTTDI	347	NSBX-50	269
HN1420	357	LSB-1/4	317	LXTTDW	347	NSBX-75	269
HN3816	357	LSB-3/8	317	LXTTGI	347	0	
HN632 HN832	357 357	LSN-1/4 LSN-3/8	317 317	LXTTGW	347	OCC-50 - OCC-75	137
HNDL	385	LT50 – LT400	150	M		OCN50 - OCN400	192
HR15I	332	LTC-3890 – LTC-40090	205	MBC-1024	311	OCR-200	6
HR15R	332	LTC-38 – LTC-400	203	MBC-1213	311	OCR-250	6
HR15W	332	LTC-3845 - LTC-40045	204	MBC-1213WM	311	OCR-300	6
HR20I	332	LVP41	48	MBC-1213XL	311	OCR-300341	6
HR20R	332	LVP41D	48	MBC-1420	311	OCR-350	6
HR20W	332	LVP42	48	MBC-1420WM	311	OCR-350341	6
HWS1420	367	LVP42D	48	MBC3D	95	OCR-400	6
HWS3816	367	LVP51 LVP52	67 67	MBC3T MBC-3816	95 311	OCR-400341 OCR-400FAN	6 6
I		LW1024	361	MBC-3816EV	311	OCR-400FAN	6
		LW1213	361	MBC-3816WM	311	OCR-600	6
IB-50 – IB-400	135	LW1420	361	MC50 - MC400	159	OCS-50 - OCS-100	137
IBB03	198	LW3816	361	MCC-1213	313	OCSH75 - OCSH200	286
IBS-50 – IBS-400 IBT-50 – IBT-600	136 175	LW632	361	MCC-1213BK	313	ODR-250	297
IBTS-50 – IBTS-600	176	LW832	361	MCC-3410BK	313	ODR-350	297
IGR150R	331	LXB1I	344	MCC-3816	313	ODR-375	297
IGR20OR	331	LXB1W	344	MCC-3816BK	313	OF654 & OF655	213
IPA4D	379	LXB2I	344 344	MCC-5811BK	313	OF671-S – OF675-S	217
IPA4G	379	LXB2W LXB3I	344	MFC-1213 MFC-3410	312 312	OF676 – OF679 OF681-S & OF682-S	217 217
IPA6D	379	LXB3W	344	MFC-3816	312	OF685 & OF686	217
IPA6G	379	LXB4I	344	MFC-5811	312	OF694 & OF695	216
IPA6GWP IPA8D	379 379	LXB4W	344	MGMR0 – MGMR2	113	OHS-38 – OHS-400	271
	379 379	LXBDI	346	MGR0 – MGR4	113	OHSR-38 - OHSR-600	280
IPA8G IR15I	379	LXBDW	346	MGSB-2	88	OHSS-50 - OHSS-400	272
IR15W	331	LXBGI	346	MGSB-2F	88	OPSC-38 – OPSC-400	268
IR20I	331	LXBGW	346	MGSB-2OW	88	OR	338
IR20W	331	LXBTI	346	MGSB-3	88	OSDSI	325
		LXBTW	346 342	MGSB-3F	88	OSDSW	325
J		LXD1BK LXD1GY	342 342	MGSB-3OW MGSB-4	88 88	OSE1100 OSE1200	320 320
		LXD101	342	MGSB-4F	88	OSE150	320
JC-100	375	LXD1R	342	MGSB-40W	88	OSE175	320
JCL50 - JCL150	279	LXD1W	342	MLB50 – MLB400	155	OSPI	325
JFC-1213	312	LXD2I	342	MLL50 - MLL400	156	OSPW	325
JFC-1420	312	LXD2OR	342	MLR50 - MLR400	157	OSSI	325
JFC-3410 JFC-3816	312 312	LXD2W	342	MOGADP	376	OSSW	325
JFC-5811	312	LXD3I	342	MOGENLG	376	OWC	111, 253
JHK-12	284	LXD3W	342	MOLB-100 – MOLB-400	146	OWE	111
JHK-12-BW2	284	LXD4I	342	MPC25	213	P	
JHK-21	284	LXD4W LXD5I	342 342	MRC-1250 – MRC-4350 MRK	169 381	DAREO BARADO	270
JHK-21-AB	284	LXD5W	342	MRK1	381	PAR50 – PAR400 PE-50 – PE-125	278 189
JHK-21-BC	284	LXD6I	342	MRK2	381	PEB-50 – PEB-125	189
JHK-21-BW2	284	LXD6W	342	MS14100	354	PESS-50 – PESS-125	142
JHK-21-BW6	284	LXDGI	346	MS14125	354	PESSB-50 - PESSB-125	143
JHK-32 JHK-32-AB	284 284	LXDGW	346	MS14150	354	PF-50	22, 372
JHK-32-BC	284	LXG1BK	343	MS14200	354	PF-51	22, 372
JHK-32-BW2	284	LXG1I	343	MS14300	354	PF-51-DU	22, 372
JHK-32-BW6	284	LXG1W	343	MS1438	354	PF-52	22, 372
JHK-64	284	LXG2I	343 343	MS14400 MS1450	354 354	PHI PI -230	314 384
JHK-64-AB	284	LXG2W LXG3I	343	MS1450 MS1475	354 354	PL-230 PL-50	384 22, 372
JHK-64-BC	284	LXG3W	343	MS38100	355	PL-500	384
V		LXG4I	343	MS38125	355	PL-51	22, 372
K		LXG4W	343	MS38150	355	PL-GARVIN	388
KC112T	264	LXG5I	343	MS38175	355	PL-LID	388
KC114T	264	LXG5W	343	MS38200	355	PNTBK	387
KC1234T	264	LXG6I	343	MS38300	355	PNTBR	387
KC1T	264 264	LXG6W LXPHON1I	343 345	MS3838 MS38400	355 355	PNTBU PNTGN	387 387
KC2T KC38T	264 264	LXPHON1W	345	MS3850	355	PNTOR	387
KU381 KIT10PAK	264 364	LXPHON2I	345	MS3875	355	PNTPU	387
KIT8EZ	364	LXPHON2W	345	MS632100	353	PNTRD	387
KOB-50 – KOB-100	121	LXR1I	345	MS632125	353	PNTWH	387
KOBR-50	121	LXR1W	345	MS632150	353	PNTYE	387
KOS-50 - KOS-600	115	LXR2I	345	MS632200	353	PNY50 - PNY600	177
KOS-50-VT - KOS-600-VT	115	LXR2W	345	MS63250	353	POW	379
KP4-12 – KP4-24	248	LXT1I	341	MS63275	353	POWC	379
L		LXT1W	341	MS832100	353	PR-4	321
	4.47	LXT2I	341 341	MS832125 MS832150	353 353	PR-412	321
LB50 – LB400	147 151	LXT2W LXT3I	341	MS832150 MS832200	353 353	PR-6 PR-8	321 321
LC50 – LC400 LFCOV	375	LXT3W	341	MS83250	353	PR-10	321
LFP	374	LXT4I	341	MS83275	353	PR-12	321
LFS-16WHT	373	LXT4W	341	MT50 – MT400	158	PS1BI	340
LFS-375-12WH	373	LXT5I	341	MVCP	31	PS1BW	340
LFS-375-18WH	373	LXT5W	341	MX1CG - MX6CG	154	PS1DI	339
LFS-375-24WH	373	LXT6I	341	N		PS1DW	339
LFS-375-36WH	373	LXT6W LXTDI	341 347		206	PS1GI	339
LFS-375-48WH	373	LAIDI	J41	NMLT-38 – NMLT-200	206	PS1GW	339

HFHK2-5 – HFHK2-30

HB50150 - HB50400

HF1490G2-5 - HF1490G2-30 HFBQG2-10 & HFBQG2-15

HC50 - HC100 HF02-5 - HF02-30

H50 - H100 HB3875 - HB38400 HB5075 - HB50125



Product Index

847-455-0188 FAX 847-455-0334 garvinindustries.com

PS1RI	339	RB-20050	185	RSC-50 – RSC-200	164	SLD-600I	335	SSCN-50I – SSCN-400I	123
PS1RW PS1TI	339 339	RB-20075 RB-250100	185 186	RT50 – RT400 RTC50 – RTC400	161 162	SLD-600W SLD-603I	335 335	SSCP-50 – SSCP-400 SSNZ-50 – SSNZ-400	124 130
PS1TW	339	RB-250125	186	RTE-50 – RTE-125	188	SLD-603W	335	SSNZ-50I – SSNZ-400I	131
PSXPD1I	339	RB-250150	186	RTF50 - RTF125	188	SLD-633W	335	SSPZ-50 - SSPZ-400	132
PSXPD1W PT-1250-3K	339 384	RB-250200 RB-25050	186 186	RW-10050	117 117	SLR-150 SLR-158	44, 283 44	STC50 - STC100	266 267
PT-1250-5K PT-1250-5K	384	RB-25075	186	RW-10075 RW-125100	117	SLR-175	44	STE50 - STE200 STF0030	301
PT-1800-3K	384	RB-300100	186	RW-12550	117	SLR-1-EV	283	STF0036	301
PT-1800-5K PT-2500-3K	384 384	RB-300125 RB-300150	186 186	RW-12575 RW-150100	117 117	SLR-250 SLR-258	45, 283 45	STF14 STF1430	301 301
PT-2500-5K PT-2500-5K	384	RB-300200	186	RW-150100 RW-150125	117	SLR-275	45 45	STF1436	301
PTSO12BK	109	RB-300250	186	RW-15050	117	SLR-2-EV	283	STF1454	301
PTSO12GN PTSO12RD	109 109	RB-350200 RB-350250	187 187	RW-15075 RW-200100	117 118	SLR-350 SLR-450	283 283	STF1466 STF14NP	301 301
PTSO12WH	109	RB-350300	187	RW-200100	118	SMY141S	358	STF38	301
PTSO12YE	109	RB-400200	187	RW-200150	118	SMY142W	358	STF3830	301
PTSO14BK PTSO14GN	109 109	RB-400250 RB-400300	187 187	RW-20050 RW-20075	118 118	SMY381S SMY38250W	358 358	STF3836 STF38NP	301 301
PTSO14RD	109	RB-400350	187	RW-250100	118	SNAP50 - SNAP200	116	STK215I	334
PTSO14WH	109	RB-500400	187	RW-250125	118	SNLK-38	208	STK215W	334
PTSO14YE PTST12BK	109 108	RB-5038 RB-600500	185 187	RW-250150 RW-250200	118 118	SNLK-3890 SNLK-38DU	208 208	STK315I STK315W	334 334
PTST12GN	108	RB-7550	185	RW-25050	118	SNLK-38SD	208	STKR15I	334
PTST12GN-NGS PTST12RD	108 108	RC-50 – RC-400 RD600I	169 336	RW-25075 RW-300100	118 119	SNLK-38SS SNLK-50	208 208	STKR15W STR50 – STR400	334 267
PTST12WH	108	RD600W	336	RW-300125	119	SNLK-5090	208	STR50-SS - STR400-SS	267
PTST12YE	108	RDC1213	302	RW-300150	119	SNLS1213	318	STU50 - STU400	267
PTST14BK PTST14GN	108 108	RDC1420 RDC3816	302 302	RW-300200 RW-300250	119 119	SNLS1420 SNLS3816	318 318	SW-1/2 SW-1/2-G	317, 363 317, 363
PTST14RD	108	RDP603I	336	RW-30050	119	SNRS1213	318	SW-1/4	317, 363
PTST14WH	108	RDP603W	336	RW-30075	119	SNRS1420	318	SW-1/4-SS	363
PTST14YE PUL1G	108 382	RE-5045 – RE-40045 RE-5090 – RE-40090	179 179	RW-350100 RW-350125	119 119	SNRS3816 SNSS1213	318 318	SW-1/4-G SW-1/2-SS	317, 363 363
PUL1Q	382	RFSC25I	336	RW-350150	119	SNSS1420	318	SW-2-1/2	317, 363
PUL5G PULPAL	382 381	RFSC25W	336	RW-350200	119	SNSS3816	318	SW-2-3/4 SW-2-3/8	317, 363 317, 363
PWHA	319	RFT-100 RN1001000	319 167	RW-350250 RW-350300	119 119	SNWO1213 SNWO1420	318 318	SW-2-5/8	317, 363
PWHH	319	RN1001200	167	RW-35050	119	SNWO3816	318	SW-3/4	317, 363
PWHL PWHM	319 319	RN100150 RN100200	167 167	RW-35075 RW-400100	119 120	SOB-1 SP-12	319 112	SW-3/4-G SW-3/8	317, 363 317, 363
PWHP-12	370	RN100200	167	RW-400125	120	SP-18	112	SW-3/8-SS	363
PWHP-14	370	RN100400	167	RW-400150	120	SP-24	112	SW-3/8-G	317, 363
PWHP-18 PWHP-26	370 370	RN100600 RN100800	167 167	RW-400200 RW-400250	120 120	SP-3 SP-3-MS	112 112	SW-5/8 SW-5/8-SS	317, 363 363
PWHP-2A	369	RN100C	167	RW-400300	120	SP-6	112	SW-5/8-G	317, 363
PWHP-2A12	369	RN1251000	167	RW-400350	120	SP-6-MS	112	SW-3/4-SS	363
PWHP-36 PWHP-3A	370 369	RN1251200 RN125150	167 167	RW-40050 RW-40075	120 120	SP-9 SQZ-3890I – SQZ-40090I	112 210	Т	
PWHP-3A12	369	RN125200	167	RW-7550	117	SQZ-38I – SQZ-400I	209	TAP14125	359
PWHP-48 PWHP-4A	370 369	RN125300 RN125400	167 167	RXCN38 – RXCN200 RXS-38 – RXS-75	220 223	SQZEMT-100 SQZEMT-38	139, 215 139, 215	TAP14175 TAP14225	359 359
PWHP-4A12	369	RN125600	167	S	223	SQZEMT-50	139, 215	TAPEBK	386
PWHP-5	370	RN125800	167	_		SQZEMT-75	139, 215	TAPEBR	386
PWHP-5A PWHP-72	369 370	RN125C RN1501000	167 168	SBEX SBLT-1 – SBLT-6	111 199	SR15250I SR15250W	333 333	TAPEBU TAPEDT	386 386
Q	0.0	RN1501200	168	SBR30-3	337	SR15I	333	TAPEGN	386
QC-1 – QC-4	110	RN150150	168 168	SBR30-4 SBR50-3	337 337	SR15W	333 333	TAPEGY	386
QC-6	110	RN150200 RN150300	168	SBR50-4	337	SR20250I SR20250W	333	TAPEOR TAPERD	386 386
QF3PAN	247	RN150400	168	SBS	111	SR20I	333	TAPEWH	386
QF40CT QF4PAN	247 247	RN150600 RN150800	168 168	SBS-L SC-50	111 53	SR20W SS1B	333 348	TAPEYE TB-1025-G	386 92
QFPIPE	247	RN150C	168	SC-507511B	65	SS1D	348	TB-1025-G	94
QFPSGR	247	RN2001000	168	SC-5075HF	53	SS1DB	348	TB-125	91
R		RN2001200 RN200150	168 168	SC-5075HFR SC-50R	21 21	SS1G SS1LUV	348 348	TB-125-G TB-135	91 93
R014T	307	RN200200	168	SC-50R-VT	21	SS1MIC	348	TB-135-G	93
R038T R15SG	307 329	RN200300 RN200400	168 168	SC-50-VT SC-75	53 53	SS1PH SS1PO	348 348	TB-225 TB-225-G	91 91
R15SI	329	RN200600	168	SC-75R	21	SS1SR	348	TB-235	93
R15SW	329	RN200800	168	SCC-1213	313	SS1T	348	TB-235-G	93
R15TRSI R15TRSW	329 329	RN200C RN501000	168 166	SCC-3410 SCC-3816	313 313	SS2B SS2D	349 349	TB-325 TB-325-F	91 89
R1814T	314	RN501200	166	SCC-5811	313	SS2DG	349	TB-325-G	91
R201	329	RN50150	166	SCC-1213BK	313	SS2G	349	TB-335	93
R20W R51614T	329 314	RN50200 RN50300	166 166	SCC-3410BK SCC-3816BK	313 313	SS2PH SS2T	349 349	TB-335-BLNK TB-335-F	95 89
R91614T	314	RN50400	166	SCC-5811BK	313	SS2TB	349	TB-335-G	93
RA50 – RA400 RB-10050	276 185	RN50600	166 166	SCC-1213SS	313 313	SS2TD SS2TG	349 349	TB-425 TB-425-F	91 89
RB-10075	185	RN50800 RN50C	166	SCC-3410SS SCC-3816SS	313	SS3B	350	TB-425-F TB-425-G	91
RB-125100	185	RN751000	166	SCC-5811SS	313	SS3D	350	TB-435	93
RB-12550 RB-12575	185 185	RN751200 RN75150	166 166	SCRUBS SDL-1/2	388 317	SS3G SS3T	350 350	TB-435-F TB-435-G	89 93
RB-150100	185	RN75200	166	SDL-3/8	317	SS4B	350	TB-525	92
RB-150125	185	RN75300	166	SDP	319	SS4D	350	TB-525-G	92
RB-15050 RB-15075	185 185	RN75400 RN75600	166 166	SEC50 - SEC400 SGB50 - SGB600	184 172	SS4G SS4T	350 350	TB-535 TB-535-G	94 94
RB-200100	185	RN75800	166	SH-11	375	SS5B	350	TB-625	92
RB-200125 RB-200150	185 185	RN75C RS-50 – RS-600	166 163	SH-12 SLB50 – SLB200	375 152	SS6B SSCN-50 – SSCN-400	350 122	TB-625-G TB-635	92 94
110-200100	100	110-00 - 110-000	103	SEBSS - SEBSSS	132	33014-30 - 33014 -4 00	122	15-000	34

Product Index



garvinindustries.com

	TD 005 0	0.4	WJFI WJFW WP1CPDH WP1CPDV WP1CPGV WP21003 WP2503 – WP2505X	000	WDEVDES
	TB-635-G	94	WJFI	322	WPEXB756
	TB-725-G	92	WD40DDLL	322	WPEXF502
	TD 925 C	94	WP1CPDH WP1CPDV	234	WPEXF504 WPEXF506
	TB-835-G	94	WP1CPGV	234	WPEXF752
	TB-925-G	92	WP21003	226	WPEXF754
	TB-935-G	94	WP2503 – WP2505X	226	WPEXF756
	TBD-250	95	WP2581003	227	WPEXR1
	TBD-350	95	WP2581005X	227	WPEXR2
	TBX-125	95	WP258503	227	WPEXR504
	TBX-225	95	WP258504	227	WPEXR754
	TBX-325	95	WP258505X	227	WPEXRR
	TBX-425	95	WP258753	227	WPGSKT1G – WPGSKT3G
	TBX-525	95	WP258754	227	WPP1
	THOO 35 THOO 999	95	WP258755X	227	WPPDUP
	THCS-75 - THCS-200	287	WP2753	226	WPPTOG
	THER EN THER END	2/3	WP2755	220	WPR505 WPR755
	THSS-25 _ THSS-400	275	WP2755Y	226	WPRCV501 – WPRCV503
	TI 105CF	371 379	WP2C2S	240	WPRCV503R
	TL105CFW	371, 379	WP2C2SW	240	WPRCVB
	TLF	371, 379	WP2CLPO60	240	WPRE1 – WPRE3
	TLH	371	WP2EXB506	239	WPRGSKT
	TLSG	371	WP2EXB508	239	WPSL
	TOG143	352	WP2EXB756	239	WPSS
	TOG144	352	WP2EXB758	239	WRSS-10
	TOG3163 & TOG3164	352	WP2G1003	236	WRSS-25
	TOG383 & TOG384	352	WP2G1004	236	
	TDC 50 TDC 100	55, 338	WP2G1005X	237	
	TPC-50 = TPC-100	130	WP2G1009	237	
	TP1420 - TP1420-0	302	WP2G2581005	238	
	TR3816 - TR3816-9	302	WP2G258505	238	
	TRH-1420	307	WP2G258755	238	
	TRH-3816	307	WP2G258757X	238	
	TS15GY	328	WP2G503	236	
	TS15I	328	WP2G504	236	
	TS15W	328	WP2G505	236	
	TS20I	328	WP2G505X	237	
	TS20W	328	WP2G506X	237	
	183151	328	WP2G507	237	
	1991944	3∠0 320	WP2G507X	237	
	TS3201	328	WP2G753	236	
	TS415I	328	WP2G754	236	
	TS415W	328	WP2G755	236	
	TS415W TSE250 – TSE2200	328 320	WP2G755 WP2G755X	236 237	
	TS415W TSE250 – TSE2200 TTH12 & TTH38	328 320 308	WP2G755 WP2G755X WP2G756	236 237 236	
	TS415W TSE250 – TSE2200 TTH12 & TTH38 TW340 & TW450	328 320 308 321	WP2G755 WP2G755X WP2G756 WP2G756X	236 237 236 237	
	TS415W TSE250 – TSE2200 TTH12 & TTH38 TW340 & TW450	328 320 308 321	WP2G755 WP2G755X WP2G756 WP2G756X WP2G757	236 237 236 237 237	
	TS415W TSE250 – TSE2200 TTH12 & TTH38 TW340 & TW450	328 320 308 321	WP2G755 WP2G755X WP2G756 WP2G756X WP2G7577 WP2G757X	236 237 236 237 237 237	
	TS415W TSE250 – TSE2200 TTH12 & TTH38 TW340 & TW450 U UB5	328 320 308 321	WP2G755 WP2G755X WP2G756 WP2G756X WP2G756X WP2G757 WP2G757X WP3G1007	236 237 236 237 237 237 237	
	TS415W TSE250 – TSE2200 TTH12 & TTH138 TW340 & TW450 U UB5 UB7	328 320 308 321 274 274	WJFI WJFW WP1CPDH WP1CPDV WP1CPGV WP21003 WP2503 – WP2505X WP2581003 WP258303 WP258503 WP258504 WP258505X WP258753 WP258753 WP258755 WP2755 WP2755 WP2755 WP2755 WP2755 WP2755 WP2755 WP2755 WP26000 WP2EXB506 WP2EXB506 WP2EXB506 WP2EXB508 WP2EXB758 WP261005 WP261005 WP261005 WP261005 WP2658505 WP2658505 WP2658505 WP26505 WP265603 WP26505 WP26755 WP26755 WP26755 WP26755 WP26757 WP36507		
	TS415W TSE250 – TSE2200 TTH12 & TTH38 TW340 & TW450 U UB5 UB7 UB9 UB11	328 320 308 321 274 274 274 338	WP2G755 WP2G755X WP2G756X WP2G756X WP2G756X WP2G757X WP3G1007 WP3G507 WP3G507 - WP4G1007	241	
	TS415W TSE250 – TSE2200 TTH12 & TTH38 TW340 & TW450 U UB5 UB7 UB9 UBL1 UBI.1-BI.U	328 320 308 321 274 274 274 338 338	WP2G755 WP2G755X WP2G756 WP2G756X WP2G756X WP2G757X WP3G1007 WP3G507 WP3G507 WP4G507 - WP4G1007 WP4G507 - WP4G1007 WP8H50	241 243	
	TS415W TSE250 – TSE2200 TTH12 & TTH38 TW340 & TW450 U UB5 UB7 UB9 UBL1 UBL1-BLU UBL1-RED	328 320 308 321 274 274 274 338 338 338	WP2G755 WP2G755X WP2G756K WP2G756X WP2G7577 WP2G757X WP3G1007 WP3G507 WP3G507 WP4G507 – WP4G1007 WP4G507 – WP4G1007 WPCP50 – WPCP100	241 243 246	
	TS415W TSE250 – TSE2200 TTH12 & TTH38 TW340 & TW450 U UB5 UB7 UB9 UBL1 UBL1-BLU UBL1-RED UBL2	328 320 308 321 274 274 274 338 338 338 338	WP2G755 WP2G755X WP2G755K WP2G756 WP2G756X WP2G757X WP3G1007 WP3G507 WP3G507 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B	241 243	
	TS415W TSE250 – TSE2200 TTH12 & TTH38 TW340 & TW450 U UB5 UB7 UB9 UBL1 UBL1-RED UBL2 UF100 – UF200	328 320 308 321 274 274 274 338 338 338 338	WP2G755 WP2G755X WP2G756X WP2G756X WP2G757X WP3G1007 WP3G507 WP3G507 WP3G507 WP4G1007 WP4G507 - WP4G1007 WPBH50 WPCP50 - WPCP100 WPCV1B WPCV1B	241 243 246 246	
	TS415W TSE250 – TSE2200 TTH12 & TTH38 TW340 & TW450 U UB5 UB7 UB9 UBL1 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400	328 320 308 321 274 274 274 338 338 338 338 222	WP2G755 WP2G755X WP2G756X WP2G756X WP2G756X WP2G757X WP3G1007 WP3G507 WP3G507 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH	241 243 246 246 232 232 232	
	TS415W TSE250 – TSE2200 TTH12 & TTH38 TW340 & TW450 U UB5 UB7 UB9 UBL1 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400	328 320 308 321 274 274 274 338 338 338 338 222 173	WP2G755 WP2G755 WP2G756 WP2G756X WP2G756X WP2G757X WP3G1007 WP3G507 WP3G507 WP4G507 – WP4G1007 WP6H50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DV WPCV1GFIH	241 243 246 246 232 232 232 232	
	TS415W TSE250 – TSE2200 TTH12 & TTH38 TW340 & TW450 U UB5 UB7 UB9 UBL1 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V	328 320 308 321 274 274 274 338 338 338 222 173	WP2G755 WP2G755X WP2G755X WP2G756X WP2G756X WP2G757X WP3G1007 WP3G507 WP3G507 WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIH WPCV1GFIH	241 243 246 246 232 232 232 232 232 232	
	TS415W TSE250 – TSE2200 TTH12 & TTH38 TW340 & TW450 U UB5 UB7 UB9 UBL1 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT	328 320 308 321 274 274 274 338 338 338 338 338 338 338 338 338	WP2G755 WP2G755X WP2G755A WP2G756X WP2G757 WP2G757X WP3G1007 WP3G507 WP3G507 WP3G507 - WP4G1007 WPBH50 WPCP50 - WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIH WPCV1GFIH WPCV1GWIU WPCV1GWIU WPCV1GWIU WPCV1GWIU	241 243 246 246 232 232 232 232 232 233	
	TS415W TSE250 – TSE2200 TTH12 & TTH38 TW340 & TW450 U UB5 UB7 UB9 UBL1 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT	274 338 338 338 338 222 173	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIH WPCV1GFIV WPCV20A WPCV20A	241 243 246 246 232 232 232 232 232 233 233	
	UB9 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT	274 338 338 338 338 222 173	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DV WPCV1GFIH WPCV1GFIV WPCV1GWU WPCV20A WPCV2B	241 243 246 246 232 232 232 232 232 233	
	TS415W TSE250 – TSE2200 TSE250 – TSE2200 TH12 & TTH38 TW340 & TW450 U UB5 UB7 UB9 UBL1 UBL1-BLU UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT W WBF-1 & WBF-2 WDS	274 338 338 338 338 222 173	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DV WPCV1GFIH WPCV1GFIV WPCV1GWU WPCV20A WPCV2B	241 243 246 246 232 232 232 232 232 233 232 240	
	UB9 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT W WBF-1 & WBF-2	274 338 338 338 222 173 375	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIV WPCV1GFIV WPCV20A WPCV2B WPCV2DUP WPCV2GLUP WPCV2GLUP	241 243 246 246 232 232 232 232 232 233 240 240 240 240	
	UB9 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT W WBF-1 & WBF-2 WDS	274 338 338 338 222 173 375	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIV WPCV1GFIV WPCV20A WPCV2B WPCV2DUP WPCV2GLUP WPCV2GLUP	241 243 246 246 232 232 232 232 232 240 240 240 240 240	
	UB9 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT W WBF-1 & WBF-2 WDS WDSMS WDSMS WDSMS WH50 – WH400	274 338 338 338 222 173 375	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIV WPCV1GFIV WPCV20A WPCV2B WPCV2DUP WPCV2GLUP WPCV2GLUP	241 243 246 232 232 232 232 232 233 232 240 240 240 240 240	
	UB9 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT W WBF-1 & WBF-2 WDS WDSWS WDSWS WH50 – WH400 WHCS75 – WHCS200	274 338 338 338 322 173 375 283 298 298 182 286	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIH WPCV1GFIV WPCV20A WPCV20B WPCV2DIP WPCV2G1DIP WPCV2GFIUP WPCV2GFIDUP WPCV2GGFISW	241 243 246 232 232 232 232 233 232 240 240 240 240 240 240	
	UB9 UBL1 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT W WBF-1 & WBF-2 WDS WDSMS WDSMS WDSMS WDSWS WH50 – WH400 WHCS75 – WHCS200 WHG50 – WHG400	274 338 338 338 322 173 375 283 298 298 298 182 286 183	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIH WPCV1GFIV WPCV20A WPCV20A WPCV2B WPCV2DIP WPCV2G1DUP WPCV2GDUPSW WPCV2GFIDUP WPCV2GFIDUP WPCV2GFIDUP WPCV2GFIDUP WPCV2GFIDUP WPCV2GFIDUP WPCV2GFIDUP WPCV2GFIDUP WPCV2GFIDUP WPCV2GFISW WPCV30A	241 243 246 232 232 232 232 232 240 240 240 240 240 240 240 240 240 232	
	UB9 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT W WBF-1 & WBF-2 WDS WDSMS WDSMS WHS0 – WH400 WHC575 – WHCS200 WHG50 – WHG400 WIU1U	274 338 338 338 222 173 375 283 298 298 298 182 286 183 231	WP3G757 WP4G507 – WP4G1007 WP6H50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIH WPCV1GFIH WPCV2GA WPCV2B WPCV2B WPCV2DUP WPCV2GUP WPCV2GUP WPCV2GFI WPCV2GFI WPCV2GGFISW WPCV30A WPCV30A	241 243 246 232 232 232 232 233 232 240 240 240 240 240 240 240 242 242	
	UB9 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT W WBF-1 & WBF-2 WDS WDSMS WDSMS WDSMS WDSWS WH50 – WH400 WHCS75 – WHCS200 WH650 – WHG400 WIU1U WIU1U	274 338 338 338 222 173 375 283 298 298 298 298 286 182 286 183 231	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIH WPCV1GFIW WPCV20A WPCV2B WPCV2DUP WPCV2GUPSW WPCV2GFIDUP WPCV2GGFIBUP WPCV2GGFIBUP WPCV2GGFIBUP WPCV30A WPCV30B WPCV30B WPCV30B WPCV30B	241 243 246 246 232 232 232 232 233 232 240 240 240 240 240 240 242 242 242	
	UB9 UBL1 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT W WBF-1 & WBF-2 WDS WDSMS WDSMS WDSMS WDSWS WH50 – WHG400 WHC375 – WHCS200 WHG50 – WHG400 WIU1U WIU1U WIU1U WIU1U	274 338 338 338 222 173 375 283 298 298 298 298 182 286 183 231 231	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIV WPCV1GFIV WPCV20A WPCV20 WPCV20UP WPCV2G1DUP WPCV2GFI WPCV2GFI WPCV2GFISW WPCV2GFISW WPCV3GB WPCV3GB WPCV3GB WPCV3GBUP WPCV3GB WPCV3GBUP WPCV3GBUP WPCV3GBUP WPCV3GBUP WPCV3GBUP WPCV3GBUP WPCV3GBUP WPCV3GBUP WPCV3GGFI	241 243 246 246 232 232 232 232 240 240 240 240 240 240 240 242 242 24	
	UB9 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT W WBF-1 & WBF-2 WDSMS WDSMS WH50 – WH400 WHCS75 – WHCS200 WHG50 – WHG400 WIU1U WIU1UD WIU1UD WIU1UD WIU1UD	274 338 338 338 222 173 375 283 298 298 298 298 182 286 183 231 231	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIV WPCV1GFIV WPCV20A WPCV20 WPCV20UP WPCV2G1DUP WPCV2GFI WPCV2GFI WPCV2GFISW WPCV2GFISW WPCV3GB WPCV3GB WPCV3GB WPCV3GBUP WPCV3GB WPCV3GBUP WPCV3GBUP WPCV3GBUP WPCV3GBUP WPCV3GBUP WPCV3GBUP WPCV3GBUP WPCV3GBUP WPCV3GGFI	241 243 246 232 232 232 232 233 232 240 240 240 240 240 242 242 242 242	
	UB9 UBL1 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT W WBF-1 & WBF-2 WDS WDSMS WDSMS WDSMS WDSWS WH50 – WHG400 WHC375 – WHCS200 WHG50 – WHG400 WIU1U WIU1U WIU1U WIU1U	274 338 338 338 222 173 375 283 298 298 298 298 182 286 183 231 231 230 231 230	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIV WPCV1GFIV WPCV20A WPCV2B WPCV2DUP WPCV2G1DUP WPCV2GFI WPCV2GFI WPCV2GFISW WPCV2GFISW WPCV3GB WPCV3GBUP WPCV3GBUP WPCV3GBUP WPCV3GBI	241 243 246 246 232 232 232 232 240 240 240 240 240 240 240 242 242 24	
	UB9 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT W WBF-1 & WBF-2 WDS WDSMS WDSMS WH50 – WH400 WHC\$75 – WHC\$200 WHG\$0 – WHG400 WIU1U WIU1UD WIU1UD WIU1V WIU2UD WIU2V	274 338 338 338 322 173 375 283 298 298 298 298 182 286 183 231 231 230 231 230 231 231 231	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIV WPCV1GFIV WPCV20A WPCV20 WPCV20B WPCV2GDUP WPCV2GFI WPCV2GFI WPCV2GFISW WPCV2GFISW WPCV3GB WPCV3GBUP WPCV3GBUP WPCV3GBUP WPCV3GBISW WPCV3GBI	241 243 246 246 232 232 232 233 232 240 240 240 240 240 242 242 242 242 24	
	UB9 UBL1 UBL1-BLU UBL1-FED UBL2 UF100 – UF200 UGB-50 – UGB-400 V V VBKT W WBF-1 & WBF-2 WDS WDSMS WDSMS WDSMS WH50 – WH6400 WHC\$75 – WHC\$200 WHG50 – WHG400 WIU1U WIU1U WIU1U WIU1V WIU2UD WIU2V WIUM1UD	274 338 338 338 322 173 375 283 298 298 298 298 182 286 183 231 231 230 231 230 231 231 231	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIV WPCV1GFIV WPCV20A WPCV20 WPCV20B WPCV2GDUP WPCV2GFI WPCV2GFI WPCV2GFISW WPCV2GFISW WPCV3GB WPCV3GBUP WPCV3GBUP WPCV3GBUP WPCV3GBISW WPCV3GBI	241 243 246 232 232 232 233 232 240 240 240 240 240 240 242 242 242 24	
	UB9 UBL1 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V V VBKT W WBF-1 & WBF-2 WDS WDSMS WDSMS WDSMS WH50 – WHC400 WHC575 – WHC5200 WHG50 – WHG400 WIU1U WIU1U WIU1U WIU1V WIU2UD WIU1V WIU2UD WIU1V WIU2UD WIUM1UD WIUM1UD WIUM1UD WIUM1UD WIUM1UD WIUM1UD WIUM1UD WIUM1UD WIUM2UD WIUM1UD WIUM2UD WJ642I WJ642I WJ642W	274 338 338 338 322 173 375 283 298 298 298 298 182 286 183 231 231 230 231 230 231 231 231	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIV WPCV1GFIV WPCV20A WPCV20 WPCV20B WPCV2GDUP WPCV2GFI WPCV2GFI WPCV2GFISW WPCV2GFISW WPCV3GB WPCV3GBUP WPCV3GBUP WPCV3GBUP WPCV3GBISW WPCV3GBI	241 243 246 246 232 232 232 232 240 240 240 240 240 240 242 242 242 24	
×	UB9 UBL1 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT W WBF-1 & WBF-2 WDS WDSWS WDSWS WH50 – WH400 WHCS75 – WHCS200 WHG50 – WHG400 WIU1U WIU1UD WIU1UD WIU1UD WIU1UD WIU1UD WIU1UV WIU1UD WIU1UD WIU1UD WIU1UD WIU1UD WIU1UD WIU1UD WIU1UD WIU1UV WIU1UD WIU1U1UD WIU1U1UD WIU1U1UD WIU1U1UD WIU1U1UD WIU1U1UD WIU1U1U1U	274 338 338 338 222 173 375 283 298 298 298 298 298 182 231 231 231 231 231 231 231 231 231 23	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIV WPCV1GFIV WPCV20A WPCV20B WPCV2DIP WPCV2G1DUP WPCV2GFI WPCV2GFI WPCV2GFISW WPCV3GB WPCV4GB	241 243 246 232 232 232 232 232 232 240 240 240 240 240 242 242 242 242 24	
iex	UB9 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT W WBF-1 & WBF-2 WDS WDSMS WDSMS WDSMS WH50 – WH400 WHC575 – WHCS200 WHG50 – WHG400 WIU1U WIU1UD WIU1UD WIU1UD WIU1V WIU2V WIUM1UD WIU2V WIUM1UD WIU4E WJ642I WJ642I WJ642I WJ64F2I WJ64F2I	274 338 338 338 338 222 173 375 283 298 298 298 298 182 231 231 230 231 231 231 231 231 231 231 232 232 232	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIH WPCV1GFIV WPCV20A WPCV20B WPCV2DUP WPCV2GDUP WPCV2GDUPSW WPCV2GFI WPCV2GGFISW WPCV3GB WPCV4GB	241 243 246 232 232 232 232 233 232 240 240 240 240 240 240 240 242 242 24	
Idex	UB9 UBL1 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V V VBKT W WBF-1 & WBF-2 WDS WDSMS WDSMS WDSMS WH50 – WHG400 WHC\$75 – WHC\$200 WHG50 – WHG400 WIU1U WIU1U WIU1V WIU2UD WIU1V WIU2UD WIU1V WIU2UD WIUM1UD WIUM2UD WIUM1UD WIUM1UD WIUM400 WIUM4	274 338 338 338 338 222 173 375 283 298 298 298 298 182 231 231 230 231 231 231 231 231 231 231 232 232 232	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIH WPCV1GFIV WPCV20A WPCV20B WPCV2DUP WPCV2GDUP WPCV2GDUPSW WPCV2GFI WPCV2GGFISW WPCV3GB WPCV4GB	241 243 246 246 232 232 232 233 232 240 240 240 240 240 242 242 242 242 24	
Idex	UB9 UBL1 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT W WBF-1 & WBF-2 WDS WDSWS WDSWS WDSWS WDSWS WH50 – WHCS200 WHCS75 – WHCS200 WHG50 – WHG400 WIU1U WIU1UD WIU1UD WIU1UD WIU1UV WIU1UD WIU1UV WIU1UD WIU1UV WIU1UV WIU1UV WIU1UV WIU1UV WIU2UD WIU4U WIU4UD WJ642I WJ64F2I WJ64F2I WJ64F2I WJ64FI WJ64FW	274 338 338 338 338 327 173 375 283 298 298 298 298 286 183 231 231 230 231 231 230 231 231 230 231 231 232 322 322 322 322	WP3G757 WP4G507 – WP4G1007 WP6H50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIH WPCV1GFIV WPCV2GUP WPCV2GUP WPCV2GUP WPCV2GGFISW WPCV2GGFISW WPCV3GBUP WPCV3GGFISW WPCV3GGFI WPCV3GGFISW WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV3GFI WPCV4GRE WPCV4GBI WPCV4GBI WPCV4GBI WPCV4GBI WPCV4GRE	241 243 246 232 232 232 232 232 230 240 240 240 240 240 240 240 242 242 24	
Idex	UB9 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT W WBF-1 & WBF-2 WDS WDSWS WHS0 – WH400 WHCS75 – WHCS200 WHG50 – WHG400 WIU1U WIU1UD WIU1UD WIU1UD WIU2V WIUM1UD WIUW2V WIUM1UD WIUM2UD WJ642I WJ64F2I WJ64F2I WJ64F2I WJ64FPW WJ64F	274 338 338 338 338 329 222 173 375 283 298 298 298 298 298 298 231 231 230 231 231 230 231 231 232 322 322 322 322 322 322	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIH WPCV1GFIV WPCV20A WPCV2B WPCV2DIP WPCV2G1DUP WPCV2GFI WPCV2GFI WPCV2GFI WPCV3GFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV4GGFI WPCV4GFI WPCV4GGFI WPCV4GFI WPCV4GGFI	241 243 246 232 232 232 233 232 240 240 240 240 240 242 242 242 242 24	
Idex	UB9 UBL1 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V V VBKT W WBF-1 & WBF-2 WDS WDSMS WDSMS WDSMS WH50 – WHG400 WHC\$75 – WHC\$200 WHG50 – WHG400 WIU1U WIU1U WIU1V WIU2UD WIU1V WIU2UD WIU1V WIU2UD WIUM1UD WIU1V WIU2UD WIUM1UD WIUM40H WJ64FU WJ64FU WJ64FU WJ64FU WJ64FU WJ64FU WJ64FU WJ64FU WJ64H	274 338 338 338 338 222 173 375 283 298 298 298 182 286 183 231 231 230 231 231 231 232 322 322 322 322 322 322	WP3G757 WP4G507 - WP4G1007 WPBH50 WPCP50 - WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIH WPCV1GFIV WPCV20A WPCV2B WPCV2DIP WPCV2G1DIP WPCV2G1DIP WPCV2GFIDIP WPCV2GFIDIP WPCV3GFI WPCV3GFI WPCV3GFI WPCV3GFI WPCV3GFI WPCV3GFI WPCV3GFI WPCV3GFI WPCV3GFI WPCV4GFI WPCV4GFI WPCV4GFI WPCV4GFI WPCV3GFI WPCV3GFI WPCV3GFI WPCV3GFI WPCV3GFI WPCV4GFI	241 243 246 232 232 232 232 232 230 240 240 240 240 240 240 240 242 242 24	
Idex	UB9 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT W WBF-1 & WBF-2 WDS WDSWS WHS0 – WH400 WHCS75 – WHCS200 WHG50 – WHG400 WIU1U WIU1UD WIU1UD WIU1UD WIU2V WIUM1UD WIUW2V WIUM1UD WIUM2UD WJ642I WJ64F2I WJ64F2I WJ64F2I WJ64FPW WJ64F	274 338 338 338 338 322 173 375 283 298 298 182 286 183 231 231 230 231 231 232 322 322 322 322 322 322 322	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIH WPCV1GFIV WPCV20A WPCV2B WPCV2DIP WPCV2G1DUP WPCV2GFI WPCV2GFI WPCV2GFI WPCV3GFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV3GGFI WPCV4GGFI WPCV4GFI WPCV4GGFI WPCV4GFI WPCV4GGFI	241 243 246 246 232 232 232 233 232 240 240 240 240 240 242 242 242 242 24	
Idex	UB9 UBL1 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT W WBF-1 & WBF-2 WDS WDSMS WDSMS WDSMS WDSMS WH50 – WHCS75 – WHCS200 WHG50 – WHG400 WIU1U WIU1UD WIU1UD WIU1UD WIU1UD WIU2UD WIU2V WIUW2UD WIU2V WIUW4UD WJ642I WJ64F2I WJ64F2I WJ64F2I WJ64F2I WJ64FPI WJ64FW WJ64I	274 338 338 338 338 338 222 173 375 283 298 298 298 298 286 183 231 230 231 230 231 231 230 231 232 322 322 322 322 322 322 322 322	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1DH WPCV1GFIV WPCV1GFIV WPCV2GH WPCV2GB WPCV2GBUPSW WPCV2GFI WPCV2GFISW WPCV3GFISW WPCV3GB WPCV3GFI WPCV4GB WPCV4GBI WPCV4GBI WPCV4GBI WPCV4GBI WPCV4GBI WPCV4GREC WPCVDB WPCVLOKGFI WPCVLOKGFI WPCVLOKREC WPCVLVR	241 243 246 232 232 232 233 232 240 240 240 240 240 242 242 242 242 24	
Product Index	UB9 UBL1 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V VBKT W WBF-1 & WBF-2 WDS WDSMS WDSMS WDSMS WDSMS WH50 – WHCS75 – WHCS200 WHG50 – WHG400 WIU1U WIU1UD WIU1UD WIU1UD WIU1UD WIU2UD WIU2UD WIU2UD WIU2UD WIU4U WIU4U WIU4U WIU4U WIU4U WIU4U WIU54E WJ64F2I WJ64F2I WJ64F2I WJ64FPI WJ64FW WJ64I WJ64W WJ884W WJ8864W WJ8864W WJ8864W WJ888W WJF2I	274 338 338 338 338 222 173 375 283 298 298 182 286 183 231 231 230 231 231 232 322 322 322 322 322 322 322	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1DH WPCV1GFIV WPCV1GFIV WPCV2GR WPCV2B WPCV2GB WPCV2GBIDUP WPCV2GFI WPCV2GFI WPCV2GFI WPCV3GB WPCV4GB	241 243 246 232 232 232 232 232 240 240 240 240 240 242 242 242 242 24	
Product Index	UB9 UBL1 UBL1-BLU UBL1-RED UBL2 UF100 – UF200 UGB-50 – UGB-400 V V VBKT W WBF-1 & WBF-2 WDS WDSMS WDSMS WDSMS WH50 – WHG400 WHC\$75 – WHC\$200 WHG50 – WHG400 WIU1U WIU1V WIU2UD WIU1V WIU2UD WIU1V WIU2UD WIUM1UD WIU1V WIU2UD WIUM1UD WIUM4U WJ642I WJ64FU WJ64FU WJ64FU WJ64FU WJ64FU WJ64H WJ64W WJ886WW WJ8864W WJ8864W	274 338 338 338 338 222 173 375 283 298 298 182 286 183 231 231 230 231 231 232 322 322 322 322 322 322 322	WP3G757 WP4G507 – WP4G1007 WPBH50 WPCP50 – WPCP100 WPCV1B WPCV1DH WPCV1DH WPCV1GFIH WPCV1GFIV WPCV20A WPCV2B WPCV2DIP WPCV2G1DIP WPCV2GFIDIP WPCV2GFIDIP WPCV2GFIDIP WPCV3GFI WPCV4GFI	241 243 246 232 232 232 233 232 240 240 240 240 240 242 242 242 242 24	

Versatile Hanging!

Wide Mouth Heavy Duty Beam Clamps

- Fits 1/4", 3/8", and 1/2" threaded rods and fasteners
- Stamped steel or malleable iron versions available
- Spring steel, standard style electrical, top beam clamps and hammer on versions available
- Spring steel, light duty clamps accommodate 10-24 or 1/4'-20 rod
- Custom beam clamps made to your specifications
- · Let us design a solution for you



See Pages 310-312 for more information!

Speedy Bonding & Grounding!

Copper and Aluminum Terminal Lugs

Open Lay In Lug Speeds Wire Connection!

- . Available in sizes up to 250 MCM-6
- . Copper or Aluminum versions available
- . Open lay in lug for easy wire insertion
- Great for use in load centers, terminal boxes or enclosures
- Helps maintain code compliance
- . In stock! On time!



See Page 198 for more information!

Add Devices Quick and Easy...

4" Square "Retrofit" Open Back Box

Add a Fire Alarm, Security Camera or Other Device to an Existing Wall.

- Open back for low voltage cable
- Easy snap in clips provide strong, rigid attachment to drywall, plaster, or tile
- · Rugged steel construction

- Mounting tab alignment is the same as standard 4" square boxes
- Fits most low voltage devices
- Quickly "Cuts In" to existing hollow walls



See Page 39 for more information!

How Do You Spend Your Time?





Custom Prefab Solutions Guaranteed to...

- Increase job site productivity up to 15 times
- End excessive and costly material handling
- Expedite project completion with made-to-order solutions
- Enhance profit dollars ... Make More Money!!!





Phone: 847-455-0188 | sales@garvinindustries.com | www.garvinindustries.com



Tools and Accessories

Have a Product Idea? 847-455-0188

Labor Saving Solutions:

- Painting for System Identification
- Custom Length Cutting
- · Holepunch, Drilling & Tapping
- · PreBuilt Units, Ready to Install
- Identification Engraving & Marking

Specialized Services:

- · Complete Prefab Assemblies
- · Product Customizations
- Custom Painting
- Private Label & Packaging
- Metal Stamping & Fabrication
- Product Development Partnerships

Our Commitment to Your Success:

- Innovative Labor Saving Products
- · Factory Direct Pricing
- · Technically Skilled Customer Service
- · Quick Ship Guarantee
- Total Access Website
- In-Stock, On-Time!



Manufacturer of Electrical, Low Voltage and Lighting Products.

Check Us Out on the Web



Total Access to:

- More than 3,000 products online
- Request for Quotation direct from website
- Videos, spec sheets, blueprints and more....



www.garvinindustries.com