If you need the following catalogues,please feel free to contact us.

Din Rail Terminal Block



Euro Terminal Block



American Terminal Block

Feed Through Terminal Block

OEM/ODM

DEGSON®

Distributor List:

DEGSON ELECTRONICS CO.,LTD.

ADD: NO 333 XIAOLIN ROAD CIXI
NINGBO CHINA
P.C: 315321
TEL: +86-574-63510770 63504258
FAX: +86-574-63508989 63501000
E-mail: sale@degson.com
Http://www.degson.com

The catalog is only for reference,and the detail data must be based on our company`s specification!

DEGSON Genral Catalogue

DEGSON®

TERMINAL BLOCK

General Catalogue

ISO9001 ISO14001

CB RoHS REACH

GC-10-01
Edition: (T43)

DEGSON®

RoHS COMPLIANT

Brief Introduction

Founded in 1990, DEGSON Electronics Co., Ltd specializes in the production of all kinds of terminal blocks and precise moulds. We have been granted ISO9001、ISO14001 management system certification and our products have been approved by CB RoHS REACH . Gained over 600 certificates and owned professional laboratory acknowledged by VDE、UL.

Through aggressive research and development, we have established a series of strong departments, like R&D center, Mould workshop, Auto-tapping and Auto assembly. Our R&D center is equipped with advanced CIMS system, Mould workshop equipped with hundreds of high precision devices, like Sodick,etc. to maintain and enhance the workmanship of precise injection, punching, die casting, and cutting. Meanwhile to upgrade the competitiveness in keeping the quality, cost reduction from computerize working and auto production artwork.

With the spirit of precise in speciality, surefooted in business, superior in quality, all the staff of DEGSON will strive to meet the market demands and make "DEGSON" more famous all over the world!

ISO9001 RoHS ISO14001

Ex NEPSI CB REACH

DEGSON®

CONTENTS

CONTENTS

HOW TO ORDER

□ – □ □ P – □ □ – X X X Customer Request

Series No. | No. of Pole | Color

1 Single pitch
2 Double pitch

1	Grey	5	Orange	9	White
2	Blue	6	Red		
3	Black	7	Trans Parent		
4	Green	8	Yellow		

EG:



15EDG ,PITCH=2.5
Pluggable terminal blocks

15EDGKD-2.5

Approval		
Standard	UL	IEC
Voltage	150V	250V
Current	14A	5A
Wire size	20AWG	0.2-0.5mm²
Pitch	2.5mm (.098")	
Poles	2P~12P	



15EDGRC-2.5

Approval		
Standard	UL	IEC
Voltage	150V	250V
Current	14A	5A
Wire size	-	-
Pitch	2.5mm (.098")	
Poles	2P~12P	



15EDGVC-2.5

Approval		
Standard	UL	IEC
Voltage	150V	250V
Current	14A	5A
Wire size	-	-
Pitch	2.5mm (.098")	
Poles	2P~12P	

15EDGKRP-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	3.81mm (.150")	
Poles	2P~20P	

15EDGKD-3.5
15EDGKD-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	12A
Wire size	28-16AWG	0.2-1.5mm²
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2P~24P	

15EDGKDM-3.5
15EDGKDM-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	12A
Wire size	28-16AWG	0.2-1.5mm²
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2P~20P	



15EDGKN-3.5

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	3.5mm (.138")	
Poles	2P~24P	



15EDGRH-2.5

Approval		
Standard	UL	IEC
Voltage	125V	130V
Current	14A	10A
Wire size	-	-
Pitch	2.5mm (.098")	
Poles	2*(2P~12P)	



15EDGVH-2.5

Approval		
Standard	UL	IEC
Voltage	125V	130V
Current	14A	10A
Wire size	-	-
Pitch	2.5mm (.098")	
Poles	2*(2P~12P)	

15EDG ,PITCH=3.5 / 3.81
Pluggable terminal blocks

15EDGK-3.5
15EDGK-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2P~24P	



15EDGKNG-3.5

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	3.5mm (.138")	
Poles	2P~24P	

15EDGKNM-3.5

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	3.5mm (.138")	
Poles	2P~20P	

15EDGRC-3.5
15EDGRC-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2P~24P	



15EDGRM-3.5
15EDGRM-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2P~20P	

15EDGKM-3.5
15EDGKM-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2P~20P	

15EDGKC-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	3.81mm (.150")	
Poles	2P~24P	

15EDGKCM-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	3.81mm (.150")	
Poles	2P~20P	

15EDGKA-3.5
15EDGKA-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2P~24P	



15EDGVC-3.5
15EDGVC-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2P~24P	



15EDGVM-3.5
15EDGVM-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2P~20P	

15EDGVCP-3.5
15EDGVCP-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2P~24P	



15EDGVMP-3.5
15EDGVMP-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2P~20P	

15EDGKAM-3.5
15EDGKAM-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2P~20P	

15EDGKB-3.5
15EDGKB-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2P~24P	

15EDGKBM-3.5
15EDGKBM-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2P~20P	

15EDGKR-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	3.81mm (.150")	
Poles	2P~24P	



15EDGLC-3.5
15EDGLC-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	12A
Wire size	-	-
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2P~24P	



15EDGLM-3.5
15EDGLM-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	12A
Wire size	-	-
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2P~20P	

15EDGRT-3.5
15EDGRT-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2*(2P~24P)	

15EDGRTM-3.5
15EDGRTM-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2*(2P~20P)	



15EDGVT-3.5
15EDGVT-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2*(2P~24P)	

15EDGVTM-3.5
15EDGVTM-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2*(2P~20P)	



15EDGRH-3.5
15EDGRH-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2*(2P~24P)	

15EDGRHM-3.5
15EDGRHM-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2*(2P~20P)	



15EDGRM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~12P	



15EDGVC-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~12P	



15EDGVM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~12P	



HT□, PITCH=3.96/5.08
Pluggable terminal blocks



15EDGVH-3.5
15EDGVH-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2*(2P~24P)	



15EDGVHM-3.5
15EDGVHM-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2*(2P~20P)	



15EDGA-3.5
15EDGA-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2P~24P	



15EDGB-3.5
15EDGB-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2P~24P	

HT396K-3.96

Approval		
Standard	UL	IEC
Voltage	150V	250V
Current	8A	15A
Wire size	28-14AWG	1.5mm²
Pitch	3.96mm (.156")	
Poles	2P~24P	

HT396R-3.96

Approval		
Standard	UL	IEC
Voltage	150V	250V
Current	8A	15A
Wire size	-	-
Pitch	3.96mm (.156")	
Poles	2P~24P	



HT396V-3.96

Approval		
Standard	UL	IEC
Voltage	150V	250V
Current	8A	15A
Wire size	-	-
Pitch	3.96mm (.156")	
Poles	2P~24P	

HT508K-5.08

Approval		
Standard	UL	IEC
Voltage	150V	320V
Current	12A	20A
Wire size	24-12AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P~24P	

15CDGV-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.81mm (.150")	
Poles	2P~20P	

15EDG-GBM-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	3.81mm (.150")	
Poles	2P~20P	



15EDG ,PITCH=5.08
Pluggable terminal blocks

15EDGK-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	5.08mm (.200")	
Poles	2P~12P	

HT508R-5.08

Approval		
Standard	UL	IEC
Voltage	150V	320V
Current	12A	20A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~24P	

HT508V-5.08

Approval		
Standard	UL	IEC
Voltage	150V	320V
Current	12A	20A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~24P	

15EDGK-3.5-30A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	3.5mm (.138")	
Poles	8P,10P	

15EDGVC-3.5-30A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	3.5mm (.138")	
Poles	8P,10P	

15EDGKM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	5.08mm (.200")	
Poles	2P~12P	

15EDGKF-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	5.08mm (.200")	
Poles	2P~12P	

15EDGKFM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm²
Pitch	5.08mm (.200")	
Poles	2P~12P	

15EDGRC-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~12P	



2EDG ,PITCH=5.0/5.08/7.5/7.62
Pluggable terminal blocks

2EDGK-5.0
2EDGK-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P~24P	

2EDGK-7.5
2EDGK-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	7.5mm (.295") 7.62mm (.300")	
Poles	2P~12P	

2EDGKM-5.0
2EDGKM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P~22P	

2EDGKM-7.5
2EDGKM-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	

2EDGKG-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P~24P	

2EDGKE-5.0
2EDGKE-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	



2EDGKT-5.0
2EDGKT-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	

2EDGKF-5.0
2EDGKF-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~18P	

2EDGKFM-5.0
2EDGKFM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~18P	

2EDGKL-5.0
2EDGKL-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	24-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	

2EDGKLM-5.0
2EDGKLM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	24-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~22P	



2EDGKC-5.0
2EDGKC-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	



2EDGKC-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	10A	20A
Wire size	28-12AWG	2.5mm²
Pitch	7.62mm (.300")	
Poles	2P~12P	

2EDGKCM-5.0
2EDGKCM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~20P	

2EDGKCM-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	10A	20A
Wire size	28-12AWG	2.5mm²
Pitch	7.62mm (.300")	
Poles	2P~12P	

2EDGKA-5.0
2EDGKA-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	10A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	

2EDGKA-7.5
2EDGKA-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	10A
Wire size	28-12AWG	2.5mm²
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	

2EDGKAM-5.0
2EDGKAM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	10A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~22P	

2EDGKAM-7.5
2EDGKAM-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	10A
Wire size	28-12AWG	2.5mm²
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	

2EDGKB-5.0
2EDGKB-5.08

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	10A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	

2EDGKB-7.5
2EDGKB-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	10A
Wire size	28-12AWG	2.5mm²
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	

2EDGKBM-5.0
2EDGKBM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	10A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~22P	

2EDGKBM-7.5
2EDGKBM-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	10A
Wire size	28-12AWG	2.5mm²
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	



2EDGKH-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	15A
Wire size	28-12AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P~12P	

2EDGKHM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	15A
Wire size	28-12AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P~12P	

2EDGKR-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P~24P	



2EDGKR-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	7.62mm (.300")	
Poles	2P~12P	

2EDGKRM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P~22P	

2EDGKRM-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	7.62mm (.300")	
Poles	2P~12P	

2EDGKRP-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P~22P	

2EDGKRP-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	7.62mm (.300")	
Poles	2P~12P	

2EDGKD-5.0
2EDGKD-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	26-12AWG	0.2-2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~16P	

2EDGKD-7.5
2EDGKD-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	10A	20A
Wire size	26-12AWG	2.5mm²
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	

2EDGKDM-5.0
2EDGKDM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	26-12AWG	0.2-2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~16P	



2EDGKDM-7.5
2EDGKDM-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	10A	20A
Wire size	26-12AWG	2.5mm²
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	

2EDGKDG-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P~16P	

2EDGKDW-5.0
2EDGKDW-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~18P	

2EDGKDWM-5.0
2EDGKDWM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~16P	



2EDGKDF-5.0
2EDGKDF-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~18P	

2EDGKDFM-5.0
2EDGKDFM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~16P	



2EDGKDA-5.0
2EDGKDA-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~18P	

2EDGKDAM-5.0
2EDGKDAM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~16P	



2EDGKDB-5.0
2EDGKDB-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~18P	

2EDGKDBM-5.0
2EDGKDBM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~16P	

2EDGKDR-5.0
2EDGKDR-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~18P	

2EDGKDRM-5.0
2EDGKDRM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~16P	



2EDGKDRN-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P~16P	

2EDGKDRW-5.0
2EDGKDRW-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~16P	

2EDGKDRWM-5.0
2EDGKDRWM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~16P	

2EDGKDH-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P~12P	



2EDGKDHM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P~12P	



2EDGR-5.0
2EDGR-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	



2EDGRB-5.0
2EDGRB-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	



2EDGRC-5.0
2EDGRC-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	



2EDGRC-7.5
2EDGRC-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	-	-
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	



2EDGRM-5.0
2EDGRM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~22P	



2EDGRM-7.5
2EDGRM-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	-	-
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	



2EDGRCP-5.0
2EDGRCP-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	



2EDGRMP-5.0
2EDGRMP-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~22P	



2EDGRN-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~24P	



2EDGV-5.0
2EDGV-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	

2EDGVC-5.0
2EDGVC-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	



2EDGVC-7.5
2EDGVC-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	-	-
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	



2EDGVM-5.0
2EDGVM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~22P	



2EDGVM-7.5
2EDGVM-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	-	-
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	



2EDGVCP-5.0
2EDGVCP-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	



2EDGVMP-5.0
2EDGVMP-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~22P	



2EDGVN-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~24P	



2EDGVG-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~24P	



2EDGL-5.0
2EDGL-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	



2EDGLC-5.0
2EDGLC-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	

2EDGVHM-5.0
2EDGVHM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	10A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2~(2P~22P)	



2EDGA-5.0
2EDGA-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	



2EDGA-7.5
2EDGA-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	-	-
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	



2EDGAM-5.0
2EDGAM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~22P	



2EDGLM-5.0
2EDGLM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~22P	



2EDGLF-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	
Poles	2P~4P	



2EDGRF-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	
Poles	2P~4P	



2EDGRT-5.0
2EDGRT-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	10A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2~(2P,3P~24P)	



2EDGAM-7.5
2EDGAM-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	-	-
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	



2EDGB-5.0
2EDGB-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	



2EDGB-7.5
2EDGB-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	-	-
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	



2EDGBM-5.0
2EDGBM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~22P	

2EDGRTC-5.0
2EDGRTC-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	10A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2~(2P~24P)	

2EDGRTM-5.0
2EDGRTM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	10A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2~(2P~22P)	

2EDGVT-5.0
2EDGVT-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	10A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2~(2P,3P~24P)	



2EDGVTC-5.0
2EDGVTC-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	10A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2~(2P~24P)	



2EDGBM-7.5
2EDGBM-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	-	-
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	

2CDG-5.08

	2CDG-5.08→2EDGKRP-5.08
	2EDGKM-5.08
Pitch	5.08mm (.200")
Poles	2P~24P



2CDGA-5.0
2CDGA-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~22P	



2CDGB-5.0
2CDGB-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~22P	

2EDGVTM-5.0
2EDGVTM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	10A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2~(2P~22P)	



2EDGRH-5.0
2EDGRH-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	10A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2~(2P~24P)	

2EDGRHM-5.0
2EDGRHM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	10A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2~(2P~22P)	



2EDGVH-5.0
2EDGVH-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	10A
Wire size	-	-
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2~(2P~24P)	



2CDGV-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~24P	



2CDGVM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~22P	



2CDGR-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~24P	



2CDGRM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~22P	

2EDG-STD-5.0
2EDG-STD-5.08

Approval		CE
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P~12P	



2EDG-GB-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P~24P	



2EDG-GBM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P~22P	

2EDG-UST-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P~24P	

2EDG-USTM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P~22P	



2EDG-UVK-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P~24P	



2EDG-UVKM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P~22P	

Reflow solder

15EDGRC-THT-2.5

Approval		
Standard	UL	IEC
Voltage	125V	130V
Current	4A	10A
Wire size	-	-
Pitch	2.5mm (.098")	
Poles	2P~12P	

15EDGVC-THT-2.5

Approval		
Standard	UL	IEC
Voltage	125V	130V
Current	4A	10A
Wire size	-	-
Pitch	2.5mm (.098")	
Poles	2P~12P	

15EDGRC-THT-3.5
15EDGRC-THT-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2P~12P	

15EDGRM-THT-3.5
15EDGRM-THT-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2P~12P	

15EDGVC-THT-3.5
15EDGVC-THT-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2P~12P	

15EDGVM-THT-3.5
15EDGVM-THT-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2P~12P	

15EDGRHB-THT-3.5

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138")	
Poles	2"(2P~24P)	

15EDGRHBN-THT-3.5

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138")	
Poles	2"(2P~24P)	

15EDGVHB-THT-3.5

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138")	
Poles	2"(2P~24P)	

15EDGVHBN-THT-3.5

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	-	-
Pitch	3.5mm (.138")	
Poles	2"(2P~24P)	

2EDGR-THT-5.08

Approval		CE
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~12P	

2EDGRC-THT-5.08

Approval		CE
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~12P	

2EDGRM-THT-5.08

Approval		CE
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~12P	

2EDGRN-THT-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~12P	

2EDGV-THT-5.08

Approval		CE
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~12P	

2EDGVC-THT-5.08

Approval		CE
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~12P	

2EDGVM-THT-5.08

Approval		CE
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~12P	

2EDGVN-THT-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.08mm (.200")	
Poles	2P~12P	

2EDGRH-THT-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	10A
Wire size	-	-
Pitch	5.0mm (.197")	
Poles	2"(2P~24P)	

2EDGRHM-THT-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	10A
Wire size	-	-
Pitch	5.0mm (.197")	
Poles	2"(2P~22P)	

2EDGRF-THT-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	
Poles	2P~4P	

2EDGLF-THT-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	
Poles	2P~4P	



2EDG-PWI

2EDG-PWI → 2EDGK/KM-5.0/5.08/7.5/7.62
2EDGKF/FM-5.0/5.08
2EDGKU/UM-5.0/5.08
2EDGKC/CM-5.0/5.08/7.62
2EDGKA/AM-5.0/5.08/7.5/7.62
2EDGKB/BM-5.0/5.08/7.5/7.62
2EDGKH/HM-5.0/5.08
2EDGKD/DM-5.0/5.08/7.5/7.62
2EDGKDA/AM-5.0/5.08
2EDGKDB/BM-5.0/5.08
2EDGA/AM-5.0/5.08/7.5/7.62
2EDGB/BM-5.0/5.08/7.5/7.62



2EDG-PWP

2EDG-PWP → 2EDGV/VC/VM-5.0/5.08/7.5/7.62
2EDGR/RC/RM-5.0/5.08/7.5/7.62
2EDGL/LC/LM-5.0/5.08
2EDGVH/VHM-5.0/5.08
2EDGRH/RHM-5.0/5.08

DEGSON®

If you need more details.please contact us for sending detailed catalogues,link our website according to the part number,or view the CD catalogue!

PLUGGABLE TERMINAL BLOCKS



5EDG ,PITCH=7.62
Pluggable terminal blocks

5EDGK-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	20A	32A
Wire size	24-10AWG	4mm²
Pitch	7.62(.300")	
Poles	2P~12P	

5EDGKM-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	20A	32A
Wire size	24-10AWG	4mm²
Pitch	7.62(.300")	
Poles	2P~12P	

5EDGKH-7.62

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	20A	32A
Wire size	24-10AWG	4mm²
Pitch	7.62(.300")	
Poles	2P~12P	

5EDGKHM-7.62

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	20A	32A
Wire size	24-10AWG	4mm²
Pitch	7.62(.300")	
Poles	2P~12P	



5EDGRC-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	20A	32A
Wire size	-	-
Pitch	7.62(.300")	
Poles	2P~12P	



5EDGVC-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	20A	32A
Wire size	-	-
Pitch	7.62(.300")	
Poles	2P~12P	



5EDG ,PITCH=10.16
Pluggable terminal blocks

5EDGK-10.16

Approval		
Standard	UL	IEC
Voltage	600V	600V
Current	52A	57A
Wire size	20-6AWG	0.5-10.0mm²
Pitch	10.16mm(.400")	
Poles	2P~9P	

5EDGKM-10.16

Approval		
Standard	UL	IEC
Voltage	600V	600V
Current	52A	57A
Wire size	20-6AWG	0.5-10.0mm²
Pitch	10.16mm(.400")	
Poles	2P~9P	

5EDGKR-10.16

Approval		
Standard	UL	IEC
Voltage	600V	1000V
Current	50A	76A
Wire size	20-6AWG	16mm²
Pitch	10.16mm(.400")	
Poles	2P~9P	

5EDGKRM-10.16

Approval		
Standard	UL	IEC
Voltage	600V	1000V
Current	50A	76A
Wire size	20-6AWG	16mm²
Pitch	10.16mm(.400")	
Poles	2P~9P	



5EDGKRP-10.16

Approval		
Standard	UL	IEC
Voltage	600V	1000V
Current	50A	76A
Wire size	20-6AWG	16mm²
Pitch	10.16mm(.400")	
Poles	2P~9P	

5EDGRC-10.16

Approval		
Standard	UL	IEC
Voltage	600V	600V
Current	52A	57A
Wire size	-	-
Pitch	10.16mm(.400")	
Poles	2P~9P	



5EDGRM-10.16

Approval		
Standard	UL	IEC
Voltage	600V	600V
Current	52A	57A
Wire size	-	-
Pitch	10.16mm(.400")	
Poles	2P~9P	



5EDGRC-10.16-10A

Approval		
Standard	UL	IEC
Voltage	600V	600V
Current	52A	57A
Wire size	-	-
Pitch	10.16mm(.400")	
Poles	2P~9P	

5EDGRM-10.16-10A

Approval		
Standard	UL	IEC
Voltage	600V	600V
Current	52A	57A
Wire size	-	-
Pitch	10.16mm(.400")	
Poles	2P~9P	

5EDGVC-10.16

Approval		
Standard	UL	IEC
Voltage	600V	600V
Current	52A	57A
Wire size	-	-
Pitch	10.16mm(.400")	
Poles	2P~9P	



5EDGVM-10.16

Approval		
Standard	UL	IEC
Voltage	600V	600V
Current	52A	57A
Wire size	-	-
Pitch	10.16mm(.400")	
Poles	2P~9P	



8EDG ,PITCH=2.5
Pluggable terminal blocks

8EDGK-2.5

Approval		
Standard	UL	IEC
Voltage	150V	130V
Current	4A	6A
Wire size	28-20AWG	0.2-0.5mm²
Pitch	2.5mm(.098")	
Poles	2P~24P	

8EDGKR-2.5

Approval		
Standard	UL	IEC
Voltage	150V	130V
Current	4A	6A
Wire size	28-20AWG	0.5mm²
Pitch	2.5mm(.098")	
Poles	2P~24P	



8EDGRC-2.5

Approval		
Standard	UL	IEC
Voltage	150V	130V
Current	4A	6A
Wire size	-	-
Pitch	2.5mm(.098")	
Poles	2P~24P	



8EDGVC-2.5

Approval		
Standard	UL	IEC
Voltage	150V	130V
Current	4A	6A
Wire size	-	-
Pitch	2.5mm(.098")	
Poles	2P~24P	

8EDGVCP-2.5

Approval		
Standard	UL	IEC
Voltage	150V	130V
Current	4A	6A
Wire size	-	-
Pitch	2.5mm(.098")	
Poles	2P~24P	



8EDG ,PITCH=3.5 / 3.81
Pluggable terminal blocks

8EDGK-3.5
8EDGK-3.81

Approval		
Standard	UL	IEC
Voltage	300V	130V
Current	10A	10A
Wire size	28-14AWG	0.2-1.5mm²
Pitch	3.5mm(.138") 3.81mm(.150")	
Poles	2P~24P	

8EDGKG-3.5
8EDGKG-3.81

Approval		
Standard	UL	IEC
Voltage	300V	130V
Current	10A	10A
Wire size	28-14AWG	0.2-1.5mm²
Pitch	3.5mm(.138") 3.81mm(.150")	
Poles	2P~24P	

8EDGKR-3.5
8EDGKR-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	10A
Wire size	28-14AWG	1.5mm²
Pitch	3.5mm(.138") 3.81mm(.150")	
Poles	2P~24P	



8EDGKRM-3.5
8EDGKRM-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	10A
Wire size	28-14AWG	1.5mm²
Pitch	3.5mm(.138") 3.81mm(.150")	
Poles	2P~24P	



8EDGRC-3.5
8EDGRC-3.81

Approval		
Standard	UL	IEC
Voltage	300V	130V
Current	10A	10A
Wire size	-	-
Pitch	3.5mm(.138") 3.81mm(.150")	
Poles	2P~24P	



8EDGVC-3.5
8EDGVC-3.81

Approval		
Standard	UL	IEC
Voltage	300V	130V
Current	10A	10A
Wire size	-	-
Pitch	3.5mm(.138") 3.81mm(.150")	
Poles	2P~24P	

8EDGVCP-3.5
8EDGVCP-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	10A
Wire size	–	–
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2P~24P	



8EDGRH-3.5
8EDGRH-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	10A
Wire size	–	–
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2*(2P~24P)	

8EDGRHB-3.5
8EDGRHB-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	10A
Wire size	–	–
Pitch	3.5mm (.138")	3.81mm (.150")
Poles	2*(2P~24P)	

8EDG ,PITCH=5.0/5.0.8/7.5/7.62
Pluggable terminal blocks

8EDGKR-7.5
8EDGKR-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	

8EDGKRMA-5.0
8EDGKRMA-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	

8EDGKRMA-7.5
8EDGKRMA-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	

8EDGKRMC-5.0
8EDGKRMC-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	

8EDGK-5.0
8EDGK-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	22-14AWG	0.2-2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	

8EDGK-7.5
8EDGK-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	22-14AWG	0.2-2.5mm²
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	



8EDGKC-5.0
8EDGKC-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	



8EDGKC-7.5
8EDGKC-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	

8EDGKRMC-7.5
8EDGKRMC-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	

8EDGKRP-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P~22P	



8EDGRC-5.0
8EDGRC-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	–	–
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	



8EDGRC-7.5
8EDGRC-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	–	–
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	

8EDGKMA-5.0
8EDGKMA-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	

8EDGKMA-7.5
8EDGKMA-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	

8EDGKMC-5.0
8EDGKMC-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	

8EDGKMC-7.5
8EDGKMC-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	

8EDGRMA-5.0
8EDGRMA-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	–	–
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	

8EDGRMA-7.5
8EDGRMA-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	–	–
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	

8EDGRM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	–	–
Pitch	5.08mm (.200")	
Poles	2P~22P	

8EDGVC-5.0
8EDGVC-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	–	–
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	

8EDGKG-5.0
8EDGKG-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	22-14AWG	0.2-2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	

8EDGKG-7.5
8EDGKG-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	22-14AWG	0.2-2.5mm²
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	

8EDGKM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P~22P	

8EDGKR-5.0
8EDGKR-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	



8EDGVC-7.5
8EDGVC-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	–	–
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	



8EDGVMA-5.0
8EDGVMA-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	–	–
Pitch	5.0mm (.197")	5.08mm (.200")
Poles	2P~24P	



8EDGVMA-7.5
8EDGVMA-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	–	–
Pitch	7.5mm (.295")	7.62mm (.300")
Poles	2P~12P	

8EDGVM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	–	–
Pitch	5.08mm (.200")	
Poles	2P~22P	



8EDGA-5.0
8EDGA-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	–	–
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P~24P	



8EDGA-7.5
8EDGA-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	–	–
Pitch	7.5mm (.295") 7.62mm (.300")	
Poles	2P~12P	

8EDGAG-5.0
8EDGAG-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	–	–
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P~24P	



8EDGAG-7.5
8EDGAG-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	–	–
Pitch	7.5mm (.295") 7.62mm (.300")	
Poles	2P~12P	



8EDGAM-5.0
8EDGAM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	–	–
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P~24P	



8EDGAM-7.5
8EDGAM-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	–	–
Pitch	7.5mm (.295") 7.62mm (.300")	
Poles	2P~12P	



8EDGB-5.0
8EDGB-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	–	–
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P~24P	



8EDGB-7.5
8EDGB-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	–	–
Pitch	7.5mm (.295") 7.62mm (.300")	
Poles	2P~12P	



8EDGBG-5.0
8EDGBG-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	–	–
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P~24P	



8EDGBG-7.5
8EDGBG-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	–	–
Pitch	7.5mm (.295") 7.62mm (.300")	
Poles	2P~12P	



8EDGBM-5.0
8EDGBM-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	–	–
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P~24P	



8EDGBM-7.5
8EDGBM-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	–	–
Pitch	7.5mm (.295") 7.62mm (.300")	
Poles	2P~12P	



8EDGC-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	–	–
Pitch	5.0mm (.197")	
Poles	2P~24P	



8EDGC-7.5

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	–	–
Pitch	7.5mm (.295")	
Poles	2P~12P	



8EDGCG-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	–	–
Pitch	5.0mm (.197")	
Poles	2P~24P	



8EDGCG-7.5

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	–	–
Pitch	7.5mm (.295")	
Poles	2P~12P	



8EDGCM-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	–	–
Pitch	5.0mm (.197")	
Poles	2P~24P	



8EDGCM-7.5

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	–	–
Pitch	7.5mm (.295")	
Poles	2P~12P	



8EDGD-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	–	–
Pitch	5.0mm (.197")	
Poles	2P~24P	



8EDGD-7.5

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	–	–
Pitch	7.5mm (.295")	
Poles	2P~12P	



8EDGDG-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	–	–
Pitch	5.0mm (.197")	
Poles	2P~24P	



8EDGDG-7.5

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	–	–
Pitch	7.5mm (.295")	
Poles	2P~12P	



8EDGDM-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	–	–
Pitch	5.0mm (.197")	
Poles	2P~24P	



8EDGDM-7.5

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	–	–
Pitch	7.5mm (.295")	
Poles	2P~12P	

8EDGKB-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2P~24P	

8EDGKB-7.5

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	7.5mm (.295")	
Poles	2P~12P	



8EDGKD-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2P~24P	

8EDGKMB-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2P~24P	

8EDGKMB-7.5

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	7.5mm (.295")	
Poles	2P~12P	

8EDGKGB-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2P~24P	

8EDGKGB-7.5

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	7.5mm (.295")	
Poles	2P~12P	

8EDGKRB-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2P~24P	



8EDGKRB-7.5

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	7.5mm (.295")	
Poles	2P~12P	

8EDGKRMB-5.0

Approval		CE
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2P~24P	

8EDGKRMB-7.5

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	7.5mm (.295")	
Poles	2P~12P	



8EDGKRD-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2P~24P	



8EDGKRD-7.5

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	7.5mm (.295")	
Poles	2P~12P	



8EDGRCB-5.0

Approval		CE
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	
Poles	2P~24P	



8EDGRCB-7.5

Approval		CE
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	-	-
Pitch	7.5mm (.295")	
Poles	2P~12P	



8EDGVCB-5.0

Approval		CE
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	
Poles	2P~24P	



8EDGVCB-7.5

Approval		CE
Standard	UL	IEC
Voltage	300V	400V
Current	15A	20A
Wire size	-	-
Pitch	7.5mm (.295")	
Poles	2P~12P	



8EDGVCBP-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	
Poles	2P~24P	



8EDGRC-THT-3.5

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	10A
Wire size	-	-
Pitch	3.5mm (.138")	
Poles	2P~24P	



8EDGVC-THT-3.5

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	10A
Wire size	-	-
Pitch	3.5mm (.138")	
Poles	2P~24P	

8EDGRC-THT-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	
Poles	2P~24P	



8EDGVC-THT-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	-	-
Pitch	5.0mm (.197")	
Poles	2P~24P	

DG009

DG009 → 8EDGK-2.5, 8EDGKR-2.5, DG240W-2.5, DG240W-2.54,

DG010

DG010 → 8EDGK-5.0, 8EDGK-5.08, 8EDGK-7.5, 8EDGK-7.62, 8EDGKR-5.0, 8EDGKR-5.08, 8EDGKR-7.5, 8EDGKR-7.62, 8EDGKB-5.0, 8EDGKB-7.5, 8EDGKRB-5.0, 8EDGKRB-7.5



PCB terminal blocks-
Wire Protector Type



DG301-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	17.5A
Wire size	22-14AWG	1.5mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	



DG301R-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	17.5A
Wire size	22-14AWG	1.5mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	

DG301S-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	17.5A
Wire size	22-14AWG	1.5mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	



DG306-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	15A
Wire size	22-14AWG	1.5mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	



DG300-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	24A
Wire size	22-14AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	



DG300-7.5

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	24A
Wire size	22-14AWG	2.5mm²
Pitch	7.5mm (.295")	
Poles	2P,3P~24P	



DG300R-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	24A
Wire size	22-14AWG	2.5mm²
Pitch	5.0mm (.197") 7.5mm (.295")	
Poles	2P,3P~24P	

DG300R-7.5

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	24A
Wire size	22-14AWG	2.5mm²
Pitch	5.0mm (.197") 7.5mm (.295")	
Poles	2P,3P~24P	



DG305-5.0

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	5.0mm (.197") 7.5mm (.295")	
Poles	2P,3P~24P	



DG305-7.5

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	5.0mm (.197") 7.5mm (.295")	
Poles	2P,3P~24P	

DG360-7.5

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	7.5mm (.295")	
Poles	2P,3P~24P	

DG365-7.5

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	20A
Wire size	22-14AWG	2.5mm²
Pitch	7.5mm (.295")	
Poles	2P,3P~24P	

DG331-5.0

Approval		CE
Standard	UL	IEC
Voltage	300V	250V
Current	10A	24A
Wire size	28-14AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2P~20P	

DG332K-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	12A
Wire size	28-16AWG	0.2-1.5mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	

DG332W-5.0

Approval		CE
Standard	UL	IEC
Voltage	300V	250V
Current	10A	12A
Wire size	30-16AWG	1.5mm²
Pitch	5.0mm (.197")	
Poles	2P~12P	

DG334K-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	12A
Wire size	28-14AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2P~20P	

DG332J-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	12A
Wire size	–	–
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	

DG332JR-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	12A
Wire size	–	–
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	

DG333K-3.5
DG333K-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	8A
Wire size	28-16AWG	1.0mm²
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2P,3P~24P	

DG302-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	20A	25A
Wire size	20-12AWG	0.5-4.0mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	



DG302-7.5

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	20A	25A
Wire size	20-12AWG	0.5-4.0mm²
Pitch	7.5mm (.295")	
Poles	2P,3P~24P	

DG302R-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	20A	25A
Wire size	20-12AWG	0.5-4.0mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	



DG302R-7.5

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	20A	25A
Wire size	20-12AWG	0.5-4.0mm²
Pitch	7.5mm (.295")	
Poles	2P,3P~24P	

DG333J-3.5
DG333J-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	8A
Wire size	–	–
Pitch	3.5mm (.138")	
Poles	2P,3P~24P	

DG333JR-3.5

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	8A
Wire size	–	–
Pitch	3.5mm (.138")	
Poles	2P,3P~24P	

DG350-3.5
DG350-3.96

Approval		
Standard	UL	IEC
Voltage	300V	130V
Current	7A	10A
Wire size	24-18AWG	1.0mm²
Pitch	3.5mm (.138") 3.96mm (.156")	
Poles	2P,3P~24P	

DG350R-3.5
DG350R-3.96

Approval		
Standard	UL	IEC
Voltage	300V	130V
Current	7A	10A
Wire size	24-18AWG	1.0mm²
Pitch	3.5mm (.138") 3.96mm (.156")	
Poles	2P,3P~24P	



DG126 -5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	18A
Wire size	26-14AWG	0.5-2.5mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	

DG126 -7.5

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	10A	18A
Wire size	26-14AWG	0.5-2.5mm²
Pitch	7.5mm (.295")	
Poles	2P,3P~24P	

DG126R-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	18A
Wire size	26-14AWG	0.5-2.5mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	

DG126S-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	18A
Wire size	26-14AWG	0.5-2.5mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	

DG340-3.81

Approval		
Standard	UL	IEC
Voltage	300V	130V
Current	7A	10A
Wire size	24-18AWG	1.0mm²
Pitch	3.81mm (.150")	
Poles	2P,3P~24P	

DG340R-3.81

Approval		
Standard	UL	IEC
Voltage	300V	130V
Current	7A	10A
Wire size	24-18AWG	1.0mm²
Pitch	3.81mm (.150")	
Poles	2P,3P~24P	



DG351-3.5

Approval		
Standard	UL	IEC
Voltage	300V	200V
Current	10A	17.5A
Wire size	26-16AWG	1.5mm²
Pitch	3.5mm (.138")	
Poles	2P,3P~24P	



DG351R-3.5

Approval		
Standard	UL	IEC
Voltage	300V	200V
Current	10A	17.5A
Wire size	26-16AWG	1.5mm²
Pitch	3.5mm (.138")	
Poles	2P,3P~24P	

DG351S-3.5

Approval		
Standard	UL	IEC
Voltage	300V	200V
Current	10A	17.5A
Wire size	26-16AWG	1.5mm²
Pitch	3.5mm (.138")	
Poles	2P,3P~24P	



DG303-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	17.5A
Wire size	26-14AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	



DG303R-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	17.5A
Wire size	26-14AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	

DG303S-5.0

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	17.5A
Wire size	26-14AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	

DG166-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	22A
Wire size	22-12AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	

DG166-7.5

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	22A
Wire size	22-12AWG	2.5mm²
Pitch	7.5mm (.295")	
Poles	2P,3P~24P	

DG167-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	22A
Wire size	22-12AWG	0.5-2.5mm²
Pitch	5.0mm (.197")	
Poles	2P~12P	

DG167-7.62

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	22A
Wire size	22-12AWG	0.5-2.5mm²
Pitch	7.62mm (.300")	
Poles	2P~12P	

DG167R-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	22A
Wire size	22-12AWG	0.5-2.5mm²
Pitch	5.0mm (.197")	
Poles	2P~12P	



DG167R-7.62

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	22A
Wire size	22-12AWG	0.5-2.5mm²
Pitch	7.62mm (.300")	
Poles	2P~12P	

DG332J-THT-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	12A
Wire size	–	–
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	

DG333J-THT-3.5

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	8A
Wire size	–	–
Pitch	3.5mm (.138")	
Poles	2P,3P~24P	



PCB terminal blocks-Cage Type

DG381-THT-3.5
DG381-THT-3.81

Approval		
Standard	UL	IEC
Voltage	150V,300V	130V
Current	10A	10A
Wire size	26-16AWG	1.0mm²
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2P,3P~24P	

DG127-THT-5.0
DG127-THT-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	15A
Wire size	26-14AWG	1.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	



DG500-THT-5.0
DG500-THT-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	18A
Wire size	24-12AWG	2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	



DG381B-3.5
DG381B-3.81

Approval		
Standard	UL	IEC
Voltage	300V	130V
Current	12A	10A
Wire size	26-16AWG	1.0mm²
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2*(2P,3P~24P)	



DG381A3-3.5
DG381A3-3.81

Approval		
Standard	UL	IEC
Voltage	150V	130V
Current	10A	10A
Wire size	26-16AWG	1.0mm²
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	3*(2P,3P~24P)	



DG632-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	28-12AWG	0.5-2.5mm²
Pitch	5.0mm (.197")	
Poles	2P~20P	

DG632R-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	28-12AWG	0.5-2.5mm²
Pitch	5.0mm (.197")	
Poles	2P~20P	

DG503-THT-5.0
DG503-THT-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	18A
Wire size	24-12AWG	2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	

DG130-THT-5.0
DG130-THT-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	20A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	

DG381-SMT-3.81

Approval		
Standard	UL	IEC
Voltage	150V	130V
Current	10A	10A
Wire size	26-16AWG	1.0mm²
Pitch	3.81mm (.150")	
Poles	2P~12P	



DG308-2.54

Approval		
Standard	UL	IEC
Voltage	150V	130V
Current	6A	8A
Wire size	26-18AWG	1.0mm²
Pitch	2.54mm (.100")	
Poles	2P~20P	



DG330-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	22-12AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	



DG103-5.0
DG103-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	24A
Wire size	24-12AWG	2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	



DG103-7.5
DG103-7.62

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	10A	24A
Wire size	24-12AWG	2.5mm²
Pitch	7.5mm (.295") 7.62mm (.300")	
Poles	2P,3P~24P	



DG104-5.0
DG104-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	24-14AWG	0.5-2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	



DG381S-3.5
DG381S-3.81

Approval		
Standard	UL	IEC
Voltage	300V	130V
Current	10A	10A
Wire size	26-16AWG	0.2-1.5mm²
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2P,3P~24P	



DG381-3.5
DG381-3.81

Approval		
Standard	UL	IEC
Voltage	150V,300V	130V
Current	10A	10A
Wire size	26-16AWG	1.0mm²
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2P,3P~24P	



DG381R-3.5-10A

Approval		
Standard	UL	IEC
Voltage	150V	130V
Current	10A	10A
Wire size	26-16AWG	1.0mm²
Pitch	3.5mm (.138")	
Poles	2P,3P~24P	



DG382-3.5

Approval		
Standard	UL	IEC
Voltage	250V	160V
Current	10A	12A
Wire size	30-14AWG	1.5mm²
Pitch	3.5mm (.138")	
Poles	2P,3P~24P	



DG127S-5.0
DG127S-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	15A
Wire size	26-14AWG	0.2-1.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	

DG127S-7.62

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	12A	15A
Wire size	26-14AWG	1.5mm²
Pitch	7.62mm (.300")	
Poles	2P,3P~24P	



DG127SF-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	15A
Wire size	26-14AWG	1.5mm²
Pitch	5.08mm (.200")	
Poles	2P,3P~24P	

DG127-5.0
DG127-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	15A
Wire size	26-14AWG	1.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	



DG383-3.5

Approval		
Standard	UL	IEC
Voltage	250V	160V
Current	10A	12A
Wire size	30-14AWG	1.5mm²
Pitch	3.5mm (.138")	
Poles	2P,3P~24P	

DG381H-3.5
DG381H-3.81

Approval		
Standard	UL	IEC
Voltage	150V	130V
Current	10A	10A
Wire size	26-16AWG	1.0mm²
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2P,3P~24P	



DG381HH-3.5
DG381HH-3.81

Approval		
Standard	UL	IEC
Voltage	150V	130V
Current	10A	10A
Wire size	26-16AWG	1.0mm²
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2P,3P~24P	



DG381A-3.5
DG381A-3.81

Approval		
Standard	UL	IEC
Voltage	300V	130V
Current	12A	10A
Wire size	26-16AWG	1.0mm²
Pitch	3.5mm (.138") 3.81mm (.150")	
Poles	2*(2P,3P~24P)	



DG127-7.5
DG127-7.62

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	12A	15A
Wire size	26-14AWG	1.5mm²
Pitch	7.5mm (.295") 7.62mm (.300")	
Poles	2P,3P~24P	



DG127H-5.0
DG127H-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	15A
Wire size	26-14AWG	1.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	



DG127HH-5.0
DG127HH-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	15A
Wire size	26-14AWG	1.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	

DG127A-5.0
DG127A-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	15A
Wire size	26-14AWG	0.5-1.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2*(2P,3P~24P)	



DG127B-5.0
DG127B-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	15A
Wire size	26-14AWG	1.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2~(2P,3P~24P)	



DG127AA-5.0
DG127AA-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	15A
Wire size	26-14AWG	1.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2~(2P,3P~24P)	



DG127BB-5.0
DG127BB-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	15A
Wire size	26-14AWG	1.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2~(2P,3P~24P)	



DG127A3-5.0
DG127A3-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	15A
Wire size	26-14AWG	1.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	3~(2P,3P~24P)	



DG127R-5.0
DG127R-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	15A
Wire size	26-14AWG	1.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	



DG128-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	18A
Wire size	24-12AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	



DG128-7.5

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	18A
Wire size	24-12AWG	2.5mm²
Pitch	7.5mm (.295")	
Poles	2P,3P~24P	



DG128W-5.0
DG128W-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	18A
Wire size	24-12AWG	2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	



DG128R-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	18A
Wire size	24-12AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	

DG128R-7.5

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	18A
Wire size	24-12AWG	2.5mm²
Pitch	7.5mm (.295")	
Poles	2P,3P~24P	



DG125-5.0
DG125-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	18A
Wire size	26-12AWG	0.5-2.5mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	



DG125R-5.0
DG125R-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	18A
Wire size	24-12AWG	0.5-2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	

DG500-5.0
DG500-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	18A
Wire size	24-12AWG	2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	



DG501-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	18A
Wire size	24-12AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	



DG503-5.0
DG503-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	18A
Wire size	24-12AWG	2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	



DG504-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	18A
Wire size	24-12AWG	2.5mm²
Pitch	5.08mm (.200")	
Poles	2P,3P~24P	

DG500H-5.0
DG500H-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	20A	24A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	

DG500HH-5.0
DG500HH-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	20A	24A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	

DG500A-5.0
DG500A-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	18A
Wire size	24-12AWG	2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2~(2P,3P~24P)	

DG500B-5.0
DG500B-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	18A
Wire size	24-12AWG	2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2~(2P,3P~24P)	



DG500AA-5.0
DG500AA-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	20A	24A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2~(2P,3P~24P)	



DG500BB-5.0
DG500BB-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	20A	24A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2~(2P,3P~24P)	



DG500A3-5.0
DG500A3-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	18A
Wire size	24-12AWG	2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	3~(2P,3P~24P)	



DG129-5.0
DG129-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	20A	20A
Wire size	26-12AWG	0.5-2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	



DG129-7.5
DG129-7.62

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	20A	20A
Wire size	26-12AWG	0.5-2.5mm²
Pitch	7.5mm (.295") 7.62mm (.300")	
Poles	2P,3P~24P	



DG129R-5.0
DG129R-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	20A	20A
Wire size	26-12AWG	0.5-2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	



DG129R-7.5
DG129R-7.62

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	20A	20A
Wire size	26-12AWG	0.5-2.5mm²
Pitch	7.5mm (.295") 7.62mm (.300")	
Poles	2P,3P~24P	

DG130-5.0
DG130-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	20A
Wire size	26-12AWG	0.5-2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	

DG130-7.5
DG130-7.62

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	20A	20A
Wire size	26-12AWG	0.5-2.5mm²
Pitch	7.5mm (.295") 7.62mm (.300")	
Poles	2P,3P~24P	



DG133-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	20A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	



DG130S-5.0
DG130S-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	20A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	



DG130S-7.5
DG130S-7.62

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	20A	20A
Wire size	26-12AWG	2.5mm²
Pitch	7.5mm (.295") 7.62mm (.300")	
Poles	2P,3P~24P	

DG130R-5.0
DG130R-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	20A	20A
Wire size	26-12AWG	2.5mm²
Pitch	5.0mm (.197")5.08mm (.200")	
Poles	2P,3P~24P	



DG130A-5.0
DG130A-5.08

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	20A	20A
Wire size	26-12AWG	0.5-2.5mm²
Pitch	5.0mm (.197")5.08mm (.200")	
Poles	2*(2P,3P~24P)	



DG130B-5.0
DG130B-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	20A	20A
Wire size	24-12AWG	2.5mm²
Pitch	5.0mm (.197")5.08mm (.200")	
Poles	2*(2P,3P~24P)	



DG130C-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	20A	20A
Wire size	24-12AWG	2.5mm²
Pitch	5.0mm (.197")	
Poles	2*(2P,3P~24P)	



DG130AA-5.0
DG130AA-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	20A	20A
Wire size	24-12AWG	2.5mm²
Pitch	5.0mm (.197")5.08mm (.200")	
Poles	2*(2P,3P~24P)	



DG130BB-5.0
DG130BB-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	20A	20A
Wire size	24-12AWG	2.5mm²
Pitch	5.0mm (.197")5.08mm (.200")	
Poles	2*(2P,3P~24P)	



DG130A3-5.0
DG130A3-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	20A	20A
Wiresize	26-12AWG	0.5-2.5mm²
Pitch	5.0mm (.197")5.08mm (.200")	
Poles	3*(2P,3P~24P)	

DG635-6.35

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	30A	32A
Wire size	26-10AWG	4.0mm²
Pitch	6.35mm (.250")	
Poles	2P,3P~24P	



DG636S-6.35

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	30A	32A
Wire size	26-10AWG	4.0mm²
Pitch	6.35mm (.250")	
Poles	2P,3P~24P	



DG636S-9.52

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	30A	32A
Wire size	26-10AWG	4.0mm²
Pitch	9.52mm (.375")	
Poles	2P,3P~24P	

DG636-6.35

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	30A	24A
Wiresize	26-10AWG	4.0mm²
Pitch	6.35mm (.250")	
Poles	2P,3P~24P	

DG636-7.62

Approval		
Standard	UL	IEC
Voltage	300V	630V
Current	30A	32A
Wire size	26-10AWG	0.2-4.0mm²
Pitch	7.62mm (.300")	
Poles	2P,3P~24P	

DG636-9.52

Approval		
Standard	UL	IEC
Voltage	300V	1000V
Current	30A	32A
Wire size	26-10AWG	0.2-4.0mm²
Pitch	9.52mm (.375")	
Poles	2P,3P~24P	



DG636A-6.35

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	30A	24A
Wire size	26-10AWG	4.0mm²
Pitch	6.35mm (.250")	
Poles	2P,3P~24P	



DG636A-9.52

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	30A	24A
Wiresize	26-10AWG	4.0mm²
Pitch	9.52mm (.375")	
Poles	2P,3P~24P	



DG950-9.5

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	30A	26A
Wire size	26-10AWG	4.0mm²
Pitch	9.52mm (.375")	
Poles	2P,3P~24P	

DG135T-10.16

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	52A	57A
Wire size	20-6AWG	10.0mm²
Pitch	10.16mm (.400")	
Poles	2P,3P~24P	



DG136T-10.16

Approval		
Standard	UL	IEC
Voltage	600V	1000V
Current	60A	65A
Wiresize	20-6AWG	2.5-16mm²
Pitch	10.16mm (.400")	
Poles	2P,3P~24P	



DG136HT-10.16

Approval		
Standard	UL	IEC
Voltage	600V	1000V
Current	60A	65A
Wire size	20-6AWG	2.5-16mm²
Pitch	10.16mm (.400")	
Poles	1P-24P	

DG136HT-12.70

Approval		
Standard	UL	IEC
Voltage	600V	1000V
Current	50A	65A
Wire size	20-6AWG	2.5-16mm²
Pitch	12.70mm (.500")	
Poles	2P,3P~24P	



DG138T-10.16

Approval		
Standard	UL	IEC
Voltage	600V	750V
Current	50A	57A
Wire size	20-6AWG	2.5-16.0mm²
Pitch	10.16mm (.400")	
Poles	1P-XXP	



DG137T-15.0

Approval		
Standard	UL	IEC
Voltage	600V	1000V
Current	90A	115A
Wiresize	20-2AWG	4.0-25.0mm²
Pitch	15.0mm (.590")	
Poles	2P,3P~9P	

DG137TM-15.0

Approval		
Standard	UL	IEC
Voltage	600V	1000V
Current	90A	115A
Wire size	20-2AWG	4.0-25.0mm²
Pitch	15.0mm (.590")	
Poles	2P,3P~9P	

DG137TM-15.0-10A

Approval		
Standard	UL	IEC
Voltage	600V	1000V
Current	90A	115A
Wire size	20-2AWG	4.0-25.0mm²
Pitch	15.0mm (.590")	
Poles	1P	

DG105R-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	24A
Wire size	30-12AWG	0.5-2.5mm²
Pitch	5.0mm (.197")	
Poles	1P~XXP	

DG105R-7.5

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	12A	24A
Wiresize	30-12AWG	0.5-2.5mm²
Pitch	7.5mm (.295")	
Poles	1P~XXP	

DG105R-5.0-10A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	24A
Wire size	30-12AWG	0.5-2.5mm²
Pitch	5.0mm (.197")	
Poles	1P~XXP	

DG105R-7.5-10A

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	12A	24A
Wire size	30-12AWG	0.5-2.5mm²
Pitch	7.5mm (.295")	
Poles	1P~XXP	

DG105V-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	24A
Wire size	30-12AWG	0.5-2.5mm²
Pitch	5.0mm (.197")	
Poles	1P~XXP	

DG105V-7.5

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	12A	24A
Wiresize	30-12AWG	0.5-2.5mm²
Pitch	7.5mm (.295")	
Poles	1P~XXP	



DG105V-5.0-10A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	24A
Wire size	30-12AWG	0.5-2.5mm²
Pitch	5.0mm (.197")	
Poles	1P~XXP	



DG105V-7.5-10A

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	12A	24A
Wire size	30-12AWG	0.5-2.5mm²
Pitch	7.5mm (.295")	
Poles	1P~XXP	



DG107R-6.35

Approval		
Standard	UL	IEC
Voltage	250V	320V
Current	30A	32A
Wire size	24-10AWG	4.0mm²
Pitch	6.35mm (.250")	
Poles	1P~XXP	



DG107R-7.62

Approval		
Standard	UL	IEC
Voltage	250V	630V
Current	30A	32A
Wire size	24-10AWG	4.0mm²
Pitch	7.62mm (.300")	
Poles	1P~XXP	

DG107V-6.35

Approval		
Standard	UL	IEC
Voltage	250V	320V
Current	30A	32A
Wire size	24-10AWG	4.0mm²
Pitch	6.35mm (.250")	
Poles	1P~XXP	



DG107V-7.62

Approval		
Standard	UL	IEC
Voltage	250V	630V
Current	30A	32A
Wire size	24-10AWG	4.0mm²
Pitch	7.62mm (.300")	
Poles	1P~XXP	



PS 4

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	25A	32A
Wire size	26-10AWG	0.2-4.0mm²
Pitch	7.5mm (.295")	
Poles	1P~XXP	



PS 10

Approval		
Standard	UL	IEC
Voltage	600V	450V
Current	70A	57A
Wire size	24-8AWG	0.2-10.0mm²
Pitch	10.0mm (.394")	
Poles	1P~XXP	



PS10-10A

Approval		
Standard	UL	IEC
Voltage	600V	450V
Current	70A	57A
Wire size	24-8AWG	0.2-10.0mm²
Pitch	10.0mm (.394")	
Poles	1P~XXP	



PS 10-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	20-8AWG	0.2-10.0mm²
Pitch	10.0mm (.394")	
Poles	1P~XXP	



PS10-PE-10A

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-8AWG	0.2-10.0mm²
Pitch	10.0mm (.394")	
Poles	1P~XXP	

DG106-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	2A	4A
Wire size	–	–
Pitch	5.0mm (.197")	
Poles	1P~18P	

DG106-7.5

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	2A	4A
Wire size	–	–
Pitch	7.5mm (.295")	
Poles	1P~18P	

DG106-5.0-10A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	2A	4A
Wire size	–	–
Pitch	5.0mm (.197")	
Poles	1P~18P	

DG106-7.5-10A

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	2A	4A
Wire size	–	–
Pitch	7.5mm (.295")	
Poles	1P~18P	



Transformer terminal blocks

TS 2.5

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	24A
Wire size	24-14AWG	0.5-2.5mm²
Pitch	7.5mm (.295")	
Poles	2P,3P	

TS 4

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	20A	32A
Wire size	20-12AWG	0.75-4.0mm²
Pitch	13.0mm (.512")	
Poles	1P	

TS 10

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	55A	57A
Wire size	12-6AWG	4.0-10.0mm²
Pitch	19.0mm (.748")	
Poles	1P	

TSA 2.5

Approval		
Standard	UL	IEC
Voltage	600V	250V
Current	10A	24A
Wire size	24-14AWG	0.5-2.5mm²
Pitch	9.5mm (.374")	
Poles	2P	

TSA 4

Approval		
Standard	UL	IEC
Voltage	600V	450V
Current	30A	32A
Wire size	24-10AWG	0.5-4.0mm²
Pitch	13.0mm (.512")	
Poles	1P	

TSB 2.5

Approval		
Standard	UL	IEC
Voltage	600V	250V
Current	10A	24A
Wire size	20-12AWG	0.5-2.5mm²
Pitch	9.5mm (.374")	
Poles	2P	

TSB 4

Approval		
Standard	UL	IEC
Voltage	600V	450V
Current	30A	32A
Wire size	20-12AWG	0.5-4.0mm²
Pitch	13.0mm (.512")	
Poles	1P	

TSC 4

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	20-10AWG	0.5-4.0mm²
Pitch	7.5mm (.295")	
Poles	1P,2P	

TSC 6

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	41A
Wire size	20-10AWG	0.5-6.0mm²
Pitch	15.0mm (.591")	
Poles	1P	

TSC 10

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	55A	57A
Wire size	12-6AWG	4.0-10.0mm²
Pitch	10.5mm (.413")	
Poles	2P	

TSCB 4

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	20A	32A
Wire size	20-10AWG	0.5-4.0mm²
Pitch	7.5mm (.295")	
Poles	1P~3P	

TSCF 4

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	10A
Wire size	20-10AWG	0.5-4.0mm²
Pitch	12.5mm (.492")	
Poles	1P	

TSCW 4

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	20-10AWG	0.5-4.0mm²
Pitch	7.5mm (.295")	
Poles	1P,2P	

TSF 2.5

Approval		
Standard	UL	IEC
Voltage	250V	250V
Current	6.3A	6.3A
Wire size	20-14AWG	0.5-2.5mm²
Pitch	22.0mm (.866")	
Poles	1P	

TSP 4

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	20-10AWG	0.5-4.0mm²
Pitch	7.5mm (.295")	
Poles	1P	

TSPF 4

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	10A	10A
Wire size	20-10AWG	0.5-4.0mm²
Pitch	15.0mm (.591")	
Poles	1P	

TZB 4

TZB4 → TSB2.5,TSB4,TSC4,TSC6,
TSC84,TSA2.5,TSA4,
TSC10,TSCF4,TSCW4



TSZB4

TSZB4 → TS2.5,TS4,TS10,TSF2.5



PCB-Spring terminal blocks



DG141V-2.54

Approval		
Standard	UL	IEC
Voltage	150V	130V
Current	2A	6A
Wire size	24-20AWG	0.2-1.0mm²
Pitch	2.54mm (.100")	
Poles	1P~XXP	



DG141R-2.54

Approval		
Standard	UL	IEC
Voltage	150V	130V
Current	2A	6A
Wire size	24-20AWG	0.2-1.0mm²
Pitch	2.54mm (.100")	
Poles	1P~XXP	



DG142V-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	15A
Wire size	22-16AWG	0.2-1.5mm²
Pitch	5.08mm (.200")	
Poles	1P~XXP	

DG142V-7.62

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	10A	15A
Wire size	22-16AWG	0.2-1.5mm²
Pitch	7.62mm (.300")	
Poles	1P~XXP	



DG142R-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	15A
Wire size	22-16AWG	0.2-1.5mm²
Pitch	5.08mm (.200")	
Poles	1P~XXP	

DG142R-7.62

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	10A	15A
Wire size	22-16AWG	0.2-1.5mm²
Pitch	7.62mm (.300")	
Poles	1P~XXP	

DG237-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	10A
Wire size	22-16AWG	0.2-1.5mm²
Pitch	5.08mm (.200")	
Poles	2P~7P	

DG390-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	10A
Wire size	22-18AWG	1.0mm²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	



DG235-3.81
DG235-3.96

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	5A	10A
Wire size	20-18AWG	1.5mm²
Pitch	3.81mm (.150") 3.96 (.156")	
Poles	1P~XXP	



DG235-5.0
DG235-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	5A	15A
Wire size	20-18AWG	0.2-2.5SOL 0.2-1.5STR
Pitch	5.0mm (.197") 5.08(.200")	
Poles	1P~XXP	

DG235-7.5
DG235-7.62

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	5A	15A
Wire size	20-18AWG	0.2-2.5SOL 0.2-1.5STR
Pitch	7.5mm (.295") 7.62(.300")	
Poles	1P~XXP	



DG235-10.0
DG235-10.16

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	5A	15A
Wire size	20-18AWG	0.2-2.5SOL 0.2-1.5STR
Pitch	10.0mm (.394") 10.16(.400")	
Poles	1P~XXP	

DG235W-3.81
DG235W-3.96

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	5A	10A
Wire size	20-18AWG	1.5mm²
Pitch	3.81mm (.150") 3.96 (.156")	
Poles	1P~XXP	

DG235W-5.0
DG235W-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	5A	15A
Wire size	20-18AWG	0.2-2.5SOL 0.2-1.5STR
Pitch	5.0mm (.197") 5.08 (.200")	
Poles	1P~XXP	

DG235W-7.5
DG235W-7.62

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	5A	15A
Wire size	20-18AWG	0.2-2.5SOL 0.2-1.5STR
Pitch	7.5mm (.295") 7.62 (.300")	
Poles	1P~XXP	

DG235W-10.0
DG235W-10.16

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	5A	15A
Wire size	20-18AWG	0.2-2.5SOL 0.2-1.5STR
Pitch	10.0mm (.394") 10.16(.400")	
Poles	1P~XXP	

DG235T-5.0
DG235T-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	5A	10A
Wire size	20-18AWG	2X0.75mm²
Pitch	5.0mm (.197") 5.08(.200")	
Poles	1P~XXP	

DG235T-7.5
DG235T-7.62

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	5A	10A
Wire size	20-18AWG	2X0.75mm²
Pitch	7.5mm (.295") 7.62(.300")	
Poles	1P~XXP	

DG235T-10.0
DG235T-10.16

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	5A	10A
Wire size	20-18AWG	2X0.75mm²
Pitch	10.0mm (.394") 10.16(.400")	
Poles	1P~XXP	

DG250-2.5 DG250-2.54

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	2A	2A
Wire size	24-20AWG	0.2-0.5mm²
Pitch	2.5mm (.098") , 2.54mm (.100")	
Poles	1P~XXP	

DG250-3.5

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	7A	5A
Wire size	22-18AWG	0.2-0.75mm²
Pitch	3.5mm (.138")	
Poles	1P~XXP	

DG250-7.0

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	7A	5A
Wire size	22-18AWG	0.2-0.75mm²
Pitch	7.0(.276")	
Poles	1P~XXP	

DG250W-3.5

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	7A	3A
Wire size	22-18AWG	0.2-0.75mm²
Pitch	3.5mm (.138")	
Poles	1P~XXP	

DG250T-5.0

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	10A	12A
Wire size	22-16AWG	0.2-1.5mm²
Pitch	5.0mm (.197")	
Poles	2*(1P~XXP)	



DG236-3.81

Approval		
Standard	UL	IEC
Voltage	300V	200V
Current	8A	10A
Wire size	20-16AWG	0.2-1.5mm²
Pitch	3.81mm (.150")	
Poles	1P~XXP	



DG236-5.0

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	8A	10A
Wire size	20-16AWG	0.2-1.5mm²
Pitch	5.0mm (.197")	
Poles	1P~XXP	

DG236-7.5

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	8A	10A
Wire size	20-16AWG	0.2-1.5mm²
Pitch	7.5mm (.295")	
Poles	1P~XXP	

DG211V-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	15A
Wire size	26-16AWG	0.2-1.5mm²
Pitch	5.0mm (.197")	
Poles	1P~XXP	



DG211V-7.5

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	15A
Wire size	26-16AWG	0.2-1.5mm²
Pitch	7.5mm (.295")	
Poles	1P~XXP	

DG211R-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	15A
Wire size	26-16AWG	0.2-1.5mm²
Pitch	5.0mm (.197")	
Poles	1P~XXP	

DG211R-7.5

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	15A
Wire size	26-16AWG	0.2-1.5mm²
Pitch	7.5mm (.295")	
Poles	1P~XXP	

DG240-2.5
DG240-2.54

Approval		
Standard	UL	IEC
Voltage	150V	130V
Current	4A	6A
Wire size	28-20AWG	0.2-0.5mm²
Pitch	2.5mm (.098") 2.54mm (.100")	
Poles	1P~XXP	

DG240W-2.5
DG240W-2.54

Approval		
Standard	UL	IEC
Voltage	150V	130V
Current	4A	6A
Wire size	28-20AWG	0.2-0.5mm²
Pitch	2.5mm (.098") 2.54mm (.100")	
Poles	1P~XXP	

DG241-2.5
DG241-2.54

Approval		
Standard	UL	IEC
Voltage	150V	130V
Current	5A	6A
Wire size	28-20AWG	0.2-0.5mm²
Pitch	2.5mm (.098") 2.54mm (.100")	
Poles	1P~XXP	

DG242V-5.0
DG242V-5.08

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	17A
Wire size	28-12AWG	0.2-2.5mm²
Pitch	5.0mm (.197"),5.08mm (.200")	
Poles	1P~XXP	

DG242V-7.5
DG242V-7.62

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	15A	17A
Wire size	28-12AWG	0.2-2.5mm²
Pitch	7.5mm (.295") 7.62mm (.300")	
Poles	1P~XXP	



DG242V-10.0
DG242V-10.16

Approval		
Standard	UL	IEC
Voltage	300V	1000V
Current	15A	17A
Wire size	28-12AWG	0.2-2.5mm²
Pitch	10.0mm (.394") 10.16mm (.400")	
Poles	1P~XXP	

DG242R-5.0
DG242R-5.08

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	17A
Wire size	28-12AWG	0.2-2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	1P~XXP	



DG242R-7.5
DG242R-7.62

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	15A	17A
Wire size	28-12AWG	0.2-2.5mm²
Pitch	7.5mm (.295") 7.62mm (.300")	
Poles	1P~XXP	

DG242R-10.0
DG242R-10.16

Approval		
Standard	UL	IEC
Voltage	300V	1000V
Current	15A	17A
Wire size	28-12AWG	0.2-2.5mm²
Pitch	10.0mm (.394") 10.16mm (.400")	
Poles	1P~XXP	

DG243-5.0
DG243-5.08

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	17A
Wire size	28-12AWG	0.2-2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	1P~XXP	

DG243-7.5
DG243-7.62

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	15A	17A
Wire size	28-12AWG	0.2-2.5mm²
Pitch	7.5mm (.295") 7.62mm (.300")	
Poles	1P~XXP	

DG243-10.0
DG243-10.16

Approval		
Standard	UL	IEC
Voltage	300V	1000V
Current	15A	17A
Wire size	28-12AWG	0.2-2.5mm²
Pitch	10.0mm (.394") 10.16mm (.400")	
Poles	1P~XXP	

DG245-5.0
DG245-5.08

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	17A
Wire size	28-12AWG	0.2-2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	1P~XXP	



DG245-7.5
DG245-7.62

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	15A	17A
Wire size	28-12AWG	0.2-2.5mm²
Pitch	7.5mm (.295") 7.62mm (.300")	
Poles	1P~XXP	

DG245-10.0
DG245-10.16

Approval		
Standard	UL	IEC
Voltage	300V	1000V
Current	15A	17A
Wire size	28-12AWG	0.2-2.5mm²
Pitch	10.0mm (.394") 10.16mm (.400")	
Poles	1P~XXP	



DG245H2-5.0
DG245H2-5.08

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	10A	18A
Wire size	28-12AWG	0.2-2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2*(1~XXP)	

DG245H2-7.5
DG245H2-7.62

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	10A	12A
Wire size	28-12AWG	2.5mm²
Pitch	7.5mm (.295") 7.62mm (.300")	
Poles	2*(1~XXP)	

DG245H2-10.0
DG245H2-10.16

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	10A	12A
Wire size	28-12AWG	2.5mm²
Pitch	10.0mm (.394") 10.16mm (.400")	
Poles	2*(1~XXP)	

DG245H3-5.0
DG245H3-5.08

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	10A	18A
Wire size	28-12AWG	0.2-2.5mm²
Pitch	5.0mm (.197"),5.08mm (.200")	
Poles	3*(1P~XXP)	

DG245H3-7.5
DG245H3-7.62

Approval		
Standard	UL	IEC
Voltage	300V	450V
Wire size	28-12AWG	2.5mm²
Pitch	7.5mm (.295") 7.62mm (.300")	
Poles	3*(1P~XXP)	

DG245H3-10.0
DG245H3-10.16

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	10A	12A
Wire size	28-12AWG	2.5mm²
Pitch	10.0mm (.394") 10.16mm (.400")	
Poles	3*(1P~XXP)	

DG245H4-5.0
DG245H4-5.08

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	10A	18A
Wire size	28-12AWG	0.2-2.5mm²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	4*(1P~XXP)	

DG295-4.57

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	3A	5A
Wire size	16 SOL	0.2-0.75mm²
Pitch	4.57mm (.180")	
Poles	3P~10P	

DG202-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	16A
Wire size	20-12AWG	0.2-2.5mm²
Pitch	5.0mm (.197")	
Poles	1P~XXP	

DG202-7.5

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	12A	16A
Wire size	20-12AWG	0.2-2.5mm²
Pitch	7.5mm (.295")	
Poles	1P~XXP	

DG202-10.0

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	12A	16A
Wire size	20-12AWG	0.2-2.5mm²
Pitch	10.0mm (.394")	
Poles	1P~XXP	



DG204-3.5
DG204-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	6A	6A
Wire size	28-14AWG	1.5mm²
Pitch	3.5mm (.138"),3.81mm (.150")	
Poles	1P~XXP	



DG204M-3.5
DG204M-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	6A	6A
Wire size	28-14AWG	1.5mm²
Pitch	3.5mm (.138"),3.81mm (.150")	
Poles	1P~XXP	



DG204P-3.5
DG204P-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	4A	4A
Wire size	28-14AWG	1.5mm²
Pitch	3.5mm (.138 "),3.81mm (.150 ")	
Poles	1P~XXP	



DG204PM-3.5
DG204PM-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	4A	4A
Wire size	28-14AWG	1.5mm²
Pitch	3.5mm (.138 "),3.81mm (.150 ")	
Poles	1P~XXP	

DG204-5.0
DG204-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	12A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197 "),5.08mm (.200 ")	
Poles	1P~XXP	

DG204M-5.0
DG204M-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	12A	12A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197 "),5.08mm (.200 ")	
Poles	1P~XXP	



DG204P-5.0
DG204P-5.08

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	8A
Wire size	28-12AWG	2.5mm²
Pitch	5.0mm (.197 "),5.08mm (.200 ")	
Poles	1P~XXP	

DG204P-7.5
DG204P-7.62

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	8A	8A
Wire size	28-12AWG	2.5mm²
Pitch	7.5mm (.295 "),7.62mm (.300 ")	
Poles	1P~XXP	

DG208-5.0

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	7A	9A
Wire size	20-16AWG	0.2-0.75mm²
Pitch	5.0mm (.197 ")	
Poles	1-XXP	



DG208-7.5

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	7A	9A
Wire size	2X20-16AWG	0.2-0.75mm²
Pitch	7.5mm (.295 ")	
Poles	1-XXP	



DG209-5.0

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	17A
Wire size	28-12AWG	0.2-2.5mm²
Pitch	5.0mm (.197 ")	
Poles	1P~XXP	

DG227

Approval		
Standard	UL	IEC
Voltage	600V	400V
Current	10A	18A
Wire size	18-16AWG	1.5mm²
Pitch	–	–
Poles	3P,5P,8P	

DG228-3.5

Approval		
Standard	UL	IEC
Voltage	600V	450V
Current	20A	24A
Wire size	22-12AWG	0.5-2.5mm²
Pitch	3.5mm (.138 ")	
Poles	2P,3P,4P,5P,8P	

DG230

Approval		
Standard	UL	IEC
Voltage	600V	400V
Current	30A	32A
Wire size	14-10AWG	1.5-4mm²
Pitch	–	
Poles	3P	



DG222-8.0

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	22A	24A
Wire size	22-12AWG	0.2-2.5mm²
Pitch	8.0mm (.315 ")	
Poles	1P	



DG222T-9.5

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	20A	24A
Wire size	22-12AWG	2.5mm²
Pitch	9.5mm (.374 ")	
Poles	1P	

DG224-8.0

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	22A	24A
Wire size	22-12AWG	0.2-2.5mm²
Pitch	8.0mm (.315 ")	
Poles	1P	

DG238-10.0

Approval		
Standard	UL	IEC
Voltage	600V	450V
Current	20A	24A
Wire size	22-12AWG	0.75-2.5mm²
Pitch	10.0mm (.394 ")	
Poles	2P~5P	

Feed Through
Terminal Blocks

DG8HS-0 DG10HS-0
DG12HS-0 DG15HS-0

Approval		
Standard	UL	IEC
Voltage	300V,600V	450V,750V
Current	20A,30A,30A,50A	32A,41A,57A,76A
Wire size	20-12,18-10 14-10,12-10AWG	0.5-4.0mm²,1.0-6.0mm² 2.5-10mm²,6.0-16mm²
Pitch	8.2mm(.323 "),10.0mm(.394 "), 11.5mm(.453 "),15.0mm(.591 ")	
Poles	2P~12P	

DG8HS-1.2 DG10HS-1.2
DG12HS-1.2 DG15HS-1.2

Approval		
Standard	UL	IEC
Voltage	300V,600V	450V,750V,1000V
Current	20A,30A,30A,50A	32A,41A,57A,76A
Wire size	20-12,18-10 14-10,12-10AWG	0.5-4.0mm²,1.0-6.0mm² 2.5-10mm²,6.0-16mm²
Pitch	8.2mm(.323 "),10.0mm(.394 "), 11.5mm(.453 "),15.0mm(.591 ")	
Poles	2P~12P	

DG8HS-4.3 DG10HS-4.3
DG12HS-4.3 DG15HS-4.3

Approval		
Standard	UL	IEC
Voltage	300V,600V	450V,750V
Current	20A,30A,30A,50A	32A,41A,57A,76A
Wire size	20-12,18-10 14-10,12-10AWG	0.5-4.0mm²,1.0-6.0mm² 2.5-10mm²,6.0-16mm²
Pitch	8.2mm(.323 "),10.0mm(.394 "), 11.5mm(.453 "),15.0mm(.591 ")	
Poles	2P~12P	

DG8HSWP-0 DG10HSWP-0
DG12HSWP-0 DG15HSWP-0

Approval		
Standard	UL	IEC
Voltage	300V,600V	450V,750V
Current	15A,20A,30A,50A	24A,32A,41A,57A
Wire size	20-14,18-12 14-10,12-8AWG	0.5-2.5mm²,0.5-4mm² 2.5-6mm²,6.0-10mm²
Pitch	8.2mm(.323 "),10.0mm(.394 "), 11.5mm(.453 "),15.0mm(.591 ")	
Poles	2P~12P	



DG8HSWP-1.2 DG10HSWP-1.2
DG12HSWP-1.2 DG15HSWP-1.2

Approval		
Standard	UL	IEC
Voltage	300V,600V	450V,750V,1000V
Current	15A,20A,30A,50A	24A,32A,41A,57A
Wire size	20-14,18-12 14-10,12-8AWG	0.5-2.5mm²,0.5-4mm² 2.5-6mm²,6.0-10mm²
Pitch	8.2mm(.323 "),10.0mm(.394 "), 11.5mm(.453 "),15.0mm(.591 ")	
Poles	2P~12P	

DG8HSWP-4.3 DG10HSWP-4.3
DG12HSWP-4.3 DG15HSWP-4.3

Approval		
Standard	UL	IEC
Voltage	300V,600	450V,750V
Current	15A,20A,30A,50A	24A,32A,41A,57A
Wire size	20-14,18-12 14-10,12-8AWG	0.5-2.5mm²,0.5-4mm² 2.5-6mm²,6.0-10mm²
Pitch	8.2mm(.323 "),10.0mm(.394 "), 11.5mm(.453 "),15.0mm(.591 ")	
Poles	2P~12P	

DG8US DG10US
DG12US DG15US

Approval		
Standard	UL	IEC
Voltage	300V,600V	450V,750V
Current	20A,30A,30A,50A	32A,41A,57A,76A
Wire size	20-12,18-10 12-8,14-6,12-4AWG	0.5-4mm²,0.75-6mm² 1.5-10.0mm²,2.5-16.0mm²
Pitch	8.2mm(.323 "),10.0mm(.394 "), 11.5mm(.453 "),15.0mm(.591 ")	
Poles	12P	

DG252

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	10A	24A
Wire size	22-16AWG	0.5-1.5mm (spring) 1.0-2.5mm (screw)
Pitch	10.0mm (.394 ")	
Poles	2P~12P	

DG1.5T DG2.5T DG4T
DG6T DG10T DG16T
DG25T DG35T

Approval		
Standard	UL	IEC
Voltage	300V,600V	450V,750V,800V
Current	15A,20A,30A,35A 50A(DG4,6A,10A	17.5A,24A,32A,41A,57A 76A(10,6,12A)
Wire size	2x1.5mm² 2x2.5mm² 2x4.0mm² 2x6.0mm² 2x2.5-10mm² 2x4.0-16.0mm² 2x6.0mm² 2x10mm²	
Pitch	–	
Poles	10P	

DG801

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	6.3A	6.3A
Wire size	22-14AWG	0.5-2.5mm²
Pitch	–	–
Poles	1P~5P	



Feed Through
Terminal Blocks

DG8H-0 DG10H-0
DG12H-0 DG14H-0
DG16H-0 DG18H-0

Approval		
Standard	UL	IEC
Voltage	300V,600V	450V,750V,1000V
Current	15A,20A,30A, 50A,65A,85A	17.5A,24A,41A, 57A,76A,101A
Wire size	20-14,18-12,14-10 12-8,14-6,12-4AWG	1.5mm²,2.5mm²,6.0mm², 10.0mm²,16.0mm²,25.0mm²
Pitch	6.2mm(.323 "),10.0mm(.394 "),12.0mm(.472 "), 12.5mm(.492 "),14.0mm(.551 "),15.0mm(.591 ")	
Poles	2P~12P	

DG8H-1.2 DG10H-1.2
DG12H-1.2 DG14H-1.2
DG16H-1.2 DG18H-1.2

Approval		
Standard	UL	IEC
Voltage	300V,600V	450V,750V,1000V
Current	15A,20A,30A, 50A,65A,85A	17.5A,24A,41A, 57A,76A,101A
Wire size	20-14,18-12,14-10 12-8,14-6,12-4AWG	1.5mm²,2.5mm²,6.0mm², 10.0mm²,16.0mm²,25.0mm²
Pitch	6.2mm(.323 "),10.0mm(.394 "),12.0mm(.472 "), 12.5mm(.492 "),14.0mm(.551 "),15.0mm(.591 ")	
Poles	2P~12P	

DG8H-4.3 DG10H-4.3
DG12H-4.3 DG14H-4.3
DG16H-4.3 DG18H-4.3

Approval		
Standard	UL	IEC
Voltage	300V,600V	450V,750V,1000V
Current	15A,20A,30A, 50A,65A,85A	17.5A,24A,41A, 57A,76A,101A
Wire size	20-14,18-12,14-10 12-8,14-6,12-4AWG	1.5mm²,2.5mm²,6.0mm², 10.0mm²,16.0mm²,25.0mm²
Pitch	6.2mm(.323 "),10.0mm(.394 "),12.0mm(.472 "), 12.5mm(.492 "),14.0mm(.551 "),15.0mm(.591 ")	
Poles	2P~12P	



DG8HWP-0 DG10HWP-0
DG12HWP-0 DG14HWP-0
DG16HWP-0 DG18HWP-0

Approval		
Standard	UL	IEC
Voltage	300V,600V	450V,750V,1000V
Current	15A,20A,30A, 50A,65A,85A	17.5A,24A,41A, 57A,76A,101A
Wire size	20-14,18-12,14-10 12-8,14-6,12-4AWG	1.5mm²,2.5mm²,6.0mm², 10.0mm²,16.0mm²,25.0mm²
Pitch	6.2mm(.323 "),10.0mm(.394 "),12.0mm(.472 "), 12.5mm(.492 "),14.0mm(.551 "),15.0mm(.591 ")	
Poles	2P~12P	

Increase 1.2mm at the bottom

DG8HWP-1.2 DG10HWP-1.2
DG12HWP-1.2 DG14HWP-1.2
DG16HWP-1.2 DG18HWP-1.2

Approval		
Standard	UL	IEC
Voltage	300V,600V	450V,750V,1000V
Current	15A,20A,30A,50A,65A,85A	17.5A,24A,41A,57A,76A,101A
Wire size	20~14,16~12,14~10,12~8,14~6,12~4AWG	1.5mm²,2.5mm²,6.0mm²,10.0mm²,16.0mm²,25.0mm²
Pitch	6.2mm(.323")、10.0mm(.394")、12.0mm(.472")、13.5mm(.532")、14.5mm(.571")、16.5mm(.650")	
Poles	2P~12P	

Increase 4.3mm at the bottom

DG8HWP-4.3 DG10HWP-4.3
DG12HWP-4.3 DG14HWP-4.3
DG16HWP-4.3 DG18HWP-4.3

Approval		
Standard	UL	IEC
Voltage	300V,600V	450V,750V,1000V
Current	15A,20A,30A,50A,65A,85A	17.5A,24A,41A,57A,76A,101A
Wire size	20~14,16~12,14~10,12~8,14~6,12~4AWG	1.5mm²,2.5mm²,6.0mm²,10.0mm²,16.0mm²,25.0mm²
Pitch	6.2mm(.323")、10.0mm(.394")、12.0mm(.472")、13.5mm(.532")、14.5mm(.571")、16.5mm(.650")	
Poles	2P~12P	



Flat-bottom

DG8HP-0 DG10HP-0
DG12HP-0 DG14HP-0
DG16HP-0 DG18HP-0

Approval		
Standard	UL	IEC
Voltage	300V,600V	450V,750V,1000V
Current	15A,20A,30A,50A,65A,85A	17.5A,24A,41A,57A,76A,101A
Wire size	20~14,16~12,14~10,12~8,14~6,12~4AWG	1.5mm²,2.5mm²,6.0mm²,10.0mm²,16.0mm²,25.0mm²
Pitch	6.2mm(.323")、10.0mm(.394")、12.0mm(.472")、13.5mm(.532")、14.5mm(.571")、16.5mm(.650")	
Poles	2P~12P	



Increase 1.2mm at the bottom

DG8HP-1.2 DG10HP-1.2
DG12HP-1.2 DG14HP-1.2
DG16HP-1.2 DG18HP-1.2

Approval		
Standard	UL	IEC
Voltage	300V,600V	450V,750V,1000V
Current	15A,20A,30A,50A,65A,85A	17.5A,24A,41A,57A,76A,101A
Wire size	20~14,16~12,14~10,12~8,14~6,12~4AWG	1.5mm²,2.5mm²,6.0mm²,10.0mm²,16.0mm²,25.0mm²
Pitch	6.2mm(.323")、10.0mm(.394")、12.0mm(.472")、13.5mm(.532")、14.5mm(.571")、16.5mm(.650")	
Poles	2P~12P	

Increase 4.3mm at the bottom

DG8HP-4.3 DG10HP-4.3
DG12HP-4.3 DG14HP-4.3
DG16HP-4.3 DG18HP-4.3

Approval		
Standard	UL	IEC
Voltage	300V,600V	450V,750V,1000V
Current	15A,20A,30A,50A,65A,85A	17.5A,24A,41A,57A,76A,101A
Wire size	20~14,16~12,14~10,12~8,14~6,12~4AWG	1.5mm²,2.5mm²,6.0mm²,10.0mm²,16.0mm²,25.0mm²
Pitch	6.2mm(.323")、10.0mm(.394")、12.0mm(.472")、13.5mm(.532")、14.5mm(.571")、16.5mm(.650")	
Poles	2P~12P	

DG280

Approval		
Standard	UL	IEC
Voltage	600V	450V
Current	20A	24A
Wire size	22-12AWG	0.5~2.5mm²
Pitch	10.0mm (.394")	
Poles	2P,3P,4P	

DG285

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	10A	16A
Wire size	22-16AWG	1.5mm²
Pitch	11.5mm (.453")	
Poles	3P	



Pitch:7.62mm
(.300")

DG25C - A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	7.62mm (.300")	
Poles	2P~24P	

DG25C - B

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	7.62mm (.300")	
Poles	2P~26P	

DG25S - A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	7.62mm (.300")	
Poles	2P~24P	

DG25S - B

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	7.62mm (.300")	
Poles	2P~26P	

DG25H - A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	7.62mm (.300")	
Poles	2P~24P	

DG25R - A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	7.62mm (.300")	
Poles	2P~24P	

DG25R - B

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	7.62mm (.300")	
Poles	2P~26P	



Pitch:8.25mm
(.325")

DG35C - A

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	20A	24A
Wire size	22-12AWG	2.5mm²
Pitch	8.25mm (.325")	
Poles	2P~24P	

DG35C - B

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	20A	24A
Wire size	22-12AWG	2.5mm²
Pitch	8.25mm (.325")	
Poles	2P~26P	

DG35S - A

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	20A	24A
Wire size	22-12AWG	2.5mm²
Pitch	8.25mm (.325")	
Poles	2P~24P	

DG35S - B

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	20A	24A
Wire size	22-12AWG	2.5mm²
Pitch	8.25mm (.325")	
Poles	2P~26P	

DG35H - A

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	20A	24A
Wire size	22-12AWG	2.5mm²
Pitch	8.25mm (.325")	
Poles	2P~24P	

DG35R - A

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	20A	24A
Wire size	22-12AWG	2.5mm²
Pitch	8.25mm (.325")	
Poles	2P~24P	

DG35R - B

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	20A	24A
Wire size	22-12AWG	2.5mm²
Pitch	8.25mm (.325")	
Poles	2P~26P	



Pitch:9.5mm
(.375")

DG45C - A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	25A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375")	
Poles	2P~20P	

DG45C - B

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	25A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375")	
Poles	2P~22P	

DG45C-B-60A Assemble

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	25A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375")	
Poles	2P~4P	

DG45S - A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	25A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375")	
Poles	2P~20P	

DG45S - B

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	25A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375")	
Poles	2P~22P	

DG45S-B-60A Assemble

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	25A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375")	
Poles	2P,3P,4P	

DG45H - A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	25A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375")	
Poles	2P~20P	

DEGSON®

If you need more details.please contact us for sending detailed catalogues,link our website according to the part number,or view the CD catalogue!

BARRIER TERMINAL BLOCKS

DG45R - A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	25A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375″)	
Poles	2P~20P	

DG45R - B

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	25A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375″)	
Poles	2P~22P	



Pitch:10.0mm (.394″)

DG55C - A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	10.0mm (.394″)	
Poles	2P~24P	

DG55C - B

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	10.0mm (.394″)	
Poles	2P~26P	

DG55S - A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	10.0mm (.394″)	
Poles	2P~24P	

DG55S - B

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	10.0mm (.394″)	
Poles	2P~26P	

DG55H - A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	10.0mm (.394″)	
Poles	2P~24P	

DG55R - A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	10.0mm (.394″)	
Poles	2P~24P	

DG55R - B

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	10.0mm (.394″)	
Poles	2P~26P	



Pitch:11.0mm (.433″)

DG65C - A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	11.0mm (.433″)	
Poles	2P~20P	

DG65C - B

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	11.0mm (.433″)	
Poles	2P~22P	

DG65S - A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	11.0mm (.433″)	
Poles	2P~20P	

DG65S - B

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	11.0mm (.433″)	
Poles	2P~22P	

DG65H - A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	11.0mm (.433″)	
Poles	2P~20P	

DG65R - A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	11.0mm (.433″)	
Poles	2P~20P	

DG65R - B

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	11.0mm (.433″)	
Poles	2P~22P	



Pitch:6.35mm (.250″)

DG16S - B

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	17.5A
Wire size	22-16AWG	1.5mm²
Pitch	6.35mm (.250″)	
Poles	2P~24P	

DG16R - B

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	17.5A
Wire size	22-16AWG	1.5mm²
Pitch	6.35mm (.250″)	
Poles	2P~24P	



Pitch:8.25mm (.325″)

DG36S - B

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	20A	24A
Wire size	22-12AWG	2.5mm²
Pitch	8.25mm (.325″)	
Poles	2P~22P	



DG36R - B

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	20A	24A
Wire size	22-12AWG	2.5mm²
Pitch	8.25mm (.325″)	
Poles	2P~22P	



Pitch:9.5mm (.375″)

DG46S - B

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375″)	
Poles	2P~24P	

DG46S-B-60A Assemble

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375″)	
Poles	2P,3,P,4P	

DG46R - B

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375″)	
Poles	2P~24P	

DG46GS - B

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375″)	
Poles	2P~12P	



DG46GR - B

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375″)	
Poles	2P~12P	



Pitch:11.11mm (.437″)

DG66S - B

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	30A	32A
Wire size	22-10AWG	4mm²
Pitch	11.11mm (.437″)	
Poles	2P~12P	

DG66R - B

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	30A	32A
Wire size	22-10AWG	4mm²
Pitch	11.11mm (.437 ")	
Poles	2P~12P	

Pitch:11.0mm
(.433 ")



DG67 - 1

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	11.0mm (.433 ")	
Poles	2P~24P	



DG67 - 2

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	11.0mm (.433 ")	
Poles	2P~24P	



DG67 - 3

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	11.0mm (.433 ")	
Poles	2P~24P	



DG67 - 5

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	11.0mm (.433 ")	
Poles	2P~24P	



Pitch:7.62mm
(.300")

DG28C - A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	7.62mm (.300 ")	
Poles	2P~24P	

DG28C - B

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	7.62mm (.300 ")	
Poles	2P~26P	

DG28S - A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	7.62mm (.300 ")	
Poles	2P~24P	

DG28S - B

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	7.62mm (.300 ")	
Poles	2P~26P	

DG28H - A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	7.62mm (.300 ")	
Poles	2P~24P	

DG28R - A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	7.62mm (.300 ")	
Poles	2P~24P	

DG28R - B

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	7.62mm (.300 ")	
Poles	2P~26P	



Pitch:8.25mm
(.325")

DG38C - A

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	8.25mm (.325 ")	
Poles	2P~24P	

DG38C - B

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	8.25mm (.325 ")	
Poles	2P~26P	



DG38S - A

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	8.25mm (.325 ")	
Poles	2P~24P	



DG38S - B

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	8.25mm (.325 ")	
Poles	2P~26P	

DG38H- A

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	8.25mm (.325 ")	
Poles	2P~24P	

DG38R - A

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	8.25mm (.325 ")	
Poles	2P~24P	

DG38R - B

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	8.25mm (.325 ")	
Poles	2P~26P	



Pitch:9.5mm
(.375")

DG48C - A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375 ")	
Poles	2P~20P	



DG48C - B

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375 ")	
Poles	2P~22P	

DG48S - A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375 ")	
Poles	2P~20P	



DG48S - B

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375 ")	
Poles	2P~22P	

DG48H - A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375 ")	
Poles	2P~20P	

DG48R - A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375 ")	
Poles	2P~20P	



DG48R - B

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375 ")	
Poles	2P~22P	



Pitch:10.0mm
(.394")

DG58C - A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	10.0mm (.394 ")	
Poles	2P~20P	

DG58C - B

Approval	UL	CE
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	10.0mm (.394")	
Poles	2P~22P	

DG58S - A

Approval	UL	CE
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	10.0mm (.394")	
Poles	2P~20P	

DG58S - B

Approval	UL	CE
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	10.0mm (.394")	
Poles	2P~22P	

DG58H - A

Approval	UL	CE
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	10.0mm (.394")	
Poles	2P~20P	

DG58R - A

Approval	UL	CE
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	10.0mm (.394")	
Poles	2P~20P	

DG58R - B

Approval	UL	CE
Standard	UL	IEC
Voltage	300V	750V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	10.0mm (.394")	
Poles	2P~22P	



Pitch:13.0mm
(.512")

DG78C - A

Approval	UL	CE
Standard	UL	IEC
Voltage	600V	750V
Current	40A	41A
Wire size	18-10AWG	6.0mm²
Pitch	13.0mm (.512")	
Poles	2P~18P	

DG78C - B

Approval	UL	CE
Standard	UL	IEC
Voltage	600V	750V
Current	40A	41A
Wire size	18-10AWG	6.0mm²
Pitch	13.0mm (.512")	
Poles	2P~20P	

DG78S - A

Approval	UL	CE
Standard	UL	IEC
Voltage	600V	750V
Current	40A	41A
Wire size	18-10AWG	6.0mm²
Pitch	13.0mm (.512")	
Poles	2P~18P	

DG78S - B

Approval	UL	CE
Standard	UL	IEC
Voltage	600V	750V
Current	40A	41A
Wire size	18-10AWG	6.0mm²
Pitch	13.0mm (.512")	
Poles	2P~20P	

DG78H - A

Approval	UL	CE
Standard	UL	IEC
Voltage	600V	750V
Current	40A	41A
Wire size	18-10AWG	6.0mm²
Pitch	13.0mm (.512")	
Poles	2P~18P	

DG78R - A

Approval	UL	CE
Standard	UL	IEC
Voltage	600V	750V
Current	40A	41A
Wire size	18-10AWG	6.0mm²
Pitch	13.0mm (.512")	
Poles	2P~18P	

DG78R - B

Approval	UL	CE
Standard	UL	IEC
Voltage	600V	750V
Current	40A	41A
Wire size	18-10AWG	6.0mm²
Pitch	13.0mm (.512")	
Poles	2P~20P	

DG1350-B

Approval	UL	IEC
Standard	UL	IEC
Voltage	600V	750V
Current	30A	41A
Wire size	26-10AWG	6.0mm²
Pitch	13.5mm (.531")	
Poles	2P~12P	

DG1350-B-10A

Approval	UL	IEC
Standard	UL	IEC
Voltage	600V	750V
Current	30A	41A
Wire size	26-10AWG	6.0mm²
Pitch	13.5mm (.531")	
Poles	2P~12P	

DG1450-B

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	45A	45A
Wire size	22-8AWG	10.0mm²
Pitch	14.5mm (.571")	
Poles	2P~14P	



DG1450H-B

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	45A	45A
Wire size	22-8AWG	10.0mm²
Pitch	14.5mm (.571")	
Poles	2P~14P	



DG1450H-B-10A

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	45A	45A
Wire size	22-8AWG	10.0mm²
Pitch	14.5mm (.571")	
Poles	2P~14P	



DG1450H-B-20A

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	45A	45A
Wire size	22-8AWG	10.0mm²
Pitch	14.5mm (.571")	
Poles	2P~14P	



DG1450H-B-30A

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	45A	45A
Wire size	22-8AWG	10.0mm²
Pitch	14.5mm (.571")	
Poles	2P~14P	



DG1450H-B-40A

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	45A	45A
Wire size	22-8AWG	10.0mm²
Pitch	14.5mm (.571")	
Poles	2P~14P	

DG2000-B

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	75A	75A
Wire size	26-4AWG	25.0mm²
Pitch	20.0mm (.787")	
Poles	2P~12P	

DG2000H-B

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	75A	75A
Wire size	26-4AWG	25.0mm²
Pitch	20.0mm (.787")	
Poles	2P~12P	



Pitch:9.5~14.0mm

DG49-A

Approval	UL	CE
Standard	UL	IEC
Voltage	300V	450V
Current	20A	32A
Wire size	22-12AWG	4.0mm²
Pitch	9.5mm (.375")	
Poles	2P~24P	

DG69-A

Approval	UL	CE
Standard	UL	IEC
Voltage	300V	750V
Current	25A	32A
Wire size	22-12AWG	4.0mm²
Pitch	11mm (.433")	
Poles	2P~18P	

DG89-A

Approval	UL	CE
Standard	UL	IEC
Voltage	600V	750V
Current	30A	41A
Wire size	22-10AWG	6.0mm²
Pitch	14mm (.551")	
Poles	2P~18P	



Pitch:7.62~9.5mm

DG24 - 1

Approval	UL	CE
Standard	UL	IEC
Voltage	300V	450V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	7.62mm (.300")	
Poles	2"(4P~24P)	

DG24 - 2

Approval	UL	CE
Standard	UL	IEC
Voltage	300V	450V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	7.62mm (.300")	
Poles	2"(4P~24P)	

DG24B-1

Approval	UL	IEC
Standard	UL	IEC
Voltage	300V	450V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	7.62mm (.300")	
Poles	2"(4P-24P)	



Pitch:9.52mm
(.375")

DG44B-1

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	9.52mm (.375")	
Poles	2~(6P~18P)	

DG44B-2

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	15A	24A
Wire size	22-14AWG	2.5mm²
Pitch	9.52mm (.375")	
Poles	2~(6P~18P)	



DGA40-A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	40A	40A
Wire size	20-8AWG	10.0mm²
Pitch	13.00mm (.512")	
Poles	1P~XXP	

DGR60-20A H=38.0mm

Approval		
Standard	UL	IEC
Voltage	600V	600V
Current	60A	60A
Wire size	20-4AWG	25.0mm²
Pitch	19.0mm (.748")	
Poles	1P~XXP	

DGR60-30A H=34.0mm

Approval		
Standard	UL	IEC
Voltage	600V	600V
Current	60A	60A
Wire size	20-4AWG	25.0mm²
Pitch	19.0mm (.748")	
Poles	1P~XXP	

DGR60-40A H=29.0mm

Approval		
Standard	UL	IEC
Voltage	600V	600V
Current	60A	60A
Wire size	20-4AWG	25.0mm²
Pitch	19.0mm (.748")	
Poles	1P~XXP	

DGR80 H=38.0mm

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	80A	80A
Wire size	20-4AWG	25.0mm²
Pitch	19.0mm (.748")	
Poles	1P~XXP	

DGA75-A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	75A	75A
Wire size	20-4AWG	25.0mm²
Pitch	16.0mm (.630")	
Poles	1P~XXP	

DGA75-B

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	75A	75A
Wire size	20-4AWG	25.0mm²
Pitch	16.0mm (.630")	
Poles	1P~XXP	

DGA100-A

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	101A	101A
Wire size	20-2AWG	35.0mm²
Pitch	21.0mm (.827")	
Poles	1P~XXP	

DGA150-A

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	150A	150A
Wire size	20-1/0AWG	50.0mm²
Pitch	27.0mm (1.063")	
Poles	1P~XXP	

DGR80-20A H=38.0mm

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	80A	80A
Wire size	20-4AWG	25.0mm²
Pitch	19.0mm (.748")	
Poles	1P~XXP	

DGR80-50A H=42.5mm

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	80A	80A
Wire size	20-4AWG	25.0mm²
Pitch	19.0mm (.748")	
Poles	1P~XXP	

DGR80-60A H=42.5mm

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	80A	80A
Wire size	20-4AWG	25.0mm²
Pitch	20.0mm (.787")	
Poles	1P~XXP	

DGR100 H=43.5mm

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	101A	100A
Wire size	20-2AWG	35.0mm²
Pitch	25.0mm (.984")	
Poles	1P~XXP	



DGA180-A

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	180A	180A
Wire size	20-1/0AWG	50.0mm²
Pitch	21.0mm (.827")	
Poles	1P~XXP	

DGB50-A

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	50A	50A
Wire size	20-8AWG	10.0mm²
Pitch	18.0mm (.709")	
Poles	1P~XXP	

DGB100-A

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	101A	101A
Wire size	20-2AWG	35.0mm²
Pitch	21.8mm (.858")	
Poles	1P~XXP	

DGB100-A-10A

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	101A	101A
Wire size	20-2AWG	35.0mm²
Pitch	25.5mm (1.004")	
Poles	1P~XXP	

DGR100-20A H=43.5mm

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	101A	100A
Wire size	20-2AWG	35.0mm²
Pitch	25.0mm (.984")	
Poles	1P~XXP	

DGR100-50A H=50.5mm

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	101A	100A
Wire size	20-2AWG	35.0mm²
Pitch	26.0mm (1.024")	
Poles	1P~XXP	

DGR100-60A H=50.5mm

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	101A	100A
Wire size	20-2AWG	35.0mm²
Pitch	26.0mm (1.024")	
Poles	1P~XXP	

DGR150 H=45.0mm

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	155A	155A
Wire size	20-2/0AWG	50.0mm²
Pitch	27.0mm (1.062")	
Poles	1P~XXP	

DGB150-A

Approval		
Standard	UL	IEC
Voltage	600V	600V
Current	150A	150A
Wire size	20-1/0AWG	50.0mm²
Pitch	27.0mm (1.063")	
Poles	1P~XXP	

DGB200-A

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	200A	200A
Wire size	20-2/0AWG	70.0mm²
Pitch	31.0mm (1.220")	
Poles	1P~XXP	



DGR40 H=42.5mm

Approval		
Standard	UL	IEC
Voltage	600V	750V
Current	30A	30A
Wire size	22-12AWG	4.0mm²
Pitch	11.5mm (.453")	
Poles	1P~XXP	



DGR60 H=38.0mm

Approval		
Standard	UL	IEC
Voltage	600V	600V
Current	60A	60A
Wire size	20-4AWG	25.0mm²
Pitch	19.0mm (.748")	
Poles	1P~XXP	

DGR150-20A H=45.0mm

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	155A	155A
Wire size	20-2/0AWG	50.0mm²
Pitch	27.0mm (1.062")	
Poles	1P~XXP	

DGR175 H=48.0mm

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	175A	175A
Wire size	20-2/0AWG	70.0mm²
Pitch	32.0mm (1.260")	
Poles	1P~XXP	

DGR175-20A H=48.0mm

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	175A	175A
Wire size	20-2/0AWG	70.0mm²
Pitch	32.0mm (1.260")	
Poles	1P~XXP	

DGR200 H=58.0mm

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	200A	200A
Wire size	20-4/0AWG	95.0mm²
Pitch	36.0mm (1.417")	
Poles	1P~XXP	

DGR200-20A H=58.0mm

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	200A	200A
Wire size	20-4/0AWG	95.0mm²
Pitch	36.0mm (1.417")	
Poles	1P~XXP	



DGR300 H=63.0mm

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	300A	300A
Wire size	20-300kcm II	150.0mm²
Pitch	45.0mm (1.772")	
Poles	1P~XXP	

DGR300-20A H=63.0mm

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	300A	300A
Wire size	20-300kcm II	150.0mm²
Pitch	45.0mm (1.772")	
Poles	1P~XXP	

DGR500

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	300A	300A
Wire size	20-750kcm II	300.0mm²
Pitch	60.0mm (2.362")	
Poles	1P~XXP	

Pitch:10~21mm

DG30-A

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	30A	41A
Wire size	28-10AWG	6.0mm²
Pitch	13.0mm (.512")	
Poles	2P~10P	

DG30-1

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	30A	41A
Wire size	18-10AWG	4.0mm²
Pitch	12.0mm (.472")	
Poles	2P~10P	



DG30-2

Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	30A	41A
Wire size	18-10AWG	4.0mm²
Pitch	12.0mm (.472")	
Poles	2P~10P	

DG30-3

Approval		
Standard	UL	IEC
Voltage	600V	750V
Current	75A	101A
Wire size	10-2AWG	25.0mm²
Pitch	16.0mm (.630")	
Poles	2P~10P	

DG30-4

Approval		
Standard	UL	IEC
Voltage	600V	750V
Current	100A	125A
Wire size	8-2AWG	35.0mm²
Pitch	21.0mm (.827")	
Poles	2P~10P	

DG31-B

Approval		
Standard	UL	IEC
Voltage	600V	750V
Current	30A	41A
Wire size	18-10AWG	6.0mm²
Pitch	10.0mm (.394")	
Poles	8P~9P	

Pitch:10.0~13.5mm

DG11-A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	30A	41A
Wire size	18-10AWG	6.0mm²
Pitch	11.0mm (.433")	
Poles	2P~11P	



DG12-A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	30A	41A
Wire size	18-10AWG	6.0mm²
Pitch	11.0mm (.433")	
Poles	2P~11P	

DG13-A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	30A	41A
Wire size	18-10AWG	6.0mm²
Pitch	11.0mm (.433")	
Poles	2P~11P	



EA16-A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	30A	32A
Wire size	22-12AWG	4.0mm²
Pitch	13.5mm (.532")	
Poles	3P	



EA17-A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	30A	32A
Wire size	22-12AWG	4.0mm²
Pitch	13.5mm (.532")	
Poles	3P	

DG21-A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	30A	41A
Wire size	18-10AWG	6.0mm²
Pitch	11.0mm (.433")	
Poles	4P,6P,8P	

DG22-A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	30A	41A
Wire size	18-10AWG	6.0mm²
Pitch	11.0mm (.433")	
Poles	4P,6P,8P	

DG23-A

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	30A	41A
Wire size	18-10AWG	6.0mm²
Pitch	11.0mm (.433")	
Poles	4P,6P,8P	



INTERFACE MODULE



DMG-02P DMG-03P DMG-04P DMG-05P DMG-07P DMG-08P DMG-09P DMG-14P DMG-17P DMG-19P DMG-24P DMG-29P

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-12AWG	2.5mm²
Width	9.5mm (.374") ; 12.5mm (.492") ; 17.5mm (.689") ; 25.0mm (.984") ; 27.5mm (1.083") ; 35.0mm (1.378") ; 45.0mm (1.772")	
Poles	4P,6P,8P,10P,12P,14P,16P,18P,22P,24P,28P,32P,48P,56P	



DMGB-02P DMGB-03P

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-12AWG	2.5mm²
Width	12.5mm (.492") ,17.5mm (.689")	
Poles	4P,6P	

FMES-02P FMES-03P FMES-04P FMES-06P FMES-08P

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	16A
Wire size	24-12AWG	2.5mm²
Width	12.5mm (.492") ,17.5mm (.689") ,22.5mm (.886") ,25.0mm (.984")	
Poles	8P,12P,16P,24P,32P	

FMET-02P FMET-03P FMET-04P FMET-06P FMET-08P

Approval		
Standard	UL	IEC
Voltage	300V	300V
Current	15A	20A
Wire size	28-12AWG	2.5mm²
Width	12.5mm (.492") ,17.5mm (.689") ,22.5mm (.886") ,25.0mm (.984") ,35.0mm (1.378") ,45.0mm (1.772")	
Poles	8P,12P,16P,24P,32P	

FEG-02P FEG-04P

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	16A
Wire size	24-12AWG	2.5mm²
Width	20.0mm (.787") ,30.0mm (1.181")	
Poles	8P,16P	

FEGH-03P FEGH-06P

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	16A
Wire size	24-12AWG	2.5mm²
Width	22.5mm (.886") ,40.0mm (1.575")	
Poles	12P,24P	

FEGM-03P FEGM-06P

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	16A
Wire size	24-12AWG	2.5mm²
Width	22.5mm (.886") ,40.0mm (1.575")	
Poles	6P,12P	

FEGM-12P

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	16A
Wire size	24-12AWG	2.5mm²
Width	25.0mm (1.016")	
Poles	12P	

DM 71

Approval	
Standard	
Voltage	
Current	
Wire size	
Width	
Poles	

DM100/108

Approval	
Standard	
Voltage	
Current	
Wire size	
Width	
Poles	

DMK

Approval	
Standard	
Voltage	
Current	
Wire size	
Width	
Poles	

DGM XX-AP01

Approval		
Standard	UL	IEC
Voltage	24V	24V
Current	5A	5A
Wire size	24-12AWG	2.5mm²
Width	–	–
Poles	–	–

DGMXX-AP02

Approval		
Standard	UL	IEC
Voltage	24V	24V
Current	5A	5A
Wire size	24-12AWG	2.5mm²
Width	–	–
Poles	–	–



DRM201-01

Approval		
Standard	UL	IEC
Voltage	24V	24V
Current	5A	5A
Wire size	24-12AWG	2.5mm²
Width	–	–
Poles	–	–



DRM202-01

Approval		
Standard	UL	IEC
Voltage	24V	24V
Current	5A	5A
Wire size	24-12AWG	2.5mm²
Width	–	–
Poles	–	–



DRM204-01

Approval		
Standard	UL	IEC
Voltage	24V	24V
Current	5A	5A
Wire size	24-12AWG	2.5mm²
Width	–	–
Poles	–	–

DRM101-01

Approval		
Standard	UL	IEC
Voltage	24V	24V
Current	16A	16A
Wire size	24-12AWG	2.5mm²
Width	–	–
Poles	–	–



DRM102-01

Approval		
Standard	UL	IEC
Voltage	24V	24V
Current	16A	16A
Wire size	24-12AWG	2.5mm²
Width	–	–
Poles	–	–



DRM104-01

Approval		
Standard	UL	IEC
Voltage	24V	24V
Current	16A	16A
Wire size	–	–
Width	–	–
Poles	–	–





DK4

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	15A	17.5A
Wire size	24-10AWG	0.2-4.0mm²
Pitch	–	–
Poles	–	–



DK4B

Approval		
Standard	UL	IEC
Voltage	600V	690V
Current	30A	17.5A
Wire size	24-10AWG	0.2-4.0mm²
Pitch	–	–
Poles	–	–



DK4-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-10AWG	0.2-4.0mm²
Pitch	–	–
Poles	–	–

DK4F

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	8A	6.3A
Wire size	24-10AWG	0.2-4.0mm²
Pitch	–	–
Poles	–	–

DK4FB

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	8A	17.5A
Wire size	24-10AWG	0.2-4.0mm²
Pitch	–	–
Poles	–	–



DKH16

Approval		
Standard	UL	IEC
Voltage	600V	500V
Current	85A	76A
Wire size	24-4AWG	0.5-16mm²
Pitch	–	–
Poles	–	–



DKH16B

Approval		
Standard	UL	IEC
Voltage	600V	500V
Current	85A	76A
Wire size	24-4AWG	0.5-16mm²
Pitch	–	–
Poles	–	–



PC series



PC 1.5

Approval		
Standard	UL	IEC
Voltage	600V	500V
Current	10A	17.5A
Wire size	26-16AWG	0.2-1.5mm²
T/W/End plate	4.2/42.5/1.5mm	
Height(mm)	42/49.5/47mm	

PC 2.5B

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	20A	24A
Wire size	24-12AWG	0.2-2.5mm²
T/W/End plate	6.2/42.5/1.5mm	
Height(mm)	42/49.5/47mm	

PC 2.5

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	20A	24A
Wire size	24-12AWG	0.2-2.5mm²
T/W/End plate	5.2/42.5/1.6mm	
Height(mm)	47/54.5/52mm	

PC 4

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	30A	32A
Wire size	24-10AWG	0.2-4mm²
T/W/End plate	6.2/42.5/1.6mm	
Height(mm)	47/54.5/52mm	

PC 6

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	50A	41A
Wire size	24-8AWG	0.2-6mm²
T/W/End plate	8.2/42.5/1.6mm	
Height(mm)	47/54.5/52mm	

PC 10

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	65A	57A
Wire size	20-6AWG	0.2-10mm²
T/W/End plate	10.2/42.5/1.6mm	
Height(mm)	47/54.5/52mm	

PC 16

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	85A	76A
Wire size	12-4AWG	0.2-16mm²
T/W/End plate	12.2/42.5/1.5mm	
Height(mm)	54/61.5/59mm	

D-PC1.5,D-PC2.5
D-PC16

D-PC1.5➡PC1.5,PC2.5B
D-PC2.5➡PC2.5,PC4,PC6,PC10
D-PC16➡PC16

PC 35

Approval		
Standard	UL	IEC
Voltage	600V	1000V
Current	7A	125A
Wire size	18AWG	0.2-35mm²
T/W/End plate	15.2/50/-mm	
Height(mm)	62/69.5/67mm	

PC 50

Approval		
Standard	UL	IEC
Voltage	600V	1000V
Current	150A	150A
Wire size	6-2/0AWG	25-50mm²
T/W/End plate	20/70.5/-mm	
Height(mm)	-/83.5/81.5mm	

PC 95

Approval		
Standard	UL	IEC
Voltage	600V	1000V
Current	230A	232A
Wire size	4-3/0AWG	35-95mm²
T/W/End plate	25/83/-mm	
Height(mm)	-/97.5/95.5mm	

PC 150

Approval		
Standard	UL	IEC
Voltage	600V	1000V
Current	285A	309A
Wire size	2-300MCM	50-150mm²
T/W/End plate	31/100/-mm	
Height(mm)	-/118.5/116mm	

PC 240

Approval		
Standard	UL	IEC
Voltage	800V	1000V
Current	380A	415A
Wire size	0-500MCM	70-240mm²
T/W/End plate	36/100/-mm	
Height(mm)	-/131.5/129.5mm	

PC 1.5-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	26-14AWG	0.2-1.5mm²
T/W/End plate	4.2/42.5/-mm	
Height(mm)	42/49.5/47mm	

PC 2.5B-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-12AWG	0.2-2.5mm²
T/W/End plate	6.2/42.5/-mm	
Height(mm)	42/49.5/47mm	

PC 2.5-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-12AWG	0.2-2.5mm²
T/W/End plate	5.2/42.5/-mm	
Height(mm) U/U/G	47/54.5/52mm	



PC 4-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-10AWG	0.2-4mm²
T/W/End plate	6.2/42.5/-mm	
Height(mm) U/U/G	47/54.5/52mm	



PC 6-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-10AWG	0.2-6mm²
T/W/End plate	8.2/42.5/-mm	
Height(mm) U/U/G	47/54.5/52mm	

PC 10-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-6AWG	0.2-10mm²
T/W/End plate	10.2/42.5/-mm	
Height(mm) U/U/G	47/54.5/52mm	



PC 16-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	12-4AWG	0.2-16mm²
T/W/End plate	12.2/42.5/-mm	
Height(mm) U/U/G	54/61.5/59mm	

PC 35-PE

Approval		CE
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	18-2AWG	0.2-35mm²
T/W/End plate	15.2/50/-mm	
Height(mm) U/U/G	62/69.5/67mm	



PC 50-PE

Approval		CE
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	6-1/0AWG	25-50mm²
T/W/End plate	20/70.5/-mm	
Height(mm) U/U/G	-/83.5/81.5mm	

PC 95-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	4-3/0AWG	35-95mm²
T/W/End plate	25.83/-mm	
Height(mm) U/U/G	-/99/96.5mm	

PC 2.5-TW

Approval		CE
Standard	UL	IEC
Voltage	300V	400V
Current	20A	24A
Wire size	30-12AWG	0.2-2.5mm²
T/W/End plate	5.2/50.5/2mm	
Height(mm) U/U/G	47/54.5/52mm	

PC 4-TW

Approval		CE
Standard	UL	IEC
Voltage	300V	500V
Current	30A	32A
Wire size	30-10AWG	0.2-4mm²
T/W/End plate	6.2/50.5/2mm	
Height(mm) U/U/G	47/54.5/52mm	



PC 10-TW

Approval		
Standard	UL	IEC
Voltage	300V	800V
Current	65A	57A
Wire size	20-6AWG	0.2-10mm²
T/W/End plate	10.2/56.5/-mm	
Height(mm) U/U/G	59/66.5/64mm	

PC 10-PL

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	65A	57A,32A
Wire size	20-6AWG,24-10AWG	0.2-10mm,0.2-4mm²
T/W/End plate	10.2/53/-mm	
Height(mm) U/U/G	47/54.5/52mm	

D-PC2.5-TW

D-PC2.5-TW→PC2.5-TW,PC4-TW

PC 2.5-TW-PE

Approval		CE
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-14AWG	0.2-2.5mm²
T/W/End plate	5.2/50.5/-mm	
Height(mm) U/U/G	47/54.5/52mm	



PC 4-TW-PE

Approval		CE
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-12AWG	0.2-4mm²
T/W/End plate	6.2/50.5/-mm	
Height(mm) U/U/G	47/54.5/52mm	



PC 10-TW-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	20-6AWG	0.2-10mm²
T/W/End plate	10.2/66.5/-mm	
Height(mm) U/U/G	59/66.5/64mm	

PC 10-PL-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	20-6AWG,24-10AWG	0.2-10mm,0.2-4mm²
T/W/End plate	10.2/53/-mm	
Height(mm) U/U/G	47/54.5/52mm	

PCDK 2.5

Approval		
Standard	UL	IEC
Voltage	300V	500V
Current	20A	24A
Wire size	24-12AWG	0.2-2.5mm²
T/W/End plate	5.2/63.5/1.5mm	
Height(mm) U/U/G	47/54.5/52.5mm	

PCDK 4

Approval		
Standard	UL	IEC
Voltage	300V	630V
Current	30A	32A
Wire size	24-10AWG	0.2-4mm²
T/W/End plate	6.2/63.5/1.5mm	
Height(mm) U/U/G	47/54.5/52.5mm	

D-PCDK2.5

D-PCDK2.5→PCDK2.5,PCDK4

PCDK 2.5-PE

Approval		CE
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-12AWG	0.2-2.5mm²
T/W/End plate	5.2/63.5/-mm	
Height(mm) U/U/G	47/54.5/52.5mm	

PCDK 4-PE

Approval		CE
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-10AWG	0.2-4mm²
T/W/End plate	6.2/63.5/-mm	
Height(mm) U/U/G	47/54.5/52.5mm	

PC 2.5-RE

Approval		
Standard	UL	IEC
Voltage	300V	500V
Current	20A	24A
Wire size	24-12AWG	0.2-2.5mm²
T/W/End plate	5.2/47.5/1.5mm	
Height(mm) U/U/G	58.5/66/63.5mm	



PC 4-RE

Approval		
Standard	UL	IEC
Voltage	300V	500V
Current	30A	32A
Wire size	24-10AWG	0.2-4mm²
T/W/End plate	6.2/47.5/1.5mm	
Height(mm) U/U/G	58.5/66/63.5mm	

D-PC2.5-RE

D-PC2.5-RE→PC2.5-RE,PC4-RE

PC 2.5-RE-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-12AWG	0.2-2.5mm²
T/W/End plate	5.2/42.5/-mm	
Height(mm) U/U/G	58.5/66/63.5mm	

PC 4-RE-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-10AWG	0.2-4mm²
T/W/End plate	6.2/42.5/-mm	
Height(mm) U/U/G	58.5/66/63.5mm	

PCKK 2.5

Approval		
Standard	UL	IEC
Voltage	300V	500V
Current	20A	24A
Wire size	24-12AWG	0.2-2.5mm²
T/W/End plate	5.2/56/2.6mm	
Height(mm) U/U/G	62/69.5/67mm	

PCKKB 2.5

Approval		
Standard	UL	IEC
Voltage	600V	500V
Current	20A	24A
Wire size	24-12AWG	0.2-2.5mm²
T/W/End plate	5.2/67/2.5mm	
Height(mm) U/U/G	62/69.5/67mm	

PCKK 4

Approval		
Standard	UL	IEC
Voltage	300V	500V
Current	30A	32A
Wire size	26-10AWG	0.2-4mm²
T/W/End plate	6.2/56/2.6mm	
Height(mm) U/U/G	62/69.5/67mm	

PCKKB 4

Approval		
Standard	UL	IEC
Voltage	600V	500V
Current	30A	32A
Wire size	24-12AWG	0.2-4mm²
T/W/End plate	6.2/67/2.5mm	
Height(mm) U/U/G	62/69.5/67mm	

PCKKB 10

Approval		
Standard	UL	IEC
Voltage	600V	500V
Current	65A	57A
Wire size	20-6AWG	0.2-10mm²
T/W/End plate	10.2/77.5/1.5mm	
Height(mm) U/U/G	73/80.5/78mm	



PCKKB 10/2.5

Approval		
Standard	UL	IEC
Voltage	600V	500V
Current	65A,20A	57A,24A
Wire size	20-6AWG,24-12AWG	0.2-10mm² 0.2-2.5mm²
T/W/End plate	10.2/17.5/1.5mm	
Height(mm)	73/80.5/78mm	

D-PCKK2.5 D-PCKKB2.5 D-PCKKB10 D-PCKKB10/2.5

D-PCKK2.5→PCKK2.5,PCKK4
D-PCKKB2.5→PCKKB2.5,PCKKB4
D-PCKKB10→PCKKB10
D-PCKKB10/2.5→PCKKB10/2.5



PCIK 16

Approval		CE
Standard	UL	IEC
Voltage	300V	400V
Current	85A	76A
Wire size	12-4AWG	4-16mm²
T/W/End plate	12.2/42.5/1.8mm	
Height(mm)	47/54.5/52mm	

D-PCIK16

D-PCIK16→PCIK16



PCIK 35

Approval		
Standard	UL	IEC
Voltage	600V	600V
Current	115A	125A
Wire size	18-2AWG	0.75-35mm²
T/W/End plate	15.2/55/-mm	
Height(mm)	51/58.5/59mm	

PCIK 16-PE

Approval		CE
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	12-4AWG	4-16mm²
T/W/End plate	12.5/42.5/-mm	
Height(mm)	47/54.5/52mm	

PCIK 35-PE

Approval		CE
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	18-2AWG	0.75-35mm²
T/W/End plate	15.2/55/-mm	
Height(mm)	51/58.5/56mm	

PC 4-HE

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	6.3A	6.3A
Wire size	24-12AWG	0.2-4mm²
T/W/End plate	8.2/72.5/-mm	
Height(mm)	56.5/64/61.5mm	

PC 10-DR

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	10A	10A
Wire size	20-6AWG	0.5-16mm²
T/W/End plate	12/62/-mm	
Height(mm)	59/66.5/64mm	

PCMT 2.5

Approval		CE
Standard	UL	IEC
Voltage	300V	400V
Current	16A	16A
Wire size	24-12AWG	0.2-2.5mm²
T/W/End plate	5.2/46/1mm	
Height(mm)	51.5/59/56mm	



PCMT 4

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	16A	16A
Wire size	24-12AWG	0.2-4mm²
T/W/End plate	6.2/51/-mm	
Height(mm)	58.5/66/63.5mm	



PCMT 4-DK

Approval		
Standard	UL	IEC
Voltage	600V	690V
Current	15A	16A
Wire size	24-10AWG	0.2-4mm²
T/W/End plate	6.2/63.5/1.5mm	
Height(mm)	47/54.5/52mm	

D-PCMT2.5

D-PCMT2.5→PCMT2.5

PCTK 6

Approval		CE
Standard	UL	IEC
Voltage	300V	400V
Current	40A	41A
Wire size	26-10AWG	0.5-6mm²
T/W/End plate	8.2/72/2mm	
Height(mm)	51.5/59/56mm	

D-PCTK6

D-PCTK6→PCTK6

PCTK 6-BEN

Approval		CE
Standard	UL	IEC
Voltage	300V	500V
Current	40A	41A
Wire size	26-10AWG	0.5-6mm²
T/W/End plate	8.2/61/2.2mm	
Height(mm)	58.5/66/63.5mm	



PCTK 6/S

Approval		
Standard	UL	IEC
Voltage	300V	500V
Current	40A	41A
Wire size	20-8AWG	0.5-6mm²
T/W/End plate	8.2/61/2.2mm	
Height(mm)	53.5/61/58.5mm	

PCTK 10-BEN

Approval		
Standard	UL	IEC
Voltage	600V	500V
Current	50A	57A
Wire size	20-6AWG	0.5-10mm²
T/W/End plate	8.2/61/1.5mm	
Height(mm)	58.5/66/63.5mm	

D-PCTK6-BEN

D-PCTK6-BEN→PCTK6-BEN

PCMB 2.5

Approval		CE
Standard	UL	IEC
Voltage	300V	400V
Current	20A	24A
Wire size	28-12AWG	0.2-2.5mm²
T/W/End plate	5.2/28/1.5mm	
Height(mm)	32mm	

PCMB 4

Approval		CE
Standard	UL	IEC
Voltage	300V	500V
Current	30A	32A
Wire size	26-10AWG	0.2-4mm²
T/W/End plate	6.2/28/1.5mm	
Height(mm)	32mm	

PCMB 6/E

Approval		
Standard	UL	IEC
Voltage	300V	500V
Current	50A	41A
Wire size	20-8AWG	0.5-6mm²
T/W/End plate	8.2/35/1.5mm	
Height(mm)	36mm	

D-PCMB2.5 D-PCMB6/E

D-PCMB2.5→PCMB2.5, PCMB4
D-PCMB6/E→PCMB6/E



PCMB 2.5-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-12AWG	0.2-2.5mm²
T/W/End plate	5.2/28/-mm	
Height(mm)	31.5mm	



PCMB 4-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-10AWG	0.2-4mm²
T/W/End plate	6.2/28/-mm	
Height(mm)	32mm	

PCMB 6/E-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	20-8AWG	0.5-6mm²
T/W/End plate	8.2/39/-mm	
Height(mm)	36mm	



E-PC

E-PC→NS35/7.5,NS35/15,NS-32

ZB4,ZB5,ZB6

ZB4→PC1.5,PC1.5-PE
ZB5→PC2.5,PC2.5-PE,PCDK2.5,PCDK2.5-PE
PCKK25,PC2.5-TW,PC2.5-TW-PE,PCMT2.5,
PC2.5-RE,PC25-RE-PE,PCM825,PCM825-PE
ZB6→PC2.5B,PC4,PC4-PE,PCDK4,PCDK4-PE
PCKK4,PC4-TW,PC4-TW-PE,PCMT4,PC4-RE,
PC4-RE-PE,PCM84,PCM84-PE

ZB8,ZB10

ZB8→PC6,PC6-PE,PC4-HE,PC10-DR,PCTK6
PCTK6-BEN,PCM86/E,PCM86/E-PE
ZB10→PC10,PC16,PC35,PC50,PC95,PC150,
PC240,PC10-PE,PC16-PE,PC35-PE,
PC50-PE,PC95-PE,PCIK16,PCIK16-PE,
PCIK35,PCIK35-PE



TS-KK 3 TS-K

TS-KK3→PC2.5B,PCDK2.5,PCDK4,PCKK2.5,
PCKK4
TS-K →PC2.5,PC4,PC6,PC10,PC35,PCIK16,
PCIK35

ATP -PC,TP-PC 35

ATP-PC →PC1.5,PC2.5B,PC2.5,PC4,PC6,
PC10,PC16
TP-PC35→PC35



EB 10-5 EB 10-6
EB 10-8 EB 10-10
EB 10-12 EB 10-15

EB10-5 →PC2.5,PCDK2.5,PCKK2.5,PCM82.5
EB10-6 →PC2.5B,PC4,PCDK4,PCKK4,PCM84
EB10-8 →PC6,PC4-HE
EB10-10→PC10
EB10-12→PC16,PC10-DR,PCIK16
EB10-15→PC35,PCIK35

FBRI 10-4 FBRI 10-5 FBI 10-6 FBI 10-8 FBI 10-10 FBI 10-12 FBI 3-15

FBRI10-4N→PC1.5
FBRI10-5N→PC2.5,PCDK2.5,PCKK2.5
FBI10-6 →PC2.5S,PC4,PCDK4,PCKK4
FBI10-8 →PC6
FBI10-10 →PC10
FBI10-12 →PC16,PC10-DR,PCIK16
FBI3-15 →PC35,PCIK35

FB2-RTK/S FB3-RTK/S FB5-RTK/S FB10-RTK/S

FB2/3/5/10-RTK/S→PCTK6

DSB

PC Series



DSBJ

PC Series

DPS

PC Series

DRPS

PC Series

DBE-1

DBE-1→NS35/7.5,NS35/15,NS-32

DBE-2

PC Series

DLM

PC Series

DLM1

PC Series

DLM2

PC Series

MK series



MK 2.5

Approval		
Standard	UL	IEC
Voltage	600V	500V
Current	20A	24A
Wire size	22-12AWG	0.5-2.5mm²
T/W/End plate	6/41/1.5mm	
Height(mm)	42.5/50/42.5mm	

MK 4

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	3A	32A
Wire size	22AWG	0.5-4mm²
T/W/End plate	6.5/42/1.5mm	
Height(mm)	47.5/55/47.5mm	

MK 6

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	3A	41A
Wire size	22AWG	0.5-6mm²
T/W/End plate	8/42/1.5mm	
Height(mm)	47.5/55/47.5mm	

MK 10

Approval		
Standard	UL	IEC
Voltage	600V	630V
Current	60A	57A
Wire size	14-6AWG	1.5-10mm²
T/W/End plate	10/42/1.5mm	
Height(mm)	47.5/55/47.5mm	

MK 16

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	80A	76A
Wire size	12-4AWG	2.5-16mm²
T/W/End plate	12/50/1.5mm	
Height(mm)	53.5/61/53.5mm	

MK 35

Approval		
Standard	UL	IEC
Voltage	600V	1000V
Current	115A	125A
Wire size	12-2AWG	10-35mm²
T/W/End plate	18/58/1.5mm	
Height(mm)	63.5/71/63.5mm	

MK 70

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	175A	192A
Wire size	6-2/0AWG	16-70mm²
T/W/End plate	22/75/1.5mm	
Height(mm)	87/94.5/87mm	

D-MK2.5 D-MK4 D-MK16 D-MK35

D-MK2.5→MK2.5
D-MK4 →MK4,MK6,MK10
D-MK16→MK16
D-MK35→MK35

MK 2.5-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-12AWG	0.5-2.5mm²
T/W/End plate	6/56/-mm	
Height(mm)	40/47.5mm	

MK 4-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	22-10AWG	0.75-4mm²
T/W/End plate	6.5/56/-mm	
Height(mm)	44/51.5mm	

MK 6-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	20-8AWG	0.5-6mm²
T/W/End plate	8/56/-mm	
Height(mm)	44/51.5mm	

MK 10-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	20-8AWG	0.5-10mm²
T/W/End plate	10/56/-mm	
Height(mm)	44/51.5mm	

MK 16-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	12-6AWG	2.5-16mm²
T/W/End plate	12/50/-mm	
Height(mm)	50/57.5mm	

MK 35-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	14AWG	4.0-35mm²
T/W/End plate	16/58/-mm	
Height(mm)	60/67.5mm	

MK 4Q

Approval		
Standard	UL	IEC
Voltage	300V	500V
Current	20A	32A
Wire size	22-12AWG	0.5-4mm²
T/W/End plate	6/54/1.5mm	
Height(mm)	60/67.5/60mm	

MK 4QV

Approval		
Standard	UL	IEC
Voltage	300V	500V
Current	20A	32A
Wire size	22-12AWG	0.5-4mm²
T/W/End plate	6/54/1.5mm	
Height(mm)	60.5/68/60mm	



D-MK4Q

D-MK4Q→MK4Q,MK4QV



MKTQ 6

Approval		
Standard	UL	IEC
Voltage	300V	500V
Current	50A	41A
Wire size	20-8AWG	0.5-6mm²
T/W/End plate	8/65/1.5mm	
Height(mm)	48.5/56/50mm	

D-MKTQ6

D-MKTQ6→MKTQ6

MKK 1

Approval		CE
Standard	UL	IEC
Voltage	300V	500V
Current	6.3A	6.3A
Wire size	22-12AWG	0.5-4mm²
T/W/End plate	8/58/1.5mm	
Height(mm)	44/51.5/45.5mm	

MKK1/LD

Approval		CE
Standard	UL	IEC
Voltage	–	–
Current	6.3A	6.3A
Wire size	22-12AWG	0.5-4mm²
T/W/End plate	8/58/1.5mm	
Height(mm)	44/51.5/45.5mm	

D-MKK1

D-MKK1 → MKK1,MKK1/LD

E-MK

E-MK → NS35/7.5,NS35/15

DEK5,DEK6

DEK5 → MK2.5,MK2.5-PE,MK4Q,MK4QV
DEK6 → MK4,MK6,MK10,MK16,MK35,MK70,
MK4-PE,MK6-PE,MK10-PE,MK16-PE,
MK35-PE,MKTQ6,MKK1,MKK1/LD

Q 10-2.5B
Q 10-2.5 Q 10-4
Q 10-6 Q 10-10
Q 10-16 Q 10-35

Q 10-2.5 → MK2.5
Q 10-4 → MK4,MK4Q,MK4QV
Q 10-6 → MK6,MKTQ6
Q 10-10 → MK10
Q 10-16 → MK16
Q 10-35 → MK35



MK Series

TSCH1

TSCH1 → MK2.5,MK4,MK6,MK10,MK16,MK35,
MK70

WS 1.5

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	10A	17.5A
Wire size	28-16AWG	0.2-1.5mm²
T/W/End plate	4/52/2.5mm	
Height(mm)	34.5/42mm	

WS 2.5

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	15A	24A
Wire size	28-14AWG	0.2-2.5mm²
T/W/End plate	5/53/2.5mm	
Height(mm)	35.5/43mm	

WS 4

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	20A	32A
Wire size	28-12AWG	0.2-4mm²
T/W/End plate	6/59/2.5mm	
Height(mm)	36.5/44mm	

WS 6

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	30A	41A
Wire size	24-10AWG	0.2-6mm²
T/W/End plate	8/74.5/2.5mm	
Height(mm)	40/47.5mm	

WS 10

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	50A	57A
Wire size	24-8AWG	0.2-10mm²
T/W/End plate	10/78/2.5mm	
Height(mm)	42.5/50mm	

WS 16

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	65A	76A
Wire size	24-6AWG	0.2-16mm²
T/W/End plate	12/94.5/2.5mm	
Height(mm)	45/52.5mm	

WS 1.5-PE

Approval		CE
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	28-16AWG	0.2-1.5mm²
T/W/End plate	4/52/2mm	
Height(mm)	34.5/42mm	

WS 2.5-PE

Approval		
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	28-12AWG	0.2-2.5mm²
T/W/End plate	5/53/2.5mm	
Height(mm)	35.5/43mm	

WS 4-PE

Approval		CE
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	28-12AWG	0.2-4mm²
T/W/End plate	6/59/2.5mm	
Height(mm)	36.5/44mm	

WS 6-PE

Approval		CE
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-10AWG	0.2-6mm²
T/W/End plate	8/74.5/2.5mm	
Height(mm)	40/47.5mm	

WS 10-PE

Approval		CE
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-8AWG	0.2-10mm²
T/W/End plate	10/78/2.5mm	
Height(mm)	42.5/50mm	



WS 16-PE

Approval		CE
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-6AWG	0.2-16mm²
T/W/End plate	12/94.5/2.5mm	
Height(mm)	45/52.5mm	

D-WS1.5, D-WS2.5
D-WS4, D-WS6
D-WS10, D-WS16

D-WS1.5 → WS1.5,WS1.5-PE
D-WS2.5 → WS2.5,WS2.5-PE
D-WS4 → WS4,WS4-PE
D-WS6 → WS6,WS6-PE
D-WS10 → WS10,WS10-PE
D-WS16 → WS16,WS16-PE

WS 1.5-TW

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	10A	17.5A
Wire size	28-16AWG	0.2-1.5mm²
T/W/End plate	4/62.5/2.5mm	
Height(mm)	34.5/42mm	

WS 2.5-TW

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	15A	24A
Wire size	28-14AWG	0.2-2.5mm²
T/W/End plate	5/64/2.5mm	
Height(mm)	35.5/43mm	

WS 4-TW

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	20A	32A
Wire size	28-12AWG	0.2-4mm²
T/W/End plate	4/62.5/2.5mm	
Height(mm)	36.5/44mm	

WS 6-TW

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	30A	41A
Wire size	24-10AWG	0.2-6mm²
T/W/End plate	8/93/2.5mm	
Height(mm)	40/47.5mm	

WS 10-TW

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	50A	57A
Wire size	24-8AWG	0.2-10mm²
T/W/End plate	10/97.5/2.5mm	
Height(mm)	42.5/50mm	

WS 16-TW

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	65A	76A
Wire size	24-6AWG	0.2-16mm²
T/W/End plate	12/104.5/2.5mm	
Height(mm)	45/52.5mm	

WS 1.5-TW-PE

Approval		CE
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	28-16AWG	0.2-1.5mm²
T/W/End plate	4/62.5/2.5mm	
Height(mm)	34.5/42mm	

WS 2.5-TW-PE

Approval		CE
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	28-14AWG	0.2-2.5mm²
T/W/End plate	5/64/2.5mm	
Height(mm)	35.5/43mm	

WS 4-TW-PE

Approval		CE
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	28-12AWG	0.2-4mm²
T/W/End plate	6/73.5/2.5mm	
Height(mm)	36.5/44mm	

WS 6-TW-PE

Approval		CE
Standard	UL	IEC
Voltage	–	–
Current	–	–
Wire size	24-10AWG	0.2-6mm²
T/W/End plate	8/93/2.5mm	
Height(mm)	40/47.5mm	

WS 10-TW-PE

Approval		CE
Standard	UL	IEC
Voltage	--	--
Current	--	--
Wire size	24-8AWG	0.2-10mm²
T/W/End plate	10/97.5/2.5mm	
Height(mm)	42.5/50mm	



WS 16-TW-PE

Approval		
Standard	UL	IEC
Voltage	--	--
Current	--	--
Wire size	24-6AWG	0.2-16mm²
T/W/End plate	12/104.5/2.5mm	
Height(mm)	45/52.5mm	

D-WS1.5-TW, D-WS2.5-TW
D-WS4-TW, D-WS6-TW
D-WS10-TW, D-WS16-TW

D-WS1.5-TW→WS1.5-TW,WS1.5-TW-PE
D-WS2.5-TW→WS2.5-TW,WS2.5-TW-PE
D-WS4-TW →WS4-TW,WS4-TW-PE
D-WS6-TW →WS6-TW,WS6-TW-PE
D-WS10-TW →WS10-TW,WS10-TW-PE
D-WS16-TW →WS16-TW,WS16-TW-PE

WS 1.5-QU

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	10A	17.5A
Wire size	28-16AWG	0.2-1.5mm²
T/W/End plate	4/73/2.5mm	
Height(mm)	34.5/42mm	

WS 2.5-QU

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	15A	20A
Wire size	28-14AWG	0.2-2.5mm²
T/W/End plate	5/75/2.5mm	
Height(mm)	35.5/43mm	

WS 4-QU

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	20A	32A
Wire size	28-12AWG	0.2-4mm²
T/W/End plate	6/86/2.5mm	
Height(mm)	36.5/44mm	

WS 1.5-QU-PE

Approval		CE
Standard	UL	IEC
Voltage	--	--
Current	--	--
Wire size	28-16AWG	0.2-1.5mm²
T/W/End plate	4/73/2.5mm	
Height(mm)	34.5/42mm	

WS 2.5-QU-PE

Approval		CE
Standard	UL	IEC
Voltage	--	--
Current	--	--
Wire size	28-14AWG	0.2-2.5mm²
T/W/End plate	5/75/2.5mm	
Height(mm)	35.5/43mm	

WS 4-QU-PE

Approval		CE
Standard	UL	IEC
Voltage	--	--
Current	--	--
Wire size	28-12AWG	0.2-4mm²
T/W/End plate	6/86/2.5mm	
Height(mm)	36.5/44mm	

D-WS1.5-QU, D-WS2.5-QU
D-WS4-QU

D-WS1.5-QU→WS1.5-QU,WS1.5-QU-PE
D-WS2.5-QU→WS2.5-QU,WS2.5-QU-PE
D-WS4-QU →WS4-QU,WS4-QU-PE

D-WS2.5-TA, D-WS4-TA

D-WS2.5-TA→WS2.5-TA,WS2.5-TA-PE
D-WS4-TA →WS4-TA,WS4-TA-PE

WS 2.5-TW-TA

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	20A	24A
Wire size	28-14AWG	0.2-2.5mm²
T/W/End plate	5/50.5/2.5mm	
Height(mm)	44/51.5mm	



WS 4-TW-TA

Approval		
Standard	UL	IEC
Voltage	600V	800V
Current	20A	32A
Wire size	28-12AWG	0.2-4mm²
T/W/End plate	6/61.5/2.5mm	
Height(mm)	44.5/52mm	

WS 2.5-TW-TA-PE

Approval		
Standard	UL	IEC
Voltage	--	--
Current	--	--
Wire size	28-14AWG	0.2-2.5mm²
T/W/End plate	5/60.5/2.5mm	
Height(mm)	44/51.5mm	

WS 4-TW-TA-PE

Approval		
Standard	UL	IEC
Voltage	--	--
Current	--	--
Wire size	28-12AWG	0.2-4mm²
T/W/End plate	6/61.5/2.5mm	
Height(mm)	44.5/52mm	

D-WS2.5-TW-TA
D-WS4-TW-TA

D-WS2.5-TW-TA→WS2.5-TW-TA,WS2.5-TW-TA-PE
D-WS4-TW-TA →WS4-TW-TA,WS4-TW-TA-PE

WS 1.5-SD

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	10A	17.5A
Wire size	28-16AWG	0.2-1.5mm²
T/W/End plate	4/42.5/2.5mm	
Height(mm)	38/45.5mm	

WS 2.5-SD

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	15A	24A
Wire size	28-14AWG	0.2-2.5mm²
T/W/End plate	5/42.5/2.5mm	
Height(mm)	38/45.5mm	

WS 4-SD

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	20A	32A
Wire size	28-12AWG	0.2-4mm²
T/W/End plate	6/42.5/2.5mm	
Height(mm)	40/47.5mm	

WS 6-SD

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	30A	41A
Wire size	24-10AWG	0.2-6mm²
T/W/End plate	8/46.5/2.5mm	
Height(mm)	44.5/52mm	

WS 10-SD

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	50A	57A
Wire size	24-8AWG	0.2-10mm²
T/W/End plate	10/52/2.5mm	
Height(mm)	49/56.5mm	

WS 16-SD

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	65A	76A
Wire size	24-6AWG	0.2-16mm²
T/W/End plate	12/58/2.5mm	
Height(mm)	53/60.5mm	

WS 2.5-SD-PE

Approval		CE
Standard	UL	IEC
Voltage	--	--
Current	--	--
Wire size	28-14AWG	0.2-2.5mm²
T/W/End plate	5/42.5/2.5mm	
Height(mm)	38/45.5mm	

WS 4-SD-PE

Approval		CE
Standard	UL	IEC
Voltage	--	--
Current	--	--
Wire size	28-12AWG	0.2-4mm²
T/W/End plate	6/42.5/2.5mm	
Height(mm)	40/47.5mm	

WS 6-SD-PE

Approval		CE
Standard	UL	IEC
Voltage	--	--
Current	--	--
Wire size	24-10AWG	0.2-6mm²
T/W/End plate	8/46.5/2.5mm	
Height(mm)	44.5/52mm	

WS 10-SD-PE

Approval		CE
Standard	UL	IEC
Voltage	--	--
Current	--	--
Wire size	24-8AWG	0.2-10mm²
T/W/End plate	10/52/2.5mm	
Height(mm)	49/56.5mm	

WS 16-SD-PE

Approval		CE
Standard	UL	IEC
Voltage	--	--
Current	--	--
Wire size	24-6AWG	0.2-16mm²
T/W/End plate	12/58/2.5mm	
Height(mm)	53/60.5mm	

D-WS1.5-SD, D-WS2.5-SD
D-WS4-SD, D-WS6-SD
D-WS10-SD, D-WS16-SD

D-WS1.5-SD→WS1.5-SD
D-WS2.5-SD→WS2.5-SD,WS2.5-SD-PE
D-WS4-SD →WS4-SD,WS4-SD-PE
D-WS6-SD →WS6-SD,WS6-SD-PE
D-WS10-SD →WS10-SD,WS10-SD-PE
D-WS16-SD →WS16-SD,WS16-SD-PE

WSK 6

Approval		
Standard	UL	IEC
Voltage	600V	500V
Current	10A	10A
Wire size	24-10AWG	0.2-6mm²
T/W/End plate	13/62/2.5mm	
Height(mm)	61.5/69mm	

WSK 6-ED

Approval		
Standard	UL	IEC
Voltage	600V	500V
Current	10A	10A
Wire size	24-10AWG	0.2-6mm²
T/W/End plate	13/62/2.5mm	
Height(mm)	61.5/69mm	



WS 6-HE

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	30A	41A
Wire size	24-10AWG	0.2-6mm²
T/W/End plate	8/87.5/2.5mm	
Height(mm)	44.5/52mm	



WS 6-RE

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	30A	41A
Wire size	24-10AWG	0.2-6mm²
T/W/End plate	8/87.5/2.5mm	
Height(mm)	44.5/52mm	

DEGSON®

If you need more details.please contact us for sending detailed catalogues,link our website according to the part number,or view the CD catalogue!

DIN RAIL TERMINAL BLOCKS

Single entry

WS 2.5-DIN15

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	15A	24A
Wire size	28-14AWG	0.2-2.5mm²
T/W/End plate	6/32/4mm	
Height(mm)	30mm	

Double entry

WS 2.5T-DIN15

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	15A	24A
Wire size	28-14AWG	0.2-2.5mm²
T/W/End plate	10/32/4mm	
Height(mm)	30mm	

Single entry

WS2.5-DIN35

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	15A	24A
Wire size	28-14AWG	0.2-2.5mm²
T/W/End plate	6/38/4mm	
Height(mm)	32/39.5mm	

Double entry

WS2.5T-DIN35

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	15A	24A
Wire size	28-14AWG	0.2-2.5mm²
T/W/End plate	10/38/4mm	
Height(mm)	32/39.5mm	

Single entry

WS2.5-MID-CO

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	15A	24A
Wire size	28-14AWG	0.2-2.5mm²
T/W/End plate	6/32/4mm	
Height(mm)	22mm	

D-WS2.5-MID-CO

D-WS2.5-MID-CO → WS2.5-DIN15,
WS2.5-DIN35,
WS2.5-MID-CO
WS2.5T-DIN15,
WS2.5T-DIN35,
WS2.5T-MID-CO

Single entry

WS 2.5-END-CO

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	15A	24A
Wire size	28-14AWG	0.2-2.5mm²
T/W/End plate	6/32/4mm	
Height(mm)	22mm	

Double entry

WS 2.5T-MID-CO

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	15A	24A
Wire size	28-14AWG	0.2-2.5mm²
T/W/End plate	10/32/4mm	
Height(mm)	22mm	

Double entry



WS 2.5T-END-CO

Approval		CE
Standard	UL	IEC
Voltage	600V	800V
Current	15A	24A
Wire size	28-14AWG	0.08-2.5mm²
T/W/End plate	10/32/4mm	
Height(mm)	22mm	

D-WS2.5-END-CO

D-WS2.5-END-CO → WS2.5-END-CO
WS2.5T-END-CO

Single entry

WS 1.5-DB

Approval		CE
Standard	UL	IEC
Voltage	300V	400V
Current	10A	17.5A
Wire size	28-16AWG	0.2-1.5mm²
T/W/End plate	5/25/2.5mm	
Height(mm)	17mm	

Double entry

WS 1.5T-DB

Approval		CE
Standard	UL	IEC
Voltage	300V	400V
Current	10A	17.5A
Wire size	28-16AWG	0.2-1.5mm²
T/W/End plate	8/25/2.5mm	
Height(mm)	17mm	

Single entry



WS 2.5-DB

Approval		CE
Standard	UL	IEC
Voltage	300V	500V
Current	15A	24A
Wire size	28-14AWG	0.2-2.5mm²
T/W/End plate	6/28/2.5mm	
Height(mm)	18mm	

Double entry



WS 2.5T-DB

Approval		CE
Standard	UL	IEC
Voltage	300V	500V
Current	15A	24A
Wire size	28-14AWG	0.2-2.5mm²
T/W/End plate	10/28/2.5mm	
Height(mm)	18mm	

Single entry



WS 4-DB

Approval		CE
Standard	UL	IEC
Voltage	300V	630V
Current	20A	32A
Wire size	28-12AWG	0.2-4mm²
T/W/End plate	7/33.5/2.5mm	
Height(mm)	23mm	

Double entry



WS 4T-DB

Approval		CE
Standard	UL	IEC
Voltage	300V	630V
Current	20A	32A
Wire size	28-12AWG	0.2-4mm²
T/W/End plate	12/33.5/2.5mm	
Height(mm)	23mm	

D-WS1.5-DB
D-WS2.5-DB
D-WS4-DB

D-WS1.5-DB → WS1.5-DB ,WS1.5T-DB
D-WS2.5-DB → WS2.5-DB ,WS2.5T-DB
D-WS4-DB → WS4-DB ,WS4T-DB

WHH-WS1.5-DB

WHH-WS1.5-DB → WS1.5-DB,WS1.5T-DB
WS2.5-DB ,WS2.5T-DB
WS4-DB ,WS4T-DB

E-WS

E-WS → NS35/7.5,NS35/15

DEK 4,DEK 5, DEK 6

DEK4 → WS1.5,WS1.5-PE,WS1.5-TW,WS1.5-TW-PE,
WS1.5-QU,WS1.5-QU-PE,WS1.5-DB,WS1.5T-DB
DEK5 → WS2.5,WS2.5-PE,WS2.5-TW,WS2.5-TW-PE,
WS2.5-QU,WS2.5-QU-PE,WS2.5-DB,WS2.5T-DB
DEK6 → WS4,WS4-PE,WS4-TW,WS4-TW-PE,WS4-QU,
WS4-QU-PE,WS4-DB,WS4T-DB

ZB6,ZB8,ZB10

ZB6 → WS4-SD,WS4-SD-PE
ZB8 → WS6,WS6-PE,WS6-TW,WS6-TW-PE,
WS6-SD,WS6-SD-PE,WS6-HE,WS6-RE
ZB10 → WS10,WS10-PE,WS10-TW,WS10-TW-PE,
WS10-SD,WS10-SD-PE,WS16-SD,
WS16-SD-PE,WSH6,WSK6-ED,E-WS
WS16,WS16-PE,WS16-TW,WS16-TW-PE,

WFA1.5 WFA 2.5 WFA 4
WFA 6 WFA 10 WFA 16

WFA1.5 → WS1.5,WS1.5-TW,WS1.5-QU,WS1.5-SD...
WFA2.5 → WS2.5,WS2.5-TW,WS2.5-QU,WS2.5-SD...
WFA4 → WS4,WS4-TW,WS4-QU,WS4-SD...
WFA6 → WS6,WS6-TW,WS6-SD...
WFA10 → WS10,WS10-TW,WS10-SD...
WFA16 → WS16,WS16-TW,WS16-SD...

WFB 1.5 WFB 2.5 WFB 4
WFB 6 WFB 10 WFB 16

WFB1.5 → WS1.5,WS1.5-TW,WS1.5-QU,WS1.5-SD...
WFB2.5 → WS2.5,WS2.5-TW,WS2.5-QU,WS2.5-SD...
WFB4 → WS4,WS4-TW,WS4-QU,WS4-SD...
WFB6 → WS6,WS6-TW,WS6-SD...
WFB10 → WS10,WS10-TW,WS10-SD...
WFB16 → WS16,WS16-TW,WS16-SD...

WFC 1.5 WFC 2.5 WFC 4
WFC 6 WFC 10 WFC 16

WFC1.5 → WS1.5,WS1.5-TW,WS1.5-QU,WS1.5-SD...
WFC2.5 → WS2.5,WS2.5-TW,WS2.5-QU,WS2.5-SD...
WFC4 → WS4,WS4-TW,WS4-QU,WS4-SD...
WFC6 → WS6,WS6-TW,WS6-SD...
WFC10 → WS10,WS10-TW,WS10-SD...
WFC16 → WS16,WS16-TW,WS16-SD...

TTA 1.5 TTA 2.5 TTA 4
TTA 6 TTA 10 TTA 16

TTA1.5 → WS1.5,WS1.5-TW,WS1.5-QU,WS1.5-SD...
TTA2.5 → WS2.5,WS2.5-TW,WS2.5-QU,WS2.5-SD...
TTA4 → WS4,WS4-TW,WS4-QU,WS4-SD...
TTA6 → WS6,WS6-TW,WS6-SD,WS6-SD-PE...
TTA10 → WS10,WS10-TW,WS10-SD...
TTA16 → WS16,WS16-TW,WS16-SD...

EEA 1.5 EEA 2.5 EEA 4
EEA 6 EEA 10 EEA 16

EEA1.5 → WS1.5,WS1.5-TW,WS1.5-QU,WS1.5-SD...
EEA2.5 → WS2.5,WS2.5-TW,WS2.5-QU,WS2.5-SD...
EEA4 → WS4,WS4-TW,WS4-QU,WS4-SD...
EEA6 → WS6,WS6-TW,WS6-SD,WS6-SD-PE...
EEA10 → WS10,WS10-TW,WS10-SD...
EEA16 → WS16,WS16-TW,WS16-SD...



SSA

WS Series

SSB

WS Series

US-15



NS35/7.5



NS35/15



NS-32




Terminal:Tin-Plated Brass
K1

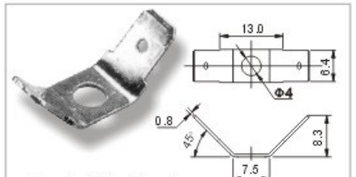
Terminal:Tin-Plated Brass
K2

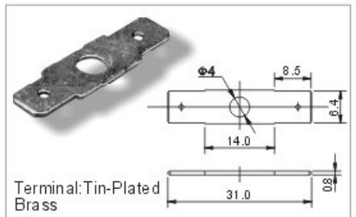
Terminal:Tin-Plated Brass
K3


Terminal:Tin-Plated Brass
K4


Terminal:Tin-Plated Brass
K5


Terminal:Tin-Plated Brass
K6


Terminal:Tin-Plated Brass
K7


Terminal:Tin-Plated Brass
K8

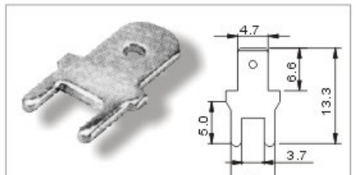
Terminal:Tin-Plated Brass
K9
T=0.8

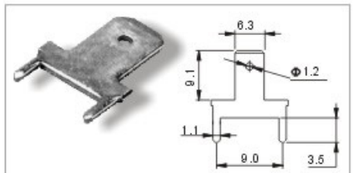
Terminal:Tin-Plated Brass
K10
T=0.8

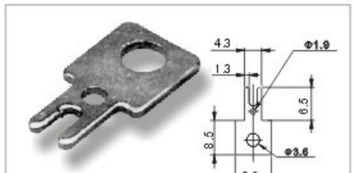
Terminal:Tin-Plated Brass
K11
T=0.8

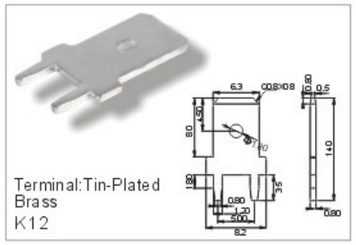
Terminal:Tin-Plated Brass
K12

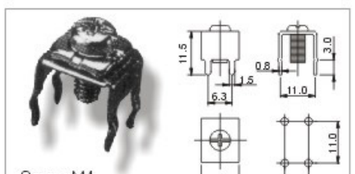
Screw:M4
Terminal:Tin-Plated Brass
K13


Screw:M3.5
Terminal:Tin-Plated Brass
K14


Screw:M3.5,Steel
Terminal:Tin-Plated Brass
K15

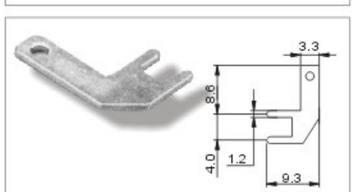
Terminal:Tin-Plated Brass
K16
T=0.8

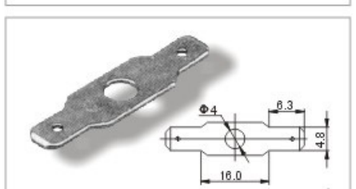
Terminal:Tin-Plated Brass
K17

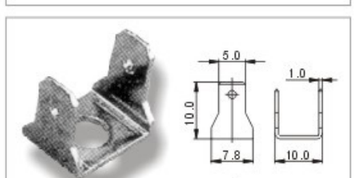
Terminal:Tin-Plated Brass
K18

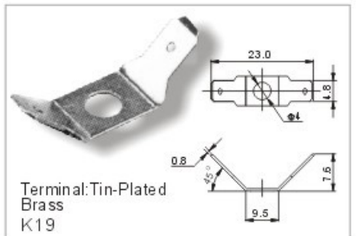
Terminal:Tin-Plated Brass
K19

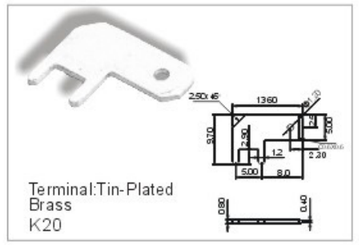
Terminal:Tin-Plated Brass
K20

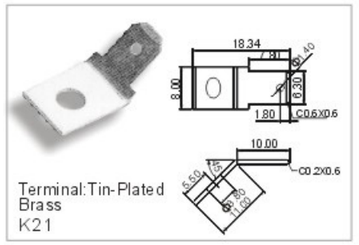
Terminal:Tin-Plated Brass
K21


Terminal:Tin-Plated Brass
K22
T=0.4

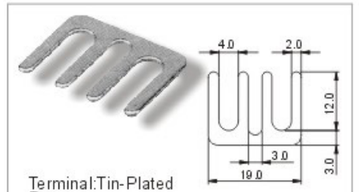
Terminal:Tin-Plated Brass
K23
T=0.4

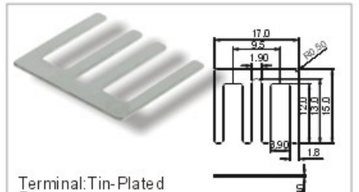
Terminal:Tin-Plated Brass
K24


Terminal:Tin-Plated Brass
K25

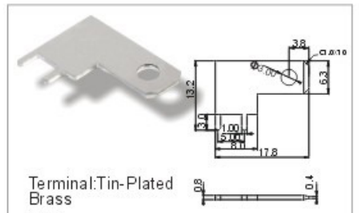
Terminal:Tin-Plated Brass
K27

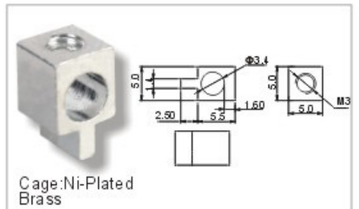
Cage:Ni-Plated Brass
K30

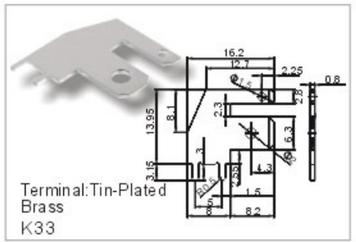
Terminal:Tin-Plated Brass
K33

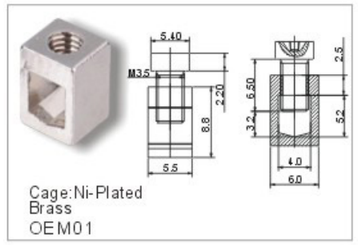
Cage:Ni-Plated Brass
OEM01

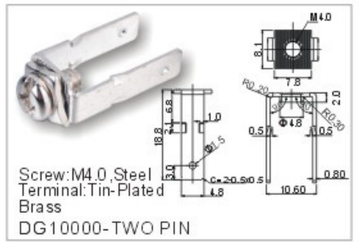
Screw:M4.0,Steel
Terminal:Tin-Plated Brass
DG10000-TWO PIN

HOW TO ORDER:

		X	X	X
Series No.	—	Customer Request		

The items marked"(DEVELOPING)" are the parts under developing

The catalog is only for reference,and the detail data must be based on our company`s specification!

Cixi Xiaolin DengGao Electronics Factory was established in 1990.

2000 Settled in current residence, renamed Degson Electronics Co.,Ltd. Degson products have got UL、VDE、CE、CQC、 and so on approvals and exported to more than 70 countries and regions.

The trade mark of DEGSON has been successfully registered in more than 90 countries and areas all over the word from 2001 to now days. Products made by DEGSON are very famous in china and well sold all over the world.

Degson has been granted IS09001:2000 management system certification in 2005.

Degson has been granted IS014001:2004 management system certification in 2006.

The first VDE external test was well carried out by VDE engineer in 2007.

Two times of VDE external test were carried out by VDE engineer in 2008.

DEGSON is making preparation of the laboratory for applying UL external test in 2010.

Capital assets : $ 29.000.000(in 2010)
Turnover : $ 44.000.000(in 2010 estimate)
Area :10000m² now;50000m² after expanding (New factory)
Staff :1600(150 for managing,500 For technical ,950 for operator)

USE TERRITORY

Industry automatization	25%
Lighting	20%
Security	15%
Instrument	10%
Electrical	10%
Audio Power Amplifier	5%
Machinery	5%
Power	5%
Communication	5%

CHART

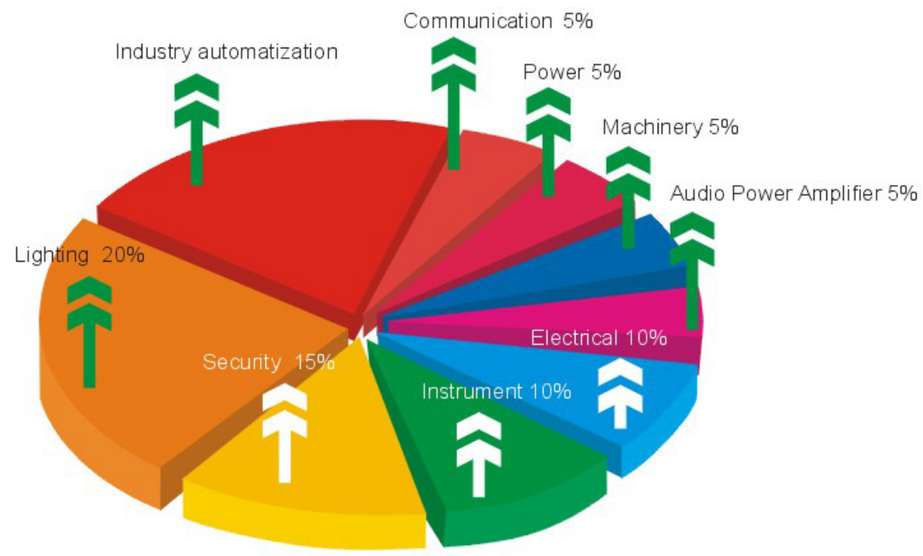

MAIN CUSTOMER:

Panasonic、HONEYWELL、OSRAM、SAMSUNG、TCL、Opple、NVC、Haier、Sangchuan、Maxim、Beghelli、Tideway、GST and so on...

RESEARCH AND DEVELOPMENT

With more than 10 years' experience in precise groupware development, DEGSON have a team of professional skilled technicians. The R&D department is equipped with the most advanced computer integrated manufacturing system (CIMS), which combines design, manufacturing and analysis in one system (CAD, CAM, CAE). We take part in international technologies exchanges and cooperation activities frequently, and provide customers with complete technological schemes on products development, production and process. Our designing team has designing experience for thousands of precise mould; meanwhile, we are keeping on making innovations and challenging in manufacturing multi-functional precise groupware. Finally, we will use all the advantages above to create the most advanced precise mould.

DEGSON®

- Stamping feature
- Injection mould design
- Stamping mould design
- Technological Discussion

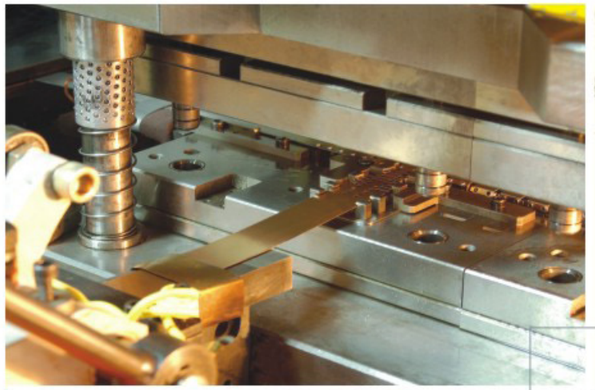

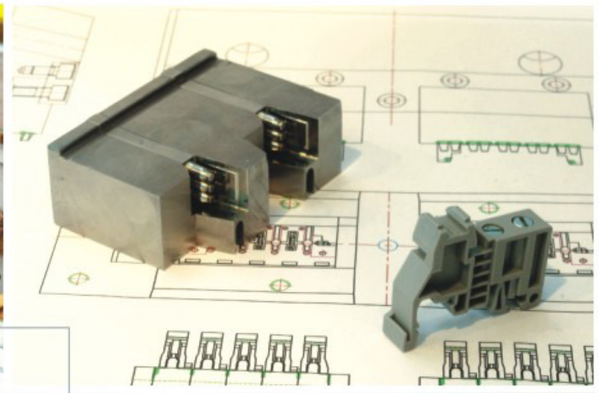

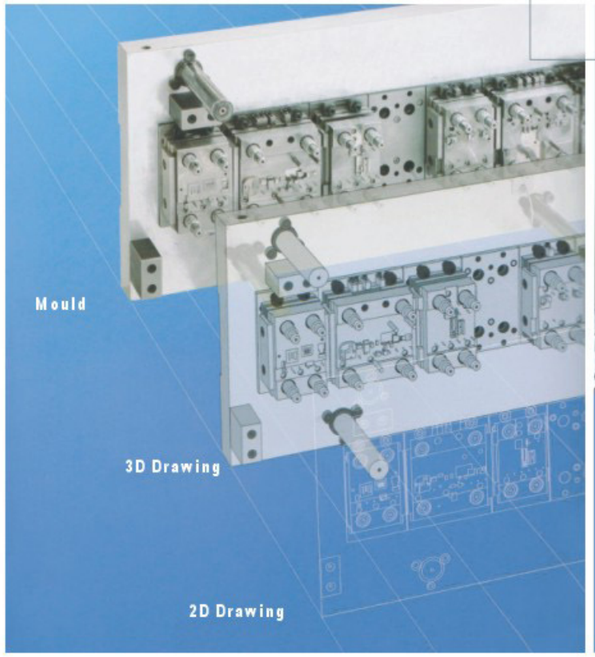

Sodick low-speed wire cutting machine

MOULD PRODUCTION

DEGSON®

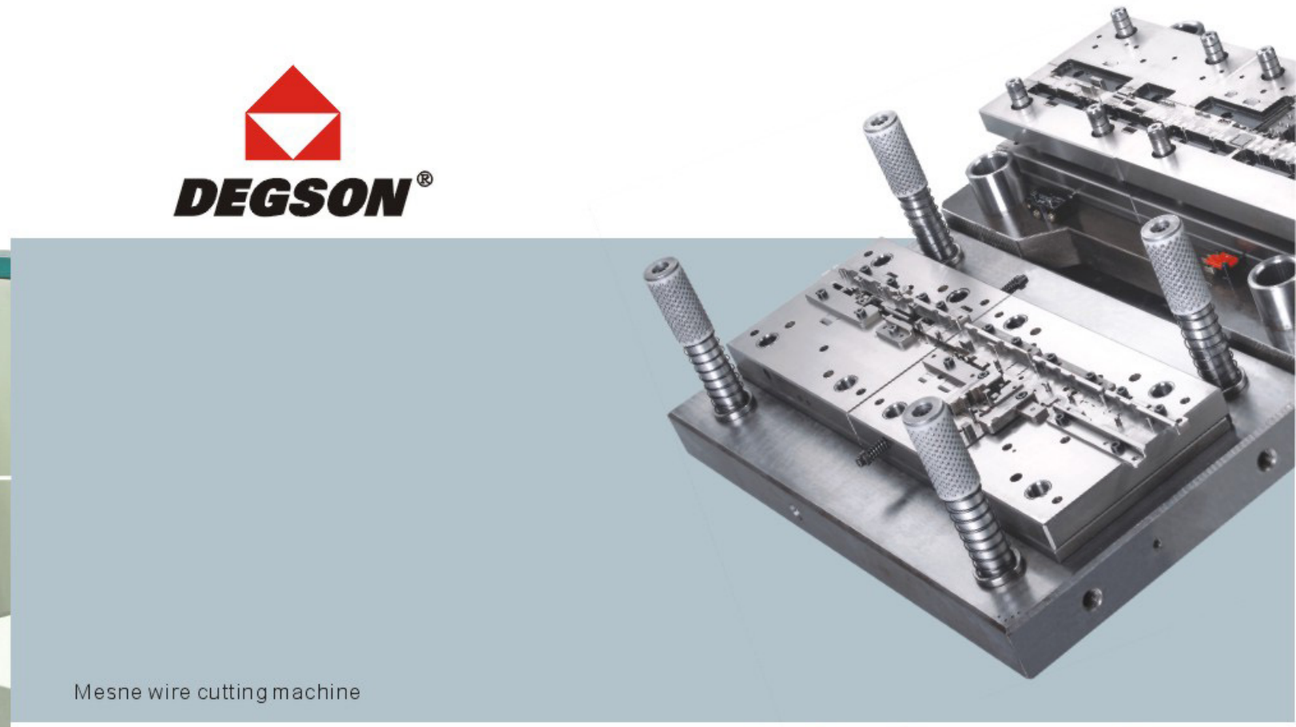

Mesne wire cutting machine

MOULD PRODUCTION TECHNOLOGY AND ENGINEERING CAPABILITIES

Our company invests in production plant and equipment such as Charmilles, SODICK low-speed wire cutting machine, Charmilles precision CNC electric pulse machine, etc and utilize CAD/CAE and application software such as AutoCAD, Moldflow to equip ourselves with the relevant and latest technology to meet our customers requirements. We employed experienced engineers for tool design, tool assembly, tool testing and tool purchasing. We produce more than 600 sets of all kinds of precise tooling per year.

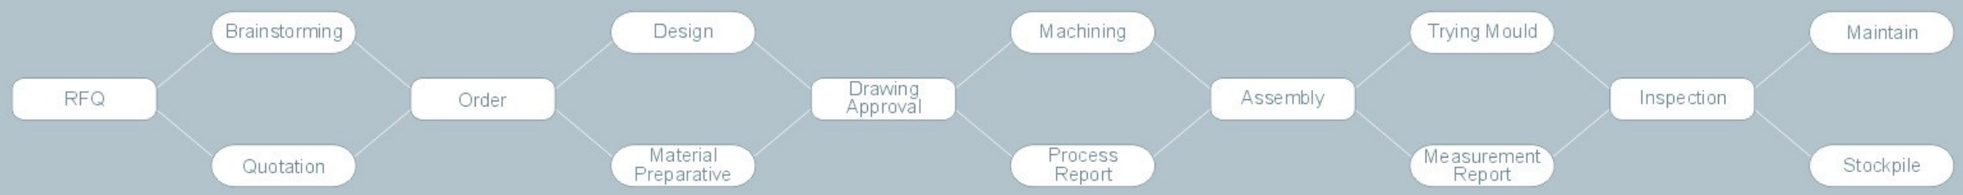

MOULD PRODUCTION

- Fast filum facility machines
- Laser spot welding
- High Precision surface Grinding Machine
- Electron discharge machining
- NC precision engraving machine
- High precision projector
- Three-D measuring machine
- Height test machine

Sodick low-speed wire cutting machine(4)	CNC electron discharge machine(15)	High Precision milling Machine(4)	High Precision surface Grinding Machine(4)
Suface grinding machine(14)	Fast filum facility machines(30)	Mesne wire cutting machine(2)	NC precision engraving machine(2)
Laser spot welding(1)	Three-D measuring machine(1)	High precision projector(6)	Height test machine(3)

DEGSON®

MOULD QUALITY CONTROL

We have Precision Testing Equipment Device:More than 10sets, like 3D measuring instrument, High-precision projector, High-precision height test machine have been used to make sure the quality of each mould. Fully strict inspection before assembly at each process will be done from material choosing, embryo material processing, template heating, machining to Die Group legislation and Die-trying.

MOULD QUALITY CONTROL

QUALITY CONTROL FLOW

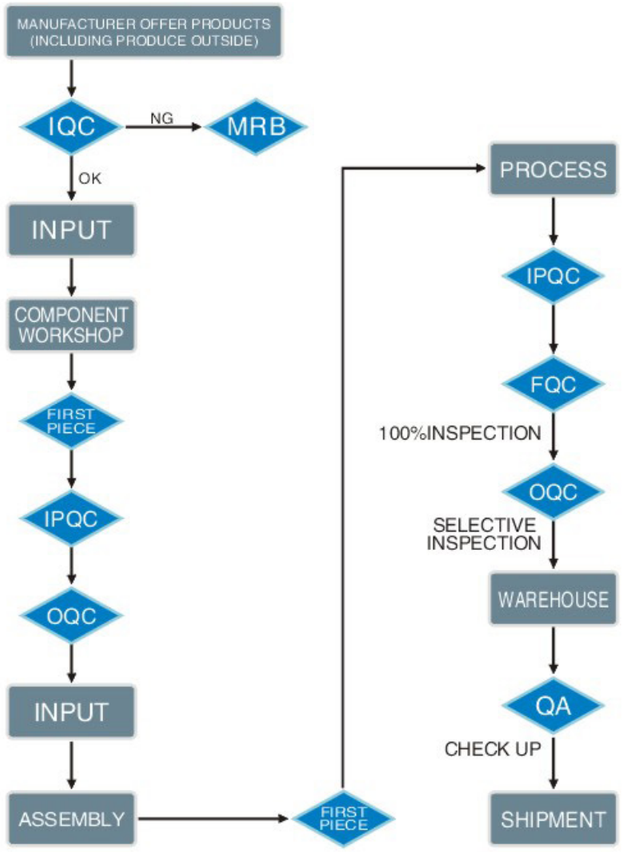

QUALITY CONTROL FLOW

We place strong emphasis on quality of our products and service. With a stringent quality assur-ance system in each operation process, we also implement comprehensive controls in the quality ofincoming material, manufacturing processes, shipment, and after service, with strict inspection and control finished product. We believe in continuing education and invest in training programs for our employees,mainly our management and engineering staff, in order to maintain a productive workforce and keep pace with new changes in technology.

VDE Authorized Lab

The engineer of VDE did the witnessed test at our company in July,2010 All the 35 products passed the test and achieved the certification. Meanwhile VDE formally authorized the certification of "Authorization of VDE" to DEGSON'Lab.(image 1)

image 1

image 2

image 3

QUALITY CERTIFICATIONS

DEGSON keeps close cooperation with international certificates organizations such as ULVDE etc ,The managing department holds regular visits to UL and VDE and learn about latest technology standards in time.

Quality Management System Certification.

Environment Management System Certification

2 EX NEPSI certificates for 20 item number.

15 certificates for 100 item No.



100 certificates for 300 item No.

File No:E228872
650 item No.

10 certificates for 100 item No.

VDE member certification

VDE recognized laboratorycertificate

European invention patent

Energy dispersive X-ray spectrometer

※RoHS test

※Metal component analysis

※Film thickness analysis

QUALITY CONTROL

Image test apparatus

※2D graphics Measurement

※2D image reticle measurement

※2D image automatic distinguish measurement

※Executable Graphics and statistical analysis of treatment

QUALITY CONTROL

Our company insists on quality as the center of management, meanwhile pays attention to environmental protection. We have been approved by ISO9001 and ISO14001, and our laboratory is equipped with many advanced detecting equipments and apparatuses to comprehensively detect terminal blocks according to UL1059 , UL486E , IEC60998 , IEC61984 , IEC60947, GB13140, GB14048. We have got more than 600 certifications such as UL, VDE,CQC, CB, SGS, RoHS and so on..

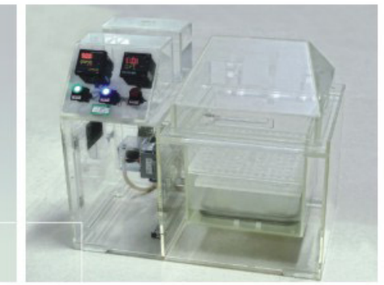

Environment test

※Salt water spray test

※So_2 protection against corrosion

※Moist ammonia-air stress cracking test

Material test

※Oxygen index test

※Glow-wire test

※Tracking test

Mechanical sequence

※Secureness test

※Inserting/pulling test

※Tumbling barrel test

Dielectric test

※Heat cycling voltage drop test

※Temperature rise test

※Voltage-withstand test

PRECISE INJECTION PROCESSING

Our company is equipped with more than 80 precise injection Machines, capable of producing all kinds of plastic parts with high precision in order to meet the production demands of different kinds of components and modules as well as structural crusts of OEM/ODM orders. Plastic injection moulds apply hot runner submarine gate according to different requirements, automatically upward and downward plastic which allows one person to charge several machines.

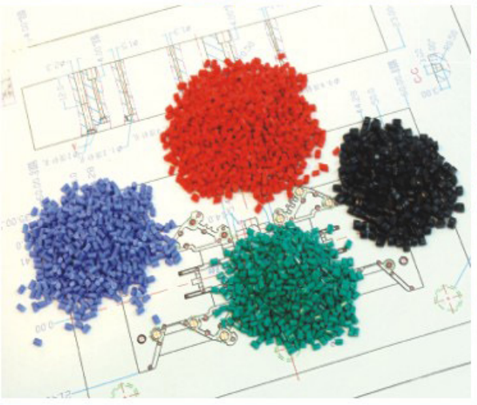

PRECISE INJECTION PROCESSING

Precision injection machine	80 sets
Injection mould	1200sets
Product category	3000types
Production ability/Day	4million poles

PRECISE STAMPING PROCESSING

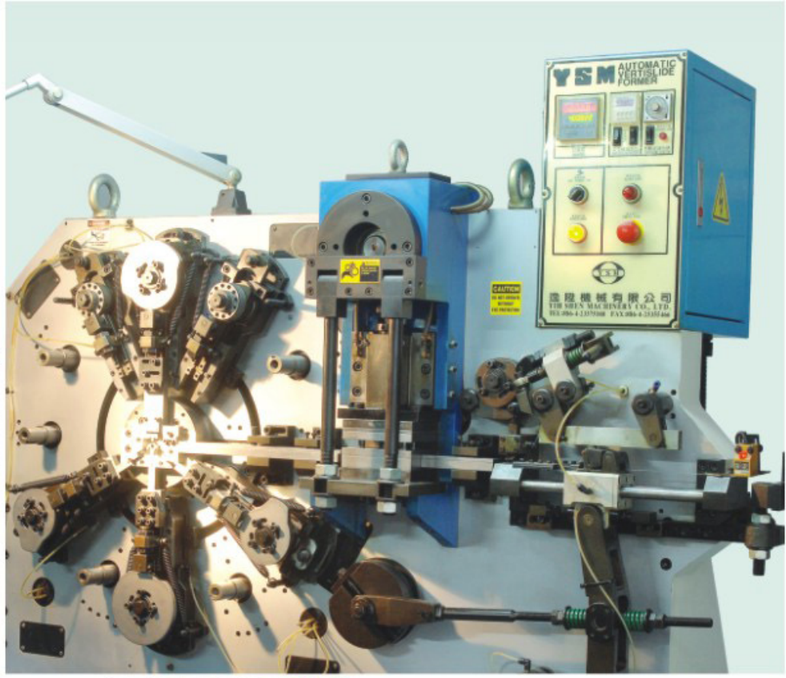

- High-Speed Punch 30sets
- NC Automatic machines 2 sets
- Punching machines 30sets
- Stamping mould 800sets
- Product category 3000types
- Production ability/Day 4million poles

PRECISE STAMPING PROCESSING

Our company has more than 30 sets of different kinds of metal stamping machines which exert force between 16-110 tons. We employ progressive stamping, that allows for multiple stamping operations to be performed in a single tool and die at one single machine which is also efficient and with high precision. We can stamp various materials including, brass, phosphor bronze, beryllium copper, nickel precoated and stainless and various types of steels.

AUTOMATIC PROCESSING

Automatic tapping machines	80sets
Pad printing machines	10sets
Automatic assembly machine	10sets
Ultrasonic jointing use machines	4sets

AUTOMATIC PROCESSING

DEGSON have all kinds of automatic production equipments. Our production department equipped with more than 80 automatic tapping machines and 10 sets automatic assembly machines, and improves the products quality and production efficiency fast.

PRECISE ELECTROPLATING PROCESSING

PRECISE ELECTROPLATING PROCESSING

Electroplating on metal parts is an essential technology in electronic products.Monitored with the tough environmental requirement, we have established the automation of barrel plating and progressive plating, the categories of plating includes copper, nickel, tin, gold, silver and Zinc(Cr3+), chemical gold plating, Zinc-nickel alloy, SnAgCu alloy, etc.

SALES NETWORK

We consider customers as long-time business relationship partners and keep a good business relationship with many world-famous companies.

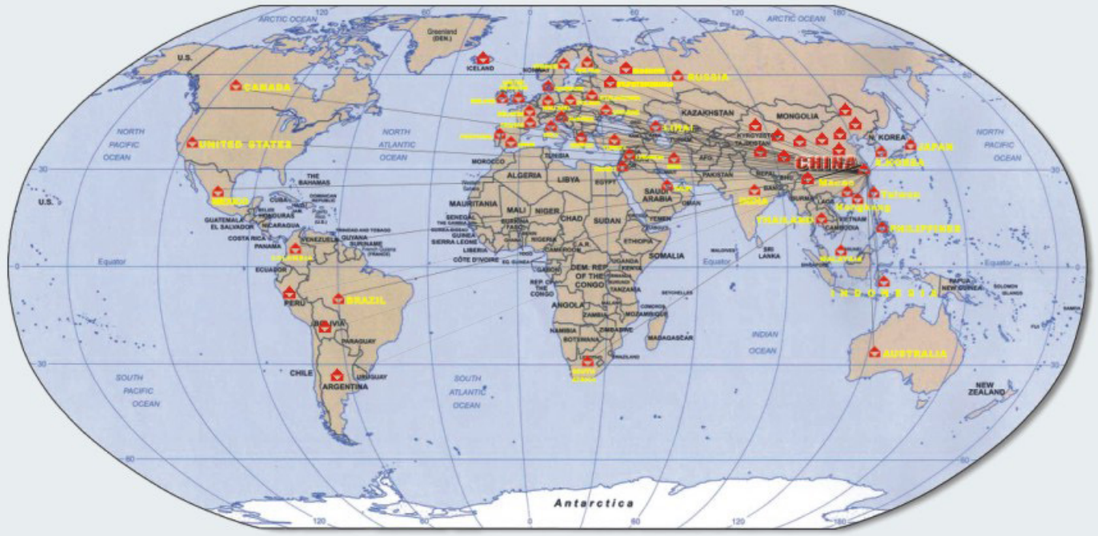

SALE & SERVICES

As an integrated manufacturer services provider, we emphasize on providing good services to our customers, ranging from our pre-sales efforts to post-sales customer support services. Our management team regularly visits our key customers to promote good working relationship and update them on our technological development. Through these visits, we are kept informed of the needs of our customers and helpful for the development and continuous improvement of the company.

SALES DISTRIBUTING

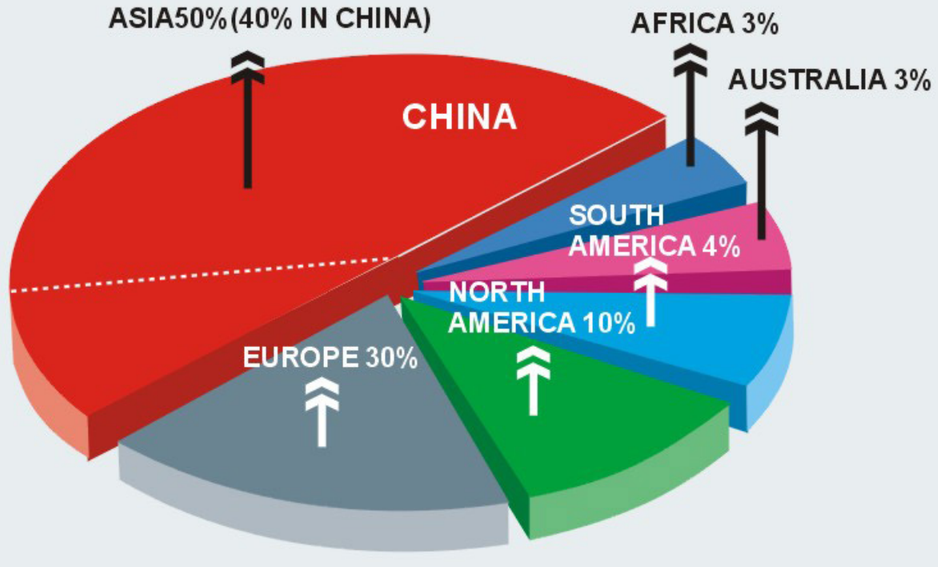



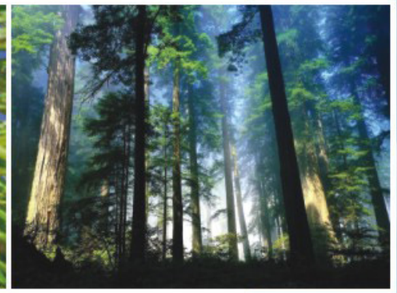

ENVIRONMENTAL POLICY

DEGSON realizes system regulation without lead in 2005 and has been granted ISO14001 in 2006. All the products conform to the European ROHS requirement.

DEGSON realizes the importance to protect environment resources, selfconsciously meets environment protection requir–ements for products and regards it as the responsibility. Thus, we have made the following environment strategic policy:

1、To meet customers'demands and obey the national and local laws and regulations as well as other environmental protection requirements.

2、Take environmental protection as one criterion for continuing development of our company. Insist on fully development of quality, benefit and environmental protection.

3、Fully considering the factors which will influence the environment in the processes of product development, manufacturing , material usage and waste processing, establish management system of waste in order to improve the environment of our company.

4、To increase the employees' consciousness of environme–ntal protection through training and to realize the continuing improvement of environment management system and the ability of environmental protection.

5、To make full use of resources and to decrease consumption of material in order to save energy.

6、To promise to our partners and society that we will make contribution to environment protection. There is only one Earth for our humanity.

7. To strive for making conservation–oriented and environment–friendly products through continuous innovation and developing new materials and technology.