


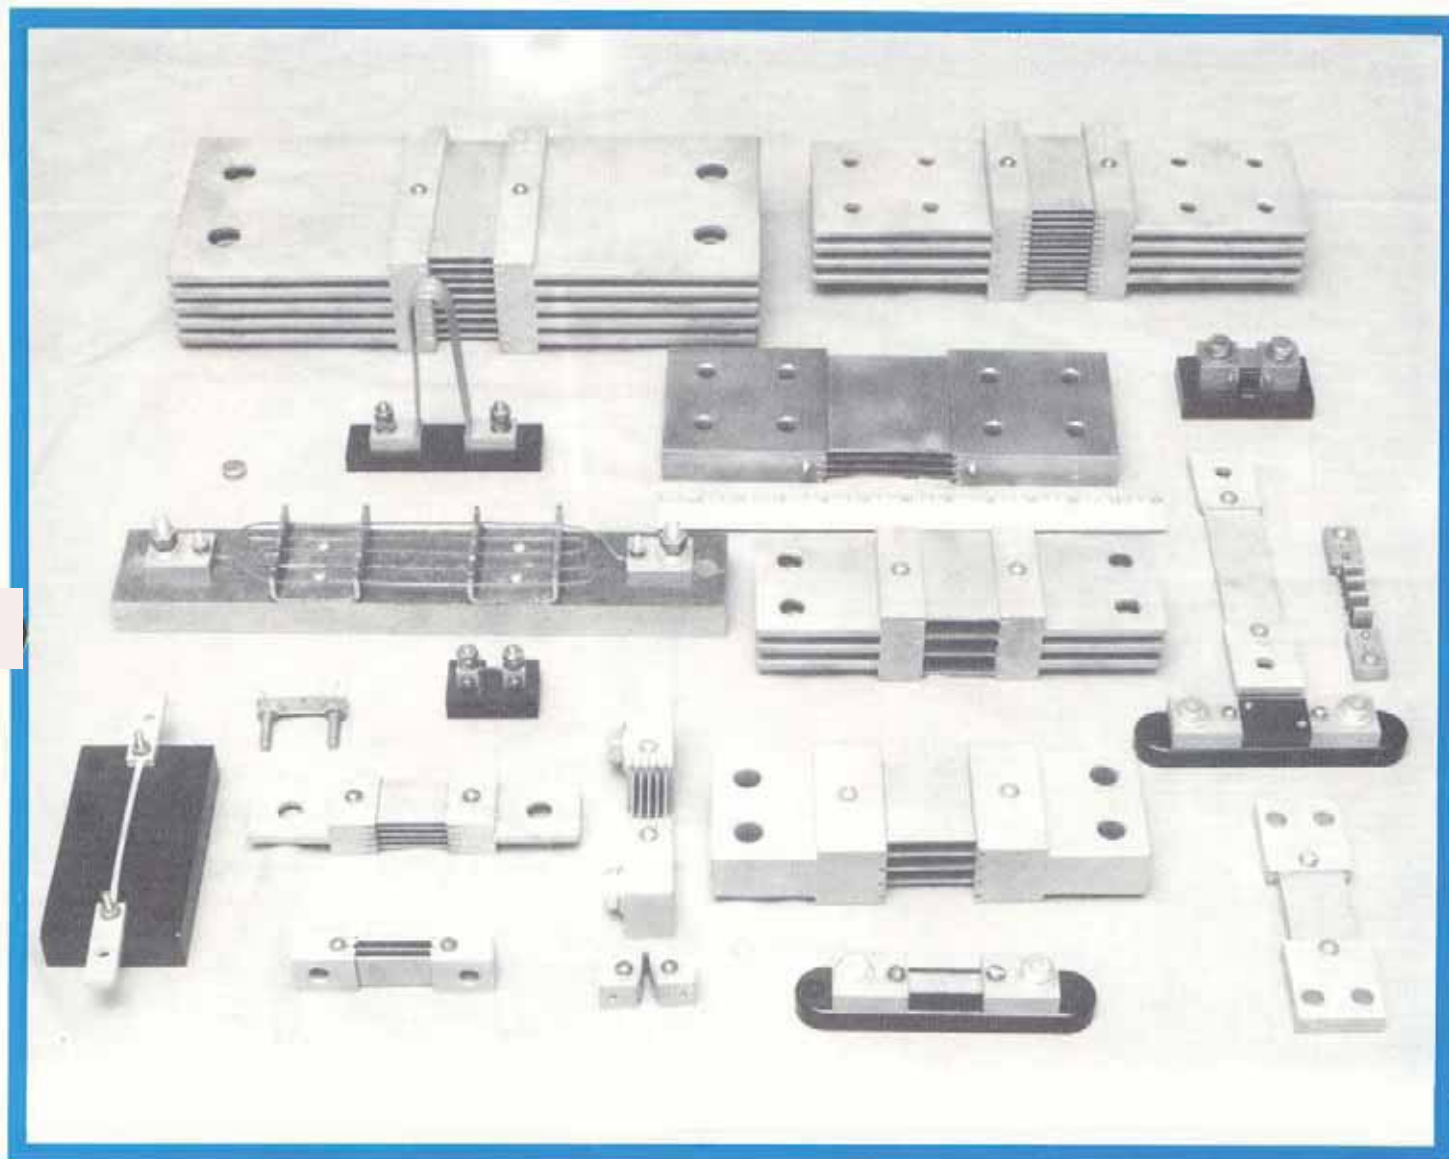

Hoyt Electrical instrument Works Inc
23 Meter Street Penacook New Hampshire 03303
Phone: 603-753-6321 Fax: 603-7539592
www.hoytmeter.com email us: info@hoytmeter.com

TYPE B • 15 through 600 Amperes

TYPE B • 50 MV

Catalog Number	AMP	A	B*	C	D	E
B-15-50	15	4	3/4	3/8	3	11/32
B-20-50	20	4	3/4	3/8	3	11/32
B-50-50	50	4	3/4	3/8	3	11/32
B-75-50	75	4	1	9/16	3	11/32
B-100-50	100	4	1	9/16	3	11/32
B-125-50	125	4	1	1/2	3	11/32
B-150-50	150	4	1	1/2	3	11/32
B-175-50	175	4	1	1/2	3	13/32
B-200-50	200	4	1 1/4	1/2	3	13/32
B-250-50	250	4	1 1/4	3/4	3	13/32
B-300-50	300	4	1 1/4	3/4	3	13/32
B-375-50	375	4	1 1/4	3/4	3	13/32
B-400-50	400	4	1	3/4	3	13/32
B-500-50	500	4	1 1/2	3/4	3	13/32
B-600-50	600	4	1 1/2	3/4	3	13/32

TYPE B • 100 MV

B-50-100	50	4 1/2	3/4	3/8	3 1/2	11/32
B-75-100	75	4 1/2	3/4	3/8	3 1/2	11/32
B-100-100	100	4 1/2	1	3/8	3 1/2	11/32
B-150-100	150	4 1/2	1	1/2	3 1/2	11/32
B-200-100	200	4 1/2	1	1/2	3 1/2	13/32
B-250-100	250	4 1/2	1	1/2	3 1/2	13/32
B-300-100	300	4 1/2	1 1/4	1/2	3 1/2	13/32
B-375-100	375	4 1/2	1 1/4	3/4	3 1/2	13/32
B-400-100	400	4 1/2	1 1/4	3/4	3 1/2	13/32
B-500-100	500	4 1/2	1 1/2	3/4	3 1/2	13/32
B-600-100	600	4 1/2	1 1/2	3/4	3 1/2	13/32

* Ref. Only

TYPE E • 300 through 1,200 Amperes

TYPE E • 50 MV

Catalog Number	AMP	A	B	C	D	E	F	G
E-300-50	300	5 1/8	1 1/4	1/2	4 3/4	7/16	1	3/8
E-400-50	400	5 1/8	2	3/4	4 3/4	7/16	1 1/4	3/8
E-500-50	500	5 1/8	2	3/4	4 3/4	7/16	1 1/4	3/8
E-600-50	600	5 1/8	2	3/4	4 3/4	7/16	1 1/4	3/8
E-750-50	750	5 1/8	2 1/4	3/4	4 3/4	7/16	1 1/2	3/8
E-800-50	800	5 1/8	2 3/4	3/4	4 3/4	7/16	1 1/2	7/16
E-1000-50	1000	5 1/8	2 1/2	1	4 3/4	7/16	1 1/2	1/2
E-1200-50	1200	5 1/8	3	1	4 3/4	7/16	1 1/2	11/16

TYPE E • 100 MV

E-300-100	300	7	1 1/4	1/2	5 1/8	7/16	1	3/8
E-400-100	400	7	2	3/4	5 1/8	7/16	1 1/4	3/8
E-500-100	500	7	2	3/4	5 1/8	7/16	1 1/4	3/8
E-600-100	600	7	2	3/4	5 1/8	7/16	1 1/4	3/8
E-750-100	750	7	2 1/4	3/4	5 1/8	7/16	1 1/2	3/8
E-800-100	800	7	2 3/4	3/4	5 1/8	7/16	1 1/2	7/16
E-1000-100	1000	7	2 1/2	1	5 1/8	7/16	1 1/2	1/2
E-1200-100	1200	7	3	1	5 1/8	7/16	1 1/2	11/16

TYPE R • 1,000 through 2,000 Amperes

TYPE R • 50 MV




Catalog Number	AMP	A	B	C	D	E	F	G	H	J
R-1000-50	1000	9 1/16	2 3/4	1 1/2	7 1/2	17/32	1 1/2	9/16	2	2 1/2
R-1200-50	1200	9 1/16	3	1 1/2	7 1/2	17/32	1 1/2	3/4	2	2 1/2
R-1500-50	1500	9 1/16	3	1 1/2	7 1/2	17/32	1 1/2	3/4	2	2 1/2
R-2000-50	2000	9 1/16	3 3/4	2	7 1/2	17/32	2	3/4	3	2 1/2

TYPE R • 100 MV

R-1000-100	1000	10 1/4	2 3/4	1 1/2	8 3/4	17/32	1 1/2	9/16	2	2 1/2
R-1200-100	1200	10 1/4	3	1 1/2	8 3/4	17/32	1 1/2	3/4	2	2 1/2
R-1500-100	1500	10 1/4	3	1 1/2	8 3/4	17/32	1 1/2	3/4	2	2 1/2
R-2000-100	2000	10 1/4	3 3/4	2	8 3/4	17/32	2	3/4	3	2 1/2

Temperature coefficient of resistance = $\pm .000015$ between 40-60°C.

DC AMMETER SHUNTS

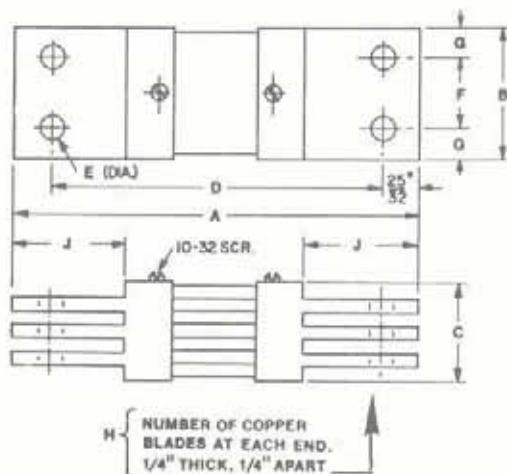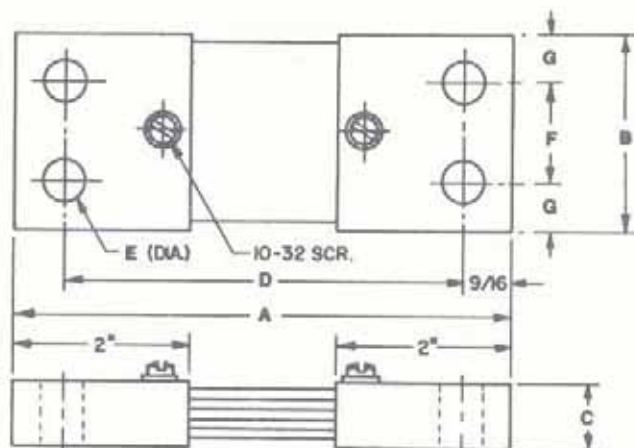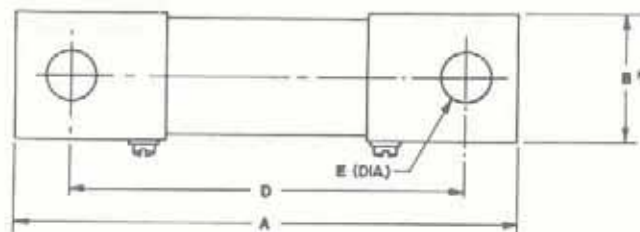

Hoyt Electrical Instrument Works Inc
23 Meter Street Penacook New Hampshire 03303
Phone: 603-753-6321 Fax: 603-7539592
www.hoytmeter.com email us: info@hoytmeter.com

DC AMMETER SHUNTS

TYPE A • 1,500 through 2,000 Amperes

TYPE A • 50 MV

Catalog Number	AMP	A	B	C	D	E	F	G
A-1500-50	1500	9%	3	1	3%	7/16	2	1/2
A-2000-50	2000	9%	4	1	3%	7/16	2	1

TYPE A • 100 MV

A-1500-100	1500	11	3	1	5	7/16	2	1/2
A-2000-100	2000	11	4	1	5	7/16	2	1

TYPE H • 2,500 through 10,000 Amperes

(Higher Amp ratings available)

TYPE H • 50 MV

Catalog Number	AMP	A	B	C	D	E	F	G	H
H-2500-50	2500	12%	4	1 1/2	6%	9/16	2	1	2
H-3000-50	3000	12%	4	2	6%	9/16	2	1	3
H-4000-50	4000	12%	4	3	6%	9/16	2	1	4
H-4500-50	4500	12%	4	3	6%	9/16	2	1	4
H-5000-50	5000	12%	4	3	6%	9/16	2	1	4
H-6000-50	6000	12%	4	4	6%	9/16	2	1	5
H-7000-50	7000	12%	5	4	6%	9/16	2 1/2	1 1/4	5
H-7500-50	7500	12%	5	4	6%	9/16	2 1/2	1 1/4	6
H-8000-50	8000	12%	5	4	6%	9/16	2 1/2	1 1/4	6
H-9000-50	9000	12%	5	4	6%	9/16	2 1/2	1 1/4	6
H-10000-50	10000	12%	5	5	6%	9/16	2 1/2	1 1/4	7

TYPE H • 100 MV

H-2500-100	2500	14	4	1 1/2	8	9/16	2	1	2
H-3000-100	3000	14	4	2	8	9/16	2	1	3
H-4000-100	4000	14	4	3	8	9/16	2	1	4
H-4500-100	4500	14	4	3	8	9/16	2	1	4
H-5000-100	5000	14	4	3	8	9/16	2	1	4
H-6000-100	6000	14	4	4	8	9/16	2	1	5
H-7000-100	7000	14	5	4	8	9/16	2 1/2	1 1/4	5
H-7500-100	7500	14	5	4	8	9/16	2 1/2	1 1/4	6
H-8000-100	8000	14	5	4	8	9/16	2 1/2	1 1/4	6
H-9000-100	9000	14	5	4	8	9/16	2 1/2	1 1/4	6
H-10000-100	10000	14	5	5	8	9/16	2 1/2	1 1/4	7

TYPE H • Over 10,000 Amperes

TYPE H • 50 MV (Over 10,000 Amps)

Catalog Number	AMP	A	B*	C	D	F	H†	J
H-12000-50	12000	12%	5	6	6%	1	9	4 1/2
H-15000-50	15000	13	8	6	7	2	9	4 11/16
H-18000-50	18000	13	8	6	7	2	10	4 11/16
H-20000-50	20000	13	8	6	7	2	10	4 11/16
H-25000-50	25000	13	8	10	7	2	18	4 19/32
H-30000-50	30000	15 11/16	8	12	9 11/16	2	22	5 11/32

*(B) + or - .250 †(H) 3/8" or 1/2" terminal blades available.

TYPE C • 1 through 500 Amperes

TYPE C • 50 MV

Catalog Number	AMP	A	B
C-1-50*	1	1.38	.500
C-2-50*	2	1.38	.500
C-5-50*	5	1.38	.500
C-10-50	10	1.38	.500
C-20-50	20	1.38	.500
C-50-50	50	1.38	.500
C-100-50	100	1.38	.500
C-150-50	150	1.38	.500
C-200-50	200	1.38	.500
C-250-50	250	1.38	.500
C-300-50	300	1.38	.500
C-400-50	400	1.63	.750
C-500-50	500	1.63	.750




TYPE C • 100 MV

Catalog Number	AMP	A	B
C-1-100*	1	1.38	.500
C-2-100*	2	1.38	.500
C-5-100*	5	1.38	.500
C-10-100*	10	1.38	.500
C-15-100*	15	1.38	.500
C-20-100*	20	1.38	.500
C-25-100	25	1.38	.500
C-50-100	50	1.38	.500
C-75-100	75	1.38	.500
C-100-100	100	1.38	.500
C-200-100	200	1.38	.500
C-300-100	300	1.38	.500
C-500-100	500	1.38	.500


Dimensions subject to change without notice



Hoyt Electrical Instrument Works Inc
23 Meter Street Penacook New Hampshire 03303
Phone: 603-753-6321 Fax: 603-7539592
www.hoytmeter.com email us: info@hoytmeter.com

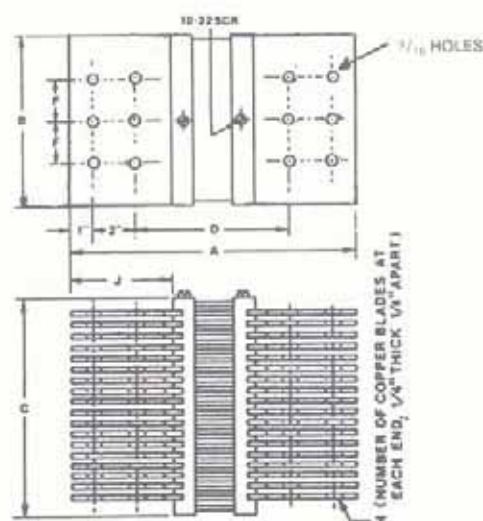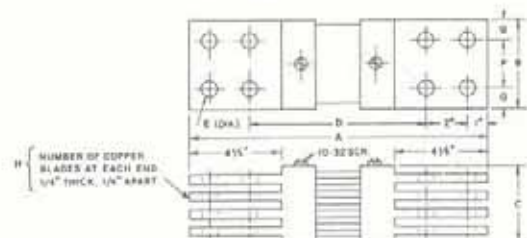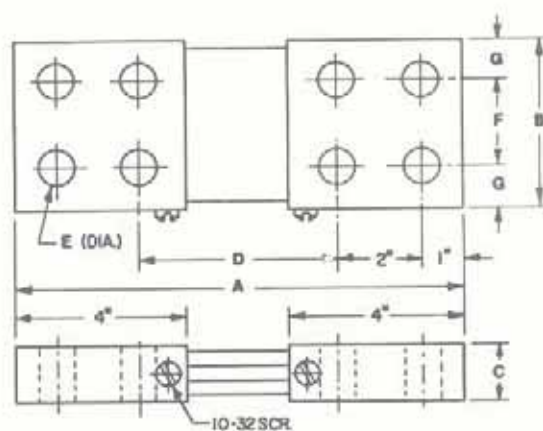

* Low amperage models are furnished with protective covers.

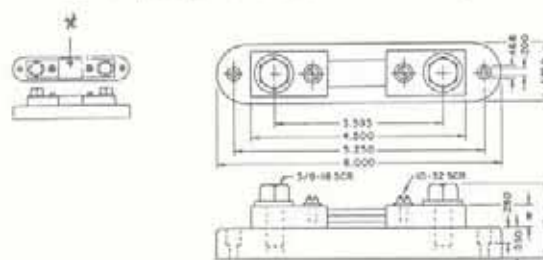

Temperature coefficient of resistance =

± .000015 between 40-60°C.

TYPE LAB • 10 through 1,000 Amperes

TYPE LAB • 50 MV

Catalog Number	AMP	A	B	C	D	E
LAB-10-50	10	5	1 1/4	1/2	3 1/2	1/4-20
LAB-15-50	15	5	1 1/4	1/2	3 1/2	1/4-20
LAB-25-50	25	5	1 1/4	1/2	3 1/2	1/4-20
LAB-50-50	50	5	1 1/4	1/2	3 1/2	1/4-20
LAB-100-50	100	5	1 1/4	1/2	3 1/2	1/4-20
LAB-150-50	150	5	1 1/4	1/2	3 1/2	1/4-20
LAB-200-50	200	5	1 1/4	1/2	3 1/2	1/4-20
LAB-250-50	250	6 3/4	1 1/8	3/4	4 1/4	3/8-16
LAB-300-50	300	6 3/4	1 1/8	3/4	4 1/4	3/8-16
LAB-400-50	400	6 3/4	1 1/8	3/4	4 1/4	3/8-16
LAB-500-50	500	6 3/4	1 1/8	3/4	4 1/4	3/8-16
LAB-600-50	600	6 3/4	2 3/8	1	4 1/4	3/8-16
LAB-750-50	750	6 3/4	2 3/8	1	4 1/4	3/8-16
LAB-1000-50	1000	6 3/4	2 3/8	1	4 1/4	3/8-16

TYPE LAB • 100 MV

LAB-10-100	10	6 1/4	1 1/4	1/2	4 3/4	1/4-20
LAB-15-100	15	6 1/4	1 1/4	1/2	4 3/4	1/4-20
LAB-25-100	25	6 1/4	1 1/4	1/2	4 3/4	1/4-20
LAB-50-100	50	6 1/4	1 1/4	1/2	4 3/4	1/4-20
LAB-100-100	100	6 1/4	1 1/4	1/2	4 3/4	1/4-20
LAB-150-100	150	6 1/4	1 1/4	1/2	4 3/4	1/4-20
LAB-200-100	200	6 1/4	1 1/4	1/2	4 3/4	1/4-20
LAB-250-100	250	8	1 1/8	3/4	5 3/8	3/8-16
LAB-300-100	300	8	1 1/8	3/4	5 3/8	3/8-16
LAB-400-100	400	8	1 1/8	3/4	5 3/8	3/8-16
LAB-500-100	500	8	1 1/8	3/4	5 3/8	3/8-16
LAB-600-100	600	8	2 3/8	1	5 3/8	3/8-16
LAB-750-100	750	8	2 3/8	1	5 3/8	3/8-16
LAB-1000-100	1000	8	2 3/8	1	5 3/8	3/8-16

TYPE F • 100 through 600 Amperes

TYPE F • 50 MV

Catalog Number	AMP	A	B	C	D	E
F-100-50	100	4 1/2	1	1/2	3 1/2	3/8-16 x 3/4
F-150-50	150	4 1/2	1	1/2	3 1/2	3/8-16 x 3/4
F-200-50	200	4 1/2	1	1/2	3 1/2	3/8-16 x 3/4
F-250-50	250	5 3/8	1 3/8	3/4	4	1/2-13 x 1
F-300-50	300	5 3/8	1 3/8	3/4	4	1/2-13 x 1
F-400-50	400	5 3/8	1 3/8	3/4	4	1/2-13 x 1
F-500-50	500	5 1/2	1 1/2	1	4	1/2-13 x 1 1/4
F-600-50	600	5 1/2	1 1/2	1	4	1/2-13 x 1 1/4

TYPE M • 300 through 1,000 Amperes


TYPE M • 50 MV

Catalog Number	AMP	A	B	C	D	E	G	J
M-300-50	300	7	1 1/2	1	5 1/4	17/32	3/4	1 3/4
M-400-50	400	7	1 1/2	1	5 1/4	17/32	3/4	1 3/4
M-500-50	500	7	1 1/2	1	5 1/4	17/32	3/4	1 3/4
M-600-50	600	7	1 1/2	1	5 1/4	17/32	3/4	1 3/4
M-750-50	750	7	2	1	5 1/4	21/32	1	1 3/4
M-800-50	800	7	2	1	5 1/4	21/32	1	1 3/4
M-1000-50	1000	7	2 1/2	1	5 1/4	21/32	1 1/4	1 3/4





TYPE M • 100 MV

M-120-100	120	7 1/2	1 1/2	1	5 3/4	17/32	3/4	1 3/4
M-130-100	130	7 1/2	1 1/2	1	5 3/4	17/32	3/4	1 3/4
M-150-100	150	7 1/2	1 1/2	1	5 3/4	17/32	3/4	1 3/4
M-200-100	200	7 1/2	1 1/2	1	5 3/4	17/32	3/4	1 3/4
M-250-100	250	7 1/2	2	1	5 3/4	17/32	1	1 3/4
M-300-100	300	7 1/2	2	1	5 3/4	17/32	1	1 3/4
M-400-100	400	7 1/2	2	1	5 3/4	17/32	1	1 3/4
M-500-100	500	7 1/2	2 1/2	1	5 3/4	17/32	1 1/4	1 3/4

Temperature coefficient of resistance ± .000015 between 40-60°C.

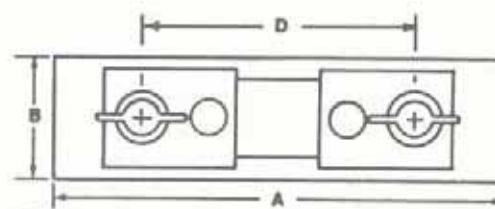

E WING SCREW

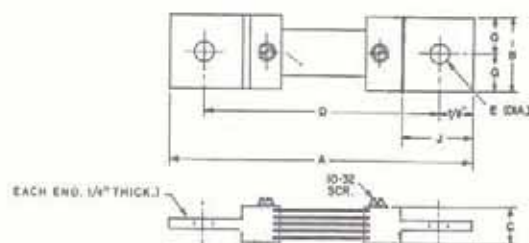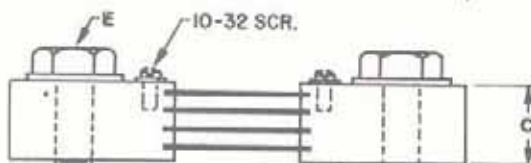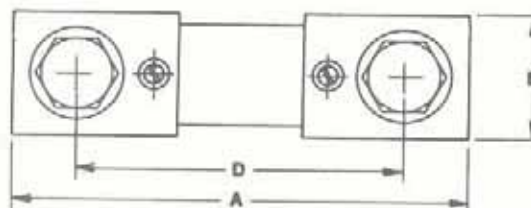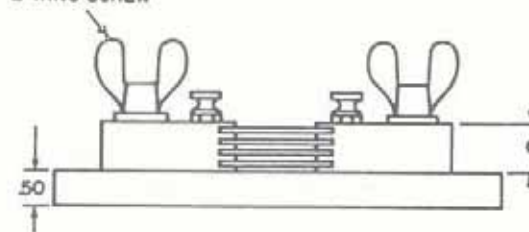

EACH END 1/4" THICK



Hoyt Electrical Instrument Works Inc
23 Meter Street Penacook New Hampshire 03303
Phone: 603-753-6321 Fax: 603-753-5992
www.hoytmeter.com email us: info@hoytmeter.com

TYPE K • 600 through 10,000 Amperes


TYPE K • 50 MV

Catalog Number	AMP	A	B	C	D	E	F	G	H	J	K
K-1000-50	1000	9 1/16	3	1 1/2	7 15/32	17/32	1 1/2	3/4	2	2 1/2	5 1/64
K-1200-50	1200	9 1/16	3	1 1/2	7 15/32	17/32	1 1/2	3/4	2	2 1/2	5 1/64
K-1500-50	1500	9 1/16	3	2	7 15/32	17/32	1 1/2	3/4	3	2 1/2	5 1/64
K-2000-50	2000	9 1/16	4	2	7 15/32	17/32	2	1	3	2 1/2	5 1/64
K-2500-50	2500	15 1/8	4	3	11 55/64	21/32	2	1	3	5 1/2	1 7/8
K-3000-50	3000	15 1/8	4	3	11 55/64	21/32	2	1	4	5 1/2	1 7/8
K-4000-50	4000	15 1/8	5	3	11 55/64	13/16	2	1 1/2	4	5 1/2	1 7/8
K-5000-50	5000	15 1/8	5	3	11 55/64	13/16	2	1 1/2	5	5 1/2	1 7/8
K-6000-50	6000	15 1/8	6	3	12 23/64	13/16	2 3/4	1 1/2	5	5 1/2	1 41/64
K-7500-50	7500	15 1/8	6	4	12 23/64	13/16	2 3/4	1 1/2	6	5 1/2	1 41/64
K-8000-50	8000	15 1/8	6	5	12 23/64	13/16	2 3/4	1 1/2	6	5 1/2	1 41/64
K-10000-50	10000	15 55/64	8	6	12 55/64	1 1/16	3 1/2	2 1/4	6	5 11/32	1 1/2

TYPE K • 100 MV

K-600-100	600	12	3	1 1/2	10 1/2	17/32	1 1/2	3/4	2	2 1/2	3/4
K-750-100	750	12	3	1 1/2	10 1/2	17/32	1 1/2	3/4	2	2 1/2	3/4
K-800-100	800	12	3	1 1/2	10 1/2	17/32	1 1/2	3/4	2	2 1/2	3/4
K-1000-100	1000	12	3	2	10 1/2	17/32	1 1/2	3/4	3	2 1/2	3/4
K-1200-100	1200	12	4	2	10 1/2	17/32	2	1	3	2 1/2	3/4
K-1500-100	1500	18 1/2	4	3	15	21/32	2	1	3	5 9/32	1 3/4
K-2000-100	2000	18 1/2	4	3	15	21/32	2	1	3	5 9/32	1 3/4
K-2500-100	2500	18 1/2	5	3	15	21/32	2	1 1/2	3	5 9/32	1 3/4
K-3000-100	3000	18 1/2	5	4	15	21/32	2	1 1/2	4	5 9/32	1 3/4
K-4000-100	4000	18 9/16	5	4	15	13/16	2 1/2	1 1/4	4	5 9/32	1 25/32
K-5000-100	5000	18 9/16	5	4	15	13/16	2 1/2	1 1/4	5	5 9/32	1 25/32
K-6000-100	6000	18 9/16	6	4	15 1/2	13/16	3	1 1/2	5	5 9/32	1 17/32

FOUR INSTRUMENT TERMINALS FURNISHED ON SHUNTS ABOVE 3000 AMPS.


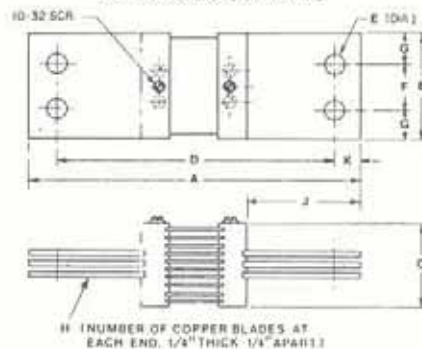


LIGHTWEIGHT TYPES • 5 through 1,200 Amperes

LIGHTWEIGHT TYPES 50 MV

Catalog Number	AMP	A	B	C	D	F	G	H	J
L-5-50	5	2.00	1.00	1.25	.437	1.688	.625	.500	1/4-28
L-10-50	10	2.00	1.00	1.25	.437	1.688	.625	.500	1/4-28
L-15-50	15	2.00	1.00	1.25	.437	1.688	.625	.500	1/4-28
L-20-50	20	2.00	1.00	1.25	.437	1.688	.625	.500	1/4-28
L-30-50	30	2.00	1.00	1.25	.437	1.688	.625	.500	1/4-28
L-50-50	50	2.00	1.00	1.25	.437	1.688	.625	.500	1/4-28
L-75-50	75	2.00	1.00	1.25	.437	1.688	.625	.500	1/4-28
L-80-50	80	2.00	1.00	1.25	.437	1.688	.625	.500	1/4-28
L-85-50	85	2.00	1.00	1.25	.437	1.688	.625	.500	1/4-28
L-100-50	100	2.00	1.00	1.25	.437	1.688	.625	.500	1/4-28
L-150-50	150	2.00	1.00	1.25	.437	1.688	.625	.500	1/4-28
L-170-50	170	3.25	1.50	1.75	.625	1.750	.438	.750	3/8-16 x 3/8
L-200-50	200	3.25	1.50	1.75	.625	1.750	.438	.750	3/8-16 x 3/8
L-250-50	250	3.25	1.50	1.75	.625	1.750	.438	.750	3/8-16 x 3/8
L-300-50	300	3.25	1.50	1.75	.625	1.750	.438	.750	3/8-16 x 3/8
L-400-50	400	3.25	1.50	1.75	.625	1.750	.438	.750	3/8-16 x 3/8
L-450-50	450	3.25	1.50	1.75	.625	1.750	.438	.750	3/8-16 x 3/8
L-500-50	500	3.25	1.50	1.75	.625	1.750	.438	.750	3/8-16 x 3/8
L-600-50	600	3.25	1.50	1.75	.625	1.750	.438	.750	3/8-16 x 3/8
L-800-50	800	4.50	2.16	2.50	1.00	2.125	.562	1.00	1/2-13 x 3/8
L-1000-50	1000	4.50	2.16	2.50	1.00	2.125	.562	1.00	1/2-13 x 3/8
L-1200-50	1200	4.50	2.16	2.50	1.00	2.125	.562	1.00	1/2-13 x 3/8

Temperature coefficient of resistance = ±.000015 between 40-60°C.

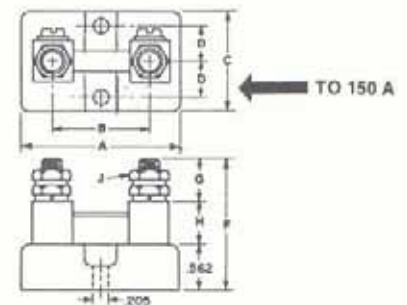

Hoyt Electrical Instrument Works Inc
23 Meter Street Penacook New Hampshire 03303
Phone: 603-753-6321 Fax: 603-753-9592
www.hoytmeter.com email us: info@hoytmeter.com