

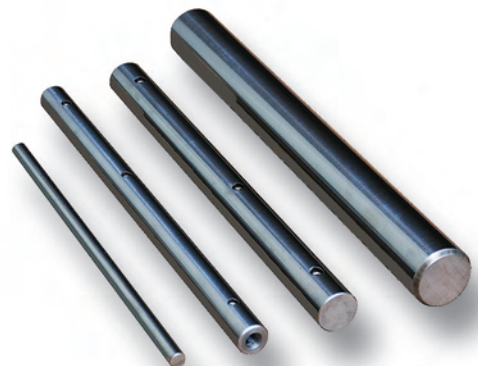
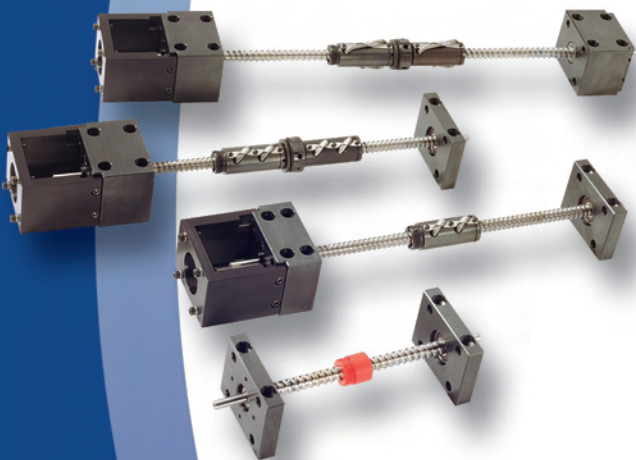


LINTECH[®]

Mechanical Motion Solutions

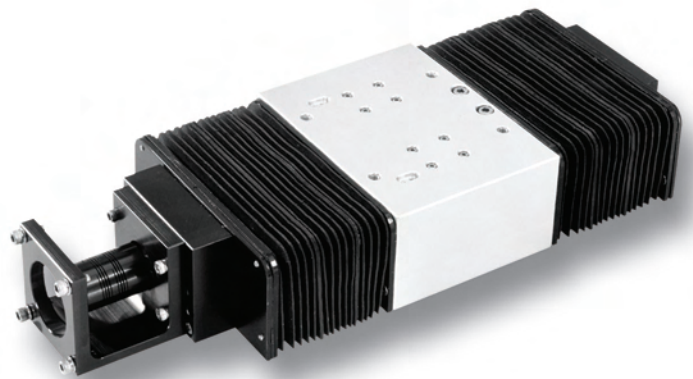

Welcome to *LINTECH*®

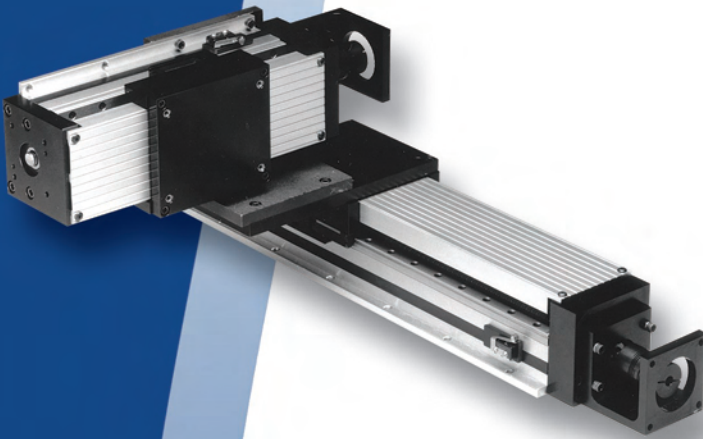

For over 40 years *LINTECH* has designed, engineered, and manufactured mechanical motion solutions for use in a wide range of applications. Whether it is a standard positioning component or a custom positioning system, *LINTECH* takes great pride in manufacturing a quality product.

At *LINTECH* we are proud to provide the motion control user with this general product guide. It was developed to assist you with acquiring the general knowledge of what *LINTECH* has to offer. You can find complete details on all *LINTECH* products via our website.

Depending on the requirements, standard positioning components can often be assembled and shipped in less than 2 weeks. Custom positioning assemblies require a different approach. We evaluate your special application, use our many years of experience to guide you, and then manufacture a quality product designed to meet your performance specifications.

LINTECH's technical support consists of a well trained inside customer service department, an experienced application engineering staff, and a versatile machining facility.

Our local technical support group consists of Automation Specialists located throughout the World. These Automation Specialists are experienced in the use of electronic and mechanical motion control products. They are well trained on the performance capabilities of *LINTECH* positioning components.

LINTECH is constantly designing new products and improving upon the many options available with our standard products. Whether it is a standard or custom positioning system required, visit our website, call, or e-mail us. We look forward to hearing from you.

Visit our website, or call us for the location of the nearest Automation Specialist in your area:

LINTECH®

1845 Enterprise Way
Monrovia, CA. 91016

Toll Free: (800) 435 - 7494

Phone: (626) 358 - 0110

Fax: (626) 303 - 2035

Web Site: www.LintechMotion.com

E-Mail: Lintech@LintechMotion.com



version: 06/2010

Table of Contents


Pages

Mechanical Components




Precision Shafting	4 - 6
Shaft Supports	7 - 9
Shaft Assemblies	10 - 11
Linear Bearings - Inch	12 - 19
Carriage Assemblies	20 - 21
Linear Bearings - Metric	22 - 25
Profile Rails	26 - 29

Ball Screw Assemblies



Overview	30
RS - Rolled Series	31 - 35
PS - Precision Series	36 - 37
GS - Ground Series	38 - 39

Standard Positioning Actuators



Screw Driven	40 - 55
Belt Driven	56 - 67
Rotary Tables	68 - 69

Custom Positioning Systems



Multi-Axis Systems	70 - 71
Application Guide	72 - 73
Examples	74 - 75

About this Brochure


This brochure is intended to provide a general overview on all the products available from **LINTECH**. There is some technical information given on each product that can assist with the selection of a product for a given application. Please visit our website at www.LintechMotion.com for complete technical specifications, available options, CAD drawings, and pricing.

Standard Positioning Components




LINTECH manufactures a wide range of standard round rail positioning components. The products available include: cut to length precision hardened steel shafting, shaft supports, shaft assemblies, linear bearings, pillow blocks, and carriage assemblies in both inch and metric versions. The wide array of options include: chrome plated shafts, shaft machining per the user print, all steel bearings, and bearing locks. Three different profile linear bearing versions are also available in various sizes.

Standard Ball Screw Assemblies



LINTECH manufactures a wide range of standard ball screw assemblies. These assemblies allow the user to get a complete, ready to mount ball screw system with end supports and nut flanges. The 3 different ball screw thread accuracy grades are rolled, precision rolled, and precision ground. The support housings are made of precision machined steel and are available in 5 configurations: simple-simple, fixed (low thrust)-simple, fixed (high thrust)-simple, rigid-simple, and rigid-rigid. There are several inch & metric screw diameter and leads available, along with motor mounts, brakes, and encoder options.

Standard Positioning Systems



LINTECH manufactures a wide range of standard linear and rotary positioning systems. There are 9 screw driven linear slide systems, 5 belt driven linear slide systems, and 2 worm gear driven rotary positioning systems. Each system has a different load capacity, envelope size, and numerous options available to make a standard system into a semi-custom.

Custom Components and Systems



LINTECH has the ability to make alterations to any of its standard products. These changes include special lengths, special platings, unique materials, rail & screw covers or special lubricants for different environments. **LINTECH** also has the ability to start from scratch and build one of a kind custom mechanical positioning systems. Common system configurations include master-slave gantries, multi-axis configurations, wide base systems, long travel lengths, heavier load capacities, high speeds, etc.. Custom systems can be provide with stress relieved steel bases, flexible aluminum bases, or precision granite bases.

LINTECH Website


Please visit our website at www.LintechMotion.com for complete technical specifications, dimensions, available options, CAD drawings, and pricing.

The screenshot shows the Lintech website's product overview for the 170 series. The page includes a navigation bar with links for My Account, About Us, Products, Customer Service, and Technical Support. The main content area features a product image of a linear motion system, a table of specifications, and a sidebar with links to CAD files, manuals, and positioning systems.

Product Overview	
Model Number:	170 series
Key Feature:	Large load capacity at an economical price
Linear Bearing:	Square Rail
Drive Type:	Acme Screw or Ball Screw
Height:	2.953 in (75 mm)
Width:	6.000 in (152 mm)
Load Capacity:	8,400 lbs (3810 kg)
Travel Range:	6 to 40 in (150 to 1020 mm)
Top Speed:	< 60 in/sec (1270 mm/sec)
Mounting:	English or Metric
Delivery:	2 to 4 weeks

Get a Price Get a CAD File

Other	For Two (2), Four (4), & Six (6) Bearing Carriages
Table Material	Base, Carriage, End Plates, & Cover Plate (optional) - 6061 anodized aluminum
Linear Rail Material	Case Hardened Steel
Screw Material (see pages 3-19 or 3-21)	Acme Screw - Stainless Steel
Screw Material (see pages 3-19 or 3-21)	Roller Ball, Precision Ball, & Ground Ball - Case Hardened Steel
Straightness	< 0.00016 in/in (x 4.06 microns/25mm)
Flatness	< 0.00016 in/in (x 4.06 microns/25mm)
Orthogonality (multi-axis systems)	< 30 arc-seconds
Friction Coefficient	< 0.01
Motor Mount	NEMA 23 & 34 Mounts, Metric Mounts, Motor Wraps, and Hand Crank Option
Coating	Three (3) different styles available
Waycover Material	Hydrex Polyester Bellows mounted to carriage & end plates

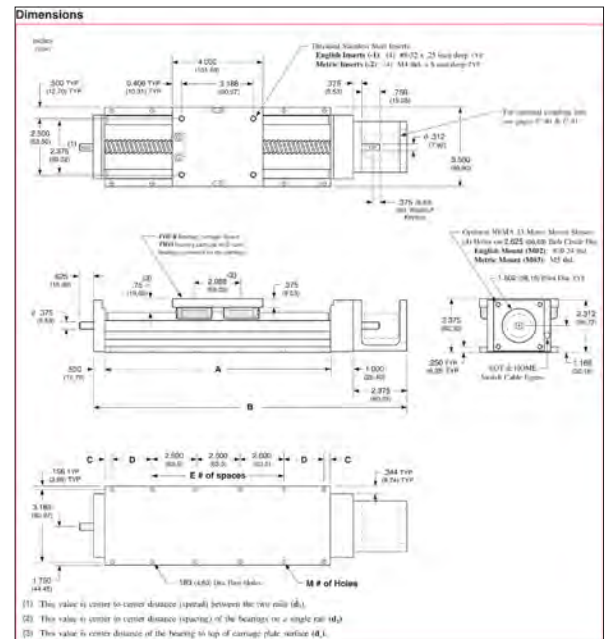

LINTECH CAD Files

The LINTeCH website is also equipped with a Part Builder that allows for the modeling of standard products in any of 36 different CAD file formats. [Get a CAD File](#)

The screenshot shows the Lintech Part Builder interface, which allows users to configure and generate CAD files for the 170 series linear motion system. The interface includes a table of specifications, a 3D model of the system, and a list of options.

Table Series:	17
Carriage Length:	6 inches
Number of Bearings (per carriage):	4 - 2 bearings per carriage
Cover Plate:	CP1 - top cover plate only
Travel Length (inches):	18 (457)
Carriage Inserts:	1 - English Mount
Screw Options:	Roller Ball Screws
Screw Size Options:	S055 - 5/8 x 200 NPL
Motor Mount:	M02 - NEMA 23 mount (E)
Coupling Options:	C000 - none
EOT and Home Switches:	L00 - no switches
Encoder Options:	E00 - none
Brake Options:	B00 - none

Generate



[More Information via the Web](#)

Dimensions & Specifications: SL, SS & SN Shafting

Model Number	Nominal Shaft Diameter (inches)	Maximum Length					Shaft Weight (lbs/in)
		SL (inches)		SS (inches)		SN (inches)	
			-SS		-SS		
Sx4	0.250	96	144	96	144	96	0.014
Sx6	0.375	172	154	172	154	172	0.031
Sx8	0.500	184	154	184	154	184	0.055
Sx10	0.625	184	154	184	154	184	0.086
Sx12	0.750	184	154	184	154	184	0.125
Sx16	1.000	184	154	184	154	184	0.222
Sx20	1.250	184	154	184	154	184	0.348
Sx24	1.500	184	154	184	154	184	0.500
Sx32	2.000	184	154	184	154	184	0.890

Diameter

Length ⁽¹⁾ : +/- 1/32"

(1) Length tolerance for 2" diameter shafting is +/- 1/16 inches. Tighter tolerance available. Contact the factory.

Specifications: SL, SS & SN Shafting


Shaft Straightness	0.001/0.002 in/ft, cumulative				
Shaft Type	1060 Steel or 440C Stainless steel (only with L & S tolerance)				
Shaft Roundness	0.000080 inches				
Shaft Chamfer	For 0.25 - 0.75 inch dia. : 0.03 inch x 45°, For 1.00 - 2.00 inch dia. : 0.06 inch x 45°				
Surface Finish	8 - 12 R _a microinch				
Diameter Tolerance					
Hardness Depth					
	Nominal Shaft Diameter (inches)	SL Diameter Tolerance (inches)	SS Diameter Tolerance (inches)	SN Diameter Tolerance (inches)	Minimum Hardness Depth (inches)
	0.250	.2495 / .2490	.2490 / .2485	.2500 / .2498	0.040
	0.375	.3745 / .3740	.3740 / .3735	.3750 / .3748	0.040
	0.500	.4995 / .4990	.4990 / .4985	.5000 / .4998	0.040
	0.625	.6245 / .6240	.6240 / .6235	.6250 / .6248	0.040
	0.750	.7495 / .7490	.7490 / .7485	.7500 / .7498	0.060
	1.000	.9995 / .9990	.9990 / .9985	1.0000 / .9998	0.080
	1.250	1.2495 / 1.2490	1.2490 / 1.2485	1.2500 / 1.2498	0.080
	1.500	1.4994 / 1.4989	1.4989 / 1.4984	1.5000 / 1.4997	0.080
	2.000	1.9994 / 1.9987	1.9987 / 1.9980	2.0000 / 1.9997	0.100

[More Information via the Web](#)



Dimensions & Specifications: SL-PD Shafting

Model Number	Nominal Shaft Diameter (inches)	Maximum Length (inches)		Pre-Drilled Holes (inches)			Shaft Weight (lbs/in)
		-SS		A +/- .016	B	G	
SL8-PD	0.500	172	154	2.00	4.00	#6-32	0.055
SL10-PD	0.625	184	154	2.00	4.00	#8-32	0.086
SL12-PD	0.750	184	154	3.00	6.00	#10-32	0.125
SL16-PD	1.000	184	154	3.00	6.00	1/4-20	0.222
SL20-PD	1.250	184	154	3.00	6.00	5/16-18	0.348
SL24-PD	1.500	184	154	4.00	8.00	3/8-16	0.500
SL32-PD	2.000	184	154	4.00	8.00	1/2-13	0.890

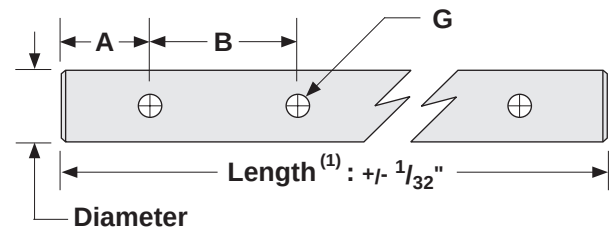

(1) Length tolerance for 2" diameter shafting is $\pm 1/16$ inches. Tighter tolerance available. Contact the factory.




[More Information via the Web](#)

Specifications: SM Metric Shafting

Shaft Straightness	0,0254/0,0508 mm/300 mm - cumulative		
Shaft Type	1060 Steel		
Shaft Roundness	0,0020 mm		
Shaft Chamfer	For 8 - 20 mm dia. : 0,762 mm x 45°, For 25 - 50 mm dia. : 1,524 mm inch x 45°		
Surface Finish	8 - 12 R _a microinch		
Diameter Tolerance		Nominal Shaft Diameter (mm)	Diameter Tolerance (mm)
Hardness Depth			Minimum Hardness Depth (mm)
		8	8,00 / 7,99
		10	10,00 / 9,99
		12	12,00 / 11,99
		16	16,00 / 15,99
		20	20,00 / 19,99
		25	25,00 / 24,99
		30	30,00 / 29,99
		40	40,00 / 39,99
		50	50,00 / 49,98

Dimensions & Specifications: SM Metric Shafting


Model Number	Nominal Shaft Diameter (mm)	Maximum Length inches (mm)	Shaft Weight (lbs/in)	Length ⁽¹⁾ : +/- 0.79 mm Diameter (1) Tighter tolerance available. Contact the factory.
SM8	8	172 (4368,8)	0.022	
SM10	10	172 (4368,8)	0.038	
SM12	12	184 (4673,6)	0.050	
SM16	16	184 (4673,6)	0.088	
SM20	20	184 (4673,6)	0.138	
SM25	25	184 (4673,6)	0.216	
SM30	30	184 (4673,6)	0.311	
SM40	40	184 (4673,6)	0.553	
SM50	50	184 (4673,6)	0.864	

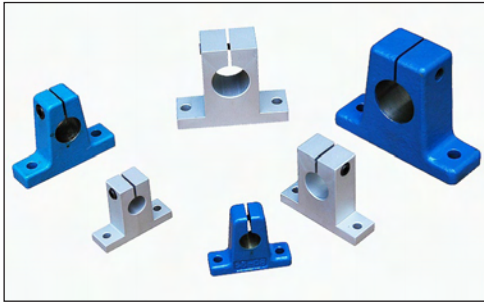

Dimensions & Specifications: ES-A End Support Block

Model Number	Nominal Shaft Diameter (inches)	Dimensions (inches)									Support Weight (lbs)
		A +/- .001	B	C	D	E +/- .010	F	H	M		
									hole	bolt size	
ES8-A	0.500	1.000	2.000	0.875	.250	1.500	0.625	1.625	.188	#8	.08
ES10-A	0.625	1.000	2.500	1.250	.313	1.750	0.688	1.875	.218	#10	.11
ES12-A	0.750	1.250	2.500	1.250	.313	2.000	0.750	2.063	.218	#10	.16
ES16-A	1.000	1.500	3.063	1.500	.375	2.500	1.000	2.500	.281	1/4	.30
ES20-A	1.250	1.750	3.750	2.000	.438	3.000	1.125	3.000	.346	5/16	.53
ES24-A	1.500	2.000	4.375	2.250	.500	3.500	1.250	3.437	.346	5/16	.73
ES32-A	2.000	2.500	5.500	3.000	.625	4.500	1.500	4.500	.406	3/8	1.40


Material:
6061-T6 aluminum
Natural Finish

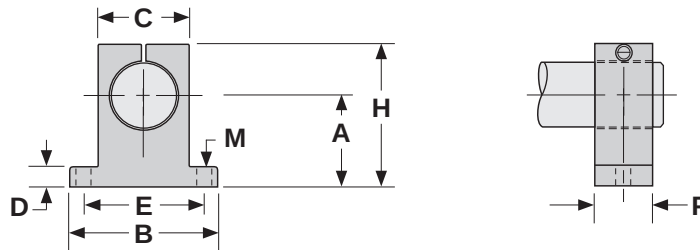


Dimensions & Specifications: ES-S End Support Block

Model Number	Nominal Shaft Diameter (inches)	Dimensions (inches)									Support Weight (lbs)
		A +/- .001	B	C	D	E +/- .010	F	H	M		
									hole	bolt size	
ES8-S	0.500	1.000	2.000	0.750	.250	1.500	0.625	1.625	.218	#10	.28
ES10-S	0.625	1.000	2.500	0.875	.312	1.875	0.750	1.750	.218	#10	.36
ES12-S	0.750	1.250	2.750	1.000	.375	2.000	0.750	2.125	.281	1/4	.53
ES16-S	1.000	1.500	3.312	1.375	.375	2.500	1.000	2.625	.281	1/4	1.00
ES20-S	1.250	1.750	4.000	1.750	.438	3.000	1.250	3.000	.343	5/16	2.10
ES24-S	1.500	2.000	4.750	2.000	.500	3.500	1.250	3.500	.343	5/16	2.80
ES32-S	2.000	2.500	6.000	2.625	.625	4.500	1.500	4.500	.406	3/8	5.10

Material:
C1045 steel
Blue Enamel


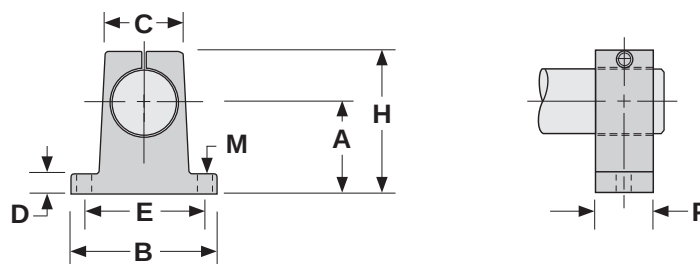


[More Information via the Web](#)

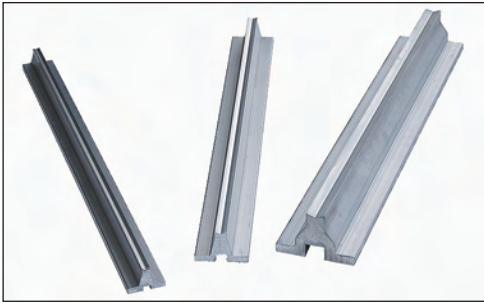


Dimensions & Specifications: ARS-PD Shaft Support

Model Number		Nominal Shaft Diameter (inches)	Dimensions (inches)									Support Weight (lbs/in)
Without Holes	With Predrilled Holes		A +/- .002	B	C	D	E +/- .010	F hole	G bolt size	H	I	
ARS8	ARS8-PD	0.500	1.125	1.500	.250	.187	1.000	.169	#6-32 x 0.87	2.00	4.00	.050
ARS10	ARS10-PD	0.625	1.125	1.625	.312	.250	1.125	.193	#8-32 x 0.87	2.00	4.00	.063
ARS12	ARS12-PD	0.750	1.500	1.750	.375	.250	1.250	.221	#10-32 x 1.25	3.00	6.00	.083
ARS16	ARS16-PD	1.000	1.750	2.125	.500	.250	1.500	.281	1/4-20 x 1.50	3.00	6.00	.108
ARS20	ARS20-PD	1.250	2.125	2.500	.562	.312	1.875	.343	5/16-18 x 1.75	3.00	6.00	.146
ARS24	ARS24-PD	1.500	2.500	3.000	.687	.375	2.250	.406	3/8-16 x 2.00	4.00	8.00	.213
ARS32	ARS32-PD	2.000	3.250	3.750	.875	.500	2.750	.531	1/2-13 x 3.25	4.00	8.00	.342

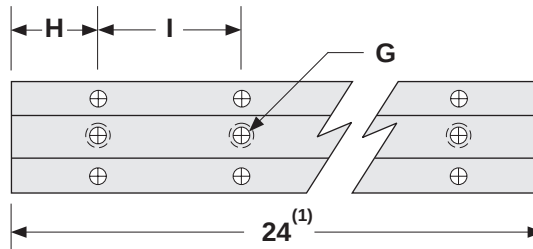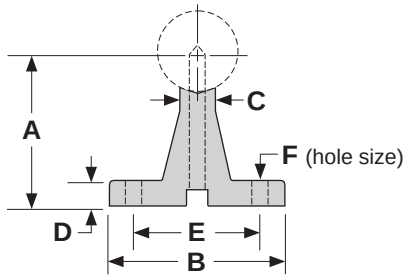


(1) Shorter lengths available. Contact the factory.

Material: 6061-T6 aluminum, Natural Finish

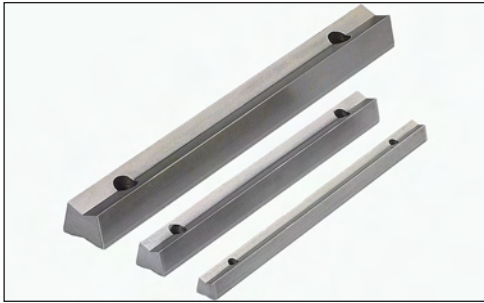

Dimensions & Specifications: LSRS-PD Shaft Support


Model Number		Nominal Shaft Diameter (inches)	Dimensions (inches)							Support Weight (lbs/in)
			A +/- .002	B	C	G		H	I	
						hole	bolt size			
LSRS8	LSRS8-PD	0.500	0.562	0.37	.341	.169	#6-32	2.00	4.00	.028
LSRS10	LSRS10-PD	0.625	0.687	0.45	.412	.193	#8-32	2.00	4.00	.041
LSRS12	LSRS12-PD	0.750	0.750	0.51	.420	.221	#10-32	3.00	6.00	.047
LSRS16	LSRS16-PD	1.000	1.000	0.69	.560	.281	1/4-20	3.00	6.00	.089
LSRS20	LSRS20-PD	1.250	1.187	0.78	.626	.343	5/16-18	3.00	6.00	.106
LSRS24	LSRS24-PD	1.500	1.375	0.93	.703	.406	3/8-16	4.00	8.00	.140
LSRS32	LSRS32-PD	2.000	1.750	1.18	.845	.531	1/2-13	4.00	8.00	.230

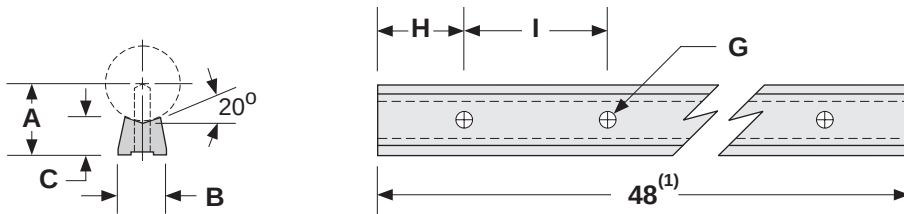

(1) Shorter lengths available. Contact the factory.

Material: AISI C-1018 steel, Natural Finish


[More Information via the Web](#)

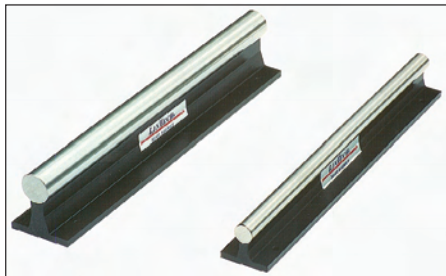

Specifications: SA Shaft Assemblies

Support Type & Finish	Precision Machined 6061-T6 Aluminum, Black Anodized																										
Shaft Straightness	0.001/0.002 in/ft, cumulative																										
Shaft Type	SL - 1060 Steel or 440C Stainless steel																										
Shaft Roundness	0.000080 inches																										
Shaft Chamfer	For 0.50 - 0.75 inch dia. : 0.03 inch x 45°, For 1.00 - 2.00 inch dia. : 0.06 inch x 45°																										
Surface Finish	8 - 12 R _a microinch																										
Diameter Tolerance	<table><tr><th>Nominal Shaft Diameter (inches)</th><th>Shaft Diameter Tolerance (inches)</th><th>Minimum Hardness Depth (inches)</th></tr><tr><td>0.500</td><td>.4995 / .4990</td><td>0.040</td></tr><tr><td>0.625</td><td>.6245 / .6240</td><td>0.040</td></tr><tr><td>0.750</td><td>.7495 / .7490</td><td>0.060</td></tr><tr><td>1.000</td><td>.9995 / .9990</td><td>0.080</td></tr><tr><td>1.250</td><td>1.2495 / 1.2490</td><td>0.080</td></tr><tr><td>1.500</td><td>1.4994 / 1.4989</td><td>0.080</td></tr><tr><td>2.000</td><td>1.9994 / 1.9987</td><td>0.100</td></tr></table>			Nominal Shaft Diameter (inches)	Shaft Diameter Tolerance (inches)	Minimum Hardness Depth (inches)	0.500	.4995 / .4990	0.040	0.625	.6245 / .6240	0.040	0.750	.7495 / .7490	0.060	1.000	.9995 / .9990	0.080	1.250	1.2495 / 1.2490	0.080	1.500	1.4994 / 1.4989	0.080	2.000	1.9994 / 1.9987	0.100
Nominal Shaft Diameter (inches)				Shaft Diameter Tolerance (inches)	Minimum Hardness Depth (inches)																						
0.500				.4995 / .4990	0.040																						
0.625				.6245 / .6240	0.040																						
0.750				.7495 / .7490	0.060																						
1.000				.9995 / .9990	0.080																						
1.250				1.2495 / 1.2490	0.080																						
1.500				1.4994 / 1.4989	0.080																						
2.000				1.9994 / 1.9987	0.100																						
Hardness Depth																											

Model Number	Nominal Shaft Diameter (inches)	Dimensions (inches)						
		A +/- .002	B	C	D	E +/- .010	F hole	G bolt size
SA8	0.500	1.125	1.500	.250	.187	1.000	.169	#6-32
SA10	0.625	1.125	1.625	.312	.250	1.125	.193	#8-32
SA12	0.750	1.500	1.750	.375	.250	1.250	.221	#10-32
SA16	1.000	1.750	2.125	.500	.250	1.500	.281	1/4-20
SA20	1.250	2.125	2.500	.562	.312	1.875	.281	1/4-20
SA24	1.500	2.500	3.000	.687	.375	2.250	.343	5/16-18
SA32	2.000	3.250	3.750	.875	.500	2.750	.406	3/8-16

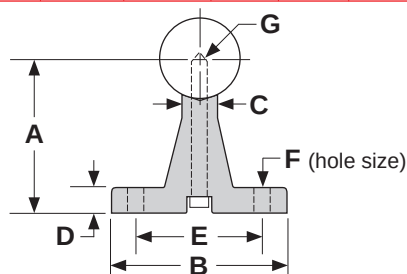

Standard lengths to 16 feet (192 inches). Longer lengths available - Contact Factory.


[More Information via the Web](#)



Specifications: TRSA TWIN RAIL® Shaft Assemblies

Support Type & Finish	Precision Machined 6061-T6 Aluminum, Black Anodized																										
Shaft Straightness	0.001/0.002 in/ft, cumulative																										
Shaft Parallelism	+/- 0.002 in overall																										
Shaft Type	SL - 1060 Steel or 440C Stainless steel																										
Shaft Roundness	0.000080 inches																										
Shaft Chamfer	For 0.50 - 0.75 inch dia. : 0.03 inch x 45°, For 1.00 - 2.00 inch dia. : 0.06 inch x 45°																										
Surface Finish	8 - 12 R _a microinch																										
Diameter Tolerance	<table><tr><th>Nominal Shaft Diameter (inches)</th><th>Shaft Diameter Tolerance (inches)</th><th>Minimum Hardness Depth (inches)</th></tr><tr><td>0.500</td><td>.4995 / .4990</td><td>0.040</td></tr><tr><td>0.625</td><td>.6245 / .6240</td><td>0.040</td></tr><tr><td>0.750</td><td>.7495 / .7490</td><td>0.060</td></tr><tr><td>1.000</td><td>.9995 / .9990</td><td>0.080</td></tr><tr><td>1.250</td><td>1.2495 / 1.2490</td><td>0.080</td></tr><tr><td>1.500</td><td>1.4994 / 1.4989</td><td>0.080</td></tr><tr><td>2.000</td><td>1.9994 / 1.9987</td><td>0.100</td></tr></table>			Nominal Shaft Diameter (inches)	Shaft Diameter Tolerance (inches)	Minimum Hardness Depth (inches)	0.500	.4995 / .4990	0.040	0.625	.6245 / .6240	0.040	0.750	.7495 / .7490	0.060	1.000	.9995 / .9990	0.080	1.250	1.2495 / 1.2490	0.080	1.500	1.4994 / 1.4989	0.080	2.000	1.9994 / 1.9987	0.100
Nominal Shaft Diameter (inches)				Shaft Diameter Tolerance (inches)	Minimum Hardness Depth (inches)																						
0.500				.4995 / .4990	0.040																						
0.625				.6245 / .6240	0.040																						
0.750				.7495 / .7490	0.060																						
1.000				.9995 / .9990	0.080																						
1.250				1.2495 / 1.2490	0.080																						
1.500				1.4994 / 1.4989	0.080																						
2.000				1.9994 / 1.9987	0.100																						
Hardness Depth																											

Model Number	Nominal Shaft Diameter (inches)	Dimensions (inches)										
		A +/- .002	B +/- .002	C	D	E +/- .010	F	G	H	J hole	K Bolt Size	L ⁽²⁾ Thread
TRSA8	0.500	1.125	3.000	3.750	0.875	2.000	.375	.312	.250	.169	#6-32	#10-32
TRSA10	0.625	1.125	3.750	4.625	1.000	2.625	.437	.312	.312	.193	#8-32	#10-32
TRSA12	0.750	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32
TRSA16	1.000	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32
TRSA20	1.250	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20
TRSA24	1.500	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18
TRSA32	2.000	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16

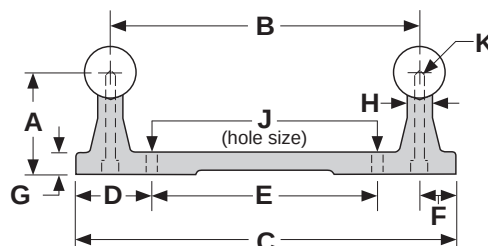

Standard lengths to 16 feet (192 inches). Longer lengths available - Contact Factory.




[More Information via the Web](#)

Specifications: LBCA & LBOA Linear Bearings

Operating Temperature Maximum Speed Bearing Seals (optional) Matching Shaft	0° F to + 600° F (LBCA series without seals) 0° F to + 185° F (all other models) 10 ft/second Internal Wiper Seals on both ends, Plastic Bearing Retainer Class S (SS series), hardened & ground shafting (see pages 4 & 5)																																																																									
Housing Tolerances C = clearance	<table><tr><th colspan="4">LBCA (closed style)</th><th colspan="2">LBOA (open style)</th></tr><tr><th rowspan="2">Nominal Shaft Diameter (inches)</th><th colspan="2">Recommended Housing Bore</th><th rowspan="2">Bearing and Shaft Fit-up (inches)</th><th rowspan="2">Nominal Shaft Diameter (inches)</th><th rowspan="2">Recommended Housing Bore before adjustment (inches)</th></tr><tr><th>Normal Fit (inches)</th><th>Press Fit (inches)</th></tr><tr><td>0.250</td><td>.5005 / .5000</td><td>.4995 / .4990</td><td>.0015C / .0005C</td><td></td><td></td></tr><tr><td>0.375</td><td>.6255 / .6250</td><td>.6245 / .6240</td><td>.0015C / .0005C</td><td></td><td></td></tr><tr><td>0.500</td><td>.8755 / .8750</td><td>.8745 / .8740</td><td>.0015C / .0005C</td><td>0.500</td><td>.8760 / .8740</td></tr><tr><td>0.625</td><td>1.1255 / 1.1250</td><td>1.1245 / 1.1240</td><td>.0015C / .0005C</td><td>0.625</td><td>1.1260 / 1.1240</td></tr><tr><td>0.750</td><td>1.2505 / 1.2500</td><td>1.2495 / 1.2490</td><td>.0015C / .0005C</td><td>0.750</td><td>1.2510 / 1.2490</td></tr><tr><td>1.000</td><td>1.5630 / 1.5625</td><td>1.5620 / 1.5615</td><td>.0015C / .0005C</td><td>1.000</td><td>1.5635 / 1.5615</td></tr><tr><td>1.250</td><td>2.0010 / 2.0000</td><td>1.9993 / 1.9983</td><td>.0015C / .0004C</td><td>1.250</td><td>2.0010 / 1.9990</td></tr><tr><td>1.500</td><td>2.3760 / 2.3750</td><td>2.3743 / 2.3733</td><td>.0016C / .0005C</td><td>1.500</td><td>2.3760 / 2.3740</td></tr><tr><td>2.000</td><td>3.0010 / 3.0000</td><td>2.9992 / 2.9982</td><td>.0020C / .0005C</td><td>2.000</td><td>3.0010 / 2.9990</td></tr></table>						LBCA (closed style)				LBOA (open style)		Nominal Shaft Diameter (inches)	Recommended Housing Bore		Bearing and Shaft Fit-up (inches)	Nominal Shaft Diameter (inches)	Recommended Housing Bore before adjustment (inches)	Normal Fit (inches)	Press Fit (inches)	0.250	.5005 / .5000	.4995 / .4990	.0015C / .0005C			0.375	.6255 / .6250	.6245 / .6240	.0015C / .0005C			0.500	.8755 / .8750	.8745 / .8740	.0015C / .0005C	0.500	.8760 / .8740	0.625	1.1255 / 1.1250	1.1245 / 1.1240	.0015C / .0005C	0.625	1.1260 / 1.1240	0.750	1.2505 / 1.2500	1.2495 / 1.2490	.0015C / .0005C	0.750	1.2510 / 1.2490	1.000	1.5630 / 1.5625	1.5620 / 1.5615	.0015C / .0005C	1.000	1.5635 / 1.5615	1.250	2.0010 / 2.0000	1.9993 / 1.9983	.0015C / .0004C	1.250	2.0010 / 1.9990	1.500	2.3760 / 2.3750	2.3743 / 2.3733	.0016C / .0005C	1.500	2.3760 / 2.3740	2.000	3.0010 / 3.0000	2.9992 / 2.9982	.0020C / .0005C	2.000	3.0010 / 2.9990
LBCA (closed style)				LBOA (open style)																																																																						
Nominal Shaft Diameter (inches)	Recommended Housing Bore		Bearing and Shaft Fit-up (inches)	Nominal Shaft Diameter (inches)	Recommended Housing Bore before adjustment (inches)																																																																					
	Normal Fit (inches)	Press Fit (inches)																																																																								
0.250	.5005 / .5000	.4995 / .4990	.0015C / .0005C																																																																							
0.375	.6255 / .6250	.6245 / .6240	.0015C / .0005C																																																																							
0.500	.8755 / .8750	.8745 / .8740	.0015C / .0005C	0.500	.8760 / .8740																																																																					
0.625	1.1255 / 1.1250	1.1245 / 1.1240	.0015C / .0005C	0.625	1.1260 / 1.1240																																																																					
0.750	1.2505 / 1.2500	1.2495 / 1.2490	.0015C / .0005C	0.750	1.2510 / 1.2490																																																																					
1.000	1.5630 / 1.5625	1.5620 / 1.5615	.0015C / .0005C	1.000	1.5635 / 1.5615																																																																					
1.250	2.0010 / 2.0000	1.9993 / 1.9983	.0015C / .0004C	1.250	2.0010 / 1.9990																																																																					
1.500	2.3760 / 2.3750	2.3743 / 2.3733	.0016C / .0005C	1.500	2.3760 / 2.3740																																																																					
2.000	3.0010 / 3.0000	2.9992 / 2.9982	.0020C / .0005C	2.000	3.0010 / 2.9990																																																																					


Dimensions & Specifications: **LBCA** Precision Linear Bearing (closed)

Model Number		Nominal Shaft Diameter (inches)	Working Bore Diameter (inches)	Dyn. Load Capacity ⁽¹⁾ (lbs)	Dimensions (inches)				Bearing Weight (lbs)
Without Seals	With Seals ⁽²⁾				A	B	C	D	
LBCA-4	LBCA-4-S	0.250	0.2500/0.2495	19	0.750/0.735	0.515/0.499	0.039	0.5000/0.4996	0.02
LBCA-6	LBCA-6-S	0.375	0.3750/0.3745	37	0.875/0.860	0.640/0.624	0.039	0.6250/0.6246	0.06
LBCA-8	LBCA-8-S	0.500	0.5000/0.4995	85	1.250/1.235	0.967/0.951	0.046	0.8750/0.8746	0.08
LBCA-10	LBCA-10-S	0.625	0.6250/0.6245	150	1.500/1.485	1.108/1.092	0.056	1.1250/1.1246	0.16
LBCA-12	LBCA-12-S	0.750	0.7500/0.7495	200	1.625/1.610	1.170/1.154	0.056	1.2500/1.2496	0.21
LBCA-16	LBCA-16-S	1.000	1.0000/0.9995	350	2.250/2.235	1.759/1.741	0.068	1.5625/1.5621	0.38
LBCA-20	LBCA-20-S	1.250	1.2500/1.2494	520	2.625/2.605	2.009/1.991	0.068	2.0000/1.9995	1.10
LBCA-24	LBCA-24-S	1.500	1.5000/1.4994	770	3.000/2.980	2.415/2.397	0.086	2.3750/2.3745	1.43
LBCA-32	LBCA-32-S	2.000	2.0000/1.9992	1,100	4.000/3.980	3.195/3.177	0.103	3.0000/2.9994	2.75

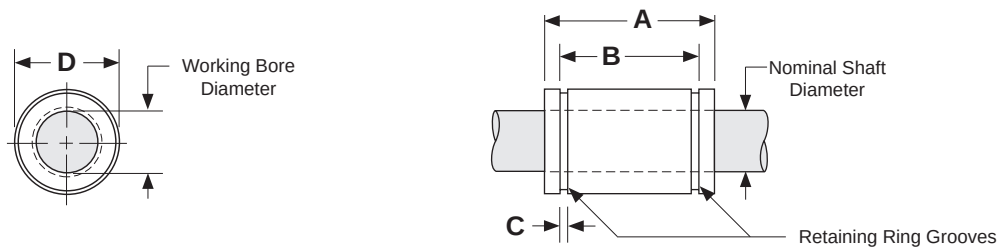

Dimensions & Specifications: **LBOA** Precision Linear Bearing (open)

Model Number		Nominal Shaft Diameter (inches)	Working Bore Diameter (inches)	Dyn. Load Capacity ⁽¹⁾ (lbs)	Dimensions (inches)					Bearing Weight (lbs)
Without Seals	With Seals ⁽²⁾				A	B	C	D	E min.	
LBOA-8	LBOA-8-S	0.500	0.5005/0.4995	60	1.250/1.235	0.967/0.951	0.046	0.8760/0.8746	0.31	0.07
LBOA-10	LBOA-10-S	0.625	0.6255/0.6245	105	1.500/1.485	1.108/1.092	0.056	1.1260/1.1240	0.38	0.11
LBOA-12	LBOA-12-S	0.750	0.7505/0.7495	140	1.625/1.610	1.170/1.154	0.056	1.2510/1.2490	0.44	0.17
LBOA-16	LBOA-16-S	1.000	1.0005/0.9995	240	2.250/2.235	1.759/1.741	0.068	1.5635/1.5615	0.56	0.32
LBOA-20	LBOA-20-S	1.250	1.2506/1.2494	400	2.625/2.605	2.009/1.991	0.068	2.0010/1.9990	0.63	0.90
LBOA-24	LBOA-24-S	1.500	1.5006/1.4994	600	3.000/2.980	2.415/2.397	0.086	2.3760/2.3740	0.75	1.12
LBOA-32	LBOA-32-S	2.000	2.0008/1.9992	860	4.000/3.980	3.195/3.177	0.103	3.0010/2.9990	1.00	2.16

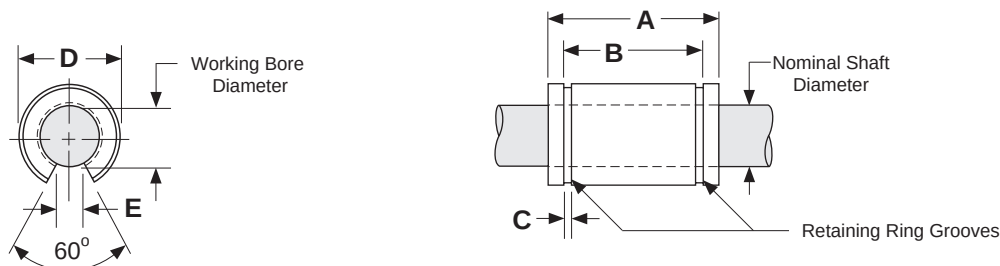


Footnotes:

(1) Rating based upon 2 million inches of travel with the load forces being applied downward on the linear bearing, while in a horizontal application, and based upon 1060 steel shafting (Rockwell 60C).

(2) The bearing retainer is plastic when the internal -S seal option is selected.

[More Information via the Web](#)

[More Information via the Web](#)

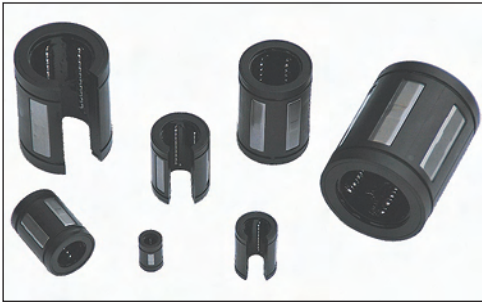


Specifications: LBC & LBO Linear Bearings

Operating Temperature	0° F to + 185° F			
Maximum Speed	9 ft/second			
Bearing Seals	Optional Internal Wiper Seals on both ends			
Matching Shaft	Class L (SL series), hardened & ground shafting (see pages 4 & 5)			
Housing Tolerances C = clearance P = preload	Nominal Shaft Diameter (inches)	Recommended Housing Bore		Bearing and Shaft Fit-up⁽¹⁾ (before adjustment)
		Fixed Housing (inches)	Adjustable Housing (inches)	Fixed Housing (inches) Adjustable Housing (inches)
	0.250	.5005 / .5000	.5010 / .5000	.0015C / .0000 .002C / .0000
	0.375	.6255 / .6250	.6260 / .6250	.0015C / .0000 .002C / .0000
	0.500	.8755 / .8750	.8760 / .8750	.0015C / .0000 .002C / .0000
	0.625	1.1255 / 1.1250	1.1260 / 1.1250	.0015C / .0000 .002C / .0000
	0.750	1.2505 / 1.2500	1.2510 / 1.2500	.0015C / .0000 .002C / .0000
	1.000	1.5630 / 1.5625	1.5635 / 1.5625	.0015C / .0000 .002C / .0000
	1.250	2.0008 / 2.0000	2.0010 / 2.0000	.0018C / .0001P .002C / .0000
	1.500	2.3760 / 2.3750	2.3760 / 2.3750	.0021C / .0000 .0021C / .0000
	2.000	3.0010 / 3.0000	3.0010 / 3.0000	.0023C / .0002P .0023C / .0002P
(1) Adjustable Housing Diameter (before adjustment) for LBO-20 is .002C/.0001P.				


Dimensions & Specifications: **LBC** Linear Bearing (closed)

Model Number		Nominal Shaft Diameter (inches)	Dyn. Load Capacity ⁽¹⁾ (lbs)	Working Bore Diameter (inches)	Housing Bore D ⁽²⁾ (inches)	Dimensions (inches)			Bearing Weight (lbs)
Without Seals	With Seals					A	B	C	
LBC-4	LBC-4-S	0.250	60	0.2500/0.2495	0.5005/0.5000	0.750/0.735	0.511/0.501	0.039	0.01
LBC-6	LBC-6-S	0.375	105	0.3750/0.3745	0.6255/0.6250	0.875/0.860	0.699/0.689	0.039	0.02
LBC-8	LBC-8-S	0.500	265	0.5000/0.4995	0.8755/0.8750	1.250/1.230	1.032/1.012	0.050	0.04
LBC-10	LBC-10-S	0.625	420	0.6250/0.6245	1.1255/1.1250	1.500/1.480	1.105/1.095	0.056	0.10
LBC-12	LBC-12-S	0.750	640	0.7500/0.7495	1.2505/1.2500	1.625/1.605	1.270/1.250	0.056	0.14
LBC-16	LBC-16-S	1.000	1,045	1.0000/0.9995	1.5630/1.5625	2.250/2.230	1.884/1.864	0.068	0.25
LBC-20	LBC-20-S	1.250	1,585	1.2500/1.2494	2.0008/2.0000	2.625/2.600	2.004/1.984	0.068	0.45
LBC-24	LBC-24-S	1.500	1,930	1.5000/1.4994	2.3760/2.3750	3.000/2.970	2.410/2.390	0.086	0.85
LBC-32	not available	2.000	3,000	2.0000/1.9992	3.0010/3.0000	4.000/3.960	3.193/3.163	0.105	1.45

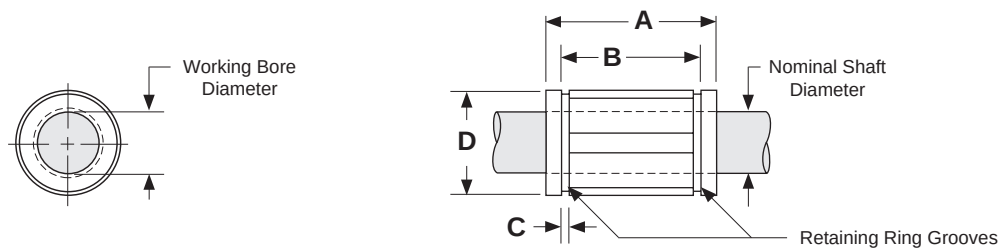

Dimensions & Specifications: **LBO** Linear Bearing (open)

Model Number		Nominal Shaft Diameter (inches)	Dyn. Load Capacity ⁽¹⁾ (lbs)	Working Bore Diameter (inches)	Housing Bore D ⁽²⁾ (inches)	Dimensions (inches)				Bearing Weight (lbs)
Without Seals	With Seals					A	B	C	E min.	
LBO-8	LBO-8-S	0.500	230	0.5000/0.4995	0.8755/0.8750	1.250/1.230	1.032/1.012	0.050	0.312	0.04
LBO-10	LBO-10-S	0.625	320	0.6250/0.6245	1.1255/1.1250	1.500/1.480	1.105/1.095	0.056	0.375	0.08
LBO-12	LBO-12-S	0.750	470	0.7500/0.7495	1.2505/1.2500	1.625/1.605	1.270/1.250	0.056	0.437	0.12
LBO-16	LBO-16-S	1.000	780	1.0000/0.9995	1.5630/1.5625	2.250/2.230	1.884/1.864	0.068	0.562	0.21
LBO-20	LBO-20-S	1.250	1,170	1.2500/1.2494	2.0008/2.0000	2.625/2.600	2.004/1.984	0.068	0.625	0.38
LBO-24	LBO-24-S	1.500	1,560	1.5000/1.4994	2.3760/2.3750	3.000/2.970	2.410/2.390	0.086	0.750	0.71
LBO-32	not available	2.000	2,350	2.0000/1.9992	3.0010/3.0000	4.000/3.960	3.193/3.163	0.105	1.000	1.20

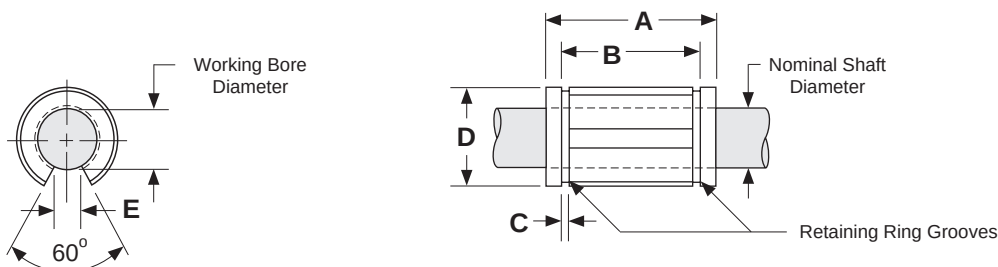


Footnotes:

- (1) Rating based upon 2 million inches of travel with the load forces being applied downward on the linear bearing, while in a horizontal application, and based upon 1060 steel shafting (Rockwell 60C).
- (2) This specification is based upon the bearing being on the shaft.

[More Information via the Web](#)

[More Information via the Web](#)


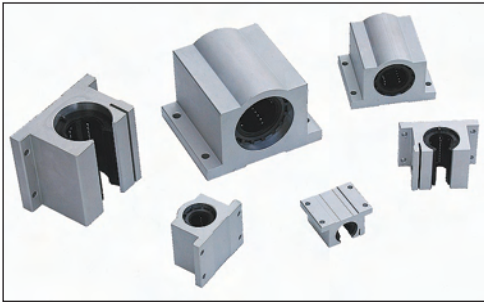


Specifications: **SLBC** & **SLBO** Pillow Blocks

Bearing Housing Type & Finish	Aluminum 6061-T6 Pillow Block, Natural Finish	
Bearing Seals	Internal Wiper Seals on Both Ends	
Bearing Type - Internal	LBC or LBO series	
Operating Temperature	0° F to + 185° F	
Maximum Speed	9 ft/second	
Matching Shaft	Class L (SL series), hardened & ground shafting (see pages 4 & 5)	
Diameter Tolerance	Nominal Shaft Diameter (inches)	Shaft Diameter Tolerance (inches)
	0.500	.4995 / .4990
	0.625	.6245 / .6240
	0.750	.7495 / .7490
	1.000	.9995 / .9990
	1.250	1.2495 / 1.2490
	1.500	1.4994 / 1.4989
	2.000	1.9994 / 1.9987



Dimensions & Specifications: **SLBC** Single Linear Bearing Pillow Block (closed)

Model Number	Nominal Shaft Diameter (inches)	Dyn. Load Capacity (lbs)	Dimensions (inches)											Block Weight
			A	B	C	D	E	F	G	H	I	J		
			+/- .003				+/- .010	+/- .010					hole	bolt
SLBC-8	0.500	265	0.687	2.00	1.69	1.13	1.688	1.000	1.38	1.25	.25	.16	# 6	0.20
SLBC-10	0.625	420	0.875	2.50	1.94	1.44	2.125	1.125	1.75	1.63	.28	.19	# 8	0.50
SLBC-12	0.750	640	0.937	2.75	2.06	1.56	2.375	1.250	1.88	1.75	.31	.19	# 8	0.60
SLBC-16	1.000	1,045	1.187	3.25	2.81	1.94	2.875	1.750	2.38	2.19	.38	.22	#10	1.20
SLBC-20	1.250	1,585	1.500	4.00	3.63	2.50	3.500	2.000	3.00	2.81	.44	.22	#10	2.50
SLBC-24	1.500	1,930	1.750	4.75	4.00	2.88	4.125	2.500	3.50	3.25	.50	.28	1/4	3.80
SLBC-32	2.000	3,000	2.125	6.00	5.00	3.63	5.250	3.250	4.50	4.06	.63	.41	3/8	7.00

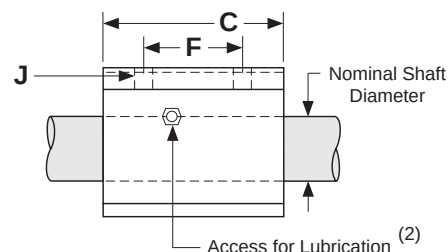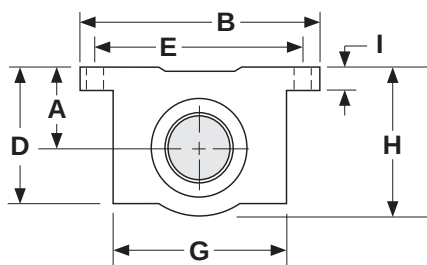

Dimensions & Specifications: **SLBO** Single Linear Bearing Pillow Block (open)

Model Number	Nominal Shaft Diameter (inches)	Dyn. Load Capacity (lbs)	Dimensions (inches)												Block Weight
			A +/- .003	B	C	D	E +/- .010	F +/- .010	H		I	J min.	K	(lbs)	
									hole	bolt					
SLBO-8	0.500	230	0.687	2.00	1.50	1.13	1.688	1.000	0.69	.16	# 6	.25	0.31	0.75	0.20
SLBO-10	0.625	320	0.875	2.50	1.75	1.44	2.125	1.125	0.88	.19	# 8	.28	0.37	0.94	0.40
SLBO-12	0.750	470	0.937	2.75	1.88	1.56	2.375	1.250	0.94	.19	# 8	.31	0.43	1.00	0.50
SLBO-16	1.000	780	1.187	3.25	2.63	2.00	2.875	1.750	1.19	.22	#10	.38	0.56	1.25	1.00
SLBO-20	1.250	1,170	1.500	4.00	3.38	2.56	3.500	2.000	1.50	.22	#10	.44	0.62	1.63	2.10
SLBO-24	1.500	1,560	1.750	4.75	3.75	2.94	4.125	2.500	1.75	.28	1/4	.50	0.75	1.88	3.20
SLBO-32	2.000	2,350	2.125	6.00	4.75	3.63	5.250	3.250	2.25	.41	3/8	.63	1.00	2.44	6.00

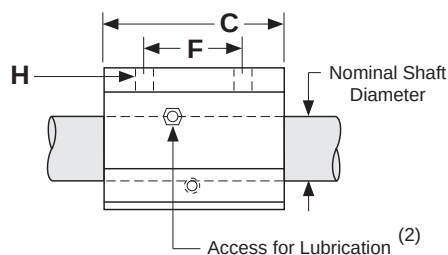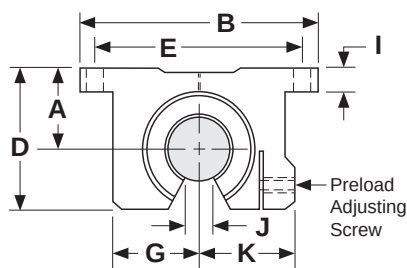


Footnotes:

(1) Rating based upon 2 million inches of travel with the load forces being applied downward on the linear bearing, while in a horizontal application, and based upon 1060 steel shafting (Rockwell 60C).

(2) Size 0.500 has oil lubricant fitting. Sizes 0.625 and above have a 1/4-28 UNF straight thread access for lubrication.

[More Information via the Web](#)

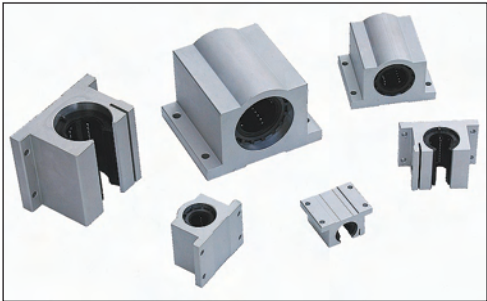



[More Information via the Web](#)

Specifications: DLBC & DLBO Pillow Blocks

Bearing Housing Type & Finish	Aluminum 6061-T6 Pillow Block, Natural Finish	
Bearing Seals	Internal Wiper Seals on Both Ends	
Operating Temperature	0° F to + 185° F	
Maximum Speed	9 ft/second	
Matching Shaft	Class L (SL series), hardened & ground shafting (see pages 4 & 5)	
Diameter Tolerance	Nominal Shaft Diameter (inches)	Shaft Diameter Tolerance (inches)
	0.500	.4995 / .4990
	0.625	.6245 / .6240
	0.750	.7495 / .7490
	1.000	.9995 / .9990
	1.250	1.2495 / 1.2490
	1.500	1.4994 / 1.4989
	2.000	1.9994 / 1.9987



Dimensions & Specifications: **DLBC** Double Linear Bearing Pillow Block (closed)

Model Number	Nominal Shaft Diameter (inches)	Dyn. ⁽¹⁾ Load Capacity (lbs)	Dimensions (inches)											Block Weight (lbs)	
			A	B	C	D	E	F	G	H	I	J			d ₂ ⁽³⁾
			+/- .003				+/- .010	+/- .010					hole	bolt	
DLBC-8	0.500	510	0.687	2.00	3.50	1.13	1.688	2.500	1.38	1.25	.25	.16	# 6	1.75	0.40
DLBC-10	0.625	900	0.875	2.50	4.00	1.44	2.125	3.000	1.75	1.63	.28	.19	# 8	2.00	1.00
DLBC-12	0.750	1,200	0.937	2.75	4.50	1.56	2.375	3.500	1.88	1.75	.31	.19	# 8	2.25	1.20
DLBC-16	1.000	2,100	1.187	3.25	6.00	1.94	2.875	4.500	2.38	2.19	.38	.22	#10	3.00	2.40
DLBC-20	1.250	3,000	1.500	4.00	7.50	2.50	3.500	5.500	3.00	2.81	.44	.22	#10	3.75	5.00
DLBC-24	1.500	4,000	1.750	4.75	9.00	2.88	4.125	6.500	3.50	3.25	.50	.28	1/4	4.50	7.80

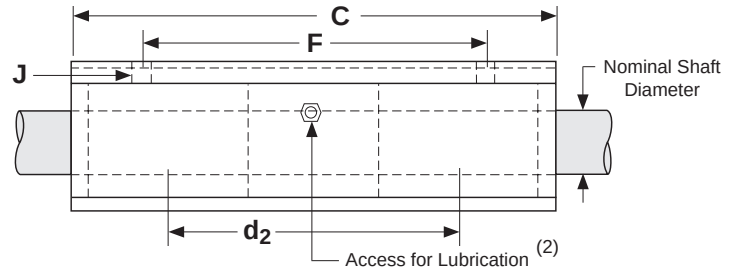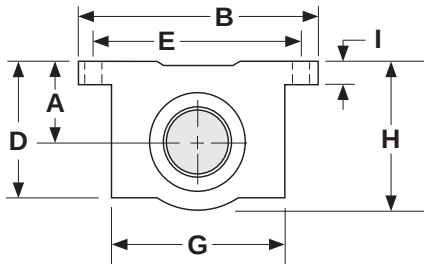

Dimensions & Specifications: **DLBO** Double Linear Bearing Pillow Block (open)

Model Number	Nominal Shaft Diameter (inches)	Dyn. Load Capacity (lbs)	Dimensions (inches)													Block Weight (lbs)
			A +/- .003	B	C	D	E +/- .010	F +/- .010	G	H min.	I	J		K	d ₂ ⁽³⁾	
												hole	bolt			
DLBO-8	0.500	460	0.687	2.00	3.50	1.13	1.688	2.500	0.69	.31	.25	.16	# 6	0.75	1.75	0.40
DLBO-10	0.625	640	0.875	2.50	4.00	1.44	2.125	3.000	0.88	.37	.28	.19	# 8	0.94	2.00	0.80
DLBO-12	0.750	940	0.937	2.75	4.50	1.56	2.375	3.500	0.94	.43	.31	.19	# 8	1.00	2.25	1.00
DLBO-16	1.000	1,560	1.187	3.25	6.00	2.00	2.875	4.500	1.19	.56	.38	.22	#10	1.25	3.00	2.00
DLBO-20	1.250	2,340	1.500	4.00	7.50	2.56	3.500	5.500	1.50	.62	.44	.22	#10	1.63	3.75	4.20
DLBO-24	1.500	3,120	1.750	4.75	9.00	2.94	4.125	6.500	1.75	.75	.50	.28	1/4	1.88	4.50	6.70

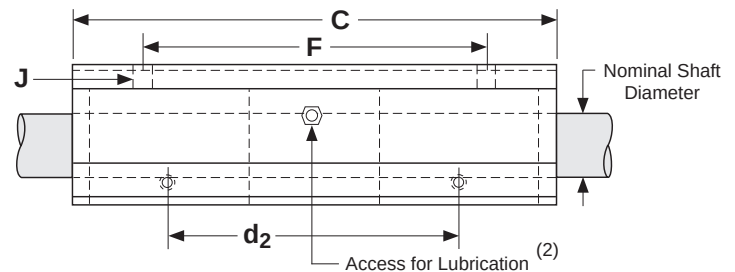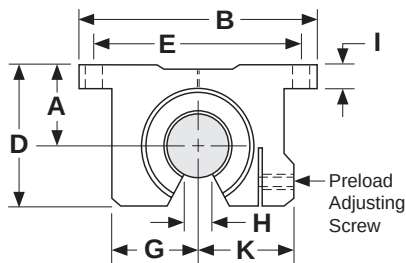

Footnotes:

- (1) Rating based upon 2 million inches of travel with the load forces being applied downward on the linear bearing, while in a horizontal application, and based upon 1060 steel shafting (Rockwell 60C).
- (2) Size 0.500 has oil lubricant fitting. Sizes 0.625 and above have a 1/4-28 UNF straight thread access for lubrication.
- (3) This value is the center to center distance (spacing) of the bearings on a single shaft (d₂).

[More Information via the Web](#)

[More Information via the Web](#)




Specifications: **TRCA** *TWIN RAIL*® Carriage Assembly

Bearing Housing Type & Finish	Aluminum 6061-T6 Pillow Block, Natural Finish																
Bearing Seals	Internal Wiper Seals on Both Ends																
Carriage Plate Type & Finish	Machined Aluminum 6061-T6 Plate, Black Anodized																
Bearing Alignment on Plate	+/- 0.001", Pillow Blocks Doweled to Carriage Plate																
Operating Temperature	0° F to + 185° F																
Maximum Speed	9 ft/second																
Matching <i>TWIN RAIL</i> ® Assembly	TRSA series (see page 11)																
Diameter Tolerance	<table> <tr> <th>Nominal Shaft Diameter (inches)</th><th>Shaft Diameter Tolerance (inches)</th></tr> <tr> <td>0.500</td><td>.4995 / .4990</td></tr> <tr> <td>0.625</td><td>.6245 / .6240</td></tr> <tr> <td>0.750</td><td>.7495 / .7490</td></tr> <tr> <td>1.000</td><td>.9995 / .9990</td></tr> <tr> <td>1.250</td><td>1.2495 / 1.2490</td></tr> <tr> <td>1.500</td><td>1.4994 / 1.4989</td></tr> <tr> <td>2.000</td><td>1.9994 / 1.9987</td></tr> </table>	Nominal Shaft Diameter (inches)	Shaft Diameter Tolerance (inches)	0.500	.4995 / .4990	0.625	.6245 / .6240	0.750	.7495 / .7490	1.000	.9995 / .9990	1.250	1.2495 / 1.2490	1.500	1.4994 / 1.4989	2.000	1.9994 / 1.9987
Nominal Shaft Diameter (inches)	Shaft Diameter Tolerance (inches)																
0.500	.4995 / .4990																
0.625	.6245 / .6240																
0.750	.7495 / .7490																
1.000	.9995 / .9990																
1.250	1.2495 / 1.2490																
1.500	1.4994 / 1.4989																
2.000	1.9994 / 1.9987																

Model Number	Nominal Shaft Diameter (inches)	Dynamic Load Capacity (lbs)	Dimensions (inches)								
			B +/- .005	D	E	F	G	H	K	d _r	d ₁
TRCA8	0.500	920	5.50	0.75	0.68	1.12	2.00	.25	0.375	1.062	3.00
TRCA10	0.625	1,280	6.75	0.93	0.87	1.43	2.50	.25	0.375	1.250	3.75
TRCA12	0.750	1,880	7.75	1.00	0.93	1.56	2.75	.25	0.500	1.437	4.50
TRCA16	1.000	3,120	9.00	1.25	1.18	2.00	3.25	.25	0.500	1.687	5.25
TRCA20	1.250	4,680	10.50	1.62	1.50	2.56	4.00	.25	0.750	2.250	6.00
TRCA24	1.500	6,240	12.00	1.87	1.75	2.93	4.75	.31	1.000	2.750	6.62
TRCA32	2.000	9,400	14.00	2.43	2.25	3.62	6.00	.37	1.250	3.375	7.25

Dimensions & Specifications: **TRCA-P** Pre-Drilled Mounting Holes

Model Number	Carriage Length (inches)	L (inches)	Threaded Insert Size
TRCA8-6-P	6.00	5.00	#10-32
TRCA8-12-P	12.00	5.00	#10-32
TRCA8-18-P	18.00	5.00	#10-32
TRCA10-6-P	6.00	5.00	#10-32
TRCA10-12-P	12.00	5.00	#10-32
TRCA10-18-P	18.00	5.50	#10-32
TRCA12-6-P	6.00	5.00	1/4-28
TRCA12-12-P	12.00	5.00	1/4-28
TRCA12-18-P	18.00	5.50	1/4-28
TRCA16-6-P	6.00	5.00	5/16-24
TRCA16-12-P	12.00	5.00	5/16-24
TRCA16-18-P	18.00	5.00	5/16-24
TRCA16-24-P	24.00	5.00	5/16-24
TRCA20-8-P	8.00	7.00	3/8-24
TRCA20-12-P	12.00	5.00	3/8-24
TRCA20-18-P	18.00	5.00	3/8-24
TRCA20-24-P	24.00	5.00	3/8-24
TRCA24-12-P	12.00	5.00	3/8-24
TRCA24-18-P	18.00	5.00	3/8-24
TRCA24-24-P	24.00	5.00	3/8-24
TRCA24-30-P	30.00	5.25	3/8-24
TRCA32-18-P	18.00	5.00	1/2-20
TRCA32-24-P	24.00	5.00	1/2-20
TRCA32-30-P	30.00	5.25	1/2-20

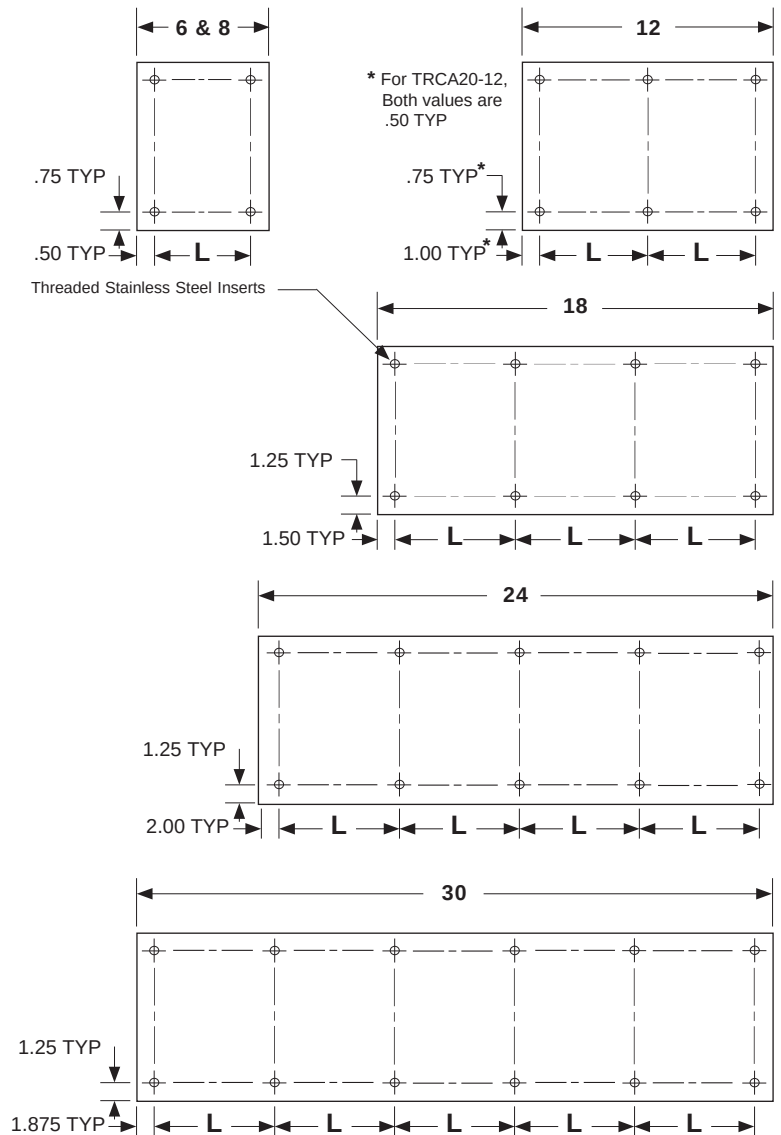


[More Information via the Web](#)



[More Information via the Web](#)


Dimensions & Specifications: **LBCM** Linear Bearing Closed Metric (Asian Style)

Model Number		Nominal Shaft Diameter (mm)	Dynamic Load Capacity N (Kgf)	Housing Bore D (mm)	Dimensions (mm)			No. of Ball Tracks	Bearing Weight (kg)
Without Seals	With Seals				A	B	C		
LBCM-16	LBCM-16-S	16	1225 (119,9)	28	37	26,5	1,60	5	0,034
LBCM-20	LBCM-20-S	20	2303 (239,8)	32	42	30,5	1,60	6	0,058
LBCM-25	LBCM-25-S	25	4312 (459,6)	40	59	41,0	1,85	6	0,120
LBCM-30	LBCM-30-S	30	4802 (569,6)	45	64	44,5	1,85	6	0,148
LBCM-40	LBCM-40-S	40	9310 (949,3)	60	80	60,5	2,10	6	0,314

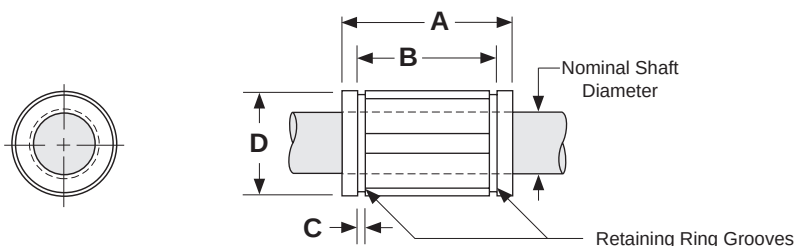

Dimensions & Specifications: **LBOM** Linear Bearing Open Metric (Asian Style)

Model Number		Nominal Shaft Diameter (mm)	Dynamic Load Capacity N (Kgf)	Housing Bore D (mm)	Dimensions (mm)				Angle α	No. of Ball Tracks	Bearing Weight (kg)
Without Seals	With Seals				A	B	C	E min.			
LBOM-16	LBOM-16-S	16	1372 (139,9)	28	37	26,5	1,60	11,0	60°	4	0,026
LBOM-20	LBOM-20-S	20	2332 (237,8)	32	42	30,5	1,60	11,0	60°	5	0,048
LBOM-25	LBOM-25-S	25	4351 (443,7)	40	59	41,0	1,85	12,5	60°	5	0,100
LBOM-30	LBOM-30-S	30	4851 (494,7)	45	64	44,5	1,85	15,0	60°	5	0,122
LBOM-40	LBOM-40-S	40	9408 (959,3)	60	80	60,5	2,15	20,0	60°	5	0,260

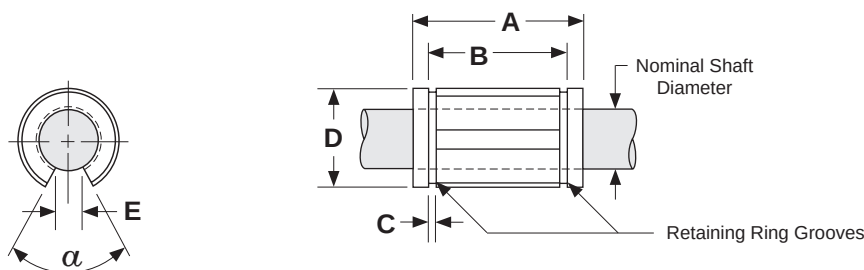


(1) Rating based upon 50 km of travel with the load forces being applied downward on the linear bearing, while in a horizontal application, and based upon 1060 steel shafting (Rockwell 60C).

(2) This specification is based upon the bearing being on the shaft.




Dimensions & Specifications: **LBCME** Linear Bearing Closed Metric (European Style)

Model Number		Nominal Shaft Diameter (mm)	Dynamic Load Capacity N (Kgf)	Housing Bore D (mm)	Dimensions (mm)			No. of Ball Tracks	Bearing Weight (kg)
Without Seals	With Seals				A	B	C		
LBCME-16	LBCME-16-S	16	1176 (119,9)	26	36	24,6	1,30	5	0,026
LBCME-20	LBCME-20-S	20	2352 (239,8)	32	45	31,2	1,60	6	0,060
LBCME-25	LBCME-25-S	25	4508 (459,6)	40	58	43,7	1,85	6	0,120
LBCME-30	LBCME-30-S	30	5586 (569,6)	47	68	51,7	1,85	6	0,184
LBCME-40	LBCME-40-S	40	9310 (949,3)	62	80	60,3	2,15	6	0,342
LBCME-50	LBCME-50-S	50	13720 (1399,0)	75	100	77,3	2,65	6	0,586

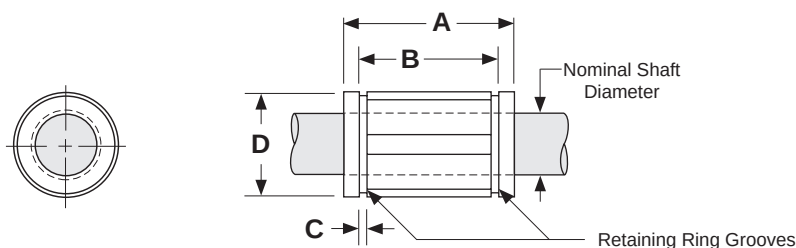

Dimensions & Specifications: **LBOME** Linear Bearing Open Metric (European Style)

Model Number		Nominal Shaft Diameter (mm)	Dynamic Load Capacity N (Kgf)	Housing Bore D (mm)	Dimensions (mm)				Angle α	No. of Ball Tracks	Bearing Weight (kg)
Without Seals	With Seals				A	B	C	E min.			
LBOME-16	LBOME-16-S	16	1332 (135,8)	26	36	24,6	1,30	9,0	68°	4	0,020
LBOME-20	LBOME-20-S	20	2371 (241,8)	32	45	31,2	1,60	9,0	55°	5	0,050
LBOME-25	LBOME-25-S	25	4557 (464,7)	40	58	43,7	1,85	11,5	57°	5	0,100
LBOME-30	LBOME-30-S	30	5644 (575,5)	47	68	51,7	1,85	14,0	57°	5	0,154
LBOME-40	LBOME-40-S	40	9398 (958,3)	62	80	60,3	2,15	19,5	56°	5	0,286
LBOME-50	LBOME-50-S	50	13857 (1413,0)	75	100	77,3	2,65	22,5	54°	5	0,486

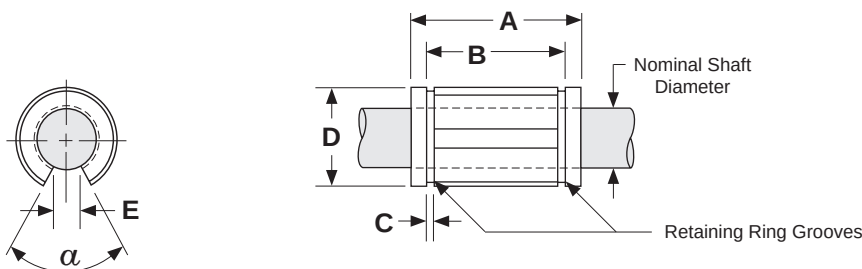


(1) Rating based upon 50 km of travel with the load forces being applied downward on the linear bearing, while in a horizontal application, and based upon 1060 steel shafting (Rockwell 60C).

(2) This specification is based upon the bearing being on the shaft.

SLBCM Series

Single Self-Aligning Closed

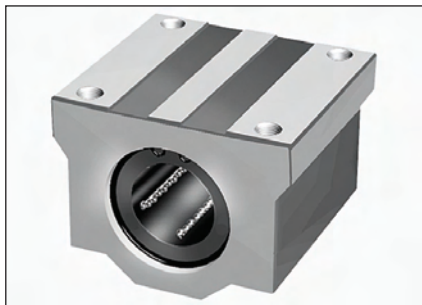

SLBCM-A Series

Single Self-Aligning Closed Adjustable



[More Information via the Web](#)


SLBOM Series

Single Self-Aligning Open



DLBCM Series

Double Self-Aligning Closed

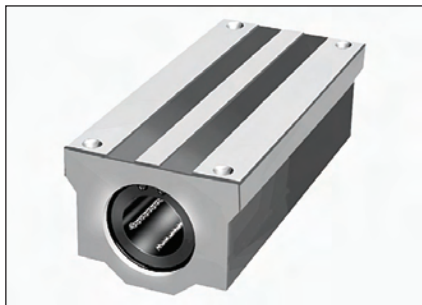

SLBCME Series

Single Self-Aligning Closed



SLBCME-A Series

Single Self-Aligning Closed Adjustable



[More Information via the Web](#)

SLBOME Series

Single Self-Aligning Open



SLBOME-A Series

Single Self-Aligning Open Adjustable



DLBCME Series

Double Self-Aligning Closed



DLBCME-A Series

Single Self-Aligning Closed Adjustable



DLBOME Series

Double Self-Aligning Open






DLBOME-A Series

Double Self-Aligning Open Adjustable




Features

MR series	AR series	HR series
		
* Miniature Series * 45° contact angle	* Standard Load Series * 45° contact angle	* Heavy Load Series * 45° contact angle

Features

Profile Rail Series	Height of Block and Rail inches (mm)	Width x Length of Block inches (mm)	Rail and Block Material	Static Load Capacity lbs (N)	Accuracy of Running Parallelism	Maximum Length inches (mm)	Self Lube Block Reservoir	Drop in Replacement to Other Same Size Brands
MR12	0.512 (13)	1.06 x 1.39 (27 x 35,4)	440C SS	780 (3465)	H grade	39.37 (1000)	standard	Yes
AR15	0.945 (24)	1.34 x 2.21 (34 x 56,1)	Alloy Steel	3,937 (17500)	H grade	118.11 (3000)	optional	Yes
HR25	1.575 (40)	1.89 x 3.16 (48 x 80,2)	Alloy Steel	8,190 (36400)	H grade	157.48 (4000)	optional	Yes

[More Information via the Web](#)




- * Miniature Rail
- * 2 rows of re-circulating balls
- * Equal loading in all directions
- * Dust proof design
- * SS bearing, rail, and balls
- * Self lube reservoir *standard*

Dimensions & Specifications:

Model Number	Dimensions (mm)														Block Weight (kg)	Rail Weight (kg/m)
	A	B	C	D	E	F	M x G	H	I	J	K	L	Q	N x O x P		
MR12	13	27	12	7.5	10	4.3	M3 x 3.5	35.4	22	15	20	25	7.5	6 x 3.5 x 4.5	0.034	0.602

Model Number	Dynamic Load Capacity (kN @ 50 km)	Static Load Capacity (kN)	Static Roll Moment M_r (Nm)	Static Pitch & Yaw Moment M_p & M_y (Nm)
MR12	2.908	3.465	21.50	12.90



- * Standard Load Rail
- * 4 rows of re-circulating balls
- * Equal loading in all directions
- * Dust proof design
- * Alloy steel bearing, rail, and balls
- * Self lube reservoir *optional*


[More Information via the Web](#)

Dimensions & Specifications:

Model Number	Dimensions (mm)																Block Weight (kg)	Rail Weight (kg/m)
	A	B	C	D	E	F	M x G	H	I	J	K	L	Q	N x O x P	R	S		
AR15	24	34	15	9.5	20.1	6	M4 x 7	56.1	39.5	26	26	60	15	7.5 x 4.5 x 5.3	4	10	0.140	1.290

Model Number	Dynamic Load Capacity (kN @ 50 km)	Static Load Capacity (kN)	Static Roll Moment M_r (Nm)	Static Pitch & Yaw Moment M_p & M_y (Nm)	
AR15	11.34	17.50	140	100	


[More Information via the Web](#)



- * Heavy Load Rail
- * 4 rows of re-circulating balls
- * Equal loading in all directions
- * Dust proof design
- * Alloy steel bearing, rail, and balls
- * Self lube reservoir *optional*

Dimensions & Specifications:

Model Number	Dimensions (mm)																Block Weight (kg)	Rail Weight (kg/m)
	A	B	C	D	E	F	M x G	H	I	J	K	L	Q	N x O x P	R	S		
HR25	40	48	23	12.5	33.6	8	M6 x 9	80.2	60.0	35	35	60	24	11 x 7 x 9	12	12	0.530	3.020

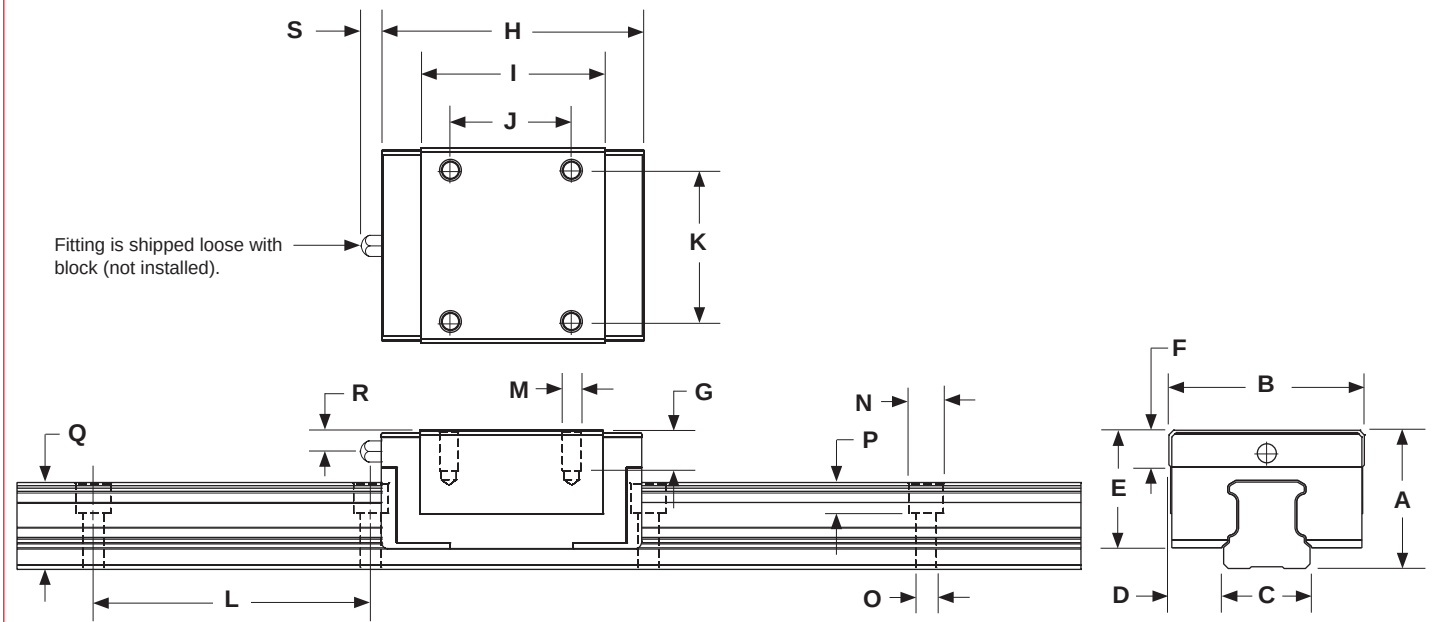

Model Number	Dynamic Load Capacity (kN @ 50 km)	Static Load Capacity (kN)	Static Roll Moment M_r (Nm)	Static Pitch & Yaw Moment M_p & M_y (Nm)	
HR25	23.68	36.40	410	300	

Features

RS Series

- * Rolled Ball Screw
- * Tapped Ball Nut
- * English Leads
- * English Diameters
- * Pre-loaded & Non-preloaded Nuts
- * Simple, Fixed and Rigid Housings
- * Available Screw Sizes
 - 0.500 inch dia., 0.200 inch lead
 - 0.500 inch dia., 0.500 inch lead
 - 0.625 inch dia., 0.200 inch lead
 - 0.625 inch dia., 1.000 inch lead
 - 0.750 inch dia., 0.200 inch lead
 - 0.750 inch dia., 0.500 inch lead
 - 1.000 inch dia., 0.250 inch lead
 - 1.000 inch dia., 0.500 inch lead
 - 1.000 inch dia., 1.000 inch lead
 - 1.500 inch dia., 0.250 inch lead
 - 1.500 inch dia., 0.500 inch lead
 - 1.500 inch dia., 1.000 inch lead
 - 1.500 inch dia., 2.000 inch lead

PS Series


- * Precision Rolled Ball Screw
- * Ground Ball Nut
- * English & Metric Leads
- * English & Metric Diameters
- * Pre-loaded & Non-preloaded Nuts
- * Simple, Fixed and Rigid Housings
- * Available Screw Sizes
 - 0.625 inch dia., 0.200 inch lead
 - 0.750 inch dia., 0.200 inch lead
 - 16 mm diameter, 5 mm lead
 - 16 mm diameter, 10 mm lead
 - 16 mm diameter, 16 mm lead
 - 20 mm diameter, 5 mm lead
 - 20 mm diameter, 20 mm lead

GS Series

- * Precision Ground Ball Screw
- * Ground Ball Nut
- * English & Metric Leads
- * English & Metric Diameters
- * Pre-loaded Nuts Only
- * Simple, Fixed and Rigid Housings
- * Available Screw Sizes
 - 0.625 inch dia., 0.200 inch lead
 - 0.750 inch dia., 0.200 inch lead
 - 16 mm diameter, 5 mm lead
 - 16 mm diameter, 16 mm lead
 - 20 mm diameter, 5 mm lead
 - 20 mm diameter, 20 mm lead


Features

Simple Support Housing




- * All Steel Construction
- * Black Oxide Finish
- * 1 Sealed Radial Bearing
- * No Lubrication Required
- * Base or Face Mounted

Fixed (LT) Support Housing




- * All Steel Construction
- * Black Oxide Finish
- * 2 Back to Back Sealed Radial Bearings
- * No Lubrication Required
- * Lip Seals
- * Base or Face Mounted
- * Motor Mount Options

Fixed (HT) Support Housing




- * All Steel Construction
- * Black Oxide Finish
- * 2 Back to Back Angular Contact Bearings
- * No Lubrication Required
- * Lip Seals
- * Base or Face Mounted
- * Motor Mount Options

Rigid Support Housing




- * All Steel Construction
- * Black Oxide Finish
- * 2 Separated Angular Contact Bearings
- * No Lubrication Required
- * Lip Seals
- * Base or Face Mounted
- * Motor Mount Options


Simple-Simple



Fixed-Simple



Rigid-Simple



Rigid-Rigid



Screw & Nut Specifications

Model Number	Nut Type	Lead Error inch/ft (mm/300 mm)	Screw Efficiency %	Backlash inches (mm)	Static Load lbs (kgf)	Dynamic Load 1 million inches lbs (kgf)	Dynamic Load 100 million inches lbs (kgf)
RS050020 0.500 inch dia. 0.200 inch lead	<i>Non-preloaded Ball</i>	< 0.003 (0,075)	90	< 0.008 (0,203)	9,400 (4263)	1,200 (544)	290 (131)
	<i>Preloaded Ball</i>	< 0.003 (0,075)	90	0	9,280 (4209)	1,080 (489)	261 (118)
	<i>Non-preloaded Turcite</i>	< 0.003 (0,075)	60	< 0.008 (0,203)	800 (362)	100 (45)	24 (11)
	<i>Preloaded Turcite</i>	< 0.003 (0,075)	60	0	720 (326)	90 (41)	21 (10)
RS050050 0.500 inch dia. 0.500 inch lead	<i>Non-preloaded Ball</i>	< 0.003 (0,075)	90	< 0.008 (0,203)	13,350 (6055)	2,200 (997)	530 (240)
	<i>Preloaded Ball</i>	< 0.003 (0,075)	90	0	13,130 (5955)	1,980 (898)	477 (216)
	<i>Non-preloaded Turcite</i>	< 0.003 (0,075)	60	< 0.008 (0,203)	800 (362)	100 (45)	24 (11)
	<i>Preloaded Turcite</i>	< 0.003 (0,075)	60	0	720 (326)	90 (41)	21 (10)

Other Specifications

Maximum Acceleration Rate	Ball nut: 772 inches/sec ² (19.6 m/sec ²) Turcite nut: 193 inches/sec ² (4.9 m/sec ²)
Maximum Speed	Ball nut: 3000 rpm Turcite nut: 1500 rpm
Screw Material	Right Hand Thread, Case Hardened Rc 58 Steel Rolled Ball Screw
Screw Extensions	304 Woodruff Keyways on Extensions from Support Housings
Maximum Screw Stock Length	72 inches (1828 mm)
Screw Weight	0.66 lbs/ft (9,1 kg/cm)
Support Housings	Steel with Black Oxide Finish, 45° Chamfer x .02 inch (0,50) all Straight Edges
Support Housing Features	Base or Face Mount with Integral Seals
Nut Flanges	Steel with Black Oxide Finish
Nut Flange Features	English or Metric Load Mounting Interface

[More Information via the Web](#)

Simple-Simple



Fixed-Simple



Rigid-Simple



Rigid-Rigid



Screw & Nut Specifications

Model Number	Nut Type	Lead Error inch/ft (mm/300 mm)	Screw Efficiency %	Backlash inches (mm)	Static Load lbs (kgf)	Dynamic Load 1 million inches lbs (kgf)	Dynamic Load 100 million inches lbs (kgf)
RS062020 0.625 inch dia. 0.200 inch lead	<i>Non-preloaded Ball</i>	< 0.003 (0,075)	90	< 0.008 (0,203)	7,450 (3379)	800 (363)	190 (86)
	<i>Preloaded Ball</i>	< 0.003 (0,075)	90	0	6,070 (2753)	720 (326)	171 (78)
	<i>Non-preloaded Turcite</i>	< 0.003 (0,075)	60	< 0.008 (0,203)	800 (362)	100 (45)	24 (11)
	<i>Preloaded Turcite</i>	< 0.003 (0,075)	60	0	720 (326)	90 (41)	21 (10)
RS062100 0.625 inch dia. 1.000 inch lead	<i>Non-preloaded Ball</i>	< 0.004 (0,099)	90	< 0.008 (0,203)	2,425 (1100)	590 (268)	140 (64)
	<i>Preloaded Ball</i>	< 0.004 (0,099)	90	0	2,425 (1100)	531 (241)	126 (57)
	<i>Non-preloaded Turcite</i>	< 0.004 (0,099)	60	< 0.008 (0,203)	800 (362)	100 (45)	24 (11)
	<i>Preloaded Turcite</i>	< 0.004 (0,099)	60	0	720 (326)	90 (41)	21 (10)

Other Specifications

Maximum Acceleration Rate	Ball nut: 772 inches/sec ² (19.6 m/sec ²) Turcite nut: 193 inches/sec ² (4.9 m/sec ²)
Maximum Speed	Ball nut: 3000 rpm Turcite nut: 1500 rpm
Screw Material Screw Extensions	Right Hand Thread, Case Hardened Rc 58 Steel Rolled Ball Screw 304 Woodruff Keyways on Extensions from Support Housings
Maximum Screw Stock Length Screw Weight	72 inches (1828 mm) 0.92 lbs/ft (12,7 kg/cm)
Support Housings Support Housing Features	Steel with Black Oxide Finish, 45° Chamfer x .02 inch (0,50) all Straight Edges Base or Face Mount with Integral Seals
Nut Flanges Nut Flange Features	Steel with Black Oxide Finish English or Metric Load Mounting Interface

[More Information via the Web](#)

Simple-Simple



Fixed-Simple



Rigid-Simple



Rigid-Rigid



Screw & Nut Specifications

Model Number	Nut Type	Lead Error inch/ft (mm/300 mm)	Screw Efficiency %	Backlash inches (mm)	Static Load lbs (kgf)	Dynamic Load 1 million inches lbs (kgf)	Dynamic Load 100 million inches lbs (kgf)
RS075020 0.750 inch dia. 0.200 inch lead	<i>Non-preloaded Ball</i>	< 0.003 (0,075)	90	< 0.008 (0,203)	18,800 (8527)	1,900 (862)	460 (208)
	<i>Preloaded Ball</i>	< 0.003 (0,075)	90	0	18,610 (8441)	1,710 (776)	414 (188)
	<i>Non-preloaded Turcite</i>	< 0.003 (0,075)	60	< 0.008 (0,203)	1,500 (680)	195 (88)	45 (20)
	<i>Preloaded Turcite</i>	< 0.003 (0,075)	60	0	1350 (612)	175 (79)	40 (18)
RS075050 0.750 inch dia. 0.500 inch lead	<i>Non-preloaded Ball</i>	< 0.003 (0,075)	90	< 0.008 (0,203)	24,200 (10977)	3,450 (1565)	820 (372)
	<i>Preloaded Ball</i>	< 0.003 (0,075)	90	0	23,855 (10820)	3,105 (1408)	738 (335)
	<i>Non-preloaded Turcite</i>	< 0.003 (0,075)	60	< 0.008 (0,203)	1,500 (680)	195 (88)	45 (20)
	<i>Preloaded Turcite</i>	< 0.003 (0,075)	60	0	1,350 (612)	175 (79)	40 (18)

Other Specifications

Maximum Acceleration Rate	Ball nut: 772 inches/sec ² (19.6 m/sec ²) Turcite nut: 193 inches/sec ² (4.9 m/sec ²)
Maximum Speed	Ball nut: 3000 rpm Turcite nut: 1500 rpm
Screw Material	Right Hand Thread, Case Hardened Rc 58 Steel Rolled Ball Screw
Screw Extensions	304 Woodruff Keyways on Extensions from Support Housings
Maximum Screw Stock Length	72 inches (1828 mm)
Screw Weight	1.42 lbs/ft (19,6 kg/cm)
Support Housings	Steel with Black Oxide Finish, 45° Chamfer x .02 inch (0,50) all Straight Edges
Support Housing Features	Base or Face Mount with Integral Seals
Nut Flanges	Steel with Black Oxide Finish
Nut Flange Features	English or Metric Load Mounting Interface

[More Information via the Web](#)

Simple-Simple



Fixed-Simple



Rigid-Simple



Rigid-Rigid



Screw & Nut Specifications


[More Information via the Web](#)

Model Number	Nut Type	Lead Error inch/ft (mm/300 mm)	Screw Efficiency %	Backlash inches (mm)	Static Load lbs (kgf)	Dynamic Load 1 million inches lbs (kgf)	Dynamic Load 100 million inches lbs (kgf)
RS100025 1.000 inch dia. 0.250 inch lead	<i>Non-preloaded Ball</i>	< 0.009 (0,229)	90	< 0.009 (0,229)	30,750 (13947)	3,350 (1519)	810 (367)
	<i>Preloaded Ball</i>	< 0.009 (0,229)	90	0	30,415 (13796)	3,015 (1367)	729 (330)
	<i>Non-preloaded Turcite</i>	< 0.009 (0,229)	60	< 0.009 (0,229)	1,500 (380)	195 (88)	45 (20)
	<i>Preloaded Turcite</i>	< 0.009 (0,229)	60	0	1,350 (612)	175 (79)	40 (18)
RS100050 1.000 inch dia. 0.500 inch lead	<i>Non-preloaded Ball</i>	< 0.009 (0,229)	90	< 0.009 (0,229)	32,300 (14650)	3,950 (1792)	970 (440)
	<i>Preloaded Ball</i>	< 0.009 (0,229)	90	0	31,905 (14471)	3,555 (1612)	873 (396)
	<i>Non-preloaded Turcite</i>	< 0.009 (0,229)	60	< 0.009 (0,229)	1,500 (680)	195 (88)	45 (20)
	<i>Preloaded Turcite</i>	< 0.009 (0,229)	60	0	1,350 (612)	175 (79)	40 (18)
RS100100 1.000 inch dia. 1.000 inch lead	<i>Non-preloaded Ball</i>	< 0.009 (0,229)	90	< 0.009 (0,229)	13,750 (6236)	2,250 (1020)	560 (254)
	<i>Preloaded Ball</i>	< 0.009 (0,229)	90	0	13,525 (6134)	2,025 (918)	504 (229)
	<i>Non-preloaded Turcite</i>	< 0.009 (0,229)	60	< 0.009 (0,229)	1,500 (680)	195 (88)	45 (20)
	<i>Preloaded Turcite</i>	< 0.009 (0,229)	60	0	1,350 (612)	175 (79)	40 (18)


Other Specifications

Maximum Acceleration Rate	Ball nut: 772 inches/sec ² (19.6 m/sec ²) Turcite nut: 193 inches/sec ² (4.9 m/sec ²)
Maximum Speed	Ball nut: 3000 rpm Turcite nut: 1500 rpm
Screw Material	Right Hand Thread, Case Hardened Rc 58 Steel Rolled Ball Screw
Screw Extensions	605 Woodruff Keyways on Extensions from Support Housings
Maximum Screw Stock Length	144 inches (3657 mm)
Screw Weight	2.23 lbs/ft (32,2 kg/cm)
Support Housings	Steel with Black Oxide Finish, 45° Chamfer x .03 inch (0,76) all Straight Edges
Support Housing Features	Base or Face Mount with Integral Seals
Nut Flanges	Steel with Black Oxide Finish
Nut Flange Features	English or Metric Load Mounting Interface


Simple-Simple



Fixed-Simple



Rigid-Simple



Rigid-Rigid



Screw & Nut Specifications

Model Number	Nut Type	Lead Error inch/ft (mm/300 mm)	Screw Efficiency %	Backlash inches (mm)	Static Load lbs (kgf)	Dynamic Load 1 million inches lbs (kgf)	Dynamic Load 100 million inches lbs (kgf)
RS150025 1.500 inch dia. 0.250 inch lead	<i>Non-preloaded Ball</i>	< 0.013 (0,330)	90	< 0.009 (0,229)	47,450 (21523)	4,050 (1837)	970 (440)
	<i>Preloaded Ball</i>	< 0.013 (0,330)	90	0	47,045 (21339)	3,645 (1653)	873 (396)
RS150050 1.500 inch dia. 0.500 inch lead	<i>Non-preloaded Ball</i>	< 0.013 (0,330)	90	< 0.009 (0,229)	102,300 (46402)	12,900 (5851)	3,100 (1406)
	<i>Preloaded Ball</i>	< 0.013 (0,330)	90	0	101,010 (45817)	11,610 (5266)	2,790 (1266)
RS150100 1.500 inch dia. 1.000 inch lead	<i>Non-preloaded Ball</i>	< 0.013 (0,330)	90	< 0.009 (0,229)	47,800 (21682)	8,250 (3742)	2,020 (916)
	<i>Preloaded Ball</i>	< 0.013 (0,330)	90	0	46,975 (21307)	7,425 (3368)	1,818 (825)
RS150200 1.500 inch dia. 2.000 inch lead	<i>Non-preloaded Ball</i>	< 0.013 (0,330)	90	< 0.009 (0,229)	31,250 (14175)	7,600 (3447)	1,850 (839)
	<i>Preloaded Ball</i>	< 0.013 (0,330)	90	0	28,240 (12809)	6,840 (3103)	1,665 (755)

Other Specifications

Maximum Acceleration Rate	Ball nut: 772 inches/sec ² (19.6 m/sec ²)
Maximum Speed	Ball nut: 3000 rpm
Screw Material	Right Hand Thread, Case Hardened Rc 58 Steel Rolled Ball Screw
Screw Extensions	605 Woodruff Keyways on Extensions from Support Housings
Maximum Screw Stock Length	144 inches (3657 mm)
Screw Weight	5.58 lbs/ft (77,1 kg/cm)
Support Housings	Steel with Black Oxide Finish, 45° Chamfer x .03 inch (0,76) all Straight Edges
Support Housing Features	Base or Face Mount with Integral Seals
Nut Flanges	Steel with Black Oxide Finish
Nut Flange Features	English or Metric Load Mounting Interface

[More Information via the Web](#)

Simple-Simple



Fixed-Simple



Rigid-Simple



Rigid-Rigid



Screw & Nut Specifications


Model Number	Nut Type	Lead Error inch/ft (mm/300 mm)	Screw Efficiency %	Backlash inches (mm)	Static Load lbs (kgf)	Dynamic Load 1 million inches lbs (kgf)	Dynamic Load 100 million inches lbs (kgf)
PS062020 0.625 inch dia. 0.200 inch lead	<i>Non-preloaded Ball</i>	< 0.002 (0,050)	90	< 0.003 (0,076)	2,700 (1224)	876 (397)	190 (86)
	<i>Preloaded Ball</i>	< 0.002 (0,050)	90	0	2,430 (1102)	788 (357)	171 (78)
PS16M05M 16 mm dia. 5 mm lead	<i>Non-preloaded Ball</i>	< 0.002 (0,050)	90	< 0.003 (0,076)	2,700 (1224)	876 (397)	190 (86)
	<i>Preloaded Ball</i>	< 0.002 (0,050)	90	0	2,430 (1102)	788 (357)	171 (78)
PS16M10M 16 mm dia. 10 mm lead	<i>Non-preloaded Ball</i>	< 0.002 (0,050)	90	< 0.003 (0,076)	2,630 (1192)	1,080 (489)	235 (106)
	<i>Preloaded Ball</i>	< 0.002 (0,050)	90	0	2,365 (1072)	972 (440)	211 (95)
PS16M16M 16 mm dia. 16 mm lead	<i>Non-preloaded Ball</i>	< 0.002 (0,050)	90	< 0.003 (0,076)	1,620 (734)	819 (371)	179 (81)
	<i>Preloaded Ball</i>	< 0.002 (0,050)	90	0	1,455 (659)	737 (334)	161 (73)

Other Specifications

Maximum Acceleration Rate	Ball nut: 772 inches/sec ² (19.6 m/sec ²)
Maximum Speed	Ball nut: 3000 rpm
Screw Material	Right Hand Thread, Case Hardened Rc 58 Steel Rolled Ball Screw
Screw Extensions	304 Woodruff Keyways on Extensions from Support Housings
Maximum Screw Stock Length	78.74 inches (2000 mm)
Screw Weight	0.87 lbs/ft (12,0 kg/cm)
Support Housings	Steel with Black Oxide Finish, 45° Chamfer x .02 inch (0,50) all Straight Edges
Support Housing Features	Base or Face Mount with Integral Seals
Nut Flanges	Steel with Black Oxide Finish
Nut Flange Features	English or Metric Load Mounting Interface

[More Information via the Web](#)


Simple-Simple



Fixed-Simple



Rigid-Simple



Rigid-Rigid



Screw & Nut Specifications


Model Number	Nut Type	Lead Error inch/ft (mm/300 mm)	Screw Efficiency %	Backlash inches (mm)	Static Load lbs (kgf)	Dynamic Load 1 million inches lbs (kgf)	Dynamic Load 100 million inches lbs (kgf)
PS075020 0.750 inch dia. 0.200 inch lead	<i>Non-preloaded Ball</i>	< 0.002 (0,050)	90	< 0.003 (0,076)	3,360 (1524)	964 (437)	210 (95)
	<i>Preloaded Ball</i>	< 0.002 (0,050)	90	0	3,025 (1372)	867 (393)	189 (86)
PS20M05M 20 mm dia. 5 mm lead	<i>Non-preloaded Ball</i>	< 0.002 (0,050)	90	< 0.003 (0,076)	3,990 (1809)	1,070 (485)	234 (106)
	<i>Preloaded Ball</i>	< 0.002 (0,050)	90	0	3,590 (1628)	960 (435)	210 (95)
PS20M20M 20 mm dia. 20 mm lead	<i>Non-preloaded Ball</i>	< 0.002 (0,050)	90	< 0.003 (0,076)	3,505 (1589)	1,293 (586)	283 (128)
	<i>Preloaded Ball</i>	< 0.002 (0,050)	90	0	3,150 (1428)	1,160 (526)	255 (116)

Other Specifications

Maximum Acceleration Rate	Ball nut: 772 inches/sec ² (19,6 m/sec ²)
Maximum Speed	Ball nut: 3000 rpm
Screw Material	Right Hand Thread, Case Hardened Rc 58 Steel Precision Rolled Ball Screw
Screw Extensions	304 Woodruff Keyways on Extensions from Support Housings
Maximum Screw Stock Length	118.11 inches (3000 mm)
Screw Weight	1.35 lbs/ft (18,7 kg/cm)
Support Housings	Steel with Black Oxide Finish, 45° Chamfer x .02 inch (0,50) all Straight Edges
Support Housing Features	Base or Face Mount with Integral Seals
Nut Flanges	Steel with Black Oxide Finish
Nut Flange Features	English or Metric Load Mounting Interface

[More Information via the Web](#)

Simple-Simple



Fixed-Simple



Rigid-Simple



Rigid-Rigid



Screw & Nut Specifications


Model Number	Nut Type	Lead Error inch/ft (mm/300 mm)	Screw Efficiency %	Backlash inches (mm)	Static Load lbs (kgf)	Dynamic Load 1 million inches lbs (kgf)	Dynamic Load 100 million inches lbs (kgf)
GS062020 0.625 inch dia. 0.200 inch lead	<i>Preloaded Ball</i>	< 0.0005 (0,012)	90	0	3,080 (1397)	987 (447)	216 (97)
GS16M05M 16 mm dia. 5 mm lead	<i>Preloaded Ball</i>	< 0.0005 (0,012)	90	0	3,080 (1397)	987 (447)	216 (97)
GS16M16M 16 mm dia. 16 mm lead	<i>Preloaded Ball</i>	< 0.0005 (0,012)	90	0	1,800 (816)	910 (816)	199 (90)

Other Specifications

Maximum Acceleration Rate	Ball nut: 772 inches/sec ² (19,6 m/sec ²)
Maximum Speed	Ball nut: 3000 rpm
Screw Material	Right Hand Thread, Case Hardened Rc 58 Steel Precision Rolled Ball Screw
Screw Extensions	304 Woodruff Keyways on Extensions from Support Housings
Maximum Screw Stock Length	45.27 inches (1150 mm)
Screw Weight	0.87 lbs/ft (12,0 kg/cm)
Support Housings	Steel with Black Oxide Finish, 45° Chamfer x .02 inch (0,50) all Straight Edges
Support Housing Features	Base or Face Mount with Integral Seals
Nut Flanges	Steel with Black Oxide Finish
Nut Flange Features	English or Metric Load Mounting Interface

[More Information via the Web](#)


Simple-Simple



Fixed-Simple



Rigid-Simple



Rigid-Rigid



Screw & Nut Specifications

Model Number	Nut Type	Lead Error inch/ft (mm/300 mm)	Screw Efficiency %	Backlash inches (mm)	Static Load lbs (kgf)	Dynamic Load 1 million inches lbs (kgf)	Dynamic Load 100 million inches lbs (kgf)
GS075020 0.750 inch dia. 0.200 inch lead	<i>Preloaded Ball</i>	< 0.0005 (0,012)	90	0	3,990 (1809)	1,070 (485)	234 (106)
GS20M05M 20 mm dia. 5 mm lead	<i>Preloaded Ball</i>	< 0.0005 (0,012)	90	0	3,990 (1809)	1,070 (485)	234 (106)
GS20M20M 20 mm dia. 20 mm lead	<i>Preloaded Ball</i>	< 0.0005 (0,012)	90	0	3,505 (1589)	1,293 (586)	283 (128)

Other Specifications


Maximum Acceleration Rate	Ball nut: 772 inches/sec ² (19,6 m/sec ²)
Maximum Speed	Ball nut: 3000 rpm
Screw Material	Right Hand Thread, Case Hardened Rc 58 Steel Precision Rolled Ball Screw
Screw Extensions	304 Woodruff Keyways on Extensions from Support Housings
Maximum Screw Stock Length	64.95 inches (1650 mm)
Screw Weight	1.35 lbs/ft (18,7 kg/cm)
Support Housings	Steel with Black Oxide Finish, 45° Chamfer x .02 inch (0,50) all Straight Edges
Support Housing Features	Base or Face Mount with Integral Seals
Nut Flanges	Steel with Black Oxide Finish
Nut Flange Features	English or Metric Load Mounting Interface

[More Information via the Web](#)


Standard Features

- ❑ Compact 2.875 inches (73 mm) wide by 2.375 inches (60 mm) tall
- ❑ Travel lengths from 2 inches (50 mm) to 60 inches (1520 mm)
- ❑ Threaded stainless steel inserts in carriage for load mounting
- ❑ 0° F to +185° F (-18° C to +85° C) operating temperature
- ❑ Recirculating linear ball bearing system
- ❑ Precision ground square rail design
- ❑ 1 rail, 1 or 2 bearing carriages

130-CP0 series

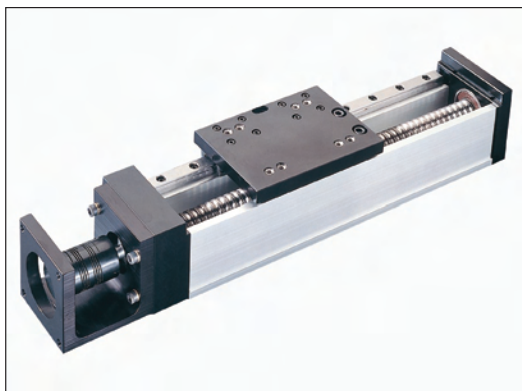

130-CP1 series

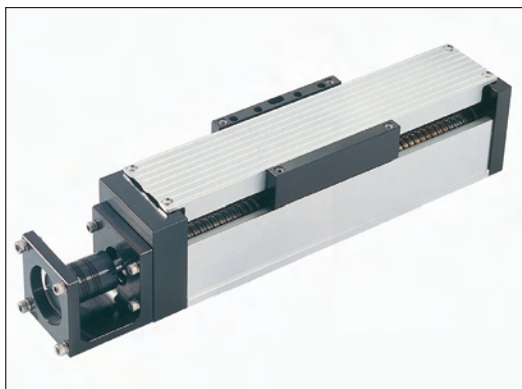

130-CP2 series



Options

- ❑ Chrome plated linear bearings, rails and screws
- ❑ AUTOCAD® drawings available via the internet
- ❑ End of travel (EOT) and home switches wired
- ❑ Adapter brackets for non-NEMA motors
- ❑ Linear and rotary incremental encoders
- ❑ NEMA 23 & 34 motor wrap packages
- ❑ NEMA 34 adapter bracket
- ❑ Power-off electric brakes
- ❑ Carriage adapter plates
- ❑ Vertical angle brackets
- ❑ Turcite nut options
- ❑ Motor couplings
- ❑ Cover plates
- ❑ Hand crank

❑ Ball screws:

Rolled - Non-preloaded & Preloaded Nuts:

- 0.625 inch diameter, 0.200 inch lead
- * 0.500 inch diameter, 0.500 inch lead
- 0.625 inch diameter, 1.000 inch lead

Precision - Non-preloaded & Preloaded Nuts:

- 0.625 inch diameter, 0.200 inch lead
- 16 mm diameter, 5 mm lead
- * 16 mm diameter, 10 mm lead
- * 16 mm diameter, 16 mm lead

Ground - Preloaded Nuts Only:

- 0.625 inch diameter, 0.200 inch lead
- 16 mm diameter, 5 mm lead
- 16 mm diameter, 16 mm lead

* (Reduction of travel with preloaded nut)

❑ Acme screws:

Rolled - Non-preloaded & Preloaded Nuts:

- 0.625 inch diameter, 0.100 inch lead
- 0.625 inch diameter, 0.200 inch lead
- 16 mm diameter, 4 mm lead

Specifications

Load Capacities		One (1) Bearing Carriage		Two (2) Bearing Carriage	
Dynamic Horizontal	2 million inches (50 km) of travel	100 lbs	(45 kg)	200 lbs	(90 kg)
Dynamic Horizontal	100 million inches (2540 km) of travel	27 lbs	(12 kg)	54 lbs	(24 kg)
Static Horizontal		200 lbs	(90 kg)	400 lbs	(180 kg)
Dynamic Roll Moment	2 million inches (50 km) of travel	8 ft-lbs	(11 N-m)	16 ft-lbs	(22 N-m)
Dynamic Roll Moment	100 million inches (2540 km) of travel	2 ft-lbs	(3 N-m)	4 ft-lbs	(5 N-m)
Static Roll Moment		14 ft-lbs	(19 N-m)	28 ft-lbs	(38 N-m)
Dyn. Pitch & Yaw Moment	2 million inches (50 km) of travel	4 ft-lbs	(5,4 N-m)	15 ft-lbs	(20 N-m)
Dyn. Pitch & Yaw Moment	100 million inches (2540 km) of travel	1 ft-lbs	(1,5 N-m)	4 ft-lbs	(5 N-m)
Static Pitch & Yaw Moment		8 ft-lbs	(10 N-m)	30 ft-lbs	(40 N-m)
Each Bearing Dyn. Capacity	2 million inches (50 km) of travel	100 lbs	(45 kg)	100 lbs	(45 kg)
Each Bearing Dyn. Capacity	100 million inches (2540 km) of travel	27 lbs	(12 kg)	27 lbs	(12 kg)
Each Bearing Static Load Capacity		200 lbs	(90 kg)	200 lbs	(90 kg)
Thrust Force Capacity	10 million screw revolutions	665 lbs	(302 kg)	665 lbs	(302 kg)
Thrust Force Capacity	500 million screw revolutions	180 lbs	(82 kg)	180 lbs	(82 kg)
Maximum Acceleration		50 in/sec ²	(1,3 m/sec ²)	150 in/sec ²	(3,8 m/sec ²)
d₂	Center to center distance (spacing) of each bearing on a single rail	-		2.088 in	(53,0 mm)
d_r CP0 version	Center distance of the bearing to top of carriage plate surface	0.750 in	(19,1 mm)	0.750 in	(19,1 mm)
d_r CP1 version	Center distance of the bearing to top of carriage plate surface	1.375 in	(34,9 mm)	1.375 in	(34,9 mm)


Other	For One (1) & Two (2) Bearing Carriages
Table Material	Base, Carriage, End Plates, & Cover Plate option - 6061 anodized aluminum
Linear Rail Material	Stainless Steel
Screw Material	Acme Screw - Stainless Steel
Screw Material	Rolled Ball, Precision Ball, & Ground Ball - Case Hardened Steel
Unidirectional Repeatability	+/- 0.0001 in (2,5 microns) to +/- 0.0002 in (5 microns) - depends on selected screw
Bidirectional Repeatability	+/- 0.0001 in (2,5 microns) to +/- 0.0082 in (208 microns) - depends on selected screw
Straightness	< 0.00013 in/in (< 3,30 microns/25mm)
Flatness	< 0.00013 in/in (< 3,30 microns/25mm)
Orthogonality (multi-axis systems)	< 30 arc-seconds
Friction Coefficient	< 0.01
Motor Mount	NEMA 23 & 34 Mounts, Metric Mounts, Motor Wraps, and Hand Crank Option
Coupling	Three (3) different styles available

[More Information via the Web](#)


Standard Features

- ❑ Compact 3.50 inches (89 mm) wide by 2.375 inches (60 mm) tall - 100 series
- ❑ Compact 5.25 inches (133 mm) wide by 2.375 inches (60 mm) tall - 110 series
- ❑ Travel lengths from 2 inches (50 mm) to 60 inches (1520 mm)
- ❑ Threaded stainless steel inserts in carriage for load mounting
- ❑ 0° F to +185° F (-18° C to +85° C) operating temperature
- ❑ Recirculating linear ball bearing system
- ❑ Precision ground square rail design
- ❑ 2 rails, 2 or 4 bearing carriages


100-CP0 series

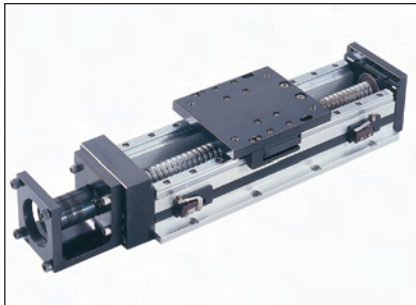


100-CP1 series

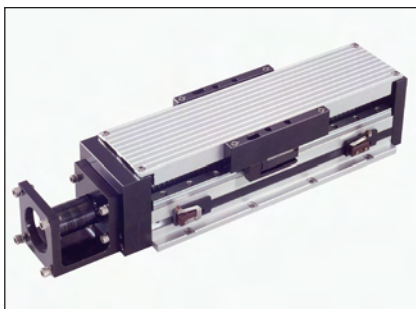

100-CP2 series

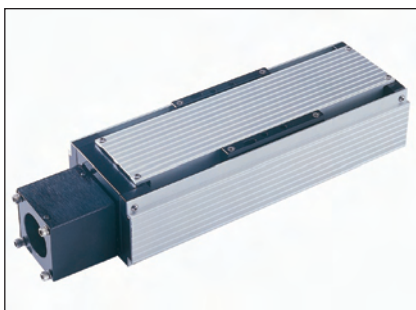

110-WC1 series

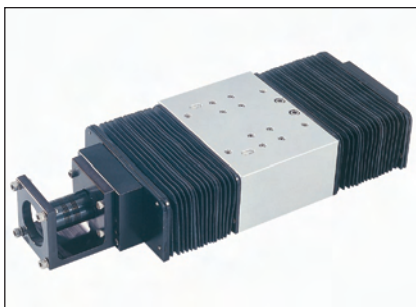

Options

- ❑ Chrome plated linear bearings, rails and screws
- ❑ End of travel (EOT) and home switches wired
- ❑ CAD drawings available via the internet
- ❑ Adapter brackets for non-NEMA motors
- ❑ Linear and rotary incremental encoders
- ❑ NEMA 23 & 34 motor wrap packages
- ❑ NEMA 34 adapter bracket
- ❑ Power-off electric brakes
- ❑ Carriage adapter plates
- ❑ Vertical angle bracket
- ❑ Turcite nut option
- ❑ Motor couplings
- ❑ Cover plates
- ❑ Waycovers
- ❑ Hand crank

❑ Ball screws:

Rolled - Non-preloaded & Preloaded Nuts:

- 0.625 inch diameter, 0.200 inch lead
- * 0.500 inch diameter, 0.500 inch lead
- 0.625 inch diameter, 1.000 inch lead

Precision - Non-preloaded & Preloaded Nuts:

- 0.625 inch diameter, 0.200 inch lead
- 16 mm diameter, 5 mm lead
- * 16 mm diameter, 10 mm lead
- * 16 mm diameter, 16 mm lead

Ground - Preloaded Nuts Only:

- 0.625 inch diameter, 0.200 inch lead
- 16 mm diameter, 5 mm lead
- 16 mm diameter, 16 mm lead

* (Reduction of travel with preloaded nut)

❑ Acme screws:

Rolled - Non-preloaded & Preloaded Nuts:

- 0.625 inch diameter, 0.100 inch lead
- 0.625 inch diameter, 0.200 inch lead
- 16 mm diameter, 4 mm lead

Specifications

Load Capacities		Two (2) Bearing Carriage		Four (4) Bearing Carriage	
Dynamic Horizontal	2 million inches (50 km) of travel	1,550 lbs	(703 kg)	3,100 lbs	(1406 kg)
Dynamic Horizontal	100 million inches (2540 km) of travel	415 lbs	(188 kg)	840 lbs	(381 kg)
Static Horizontal		2,360 lbs	(1070 kg)	4,720 lbs	(2140 kg)
Dynamic Roll Moment	2 million inches (50 km) of travel	140 ft-lbs	(190 N-m)	280 ft-lbs	(379 N-m)
Dynamic Roll Moment	100 million inches (2540 km) of travel	37 ft-lbs	(50 N-m)	75 ft-lbs	(101 N-m)
Static Roll Moment		210 ft-lbs	(285 N-m)	425 ft-lbs	(576 N-m)
Dyn. Pitch & Yaw Moment	2 million inches (50 km) of travel	18 ft-lbs	(24 N-m)	240 ft-lbs	(325 N-m)
Dyn. Pitch & Yaw Moment	100 million inches (2540 km) of travel	5 ft-lbs	(7 N-m)	65 ft-lbs	(88 N-m)
Static Pitch & Yaw Moment		30 ft-lbs	(41 N-m)	365 ft-lbs	(495 N-m)
Each Bearing Dyn. Capacity	2 million inches (50 km) of travel	775 lbs	(351 kg)	775 lbs	(351 kg)
Each Bearing Dyn. Capacity	100 million inches (2540 km) of travel	208 lbs	(94 kg)	208 lbs	(94 kg)
Each Bearing Static Load Capacity		1,180 lbs	(535 kg)	1,180 lbs	(535 kg)
Thrust Force Capacity	10 million screw revolutions	665 lbs	(302 kg)	665 lbs	(302 kg)
Thrust Force Capacity	500 million screw revolutions	180 lbs	(82 kg)	180 lbs	(82 kg)
Maximum Acceleration		386 in/sec ²	(9,8 m/sec ²)	772 in/sec ²	(19,6 m/sec ²)
d₁	Center to center distance (spread) between the two rails	2.375 in	(60,3 mm)	2.375 in	(60,3 mm)
d₂	Center to center distance (spacing) of the bearings on a single rail	-		2.088 in	(53,0 mm)
d_r CP0 version	Center distance of the bearing to top of carriage plate surface	.750 in	(19,1 mm)	.750 in	(19,1 mm)
d_r CP1 version	Center distance of the bearing to top of carriage plate surface	1.375 in	(34,9 mm)	1.375 in	(34,9 mm)


Other	For Two (2) & Four (4) Bearing Carriages
Table Material	Base, Carriage, End Plates, & Cover Plate option - 6061 anodized aluminum
Linear Rail Material	Stainless Steel
Screw Material	Acme Screw - Stainless Steel
Screw Material	Rolled Ball, Precision Ball, & Ground Ball - Case Hardened Steel
Unidirectional Repeatability	+/- 0.0001 in (2,5 microns) to +/- 0.0002 in (5 microns) - depends on selected screw
Bidirectional Repeatability	+/- 0.0001 in (2,5 microns) to +/- 0.0082 in (208 microns) - depends on selected screw
Straightness	< 0.00013 in/in (< 3,30 microns/25mm)
Flatness	< 0.00013 in/in (< 3,30 microns/25mm)
Orthogonality (multi-axis systems)	< 30 arc-seconds
Friction Coefficient	< 0.01
Motor Mount	NEMA 23 & 34 Mounts, Metric Mounts, Motor Wraps, and Hand Crank Option
Coupling	Three (3) different styles available
Waycover Material (110 series)	Hypilon Polyester Bellows firmly mounted to carriage & end plates

[More Information via the Web](#)


Standard Features

- ❑ Compact 8.0 inches (203 mm) wide by 2.930 inches (74 mm) tall
- ❑ Travel lengths from 6 inches (150 mm) to 60 inches (1520 mm)
- ❑ Threaded stainless steel inserts in carriage for load mounting
- ❑ 0° F to +185° F (-18° C to +85° C) operating temperature
- ❑ 2 rail, 4 bearing, 6 & 12 inch long carriages
- ❑ Recirculating linear ball bearing system
- ❑ Precision ground round rail design

90-WC0 series

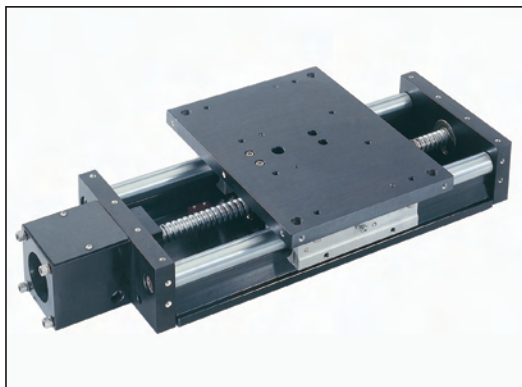

90-WC1 series

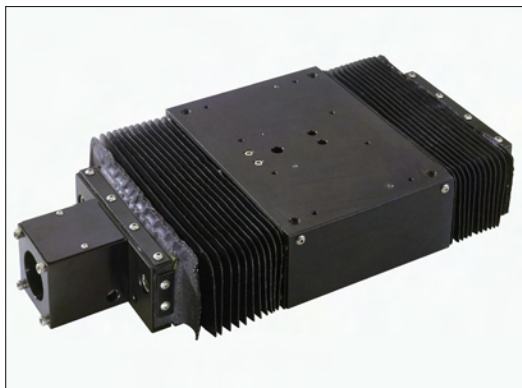

Options

- ❑ Chrome plated linear bearings, rails and screws
- ❑ End of travel (EOT) and home switches wired
- ❑ CAD drawings available via the internet
- ❑ Adapter brackets for non-NEMA motors
- ❑ Linear and rotary incremental encoders
- ❑ NEMA 23 & 34 motor wrap packages
- ❑ NEMA 34 adapter bracket
- ❑ Power-off electric brakes
- ❑ Vertical angle bracket
- ❑ Turcite nut option
- ❑ Motor couplings
- ❑ Hand crank
- ❑ Ball screws:

Rolled - Non-preloaded & Preloaded Nuts:

0.625 inch diameter, 0.200 inch lead
 0.625 inch diameter, 1.000 inch lead
 0.750 inch diameter, 0.200 inch lead
 0.750 inch diameter, 0.500 inch lead
 1.000 inch diameter, 0.250 inch lead
 1.000 inch diameter, 0.500 inch lead
 1.000 inch diameter, 1.000 inch lead

Precision - Non-preloaded & Preloaded Nuts:

0.625 inch diameter, 0.200 inch lead
 16 mm diameter, 5 mm lead
 16 mm diameter, 10 mm lead
 16 mm diameter, 16 mm lead
 0.750 inch diameter, 0.200 inch lead
 20 mm diameter, 5 mm lead
 20 mm diameter, 20 mm lead

Ground - Preloaded Nuts Only:

0.625 inch diameter, 0.200 inch lead
 16 mm diameter, 5 mm lead
 16 mm diameter, 16 mm lead

- ❑ Acme screws:

Rolled - Non-preloaded & Preloaded Nuts:

0.625 inch diameter, 0.100 inch lead
 0.625 inch diameter, 0.200 inch lead

Specifications

Load Capacities		6 inch (4 bearing) Carriage		12 inch (4 bearing) Carriage	
Dynamic Horizontal ⁽¹⁾	2 million inches (50 km) of travel	3,300 lbs	(1496 kg)	3,300 lbs	(1496 kg)
Dynamic Horizontal ⁽¹⁾	100 million inches (2540 km) of travel	885 lbs	(401 kg)	885 lbs	(401 kg)
Static Horizontal ⁽¹⁾		5,000 lbs	(2268 kg)	5,000 lbs	(2268 kg)
Dynamic Roll Moment ⁽¹⁾	2 million inches (50 km) of travel	380 ft-lbs	(515 N-m)	380 ft-lbs	(515 N-m)
Dynamic Roll Moment ⁽¹⁾	100 million inches (2540 km) of travel	102 ft-lbs	(138 N-m)	102 ft-lbs	(138 N-m)
Static Roll Moment ⁽¹⁾		575 ft-lbs	(780 N-m)	575 ft-lbs	(780 N-m)
Dyn. Pitch & Yaw Moment ⁽¹⁾	2 million inches (50 km) of travel	150 ft-lbs	(203 N-m)	525 ft-lbs	(712 N-m)
Dyn. Pitch & Yaw Moment ⁽¹⁾	100 million inches (2540 km) of travel	41 ft-lbs	(55 N-m)	141 ft-lbs	(191 N-m)
Static Pitch & Yaw Moment ⁽¹⁾		225 ft-lbs	(305 N-m)	790 ft-lbs	(1071 N-m)
Each Bearing Dyn. Cap. ⁽¹⁾	2 million inches (50 km) of travel	825 lbs	(374 kg)	825 lbs	(374 kg)
Each Bearing Dyn. Cap. ⁽¹⁾	100 million inches (2540 km) of travel	222 lbs	(100 kg)	222 lbs	(100 kg)
Each Bearing Static Load Capacity ⁽¹⁾		1,250 lbs	(567 kg)	1,250 lbs	(567 kg)
Thrust Force Capacity	10 million screw revolutions	895 lbs	(406 kg)	895 lbs	(406 kg)
Thrust Force Capacity	500 million screw revolutions	240 lbs	(109 kg)	240 lbs	(109 kg)
Maximum Acceleration		772 in/sec ²	(19,6 m/sec ²)	772 in/sec ²	(19,6 m/sec ²)
d₁	Center to center distance (spread) between the two rails	4.500 in	(114,3 mm)	4.500 in	(114,3 mm)
d₂	Center to center distance (spacing) of the bearings on a single rail	2.500 in	(63,5 mm)	8.620 in	(218,9 mm)
d_r	Center distance of the bearing to top of carriage plate surface	1.437 in	(36,5 mm)	1.437 in	(36,5 mm)

Other	For Six (6) & Twelve (12) Inch Carriages
Table Material	Base, Carriage & End Plates - 6061 anodized aluminum
Linear Rail Material	Case Hardened Steel
Screw Material	Acme Screw - Stainless Steel
Screw Material	Rolled Ball, Precision Ball, & Ground Ball - Case Hardened Steel
Unidirectional Repeatability	+/- 0.0002 in (5 microns)
Bidirectional Repeatability	+/- 0.0002 in (5 microns) to +/- 0.0092 in (234 microns) - depends on selected screw
Straightness	< 0.00016 in/in (< 4,06 microns/25mm)
Flatness	< 0.00016 in/in (< 4,06 microns/25mm)
Orthogonality (multi-axis systems)	< 30 arc-seconds
Friction Coefficient	< 0.01
Motor Mount	NEMA 23 & 34 Mounts, Metric Mounts, Motor Wraps, and Hand Crank Option
Coupling	Three (3) different styles available
Waycover Material	Hypilon Polyester Bellows firmly mounted to carriage & end plates

Footnotes:


(1) Derate value by 50 % when load is applied to the open end of the bearing (such as in moment loads and inverted configurations).

[More Information via the Web](#)


Standard Features

- ❑ Compact 5.50 inches (139,7 mm) wide by 2.953 inches (75 mm) tall - 160 series
- ❑ Compact 6.00 inches (152,4 mm) wide by 2.953 inches (75 mm) tall - 170 series
- ❑ T-slot or threaded stainless steel inserts in carriage for load mounting
- ❑ Travel lengths from 6 inches (150 mm) to 60 inches (1520 mm)
- ❑ 0° F to +185° F (-18° C to +85° C) operating temperature
- ❑ 2 rails, 2 or 4 bearing, 6 inch long carriage
- ❑ Recirculating linear ball bearing system
- ❑ Precision ground square rail design


160-CP0 series

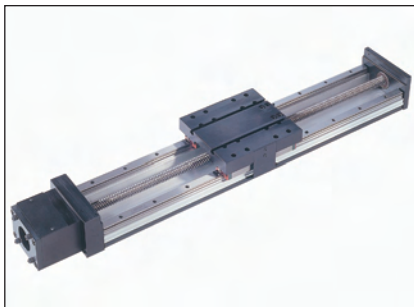

170-CP0 series

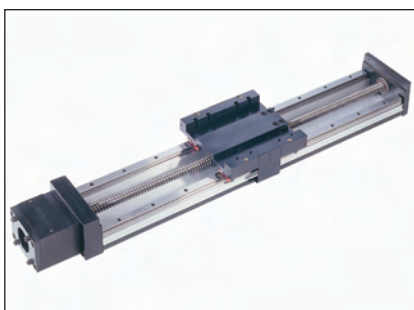

170-CP1 series

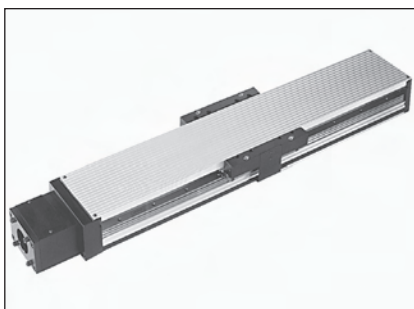

170-CP2 series



Options

- ❑ Chrome plated linear bearings, rails and screws
- ❑ End of travel (EOT) and home switches wired
- ❑ CAD drawings available via the internet
- ❑ Adapter brackets for non-NEMA motors
- ❑ Linear and rotary incremental encoders
- ❑ NEMA 23 & 34 motor wrap packages
- ❑ NEMA 34 adapter bracket
- ❑ Power-off electric brakes
- ❑ Turcite nut option
- ❑ Ball screws:

Rolled - Non-preloaded & Preloaded Nuts:

- 0.625 inch diameter, 0.200 inch lead
- 0.625 inch diameter, 1.000 inch lead
- 0.750 inch diameter, 0.200 inch lead
- 0.750 inch diameter, 0.500 inch lead

Precision - Non-preloaded & Preloaded Nuts:

- 0.625 inch diameter, 0.200 inch lead
- 16 mm diameter, 5 mm lead
- 16 mm diameter, 10 mm lead
- 16 mm diameter, 16 mm lead
- 0.750 inch diameter, 0.200 inch lead
- 20 mm diameter, 5 mm lead
- 20 mm diameter, 20 mm lead

Ground - Preloaded Nuts Only:

- 0.625 inch diameter, 0.200 inch lead
- 0.625 inch diameter, 0.500 inch lead

- ❑ Acme screws:

Rolled - Non-preloaded & Preloaded Nuts:

- 0.625 inch diameter, 0.100 inch lead
- 0.625 inch diameter, 0.200 inch lead

170-WC1 series



Specifications

Load Capacities		Two (2) Bearing Carriage		Four (4) Bearing Carriage	
Dynamic Horizontal	2 million inches (50 km) of travel	3,890 lbs	(1765 kgf)	7,780 lbs	(3530 kgf)
Dynamic Horizontal	100 million inches (2540 km) of travel	1,045 lbs	(474 kgf)	2,090 lbs	(948 kgf)
Static Horizontal		5,830 lbs	(2645 kgf)	11,660 lbs	(5290 kgf)
Dynamic Roll Moment	2 million inches (50 km) of travel	510 ft-lbs	(690 N-m)	1,025 ft-lbs	(1390 N-m)
Dynamic Roll Moment	100 million inches (2540 km) of travel	137 ft-lbs	(185 N-m)	275 ft-lbs	(370 N-m)
Static Roll Moment		915 ft-lbs	(1240 N-m)	1,830 ft-lbs	(2480 N-m)
Dyn. Pitch & Yaw Moment	2 million inches (50 km) of travel	71 ft-lbs	(96 N-m)	930 ft-lbs	(1260 N-m)
Dyn. Pitch & Yaw Moment	100 million inches (2540 km) of travel	19 ft-lbs	(26 N-m)	250 ft-lbs	(339 N-m)
Static Pitch & Yaw Moment		126 ft-lbs	(170 N-m)	1,670 ft-lbs	(2260 N-m)
Each Bearing Dyn. Capacity	2 million inches (50 km) of travel	1,945 lbs	(882 kgf)	1,945 lbs	(882 kgf)
Each Bearing Dyn. Capacity	100 million inches (2540 km) of travel	525 lbs	(238 kgf)	525 lbs	(238 kgf)
Each Bearing Static Load Capacity		2,910 lbs	(1320 kgf)	2,910 lbs	(1320 kgf)
Thrust Force Capacity	10 million screw revolutions	895 lbs	(406 kgf)	895 lbs	(406 kgf)
Thrust Force Capacity	500 million screw revolutions	240 lbs	(109 kgf)	240 lbs	(109 kgf)
Maximum Acceleration		386 in/sec ²	(9,8 m/sec ²)	772 in/sec ²	(19,6 m/sec ²)
d₁	Center to center distance (spread) between the two rails	3.660 in	(92,96 mm)	3.660 in	(92,96 mm)
d₂	Center to center distance (spacing) of the bearings on a single rail	-		3.290 in	(83,57 mm)
d_r	Center distance of the bearing to top of carriage plate surface	1.320 in	(33,53 mm)	1.320 in	(33,53 mm)


Other	For Two (2) & Four (4) Bearing Carriages
Table Material	Base, Carriage, End Plates & Cover Plate Option - 6061 anodized aluminum
Linear Rail Material	Case Hardened Steel
Screw Material	Acme Screw - Stainless Steel
Screw Material	Rolled Ball, Precision Ball, & Ground Ball - Case Hardened Steel
Unidirectional Repeatability	+/- 0.0002 in (5 microns)
Bidirectional Repeatability	+/- 0.0002 in (5 microns) to +/- 0.0082 in (208 microns) - depends on selected screw
Straightness	< 0.00016 in/in (< 4,06 microns/25mm)
Flatness	< 0.00016 in/in (< 4,06 microns/25mm)
Orthogonality (multi-axis systems)	< 30 arc-seconds
Friction Coefficient	< 0.01
Motor Mount	NEMA 23 & 34 Mounts, Metric Mounts, Motor Wraps, and Hand Crank Option
Coupling	Three (3) different styles available
Waycover Material	Hypilon Polyester Bellows mounted to carriage & end plates

[More Information via the Web](#)


Standard Features

- ❑ Compact 6.00 inches (152,4 mm) wide by 2.953 inches (75 mm) tall
- ❑ Threaded stainless steel inserts in carriage for load mounting
- ❑ Travel lengths from 6 inches (150 mm) to 60 inches (1520 mm)
- ❑ 0° F to +185° F (-18° C to +85° C) operating temperature
- ❑ 2 rails, 4 or 6 bearing, 12 inch long carriage
- ❑ Recirculating linear ball bearing system
- ❑ Precision ground square rail design

170-CP0 series

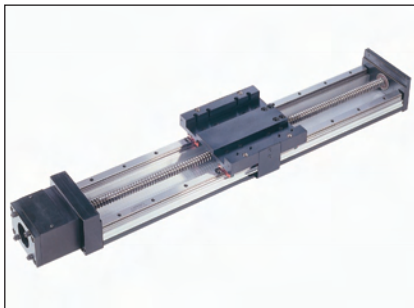

170-CP1 series

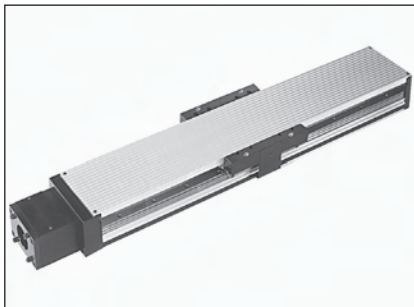

170-CP2 series



170-WC1 series



Options

- ❑ Chrome plated linear bearings, rails and screws
- ❑ End of travel (EOT) and home switches wired
- ❑ CAD drawings available via the internet
- ❑ Adapter brackets for non-NEMA motors
- ❑ Linear and rotary incremental encoders
- ❑ NEMA 23 & 34 motor wrap packages
- ❑ NEMA 34 adapter bracket
- ❑ Power-off electric brakes
- ❑ Turcite nut option
- ❑ Ball screws:

Rolled - Non-preloaded & Preloaded Nuts:

- 0.625 inch diameter, 0.200 inch lead
- 0.625 inch diameter, 1.000 inch lead
- 0.750 inch diameter, 0.200 inch lead
- 0.750 inch diameter, 0.500 inch lead

Precision - Non-preloaded & Preloaded Nuts:

- 0.625 inch diameter, 0.200 inch lead
- 16 mm diameter, 5 mm lead
- 16 mm diameter, 10 mm lead
- 16 mm diameter, 16 mm lead
- 0.750 inch diameter, 0.200 inch lead
- 20 mm diameter, 5 mm lead
- 20 mm diameter, 20 mm lead

Ground - Preloaded Nuts Only:

- 0.625 inch diameter, 0.200 inch lead
- 0.625 inch diameter, 0.500 inch lead

- ❑ Acme screws:

Rolled - Non-preloaded & Preloaded Nuts:

- 0.625 inch diameter, 0.100 inch lead
- 0.625 inch diameter, 0.200 inch lead

Specifications

Load Capacities		Four (4) Bearing Carriage		Six (6) Bearing Carriage	
Dynamic Horizontal	2 million inches (50 km) of travel	7,780 lbs	(3530 kgf)	11,660 lbs	(5280 kgf)
Dynamic Horizontal	100 million inches (2540 km) of travel	2,090 lbs	(948 kgf)	3,135 lbs	(1420 kgf)
Static Horizontal		11,660 lbs	(5290 kgf)	17,500 lbs	(7930 kgf)
Dynamic Roll Moment	2 million inches (50 km) of travel	1,025 ft-lbs	(1390 N-m)	1,540 ft-lbs	(2085 N-m)
Dynamic Roll Moment	100 million inches (2540 km) of travel	275 ft-lbs	(370 N-m)	410 ft-lbs	(555 N-m)
Static Roll Moment		1,830 ft-lbs	(2480 N-m)	2,750 ft-lbs	(3725 N-m)
Dyn. Pitch & Yaw Moment	2 million inches (50 km) of travel	2,160 ft-lbs	(2925 N-m)	2,235 ft-lbs	(3030 N-m)
Dyn. Pitch & Yaw Moment	100 million inches (2540 km) of travel	580 ft-lbs	(785 N-m)	600 ft-lbs	(810 N-m)
Static Pitch & Yaw Moment		3,860 ft-lbs	(5230 N-m)	3,980 ft-lbs	(5395 N-m)
Each Bearing Dyn. Capacity	2 million inches (50 km) of travel	1,945 lbs	(882 kgf)	1,945 lbs	(882 kgf)
Each Bearing Dyn. Capacity	100 million inches (2540 km) of travel	525 lbs	(238 kgf)	525 lbs	(238 kgf)
Each Bearing Static Load Capacity		2,910 lbs	(1320 kgf)	2,910 lbs	(1320 kgf)
Thrust Force Capacity	10 million screw revolutions	895 lbs	(406 kgf)	895 lbs	(406 kgf)
Thrust Force Capacity	500 million screw revolutions	240 lbs	(109 kgf)	240 lbs	(109 kgf)
Maximum Acceleration		772 in/sec ²	(19,6 m/sec ²)	772 in/sec ²	(19,6 m/sec ²)
d₁	Center to center distance (spread) between the two rails	3.660 in	(92,96 mm)	3.660 in	(92,96 mm)
d₂	Center to center distance (spacing) of the bearings on a single rail	9.290 in	(235,97 mm)	4.645 in	(117,98 mm)
d_r	Center distance of the bearing to top of carriage plate surface	1.320 in	(33,53 mm)	1.320 in	(33,53 mm)


Other	For Four (4) & Six (6) Bearing Carriages
Table Material	Base, Carriage, End Plates & Cover Plate Option - 6061 anodized aluminum
Linear Rail Material	Case Hardened Steel
Screw Material	Acme Screw - Stainless Steel
Screw Material	Rolled Ball, Precision Ball, & Ground Ball - Case Hardened Steel
Unidirectional Repeatability	+/- 0.0002 in (5 microns)
Bidirectional Repeatability	+/- 0.0002 in (5 microns) to +/- 0.0082 in (208 microns) - depends on selected screw
Straightness	< 0.00016 in/in (< 4,06 microns/25mm)
Flatness	< 0.00016 in/in (< 4,06 microns/25mm)
Orthogonality (multi-axis systems)	< 30 arc-seconds
Friction Coefficient	< 0.01
Motor Mount	NEMA 23 & 34 Mounts, Metric Mounts, Motor Wraps, and Hand Crank Option
Coupling	Three (3) different styles available
Waycover Material	Hypilon Polyester Bellows mounted to carriage & end plates

[More Information via the Web](#)

Standard Features

- ❑ Compact 6.750 inches (171 mm) wide by 2.625 inches (67 mm) tall
- ❑ Travel lengths from 6 inches (150 mm) to 62 inches (1570 mm)
- ❑ Threaded stainless steel inserts in carriage for load mounting
- ❑ 0° F to +185° F (-18° C to +85° C) operating temperature
- ❑ 2 rail, 2 & 4 bearing, 4 & 8 inch long carriages
- ❑ Recirculating linear ball bearing system
- ❑ Precision ground square rail design

150-WC0 series

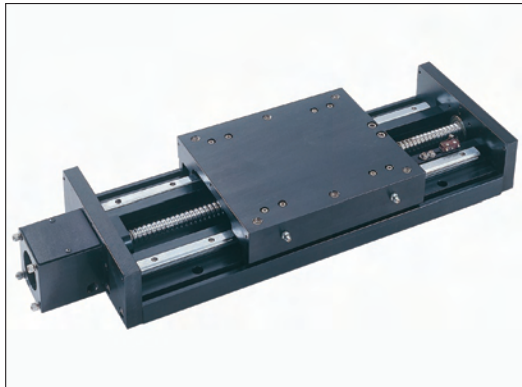

150-WC1 series



Options

- ❑ Chrome plated linear bearings, rails and screws
- ❑ End of travel (EOT) and home switches wired
- ❑ CAD drawings available via the internet
- ❑ Adapter brackets for non-NEMA motors
- ❑ Linear and rotary incremental encoders
- ❑ NEMA 23 & 34 motor wrap packages
- ❑ NEMA 34 adapter bracket
- ❑ Power-off electric brakes
- ❑ Vertical angle bracket
- ❑ Turcite nut option
- ❑ Motor couplings
- ❑ Hand crank

❑ Ball screws:

Rolled - Non-preloaded & Preloaded Nuts:

0.625 inch diameter, 0.200 inch lead
 0.625 inch diameter, 1.000 inch lead
 0.750 inch diameter, 0.200 inch lead
 0.750 inch diameter, 0.500 inch lead

Precision - Non-preloaded & Preloaded Nuts:

0.625 inch diameter, 0.200 inch lead
 16 mm diameter, 5 mm lead
 16 mm diameter, 10 mm lead
 16 mm diameter, 16 mm lead
 0.750 inch diameter, 0.200 inch lead
 20 mm diameter, 5 mm lead
 20 mm diameter, 20 mm lead

Ground - Preloaded Nuts Only:

0.625 inch diameter, 0.200 inch lead
 16 mm diameter, 5 mm lead
 16 mm diameter, 16 mm lead
 0.750 inch diameter, 0.200 inch lead
 0.750 inch diameter, 0.500 inch lead

❑ Acme screws:

Rolled - Non-preloaded & Preloaded Nuts:

0.625 inch diameter, 0.100 inch lead
 0.625 inch diameter, 0.200 inch lead

Specifications

Load Capacities		4 inch (2 bearing) Carriage		8 inch (4 bearing) Carriage	
Dynamic Horizontal	2 million inches (50 km) of travel	1,900 lbs	(862 kg)	3,800 lbs	(1724 kg)
Dynamic Horizontal	100 million inches (2540 km) of travel	510 lbs	(231 kg)	1,020 lbs	(463 kg)
Static Horizontal		3,400 lbs	(1542 kg)	6,800 lbs	(3084 kg)
Dynamic Roll Moment	2 million inches (50 km) of travel	285 ft-lbs	(386 N-m)	575 ft-lbs	(780 N-m)
Dynamic Roll Moment	100 million inches (2540 km) of travel	77 ft-lbs	(104 N-m)	155 ft-lbs	(210 N-m)
Static Roll Moment		515 ft-lbs	(698 N-m)	1,030 ft-lbs	(1396 N-m)
Dyn. Pitch & Yaw Moment	2 million inches (50 km) of travel	56 ft-lbs	(76 N-m)	700 ft-lbs	(949 N-m)
Dyn. Pitch & Yaw Moment	100 million inches (2540 km) of travel	15 ft-lbs	(20 N-m)	190 ft-lbs	(258 N-m)
Static Pitch & Yaw Moment		100 ft-lbs	(136 N-m)	1,255 ft-lbs	(1702 N-m)
Each Bearing Dyn. Capacity	2 million inches (50 km) of travel	950 lbs	(431 kg)	950 lbs	(431 kg)
Each Bearing Dyn. Capacity	100 million inches (2540 km) of travel	255 lbs	(115 kg)	255 lbs	(115 kg)
Each Bearing Static Load Capacity		1,700 lbs	(771 kg)	1,700 lbs	(771 kg)
Thrust Force Capacity	10 million screw revolutions	895 lbs	(406 kg)	895 lbs	(406 kg)
Thrust Force Capacity	500 million screw revolutions	240 lbs	(109 kg)	240 lbs	(109 kg)
Maximum Acceleration		386 in/sec ²	(9,8 m/sec ²)	772 in/sec ²	(19,6 m/sec ²)
d₁	Center to center distance (spread) between the two rails	4.300 in	(109,2 mm)	4.300 in	(109,2 mm)
d₂	Center to center distance (spacing) of the bearings on a single rail	-		4.900 in	(124,5 mm)
d_r	Center distance of the bearing to top of carriage plate surface	1.250 in	(31,8 mm)	1.250 in	(31,8 mm)


Other	For 4 inch (2 bearing) & 8 inch (4 bearing) Carriages
Table Material	Base, Carriage, & End Plates - 6061 anodized aluminum
Linear Rail Material	Case Hardened Steel
Screw Material	Acme Screw - Stainless Steel
Screw Material	Rolled Ball, Precision Ball, & Ground Ball - Case Hardened Steel
Unidirectional Repeatability	+/- 0.0001 in (2,5 microns) to +/- 0.0002 in (5 microns) - depends on selected screw
Bidirectional Repeatability	+/- 0.0001 in (2,5 microns) to +/- 0.0082 in (208 microns) - depends on selected screw
Straightness	< 0.00004 in/in (< 1,02 microns/25mm)
Flatness	< 0.00004 in/in (< 1,02 microns/25mm)
Orthogonality (multi-axis systems)	< 15 arc-seconds
Friction Coefficient	< 0.01
Motor Mount	NEMA 23 & 34 Mounts, Metric Mounts, Motor Wraps, and Hand Crank Option
Coupling	Three (3) different styles available
Waycover Material	Hypilon Polyester Bellows firmly mounted to carriage & end plates

[More Information via the Web](#)

Standard Features

- ❑ Compact 8.500 inches (216 mm) wide by 3.750 inches (95 mm) tall
- ❑ Travel lengths from 6 inches (150 mm) to 55 inches (1395 mm)
- ❑ Threaded stainless steel inserts in carriage for load mounting
- ❑ 0° F to +185° F (-18° C to +85° C) operating temperature
- ❑ 2 rail, 2 & 4 bearing, 6 & 12 inch long carriages
- ❑ Recirculating linear ball bearing system
- ❑ Precision ground square rail design

200-WC0 series

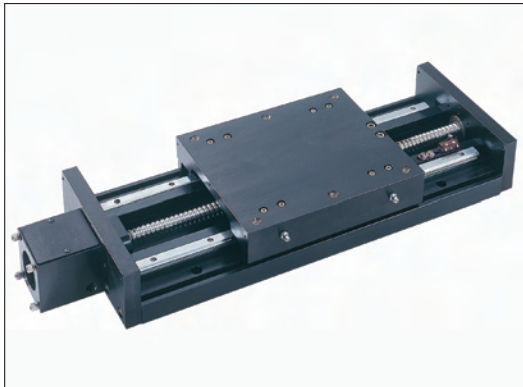

200-WC1 series



Options

- ❑ Chrome plated linear bearings, rails and screws
- ❑ End of travel (EOT) and home switches wired
- ❑ CAD drawings available via the internet
- ❑ Adapter brackets for non-NEMA motors
- ❑ Linear and rotary incremental encoders
- ❑ NEMA 23 & 34 motor wrap packages
- ❑ NEMA 34 adapter bracket
- ❑ Power-off electric brakes
- ❑ Vertical angle bracket
- ❑ Turcite nut option
- ❑ Motor couplings
- ❑ Hand crank
- ❑ Ball screws:

Rolled - Non-preloaded & Preloaded Nuts:

- 0.750 inch diameter, 0.200 inch lead
- 0.750 inch diameter, 0.500 inch lead

Precision - Non-preloaded & Preloaded Nuts:

- 0.750 inch diameter, 0.200 inch lead
- 20 mm diameter, 5 mm lead
- 20 mm diameter, 20 mm lead

Ground - Preloaded Nuts Only:

- 0.750 inch diameter, 0.200 inch lead
- 20 mm diameter, 5 mm lead
- 20 mm diameter, 20 mm lead

- ❑ Acme screws:

Rolled - Non-preloaded & Preloaded Nuts:

- 0.750 inch diameter, 0.100 inch lead
- 0.750 inch diameter, 0.200 inch lead

Specifications

Load Capacities		6 inch (2 bearing) Carriage		12 inch (4 bearing) Carriage	
Dynamic Horizontal	2 million inches (50 km) of travel	4,400 lbs	(1996 kg)	8,800 lbs	(3992 kg)
Dynamic Horizontal	100 million inches (2540 km) of travel	1,180 lbs	(535 kg)	2,360 lbs	(1070 kg)
Static Horizontal		7,600 lbs	(3447 kg)	15,200 lbs	(6895 kg)
Dynamic Roll Moment	2 million inches (50 km) of travel	790 ft-lbs	(1071 N-m)	1,580 ft-lbs	(2142 N-m)
Dynamic Roll Moment	100 million inches (2540 km) of travel	210 ft-lbs	(285 N-m)	425 ft-lbs	(576 N-m)
Static Roll Moment		1,365 ft-lbs	(1851 N-m)	2,730 ft-lbs	(3701 N-m)
Dyn. Pitch & Yaw Moment	2 million inches (50 km) of travel	175 ft-lbs	(237 N-m)	2,485 ft-lbs	(3369 N-m)
Dyn. Pitch & Yaw Moment	100 million inches (2540 km) of travel	47 ft-lbs	(64 N-m)	670 ft-lbs	(908 N-m)
Static Pitch & Yaw Moment		300 ft-lbs	(407 N-m)	4,300 ft-lbs	(5830 N-m)
Each Bearing Dyn. Capacity	2 million inches (50 km) of travel	2,200 lbs	(998 kg)	2,200 lbs	(998 kg)
Each Bearing Dyn. Capacity	100 million inches (2540 km) of travel	590 lbs	(265 kg)	590 lbs	(265 kg)
Each Bearing Static Load Capacity		3,800 lbs	(1724 kg)	3,800 lbs	(1724 kg)
Thrust Force Capacity	10 million screw revolutions	1,050 lbs	(476 kg)	1,050 lbs	(476 kg)
Thrust Force Capacity	500 million screw revolutions	270 lbs	(122 kg)	270 lbs	(122 kg)
Maximum Acceleration		386 in/sec ²	(9,8 m/sec ²)	772 in/sec ²	(19,6 m/sec ²)
d₁	Center to center distance (spread) between the two rails	5.280 in	(134,1 mm)	5.280 in	(134,1 mm)
d₂	Center to center distance (spacing) of the bearings on a single rail	-		7.870 in	(199,9 mm)
d_r	Center distance of the bearing to top of carriage plate surface	1.900 in	(48,3 mm)	1.900 in	(48,3 mm)


Other	For 6 inch (2 bearing) & 12 inch (4 bearing) Carriages
Table Material	Base, Carriage, & End Plates - 6061 anodized aluminum
Linear Rail Material	Case Hardened Steel
Screw Material	Acme Screw - Stainless Steel
Screw Material	Rolled Ball, Precision Ball, & Ground Ball - Case Hardened Steel
Unidirectional Repeatability	+/- 0.0001 in (2,5 microns) to +/- 0.0002 in (5 microns) - depends on selected screw
Bidirectional Repeatability	+/- 0.0001 in (2,5 microns) to +/- 0.0082 in (208 microns) - depends on selected screw
Straightness	< 0.00004 in/in (< 1,02 microns/25mm)
Flatness	< 0.00004 in/in (< 1,02 microns/25mm)
Orthogonality (multi-axis systems)	< 15 arc-seconds
Friction Coefficient	< 0.01
Motor Mount	NEMA 23 & 34 Mounts, Metric Mounts, Motor Wraps, and Hand Crank Option
Coupling	Three (3) different styles available
Waycover Material	Hypilon Polyester Bellows firmly mounted to carriage & end plates

[More Information via the Web](#)

Standard Features

- ❑ Compact 10.0 inches (254 mm) wide by 4.875 inches (124 mm) tall
- ❑ Travel lengths from 6 inches (150 mm) to 56 inches (1420 mm)
- ❑ Threaded stainless steel inserts in carriage for load mounting
- ❑ 0° F to +185° F (-18° C to +85° C) operating temperature
- ❑ 2 rail, 2 & 4 bearing, 6 & 12 inch long carriages
- ❑ Recirculating linear ball bearing system
- ❑ Precision ground square rail design

250-WC0 series

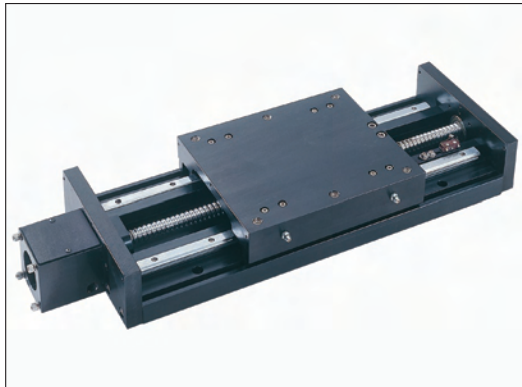

250-WC1 series



Options

- ❑ Chrome plated linear bearings, rails and screws
- ❑ End of travel (EOT) and home switches wired
- ❑ CAD drawings available via the internet
- ❑ Adapter brackets for non-NEMA motors
- ❑ Linear and rotary incremental encoders
- ❑ NEMA 34 & 42 motor wrap packages
- ❑ NEMA 42 adapter bracket
- ❑ Power-off electric brakes
- ❑ Vertical angle bracket
- ❑ Turcite nut option
- ❑ Motor couplings

❑ Ball screws:

Rolled - Non-preloaded & Preloaded Nuts:

- 1.000 inch diameter, 0.250 inch lead
- 1.000 inch diameter, 0.500 inch lead
- 1.000 inch diameter, 1.000 inch lead

Precision - Non-preloaded & Preloaded Nuts:

- 1.000 inch diameter, 0.200 inch lead
- 25 mm diameter, 10 mm lead
- 25 mm diameter, 25 mm lead

Ground - Preloaded Nuts Only:

- 1.000 inch diameter, 0.200 inch lead
- 1.000 inch diameter, 0.500 inch lead
- 25 mm diameter, 25 mm lead

❑ Acme screws:

Rolled - Non-preloaded & Preloaded Nuts:

- 1.000 inch diameter, 0.100 inch lead
- 1.000 inch diameter, 0.200 inch lead

Specifications


Load Capacities		6 inch (2 bearing) Carriage		12 inch (4 bearing) Carriage	
Dynamic Horizontal	2 million inches (50 km) of travel	8,300 lbs	(3765 kg)	16,600 lbs	(7530 kg)
Dynamic Horizontal	100 million inches (2540 km) of travel	2,225 lbs	(1009 kg)	4,455 lbs	(2020 kg)
Static Horizontal		13,600 lbs	(6169 kg)	27,200 lbs	(12338 kg)
Dynamic Roll Moment	2 million inches (50 km) of travel	1,655 ft-lbs	(2244 N-m)	3,310 ft-lbs	(4488 N-m)
Dynamic Roll Moment	100 million inches (2540 km) of travel	445 ft-lbs	(603 N-m)	895 ft-lbs	(1213 N-m)
Static Roll Moment		2,715 ft-lbs	(3681 N-m)	5,425 ft-lbs	(7355 N-m)
Dyn. Pitch & Yaw Moment	2 million inches (50 km) of travel	455 ft-lbs	(617 N-m)	3,930 ft-lbs	(5328 N-m)
Dyn. Pitch & Yaw Moment	100 million inches (2540 km) of travel	121 ft-lbs	(164 N-m)	1,065 ft-lbs	(1444 N-m)
Static Pitch & Yaw Moment		635 ft-lbs	(861 N-m)	6,450 ft-lbs	(8745 N-m)
Each Bearing Dyn. Capacity	2 million inches (50 km) of travel	4,150 lbs	(1882 kg)	4,150 lbs	(1882 kg)
Each Bearing Dyn. Capacity	100 million inches (2540 km) of travel	1,115 lbs	(505 kg)	1,115 lbs	(505 kg)
Each Bearing Static Load Capacity		6,800 lbs	(3084 kg)	6,800 lbs	(3084 kg)
Thrust Force Capacity	10 million screw revolutions	1,685 lbs	(764 kg)	1,685 lbs	(764 kg)
Thrust Force Capacity	500 million screw revolutions	455 lbs	(206 kg)	455 lbs	(206 kg)
Maximum Acceleration		386 in/sec ²	(9,8 m/sec ²)	772 in/sec ²	(19,6 m/sec ²)
d₁	Center to center distance (spread) between the two rails	6.000 in	(152,4 mm)	6.000 in	(152,4 mm)
d₂	Center to center distance (spacing) of the bearings on a single rail	-		6.730 in	(170,9 mm)
d_r	Center distance of the bearing to top of carriage plate surface	2.180 in	(55,4 mm)	2.180 in	(55,4 mm)

Other	For 6 inch (2 bearing) & 12 inch (4 bearing) Carriages
Table Material	Base, Carriage, & End Plates - 6061 anodized aluminum
Linear Rail Material	Case Hardened Steel
Screw Material	Acme Screw - Stainless Steel
Screw Material	Rolled Ball, Precision Ball, & Ground Ball - Case Hardened Steel
Unidirectional Repeatability	+/- 0.0001 in (2,5 microns) to +/- 0.0002 in (5 microns) - depends on selected screw
Bidirectional Repeatability	+/- 0.0001 in (2,5 microns) to +/- 0.0092 in (234 microns) - depends on selected screw
Straightness	< 0.00004 in/in (< 1,02 microns/25mm)
Flatness	< 0.00004 in/in (< 1,02 microns/25mm)
Orthogonality (multi-axis systems)	< 15 arc-seconds
Friction Coefficient	< 0.01
Motor Mount	NEMA 34 & 42 Mounts, Metric Mounts, Motor Wraps, and Hand Crank Option
Coupling	Three (3) different styles available
Waycover Material	Hypilon Polyester Bellows firmly mounted to carriage & end plates

[More Information via the Web](#)

Standard Features






- ❑ Compact 2.362 inches (56,00 mm) wide by 2.244 inches (57,00 mm) tall
- ❑ Travel lengths from 6 inches (150 mm) to 156 inches (3962 mm)
- ❑ Two row angular contact roller bearings, sealed roller housings
- ❑ Polyurethane belt with high strength steel tension members
- ❑ 0° F to +176° F (-20° C to +80° C) operating temperature
- ❑ Threaded metric holes in carriage for load mounting
- ❑ Hardened Precision ground shaft for carriage rollers
- ❑ Belt tensioning at ends of carriage, both sides
- ❑ Dynamic load capacity to 575 lbs (2557 N)
- ❑ 2 rails, single or dual carriages

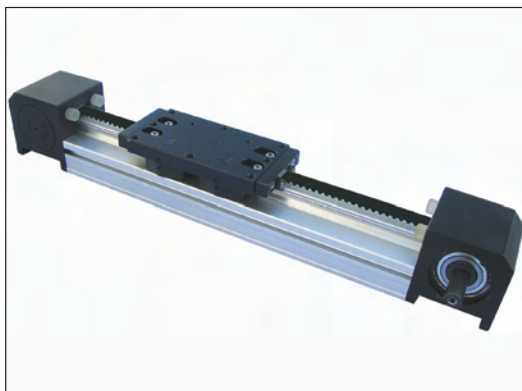440 series**Options**

- ❑ End of travel (EOT) and home switches wired
- ❑ CAD drawings available upon request
- ❑ Adapter brackets for non-NEMA motors
- ❑ NEMA 34 adapter bracket
- ❑ Power-off electric brakes
- ❑ Carriage adapter plates
- ❑ Motor couplings
- ❑ Gearheads

Specifications

Load Capacities		441 - single carriage		442 - dual carriage ⁽¹⁾	
Dynamic C_Z - Horizontal	2 million inches (50 km) of travel	170 lbs	(760 N)	275 lbs	(1223 N)
Dynamic C_Z - Horizontal	100 million inches (2540 km) of travel	46 lbs	(204 N)	74 lbs	(329 N)
Static C_Z - Horizontal		195 lbs	(871 N)	317 lbs	(1411 N)
Dynamic C_Y - Horizontal	2 million inches (50 km) of travel	355 lbs	(1579 N)	575 lbs	(2557 N)
Dynamic C_Y - Horizontal	100 million inches (2540 km) of travel	96 lbs	(427 N)	155 lbs	(689 N)
Static C_Y - Horizontal		419 lbs	(1868 N)	680 lbs	(3026 N)
Dynamic M_R - Moment	2 million inches (50 km) of travel	4.49 ft-lbs	(6.0 N-m)	7.22 ft-lbs	(9.7 N-m)
Dynamic M_R - Moment	100 million inches (2540 km) of travel	1.21 ft-lbs	(1.6 N-m)	1.95 ft-lbs	(2.6 N-m)
Static M_R - Moment		5.16 ft-lbs	(7.0 N-m)	8.33 ft-lbs	(11.3 N-m)
Dynamic M_P - Moment	2 million inches (50 km) of travel	14.00 ft-lbs	(18.9 N-m)	68.00 ft-lbs	(92.2 N-m)
Dynamic M_P - Moment	100 million inches (2540 km) of travel	3.80 ft-lbs	(5.1 N-m)	18.45 ft-lbs	(25.0 N-m)
Static M_P - Moment		16.07 ft-lbs	(21.8 N-m)	78.03 ft-lbs	(105.8 N-m)
Dynamic M_Y - Moment	2 million inches (50 km) of travel	29.50 ft-lbs	(40.0 N-m)	141.00 ft-lbs	(191.1 N-m)
Dynamic M_Y - Moment	100 million inches (2540 km) of travel	8.00 ft-lbs	(10.8 N-m)	38.20 ft-lbs	(51.8 N-m)
Static M_Y - Moment		34.44 ft-lbs	(46.7 N-m)	167.42 ft-lbs	(227.0 N-m)
Maximum Belt Tensile Force		225 lbs	(1000 N)	225 lbs	(1000 N)
Maximum Carriage Thrust Force		103 lbs	(458 N)	103 lbs	(458 N)
Maximum Speed		196 in/sec	(5 m/sec)	196 in/sec	(5 m/sec)
Maximum Acceleration		1,574 in/sec ²	(40 m/sec ²)	1,574 in/sec ²	(40 m/sec ²)


Other	For Single or Double Carriages			
System Material	Base, Carriage & End Housings - 6061 anodized aluminum			
Linear Shaft Material, Rollers	Case Hardened Steel, 2 Row Steel Angular Contact Bearing			
Belt Properties	10 mm wide, Black Polyurethane, Steel reinforced belt			
Drive Pulley Weight	0.10	lbs	(0,220	kg)
Drive Pulley Diameter	1.208	in	(30,69	mm)
Drive Lead	3.937	in	(100,00	mm)
Belt Stretch - x Load (lbs or N)	0.00021	in/ft per lbs	(0,00400	mm/m per N)
Unidirectional Repeatability	+/- 0.002	in	(+/- 0,0508	mm)
Bidirectional Repeatability	+/- 0.004	in	(+/- 0,1016	mm)
Position Accuracy (Belt)	< 0.010	in/ft	(< 0,254	mm/300mm)
Friction Coefficient	< 0.02			
Breakaway Torque	< 30 oz-in (0,530 N-m)			

[More Information via the Web](#)

Standard Features

- ❑ Compact 2.875 inches (73 mm) wide by 3.000 inches (76 mm) tall
- ❑ Travel lengths from 4 inches (100 mm) to 10 feet (3,0 meters)
- ❑ Threaded stainless steel inserts in carriage for load mounting
- ❑ Polyurethane belt with high strength steel tension members
- ❑ 0° F to +176° F (-18° C to +80° C) operating temperature
- ❑ Single screw belt tensioning with self locking thread
- ❑ Dynamic Load Capacity to 200 lbs (90 kg)
- ❑ Recirculating linear ball bearing system
- ❑ Precision ground square rail design
- ❑ 1 rail, 1 or 2 bearing carriages


140-CP0 series

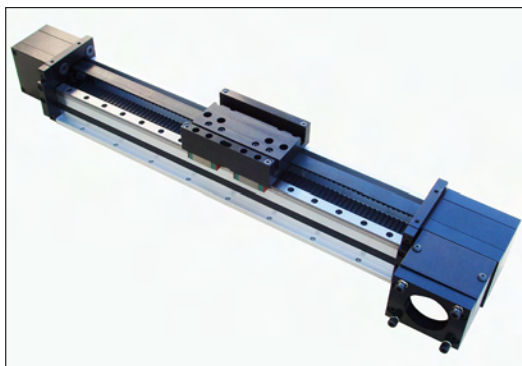

Options

- ❑ AUTOCAD® drawings available via the internet
- ❑ End of travel (EOT) and home switches wired
- ❑ Adapter brackets for non-NEMA motors
- ❑ Chrome plated linear bearings & rails
- ❑ Rotary incremental encoders
- ❑ NEMA 34 adapter bracket
- ❑ Power-off electric brakes
- ❑ Carriage adapter plates
- ❑ Vertical angle bracket
- ❑ Motor couplings

140-CP1 series

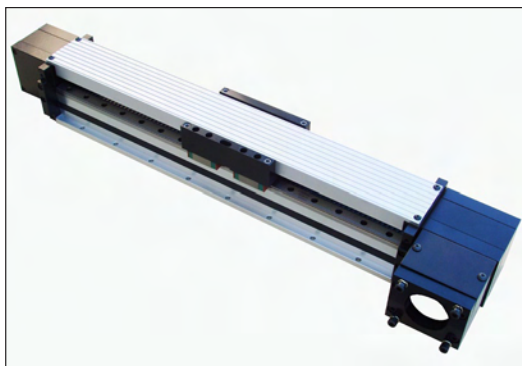

140-CP2 series



Specifications


Load Capacities		One (1) Bearing Carriage		Two (2) Bearing Carriage	
Dynamic Horizontal	2 million inches (50 km) of travel	100 lbs	(45 kg)	200 lbs	(90 kg)
Dynamic Horizontal	100 million inches (2540 km) of travel	27 lbs	(12 kg)	54 lbs	(24 kg)
Static Horizontal		200 lbs	(90 kg)	400 lbs	(180 kg)
Dynamic Roll Moment	2 million inches (50 km) of travel	8 ft-lbs	(11 N-m)	16 ft-lbs	(22 N-m)
Dynamic Roll Moment	100 million inches (2540 km) of travel	2 ft-lbs	(3 N-m)	4 ft-lbs	(6 N-m)
Static Roll Moment		14 ft-lbs	(19 N-m)	28 ft-lbs	(38 N-m)
Dyn. Pitch & Yaw Moment	2 million inches (50 km) of travel	4 ft-lbs	(5,4 N-m)	15 ft-lbs	(20 N-m)
Dyn. Pitch & Yaw Moment	100 million inches (2540 km) of travel	1 ft-lbs	(1,9 N-m)	4 ft-lbs	(6 N-m)
Static Pitch & Yaw Moment		8 ft-lbs	(10 N-m)	30 ft-lbs	(40 N-m)
Each Bearing Dyn. Capacity	2 million inches (50 km) of travel	100 lbs	(45 kg)	100 lbs	(45 kg)
Each Bearing Dyn. Capacity	100 million inches (2540 km) of travel	27 lbs	(12 kg)	27 lbs	(12 kg)
Each Bearing Static Load Capacity		200 lbs	(90 kg)	200 lbs	(90 kg)
Maximum Belt Tensile Force		250 lbs	(113 kg)	250 lbs	(113 kg)
Maximum Carriage Thrust Force		115 lbs	(52 kg)	115 lbs	(52 kg)
Maximum Speed		78 in/sec	(2 m/sec)	78 in/sec	(2 m/sec)
Maximum Acceleration		193 in/sec ²	(4,9 m/sec ²)	386 in/sec ²	(9,8 m/sec ²)
d₂	Center to center distance (spacing) of each bearing on a single rail	-		2.088 in	(53,0 mm)
d_r	Center distance of the bearing to top of carriage plate surface	1.375 in		(34,9 mm)	1.375 in (34,9 mm)

Other	For One (1) & Two (2) Bearing Carriages	
Table Material	Base, Carriage, End Plates, & Cover Plate - 6061 anodized aluminum	
Linear Rail Material	Stainless Steel	
Belt Properties	Black, 16 mm wide, Polyurethane, Steel reinforced belt	
Drive Pulley Weight	0.21 lbs	(0,10 kg)
Drive Pulley Diameter	1.128 in	(28,65 mm)
Drive Lead	3.543 in	(90,00 mm)
Belt Stretch - x Load (lbs or N)	0.00025 in/ft per lbs	(0,00476 mm/m per N)
Unidirectional Repeatability	+/- 0.001 in	(+/- 0,0254 mm)
Bidirectional Repeatability	+/- 0.004 in	(+/- 0,1016 mm)
Position Accuracy (Belt)	< 0.005 in/ft	(< 0,127 mm/300mm)
Orthogonality (multi-axis systems)	< 30 arc-seconds	
Friction Coefficient	< 0.01	
Breakaway Torque	< 40 oz-in (0,282 N-m)	
Motor Mount	NEMA 23 & 34 Mounts, Metric Mounts, and Gearheads	
Coupling	Two (2) different styles available	

[More Information via the Web](#)

Standard Features

- ❑ Compact 3.500 inches (89 mm) wide by 3.000 inches (76 mm) tall
- ❑ Travel lengths from 4 inches (100 mm) to 10 feet (3,0 meters)
- ❑ Threaded stainless steel inserts in carriage for load mounting
- ❑ Polyurethane belt with high strength steel tension members
- ❑ 0° F to +176° F (-18° C to +80° C) operating temperature
- ❑ Single screw belt tensioning with self locking thread
- ❑ Dynamic Load Capacity to 3,100 lbs (1406 kg)
- ❑ Recirculating linear ball bearing system
- ❑ Precision ground square rail design
- ❑ 2 rails, 2 or 4 bearing carriages

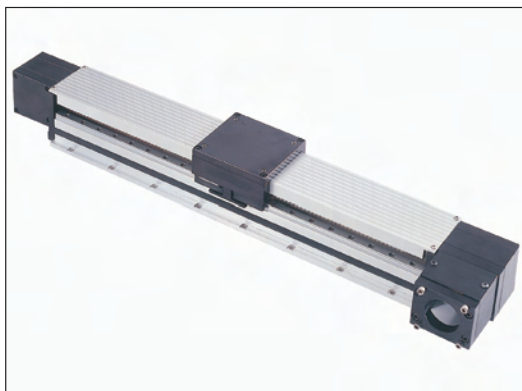120 series**Options**

- ❑ End of travel (EOT) and home switches wired
- ❑ CAD drawings available via the internet
- ❑ Adapter brackets for non-NEMA motors
- ❑ Chrome plated linear bearings & rails
- ❑ Rotary incremental encoders
- ❑ NEMA 34 adapter bracket
- ❑ Power-off electric brakes
- ❑ Carriage adapter plates
- ❑ Vertical angle bracket
- ❑ Motor couplings

Specifications

Load Capacities		Two (2) Bearing Carriage		Four (4) Bearing Carriage	
Dynamic Horizontal	2 million inches (50 km) of travel	1,550 lbs	(703 kg)	3,100 lbs	(1406 kg)
Dynamic Horizontal	100 million inches (2540 km) of travel	415 lbs	(188 kg)	840 lbs	(381 kg)
Static Horizontal		2,360 lbs	(1070 kg)	4,720 lbs	(2140 kg)
Dynamic Roll Moment	2 million inches (50 km) of travel	140 ft-lbs	(190 N-m)	280 ft-lbs	(379 N-m)
Dynamic Roll Moment	100 million inches (2540 km) of travel	37 ft-lbs	(50 N-m)	75 ft-lbs	(101 N-m)
Static Roll Moment		210 ft-lbs	(285 N-m)	425 ft-lbs	(576 N-m)
Dyn. Pitch & Yaw Moment	2 million inches (50 km) of travel	18 ft-lbs	(24 N-m)	240 ft-lbs	(325 N-m)
Dyn. Pitch & Yaw Moment	100 million inches (2540 km) of travel	5 ft-lbs	(7 N-m)	65 ft-lbs	(88 N-m)
Static Pitch & Yaw Moment		30 ft-lbs	(41 N-m)	365 ft-lbs	(495 N-m)
Each Bearing Dyn. Capacity	2 million inches (50 km) of travel	775 lbs	(351 kg)	775 lbs	(351 kg)
Each Bearing Dyn. Capacity	100 million inches (2540 km) of travel	208 lbs	(94 kg)	208 lbs	(94 kg)
Each Bearing Static Load Capacity		1,180 lbs	(535 kg)	1,180 lbs	(535 kg)
Maximum Belt Tensile Force		250 lbs	(113 kg)	250 lbs	(113 kg)
Maximum Carriage Thrust Force		115 lbs	(52 kg)	115 lbs	(52 kg)
Maximum Speed		118 in/sec	(3 m/sec)	118 in/sec	(3 m/sec)
Maximum Acceleration		386 in/sec ²	(9,8 m/sec ²)	772 in/sec ²	(19,6 m/sec ²)
d₁	Center to center distance (spread) between the two rails	2.375 in	(60,3 mm)	2.375 in	(60,3 mm)
d₂	Center to center distance (spacing) of the bearings on a single rail		-	2.088 in	(53,0 mm)
d_r	Center distance of the bearing to top of carriage plate surface	1.375 in	(34,9 mm)	1.375 in	(34,9 mm)


Other	For Two (2) & Four (4) Bearing Carriages			
Table Material	Base, Carriage, End Plates, & Cover Plate - 6061 anodized aluminum			
Linear Rail Material	Stainless Steel			
Belt Properties	Black, 16 mm wide, Polyurethane, Steel reinforced belt			
Drive Pulley Weight	0.21	lbs	(0,10	kg)
Drive Pulley Diameter	1.128	in	(28,65	mm)
Drive Lead	3.543	in	(90,00	mm)
Belt Stretch - x Load (lbs or N)	0.00025 in/ft per lbs	(0,00476	mm/m per N)	
Unidirectional Repeatability	+/- 0.001	in	(+/- 0,0254	mm)
Bidirectional Repeatability	+/- 0.004	in	(+/- 0,1016	mm)
Position Accuracy (Belt)	< 0.005	in/ft	(< 0,127	mm/300mm)
Orthogonality (multi-axis systems)	< 30 arc-seconds			
Friction Coefficient	< 0.01			
Breakaway Torque	< 60	oz-in	(0,424 N-m)	
Motor Mount	NEMA 23 & 34 Mounts, Metric Mounts, and Gearheads			
Coupling	Two (2) different styles available			

[More Information via the Web](#)

Standard Features

- ❑ Compact 6.0 inches (152 mm) wide by 2.953 inches (75 mm) tall
- ❑ Travel lengths from 6 inches (150 mm) to 108 inches (2740 mm)
- ❑ Threaded stainless steel inserts in carriage for load mounting
- ❑ Polyurethane belt with high strength steel tension members
- ❑ 0° F to +176° F (-18° C to +80° C) operating temperature
- ❑ Single screw belt tensioning with self locking thread
- ❑ Dynamic Load Capacity to 5,600 lbs (2540 kg)
- ❑ 2 rails, 2 or 4 bearing, 6 inch long carriage
- ❑ Recirculating linear ball bearing system
- ❑ Precision ground square rail design

180-CP0 series

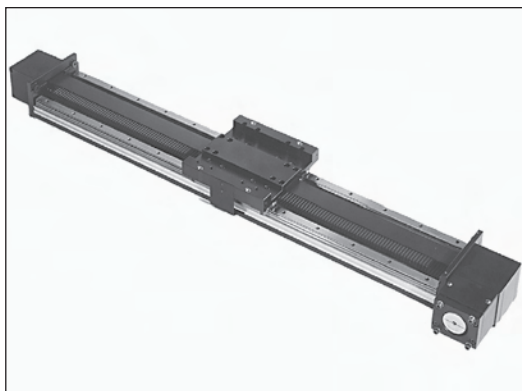

Options

- ❑ End of travel (EOT) and home switches wired
- ❑ CAD drawings available via the internet
- ❑ Adapter brackets for non-NEMA motors
- ❑ Chrome plated linear bearings & rails
- ❑ Rotary incremental encoders
- ❑ NEMA 34 adapter bracket
- ❑ Power-off electric brakes
- ❑ Carriage adapter plates
- ❑ Planetary gearheads
- ❑ Motor couplings


180-CP1 series



180-CP2 series



180-WC1 series

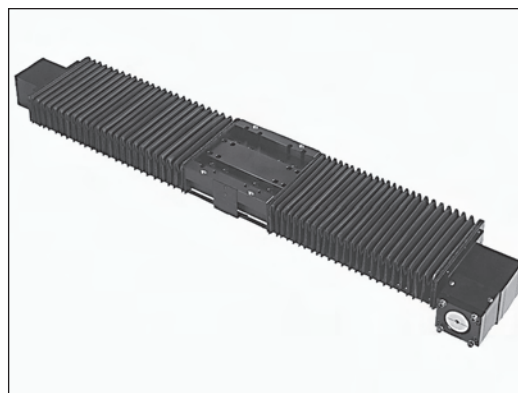

Specifications

Load Capacities		Two (2) Bearing Carriage		Four (4) Bearing Carriage	
Dynamic Horizontal	2 million inches (50 km) of travel	3,890 lbs	(1765 kg)	7,780 lbs	(3530 kg)
Dynamic Horizontal	100 million inches (2540 km) of travel	1,045 lbs	(474 kg)	2,090 lbs	(948 kg)
Static Horizontal		5,830 lbs	(2645 kg)	11,660 lbs	(5290 kg)
Dynamic Roll Moment	2 million inches (50 km) of travel	510 ft-lbs	(690 N-m)	1,025 ft-lbs	(1390 N-m)
Dynamic Roll Moment	100 million inches (2540 km) of travel	137 ft-lbs	(185 N-m)	275 ft-lbs	(370 N-m)
Static Roll Moment		915 ft-lbs	(1240 N-m)	1,830 ft-lbs	(2480 N-m)
Dyn. Pitch & Yaw Moment	2 million inches (50 km) of travel	71 ft-lbs	(96 N-m)	930 ft-lbs	(1260 N-m)
Dyn. Pitch & Yaw Moment	100 million inches (2540 km) of travel	19 ft-lbs	(26 N-m)	250 ft-lbs	(339 N-m)
Static Pitch & Yaw Moment		126 ft-lbs	(170 N-m)	1,670 ft-lbs	(2260 N-m)
Each Bearing Dyn. Capacity	2 million inches (50 km) of travel	1,945 lbs	(882 kg)	1,945 lbs	(882 kg)
Each Bearing Dyn. Capacity	100 million inches (2540 km) of travel	525 lbs	(238 kg)	525 lbs	(238 kg)
Each Bearing Static Load Capacity		2,910 lbs	(1320 kg)	2,910 lbs	(1320 kg)
Maximum Belt Tensile Force		350 lbs	(159 kg)	350 lbs	(159 kg)
Maximum Carriage Thrust Force		230 lbs	(104 kg)	230 lbs	(104 kg)
Maximum Speed		118 in/sec	(3 m/sec)	118 in/sec	(3 m/sec)
Maximum Acceleration		386 in/sec ²	(9,8 m/sec ²)	772 in/sec ²	(19,6 m/sec ²)
d₁	Center to center distance (spread) between the two rails	3.660 in	(92,96 mm)	3.660 in	(92,96 mm)
d₂	Center to center distance (spacing) of the bearings on a single rail	-		3.290 in	(83,57 mm)
d_r	Center distance of the bearing to top of carriage plate surface	1.320 in	(33,53 mm)	1.320 in	(33,53 mm)


Other	For Two (2) & Four (4) Bearing Carriages	
Table Material	Base, Carriage, End Plates, & Cover Plate - 6061 anodized aluminum	
Linear Rail Material	Case Hardened Steel	
Belt Properties	Black, 32 mm wide, Polyurethane, Steel reinforced belt	
Drive Pulley Weight	0.39 lbs	(0,18 kg)
Drive Pulley Diameter	1.128 in	(28,65 mm)
Drive Lead	3.543 in	(90,00 mm)
Belt Stretch - x Load (lbs or N)	0.00011 in/ft per lbs	(0,00212 mm/m per N)
Unidirectional Repeatability	+/- 0.001 in	(+/- 0,0254 mm)
Bidirectional Repeatability	+/- 0.004 in	(+/- 0,1016 mm)
Position Accuracy (Belt)	< 0.005 in/ft	(< 0,127 mm/300mm)
Orthogonality (multi-axis systems)	< 30 arc-seconds	
Friction Coefficient	< 0.01	
Breakaway Torque	< 75 oz-in (0,530 N-m)	
Motor Mount	NEMA 23 & 34 Mounts, Metric Mounts, and Gearheads	
Coupling	Two (2) different styles available	
Waycover Material	Hypilon Polyester Bellows mounted to carriage & end plates	

[More Information via the Web](#)

Standard Features

- ❑ Compact 6.0 inches (152 mm) wide by 2.953 inches (75 mm) tall
- ❑ Travel lengths from 6 inches (150 mm) to 108 inches (2740 mm)
- ❑ Threaded stainless steel inserts in carriage for load mounting
- ❑ Polyurethane belt with high strength steel tension members
- ❑ 0° F to +176° F (-18° C to +80° C) operating temperature
- ❑ Single screw belt tensioning with self locking thread
- ❑ Dynamic Load Capacity to 5,600 lbs (2540 kg)
- ❑ 2 rails, 4 or 6 bearing, 12 inch long carriage
- ❑ Recirculating linear ball bearing system
- ❑ Precision ground square rail design

180-CP0 series

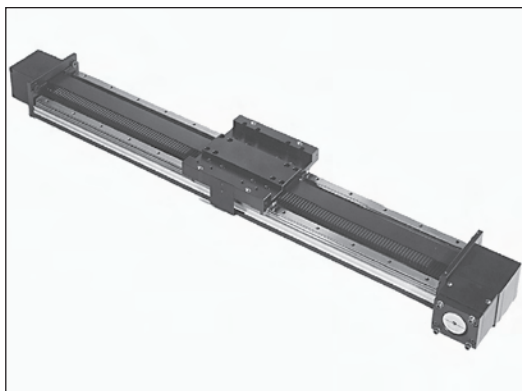

Options

- ❑ End of travel (EOT) and home switches wired
- ❑ CAD drawings available via the internet
- ❑ Adapter brackets for non-NEMA motors
- ❑ Chrome plated linear bearings & rails
- ❑ Rotary incremental encoders
- ❑ NEMA 34 adapter bracket
- ❑ Power-off electric brakes
- ❑ Carriage adapter plates
- ❑ Planetary gearheads
- ❑ Motor couplings


180-CP1 series



180-CP2 series



180-WC1 series

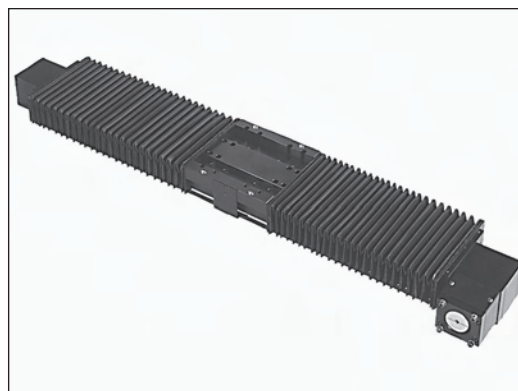

Specifications

Load Capacities		Four (4) Bearing Carriage		Six (6) Bearing Carriage	
Dynamic Horizontal	2 million inches (50 km) of travel	7,780	lbs (3530 kgf)	11,660	lbs (5280 kgf)
Dynamic Horizontal	100 million inches (2540 km) of travel	2,090	lbs (948 kgf)	3,135	lbs (1420 kgf)
Static Horizontal		11,660	lbs (5290 kgf)	17,500	lbs (7930 kgf)
Dynamic Roll Moment	2 million inches (50 km) of travel	1,025	ft-lbs (1390 N-m)	1,540	ft-lbs (2085 N-m)
Dynamic Roll Moment	100 million inches (2540 km) of travel	275	ft-lbs (370 N-m)	410	ft-lbs (555 N-m)
Static Roll Moment		1,830	ft-lbs (2480 N-m)	2,750	ft-lbs (3725 N-m)
Dyn. Pitch & Yaw Moment	2 million inches (50 km) of travel	2,160	ft-lbs (2925 N-m)	2,235	ft-lbs (3030 N-m)
Dyn. Pitch & Yaw Moment	100 million inches (2540 km) of travel	580	ft-lbs (785 N-m)	600	ft-lbs (810 N-m)
Static Pitch & Yaw Moment		3,860	ft-lbs (5230 N-m)	3,980	ft-lbs (5395 N-m)
Each Bearing Dyn. Capacity	2 million inches (50 km) of travel	1,945	lbs (882 kgf)	1,945	lbs (882 kgf)
Each Bearing Dyn. Capacity	100 million inches (2540 km) of travel	525	lbs (238 kgf)	525	lbs (238 kgf)
Each Bearing Static Load Capacity		2,910	lbs (1320 kgf)	2,910	lbs (1320 kgf)
Maximum Belt Tensile Force		350	lbs (159 kg)	350	lbs (159 kg)
Maximum Carriage Thrust Force		230	lbs (104 kg)	230	lbs (104 kg)
Maximum Speed		118	in/sec (3 m/sec)	118	in/sec (3 m/sec)
Maximum Acceleration		772	in/sec ² (19,6 m/sec ²)	772	in/sec ² (19,6 m/sec ²)
d₁	Center to center distance (spread) between the two rails	3.660	in (92,96 mm)	3.660	in (92,96 mm)
d₂	Center to center distance (spacing) of the bearings on a single rail	9.290	in (235,97 mm)	4.645	in (117,98 mm)
d_r	Center distance of the bearing to top of carriage plate surface	1.320	in (33,53 mm)	1.320	in (33,53 mm)

Other	For Four (4) & Six (6) Bearing Carriages
Table Material	Base, Carriage, End Plates, & Cover Plate - 6061 anodized aluminum
Linear Rail Material	Case Hardened Steel
Belt Properties	Black, 32 mm wide, Polyurethane, Steel reinforced belt
Drive Pulley Weight	0.39 lbs (0,18 kg)
Drive Pulley Diameter	1.128 in (28,65 mm)
Drive Lead	3.543 in (90,00 mm)
Belt Stretch - x Load (lbs or N)	0.00011 in/ft per lbs (0,00212 mm/m per N)
Unidirectional Repeatability	+/- 0.001 in (+/- 0,0254 mm)
Bidirectional Repeatability	+/- 0.004 in (+/- 0,1016 mm)
Position Accuracy (Belt)	< 0.010 in/ft (< 0,254 mm/300mm)
Orthogonality (multi-axis systems)	< 30 arc-seconds
Friction Coefficient	< 0.01
Breakaway Torque	< 75 oz-in (0,530 N-m)
Motor Mount	NEMA 23 & 34 Mounts, Metric Mounts, and Gearheads
Coupling	Two (2) different styles available
Waycover Material	Hypilon Polyester Bellows mounted to carriage & end plates

[More Information via the Web](#)

Standard Features

- ❑ 10.236 inches (260 mm) long carriage with two M5 slots for load mounting
- ❑ Compact 3.15 inches (80 mm) wide by 3.937 inches (100 mm) tall
- ❑ Travel lengths from 12 inches (300 mm) to 30 feet (9,1 meters)
- ❑ Rigid belt driven design with fully enclosed aluminum housing
- ❑ 0° F to +176° F (-18° C to +80° C) operating temperature
- ❑ Two screw belt tensioning with self locking threads
- ❑ Dynamic Load Capacity to 10,500 lbs (4763 kg)
- ❑ Recirculating linear ball bearing system
- ❑ Precision ground square rail design
- ❑ 1 rail with 2 bearing carriages

550 series (553 carriage)



- ❑ Two bearing carriage
- ❑ 10,500 lbs (4763 kg) dynamic load capacity
- ❑ 410 ft-lbs (556 N-m) dynamic roll moment
- ❑ Less expensive than the 555 carriage
- ❑ Large moment load capability

Options

- ❑ Angle brackets for multiple axis configurations
- ❑ End of travel (EOT) and home switches wired
- ❑ CAD drawings available via the internet
- ❑ Chrome plated linear bearings and rails
- ❑ Motor mounts for non-NEMA motors
- ❑ NEMA 34 & 42 motor mounts
- ❑ Rotary incremental encoders
- ❑ Power-off electric brakes
- ❑ Base mounting brackets
- ❑ Carriage adapter plates
- ❑ Planetary gearheads
- ❑ Motor couplings

550 series (554 carriage)



- ❑ Two bearing carriage
- ❑ 10,500 lbs (4763 kg) dynamic load capacity
- ❑ 410 ft-lbs (556 N-m) dynamic roll moment
- ❑ Self lubricating linear bearings
- ❑ Large moment load capability

550 series (555 carriage)



- ❑ Two bearing carriage
- ❑ 9,120 lbs (4136 kg) dynamic load capacity
- ❑ 172 ft-lbs (233 N-m) dynamic roll moment
- ❑ Less audible noise than the 553 or 554 series
- ❑ Smoother than the 553 or 554 carriage
- ❑ Unique linear bearing design

Specifications

Load Capacities		553 & 554 Carriages		555 Carriage	
Dynamic Horizontal	2 million inches (50 km) of travel	10,500	lbs (4763 kg)	9,120	lbs (4136 kg)
Dynamic Horizontal	100 million inches (2540 km) of travel	2,820	lbs (1270 kg)	2,450	lbs (1111 kg)
Static Horizontal		15,400	lbs (6985 kg)	14,700	lbs (6668 kg)
Dynamic Roll Moment	2 million inches (50 km) of travel	410	ft-lbs (556 N-m)	172	ft-lbs (233 N-m)
Dynamic Roll Moment	100 million inches (2540 km) of travel	111	ft-lbs (150 N-m)	47	ft-lbs (64 N-m)
Static Roll Moment		650	ft-lbs (881 N-m)	285	ft-lbs (386 N-m)
Dyn. Pitch & Yaw Moment	2 million inches (50 km) of travel	1,215	ft-lbs (1647 N-m)	510	ft-lbs (690 N-m)
Dyn. Pitch & Yaw Moment	100 million inches (2540 km) of travel	330	ft-lbs (447 N-m)	138	ft-lbs (187 N-m)
Static Pitch & Yaw Moment		1,775	ft-lbs (2406 N-m)	845	ft-lbs (1145 N-m)
Each Bearing Dyn. Capacity	2 million inches (50 km) of travel	5,250	lbs (2381 kg)	4,560	lbs (2068 kg)
Each Bearing Dyn. Capacity	100 million inches (2540 km) of travel	1,410	lbs (639 kg)	1,225	lbs (555 kg)
Each Bearing Static Load Capacity		7,700	lbs (3493 kg)	7,350	lbs (3334 kg)
Maximum Belt Tensile Force		675	lbs (306 kg)	675	lbs (306 kg)
Maximum Carriage Thrust Force		475	lbs (215 kg)	475	lbs (215 kg)
Maximum Speed		118	in/sec (3 m/sec)	197	in/sec (5 m/sec)
Maximum Acceleration		1,930	in/sec ² (49,0 m/sec ²)	1,930	in/sec ² (49,0 m/sec ²)
d₂	Center to center distance (spacing) of each bearing on a single rail	3.876	in (98,4 mm)	3.876	in (98,4 mm)
d_r	Center distance of the bearing to top of carriage plate surface	1.508	in (38,3 mm)	1.626	in (41,3 mm)

Other	553, 554 & 555 Carriages
Table Material	Base Extrusion, Carriage, & End Plates - 6061 anodized aluminum
Linear Rail Material	Case Hardened Steel
Belt Properties	Black, 50 mm wide, Polyurethane, Steel reinforced belt
Drive Pulley Weight	1.500 lbs (0,68 kg)
Drive Pulley Diameter	2.569 in (65,25 mm)
Drive Lead	8.071 in (205,00 mm)
Belt Stretch - x Load (lbs or N)	0.00006 in/ft per lbs (0,00114 mm/m per N)
Unidirectional Repeatability	+/- 0.001 in (+/- 0,0254 mm)
Bidirectional Repeatability	+/- 0.004 in (+/- 0,1016 mm)
Position Accuracy (Belt)	< 0.010 in/ft (< 0,254 mm/300mm)
Orthogonality (multi-axis systems)	< 60 arc-seconds
Friction Coefficient	< 0.01
Breakaway Torque	< 16 lb-in (1,808 N-m)
Motor Mount	NEMA 34 & 42 Mounts, Metric Mounts, and Gearheads
Coupling	Two (2) different styles available

[More Information via the Web](#)

Standard Features - 300 series

- ❑ Worm gear drive
- ❑ NEMA 23 & 34 motor mounts
- ❑ Standard & Precision versions
- ❑ 45, 90, & 180:1 gear reductions
- ❑ Load capacity to 225 lbs (102 kg)
- ❑ 30 revs/sec maximum input speed
- ❑ 10 arc-sec unidirectional repeatability
- ❑ 6, 8, 10, & 12 inch table top diameters
- ❑ CAD drawings available via the internet
- ❑ 0.75 inch (19 mm) diameter through hole
- ❑ English & Metric inserts for load mounting

Standard Features - 400 series

- ❑ Worm gear drive
- ❑ NEMA 34 motor mount
- ❑ Standard & Precision versions
- ❑ English inserts for load mounting
- ❑ 9 revs/sec maximum input speed
- ❑ Load capacity to 1,000 lbs (453 kg)
- ❑ 12 arc-sec unidirectional repeatability
- ❑ 5.48 inch (139 mm) table top diameter
- ❑ CAD drawings available via the internet
- ❑ 4.5 inch (114 mm) diameter through hole
- ❑ 30, 90, 180, 270, & 360:1 gear reductions

300 series



400 series



Specifications

Load Capacities	300 series ⁽¹⁾	400 series ⁽¹⁾
Dynamic Horizontal (1 million revs)	225 lbs (102 kg)	1000 lbs (453 kg)
Dynamic Inverted (1 million revs)	100 lbs (45 kg)	1000 lbs (453 kg)
Static Horizontal	250 lbs (113 kg)	1000 lbs (453 kg)
Dynamic Moment (1 million revs)	20 ft-lbs (27 N-m)	225 ft-lbs (305 N-m)
Static Moment	25 ft-lbs (34 N-m)	250 ft-lbs (339 N-m)
Maximum Input Speed	30 rev/sec	9 rev/sec
Maximum Input Acceleration	75 rev/sec ²	50 rev/sec ²


Other	300 series			400 series				
Table Material	Base & Table Top - 6061 black anodized aluminum							
Worm Wheel Type	Bronze (AGMA - class 10)							
Worm Gear Type	Steel (AGMA - class 10)							
Duty Cycle	60 %							
(gear ratio)	45:1	90:1	180:1	30:1	90:1	180:1	270:1	360:1
Maximum Table Top Speed	40 rpm	20 rpm	10 rpm	18 rpm	6 rpm	3 rpm	2 rpm	1.5 rpm
Worm Gear Efficiency	50 %	60 %	70 %	50 %	60 %	60 %	60 %	60 %
Worm Gear Inertia (oz-in ²)	0.03	0.03	0.03	0.10	0.10	0.13	0.16	0.19
Accuracy	< 150 arc-sec			< 180 arc-sec				
Unidirectional Repeatability	< 10 arc-sec			< 12 arc-sec				
Bidirectional Repeatability	< 40 arc-sec			< 42 arc-sec				
Backlash	< 30 arc-sec			< 30 arc-sec				
Runout (vertical runout)	Standard	< 0.003 in	(0,076 mm) ⁽²⁾	<	0.002 in	(0,05 mm) ⁽³⁾		
	Precision	< 0.001 in	(0,025 mm) ⁽²⁾					
Concentricity (radial runout)	Standard	< 0.003 in	(0,076 mm) ⁽⁴⁾	<	0.002 in	(0,05 mm) ⁽⁵⁾		
	Precision	< 0.001 in	(0,025 mm) ⁽⁴⁾					
Wobble (axis runout)	Standard	< 80 arc-sec	⁽⁶⁾	<	60 arc-sec	⁽⁶⁾		
	Precision	< 40 arc-sec	⁽⁶⁾					
Breakaway Torque	< 20 oz-in (0,141 N-m)			<	60 oz-in	(0,424 N-m)		

Footnotes:


- (1) Dynamic load capacities & life are limited by the stresses exerted upon the worm gear assembly.
- (2) Measured at 6 inches (152,4 mm) from table top center. Total indicator runout.
- (3) Measured at 5.5 inches (139,7 mm) from table top center. Total indicator runout.
- (4) Measured at 0.75 inches (19,1 mm) from table top center. Total indicator runout.
- (5) Measured at 4.5 inches (114,3 mm) from table top center. Total indicator runout.
- (6) Based on the centerline of the table top.

[More Information via the Web](#)

LINTECH shafts, shaft assemblies, linear bearings, pillow blocks and carriage assemblies are used in many different applications requiring mechanical motion. These components are utilized with air cylinders, hydraulic actuators, lead screws, rack & pinion systems, belt & pulleys, chain & sprockets, as well as in manual positioning systems. ***LINTECH*** individual shafts or SA shaft assemblies, along with individual linear bearings or pillow blocks, are typically used when a designer wishes to spread apart the shafts or SA shaft assemblies and make a custom carriage assembly. The TRSA shaft assemblies and TRCA carriage assemblies are utilized together when ease of installation is of essence.

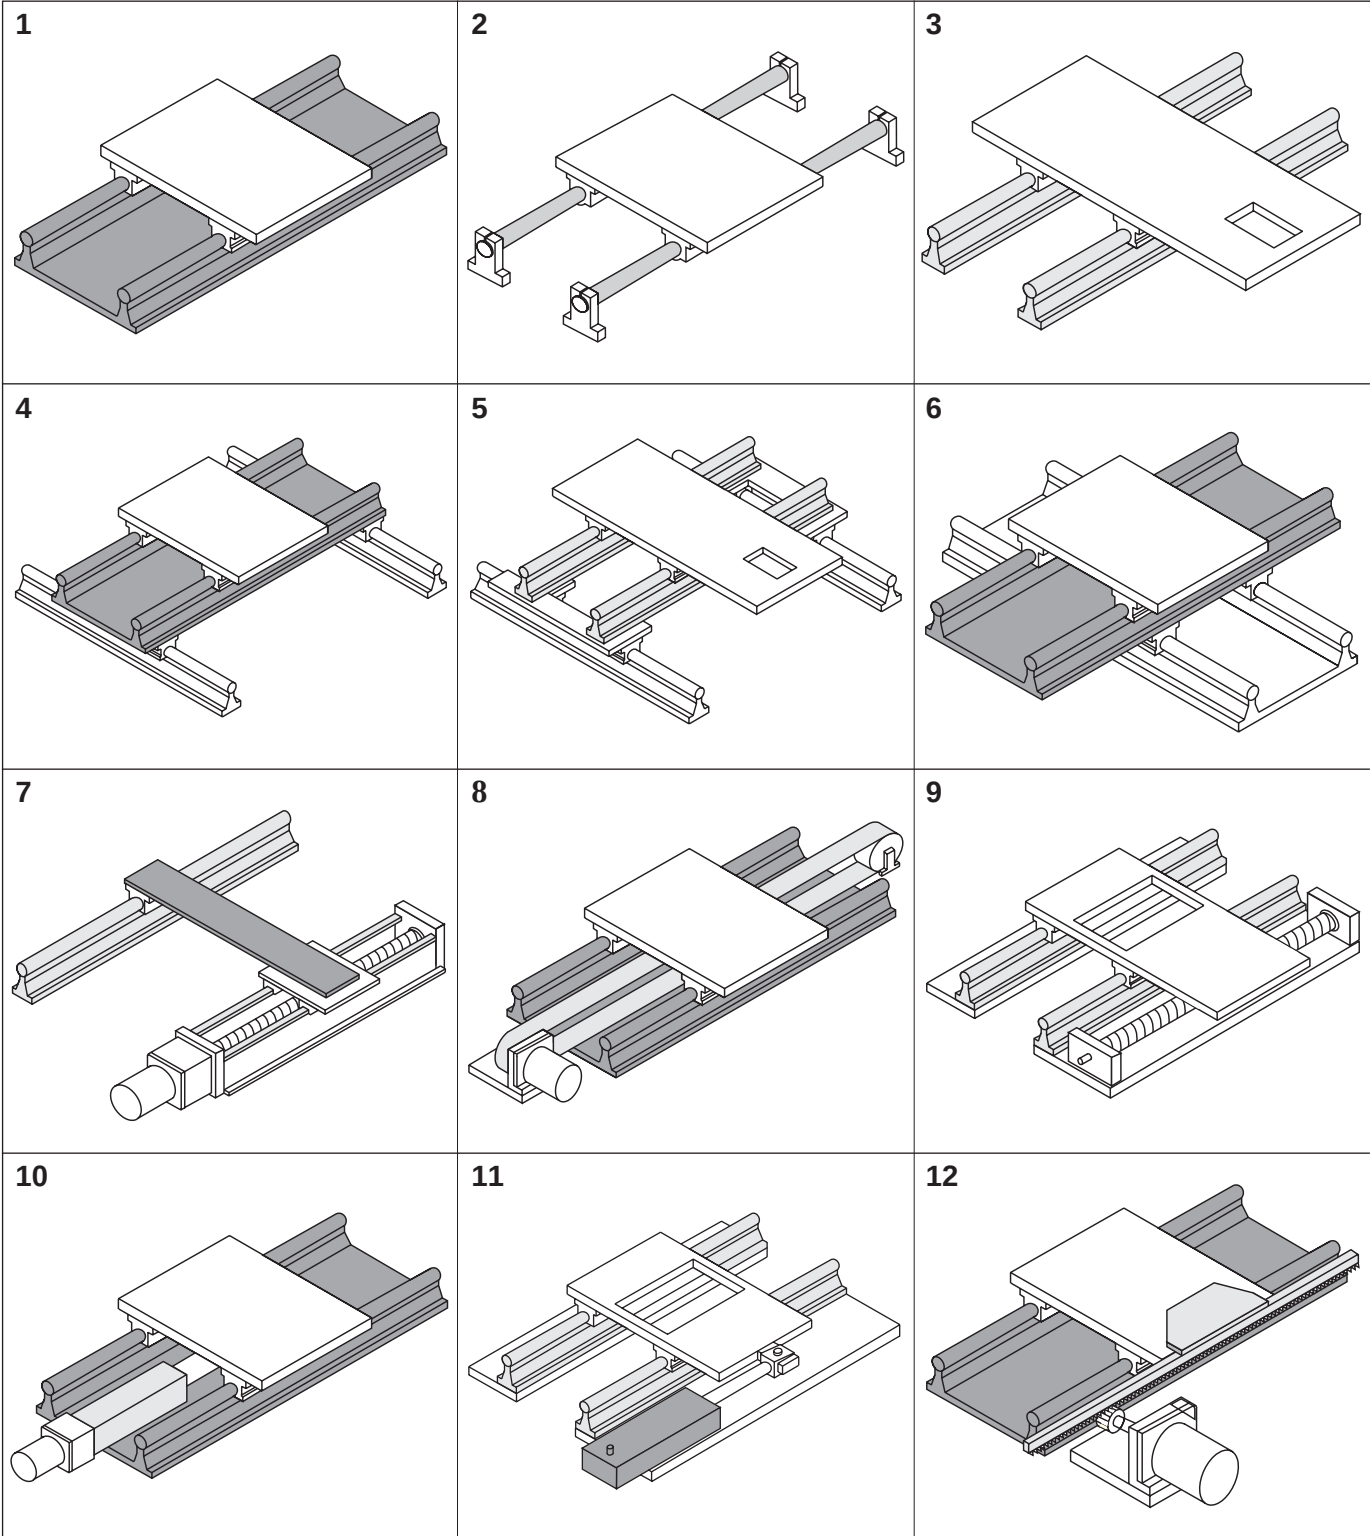

LINTECH can provide adapter plates and vertical brackets, to facilitate the construction of X-Y, X-Z, and X-Y-Z multi-axis configurations. There are hundreds of possible configurations available. See below for some of the more common systems. **LINTECH** has experience dealing with multiple axis configurations. Sometimes different standard table series can be mounted to form a custom system. Other times, a custom assembly can be created. Contact **LINTECH** for more information.

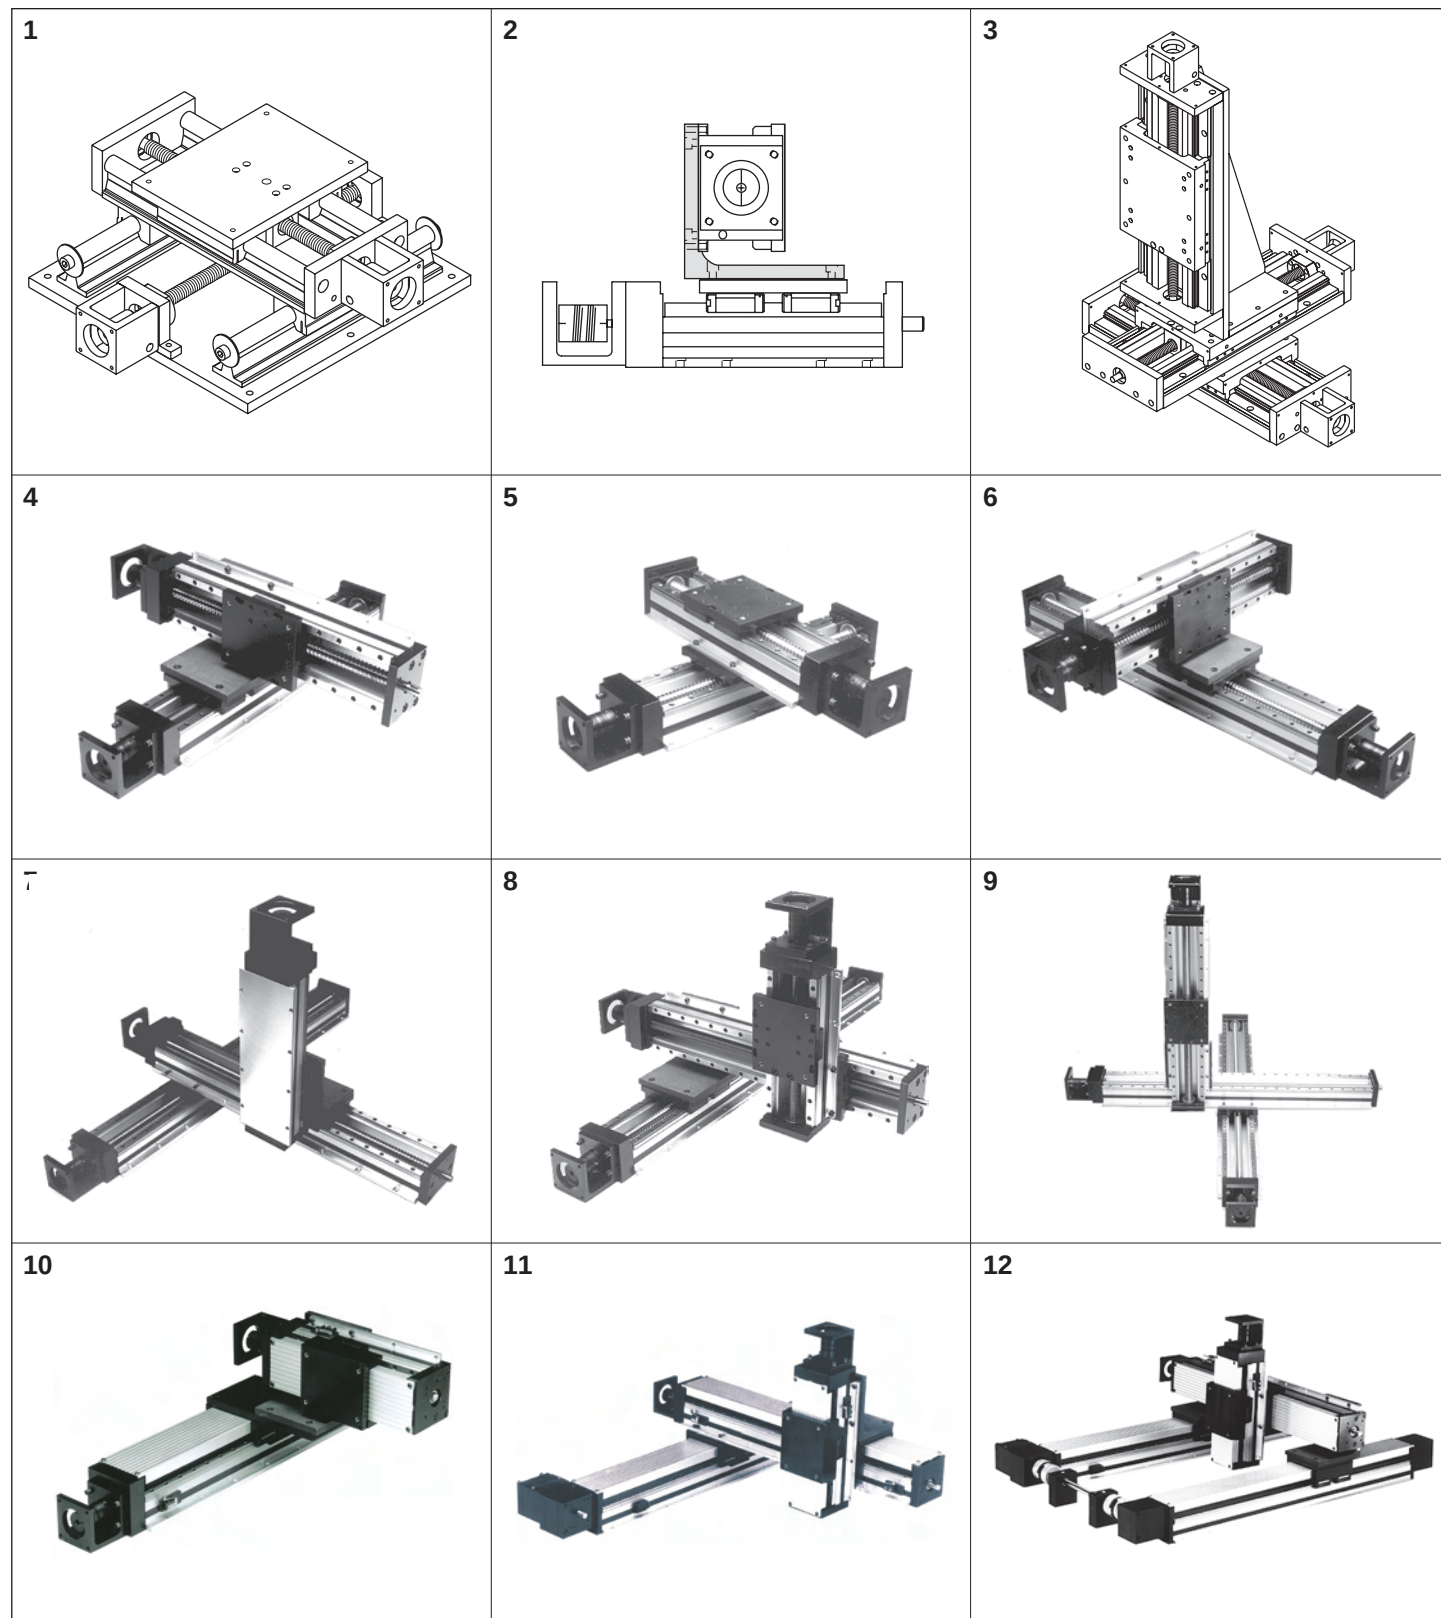

Custom Systems

LINTECH has been manufacturing custom positioning assemblies and systems for use in a wide variety of applications for over 30 years. Some of these custom systems have been simple modifications of carriage assemblies, special base mounting hole patterns, nonstandard travel lengths, specific motor mount brackets, or different accessories such as couplings, encoders, or waycovers.

Other more involved custom systems have been:

- * 30 x 30 x 30 foot X-Y-Z inspection stations
- * 60 foot part placement machines
- * 5,000 pound load capacity assembly stations.
- * vacuum or wash down rated
- * 9 axis special assembly machines

All of these custom systems were successful by following a simple approach.

Review, fill out, and provide all the information on the application guide shown on the next page. Providing us with all, or as much detail up front, can lead to the successful completion of a custom system. Then submit this information to **LINTECH** and we will review the data, to see if it is within our capabilities to manufacture.

Some of the more important information to provide us follows:

Budget will become extremely important in our evaluation process with you. With our many years of experience building custom systems we will be able to determine if the required performance you are seeking is possible within your budget.

Accuracy or Repeatability will make a big difference in the cost of a custom system. The accuracy of 0.0002 inches over 48 inches of travel will cost a whole lot more than a repeatability of 0.0002 inches over the same 48 inches of travel.

Load Weight will have an impact on the linear bearing, drive assembly, and structure that we would design for the custom system. Providing a realistic estimated of load weight (along with any other potential external forces), without too much of a safety factor will help select the proper custom positioning components. We will use the proper safety factors based on your application details.

Required System Life will also affect the selection of the proper components for the system.

Systems Speeds may affect the cost of a custom system if larger, more expensive components are required to meet the application needs. Providing us with a realistic target speed helps create a successful custom system.

Application Sketch (or diagram) can help minimize the time for us to respond to your request.


Other Details such as waycovers, motor mounts, or carriage size may not seem like key items to mention. However, providing us with as much information on the application requirements will lead to the successful completion of a custom system.

[More Information via the Web](#)

Design Considerations

Application Guide

Name _____		Date _____	
Company _____		State _____	
Phone () _____	Email _____		
System Requirements		Budget (per system) _____	




Axis		X	Y	Z	Ø	Axis	X	Y	Z	Ø
Load Dimensions length x width (in or mm)						Maximum Accel (in/sec² or m/sec²)				
Load Weight (lbs or kg)						Duty Cycle (%)				
Travel Length (in or mm)						Table Life (millions of inches or Km)				
Repeatability (in or mm)						Motor Frame Size (NEMA 23, 34, 42, other)				
Accuracy (Overall - in or mm)						Limit Switch Type (mech, reed, hall, prox)				
Maximum Speed (in/sec or mm/sec)						Waycovers (Yes or No)				
Most Difficult Move Profile	Distance (in or mm)					Encoder (linear, rotary, & resolution)				
	Time (sec)					Power-off Brake (Yes or No)				


Special Requirements	☐ High Temperature	☐ Clean Room	☐ Maximum Smoothness	☐ Motor Wrap
	☐ Vacuum Rated	☐ High Moisture	☐ Low Audible Noise	☐ Other (explain below)

Moment Loads

Horizontal Application

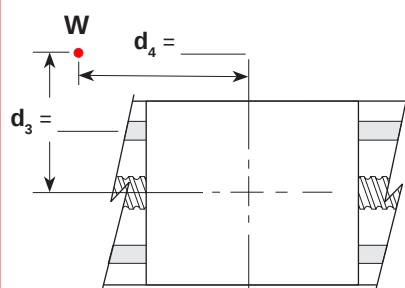


Side Mounted Application

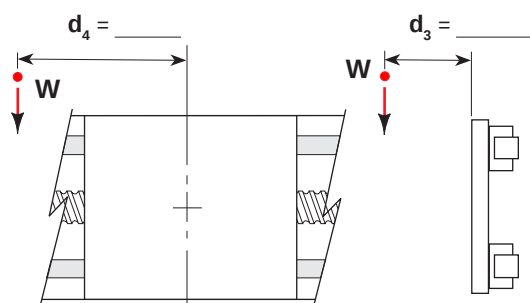


Load Weight (W) _____ (lbs or kg)

Vertical Application

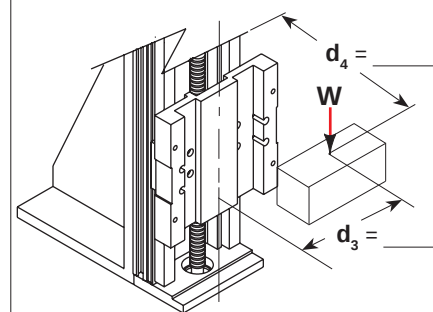


Application Details


Custom Positioning Systems

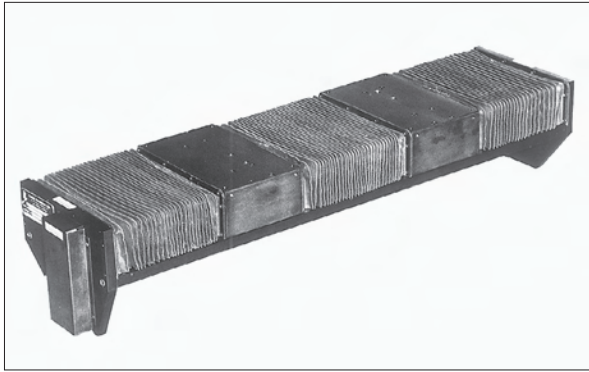

Dual carriages individually driven by two motors on same base

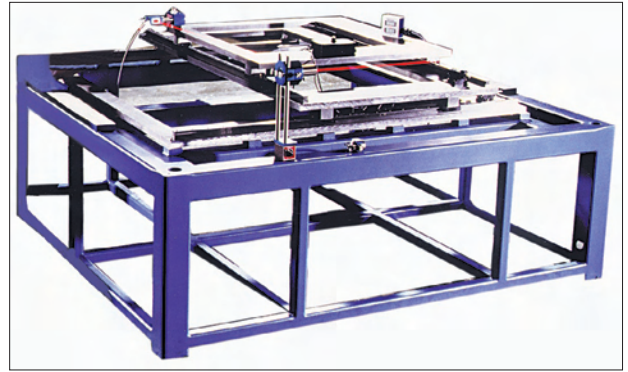


X-Y open frame inspection station with a steel support structure

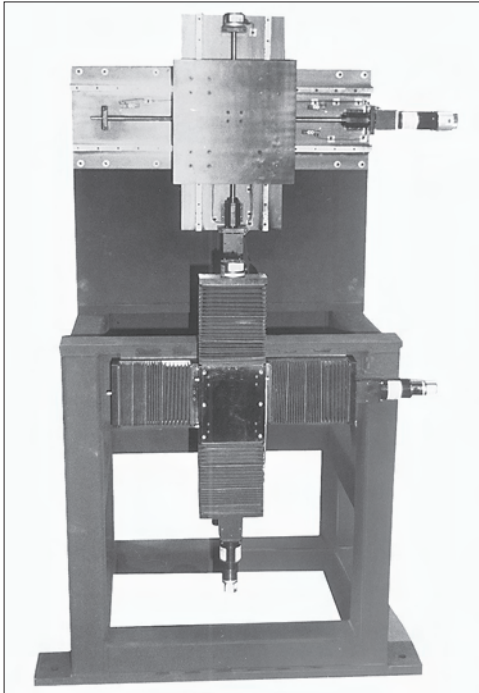


Two individual X-Y axes for laser cutting process supported by steel structure



X-Y-Z automated assembly system with aluminum support structure

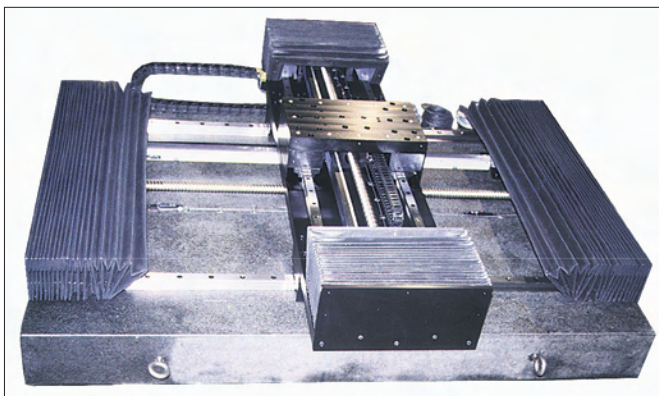

High speed X-Y laser marking assembly with a granite support structure

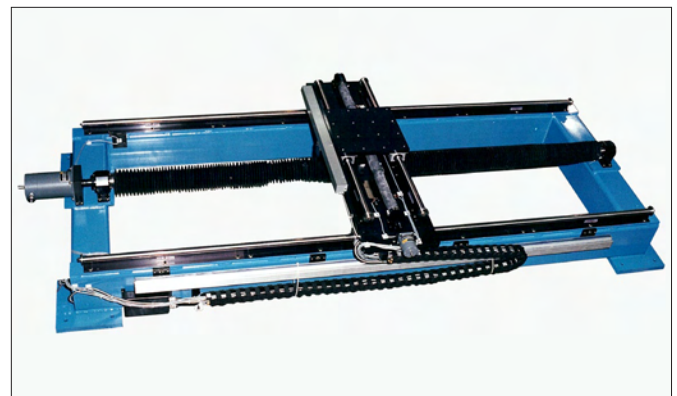

X-Y axis water jet cutting process with open frame steel support structure


Custom Positioning Systems



X-Y chemical coating process
with open frame aluminum structure



X axis machining station
with steel support structure

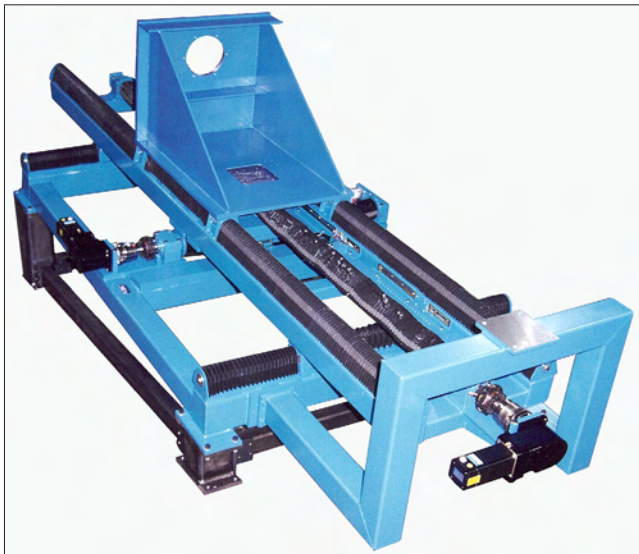


X-Y machine assembly process
mounted to steel support structure



Belt driven long travel X-Y-Z inspection station
with aluminum support structure



X-Y belt driven infrared inspection station
supported by movable aluminum structure

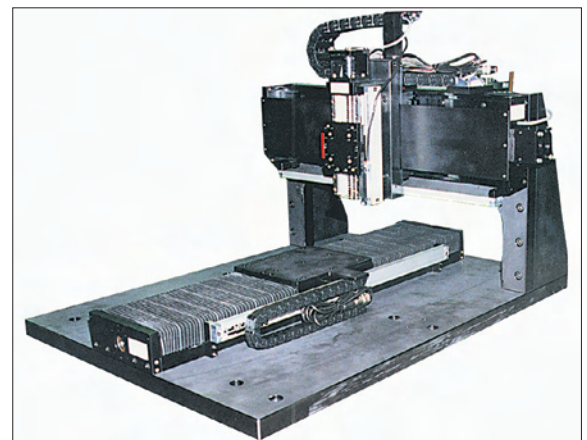

High accuracy X-Z vision inspection station
mounted on a steel sub plate

Unit Conversions

Torque Conversions

Present Units	Convert To	Multiply By
Gram-centimeters	newton-meters -----	0.0000981
Gram-centimeters	ounce-inches -----	0.0138874
Gram-centimeters	pound-inches -----	0.000868
Gram-centimeters	pound-feet -----	0.0000723
Newton-meters	gram-centimeters ---	10,197.162
Newton-meters	ounce-inches -----	141.612
Newton-meters	pound-inches -----	8.85
Newton-meters	pound-feet -----	0.73756
Ounce-inches	gram-centimeters ---	72.0077
Ounce-inches	newton-meters -----	0.007062
Ounce-inches	pound-inches -----	0.0625
Ounce-inches	pound-feet -----	0.005208
Pound-inches	gram-centimeters ---	1,152.0
Pound-inches	newton-meters -----	0.11299
Pound-inches	ounce-inches -----	16.0
Pound-inches	pound-feet -----	0.08333
Pound-feet	gram-centimeters ---	13,825.5
Pound-feet	newton-meters -----	1.3558
Pound-feet	ounce-inches -----	192.0
Pound-feet	pound-inches -----	12.0

Distance Conversions

Present Units	Convert To	Multiply By
Arc-minutes	degrees -----	0.016666
Arc-seconds	degrees -----	0.000277
Centimeters	inches -----	0.3937
Centimeters	feet -----	0.03280
Centimeters	microns -----	10,000.0
Degrees	arc-minutes ----	60.0
Degrees	arc-seconds ----	3,600.0
Degrees	radians -----	0.017453
Feet	centimeters -----	30.48
Feet	meters -----	0.3048
Inches	centimeters ----	2.54
Inches	Km -----	0.0000254
Inches	meters -----	0.0254
Inches	microns -----	25,400.0
Inches	millimeters ----	25.4
Km	inches -----	39,370.0
Meters	feet -----	3.2808
Meters	inches -----	39.37
Meters	microns -----	1,000,000.0
Microns	centimeters ----	0.0001
Microns	inches -----	0.00003937
Microns	meters -----	0.000001
Microns	millimeters ----	0.001
Millimeters	inches -----	0.03937
Millimeters	microns -----	1,000.0
Radians	degrees -----	57.295779

Inertia Conversions

Present Units	Convert To	Multiply By
Gram-cm ²	ounce-inches ² ----	0.00546745
Gram-cm ²	ounce-inch-sec ² --	0.000014161
Gram-cm ²	pound-inches ² ----	0.000341716
Gram-cm ²	pound-inch-sec ² --	0.000000885
Gram-cm ²	pound-feet-sec ² --	0.000000074
Ounce-inches ²	gram-cm ² -----	182.901
Ounce-inches ²	ounce-inch-sec ² --	0.00259008
Ounce-inches ²	pound-inches ² ----	0.0625
Ounce-inches ²	pound-inch-sec ² --	0.00016188
Ounce-inches ²	pound-feet-sec ² --	0.00001349
Ounce-inch-sec ²	gram-cm ² -----	70,615.4
Ounce-inch-sec ²	ounce-inches ² ----	386.0
Ounce-inch-sec ²	pound-inches ² ----	24.13045
Ounce-inch-sec ²	pound-inch-sec ² --	0.0625
Ounce-inch-sec ²	pound-feet-sec ² ---	0.00520833
Pound-inches ²	gram-cm ² -----	2,926.41
Pound-inches ²	ounce-inches ² ----	16.0
Pound-inches ²	ounce-inch-sec ² --	0.0414413
Pound-inches ²	pound-inch-sec ² --	0.00259008
Pound-inches ²	pound-feet-sec ² --	0.00021584
Pound-inch-sec ²	gram-cm ² -----	1,129,850.0
Pound-inch-sec ²	ounce-inches ² ----	6,177.4
Pound-inch-sec ²	ounce-inch-sec ² --	16.0
Pound-inch-sec ²	pound-inches ² ---	386.0
Pound-inch-sec ²	pound-feet-sec ² --	0.0833333
Pound-feet-sec ²	gram-cm ² -----	13,558,200.0
Pound-feet-sec ²	ounce-inches ² ---	74,128.9
Pound-feet-sec ²	ounce-inch-sec ² --	192.0
Pound-feet-sec ²	pound-inches ² ---	4,633.06
Pound-feet-sec ²	pound-inch-sec ² -	12.0

Load Conversions

Present Units	Convert To	Multiply By
Grams	newtons -----	0.009806
Grams	ounces -----	0.03528
Grams	pounds -----	0.002204
Kilograms	pounds -----	2.2046
Newtons	grams -----	101.971
Newtons	ounces -----	3.59692
Newtons	pounds -----	0.224808
Ounces	grams -----	28.3495
Ounces	newtons -----	0.27802
Ounces	pounds -----	0.0625
Pounds	grams -----	453.592
Pounds	kilograms -----	0.45359
Pounds	newtons -----	4.44824
Pounds	ounces -----	16.0
Pounds	tons -----	0.0005
Tons	pounds -----	2,000.0

Terms of Sale

To Order

Any standard, or custom, product from *LINTECH* may be ordered by mail, email, on-line, phone, or fax from an Automation Specialist in your area. To obtain the name of your local Automation Specialist call:

LINTECH[®]
1845 Enterprise Way
Monrovia, CA 91016

Toll Free: (800) 435 - 7494
Phone: (626) 358 - 0110
Fax: (626) 303 - 2035

Web Site: www.LintechMotion.com
E-Mail: Lintech@LintechMotion.com

All required options should be reviewed using the part numbering guide for each model series. Your local Automation Specialist or factory personnel can assist you with any questions you may have.

Delivery

All shipping promises are made in good faith. Any shipping dates appearing on acknowledgments of orders or given to a customer in any other manner are approximate. Where the customer delays in supplying information necessary to proceeding with an order, the date of shipment may be extended accordingly. Standard products from *LINTECH* are usually available for delivery within 1 to 6 weeks of receipt of a purchase order. However, component shortages, labor disputes, or any other unforeseen circumstance may delay the delivery of an order. *LINTECH* shall not be held liable under any circumstance. All products are shipped F.O.B. Monrovia, CA. *LINTECH* packages all standard and custom products carefully. However, *LINTECH* is not liable for damage incurred during shipment. Contact the carrier immediately if damage to a package or shipment is noticed upon receipt of such shipment.

Payment Terms

Unless otherwise specified, payment shall be made by C.O.D, credit card (AMEX, Visa, or Master Card), or net thirty (30) days (pending credit approval) from date of shipment of the items purchased hereunder in U.S. currency. *LINTECH* reserves the right to require deposit payments on non-standard items, customs, or product built to Buyer's designs or specifications. Amounts not timely paid shall bear interest at the rate of 1.5% for each month or a portion thereof that Buyer is late in making payments. No responsibility is assumed by *LINTECH* for damages arising from delivery delays, fires, strikes, material shortages, accidents, or any other cause whatsoever, and purchase orders are accepted subject only to these conditions irrespective of statements or stipulations on purchase orders.

Minimum Order Amount

LINTECH requires a minimum of \$30 List Price U.S. currency on all orders.

Warranty

All *LINTECH* products are guaranteed to be free from defects in material and workmanship, under normal use, for a period of one year after date of shipment. This warranty covers the repair or replacement of a product when it is sent prepaid to *LINTECH*. *LINTECH* does not assume liability for installation, abuse, alteration, insufficient application data provided for a design, or misuse of any positioning system. Products furnished by *LINTECH*, but not manufactured by *LINTECH* (motors, gearheads, encoders, amplifiers, etc....), are subject to the manufacturers standard warranty terms and conditions.

Returns


Any product requiring a return to *LINTECH* (for warranty or non-warranty repair) requires pre-approval from the factory prior to shipment. Contact the customer service department at (800) 435-7494 in order to obtain a RMA (Return Materials Authorization) number. At that time, please have your system Model & Serial numbers available, along with the reason for the return. The RMA number should be clearly marked on the returned package label and your packing list, or shipping document. Return product freight prepaid in its original package or one with comparable protection. *LINTECH* will not accept return shipments sent freight collect. Product damage incurred during return shipment, from poor packaging, will not be warranted by *LINTECH*. Keeping original packing materials is recommended until initial inspection and testing is completed.

Dimensions and Product Changes

Published dimensions shown in *LINTECH* catalogs are known to be accurate at time of printing. *LINTECH* shall not be held liable, under any circumstances, for any wrongly documented dimension or specification. Changes in design are made whenever *LINTECH* believes its products will improve by the change. No obligation to incorporate these changes in units manufactured prior to a change will be assumed.

Cancellations

All items entered for production and on which a cancellation is requested shall be paid for on the basis of actual cost of labor, materials, and supplies applied to the production of such items plus proper overhead expenses determined in accordance with good accounting practice, plus 25% of the total of such cost and expenses; provided that such cost and expense plus 25% shall in no case exceed 100% of the quoted price of original order. Upon cancellation, *LINTECH* may dispose of materials used in the manufacture of cancelled order as it sees fit.

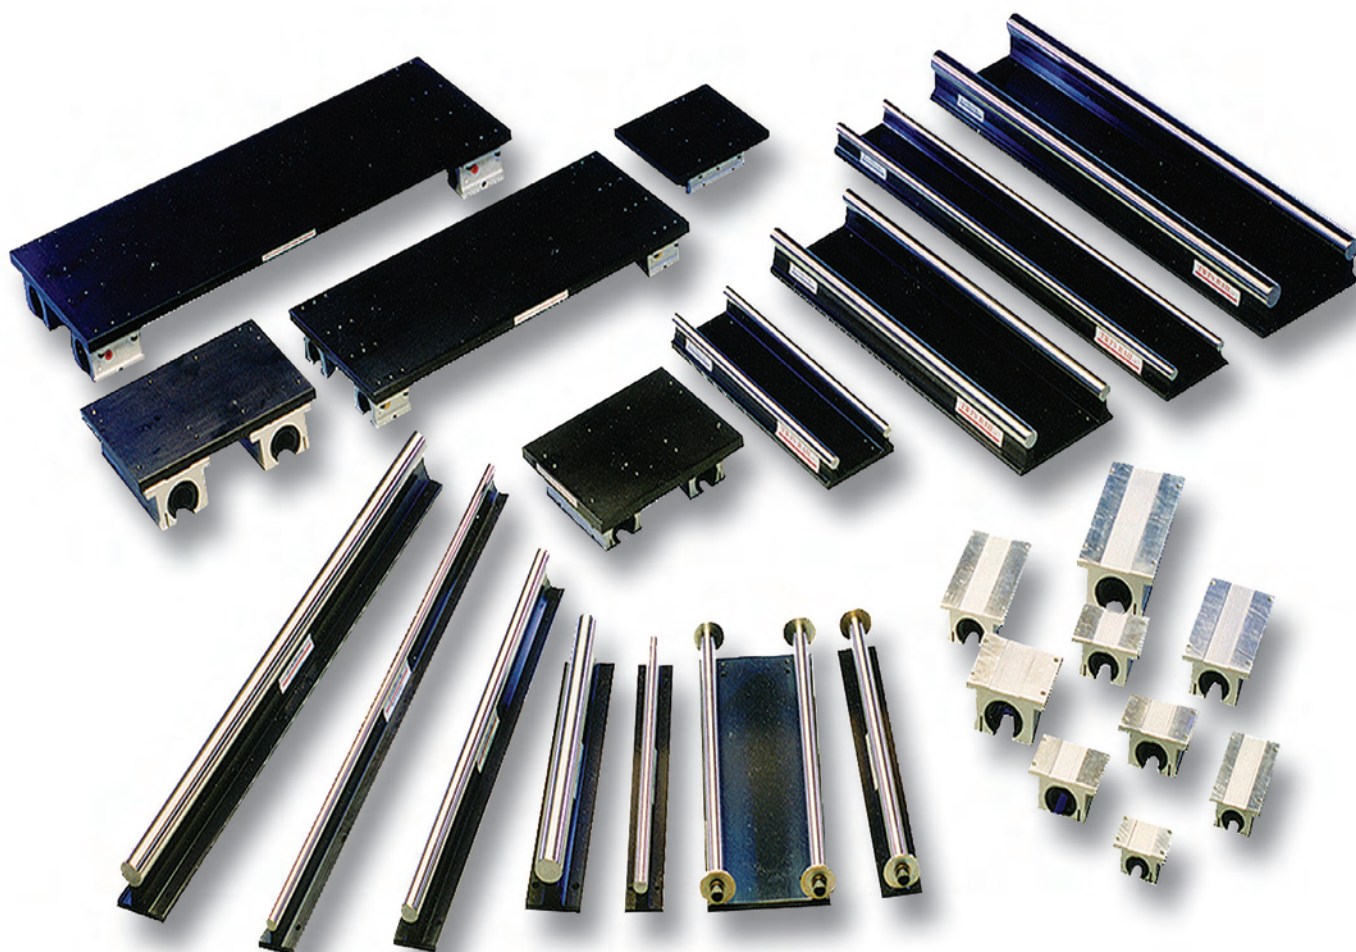

1845 Enterprise Way
Monrovia, CA. 91016
Phone: (800) 435 - 7494
(626) 358 - 0110
Fax: (626) 303 - 2035

Web Site: www.LintechMotion.com
E-Mail: Lintech@LintechMotion.com

YOUR LOCAL AUTOMATION SPECIALIST: