

Functional, effective
mats that increase
comfort and productivity...



WEARWELL®
You're in good company.®



Product Index

Product	Number	Page
Heavy Duty / Dry Area		
UltraSoft Diamond-Plate	414	6-7
Diamond-Plate SpongeCote®	415	6-7
Diamond-Plate with GritWorks!®	416	6-7
ErgoDeck® Solid	562	8-9
ErgoDeck® Ramps & Corners	560	8-9
ErgoDeck® SOFT Solid	566	8-9
ErgoDeck® SOFT Ramps & Corners	564	8-9
NEW Rejuvenator® Connect	502	10-11
Rejuvenator® Ultra Soft-Cell	501	10-11
24/Seven® Solid	570	12
24/Seven® Edging	572	12
(SR) Slip Resistant Diamond-Plate	418	12
WeldSafe®	447	13
Comfort2Go™	518	13
Medium Duty / Dry Area		
Diamond-Plate Select	495	15
Tile-Top Select	494	15
Corrugated SpongeCote®	431	16
ComfortPro™	433	16
Ortho Stand™	454	17
Modular Diamond-Plate	470/466	17
Safety Zone Interlock	455	18
Enviro Mat	405	18
Light Duty / Dry Area		
NEW Primo Sponge	512	20
Endurable	459	21
Ultra-Tred ArmorCote	440	21
Tuf Sponge	451	22
Deluxe Tuf Sponge	442	22
Soft Step	427	23
Deluxe Soft Step	444	23
High Energy Mat	511	23
Heavy Duty / Wet Area: Section I		
ErgoDeck® Open Grid	560	24-25
ErgoDeck® SOFT Open Grid	564	24-25
ErgoDeck® Open Grid with GritWorks!®	561	26
ErgoDeck® Solid with GritWorks!®	563	26
ErgoDeck® Ramps & Corners	560	24-25
ErgoDeck® SOFT Ramps & Corners	564	24-25
24/Seven®	572	27
24/Seven® with GritWorks!®	576	27
24/Seven® Solid with GritWorks!®	574	28
Comfort Deck®	460	29
Grit-Top Comfort Deck®	461	29

Product	Number	Page
Heavy Duty / Wet Area: Section II		
Industrial WorkSafe®	479	31
Industrial GritWorks!®	487	31
WorkSafe®	477	32
Medium Duty / Wet Area		
WorkSafe® Light	478	34
WorkRite	474	34
Kushion Walk	475	35
Abrasive Coated Kushion Walk	480	35
Modular WorkSafe® Light	472/471	36
Vinyl Grid Air-Tread	891	36
Vinyl Grid Gripper Tread	892	36
Food Production		
Grade A®	482	38
Sanitizing Footbath Mat	222	38
Labs & Pharmacies		
UltraSoft Tile-Top AM	419AM	40
Tile-Top AM	420AM	40
Re-energizer®	401	41
Ergo-Stance®	489	41
ErgOasis™	488	42
Rejuevenator® Ultra Soft-Cell	501	42
NEW Rejuevenator® Connect	502	42
Contamination Control		
NEW PermaTack	092	44
NEW Pür-Comfort	504	45
Clean Room Mat	095	45
NEW Autoclavable Mat	580	46
Static Control		
Electrically Conductive Anti-Fatigue	786	48
Electrically Conductive Runner	785	48
Modular Diamond-Plate ESD	788	49
Modular WorkSafe® Light ESD	789	49
Heel Grounder	793.HG	49
15' Ground Cord	793.15Cord	49
Static Dissipative Anti-Fatigue Mat	791	50
Electro-Soft	796	50
ESD Work Surface Material	793	51
6' Wrist Strap	793.6WStrap	51
Common Point Ground Cord	797.CPCord	51

Product	Number	Page
Non-Conductive		
Corrugated Switchboard	702	53
Diamond-Plate Switchboard	701	53
Smooth Military Switchboard	711	54
Diamond-Plate Military Switchboard	712	54
NEW Marbleized Switchboard Type I	710	55
Runners		
Diamond-Plate Runner	385	56
Heavy Duty Corrugated Runner	305	56
Radial Runner	356	56
Standard Corrugated Vinyl Runner	381	57
KleenSweep Runner	391	57
Textured Kleen-Rite Rubber Runner	383	57
Outdoor Entrance Mats		
OutFront Reversible Scraper Mat	227	58
UpFront Scraper Mat	224	58
Multi-Guard, Heavy Duty	220	59
Mud Chucker™	229	59
Indoor Entrance Mats		
Clean Zone	290	60
Cavalier	287	60
Elite Super Olefin	211	61
Reliant Wearbond Olefin	209	61
Mat Movement Reduction		
NEW Grip Strips	051	62
GripSafe Reflective Tape	050	62
LockFast	053	62
Specialty Products		
Emergency Shower & Eyewash		
Station Mat	465	63
Safety Sorb	400	63
Safety Track	698	64
Wheel Chocks	900	64



You're in Good Company.®

We'll help you increase productivity, worker safety and comfort while protecting your bottom line.

At Wearwell, we know the importance of Brand Equity, as we have the most recognized and trusted brand in the matting industry. Because we created and nurtured the industrial matting marketplace, industrial customers everywhere trust our brand and have faith in our products. You can have complete confidence that our products will perform as advertised. With the Wearwell brand **you're in good company** because the list of end users who specify "Wearwell only" grows every day.

Wearwell is the **undisputed innovator of industrial, ergonomic, and safety matting**. Unlike other matting companies, it is not a sideline business for us. It is what we live, eat, and breathe 24 hours a day. And that's why every significant advance in the industrial matting marketplace has been a Wearwell innovation, and a solution to a specific workplace problem.

We manufacture innovative, functional, effective mats that solve specific problems and always work to increase overall productivity. At Wearwell, we believe in creating new compounds and designs that provide solutions in difficult and challenging manufacturing environments—from harsh industrial settings, to high-tech laboratories, to food production environments, to clean rooms and beyond.

Here are just a few of the Wearwell firsts:

- *The first* Diamond-Plate Anti-Fatigue mats, now **the #1 seller in the industry**
- *The first* double-thick "UltraSoft" Diamond-Plate mats
- *The first* ESD Anti-Fatigue mats for static control applications
- *The first* Gritted Anti-Fatigue mats for high traction areas
- *The first* Welding mats
- *The first* Cutting Fluid Resistant mats
- *The first* fully functional Modular Mats
- *The first* Modular **100% Urethane mats**, the highest performance mats one can buy
- *The first* 18"x18" Ergonomic Floor Tiles, a distinct category unto itself

When you ask "Why Wearwell?" the answer is clear.

We're nothing like the other guys.

And that makes all the difference.



The twenty-four months since the introduction of our last catalog have been tremendously exciting. Wearwell has grown and transformed in many ways. Slightly over a year ago we relocated our headquarters to a new facility just south of Nashville. Built for future growth and complete efficiency, this building is also designed to accommodate extensive manufacturing capabilities and massive product warehousing. In addition, as a blueprint for our green initiative, this new facility has allowed us to dramatically reduce our carbon footprint and is designed for continuous environmental improvements.

In actuality, the new facility is just one of the exciting developments. We have continued to innovate, with a strong emphasis on developing new products that provide solutions in difficult and challenging environments...from harsh industrial settings, to high-tech laboratories, to food production environments, and beyond. You'll see several totally new products as well as a number of specialized product improvements that increase functionality in specific applications. And one of our most unique achievements is Pur-Comfort No. 504, a product for use in ISO Class 5 Clean Rooms. Watch for the official introduction soon.

Product innovation, our comprehensive "Green Initiative," and our commitment to continuous improvement are just three of the factors that differentiate us from the competition. In fact, when you ask "Why Wearwell," the answer is clear. We're nothing like the other guys. And that makes all the difference.

As you look through our new catalog and view our updated website at www.wearwell.com, you can have complete confidence that our products will perform as advertised. That is our promise to you and we'll back it up 100%. With Wearwell, *you are truly in good company.*

Best Regards,

A handwritten signature in black ink, appearing to read "Elliot Greenberg".

Elliot Greenberg
President and CEO
Wearwell







Our new corporate headquarters.

A few of the Wearwell innovations over the past 20 years.

1987 1989 1992 1994 1996 1997 1998 1999 2002 2004 2005 2006 2007 2008

2009

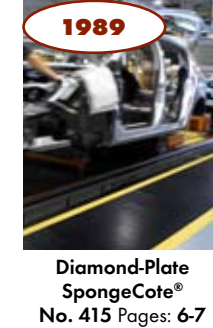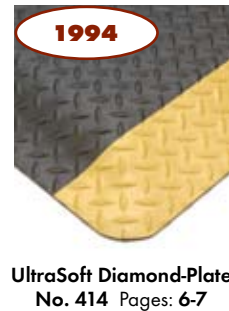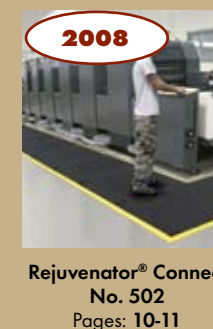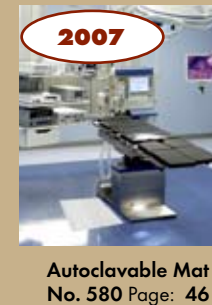

There's really only one way to describe the Wearwell brand:


Functional. Effective. Green.

As the thought leader in the global ergonomic and safety matting industry, we recognize our role and responsibility in promoting industry-leading standards and responding proactively to global issues. Responsible business practices are key to a company's success. At Wearwell, **we recognize that every aspect of our business has an impact on the environment**, and that it is **our responsibility** to mitigate that impact to the best of our ability.

Product	% Recycled	LEED Credit	Page
ErgoDeck® Open No. 560	100% Post Industrial	1 point	25
ErgoDeck® Open w/ GritWorks!® No. 561	100% Post Industrial	1 point	26
ErgoDeck® Solid No. 562	100% Post Industrial	1 point	9
ErgoDeck® Solid w/ GritWorks!® No. 563	100% Post Industrial	1 point	26
ErgoDeck® SOFT Open No. 564	100% Post Industrial	1 point	25
ErgoDeck® SOFT Solid No. 566	100% Post Industrial	1 point	9
Comfort Deck® No. 460	100% Post Industrial	1 point	29
Grit-Top Comfort Deck® No. 461	100% Post Industrial	1 point	29
Emergency Eyewash Station Mats No. 465	100% Post Industrial	1 point	63
Diamond-Plate Runner No. 385	100% Post Industrial	1 point	56
Standard Corrugated No. 381	100% Post Industrial	1 point	57
KleenSweep No. 391	100% Post Industrial	1 point	57
SafetySorb No. 400	100% Pre-Industrial	1 point	63
EnviroMat No. 405	80% Post Industrial	1 point	18
Wheel Chocks No. 900	>50% Post Industrial	1 point	64
Heavy Duty Corrugated No. 305	>50% Post Industrial	1 point	56
Corrugated SpongeCote® No. 431	50% Post Industrial	1 point	16
Comfort Pro No. 433	50% Post Industrial	1 point	16
Diamond-Plate SpongeCote® No. 415	50% Post Industrial	1 point	7
Diamond-Plate with GritWorks!® No. 416	50% Post Industrial	1 point	7
UltraSoft Diamond-Plate No.414	50% Post Industrial	1 point	7
(SR) Diamond-Plate No. 418	40% Post Industrial	1 point	12
Comfort2Go™ No. 518	40% Post Industrial	1 point	13
Diamond-Plate Select No. 495	50% Post Industrial	1 point	15
24/Seven® No. 570 (GR)	>33% Post Industrial	1 point	12
24/Seven® No. 572 (GR)	>33% Post Industrial	1 point	27
WorkRite No. 474	>33% Post Industrial	1 point	34
WeldSafe® No. 447	>33% Post Industrial	1 point	13
WorkSafe® No. 477	>33% Post Industrial	1 point	32
Modular WorkSafe® Light No. 472	>33% Post Industrial	1 point	36
Modular Diamond-Plate No. 470	>33% Post Industrial	1 point	17
MudChucker™ No. 229	>33% Post Industrial	1 point	58
Multi-Guard No. 220	>33% Post Industrial	1 point	59
Ortho Stand™ No. 454	>33% Post Industrial	1 point	17
UpFront Scraper Mat No. 224	>33% Post Industrial	1 point	58
OutFront Reversible Scraper No. 227	>33% Post Industrial	1 point	58
Textured Kleen-Rite Rubber Runner No. 383	>33% Post Industrial	1 point	57



Wearwell is a member of the United States Green Building Council. The USGBC is a 501(c)(3) non-profit community of leaders working to make green buildings accessible to everyone. The USGBC created the Leadership in Energy and Environmental Design (LEED) Green Building Rating System™. This system encourages global adoption of sustainable green building and development practices through the implementation of performance criteria.

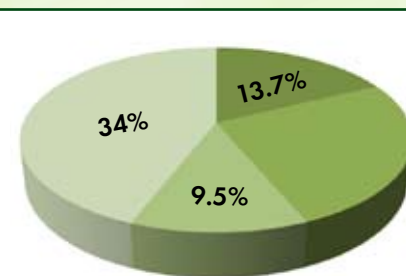

- 34% of all Wearwell mats are composed of >33% post industrial material
- 13.7% of Wearwell products are 100% recycled content
- 9.5% of products can be permanently recycled



On the Job



Wearwell **participates in the TVA Green Power Switch** by purchasing over 5% of our electricity from renewable sources such as the sun, wind and methane gas.

Compressed Air

We have reduced the use of compressed air by 23%. We filter "processed air" before it is vented outside.

23% LESS

- Our injection molding department **regrinds all non-fill parts**, thus eliminating seconds and extra waste.
- Precycling—By eliminating styrofoam cups in the office, Wearwell has **prevented the disposal of over 50,000 cups each year.**

In the Community

- Wearwell **donates** excess inventory to local schools. By doing so, we decrease waste while supporting educators in our area. Donations in the past 12 months have been in excess of 1,000 mats.
- Wearwell employees donate old cell phones to Cell Phones for Soldiers. **Americans replace an estimated 130 million cell phones a year.** By donating to this worthy cause, we keep ours out of the landfills and put them in the hands of soldiers who need them.
- Over **20%** of Wearwell employees carpool.
- Our **employee-driven recycling program** collects 23 tons of paper annually. That is the equivalent of saving:
 - **391 trees**
 - **46 barrels** of oil (enough to run the average car for **28,980 miles**)
 - **94,300 kilowatts** of energy (enough to power the average home for **11.5 years**)
 - **74 cubic yards** of landfill space
 - **1,380 pounds** of air pollution



120,000+ lbs. Recycled

Over 120,000 lbs. of PVC is recycled each year by our manufacturing facility.



In 2007, we transitioned to a new digitized document system that successfully **reduced paper consumption and storage by 80%.**



We use a "Quick Start Monitoring System" by EST to fully review all electrical or water flow anomalies etc., so that issues can be acted upon immediately.

Diamond-Plate Matting

3 Year Warranty

(BYL)



Wearwell Diamond-Plate mats outperform Competitive look-alikes because their unique Nitricell® sponge base offers **twice** the resilience and **three times** the life expectancy of simple PVC sponge.

We also—

1. **Pre-bevel the Nitricell** before the manufacturing process, **assuring perfect lay-flat quality**, and
2. **Extend it to within 1.5 inches of the mat borders**, giving the worker maximum standing area. This is up to 20% more sponge coverage than look-alike products.



Customize Your Diamond-Plate!

Over **40%** of all Diamond-Plate mats we manufacture are unique lengths, widths or configurations including circular and oval mats. For complicated shapes or cutouts, simply give us a template and call for pricing.




Recommended Usage:

- Mostly dry areas
- Industrial facilities
- Laboratories
- Food Packaging areas
- Where standing worker comfort is a must!

UltraSoft Diamond-Plate No. 414

ULTIMATE Performance

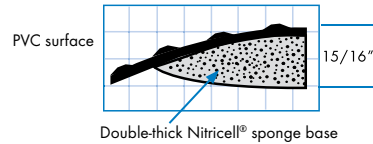


Defined by its double-thick Nitricell® sponge base, this outstanding Nitrile rubber composite sponge offers maximum comfort and resilience. Nitricell immediately bounces back even during continuous use. UltraSoft Diamond-Plate also features an **extremely chemical and abrasion resistant diamond-embossed surface** designed for heavy use production and lab areas. Choose the optional colored borders for maximum safety awareness.

UltraSoft Diamond-Plate Facts

PVC Compound
15/16" Overall Thickness
Wearwell **Innovation**—1994
Green Rating > 50% Post Industrial Material

Diamond-Plate SpongeCote® No. 415

BEST Performance

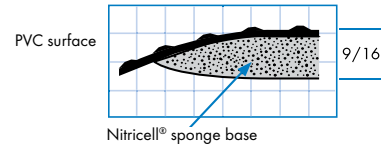

Diamond-Plate SpongeCote is also defined by its **Nitricell sponge base**. At a standard 3/8" thickness, this is the original Nitricell sponge base we introduced in 1989. This original version has all the other attributes of UltraSoft Diamond-Plate and is one of the most sought-after mats for production and laboratory areas. Choose the optional colored borders for maximum safety awareness.

Diamond-Plate SpongeCote Facts

PVC Compound
9/16" Overall Thickness
Wearwell **Innovation**—1989
Green Rating > 50% Post Industrial Material

Sizes for No. 414 and No. 415


Stock Sizes	Non-Stock Sizes	
Ship in 1 Business Day	Ship in 2 Business Days	
2' x 3'	3' x 20'	2' Cut up to 75'
3' x 5'	2' x 75'	3' Cut up to 75'
3' x 10'	3' x 75'	4' Cut up to 75'
	4' x 75'	5' Cut up to 75'*
	5' x 75'*	6' Cut up to 75'*
	6' x 75'*	

Special Custom Widths and Lengths*

From up to 2' - 12' up to 150', min. Length of 5'.

Please specify color when ordering.

Colors: Black with Yellow Borders (BYL), Black (BK), Gray (GY) and Black with Chevron Borders (CHV)

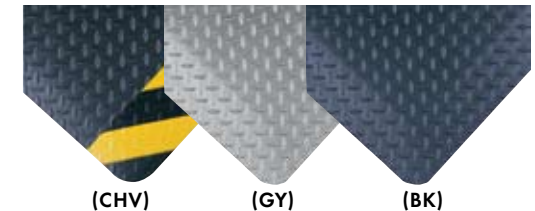

C Can be customized! See page 6.

Diamond-Plate with GritWorks!® No. 416

ULTIMATE Performance



This Diamond-Plate is defined by its high traction GritWorks! surface. For dry areas with slight overspray or oil tracking, the carbide grit increases traction by over 50% while also increasing chemical resistance.




Diamond-Plate with GritWorks! is available in **two (2)** thicknesses:

- 15/16" UltraSoft has double-thick Nitricell sponge base
- 9/16" has a 3/8" Nitricell sponge base

Diamond-Plate with GritWorks! Facts

Wearwell **Innovation**—2002
Green Rating > 50% Post Industrial Material

Magnified grit surface

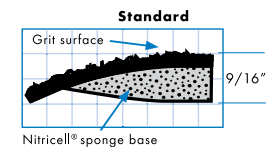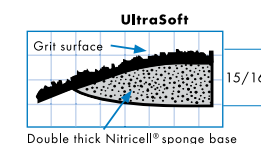

Diamond-Plate w/ GritWorks! Sizes


Stock Sizes	Non-Stock Sizes	
Ship in 1 Business Day	Ship in 2 Business Days	
2' x 3'	2' x 75'	2' Cut up to 75'
3' x 5'	3' x 75'	3' Cut up to 75'
	4' x 75'	4' Cut up to 75'

C Can be customized! See page 6.

ErgoDeck® Matting

3 Year Warranty

Each 18" x 18" tile has six LockSafe® connectors per side for a totally secure connection

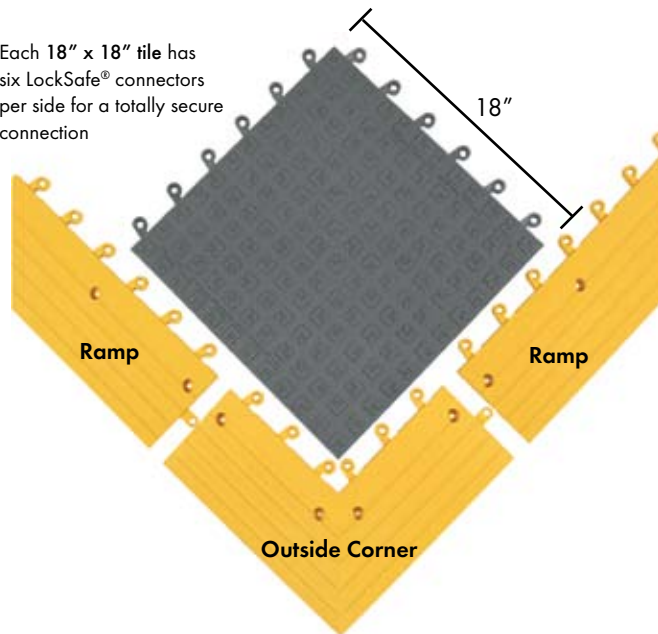

ErgoDeck is an Ergonomic Flooring system ideally designed to cover large areas. These substantial 18" x 18" **super-sized tiles** quickly assemble to create "a floor above a floor." Our patented LockSafe® interlocking system securely connects tiles for a seamless installation. Flex-points on the underside provide support and enhance comfort. The optional 6" side safety ramps and corners have countersunk holes so ErgoDeck **can be permanently installed**. ErgoDeck tiles are **Silicone Free**, perfect for paint and other sensitive areas.

ErgoDeck Facts

PVC Compound

7/8" Overall Thickness

Wearwell **Innovation**—2004

Green Rating = 100% Post Industrial Material



Recommended Usage:

- Mostly dry areas
- Industrial facilities
- Heavy-use applications
- Where standing worker comfort is a must!

ErgoDeck Solid No. 562

ULTIMATE Performance

ErgoDeck Solid No. 562 is the original version, designed to withstand heavy use, including cart traffic (up to 64 psi).
Color: Black (BK)



ErgoDeck SOFT Solid No. 566


ULTIMATE Performance

ErgoDeck SOFT Solid No. 566 is a **more flexible** formulation designed for worker comfort and productivity.
Color: Charcoal (CH)



ErgoDeck SOFT WHITE Solid No. 566


ULTIMATE Performance

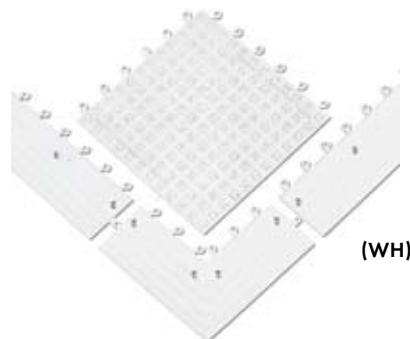


ErgoDeck SOFT WHITE Solid No. 566 is designed for "body in white" applications where metal forms are painted and inspected. This light color helps to highlight any blemishes in the paint. Color: White (WH)

ErgoDeck Edging

Outside Corner



Ramp



ErgoDeck Stock Sizes

Ship within 1 Business Day

ErgoDeck Solid No. 562

Case of 10 Tiles

Edging No. 560

Case of 10 Ramps

Case of 4 Corners

Please specify Black (BK) or Yellow (YL) when ordering.

ErgoDeck SOFT Solid No. 566

Case of 10 Tiles

SOFT Edging No. 564

Case of 10 Ramps

Case of 4 Corners

Please specify Charcoal (CH) or White (WH) when ordering.

ErgoDeck Non-Stock Sizes

Ship within 2 Business Days

ErgoDeck Solid No. 562

Single Tile

Edging No. 560

Single Ramp

Single Outside Corner

Please specify Black (BK) or Yellow (YL) when ordering.

ErgoDeck SOFT Solid No. 566

Single Tile

SOFT Edging No. 564

Single Ramp

Single Outside Corner

Please specify Charcoal (CH), Yellow (YL) or White (WH) when ordering.



Unique configurations are available in 3" increments. Some mats may require several sections. Please call for pricing.

For more versions of ErgoDeck see:

ErgoDeck Drainage, page 25

ErgoDeck with GritWorks!®, page 26

An Ergonomic "Floor Above a Floor."

100% Urethane Matting

5 Year Warranty

Urethane is the most premium matting compound because in addition to being exceptionally comfortable, it is **virtually crush-resistant**, far surpassing the performance of most rubbers and plastics.

In fact, urethane is so resilient that **it is the preferred compound** for chair cushions, bike seats, insoles, protective devices, etc.

Recommended Usage:

- Mostly dry areas
- Industrial facilities
- Laboratories
- Pharmacy settings
- Heavy-use applications
- Anywhere where standing worker comfort is a must
- See p. 42 for additional work environments also suitable for 100% Urethane Matting

Rejuvenator® Connect No. 502




Rejuvenator® Ultra Soft-Cell No. 501

A single workstation
favorite!



NEW! Rejuvenator® Connect No. 502

ULTIMATE Performance

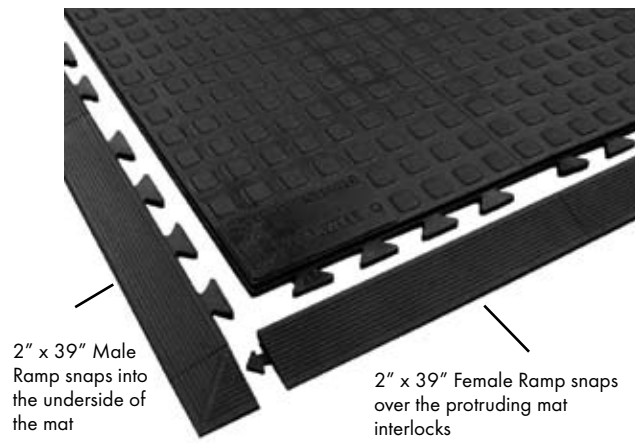

Rejuvenator Connect Sizes

Stock Sizes

Ship within 1 Business Day

3' x 3' Mat
 2" x 39" Male Ramp, Black
 2" x 39" Male Ramp, Yellow
 2" x 39" Female Ramp, Black
 2" x 39" Female Ramp, Yellow



Rejuvenator Connect can be customized in any size or shape. Size is only limited by weight and shipping restrictions.

This customizable urethane is the **"best of the best"**—a perfect combination of extremely high performance and exceptional comfort. The robust, **abrasion resistant exterior skin** encapsulates a resilient, **crush-resistant urethane sponge** creating a **virtually indestructible mat**.



Modular and designed with an effective interlocking system on all four sides, these mats snap together and stay together. Perfect to **accommodate any custom sized area**—even an entire floor in industrial, laboratory, pharmaceutical or commercial environments. Ideal for mostly dry areas, Rejuvenator Connect is also very resistant to a wide variety of chemicals and fluids.

These mats are 3' x 3' with an optional 2" wide urethane bevel for safe access.

Rejuvenator Connect Facts


100% Urethane Compound
5/8" Overall Thickness
Wearwell Innovation—2008

A simple 2-mat configuration.

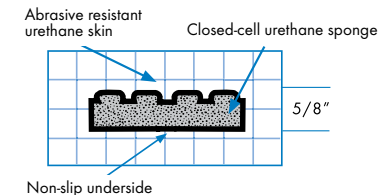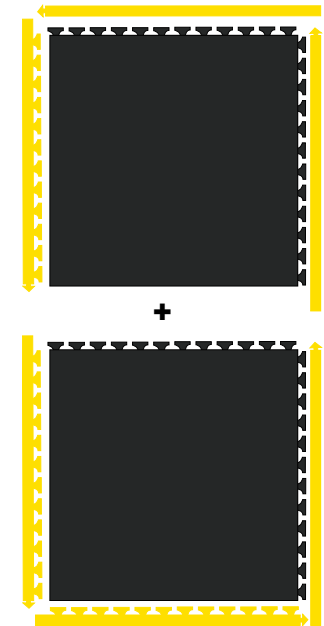

Rejuvenator® Ultra Soft-Cell No. 501 Nothing else feels like it. Nothing lasts like it.

ULTIMATE Performance

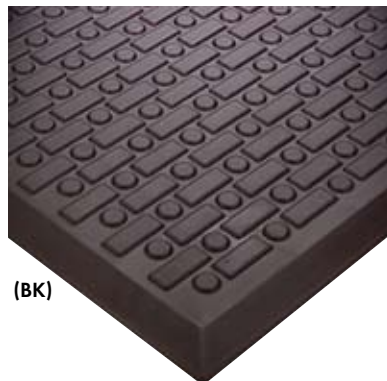


Energize workers with this virtually indestructible anti-fatigue mat!

Rejuvenator is **100% urethane**, an incredibly premium sponge compound that's more resilient than any other anti-fatigue mat. The urethane compound is totally crush resistant and consists of a **closed-cell urethane sponge totally encapsulated by a dense, 1/8" thick skin**. This exterior skin provides outstanding chemical and abrasion resistance in high use areas, and the underside of the mat is textured to prevent mat movement.

Rejuvenator Facts

100% Urethane Compound
5/8" Overall Thickness
Wearwell Innovation—1998

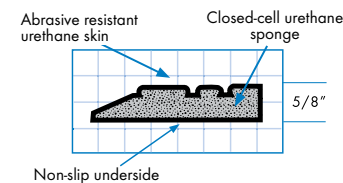

Rejuvenator Ultra Soft-Cell Sizes


Stock Sizes

Ship within 1 Business Day


2' x 3'
 3' x 5'

24/Seven® Solid No. 570

BETTER Performance

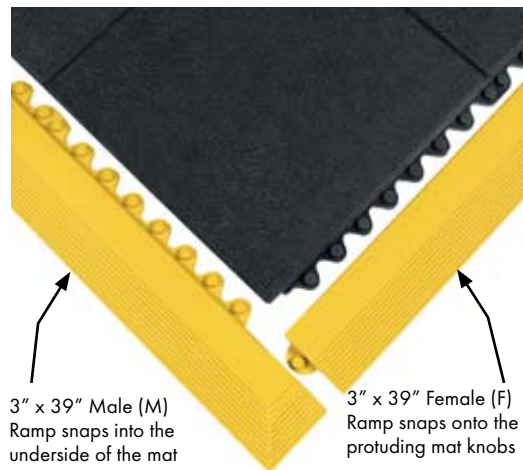

Colors: Mat - Black (BK)
Beveled Edge - Yellow or Black



Very **substantial in design**, this solid surface, modular anti-fatigue mat keeps employees comfortable and productive 24/7. Available in a 3' x 3' single workstation size, it also has a hidden interlocking system that connects mats on all four sides to allow **quick coverage of large areas**. An unparalleled value, 24/Seven Solid can also be customized to accommodate unusually shaped areas. Available in **three (3)** formulations—

- **General Purpose (GR)** natural rubber black mats designed for use in dry areas and around water.
- **CFR (Cutting Fluid Resistant)** formulation resists mineral oil-based cutting fluids. Also available with GritWorks! surface for extra traction. See [page 28](#).
- **New 100% Nitrile (NBR)** mats for use around petroleum based fluids. Also available with GritWorks! surface for extra traction. See [page 28](#).

For **extra safety**, attach optional 3" x 39" yellow safety beveled edges (female ramps snap onto protruding mat knobs and male ramps snap into underside of mat). **GR ramps go with GR Mats, CFR ramps go with CFR Mats and NBR ramps go with NBR Mats.**

24/Seven Solid Sizes

Stock Sizes

Ship within 1 Business Day

3' x 3' Mat
3" x 39" Female Ramp
3" x 39" Male Ramp

Non-Stock Sizes

Ship within 5 Business Days

To 15' W x 60' L

C Mats with edging available. Custom widths or unique configurations are available in 12" increments. Some mats may require several sections. Please call for pricing.

Please specify compound when ordering.

24/Seven Solid Facts

5/8" Overall Thickness


Wearwell **Innovation**—1995

***Green Rating > 33%** Post Industrial Material

**General Purpose Only*

(SR) Slip-Resistant Diamond-Plate No. 418

BEST Performance

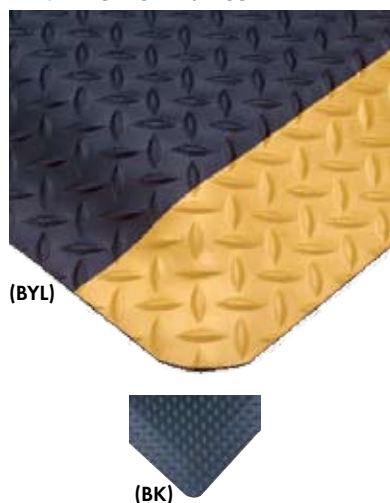

Defined by its **natural rubber sponge base**, (SR) Diamond-Plate offers unique benefits unmatched by any other sponge-backed mat on the market.

- The rubber sponge hugs smooth and sealed epoxy floors, **drastically reducing any mat movement**.
- The **100% natural rubber sponge base** is incredibly buoyant, basically refusing to crush down. This resilience equates to **exceptional comfort and long-term performance**.


(SR) Diamond-Plate Facts

9/16" Overall Thickness

Wearwell **Innovation**—1998

3 Year Warranty

Green Rating = 50% Post Industrial Material



(SR) Diamond-Plate Sizes

Stock Sizes

Ship within 1 Business Day

2' x 3' 3' x 5'

Non-Stock Sizes

Ship within 2 Business Days

2' x 75' 2' Cut up to 75'
3' x 75' 3' Cut up to 75'
4' x 75' 4' Cut up to 75'

Please specify color when ordering.

WeldSafe® No. 447**BEST Performance**

WeldSafe dramatically reduces fatigue while withstanding the challenges of welding environments. Specifically formulated to repel sparks and hot metal shards, the thick rubber surface has a melt point of over 500°F. The super resilient Nitricell® sponge base is a Nitrile rubber composite that offers unparalleled comfort during long shifts. **All edges are safety beveled.**

Color: Black (BK). Available in two (2) thicknesses:



- **UltraSoft 7/8"** with a double-thick, 3/4" Nitricell sponge base for even more standing comfort
- **Standard 9/16"** with a 3/8" sponge base

WeldSafe Facts

Wearwell Innovation—1996

3 Year Warranty

Green Rating > 33% Post Industrial Material

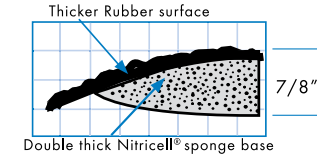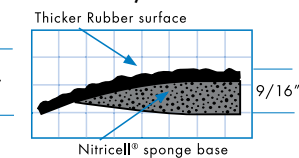UltraSoft 7/8" thickness**Standard 9/16" thickness****WeldSafe® Sizes**

Stock Sizes	
Ship within 1 Business Day	
2' x 3'	3' x 5'
Non-Stock Sizes	
Ship within 2 Business Days	
2' x 75'	2' Cut up to 75'
3' x 75'	3' Cut up to 75'
4' x 75'	4' Cut up to 75'

Please specify thickness when ordering.



Square edges, custom widths and unique configurations are available. Please call for pricing.

Comfort2Go™ No. 518 Kneel. Stand. Go.**BEST Performance**

Comfort2Go is an **extra-duty, dual-purpose, portable anti-fatigue mat** designed for employees who move from place to place to work—technicians, mechanics, engineers, reliability personnel etc. **Large enough to stand on and comfortable enough to kneel on**, Comfort2Go's flexible vinyl surface provides outstanding durability and abrasion resistance while its **super-thick Nitrile rubber composite sponge base** lessens overall fatigue. Easily transportable, simply hang it on a tool cart, throw it in the back of your truck or carry Comfort2Go to the next job site. **Color:** Black (BK)


Comfort2Go Facts

7/8" Overall Thickness

Wearwell Innovation—2005

3 Year Warranty

Green Rating > 33% Post Industrial Material



Durable vinyl surface



(BK)

Easy grip handle. Use to hang mat on a tool cart

**Comfort2Go Size**

Stock Size	
Ships within 1 Business Day	
17" x 30"	

Medium Duty Industry


In this section, you'll find:

Diamond-Plate Select	No. 495	p. 15
Tile-Top Select.....	No. 494	p. 15
Corrugated SpongeCote®	No. 431	p. 16
ComfortPro™	No. 433	p. 16
Ortho Stand	No. 454	p. 17
Modular Diamond-Plate.....	No. 470/466	p. 17
Safety Zone Interlock.....	No. 455	p. 18
Enviro Mat	No. 405	p. 18



Diamond-Plate Select No. 495

BETTER Performance

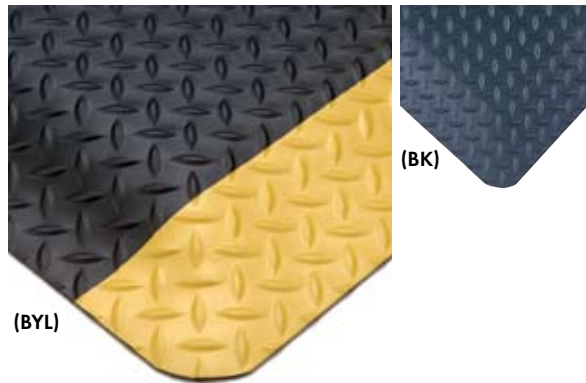


Diamond-Plate Select is an **excellent anti-fatigue mat** for those on a **tighter budget**. Designed to prevent worker fatigue in dry industrial applications, it has a Flex-Link™ sponge base. Flex-Link is specially formulated **blown-vinyl sponge designed for comfort**.


A popular choice in areas that require a high-tech look, Diamond-Plate Select is used in industrial, commercial, lab and retail applications. **Colors:** Black (BK), Black/Yellow (BYL)

Available in two (2) thicknesses:

UltraSoft 15/16" - Designed for extra softness

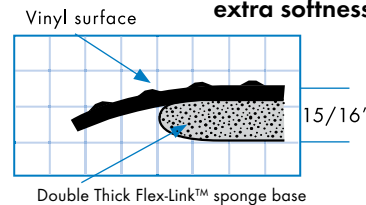

Standard 9/16"

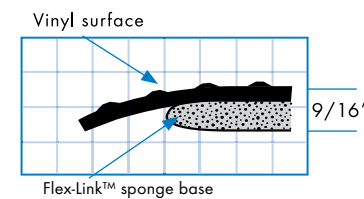

Diamond-Plate Select Facts

Wearwell **Innovation**—1994

1 Year Warranty

Green Rating = 50% Post Industrial Material

Diamond-Plate Select Sizes

Stock Sizes

Ship within 1 Business Day

2' x 3'

3' x 5'

Non-Stock Sizes

Ship within 2 Business Days

2' x 75'

2' Cut up to 75'

3' x 75'

3' Cut up to 75'

4' x 75'


4' Cut up to 75'

Please specify thickness and color when ordering.



Tile-Top Select No. 494

BETTER Performance

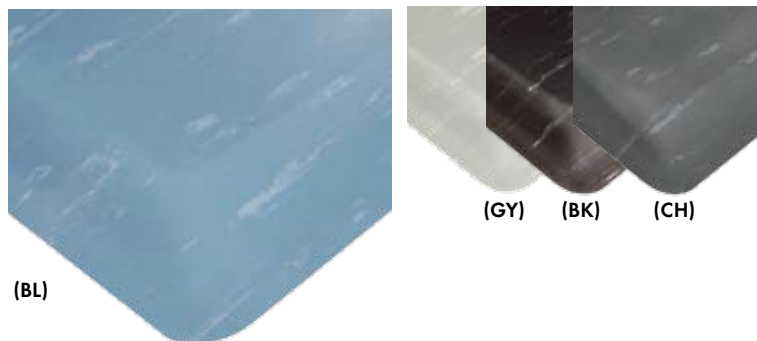


An ideal Lab or Commercial mat, Tile-Top Select is designed for those facilities who need productive, comfortable employees, yet are on a budget. The durable marbled surface is **resistant to many common chemicals and cleaners** and perfect for **high-use areas**. And our comfortable Flex-Link sponge base is designed to **prevent fatigue all day long**.

Available in an **UltraSoft 7/8"** version with a double-thick Flex-Link™ sponge base and in a **Standard 1/2"** thickness.


Colors: Blue (BL), Gray (GY), Black (BK) and Charcoal (CH)

Available in two (2) thicknesses:

UltraSoft 7/8"



Standard 1/2"



Tile-Top Select Sizes

Stock Sizes

Ship within 1 Business Day

2' x 3'

3' x 5'

Non-Stock Sizes

Ship within 2 Business Days

2' x 60'

2' Cut up to 60'

3' x 60'

3' Cut up to 60'

4' x 60'

4' Cut up to 60'


Please specify color and thickness when ordering.

Tile-Top Select Facts


1 Year Warranty

Corrugated SpongeCote® No. 431

BEST Performance

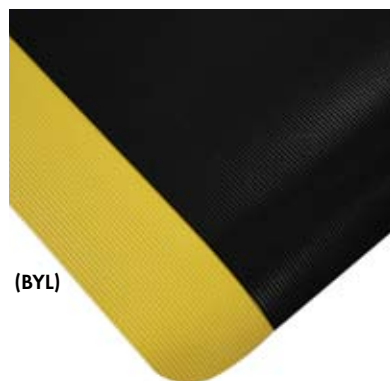

(BYL)



(BK)

This long-time favorite gets the job done by providing **traction and comfort in dry industrial, commercial and retail applications**. In fact, the flexible corrugated surface is a real favorite among line workers and supermarket clerks because of the extra traction in the instance of surface spills. The **specially formulated Flex-Link™ sponge base** is blown-vinyl, designed for comfort. Use in dry areas or where chemicals can spill on the surface. (check the **chemical resistance chart** for compatibility).
Colors: Black (BK) and Black with Yellow Borders (BYL)

Corrugated SpongeCote Facts


Wearwell **Innovation**—1985

1 Year Warranty

Green Rating > 50% Post Industrial Material


Available in two (2) thicknesses:

UltraSoft 7/8" - Designed for extra softness

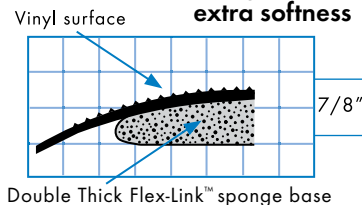

Double Thick Flex-Link™ sponge base

Standard 1/2"

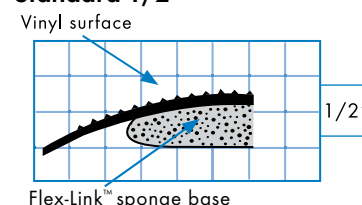

Flex-Link™ sponge base

Corrugated SpongeCote Sizes

Stock Sizes	Non-Stock Sizes	
Ship within 1 Business Day	Ship within 2 Business Days	
2' x 3'	Black w/ Yellow Borders	
3' x 5'	2' x 60'	2' Cut up to 60'
	3' x 60'	3' Cut up to 60'
	4' x 60'	4' Cut up to 60'
	Black	
	2' x 75'	2' Cut up to 75'
	3' x 75'	3' Cut up to 75'
	4' x 75'	4' Cut up to 75'


Please specify thickness and color when ordering.



Square edges, custom widths and unique configurations are available. Please call for pricing.

ComfortPro™ No. 433

BEST Performance

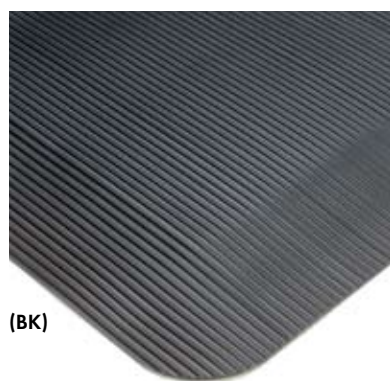

(BK)

This anti-fatigue mat performs like a true professional providing the necessary comfort at an exceptional price. Another long time favorite, **Comfort-Pro has a flexible, easy to clean vinyl surface** that adds to the overall comfort and chemical resistance of the mat.

The **Flex-Link™ sponge base** is a specially formulated blown-vinyl sponge designed for comfort. Color: Black (BK)

ComfortPro Facts


Wearwell **Innovation**—1985

1 Year Warranty

Green Rating > 50% Post Industrial Material


Available in two (2) thicknesses:

UltraSoft 7/8"

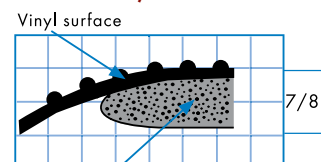

Double Thick Flex-Link™ sponge base

Standard 1/2"

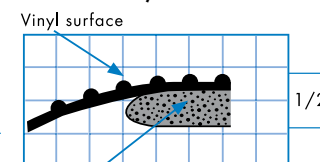

Flex-Link™ sponge base

ComfortPro Sizes

Stock Sizes	Non-Stock Sizes	
Ship in 1 Business Day	Ship in 2 Business Days	
2' x 3'	2' x 75'	2' Cut up to 75'
3' x 5'	3' x 75'	3' Cut up to 75'
	4' x 75'	4' Cut up to 75'


Please specify thickness when ordering.



Square edges, custom widths and unique configurations are available. Please call for pricing.

Ortho Stand™ No. 454

BETTER Performance

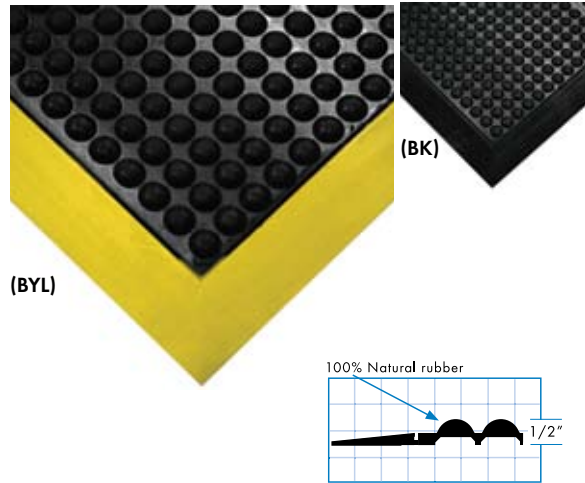

This **ergonomically designed anti-fatigue mat** has a **hollow-domed surface** that slightly compresses underfoot to encourage subtle changes in posture. These shifts **increase circulation resulting in less fatigue and much more overall comfort.**

An economical, dry area, single work area mat, Ortho Stand has a **resilient natural rubber compound** perfect for use at checkout stands, manifest stations, mailing areas and even punch presses. **Colors:** Black (BK), Black with Yellow Borders (BYL)



Ortho Stand Facts

1/2" Overall Thickness

Wearwell **Innovation**—1994

1 Year Warranty

Green Rating > 33% Post Industrial Material

Ortho Stand Sizes

Stock Sizes

Ship in 1 Business Day


2' x 3'

3' x 4'

Please specify color when ordering.

Modular Diamond-Plate No. 470

BETTER Performance

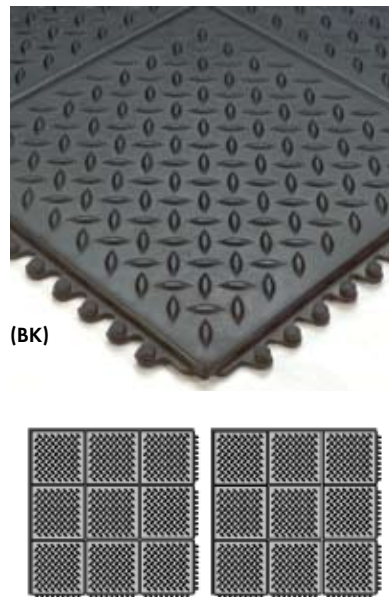

Defined by its **functional, lightweight design**, this 3' x 3' **modular anti-fatigue mat** is ideal for single work spaces or to cover large areas.

Designed for comfort and ease of use in mostly dry areas, it has a hidden interlocking system that requires no additional bevels or attachment devices. Perfect for high maintenance areas, it's also easy to clean. The exterior edges are safety rounded. It is available in **two (2) compounds**:

General Purpose—Natural Rubber

Grease Proof—50% Nitrile Rubber (for areas where chemicals and caustic agents occasionally spill to the floor)

Color: Black (BK)

Modular Diamond-Plate Facts

1/2" Overall Thickness

Wearwell **Innovation**—1993

1 Year Warranty

Green Rating > 20% Post Industrial Material

Modular Diamond-Plate Sizes

Stock Sizes

Ship in 1 Business Day

3' x 3'

Non-Stock Sizes


Ship in 5 Business Days

To 15' wide by 60' long

Custom sizes must be ordered with the Part Number 466.



Please specify General Purpose or Grease Proof when ordering.

C Custom widths and unique configurations are available in 12" increments. Some mats may require several sections. Call for pricing and order using Part No. 466.




Safety Zone Interlock No. 455

BETTER Performance

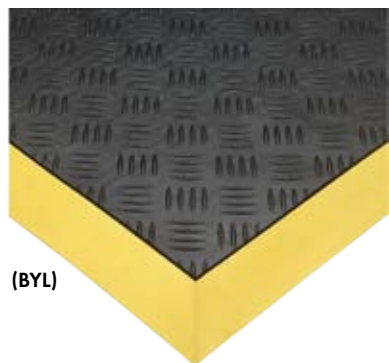

(BYL)

100% Natural rubber



This interlocking mat **creates a “zone” of safety** as sections snap together to form runners of any length, yet zip apart easily for clean-up. **Its optional yellow borders highlight the work area**, while the aggressive deck-plate surface ensures extra traction. The natural rubber compound is **ideal for dry areas or places with watery overspray**. Available in End, Single and Center sections.


Colors: Black (BK) and Black with Yellow Borders (BYL)

Safety Zone Interlock Facts

1/2” Overall Thickness

Wearwell Innovation—1983

1 Year Warranty

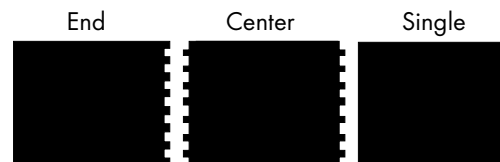

Safety Zone Interlock Sizes

Stock Sizes


Ship within 1 Business Day

2' x 3' End	3' x 2' End
2' x 3' Center	3' x 2' Center
2' x 3' Single	3' x 2' Single

Please specify color when ordering.

Enviro Mat No. 405

GOOD Performance

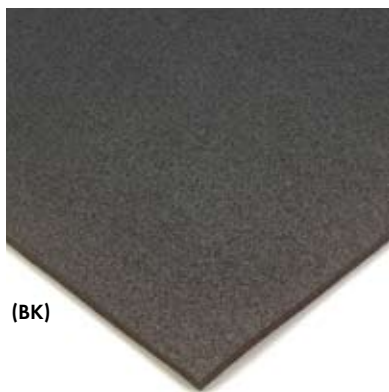

(BK)

One of the **first recycled mats of its kind**, Enviro Mat is an industrial strength, anti-fatigue runner mat. Densely compounded with recycled tire buffings, this “green” mat is **tough enough for heavy use**. Enviro Mat offers cushioning and impact resistance where employees walk, work, and even workout. It is popular in dry industrial and fitness areas.

Color: Black (BK)


Enviro Mat Facts

3/8” Overall Thickness

1 Year Warranty

Green Rating > 80% Post Industrial Material

Recycled tire buffings



Enviro Mat Sizes

Stock Sizes

Non-Stock Sizes

Ship within 1 Business Day Ship within 2 Business Days

2' x 105'	2' Cut up to 105'
3' x 105'	3' Cut up to 105'
4' x 105'	4' Cut up to 105'

PVC Sponge Matting

PVC sponge mats are very popular solutions to standing worker fatigue. Among the **most economical** "Dry Area" products on the market, they are also very versatile. In fact, it is very common for companies to purchase rolls of these materials and cut mats to fit the exact length of each workstation.

Wearwell offers a **variety of PVC sponge mats**, each with slightly different features to meet the specific needs of the work environment and the workers.


In this section, you'll find:

Primo Sponge.....	No. 512	p. 20
Endurable	No. 459	p. 21
Ultra-Tred ArmorCote.....	No. 440	p. 21
Tuf Sponge.....	No. 451	p. 22
Deluxe Tuf Sponge	No. 442	p. 22
Soft Step.....	No. 427	p. 23
Deluxe Soft Step	No. 444	p. 23
High Energy Mat.....	No. 511	p. 23

1 Year Warranty



NEW! **Primo Sponge No. 512**
BETTER Performance

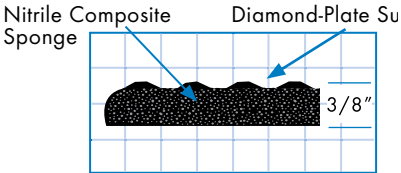

Defined by its uncommon comfort and unique High Viz borders, Primo Sponge provides consistent and supportive comfort. Created in response to customer demand for a sponge product that meets performance requirements, Primo is a totally new sponge compound loaded with Nitrile and other resilience enhancing additives. This incredibly substantial advanced performance mat provides the an **exceptional level of support and comfort**. Primo Sponge also has unique high visibility borders and a diamond-embossed surface.

This **exceptional blend of resilience and higher density** is just what your employees need for a comfortable and productive day at work. When you think about it, many of them spend 1/4th of their lives standing at work. They **deserve to be comfortable**. And when they are, you reap the benefits in terms of higher productivity.

Color: Black with High Viz Borders (BKHV)

Primo Sponge Facts

- 3/8" Overall Thickness
- Wearwell **Innovation**—2009
- 1 Year Warranty




Primo Sponge Sizes

Stock Sizes	Non-Stock Sizes
Ship within 1 Business Day	Ship within 2 Business Days
2' x 3'	2' Cut up to 60' in Length
3' x 5'	3' Cut up to 60' in Length
3' x 12'	4' Cut up to 60' in Length
2' x 60'	6' Cut up to 60' in Length
3' x 60'	
4' x 60'	
6' x 60'	

Please specify part and color when ordering.

Endurable No. 459

GOOD Performance

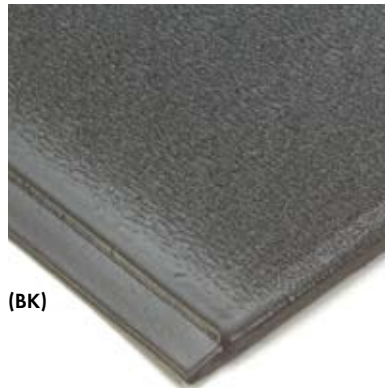

(BK)

This PVC sponge is unique in that it has a **remarkably durable and abrasion-resistant surface**. The dense PVC surface, created during the manufacturing process, is heat bonded to a comfortable sponge base. As a dual density, "two-in-one construction" anti-fatigue mat, Endurable **lasts much longer than similar products**, but is still very economical. All edges are safety beveled. **Color: Black (BK)**


Endurable Facts

1/2" Overall Thickness
1 Year Warranty

Endurable Sizes

Stock Sizes		Non-Stock Sizes
Ship in 1 Business Day		Ship in 2 Business Days
2' x 3'	2' x 60'	2' Cut up to 60' in Length
3' x 5'	3' x 60'	3' Cut up to 60' in Length
3' x 12'	4' x 60'	4' Cut up to 60' in Length

Dense vinyl surface



Ultra-Tred ArmorCote No. 440

GOOD Performance




Ultra-Tred ArmorCote has the comfort and flexibility of a PVC sponge, yet is defined by its **chemical resistant, double-thick urethane surface coating**. This feature offers more abrasion resistance than comparable sponge products.

A tremendously versatile, yet affordable mat, Ultra-Tred is ideal for use in mostly dry applications such as labs and other medium traffic areas.

Color: Black with Yellow Borders (BYL)


Ultra-Tred ArmorCote Facts

3/8" Overall Thickness
Urethane Coating
1 Year Warranty

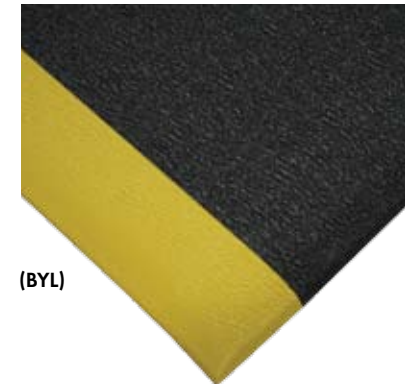

(BYL)

Urethane Coating



Blown vinyl sponge

Ultra-Tred ArmorCote Sizes

Stock Sizes		Non-Stock Sizes
Ship in 1 Day		Ship in 2 Days
2' x 3'	2' x 60'	2' Cut up to 60' in Length
3' x 5'	3' x 60'	3' Cut up to 60' in Length
3' x 12'	4' x 60'	4' Cut up to 60' in Length

Tuf Sponge Matting
GOOD Performance






Tuf Sponge No. 451

Tuf Sponge is an excellent choice for practical and economical comfort. Ergonomically **designed to reduce floor hardness up to 50%**, this blown-vinyl sponge has a classic linear surface pattern. **Available in workstation mats and rolls**, it can easily be “custom” cut to fit work areas. All edges safety rounded on full rolls and stock sizes. Available in **two** standard thicknesses: 1/4” (only available in Black and Gray) and 3/8”.

Colors: Black with Yellow Borders (BYL), Black (BK), Gray (GY)


Available in TWO (2) thicknesses:

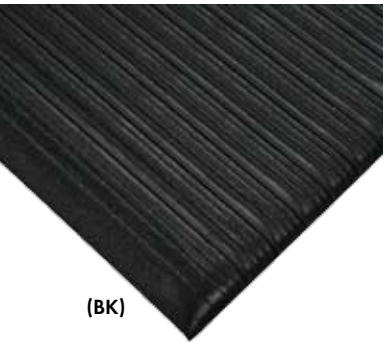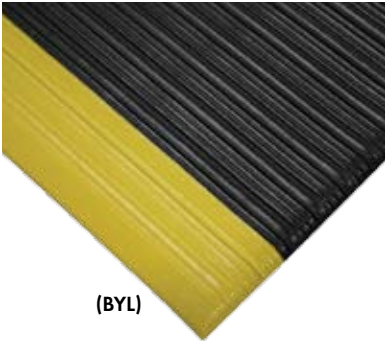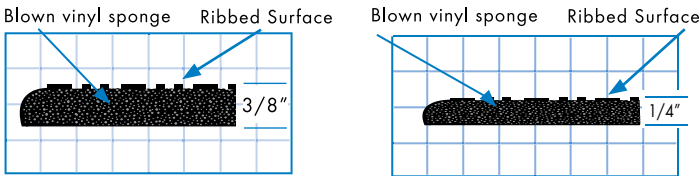

Deluxe Tuf Sponge No. 442

Deluxe Tuf Sponge is virtually identical to **Tuf Sponge** except for two features. This Deluxe sponge has a **softer, thicker formulation for extra comfort**. Overall **thickness of 5/8”**.

Colors: Black (BK), **NEW!** Black with Yellow Borders (BYL) or Gray (GY)

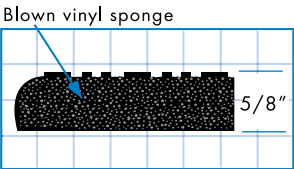


Tuf Sponge and Deluxe Tuf Sponge Sizes

Stock Sizes	Non-Stock Sizes
Ship in 1 Business Day	Ship in 2 Business Days
2' x 3'	2' Cut up to 60' in Length
3' x 5'	3' Cut up to 60' in Length
2' x 60'	4' Cut up to 60' in Length
3' x 60'	6' Cut up tp 60' in Length (3/8" only)
4' x 60'	
6' x 60' (only in 3/8" thickness)	
27" x 36" (only 3/8" thickness)	
27" x 60" (only 3/8" thickness)	
3' x 12' (only 3/8" thickness)	

Please specify Part Number and color when ordering.

Soft Step Matting

GOOD Performance

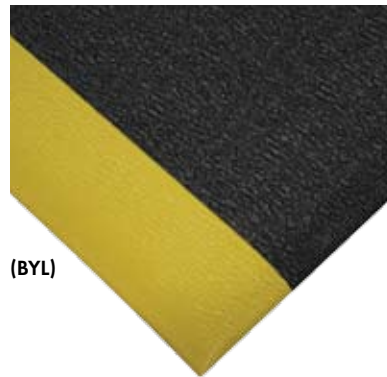

(BYL)

Soft Step No. 427

GOOD Performance


Very similar to Tuf Sponge, this blown PVC sponge is identified by its attractive pebble embossed pattern. As one of the most affordable anti-fatigue mats on the market, it provides a "soft step" to lessen worker fatigue and the impact of heel strike.

Colors: Black (BK), Black with Yellow Borders (BYL) and Gray (GY)

Soft Step Facts

3/8" Overall Thickness

1 Year Warranty



Deluxe Soft Step No. 444

BETTER Performance

Designed to **prevent standing worker fatigue without emptying your wallet**, this deluxe version of Soft Step is thicker and has a softer formulation. It can easily be cut to fit your work areas and all edges are safety rounded on full rolls and stock sizes.

Colors: Black (BK), **NEW!** Black with Yellow Borders (BYL) or Gray (GY)



(BK)




(GY)

Deluxe Soft Step Facts

5/8" Overall Thickness

1 Year Warranty



Soft Step and Deluxe Soft Step Sizes


Stock Sizes		Non-Stock Sizes
Ship in 1 Business Day		Ship in 2 Business Days
2' x 3'	2' x 60'	2' Cut up to 60' in Length
3' x 5'	3' x 60'	3' Cut up to 60' in Length
3' x 12'*	4' x 60'	4' Cut up to 60' in Length

* Available in Soft Step No. 427 only.

Please specify part and color when ordering.

High Energy Mat No. 511

GOOD Performance

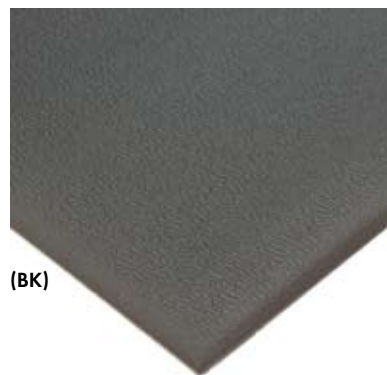

(BK)


More than a typical sponge mat, High Energy is a unique **cross-linked PVC compound**. Engineered to **outperform similar mats**, it has incredible flexibility and immediate rebound. Available in stock size mats and rolls, High Energy can easily be cut to "**custom**" fit your **workstations**. Perfect for dry areas where more comfort and longevity is required from sponge matting. Edges are safety rounded.

Color: Black (BK)

High Energy Mat Facts

3/8" Overall Thickness

1 Year Warranty



High Energy Mat Sizes

Stock Sizes		Non-Stock Sizes
Ship in 1 Business Day		Ship in 2 Business Days
2' x 3'	2' x 60'	2' Cut up to 60' in Length
3' x 5'	3' x 60'	3' Cut up to 60' in Length
	4' x 60'	4' Cut up to 60' in Length

Section I: Modular Matting

Why modular? Aside from the obvious fact that **modular matting will create an ergonomic floor above a floor**, there are other compelling reasons to choose these accommodating products. Installing modular matting **saves money and increases overall productivity** because:

- Modular mats can be **quickly assembled** to cover large and unusually shaped areas resulting in reduced installation costs.
- Damaged sections can be unlocked and easily replaced. This dramatically extends the life of the product.
- They can **cover large and unusually shaped areas** without the up-charge of a custom mat.
- Modular mats can conform to work areas adapting the space to the needs of the worker.
- These products can often be **permanently installed** to eliminate any movement and reduce the strain of repositioning.

In this section, you'll find:

ErgoDeck® Open Grid	No. 560	p. 25
ErgoDeck® SOFT Open Grid	No. 564	p. 25
ErgoDeck® SOFT Open Grid White.....	No. 564	p. 25
ErgoDeck® Solid with GritWorks!®	No. 563	p. 26
ErgoDeck® Open with Gritworks!®	No. 561	p. 26
24/Seven®	No. 572	p. 27
24/Seven® with GritWorks!®	No. 576	p. 27
24/Seven® Solid with Gritworks!®	No. 574	p. 28
Comfort Deck®	No. 460	p. 29
Grit-Top Comfort Deck®	No. 461	p. 29




ErgoDeck® Open No. 560

**Protect your
employees from chemical, water, grease
and oil spills.**

ErgoDeck Ergonomic Floor System

Each 18" x 18" tile has six LockSafe® connectors per side for a totally secure connection

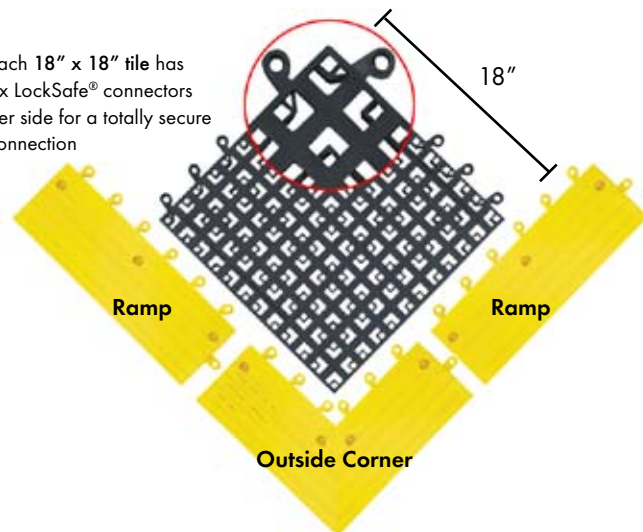

These ErgoDeck tiles are specifically designed to create a comfortable, ergonomic flooring system for wet areas, specifically water and other non-hazardous fluids. The **super-sized 18" x 18"** vinyl tiles quickly and securely connect for a seamless installation using our patented LockSafe® interlocking system. If one is somehow damaged during use however, it can be "un-locked" and easily replaced. The **optional 6" side safety ramps and corners** have countersunk holes so ErgoDeck can be permanently installed.

ErgoDeck Facts

7/8" Overall Thickness

Available in **Three (3) Versions:**

ErgoDeck Open No. 560 - Original

ErgoDeck Open SOFT No. 564 - Charcoal

ErgoDeck Open SOFT No. 564 - White

Wearwell **Innovation—2005**

Green Rating = 100% Post Industrial Material

An Ergonomic "Floor Above a Floor."

ErgoDeck Open Grid No. 560

ULTIMATE Performance

ErgoDeck Open No. 560 is the **original version** designed to withstand heavy use including cart traffic (up to 64 psi). It's **ideal for use in wet, non-greasy areas** and where small debris is present. Color: Black (BK)

ErgoDeck SOFT Open Grid No. 564

ULTIMATE Performance

Manufactured with a **more flexible formulation**, it is designed for worker comfort and productivity. Tiles should be used in areas where water or other non-slippery fluids are present.

Color: Charcoal (CH)

ErgoDeck SOFT WHITE Open Grid No. 564

ULTIMATE Performance

ErgoDeck SOFT Open White is designed for "body in white" applications where metal forms are painted and inspected. This light color helps to highlight any blemishes in the paint.

Color: White (WH)



ErgoDeck Stock Sizes

Ship within 1 Business Day

ErgoDeck Open Grid No. 560	ErgoDeck™ SOFT Open No. 564
Case of 10 Tiles	Case of 10 Tiles
Edging No. 560	SOFT Edging No. 564
Case of 10 Ramps	Case of 10 Ramps
Case of 4 Corners	Case of 4 Corners
Please specify Black (BK) or Yellow (YL) when ordering.	Please specify Charcoal (CH) or White (WH) when ordering.

ErgoDeck Non-Stock Sizes

Ship within 2 Business Days

ErgoDeck Open Grid No. 560	ErgoDeck™ SOFT Open No. 564
Single Tile	Single Tile
Edging No. 560	SOFT Edging No. 564
Single Ramp	Single Ramp
Single Outside Corner	Single Outside Corner
Please specify Black (BK) or Yellow (YL) when ordering.	Please specify Charcoal (CH) or White (WH) when ordering.



Unique configurations are available in 3" increments. Some mats may require several sections. Please call for pricing.

ErgoDeck® Ergonomic Floor System

Defined by their **high traction GritWorks!® surfaces**, these ErgoDeck tiles are specifically designed to provide a slip resistant, ergonomic flooring system. GritWorks! is a carbide grit that effectively prevents slip hazards—even in areas that would normally be extremely slick.

ErgoDeck tiles are **quickly assembled** and securely connect using our patented LockSafe® interlocking system. This **seamless installation** is ideal for any size area **including very large and custom configurations**. If one tile is ever damaged during use, it can be “un-locked” and easily replaced.

The **optional 6” side safety ramps and corners** have countersunk holes so ErgoDeck can be permanently installed.

ErgoDeck Facts

7/8” Overall Thickness

Available in **Two (2) Versions**:

ErgoDeck Solid with GritWorks! No. 563

ErgoDeck Open with GritWorks! No. 561

Wearwell **Innovation—2004**

Green Rating = 100% Post Industrial Material

ErgoDeck Solid with GritWorks!® No. 563

ULTIMATE Performance


ErgoDeck Solid with GritWorks! No. 563 is most commonly used in areas where over spray or tracking of grease and oil cause slip hazards. The solid surface facilitates frequent maintenance and can withstand cart traffic. **Color: Black (BK)**

ErgoDeck Open Grid with GritWorks!® No. 561

ULTIMATE Performance

ErgoDeck Open Grid with GritWorks! No. 561 has a high traction carbide surface to prevent slip hazards in wet areas where slippery fluids are present. This original version can withstand cart traffic up to 64 psi. **Color: Black (BK)**

Each 18” x 18” tile has six LockSafe® connectors per side for a totally secure connection

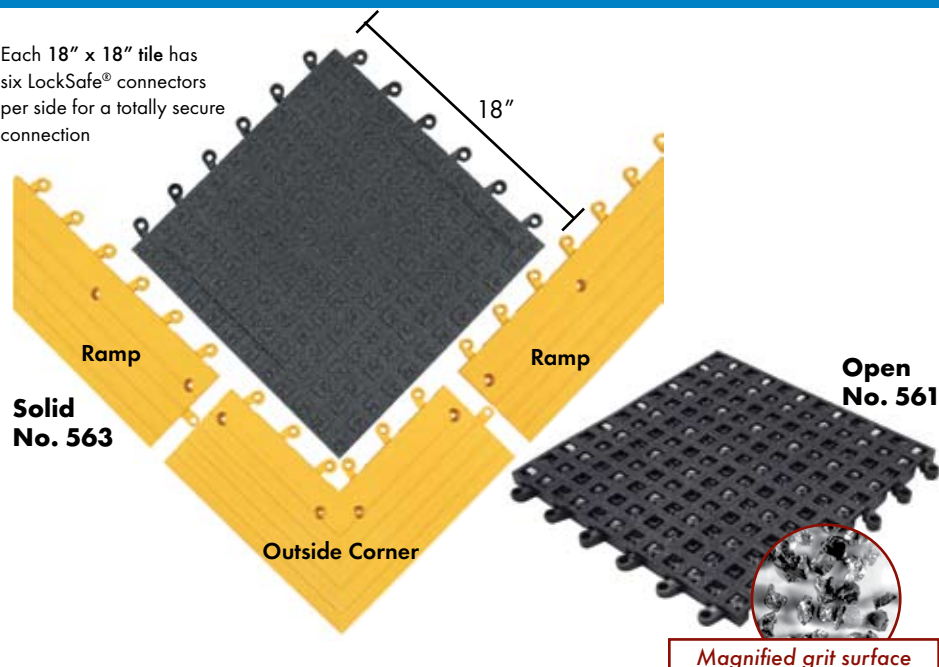

ErgoDeck Stock Sizes

Ship within 1 Business Day

Solid with GritWorks! No. 563

Case of 10 Tiles

Edging No. 560 in either Black (BK) or Yellow (YL)

Case of 10 Ramps

Case of 4 Corners

Open Grid with GritWorks! No. 561

Case of 10 Tiles

ErgoDeck Non-Stock Sizes

Ship within 2 Business Days

Solid with GritWorks! No. 563

Single Tile

Edging No. 560 in either Black (BK) or Yellow (YL)

Single Ramp

Single Outside Corner

Open Grid with GritWorks! No. 561

Single Tile




Unique configurations are available in 3” increments. Some mats may require several sections. Please call for pricing.

An Ergonomic “Floor Above a Floor.”

24/Seven® No. 572

ULTIMATE Performance

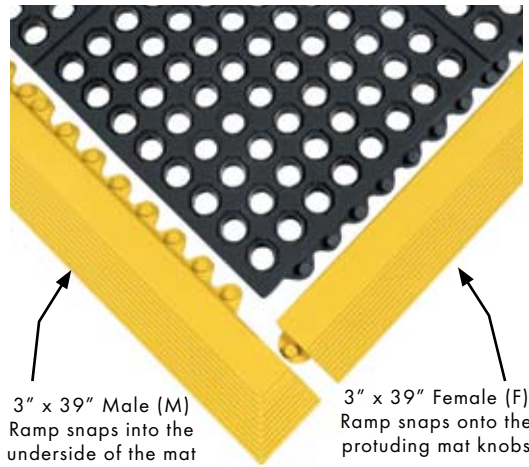

Colors: Mat—Black (BK)
Beveled Edge - Yellow or Black


Defined by its functional, modular style, this substantial anti-fatigue mat keeps workers productive, all day, every day. A very versatile 3' x 3' size, it features large holes to allow fluids and debris to flow through freely, while the hidden interlocking system connects on all four sides to quickly cover large areas. Available in **three (3)** formulations—

- **General Purpose (GR)** natural rubber black mats designed for use in dry areas and around water
- **CFR (Cutting Fluid Resistant)** formulation resists mineral oil-based cutting fluids
- **New 100% Nitrile (NBR)** mats for use around petroleum based fluids

For **extra safety**, attach optional 3" x 39" yellow safety beveled edges (female ramps snap onto protruding mat knobs and male ramps snap into underside of mat). **GR ramps go with GR Mats**, **CFR ramps go with CFR Mats** and **NBR ramps go with NBR Mats**.

24/Seven® with GritWorks!® No. 576

ULTIMATE Performance

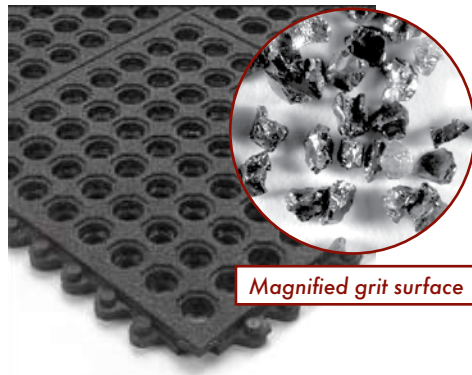

Colors: Mat—Black (BK)
Beveled Edge - Yellow or Black

Increase Traction by 40% with GritWorks! surface.

The high performance carbide grit coating offers **40% more traction than specified by OSHA in wet areas**. 24/Seven with GritWorks! No. 576 provides safety and comfort 24/7.

Available in **two (2)** rubber compounds—

- **CFR (Cutting Fluid Resistant)** formulation resists mineral oil-based cutting fluids
- **New 100% Nitrile (NBR)** mats for use around petroleum based fluids

24/Seven Facts


5/8" Overall Thickness

Wearwell **Innovation—1995**

1997 with GritWorks!

* **Green Rating > 33%** Post Industrial Material

* **General Purpose Only**



No. 572 and No. 576 Sizes

Stock Sizes

Ship within 1 Business Day

3' x 3' Mat

3" x 39" Female Ramp

3" x 39" Male Ramp

Non-Stock Sizes

Ship within 5 Business Days

To 15' W x 60' L


Please specify compound when ordering.

C Mats with edging available. Please call for pricing. Custom widths or unique configurations are available in 12" increments. Some mats may require several sections. Please call for pricing.



24/Seven® Solid with GritWorks!® No. 574

ULTIMATE Performance

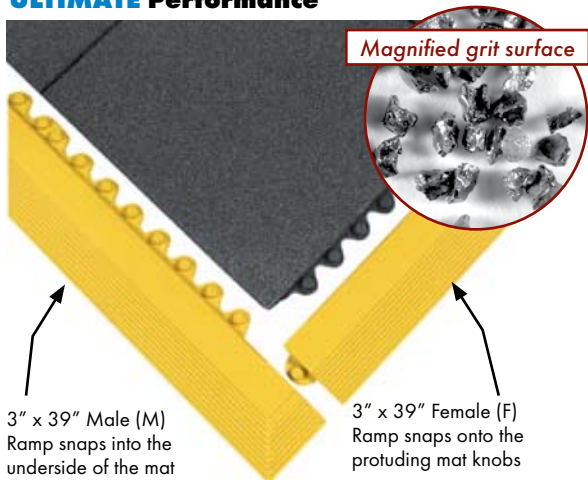

24/Seven Solid GritWorks! modular mats are designed for **use in hazardously slippery areas**. They provide exceptional traction in areas with overspray and tracking of greasy fluids. Ideal for facilities with multiple shifts, these substantial mats work 24/7 to keep employees comfortable.


As **3' x 3'** single workstation mats, they also **interlock on all sides for complete coverage of large areas**. Available in **two (2)** rubber compounds—

- **CFR (Cutting Fluid Resistant)** formulation resists mineral oil-based cutting fluids
- **New 100% Nitrile (NBR)** mats for use around petroleum based fluids

For **extra safety**, attach optional **3" x 39" yellow safety beveled edges** (female ramps snap onto protruding mat knobs and male ramps snap into underside of mat). **CFR ramps go with CFR Mats** and **NBR ramps go with NBR Mats**.

Colors: Mat—Black (BK)

Beveled Edge—Yellow or Black



24/Seven Solid with GritWorks! Facts

5/8" Overall Thickness

Wearwell **Innovation—1995**

Solid GritWorks! Sizes

Stock Sizes

Ship within 1 Business Day

3' x 3' Mat

3" x 39" Female Ramp

3" x 39" Male Ramp

Non-Stock Sizes

Ship within 5 Business Days

To 15' W x 60' L

Please specify compound when ordering.




Custom widths or unique configurations are available in 12" increments. Some mats may require several sections. Please call for pricing.

C Customization—We frequently customize all versions of 24/Seven.




Comfort Deck® No. 460**BEST Performance**


More than just an anti-fatigue mat, Comfort Deck is comprised of **substantial 12" x 12" interlocking tiles**, heat-sealed together to form stock and custom size mats. Unusually comfortable and functional, the surface effectively allows spills and small debris to easily flow through, keeping workers safe and productive. The **high quality PVC compound** is resistant to many industrial chemicals and fluids. Use at single workstations or cover a large area. **Colors:** Black with Yellow (BYL) and Black with Orange borders (BOR)

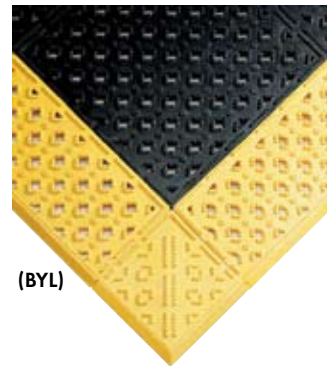

(BYL)



(BOR)

**Comfort Deck Facts**

7/8" Overall Thickness

1 Year Warranty

Green Rating > 50% Post Industrial Material

C Unique configurations are available. Some mats may require several sections. Please call for pricing.


Grit-Top Comfort Deck® No. 461**BEST Performance**

Defined by its GritWorks! surface, this slip-resistant version of Comfort Deck is designed for use in wet and slippery areas. The **GritWorks! surface dramatically increases traction** to a level that is **40% higher** than OSHA recommends in areas where grease and oil spills are common.


Colors: Black with Yellow Borders (BYL) and Black with Orange Borders (BOR)

Note: Only the tiles have grit.

C Unique configurations are available. Some mats may require several sections. Please call for pricing.

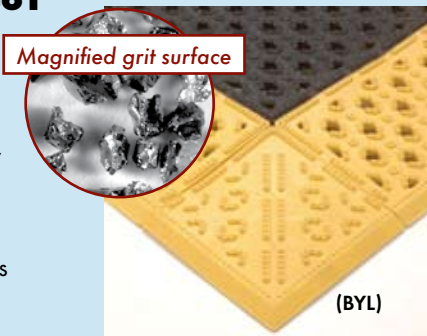


Magnified grit surface

**No. 460 and No. 461 Sizes**

Stock Sizes		Non-Stock Sizes
Ship in 1 Business Day		Ship in 5 Business Days
30" x 36"	42" x 96"	To 15' wide by 60' Long
30" x 48"	42" x 120"	
30" x 60"	12" x 12" Black tiles	
30" x 72"	6" x 12" Bevel - Not available with grit	
30" x 96"	6" x 6" Corner - Not available with grit	
42" x 72"		

Mats with Yellow Borders are in stock. Custom sizes are available in 12" increments.

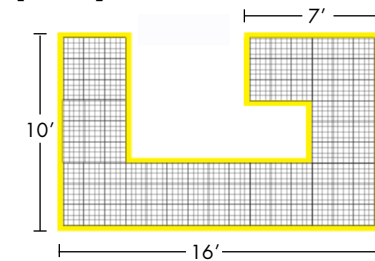C We Frequently Customize!

We specialize in customizing this mat. **6" wide safety ramps on three sides provide trip proof access.** With the ramps on just three sides, the mat can completely extend to the machine increasing workers' reach.




Section II:


High Performance Molded Drainage Mats

Defined by their effective and functional designs, these mats have been **favorites for many years**. The individual workstation sizes are very popular in machine shop and other industrial areas where drainage is essential. Some customers also prefer to use the drainage holes to collect metal or wood shavings, thus **reducing the need for daily maintenance**.

In this section, you'll find:

Industrial WorkSafe®.....	No. 479	p. 31
Industrial GritWorks!®	No. 487	p. 31
WorkSafe®	No. 477	p. 32

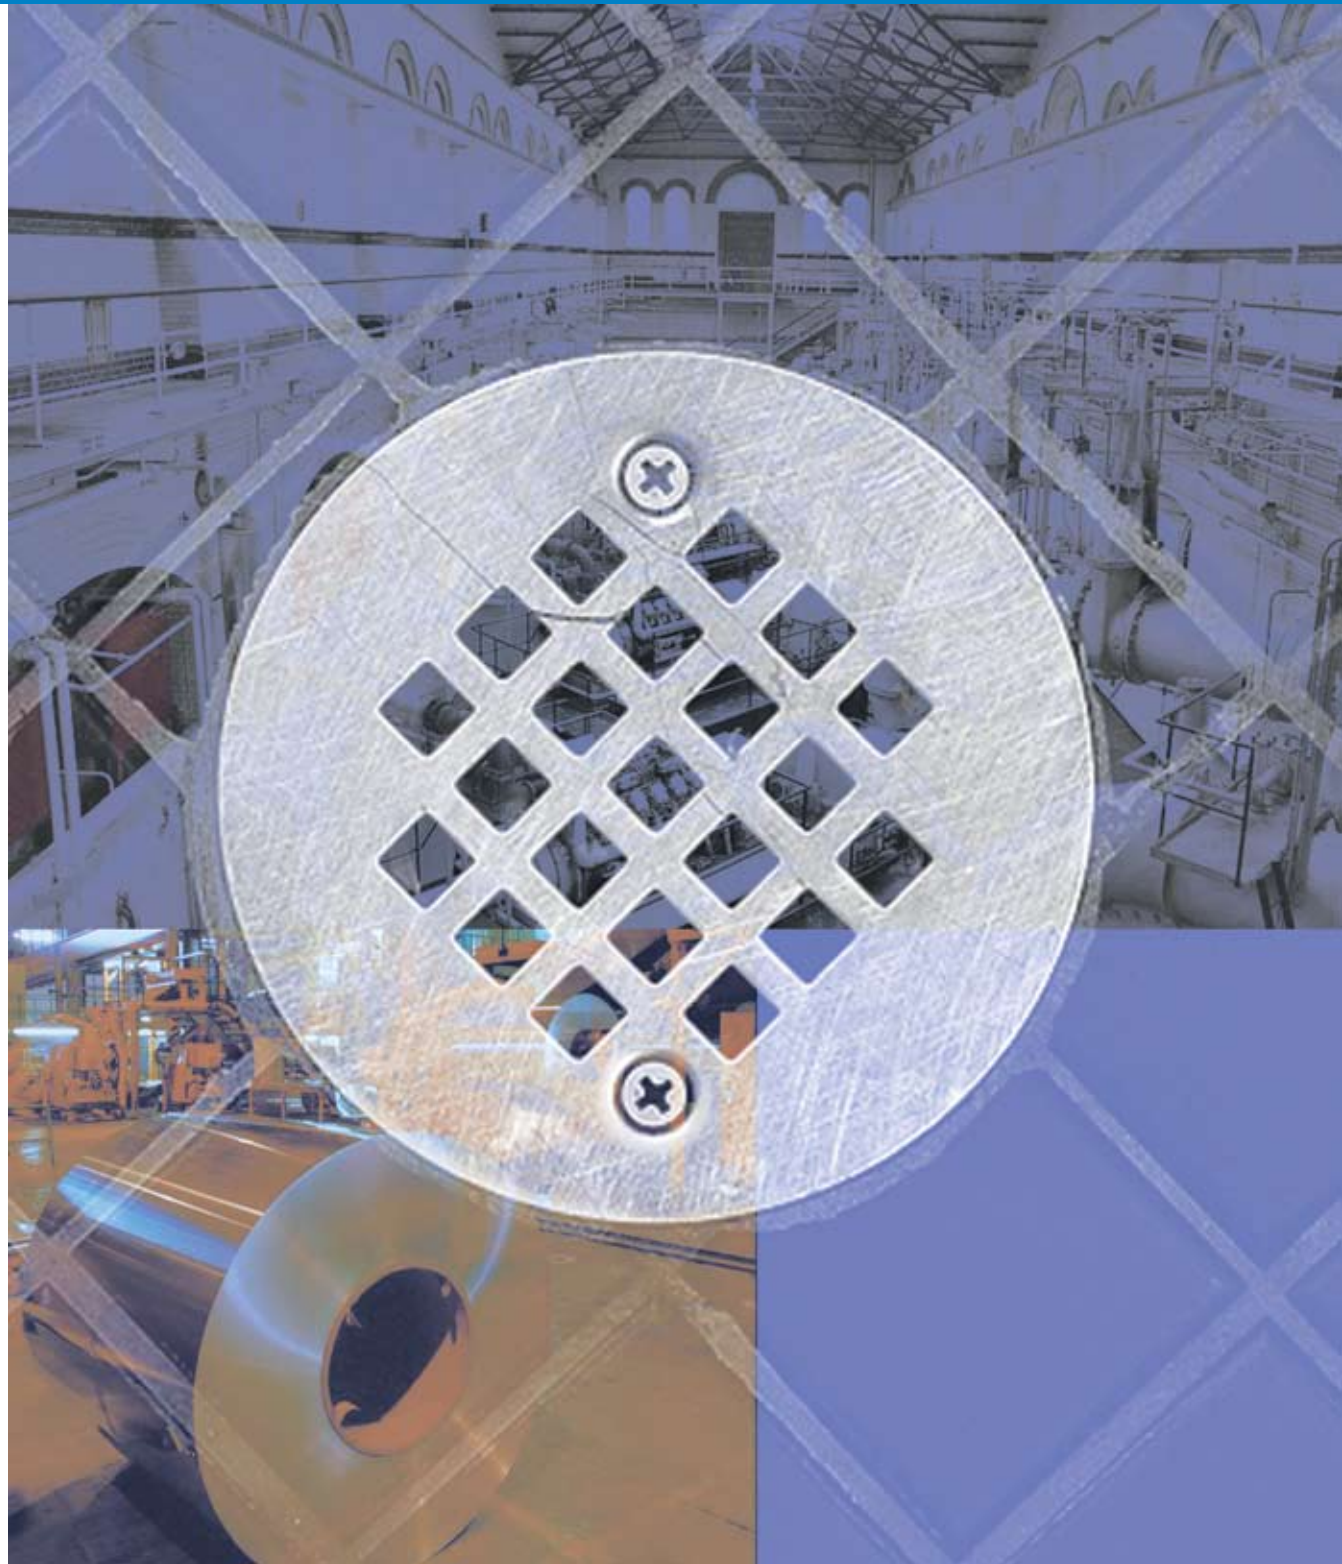

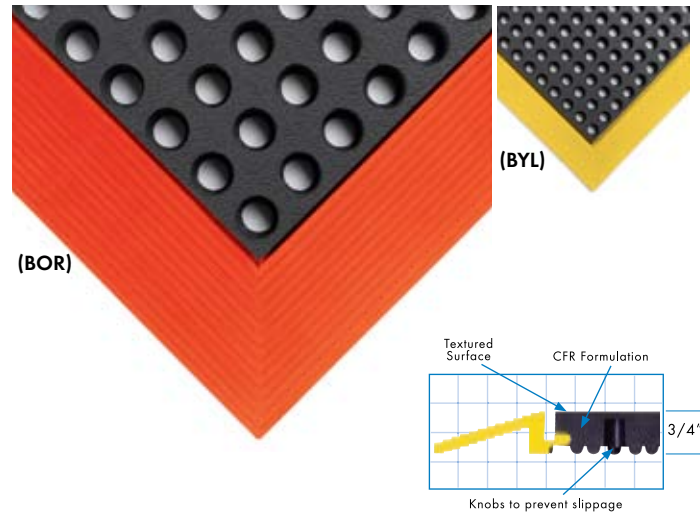Industrial WorkSafe® No. 479**BEST Performance**

Defined by its remarkable **CFR (mineral oil cutting fluid resistant)** compound, this anti-fatigue mat has other features that make it one of the most popular in the Wearwell line. Industrial WorkSafe's **extra thick, extra buoyant design** provides **high performance and long-term comfort**. The bright yellow or orange, molded-in safety borders define workstations while the mat's textured surface adds **traction in wet areas**.

Industrial WorkSafe Facts


3/4" Overall Thickness

Wearwell **Innovation**—1987

1 Year Warranty

No. 479 and No. 487 Sizes**Stock Sizes****Ship in 1 Business Day**

2' x 3'	3' x 5'
3' x 4'	3' x 9'8"

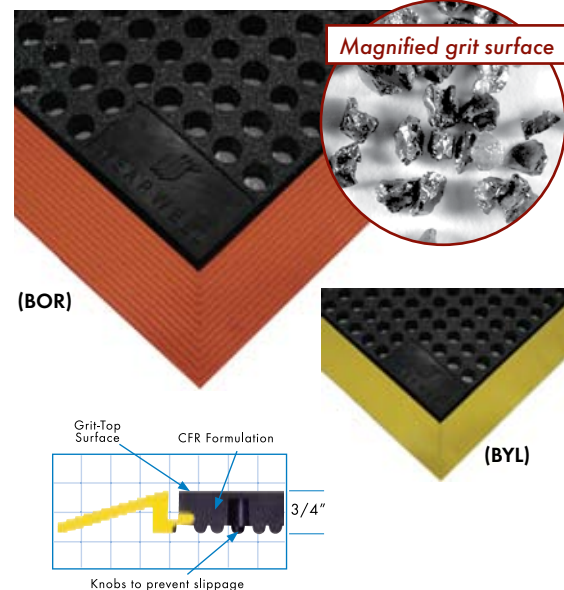**Industrial GritWorks!® No. 487****BEST Performance**

Increase Traction by 40% with a high traction **GritWorks! surface**. This high-powered anti-fatigue mat is extremely popular in industrial workstations. Designed for **use in slippery and hazardous areas**, the **GritWorks!** provides **40% more traction than recommended by OSHA** for wet areas.

Exceptionally comfortable, Industrial GritWorks! is a **totally functional and effective anti-fatigue mat**. The molded-in, orange or yellow safety borders perfectly define workstations.

Industrial GritWorks! Facts

3/4" Overall Thickness


Wearwell **Innovation**—1997

1 Year Warranty




WorkSafe® No. 477

BEST Performance

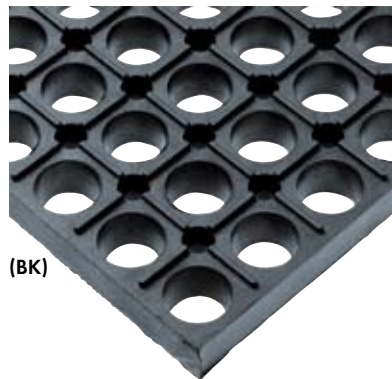

(BK)



WorkSafe's premium natural rubber compound is **ideal for use around water, mild chemicals and detergent solutions**, making this mat an excellent choice for wet areas or in applications where there are wood shavings or other debris. This **extra-thick**, versatile drainage mat is designed for overall productivity.

In addition to its **exceptional level of comfort**, WorkSafe is available in a wide variety of sizes that can be connected to cover large areas or to create unique shapes. The **3' x 5'** mats are available in **Ends, Centers and Singles** for creating long runners. The smaller sizes can be used as individual workstation mats or attached together with connector strips. Optional safety edging is available for trip-proof or cart access.



WorkSafe Facts

7/8" Overall Thickness

Wearwell Innovation—1985

1 Year Warranty

Green Rating > 50% Post Industrial Material

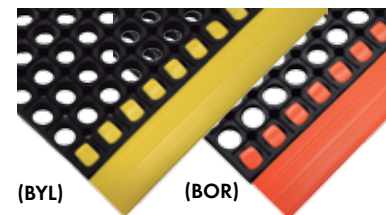

(BYL)

(BOR)

C Mats with edging available. Custom widths or unique configurations are available. Some mats may require several sections. Please call for pricing.

WorkSafe Sizes

Stock Sizes

Ship within 1 Business Day

18" x 24" Single	3' x 5' Single
18" x 48" Single	3' x 5' End
2' x 3' Single	3' x 5' Center
3' x 30" Single	Connector
3' x 4' Single	

Non-Stock Sizes

Ship within 5 Business Days


Mats Up To 12' W x 60' L, No edging
Beveled Edging (Unattached)
2" x 65' Roll (Unattached)

Customization

We frequently customize WorkSafe No. 477. It's available in large and unusual sizes in the following formats:

- Without Borders
- With Yellow, Orange or Black Safety borders

Custom mats are **available up to 12' wide by 30' long in one section**. These sections can then be connected onsite. Some mats may require two or more sections depending on size, weight and shipping requirements. In addition, if you have a **uniquely shaped area** or require cutouts, please e-mail us a template so we can accommodate your exact requirements.

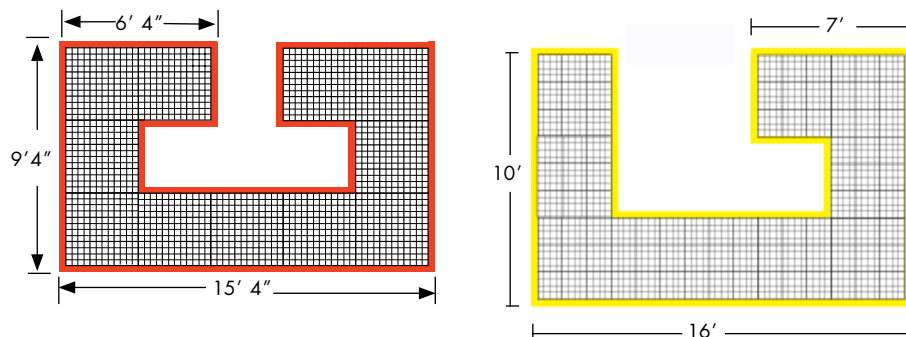

Prevent accidents in areas where chemicals, water and debris pose a problem.



Use Wearwell anti-fatigue matting in areas like this.




Medium Duty Industry

In this section, you'll find:

WorkSafe® Light.....	No. 478	p. 34
WorkRite	No. 474	p. 34
Kushion Walk.....	No. 475	p. 35
Abrasive Coated Kushion Walk.....	No. 480	p. 35
Modular WorkSafe® Light	No. 472/471	p. 36
Vinyl Grid Air-Tread	No. 891	p. 36
Vinyl Grid Gripper Tread	No. 892	p. 36


WorkSafe® Light No. 478

BETTER Performance

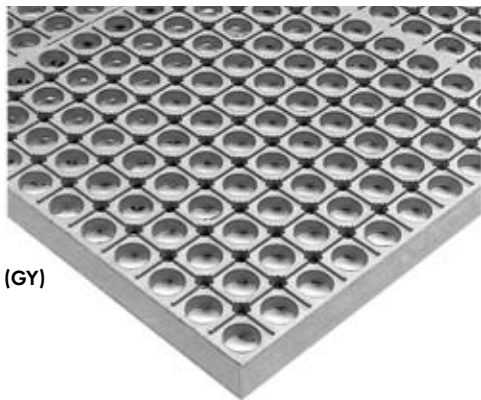

(GY)

CFR Rubber Compound



This **light-weight drainage mat** is defined by its **CFR—mineral oil based Cutting Fluid Resistant** formulation and its functional design. An ideal anti-fatigue mat for wet industrial areas, WorkSafe Light has a well-engineered drainage system that keeps debris from becoming trapped.

Weighing in at just 25 lbs., it **eases the strain of clean up**, yet keeps employees quite comfortable. **Molded-in edges** also provide safe access.

Color: Gray (GY)

WorkSafe Light Facts

1/2" Overall Thickness

Wearwell Innovation—1987

1 Year Warranty

WorkSafe Light Sizes

Stock Sizes

Ship in 1 Business Day


3' x 5' 3' x 20'

3' x 10' Connector




WorkRite No. 474

GOOD Performance

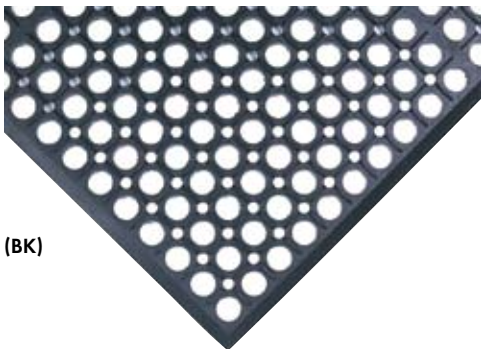

(BK)



100% Natural rubber

A **popular and economical general-purpose drainage mat**, WorkRite is perfect for wet commercial or industrial areas. The flexible natural rubber compound is for use around water and non-caustic agents. Its lightweight design eases strain of frequent cleanings, yet keeps employees comfortable. WorkRite has a **functional drainage design and molded-in safety edges**.

Color: Black (BK)

WorkRite Facts

1/2" Overall Thickness

Wearwell Innovation—1990

1 Year Warranty

Green Rating > 50% Post Industrial Material

WorkRite Sizes

Stock Sizes

Ship in 1 Business Day


3' x 5' 3' x 20'

3' x 10'



Kushion Walk No. 475

BETTER Performance

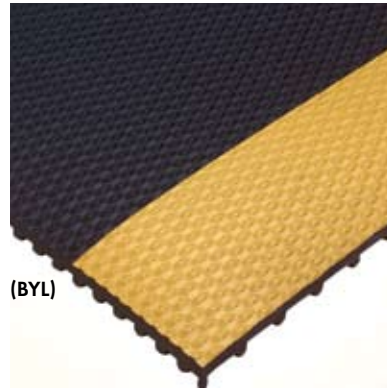

(BYL)


Kushion Walk is a **super tough, abrasion resistant runner** that combines comfort with solid construction. Its durable, textured surface guards against slip and fall injuries, while a knobbed bottom and optional drainage slots permit run-off and aeration. Kushion Walk's **high quality PVC formulation and tough construction** are ideal for heavy use areas. All edges are beveled.

Colors: Black (BK), Black with Yellow Borders (BYL)

Kushion Walk Facts

3/8" Overall Thickness

1 Year Warranty



No. 475 and No. 480 Sizes


Stock Sizes	Non-Stock Sizes
Ship in 1 Business Day	Ship in 2 Business Days
3' x 5'	2' Cut up to 60'
2' x 60'	3' Cut up to 60'
3' x 60'	

Black Kushion Walk is in stock. All other colors and sizes are non-stock.
When ordering, specify: Slotted (SLT) or Unslotted (UNS).
Then specify color: Black (BK) or Black/Yellow (BYL).
Grit surface is only available in Black (BK).



Abrasive Coated Kushion Walk No. 480

BEST Performance

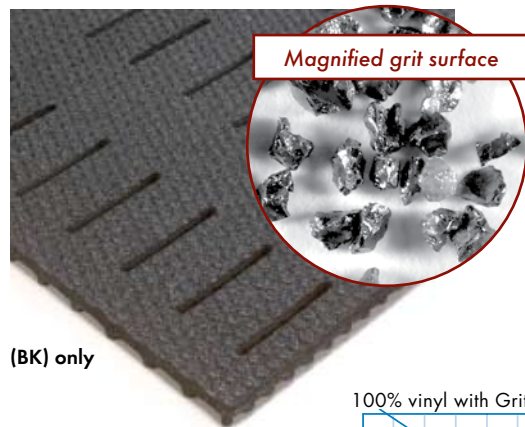

(BK) only


Magnified grit surface

Abrasive Coated Kushion Walk is an **excellent option for slip resistance** and moderate comfort in hazardous industrial areas. This carbide grit surface provides superb traction—**40% more than OSHA recommends in wet areas**—and **resistance to many industrial fluids**. Edges are slightly beveled.
Color: Black (BK)

Abrasive Coated Kushion Walk Facts


3/8" Overall Thickness

1 Year Warranty




Modular WorkSafe® Light No. 472

BETTER Performance

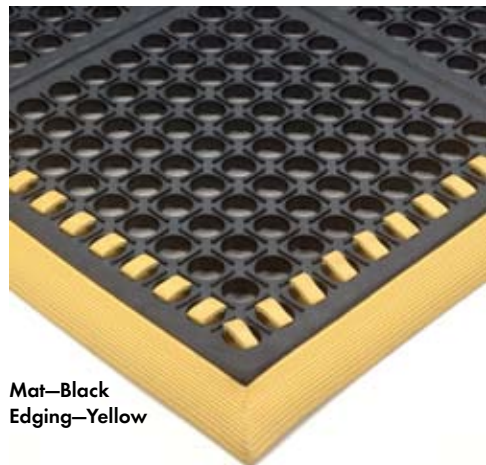


Mat—Black
Edging—Yellow



Defined by its functional lightweight design, this 3' x 3' interlocking modular drainage mat is ideal for single work areas or to cover large spaces. Innovated for comfort and ease of use, it has a hidden interlocking system that requires no additional bevels or attachment devices. Popular in high maintenance areas, it's **lightweight and easy to clean**. The exterior edges are safety rounded so additional edging is not necessary.

Available in **two (2)** compounds:

- **General Purpose**—Natural Rubber (GR)
- **Grease Proof**—**50% Nitrile** Rubber (for use around petroleum based fluids, chemicals and caustic agents) (GP)



Modular WorkSafe Light Sizes

Stock Size	Non-Stock Sizes
Ships in 1 Business Day	Ship in 5 Business Days
3' x 3'	To 15' x 60'
	To 15' x 60' w/ Yellow Borders


Please specify compound (GR) or (GP) when ordering.

C For Custom parts, use Part No. 471.

If you have a special configuration or want to add Yellow borders to define a workspace, let us customize a mat for you. These mats are permanently locked together, but some may require several sections. Please call for pricing.



Vinyl Grid Air-Tread No. 891 / Vinyl Grid Gripper Tread No. 892

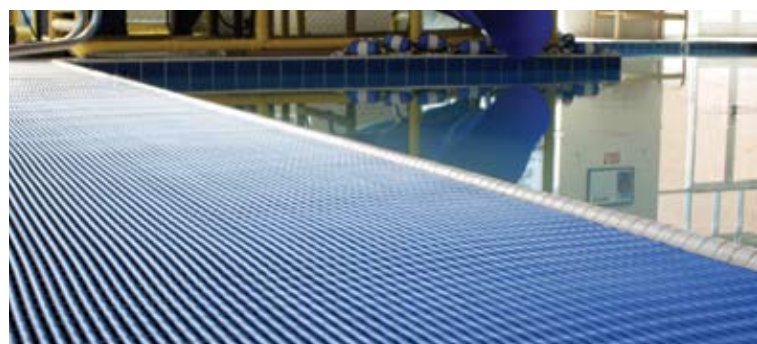

Defined by their duckboard design, these mats **elevate workers above slippery areas** and allow free drainage of fluid and debris. A **perfect choice for wet work areas including pools and boats**, these mats are compounded to resist UV rays and mildew.


BETTER Performance

Vinyl Grid Gripper Tread No. 892

Reliable slip protection. Surface Texture:

Tire-like, gripper tread.

Colors: Black (BK) or Red (RD)

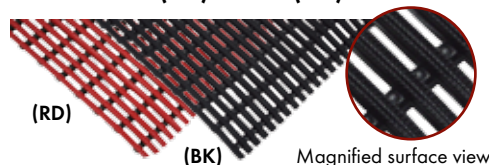


GOOD Performance

Vinyl Grid Air-Tred No. 891

Comfortable (open tube) design. Surface

Texture: Smooth, tubular.

Colors: Blue (BL) or Black (BK)

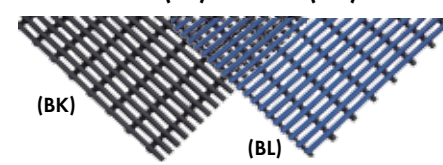

Vinyl Grid Air-Tread/Vinyl Grid Gripper Tread Sizes

Stock Sizes	Non-Stock Sizes
Ship in 1 Business Day	Ship in 2 Business Days
2' x 40'	2' Cut up to 40'
3' x 40'	3' Cut up to 40'
4' x 40'	4' Cut up to 40'

Please specify color when ordering.

No. 891 and No. 892 Facts

3/8" Overall Thickness

1 Year Warranty



Food Production Matting



Grade A® No. 482



Wearwell's **breakthrough anti-fatigue mat, Grade A**, is the first designed to specifically meet the needs of the food production industry. It is **approved** by the **Canadian Food Inspection Agency CFIA** and meets **FDA and USDA standards** for nonfood contact surfaces. Its permanent anti-microbial additive has **GRAS** status and is frequently used in consumer products such as mouthwash and toothpaste.

Other Wearwell mats commonly used in food production facilities:

Production Areas

WorkRite No. 474 p. 34
 Sanitizing Footbath No. 222 p. 38

Test and Development Labs

Diamond-Plate SpongeCote® No. 415 p. 6-7
 Tile-Top AM Nos. 419AM, 420AM p. 40
 Rejuvenator® No. 501 p. 10-11
 Rejuvenator® Connect No. 502 p. 10-11


Grade A® No. 482

BEST Performance



Terra Cotta (TC)

100% Nitrile Rubber



Grade A Sizes

Stock Sizes

Ship in 1 Business Day

30" x 36"

30" x 60"

Defined by its **specially formulated anti-microbial rubber compound** and its totally functional design, Grade A is **the first mat designed specifically for the food production and processing industries**. Its uniquely formulated Nitrile rubber compound is designed to withstand fluids and oils commonly found in food processing environments including vegetable oils, animal fats, citrus, and fish oil. Grade A:


- 1) Passes ASTM G21-96 (2002), the test used by NSF to determine resistance to microorganisms and is 100% anti-microbial.
- 2) Has built-in handles to ease pick-up and cleaning of the mats.
- 3) Features a hygienic porthole and solid underside design that simplify cleaning and virtually eliminate areas where food can collect.
- 4) Has a substantial underside knobs that allow quick drainage and increase the comfort level of the mat.
- 5) Has a textured surface that increases traction when greasy and wet.
- 6) Is permanently anti-microbial and the additive has **GRAS status**.

Grade A Facts

1/2" Overall Thickness

Wearwell **Innovation**—2006

2 Year Warranty

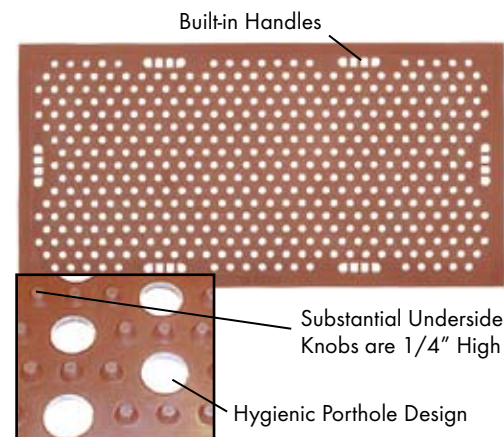

Built-in Handles

Substantial Underside Knobs are 1/4" High

Hygienic Porthole Design

CFIA APPROVED

Sanitizing Footbath Mat No. 222

BEST Performance

Designed to **decontaminate and disinfect footwear**, this mat keeps hygienic areas **free of debris and germs**. Especially effective in food processing facilities, the mat is simply filled with a diluted chlorine or quaternary solution. As employees step in the mat, their shoe treads are immersed in the disinfectant solution while the pliable rubber scrapers dislodge contaminants. **1 Year Warranty**



Black (BK)

NOW Available with **Yellow** Borders (BYL)

Available in two (2) versions:


- **Standard** mat holds up to 1 gallon.

Stock Size

Ships in 1 Business Day

24" x 32"

Standard




- **Tall Wall (2 1/2" walls)** holds up to 5.5 gallons. The liquid is at least 2" high.

Stock Size

Ships in 1 Business Day

32" x 39"

Tall Wall



Standard



(BK)

Tall Wall



NEW!
(BYL)

Labs and Pharmacies

Anti-fatigue mats are recommended for standing workers by OSHA, the CDC and the Human Factors Society—just to name a few independent organizations that focus on worker safety.

Ergonomically designed matting increases worker comfort, ability to focus, and overall productivity. Optimizing employee comfort and their ability to focus on the job is crucial, especially in critical areas such as hospital pharmacies or lab and research centers.

In addition to increasing comfort and productivity, this series of **anti-fatigue mats also withstands chemicals and protects flooring from damage.**



In this section, you'll find:

Tile-Top AM	No. 420AM	p. 40
UltraSoft Tile-Top AM	No. 419AM	p. 40
Re-Energizer®	No. 401	p. 41
Ergo-Stance®	No. 489	p. 41
ErgOasis.....	No. 488	p. 42
Rejuvenator®	No. 501	p. 42
Rejuvenator® Connect	No. 502	p. 42

Also check out the **Autoclavable Mat No. 580**, page 46

Tile-Top **AM** Matting No. 419AM and No. 420AM

ULTIMATE Performance



Ideal for use in:

- Hospital and healthcare facilities
- Labs
- Pharmacies
- Pharmaceutical manufacturing
- Shipping and packaging
- Any dry area where overall comfort and productivity are important

Tile-Top **AM** and UltraSoft **AM** Sizes

Stock Sizes	Non-Stock Sizes
Ship in 1 Business Day	Ship in 2 Business Days
2' x 3'	2' Cut up to 60' in Length
3' x 5'	3' Cut up to 60' in Length
2' x 60'	4' Cut up to 60' in Length
3' x 60'	
4' x 60'	

Please specify thickness and color when ordering.



Unique configurations are available. Some mats may require several sections. Please call for pricing.

UltraSoft Tile-Top **AM** No. 419

UltraSoft Tile-Top is **defined by its double-thick sponge base** and **NEW anti-microbial (AM) properties**. The nitrile rubber composite sponge offers maximum comfort and resilience and will inhibit the growth of contaminants. The new, **non-porous vinyl surface has an extra wear layer for exceptional abrasion and chemical resistance**, and is also anti-microbial. This updated version of UltraSoft Tile-Top is designed for comfort and productivity in areas where organic contamination control is important and is ideal for use in general industry settings where worker satisfaction and efficiency are key.

Colors: Black (BK), Blue (BL), Charcoal (CH) and Gray (GY)

Tile-Top **AM** No. 420

Offering timeless appeal, **exceptional comfort**, and performance in heavy use areas, **Tile-Top AM far outperforms** similar-looking mats. Its nitrile rubber composite sponge base offers unparalleled comfort and performance, and is now anti-microbial. Also designed to inhibit the growth of contaminants, the improved non-porous surface has an extra wear layer for outstanding abrasion and chemical resistance.


Colors: White (WH), Tan (TN), Sandalwood (SA), Brown (BN), Black (BK), Blue (BL), Charcoal (CH) and Gray (GY)

UltraSoft Tile-Top **AM** Facts

7/8" Overall Thickness

Wearwell Innovation—2000

3 Year Warranty

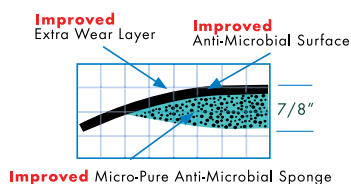


Tile-Top **AM** Facts

1/2" Overall Thickness

Wearwell Innovation—1963

3 Year Warranty

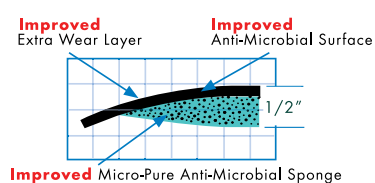

Black (BK)
(Both Versions)

Blue (BL)
(Both Versions)

Charcoal (CH)
(Both Versions)

Gray (GY)
(Both Versions)

White (WH)
(No. 420AM only)


Tan (TN)
(No. 420AM only)

Sandalwood (SA)
(No. 420AM only)


Brown (BN)
(No. 420AM only)

Re-energizer® No. 401

ULTIMATE Performance

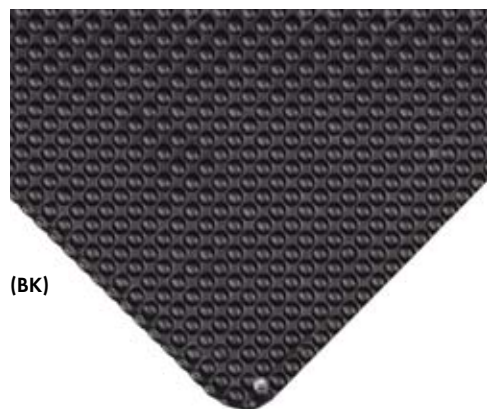

(BK)




(GY)

Defined by its **techno-domed surface** which provides an extra level of resilience, durability and chemical resistance, Re-energizer is the **"next generation" SpongeCote® mat**. Its Nitricell® sponge base is an outstanding Nitrile rubber composite sponge, **offering maximum comfort**.

Combined with the domed surface, it will re-energize your standing workers. The modern design and upscale performance are **ideal in any laboratory, pharmaceutical, commercial, industrial, office or retail environment**. Five-year limited warranty is the best in its class.

Colors: Metallic Gray (GY) and Black (BK)



Re-energizer Facts

9/16" Overall Thickness

Wearwell **Innovation—2005**

5 Year Warranty

Re-energizer Sizes

Stock Sizes	Non-Stock Sizes
Ship in 1 Business Day	Ship in 2 Business Days
2' x 3'	2' Cut up to 75' in Length
3' x 5'	3' Cut up to 75' in Length
	4' Cut up to 75' in Length


Please specify color when ordering.

Ergo-Stance® No. 489

BEST Performance




(BK)



(BL)

(GY)

Defined by its unique **dual density sponge-base**, ErgoStance is **ergonomically designed** to stimulate blood flow and prevent fatigue. The amazingly comfortable sponge base consists of high-density and low-density rubber sponge strips, alternating every 12". This variation **actively stimulates leg muscles, increases circulation and decreases fatigue**. Its attractive marbled rubber surface will withstand heavy use in commercial and assembly areas. **Colors:** Blue (BL), Gray (GY), Black (BK)

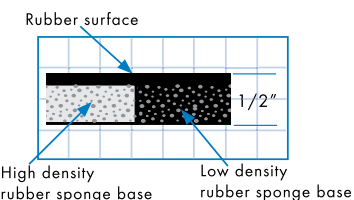

Ergo-Stance Facts

1/2" Overall Thickness


Wearwell **Innovation—1992**

3 Year Warranty

Ergo-Stance Sizes


Stock Sizes	Non-Stock Sizes
Ship in 1 Business Day	Ship in 2 Business Days
2' x 3'	2' Cut up to 30' in Length
3' x 4'	3' Cut up to 30' in Length
3' x 5'	4' Cut up to 30' in Length

Please specify color when ordering.

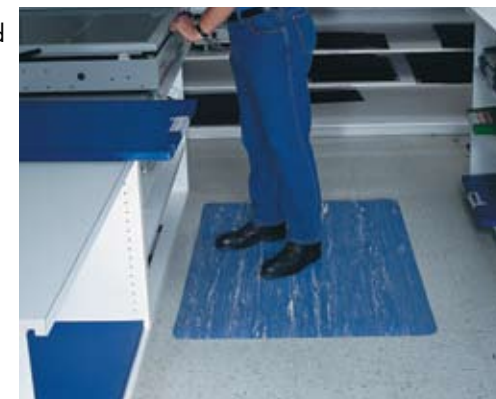

ErgOasis™ No. 488

BEST Performance

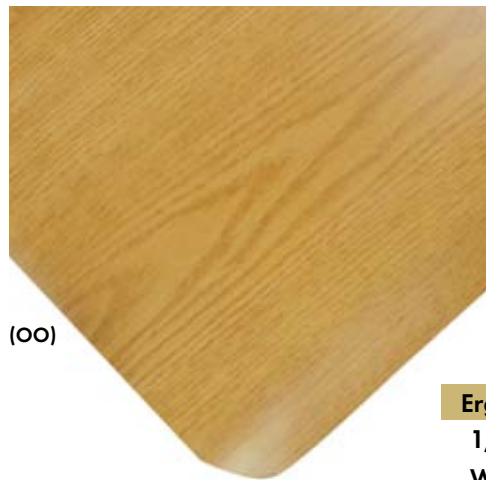


(OO)

With the **look and beauty of natural oak**, ErgOasis coordinates with any workspace, from offices, banks and retail, to labs and pharmacies. An exceptionally comfortable anti-fatigue mat, the **Nitricell® sponge base** is a resilient nitrile rubber composite. The **durable woodgrain vinyl surface** is **chemical resistant and perfect for heavy use areas**.

All edges safety beveled.

Color: Olympic Oak (OO)



ErgOasis Facts

1/2" Overall Thickness

Wearwell **Innovation—2003**

1 Year Warranty

ErgOasis Sizes

Stock Sizes	Non-Stock Sizes
Ship in 1 Business Day	Ship in 2 Business Days
2' x 3'	3' x 75'
3' x 5'	3' Cut up to 75' in Length



100% Urethane Matting No. 501 and No. 502


ULTIMATE Performance

Rejuvenator® urethane anti-fatigue mats are **the best long-term value!** They provide a perfect combination of **extremely high performance and exceptional resilience**. A robust, abrasion resistant exterior skin totally encapsulates the **crush-resistant urethane sponge interior** creating virtually indestructible products. Ideal for labs, pharmacies and other mostly dry areas, Rejuvenator mats are also resistant to a wide variety of chemicals.

5 Year Warranty

Available in two (2) configurations:

Rejuvenator—is available in single workstation mats




(BK)

Rejuvenator Connect—a **NEW** and totally unique 3' x 3' modular urethane mat connects on all four (4) sides to accommodate any custom sized area.

Rejuvenator Connect Sizes



Stock Sizes
Ship within 1 Business Day
3' x 3' Mat
2" x 39" Male Ramp, Black
2" x 39" Male Ramp, Yellow
2" x 39" Female Ramp, Black
2" x 39" Female Ramp, Yellow

C Rejuvenator® Connect can be customized in any size or shape. Size is only limited by weight and shipping restrictions.

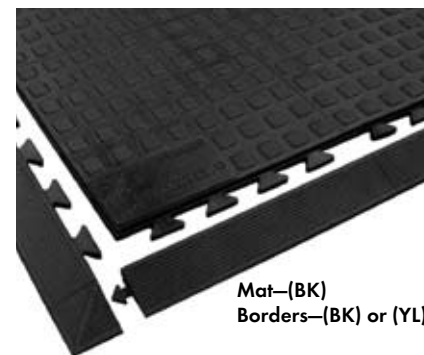

Mat—(BK)
Borders—(BK) or (YL)

A simple 2-mat configuration.

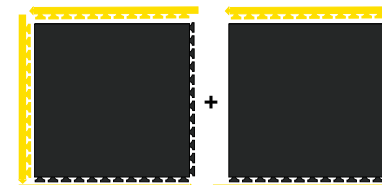

Rejuvenator Sizes

Stock Sizes
Ship within 1 Business Day
2' x 3'
3' x 5'

Contamination Control

Contamination control is essential in areas where environmental cleanliness or sterility is a critical concern. Contamination can often result in:


- Quarantined batches
- Rejected goods
- A negative impact on product yields
- Hospital acquired infections

Our range of contamination control products **reduce or eliminate contamination, and maintain efficient production** (See also **Tile-Top AM No. 420** and **UltraSoft Tile-Top No. 419**, Page 40).

To control the contamination of static discharge, see pages 47-51.

In this section, you'll find:

PermaTack.....	No. 092.....	p. 44
Pür-Comfort.....	No. 504.....	p. 45
Clean Room Mat.....	No. 095.....	p. 45
Autoclavable Mat.....	No. 580.....	p. 46



The Autoclavable Mat
No. 580 (p. 46) is the perfect
solution for comfort in sterile areas.

CONTAMINATION CONTROL

New! PermaTack No. 092 ULTIMATE Performance

A high performance, industrial strength contamination control mat, PermaTack is ideal for inside and outside critical areas, such as clean rooms in the following industries:

- Industrial
- Medical
- Pharmaceutical
- Aerospace
- Semi-conductor
- Food production

The **permanently tacky surface** is designed to remove even the finest particles off shoes or wheels. In fact **98% to 100% of all such contamination will be removed** if each foot touches the mat 3 times—generally this requires a minimum length of 20'.

PermaTack is also a **great dirt control solution** in heavy use, less critical areas such as offices, labs, inspection rooms or any area where the tracking of dirt and small debris can be a maintenance nightmare.

KEY FEATURES:

- When cleaned, the **surface will regenerate its tack**. To clean, just mop with water or a low Ph cleaner such as **Simple Green®**. Squeegee the extra moisture off the mat and allow the mat to dry.
- PermaTack's **super polymer surface** is bonded to a durable base that provides stability and long-lasting performance.
- PermaTack has an **adhesive backing that prevents mat movement and eliminates the need for a supplemental tray**.
- Surface is static dissipative - $RTT = 1 \times 10^8$ to 1×10^{10} ohms.
- The mat has a low profile to accommodate any doorway.
- PermaTack is a **"green"** product and can be used to replace multiple layer tacky mats. With **no sheets to throw away**, there is much less waste.

PermaTack Facts

Low profile to accommodate any doorway

Surface is static dissipative $RTT = 1 \times 10^8$ to 1×10^{10} ohms

Wearwell Innovation—2009



Color: Blue (BL)

PermaTack IS the Best Long-Term Value!

PermaTack has a considerable cost advantage over disposable, multiple layer mats*

Product	Cost per Day
Peel off tacky mat	\$1.83 (one sheet per day)*
PermaTack	\$1.40 (in service for 1 year)
PermaTack	\$0.70 (in service for 2 years)

*Based on a 24" x 45" disposable mat vs. a 24" x 48" PermaTack. Life expectancy of PermaTack is two (2) years under normal wear conditions with a payback in 9 months.


COMING SOON!

PermaTack Sizes

Stock Sizes	Non-Stock Sizes
Ship in 1 Business Day	Ship in 2 Business Days
24" x 48"	30" x 10'
30" x 72"	54" x 10'
	30" x 20"
	54" x 20"
	24", 30" and 54" wide material is available in cut lengths > 5' long. Please call for a quote.

NEW! Pūr-Comfort No. 504

ULTIMATE Performance

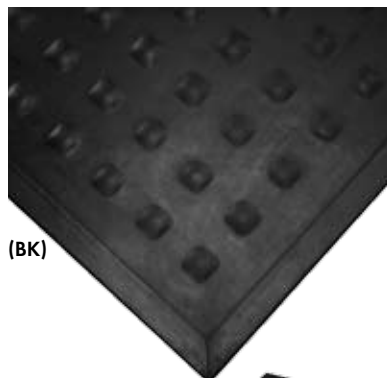

(BK)



Developed to **prevent fatigue in controlled environments**, Pūr-Comfort is **certified for use in ISO Class 5 Clean Rooms**. This unique and incredibly comfortable anti-fatigue mat is a **100% premium molded urethane**. More resilient than other compounds on the market, it provides an exceptionally high-level of long-term performance and comfort.

In addition, it has been tested for Dynamic Headspace outgassing and Extractable Non-volatile residue. Pūr-Comfort passes with a low level of total organics. For critical environments where static is an issue, Pūr-Comfort will drain the electro-static discharge at a dissipative level. **The surface (RTT) and volume resistance (RTG) = 1×10^7 ohms to 1×10^8 ohms.**

This mat must be grounded (use our 15' ground cord), and employees must either wear Heel Grounders or shoes with conductive soles. A grounding snap is attached to lower left hand corner of each mat. And for maximum effectiveness, keep the surface clean.

Packaged for immediate use, each mat is double bagged, cleaned and **certified ISO Class 5 Clean Room ready**. To clean, simply wipe down with a pre-moistened alcohol-based clean room wipe. **Pur-Comfort can also be autoclaved** (275°F for 20 minutes at 15 psi) and gamma sterilized.

Color: Black (BK)

Pūr-Comfort Facts

1/2" Overall Thickness

Wearwell Innovation—2009



Pūr-Comfort Size

Stock Size

Ships within 1 Business Day

2' x 3'

Clean Room Mat No. 095

BEST Performance



(WH)



(BL)

Clean Room Mat **traps impurities** in areas that require dirt and dust control. Perfect for outside clean rooms, labs, hospital pharmacies or any sterile areas. The tacky surface **efficiently pulls dirt and dust off** shoe soles before it can contaminate a clean room. Effective and easy to use, **each mat has 30 layers of tough film**. Once the top layer is contaminated, simply pull it off and discard. Use on low-profile carpet, tile, or concrete surfaces.

Colors: White (WH) and Blue (BL)

Clean Room Mat Sizes

Stock Sizes

Ship within 1 Business Day

18" x 36"

24" x 45"

18" x 45"

36" x 45"

2' x 3'

30 sheets to a mat, 4 mats to a case.
Please specify color when ordering.




The Autoclavable Mat No. 580

ULTIMATE Performance



Gray (GY)

SBR/Nitrile (totally anti-microbial)



An ideal anti-fatigue mat for sterile areas, the Autoclavable Mat provides comfort in operating rooms, **USP 797 compliant** pharmacies, laboratories, radiology rooms, etc. The domed design provides long-lasting comfort during extended shifts or surgeries. Its non-porous rubber compound is 100% anti-microbial and will **withstand extensive sterilization/autoclaving**. The 2' x 3' size fits flat into standard autoclaves and is easily replaced after cleaning. It can also be gamma sterilized or simply wiped clean. The Autoclavable Mat is **Latex-Free. Color: Gray (GY)**

Autoclavable Facts

1/2" Overall Thickness

Wearwell **Innovation**—2007

The Autoclavable Mat Size

Stock Size

Ships within 1 Business Day

2' x 3'

Cleaning Guidelines for the Autoclavable Mat No. 580

Autoclave—Lay flat in an autoclave. Clean for 20 minutes at 15 psi and 275 degrees Fahrenheit.

Manual Cleaning—Use a mixture of hot water and a mild soap (like Ivory Liquid) with a pH between 4.0 and 9.0 and wipe the mat down.

Another option is to use a pre-moistened wipe such as Sani-Cloth HB or SANI-CLOTH® PLUS both of which have very low levels of alcohol.



The Autoclavable Mat No. 580 complies with USP 797 CSP Risk Levels

USP 797 - Risk levels are assigned to CSPs (Compounding - Sterile Preparations) on the basis of their potential for microbial contamination.

Low Risk—A one to one mix ratio. A good example of this is the transfer of a compound into a syringe or a mini-bag.

Medium Risk—An ISO Class 7 Clean Room, formerly a Class 10,000 Clean Room where three or more ingredients are mixed in 1 to 3 or 3 to 1 ratios.


High Risk—An ISO Class 5 Clean Room requiring laminar-flow workbenches or barrier isolators. The creation of any CSP using nonsterile ingredients or CSPs that require filtration, steam, heat gas or ionizing radiation, are considered high-risk operations. High-risk areas must be totally accurate and sterile, devoid of living microorganisms.



Conductive mats are designed to **control the risk of static discharge** by quickly draining it from workers. Humans easily generate static electricity by walking or using chairs with casters. Then, with a simple touch, the electricity is passed on. One shock can destroy semi-processors or cause a fire if in contact with flammable chemicals. **To eliminate these hazards, Wearwell offers both Electrically Conductive and Static Dissipative mats.** The basic difference between them is that conductive mats disperse the static electricity quicker than static dissipative mats.

Therefore, the general rule of thumb is that **Conductive mats should be used around the most sensitive components.**

It's important to note that all conductive and dissipative matting must be grounded to be effective. In addition, unless you're wearing conductive shoes, you **must wear a heel grounder** to allow the static to drain off your body and through the mat. We offer these accessories to insure static is no longer an issue for you.

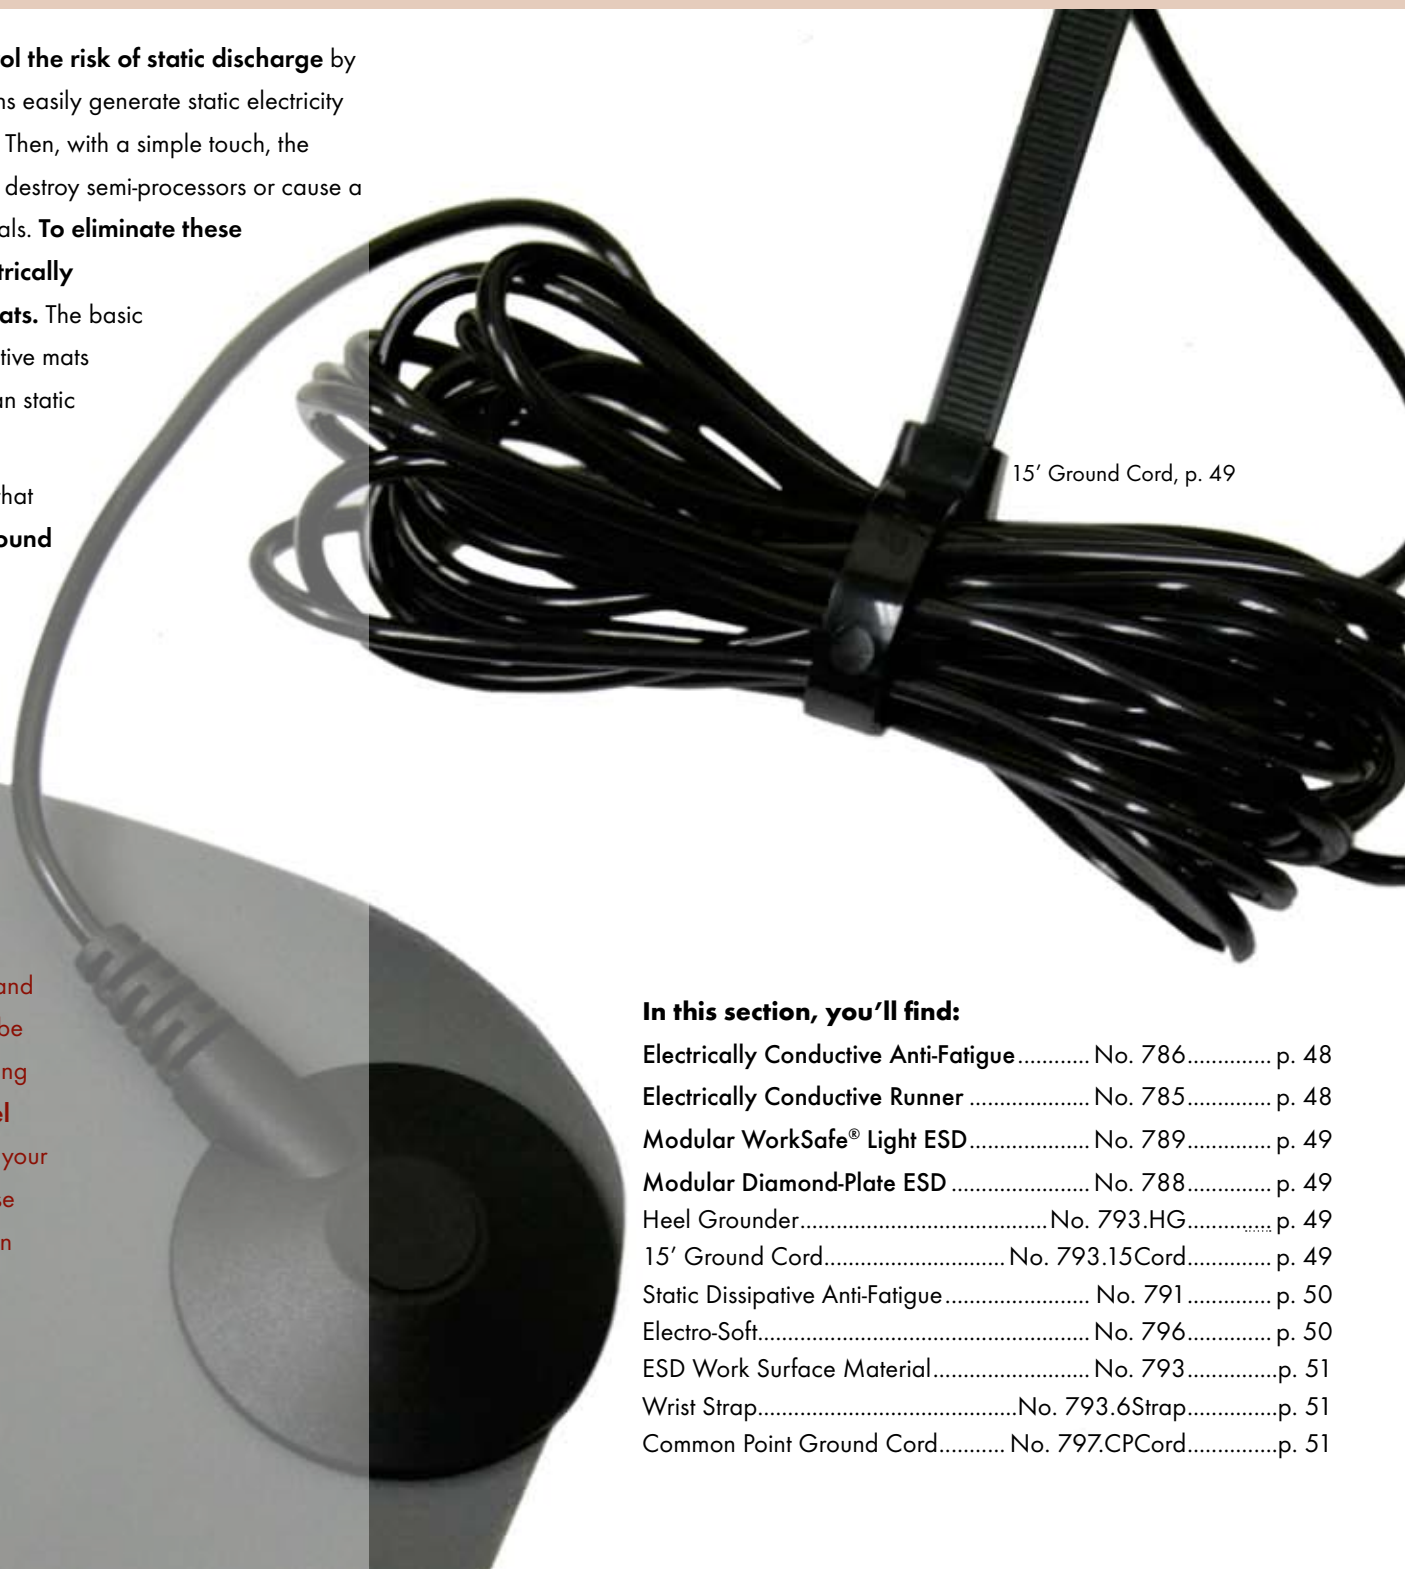


15' Ground Cord, p. 49

In this section, you'll find:

Electrically Conductive Anti-Fatigue.....	No. 786.....	p. 48
Electrically Conductive Runner	No. 785.....	p. 48
Modular WorkSafe® Light ESD.....	No. 789.....	p. 49
Modular Diamond-Plate ESD	No. 788.....	p. 49
Heel Grounder.....	No. 793.HG.....	p. 49
15' Ground Cord.....	No. 793.15Cord.....	p. 49
Static Dissipative Anti-Fatigue.....	No. 791	p. 50
Electro-Soft.....	No. 796.....	p. 50
ESD Work Surface Material.....	No. 793.....	p. 51
Wrist Strap.....	No. 793.6Strap.....	p. 51
Common Point Ground Cord.....	No. 797.CPCord.....	p. 51



Electrically Conductive Anti-Fatigue No. 786

BEST Performance

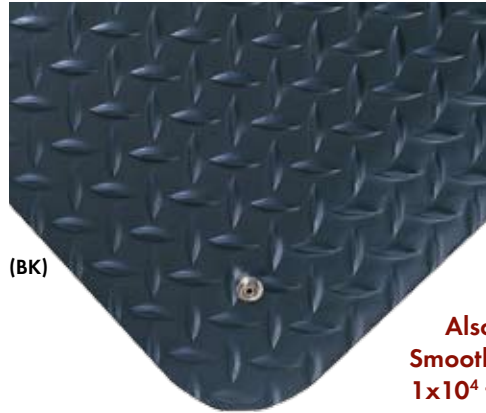

(BK)

Also available in
Smooth with an RTG of
 1×10^4 to 1×10^6 ohms.



Defined by its **ability to quickly drain static electricity from workers**, Electrically Conductive Anti-Fatigue effectively protects sensitive equipment and products from damage. It also **prevents the incidence of sparks caused by static**. Designed to dramatically reduce fatigue, the **Nitricell® sponge base** is a Nitrile rubber composite designed for resilience and long-term performance.

RTT - 5×10^5 to 1×10^7 ohms	
RTG - 5×10^5 to 1×10^7 ohms	
Standard	UltraSoft
9/16"	15/16"

Electrically Conductive Anti-Fatigue Sizes

Stock Sizes	Non-Stock Sizes
Ship in 1 Business Day	Ship in 2 Business Days
2' x 3'	3' x 75'
3' x 5'	3' Cut up to 75'

Electrically Conductive Anti-Fatigue Facts

Wearwell **Innovation**—1992

3 Year Warranty

Required Accessories for ESD Matting

15' Ground Cord No. 793.15Cord

Connect all ESD tabletop and floor mats to a building or ground.



See page 49 for more details.

Heel Grounder No. 793.HG


Allows static electricity to pass from the worker to the ESD matting or flooring. The velcro loop allows for easy attachment.



See page 49 for more details.


Electrically Conductive Runner No. 785

BEST Performance

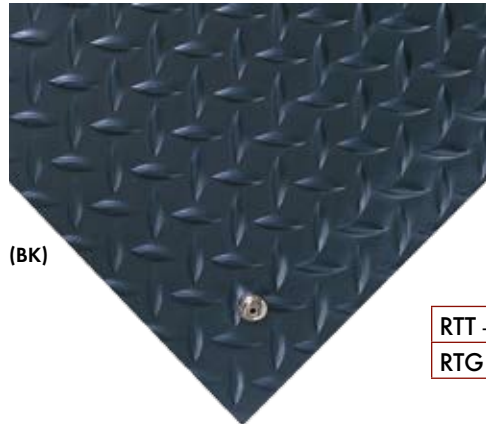

(BK)

The Electrically Conductive Runner is **ideal in areas where static prevention is a priority**. It quickly carries out to ground preventing damage to vulnerable equipment. Use in aisles and other heavy use areas. Available in a **Diamond-Plate surface texture** for a high-tech look, easy maintenance and cart traffic.



RTT - 5×10^5 to 1×10^7 ohms
RTG - 5×10^5 to 1×10^7 ohms

Electrically Conductive Runner Facts

3/16" Overall Thickness

Electrically Conductive Runner Sizes


Stock Sizes	Non-Stock Sizes
Ship in 1 Business Day	Ship in 2 Business Days
3' x 75'	3' Cut

Also available in
Smooth with an RTG of
 1×10^4 to 1×10^6 ohms.



Modular WorkSafe® Light ESD No. 789 / Modular Diamond-Plate ESD No. 788

BETTER Performance

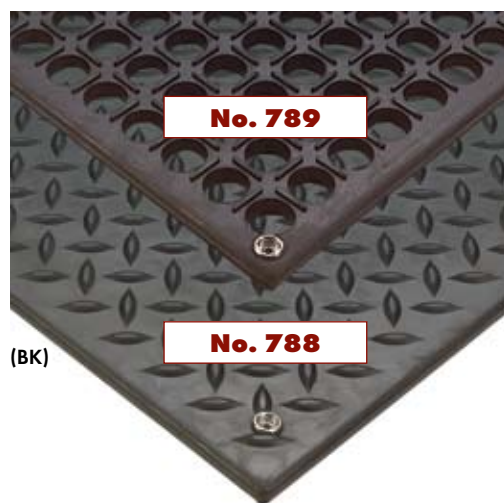

(BK)

Wearwell Modular ESD mats are ideal for virtually any environment where static discharge is a problem: Computer or microprocessor assembly, circuit board repair, manufacturing, etc. The 3' x 3' size is perfect for individual workstations, yet both products have interlocks on two sides so multiple mats can be snapped together in **virtually any configuration**. Designed for comfort, they greatly reduce standing worker fatigue. All edges are rounded for safety and each mat has a grounding snap in one corner. Both products are 1/2" thick, lightweight and easy to clean.

- **Modular WorkSafe Light ESD No. 789**—Ideal for air-flow.
- **Modular Diamond-Plate ESD No. 788**—Designed for ease of maintenance.

No. 789 and No. 788

RTT - 1×10^4 to 8×10^6 ohms

RTG - 1×10^4 to 8×10^6 ohms

This **mat must be grounded** (use our 15' ground cord), and employees must either wear Heel Grounders or shoes with conductive soles. A grounding snap is attached to lower left hand corner of each mat. And for maximum effectiveness, keep the surface clean.

Modular ESD Facts


1/2" Overall Thickness

Wearwell **Innovation**—1996


1 Year Warranty

Green Rating > 33% Post Industrial Material

No. 789



No. 788



No. 789 and No. 788 Sizes

Stock Sizes	Non-Stock Sizes
Ship in 1 Business Day	Ship in 5 Business Days
3' x 3'	To 15' W x 60'

C Custom widths and unique configurations are available in 12" increments. Please call for pricing.

Heel Grounder No. 793.HG



Made for workers wearing insulative shoes, the Heel Grounder **allows static electricity to pass from the worker to the ESD matting or flooring**. One size fits all and the Velcro® loop allows for easy attachment. Allow the fabric strip to touch the workers skin for best performance. **The Heel Grounder has a one megohm resistor**. Overall Thickness: 0.060"

Heel Grounder Size

Stock Size
Ships within 1 Business Day
One Size Fits All

15' Ground Cord No. 793.15Cord



Use this cord to **connect all ESD tabletop and floor mats to a building ground**. The solderless terminal can be connected to an electrical outlet by using the screw in the outlet cover. The molded-in snap fastener has an integral one megohm resistor and conforms to 10mm snaps.



15' Ground Cord Size

Stock Size
Ships within 1 Business Day
15' Ground Cord

Static Dissipative Anti-Fatigue No. 791


BEST Performance



(GY)

Defined by its effective construction, the surface has a metal scrim that is embedded in the vinyl surface. This ensures **speedy and effective dissipation of static electricity**. The Nitricell® sponge base is a **Nitrile rubber** composite designed for employee comfort and productivity. It's ideal for manufacturing and commercial areas where static electricity can pose a problem. **Color: Gray (GY)**

RTT - 1×10^7 to 5×10^8 ohms
RTG - 1×10^7 to 5×10^8 ohms



Static Dissipative Anti-Fatigue Sizes

Stock Sizes	Non-Stock Sizes	
Ship in 1 Business Day	Ship in 2 Business Days	
2' x 3'	3' x 75'	3' Cut up to 75'
3' x 5'	4' x 75'	4' Cut up to 75'

Static Dissipative Anti-Fatigue Facts

1/2" Overall Thickness

Wearwell **Innovation—1994**

3 Year Warranty



Required Accessories for ESD Matting

15' Ground Cord No. 793.15Cord

Connect all ESD tabletop and floor mats to a building or ground.



See page 49 for more details.

Heel Grounder No. 793.HG


Allows static electricity to pass from the worker to the ESD matting or flooring. The velcro loop allows for easy attachment.



See page 49 for more details.

Electro-Soft No. 796


BETTER Performance

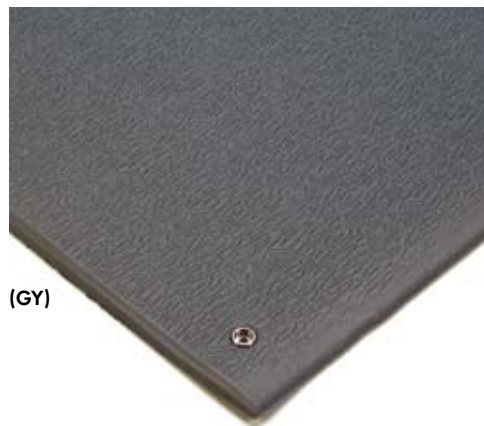

(GY)

Electro-Soft is a truly dissipative anti-fatigue mat. This unique, **cross-linked PVC sponge** is three (3) times more resilient than ordinary vinyl sponges and therefore provides better performance and much more overall comfort. Available in single mats and full rolls that can be cut to size, Electro-Soft has the **benefits of more expensive mats and still meets every budget**. **Color: Gray (GY)**

RTT - 1×10^9 to 1×10^{10} ohms
RTG - 1×10^9 to 1×10^{10} ohms



Electro-Soft Sizes

Stock Sizes	Non-Stock Sizes	
Ship in 1 Business Day	Ship in 2 Business Day	
2' x 3'	3' Cut up to 60' in Length	
3' x 5'	4' Cut up to 60' in Length	
3' x 60'		
4' x 60'		

Electro-Soft Facts

3/8" Overall Thickness

1 Year Warranty



ESD Work Surface Material No. 793

BEST Performance


Defined by its **flexible three-layer construction**, this static dissipative workstation mat is ideal for work benches and desks in areas where static control is imperative. **Perfect for use underneath computers and at workstations where sensitive components are packaged**, this material is also frequently used as a liner for conductive bins. **For maximum functionality, ground the mat (No. 797.CPCord) and also ground your employee (No. 793.6WStrap).**



Color: Sky Blue (SB)

RTT - 1×10^7 to 5×10^8 ohms

RTG - 1×10^7 to 5×10^8 ohms

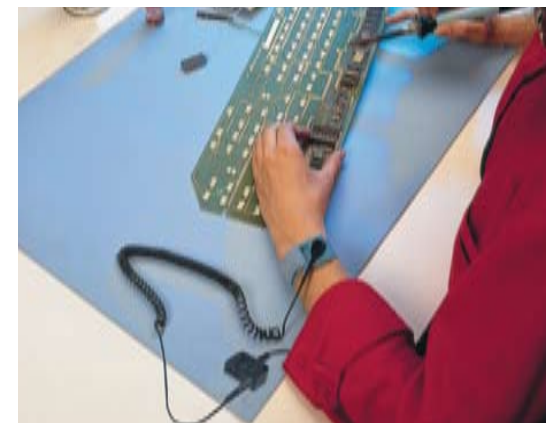

ESD Work Surface Material Sizes

Non-Stock Sizes

Ship in 2 Business Days

2' x 3'	2' Cut up to 100'
2' x 4'	3' Cut up to 100'

Wrist Strap No. 793.6WStrap

Use our **6' Coil Cord** and **Wrist Strap** to **ground workers to their ESD tabletop mats.**

One inch wide comfort strap with copper sulfide fibers is attached to a 6' Coil Cord with snap on one end and a banana jack on the other. Separate alligator clip. **Has a one megaohm resistor.** To complete the connection to a building ground, connect the coil cord to our 797.CPCord or simply clip to the grounding snap.



Wrist Strap Size

Stock Size

Ships within 1 Business Day

6' Coil w/ Wrist Strap

Common Point Ground Cord No. 797.CPCord

Equipped with dual jacks, our common-point ground cord **allows two wrist straps to be grounded at the same point.** The molded-in male fastener connects to the snap on the tabletop mat, while the solderless terminal at the end of the **15' cord connects to a building ground.** It conforms to 10mm snaps.

Common Point Ground Cord Size

Stock Size

Ships within 1 Business Day

15' Common Point Ground Cord

Non-Conductive Matting

Most commonly called **Switchboard matting**, our non-conductive mats insulate workers, protecting them from deadly shocks generated by high voltage equipment. **We offer products that meet:**

- A. **ASTM D178-01 specifications** (No. 701 and No. 702)
- B. **Military 15562-G specifications** (No. 710, No. 711 and No. 712)

These mats are tested and proven to have a high Dielectric strength. However, to provide a large margin of safety the maximum recommended voltage exposure is much less. This is important since the switchboard mats are true safety mats, **designed to save employees' lives.**

Product Name and Number	Standard and Type	Material
Diamond-Plate Switchboard No. 701	ASTM D178-01 Class 2, Type II	Vinyl
Corrugated Switchboard No. 702	ASTM D178-01 Class 2, Type II	Vinyl
	ASTM D178-01 Class 3, Type II	Vinyl
Smooth Military Switchboard No. 711	Military 15562-G Type II	Vinyl
Diamond-Plate Military Switchboard No. 712	Military 15562-G Type III	Vinyl
NEW Marbleized Military for Permanent Installation No. 710	Military 15562-G Type I	Vinyl



Our mats SAVE LIVES.

In this section, you'll find:

- Corrugated Switchboard..... No. 702.....p. 53
- Diamond-Plate Switchboard..... No. 701p. 53
- Smooth Military SwitchboardNo. 711p. 54
- Diamond-Plate Military Switchboard.....No. 712.....p. 54
- Marbleized Switchboard Type I..... No. 710.....p. 55

Corrugated Switchboard No. 702

BEST Performance



Defined by its ability to **insulate workers from extremely high voltage**, Corrugated Switchboard matting protects them from harmful or deadly electrical shock. **Conforming to ANSI/ASTM D178-01**, this material is **Type II** (a premium quality vinyl compound resistant to UV, ozone and many common chemicals). **1 Year Warranty**.


Color: Black (BK)

Available in two (2) thicknesses:

Thickness	Dielectric Strength	Recommended Usage per ASTM D178-01
Class 2 = 1/4"	30,000 volts	up to 17,000 volts
Class 3 = 3/8"	40,000 volts	up to 26,500 volts


1/4" Thickness

Class 2



3/8" Thickness

Class 3



(BK)

Switchboard Sizes


Stock Sizes	Non-Stock Sizes
Ship in 1 Business Day	Ship in 2 Business Days
1/4" Thick	
2' x 75'	2' Cut up to 75'
3' x 75'	3' Cut up to 75'
4' x 75'	4' Cut up to 75'
3/8" Thick, No. 702 only	
3' x 75'	

U.S. Department of Labor Mine Safety and Health Administration

Corrugated No. 702 and
Diamond-Plate Switchboard Matting No. 701 **pass**
Title 30, Code of Regulations 18.65 Flammability
Rating for products taken into mines.

Diamond-Plate Switchboard No. 701

BEST Performance

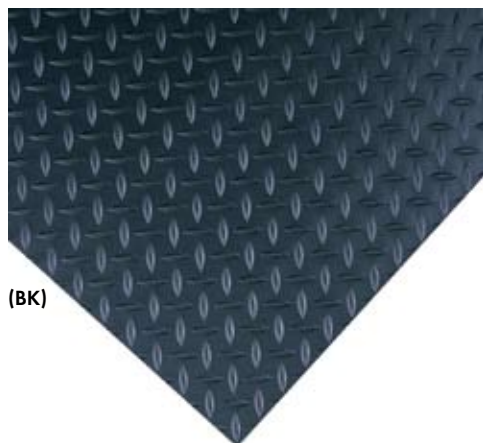


(BK)

Diamond-Plate Switchboard is the **newest** version of **high-performance non-conductive matting**. Designed to **protect personnel in areas with dangerous high-voltage equipment**, it can **insulate against as much as 30,000 volts of electricity**. Its unique diamond-embossed surface is easily cleaned and will not collect contaminants.

Diamond-Plate Switchboard matting **conforms to ANSI/ASTM D-178-01 Type II** (a premium quality vinyl compound resistant to UV, ozone and many common chemicals), **Class 2**. **1 Year Warranty**.

Color: Black (BK)


Thickness	Dielectric Strength	Recommended Usage per ASTM D178-01
Class 2 = 1/4"	30,000 volts	up to 17,000 volts



NON-CONDUCTIVE

Smooth Military Switchboard No. 711


BETTER Performance

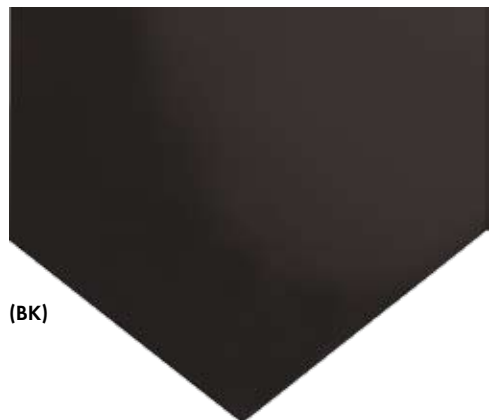

Designed to **meet strict military standards**, Smooth Military Switchboard Matting is non-conductive matting with a **dielectric strength of 30,000 volts**. The smooth vinyl surface is easy to clean and offers exceptional ozone and oil resistance. Smooth Military Switchboard Matting meets **Mil. Spec. 15562-G Type II**.

Color: Black (BK)

Overall Thickness	3/16"
Dielectric Strength	30,000 volts
Recommended Voltage	7,500 volts
Surface Pattern	Type II
Warranty	1 Year




Smooth Military Switchboard Sizes

Stock Sizes	Non-Stock Sizes
Ships in 1 Business Day	Ship in 2 Business Days
3' x 75'	3' Cut up to 75'


Diamond-Plate Military Switchboard No. 712

BETTER Performance

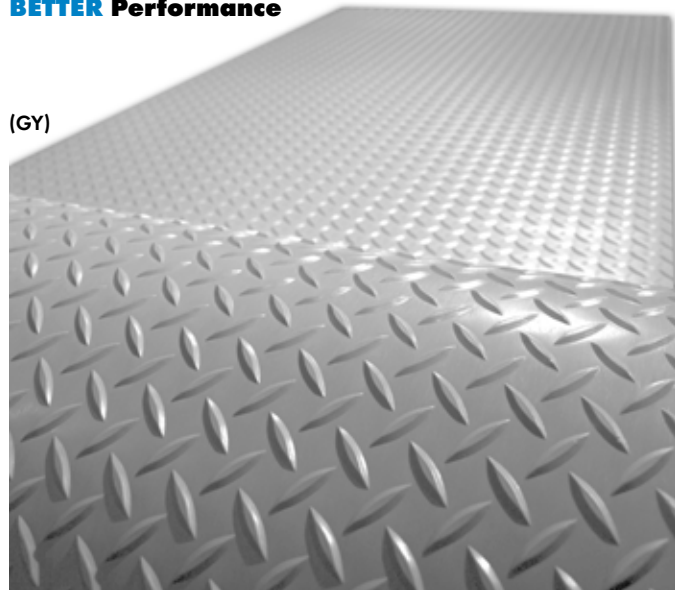

Diamond-Plate Military Switchboard Mats are non-conductive and **meet the strict military standard 15562-G Type III**. Perfect for use around high voltage apparatus and in heavily trafficked areas, the diamond-plate pattern offers additional traction and abrasion resistance.

Color: Gray (GY)




Overall Thickness	3/16"
Dielectric Strength	30,000 volts
Recommended Voltage	7,500 volts
Surface Pattern	Type III
Warranty	1 Year

Diamond-Plate Military Switchboard Sizes

Stock Size	Non-Stock Sizes
Ships in 1 Business Day	Ship in 2 Business Days
3' x 75'	3' Cut up to 75'

NEW! Marbleized Switchboard Type I No. 710

ULTIMATE Performance

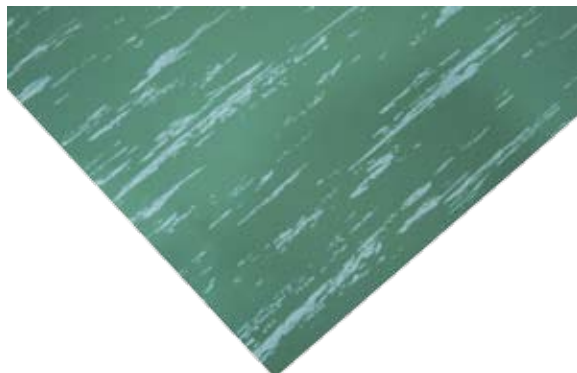

Colors: Green (GN) or Blue (BL)

Specifically designed for permanent installation, this non-conductive matting meets Mil. Spec. 15562-G Type I. Specially treated for flooring applications, the smooth, marbleized material can be installed with any vinyl-compatible mastic adhesive. With a dielectric strength of 30,000 volts, the recommended usage is up to 7,500 volts. The smooth vinyl surface is easy to clean and offers exceptional ozone and oil resistance.

Overall Thickness	1/8"
Dielectric Strength	30,000 volts
Recommended Voltage	7,500 volts
Surface Pattern	Marbleized Smooth
Welding Thread	300' Spool



When installing several widths of matting side-by-side, it is important to seal the seams to ensure the mat's reliability or consistent insulative properties. This can be accomplished by **bonding the mats together with our welding thread** and is available in colors that match the marbleized rolls. For best results, use professional floor installers. They have experience and machinery designed to bond this material.



Marbleized Switchboard Type I Sizes


Stock Sizes	Quote Sizes
Ship in 1 Business Day	Ship in 2 Business Days
3' x 75'	3' Cut up to 75'
1/8" x 300' Thread	1/8" Thread up to 300' Length

Please specify color when ordering.

RUNNERS


Diamond-Plate Runner No. 385

BEST Performance

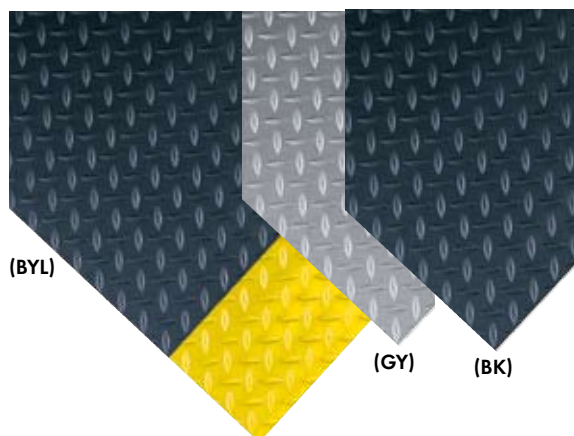

Our industrial strength Diamond-Plate Runner protects floors from heavy foot traffic and **provides extra traction** in the process. The yellow-bordered version is often used to designate safe walkways.

Colors: Black with Yellow Borders (BYL), Black (BK) and Gray (GY)



Diamond-Plate Runner Facts

3/16" Overall Thickness

1 Year Warranty

Green Rating = 100% Post Industrial Material


Diamond-Plate Runner Sizes

Stock Sizes	Non-Stock Sizes
Ship in 1 Business Day	Ship in 2 Business Days
2' x 75'	2' Cut up to 75'
3' x 75'	3' Cut up to 75'
4' x 75'	4' Cut up to 75'


Please specify color when ordering.

Heavy Duty Corrugated No. 305

ULTIMATE Performance

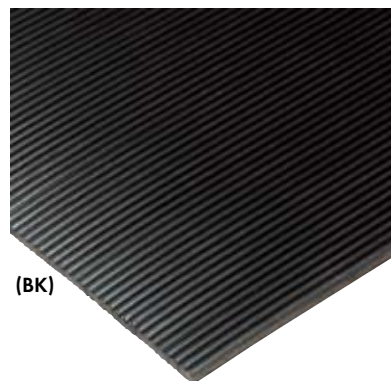

Designed to **withstand abuse in extremely high traffic areas** including recreational facilities, Heavy-Duty Corrugated is our toughest runner. It protects floors and provides long-lasting slip and chemical resistance in most any environment. **Color:** Black (BK)



Heavy Duty Corrugated Facts

1/4" Overall Thickness

1 Year Warranty


Green Rating > 50% Post Industrial Material

Heavy Duty Corrugated Sizes


Stock Sizes	Non-Stock Sizes
Ship in 1 Business Day	Ship in 2 Business Days
2' x 75'	2' Cut up to 75'
3' x 75'	3' Cut up to 75'
4' x 75'	4' Cut up to 75'

Radial Runner No. 356

ULTIMATE Performance

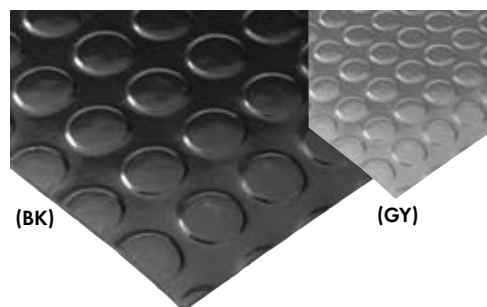

Stud Thickness .060 x 7/8" Dia.



Designed for **pedestrian walkways in high-traffic commercial areas**, the raised surface pattern offers exceptional traction and provides a distinct aesthetic appeal. Radial Runner can be used as a removable runner, or be permanently installed to any interior level floor surface. It **complies with NFPA flammability specifications** and can be used in Type II construction.

Colors: Black (BK) and Gray (GY)

Radial Runner Facts

1/8" Overall Thickness


1 Year Warranty

Radial Runner Sizes

Stock Sizes	Non-Stock Sizes
Ship in 1 Business Day	Ship in 2 Business Days
3' x 50'	3' Cut up to 50'
4' x 50'*	4' Cut up to 50'
*4' width a nominal size. It is typically 47 1/4".	

Standard Corrugated Vinyl No. 381

BEST Performance

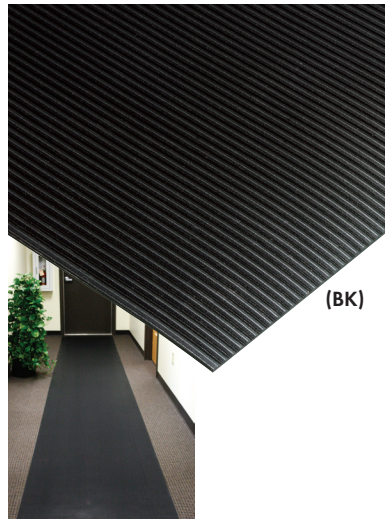

Our **most popular** runner, Standard Corrugated Vinyl **protects floors, reduces cleaning costs and adds traction** where it's needed. Its flexible, yet durable vinyl compound won't curl during use, and resistant to many chemicals and cleaning fluids.


Colors: Black (BK) and Black with Yellow Borders (BYL)

Standard Corrugated Vinyl Facts

1/8" Overall Thickness

1 Year Warranty

Green Rating = 100% Post Industrial Material



Standard Corrugated Vinyl Sizes


Stock Sizes		Non-Stock Sizes
Ship in 1 Business Day		Ship in 2 Business Days
2' x 75'	2' x 150'	2' Cut up to 150'
3' x 75'	3' x 150'	3' Cut up to 150'
4' x 75'	4' x 150'	4' Cut up to 150'
	2' x 105'	
	3' x 105'	
	4' x 105'	



Custom widths are available. Please call for pricing.

KleenSweep Runner No. 391

BEST Performance




Named for its easy-to-clean round-rib design, KleenSweep is a durable runner designed for **moderate foot traffic** in regularly maintained areas.

KleenSweep Runner Facts

1/8" Overall Thickness

1 Year Warranty

Green Rating = 100% Post Industrial Material



KleenSweep Runner Sizes

Stock Sizes		Non-Stock Sizes
Ship in 1 Business Day		Ship in 2 Business Days
2' x 105'		2' Cut up to 105'
3' x 105'		3' Cut up to 105'
4' x 105'		4' Cut up to 105'

Textured Kleen-Rite Runner No. 383

BETTER Performance




This runner **protects floors and prevents slip accidents**, but it's also frequently purchased for **use as a shelf, drawer or locker liner**. It's easily customized yet durable and abrasion resistant.

Textured Kleen-Rite Runner Facts

3/32" Overall Thickness

1 Year Warranty

Green Rating > 33% Post Industrial Material




Textured Kleen-Rite Runner Sizes

Stock Sizes		Non-Stock Sizes
Ship in 1 Business Day		Ship in 2 Business Days
3' x 75'	3' x 150'	3' Cut up to 150'
4' x 75'	4' x 150'	4' Cut up to 150'

OutFront Reversible Scraper Mat No. 227


ULTIMATE Performance

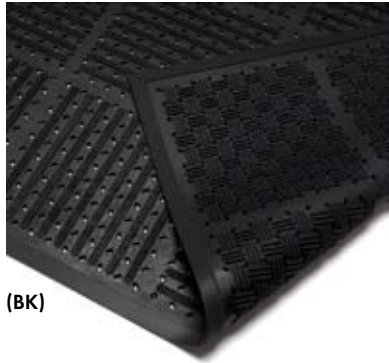

(BK)

OutFront Reversible Scraper redefines what an outdoor mat can do. **Totally reversible**, it's easily flipped over to accommodate all weather conditions. One side features rows of flexible scrapers alternating with quick-dry drainage ports for a "brush and release" effect.

The other side features clusters of stiff ridges designed to scrape heavier debris and packed snow off outsoles. **OutFront is 3'x6'** to accommodate a single or double entryway.



OutFront Reversible Scraper Mat Facts

7/16" Overall Thickness

Wearwell **Innovation**—2006

1 Year Warranty

Green Rating > 50% Post Industrial Material



OutFront Reversible Scraper Mat Size

Stock Size

Ships within 1 Business Day

3' x 6'

UpFront Scraper Mat No. 224

BEST Performance



(BK)

(BK)


This popular, classic design **effectively scrapes dirt, snow and rain off shoes, containing it outside**. Its low-profile accommodates tight thresholds. **Resistant to harsh outdoor elements**, UpFront is **also available in a quick-dry vented version** featuring an open slot design.

UpFront Scraper Mat Facts

5/16" Overall Thickness

1 Year Warranty

Green Rating > 50% Post Industrial Material




UpFront Scraper Mat Sizes

Stock Size

Ships within 1 Business Day

3' x 5' Classic

3' x 5' Quick Dry w/Vents

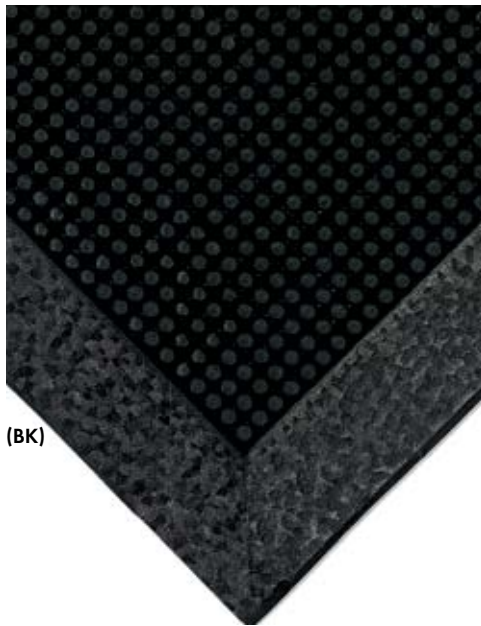Heavy Duty Multi-Guard No. 220**BEST Performance**

(BK)

Heavy Duty Multi-Guard has thousands of scraping fingers that effectively remove pounds of dirt from sight and hold it between cleanings. Available in a wide variety of sizes to fit virtually any outdoor entrance, this mat is the first step toward keeping vestibules, lobbies and other interior areas clean during the worst weather conditions.


Color: Black (BK)

Heavy Duty Multi-Guard Facts

1/2" Overall Thickness

1 Year Warranty

Green Rating > 50% Post Industrial Material

**Heavy Duty Multi-Guard Sizes****Stock Sizes****Ship within 1 Business Day**

24" x 32"

3' x 5'

28" x 46"

3' x 6'

32" x 39"

Mud Chucker™ No. 229**BEST Performance**

Defined by its ability to **effectively scrape dirt, snow or any other muck off both the sides and the bottoms of shoes**, the Mud Chucker can be used in conjunction with an entrance mat in very challenging areas, or as a stand-alone product in tight spaces. It can be **permanently installed at your entrance or used as a mobile entrance mat** for workers who toil in muddy areas and then travel to another location. To clean, simply shake the dirt off or spray down with a hose.

Mud Chucker Facts

1" at the front edge, 2 2/3" on the sides

1 Year Warranty

Green Rating > 50% Post Industrial Material

Mud Chucker Size**Stock Size****Ships within 1 Business day**

12 3/8" x 15 1/4"


Clean Zone No. 290

BEST Performance



(RD)


Defined by its unique, slim-line profile, Clean Zone’s tightly woven **polypropylene fibers** will not show traffic patterns and effectively resists crushing and abrasion. This dense surface **conceals dirt and quickly absorbs moisture**, reducing interior maintenance costs. A **premium choice for heavily trafficked entrances**, Clean Zone’s slim-line profile will accommodate even the lowest threshold doorways. **Colors:** Red (RD), Brown (BN), Charcoal (CH) and Gray (GY)

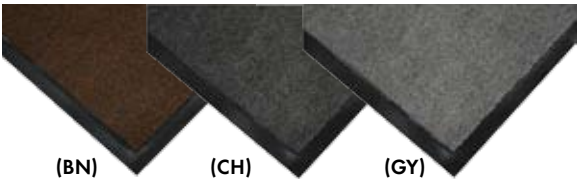

(BN)

(CH)

(GY)



Clean Zone Sizes

Stock Sizes	Non-Stock Sizes	
Ship within 1 Business Day	Ship within 10 Business Days	
2' x 3'	3' x 60'	3' Cut up to 60'
3' x 4'	4' x 60'	4' Cut up to 60'
3' x 5'	6' x 60'	6' Cut up to 60'
4' x 6'		

Please specify color when ordering.

Cavalier No. 287

BETTER Performance




(RBRD)



Cavalier’s **super coarse, absorptive fibers** and **two-level construction**, soak up water, hide dirt and reduce traffic patterns instantly. Choose from Cavalier’s two (2) surface design options, ribbed or chevron. Both are suitable for any interior and provide an **affordable and attractive** entrance solution.


Colors: Ribbed Red (RBRD), Ribbed Gray (RBGY), Ribbed Charcoal (RBCH), Ribbed Brown (RBBN), Chevron Brown (CHBN) and Chevron Charcoal (CHCH)



(RBGY)

(RBCH)

(RBBN)




(CHBN)

(CHCH)

Cavalier Facts

5/16" Overall Thickness
1 Year Warranty
Passes DOC FF1-70 and DOC FF2-70




Cavalier Sizes

Stock Sizes	Non-Stock Sizes	
Ship within 1 Business Day	Ship within 10 Business Days	
3' x 4'	3' x 60'	3' Cut up to 60'
3' x 5'	4' x 60'	4' Cut up to 60'
4' x 6'	6' x 60'	6' Cut up to 60'
4' x 8'		

Please specify color when ordering.


Elite Super Olefin No. 211

BEST Performance

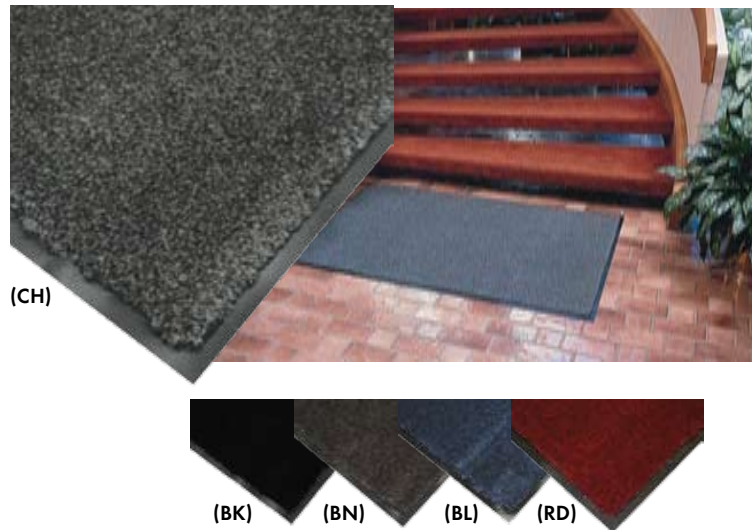

Thick pile gives Elite Super Olefin the look of plush carpeting, yet it **soaks up dirt and water like a sponge**. It performs beautifully even in the heaviest traffic areas, while the dense fibers remain soft and supple and extremely attractive throughout the day. This mat is truly in an "elite" class.

Colors: Charcoal (CH), Black (BK), Brown (BN), Blue (BL) and Red (RD)



Elite Super Olefin Facts

3/8" Overall Thickness

1 Year Warranty

Passes DOC FF1-70 and DOC FF2-70


Elite Super Olefin Sizes

Stock Sizes		Non-Stock Sizes	
Ship within 1 Business Day		Ship within 10 Business Days	
2' x 3'	3' x 6'	3' x 60'	3' Cut up to 60'
3' x 4'	4' x 6'	4' x 60'	4' Cut up to 60'
3' x 5'	4' x 8'	6' x 60'	6' Cut up to 60'

Please specify color when ordering.

Reliant Wearbond Olefin No. 209

GOOD Performance

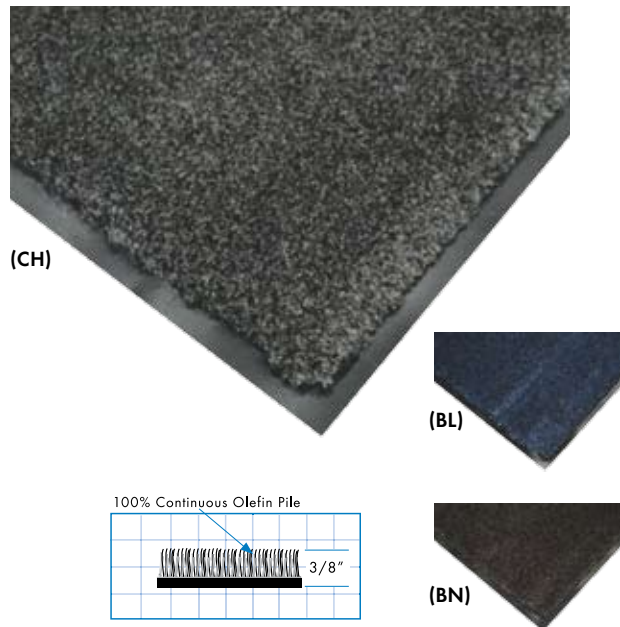

Designed for moderately trafficked entrances, Reliant Wearbond Olefin **provides reliable protection from the outdoor elements**. Its high-hiding, continuous filament pile surface absorbs water and traps dirt like more expensive mats, but the mat is **priced for budget-conscious consumers**.

Colors: Blue (BL), Brown (BN) and Charcoal (CH)

Reliant Wearbond Olefin Facts

3/8" Overall Thickness

1 Year Warranty

Passes DOC FF1-70 and DOC FF2-70

Reliant Wearbond Olefin Sizes

Stock Sizes		Non-Stock Sizes	
Ship within 1 Business Day		Ship within 2 Business Days	
3' x 5'		3' Cut up to 60'	
4' x 6'		4' Cut up to 60'	
4' x 8'		6' Cut up to 60'	

Please specify color when ordering.

Flammability Tests

DOC FF 1-70 is the Department of Commerce Flammable Fabrics standard No. 1. It requires that all carpet (including carpet mats) and rugs pass a small-scale ignition test. This is commonly referred to as the "pill test." This test subjects the material to conditions similar to that of a burning cigarette, match or fireplace ember. After conditioning the carpet material, a methenamine tablet is placed in the center of each specimen. Then the tablet is ignited with a match. If the burned or charred area is more than three inches from the center, the specimen fails.

DOC FF 2-70 is the second standard. It simply states that rugs and carpets under 24 sq. ft. do not need to pass the pill test, but if they do not, they must have a permanent label. The label must state "Flammable: (Fails the U.S. Department of Commerce standard DOC FF 1-70) Should not be used near sources of ignition."

MAT MOVEMENT REDUCTION

NEW! Grip Strips No. 051 **BEST** Performance

Designed specifically for **use on highly polished or shiny floors**, Grip Strips will prevent sponge, sponge-backed, or carpet mats from moving out of place. They're so effective that only a few are needed even in high traffic areas. Compounded in a unique, anti-microbial polymer, Grip Strips are **permanently tacky**. If the surface ever gets dusty or dirty, simply wipe it off with Simple Green® or a similar cleanser. The strip will quickly dry and regain its tack. Best of all, Grip Strips **grip effectively without leaving a residue**.

Grip Strips Facts


Wearwell **Innovation**—2008

Grip Strips Size

Stock Size

Ships within 1 Business Day

Package of four (4) 6" x 6" strips

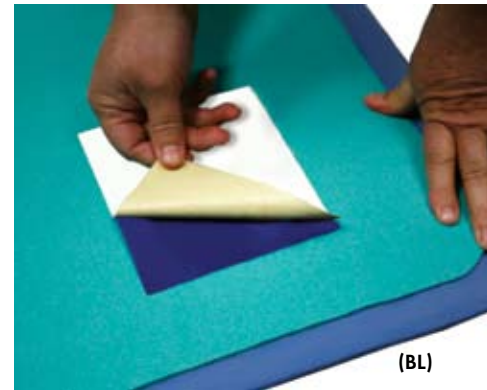

(BL)

GripSafe Reflective Tape No. 050 **BEST** Performance



GripSafe **prevents mat movement** even in the most heavily trafficked areas, including those with truck or tow-motor traffic. **Designed for use on concrete, terrazzo, tile or vinyl**, this sturdy tape will hold rubber or vinyl anti-fatigue mats in place. Use also to designate specific areas both inside and outside your facility.

For best results, adhere to a clean dry floor and apply to the mat lengths. If mats are large or over 6' wide, please tape down all four sides.




GripSafe Reflective Tape Size

Stock Size

Ships within 1 Business Day

4" x 45'

LockFast No. 053 **GOOD** Performance

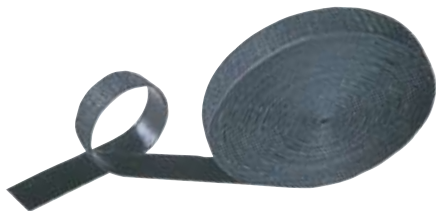

LockFast safely locks carpet mats in place on carpeted surfaces. This economical product requires no additional adhesive or fasteners. Just peel off the protective film to expose pressure-sensitive adhesive and apply to underside of the mat. Some movement may occur on cut-pile or plush pile surfaces.

LockFast Size

Stock Size

Ships within 1 Business Day

1" Wide x 75'


Non-Stock Size

Ships within 2 Business Days

1" Cut up to 75'

Emergency Shower & Eyewash Station Mat No. 465

BEST Performance

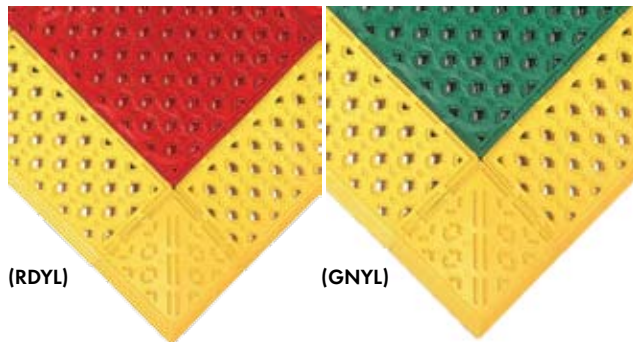

(RDYL)

(GNYL)

Designed for use under emergency showers or eyewash stations, these mats **keep accident victims from slipping** and raise them above the overflow area as the hazardous chemicals are washed away. Created for overall functionality with a high-traction surface design and drainage ports, the highly visible yellow borders are 6" wide with a gradual slope for easy access. Following the **ANSI Z535.1-1998 Standard, Red (RDYL) is for emergency showers and Green (GNYL) is for eyewash areas.**

Emergency Shower & Eyewash Station Mat Facts

7/8" Overall Thickness

1 Year Warranty

Green Rating > 50% Post Industrial Material



Emergency Shower & Eyewash Station Mat Sizes

Stock Sizes


Ship within 1 Business Day

30" x 36"

30" x 48"

Safety Sorb No. 400

BETTER Performance

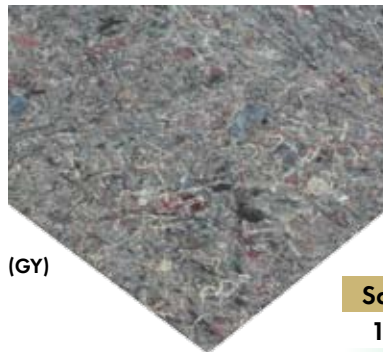

(GY)

A totally **"Green"** product, Safety Sorb is defined by its ability to effectively keep your plant cleaner safer and drier. **Ideal for confining leaks, drips and oversprays**, Safety Sorb **absorbs up to 10 times its weight in water**, grease and oil. To reduce maintenance effort, place under your drainage mats where water and other fluids collect. Replace when saturated.

Color: Gray (GY)

Safety Sorb Facts

1/4" Overall Thickness

Green Rating = 100% Pre-Industrial Textile

Safety Sorb Sizes

Stock Size

Ships within 1 Business Day

3' x 150'

Available only in rolls.



Safety Track No. 698

BETTER Performance



Use Safety Track for long lasting traction on interior ramps, ladders and walkways. Safety Track adheres to clean, dry surfaces including wood, metal, or concrete for that extra bit of traction. **1 Year Warranty**

Safety Track Sizes

Stock Sizes	
Ship within 1 Business Day	
Sizes	Per Ctn.
6" x 24"	50
1" x 60'	1
2" x 60'	1
4" x 60'	1
6" x 60'	1
12" x 60'	1
18" x 60'	1

Magnified backing view

To apply, peel off the backing and press the product on to the surface.

Wheel Chocks No. 900

BEST Performance

Our industrial strength, solid molded rubber wheel chock provides maximum gripping power to prevent wheel slippage accidents. Both models meet OSHA requirements and are resistant to sun, moisture, salt and oil. **Color: Black (BK)**


Available in two (2) Versions:

- Model B or "EB" has a traditional eyebolt for chain connection.
- Model A or "H" has a handle for easy pickup and placement.


Wheel Chocks Facts

Green Rating > 50% Post Industrial Material

Model A



Model B



Wheel Chocks Sizes

Stock Sizes	Non-Stock Sizes
Ship within 1 Business day	Ship within 2 Business Days
Model A - 6" H x 8" W x 9" L	Chain - Cut
Model B - 6" H x 8" W x 9" L	

Other Specialty Mats

At Wearwell, we never introduce a product just because we can, or just because it keeps our equipment busy. **We create products that meet a need**, and if that means we have to invest in new manufacturing capabilities, we do it. Often, we recognize and fulfill a need that no one knew existed. When we introduced ESD (static control) anti-fatigue mats in the mid '80s, we filled a void just as the micro electronics industry was booming. A marketplace was born. Wearwell has done this over and over again for the lab and pharmaceutical marketplace, food production and industrial environments of every kind.

Some of our Specialty Mats:

New!

PermaTack
No. 092
p. 44

Sanitizing Footbath Mat
No. 222
p. 38

Clean Room Mat
No. 095
p. 45

New!

Pur-Comfort
No. 504
p. 45

Autoclavable Mat
No. 580
p. 46

New!

ErgoDeck® White
Open No. 564, p. 25
Solid No. 566, p. 9

Grade A®
No. 482
p. 38



Dynamic Ergonomics

The Wearwell Study

Anti-fatigue mats are an integral part of many Ergonomic and Safety Programs. Standing workers love them, but production managers need to be able to **justify the financial investment**. Although perception studies have proven workers feel much better when they use anti-fatigue mats, Wearwell wanted to go a step further and prove that anti-fatigue matting actually increases worker productivity—**resulting in real savings for the company**. This study examines the bottom-line impact of using anti-fatigue matting and essentially proves a positive return on investment (ROI).

Wearwell's 12-month ergonomics study was designed to answer several questions:

- ☒ Does standing on the job contribute to fatigue?
- ☒ Does the use of anti-fatigue matting lessen standing workers' fatigue?
- ☒ Can using anti-fatigue matting can be linked to increased worker productivity?
- ☒ Can anti-fatigue matting generate cost savings?

The company used in the study was a manufacturer of commercial ovens. It was the largest and "best" in terms of wages and benefits employer in a 30-mile radius, but with a high injury rate and a high rate of absenteeism—as high as 10% on Mondays.

Before the installation of anti-fatigue matting, a questionnaire was given to workers to assess:

- Their current work surface (i.e. concrete)
- The overall level of fatigue before and after their shift
- The fatigue and discomfort level of their legs and feet before and after their shift

Once the matting was installed, the workers then completed that same questionnaire on a monthly basis for 12 months. The workers' perceptions were very clear. The participants felt considerably less fatigued before and after work when using anti-fatigue mats. In addition, the "at risk" areas of their bodies, such as legs, feet, and lower back, were much more comfortable when anti-fatigue mats were used.

More of the Company's Statistics	
No. of Employess	175 in Mfg./Assembly
No. of Shifts	2
Location Population	Less than 5,000
Avg. Employee Tenure	4 Years
Avg. Employee Age	41
Mean Employee Age	35

Cost Savings

The installation of anti-fatigue mats **resulted in an estimated 2.2% increase in productivity due to lower absenteeism and injury rates and a \$60,000 reduction in insurance premiums**. The numbers prove it. Through this study Wearwell® was able to prove that **anti-fatigue matting is good for employees and good for the business**. The company studied realized a **cost savings of \$360,000 over the course of the one year study**.

Installation Facts	Before Mats	After Mats	Improvement with Mats
Injury Rate	>3 per month	<1 per month	70%
Absenteeism	5.2% (up to 10% on Mondays)	4%	23%

Cost Savings Related to Anti-fatigue Mats

Increased Productivity	\$300,000
Insurance Premium Reduction	\$60,000
Total Cost Savings	\$360,000

Cleaning Guidelines

For best results, mats should receive scheduled cleanings. Simply follow these instructions to keep your mats looking great and functioning effectively.

SpongeCote Mats, PVC Sponges and Urethane Mats (Dry area mats): Sweep regularly or dry-mop the surface. These mats can be wet-mopped with mild soap or detergent. For best results use a detergent like Ivory Liquid with a pH between 4.0 - 9.0.

Molded Rubber and PVC Anti-fatigue Mats (those designed for Wet areas): Use a high-pressure hose (not to exceed 500 psi) and hot water (max 160 degrees F) to rid the mats of oils. For best results use a mild soap or detergent like Ivory Liquid with a pH between 4.0 - 9.0, to clean the mats. Do not use steam (unless specifically recommended), degreasers or caustic chemicals. Do not machine wash or mechanically scrub the mats.

ESD Mats: When cleaning ESD mats, it is important to sweep or dry-mop the surface regularly. Also wet-mop or wipe off with mild soap or a static control cleaning solution that will **not leave a residue**. This will allow the mat to continue to function efficiently.

Runner Mats: Simply sweep the surface with a broom or vacuum. Our runners can also be wet-mopped with mild soap.

Outdoor Entrance Mats: Take the mats outside and shake them to remove excess dirt and debris. If necessary, use a hose to wash them off.

Carpet Mats: Our carpet and entrance mats are designed to lower your maintenance costs and still be easily maintained. Carpet mats can be cleaned the same way you maintain your carpeting. Vacuum them daily, and extract or shampoo them when dirt builds up.

List of Compounds

Urethane

Pur-Comfort	No. 504
Rejuvenator®	No. 501
Rejuvenator® Connect	No. 502

Nitrile

24/Seven®	No. 572
24/Seven® GritWorks!®	No. 576
24/Seven® Solid	No. 570
24/Seven® Solid GritWorks!®	No. 574
Autoclavable Mat	No. 580
Grade A®	No. 482
Modular Diamond-Plate	No. 470
Modular WorkSafe® Light	No. 472

PVC

Abrasive Coated Cushion Walk	No. 480
Comfort2Go™	No. 518
Comfort Deck®	No. 460
ComfortPro	No. 433
Corrugated SpongeCote®	No. 431
Deluxe Tuf Sponge	No. 442
Deluxe Soft Step	No. 444
Diamond-Plate Select	No. 495
Diamond-Plate SpongeCote®	No. 415
Diamond-Plate with GritWorks!®	No. 416
Electrically Conductive Diamond-Plate	No. 786
Electro-Soft	No. 796
Emergency Eyewash & Shower Station	No. 465
Endurable	No. 459

PVC Continued

ErgoOasis	No. 488
ErgoDeck® Open	No. 560
ErgoDeck® Solid	No. 562
ErgoDeck® Open with GritWorks!®	No. 561
ErgoDeck® Solid with GritWorks!®	No. 563
ErgoDeck® SOFT Open	No. 564
ErgoDeck® SOFT Solid	No. 566
Grit-Top Comfort Deck®	No. 461
High Energy Mat	No. 511
Kushion Walk	No. 475
Primo Sponge	No. 512
PermaTack	No. 092
Re-energizer®	No. 401
Soft Step	No. 427
(SR) Diamond-Plate	No. 418
Static Dissipative Anti-Fatigue	No. 791
Tile-Top AM	No. 420AM
Tile-Top Select	No. 494
Tuf Sponge	No. 451
UltraSoft Diamond-Plate	No. 414
Ultra-Tred ArmorCote	No. 440
UltraSoft Tile-Top AM	No. 419AM
Vinyl Grid Air Tread	No. 891
Vinyl Grid Gripper Tread	No. 892

CFR

24/Seven®	No. 572CFR
24/Seven® GritWorks!®	No. 576CFR
24/Seven® Solid	No. 570CFR

CFR Continued

24/Seven® Solid GritWorks!®	No. 574CFR
Industrial GritWorks!®	No. 487
Industrial WorkSafe®	No. 479
WorkSafe® Light	No. 478

SBR Rubber

Enviromat	No. 405
Ergo-Stance®	No. 489

Natural Rubber

24/Seven®	No. 572GR
24/Seven® Solid	No. 570GR
Electrically Conductive Smooth	No. 786
Modular Dimond-Plate	No. 470
Modular WorkSafe® Light	No. 472
Ortho™ Stand	No. 454
Safety Zone Interlock	No. 455
WorkRite	No. 474
WorkSafe®	No. 477
WeldSafe®	No. 447



Chemical Resistance Data and Information

- **A** = Performs Well
- **B** = Slightly Affected
- **C** = Moderately Affected
- **D** = Chemical Really Attacks the Mat
- **U** = Not Recommended
- **NT** = Not Tested

The resistance levels reflected in this chart are based on moderate exposure, not long-term immersion in any of the above listed fluids. If your application is more rigorous, please request a sample to test against the chemicals in question. For best results, please use this chart as a guide, and schedule regular maintenance (cleaning) for your mats.

Chemical	Urethane	100% Nitrile	PVC	CFR	SBR	Natural Rubber
Acetone	U	U	U	C	C	C
Animal Fats	NT	A	U	U	U	U
Bleach Solution (10% Dilute)	NT	B	U	U	U	U
Boric Acid	A	A	A	A	A	A
Brake Fluid	U	A	C	D	D	D
Brake Fluid - Silicone Based	B	A	A	A	B	B
Chlorine Solution (3% Dilute)	B	A	B	C	C	C
Citric Acid	NT	A	C	C	C	U
Cutting Fluid - Mineral Oil Based	C	B	C	B	C	D
Diesel Oil	A	A	U	U	U	U
Ethylene Acetate	NT	U	NT	U	U	U
Ethylene Glycol	A	A	A	A	A	A
Hydraulic Oil - Petroleum	U	A	C	U	U	D
HydroChloric Acid Cold - 37% Dilute	U	C	C	B	B	B
Hydraulic Oils (Petroleum)	U	A	NT	U	U	U
Isopropyl Alcohol	A	B	A	B	B	A
Lacquer Solvents	U	U	U	U	U	U
Lindol (Hydraulic Fluid)	NT	U	NT	U	U	U
MEK	U	U	U	U	U	U
Mineral Oil	B	A	C	A	B	U
Naptha	NT	B	U	U	U	U
Napthlene	U	U	U	U	U	U
Petroleum	U	A	A	C	D	D
Salt water	A	A	B	B	B	C
Tolulene	U	U	U	U	U	U
Transmission Fluid - Type A	NT	A	C	C	U	U
Trichloroethane	U	U	U	U	U	U
Vegetable Oil	C	A	B	C	C	C

Tennessee Mat Company, Inc.®
199 Threet Industrial Rd.
Smyrna, TN 37167
1 • 800 • 264 • 3030
www.wearwell.com

Copyright® 2009 by Tennessee Mat Company, Inc. All rights reserved. Printed in the USA. No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form by any means, electronic, mechanical, photocopying, recording or otherwise, without prior written permission by Tennessee Mat Company, Inc.



Printed on Chorus Art chlorine-free paper containing 50% recycled content with 25% post consumer waste.